

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

HIGH SPEED CYLINDRICAL
ROLLER BEARING ANALYSIS

SKF COMPUTER PROGRAM 'CYBEAN'
VOLUME II: USER'S MANUAL

JUNE 1981

(NASA-CR-165364) HIGH SPEED CYLINDRICAL N82-31968
ROLLER BEARING ANALYSIS. SKF COMPUTER
PROGRAM CYBEAN. VOLUME 2: USER'S MANUAL
Final Report (SKF Technology Services) Unclas
147 p HC A07/MF A01 CSCL 09B G3/61 28764

G. J. DYBA
R. J. KLECKNER

SKF REPORT NO.: AT81D049

SKF COMPUTER PROGRAM: AT81Y004

SUBMITTED TO:

NATIONAL AERONAUTICS & SPACE ADMINISTRATION
LEWIS RESEARCH CENTER
21000 BROOKPARK ROAD
CLEVELAND, OHIO 44135

UNDER CONTRACT NAS-22690



SUBMITTED BY:

SKF TECHNOLOGY SERVICES
SKF INDUSTRIES, INC.
KING OF PRUSSIA, PA

PROPRIETARY NOTICE

FURNISHED UNDER U.S. GOVERNMENT CONTRACT NO. NAS3-22690. SHALL NOT BE EITHER RELEASED OUTSIDE THE GOVERNMENT, OR USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR MANUFACTURE OR PROCUREMENT, WITHOUT THE WRITTEN PERMISSION OF THE SECURITY CLASSIFICATION OFFICER, NASA-LEWIS RESEARCH CENTER, CLEVELAND, OHIO 44135.

1. Report No. NASA CR No. 165364		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle High Speed Cylindrical Roller Bearing Analysis, SKF Computer Program "CYBEAN"-Volume 11: User's Manual				5. Report Date May, 1981	
				6. Performing Organization Code	
7. Author(s) Dyba, G.J., and Kleckner, R.J.				8. Performing Organization Report No. AT81D049	
9. Performing Organization Name and Address SKF Industries, Inc. Technology Services Division 1100 First Avenue King of Prussia, PA 19406				10. Work Unit No.	
				11. Contract or Grant No. NAS3-22690	
12. Sponsoring Agency Name and Address NASA Lewis Research Center 21000 Brookpark Road Cleveland, OH 44135				13. Type of Report and Period Covered Final	
				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract <p>CYBEAN (CYlindrical BEaring ANALysis) has been created to detail radially loaded, aligned and misaligned cylindrical roller bearing performance under a variety of operating conditions. Emphasis has been placed on detailing the effects of high speed, preload and system thermal coupling. Roller tilt, skew, radial, circumferential and axial displacement as well as flange contact have been considered. Variable housing and flexible out-of-round outer ring geometries, and both steady state and time transient temperature calculations have been enabled. The complete range of elastohydrodynamic contact considerations, employing full and partial film conditions have been treated in the computation of raceway and flange contacts.</p> <p>Volume II of this report is structured to guide the user in the practical and correct implementation of CYBEAN. The capability to execute the program at four different levels of complexity has been included. In addition, the program has been updated to properly direct roller-to-raceway contact load vectors automatically in those cases where roller and/or ring profiles have small radii of curvature. Input and output architectures containing guidelines for use and two sample executions are detailed.</p> <p>The models and associated mathematics used within CYBEAN are described in Volume I [7] of the original report of July, 1978. The user is referred to the material contained therein for formulation assumptions and algorithm detail.</p>					
17. Key Words (Suggested by Author(s))			18. Distribution Statement		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page)		21. No. of Pages 141	22. Price*

* For sale by the National Technical Information Service, Springfield, Virginia 22161

HIGH SPEED CYLINDRICAL
ROLLER BEARING ANALYSIS

SKF COMPUTER PROGRAM 'CYBEAN'
VOLUME II: USER'S MANUAL

JUNE 1981

G. J. DYBA
R. J. KLECKNER

PREPARED:

George Dyba

SKF REPORT NO.: AT81D049

RELEASED:

R. J. Kleckner

SKF COMPUTER PROGRAM: AT81Y004

SUBMITTED TO:

NATIONAL AERONAUTICS & SPACE ADMINISTRATION
LEWIS RESEARCH CENTER
21000 BROOKPARK ROAD
CLEVELAND, OHIO 44135

UNDER CONTRACT NAS3-22690

SUBMITTED BY:

SKF TECHNOLOGY SERVICES
SKF INDUSTRIES, INC.
KING OF PRUSSIA, PA

TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
I.	INTRODUCTION	2
II.	INPUT DATA	2
III.	SPECIAL INPUT DATA	23
III.1	OPTION 1: USER SPECIFIED MATERIAL PROPERTIES	24
III.2	OPTION 2: FIT CALCULATIONS	25
III.3	OPTION 3: USER SPECIFIED INFLUENCE COEFFICIENTS	27
III.4	OPTION 4: USER SPECIFIED SLICE WIDTHS	28
III.5	OPTION 5: USER INPUT OF SYMMETRIC ROLLER GEOMETRY	29
III.6	OPTION 6: OVERWRITE CALCULATED (ROLLER) END RADII WITH USER SUPPLIED VALUES	30
III.7	OPTION 7: USER SPECIFIED, COMPLETELY VARIABLE ROLLER GEOMETRY	31
III.8	OPTION 8: USER SPECIFIED SYMMETRIC RING GEOMETRY	32
III.9	OPTION 9: OVERWRITE CALCULATED (RING) END RADII WITH USER SUPPLIED VALUES	33
III.10	OPTION 10: USER SPECIFIED, COMPLETELY VARIABLE RING GEOMETRY	34
III.11	OPTION 11: TEMPERATURE CALCULATIONS	35
IV.	OUTPUT DATA	45
IV.1	SAMPLE PROBLEM OUTPUT DESCRIPTION	46
V.	PROGRAM LIMITATION AND SPECIAL CASES	51
VI.	REFERENCES	54
	APPENDIX A - SPECIAL DATA INPUT CARD FORMATS	A

TABLE OF CONTENTS (Cont.)

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
APPENDIX B	- HEAT TRANSFER COMPUTATION NOTES	B
APPENDIX C	- CYBEAN FLOW CHART	C
APPENDIX D	- SAMPLE OUTPUT, SOLUTION LEVEL 2	D
APPENDIX E	- SAMPLE OUTPUT, SOLUTION LEVEL 3	E

LIST OF TABLES

<u>TABLE NO.</u>	<u>TITLE</u>	<u>PAGE</u>
1	ORGANIZATION OF INPUT DATA CATEGORIES	72
2	DEFAULT VALUES FOR UNSPECIFIED VARIABLES	73
3	PROPERTIES OF FOUR LUBRICANTS	74
4	ORGANIZATION OF SPECIAL INPUT DATA	75
5	ROLLER BEARING SPECIFICATIONS	76

LIST OF FIGURES

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE</u>
1	USER INPUT RING DATA	56
2	USE OF FREE FORMAT TO SPECIFY INPUT DATA	57
3	USER INPUT ROLLER GEOMETRY	58
4	USER INPUT BEARING CLEARANCES	59
5	BEARING COORDINATE FRAME	60
6	USER INPUT CAGE GEOMETRY	61
7	TEMPERATURE NODE IDENTIFICATION SCHEME	62
8	USER SPECIFIED INFORMATION REQUIRED FOR FOUR MOST POPULAR MODES OF INDUCING ROLLER PRELOAD	63
9	VARIABLES USED IN DESCRIPTION OF A 2-LOBED PROFILE	64
10	VARIABLES USED IN DESCRIPTION OF A 3-LOBED PROFILE	65
11	USER INPUT GEOMETRY FOR CIRCULAR RING FIT ANALYSIS	66
12	OPTIONAL SYMMETRIC ROLLER GEOMETRY INPUT DATA	67
13	OPTIONAL ROLLER GEOMETRY INPUT DATA	68
14	OPTIONAL SYMMETRIC RING GEOMETRY INPUT DATA	69
15	OPTIONAL USER INPUT RING GEOMETRY	70
16	ROLLER COORDINATE FRAME	71

FOREWORD

This report, "High Speed Cylindrical Roller Bearing Analysis," details information required to use the design and analysis of computer program CYBEAN. The program described in this volume conforms to the 1978 version of CYBEAN prepared under U.S. government Contract No. NAS3-20068 except that the program can now be executed at four levels of complexity.

All efforts involved in the generation of this new version of the code were sponsored by the NASA-Lewis Research Center of Cleveland, Ohio, under the administration of the Bearing and Gear Analysis Section. The technical monitor was Mr. H. Coe. The work was performed under Contract No. NAS3-22690 at SKF Industries, Inc., King of Prussia, Pennsylvania, during the period March 1981 through May 1981.

Technical project leadership was executed by Mr. G. J. Dyba, with contribution from Mr. R. J. Kleckner.

HIGH SPEED CYLINDRICAL ROLLER BEARING ANALYSISI. INTRODUCTION

CYBEAN (CYlindrical BEaring ANalysis) has been created to detail radially loaded, aligned and misaligned cylindrical roller bearing performance under a variety of operating conditions. Emphasis has been placed on detailing the effects of high speed, preload and system thermal coupling. Roller tilt, skew, radial, circumferential and axial displacement as well as flange contact have been considered. Variable housing and flexible out-of-round outer ring geometries, and both steady state and time transient temperature calculations have been enabled. The complete range of elastohydrodynamic contact considerations, employing full and partial film conditions have been treated in the computation of raceway and flange contacts. The program properly directs roller-to-raceway contact load vectors automatically in those cases where roller and/or ring profiles have small radii of curvature.

Volume I [7] of this report describes the models and associated mathematics used within CYBEAN. The user is referred to the material contained therein for formulation assumptions and algorithm detail. The material present in this, Volume II, is structured to guide the user in the practical and correct implementation of CYBEAN. Input and output architectures containing guidelines for use and a sample execution are detailed in the matter which follows.

II. INPUT DATA

CYBEAN requires the preparation of input data which in general describes the bearing geometry, properties of the materials used, and specifies the imposed operating conditions. With these inputs defined, optional solution procedure control may be selected.

The input architecture has been formulated to impose minimal initial demands on the user. Data is segregated into CATEGORIES which individually address specific characterization of the configuration addressed. Any single data set item required by the program falls into one of ten distinctly identified subsets or categories (Table 1). Category "ROLLER", for example, contains all roller geometry data. Category "CAG" details cage information. Items detailing operating parameters such as load and speed are entered into input categories "OPER8" and "LOAD".

All data required by the basic program are accepted in free NAMELIST format and default values are hardcoded to minimize the demands on user judgment. Special input data, required when the program options are used, is in 80 column card image format.

In each category, the user has the freedom to specify all, part, or none of the data. If an item of data is omitted, a default value is assumed. A list of these default values is shown in Table 2. Failure to include basic data, e.g., ring radius, load, speed, etc. results in a diagnostic abort message.

Data comprising a category is specified in free format, with the restrictions that (1) column one of any card is not used and (2) all pieces of data in any category are separated by commas¹. No specific sequence of data is required within each category. A minimum of two cards is needed to specify a complete set of data within a category.

¹On some computers the comma must follow the last significant digit of an input variable. It is suggested that this restriction be observed to avoid the inconvenience caused by compiler peculiarities.

As an example, consider the category "IRING". Three items are needed. Using the nomenclature of Figure 1, they are:

1. RIG - The groove radius of the inner ring
2. FLGALI - The flange layback angle of a flanged inner ring on the left side.
3. FLGARI - The flange layback angle of a flanged inner ring on the right side.

An example of free format data is illustrated for the category "IRING" in Figure 2. In this case the user wishes to describe the geometry of a flanged inner ring. Three cards are required. The first card contains a Dollar Sign (\$) ¹in column 2 followed by the category name "IRING". The second card is used to specify values of input data. Note that free format is used throughout and that all pieces of data are separated by a comma. The third card contains a Dollar Sign (\$) ¹in column 2 and the word END in columns 3 through 5 signifying the end of data for the category. Column 1 is never used in specifying data or category.

Each data category is used to describe a particular aspect of either program use or the bearing configuration. Categories, in turn, must be arranged in the sequence noted in Table 1 before they can be used to transmit data to the program.

The following paragraphs will list, in their proper order, all categories and the data they contain. In certain cases where, at the user's option, categories can be omitted from the set, these options are made clear. Likewise, it is also clearly indicated when a category must be included in the set, regardless of execution options. If the user wishes to omit a category of data, he must still include the two cards:

```
$CATEGORY NAME
$END
```

¹Different computers may allow or require a different symbol.

CATEGORY 1 - SOLUTION CONTROL PARAMETERS
--

CATEGORY NAME: SOLV

CATEGORY DESCRIPTION:

Computer program CYBEAN uses a Newton-Raphson iterative scheme to compute values for the governing equilibrium equation set. The user may wish to override existing solution control parameters. Those, which are permitted as input by the user are contained within this category.

DATA ITEMS:

DEFAULT

ITMAX - maximum number of iterations to be used in the Newton-Raphson iteration scheme, 15

NPR - debug output print flag. Allows the user to see calculated results at intermediate steps of solution. NPR may be input with the following values: 0

- NPR = 0 No intermediate output printed
- NPR = 1 Divergence messages, intermediate equation residues (see Volume I) and roller-raceway loads are printed
- NPR = 2 All output contained in NPR=1 plus the corrections of the variable values (see Volume I) as calculated in the linear equation solver
- NPR = 3 All output given for NPR=2 plus the solution algorithm used in this particular execution
- NPR = 4 All output given for NPR=3 plus the matrix of partial derivatives

DATA ITEMS	DEFAULT
<u>CONVER</u> - convergence criterion used to halt the iteration procedure. Solution is said to be obtained when	.1

$$\left(\sum_{i=1}^N EQ_i \right) / N \leq \text{CONVER} \quad (1)$$

and

$$\left| \frac{100}{N} \sum_{i=1}^N \left\{ \left(|EQ_i|^k - |EQ_i|^{k-1} \right) / |EQ_i|^k \right\} \right| < 2 \quad (2)$$

Here, k is the iteration index and EQ_i is the i-th equation residue.

<u>LEVEL</u> - Solution control level:	1
--	---

LEVEL = 1:

Inner ring and roller equilibrium is mutually satisfied through consideration of the elastic (Hertzian) contact loads at all roller-race contacts. Rollers are permitted to translate radially and rotate about their z-axis (roller tilt). The inner ring may translate in its radial plane. This execution level will permit economic calculation of bearing life. Lubricant and friction related loads are not considered; epicyclic roller speeds are assumed.

LEVEL = 2:

Mutual equilibrium of rollers and inner ring is sought as in Level 1, then used to evaluate the lubricant related forces (EHD,

DATA ITEMS

HD, drag, and cage pocket). This level of execution permits an economic estimation of bearing generated heat. Epicyclic roller speeds are assumed.

LEVEL = 3:

Two solution algorithms are used to evaluate the bearing performance. The first seeks mutual equilibrium of inner ring and rollers by varying the inner ring position and roller radial, axial and tilt positions. The second algorithm seeks mutual equilibrium of the rollers and cage by varying the cage position and roller skew, tilt and rotational speeds. This level of execution provides an economic method of evaluating bearing performance when there is little or no rolling element skidding, and can be used to predict the existence of such skidding, but not its absolute magnitude. Note that at this level of execution, the inner ring reactive load may not exactly equilibrate the applied loading.

LEVEL = 4:

The two algorithms used in Level 3 are repeated until mutually satisfied. This assures equilibrium of the inner ring with applied loading. This execution level can be used to predict the presence and magnitude of rolling element skidding.

DATA ITEMS

DEFAULT

ITILT - Tilt analysis flag.

T

A .TRUE. value permits roller rotation about its z-axis (roller tilt) by solving the moment equilibrium equation. This flag is normally set to .TRUE.. However, in those cases where the roller tilt is expected to be very small, the user can specify ITILT = .FALSE. to save on execution time.

CATEGORY 2 - PROGRAM LOGIC

CATEGORY NAME: LOGIC

CATEGORY DESCRIPTION:

Within this category, the user is permitted to specify values for logic used in a given program execution. User provided values dictate the program options.

All variables in this category are "logical", and have either of two values, .TRUE. or .FALSE. eg., MPROP = .TRUE.

In many cases, additional data will be required from the user as a consequence of selecting a specific program option. Descriptions of this extra input are found in the section "SPECIAL INPUT DATA", starting on page 23.

DATA ITEMS:

DEFAULT

PLTRNG - Allows the user to obtain a line printer plot of the inner and outer ring profiles along their axial effective length. F

PLTROL - Allows the user to obtain a line printer plot of the roller profiles along their axial effective length. F

ECHO - Allows the user to echo check the input data. This option invokes routines which print the data immediately after it has been read. F

Special Program Option Logic:

The following eight data items permit the user to invoke certain special program options. All items require the user to include additional data (see "SPECIAL INPUT DATA").

DATA ITEMS

DEFAULT

COEF - Allows the user to input the influence coefficients for the housing or other outer ring support structure.

F

MPROP - Allows the user to input material properties for the rings, rollers, cage and housing.

F

OVREND - Allows the user to input values of roller and ring radii at the last 3 positions across the effective length. These values will overwrite values computed in the program.

F

SYMY - A .TRUE. value indicates that the roller and rings are symmetric about their respective y-axis. If SYMY is .FALSE., the non-symmetric roller and race profiles must be read in.

T

EVSLIC - The program uses a slicing technique (see Volume I) to compute the roller-raceway loads. By default all slices are of equal width. In many cases it may be advantageous to specify that these slices are of unequal width. Unequal slice widths may be included as part of the input data by specifying EVSLIC = .FALSE..

T

FITS - Allows the user to use the clearance change portion of the analysis. Default is no fit calculation, and a flexurally rigid outer ring is assumed.

F

THERM - A .TRUE. value allows the user to use either the steady state or time transient temperature calculating routines.

F

OOR - Used to denote an out-of-round outer ring. Operating diametral clearance for circular ring bearings may be calculated with the program by specifying OOR = .FALSE. and FITS = .TRUE..

F

CATEGORY 3 - ROLLER GEOMETRY DATA

CATEGORY NAME: ROLLER

CATEGORY DESCRIPTION

Within this category the user must describe the geometry of the rolling elements within the bearing complement. This category is always included. (See Figures 3 and 4, all lengths are in mm.)

DATA ITEMS	DEFAULT
<u>ROLLD</u> - Roller maximum diameter	None
<u>RTL</u> - Roller total length	None
<u>RCR</u> - Roller Crown Radius	None
<u>SPHR</u> - Roller end sphere radius on the right side of roller (see Figure 3).	381 mm
<u>SPHL</u> - Roller end sphere radius on the left side of roller	381 mm
<u>RFL</u> - Roller flat length	None
<u>ELO</u> - Effective length of the roller outer ring contact ¹	None
<u>ELI</u> - Effective length of the roller inner ring contact ¹	None
<u>XL, XR</u> - The x-coordinate of the roller end sphere origin (see Figure 3)	None

¹The effective contact length refers to the longest possible length which can be used to transmit load between the roller and raceway. Typically, this is the roller total length less corner radii. If, however, the raceway undercuts are exceptionally large so that the track width is less than the roller effective length then the track width should be input.

DATA ITEMS	DEFAULT
<u>EMPLAYO</u> - Roller end-flange end play for a bearing having a flanged outer ring (see Figure 4).	0.
<u>EMPLAYI</u> - Roller end-flange end play for a bearing having a flanged inner ring (see Figure 4).	0.
<u>DIACL</u> ¹ - Bearing diametral clearance (see Figure 4). When using the FITS option (option 2) to calculate circular ring bearing operating clearance, DIACL is the cold, unmounted diametral clearance.	0.
<u>KLUE</u> - Roller geometry flag having the following four possible values:	1.
KLUE = 1; The roller active profile is either fully flat or crowned with a flat. Symmetry about y is assumed. (KLUE=1 is applicable to the roller shown in Figure 3.)	
KLUE = 2; The roller active profile is fully crowned and symmetric about y.	
KLUE = 3; The roller active profile is symmetric about the y-axis but will be read in by the user (see "SPECIAL INPUT DATA").	
KLUE = 4; The roller active profile is non-symmetric about the y-axis and will be read in by the user (see "SPECIAL INPUT DATA").	
<u>NUMROL</u> - Total number of rollers in the complement (maximum permitted value = 50).	None

¹Calculations with out-of-round components require DIACL to be calculated. See Option 2, page 25.

DATA ITEMS

DEFAULT

NS - Number of roller raceway slices used in the analysis. 5

Note: If the user specifies symmetry about the roller y-axis then NS is the number of slices per symmetric half. If the user specifies no symmetry then NS is the total number of slices.

PHI1 - Angular location of the first element in the complement. In the nomenclature of Figure 5, the angle is measured CCW positive from the bearing y-axis. This input is in degrees. 0.

CATEGORY 4: OUTER RING DESCRIPTION

CATEGORY NAME: ORING

CATEGORY DESCRIPTION:

ORING is used to describe the geometry of the outer ring. Specification for lobing of the outer ring is made through the input of special data and will be discussed later. ORING is always included with input. Ring geometry is defined in Figure 1. Lengths and angles are to be specified in millimeters and degrees respectively.

DATA ITEMS

DEFAULT

<u>ROG</u> - Groove radius of the outer race	0.(flat)
<u>FLGALO</u> - Flange angle of the flange located on the left side of the outer ring	No flange
<u>FLGARO</u> - Flange angle of the flange located on the right side of the outer ring. If either FLGALO or FLGARO is left unspecified, then the outer ring is considered to be without flanges.	No flange
<u>DM</u> - Pitch diameter	None
<u>KRING</u> - Used to define the geometry class of rings.	1

KRING=1; Both raceways have a flat profile (i.e. RIG=ROG=0) and ring geometry is symmetric about the y-axis.

KRING=2; Both raceways have a fully crowned profile (i.e. RIG≠0 and ROG≠0) and their geometry is symmetric about the y-axis.

AT81D049

KRING=3; Both raceway profiles will be read in as user specified input, symmetry is assumed (see "SPECIAL INPUT DATA", Option 8, page 32).

KRING=4; Both raceway profiles will be read in by user specified input, no symmetry is assumed (see "SPECIAL INPUT DATA", Option 10, page 34).

CATEGORY 5 - INNER RING DESCRIPTION

CATEGORY NAME: IRING

CATEGORY DESCRIPTION:

Category IRING is used to describe the geometry of the inner ring. IRING is always included with input data. Ring geometry is defined in Figure 1.

DATA ITEMS	DEFAULT
<u>RIG</u> - Groove radius of the inner ring	0.(flat)
<u>FLGALI, FLGARI</u> - Flange angles. See FLGALO and FLGARO in category ORING.	No flange

CATEGORY 6 - CAGE DESCRIPTION

CATEGORY NAME: CAG

CATEGORY DESCRIPTION:

The data items contained within this category are used to describe the geometry of the cage. This set of data must always be included. All lengths are in mm (see Figure 6).

DATA ITEMS	DEFAULT
<u>IRIDE</u> - Cage type flag	+1
IRIDE = 1; the cage is inner ring land riding	
IRIDE = -1; the cage is outer ring land riding	
IRIDE = 0; the cage is rolling element riding	
<u>RLDC</u> - Rail-land diametral clearance	None
<u>SRW</u> - Single rail width	None
<u>RLD</u> - Rail-land diameter	None
<u>CPCLR</u> - Cage pocket radial clearance	None

CATEGORY 7 - OPERATING CONDITIONS

CATEGORY NAME: OPER8

CATEGORY DESCRIPTION:

Bearing operating conditions and operating temperatures are given in this category. Outer ring, inner ring and flange temperatures are used to evaluate the properties of the specified lubricant at these locations. Bulk temperature (BULKT) is used to evaluate the properties of the specified lubricant contained in the free space of the bearing cavity. This information is subsequently used in the calculation of the viscous drag force acting upon the rolling elements. Data for this category must always be included. All temperatures are specified in degrees Celcius.

DATA ITEMS (See Figure 7)	DEFAULT
<u>SS</u> - Shaft speed - RPM	None
<u>BULKT</u> - Average temperature of lubricant in bearing cavity	100.
<u>TRE</u> - Rolling element temperature	100.
<u>THSG</u> - Housing temperature	100.
<u>TSHFT</u> - Shaft temperature	100.
<u>TOR</u> - Outer ring temperature	100.
<u>TIR</u> - Inner ring temperature	100.
<u>TF1</u> through <u>TF4</u> - Flange temperatures as shown in Figure 7	100.

CATEGORY 8 - LUBRICATION DATA

CATEGORY NAME: LUBE

CATEGORY DESCRIPTION:

Within this category the user specifies lubricant properties and other data which relate directly to the lubricant or to the definition of friction related processes.

DATA ITEMS

DEFAULT

NCODE - The user may specify particular lubricant properties or simply select a value of 1 through 4 for NCODE. The latter selection obtains lubricant properties from a precoded table. Specific values of NCODE and associated lubricant properties are shown in Table 3. The user may input lubricant properties not in Table 3 by specifying NCODE=0.

4

ZTO, ZTI - Lubricant replenishment layer thickness¹ at the outer and inner rings, respectively. (mm)

7.62x10⁻⁴
2.54x10⁻⁴

ZTFO, ZTFI - Lubricant replenishment layer thickness at the outer and inner flanges, respectively. (mm)

1.27x10⁻⁴
1.27x10⁻⁴

¹At the present time the magnitudes of the inner and outer replenishment layer thicknesses have not been correlated with flow rate, particular lubricants or bearing speed. The user is required to establish proper values of the replenishment layer thickness. The following guidelines are suggested:

- 1) To avoid starvation, replenishment layer thickness should be 1 or 2 times the EHD film thickness.
- 2) Because of centrifugal force, intuition suggests the outer be thicker than the inner replenishment layer.

DATA ITEMS	DEFAULT
<u>XCAV</u> - Percent of lubricant occupying the bearing cavity? $0. \leq XCAV \leq 100.$	5.
<u>FRK</u> - Lubricant friction coefficient, used in the Allen [1] ³ traction model. Typical values lie in the range $0.05 \leq FRK \leq 0.08.$.07
<u>AKN</u> - Computer program CYBEAN uses a model developed by Loewenthal [2] to compute EHD film thickness in point and line contacts. The term AKN, the lubricant film thickness coefficient, appears in that equation. Typical values are $18. \leq AKN \leq 50.$	50.
<u>XMUCG</u> - Coulomb friction coefficient used at the cage pocket-rolling element contact. If $ZTO=ZTI=0$, XMUCG is applied.	.0175
<u>XMURC</u> - Dry coefficient of friction at race contacts. If $ZTO=ZTI=0$, XMURC is applied.	.0175
<u>XMUFL</u> - Dry coefficient of friction at the flange contact. If $ZTFO=ZTFI=0$, XMUFL is applied.	.0175
The following data must be included if NCODE was specified as zero:	
<u>VIS1</u> - Viscosity of lubricant (CENTISTOKES) at 100° F.	None
<u>VIS2</u> - Viscosity of lubricant (CENTISTOKES) at 210° F.	None
<u>RHO60</u> - Density of lubricant (gm/cm ³) at 15°C.	None
<u>G</u> - Thermal coefficient of expansion (1/C°)	None
<u>COND</u> - Thermal conductivity (watts/M-Deg C)	None

²As with replenishment layer thickness the amount of free lubricant should be correlated with the operating parameters. At this time such correlations do not exist. XCAV values of less than 5 percent are recommended.

³Numbers in brackets designate References listed in Section 6.

CATEGORY 9 - BEARING APPLIED LOAD

CATEGORY NAME: LOAD

CATEGORY DESCRIPTION:

All bearing applied loads, either forces or misalignments are specified in this category. This data set must always be included (see Figure 5).

DATA ITEMS	DEFAULT
<u>FY</u> - Radial load in Y direction (Newtons)	0.
<u>FZ</u> - Radial load in Z direction (Newtons)	0.
<u>THETAZ</u> - Misalignment about the z-axis (degrees)	0.
<u>THETAY</u> - Misalignment about the y-axis (degrees)	0.

CATEGORY 10 - SURFACE FINISH AND FATIGUE LIFE DATA
--

CATEGORY NAME: LIFE

CATEGORY DESCRIPTION:

Self-explanatory. This category must always be included.

DATA ITEMS	DEFAULT
<u>RMSROL</u> - The RMS surface roughness of the roller (microns)	.2032
<u>RMSIR</u> - The RMS surface roughness of the inner ring (microns)	.254
<u>RMSOR</u> - The RMS surface roughness of the outer ring (microns)	.254
<u>CIR</u> - Life correction factor ¹ for the inner ring	1.
<u>COR</u> - Life correction factor ¹ for the outer ring	1.

¹The numbers input for CIR and COR are used to account for improved materials by multiplying the raceway fatigue lives as calculated by Lundberg-Palmgren methods. Typical life factor values for modern steels are in the range of 2 to 3.

In the ASME Publication Life Adjustment Factors for Ball and Roller Bearings, the Material Factor D and the Material Process Factor E should be used multiplicatively as inputs for CIR and COR.

The Lubricant Life Factor FL is calculated directly in the program and applies to both the inner and outer rings.

III. SPECIAL INPUT DATA

The user activates extended program capabilities by invoking up to a maximum of eleven options. Logic used to activate an option was detailed in the preceding material, and is summarized in Table 4.

The user may employ as many options as necessary in a single program execution. The only restrictions are found in the input data sequence shown in Table 4 and in the use of specific input formats (Appendix A).

All options require the user to specify additional information. This data follows immediately after the basic categorized data.

III.1 OPTION 1: USER SPECIFIED MATERIAL PROPERTIES

The user may specify the material properties of any bearing component. This is done by setting the logical variable MPROP = .TRUE. The appropriate properties are entered according to the card format shown in Figure A1. Unspecified variables (i.e., those set to zero or left blank) are assigned the following values:

Modulus of Elasticity	204083 N/mm ²
Poisson's Ratio	.3
Coefficient of Thermal Expansion	0.1124 x 10 ⁻⁴ per °C
Density	7.806 gm/cm ³

III.2 OPTION 2: FIT CALCULATIONS

This option enables the user to analyze cylindrical roller bearings manufactured with out-of-round outer rings. The user is given complete flexibility in specifying the geometry by which preload is induced. The four most popular methods for generation of the latter with noncircular outer rings are shown in Figure 8. Input card format is specified in Figure A2.

Variables which describe the shape of the noncircular components follow:

MEAN RADIUS - This variable is defined in the nomenclature of Figure 9 and Figure 10 as

$$R_{\text{MEAN}} = \frac{D_{\text{MAX}} + D_{\text{MIN}}}{4}$$

It is to be noted that the mean radius must be specified for the raceway profile, outer ring outer surface profile and the housing profile (Figures 9 and 10).

ECCENTRICITY RATIO - This variable is defined in the nomenclature of Figure 9 and Figure 10 as

$$\epsilon = \frac{2D_{\text{MAX}}}{(D_{\text{MAX}} + D_{\text{MIN}})} - 1$$

This variable is used to describe the magnitude of out-of-roundness manufacture into the raceway, ring outer surface and housing.

LOBE ORIENTATION ANGLE - The lobe orientation angle, θ , is the angle measured clockwise positive from the bearing y-axis to the first lobe (Figures 9 and 10). Input is in degrees.

NUMBER OF LOBES - Although most bearings which are manufactured out-of-round are made with 2 lobes, the user may input any number of lobes greater than or equal to zero.

NOTE: Bearing diametral clearance under this option must be specified as follows:

$$\text{DIACL} = \{ (\text{MEAN RADIUS OF OUTER RACEWAY}) - (\text{RADIUS OF INNER RACEWAY SURFACE}) - (\text{ROLLER MAXIMUM DIAMETER}) \} \times 2$$

NOTE: The above calculations are with OOR = .TRUE.. Option 2 can also be used for calculating the operating diametral clearance for circular ring bearings when OOR = .FALSE.. The input card format is specified on figure A2-A and the data cards would be placed in the same position as the OOR fit analysis cards. Definitions of items indicated for input card formats on A2-A are shown in Figure 11.

III.3 OPTION 3: USER SPECIFIED INFLUENCE COEFFICIENTS

In the fit analysis described in Section III.2, it was assumed that the housing was rigid, therefore, all deformation was experienced by the outer ring. In some instances the user may wish to treat the outer ring support structure (the housing) as a deformable body. In this case, he must supply the "influence coefficients"¹ for the housing. The influence coefficients completely describe the deformation of the housing and are typically obtained by using a finite element analysis.

The user is required to input one coefficient per roller. Coefficients are evaluated at each roller location. Note that if the coefficients are not input, default is a rigid housing. The card image input format is shown in Figure A3.

¹The influence coefficients, C_i , are defined as the outward radial deformation of the housing at the i -th roller location due to a unit load at roller location i . (mm/N)

III.4 OPTION 4: USER SPECIFIED SLICE WIDTHS

CYBEAN uses a slicing technique (Ref. 3 & Ref. 7 of this report) to compute lubricant traction at the outer and inner ring roller contacts. Ordinarily, the slice widths are assumed equal, however, in some instances, it may be advantageous for the user to specify their individual and varying extent. It may, for example, be desired to obtain greater detail at the roller extremities.

This option is invoked by specifying SYMY = .TRUE. and EVSLIC = .FALSE. Since symmetry is assumed, the slice widths need only be input for a symmetric half of the roller. The numbering scheme used is one where the first slice is encountered at the roller centerline, the last at the roller end (Figure 12). The card format shown in Figure A4 is used for input data.

III.5 OPTION 5: USER INPUT OF SYMMETRIC ROLLER GEOMETRY

The specification of roller crown radius and flat length is sufficient to describe the geometry of the roller. If the user feels this to be insufficient, he may input values for the roller radii at specific locations along the roller effective length. The input sequence is shown in Figure 12.

Note that the number of radii to be read in is equal to the number of slices plus one. Card formats are given in Figure A5. The specific example of logic used is SYMY = .TRUE. and KLUE = 3..

III.6 OPTION 6: OVERWRITE CALCULATED (ROLLER) END RADII
WITH USER SUPPLIED VALUES

In cases where the roller effective length extends for nearly the complete roller length, it would be convenient for the user to specify the last 3 roller radii. In doing so, this would account for the blend radius in the specification of the roller geometry. Again, note that symmetry is assumed, and the user need only specify the last 3 end radii on a symmetric half of the roller.

The format of the input cards is shown in Figure A6, logic used is SYMY = .TRUE. and OVREND = .TRUE.

This option also invokes Option 9.

III.7 OPTION 7: USER SPECIFIED, COMPLETELY VARIABLE
ROLLER GEOMETRY

The user may specify the complete detail of roller geometry as input by using the options:

SYMY = .FALSE. and

KLUE = 4

When employing this option, the user must specify roller radii and slice widths across both the outer and inner ring effective lengths. Note that the number of slices input corresponds to the total number of roller raceway slices (Figure 13).

Card formats for data input are shown in Figure A7.

III.8 OPTION 8: USER SPECIFIED SYMMETRIC RING GEOMETRY

As with the roller geometry, the user is given the option of supplying the program with the symmetric ring geometry. The ring line of symmetry lies in the y-z plane of the bearing and divides the ring effective length into two equal parts.

The data required when exercising this option is shown in Figure 14, input card formats in Figure A8, logic used is SYMY = .TRUE. and KRING = 3.

III.9 OPTION 9: OVERWRITE CALCULATED (RING) END RADII
WITH USER SUPPLIED VALUES

This option is similar to Option 6 except that the user specifies the last 3 ring radii instead of the last 3 roller radii. Note that when Option 6 is invoked, this option is also invoked.

The format of the input data cards is shown in Figure A9, logic used is SYMY = .TRUE. and OVREND = .TRUE.

III.10 OPTION 10: USER SPECIFIED, COMPLETELY VARIABLE
RING GEOMETRY

The user may specify the ring geometry as input by using the options

SYMY = .FALSE. and

KRING = 4

When using this option the user must specify all of the ring radii across both effective lengths. Note also, that the number of slices that are input corresponds to the total number of roller raceway slices (Figure 15).

Card formats for data input are shown in Figure A10.

III.11 OPTION 11: TEMPERATURE CALCULATIONS

CYBEAN may be used to compute either the time transient or steady state temperature distribution within a system defined by the bearing and its environment. Logic used requires THERM = .TRUE.

The temperature portion of CYBEAN is designed to produce temperature maps for an axisymmetric mechanical system of any geometrical shape. The mechanical system is first approximated by an equivalent system which consists of a number of elements having simple geometric shape. Each element is then represented by a node point characterized by a mass, surface area, and having either a known or an unknown temperature. The environment surrounding the system is also represented by one or more nodes. With the node points properly selected, heat balance equations are formulated by the program for the nodes of unknown temperature. These equations become non-linear when there is radiation between two or more of the node points considered.

The success of the approach depends largely on the realistic physical subdivision of the system. If the subdivision is too fine, there will be a large number of equations to be solved. If the subdivision is too crude, the results are likely to be inaccurate.

The present thermal simulation is restricted to the treatment of axially symmetric physical systems. Bearing rings for example, fall into this category and can be represented by an element of uniform temperature. For a component or module which is not axially symmetric, the user must represent it with an equivalent axially symmetric element of approximately the same surface area and material volume.

This section is based upon work presented in [4].

With input data prepared as described in the following paragraphs, CYBEAN will solve the heat-balance equations for either the steady state or the time transient conditions and produce temperature maps for the physical system.

INPUT DATA FOR TEMPERATURE CALCULATIONS

Card formats for data input are listed in Figure A11.

Card 1

Card 1 is a control card and contains input for both steady state and transient thermal analyses. It is not intended however, that both analyses be executed with the same run.

Item 1: Highest Node Number (N). The temperature nodes must be numbered consecutively from one (1) to the highest node number. The highest node number must not exceed one hundred (100).

Item 2: Number of Unknown Temperature Nodes (N). It is required that all nodes with unknown temperatures be assigned the lowest node numbers. The nodes which have known temperatures are assigned the highest numbers.

Item 3: Common Initial Temperature (TEMP)°C: The temperature solution iteration scheme requires a starting point, i.e., guesses of the equilibrium temperatures. Card 2 allows the user to input guesses of individual node temperatures, however, when a node is not given a specific initial temperature, the temperature specified as Item 3 of Card 1 is assigned.

Item 4: Punch Flag (IPUNCH): If the Punch Flag is not zero (0) or blank, the system equilibrium temperatures along with the respective node numbers will be punched according to the format of Card 2. This option is useful if, for instance, the user makes a steady state run with lubrication, and then wishes to use the resultant temperature as the initiation point for a transient dry friction run in order to assess the consequence of lubricant flow termination.

Item 5: "Output Flag" (IUB). If the "Output Flag" is not zero the bearing program output and a temperature map will be printed after each call to the bearing solution scheme. This printout will allow the user to observe the flow of the solution and to note the interactive effects of system temperatures and bearing heat generation rates. Since the temperature solution is not mathematically coupled to the bearing solution the possibility exists that the solution may diverge or oscillate. In such a case, study of the intermediate output produced by the "Output Flag" option may provide the user with better initial temperature guesses that will effect a steady state solution. Two levels of bearing output are permitted. If IUB is 1, the rolling element output is not required. If IUB is 2, full bearing output is obtained.

Item 6: "Maximum Number of Calls to the Bearing Program" (IT1). IT1 is the limit on the number of Thermal-Bearing iterations, i.e., the external temperature equilibrium calculation. The user must input a non-zero integer such as 5 or 10 in order for CYBEAN to iterate to an equilibrium condition. If IT1 is left blank or set to zero (0) or 1, bearing performance will be based on the initially guessed temperatures of the system. Temperatures printed will be based on the bearing generated heats.

It is unlikely that an acceptable equilibrium condition will be achieved. However, the temperatures which result may provide better initial guesses for a subsequent run than those specified by the user.

IT1 also serves as a limit on the transient temperature solution scheme, by limiting the number of times the bearing solution scheme is called. Each call to the bearing scheme will input a new set of bearing heats to the transient temperature scheme until a steady state condition is approached or until the transient solution time-up limit is reached.

Item 7: "Absolute Accuracy of Temperatures for the External Thermal Solution" (EPI). In the steady state thermal solution scheme, each calculation of system temperatures occurs after a call to the bearing scheme which produces bearing generated heats. After the system temperatures have been calculated for each iteration, using the internal temperature solution scheme, each node temperature is checked against the nodal temperature at the previous iteration.

If $\{t_{(N)i} - t_{(N-1)i}\} < \text{EPI}$ for all nodes i then equilibrium has been achieved and the iteration process stops.

Item 8: "Iteration Limit for the Internal Thermal Solution" (IT2). After each call to the bearing program, the internal temperature iteration scheme is used to determine the steady state equilibrium temperatures based on the calculated set of bearing heat generation rates. If IT2 is left blank or set to zero (0), the number of internal iterations is limited to twenty (20).

Item 9: "Accuracy for Internal Thermal Solution" (EP2). The use of EP2 is explained in Volume I. If EP2 is left blank or set to zero (0), a default value of 0.001 is used.

Item 10: "Starting Time" (START) is a time at which the transient solution begins, T_s ; usually set to zero (0).

Item 11: "Stopping Time" (STOP) is the time in seconds at which the transient solution terminates, T_f . The transient solution will generate a history of the system performance which will encompass a total elapsed time of

$$(T_f - T_s) \text{ seconds}$$

Item 12: "Calculation Time Step" (STEPIN). The transient internal solution scheme solves the system of equations (see Volume I):

$$t_{k+1} = t_k + \frac{q_k}{C_p V} T$$

$$T = \text{STEPIN}$$

The user may specify STEPIN. If left blank or set to zero (0), CYBEAN calculates an appropriate value for STEPIN using the procedure described in [4].

Item 13: "Time Interval Between Printed Temperature Maps" (TTIME) seconds. The user must specify the length of time which will elapse between each printing of the temperature map. The interval will always be at least as large as the "calculation timestep" (STEPIN).

Item 14: "Time Interval Between Calls of the Bearing Program" (BTIME). BTIME will always have a value larger than or equal to (STEPIN) even if the user inadvertently inputs a shorter interval. Computational time savings result if BTIME is greater than STEPIN, however, accuracy might be lost.

Card 2

In the steady state analysis this card is used to input initial guesses of individual nodal temperatures for unknown nodes as well as the constant temperatures for known nodes, such as ambient air and/or an oil sump.

In the transient analysis, Card 2 is used to input the nodal temperatures of all nodes at time = T_s , i.e., at the initiation of the transient solution.

Card 3

With this card, node numbers are assigned to the components of the bearing. With this information the proper system temperatures are carried into the respective bearing analysis. The inner race and inner ring node numbers may or may not be the same at the user's discretion. Similarly, the outer race and outer ring node numbers may or may not be the same. The flange numbering scheme is shown in Figure 1.

Card 4

The bearing analysis accounts for frictional heat generated at five locations in the bearing, i.e., the inner race, the outer race, between the cage rail and ring land, the bulk lubricant due to drag and at the flanges. The heat generated at the cage-rolling element contact is added to the bulk lubricant. This card allows the heat generated to be distributed equally to two nodes. For instance, the heat generated at the inner race-rolling element contact should be distributed half to the rolling element and half to the inner race. The heat developed between the cage and inner ring land may be distributed half to the inner ring and half to the cage if a cage node has been defined otherwise, half to the bulk lubricant.

Card 5

This card specifies the node numbers and the heat generation rate at those nodes. This card is used to specify where heat is generated at a constant rate such as at rubbing seals or gear contacts.

Card 6

This card type is used to input the numerical values of the various heat transfer coefficients which appear in the equations for heat transfer by conductivity, free convection, forced convection, radiation and fluid flow. Up to ten coefficients of each type may be used. Separate values of each type of coefficient are assigned an index number via card 6 and in describing heat flow paths (Card 7 below) it is necessary only to list the index number by which heat transfers between node pairs.

Indices 1-10 are reserved for the conduction coefficient λ , 11-20 for the free convection parameters, 21-30 for forced convection, 31-40 for emissivity and 41-50 for fluid flow (product of specific heat, density and volume flow rate).

As an example, for heat transfer by conduction with coefficient λ of 53.7 watts/M°C one could prepare a card 6 with the digit 1 punched in column 10 and the value 53.7 punched in the field corresponding to card columns 11-20. If a conduction coefficient of 46.7 were applicable for certain other nodes in the system one could punch an additional card assigning index No. 2 to the value $\lambda = 46.7$ by punching a "2" in card column 10 and 46.7 anywhere within card columns 11-20.

Rather than inputting constant forced convection coefficients, optionally, these coefficients can be calculated by the program in one of three ways. If the calculation option is exercised a pair of cards is used in place of a single card containing a fixed value of α . The contents of the pair of cards depends upon which of the three optional methods are used.

Option 1) α is independent of temperature but is calculated as a function of the Nusselt number which in turn is a function of the Reynolds number R_e , the Prandtl number P_r as follows, (cf. [5]):

$$\alpha = (\lambda_{oil}/L)N_u$$

$$N_u = KR_e^a P_r^b$$

where λ_{oil} is the lubricant conductivity, L is a characteristic length (with the units of meters) and K , a and b are constants.

Option 2) α is a function only of fluid dynamic viscosity and viscosity is temperature dependent.

$$\alpha = c \eta^d$$

Option 3) α is a function of the Nusselt, Reynolds and Prandtl numbers and viscosity is temperature dependent.

Appendix B has been included to aid the user in data preparation and calculation of heat transfer coefficients.

Card 7

This card defines the heat flow paths between pairs of nodes. Every node must be connected to at least one other node, i.e., two or more independent node systems may not be solved with a single program execution.

The calculation of heat transfer areas is based on lengths, L_1 and L_2 input using card 7. Additionally, the type of surface for which the area is being calculated is indicated by the sign assigned to the heat transfer coefficient index. If the surface is cylindrical or circular the index should be positive, if the surface is rectangular the index should be input as a negative integer.

In the case of radiation between concentric axially symmetric bodies, L_3 is the radius of the larger body. For radiation between two parallel flat surfaces or for conduction between nodes, L_3 is the distance between them.

Fluid flow heat transfer accounts for the energy which the fluid transports across a node boundary. Along a fluid node at which convection is taking place, the temperature varies. The nodal temperature which is output is the average of the fluid temperature at the output and input boundaries. If the emerging temperature of the fluid is of interest, it is necessary to have a fluid node at the fluid outlet. At this auxiliary node only fluid flow heat transfer occurs and the fluid temperature would be constant throughout the node. Thus the true fluid outlet temperature will be obtained.

Conduction of heat through a bearing is controlled by index 51. The actual heat transfer coefficient which contains a conductivity, area and a path length term is calculated in the bearing portion of the program. The term is based upon an average outer race and inner race rolling element contact.

AT81D049

Card 8

This card inputs data required to calculate the heat capacity of each node in the system. This card type is required only for a transient analysis.

IV. OUTPUT DATA

CYBEAN output data is structured such that all user supplied information, e.g. bearing geometry and operating conditions, are printed first. Default values assigned for unspecified input parameters are also displayed. Computed data resulting from the bearing analysis are then presented. Two examples are included representing solution levels 2 and 3 to illustrate typical program output. The applicable cylindrical roller bearing geometry and operating conditions are specified in Table 5.

The following program options were used in the sample executions:

PLTRNG = .FALSE.

PLTROL = .FALSE.

MPROP = .TRUE.

THERM = .FALSE.

FITS = .FALSE.

IV.1 SAMPLE PROBLEM OUTPUT DESCRIPTION

A. Output at Solution Level = 2

The output generated at solution level 2 is presented in Appendix D. Output contained on the first page informs the user of the program version, and references the latest user's manual. User invoked options for this execution are also noted on this page.

Pages D1 and D3 present an organized list of the basic categorized input data. Roller and ring geometry are listed on Page D4.

Cage geometry, material properties and friction data are listed on Page D5 along with bearing component temperatures.

The bearing fatigue life, as well as individual L_{10} fatigue lives of the outer and inner rings are presented on Page D6. The bearing life represents the statistical combination of the two raceway lives. The raceway lives in turn reflect the combined effects of the user input material factors and the computed lubricant film thickness factors. The film thickness to surface roughness ratio is used in the calculation of the lubricant life factor. Detailed information for this calculation is given in [6].

Pages D7 and D8 list the roller raceway contact loads at the outer and inner ring contacts as defined in the \bar{R} coordinate

frame, illustrated in Figure 16. These forces include both elastic and lubricant traction effects. Rollers are numbered in ascending order beginning with the roller lying on (or nearest) the bearing y-axis and proceeding counter clockwise. On Page D9, the inner ring applied forces, moments and displacements, which constitute the system loading information supplied by the user are displayed. The calculated "inner ring reactive forces and moments" are the resultant of the vector sum of all roller-inner ring contacts. Load values are included with the output to assess the degree of convergence at the lower solution levels. In this LEVEL 2 execution, the user specified applied load was 4448N in the radial Y direction. The program arrived at a solution of:

$$Y = 4450 \text{ N}$$

$$Z = 1.69 \text{ N}$$

The theoretically correct solution requires $Z = 0$, and the 1.69N residual represents only 0.04% deviation from the applied load.

The lubricant data shown on the same page is self-explanatory. Output contained on Page D10 is for the most part self-evident. The roller orbital and rotational speeds printed are epicyclic since at level 2 they are not solved for. The pocket loads are estimated from rolling element Z equilibrium force equation residues.

The Hertzian contact stresses provided on Page D11 represent

maximum values for the line (roller-raceway) and point (roller end-flange) contacts. At this solution level flange-roller contact is not analyzed. The lubricant film thicknesses on Page D12 represent minimum values for the line (roller-raceway) contacts. On Page D13, roller skew and tilt are presented to the user as measured in two distinctly different reference frames. [Note: At LEVEL 2, roller skew is not calculated.]

Calculated roller skew and tilt is presented to the user as measured in two distinctly different reference frames. "Absolute" refers to the rotation the roller experiences relative to its initial position. "Relative" refers to the rotation the roller experiences relative to the inner ring position. The following example illustrates the two conventions.

Consider a bearing whose four rollers are "frozen" in their position of zero absolute skew and tilt. Assume rollers to be located at 90° intervals, two being on the Y-axis and two on the Z-axis. The inner ring is now rotated about the Z-axis. With the ring in its final position, the rollers still have zero "absolute" skew, however, the rollers which lie on the axis of rotation appear skewed when viewed from the "relative" reference frame of the inner ring.

Heat generation rates are displayed on Page D14 for bearing components. These data are self-explanatory.

B. Output at Solution Level = 3

The output generated at this solution level is presented in Appendix E. Data listed on Pages E1 through E8 are displayed in the same manner as for solution level 2, described in Section IV.1 A.

On Page E9, in addition to applied and calculated inner ring reactive forces, misalignment of the inner ring was considered.

At LEVEL 3 flange-roller contact can be analyzed. Flange induced roller loads are listed on Pages E10-E11. The numbering scheme is identical to the one used for roller-raceway loads. These loads are defined in the \bar{R} coordinate frame of Figure 16. Page E12 displays the sliding speed magnitude at the roller end-flange contact. The lubricant data is also represented on this page. At level three the roller speeds are computed using the roller equilibrium equations considering friction forces and moments.

On Page E13, the calculated roller speeds are provided. Epicyclic speeds are printed for the user's reference.

The cage pocket normal force listed is that force experienced by the roller due to interaction in the z direction with the cage web. A negative sign indicates that the roller is pushing the cage. All pocket loads are computed such that the rolling elements and cage are in equilibrium.

Maximum Hertzian stresses are displayed on Page E14 for the roller-raceway and roller-end flange contacts. The lubricant film thicknesses printed on Page E15 represent minimum values calculated for both raceways and the flange-roller contact.

Page E16 lists the roller tilt and skew angles. Roller skew is calculated at this level (LEVEL 3). Roller tilt was not considered in this particular analysis (ITILT was set to .FALSE.). Thus, the tilt values presented on this page are not calculated, rather they are estimated by the program.

Page E17 provides the heat generated at the rolling element-flange contacts in addition to the other bearing heat generation rates.

V. PROGRAM LIMITATION AND SPECIAL CASES

CYBEAN is a design tool. As with any tool, successful use requires awareness of intended applicability and inherent limitations.

A. LIMITATIONS

The user must conform to the following geometric and operating restrictions:

- 1) The bearing complement may contain no more than fifty (50) rollers. However, this version of CYBEAN has been dimensioned to accommodate a 203 x 203 array of partials [COMMON/BIGC/C(41209)]. This corresponds to only 28 rollers. The rest of the program is structured to accept up to 50 rollers. To execute CYBEAN with more than 28 rollers, the C array needs to be expanded. The equation to use in computing the array size is:

$$\text{DIMENSION} = [7 \times \text{NUMROL} + 7]^2$$

NUMROL = NO. OF ROLLERS

The /BIGC/ common appears in the following subroutines:

PARDA, PARDER, SOLV14, SIMQA, WRITC,
MINT, CINT, RINT, RINFIT

- 2) Flanges may be specified on the outer or inner ring, but not on both simultaneously.
- 3) Given a cylindrical roller bearing operating with specified misalignment, and/or no geometric symmetry, one ring (either the inner or outer) must be flanged.

- 4) This edition of CYBEAN does not accept externally imposed axial loads.
- 5) Extremely light radial loading¹, wherein a single roller interacts with the inner ring, will cause error termination.
- 6) Use of the fit option (i.e. FITS = .TRUE.), requires the mean radius of the outer ring outer surface to be less than the mean radius of the housing (for OOR = .TRUE.)

B. SPECIAL APPLICATIONS

Some special applications of CYBEAN are:

- 1) The user may approximate the bearing heat generation rate by specifying ITMAX=1. Heat generation rate computations under this option are based upon a single iteration of the initial guess independent variable values.

The initial guess variable values are obtained by solving the governing equation set for the equilibrium of elastic forces.

- 2) Through the use of the symmetric ring and roller geometry program options, the user can use the cylindrical roller bearing program to analyze a single row

¹A current estimate used to determine the minimal radial load is

$$P_{\min} = C/50.$$

Here, C is the basic (AFBMA) dynamic capacity and P_{\min} is the minimum radial load.

spherical roller bearing. When doing so, ring misalignment must be set to zero.


- 3) The user may, when making several steady state temperature program executions, use the card punch option (IPUNCH#0) to obtain the temperatures in 80 column card format. These provide an economic initial guess (see: Temperature Calculations, Card 2) for subsequent runs.
- 4) The program is capable of properly directing roller-to-raceway contact load vectors automatically, in those cases where roller and/or ring profiles have small radii of curvature.

VI. REFERENCES


- 1) Allen, C. W., Townsend, D. P., and Zaretsky, E. V., "New Generalized Rheological Model for a Ball Spinning in a Non-Conforming Groove," NASA Technical Note D7280, National Aeronautics and Space Administration, Washington, D.C., May 1973.
- 2) Loewenthal, S. H., et al, "Correlation of Elastohydrodynamic Film Thickness Measurements for Fluorocarbon, Type II Ester and Polyphenal Ether Lubricants," NASA TN D-7825, NASA Lewis and USAAMRDL, Cleveland, Ohio, November 1974.
- 3) Crecelius, W. J., et al, "Improved Flexible Shaft Bearing Thermal Analysis With NASA Friction Models and Cage Effects," SKF Report No. AL76P003, submitted to National Aeronautics and Space Administration, Lewis Center, Cleveland, Ohio, under Contract No. NAS3-19739, February 1976.
- 4) Crecelius, W.C., and Pirvics, J., "A Computer Program for the Analysis of the Steady State and Transient Thermal Performance of Shaft-Bearing Systems," SKF Report No. AL76P030, submitted to AFAPL, Wright-Patterson AFB, Ohio, and NAPTC, Trenton, N.J., under Air Force Contract No. F33615-76-C-2061 and Navy MIPR No. M62376-MP-00005.
- 5) Kent's Mechanical Engineering Handbook-Power Volume, John Wiley and Sons, Inc., 12th Edition, 1960, Chapter 3, p. 20.
- 6) Kleckner, R. J. and Dyba, G. J., "Curve Fit for ASME's Lubrication Life Factor vs. Λ Chart," SKF Report AL79P007L (September 1979).

AT81D049

- 7) Kleckner, R.J. and Pirvics, J., "SKF Computer Program CYBEAN - Volume I: Analysis", Submitted to NASA - Lewis Research Center under contract NAS3-20068, SKF Report AL78P022, CR-159460 (July 1978).

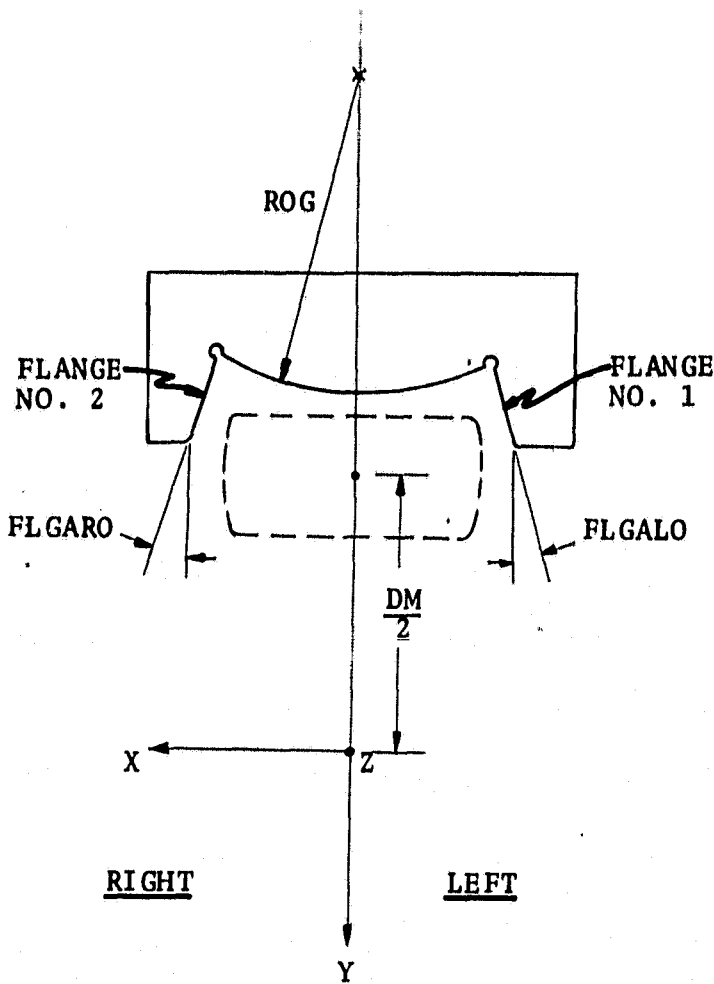

4a) User Specified
Outer Ring Data

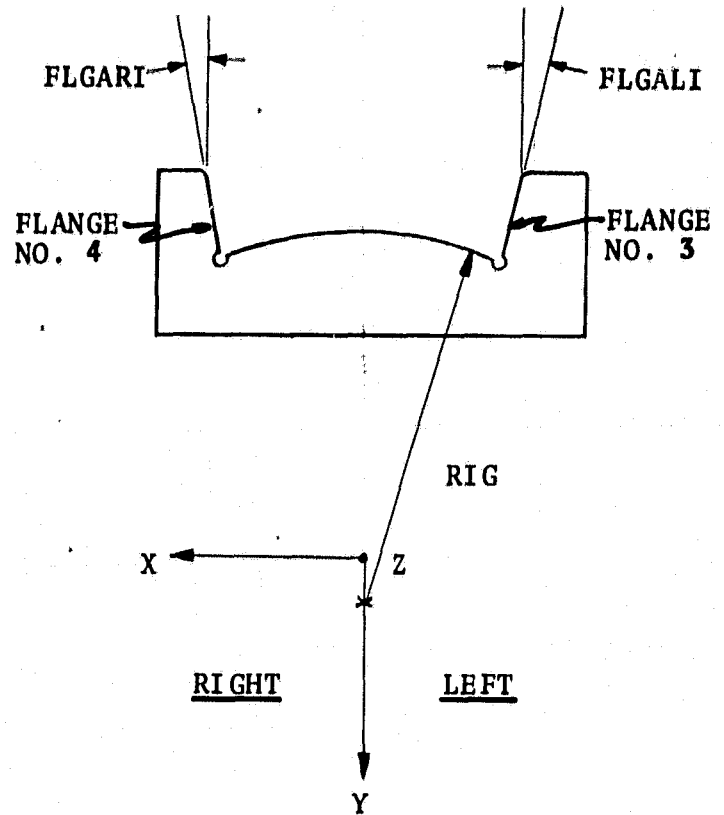

4b) User Specified
Inner Ring Data

FIGURE 1: USER INPUT RING DATA.

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

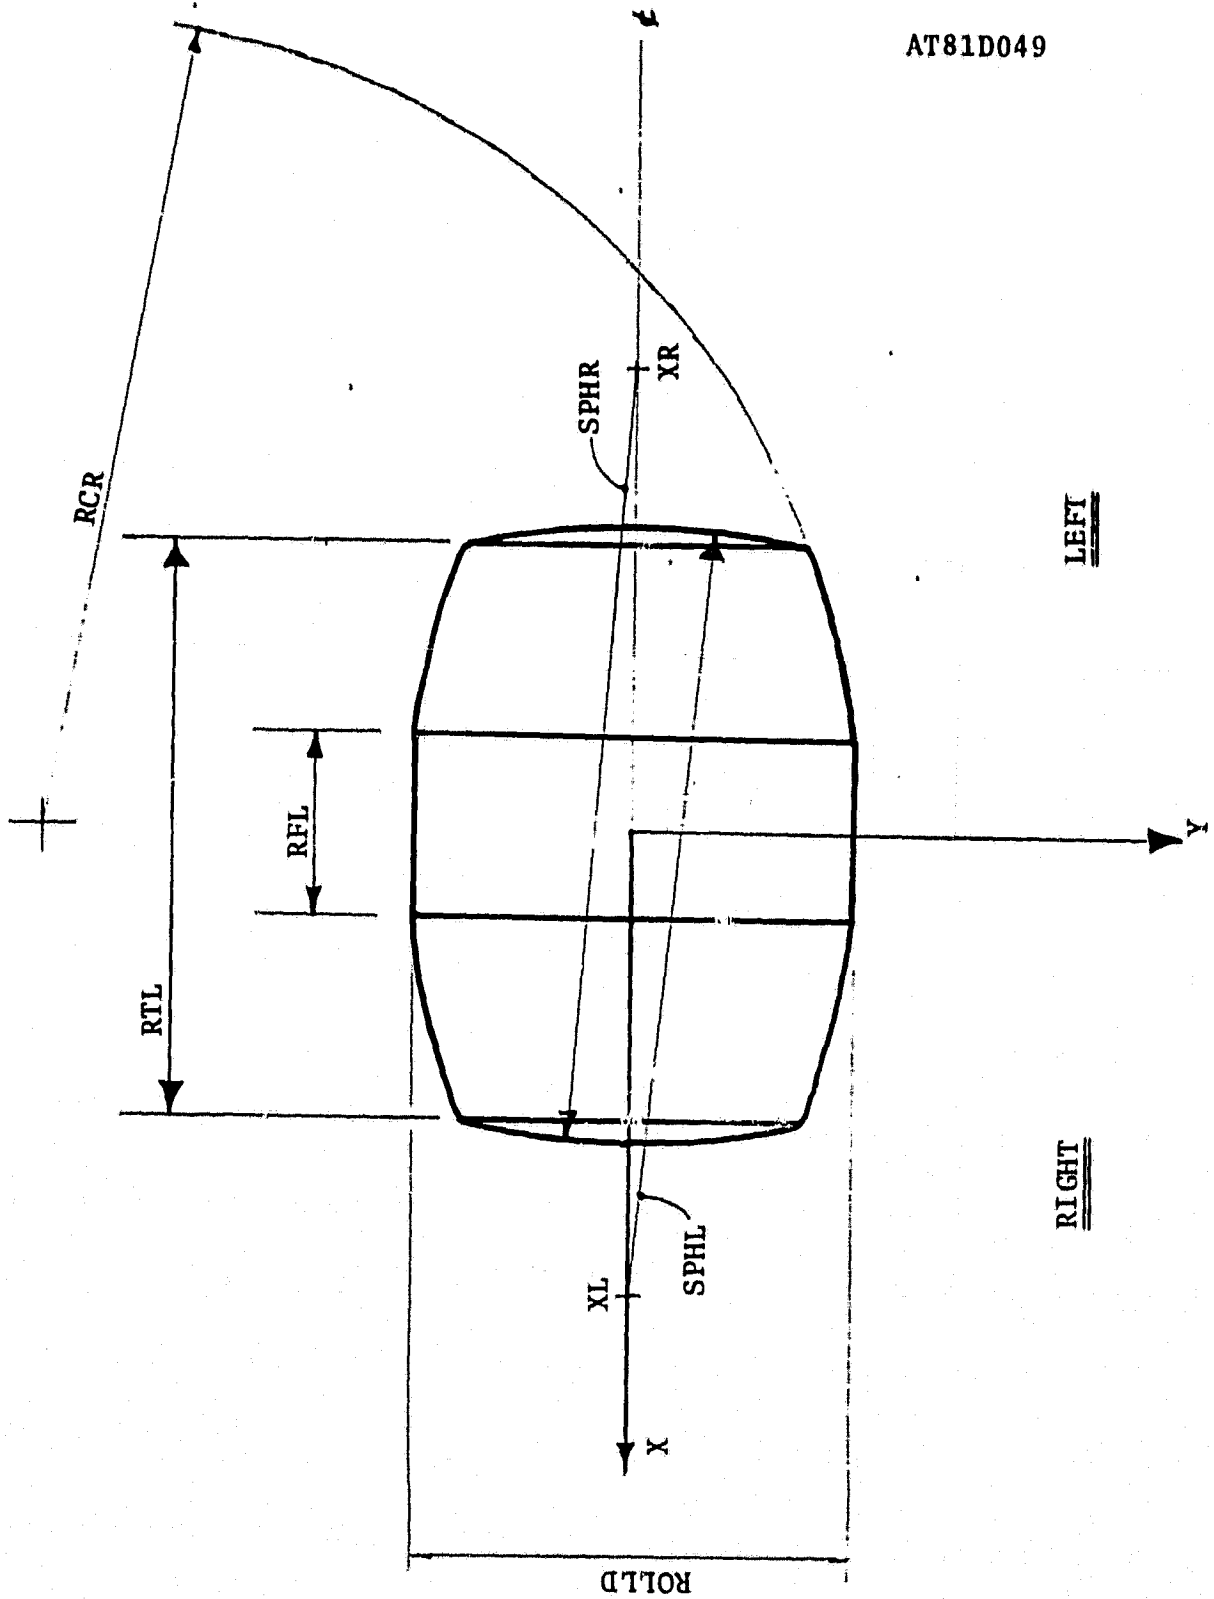


FIGURE 3: USER INPUT ROLLER GEOMETRY.

AT81D049

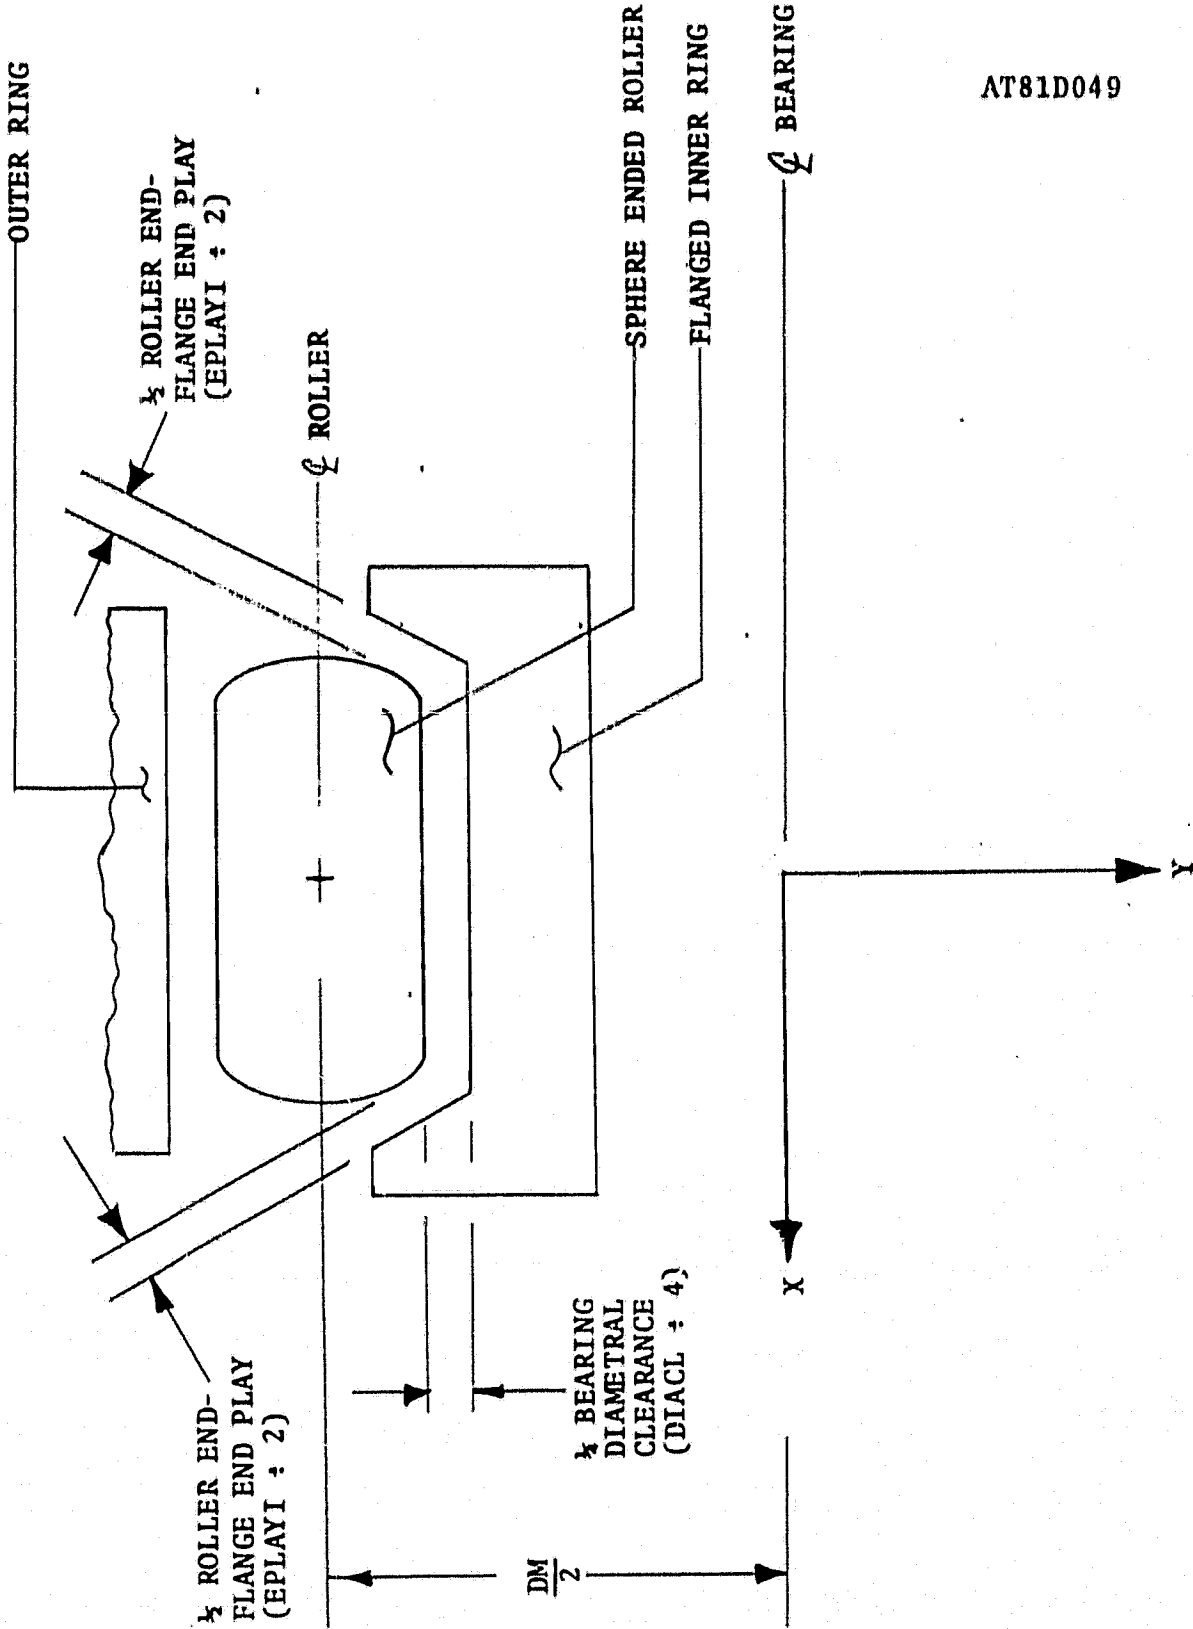


FIGURE 4: USER INPUT BEARING CLEARANCES

AT81D049

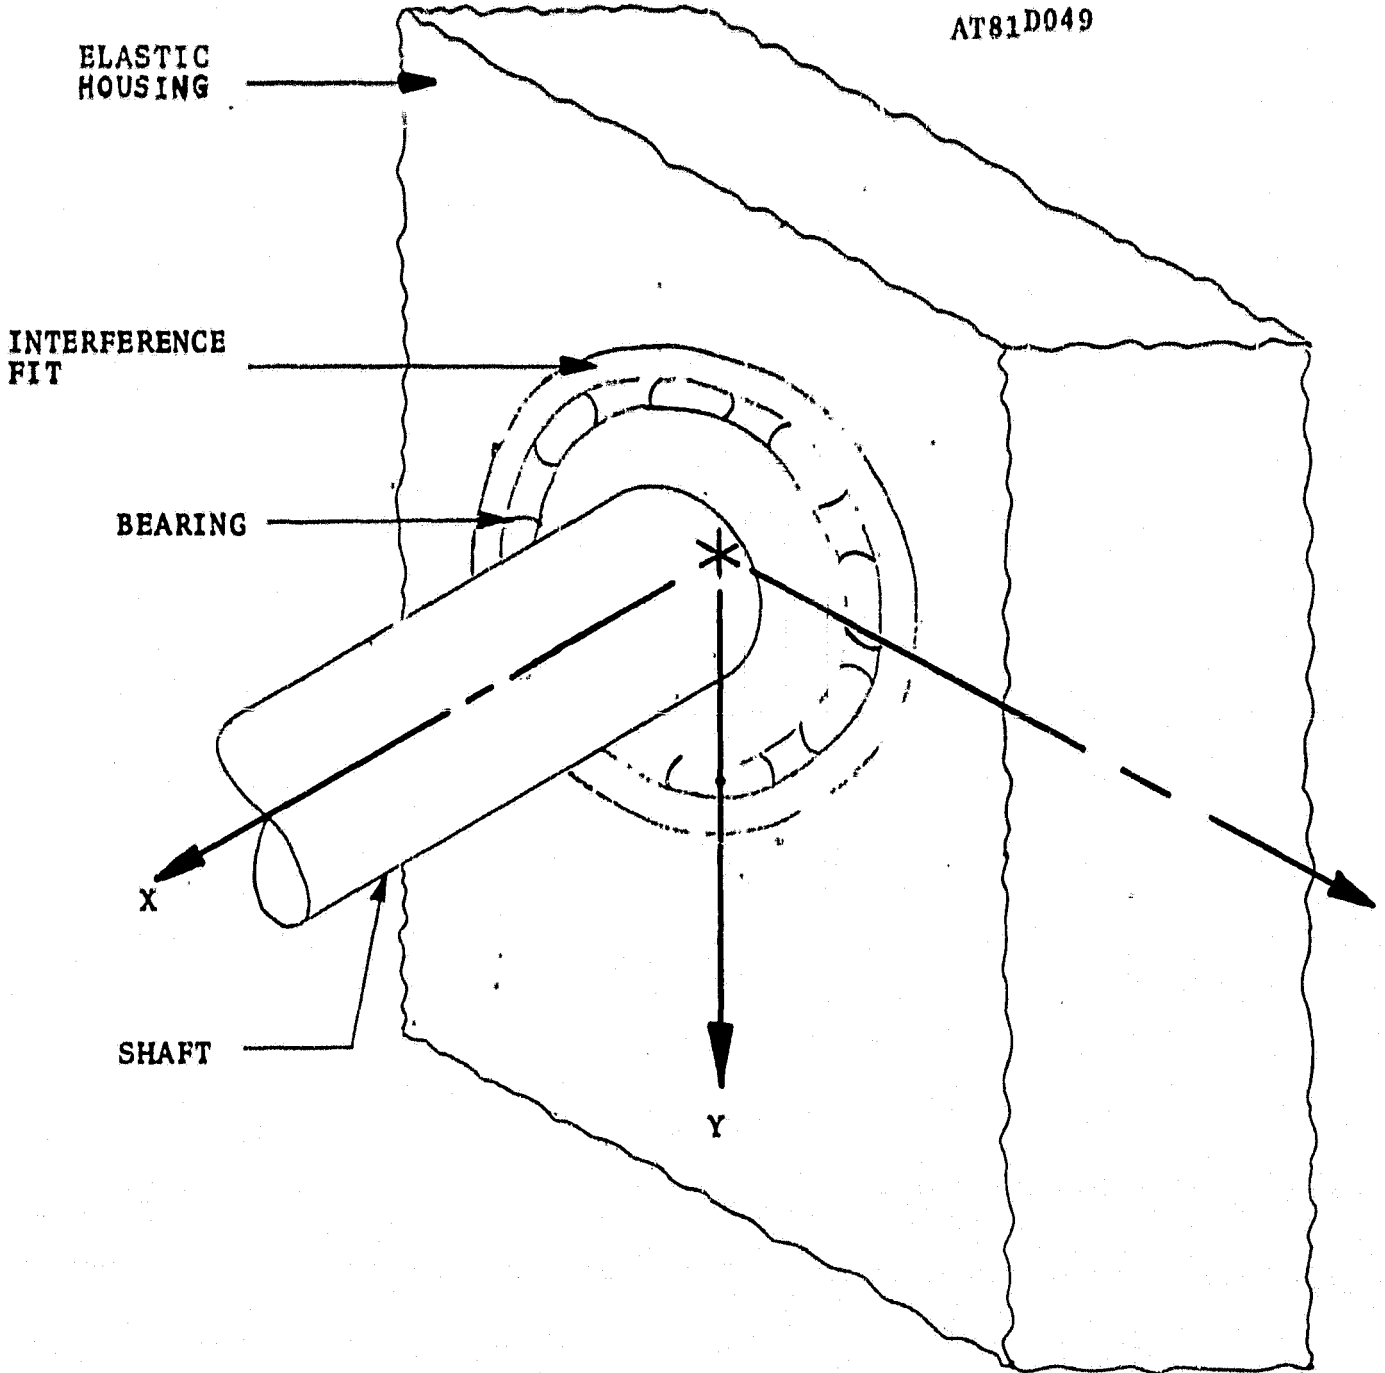


FIGURE 5: BEARING COORDINATE FRAME.

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

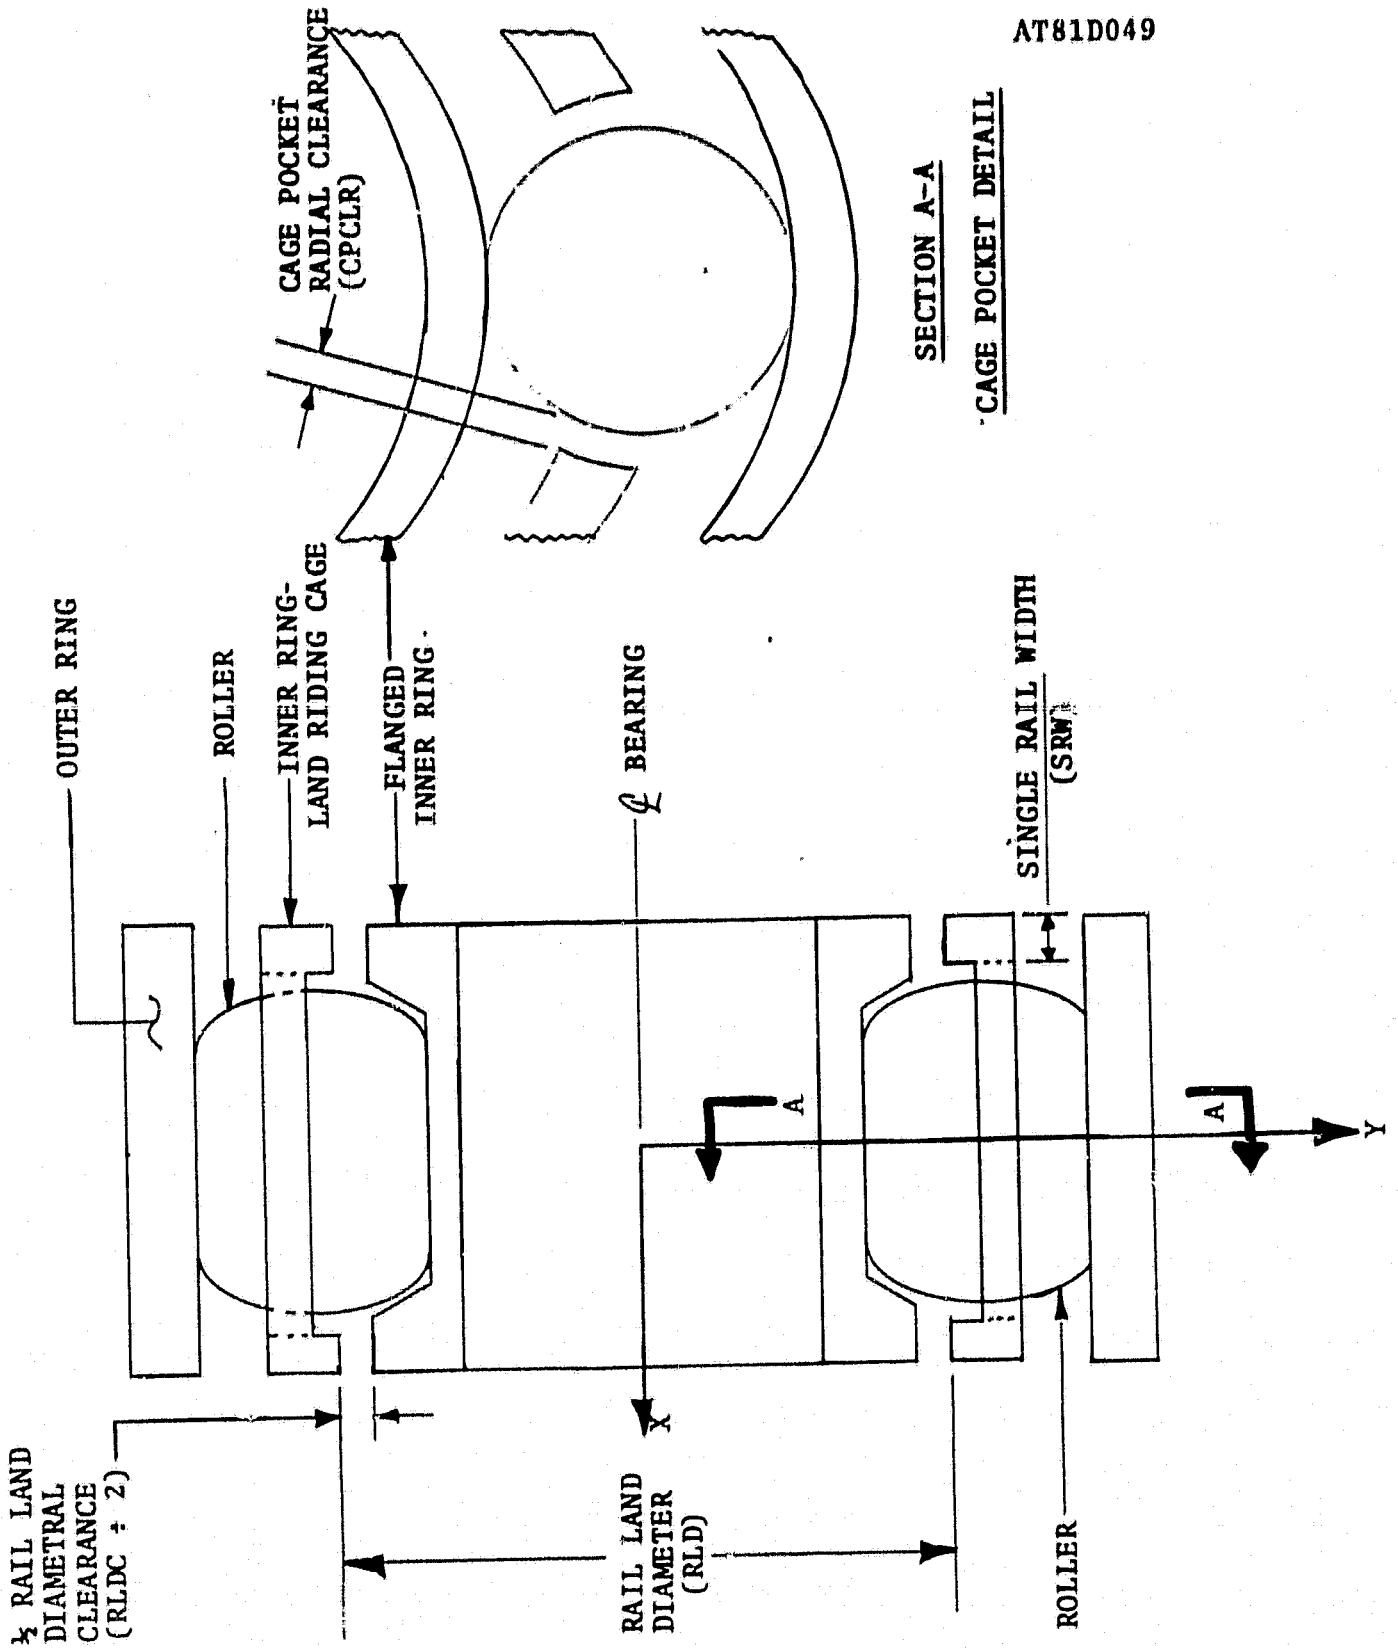


FIGURE 6 : USER INPUT CAGE GEOMETRY.

ORIGINAL PAGE IS
OF POOR QUALITY


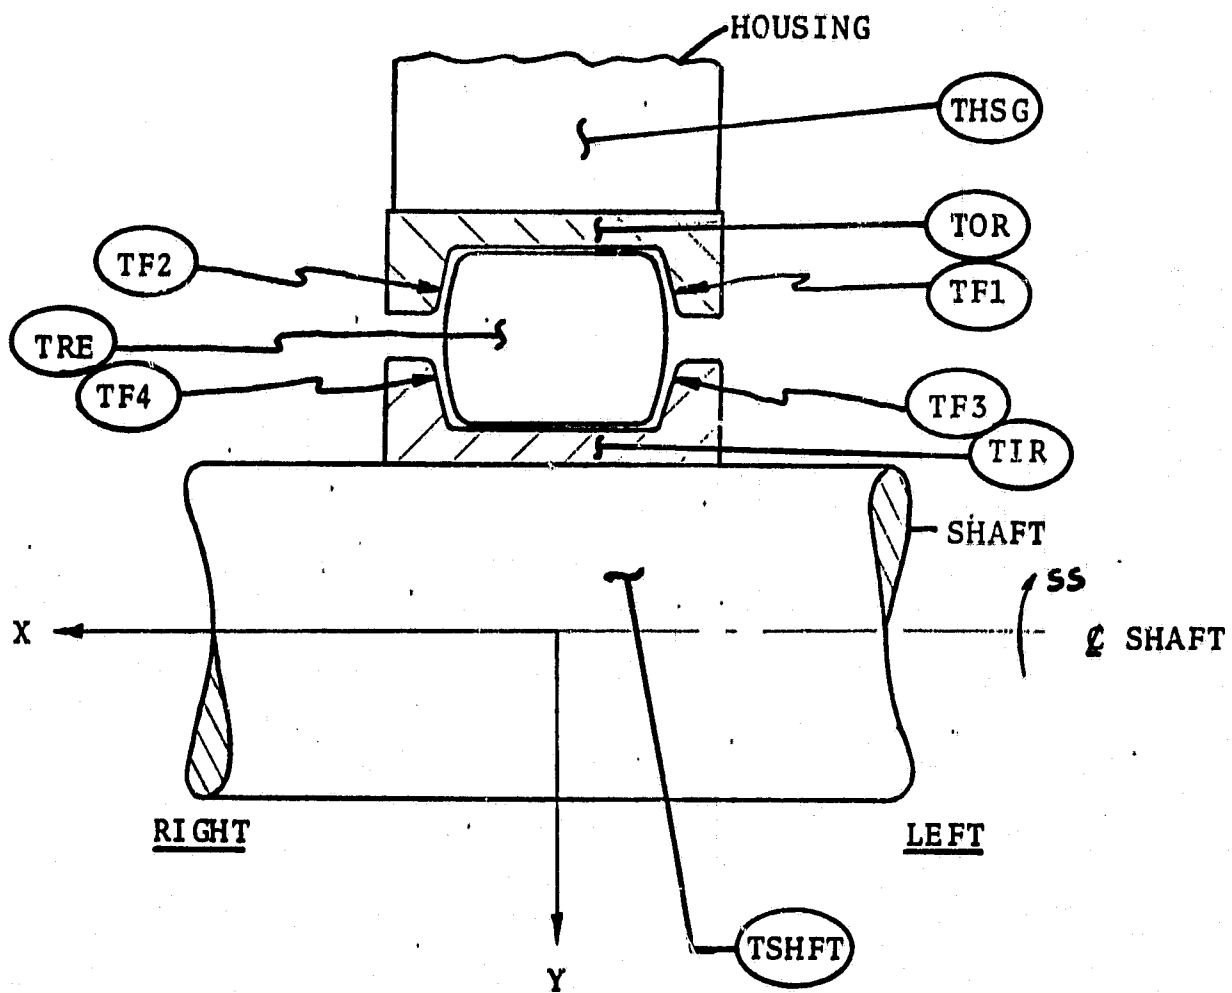


FIGURE 7: TEMPERATURE NODE IDENTIFICATION SCHEME.

AT81D049

CYBEAN - COMPLIANT OUTER RING

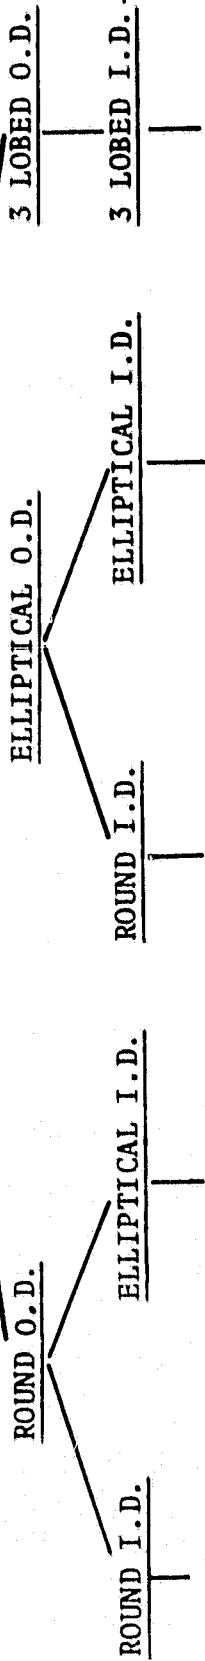

(NO PRELOAD) USER SPECIFIES:	USER SPECIFIES:	USER SPECIFIES:	USER SPECIFIES:
R_N	R_N	R_N	R_N
I	I	I	I
RO, RR, RH	RO, RR, RH	RO, RR, RH	RO, RR, RH
EI	EO, EI	EO, EI	EO, EI
ϕ_I	ϕ_O, ϕ_I	ϕ_O, ϕ_I	ϕ_O, ϕ_I
$N_I=2$	$N_O=2$	$N_O=2$	$N_O=3$
	$N_I=2$		$N_I=3$

NOMENCLATURE:


- R_N - radius to neutral axis of outer ring
- I - outer ring cross section moment of inertia
- RO, RR, RH - mean radii of ring O.D., ring I.D. and housing, respectively
- EO, EI, EH - eccentricity of ring O.D., ring I.D. and housing, respectively
- ϕ_O, ϕ_R, ϕ_H - lobe orientation angle of ring O.D., ring I.D. and housing, respectively
- N_O, N_R, N_H - number of lobes on ring O.D., ring I.D. and housing, respectively

NOTE: IN THESE EXAMPLES THE HOUSING IS ASSUMED CIRCULAR IN PROFILE.

FIGURE 8: USER SPECIFIED INFORMATION REQUIRED FOR FOUR MOST POPULAR MODES OF INDUCING ROLLER PRELOAD.

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

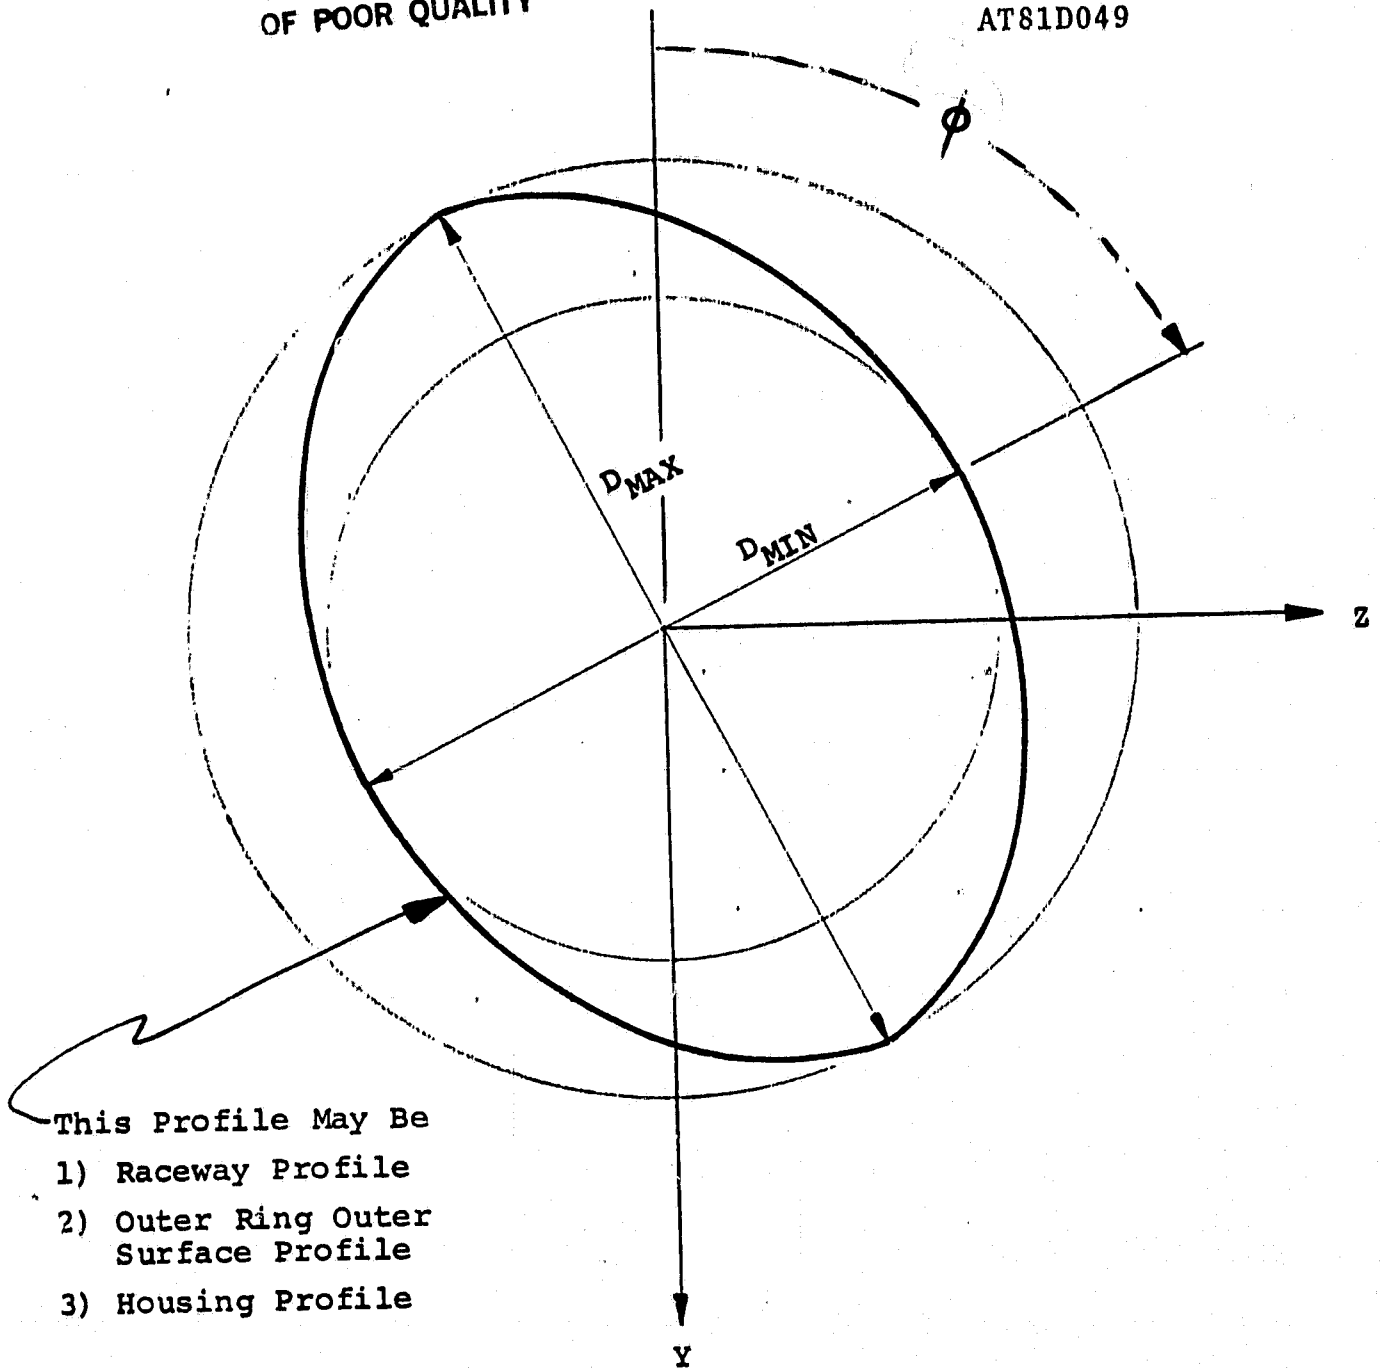


This Profile May Be

- 1) Raceway Profile
- 2) Outer Ring Outer Surface Profile
- 3) Housing Profile

FIGURE 9: VARIABLES USED IN DESCRIPTION
OF A 2-LOBED PROFILE.

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

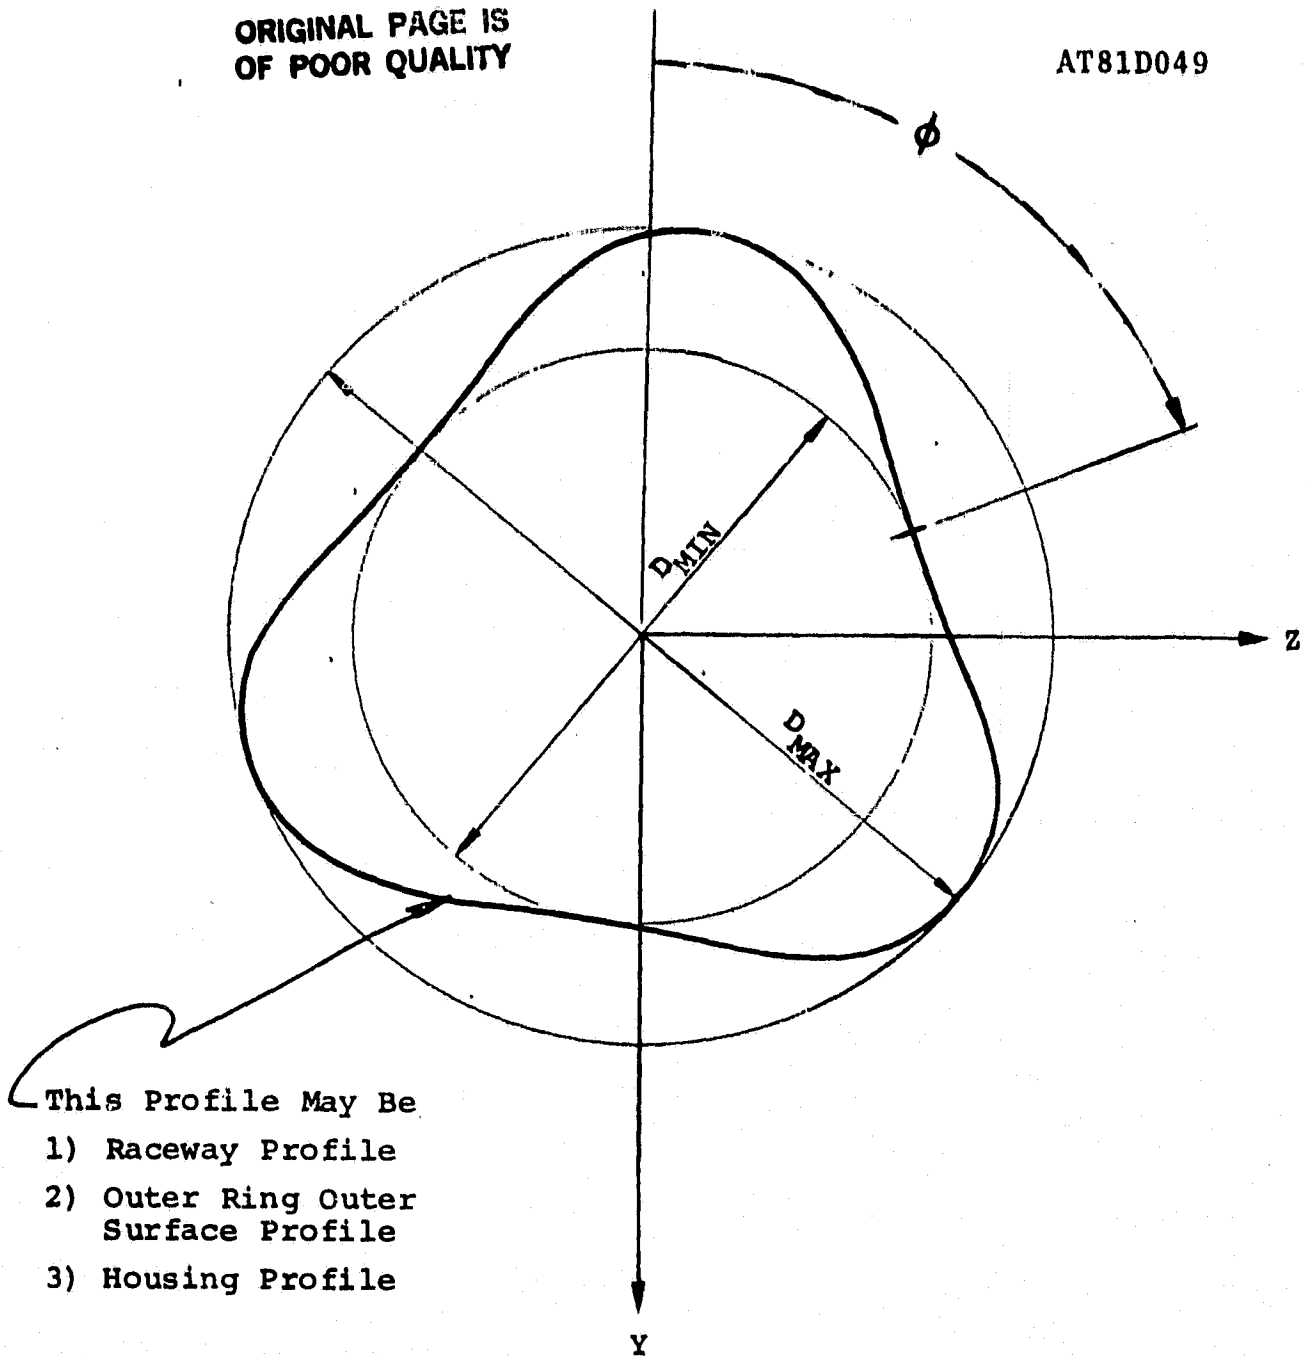

This Profile May Be

- 1) Raceway Profile
- 2) Outer Ring Outer Surface Profile
- 3) Housing Profile

FIGURE 10: VARIABLES USED IN DESCRIPTION
OF A 3-LOBED PROFILE.

ORIGINAL PAGE IS
OF POOR QUALITY


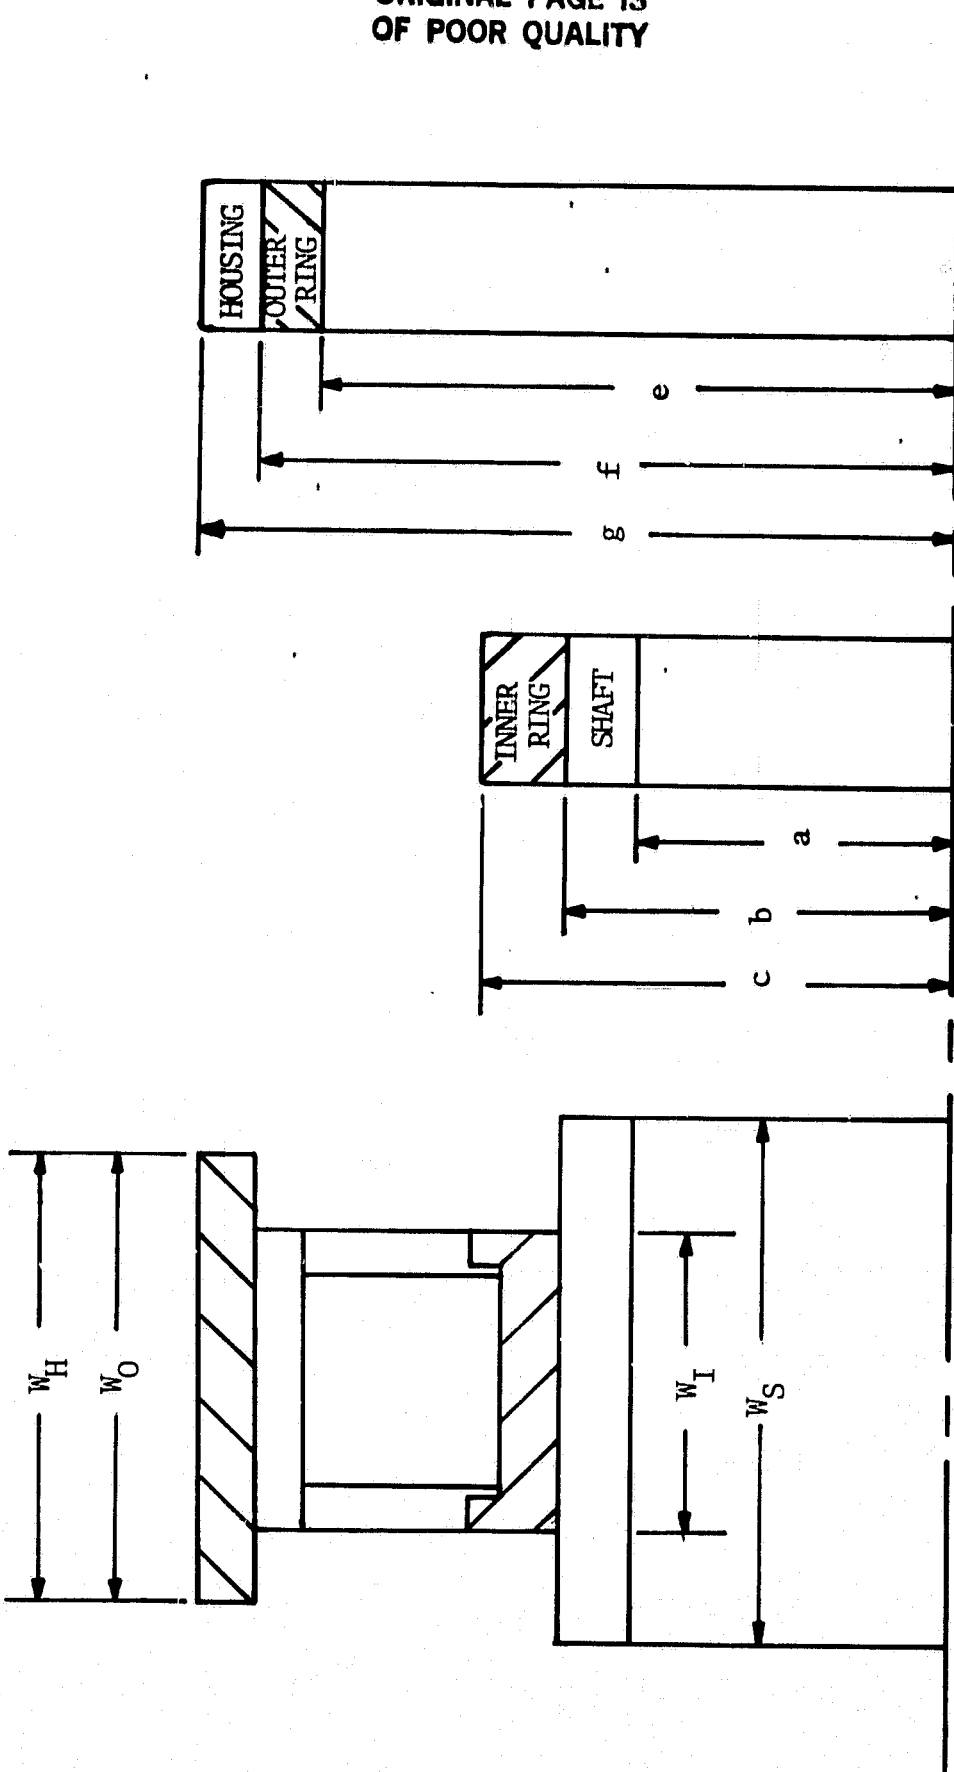


FIGURE 11: INPUT GEOMETRY DEFINITIONS FOR CIRCULAR RING FIT ANALYSIS

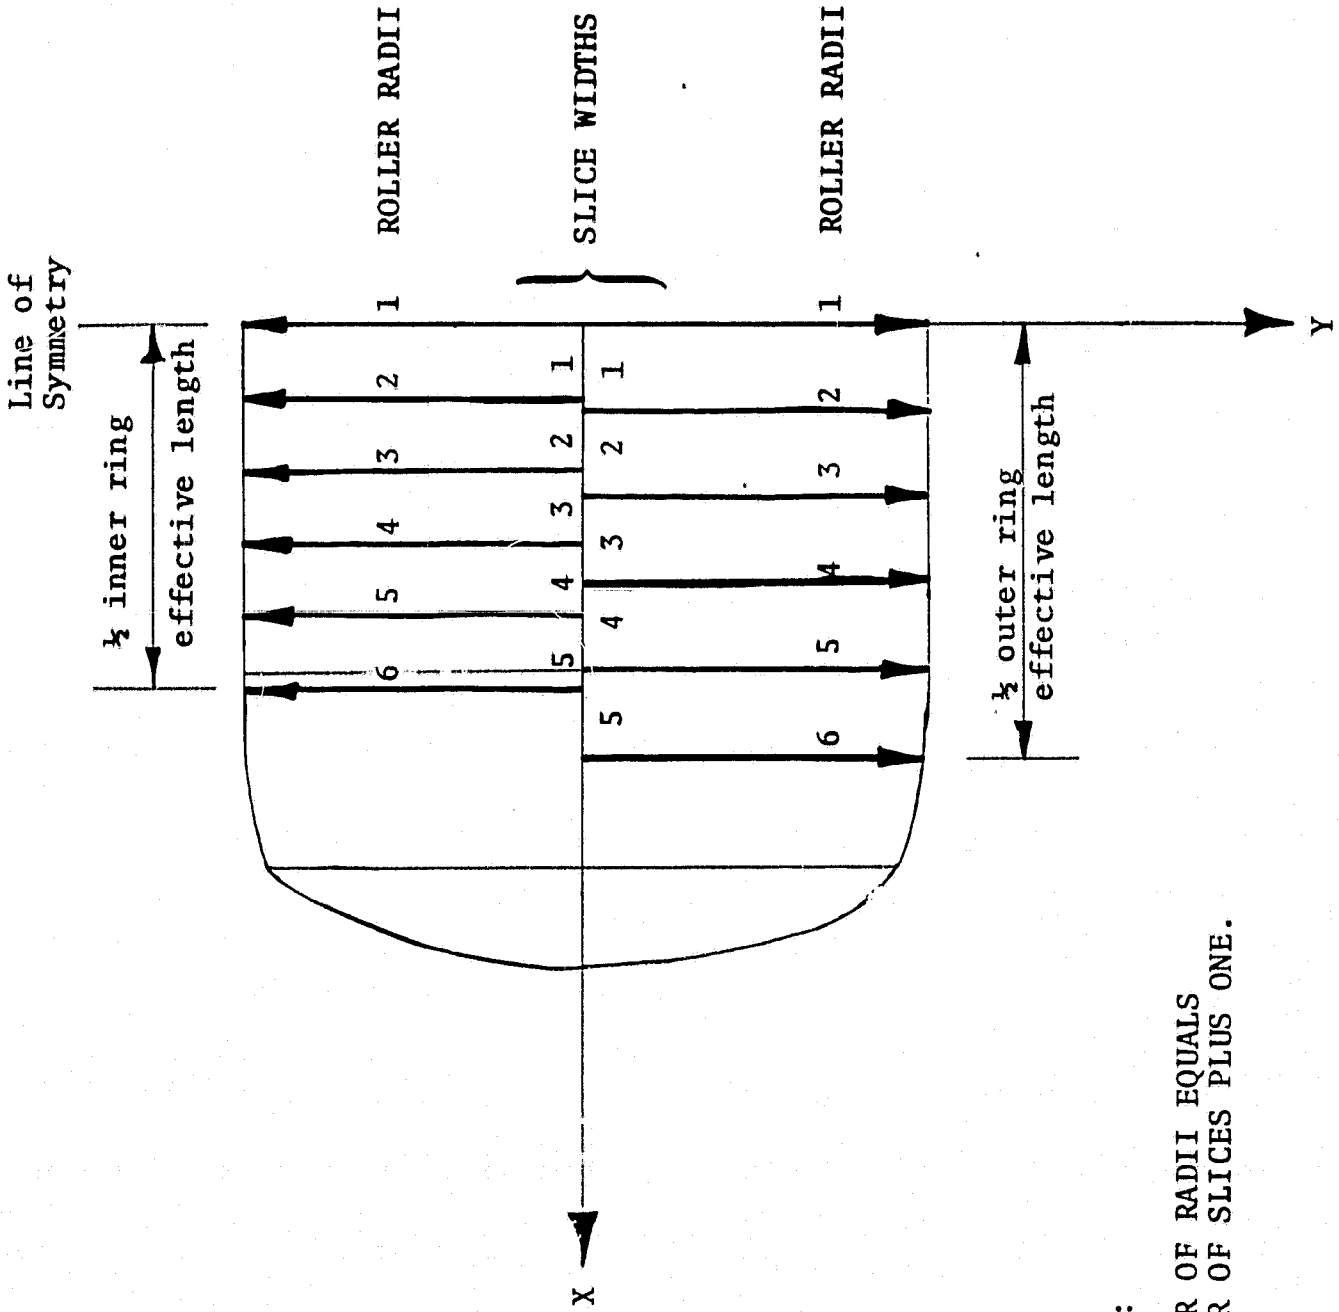


USER NOTE:

THE NUMBER OF RADIi EQUALS
THE NUMBER OF SLICES PLUS ONE.

FIGURE 12: OPTIONAL SYMMETRIC ROLLER GEOMETRY INPUT DATA


ORIGINAL PAGE IS
OF POOR QUALITY

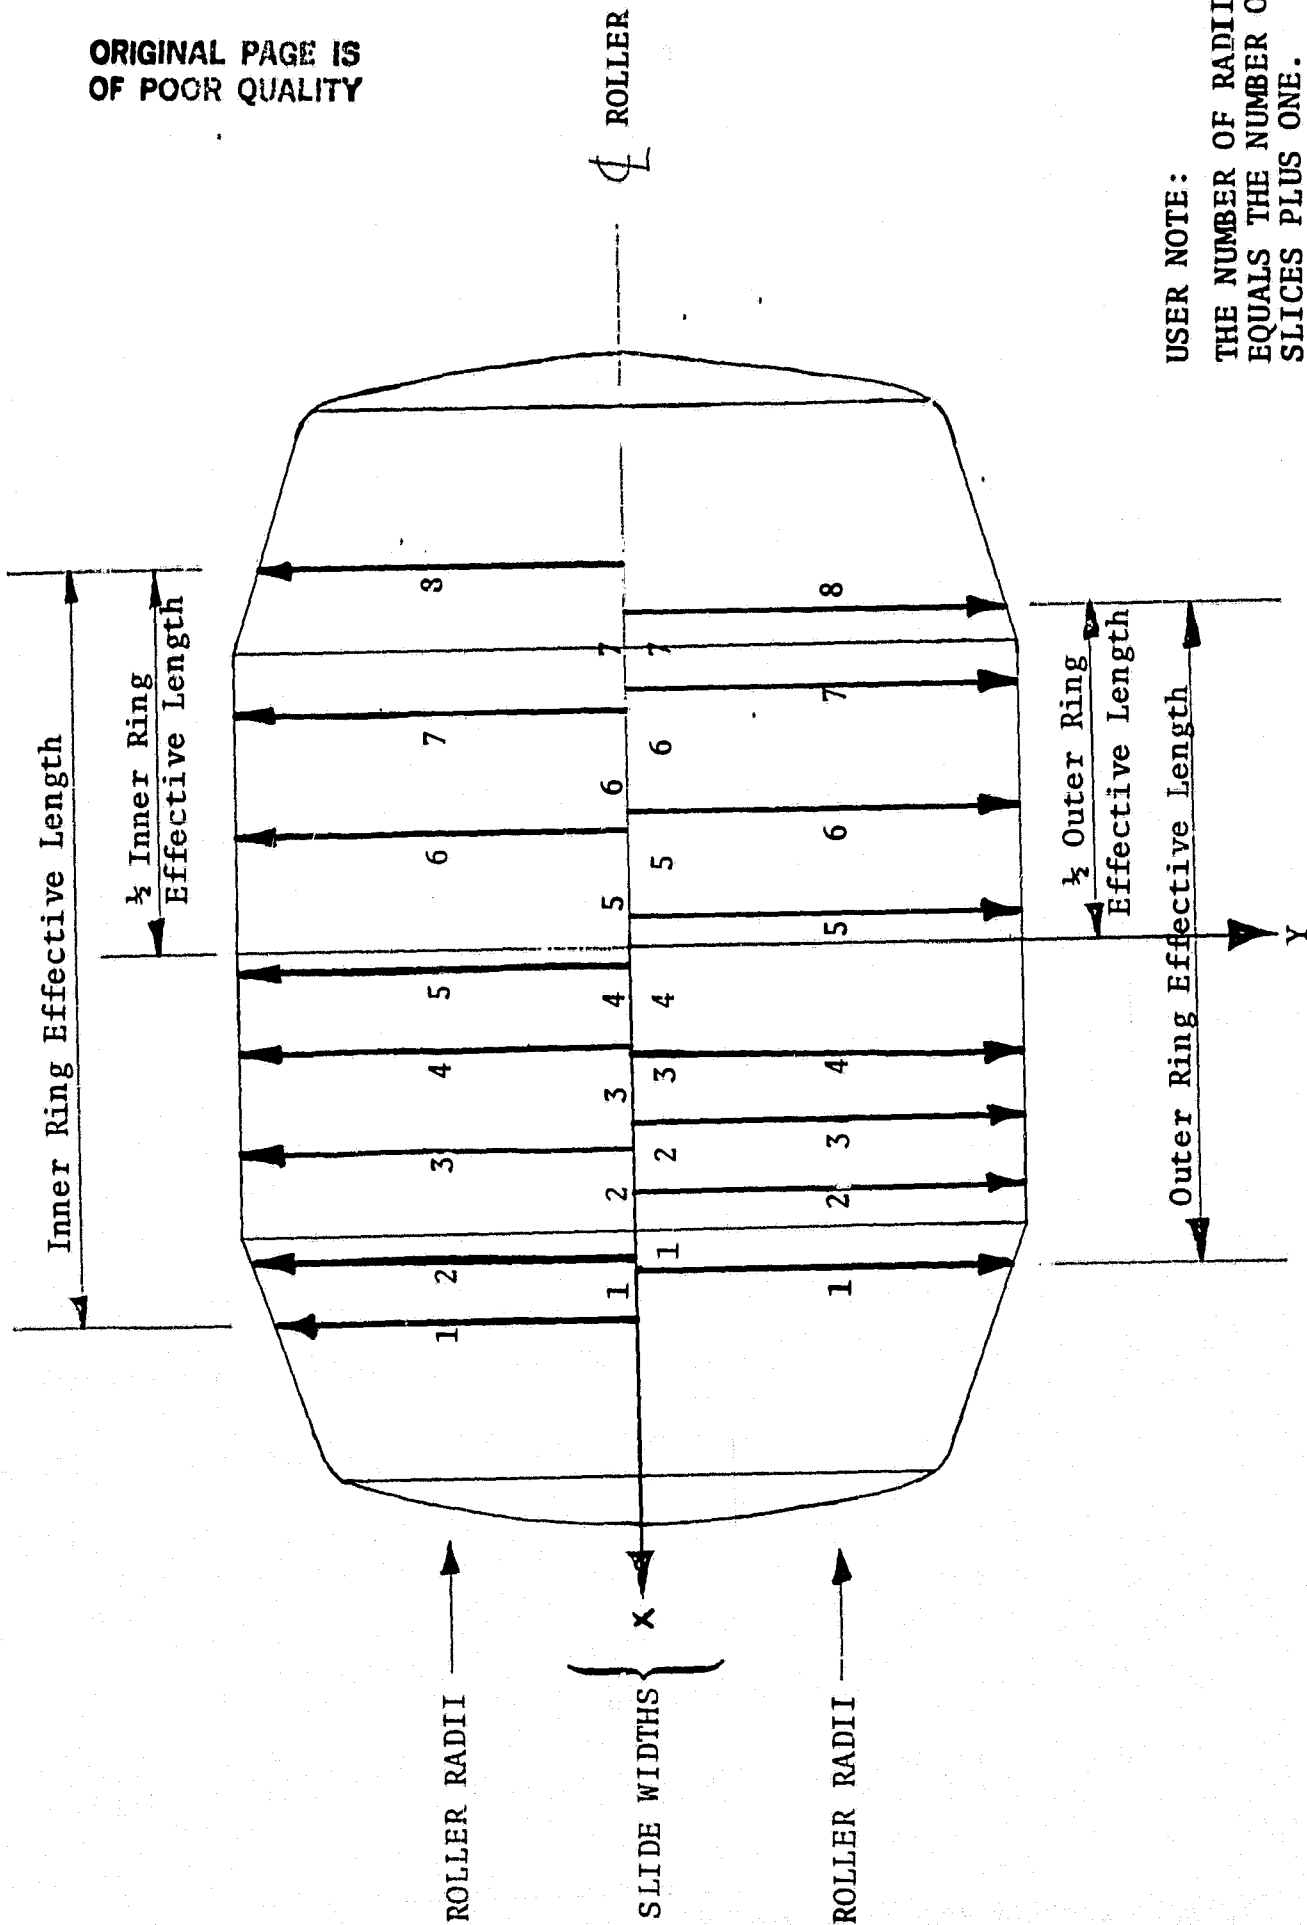

USER NOTE:
THE NUMBER OF RADII
EQUALS THE NUMBER OF
SLICES PLUS ONE.

FIGURE 13: OPTIONAL ROLLER GEOMETRY INPUT DATA.

AT81D049

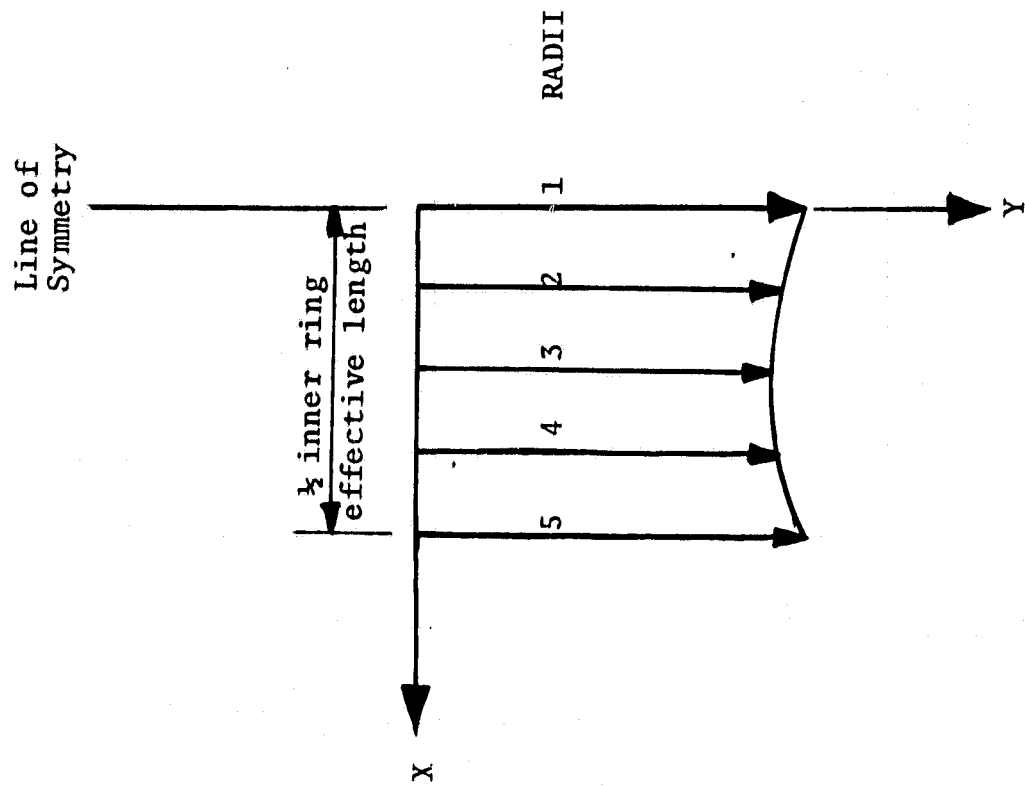


11a) Outer Ring

11b) Inner Ring


USER NOTE:
THE NUMBER OF RADII EQUALS
THE NUMBER OF SLICES PLUS ONE.

FIGURE 14: OPTIONAL SYMMETRIC RING GEOMETRY INPUT DATA.

AT81D049

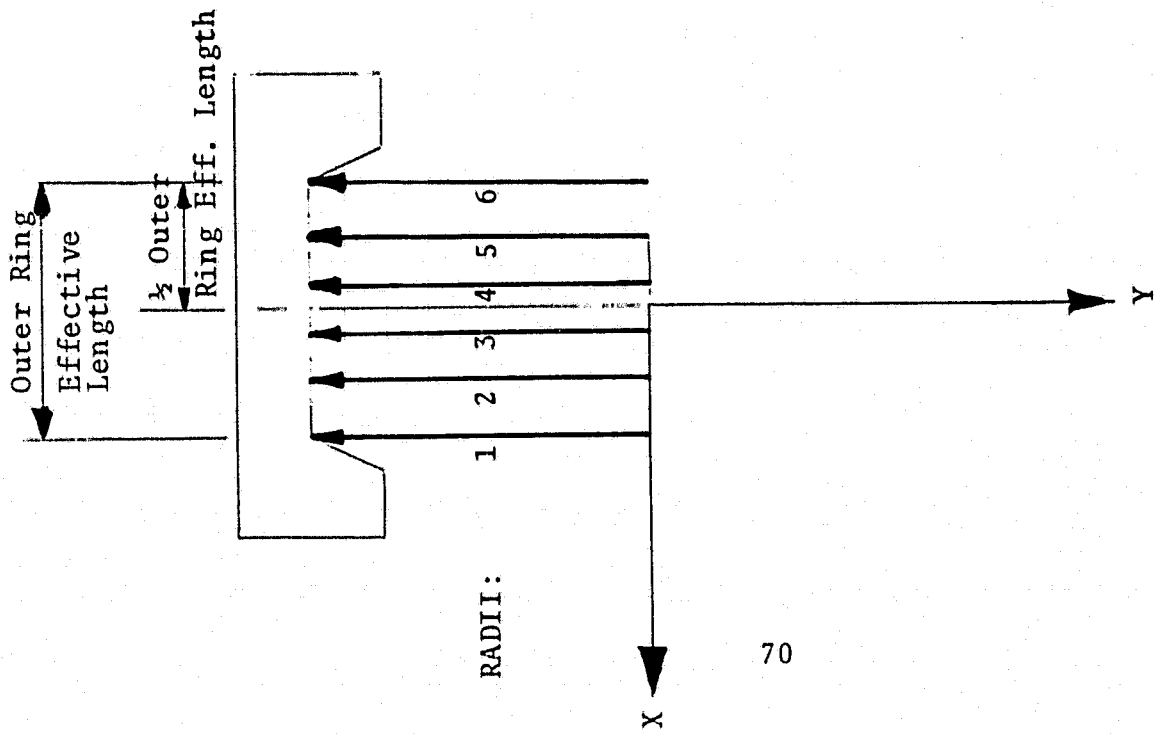

12a) Outer Ring

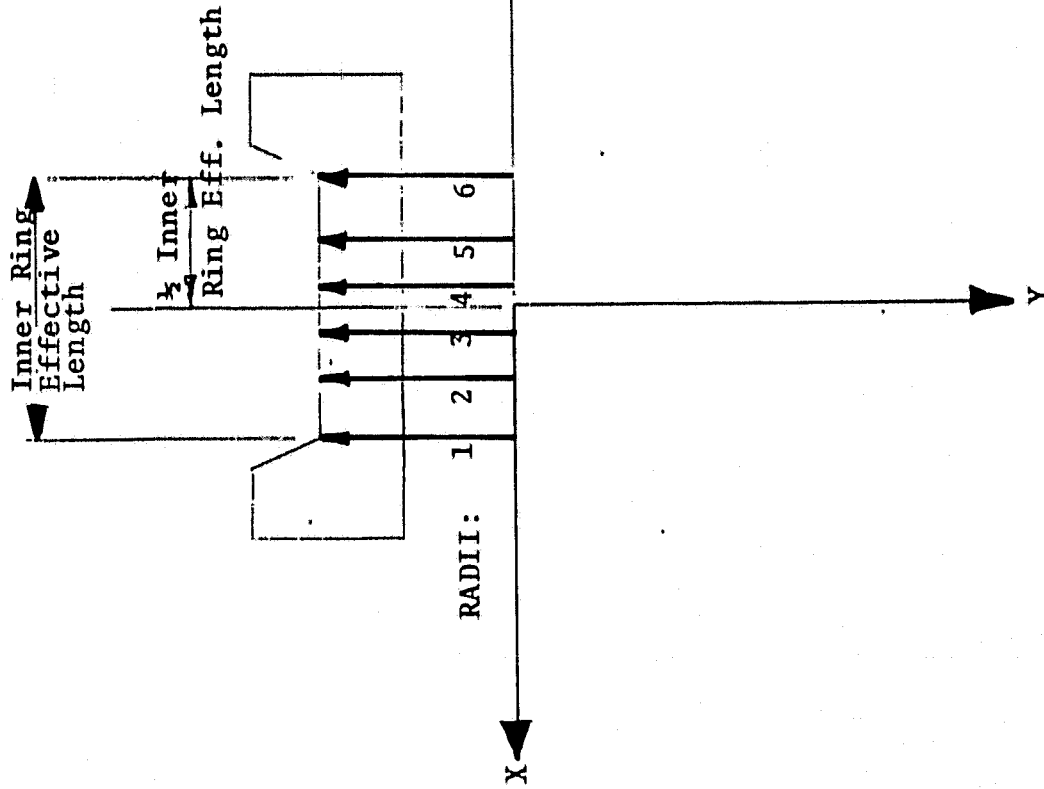


12b) Inner Ring

USER'S NOTE:
THE NUMBER OF RADII INPUT IS EQUAL TO THE NUMBER OF SLICES PLUS ONE.


FIGURE 15: OPTIONAL USER INPUT RING GEOMETRY.

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

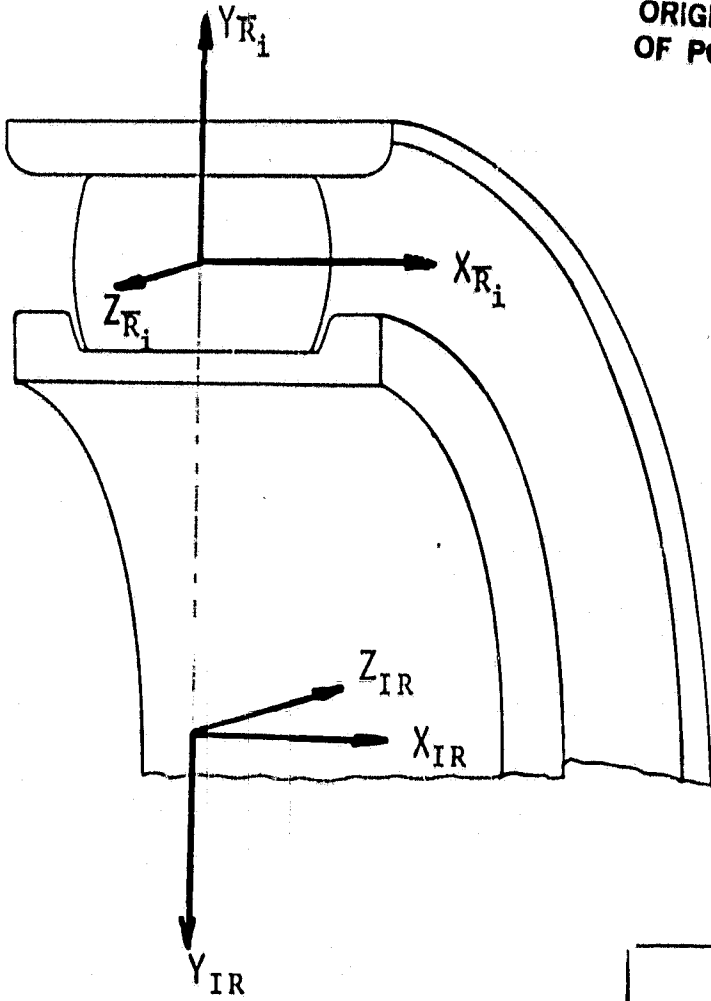

FLANGED INNER RING

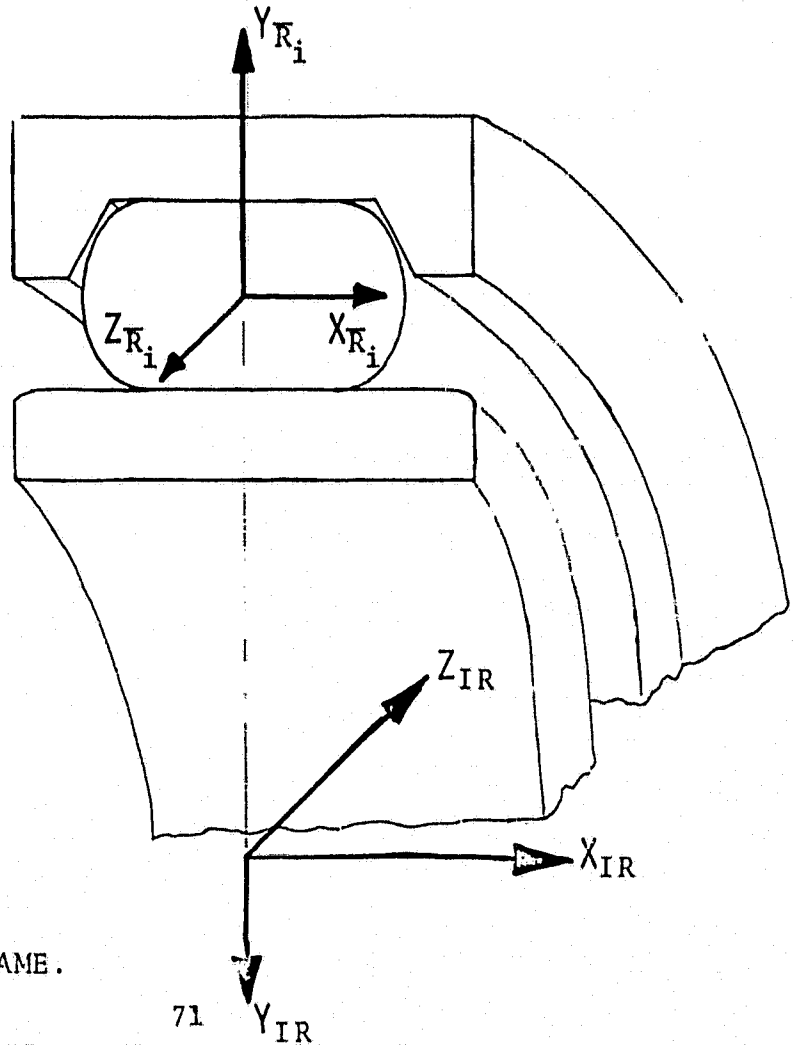

FLANGED OUTER RING

FIGURE 16: ROLLER COORDINATE FRAME.

TABLE 1.ORGANIZATION OF INPUT DATA CATEGORIES

<u>CATEGORY NUMBER</u>	<u>CATEGORY NAME</u>	<u>CATEGORY DESCRIPTION</u>	<u>NECESSARY</u>
1	SOLV	Solution Control Parameters	No
2	LOGIC	Program Control Logic	No
3	ROLLER	Roller Geometry Data	Yes
4	ORING	Outer Ring Description	Yes
5	IRING	Inner Ring Description	Yes
6	CAG	Cage Description	Yes
7	OPER8	Operating Conditions	Yes
8	LUBE	Lubrication Data	Yes
9	LOAD	Bearing Applied Loads	Yes
10	LIFE	Fatigue Life Data	Yes

TABLE 2
DEFAULT VALUES FOR UNSPECIFIED VARIABLES

CATEGORY NAME	VARIABLE NAME	TYPE ¹	DEFAULT VALUE	CATEGORY NAME	VARIABLE NAME	TYPE ¹	DEFAULT VALUE		
SOLV	ITMAX	I	15	IEING	RIG	R	0.0 (flat)		
	NPR	R	0		FLGALI	R	NO FLANGE		
	CONVER	I	.1		FLGARI	R	NO FLANGE		
	LEVEL	L	.TRUE.		CAG	IRIDE	I	+1 (Inner Ring Riding)	
	ITILT	L	.FALSE.			RLDC	R	---	
	COEF	L	.FALSE.			SRW	R	---	
	MPROP	L	.FALSE.			RLD	R	---	
	LOGIC	OVBEND	L		.TRUE.	OPER8	SS	R	---
		SYMY	L		.TRUE.		BULKY	R	100°C
		EVSLIC	L		.FALSE.		TRE	R	100°C
FITS		L	.FALSE.	THSG	R		100°C		
PLTRNG		L	.FALSE.	TSHFT	R		100°C		
PLTROL		L	.FALSE.	TDR	R		100°C		
ECHO		L	.FALSE.	DIR	R		100°C		
THERM		L	.FALSE.	TFI	R		100°C		
ROOR		L	.FALSE.	TF2	R		100°C		
ROLLD		R	---	TF3	R		100°C		
ROLLER	RTL	R	---	TF4	R	100°C			
	RCR	R	---	LUBE	NCOE	I	4 (MIL-L-23699)		
	SPHR	R	381. mm (15 in.)		ZTO	R	7.620x10 ⁻⁴ MM		
	SPHL	R	381. mm (15 in.)		ZTI	R	2.540x10 ⁻⁴ MM		
	RFL	R	---		ZTFO	R	1.270x10 ⁻⁴ MM		
	ELO	R	---		ZTFI	R	1.270x10 ⁻⁴ MM		
	ELI	R	---		XCAV	R	5%		
	XL	R	---		FRK	R	0.07		
	XR	R	---		AKN	R	50.0		
	EPLAYO	R	0.		XMUCC	R	.0175		
EPLAYI	R	0.	XMUFL		R	.0175			
ORING	DIACL	R	0.	LOAD	ALL VARIABLES	R	0.0		
	KLUE	R	1		RMSROL	R	.2032 MICRONS		
	NUMROL	I	---		RMSIR	R	.254 MICRONS		
	NS	I	5		RMSOR	R	.254 MICRONS		
	PHI1	I	0.		CIR	R	1.		
	ROG	R	0.0 (flat)		COR	R	1.		
	FLGALO	R	NO FLANGE						
	FLGARO	R	NO FLANGE						
	DM	R	---						
	KRING	I	1						

ORIGINAL PAGE IS
OF POOR QUALITY

¹TYPE REFERS TO VARIABLE TYPE, i.e., I ≡ INTEGER VARIABLE, EXAMPLE: ITMAX = 20
R ≡ REAL VARIABLE, EXAMPLE: CCNVER = .01
L ≡ LOGICAL VARIABLE, EXAMPLE: COEF = .TRUE.

TABLE 3

PROPERTIES OF FOUR LUBRICANTS

LUBRICANT NUMBER (NCODE)	LUBRICANT TYPE	KINEMATIC VISCOSITY 37.78°C (100°F) (VIS1)	(cs) 98.89°C (210°F) (VIS2)	DENSITY @15.56°C (60°F) gm/cm ³ (RHO60)	THERMAL CONDUCTIVITY W/m/°C (COND)	THERMAL COEFF. OF EXPANSION 1/°C 10 ⁻⁴ (G)	FILM THICKNESS COEFF. AKN*
1	Mineral Oil	64.0	8.0	0.88	0.116	6.336	---
2	MIL-L-7808G	17.8	3.2	0.95	0.152	7.092	18.2
3	Polyphenal Ether	25.4	4.13	1.20	0.119	7.470	24.9
4	MIL-L-23699	28.0	5.1	1.07	0.152	7.452	18.2

*Not part of NCODE information. AKN is input separately in LUBE category.

ORIGINAL PAGE IS OF POOR QUALITY

AT81D049

TABLE 4
ORGANIZATION OF SPECIAL INPUT DATA

SEQUENCE	PROGRAM OPTION	LOGIC USED TO INVOKE OPTION	INPUT CARD FORMAT SEE FIG. BELOW IN APPENDIX A
1	User Input Material Properties	MPROP = .TRUE.	A1
2	Perform Fit Calculations	FITS = .TRUE., OOR = .TRUE.	A2
2a	Perform Clearance Calculations	FITS = .TRUE., OOR = .FALSE.	A2A
3	User Input Influence Coefficients	COEF = .TRUE. and FITS = .TRUE.	A3
4	User Input of Slice Widths	SYMY = .TRUE. and EVSLIC = .FALSE.	A4
5	ROLLER GEOMETRY		
5a	User Input of Symmetric Roller Geometry	SYMY = .TRUE. and KLUE = 3	A5
5b	Override Calculated End Radii	SYMY = .TRUE. and OVREND = .TRUE.	A6
5c	User Input of All Roller Geometry	SYMY = .FALSE. and KLUE = 4	A7
6	RING GEOMETRY		
6a	User Input of Symmetric Ring Geometry	SYMY = .TRUE. and KRING = 3	A8
6b	Override Calculated End Radii	SYMY = .TRUE. and OVREND = .TRUE.	A9
6c	User Input of All Ring Geometry	SYMY = .FALSE. and KRING = 4	A10
7	TEMPERATURE CALCULATIONS	THERM = .TRUE.	A11

AT81D049

TABLE 5ROLLER BEARING SPECIFICATIONS

Inner Race

Bore Dia.	mm (in)	118	(4.6457)
Raceway Dia.	mm (in)	131.66	(5.1834)
Flange Dia.	mm (in)	137.47	(5.4122)
Width	mm (in)	26.92	(1.060)
Groove Width	mm (in)	14.59	(0.5746)
Flange Angle		.6 deg.	

Outer Race

Outer Dia.	mm (in)	164.65	(6.4760)
Raceway Dia.	mm (in)	157.08	(6.1842)
Width	mm (in)	23.9	(0.942)

Rollers

Diameter	mm (in)	12.65	(0.4979)
Length - overall	mm (in)	14.56	(0.5733)
- effective	mm (in)	13.04	(0.5133)
- flat	mm (in)	8.40	(0.3307)
Crown Radius	mm (in)	622.3	(24.5)
End Radius	mm (in)	381.0	(15.0)
Number		28	

Cage

Land Dia.	mm (in)	137.95	(5.4312)
Axial Pocket Clearance	mm (in)	.020	(0.0008)
Tangential Pocket Clearance	mm (in)	.221	(0.0087)
Single Rail Width	mm (in)	4.6	(0.18)

Operating Conditions

Shaft Speed		20,000 rpm
Bearing Radial Load	4450 N	(1000 lb)
Oil Inlet Temperature	366.5K	(200°F)
Misalignment of Races	0 deg. and 0.0833 deg.	
Lubricant	MIL-L-23699	

APPENDIX A
SPECIAL DATA INPUT CARD FORMATS

Notes: Four cards required. All data items need not be specified. Those left blank will be set at the default values. Data items are specified in F10.0 format.

FIGURE A1: USER INPUT MATERIAL PROPERTIES CARD FORMAT

CARD 1																																																																															
MODULUS OF ELASTICITY (N/mm ²)																																																																															
SHAFT			OUTER RING			INNER RING			ROLLING ELEMENT			HOUSING																																																																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80

CARD 2																																																																															
POISSON'S RATIO																																																																															
SHAFT			OUTER RING			INNER RING			ROLLING ELEMENT			HOUSING																																																																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80

CARD 3																																																																															
COEFFICIENT OF THERMAL EXPANSION (1/C°)																																																																															
SHAFT			OUTER RING			INNER RING			ROLLING ELEMENT			HOUSING																																																																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80

CARD 4																																																																															
DENSITY → (gm/cm ³)																																																																															
SHAFT			OUTER RING			INNER RING			ROLLING ELEMENT			HOUSING																																																																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80

FIGURE A2-A USER INPUT CARD FORMAT FOR CIRCULAR RING FIT ANALYSIS

Card #1		Housing Fit, Positive if interference, (mm) on radius	Housing Effective Length (mm)	Bearing Inner Ring Width (mm)	Bearing Outer Ring Width (mm)	Housing Effective Width (mm)
			W_S	W_I	W_O	W_H
1	2					
3	4					
5	6					
7	8					
9	10					
11	12					
13	14					
15	16					
17	18					
19	20					
21	22					
23	24					
25	26					
27	28					
29	30					
31	32					
33	34					
35	36					
37	38					
39	40					
41	42					
43	44					
45	46					
47	48					
49	50					
51	52					
53	54					
55	56					
57	58					
59	60					
61	62					
63	64					
65	66					
67	68					
69	70					
71	72					
73	74					
75	76					
77	78					
79	80					
F	1					
0	0					
0	0					

A:3a

Card #2		Bearing Bore radius (mm)	Bearing Inner Ring Mean Outer radius (mm)	Bearing Outer Ring Mean Inner radius (mm)	Bearing Outer radius (mm)	Housing Outer radius (mm)	Fit Tolerance If left blank, value is set to .0001	Number of Fit Iterations If left blank, value is set at 5
		b	c	e	f	g		
1	2							
3	4							
5	6							
7	8							
9	10							
11	12							
13	14							
15	16							
17	18							
19	20							
21	22							
23	24							
25	26							
27	28							
29	30							
31	32							
33	34							
35	36							
37	38							
39	40							
41	42							
43	44							
45	46							
47	48							
49	50							
51	52							
53	54							
55	56							
57	58							
59	60							
61	62							
63	64							
65	66							
67	68							
69	70							
71	72							
73	74							
75	76							
77	78							
79	80							
F	1							
0	0							
0	0							

AT81D049

FIG. A4: USER INPUT SLICE WIDTH CARD FORMATS
CARD 1

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
F I I O . 0																				F I I O . 0																																																											
SLICE WIDTH ACROSS SYMMETRIC HALF OF OUTER RING EFFECTIVE LENGTH (USE AS MANY CARDS AS NEEDED, mm)																																																																															
WIDTH OF SLICE NO. 1																				WIDTH OF SLICE NO. 2																				ETC.																																							

CARD 2

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
F I I O . 0																				F I I O . 0																																																											
SLICE WIDTHS ACROSS SYMMETRIC HALF OF INNER RING EFFECTIVE LENGTH (USE AS MANY CARDS AS NEEDED, mm)																																																																															
WIDTH OF SLICE NO. 1																				WIDTH OF SLICE NO. 2																				ETC.																																							

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

CARD 1 - TEMPERATURE CALCULATION CONTROL CARD

N	TEMP		FUELER		WCS		ITI		EPI		ITZ		EP2		START		STOP		STEP IN		TIME		BTIME																																												
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25																																										
I 5	x	I 5	x	F 5	0	X	I	5	x	F	5	0	X	I	5	x	F	5	0	X	F	5	0	X	F	5																																									
1 2	1 3	1 4	1 5	1 6	1 7	1 8	1 9	2 0	2 1	2 2	2 3	2 4	2 5	2 6	2 7	2 8	2 9	3 0	3 1	3 2	3 3	3 4	3 5	3 6	3 7	3 8	3 9	4 0	4 1	4 2	4 3	4 4	4 5	4 6	4 7	4 8	4 9	5 0	5 1	5 2	5 3	5 4	5 5	5 6	5 7	5 8	5 9	6 0	6 1	6 2	6 3	6 4	6 5	6 6	6 7	6 8	6 9	7 0	7 1	7 2	7 3	7 4	7 5	7 6	7 7	7 8	7 9

GENERAL					STEADY STATE ONLY					TRANSIENT ONLY				
HIGHEST ROBE NUMBER	HIGHEST DIKROBE NUMBER SAME AS NUMBER OF DIKROBE ROBE	COTTON INITIAL TEMPERATURE (°C) SELECTED CAR BE TEMPERATURES GIVEN DIFFERENT INITIAL VALUES USING CARD 2	PUNCH FLAG. FINALLY ZERO. IF #0 FINAL TEMPERATURES WILL BE ACCORDING TO THE FORMAT OF CARD 2. WHEN READ IN THE PROGRAM THE INITIAL TEMPERATURES IN A LATER RUN.	OUTPUT FLAG. FINALLY ZERO. IF #0 BEARING AND APERATURE WILL BE PRINTED EVERY TIME THE BEARING HAS BEEN CALLED.	MAXIMUM VALUE OF BEARING PROGRAM.	ABSOLUTE LIMIT OF TEMPERATURES	ITERATION LIMIT USUALLY LEFT BLANK	ACCELERATION USUALLY LEFT BLANK	STARTING TIME	STOPPING TIME	CALCULATION TIME STEP. IF LEFT BLANK THE PROGRAM WILL FOLLOW SUITABLE STEP.	TIME INTERVAL BETWEEN PRINTED TEMPS.	TIME INTERVAL BETWEEN CALLS OF BEARING PROGRAM. ALWAYS AT LEAST EQUAL TO THE CALC. TIME STEP.	

- ITEM 1 . ITEM 2 . ITEM 3 . ITEM 4 . ITEM 5 . ITEM 6 . ITEM 7 . ITEM 8 . ITEM 9 . ITEM 10 . ITEM 11 . ITEM 12 . ITEM 13 . ITEM 14

AT81D049

ORIGINAL PAGE IS OF POOR QUALITY

C-2

FIGURE A11: INPUT DATA CARD FORMATS FOR TEMPERATURE CALCULATION

CARD 2 - NODE INITIAL TEMPERATURES
 USE AS MANY CARDS AS NEEDED FOLLOWED BY A BLANK CARD.

Node Number	Initial Temperature	Node Number	Initial Temperature
1		71	
2		72	
3		73	
4		74	
5		75	
6		76	
7		77	
8		78	
9		79	
10		80	
11		81	
12		82	
13		83	
14		84	
15		85	
16		86	
17		87	
18		88	
19		89	
20		90	
21		91	
22		92	
23		93	
24		94	
25		95	
26		96	
27		97	
28		98	
29		99	
30		100	
31		101	
32		102	
33		103	
34		104	
35		105	
36		106	
37		107	
38		108	
39		109	
40		110	
41		111	
42		112	
43		113	
44		114	
45		115	
46		116	
47		117	
48		118	
49		119	
50		120	
51		121	
52		122	
53		123	
54		124	
55		125	
56		126	
57		127	
58		128	
59		129	
60		130	
61		131	
62		132	
63		133	
64		134	
65		135	
66		136	
67		137	
68		138	
69		139	
70		140	
15	F5.0		

ORIGINAL PAGE IS
 OF POOR QUALITY

AT81D049

FIGURE A11 (CONTINUED): INPUT DATA CARD FORMATS FOR TEMPERATURE CALCULATION.

CARD 8 - NODAL HEAT CAPACITIES (USE ONLY FOR TRANSIENT CALCULATIONS) ONE CARD PER NODE

Node Number	Volume at Node = L ₁	L ₂	L ₃	Density (KG/M ³)	Specific Heat WS/KG°C
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					

ORIGINAL PAGE IS OF POOR QUALITY

AT81D049

FIGURE A11 (CONTINUED): INPUT DATA CARD FORMATS FOR TEMPERATURE CALCULATION.

APPENDIX B
HEAT TRANSFER COMPUTATION NOTES

B.1 BASIC EQUATIONS*

B.1.1 Heat Conduction

The rate of heat flow $q_{ci,j}$ (W) that is conducted from node i to node j may be expressed by,

$$q_{ci,j} = \frac{\lambda_{ij} A_{ij}}{L_{ij}} (t_i - t_j)$$

t_i and t_j are the temperatures at i and j , respectively, $A_{i,j}$ the area normal to the heat flow, (m^2) L_{ij} the distance (m) and λ_{ij} the thermal conductivity between i and j , ($W/m^\circ C$).

Assuming that the structure between point i and j is composed of different materials, an equivalent heat conductivity may be calculated as follows:

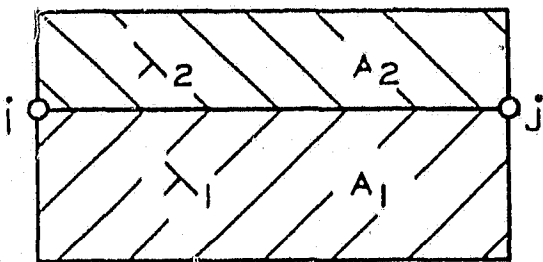


Fig. B-1

$$\lambda_{ij} = \frac{\lambda_1 A_1 + \lambda_2 A_2}{A_{ij}}$$

$$A_{ij} = A_1 + A_2$$

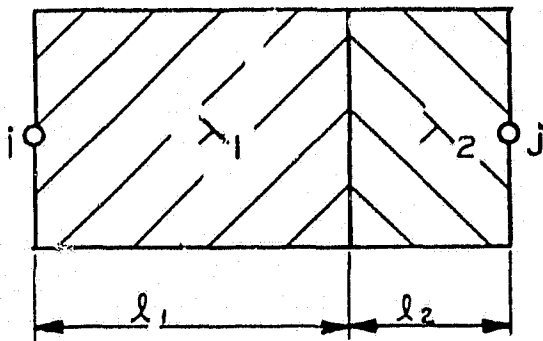


Fig. B-2

$$\lambda_{ij} = \frac{l_{ij}}{l_1/\lambda_1 + l_2/\lambda_2}$$

$$l_{ij} = l_1 + l_2$$

The calculation of the areas will be discussed in Section B.1.5.

*This Appendix is based on the material present in Reference 4.

B.1.2 Convection

The rate of heat flow that is transferred between a solid structure and air by free convection may be expressed by

$$q_{vi,j} = \alpha_{i,j} \cdot A_{i,j} \cdot |t_i - t_j|^{1.25} \cdot \text{SIGN}(t_i - t_j)$$

where

$$\text{SIGN} = \begin{cases} 1, & \text{if } (t_i - t_j) \geq 0 \\ -1, & \text{if } (t_j - t_i) < 0 \end{cases}$$

in which

$$\alpha_{ij} = \begin{cases} 2.5 \cdot 10^{-2} \text{ W/m}^2 \cdot (\text{degC})^{1.25} & \text{for hot surfaces facing} \\ & \text{upward and cold surfaces facing downward} \\ 1.4 \cdot 10^{-2} \text{ W/m}^2 \cdot (\text{degC})^{1.25} & \text{for hot surfaces facing} \\ & \text{downward and cold surfaces facing upward} \\ 1.8 \cdot 10^{-2} \text{ W/m}^2 \cdot (\text{degC})^{1.25} & \text{for vertical surfaces} \end{cases}$$

For other special conditions, α_{ij} must be estimated by referring to heat transfer literature.

The rate of heat flow that is transferred between a solid structure and a fluid by forced convection may be expressed by

$$q_{ni,j} = \alpha_{i,j} A_{i,j} (t_i - t_j)$$

in which α_{ij} is the convective heat transfer coefficient.

Now, with $\alpha = \alpha_{ij}$, introduce the Nusselt number

$$N_u = \frac{\alpha L}{\lambda}$$

the Reynolds number

$$R_e = \frac{UL}{\nu}$$

and the Prandtl number

$$P_r = \frac{\rho \nu C_p}{\lambda}$$

where

L is a characteristic length which is equal to the diameter in the case of a cylindrical surface and is equal to the plate length in case of a flat surface (m).

U is a characteristic velocity which is equal to the difference between the fluid velocity at some distance from the surface and the surface velocity (m/sec).

λ is the fluid thermal conductivity (W/M°C)

ν is the fluid kinematic viscosity (M²/sec)

ρ is the fluid density (kg/m³)

C_p is the fluid specific heat (J/kg°C)

For given values of R_e and P_r the Nusselt number N_u and thus the heat transfer coefficient may be estimated from one of the following expressions:

Laminar flow along a flat plate: $R_e < 2300$

$$N_u = 0.323 \sqrt{R_e} \cdot \sqrt[3]{P_r}$$

Laminar flow of a liquid in a pipe:

$$N_u = 1.36 \sqrt[3]{R_e \cdot P_r \left(\frac{D}{L}\right)}$$

where D is the pipe diameter and L the pipe length

Turbulent flow of a liquid in a pipe:

$$N_u = 0.027 \cdot R_e^{0.8} \cdot \sqrt[3]{P_r}$$

Gas flow inside and outside a tube:

$$N_u = 0.3 R_e^{0.57}$$

Liquid flow outside a tube:

$$N_u = 0.6 R_e^{0.5} \cdot P_r^{0.31}$$

Forced convection from the outer surface of a rotating shaft

$$N_u = 0.11 [0.5 R_e^2 \cdot P_r]^{0.35}$$

where the Reynolds number R_e is developed by the shaft

$$R_e = \frac{\omega \pi D^2}{\nu}$$

in which ω is the angular velocity (rad/sec)

D is the shaft diameter (m)

The average coefficient of forced convection to the lubricating oil within a rolling contact bearing may be approximated by,

$$\alpha = 0.0986 \left\{ \frac{N}{\nu} \left[1 \pm \frac{D \cos(\beta)}{d_m} \right] \right\}^{1/2} \lambda (P_r)^{1/3}$$

using + for outer ring rotation

- for inner ring rotation

in which N is the bearing operating speed (rpm)

D is the diameter of the rolling elements (mm)

d_m is the bearing pitch diameter (mm)

β is the bearing contact angle; zero for cylindrical roller bearings (degrees)

B.1.3 Fluid Flow

The rate of heat flow that is transferred from fluid node i to fluid node j by fluid flow is

$$q_{fi,j} = \rho \dot{V}_{ij} C_p (t_i - t_j)$$

\dot{V}_{ij} is the volume rate of flow from i to j . It must be observed that the continuity of mass requires the following equation to be satisfied

$$\sum \dot{V}_{ij} = 0$$

provided the fluid density is constant. The summation should be extended over all nodes i within the fluid which have heat exchange with node j by fluid flow.

B.1.4 Heat Radiation

The rate of heat flow that is radiated to node j from node i is expressed by

$$q_{Ri,j} = \delta_{i,j} \{ (t_i + 273)^4 - (t_j + 273)^4 \}$$

where

$$T_j = t_j + 273.16$$

$$T_i = t_i + 273.16$$

and the value of the coefficient $\delta_{i,j}$ depends on the geometry and the emissivity or the absorptivity of the bodies involved.

For radiation between large, parallel and adjacent surfaces of equal area, $A_{i,j}$ and emissivity, $\epsilon_{i,j}$, $\delta_{i,j}$ is obtained from the equation

$$\delta_{i,j} = \epsilon_{i,j} \sigma A_{i,j}$$

where σ , the Stefan-Boltzmann constant, is

$$\sigma = 5.76 \cdot 10^{-8} \text{ W/m}^2 / (\text{degK})^4$$

For radiation between concentric spheres and coaxial cylinders of equal emissivity, $\epsilon_{i,j}$, $\delta_{i,j}$ is given by the equation

$$\delta_{ij} = \frac{\epsilon_{i,j} \sigma A_{i,j}}{1 + (1 - \epsilon_{i,j}) \frac{A_{i,j}}{A^*_{i,j}}}$$

where σ is as above $A_{i,j}$ is the area of the enclosed body and $A^*_{i,j}$ is the area of the surrounding body, i.e., $A_{i,j} < A^*_{i,j}$.

Expressions for $\delta_{i,j}$ that are valid for more complicated geometries or for different emissivities may be found in the heat transfer literature.

B.1.5 Calculation of Areas

In the case of heat transfer in the axial direction $A_{i,j}$ is given by the equation (Fig. B-3)

$$A_{i,j} = 2\pi r_m \cdot \Delta r$$

Referring to the temperature calculation input instructions, card 7, but recalling L must be input in mm not m.

$$L_1 = r_m = \frac{r_1 + r_2}{2}$$

$$L_2 = \Delta r = r_2 - r_1$$

In the case of heat transfer in the radial direction, $A_{i,j}$ is obtained from the expression

$$A_{i,j} = 2\pi r_m \cdot H; L_1 = r_m; L_2 = H$$

and similarly for the radiation term above

$$A^*_{i,j} = 2\pi r_m^* H$$

$$L_3 = r_m^*$$

$$L_2 = 2H$$

in which H is the length of the cylindrical surface; where heat is conducted between i and j, r_m is given by the same equation as above (Fig. B-4 (a)); where heat is convected between i and j, r_m is the radius of the cylindrical surface (Fig. B-4(b)); where heat is radiated between i and j, r_m is the radius of the enclosed cylindrical surface and r_m^* the radius of the surrounding cylindrical surface (Fig. B-4(c)).

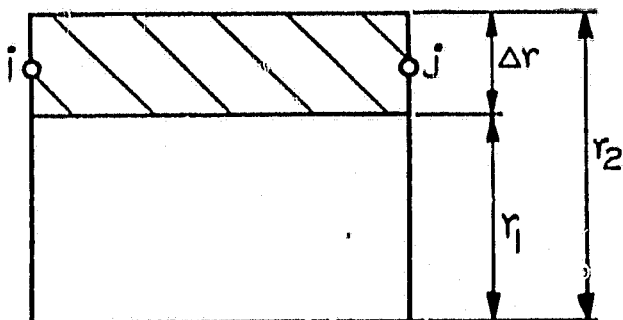


Fig. B-3

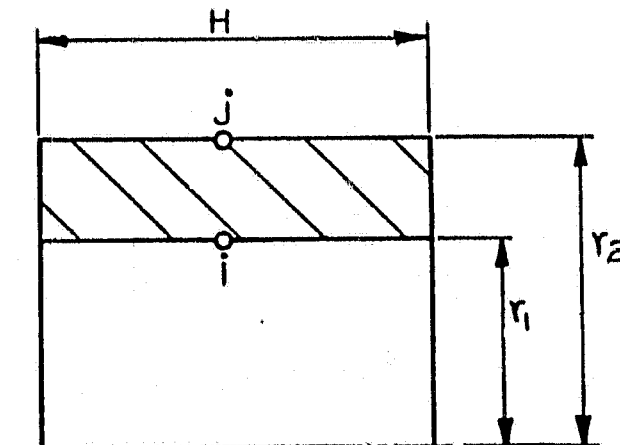


Fig. B-4(a)

B.2 TRANSIENT ANALYSIS

For the transient analysis all of the data pertaining to the node to node heat transfer coefficients must be provided by the input. Additionally, the volume and the specific heat at each node is required. For metal nodes this input is straightforward. However, when fluid flow is being considered there is no easy way to approximate the fluid nodal volume in a free space such as the bearing cavity. However, through use of CYBEAN the user's ability to make appropriate estimates will improve.

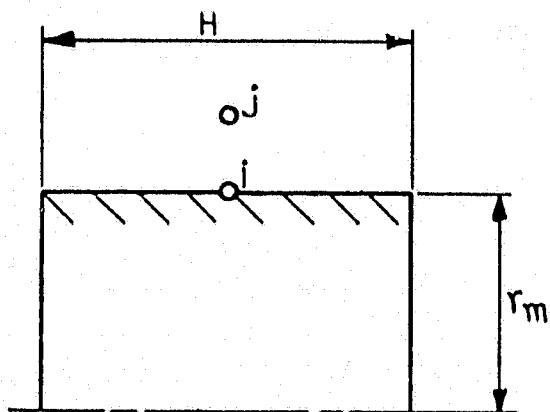


Fig. B-4(b)


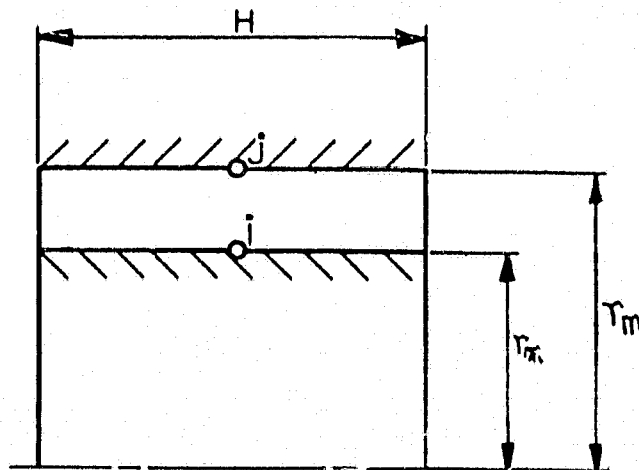


Fig. B-4(c)

APPENDIX C
CYBEAN FLOWCHART




ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

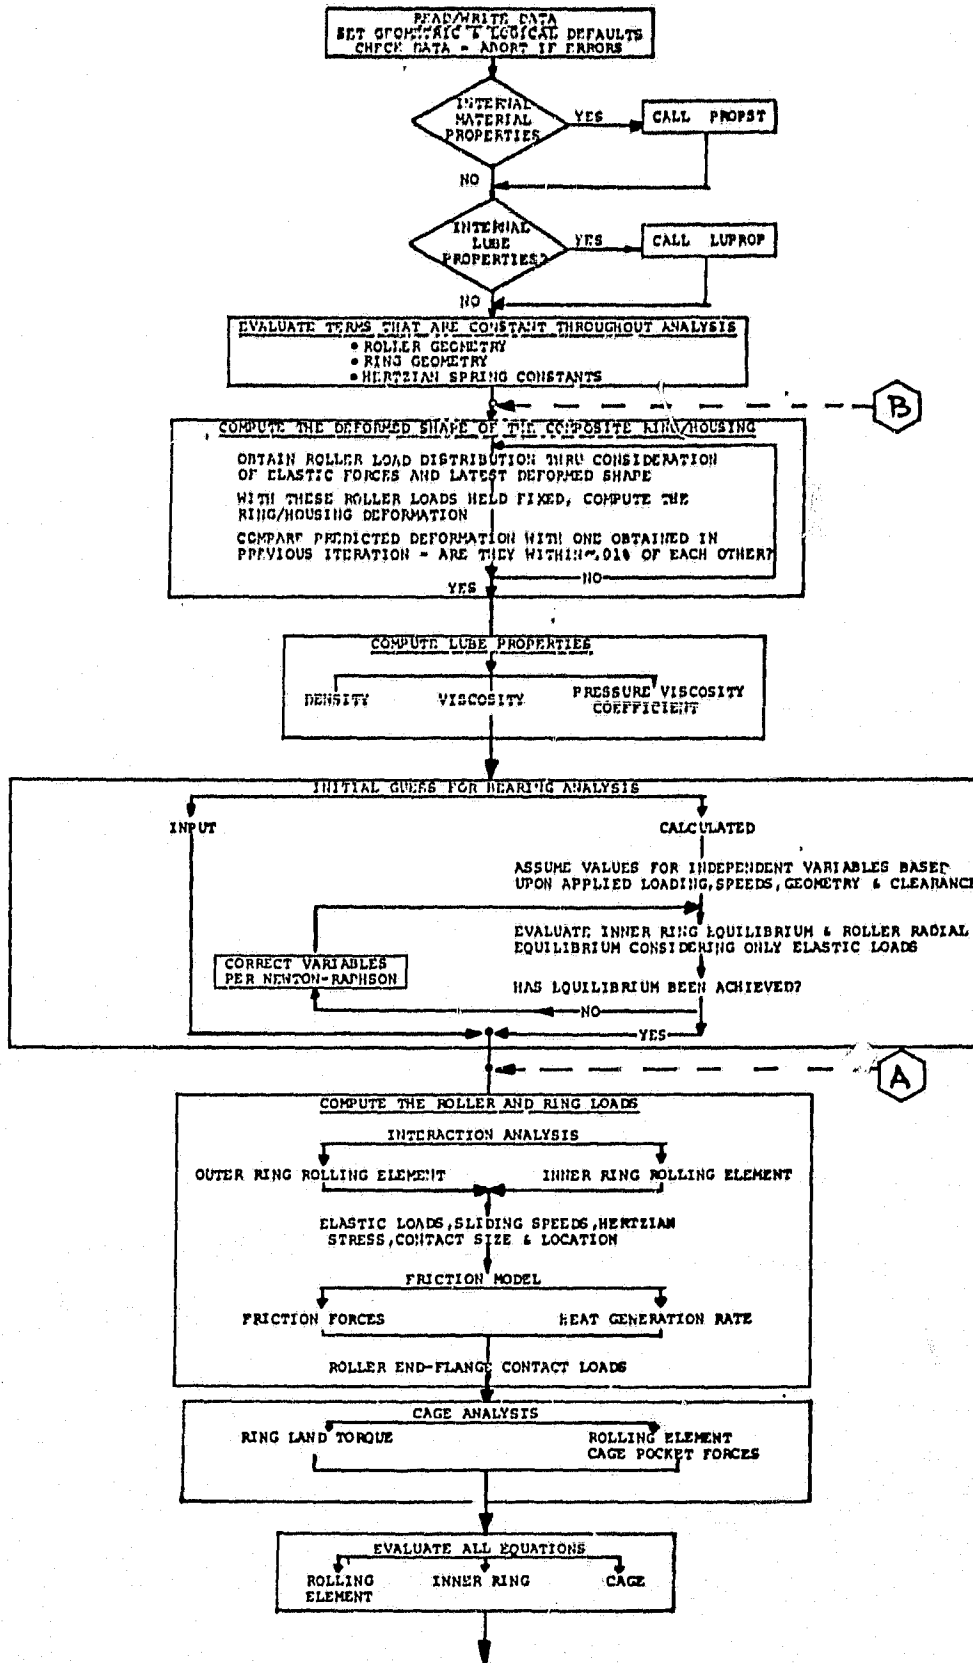

ORIGINAL PAGE IS
OF POOR QUALITY.

AT81D049

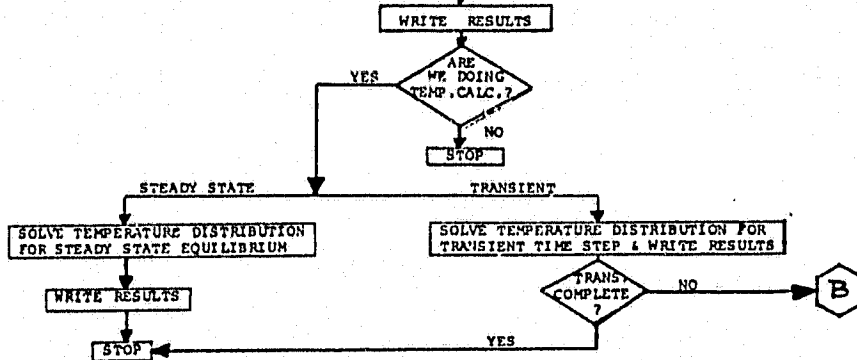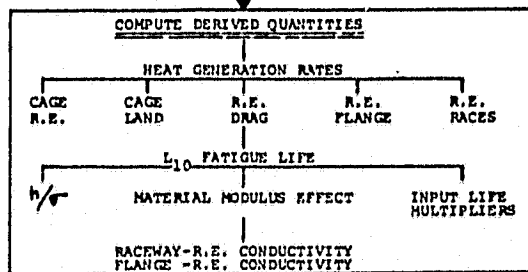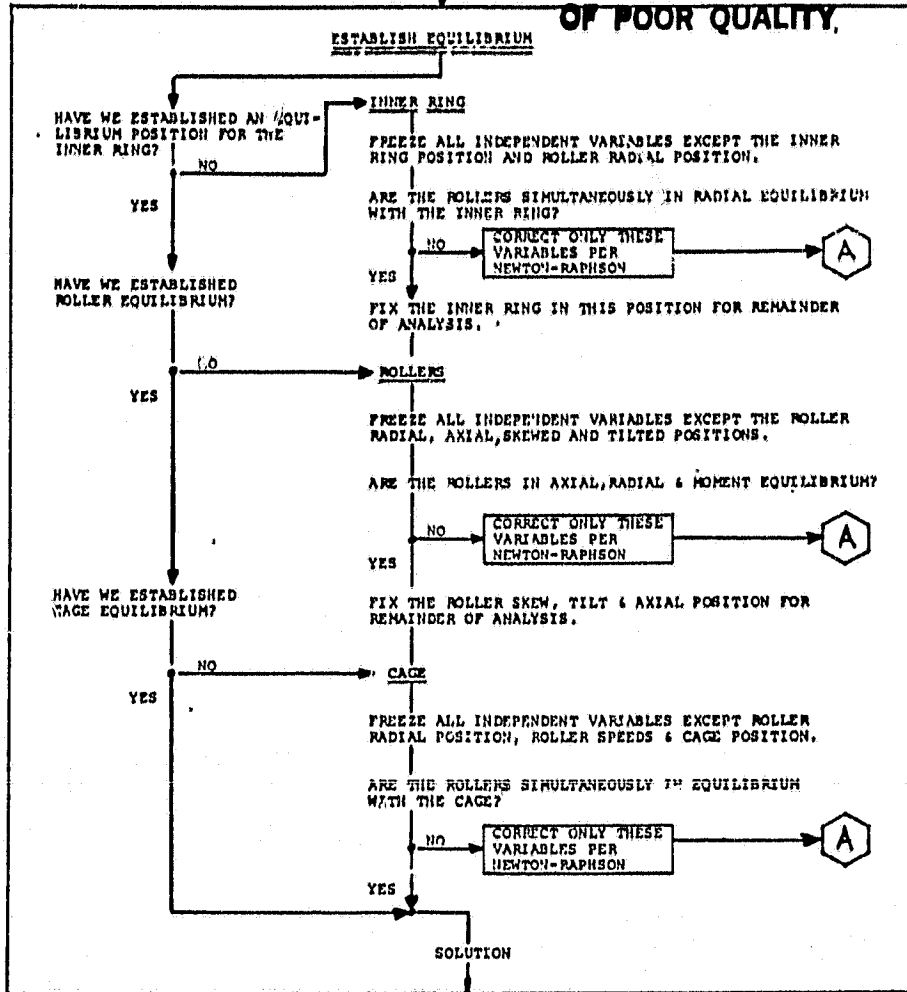

0

APPENDIX D
SAMPLE OUTPUT
SOLUTION LEVEL = 2

- D -

F-11232-1-R100

CYBEAR/NASA - VERSION NUMBER 2

USE THIS VERSION WITH THE FOLLOWING USER'S MANUALS

- VOLUME 1 REVISION 0 DATED 6/78, S K F REPORT NO. ALR1P022
- VOLUME 2 REVISION 1, DATED 5/81, S K F REPORT NO. AT81D049

PROGRAM OPTIONS INEFFECT

=====

SYMMETRIC ROLLER AND RING GEOMETRIES ABOUT Y-AXIS
 COJAL SLICE WIDTHS
 CODED MATERIAL PROPERTIES USED
 ALL DATA PRESENTED IN METRIC UNITS

PROGRAM EXECUTED AT LEVEL 2
 TILT IS CONSIDERED IN THE ANALYSIS

UNITS
 =====

ENGLISH	METRIC
LENGTH	MILLIMETERS
FILM THICKNESS	MICRONS
MASS	KILOGRAMS
FORCE	NEWTONS
COEF. OF THERMAL EXP.	1/DEGREES C
DENSITY	MTS./MM CUBED
STRESS	MTS./MM SQUARED
MOMENT	MM-NEWTONS
TEMPERATURE	DEGREES C
PRESS. VIS. COEF.	MT-MM SQUARED
SPEED	RPM
HEAT GEN. RATES	WATTS
REPLENISH. LAYER THICK.	MICRONS

ROLLER	=	.12546660E+02
ROLLO	=	.14561820E+02
RTL	=	.52230000E+03
RCR	=	.38100000E+03
SPHR	=	.38100000E+03
SPHL	=	.38100000E+03
RFL	=	.8597800E+01
ELQ	=	.13037820E+02
FTI	=	.13337820E+02

ORIGINAL PAGE IS
 OF POOR QUALITY

AT81D049

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

DTACL	=	.12700000E+00
KLUC	=	+1
NUMRIL	=	+28
RS	=	+5
PHFI	=	.00000000E+00
XL	=	.3736787E+03
XR	=	-.5756787E+03
EPLAYG	=	.00000000E+00
EPLAYI	=	.50000000E-01
LEND		
LORING		
ROG	=	.00000000E+00
FLGALO	=	.86000000E+02
FLGAPO	=	.86000000E+02
DN	=	.14436852E+03
KRING	=	+1
LEHB		
LIRING		
RIG	=	.00000000E+00
FLGALI	=	.60000000E+00
FLGARI	=	.60000000E+00
LEND		
LCAG		
RLD	=	.15795248E+03
SRB	=	.45720000E+01
RLDC	=	.48260000E+00
CPCLP	=	.22098000E+00
IRIDE	=	+1
LEND		
LOPRB		
SS	=	.20000000E+05
BURKT	=	.93300000E+02
IRC	=	.93300000E+02
TRSG	=	.93300000E+02
LSHFT	=	.93300000E+02
LOR	=	.93300000E+02
LIR	=	.93300000E+02
IF1	=	.93300000E+02
IF2	=	.93300000E+02
IF3	=	.93300000E+02
IF4	=	.93300000E+02
LEND		
LLORE		
RCODE	=	+4
VIS1	=	.20000000E+02
VIS2	=	.51000000E+01
RH060	=	.10102000E+01
G	=	.74520000E-03
CORD	=	.15214000E+00
XARC	=	.17500000E-01
ZTO	=	.20320000E-02
ZTI	=	.20320000E-02

ORIGINAL PAGE IS
OF POOR QUALITY.

ZTFO	=	.00000000E+00
ZTFL	=	.00000000E+00
XCAV	=	.10000000E+01
FRK	=	.70000000E-01
XHUCG	=	.17500000E-01
AKH	=	.18200000E+02
XHUFL	=	.50000000E-01
1END		
1LOAD		
FY	=	.44482000E+04
FZ	=	.00000000E+00
THETAY	=	.00000000E+00
THETAZ	=	.00000000E+00
1END		
1LIFE		
RHSROL	=	.20320000E+00
RHSOR	=	.15240000E+00
RHSIR	=	.15240000E+00
CTR	=	.10000000E+01
COR	=	.10000000E+01
1END		

AT81D049

** * C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

ROLLER DATA
ROLLER TOTAL LENGTH 14.562 ROLLER MAXIMUM DIAMETER 12.647
EFFECTIVE LENGTH (O.R.) 13.038 EFFECTIVE LENGTH (I.R.) 13.038
FLAT LENGTH 8.400 CROWN RADIUS 622.3
ROLLER MASS .001187
END SPHERE RADIUS (LEFT) 381.000 END SPHERE RADIUS (RIGHT) 381.000
END PLAY (O.R.) .000 END PLAY (I.R.) .051
DIAMETRAL CLEARANCE .127000
NUMBER OF ROLLERS 28 TOTAL NUMBER OF ROLLER-RACEWAY SLICES 10

OUTER AND INNER RING DATA

RACE CURVATURE(O.R.) .000 RACE CURVATURE(I.R.) .000
PITCH DIAMETER 144.359 SPECIFIED MISALIGNMENTS .000000 (Y-RADIANS) .000000 (Z-RADIANS)

{ FLANGE ANGLE FOR FLANGED INNER RING(DEGREES)
LEFT SIDE .600 RIGHT SIDE .600

OUTER RING SPEED (RPM) .00000000 INNER RING SPEED (RPM) .20000000*05

CAGE DATA

TYPE-INNER RING LAND RIDING

CAGE POCKET CLEARANCE GEOMETRY GROUP 1 .221
 CAGE POCKET CLEARANCE GEOMETRY GROUP 2 .000

CAGE WEIGHT .000

RAIL LAND DIAMETER 137.952
 RAIL LAND DIA/NETRAL CLEARANCE .482600
 CAGE POCKET COEFFICIENT OF FRICTIONS .0175

SINGLE RAIL WIDTH 4.572

MATERIAL PROPERTIES

	CAGE	O.R.	I.R.	R.E.	HSE.
MODULUS OF ELASTICITY	.20+06	.20+06	.20+06	.20+06	.20+06
POISSON'S RATIO	.30	.30	.30	.30	.30
COEF. OF THERMAL EXPANSION	.11-04	.11-04	.11-04	.11-04	.11-04
DENSITY	.78+01	.78+01	.78+01	.78+01	.78+01

FRICTION DATA

REPLENISHMENT LAYER THICKNESS
 OUTER RACE .203+01
 O.R. FLANGE .000
 INNER RACE .203+01
 I.R. FLANGE .000

NASA LIMITING FRICTION COEFFICIENT .070

NASA LUBE FILM THICKNESS FACTOR 18.200

FRACTION OF LUBE IN BEARING CAVITY .010

TEMPERATURES RELEVANT TO BEARING PERFORMANCE (DEGREES F)

INNER RING	OUTER RING	ROLLERS	FLANGE 1	FLANGE 2	FLANGE 3	FLANGE 4	SHAFT	HOUSING	BULK OIL
199.9	199.9	199.9	173.9	199.9	199.9	199.9	199.9	199.9	199.9

ORIGINAL PAGE IS
 OF POOR QUALITY

AT81D049

L-10 FATIGUE LIVES(HRS)

OUTER RING .21+04
INNER RING .83+04
SINGLE ROW BEARING .18+04
BEARING FATIGUE LIFE .18+04

LUBE LIFE REDUCTION FACTORS
O.R. 1.620
I.R. 1.580

USER INPUT LIFE MULTIPLIERS
O.R. 1.000
I.R. 1.000

FILM THICKNESS TO SURFACE ROUGHNESS RATIO
FOR HEAVYEST LOADED ROLLING ELEMENT

O.R. 1.486
I.R. 1.460

O.R. 1.486
I.R. 1.460

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

*** CYBEAN / NASA * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * CYREAP / NASA

ROLLER RACEWAY CONTACT LOADS AT THE INNER RING

ROLLER	F-X	F-Y	F-Z	N-X	K-Y	M-Z
1	.000	.155+04	.919+00	.226+01	.000	.000
2	.000	.120+04	.132+00	.107+02	.000	.000
3	.000	.308+03	.103+01	.467+00	.000	.000
4	.000	.000	.000	.000	.000	.000
5	.000	.000	.000	.000	.000	.000
6	.000	.000	.000	.000	.000	.000
7	.000	.000	.000	.000	.000	.000
8	.000	.000	.000	.000	.000	.000
9	.000	.000	.000	.000	.000	.000
10	.000	.000	.000	.000	.000	.000
11	.000	.000	.000	.000	.000	.000
12	.000	.000	.000	.000	.000	.000
13	.000	.000	.000	.000	.000	.000
14	.000	.000	.000	.000	.000	.000
15	.000	.000	.000	.000	.000	.000
16	.000	.000	.000	.000	.000	.000
17	.000	.000	.000	.000	.000	.000
18	.000	.000	.000	.000	.000	.000
19	.000	.000	.000	.000	.000	.000
20	.000	.000	.000	.000	.000	.000
21	.000	.000	.000	.000	.000	.000
22	.000	.000	.000	.000	.000	.000
23	.000	.000	.000	.000	.000	.000
24	.000	.000	.000	.000	.000	.000
25	.000	.000	.000	.000	.000	.000
26	.000	.000	.000	.000	.000	.000
27	.000	.308+03	.740+00	.467+00	.000	.000
28	.000	.120+04	.705+00	.107+02	.000	.000

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y B E A N / N A S A * T E C H N O L O G Y D I V I S I O N S K F I N D U S T R I E S I N C . * C Y B E A N / N A S A

ROLLER RACEWAY CONTACT LOADS AT THE OUTER RING

ROLLER	F-X	F-Y	F-Z	M-X	M-Y	M-Z
1	.000	-.249+04	-.469+01	-.174+02	.000	.000
2	.000	-.214+04	-.435+01	-.153+02	.000	.000
3	.000	-.125+04	-.354+01	-.102+02	.000	.000
4	.000	-.939+03	-.398+01	-.130+02	.000	.000
5	.000	-.939+03	-.398+01	-.129+02	.000	.000
6	.000	-.939+03	-.398+01	-.125+02	.000	.000
7	.000	-.939+03	-.398+01	-.129+02	.000	.000
8	.000	-.939+03	-.398+01	-.130+02	.000	.000
9	.000	-.939+03	-.398+01	-.129+02	.000	.000
10	.000	-.939+03	-.398+01	-.130+02	.000	.000
11	.000	-.939+03	-.398+01	-.130+02	.000	.000
12	.000	-.939+03	-.398+01	-.130+02	.000	.000
13	.000	-.939+03	-.398+01	-.129+02	.000	.000
14	.000	-.939+03	-.398+01	-.129+02	.000	.000
15	.000	-.939+03	-.398+01	-.130+02	.000	.000
16	.000	-.939+03	-.398+01	-.129+02	.000	.000
17	.000	-.939+03	-.398+01	-.129+02	.000	.000
18	.000	-.939+03	-.398+01	-.130+02	.000	.000
19	.000	-.939+03	-.398+01	-.129+02	.000	.000
20	.000	-.939+03	-.398+01	-.129+02	.000	.000
21	.000	-.939+03	-.398+01	-.129+02	.000	.000
22	.000	-.939+03	-.398+01	-.130+02	.000	.000
23	.000	-.939+03	-.398+01	-.130+02	.000	.000
24	.000	-.939+03	-.398+01	-.129+02	.000	.000
25	.000	-.939+03	-.398+01	-.129+02	.000	.000
26	.000	-.939+03	-.398+01	-.130+02	.000	.000
27	.000	-.125+04	-.354+01	-.102+02	.000	.000
28	.000	-.214+04	-.435+01	-.153+02	.000	.000

AT81D049

.. C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

INNER RING APPLIED FORCES, MOMENTS, DISPLACEMENTS
=====

AXIAL LOAD = .000000
 RADIAL LOAD(Y) = .444820+04 RADIAL MOMENT(Y) = .000000 RADIAL MISALIGNMENT(Y) = .000000 (DEG)
 RADIAL LOAD(Z) = .000000 RADIAL MOMENT(Z) = .000000 RADIAL MISALIGNMENT(Z) = .000000 (DEG)

CALCULATED INNER RING REACTIVE FORCES, MOMENTS, DISPLACEMENTS
=====

AXIAL LOAD = .000 AXIAL TRANSLATION = .000
 RADIAL LOAD(Y) = -.445-04 RADIAL MOMENT(Y) = .000 RADIAL TRANSLATION(Y) = .775-01 RADIAL ROTATION(Y) = .000
 RADIAL LOAD(Z) = -.169+01 RADIAL MOMENT(Z) = .000 RADIAL TRANSLATION(Z) = .000 RADIAL ROTATION(Z) = .000 (DEG)

LUBRICANT DATA

LUBE TYPE -	MIL-L-23699	TEMP (DEG C)	DENS (GM/3 /CM)	VISCOSITY (CSTK)	VISCOSITY (CPOIS)	PRESS. VIS. COEF
						1./ / MT-HM
O.R.		93.	.952	.569+01	.542+01	.130-01
I.R.		93.	.952	.569+01	.542+01	.130-01
BULK		93.	.952	.569+01	.542+01	.130-01
FLG. 1		93.	.952	.569+01	.542+01	.130-01
FLG. 2		93.	.952	.569+01	.542+01	.130-01
FLG. 3		93.	.952	.569+01	.542+01	.130-01
FLG. 4		93.	.952	.569+01	.542+01	.130-01

ROLLING ELEMENT SPEEDS, NON-CONTACT FORCES, DEFLECTIONS

ROLLER	OUTER RING DEFLECTION	ROLLER CENTRIFUGAL FORCE	ROLLER ORBITAL SPEED	ROLLER ROTATIONAL SPEED	NORMAL FORCE	CAGE POCKET FORCES Y-FRICTION FORCE	Y-FRICTION MOMENT
1	.000	.940+03	.9124+04	-.1133+06	.434+01	.000	.000
2	.000	.940+03	.9124+04	-.1133+06	.505+01	.000	.000
3	.000	.939+03	.9124+04	-.1133+06	.308+01	.000	.000
4	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
5	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
6	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
7	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
8	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
9	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
10	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
11	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
12	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
13	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
14	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
15	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
16	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
17	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
18	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
19	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
20	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
21	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
22	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
23	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
24	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
25	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
26	.000	.939+03	.9124+04	-.1133+06	.455+01	.000	.000
27	.000	.939+03	.9124+04	-.1133+06	.337+01	.000	.000
28	.000	.940+03	.9124+04	-.1133+06	.562+01	.000	.000

CALCULATED CAGE SPEED 9124.
 CAGE DRIVING TORQUE 521.3
 CAGE LAND NORMAL FORCE 1.1
 EPICYCLIC CAGE SPEED .912+04
 EPICYCLIC ROLLER SPEED .113+06

ORIGINAL PAGE IS
 OF POOR QUALITY

AT81D049

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

*** CYBEAN / N A S A ** TECHNOLOGY DIVISION S&F INDUSTRIES INC. * CYBEAN / N A S A

ROLLER	I-RACE	HERTZ CONTACT STRESS AT ROLLER-RACE AND ROLLER END-FLANGE CONTACT O-RACE	FLG 1	FLG 2	FLG 3	FLG 4
1	.103+04	.121+04	.000	.000	.000	.000
2	.928+03	.114+04	.900	.000	.000	.000
3	.482+03	.903+03	.000	.000	.000	.000
4	.000	.804+03	.000	.000	.000	.000
5	.000	.804+03	.000	.000	.000	.000
6	.000	.804+03	.000	.000	.000	.000
7	.000	.804+03	.000	.000	.000	.000
8	.000	.804+03	.000	.000	.000	.000
9	.000	.804+03	.000	.000	.000	.000
10	.000	.804+03	.000	.000	.000	.000
11	.000	.804+03	.000	.000	.000	.000
12	.000	.804+03	.000	.000	.000	.000
13	.000	.804+03	.000	.000	.000	.000
14	.000	.804+03	.000	.000	.000	.000
15	.000	.804+03	.000	.000	.000	.000
16	.000	.804+03	.000	.000	.000	.000
17	.000	.804+03	.000	.000	.000	.000
18	.000	.804+03	.000	.000	.000	.000
19	.000	.804+03	.000	.000	.000	.000
20	.000	.804+03	.000	.000	.000	.000
21	.000	.804+03	.000	.000	.000	.000
22	.000	.804+03	.000	.000	.000	.000
23	.000	.804+03	.000	.000	.000	.000
24	.000	.804+03	.000	.000	.000	.000
25	.000	.804+03	.000	.000	.000	.000
26	.000	.804+03	.000	.000	.000	.000
27	.482+03	.903+03	.000	.000	.000	.000
28	.928+03	.114+04	.000	.000	.000	.000

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y B E A N / N A S A * T E C H N O L O G Y D I V I S I O N S K F I N D U S T R I E S I N C . * C Y B E A N / N A S A

ROLLER	O-RACE		LUBRICANT FILM THICKNESS			
	I-RACE	FLG 1	FLG 2	FLG 3	FLG 4	
1	.371+00	.000	.000	.000	.000	
2	.386+00	.000	.000	.000	.000	
3	.417+00	.000	.000	.000	.000	
4	.000	.000	.000	.000	.000	
5	.000	.000	.000	.000	.000	
6	.000	.000	.000	.000	.000	
7	.000	.000	.000	.000	.000	
8	.000	.000	.000	.000	.000	
9	.000	.000	.000	.000	.000	
10	.000	.000	.000	.000	.000	
11	.000	.000	.000	.000	.000	
12	.000	.000	.000	.000	.000	
13	.000	.000	.000	.000	.000	
14	.000	.000	.000	.000	.000	
15	.000	.000	.000	.000	.000	
16	.000	.000	.000	.000	.000	
17	.000	.000	.000	.000	.000	
18	.000	.000	.000	.000	.000	
19	.000	.000	.000	.000	.000	
20	.000	.000	.000	.000	.000	
21	.000	.000	.000	.000	.000	
22	.000	.000	.000	.000	.000	
23	.000	.000	.000	.000	.000	
24	.000	.000	.000	.000	.000	
25	.000	.000	.000	.000	.000	
26	.000	.000	.000	.000	.000	
27	.417+00	.000	.000	.000	.000	
28	.386+00	.000	.000	.000	.000	

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

ROLLER SKEW AND TILT (RADIANS)

ROLLER	ROLLER SKEW RELATIVE	ROLLER TILT RELATIVE	ROLLER SKEW ABSOLUTE	ROLLER TILT ABSOLUTE
1	.0000	-.8923-11	.0000	-.8923-11
2	.0000	-.3135-10	.0000	-.3135-10
3	.0000	-.4517-10	.0000	-.4517-10
4	.0000	.0000	.0000	.0000
5	.0000	.0000	.0000	.0000
6	.0000	.0000	.0000	.0000
7	.0000	.0000	.0000	.0000
8	.0000	.0000	.0000	.0000
9	.0000	.0000	.0000	.0000
10	.0000	.0000	.0000	.0000
11	.0000	.0000	.0000	.0000
12	.0000	.0000	.0000	.0000
13	.0000	.0000	.0000	.0000
14	.0000	.0000	.0000	.0000
15	.0000	.0000	.0000	.0000
16	.0000	.0000	.0000	.0000
17	.0000	.0000	.0000	.0000
18	.0000	.0000	.0000	.0000
19	.0000	.0000	.0000	.0000
20	.0000	.0000	.0000	.0000
21	.0000	.0000	.0000	.0000
22	.0000	.0000	.0000	.0000
23	.0000	.0000	.0000	.0000
24	.0000	.0000	.0000	.0000
25	.0000	.0000	.0000	.0000
26	.0000	.0000	.0000	.0000
27	.0000	.0000	.0000	.0000
28	.0000	.0000	.0000	.0000

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

*** C Y B E A H / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A H / N A S A

BRKING HEAT GENERATION RATES

SUM OF ROLLING ELT/O-R. CONTACT HEAT GEN. RATES 6900.
SUM OF ROLLING ELT/I-R. CONTACT HEAT GEN. RATES 1045.
SUM OF ROLLING ELT DRAG HEAT GEN. RATES 1103.
SUM OF ROLLING ELT/CAGE PKT. HEAT GEN. RATES 152.
CAGE RAIL/RING LARD HEAT GEN. RATE 594.
SUM OF ROLLING ELT/FLG. 1 HEAT GEN. RATES 0.
SUM OF ROLLING ELT/FLG. 2 HEAT GEN. RATES 0.
SUM OF ROLLING ELT/FLS. 3 HEAT GEN. RATES 0.
SUM OF ROLLING ELT/FLG. 4 HEAT GEN. RATES 0.

APPENDIX E
SAMPLE OUTPUT
SOLUTION LEVEL = 3

CYBEAN/NASA * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * CYBEAN/NASA

CYBEAN/NASA - VERSION NUMBER 2

USE THIS VERSION WITH THE FOLLOWING USER'S MANUALS

- VOLUME 1 REVISION 0, DATED 6/78, S K F REPORT NO. ALRIP022
- VOLUME 2 REVISION 1, DATED 5/81, S K F REPORT NO. AT81D049

PROGRAM OPTIONS IMPEFFECT
=====

SYMMETRIC ROLLER AND RING GEOMETRIES ABOUT Y-AXIS
EQUAL SLICE WIDTHS
CODED MATERIAL PROPERTIES USED
ALL DATA PRESENTED IN METRIC UNITS

PROGRAM EXECUTED AT LEVEL 3
TILT IS NOT CONSIDERED IN THE ANALYSIS

UNITS
=====

ENGLISH	METRIC
LENGTH	MILLIMETERS
FILM THICKNESS	MICROMS
MASS	KILOGRAMS
FORCE	NEWTONS
COEF. OF THERMAL EXP.	1/DEGREES C
DENSITY	MTS./MM CUBED
STRESS	MTS./MM SQUARED
MOMENT	MM-NEWTONS
TEMPERATURE	DEGREES C
PRESS. VIS. COEF.	MT-MM SQUARED
SPEED	RPM
HEAT GEN. RATES	WATTS
REPLENISH. LAYER THICK.	MICROMS

ROLLER	=	.12646650E+02
ROLLO	=	.14561420E+02
RTL	=	.62230000E+03
RCR	=	.38100000E+03
SPHR	=	.34100900E+03
SPHL	=	.43997000E+01
NFL	=	.13037300E+02
FLO	=	.13037320E+02
ELI	=	

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

DIACL	=	.12700000E+00
KLUE	=	+1
MMROL	=	+28
HS	=	+5
PHI1	=	.00000000E+00
XL	=	.3736787E+03
AR	=	-.3736787E+03
EPLAY0	=	.00000000E+00
EPLAY1	=	.50800000E-01
SEND		
FORING	=	
ROG	=	.00000000E+00
FLGAL0	=	.85300000E+02
FLGAR0	=	.86000000E+02
DM	=	.1436852E+03
KRING	=	+1
SEND		
FORING	=	
RI1	=	.00000000E+00
FLGALI	=	.60000000E+00
FLGARI	=	.60000000E+00
SEND		
ICAG	=	
RLD	=	.13795348E+03
SR1	=	.45720000E+01
RLOC	=	.48260000E+00
CPCLR	=	.22098000E+00
IRIDE	=	+1
SEND		
TOPER8	=	
SS	=	.20000000E+05
BULK1	=	.93300000E+02
TRF	=	.93300000E+02
THSG	=	.93300000E+02
TSHT	=	.93300000E+02
TAR	=	.93300000E+02
TRR	=	.93300000E+02
TF1	=	.93300000E+02
TF2	=	.93300000E+02
TF3	=	.93300000E+02
TF4	=	.93300000E+02
SEND		
ELURE	=	
PIC0DE	=	+4
VIS1	=	.28000000E+02
VIS2	=	.51000000E+01
RH060	=	.10102000E+01
G	=	.74520000E-03
COM0	=	.15218000E+00
XMRRC	=	.17500000E-01
ZIO	=	.40540000E-03
ZFI	=	.40540000E-03

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

ZTFB	.40540000E-03
ZTFI	.40640000E-03
XCAJ	.10000000E+01
FRK	.70000000E-01
XHUCG	.17500000E-01
AKN	.18200000E+02
XNUFL	.50000000E-01

LEND	
SLOAD	
FY	.44482000E+04
FZ	.30000000E+00
THETA	.00000000E+00
THETAZ	.33334000E-01

LEND	
BLIFE	
RYSROL	.20320000E+00
RMSJK	.15240000E+00
RMSIE	.15240000E+00
CIR	.10000000E+01
CJR	.10000000E+01

LEND

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

ROLLER DATA
ROLLER TOTAL LENGTH 14.562 ROLLER MAXIMUM DIAMETER 12.647
EFFECTIVE LENGTH (O.R.) 13.038 EFFECTIVE LENGTH (I.R.) 13.038
FLAT LENGTH 3.400 CROWN RADIUS 622.3
ROLLER MASS .001197
END SPHERE RADIUS (LEFT) 391.000 END SPHERE RADIUS (RIGHT) 391.000
END PLAY (O.R.) .000 END PLAY (I.R.) .051
DIAMETRAL CLEARANCE .127000
NUMBER OF ROLLERS 28 TOTAL NUMBER OF ROLLER-RACEWAY SLICES 10
OUTER AND INNER RING DATA
RACE CURVATURE(O.R.) .000 RACE CURVATURE(I.R.) .000
PITCH DIAMETER 144.369 SPECIFIED MISALIGNMENTS .000060(Y-RADIANS) .001454(Z-RADIANS)
FLANGE ANGLE FOR FLANGED INNER RING(DEGREES)
LEFT SIDE .600 RIGHT SIDE .600
OUTER RING SPEED (RPM) .00000000 INNER RING SPEED (RPM) .20000000.05

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

C Y H E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A H / N A S A
CASE DATA

TYPE-INNER RING LAND RIDING

CAGE POCKET CLEARANCE GEOMETRY GROUP 1 .221
CAGE POCKET CLEARANCE GEOMETRY GROUP 2 .000
CAGE WEIGHT .000

RAIL LAND DIAMETER 137.952 SINGLE RAIL WIDTH 4.572
RAIL LAND DIAMETRAL CLEARANCE .482600
CAGE POCKET COEFFICIENT OF FRICTION% .0175

MATERIAL PROPERTIES

	CASE	O.R.	I.R.	R.E.	HSG.
MODULUS OF ELASTICITY	.20+06	.20+06	.20+06	.20+06	.20+06
POISSON'S RATIO	.30	.30	.30	.30	.30
COEF. OF THERMAL EXPANSION	.11-04	.11-04	.11-04	.11-04	.11-04
DENSITY	.78+01	.78+01	.78+01	.78+01	.78+01

FRICITION DATA

REPLENISHMENT LAYER THICKNESS
OUTER RACE .405+00 INNER RACE .406+00
O.R. FLANGE .406+00 I.R. FLANGE .406+00

NASA LIMITING FRICTION COEFFICIENT .070

NASA LUBE FILM THICKNESS FACTOR 13.200

FRACTION OF LUBE IN BEARING CAVITY .010

		TEMPERATURES RELEVANT TO BEARING PERFORMANCE (DEGREES F)							
INNER RING	OUTER RING	ROLLERS	FLANGE 1	FLANGE 2	FLANGE 3	FLANGE 4	SHAFT	HOUSING	BULK OIL
133.9	133.9	133.9	151.9	199.9	191.0	194.9	199.9	199.9	199.9

L-10 FATIGUE LIVES(HRS)

OUTER RING .21+04
INNER RING .A2+04
SINGLE ROW BEARING .19+04
BEARING FATIGUE LIFE .1A+04

LUBE LIFE REDUCTION FACTORS

O.R. I.R.
1.520 1.590

USER INPUT LIFE MULTIPLIERS

O.R. I.R.
1.000 1.000

FILM THICKNESS TO SURFACE ROUGHNESS RATIO
FOR HEAVIEST LOADED ROLLING ELEMENT

O.R. I.R.
1.483 1.460

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

*** CYBERAN / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * CYBERAN / H A S A

ROLLER RACEJAY CONTACT LOADS AT THE INNER RING

ROLLER	F-X	F-Y	F-Z	M-X	M-Y	M-Z
1	.000	.155+04	.130+02	-.740+02	.000	.442-01
2	-.134+01	.120+04	.667+01	-.322+02	.553-01	.809+01
3	.353+00	.393+03	.407+01	-.187+02	-.247-01	.169+01
4	.000	.000	.000	.000	.000	.000
5	.000	.000	.000	.000	.000	.000
6	.000	.000	.000	.000	.000	.000
7	.000	.000	.000	.000	.000	.000
8	.000	.000	.000	.000	.000	.000
9	.000	.000	.000	.000	.000	.000
10	.000	.000	.000	.000	.000	.000
11	.000	.000	.000	.000	.000	.000
12	.000	.000	.000	.000	.000	.000
13	.000	.000	.000	.000	.000	.000
14	.000	.000	.000	.000	.000	.000
15	.000	.000	.000	.000	.000	.000
16	.000	.000	.000	.000	.000	.000
17	.000	.000	.000	.000	.000	.000
18	.000	.000	.000	.000	.000	.000
19	.000	.000	.000	.000	.000	.000
20	.000	.000	.000	.000	.000	.000
21	.000	.000	.000	.000	.000	.000
22	.000	.000	.000	.000	.000	.000
23	.000	.000	.000	.000	.000	.000
24	.000	.000	.000	.000	.000	.000
25	.000	.000	.000	.000	.000	.000
26	.000	.000	.000	.000	.000	.000
27	-.141-01	.320+03	.376+01	-.186+02	.600	.871-01
28	-.122+00	.121+04	.885+01	.496+02	.000	.294+00

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y R E A N / N A S A

ROLLER RACEWAY CONTACT LOADS AT THE OUTER RING

ROLLER	F-X	F-Y	F-Z	M-X	M-Y	M-Z
1	-.122-01	-.249+04	.16R+01	.228+02	.000	.770-01
2	.255+01	-.213+04	.810+01	.633+02	-.132+00	.170+01
3	-.220+01	-.124+04	.439+01	.399+02	.197+00	.151+02
4	.000	-.937+03	.301+01	.312+02	.000	.000
5	.000	-.937+03	-.326+01	-.849+01	.000	.000
6	.000	-.937+03	-.294+01	-.640+01	.000	.000
7	.000	-.937+03	-.371+00	.977+01	.000	.000
8	.000	-.937+03	-.502+00	.897+01	.000	.000
9	.000	-.937+03	-.317+01	-.791+01	.000	.000
10	.000	-.937+03	-.297+01	-.664+01	.000	.000
11	.000	-.937+03	-.381+01	-.120+02	.000	.000
12	.000	-.937+03	.743-01	.126+02	.000	.000
13	.000	-.937+03	-.770+00	.725+01	.000	.000
14	.000	-.937+03	-.731+00	.753+01	.000	.000
15	.000	-.937+03	-.288+01	-.504+01	.000	.000
16	.000	-.937+03	.167+01	.227+02	.000	.000
17	.000	-.937+03	.798+00	.171+02	.000	.000
18	.000	-.937+03	-.623+00	.823+01	.000	.000
19	.000	-.937+03	.189+01	.241+02	.000	.000
20	.000	-.937+03	-.715+00	.763+01	.000	.000
21	.000	-.937+03	.137+01	.208+02	.000	.000
22	.000	-.937+03	-.900+00	.547+01	.000	.000
23	.000	-.937+03	.317+01	.321+02	.000	.000
24	.000	-.937+03	-.394+01	-.128+02	.000	.000
25	.000	-.937+03	-.300+00	.102+02	.000	.000
26	.000	-.937+03	.847+00	.175+02	.000	.000
27	.595+00	-.125+04	-.311+01	-.752+01	.000	-.336+01
28	.157+01	-.214+04	-.578+01	-.244+02	-.521-01	-.873+01

... C Y P E A N / N A S A * T E C H N O L O G Y D I V I S I O N S K F I N D U S T R I E S I M C . * C Y B E A N / N A S A
 I N N E R R I N G A P P L I E D F O R C E S , M O M E N T S , D I S P L A C E M E N T S

AXIAL LOAD = .000000
 RADIAL LOAD(Y) = -.444827+04
 RADIAL LOAD(Z) = -.300000
 RADIAL MOMENT(Y) = .000000
 RADIAL MOMENT(Z) = .300000
 RADIAL MISALIGNMENT(Y) = .000000 (DEG)
 RADIAL MISALIGNMENT(Z) = .833344-01 (DEG)

C A L C U L A T E D I N N E R R I N G R E A C T I V E F O R C E S , M O M E N T S , D I S P L A C E M E N T S
 =====

AXIAL LOAD = .249+01
 RADIAL LOAD(Y) = -.445+04
 RADIAL LOAD(Z) = -.255+02
 AXIAL TRANSLATION = .000
 RADIAL TRANSLATION(Y) = -.553+02
 RADIAL TRANSLATION(Z) = -.169+03
 RADIAL ROTATION(Y) = .775-01
 RADIAL ROTATION(Z) = -.138-03
 RADIAL ROTATION(Y) = .000 (DEG)
 RADIAL ROTATION(Z) = .000 (DEG)

ORIGINAL PAGE IS
 OF POOR QUALITY.

AT81D049

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y R E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A H / N A S A

ROLLER END-FLANGE CONTACT LOADS AT THE INNER RING, LEFT SIDE

ROLLER	F-X	F-Y	F-Z	M-X	M-Y	M-Z
1	.000	.000	.000	.000	.000	.000
2	.000	.000	.000	.000	.000	.000
3	.195+01	.000	.318-01	-.133+00	.152+01	.730+01
4	.000	.000	.000	.000	.000	.000
5	.000	.000	.000	.000	.000	.000
6	.000	.000	.000	.000	.000	.000
7	.000	.000	.000	.000	.000	.000
8	.000	.000	.000	.000	.000	.000
9	.000	.000	.000	.000	.000	.000
10	.000	.000	.000	.000	.000	.000
11	.000	.000	.000	.000	.000	.000
12	.000	.000	.000	.000	.000	.000
13	.000	.000	.000	.000	.000	.000
14	.000	.000	.000	.000	.000	.000
15	.000	.000	.000	.000	.000	.000
16	.000	.000	.000	.000	.000	.000
17	.000	.000	.000	.000	.000	.000
18	.000	.000	.000	.000	.000	.000
19	.000	.000	.000	.000	.000	.000
20	.000	.000	.000	.000	.000	.000
21	.000	.000	.000	.000	.000	.000
22	.000	.000	.000	.000	.000	.000
23	.000	.000	.000	.000	.000	.000
24	.000	.000	.000	.000	.000	.000
25	.000	.000	.000	.000	.000	.000
26	.000	.000	.000	.000	.000	.000
27	.000	.000	.000	.000	.000	.000
28	.000	.000	.000	.000	.000	.000

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

C Y B E A M / I A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A M / N A S A

ROLLER END-FLANGE CONTACT LOADS AT THE INNER RING, RIGHT SIDE

ROLLER	F-X	F-Y	F-Z	M-X	M-Y	M-Z
1	.000	.000	.000	.000	.000	.000
2	-.117+01	.000	.182-01	-.765-01	-.653+00	-.462+01
3	.000	.000	.000	.000	.000	.000
4	.000	.000	.000	.000	.000	.000
5	.000	.000	.000	.000	.000	.000
6	.000	.000	.000	.000	.000	.000
7	.000	.000	.000	.000	.000	.000
8	.000	.000	.000	.000	.000	.000
9	.000	.000	.000	.000	.000	.000
10	.000	.000	.000	.000	.000	.000
11	.000	.000	.000	.000	.000	.000
12	.000	.000	.000	.000	.000	.000
13	.000	.000	.000	.000	.000	.000
14	.000	.000	.000	.000	.000	.000
15	.000	.000	.000	.000	.000	.000
16	.000	.000	.000	.000	.000	.000
17	.000	.000	.000	.000	.000	.000
18	.000	.000	.000	.000	.000	.000
19	.000	.000	.000	.000	.000	.000
20	.000	.000	.000	.000	.000	.000
21	.000	.000	.000	.000	.000	.000
22	.000	.000	.000	.000	.000	.000
23	.000	.000	.000	.000	.000	.000
24	.000	.000	.000	.000	.000	.000
25	.000	.000	.000	.000	.000	.000
26	.000	.000	.000	.000	.000	.000
27	-.571+00	.000	.000	-.340-01	-.764-01	-.223+01
28	-.145+01	.148-01	.253-01	-.104+00	-.248+00	-.567+01

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

SLIING SPEEDS AT ROLLER END-FLANGE CONTACT (METERS PER SECOND)
ROLLER NO FLG 1 FLG 2 FLG 3 FLG 4

ROLLER NO	FLG 1	FLG 2	FLG 3	FLG 4
1	.000	.000	.000	.000
2	.000	.000	.000	.000
3	.000	.000	32.676	31.233
4	.000	.000	.000	.000
5	.000	.000	.000	.000
6	.000	.000	.000	.000
7	.000	.000	.000	.000
8	.000	.000	.000	.000
9	.000	.000	.000	.000
10	.000	.000	.000	.000
11	.000	.000	.000	.000
12	.000	.000	.000	.000
13	.000	.000	.000	.000
14	.000	.000	.000	.000
15	.000	.000	.000	.000
16	.000	.000	.000	.000
17	.000	.000	.000	.000
18	.000	.000	.000	.000
19	.000	.000	.000	.000
20	.000	.000	.000	.000
21	.000	.000	.000	.000
22	.000	.000	.000	.000
23	.000	.000	.000	.000
24	.000	.000	.000	.000
25	.000	.000	.000	.000
26	.000	.000	.000	.000
27	.000	.000	.000	.000
28	.000	.000	.000	.000

LUBRICANT DATA

LUBE TYPE - MIL-L-23699

	TEMP (DEG C)	DENS (GM/3 /CM ³)	VISCOSITY (CSTK)	VISCOSITY (CPOIS)	VISCOSITY 1. / / NT-MM 2	PRESS. VIS. COEF
O.R.	93.	.952	.569+01	.542+01	.130-01	.000
I.R.	93.	.952	.569+01	.542+01	.130-01	.000
BULK	93.	.952	.569+01	.542+01	.130-01	.000
FLG. 1	93.	.952	.569+01	.542+01	.130-01	.000
FLG. 2	93.	.952	.569+01	.542+01	.130-01	.000
FLG. 3	93.	.952	.569+01	.542+01	.130-01	.000
FLG. 4	93.	.952	.569+01	.542+01	.130-01	.000

ORIGINAL PAGE IS
OF POOR QUALITY.

AT81D049

** * C Y B E A N / J A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

ROLLING ELEMENT SPEEDS, NON-CONTACT FORCES, DEFLECTIONS

ROLLER	OUTER RINGS DEFLECTION	ROLLER CENTRIFUGAL FORCE	ROLLER ORBITAL SPEED	ROLLER ROTATIONAL SPEED	NORMAL FORCE	CAGE POCKET FORCES Y-FRICTION FORCE	Y-FRICTION MOMENT
1	.000	.959+03	.9072+04	-.1129+06	-.139+02	-.143+01	.000
2	.000	.929+03	.9072+04	-.1133+06	-.211+02	-.177+01	.000
3	.000	.915+03	.9011+04	-.1126+06	-.118+02	-.132+01	.000
4	.000	.924+03	.9051+04	-.1129+06	.309+01	.675+00	.000
5	.000	.924+03	.9047+04	-.1123+06	.818+01	.110+01	.000
6	.000	.934+03	.9097+04	-.1129+06	.945+00	.373+00	.000
7	.000	.921+03	.9034+04	-.1124+06	-.270+01	-.629+00	.000
8	.000	.927+03	.9065+04	-.1128+06	.221+01	.571+03	.000
9	.000	.922+03	.9041+04	-.1123+06	.511+01	.866+00	.000
10	.000	.930+03	.9073+04	-.1128+06	.413+01	.780+00	.000
11	.000	.925+03	.9051+04	-.1124+06	.460+00	.260+00	.000
12	.000	.928+03	.9067+04	-.1127+06	.623+01	.958+01	.000
13	.000	.922+03	.9036+04	-.1124+06	.362+01	.723+00	.000
14	.000	.928+03	.9068+04	-.1128+06	.691+01	.101+01	.000
15	.000	.927+03	.9065+04	-.1125+06	.242+01	.597+00	.000
16	.000	.925+03	.9059+04	-.1129+06	.346+00	.226+00	.000
17	.000	.923+03	.9042+04	-.1126+06	.457+01	.820+00	.000
18	.000	.932+03	.9086+04	-.1129+06	.168+01	.498+00	.000
19	.000	.921+03	.9035+04	-.1126+06	.510+00	.274+00	.000
20	.000	.930+03	.9080+04	-.1129+06	.978+00	.380+00	.000
21	.000	.921+03	.9033+04	-.1126+06	.222+01	.572+00	.000
22	.000	.932+03	.9086+04	-.1129+06	.161+01	.488+00	.000
23	.000	.918+03	.9021+04	-.1126+06	.414+01	.780+00	.000
24	.000	.932+03	.9088+04	-.1128+06	.623+01	.959+00	.000
25	.000	.926+03	.9059+04	-.1126+06	-.192+01	-.532+00	.000
26	.000	.925+03	.9054+04	-.1128+06	-.807+00	-.345+00	.000
27	.000	.925+03	.9051+04	-.1124+06	.231+01	.583+00	.000
28	.000	.932+03	.9085+04	-.1129+06	-.303+01	-.658+00	.000

CALCULATED CASE SPEED 9058.
CAGE DRIVING TORQUE 485.4
CAGE LAND NORMAL FORCE .0
EPICYCLIC CAGE SPEED .912+04
EPICYCLIC ROLLER SPEED .113+06

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

C Y B E A N / H A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N # N A S A

ROLLER	I-RACE	HERTZ CONTACT STRESS AT ROLLER-RACE AND ROLLER END-FLANGE CONTACT J-RACE	FLG 1	FLG 2	FLG 3	FLG 4
1	.103+04	.121+04	.000	.000	.000	.000
2	.930+03	.114+04	.000	.000	.000	.173+02
3	.478+03	.900+03	.000	.000	.201+02	.000
4	.000	.803+03	.000	.000	.000	.000
5	.000	.803+03	.000	.000	.000	.000
6	.000	.803+03	.000	.000	.000	.000
7	.000	.803+03	.000	.000	.000	.000
8	.000	.803+03	.000	.000	.000	.000
9	.000	.803+03	.000	.000	.000	.000
10	.000	.803+03	.000	.000	.000	.000
11	.000	.803+03	.000	.000	.000	.000
12	.000	.803+03	.000	.000	.000	.000
13	.000	.803+03	.000	.000	.000	.000
14	.000	.803+03	.000	.000	.000	.000
15	.000	.803+03	.000	.000	.000	.000
16	.000	.803+03	.000	.000	.000	.000
17	.000	.803+03	.000	.000	.000	.000
18	.000	.803+03	.000	.000	.000	.000
19	.000	.803+03	.000	.000	.000	.000
20	.000	.803+03	.000	.000	.000	.000
21	.000	.803+03	.000	.000	.000	.000
22	.000	.803+03	.000	.000	.000	.000
23	.000	.803+03	.000	.000	.000	.000
24	.000	.803+03	.000	.000	.000	.000
25	.000	.803+03	.000	.000	.000	.000
26	.000	.803+03	.000	.000	.000	.000
27	.492+03	.905+03	.000	.000	.000	.135+02
28	.931+03	.114+04	.000	.000	.000	.185+02

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

** * C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A *

ROLLER	I-RACE	O-RACE	LUBRICANT FILM THICKNESS		
			FLG 1	FLG 2	FLG 3
1	.371+00	.377+00	.000	.000	.000
2	.390+00	.395+00	.000	.000	.509+01
3	.418+00	.406+00	.000	.000	.000
4	.000	.416+00	.000	.000	.000
5	.000	.415+00	.000	.000	.000
6	.000	.416+00	.000	.000	.000
7	.000	.415+00	.000	.000	.000
8	.000	.415+00	.000	.000	.000
9	.000	.415+00	.000	.000	.000
10	.000	.416+00	.000	.000	.000
11	.000	.415+00	.000	.000	.000
12	.000	.416+00	.000	.000	.000
13	.000	.415+00	.000	.000	.000
14	.000	.416+00	.000	.000	.000
15	.000	.415+00	.000	.000	.000
16	.000	.416+00	.000	.000	.000
17	.000	.415+00	.000	.000	.000
18	.000	.416+00	.000	.000	.000
19	.000	.415+00	.000	.000	.000
20	.000	.416+00	.000	.000	.000
21	.000	.415+00	.000	.000	.000
22	.000	.416+00	.000	.000	.000
23	.000	.415+00	.000	.000	.000
24	.000	.416+00	.000	.000	.000
25	.000	.416+00	.000	.000	.000
26	.000	.416+00	.000	.000	.000
27	.416+00	.406+00	.000	.000	.533+01
28	.380+00	.395+00	.000	.000	.501+01

ORIGINAL PAGE IS
OF POOR QUALITY

AT81D049

ROLLER SKEW AND TILT (RADIAN)

ROLLER	ROLLER SKEW RELATIVE	ROLLER TILT RELATIVE	ROLLER SKEW ABSOLUTE	ROLLER TILT ABSOLUTE
1	-.4744-05	-.1454-02	-.4744-05	-.7465-08
2	.9077-03	-.1424-02	.1231-02	-.5596-05
3	-.2563-02	-.1311-02	-.1938-02	-.5486-06
4	-.9068-03	-.1137-02	.2224-12	.4871-08
5	-.1137-02	-.9068-03	-.1739-12	-.9946-08
6	-.1310-02	-.6310-03	-.1359-12	.1334-97
7	-.1418-02	-.3236-03	-.5757-11	-.1062-08
8	-.1454-02	-.9041-08	.2237-12	-.8974-98
9	-.1418-02	.3236-03	-.2223-12	.4435-98
10	-.1310-02	.6311-03	-.4672-11	.1010-07
11	-.1137-02	.9068-03	.1901-12	-.4239-08
12	-.9068-03	.1137-02	-.5956-11	-.1675-08
13	-.6310-03	.1310-02	-.1268-12	.1428-08
14	-.3236-03	.1418-02	-.2672-08	-.7368-10
15	-.3064-09	.1454-02	-.1497-12	.8266-09
16	.3236-03	.1418-02	-.7898-08	-.7395-10
17	.6310-03	.1510-02	-.2174-12	.1314-08
18	.9068-03	.1137-02	-.1813-12	.1509-08
19	.1137-02	.9068-03	-.1971-12	-.1061-08
20	.1310-02	.6310-03	.1975-12	-.3853-08
21	.1418-02	.3236-03	-.6319-12	.9657-09
22	.1454-02	.1052-03	.9951-12	.4625-09
23	.1418-02	-.3236-03	-.2887-11	-.1490-09
24	.1310-02	-.6310-03	.1002-11	.2196-09
25	.1137-02	-.9068-03	-.1028-11	-.1033-08
26	.9068-03	-.1137-02	-.1223-11	-.2209-10
27	.6953-03	-.1311-02	.6429-04	-.2297-06
28	.4319-03	-.1418-02	.1083-03	-.4369-06

ORIGINAL PAGE IS
OF POOR QUALITY.

AT81D049

* * * C Y B E A N / N A S A * TECHNOLOGY DIVISION SKF INDUSTRIES INC. * C Y B E A N / N A S A

BEARING HEAT GENERATION RATES

SUM OF ROLLING ELT/O.R. CONTACT HEAT GEN. RATES 6841.
SUM OF ROLLING ELT/I.R. CONTACT HEAT GEN. RATES 1066.
SUM OF ROLLING ELI DRAG HEAT GEN. RATES 1079.
SUM OF ROLLING ELT/CAGE PKT. HEAT GEN. RATES 1443.
CAGE RAIL/RING LAND HEAT GEN. RATE 556.
SUM OF ROLLING ELT/FLG. 1 HEAT GEN. RATES 0.
SUM OF ROLLING ELT/FLG. 2 HEAT GEN. RATES 0.
SUM OF ROLLING ELT/FLG. 3 HEAT GEN. RATES 1.
SUM OF ROLLING ELT/FLG. 4 HEAT GEN. RATES 2.