

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

**THIS NASA INVENTION APPEARS TO HAVE
EXCELLENT COMMERCIAL POTENTIAL**

NASA CASE NO.

MFS-25,707-1

PRINT FIGURE

#3

NOTICE

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.2).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourages nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will consider the granting of a limited exclusive license, pursuant to the NASA Patent Licensing Regulations, when such a license will provide the necessary incentive to the licensee to achieve early practical application of the invention.

Address inquiries and all applications for license for this invention to NASA Patent Counsel, Marshall Space Flight Center, Mail Code CCO1, Huntsville, AL 35812. Approved NASA forms for application for nonexclusive or exclusive license are available from the above address.

MSFC

(NASA-Case-MFS-25707-1) EXOTHERMIC FURNACE
MODULE Patent Application (NASA) 12 p
HC A02/MF A01 CACL 14B



N82-26631

Unclas
G3/35 21070

EXOTHERMIC FURNACE MODULE

Technical Abstract

This invention relates to an exothermic furnace module for processing materials in space.

The module includes an insulated casing (10) and a sample support (16), (18) carried within the casing which supports a sample container (14). An exothermic heat source A includes a plurality of segments (20) of exothermic material stacked one upon another to produce a desired temperature profile when ignited. The exothermic material segments are constructed in the form of an annular element having a recess opening (22) which defines an open central core (23) throughout the vertical axis of the stacked exothermic material (A). The sample container (14) is arranged within the core (23) of the stacked exothermic heating material. Igniters (24) are spaced vertically along the axis of the heating material to ignite the exothermic material at spaced points to provide total rapid burn and release of heat. To rapidly cool and quench the heat, a source (30) of liquid carbon dioxide is provided which is conveyed through a conduit (32) and a metering orifice (36) into a distribution manifold (34) where the carbon dioxide is gasified and dispersed around the exothermic heating material and the sample container via tubes (38) for rapidly cooling the material sample.

Novelty of the invention is believed to reside in the provision of a source of cooling gas and means for dispersing it around the sample. This feature enables attainment of a stable, controlled temperature profile.

INVENTOR:	RICHARD M. POORMAN
EMPLOYER:	NASA-MSFC
APPLICATION S. N.:	359,627
DATE FILED:	March 18, 1982

ORIGINAL PAGE IS
OF POOR QUALITY

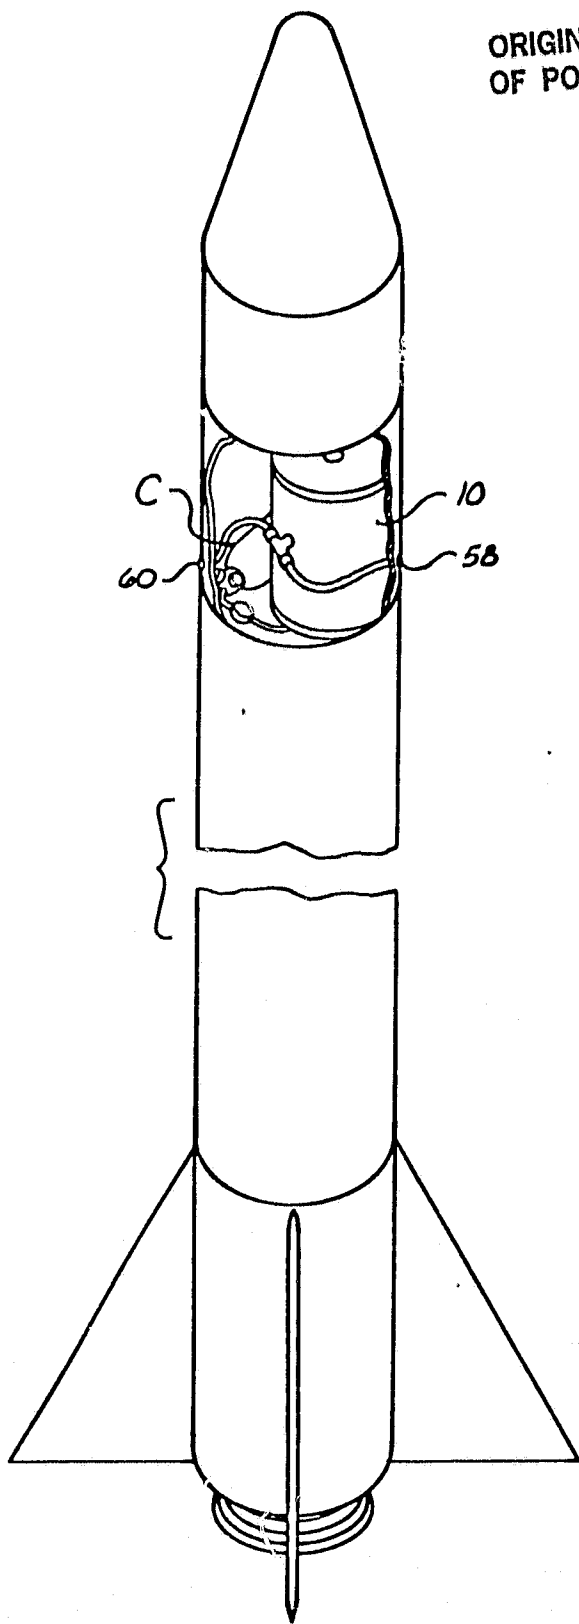


Fig. 1

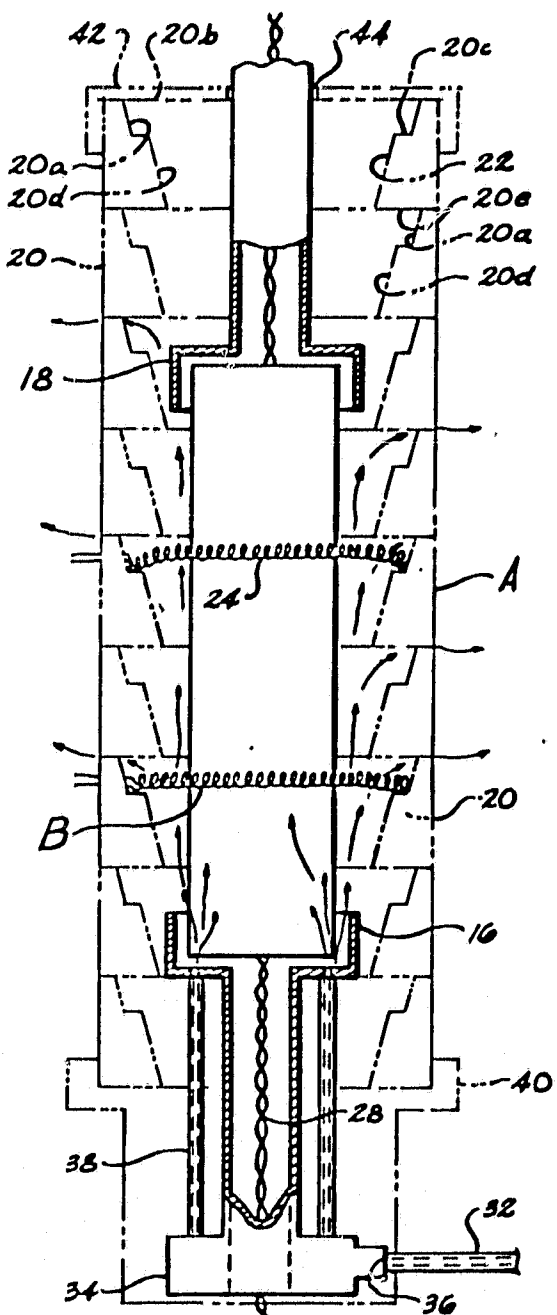


Fig. 2

ORIGINAL PAGE IS OF POOR QUALITY

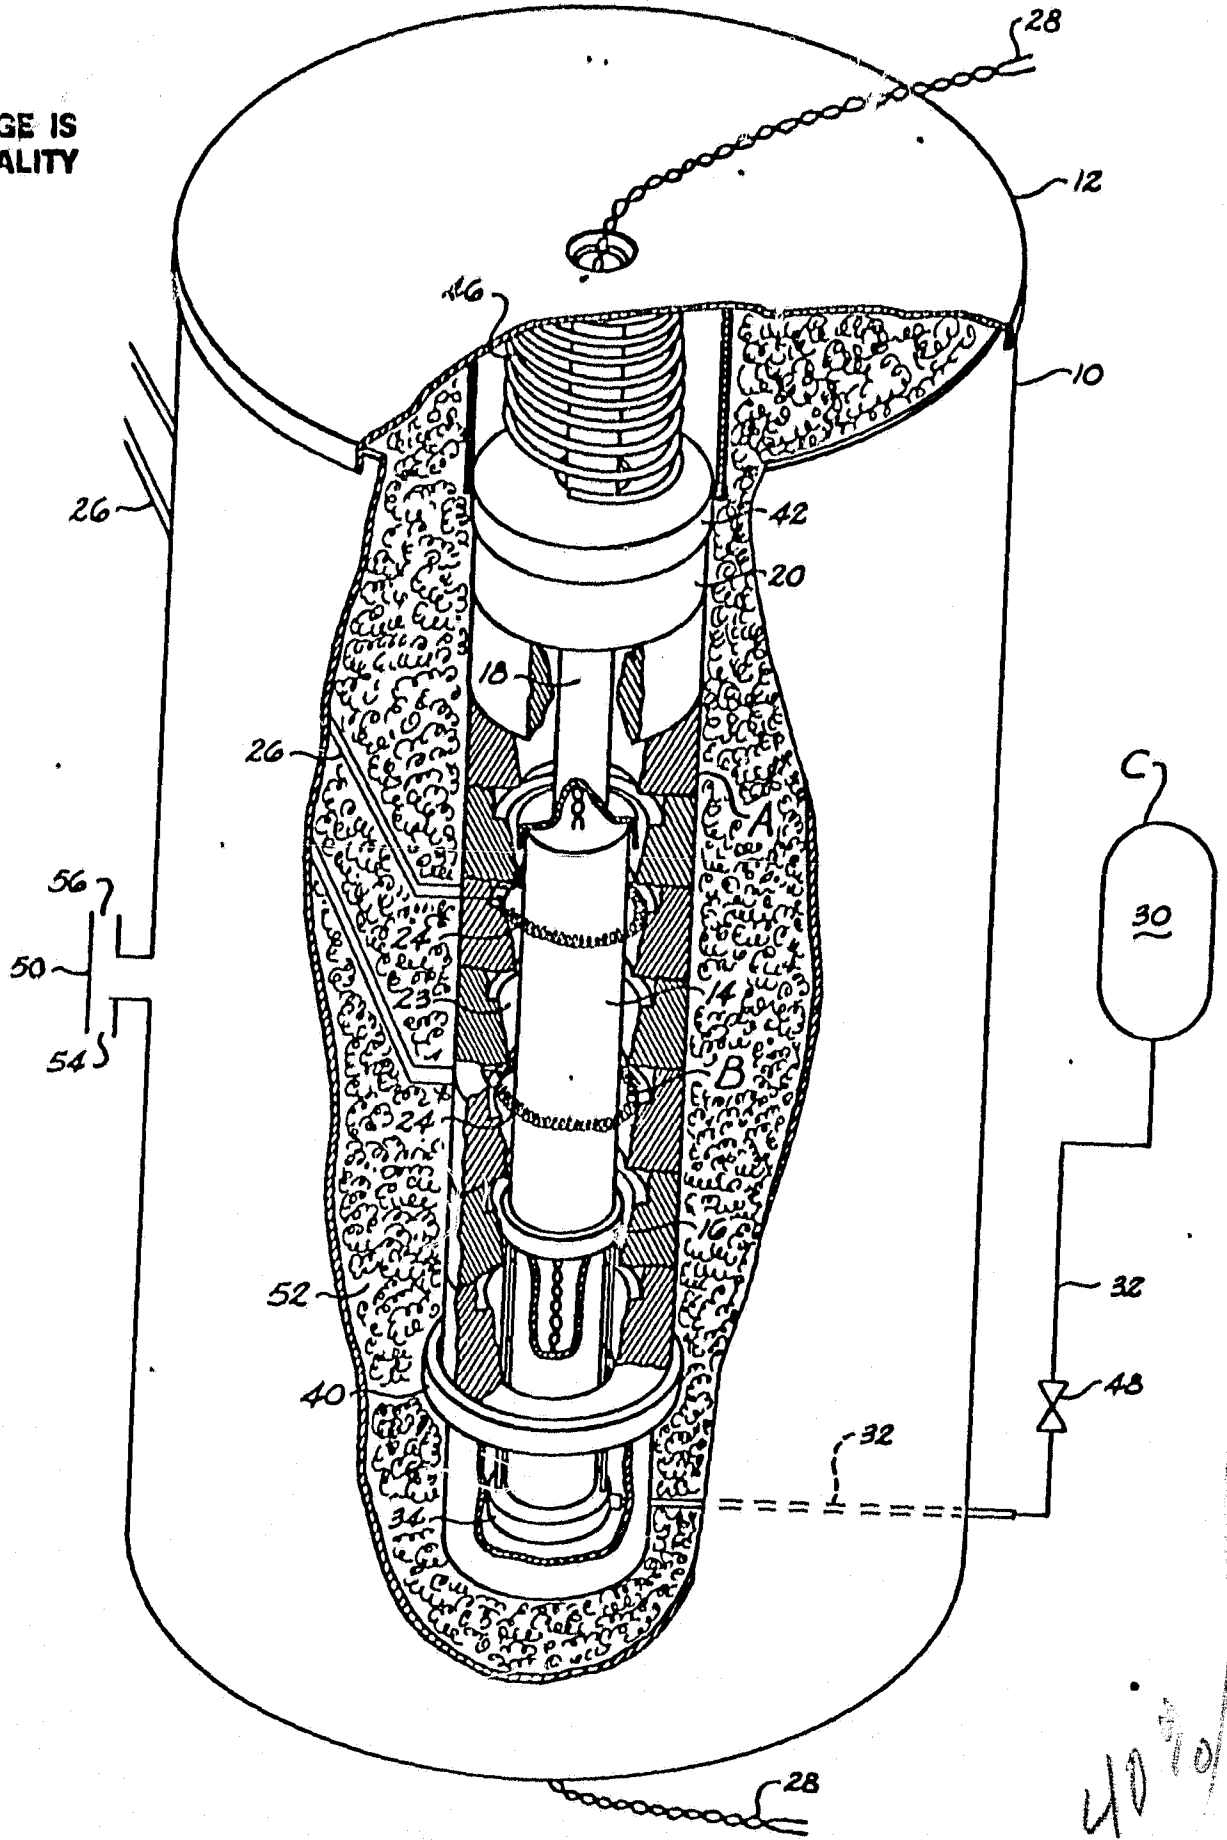


Fig. 3

359,627 40 10

EXOTHERMIC FURNACE MODULE

Origin of the Invention

The invention described herein was made by an employee of the United States Government and may
5 be manufactured and used by or for the Government for governmental purposes without the payment of any royalties thereon or therefor.

Background of the Invention

The invention relates to the processing of
10 material samples in space and, particularly, to the rapid heating and cooling of a material sample in space by means of a controlled temperature profile.

The environment for heating and cooling processes of material samples in space does not lend
15 itself to conventional heating and cooling techniques. In space, a stable and controlled temperature profile must be established from a heat source which is a problem to which considerable attention need be given, particularly at elevated temperatures of 1000 to 1200
20 degrees Centigrade. Combustion reactions are too dependent on environmental pressure and tend to be unstable and difficult to control for accurate heat processing in space. Exothermic reactions produce heat reactions fairly independent of environmental
25 pressure and have been utilized as heat sources mainly for unsophisticated domestic applications, such as for thermal batteries as disclosed in United States Patent No. 4,158,084.

Accordingly, an important object of the
30 present invention is to provide a highly controllable and reliable means for heating material samples in space experiments.

Yet another important object of the present invention is to provide apparatus for heating and
35 cooling material samples by means of a controlled

temperature profile in space environments.

Still another important object of the present invention is to provide apparatus for rapidly heating material samples and thereafter rapidly quenching the temperature for the processing of foamed metals in space environments.

Summary of the Invention

The above objectives are accomplished according to the present invention by providing a furnace module which includes an insulated casing and a sample support carried within the casing which supports a sample container. An exothermic heat source includes a plurality of segments of exothermic material stacked one upon another to produce a desired temperature profile when ignited. The exothermic material segments are constructed in the form of an annular element having a recess opening which defines an open central core throughout the vertical axis of the stacked exothermic material. The sample container is arranged within the core of the stacked exothermic heating material. Ignition means are spaced vertically along the axis of the heating material to ignite the exothermic material at spaced points to provide total rapid burn and release of heat. To rapidly cool and quench the heat, a source of liquid carbon dioxide is provided which is conveyed through a conduit and a metering orifice into a distribution chamber. A pressure drop across the metering orifice is such that the temperature and pressure of the liquid carbon dioxide is reduced to a point where the liquid carbon dioxide is solidified and gasified in the chamber. The gasified carbon dioxide is dispersed around the exothermic heating material and the sample container for rapidly cooling the material sample. The gases from the cooling medium and heating reaction are

vented through a non-propulsive vent on the exterior of the module casing which may be exhausted on the outside of the rocket or other vehicle in which the experiment is being carried such that no reactive
5 forces are produced.

A very effective heating and cooling furnace is thus provided in which the temperature of a material sample may be brought to above 1200 degrees Centigrade and thereafter cooled to below 900 degrees Centigrade
10 in a manner of a few minutes. This is particularly useful in space experiments for processing foamed metals such as copper.

Description of the Drawings

The construction designed to carry out the
15 invention will be hereinafter described, together with other features thereof.

The invention will be more readily understood from a reading of the following specification and by reference to the accompanying drawing forming
20 a part thereof, wherein an example of the invention is shown and wherein:

Figure 1 is an elevation of a sounding rocket vehicle in which an exothermic furnace module constructed according to the present invention is
25 utilized to carry out processing and experimentation of material samples in space;

Figure 2 is a partially cutaway view illustrating exothermic heating apparatus constructed according to the present invention; and

30 Figure 3 is an elevation of exothermic heating apparatus constructed according to the present invention with parts thereof shown in phantom lines to illustrate the cooling of the exothermic
35 material and sample container.

Description of a Preferred Embodiment

Referring now in more detail to the drawings, apparatus for heating material samples in a low gravity space environment by means of an exothermic reaction is illustrated as including a casing having a generally closed interior and a sample support means carried within the casing for supporting the sample. Exothermic heating means A is provided for rapidly releasing heat having an open core in which the sample is supported to be heated. Ignition means activates the exothermic material A to release the heat. After heating, quenching means C rapidly quenches the temperature of the sample material at a desired cooling rate for controlled cooling. Insulation is carried within the casing surrounding the exothermic heating means and the sample support. The sample material is rapidly heated and cooled by means of a controlled temperature profile.

In reference to Figure 3, it can be seen that the casing includes a cylindrical casing having a removable top which may be secured to casing in any suitable manner such as by screws. Within the interior of the casing, the means for supporting a sample container is provided in the form of a lower container support and an upper container support. The sample container is held by its ends between the upper and lower sample supports.

The exothermic heating means A includes a plurality of segments of an exothermic material which are stacked one upon another to produce the desired temperature profile for the heating process. When activated, the exothermic material produces a certain amount of heat depending on the number of segments and hence amount of material whereby the

temperature profile (temperature versus time) of the sample heating may be reliably controlled. The segments may be made from any suitable exothermic material such as iron oxide and aluminum which is
5 mixed with water in powdered form and then cast in the desired shape. Each segment includes a central recess 22 which defines open core 23 when the segments are stacked one upon another. The recess 22 is defined by a first generally vertical surface 20a
10 extending from a top surface 20b of the segment which terminates in a generally horizontal ledge surface 20c. A second generally vertical surface 20d extends from the ledge surface 20c and terminates at a bottom surface 20e of the segment. Thus, with the segments
15 stacked one upon another, the continuous central core opening 23 is provided along the axis of the vertically stacked exothermic heating material in which the sample container 14 and material sample contained therein are received.

20 Ignition means B includes an annular heating element 24 which is carried on a the ledge surface 20c of at least two of the segments 20, as can best be seen in Figures 2 and 3. Electrical leads 26 connect the heating elements 24 to an exterior voltage control
25 source by means of which the furnace may be remotely activated by energizing the heating elements 24 which, in turn, activate and ignite the exothermic material. Any conventional remote control may be utilized to energize the heating elements. Heating elements are
30 provided in number and spaced such that total burn of the exothermic material is accomplished to release the total heat therefrom. Thermal couple leads coupled 28 are operatively connected to the sample container 14 to monitor the temperature of the container and sample
35 by remote station in a conventional manner. By achiev-

ing total burn of the exothermic material, control of the temperature profile in the heating process is achieved.

Cooling means C is illustrated in the form of a source of a cooling fluid which is preferably liquid carbon dioxide carried externally of the casing 10. Conduit means 32 conveys the cooling fluid from the container 30. A manifold 34 is connected to the conduit 32. A metering orifice 36 in flow relationship with the conduit 32 includes a restricted opening which causes the pressure and temperature of the cooling fluid passing through the orifice to drop whereby the cooling fluid is solidified and gasified in manifold 34. Distribution means 38 conveys the gasified coolant for distribution to and around the exothermic heating material A and the sample container 14. Heat is absorbed by the solidified carbon dioxide which causes more gas coolant to be released. By way of example, conduit 32 may be one-eighth of an inch tubing and orifice 36 restricted to about .0017 of an inch. Liquid carbon dioxide in container 30 is pressurized to approximately 1000 psi. The pressure drops to about 1 or 2 psi across the metering orifice whereby solid and gaseous carbon dioxide are formed at a temperature of about minus seventy five degrees Centigrade.

The segments 20 of exothermic material are stacked upon a lower base 40 on the bottom of casing 10. An upper retaining cap 42 is resiliently biased toward base 40 such that the stack of segments 20 are resiliently held between base 40 and cap 42. For this purpose, a biasing spring 46 is provided at the top of the casing which urges the cap 42 and segments 20 against the bottom base support 40. The cooling gas difuses in and around exothermic material normally

exiting the top through gap 44 between the upper container support 18 and cap 42. In one experimentation, for example, foamed copper is processed in space aboard a sounding rocket vehicle by heating
5 carbon, copper oxide, and copper in container 14 to about 1200 degrees Centigrade in approximately one minute. After the material reacts for approximately one minute, the temperature is quenched by cooling fluid and gases to about 900 degrees Centigrade in
10 one minute. The entire process takes less than five minutes.

A solenoid valve 48 is provided in the conduit 32 for controlling the flow and amount of cooling fluid from the source 30 and hence the cooling
15 temperature profile and rate. In space processing, this may be done remotely by conventional means.

A non-propulsive vent 50 is carried by the casing 10 which communicates with the interior of the casing. The exhaust gases from the heating and cooling
20 disperse through the heating material A and insulation 52 and exit through the opposite vent ports 54 and 56 of vent 50. The vent ports 54 and 56 are connected by suitable tubing to exterior ports 58 and 60, respectively, on the exterior of the rocket which nullify
25 each other and whereby no reactive force is produced on the vehicle.

While a preferred embodiment of the invention has been described using specific terms, such description is for illustrative purposes only, and it
30 is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

-6-

EXOTHERMIC FURNACE MODULE

Abstract of the Disclosure

An exothermic furnace module is disclosed for processing materials in space which includes an insulated casing (10) and a sample support (16), (18) carried within the casing which supports a sample container (14). An exothermic heat source A includes a plurality of segments (20) of exothermic material stacked one upon another to produce a desired temperature profile when ignited. The exothermic material segments are constructed in the form of an annular element having a recess opening (22) which defines an open central core (23) throughout the vertical axis of the stacked exothermic material (A). The sample container (14) is arranged within the core (23) of the stacked exothermic heating material. Igniters (24) are spaced vertically along the axis of the heating material to ignite the exothermic material at spaced points to provide total rapid burn and release of heat. To rapidly cool and quench the heat, a source (30) of liquid carbon dioxide is provided which is conveyed through a conduit (32) and a metering orifice (36) into a distribution manifold (34) where the carbon dioxide is gasified and dispersed around the exothermic heating material and the sample container via tubes (38) for rapidly cooling the material sample.