

NOTICE

THIS DOCUMENT HAS BEEN REPRODUCED FROM
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED
IN THE INTEREST OF MAKING AVAILABLE AS MUCH
INFORMATION AS POSSIBLE

THIS NASA INVENTION APPEARS TO HAVE
EXCELLENT COMMERCIAL POTENTIAL

NASA CASE NO. *ARC-11,325-1*

PRINT FIG. *The Figure*

NOTICE

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.2).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourages nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will consider the granting of a limited exclusive license, pursuant to the NASA Patent Licensing Regulations, when such a license will provide the necessary incentive to the licensee to achieve early practical application to the invention.

Address inquiries and all applications for license for this invention to NASA Patent Counsel, Ames Research Center, Mail Code 200-11A, Moffett Field, California, 94035. Approved NASA forms for application for nonexclusive or exclusive license are available from the above address.



ARC

(NASA-Case-ARC-11325-1) CLUTCHLESS MULTIPLE DRIVE SOURCE FOR OUTPUT SHAFT Patent Application (NASA) 11 p HC A02/MF A01 N82-22496

CSCI 131

Unclass

G3/37 18414

SERIAL NO. 354,126
FILE DATE: 3/2/82

NASA CASE NO. ARC-11325-1

Clutchless
Multiple Drive Source for Output Shaft

Invention Abstract

The subject invention relates to a multiple drive source for an output shaft which may be driven either concurrently or exclusively by separate sources of rotational power, without requiring the use of a clutch and without using a planetary gear.

A multiple drive source (10) for output shaft (12) has a first shaft (14) connected to a first source (16) of rotational power. First shaft (14) has a first gear (28) fixedly mounted on the shaft. A second gear (32) is fixedly mounted on a gear shaft (30), which gear shaft (30) is parallel to first shaft (14). A third gear (34), also fixedly mounted on gear shaft (30), meshes with a fourth gear (36), which fourth gear (36) is fixedly mounted on the output shaft (12). First input shaft (14) and output shaft (12) are rotatably mounted through a housing (24), which housing (24) is itself rotatable with respect to base 20. First input shaft (14) and output shaft (12) are coaxial and in end-to-end relationship. A second input shaft (46) is connected to a second source (42) of rotational power. A fifth gear (48) is fixedly mounted on second input shaft (46) and meshes with a sixth gear (54), which is fixedly mounted on rotatable housing (24), and in coaxial relationship with first input shaft (14). In operation, first drive source (16) and gear train (56) provide rotational power in a first direction (60) to drive output shaft (12) in a given direction (62) of rotation. The second source (42) of rotational power may be operated either to decrease the rate of rotation imparted to output shaft (12) by first source (16) of rotational power, or increase that rate of rotation, depending on which direction the housing (24) is rotated by the second source (42) of rotational power.


Prior art multiple drive sources for an output shaft either require the use of clutches or utilize a planetary gear. This multiple drive source for an output shaft can provide a 1:1 gear ratio, since it does not utilize a planetary gear, and it is also capable of being implemented in a smaller, lower cost form than conventional multiple drive sources for output shafts.

Inventor:

Larry D. Webster

Employer:

Department of the Army,
Aeromechanics Laboratory,
AVRADCOM

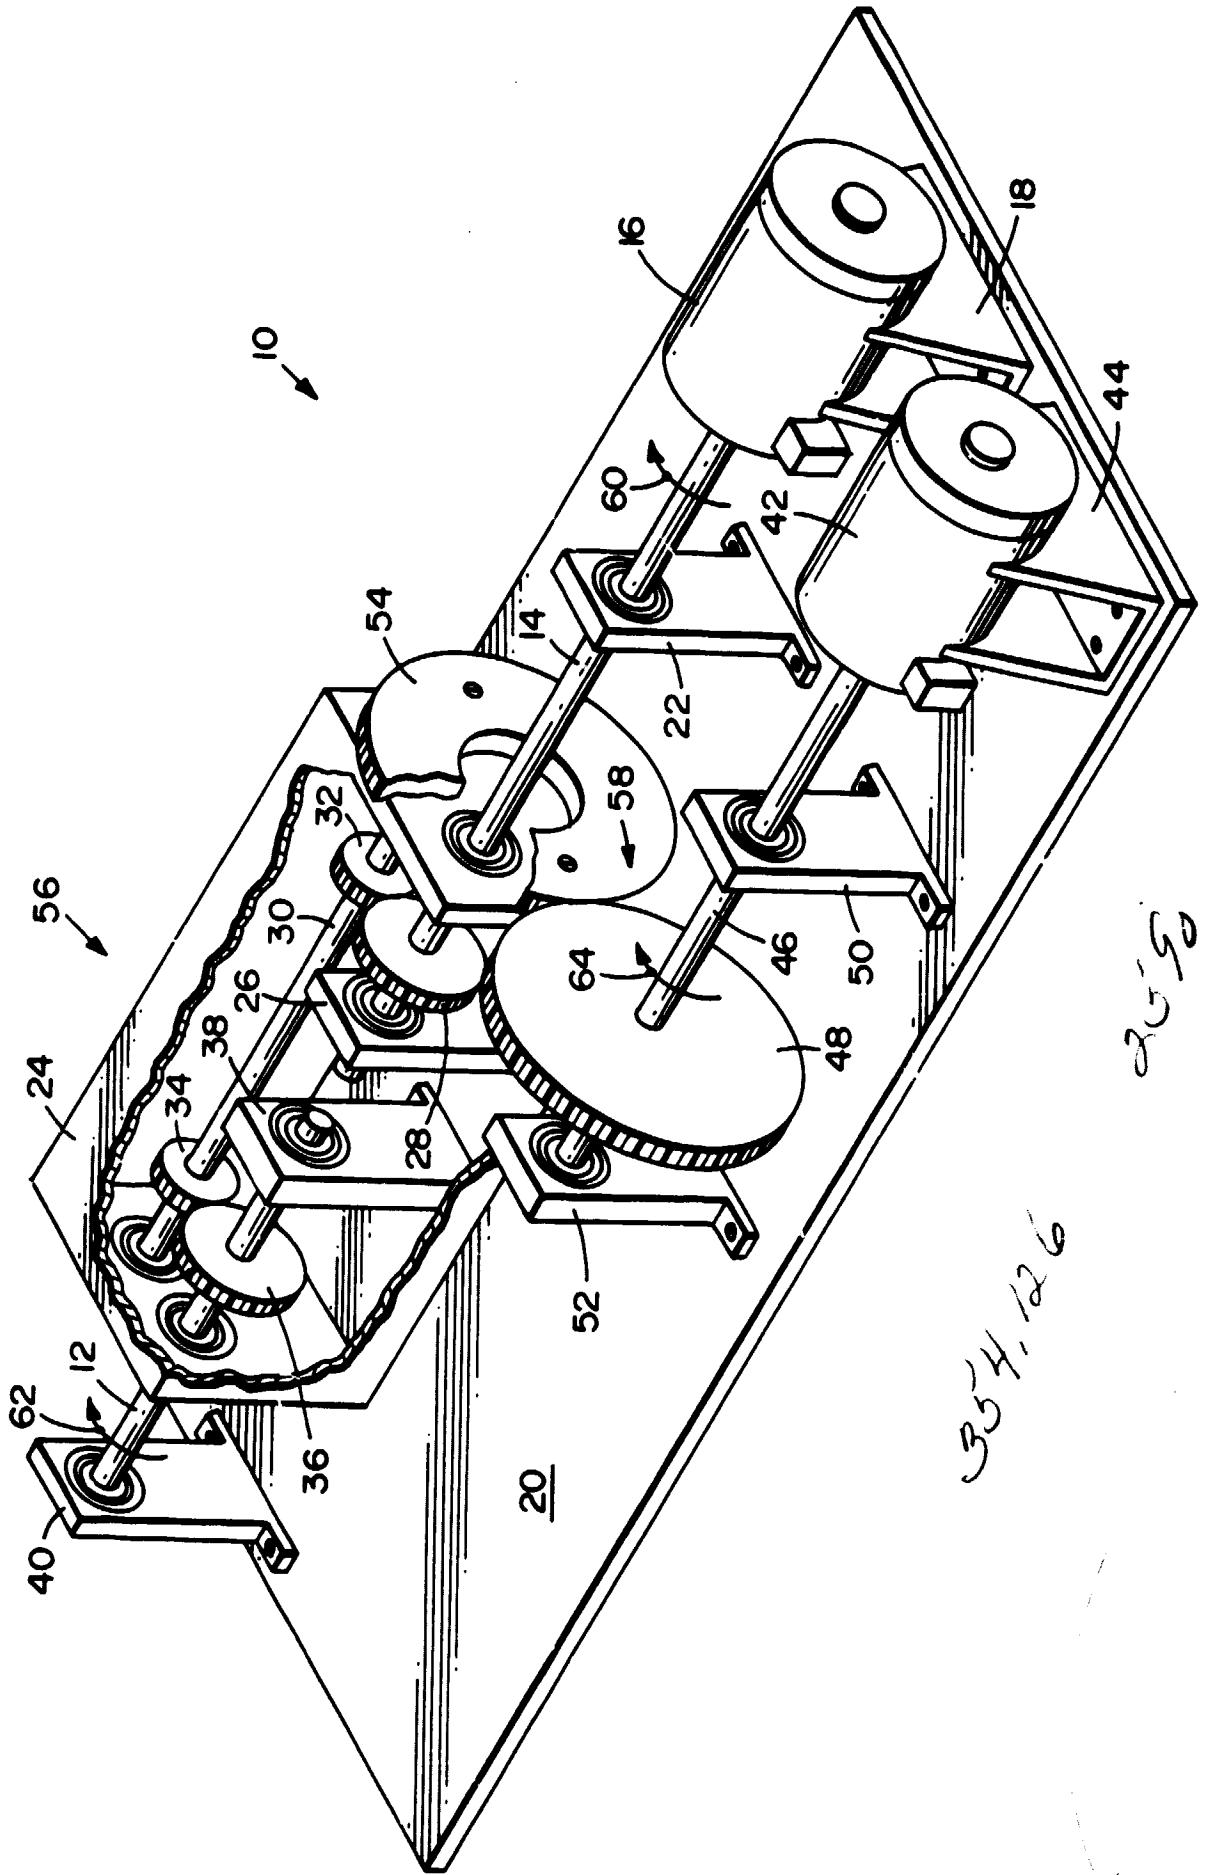

Arc-11, 325-1

354, 126

2090

1 NASA Case No. ARC-11325-1

2

3 CLUTCHLESS MULTIPLE DRIVE SOURCE FOR OUTPUT SHAFT

4

5 Origin of the Invention

6 The invention described herein was made by an employee
7 of the United States Government and may be manufactured and
8 used by or for the government for governmental purposes with-
9 out the payment of any royalties thereon or therefor.

10

11 Field of the Invention

12 This invention relates to an improved clutchless mul-
13 tiple drive source for an output shaft. More particularly,
14 it relates to such a multiple drive source that is both low
15 in cost and which may be embodied in physically small form.
16 Most especially, it relates to such a multiple drive source
17 which can be implemented with a 1:1 gear ratio and without
18 any intervening clutch.

19

20 Description of the Prior Art

21 There is a wide variety of gear drives known in the art
22 for connecting a source of rotational power, such as a gaso-
23 line engine or an electric motor, to an output shaft. Many
24 of those gear drives are of the type for connecting a plural-
25 ity of separate power sources to a common output shaft.
26 Examples of such gear drives are described in U.S. Patents
27 2,180,599; 2,660,860; 2,971,402; 3,457,806; 3,507,173; and
28 3,748,927.

29

30 The multiple drive sources as disclosed in the above
31 prior art either have clutches for disconnection of one of
32 the power sources or incorporate planetary gears to allow
33 the use of more than one power source simultaneously under
34 different operating conditions. Such gear drives tend either
35 to be complex or bulky in their construction, so that they
36 have achieved acceptance primarily in relatively heavy duty
37 situations, such as driving an aircraft propeller from more
than one internal combustion engine. Planetary gear drives

1 are employed where their physical bulk is not a problem
2 and it is desired to avoid the use of a clutch mechanism
3 in a multiple drive source. However, in addition to their
4 bulk, another disadvantage of planetary gear drives is that
5 a 1:1 gear ratio cannot be achieved with them.

6 Thus, despite the long history of multiple drive
7 sources, a need still remains for further development
8 of such drive sources to meet situations in which a clutch-
9 less drive which is physically small, low in cost and which
10 can provide a 1:1 gear ratio is needed.

11

12 Summary of the Invention

13 Accordingly, it is an object of this invention to
14 provide a clutchless, non-planetary gear multiple drive
15 source for an output shaft.

16 It is another object of the invention to provide a
17 clutchless, multiple drive source for an output shaft,
18 which drive can provide a 1:1 gear ratio.

19 It is a further object of the invention to provide
20 a clutchless, multiple drive source for an output shaft
21 which can be implemented in a physically small, low cost
22 configuration.

23 The attainment of these and related objects may be
24 achieved through use of the novel multiple drive for an
25 output shaft herein disclosed. This drive has a first
26 shaft connected to a first source of rotational power. A
27 gear train is mounted in a rotatably movable housing. The
28 gear train operatively connects the first shaft and the
29 output shaft. The first shaft and the output shaft are
30 coaxial. A second shaft is connected to a second source
31 of rotational power mounted so as to be stationary, other
32 than with respect to the rotational power, with respect
33 to the first source of rotational power. There is a
34 means for coupling rotational motion from the second shaft
35 to the rotatably movable housing.

36

37

1 In operation, the first drive and the gear train may
2 provide rotational power in a first direction to drive the
3 output shaft in a given direction of rotation. The second
4 source of rotational power may be operated either to
5 decrease the rate of rotation imparted to the output shaft
6 by the first source of rotational power, or increase that
7 rate of rotation, depending on which direction the housing
8 is rotated by the second source of rotational power.

9 The attainment of the foregoing and related objects,
10 advantages and features of the invention should be more
11 readily apparent to those skilled in the art after review
12 of the following more detailed description of the invention,
13 taken together with the drawing, in which:

14
15 Brief Description of the Drawing

16 The sole figure of drawing is a perspective view of
17 a multiple drive for an output shaft in accordance with the
18 invention.

19
20 Detailed Description of the Invention

21 Turning now to the drawing, the multiple drive 10
22 for output shaft 12 has a first shaft 14 connected to a
23 first source 16 of rotational power, such as an electric
24 motor. Support 18 is bolted or otherwise fixedly mounted
25 to base 20. First shaft 14 is rotatably mounted in support
26 22, also fixedly mounted to base 20. The first shaft 14
27 is also rotatably mounted in housing 24, and support 26 is
28 fixedly mounted to housing 24. Housing 24 is itself free
29 to rotate. A first gear 28 is fixedly mounted on first
30 shaft 14. A gear shaft 30 has a second gear 32 fixedly
31 mounted on it, with the second gear 32 in meshing relation-
32 ship with first gear 28. Gear shaft 30 is rotatably
33 mounted in housing 24. The gear shaft 32 has a third gear
34 34, also fixedly mounted to the shaft 30. Third gear 34
35 meshes with a fourth gear 36, which is fixedly mounted
36 on the output shaft 12. The output shaft 12 is rotatably
37 mounted in housing 24, in support 38 fixedly mounted within

1 the housing 24, and to support 40, which is fixedly
2 mounted to the base 20.

3 A second source 42 of rotational power, such as an
4 electric motor, is also fixedly connected by a support 44
5 to base 20. The second source of power 42 is operatively
6 connected to a second shaft 46. The second shaft 46 is
7 parallel to the first shaft 14, the output shaft 12, and
8 the gear shaft 30. A fifth gear 48 is fixedly mounted on
9 the second shaft 46. The second shaft 46 is rotatably
10 supported by supports 50 and 52, which supports are fixedly
11 mounted to base 20. Fifth gear 48 is in meshing engagement
12 with sixth gear 54, which is fixedly mounted to the rota-
13 table housing 24. Sixth gear 54 is concentrically disposed
14 relative to the first shaft 14, which is free to rotate
15 with respect to the sixth gear 54. Since the output shaft
16 12 is axially disposed in end-to-end relationship with the
17 first shaft 14, the sixth gear 54 is also concentrically
18 disposed relative to the axis of shaft 12. In a preferred
19 embodiment, the fifth and sixth gears 48 and 54 have a
20 1:1 gear ratio, though any gear ratio is possible. The
21 first through fourth gears 28, 32, 34 and 36 provide a
22 500:1 gear ratio in the depicted embodiment, although the
23 gear sizes actually shown in the drawing are much closer
24 in size than necessary to provide that ratio, for
25 simplicity in the drawing. It should be recognized that
26 a gear train of parallel shaft gears of any desired ratio
27 could be used for gears 28, 32, 34 and 36 comprising
28 gear train 56.

29 There are certain relationships which are useful for
30 an understanding of the operation of multiple source drive
31 10. First shaft 14 provides rotational power to the output
32 shaft 12 through the gear train 56 contained within rota-
33 table housing 24. Rotations of the first shaft 14, refer-
34 enced to housing 24 of gear train 56, are capable of rotat-
35 ing the output shaft as a function of the gear ratio of the
36 gear ratio of the gear train 56, R_{GT56} where:

37 (1)
$$R_{GT56} = \frac{1}{T_{S1}}$$

1 wherein T_{S1} equals the number of turns first shaft 14 must
2 make, relative to housing 24 of gear train 56, to cause
3 output shaft 12 to turn one complete revolution, also
4 referenced to housing 24 of gear train 56. First shaft 14
5 and the output shaft 12 are not physically connected.
6 Torque, and therefore movement, is transferred from first
7 shaft 14 to output shaft 12 through gears 32 and 34, whose
8 center of rotation is not coaxial with respect to first
9 shaft 14. R_{GT56} may take on any physically attainable
10 value and gear train 56 may then act as either a coaxial
11 speed reducer or a coaxial speed increaser.

12 Gear 48 and gear 54 comprise a second gear train 58
13 in its simplest form. Gear 48 is physically attached to
14 second shaft 46 and rotates directly with it. Gear 54 is
15 physically connected to housing 24 of gear train 56 and
16 has an axis of rotation that is coincident with the axis
17 of rotation of output shaft 12. Gear 48 drives gear 54.
18 Rotations of second shaft 46 are capable of rotating
19 housing 24 as a function of the gear ratio R_{GT58} , where:

20
21 (2)
$$R_{GT58} = \frac{1}{T_{S2}}$$

22

23 wherein T_{S2} equals the number of turns second shaft 46 must
24 make, referenced to base 20, to cause the gear train 56
25 housing 24 to rotate one complete revolution, also with
26 respect to base 20. Unlike the gear ratio in a
27 planetary gear train, gear ratio R_{GT58} may take on any
28 physically attainable value, including 1:1.

29 The angular velocity of output shaft 12, $\dot{\theta}_{out}$,
30 referenced to base 20, in response to the input angular
31 velocities of the first and second shafts 14 and 46, may be
32 expressed:

33
34 (3)
$$\dot{\theta}_{out} = R_{GT56} \dot{\theta}_1 - R_{GT58} \dot{\theta}_2 (1 - R_{GT56})$$

35

36 where $\dot{\theta}_1$ and $\dot{\theta}_2$ are the angular velocities, referenced to
37 base 20 of first shaft 14 and second shaft 46,

1 respectively. The positive sense for each shaft 14, 12
2 and 46 is shown in the drawing by arrows 60, 62 and 64,
3 respectively. Relationship (3) shows that both input
4 shafts 14 and 46 may rotate output shaft 12 with respect
5 to base 20 concurrently, or exclusively, and with no
6 intervening clutch. The exact relationship of input shaft
7 14 and/or 46 to output shaft 12 velocity is directly a
8 function of the two gear ratios R_{GT56} and R_{GT58} .

9 Similarly, the change in angular position of output
10 shaft 12, $\Delta\theta_{out}$, with respect to support 20, in response to
11 changes in angular positions of the input shafts 14 and 46,
12 $\Delta\theta_1$ and $\Delta\theta_2$ respectively, may be expressed:

13
14 (4)
$$\Delta\theta_{out} = R_{GT56}\Delta\theta_1 - R_{GT58}\Delta\theta_2 (1-R_{GT56})$$

15
16 Relationship (4) shows that both input shafts 14 and 46
17 may alter the angular position of output shaft 12 concur-
18 rently or exclusively, and without the use of an intervening
19 clutch.

20 In an alternative form of the invention, the functions
21 of input shaft 46 and output shaft 12 could be exchanged.
22 A second source of rotational power connected to shaft 12
23 would then drive shaft 46 through gear train 58. Shaft 12
24 in this embodiment then becomes a part of gear train 56
25 housing 24. For this embodiment, relationships (3) and
26 (4) above would be slightly modified.

27 It should now be apparent to those skilled in the
28 art that a novel multiple drive source output capable of
29 achieving the stated objects of the invention has been
30 provided. A multiple drive source for an output shaft
31 that is clutchless and which does not utilize a planetary
32 gear is provided, so that a 1:1 gear ratio is attainable.
33 Further, because a planetary gear is not employed, this
34 multiple drive source for an output shaft can be imple-
35 mented in a physically small, low cost configuration.

36 It should further be apparent to those skilled in the
37 art that various changes in form and details of the

1 invention as shown and described may be made. It is
2 intended that such changes be included within the spirit
3 and scope of the claims appended hereto.
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

PRECEDING PAGE BLANK NOT FILMED

1 NASA Case No. ARC-11325

2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

ABSTRACT OF THE DISCLOSURE

A multiple drive source (10) for output shaft (12) has a first shaft (14) connected to a first source (16) of rotational power. First shaft (14) has a first gear (28) fixedly mounted on the shaft. A second gear (32) is fixedly mounted on a gear shaft (30), which gear shaft (30) is parallel to first shaft (14). A third gear (34), also fixedly mounted on gear shaft (30), meshes with a fourth gear (36), which fourth gear (36) is fixedly mounted on the output shaft (12). First input shaft (14) and output shaft (12) are rotatably mounted through a housing (24), which housing (24) is itself rotatable with respect to support 20. First input shaft (14) and output shaft (12) are coaxial and in end-to-end relationship. A second input shaft (46) is connected to a second source (42) of rotational power. A fifth gear (48) is fixedly mounted on second input shaft (46) and meshes with a sixth gear (54), which is fixedly mounted on rotatable housing 24, and in coaxial relationship with first input shaft (14). In operation, first drive source (16) and gear train (56) provide rotational power in a first direction (60) to drive output shaft (12) in a given direction (62) of rotation. The second source (42) of rotational power may be operated either to decrease the rate of rotation imparted to output shaft (12) by first source (16) of rotational power, or increase that rate of rotation, depending on which direction the housing (24) is rotated by the second source (42) of rotational power.