


UNCLASSIFIED

8/2  
C-1  
NASA  
TM  
81259  
c.1

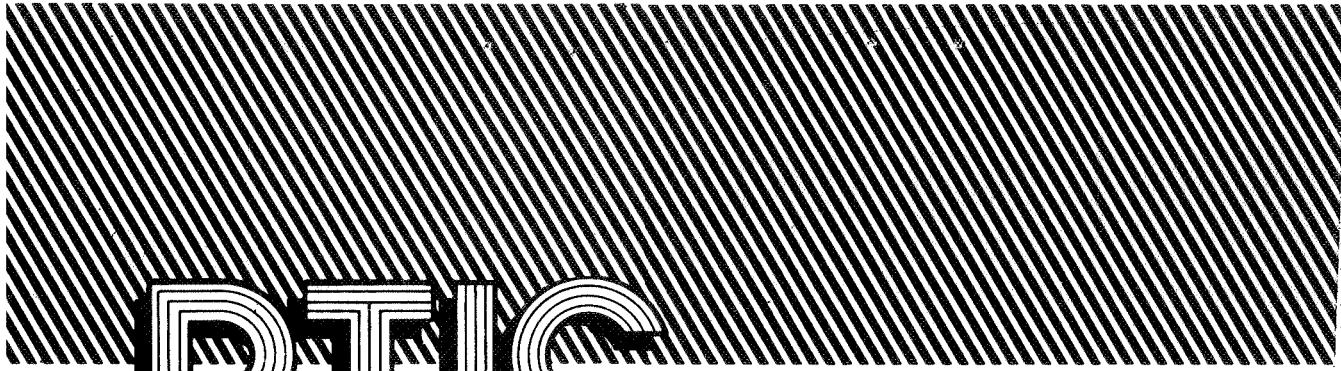

**DTIC**

TECH LIBRARY KAFB, NM  
0150530

LOAN COPY: RETURN TO  
AFWL TECHNICAL LIBRARY  
KIRTLAND AFB, N.M. 87117

# Technical Report

distributed by



**Defense Technical Information Center  
DEFENSE LOGISTICS AGENCY**

Cameron Station • Alexandria, Virginia 22304-6145

UNCLASSIFIED



0150530

*By: [Signature]*  
USRAVRADCOM TR 81-A-5

NASA Technical Memorandum 81259

**LEVEL II**

*Q*

*See back*

AD A 098 018

# Computation of Unsteady Turbulent Boundary Layers with Flow Reversal and Evaluation of Two Separate Turbulence Models

Tuncer Cebeci and Lawrence W. Carr

DTIC  
SELECTED  
APR 20 1981  
*C*

March 1981

DISTRIBUTION STATEMENT A  
Approved for public release;  
Distribution Unlimited

**NASA**  
National Aeronautics and  
Space Administration

United States Army  
Aviation Research  
and Development  
Command



81 4 20 053

FILE COPY

X



---

# Computation of Unsteady Turbulent Boundary Layers with Flow Reversal and Evaluation of Two Separate Turbulence Models

---

Tuncer Cebeci  
Lawrence W. Carr, Aeromechanics Laboratory  
AVRADCOM Research and Technology Laboratories  
Ames Research Center, Moffett Field, California



National Aeronautics and  
Space Administration  
Ames Research Center  
Moffett Field, California 94035

DISTRIBUTION STATEMENT A  
Approved for public release;  
Distribution Unlimited

United States Army  
Aviation Research and  
Development Command  
St. Louis, Missouri 63166



COMPUTATION OF UNSTEADY TURBULENT BOUNDARY LAYERS WITH FLOW REVERSAL  
AND EVALUATION OF TWO SEPARATE TURBULENCE MODELS

by

Tuncer Cebeci\* and Lawrence W. Carr

SUMMARY

Recently a new procedure, which solves the governing boundary-layer equations with Keller's box method, has been developed for calculating unsteady laminar flows with flow reversal [1]. In regions where the streamwise velocity contains flow reversal, the solution scheme was modified by a procedure which accounted for the downstream influence. With this modification, the unsteady flow over a circular cylinder started impulsively from rest was successfully calculated to values of time and space greater than in any previous solutions. An examination of unsteady separation for laminar flow was made and revealed that the unsteady boundary layer for that flow, even at large times, was free of singularities.

In this report we extend the method of ref. [1] to turbulent boundary layers with flow reversal. Using the algebraic eddy viscosity formulation of Cebeci and Smith [2], we consider several test cases to investigate the proposition that unsteady turbulent boundary layers also remain free of singularities.

Since the solution of turbulent boundary layers requires a closure assumption for the Reynolds shear-stress term and the accuracy of the solutions depend on this assumption, we also perform turbulent flow calculations by using the turbulence model of Bradshaw, Ferriss and Atwell [3]; we solve the governing equations for both models by using the same numerical scheme and compare the predictions with each other, restricting the comparisons to cases in which wall shear is positive.

\*CSC Enterprises, Inc., 810 Rancho Drive, Long Beach, CA 90815

Accession For	
NTIS CRIM	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

The study reveals that, as in laminar flows, the unsteady turbulent boundary layers are free from singularities but there is a clear indication of rapid thickening of the boundary layer with increasing flow reversal. The study also reveals that the predictions of both turbulence models are the same for all practical purposes.

TABLE OF CONTENTS

	Page
I. INTRODUCTION . . . . .	1
II. GOVERNING EQUATIONS . . . . .	2
III. SOLUTION PROCEDURE . . . . .	6
3.1 CS Method with and without Flow Reversal . . . . .	6
3.2 BF Method with no Flow Reversal . . . . .	10
IV. RESULTS AND DISCUSSION . . . . .	15
V. CONCLUDING REMARKS . . . . .	26
VI. REFERENCES . . . . .	27
VII. DESCRIPTION OF THE COMPUTER PROGRAM WHICH USES THE CS MODEL . . . .	29

## I. INTRODUCTION

The prediction of unsteady turbulent boundary layers with flow reversal is of importance in a number of aerodynamic problems, notably in dynamic stall, buffeting and gust studies. However, some of the more popular turbulence models implicitly assume that the wall shear is positive and their extension to unsteady flows with flow reversal is not easy. It requires modifications to the functional form of the law of the wall and to the manner in which the wall shear is determined. Two near-wall assumptions are considered here. In the first, the near wall grid point is located in the logarithmic region and the law of the wall is used to link the flow properties at this grid point to the wall. In the second, a Van Driest formulation due to Cebeci and Smith [2] is used; this implies that the grid point closest to the wall will occur in the viscous sublayer.

A further aspect of these flows of current interest is the possibility of a singularity occurring in the reversed-flow region. Examples of this phenomenon have also been reported in laminar flows but, in earlier studies Cebeci [1,4] and Bradshaw [5] have shown that the occurrence is not a feature of the governing equations but is due to the limitations of the numerical procedure used. We shall demonstrate that, for the examples we study, there is no indication of such a singularity in turbulent flow either but there is a clear indication of rapid thickening of the boundary layer.

In addition to the examination of wall functions, we have also considered two turbulence models for unsteady flows without flow reversal. The algebraic eddy-viscosity formulation of Cebeci and Smith (CS) is compared with the transport model of Bradshaw, Ferriss and Atwell [3] (BF). Calculations were performed to determine whether the representation of unsteady flows with strong pressure gradients requires that account be taken of transport of turbulence quantities. As will be shown, the predictions with both models are nearly identical for both steady and unsteady flows with and without strong pressure gradient.

The report has been prepared with six main sections describing, respectively, the governing equations, the numerical procedure, the results, concluding remarks, references and the computer program which uses only the CS model.

## II. GOVERNING EQUATIONS

The continuity and momentum equations can be written for two-dimensional unsteady incompressible laminar or turbulent thin shear layers as:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + \frac{\partial \tau}{\partial y} \quad (2)$$

Here

$$\tau = \nu \frac{\partial u}{\partial y} - \overline{u'v'} \quad (3)$$

and we recall that  $u'$  and  $v'$  denote fluctuations about the ensemble-average velocity;  $u'$  and  $v'$  are zero in unsteady laminar flow, and  $\nu \partial u / \partial y$  is negligible outside the viscous sublayer in a turbulent flow. These equations are subject to the usual boundary conditions, which in the case of boundary layers are

$$y = 0, \quad u = v = 0; \quad y \rightarrow \delta \quad u \rightarrow u_e(x,t) \quad (4)$$

The presence of the Reynolds stress term,  $-\overline{u'v'}$  introduces an additional unknown to the system given by Eqs. (2) to (4). In this report we present calculations using two different turbulence models. One is an algebraic eddy-viscosity formulation developed (for steady flows) by Cebeci and Smith and the other is a transport-equation model developed by Bradshaw, Ferriss and Atwell. In the CS model, we write Eq. (3) as

$$\tau = (\nu + \epsilon_m) \frac{\partial u}{\partial y} \quad (5)$$

with two separate formulas for  $\epsilon_m$ . In the so-called inner region of the boundary layer  $(\epsilon_m)_i$  is defined by the following formula:

$$(\epsilon_m)_i = 10.4\nu [1 - \exp(-y/A)]^2 \left| \frac{\partial u}{\partial y} \right| \quad (6)$$

where

$$A = 26\nu \tau^{-1} [1 - 11.8(p_t^+ + p_x^+)]^{-1/2} \quad (7a)$$



$$u_{\tau} = \left( \frac{\tau_w}{\rho} \right)^{1/2}, \quad \rho_{\tau}^+ = \frac{\rho}{\rho_w} \frac{\partial u}{\partial y}, \quad \rho_{\tau}^+ = \frac{\rho u}{\rho_w} \frac{\partial u}{\partial y} \quad (7b)$$

In the outer region  $s_m$  is defined by the following formula

$$(s_m)_0 = 0.0188 \int_0^{\infty} (u_0 - u) dy \quad (8)$$

The boundary between the inner and outer regions is established by the continuity of the eddy-viscosity formulas.

In the BF model, which is used only outside the viscous sublayer, we assume  $\tau = -\overline{u'v'}$  and write a single first-order partial-differential equation for it; the equation was originally developed from the turbulent energy equation but can be equally well regarded as an empirical closure of the exact shear-stress transport equation. This reads

$$\frac{D\tau}{Dt} \equiv \frac{\partial \tau}{\partial t} + u \frac{\partial \tau}{\partial x} + v \frac{\partial \tau}{\partial y} = 2a_1 \tau \frac{\partial u}{\partial y} - \frac{\partial}{\partial y} (\tau V_{\tau}) - 2a_1 \frac{\tau^{3/2}}{L} \quad (9)$$

Here  $a_1$  is a dimensionless quantity,  $V_{\tau}$  is a velocity and  $L$  is the dissipation length parameter specified algebraically by  $L/\delta = f(n)$  with  $n = y/\delta$  and  $f(n)$  given from an analytic fit to an empirical curve by

$$f(n) = \begin{cases} 0.4n & n < 0.18 \\ 0.055 - 0.055(2n - 1)^2 & 0.18 \leq n < 1.1 \\ 0.016 \exp[-10(n - 1.1)] & n \geq 1.1 \end{cases} \quad (10)$$

In a more advanced version of this turbulence model [6]  $L$  itself is determined from a transport equation.

The turbulent transport velocity  $V_{\tau}$ , nominally  $(\overline{p'u'} + \overline{u'v'^2})/\overline{u'v'}$  is proportional to a velocity scale of the large eddies and is chosen to be

$$V_{\tau} = 2a_1 \frac{\tau_{\max}}{u_0} g(n) \quad (11)$$

where  $g(n)$  is given by

$$g(\eta) = \begin{cases} 33.2\eta^2(0.184 + 0.822\eta) & \eta < 0.5 \\ 39.2\eta^3(0.368 + 2.422\eta^{-2}) & 0.5 \leq \eta < 1.0 \\ 18.7\eta + 14.60 & \eta \geq 1.0 \end{cases} \quad (12)$$

In the CF model equations, the inner boundary conditions for (1), (2) and (9) are applied outside the viscous sublayer, usually at  $y_1 = 50\nu/u_\tau$ . In the steady-flow study reported in [7], these boundary conditions are:

$$u_1 = u_\tau \left( \frac{1}{\kappa} \ln \frac{y_1 u_\tau}{\nu} + 5.2 \right) \quad (13)$$

$$v_1 = - \frac{u_1 y_1}{u_\tau} \frac{\partial u_\tau}{\partial x} \quad (14)$$

$$\tau_1 = \tau_w + \frac{1}{\rho} \frac{\partial p}{\partial x} y_1 + \alpha^* \frac{\partial \tau_w}{\partial x} y_1 \quad (15)$$

Here  $v_1$  is evaluated from the continuity equation (1), and  $\alpha^*$  is evaluated from (1) and (2) on the assumption that the velocity  $u$  is given by

$$\frac{u}{u_\tau} = \phi \left( \frac{u_\tau y}{\nu} \right) \quad (16)$$

for  $0 < y < y_1$ ; Eq. (13) is, of course, a special case of (16). The evaluation of  $\alpha^*$  is discussed in Ref. [7]; the last term in (15) can be as large as half the second (pressure-gradient) term. In unsteady flow without flow reversal, we use the same inner "boundary" conditions at  $y_1 = 50\nu/u_\tau$ , but because of the presence of the time-dependent term in (2),  $\alpha^*$  becomes more complicated. If we again assume that (16) holds - remember that the turbulence structure of the inner layer is unlikely to be affected unless the external-stream frequency is very high - then (1) and (2) give

$$\tau = \tau_w + \int_0^{y_1} \frac{\partial u}{\partial t} dy + \frac{\partial p}{\partial x} y_1 + \int_0^{y_1} \frac{\partial}{\partial x} (u^2) dy + uv \Big|_{y=y_1} \quad (17)$$

Integrating we can write



### III. SOLUTION PROCEDURE

We use Keller's two-point finite-difference method (called the Box method) to solve the system of equations described in the previous section. The application of this method to unsteady flows with no flow reversal using the CS model has been described in Ref. [8]. Its application to steady two-dimensional flows using the BF model is described in Ref. [7]. Here we present a description of the extension of the CS model to unsteady two-dimensional turbulent flows with flow reversal as well as a description of the extension of the BF model to unsteady turbulent flows with no flow reversal.

#### 3.1 CS Method with and without Flow Reversal

As in previous studies (see, for example [8]), we transform the equations with

$$\bar{x} = x/L, \quad \bar{t} = tu_0/L, \quad \eta = (u_0/\sqrt{\nu x})^{1/2} y \quad (19a)$$

and a dimensionless stream function  $f(\bar{x}, \eta, \bar{t})$ , where

$$\psi = (u_0 \nu x)^{1/2} f(\bar{x}, \eta, \bar{t}) \quad (19b)$$

Here  $u_0$  is a reference velocity,  $L$  a reference length, and  $\psi$  is the usual definition of the stream function corresponding to the continuity equation (1). With the relations defined by (19) and with the definition of eddy viscosity, equations (1) to (3) and the boundary conditions can be written as

$$(bf'')' + \frac{1}{2} ff'' + m_3 = \bar{x} \left( f' \frac{\partial f'}{\partial \bar{x}} - f'' \frac{\partial f}{\partial \bar{x}} + \frac{\partial f'}{\partial \bar{t}} \right) \quad (20)$$

$$\eta = 0, \quad f = f' = 0; \quad \eta \rightarrow \eta_\infty, \quad f' = u_e/u_0 \equiv \bar{u}_e \quad (21)$$

Primes denote differentiation with respect to  $\eta$  and

$$f' = u/u_0, \quad p_3 = \bar{x} \left( \bar{u}_e \frac{\partial \bar{u}_e}{\partial \bar{x}} + \frac{\partial \bar{u}_e}{\partial \bar{t}} \right) \quad (22)$$

$$b = 1 + \epsilon_m^+, \quad \epsilon_m^+ = \frac{c_m}{\nu}$$

For simplicity, we shall now drop the bars on  $x$  and  $t$ .

We use two separate solution procedures to solve the system given by Eqs. (20) and (21). When there is no flow reversal across the layer, we use the standard Box. On the other hand, when there is flow reversal, then we use the so-called zig-zag Box as described below.

To solve Eqs. (20) and (21) by the standard Box method, we first write Eq. (20) in terms of three first-order equations by introducing new dependent variables  $u(x,n,t)$ ,  $v(x,n,t)$ , that is,

$$f' = u \quad (23a)$$

$$u' = v \quad (23b)$$

$$(bv)' + \frac{1}{2}fv + P_3 = x(u \frac{\partial u}{\partial x} - v \frac{\partial f}{\partial x} + \frac{\partial u}{\partial t}) \quad (23c)$$

We next consider the net cube shown in Fig. 1 and write difference approximations to Eqs. (23). Equations (23a,b) are approximated using centered difference quotients and averaged about the midpoint  $(x_j, t_n, \eta_{j-\frac{1}{2}})$ . The difference quotients which are to approximate (23c) are written about the midpoint  $(x_{j-\frac{1}{2}}, t_{n-\frac{1}{2}}, \eta_{j-\frac{1}{2}})$  of the cube whose mesh widths are  $r_j, k_n,$  and  $h_j$ . This procedure yields the following equations:

$$f_j^{1,n} - f_{j-1}^{1,n} - h_j u_{j-\frac{1}{2}}^{1,n} = 0 \quad (24a)$$

$$u_j^{1,n} - u_{j-1}^{1,n} - h_j v_{j-\frac{1}{2}}^{1,n} = 0 \quad (24b)$$

$$\frac{(bv)_j^{1,n} - (bv)_{j-1}^{1,n}}{h_j} + \frac{1}{2}(fv)_{j-\frac{1}{2}}^{1,n} - \alpha_1 (u^2)_{j-\frac{1}{2}}^{1,n} + \frac{\alpha_1}{2} (v_{j-\frac{1}{2}}^{1,n} f_{j-\frac{1}{2}}^{1,n} + m_3 f_{j-\frac{1}{2}}^{1,n} + m_4 v_{j-\frac{1}{2}}^{1,n}) - 2\beta_n u_{j-\frac{1}{2}}^{1,n} = n_3 \quad (24c)$$

where

$$\alpha_1 = \frac{x_{j-\frac{1}{2}}}{x_j - x_{j-1}}, \quad \beta_n = \frac{x_{j-\frac{1}{2}}}{t_n - t_{n-1}}, \quad m_3 = v_{j-\frac{1}{2}}^{234}, \quad m_4 = f_{j-\frac{1}{2}}^{(4)} - 2\bar{f}_{j-1}$$

$$n_3 = \alpha_1 [(u^2)_{j-\frac{1}{2}}^{(4)} - 2(\bar{u}^2)_{j-1}] - \frac{\alpha_1}{2} m_3 m_4 + 2\beta_n [u_{j-\frac{1}{2}}^{(2)} - 2\bar{u}_{n-1}] - h_j^{-1} [(bv)_j^{234} - (bv)_{j-1}^{234}] - \frac{1}{2} (fv)_{j-\frac{1}{2}}^{234} - 4(P_3)_{j-\frac{1}{2}}$$

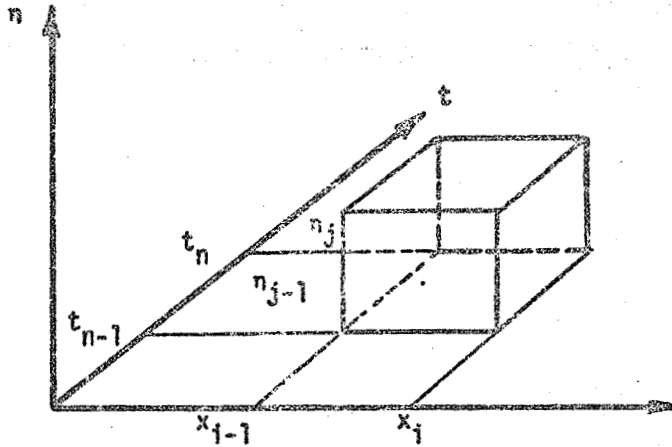


Fig. 1 Net cube for the standard Box method.

Here by  $v_j^{234}$  we mean  $v_j^{i-1,n} + v_j^{i-1,n-1} + v_j^{i,n-1}$ , the sum of the values of  $v_j$  at three of the four corners of the face of the box. Also

$$\bar{v}_{j-1} = \frac{1}{2} (v_{j-\frac{1}{2}}^{n,i-1} + v_{j-\frac{1}{2}}^{n-1,i-1})$$

$$\bar{u}_{n-1} = \frac{1}{2} (u_{j-\frac{1}{2}}^{n-1,i} + u_{j-\frac{1}{2}}^{n-1,i-1})$$

$$r_{j-\frac{1}{2}}^{i,n} = \frac{1}{2} (r_j^{i,n} + r_{j-1}^{i,n})$$

The resulting algebraic system given by Eqs. (24) together with the boundary conditions, which now become

$$f_0 = u_0 = 0, \quad u_j = \bar{u}_0 \quad (25)$$

are nonlinear. We use Newton's method to linearize the system and solve the linear system by the block elimination method discussed in ref. [9].

When there is flow reversal across the boundary layer at some  $x$  and  $t$ , we modify the standard Box method used for Eq. (23c) but retain that for (23a,b) and still center them at  $(x_i, t_n, \eta_{j-1/2})$ . To write the difference approximations for the Box centered at  $(x_{i+1/2}, t_{n-1/2}, \eta_{j-1/2})$  we examine previously computed values of  $u_{j-1/2}^{i,n}$ . If  $u_{j-1/2}^{i,n} \geq 0$ , then we use the standard Box method: if  $u_{j-1/2}^{i,n} < 0$ , then we write (23c) for the Box centered at P (see Fig. 2) using quantities centered at P, Q, and R, where

$$\begin{aligned}
 P &\equiv (x_i, t_{n-1/2}, \eta_{j-1/2}), & Q &\equiv (x_{i-1/2}, t_n, \eta_{j-1/2}) \\
 R &\equiv (x_{i+1/2}, t_{n-1}, \eta_{j-1/2})
 \end{aligned}
 \tag{26}$$

Equation (23c) can then be written as

$$\begin{aligned}
 (bv)'(P) + \frac{1}{2}(fv)(P) = x(P) \left[ \phi u(Q) \frac{\partial u}{\partial x}(Q) + \phi u(R) \frac{\partial u}{\partial x}(R) - \epsilon v(Q) \frac{\partial f}{\partial x}(Q) \right. \\
 \left. - \phi v(R) \frac{\partial f}{\partial x}(R) + \frac{\partial u}{\partial t}(P) \right]
 \end{aligned}
 \tag{27}$$

Here

$$\begin{aligned}
 \theta &\equiv \frac{x_{i+1} - x_i}{x_{i+1} - x_{i-1}}, & \phi &\equiv \frac{x_i - x_{i-1}}{x_{i+1} - x_{i-1}}
 \end{aligned}
 \tag{28}$$

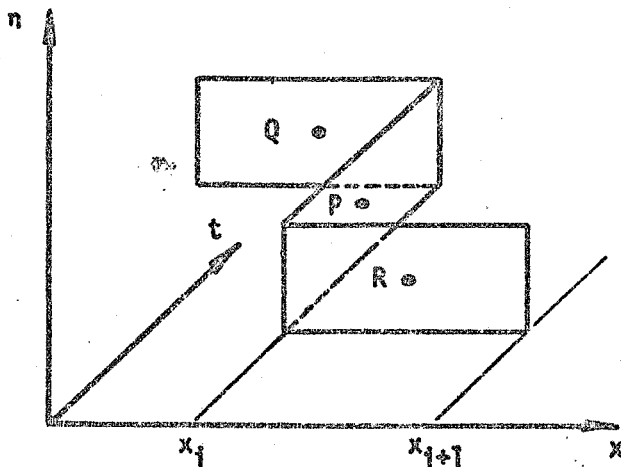


Fig. 2 Finite difference molecule for the Zig-Zag differencing.

The resulting algebraic system is again nonlinear and its solution is obtained by using the procedure followed in the standard Sox method.

### 3.2 BF Method with no Flow Reversal

The solution of the governing equations for unsteady flows with the BF model, even with no flow reversal across the boundary layer, is much more difficult than with the CS model. This is because of the hyperbolic nature of the governing equations, together with the nonlinear boundary conditions, which play an important role in the solution procedure. As is common in most (if not all) methods that use boundary conditions away from the "wall," the wall shear stress is also an unknown parameter; it can be treated as an eigenvalue or as a meshul as described in Ref. [7]. The latter procedure is much more efficient than the former procedure and is used here.

To solve the BF model equations, we first introduce the stream function  $\psi(x,y)$  as in Ref. [7] in order to satisfy the continuity equation. With  $\sqrt{\tau_w} = w$  treated as meshul, the resulting system can be written as a system of four first-order equations:

$$w' = 0 \quad (29a)$$

$$\psi' = u \quad (29b)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} - u' \frac{\partial \psi}{\partial x} = F_3 + \tau' \quad (29c)$$

$$\frac{\partial \tau}{\partial t} + u \frac{\partial \tau}{\partial x} - \tau' \frac{\partial \psi}{\partial x} = 2a_1 \left[ \tau u' - \frac{\tau^{3/2}}{L} - \tau_{\max}^{1/2} (G\tau)' \right] \quad (29d)$$

We again center Eqs. (29a,b) about the midpoint  $(x_j, t_n, \eta_{j-1/2})$  and Eqs. (29c,d) about the midpoint  $(x_{j-1/2}, t_{n-1/2}, \eta_{j-1/2})$  of the cube shown in Fig. 1. This procedure yields the following nonlinear algebraic equations:

$$w_j^{1,n} - w_{j-1}^{1,n} = 0 \quad (30a)$$

$$\psi_j^{1,n} - \psi_{j-1}^{1,n} - h_j u_{j-1/2}^{1,n} = 0 \quad (30b)$$

$$\frac{\tau_j^{1,n} - \tau_{j-1}^{1,n}}{h_j} + a_1 \left[ \frac{u_j^{1,n} - u_{j-1}^{1,n}}{h_j} (\psi_{j-1/2}^{1,n} - \psi_{j-3/2}^{1,n}) + \psi_{j-1/2}^{1,n} \frac{u_j^{1,n} - u_{j-1}^{1,n}}{h_j} - (u^2)_{j-1/2}^{1,n} \right] - 2\beta_n u_{j-1/2}^{1,n} = F_3 \quad (30c)$$



$$\begin{aligned}
& \beta_n \tau_{j-\frac{1}{2}}^{1,n} + \alpha_1 \left[ u_{j-\frac{1}{2}}^{1,n} (\tau_{j-\frac{1}{2}}^{1,n} - \tau_{j-\frac{1}{2}}^{1,n-1}) + u_{j-\frac{1}{2}}^{1-1,n} \tau_{j-\frac{1}{2}}^{1,n} \right] - \alpha_1 \left[ \frac{\tau_{j-\frac{1}{2}}^{1,n} - \tau_{j-\frac{1}{2}}^{1,n-1}}{h_j} (\psi_{j-\frac{1}{2}}^{1,n} - \psi_{j-\frac{1}{2}}^{1,n-1}) \right. \\
& \left. + \psi_{j-\frac{1}{2}}^{1,n} \left( \frac{\tau_{j-\frac{1}{2}}^{1,n} - \tau_{j-\frac{1}{2}}^{1,n-1}}{h_j} \right) \right] - \tau_{j-\frac{1}{2}}^{1,n} \frac{u_{j-\frac{1}{2}}^{1,n} - u_{j-\frac{1}{2}}^{1,n-1}}{h_j} + \frac{(\tau^{3/2})_{j-\frac{1}{2}}^{1,n} + (\tau^{3/2})_{j-\frac{1}{2}}^{1,n-1}}{L_{j-\frac{1}{2}}^{1,n} + L_{j-\frac{1}{2}}^{1,n-1}} \\
& + (G')_{j-\frac{1}{2}}^{1,n} \tau_{j-\frac{1}{2}}^{1,n} + G_{j-\frac{1}{2}}^{1,n} \frac{\tau_{j-\frac{1}{2}}^{1,n} - \tau_{j-\frac{1}{2}}^{1,n-1}}{h_j} = n_4 \tag{30d}
\end{aligned}$$

where now

$$\alpha_1 = \frac{1}{x_1 - x_{1-1}}, \quad \beta_1 = \frac{1}{t_n - t_{n-1}}, \quad \alpha_2 = \frac{\alpha_1}{2a_1}, \quad \beta_n = \frac{\beta_1}{2a_1}$$

$$\begin{aligned}
n_3 = & -4(P_3)_{n-\frac{1}{2}}^{1-\frac{1}{2}} - (\tau')_{j-\frac{1}{2}}^{234} + 2\beta_n (u_{j-\frac{1}{2}}^{1-1,n} - u_{j-\frac{1}{2}}^{1-1,n-1} - u_{j-\frac{1}{2}}^{1,n-1}) + \alpha_1 [(u^2)_{j-\frac{1}{2}}^{1,n-1} \\
& - (u^2)_{j-\frac{1}{2}}^{1-1,n-1} - (u^2)_{j-\frac{1}{2}}^{1-1,n}] - \alpha_1 \left[ (\psi')_{j-\frac{1}{2}}^{1,n-1} + (\psi')_{j-\frac{1}{2}}^{1-1,n-1} \right. \\
& \left. (\psi_{j-\frac{1}{2}}^{1,n-1} - \psi_{j-\frac{1}{2}}^{1-1,n-1}) - (u')_{j-\frac{1}{2}}^{1-1,n} \psi_{j-\frac{1}{2}}^{1-1,n} \right]
\end{aligned}$$

$$n_4 = \alpha_1 (A_3 - A_2) - 2\beta_n A_1 + (\tau u')_{j-\frac{1}{2}}^{234} - 2A_4 - (G' \tau)_{j-\frac{1}{2}}^{234} - (G \tau')_{j-\frac{1}{2}}^{234}$$

$$A_1 = \tau_{j-\frac{1}{2}}^{1-1,n} - \tau_{j-\frac{1}{2}}^{1-1,n-1} - \tau_{j-\frac{1}{2}}^{1-1}$$

$$A_2 = 2u_{j-\frac{1}{2}}^{1-1,n-1} (\tau_{j-\frac{1}{2}}^{1,n-1} - \tau_{j-\frac{1}{2}}^{1-1,n-1}) - u_{j-\frac{1}{2}}^{1-1,n} \tau_{j-\frac{1}{2}}^{1-1,n}$$

$$A_3 = [(\tau')_{j-\frac{1}{2}}^{1,n-1} + (\tau')_{j-\frac{1}{2}}^{1-1,n-1}] (\psi_{j-\frac{1}{2}}^{1,n-1} - \psi_{j-\frac{1}{2}}^{1-1,n-1}) - (\tau')_{j-\frac{1}{2}}^{1-1,n} \psi_{j-\frac{1}{2}}^{1-1,n}$$

$$A_4 = \frac{(\tau^{3/2})_{j-\frac{1}{2}}^{1,n-1} + (\tau^{3/2})_{j-\frac{1}{2}}^{1-1,n-1}}{L_{j-\frac{1}{2}}^{1,n-1} + L_{j-\frac{1}{2}}^{1-1,n-1}}$$

Again the system given by Eqs. (30) is nonlinear and is linearized by using Newton's method. This procedure gives rise to the following form ( $2 < j < J$ )

$$\delta w_j - \delta w_{j-1} = (r_3)_j \tag{31a}$$

$$\delta \psi_j - \delta \psi_{j-1} - \frac{h_j}{2} (\delta u_j + \delta u_{j-1}) = (r_4)_{j-1} \tag{31b}$$

$$(s_1)_j \delta u_j + (s_2)_j \delta u_{j-1} + (s_3)_j \delta \psi_j + (s_4)_j \delta \psi_{j-1} + (s_5)_j \delta \tau_j + (s_6)_j \delta \tau_{j-1} = (r_1)_j \quad (31c)$$

$$(\beta_1)_j \delta u_j + (\beta_2)_j \delta u_{j-1} + (\beta_3)_j \delta \psi_j + (\beta_4)_j \delta \psi_{j-1} + (\beta_5)_j \delta \tau_j + (\beta_6)_j \delta \tau_{j-1} = (r_2)_j \quad (31d)$$

Here for convenience we have dropped the superscripts  $i, n$  and have defined  $(s_k)_j$  ( $k = 1, 2, \dots, 6$ )

$$(s_1)_j = -\beta_n - \alpha_1 u_j + \alpha_1 / h_j (\psi_{j-\frac{1}{2}} - \psi_{j-\frac{1}{2}}^{i-1, n})$$

$$(s_2)_j = -\beta_n - \alpha_1 u_j - \alpha_1 / h_j (\psi_{j-\frac{1}{2}} - \psi_{j-\frac{1}{2}}^{i-1, n})$$

$$(s_3)_j = \alpha_1 / 2 [(u')_{j-\frac{1}{2}} + (u')_{j-\frac{1}{2}}^{i-1, n}]$$

$$(s_4)_j = (s_3)_j$$

$$(s_5)_j = 1/h_j, \quad (s_6)_j = -1/h_j$$

and  $(\beta_k)_j$  ( $k = 1, 2, \dots, 6$ )

$$(\beta_1)_j = \frac{\tilde{\alpha}_1}{2} (\tau_{j-\frac{1}{2}} - \tau_{j-\frac{1}{2}}^{i-1, n}) - \frac{1}{h_j} \tau_{j-\frac{1}{2}}$$

$$(\beta_2)_j = \frac{\tilde{\alpha}_1}{2} (\tau_{j-\frac{1}{2}} - \tau_{j-\frac{1}{2}}^{i-1, n}) + \frac{1}{h_j} \tau_{j-\frac{1}{2}}$$

$$(\beta_3)_j = -\frac{\tilde{\alpha}_1}{2} [(\tau')_{j-\frac{1}{2}} + (\tau')_{j-\frac{1}{2}}^{i-1, n}], \quad (\beta_4)_j = (\beta_3)_j$$

$$(\beta_5)_j = \beta_n + \frac{\tilde{\alpha}_1}{2} (u_{j-\frac{1}{2}} - u_{j-\frac{1}{2}}^{i-1, n}) + \frac{\tilde{\alpha}_1}{h_j} (\psi_{j-\frac{1}{2}}^{i-1, n} - \psi_{j-\frac{1}{2}}) \\ + \frac{1}{2} [(G')_{j-\frac{1}{2}} - (u')_{j-\frac{1}{2}}] + \frac{3}{2} \frac{\sqrt{|\tau_j|}}{L_{j-\frac{1}{2}}^{i-1, n} + L_{j-\frac{1}{2}}} + \frac{G_{j-\frac{1}{2}}}{h_j}$$

$$(\beta_6)_j = \beta_n + \frac{\tilde{\alpha}_1}{2} (u_{j-\frac{1}{2}} - u_{j-\frac{1}{2}}^{i-1, n}) - \frac{\tilde{\alpha}_1}{h_j} (\psi_{j-\frac{1}{2}}^{i-1, n} - \psi_{j-\frac{1}{2}}) \\ + \frac{1}{2} [(G')_{j-\frac{1}{2}} - (u')_{j-\frac{1}{2}}] + \frac{3}{2} \frac{\sqrt{|\tau_j|}}{L_{j-\frac{1}{2}}^{i-1, n} + L_{j-\frac{1}{2}}} - \frac{G_{j-\frac{1}{2}}}{h_j}$$

The terms denoted by  $(r_k)_j$  ( $k = 1, 2, 3, 4$ ) are defined by:

$$(r_3)_j = 0$$

$$(r_4)_{j-1} = \psi_{j-1} - \psi_j + n_j u_{j-1/2}$$

$$(r_1)_j = n_3 - [2\beta_n u_{j-1/2} + \alpha_1 (u^2)_{j-1/2} - \alpha_1 ((u')_{j-1/2} (\psi_{j-1/2} - \psi_{j-3/2}^{1-1,n}) + (u')_{j-1/2}^{1-1,n} \psi_{j-1/2}) - (\tau')_{j-1/2}]$$

$$(r_2)_j = n_4 - \left[ 2\beta_n \tau_{j-1/2} + \alpha_1 (u_{j-1/2} (\tau_{j-1/2} - \tau_{j-3/2}^{1-1,n}) + u_{j-1/2}^{1-1,n} \tau_{j-1/2}) - \alpha_1 ((\tau')_{j-1/2} (\psi_{j-1/2} - \psi_{j-3/2}^{1-1,n}) + (\tau')_{j-1/2}^{1-1,n} \psi_{j-1/2}) - \tau_{j-1/2} (u')_{j-1/2} + 2 \left( \frac{\tau_{j-1/2}^{3/2} + (\tau^{3/2})_{j-1/2}^{1-1,n}}{L_{j-1/2} + L_{j-3/2}^{1-1,n}} \right) + G_{j-1/2} \tau_{j-1/2} + G_{j-1/2} (\tau')_{j-1/2} \right]$$

For  $j = 1$ , we use the boundary conditions given by Eqs. (13), (14) and (15) and first write them as:

$$u_1 = w_1 \left( 2.5 \ln \frac{y_1 w_1}{v} + 5.2 \right)$$

$$\frac{\partial \psi_1}{\partial x} - \frac{u_1 y_1}{w_1} \frac{\partial w_1}{\partial x} = 0$$

$$\tau_1 = w_1^2 + y_1 \frac{u_1}{w_1} \frac{\partial w_1}{\partial t} + \alpha^2 y_1 \frac{\partial}{\partial x} w_1^2 - \rho_3 y_1$$

After we write the difference equations and linearize the resulting nonlinear expressions, we get

$$\delta u_1 - \left[ 2.5 \left( \ln \frac{y_1 w_1}{v} + \frac{v}{y_1} \right) \right] \delta w_1 = (r_1)_1 \quad (32a)$$

$$y_1 (w_1 - E_2) \delta u_1 + (w_1 + w_1^{234}) \delta \psi_1 + [(\psi_1 - E_1) - y_1 (u_1 - u_1^{234})] \delta w_1 = (r_2)_1 \quad (32b)$$

$$\delta \tau_1 + g_7 \delta w_1 = (r_3)_1 \quad (32c)$$

where

$$E_1 = \psi_1^{i-1,n} - \psi_1^{i,n-1} + \psi_1^{i-1,n-1}$$

$$E_2 = (w_1^2)^{i-1,n} - (w_1^2)^{i,n-1} + (w_1^2)^{i-1,n-1}$$

$$E_4 = -w_1^{i,n-1} + w_1^{i-1,n} - w_1^{i-1,n-1}$$

$$E_5 = \frac{1}{2y_1^+} \int_0^{y_1^+} [2.5 \ln(1.0 + y_1^+) + 5.1 - (3.39y_1^+ + 5.1) \exp(-0.37y_1^+)]^2 dy_1^+$$

$$g_7 = -2w_1 \left(1 + \frac{1}{2} y_1 \alpha_1 E_5^{1234}\right) - \frac{1}{2} y_1 \beta_n \left(\frac{u_1}{w_1}\right)^{1234}$$

$$(r_1)_1 = w_1 \left[2.5 \ln \frac{y_1 w_1}{v} + 5.2\right] - u_1$$

$$(r_2)_1 = y_1 u_1^{1234} (w_1 - E_2) - w_1^{1234} (\psi_1 - E_1)$$

$$(r_3)_1 = (w_1^2)^{234} - \tau_1^{234} - 4(P_3)_{i-1/2}^{n-1/2} y_1 + \frac{1}{2} y_1 \beta_n \left(\frac{u_1}{w_1}\right)^{1234} E_4 + \frac{1}{2} y_1 \alpha_1 E_5^{1234} E_3$$

$$- \left[ \tau_1 - w_1^2 - \frac{1}{2} y_1 \beta_n \left(\frac{u_1}{w_1}\right)^{1234} w_1 - \frac{1}{2} y_1 \alpha_1 E_5^{1234} y_1^2 \right]$$

For  $j = J$ , we use the usual boundary condition,

$$u_j = u_e$$

which in its linearized form is

$$\delta u_j = (r_4)_1 = 0 \quad (33)$$

The equations (31) for  $2 \leq j < J$  and the boundary conditions given by Eqs. (32) and (33) form a linear system which is solved by the block-elimination method discussed in Ref. [9].

#### IV. RESULTS AND DISCUSSION

To study the calculation of unsteady turbulent boundary layers with and without flow reversal we have considered three separate test cases. The first case has an external velocity distribution of the form

$$\bar{u}_e = 1 - \alpha(x - x^2)(t^2 - t^3) \quad 0 < x < 1, \quad t > 0 \quad (34)$$

where  $\alpha$  is a positive constant. The same velocity distribution was recently used by Cebeci [1] for laminar flows in order to study the computation of unsteady laminar flows with flow reversal using the solution procedure described in the previous section and to see whether there is a singularity associated with such flows.

In performing calculations for this case and for the others considered here, care must be taken in generating the initial conditions in the  $(t, y)$  and  $(x, y)$  planes at some distance, say  $x = x_0$ . For a laminar flow if  $x_0 = 0$ , the initial velocity profile for the velocity distribution given by Eq. (34) can be taken as Blasius and there is no difficulty about computing the solution in  $x > 0$  since the initial boundary layer is of zero thickness. If  $x_0 \neq 0$ , we can take

$$\bar{u}_e = 1 - \alpha(x_0 - x_0^2)(t^2 - t^3) \quad 0 < x < x_0$$

but then at  $x = x_0$  there is a discontinuity in the pressure gradient. Since it acts on an already-established boundary layer, the initial response is inviscid leading formally to a velocity slip and hence a subboundary layer at the wall. The treatment of the boundary layer is then rather subtle (see Ref. [10]) but if we are not too concerned with the details of the solution near  $x = x_0$ , which is the case here, a convenient procedure would be to write Eq. (34) as

$$\bar{u}_e = 1 - \alpha F[(x - x_0)/a](x - x_0^2)(t^2 - t^3) \quad (35)$$

where  $F$  is a smooth function which vanishes if  $x < x_0$  and is unity if  $x - x_0 > a$ . For example, we can take  $F(s) = \sin(\pi s/2)$   $0 < s < 1$ , and  $a = 0.05$  with ten stations between  $x = x_0$  and  $x = x_0 + a$ . A similar difficulty would occur at  $t = 0$  if  $t^2$  in Eq. (34) were replaced by  $t$  since the boundary layer is well established at  $t = 0$ .

Figures 3 and 4 show the results for the turbulent flow calculations with the CS model for the test case given by Eq. (35) with  $\alpha = 40$  and a unit Reynolds number  $u_0/v = 2.2 \times 10^6/m$ . The results shown in Fig. 3 were obtained by using different expressions for  $A$ ; those shown by circles were obtained with Eq. (7), and those shown by solid lines with Eq. (7) written as

$$A = 25 \left( \frac{I}{\rho} \right)_{\max}^{-1/2} \quad (36)$$

As can be seen, both expressions give nearly the same results.

The results in Fig. 4, as in laminar flows, exhibit no signs of singularity for all calculated values of  $t$ . This is in contrast to the findings of Patel and Nash [11]. Again, as in laminar flows [3], we see the familiar rapid thickening of the boundary layer in the reversed flow region. If it had not been for this, the calculations would have been computed for greater values of  $t$  than those considered here.

The two other test cases considered here correspond to Cases 4 and 5, as reported by Carr [12]. Case 4 is for unsteady Howarth flow. It starts from a well-established steady flat-plate flow, on which a linear deceleration of  $u_e$  is imposed at  $t = 0$ . The external velocity distribution is given by

$$\bar{u}_e = 1 - \bar{\alpha}(x - 1.24)t \quad 1.24 \leq x \leq 4.69 \quad (37)$$

where  $\bar{\alpha}$  is a constant equal to  $2.4/3.45 \text{ sec}^{-1}\text{m}^{-1}$ . The flow was assumed to be steady up to  $x = 1.24\text{m}$ ; the velocity distribution Eq. (37) was then imposed as a function of  $x$  and  $t$ . This test case differs from the previous one in that, once the flow separates, it does not reattach. For this reason, the calculations can only be continued as far as the station where the flow reversal first occurs. The initial velocity profile at  $x = 1.24$  and for all time correspond to a flat-plate profile with a momentum thickness Reynolds number ( $R_\theta$ ) of 4860, and local skin-friction coefficient  $c_f$  of  $2.8 \times 10^{-3}$ .

As in the previous test case, we introduce a function  $F_1$  so that at  $x = 1.24$ ,  $du_e/dx = 0$ . Since we also want the solutions at  $t = 0$  to correspond to steady-state solutions, we introduce another function  $F_2$  in order to set  $\partial u_e/\partial t = 0$ . With these functions, Eq. (37) then becomes

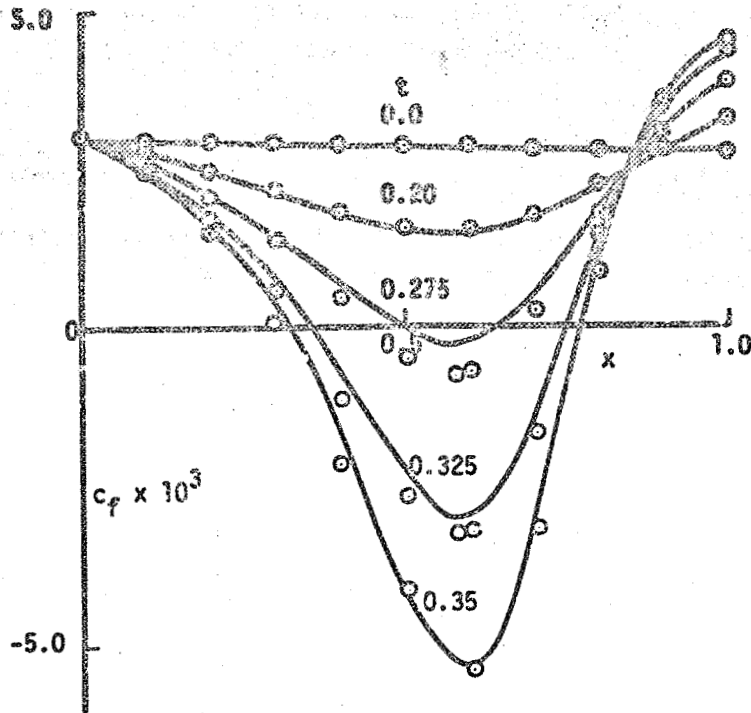


Figure 3. Local skin-friction variation with  $x$  for various values of  $z$ . Solid lines denote the calculations made by (29) and circles by (8).

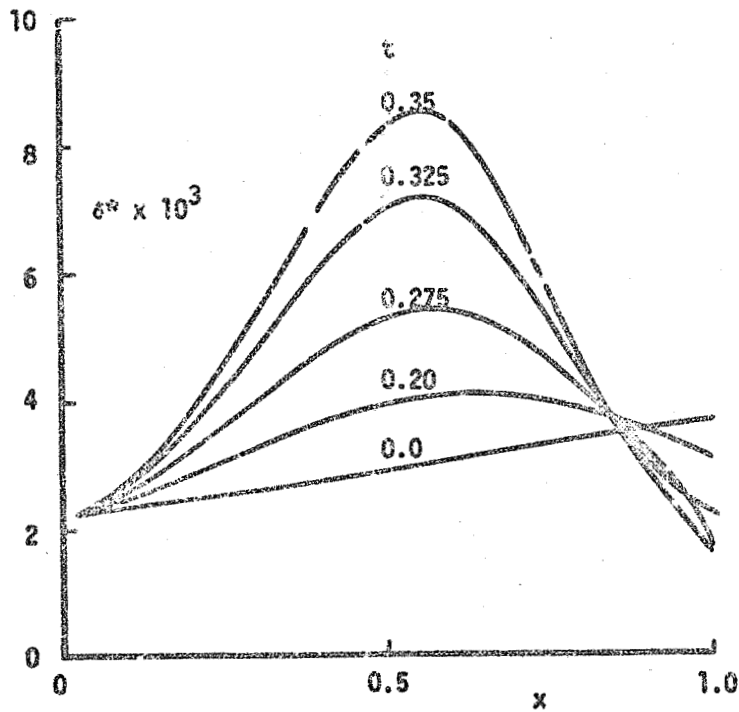


Figure 4. Variation of displacement thickness with  $x$  for various values of  $z$ .

$$\bar{u}_e = 1 - \bar{c}F_1F_2(x - 1.24)t \quad (39)$$

where

$$F_1 = \sin \frac{\pi}{2} \left( \frac{x - 1.24}{6.1} \right), \quad F_2 = \sin \frac{\pi}{2} \frac{t}{1.33}$$

Figures 5, 6 and 7 show the calculated local skin-friction coefficient  $c_f$ , the shape factor  $H$  and the momentum thickness Reynolds number  $Re_\theta$  for this test case. The calculations were done by using both CS and BF models; the results shown by solid lines refer to the predictions of the CS model and those shown by circles refer to the predictions of the BF model.

As seen from these three figures, there is essentially no difference between the predictions of both models. Although there is some discrepancy in the shape factor predictions, this does not seem to be too significant.

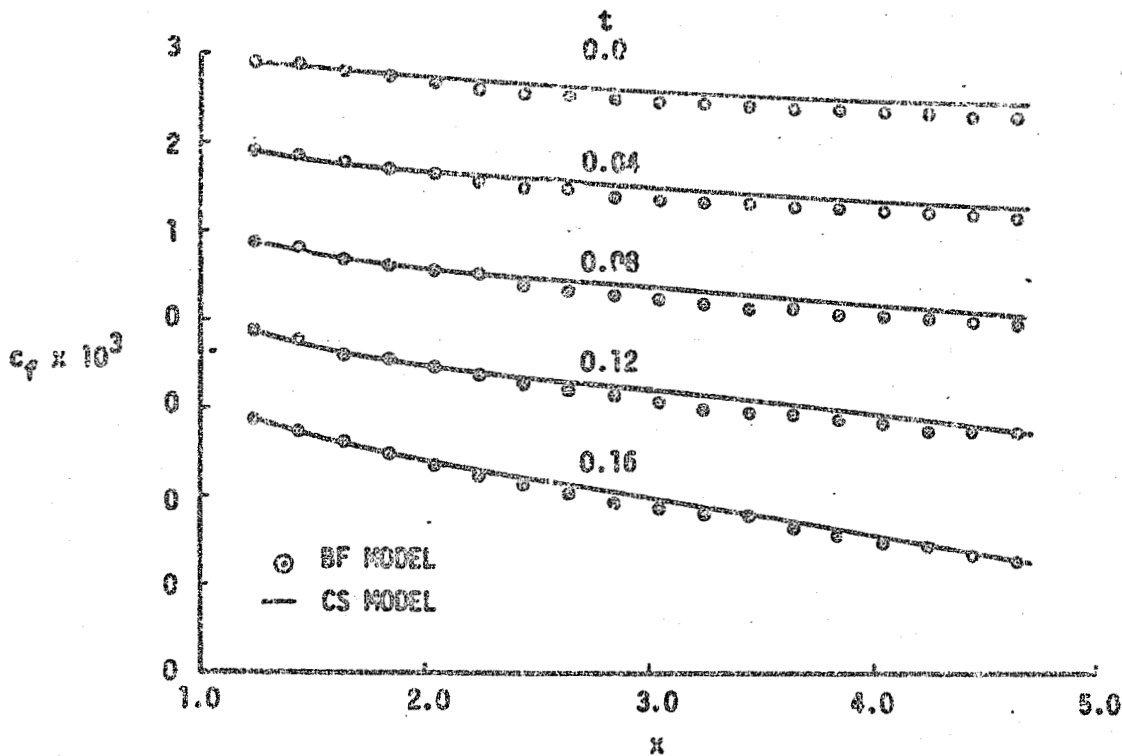


Figure 5. Computed local skin-friction distribution for test case 4.



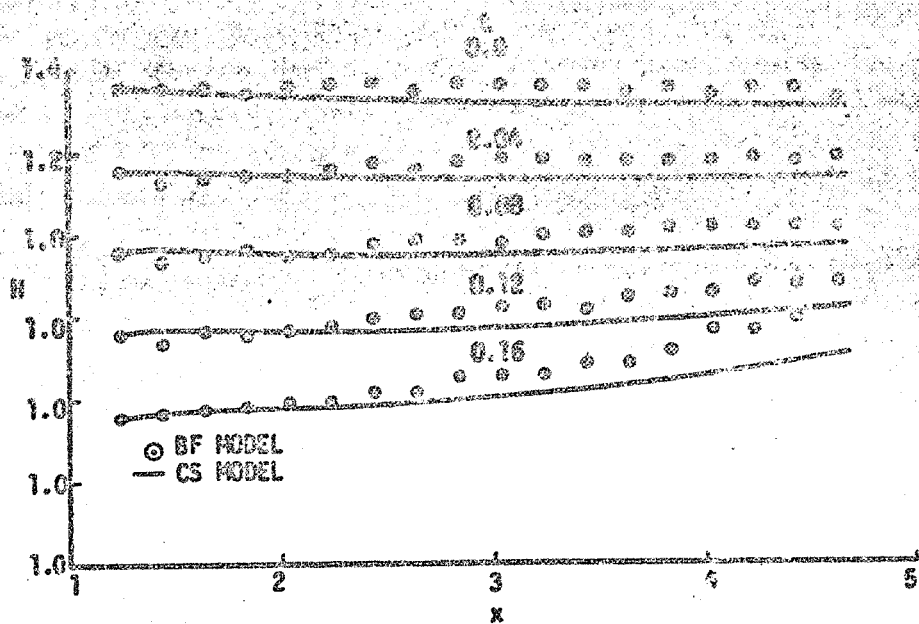


Figure 6. Computed shape factor distribution for test case 4.

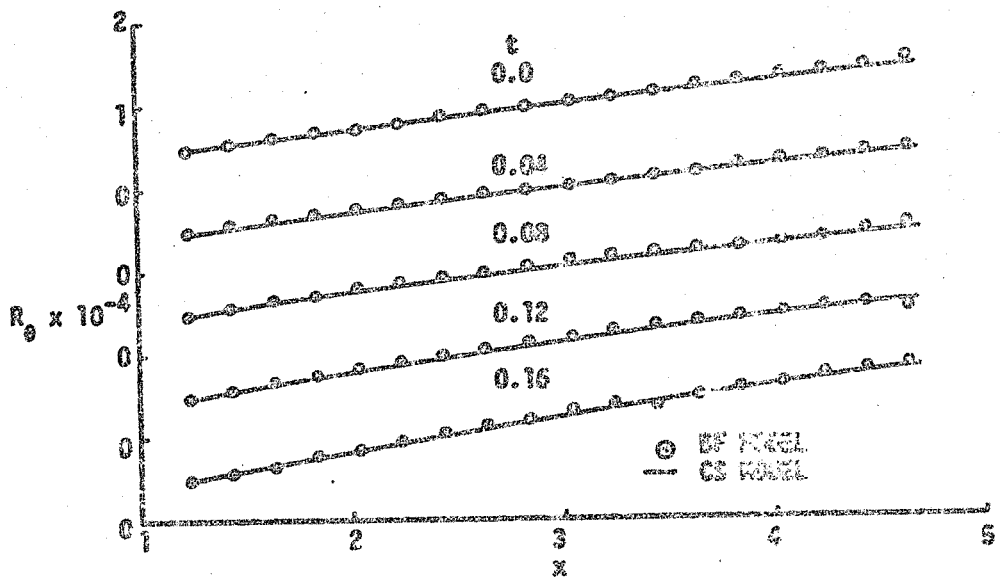


Figure 7. Computed momentum-thickness Reynolds number for test case 4.

According to the predictions of the CS model, which also has the capability of predicting unsteady boundary layers with flow reversal, the wall-shear vanishes first around  $t \approx 0.22$ ,  $x = 4.69$ . Since the computation of boundary layers for values of  $x$  in the range  $1.24 \leq x \leq 4.69$  for  $t > 0.22$  depends on the specification of a velocity profile at  $x = 4.69$ , we generate such a profile by assuming it is given by the extrapolation of two velocity profiles computed for  $x < 4.69$ . This procedure in which the extrapolated station serves as a downstream boundary condition, allows the calculations to be continued in the negative wall shear region as shown in Fig. 8.

The third case considered in our study corresponds to Case 5 in ref. [12], which in a way resembles the external velocity distribution in Eq. (34). It is given by

$$\bar{u}_e = 1 + \{A^2 + (Bt)^2 [\epsilon - \epsilon_0]^2\}^{1/2} - [A^2 + (B\epsilon_0 t)^2]^{1/2} \quad (39)$$

where  $A = 0.05$ ,  $B = 3.4 \text{ sec}^{-1}$ ,  $\epsilon = (x - 1.24)/3.45$  and the range of  $x$  values are limited to  $1.24 \leq x \leq 4.69$ . As before, the initial velocity profiles at  $x = 1.24$  for all  $t$  correspond to a steady flat-plate flow with  $R_\theta = 4860$ ,  $c_f = 2.89 \times 10^{-3}$ . We again modify Eq. (39) to avoid the discontinuity in the pressure gradient. This time we multiply the right-hand side of Eq. (39) by  $F_1$  used in Eq. (38).

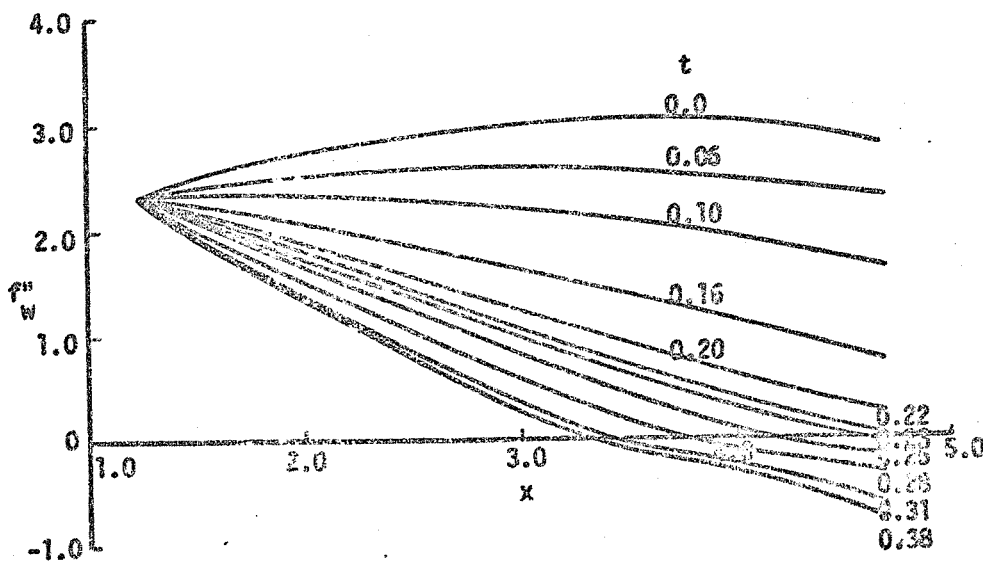


Figure 8. Variation of wall-shear parameter  $f''_w$  with distance as a function of time for test case 4.

Figures 9 and 10 show the calculated local skin-friction coefficient  $c_f$  and the momentum thickness Reynolds number  $R_\theta$  for this test case. Again we present the predictions of both turbulence models. Figure 11 shows the calculated velocity profiles for several  $t$  and  $x$ -stations. As is seen from these figures, the predictions of both turbulence models are the same for all practical purposes.

Figure 12 shows the variation of wall shear parameter  $f_w''$  as a function of  $x$  and  $t$ , and Figure 13 shows the calculated velocity profiles, including the regions in which there is flow reversal across the boundary layer. These computations which are done by using the CS model provide confirmation of the general trends in test case 4, namely that as in laminar flows, the unsteady turbulent boundary layers thicken rapidly with increasing flow reversal. A new feature however is the dip in the graphs of  $f_w''$  near  $x = 2.5$  which develops as  $t$  increases towards 0.40. It is possible that a singularity occurs in the solution at a later time as many authors have suggested is the case for laminar boundary layers. The most cogent argument in favor of this phenomenon has been advanced by Shen [15] but we note that the most definite sign of its occurrence appeared in his graphs of displacement thickness which showed spikey characteristics. Here the displacement thickness seems to be fairly smooth but the skin friction becomes spikey.

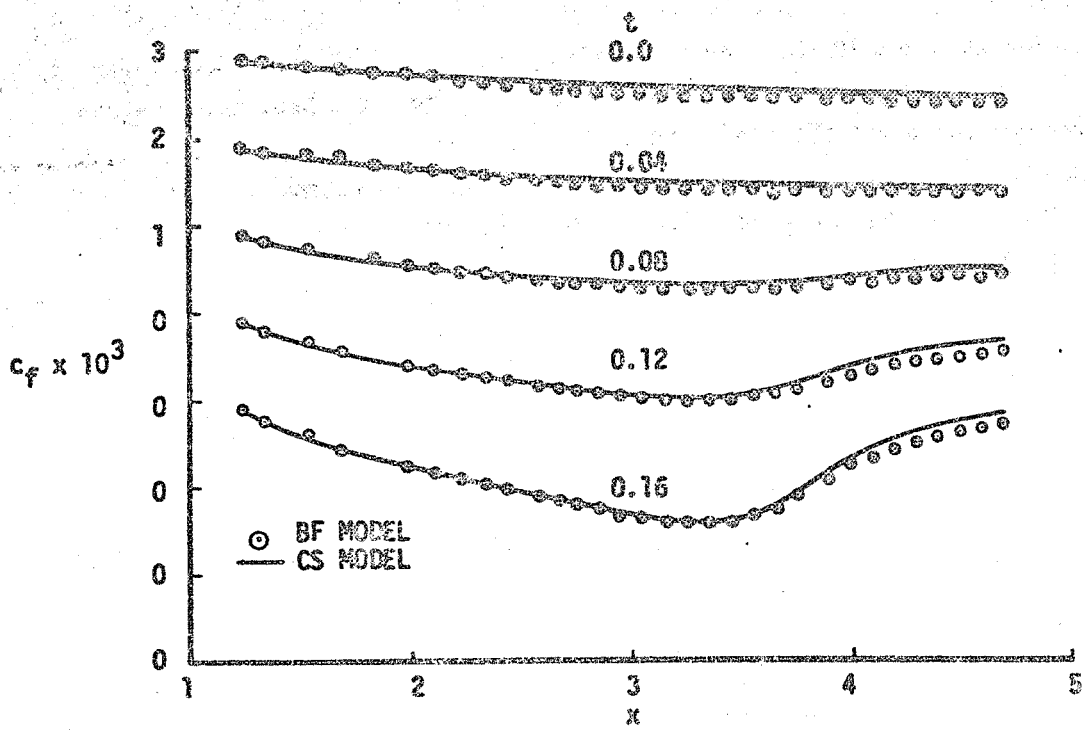


Figure 9. Computed local skin-friction distribution for test case 5.



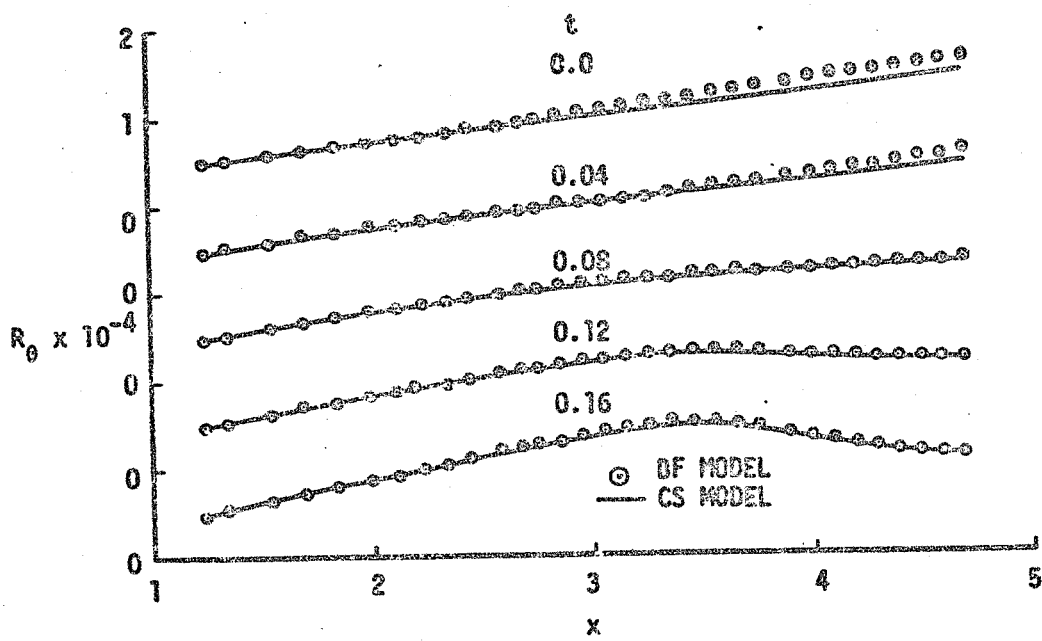



Figure 10. Computed momentum-thickness Reynolds number for test case 5.

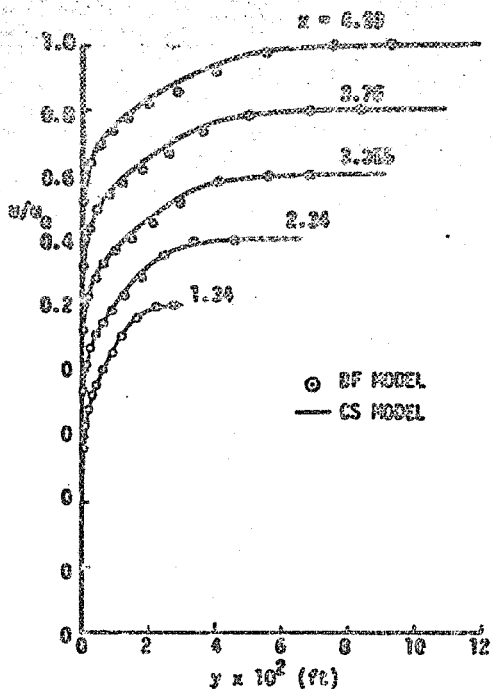


(a)  $t = 0.0$ .

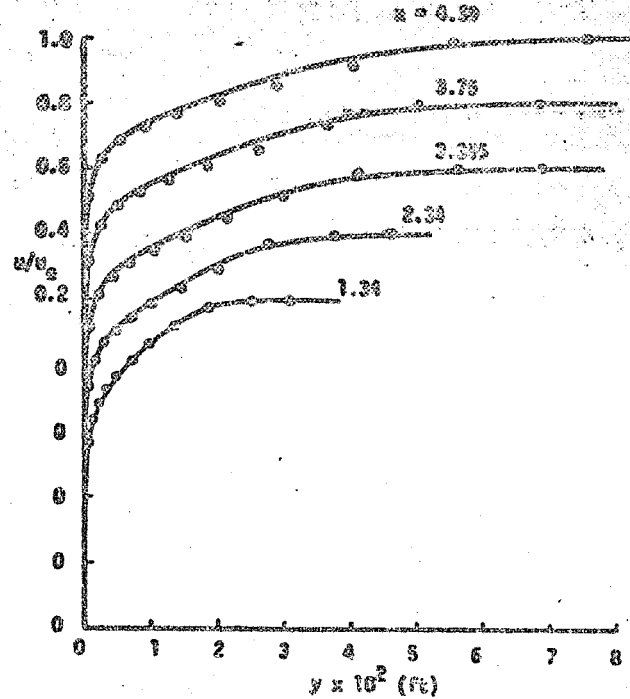

(b)  $t = 0.04$ .

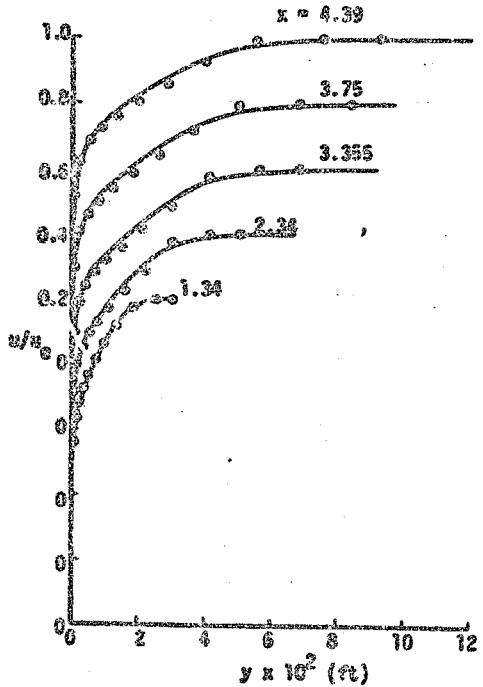

(c)  $t = 0.08$ .

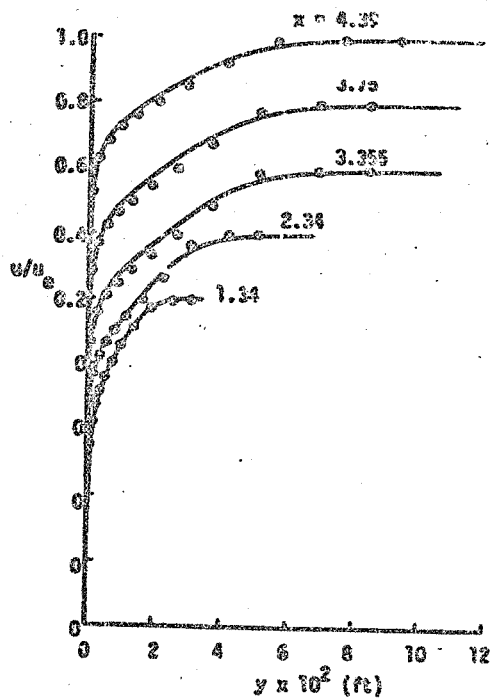

(d)  $t = 0.12$ .

Figure 11. Comparison of calculated velocity profiles for test case 5 with no flow reversal.

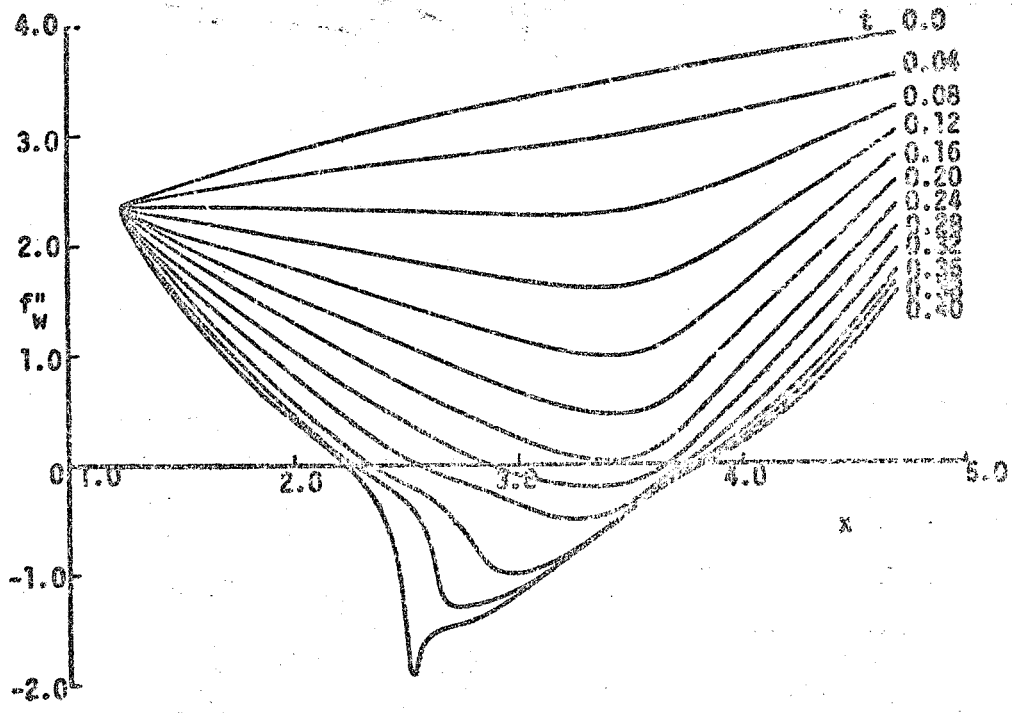


Figure 12. Variation of wall shear parameter  $f''_w$  with distance as a function of time for test case 5.

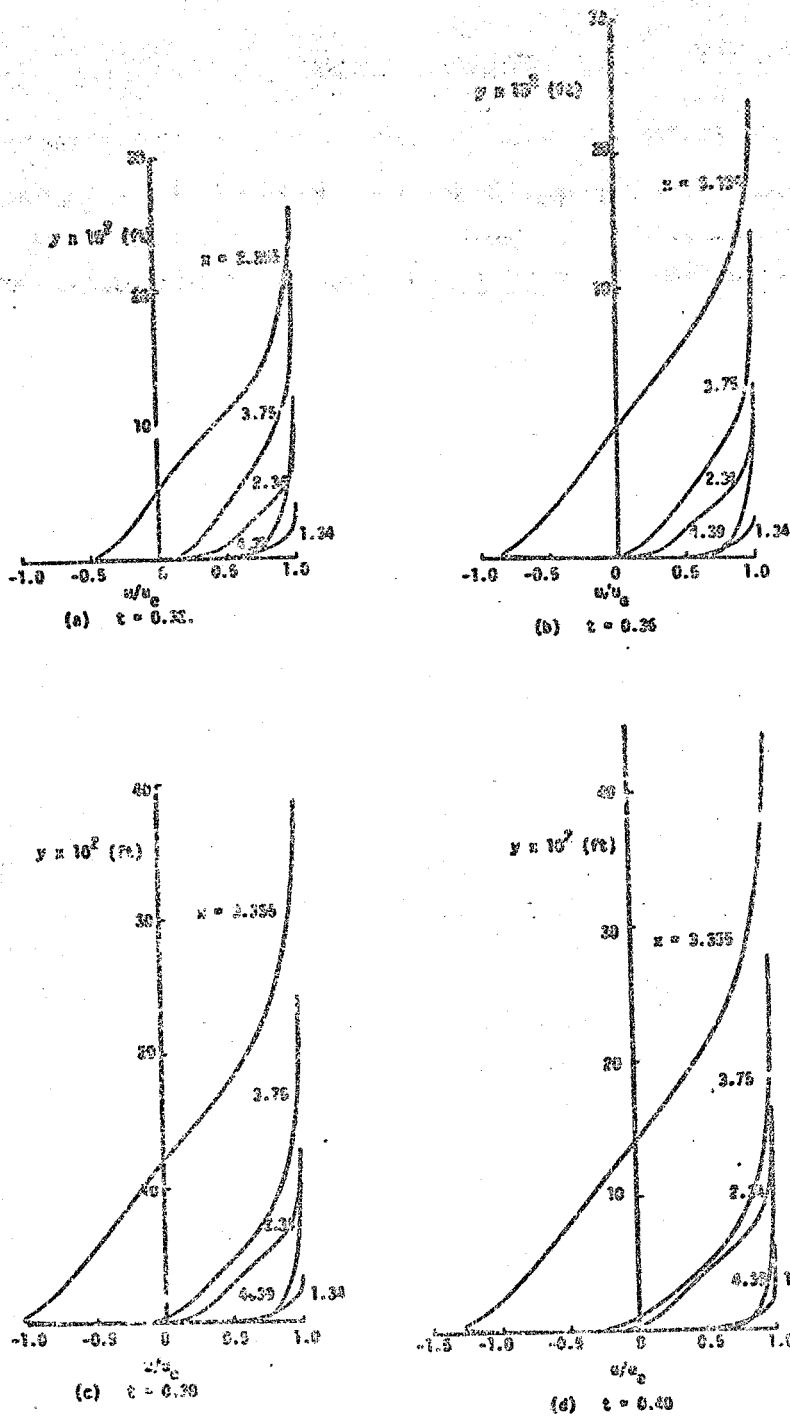


Figure 13. Calculated velocity profiles including flow reversal by the CS models for test case 5.

## V. CONCLUDING REMARKS

Based on the studies conducted in this report, we observe that:

1. The numerical solution of unsteady laminar and turbulent boundary layers including the flow reversal across the layer can be obtained quite satisfactorily for a given pressure distribution. A combination of both regular and zig-zag box schemes are shown to yield accurate results for unsteady boundary layers.
2. Whether the unsteady boundary-layer equations for laminar and turbulent flows are singular for a given pressure distribution still remains to be investigated. The results for test case 5 indicate that at large times there is a puzzling "kink" in the wall shear parameter,  $f''_w$ ; this may be due to a singularity or it may be due to a numerical problem. Recent studies conducted by Cebeci [14] and van Dommelen and Shen [15] for a circular cylinder started impulsively from rest indicate that at large times,  $t = 1.25$  or more, there appears to be a singularity in  $\delta^*$  around  $\theta = 120^\circ$ . However, these calculations do not indicate any puzzling behavior in the wall shear parameter near "singularity;" the  $f''_w$ -values are smooth and well behaved for these and larger times. On the other hand, examining the  $\delta^*$ -results for test case 5, we find that while there is an abnormal behavior in  $f''_w$  at large times, the corresponding  $\delta^*$ -values are smooth and well behaved, a trend which is opposite to that for a circular cylinder.
3. A comparison of the predictions of two turbulence models, namely, CS and BF models indicate that for attached flows, both models yield almost identical results. This is also true for flows which are sufficiently strong in pressure gradient to cause flow reversal across the layer.



## VI. REFERENCES

1. Cebeci, T.: The Laminar Boundary Layer on a Circular Cylinder Started Impulsively from Rest. *J. of Comp. Physics*, Vol. 3, No. 2, May 1979.
2. Cebeci, T. and Smith, A.H.O.: *Analysis of Turbulent Boundary Layers*. Academic Press: New York, 1974.
3. Bradshaw, P., Ferriss, D.H. and Atwell, N.P.: Calculation of Boundary-Layer Developments Using the Turbulent Energy Equation. *J. Fluid Mech.*, Vol. 28, 1957, p. 593.
4. Cebeci, T.: An Unsteady Laminar Boundary Layer with Separation and Reattachment. *AIAA J.*, Vol. 16, No. 12, 1978, pp. 1305-1306.
5. Bradshaw, P.: Singularities in Unsteady Boundary Layers. *AIAA J.*, Vol. 17, No. 7, 1979, pp. 790-793.
6. Bradshaw, P. and Unsworth, K.: Computation of Complex Turbulent Flows. In *Reviews in Viscous Flows*, Lockheed-Georgia Co. Rept. LG77ER0044, 1977.
7. Cebeci, T., Chang, K.C. and Bradshaw, P.: Solution of a Hyperbolic System of Turbulence-Model Equations by the "Box" Scheme. *Comp. Methods in App. Mech. and Eng.*, Vol. 22, No. 2, May 1980, pp. 213-227.
8. Cebeci, T. and Carr, L.W.: A Computer Program for Calculating Laminar and Turbulent Boundary Layers for Two-Dimensional Time-Dependent Flows. *NASA TM 78470*, 1978.
9. Cebeci, T. and Bradshaw, P.: *Momentum Transfer in Boundary Layers*. McGraw-Hill/Hemisphere: Washington, D.C., 1977.
10. Cebeci, T., Stewartson, K. and Williams, P.G.: On the Response of a Stagnation Boundary Layer to a Change in the External Velocity. *SIAM J. of Applied Math.*, Vol. 35, 1979, pp. 190-199.
11. Patel, V.C. and Nash, J.: Unsteady Turbulent Boundary Layers with Flow Reversal. *Unsteady Aerodynamics*, Kinney, Ed., Vol. 1, 1976, p. 191.
12. Carr, L.W.: Standardization of Computational Experiments in Unsteady Turbulent Boundary-Layer Flow. *NASA TM-78,445*, Dec. 1977.
13. Shen, S.F.: Unsteady Separation According to the Boundary-Layer Equation. *Advanced in Applied Mechanics*, Vol. 18, 1978, pp. 177-200.

14. Godecki, T.: Instability Separation. Proceedings of Numerical and Physical Aspects of Aerodynamic Flows. Calif. State University at Long Beach, Long Beach, CA, Jan. 1981.
15. Von Deuzelen, L.I. and Shen, S.F.: The Spontaneous Generation of the Singularity in a Separating Laminar Boundary Layer. To be published in J. of Computational Physics, 1981.

## VII. DESCRIPTION OF THE COMPUTER PROGRAM WHICH USES THE CS MODEL

### Input

Essentially the input to the computer program consists of four types of cards. Card 1 contains the title of the flow problem under consideration. Card 2 requires the following information to be specified.

**NXT** Total number of t-stations to be calculated  
**NZT** Total number of x-stations to be calculated  
**NTR** x-station where transition begins. If the initial velocity profile is for turbulent flows, then NTR=1. If flow is all laminar, set NTR>NZT.  
**IDBY** Specifies whether the flow at x=0 starts as a flat-plate flow or as a stagnation-point flow.  
=1 flat-plate flow  
=2 stagnation-point flow  
**RL** Free-stream Reynolds number,  $u_{\infty} L/\nu$ .  
**IPRNT** Controls the print output  
=1 prints out only the boundary-layer parameters  $\delta^+, \theta, c_f, R_{\delta^+}, R_{\theta}, H$  and external velocity distribution.  
=2 prints out profiles as well as the boundary-layer parameters and external velocity field.

DETA(1) and VGP are the nonuniform grid parameters that control the spacing across the layer. The grid used in this report is a geometric progression with the property that the ratio of lengths of any two adjacent intervals is a constant; that is,  $\Delta x_j = K \Delta x_{j-1}$ . The distance to the j-th line is given by the following formula:

$$\Delta x_j = h_1 (K^j - 1) / (K - 1) \quad K > 1$$

There are two parameters in this equation:  $h_1$ , the length of the first step, and  $K$ , the ratio of two successive steps. The total number of points  $J$  can be calculated from the following formula:

$$J = \frac{\ln[1 + (K - 1)(u_e/h_1)]}{\ln K}$$

In the computer program which embodies the present solution method,  $h_1$  and  $K$  are chosen with typical values, for moderate Reynolds numbers, of 0.01 and 1.3, respectively. In general, approximately 50 grid nodes across the boundary layer are sufficient to represent laminar and turbulent boundary-layer flows. The chosen values of  $h_1$  and  $K$  must be such that the formula which generates the number of grid nodes according to a given or estimated  $n_e$ , i.e. Eq. ( ) does not allow  $J$  to exceed 101. Figure 14 is provided, therefore, to provide guidance in the selection of  $J$ .

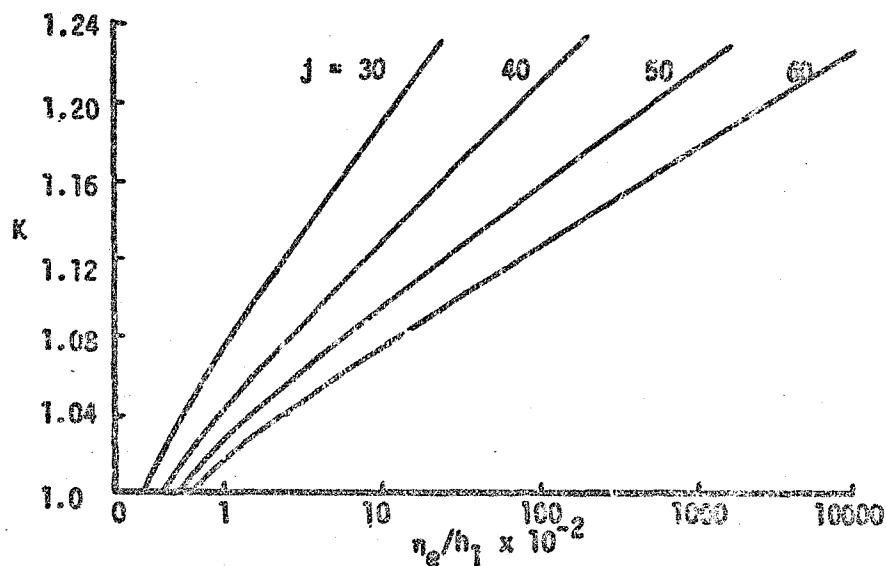


Figure 14. Variation of  $K$  with  $h_1$  for different  $n_e$ -values.

$C_F$  and  $R_{KH}$  are the local  $c_f$  and  $R_\theta$  values which are used to start the turbulent flow calculations. The initial velocity profile is generated by using the formulas proposed by Granville (see ref. 9)

$$\frac{u}{u_\tau} = \frac{1}{\kappa} [\ln y^+ + c + \Pi(1 - \cos \pi \eta) + (\eta^2 - \eta^3)] \quad (40)$$

From Eq. (40) and from the definitions of  $\delta^*$  and  $\theta$ , it can be shown that

$$\frac{\delta^*}{\delta} = \int_0^1 \frac{u_e - u}{u_\tau} \frac{u}{u_e} d\eta = \frac{u_\tau}{\kappa u_e} \left( \frac{11}{12} + \Pi \right) \quad (41)$$

$$\frac{R_0}{\kappa} = \int_0^1 \frac{u}{u_e} \left(1 - \frac{u}{u_e}\right) dx = \frac{u_\tau}{\kappa u_e} \left(\frac{11}{12} + \pi\right) - \left(\frac{u_\tau}{\kappa u_e}\right)^2 \left[2 + 2\pi + \frac{1}{4} S_1(\pi)\right] + 1.5\pi^2 + \frac{1}{105} - \frac{7}{72} - 0.120925\pi \quad (42)$$

From Eq. (42), taking  $S_1(\pi) = 1.8519$ , we can also write

$$\frac{R_0}{\kappa} = \frac{u_\tau}{\kappa u_e} \left(\frac{11}{12} + \pi\right) - \left(\frac{u_\tau}{\kappa u_e}\right)^2 (1.9123016 + 3.05603 + 1.5\pi^2)$$

Evaluating Eq. (40) at  $\eta = 1$ , we get

$$\frac{u_e}{u_\tau} = \frac{1}{\kappa} \left[ \ln \left( \frac{\delta u_e}{\nu} \frac{u_\tau}{u_e} \right) + c + 2\pi \right] \quad (43)$$

For a given value of  $c_f$  and  $R_0$ , we can solve Eqs. (42) and (43) for  $\delta$  and  $\pi$  and then substitute them into Eqs. (40) and (41), thus obtaining  $u$ -profile.

Cards 3 and 4 read in the  $\eta$  and  $x$  stations, respectively. The present computer program specifies the external velocity distribution by a formula and computes the dimensionless pressure gradient parameters analytically as is shown in the listing which follows this section. The test case in the computer listing is for case 4 of ref. [12].

#### Output

Depending on the IPANT, the computer program prints out the profiles  $f$ ,  $f'$ ,  $f''$  and  $b$  as a function of the similarity variable  $\eta$  and grid parameter  $j$  together with a parameter KALC(J). Here KALC(J) = 0 when we use the standard box and = 1 when we use the zig-zag box.

ETA	$\eta$
F	$f'$
U	$f''$
V	$f'''$
B	$b (=1 + c_{fb}^+)$ equals 1.0 for laminar flows

The output also includes displacement thickness  $\delta^*$ , momentum thickness  $\theta$ , local skin-friction coefficient  $c_f$ , Reynolds numbers based on  $\delta^*$  and  $\theta$ ,

that is,  $R_{\delta^*}$ ,  $R_{\theta}$  and shape factor  $H$ . The definition of these parameters and their computer notation is

DELSTR  $\delta^* = \int_0^{\eta} (1 - u/u_0) dy$

THETA  $\theta = \int_0^{\eta} u/u_0 (1 - u/u_0) dy$

CF  $c_f = 2\tau_w/\rho u_0^2$

RDELST  $R_{\delta^*} = \delta^* u_0/\nu$

RTHETA  $R_{\theta} = \theta u_0/\nu$

RZ  $R_z = z u_0/\nu$

H  $\delta^*/\theta$

In terms of transformed variables,  $\delta^*$ ,  $\theta$  and  $c_f$  can be written as

$$\delta^* = \frac{z}{\sqrt{R_z}} [\eta_0 - f_0/f_0']$$

$$\theta = \frac{z}{\sqrt{R_z}} \int_0^{\eta} \frac{f_0'}{f_0} (1 - \frac{f_0'}{f_0'}) d\eta$$

$$c_f = 2 \frac{f_0''}{\sqrt{R_z}}$$



```

1  (V11,NZ,Z1)+0.0001V1111 .LT. 0.001 GO TO 88
GO TO 20
88  ITIME .EQ. NPT1 GO TO 90
IABS(UIMP-2,NZ,Z1/UIMP,NZ,Z1)-1.01 .LT. 0.0015
1  .AND. ABS(VIMP,NZ,Z1) .LT. 0.0015 GO TO 90
IABS(WIMP,NZ,Z1) GO TO 90
ICROW = ICROW+1
WRITE(6,1201)
LL = 2
CALL SFOWTHILL)
GO TO 20
90  CALL OUTPUT
IF ( IY .GE. NXPNT ) IPRNT = 0
IF ( ITIME .GT. 2 ) GO TO 10
IF ( ITIME .EQ. 2 .AND. NZ .EQ. 3 ) GO TO 96
IF ( ITIME .NE. 1 ) GO TO 10
IF ( 4 .LT. 3 ) GO TO 92
DO 91 J=1,NPT
FF(J,3)=FC(J,3,2)
UU(J,3)=UC(J,3,2)
VV(J,3)=VC(J,3,2)
RR(J,3)=RC(J,3,2)
91  CONTINUE
GO TO 5
92  M = M + 1
DO 93 J=1,NPT
FF(J,M) = FC(J,M,2)
UU(J,M) = UC(J,M,2)
VV(J,M) = VC(J,M,2)
RR(J,M) = RC(J,M,2)
93  CONTINUE
IF ( M .LT. 3 ) GO TO 10
NNZ = 2
CALL REPROD ( NPT, FF, UU, VV, RR, NNZ )
N7 = 3
GO TO 10
96  M = 1
DO 97 J = 1,NPT
FF(J,M) = FC(J)
UU(J,M) = UC(J)
VV(J,M) = VC(J)
97  RR(J,M) = RC(J)
DO 98 K = 1,2
M = M+1
DO 98 J = 1,NPT
FF(J,M) = FC(J,K,2)
UU(J,M) = UC(J,K,2)
VV(J,M) = VC(J,K,2)
98  RR(J,M) = RC(J,K,2)
N7 = 1
CALL REPROD ( NPT, FF, UU, VV, RR, NNZ )
ITIME = ITIME+1
IF ( IPRNT .LT. 2 .AND. ITIME .GT. 1 ) WRITE(6,1101) NX,NZ,XINX)
1  ZINZ1
CALL OUTPUT

```



ON TO 10

```
C - - - - -  
100 FORMAT(1H0,16X,32HITERATIONS EXCEEDED IYMAX AT NIT,19)  
101 FORMAT(19)  
110 FORMAT(1H0,40X =,13.5X,40XZ =,13.5X,50X =,F10.5,3X,30XZ =,F10.5)  
120 FORMAT(1H0,2X, BOUNDARY LAYER HAS GROWN)  
121 FORMAT(1H0,5X,50XK =,13.5X,50XKINX =,F10.5,5X,50XK =,F10.5/  
110,5X,50XJ =,5X,50XZ (J),5X,50XV (VAL),10X,20X,  
2 10X,10X,10X,40XTHETA,10X,20XZ,5X,40XENTRAP / )  
122 FORMAT(1H ,5X,13.2X,F11.6,50XZ,F13.8,5X,11)  
END
```

```

SUBROUTINE COEFFC(1)
COMMON/BLCO/ NXP,NZT,NX,NZ,NP,NTR,ITMAX,IBDY,NP7,IZIG,ITUP6,ETA6,
1 VGP,A(101),ETA(101),DETA(101)
COMMON/BLC1/ X(101),Z(101),UD(101),PZ(101),PL(101),P2(101),P3(101),Q1,
1 UE(101,81)
COMMON/BLCC/ S1(101),S2(101),S3(101),S4(101),S5(101),S6(101),
1 R1(101),R2(101),P3(101)
COMMON/BLCP/ DELV(101),F(101,81,2),U(101,81,2),V(101,81,2),
1 B(101,81,2)
COMMON/ZGZG/ KALC(101)
COMMON/SOVS/ NZIG,NZIGS
-----
U(NP,NZ,2) = UE(NX,NZ) / UD(NZ)
UOB = 0.5*(UD(NZ)+UD(NZ-1))
IF ( IT .GT. 1 .AND. NZIGS .EQ. 1 ) GO TO 6
NZIG = 0
KALC(1)=0
DO 4 J=2,NP
UR = 0.5*(U(J,NZ,2)+U(J-1,NZ,2))
IF(UOB .GE. 0.0) GO TO 4
NZIG = 1
KALC(1)=1
GO TO 6
4 CONTINUE
6 DELX = X(NX)-X(NX-1)
DELZ = Z(NZ)-Z(NZ-1)
ZB = 0.5*(Z(NZ)+Z(NZ-1))
CEL = ZB/DELZ
BFLM = ZB/(DELX/UD)
CEL2 = 0.5*CEL
CEL4 = 0.25*CEL
P1H = 0.5*P1(NZ)
P2H = 0.5*P2(NZ)
P1H = 0.5*(P1(NZ)+P1(NZ-1))
P2H = 0.5*(P2(NZ)+P2(NZ-1))
P19H = 0.5*P19
P3B = 0.25*(P3(NZ,NZ)+P3(NX-1,NZ)+P3(NX,NZ-1)+P3(NX-1,NZ-1))
DUSOZ = 0.25*(U(NP,NZ,2)**2-U(NP,NZ-1,2)**2
1 +U(NP,NZ,1)**2-U(NP,NZ-1,1)**2)/DELZ
DUX = 0.5*(U(NP,NZ,2)-U(NP,NZ,1)+
1 U(NP,NZ-1,2)-U(NP,NZ-1,1))/DELX
P3B = ZB*(DUSOZ+DUX/UOB)+P2B*(U(NP,NZ,2)**2+U(NP,NZ,1)**2
1 +U(NP,NZ-1,2)**2+U(NP,NZ-1,1)**2)*0.25
IF(NZ .EQ. NZT) GO TO 10
NZP1 = NZ+1
E1 = Z(NZ)/( (Z(NZP1)-Z(NZ))/(Z(NZP1)-Z(NZ-1))/DELZ )
E1H = 0.5*E1
E2 = Z(NZ)/DELX/UD(NZ)
E3 = Z(NZ)*DELZ/(Z(NZP1)-Z(NZ-1))/(Z(NZ)-Z(NZP1))
P3BZ = 0.5*(P3(NX,NZ)+P3(NX-1,NZ) )
DUDX = (U(NP,NZ,2)-U(NP,NZ,1))/DELX
DUSOZ = 0.5*(U(NP,NZ,2)**2-U(NP,NZ-1,2)**2)*E1
1 +(U(NP,NZ,1)**2-U(NP,NZP1,1)**2)*E3)
P3BZ = Z(NZ)*(DUSOZ/Z(NZ)+DUDX/UD(NZ))+
1 P2(NZ)*(U(NP,NZ,2)**2+U(NP,NZ,1)**2)*0.5
10 CONTINUE
DO 50 J=2,NP

```

```

FB = 0.5*(F(J,NZ,2)+F(J-1,NZ,2))
FVB = 0.5*(F(J,NZ,2)+V(J,NZ,2)+F(J-1,NZ,2)*V(J-1,NZ,2))
FR = 0.5*(U(J,NZ,2)+U(J-1,NZ,2))
US1 = 0.5*(U(J,NZ,2)+U(J-1,NZ,2))
US2 = 0.5*(U(J,NZ-1,2)+U(J-1,NZ-1,2))
UB4 = 0.5*(U(J,NZ,1)+U(J-1,NZ,1))
VB = 0.5*(V(J,NZ,2)+V(J-1,NZ,2))
DERBV = (R(J,NZ,2)+V(J,NZ,2)-B(J-1,NZ,2)+V(J-1,NZ,2))/DETA(J-1)
FB4 = 0.5*(F(J,NZ,1)+F(J-1,NZ,1))
USP4 = 0.5*(U(J,NZ,1)+U(J-1,NZ,1))
IF(NZ .EQ. 1) GO TO 20
IF ( NZIG .EQ. 1 ) GO TO 30
20 FVJ2 = F(J,NZ,1)+V(J,NZ,1)+F(J,NZ-1,1)+V(J,NZ-1,1)+
I F(J,NZ-1,2)+V(J,NZ-1,2)
FVJ1 = F(J-1,NZ,1)+V(J-1,NZ,1)+F(J-1,NZ-1,1)+V(J-1,NZ-1,1)+
I F(J-1,NZ-1,2)+V(J-1,NZ-1,2)
FR1 = 0.25*(F(J,NZ-1,1)+F(J-1,NZ-1,1)+F(J,NZ-1,2)+F(J-1,NZ-1,2))
FVR234 = 0.5*(FVJ2+FVJ1)
USR2 = 0.5*(U(J,NZ-1,2)+U(J-1,NZ-1,2))
USR1 = 0.5*(U(J,NZ-1,1)+U(J-1,NZ-1,1))
UR1 = 0.5*(USR2+USR1)
URK1 = 0.25*(U(J,NZ-1,1)+U(J-1,NZ-1,1)+U(J,NZ,1)+U(J-1,NZ,1))
USJ2 = U(J,NZ,1)+U(J,NZ-1,1)+U(J,NZ-1,2)
USJ1 = U(J-1,NZ,1)+U(J-1,NZ-1,1)+U(J-1,NZ-1,2)
USR234 = 0.5*(USJ2+USJ1)
VJ1 = V(J-1,NZ,1)+V(J-1,NZ-1,1)+V(J-1,NZ-1,2)
VJ2 = V(J,NZ,1)+V(J,NZ-1,1)+V(J,NZ-1,2)
VR234 = 0.5*(VJ2+VJ1)
RVJ1 = R(J-1,NZ,1)+V(J-1,NZ,1)+B(J-1,NZ-1,1)+V(J-1,NZ-1,1)+
I R(J-1,NZ-1,2)+V(J-1,NZ-1,2)
RVJ2 = R(J,NZ,1)+V(J,NZ,1)+B(J,NZ-1,1)+V(J,NZ-1,1)+
I R(J,NZ-1,2)+V(J,NZ-1,2)

CM1 = USR4-2.0*USR1
CM2 = UB2-2.0*URK1
CM4 = FR4-2.0*FR1
CM8 = (RVJ2-RVJ1)/DETA(J-1)
CM33 = CM1+CEL-0.5*CEL*VR234+CM4+2.0*BFL*CM7-CM8-PIB*FVR234
I +0.25*USP234-4.0*P39

COEFFICIENTS FOR THE REGULAR FCX.
S1(J) = B(J,NZ,2)/DETA(J-1)+PIB*F(J,NZ,2)+CEL4*(FB+CM4)
S2(J) = -R(J-1,NZ,2)/DETA(J-1)+PIB*F(J-1,NZ,2)+CEL4*(FB+CM4)
S3(J) = PIB*V(J,NZ,2)+CEL4*(VB+VR234)
S4(J) = PIB*V(J-1,NZ,2)+CEL4*(VB+VR234)
S5(J) = -(P2R+CEL)*U(J,NZ,2)-BFLM
S6(J) = -(P2D+CEL)*U(J-1,NZ,2)-BFLM
R2(J) = CM33-(DERBV+PIB*FVJ)-(P2R+CEL)*USB+CEL2*(VB+FB+VR234+FB
I +CM4+VR)-BFL4*2.0*LR)
KALF(J)=0
GO TO 40

30 FB2 = 0.5*(F(J,NZ-1,2)+F(J-1,NZ-1,2))
VB2 = 0.5*(V(J,NZ-1,2)+V(J-1,NZ-1,2))
FVB4 = 0.5*(F(J,NZ,1)+V(J,NZ,1)+F(J-1,NZ,1)+V(J-1,NZ,1))
UR6 = 0.5*(U(J,NZP1,1)+U(J-1,NZP1,1))
FR6 = 0.5*(F(J,NZP1,1)+F(J-1,NZP1,1))
UR66 = 0.25*(U(J,NZ,1)+U(J-1,NZ,1)+U(J,NZP1,1)+U(J-1,NZP1,1))

```

```

VRA6 = 0.23*(V1J,NZ,1)+V1J-1,NZ,1+V1J,NZP1,1+V1J-1,NZP1,1
DETV4 = (B(J,N7,1)+V1J,NZ,1-B(J-1,NZ,1)+V1J-1,NZ,1)/DETA(J-1)
C1 = F1H*(V3+V32-UR2**2)+E2*(U34-U31)*UR4-V34*(F34-F31)
C2 = DETV4*(F1H)*V34-P2*(NZ)*UR4+2.0*F32
C3 = -C2+2.0*E2-2.0*E2*UR4

```

COEFFICIENTS FOR THE ITU-200 RCX.

```

S1(J) = B(J,NZ,2)/DETA(J-1)+F1H*(J,NZ,2)+F1H*(F3-F32)
S2(J) = -B(J-1,NZ,2)/DETA(J-1)+F1H*(J-1,NZ,2)+F1H*(F3-F32)
S3(J) = F1H*(V1J,NZ,2)+F1H*(V3+V32)
S4(J) = F1H*(V1J-1,NZ,2)+F1H*(V3+V32)
S5(J) = -P2*(NZ)*U(J,N7,2)-E2-F1*U(J,NZ,2)
S6(J) = -P2*(NZ)*U(J-1,NZ,2)-E2-F1*U(J-1,NZ,2)
P2(J) = 3-(DEFBV+P1(N7)+FVA-P2(NZ)+USB-2.0*E2*UB-E1*(UB**2
-VR*FB-VR2*FB+FR2*VB))

```

```

1 KALC(J)=1
40 R1(J) = F(J-1,NZ,2)-F(J,NZ,2)+DETA(J-1)*UR
R3(J-1)=U(J-1,NZ,2)-U(J,NZ,2)+DETA(J-1)*VB
50 CONTINUE
IF (IT .EQ. 1) NZIGS = NZIG
R3(ND) = 0.0
C1(1) = 0.0
P2(1) = 0.0
RETURN
END

```

```

SUPPORTING RDAY
COMMON/ALCO/ NNT,NVT,NZ,NI,NA,NP,ITM,N,IEDY,NPT,IXI,ITURB,ETA,
1 NPT,ETA,ETA(10),ETA(10)
COMMON/ALCO/ X(10),Z(10),UC(10),V(10),PI(10),P(10),P(10),P(10),P(10),
1 UC(10),PI
COMMON/ALCO/ DELV(10),F(10),G(10),U(10),V(10),G(10),
1 G(10),G(10)
COMMON/ALCO/ AL,CF,RYH
DIMENSION EDV(10)
DIMENSION TO(10)

```

```

-----
GAMTR = 1.0
IF ( ITURB .NE. 0 ) GO TO 12
UC1 = 0.0
UC1 = 1.0/UF(NX,NTR-1)
DO 10 I=NTR,NZ
UC2 = 1.0/UE(NX,I)
UCI = UC1+(UC1+UC2)*0.5*(Z(I)-Z(I-1))
10 UC1 = UC2
GG = 8.35E-04*UE(NX,NZ)**3 / (UE(NX,NTR-1)*Z(NTR-1))**1.34
EXPT = GC*PI**0.66*(Z(NZ)-Z(NTR-1))*UCI
IF ( EXPT .LE. 10.0 ) GAMTR = 1.0 - EXPT-EXPT

12 SUM1 = 0.0
F1 = U(1,NZ,2)/U(NP,NZ,2)*(1.0-U(1,NZ,2)/U(NP,NZ,2))
DO 13 J=2,NP
F2 = U(J,NZ,2)/U(NP,NZ,2)*(1.0-U(J,NZ,2)/U(NP,NZ,2))
SUM1 = SUM1+(F1+F2)**4(1)
13 F1 = F2
THETA = SQRT(Z(NZ)/PI*UC(NZ,2))*SUM1
ET = UE(NX,NZ)*THETA**2
IF ( ET .LE. 425.0 ) GO TO 14
IF ( ET .GT. 6000.0 ) GO TO 15
XPI = ET/425.0-1.0
PI = 0.55*(1.0-EXP(-0.269*SQRT(XPI)-2.98*XPI))
GO TO 20
14 PI = 0.0
GO TO 20
15 PI = 0.55

20 IFLG = 0
RZ2 = SORT (U(NZ,2)*Z(NZ)*PI)
RZ4 = SORT (RZ2)
VMAX = V(1,NZ,2)
DO 30 J = 2,NP
IF(ABS(V(J,NZ,2)).GT.ABS(VMAX)) VMAX= V(J,NZ,2)
30 CONTINUE
EDVC = 0.0168*(1.55*(1.0+PI))**RZ2*(U(NP,NZ,2)*ETA(NP)-F(NP,NZ,2))
1+GAMTR
J = 1
80 IF(IFLG .EQ. 1) GO TO 90
PPLUS = (P2(NZ)/RZ4)*(UE(NX,NZ)/UC(NZ))**2*(1.0/ABS(VMAX))**1.5)
YGA = RZ4*ETA(J)*SQRT(ABS(VMAX)*(1.0-11.8*PPLUS))/26.0
EL = 1.0
IF(YGA .LT. 4.0) EL = (1.0-EXP(-YGA))**2
EDVI = 0.16**RZ2*ABS(V(J,NZ,2))*EL*GAMTR*ETA(J)**2
IF(EDVI .LT. EDVC) GO TO 100

```

```

IFLG = 1
90 EDV(J) = EDVO
GO TO 110
100 EDV(J) = EDVI
IF(EDV(J).GT.EDV(J-1)) GO TO 110
EDV(J) = EDV(J-1) + (EDV(J-1) - EDV(J-2)) * W
IF(EDV(J).LT.EDVO) GO TO 110
EDV(J) = EDVO
IFLG = 1
110 R(J,NZ,2) = 1.0 + EDV(J)
J = J + 1
IF(J.LE.NP) GO TO 20
NDM1 = NP - 1
TR(1) = R(1,NZ,2)
DO 150 J = 2, NP
TR(J) = (R(J-1,NZ,2) + R(J,NZ,2)) * 0.5
150 CONTINUE
TR(NP) = TR(NDM1)
DO 170 J = 2, NDM1
R(J,NZ,2) = (TR(J) + TR(J+1)) * 0.5
170 CONTINUE
R(NP,NZ,2) = R(NDM1,NZ,2)
RETURN
END

```

```

SUBROUTINE QMIF
COMMON/BLCK/ NKT,KEY,IK,NI,ND,NTR,ITMAX,ISCV,SNP,ILIC,ITUPR,ITM,
1 VGP,AFIC(1),GVA(101),DETA(101)
-----
IF(VGP-1.0) .LT. 0.001 GO TO 10
ND = ALLOC(101*NDTR/ITM)*VGP-1.0/AFIC(1)/ALLEG(1) + 1.0001
DETA(1) = FTOP*(VGP-1.0)/VTRAC(1)*1-1.01
GO TO 20
10 ND = FTRB/DETA(1) + 1.0001
20 IF(ND .LE. 101) GO TO 30
WRITE(6, 50)
STOP
30 DTA(1) = 0.0
DO 40 J=2,101
DTA(J) = VGP*DTA(J-1)
A(J) = 0.5*DTA(J-1)
40 DTA(J) = DTA(J-1)+DTA(J-1)
RETURN
C -----
50 FORMAT(1H0, ' ND EXCEEDED 101 -- PROGRAM TERMINATED')
END

```





```

SUBROUTINE ICONZ
COMMON/BLCO/ NNT,NZ,NX,NZ,NP,NY,ITMAX,ISDY,NPT,IZIG,ITURB,ETA,
1 VSP,AV(101),ETA(101),DETA(101)
COMMON/BLC1/ X1(101),Z1(101),U(101),RZ1(101),P1(101),P2(101),P3(101,01),
1 UR(101,01)
COMMON/BLC2/ DELV1(101),F(101,01,2),U(101,01,2),V(101,01,2),
1 B1(101,01,2)
COMMON/BLCC/ S1(101),S2(101),S3(101),S4(101),S5(101),S6(101),
1 R1(101),R2(101),R3(101)

```

C - - - - -

```

BEL = 0.0
IF(NZ .GT. 1) BEL = 0.5*(Z(NZ)+Z(NZ-1))/(Z(NZ)-Z(NZ-1))
PIP = U(NZ)+BEL
P2P = V(NZ)+BEL
DO 30 J=2,NP

```

C DEFINITION OF AVERAGED QUANTITIES

```

FR = 0.5*(F(J,NZ,2)+F(J-1,NZ,2))
UR = 0.5*(U(J,NZ,2)+U(J-1,NZ,2))
VR = 0.5*(V(J,NZ,2)+V(J-1,NZ,2))
FVR = 0.5*(F(J,NZ,2)*V(J,NZ,2)+F(J-1,NZ,2)*V(J-1,NZ,2))
USR = 0.5*(U(J,NZ,2)**2+U(J-1,NZ,2)**2)
DERRV = (R(J,NZ,2)*V(J,NZ,2)-B(J-1,NZ,2)*V(J-1,NZ,2))/DETA(J-1)
IF(NZ .GT. 1) GO TO 10
CFB = 0.0
CUR = 0.0
CVB = 0.0
CRB = -P2(NZ)
GO TO 20

```

```

10 CFB = 0.5*(F(J,NZ-1,2)+F(J-1,NZ-1,2))
CUR = 0.5*(U(J,NZ-1,2)+U(J-1,NZ-1,2))
CVR = 0.5*(V(J,NZ-1,2)+V(J-1,NZ-1,2))
CFVB = 0.5*(F(J,NZ-1,2)*V(J,NZ-1,2)+F(J-1,NZ-1,2)*V(J-1,NZ-1,2))
CUSR = 0.5*(U(J,NZ-1,2)**2+U(J-1,NZ-1,2)**2)
CDRRV = (B(J,NZ-1,2)*V(J,NZ-1,2)-B(J-1,NZ-1,2)*V(J-1,NZ-1,2))/
1 DETA(J-1)
CLB = CDRRV+P1(NZ-1)+CFVR-P2(NZ-1)+CUSR+P3(NX,NZ-1)
CRB = -P3(NX,NZ)+BEL+(CFVB-CUSR)-CLB

```

C COEFFICIENTS OF THE DIFFERENCED MOMENTUM EQUATION

```

20 S1(J) = B(J,NZ,2)/DETA(J-1)+(PIP*F(J,NZ,2)-BEL*CFB)*0.5
S2(J) = -B(J-1,NZ,2)/DETA(J-1)+(PIP*F(J-1,NZ,2)-BEL*CFB)*0.5
S3(J) = 0.5*(PIP*V(J,NZ,2)+BEL*CVB)
S4(J) = 0.5*(PIP*V(J-1,NZ,2)+BEL*CVB)
S5(J) = -P2P*U(J,NZ,2)
S6(J) = -P2P*U(J-1,NZ,2)

```

C DEFINITIONS OF RJ

```

R1(J) = F(J-1,NZ,2)-F(J,NZ,2)+DETA(J-1)*UR
R3(J-1) = U(J-1,NZ,2)-U(J,NZ,2)+DETA(J-1)*VR
P2(J) = CRB-(DERRV+PIP*F(J,NZ,2)-P2P*USR-BEL*(CFVR-CVB+CFB))

```

```

30 CONTINUE
R1(1) = 0.0
R2(1) = 0.0
P3(NP) = 0.0
RETURN
END

```

```

SUBROUTINE INPUT
COMMON/BLCO/ NXY,NZY,NX,NZ,NA,NTR,ITMAX,IPDY,PWT,ITIC,ITUPR,ETAF,
VGP,AC(10),XTO,ITDY,CFPA(10)
COMMON/BLC1/ X(101),Z(101),NXT,NZT,DETA(1),VGP,CF,PTH,
VE(10),SL
COMMON/BLCP/ DELV(101),U(101,01,2),V(101,01,2),W(101,01,2),
S(101,01,2)
COMMON/BLCD/ RL,CP,PTH
COMMON/PRNT/ IPRINT
COMMON/SAVE/ ITIME,NXTD,NZTD,XC(101),ZC(101)
DIMENSION TITLE(20)

```

```

C-----
PI = 3.141593
NPT = 101
ITMAX = 10
ETAF = 0.0
ISD = 2
INTD = 2
BL = 1.0
BA = 2.4/(33.0*7.45)
IF(ITIME .EQ. 1) GO TO 60
NXT=NXTD
NZT=NZTD
DO 40 I=1,NXT
40 X(I)=XC(I)
DO 42 I=1,NZT
42 Z(I)=ZC(I)
GO TO 80
60 ITUPR = 0
READ (5, 270) TITLE
READ (5, 260) NXT,NZT,NTR,IPDY,RL,IPRNT,DETA(1),VGP,CF,PTH
IF ( NTR .EQ. 1 ) ITUPR = 1
READ (5, 290) (X(I), I=1,NXT)
READ (5, 290) (Z(I), I=1,NZT)
NXTD=NXT
NZTD=NZT
DO 70 I=1,NXT
70 X(I)=X(I)
DO 72 I=1,NZT
72 Z(I)=Z(I)
Z1 = Z(1)
DO 74 I=1,3
74 Z(I) = Z1-0.01*(3-I)
NXT=1
NZT=2
80 DO 100 I=1,NXT
100 X(I) = X(I) * 23.0
CONTINUE
IF( ITIME .EQ. 1 ) GO TO 120
WRITE(6, 330) TITLE
WRITE(6, 340) NXT,NZT,NTR,IPDY
WRITE(6, 342) RL, DETA(1), VGP, CF, PTH
C
120 DO 140 I = 1,NZT
140 U(1,I)=1.0
140 P(1,I)=0.0
C PRESSURE GRADIENT PARAMETER FOR STEADY STATE

```

```

PZ(1) = 0.0
PZ(1) = 0.5*(1.0+PZ(1))
140 UO(1) = 1.0
      IF( TIME .EQ. 1) RETURN
      SAMPLE TEST CASE 4
      DO 150 K = 1,NXT
      DO 150 I = 1,NZT
      FUNC = 1.0
      FC = 0.0
      FUNT = 1.0
      DT = 0.0
      IF(Z(1) .GE. 1.34) GO TO 143
      FUNC = SIN(PI/2.0*(Z(1)-1.24)/0.1)
      FC = PI/2.0/0.1*COS(PI/2.0*(Z(1)-1.24)/0.1)
143 IF(X(K) .GT. 1.98) GO TO 145
      FUNT = SIN(PI/2.0*(X(K)/1.98))
      DT = PI/1.98/2.0*COS(PI/2.0*(X(K)/1.98))
145 UE(K,I) = 1.0-BA*X(K)*(Z(1)-1.24)*FUNC*FUNT
      DUEFX = (-BA*X(K)*FUNC-BA*X(K)*(Z(1)-1.24)*DF1*FUNT
      DUEFY = (-BA*(Z(1)-1.24)*FUNCI*FUNT*DT*(-BA*(Z(1)-1.24)*X(K)*FUNCI
      P3(K,I) = 7(I)/UO(1)**2*(UE(K,I)+DUEFX+DUEFY)
150 CONTINUE
160 WRITE (6, 322) NXT
      WRITE (6, 323) ( X(I),I=1,NXT )
      WRITE (6, 324) NZT
      WRITE (6, 325) ( Z(I),I=1,NZT )

      RETURN
-----
260 FORMAT( 6F10.0 )
270 FORMAT(20A4)
290 FORMAT(8F10.0)
322 FORMAT (///1H0,2HTABLE OF INPUT X FROM 1 TO , I3 / )
324 FORMAT (1H0,2HTABLE OF INPUT Z FROM 1 TO , I3 /)
326 FORMAT (1H , 3X, 12F10.5 )
330 FORMAT(1H0,20A4)
340 FORMAT( ///1H0,12H** CASE DATA/1H0,3X,6HNXT =,I3,14X,6HNZT =,I3,
1 14X,6HNTR =,I3/ 4X,6HIBDY =,I3 ,14X,6HIZIG =,I3,14X,
2 6HITQZ =,I3)
342 FORMAT( 1H ,3X,6HRL =,E14.6,3X,6HDETA1=,E14.6,3X,6HVGDP =,E14.6/
1 4X,6HCF =,E14.6,3X,6HRTNET=,E14.6 )
350 FORMAT(1H0,3X,6HBB =,E14.6,3X,6HBA =,E14.6,3X,6HBL =,E14.6,
1 3X,6HZO =,E14.6/)
      END

```

SUBROUTINE TYP

```

COMMON/ALCO/ NKT,NET,PK,RZ,RP,RTD,ITMAX,IGDY,NET,IZIS,ITURB,EYAB,
1 WSP,AI(101),ETA(101),PETA(101)
COMMON/ALC1/ XI(101),ZI(101),UI(101),VI(101),PI(101),PDI(101,101),
1 UE(101,101)
COMMON/ALC2/ DELV(101),F(101,21,2),U(101,21,2),V(101,21,2),
1 G(101,21,2)
COMMON/ALCD/ RL,CP,RTMET1
COMMON/SAVP/ EYME,MAXTO,NETO,XC(101),ZC(101)
DIMENSION UUI(101),FF(101),GG(101),SHEAP(101)
DATA PY,PK,C/3.14159265,C.41,2.0/

```

```
IF ( ITURB .EQ. 1 ) GO TO 8
```

LAMINAR PROFILE

```

CALL GFID
N7 = 1
ETANPO = 0.25*ETA(NP)
ETAU15 = 1.5/ETA(NP)
DO 3 J=1,NP
ETAB = ETA(J)/ETA(NP)
ETAB2 = ETAB**2
F(J,NZ,2) = ETANPO*ETAB2*(3.0-0.5*ETAB2)
U(J,NZ,2) = 0.5*ETAB*(3.0-ETAB2)
V(J,NZ,2) = ETAU15*(1.0-ETAB2)
R(J,NZ,2) = 1.0
3 CONTINUE
RETURN

```

TURBULENT PROFILE

```

8 RZ(INZ) = UE(INX,NZ)*Z(INZ)*RL
SQRZ = SQRT(RZ(INZ))
CF02 = 0.5*CF
SOCFO2 = SQRT(CF02)
UTAU = SOCFO2
CRXCF2 = SQRZ*SOCFO2
SOCFO2K = SOCFO2/PK
YY = 0.1
AN = SOCFO2/PK
AA = AN*AN
CC1 = -1.9123016*AA+11./12.*AN
CF2 = AN-2.05603*AA
CC3 = -1.5*AA
CC4 = 1.0/AN-C-ALOG(SOCFO2*RTMET1)
AA1 = (CC1+0.5*CC2*CF4+C.25*CC3*CC4)**2
AA2 = 0.5*(CC2+CC3*CC4)
AA3 = 0.25*CC3
10 YLOG = ALOG(YY)
FFC = YY-(AA1+AA2*YLOG+AA3*YLOG**2)
DF = 1.0-(AA2+2.0*AA3*YLOG)/YY
DYY = FFC/DF
YY = YY-DYY
IF(ABS(DYY) .LT. 0.00001) GO TO 20
IT = IT+1

```

```

YF17 17. 101 00 10 15
20 CONTINUE
PIE = 0.5155441100000000
SCF02K = 2.0/PIE
PIE = DELTA/PIE
IF (PIE .GT. 1.0) SCF02K = 2.0/PIE
SCF02K = 50.0/SCF02K
CALL G10
DO 30 J=1,NP
IF (TA(J) .GT. SCF02K) GO TO 40
30 CONTINUE
NREG1 = J
GO TO 50
40 NREG1 = J-1
NREG2 = J
CALCULATE EP, EPP PROFILES
50 77 = E*(NREG1)/ETA(NP)
R2 = FTA(NREG1)*SPXCF2
R1 = 1./PIE*(ALOG(SP2)*C+PIE*(1.-COS(PI*ZZ)) + ZZ*ZZ*(1.-ZZ))
CY = 0.09
IT = 0
60 FFC = R1*CY - ATAN(R2*CY)
DF = R1 - 2/(1.+(R2*CY)**2)
DCY = FFC/DF/CY
CY = CY*(1.-DCY)
IF (ABS(DCY) .LT. 0.001 .OR. IT .GT. 15) GO TO 70
IT = IT+1
GO TO 60
70 UTM = CY*SCXCF2
VTM = SCF02K*SCXCF2
DO 80 J=1,NREG1
VIJ,NZ,2) = SCF02K*(ATAN(UTM/ETA(J))/CY)
80 VIJ,NZ,2) = VTM/(1.0+(UTM/ETA(J))**2)
IF (NREG1 .EQ. NP) GO TO 100
ZZ = E*(NREG1)/ETA(NP)
C = U(NREG1,NZ,2)/SCF02K - (ALOG(SP2)*ETA(NREG1) + PIE*
(1.-COS(PI*ZZ)) + ZZ*ZZ*(1.-ZZ))
VJ = PIE*PI/ETA(NP)
DO 90 J=NREG2,NP
77 = E*(J)/ETA(NP)
COSANG = COS(PI*ZZ)
SINANG = SQRT(1.-COSANG**2)
VIJ,NZ,2) = SCF02K*(ALOG(SCXCF2*ETA(J)) + C + PIE*(1.-COSANG) + ZZ*ZZ*
(1.0-ZZ))
90 VIJ,NZ,2) = SCF02K*(1./ETA(J) + VJ*SINANG + ZZ/ETA(NP)*(2.-3.*ZZ))
CALCULATE F PROFILE
100 FDEN = 2.*CY**2*SCXCF2
E(1,NZ,2) = 0.0
DO 110 J=2,NREG1
110 F(J,NZ,2) = SCF02K*(ETA(J)/CY*ATAN(UTM/ETA(J)) - 1.0/PIE*
ALOG(1.0+(UTM/ETA(J))**2))
IF (NREG1 .EQ. NP) GO TO 130
ETA1 = E*(NREG1)
FJ = PIE*ETA(NP)/PI
ZZ = FTA(NP)
FC = F(NREG1,NZ,2) - SCF02K*(ETA1*(ALOG(SCXCF2*ETA1) - 1.0 + C + PIE) - FJ*
SIN(PI*ZZ) + FTA1*ZZ*ZZ*(1./3.-ZZ/4.))
1

```

```

09 120 J=NRG2,MP
STAJ = E751J)
Z2 = E75J/ETA(MV)
120 FIG.MZ,21=C+ECFQNG (ETA J=TALES (SHCFZ=PTAJ)-1.0+C+PIE)-SJM INPI
1
      QZ1=ETAJ+E212=11./3.-22/4.)
130 DO 140 J=1,MP
140 U1J.MZ,21 = U1J.MZ,21/UTMP.MZ,21
VMP.MZ,21 = 0.0010
CALL EDDY
RETURN

```

```

-----
150 FORMATTING: AMPLE=.E14.6,3X,THROFLTA=.E14.6,3X,SHETA=.E14.6,3X,
1      SHCF=.E14.6,3X,SHRTHETA=.E14.6)
END

```

SUBROUTINE OUTPUT

```

COMMON/ALCO/ NNT,NIT,NK,NZ,NP,NTO,NTR,NST,NST,IZIG,ITUP,ETA,
1 VSP,A(101),B(101),Z(101)
COMMON/ALC1/ X(101),Y(101),U(101),A(101),P(101),P2(101),P3(101,01),
1 U(101,01)
COMMON/ALC2/ DELV(101),F(101,02,01),D(101,01,21),V(101,01,21),
1 B(101,01,21)
COMMON/XCYS/ KALC(101)
COMMON/ALCO/ RL,CP,RTM
COMMON/PRINT/ IPRNT
COMMON/INTP/ N,IFX(01)
COMMON/SAVE/ ITIME,NXTO,NZTC,KO(101),Z(101),P(101),IS(101),RTMFA
DIMENSION RTMFA(101),RTM(101),NPK(101)
DIMENSION F(101,21),U(101,21),V(101,21),D(101,21)
DIMENSION EN(101),UN(101),VN(101),DN(101)
-----
NZ2 = NZT-2
IFXTRP = 0
IEXINZ1 = 0
IF (ITIME .LT. 3) GO TO 5
IF (IPRNT .NE. 0) GO TO 5
WRITE(6, 220)
NDM1 = NP-1
J = 1
WRITE(6, 230) J,ETA(J),F(J,NZ,21),U(J,NP,21),V(J,NZ,21),B(J,NZ,21),
1 KALC(J)
NDM2 = ND-2
WRITE(6, 230) J,ETA(J),F(J,NZ,21),U(J,NZ,21),V(J,NZ,21),B(J,NP,21),
1 KALC(J),J=NDM2,ND)
* CONTINUE
NPK(NZ)=ND
IF (NZ .EQ. 1 .AND. NTR .NE. 1) GO TO 95
C1 = SQRT( Z(NZ) / (RL*UC(NZ)) )
DELSTR = C1*(ETA(NP)-F(NP,NZ,21)/U(NP,NZ,21)
CF = 2.0*UV(1,NZ,21)/(SQRT(FL*UC(NZ)*Z(NZ)))+(UE(AX,NZ)/UC(NZ))**2
CFR(NZ) = CF
DELST = UC(NX,NZ)*DELSTR*RL
SUM1 = 0.0
F1 = U(1,NZ,21)/U(NP,NZ,21)*(1.0-U(1,NZ,21)/U(NP,NZ,21))
DO 10 J=2,ND
F2 = U(J,NZ,21)/U(NP,NZ,21)*(1.0-U(J,NZ,21)/U(NP,NZ,21))
SUM1 = SUM1+(F1+F2)*A(J)
10 F1 = F2
THETA = C1*SUM1
RTMFA(NZ) = UC(NX,NZ)*THETA*RL
RTM = RTMFA(NZ)
H = DELSTR/THETA
HS(NZ) = H
IF (IFXTRP .GT. 0 .AND. NZ .EQ. NZT) GO TO 190
90 CALL GROWTH(1)
IF (ITIME .LT. 3) GO TO 100
IF (IPRNT .GT. 1) GO TO 100
WRITE ( 6, 242 ) DELSTR,THETA,CF,DELST,RTMFA(NZ),H,
1 UC(NX,NZ)
100 IF ( NZ .EQ. NZT ) GO TO 140
IF (ITIME .LT. 3) GO TO 140
IF ( NZT .LT. NZ2 ) GO TO 140

```

```

N      = N+1
DO 120 J = 1,NPT
  F(IJ,NZ) = F(IJ,NZ,2) / F(IJ,NZ)
  U(IJ,NZ) = U(IJ,NZ,2) / F(IJ,NZ)
  V(IJ,NZ) = V(IJ,NZ,2) / F(IJ,NZ)
120  R(IJ,NZ) = R(IJ,NZ,2)
  IF ( NZ .LT. (N2T-1) ) GO TO 140
  DO 124 J = 1,NPT
  IF ( U(IJ,NZ,2) .LT. 0. ) GO TO 130
124  CONTINUE
  GO TO 140
130  DZ1 = Z(N2T-1) - Z(N2T-2)
  DZ2 = Z(N2T) - Z(N2T-2)
  DO 134 J = 1,NPT
  DF = F(IJ,2) - F(IJ,1)
  DU = U(IJ,2) - U(IJ,1)
  DV = V(IJ,2) - V(IJ,1)
  DR = R(IJ,2) - R(IJ,1)
  FN(IJ) = F(IJ,1) + DZ2 * DF / DZ1
  UN(IJ) = U(IJ,1) + DZ2 * DU / DZ1
  VN(IJ) = V(IJ,1) + DZ2 * DV / DZ1
  RN(IJ) = R(IJ,1) + DZ2 * DR / DZ1
134  CONTINUE
  IFXTRP = 1
  IFX(NZ+1) = 1
140  NZ      = NZ+1
  IF ( IFXTRP .LE. 0 ) GO TO 143
  DO 142 J = 1,NPT
  KALC(J) = 2
  F(IJ,NZ,2) = F(IJ) * UE(INX,NZ)
  U(IJ,NZ,2) = U(IJ) * UE(INX,NZ)
  V(IJ,NZ,2) = V(IJ) * UE(INX,NZ)
142  R(IJ,NZ,2) = R(IJ)
  IF ( IDANT .NE. 0 ) GO TO 5
  WRITE(6, 220)
  NPM1 = NP - 1
  WRITE(6, 230) F(IJ), F(IJ,NZ,2), U(IJ,NZ,2), V(IJ,NZ,2), R(IJ,NZ,2),
  I      KALC(J), J=1, NPM1, 3)
  J = NP
  WRITE(6, 230) J, ETA(J), F(IJ,NZ,2), U(IJ,NZ,2), V(IJ,NZ,2), R(IJ,NZ,2),
  I      KALC(J)
  GO TO 5
148  IF ( INX .GT. 1 ) GO TO 160
C  INITIAL GUESS FOR NEXT STATION
  DO 150 J = 1,NPT
  F(IJ,NZ,2) = F(IJ,NZ-1,2)
  U(IJ,NZ,2) = U(IJ,NZ-1,2)
  V(IJ,NZ,2) = V(IJ,NZ-1,2)
150  R(IJ,NZ,2) = R(IJ,NZ-1,2)
  IF ( NX .EQ. 1 ) RETURN
C
C
C  DETERMINE NP FOR VIG7AG SCHEME
  IF ( NZ .EQ. N2T ) GO TO 170
  IF ( NX .EQ. 1 ) GO TO 170
  IF ( NP .LT. NPK(NZ+1) ) NP = NPK(NZ+1)
  RETURN

```



```

160 NP = NPX(NZ)
IF INZ .EQ. 1) RETURN
IF INP .LT. NPX(NZ-1) NP=NPX(NZ-1)
IF (IXIC .EQ. 0) GO TO 170
IF INP .LT. NPX(NZ-1) NP=NPX(NZ-1)
170 UR = UFINX,NZ) / UFINX,NZ-1)
DO 180 J = 1,NP
  F(J,NZ,2) = F(J,NZ-1,2) * UR
  U(J,NZ,2) = U(J,NZ-1,2) * UR
  V(J,NZ,2) = V(J,NZ-1,2) * UR
  B(J,NZ,2) = B(J,NZ-1,2)
180 CONTINUE
RETURN
190 IF INX .EQ. NXT .AND. I*TIME .EQ. 1) RETURN
IF ( IFFM .NE. 2 ) GO TO 194
I XI = X(NX) / 33.0
WRITE ( 6, 250 ) NX, X(NX), XI
DO 193 K = 1, NZ
  WRITE ( 6, 260 ) K, Z(K), V(1,K,2), CFS(K), HS(K), RTHETA(K),
  UF(NX,K), IFX(K)
I
193 CONTINUE
194 IF INX .EQ. NXT .AND. I*TIME .EQ. 3) STOP
NX = NX+1
V = 0
NZ = 1
C SHIFT.
DO 210 K=1,NZT
  DO 200 J=1,NPT
    F(J,K,1) = F(J,K,2)
    U(J,K,1) = U(J,K,2)
    V(J,K,1) = V(J,K,2)
    B(J,K,1) = B(J,K,2)
200 B(J,K,1) = B(J,K,2)
210 CONTINUE
GO TO 160
-----
220 FORMAT (1H0, 2X, 1HJ, 4X, 3HETA, 10X, 1HF, 12X, 1HU, 12X, 1HV, 12X, 1H0, 8X,
1 4HKALC)
230 FORMAT (1H , 13, F10.5, 4F14.6, 1C)
24? FORMAT (1H0, 7HDELSTR =, F14.6, 3X, 7HTHETA =, F14.6, 3X, 7HCF =, F14.6 /
1 1H , 7HDELSTR =, F14.6, 3X, 7HTHETA =, F14.6
2 1H , 7HH =, F14.6, 3X, 7HCF =, F14.6 / )
250 FORMAT (1H0, 5X, 5HNX = .13, 5X, 5HX(NX) = .F10.5, 5X, 5HXI = .F10.5 /
11H0, 5X, 3H J , 5X, 5HZ (J), 5X, 5HV (BALL), 10X, 2HCF,
2 12X, 1HH, 12X, 6HRTNETHA, 12X, 2HCF, 8X, 6HENTRAP / )
260 FORMAT (1H , 5X, 13, 2X, F11.6, 5(2X, E13.6), 5X, 11)
END

```

```

SUBROUTINE SMC07N
COMMON/PLCO/ NNT,NZ,NP,NTR,ITMAX,IBDP,NPT,ZIG,IBND,PTAE,
1 VSP,B(101),F(101,01,2),U(101,01,2)
COMMON/PLC1/ U(101,01),V(101,01,2),US(101),FS(101),FV(101,01,2),VS(101,01,2),
1 UE(101,01)
COMMON/PLCP/ DEL,V(101),F(101,01,2),U(101,01,2),V(101,01,2),
1 R(101,01,2)
DIMENSION FS(101),US(101),VS(101),BS(101)

```

```

C-----
NPM1 = NP-1
NPM2 = NP-2
JMAX = 1
VMAX = V(1,NZ,2)
DO 10 J = 2, NP
IF ( V(J,NZ,2) .LT. VMAX ) GO TO 10
VMAX = V(J,NZ,2)
JMAX = J
10 CONTINUE
DUJ1 = U(JMAX+1,NZ,2)-U(JMAX,NZ,2)
DVJ1 = V(JMAX+1,NZ,2)-V(JMAX,NZ,2)
JS = JMAX+2
DO 20 J=JS, NP
JJ = J
DUJ2 = U(J,NZ,2)-U(J-1,NZ,2)
DVJ2 = V(J,NZ,2)-V(J-1,NZ,2)
UJPROD = UJ2*DUJ1
VJPROD = VJ2*DVJ1
IF ( UJPROD .LT. 0.0 .OR. VJPROD .LT. 0.0 ) GO TO 30
DUJ1 = DUJ2
DVJ1 = DVJ2
20 CONTINUE
30 IF ( JJ .EQ. NP ) RETURN
DO 40 J = JJ, NP
FS(J) = 0.5*(F(J-1,NZ,2)+F(J,NZ,2))
US(J) = 0.5*(U(J-1,NZ,2)+U(J,NZ,2))
VS(J) = 0.5*(V(J-1,NZ,2)+V(J,NZ,2))
R(J) = 0.5*(R(J-1,NZ,2)+R(J,NZ,2))
40 CONTINUE
DO 50 J= JJ,NPM1
F(J,NZ,2)=0.5*(FS(J)+FS(J+1))
U(J,NZ,2)=0.5*(US(J)+US(J+1))
V(J,NZ,2)=0.5*(VS(J)+VS(J+1))
B(J,NZ,2)=0.5*(BS(J)+BS(J+1))
50 CONTINUE
VNP = -V(NP-1,NZ,2)+(U(NP,NZ,2)-U(NPM2,NZ,2))/AINP)
IF (ABS(VNP) .LT. ABS(V(NP,NZ,2))) VNP,NZ,2) = VNP
RETURN
END

```



```

SUBROUTINE SOLV3111)
COMMON/PLCP/ NRT,REV,RR,RI,RP,RTG,ITMAX,ISDY,MPY,RTIG,ITUR,ETAF,
1 VCP,A11(1),A12(1),A13(1),A21(1),A22(1),
COMMON/PLC1/ X1(1),Z1(1),UC1(1),A21(1),P1(1),P2(1),P3(1),P4(1),
2 X2(1),X3(1)
COMMON/BLCC/ S1(1),S2(1),S3(1),S4(1),S5(1),S6(1),
1 R1(1),R2(1),R3(1)
COMMON/PLCP/ DELV(1),F1(1),G1(1),G2(1),G3(1),G4(1),G5(1),
1 F1(1),G1(1)
COMMON/PONT/ YPNT
DIMENSION A11(1),A12(1),A13(1),A21(1),A22(1),A23(1),
1 G11(1),G12(1),G13(1),G21(1),G22(1),G23(1),
2 W1(1),W2(1),W3(1),DELV(1),DELU(1)

```

```

RELAX = 1.0
IF ( IT .GT. 4 ) RELAX = 0.50
W1(1) = P1(1)
W2(1) = R2(1)
W3(1) = P3(1)
A11(1) = 1.0
A12(1) = 0.0
A13(1) = 0.0
A21(1) = 0.0
A22(1) = 1.0
A23(1) = 0.0
G11(1) = -1.0
G12(1) = 0.5*P2(1)
G13(1) = 0.0
G21(1) = S4(1)
G22(1) = 2.0*S2(1)/P2(1)
G23(1) = G22(1)+S6(1)
NY = 20
J = 2, NP
IF ( J .EQ. 2 ) GO TO 10
DEN = (A12(J)-1)*A21(J)-1-A23(J)-1+A11(J)-1-A13(J)
1 G11(J) = (A12(J)-1)*A21(J)-1-A22(J)-1+A11(J)-1)
G12(J) = (1.0+G11(J)*A11(J)-1)/A21(J)-1
G13(J) = (G11(J)*A13(J)-1+G12(J)*A23(J)-1)/A11(J)
G21(J) = (S2(J)*A21(J)-1-S4(J)*A23(J)-1+A(J)*(S4(J)*
1 A22(J)-1-S6(J)*A21(J)-1))/DEN
G22(J) = (S4(J)-G21(J)*A11(J)-1)/A21(J)-1
G23(J) = (G21(J)*A12(J)-1+G22(J)*A22(J)-1-S6(J))
10 A11(J) = 1.0
A12(J) = A11(J)-G13(J)
A13(J) = A11(J)*G13(J)
A21(J) = S2(J)
A22(J) = S5(J)-G23(J)
A23(J) = S1(J)+A11(J)*G23(J)
W1(J) = P1(J)-G11(J)*W1(J-1)-G12(J)*W2(J-1)-G13(J)*W3(J-1)
W2(J) = R2(J)-G21(J)*W1(J-1)-G22(J)*W2(J-1)-G23(J)*W3(J-1)
W3(J) = P3(J)
20 CONTINUE
DELU(NP) = W3(NP)
F1 = W1(NP)-A12(NP)*DELU(NP)
F2 = W2(NP)-A22(NP)*DELU(NP)
DELV(NP) = (F2*A11(NP)-F1*A21(NP))/(A23(NP)*A11(NP)-A13(NP)+
1 A21(NP))

```



1. Report No. NACA TN-21259		2. Government Accession No. AD-807018		3. Distribution Statement	
6. COMPUTATION OF UNSTEADY TURBULENT BOUNDARY LAYERS WITH FLOW REVERSAL AND EVALUATION OF TWO SEPARATE		7. AUTHOR(S)		8. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)	
10. Tuncer/Cebeci Lawrence W./Carr		14. NACA-A-8678		9. PERFORMING ORGANIZATION REPORT NUMBER	
11. Contract or Grant No.		12. Sponsoring Agency Name and Address		13. Technical Memorandum	
Ames Research Center, NASA, and AVRADCOM Research and Technology Laboratories, Moffett Field, California 94035		National Aeronautics and Space Administration, Washington, D. C. 20546 and U. S. Army Aviation Research and Development Command, St. Louis, Missouri 63156		14. Sponsoring Agency Name	
15. Supplementary Notes		16. Abstract		17. Key Words (Keywords by Author)	
(18) NASA, USAAVRADCOM		(19) TM-81259, TR-81-A-5		Unsteady boundary layer Boundary layer computation Turbulent boundary layer	
Recently a new procedure, which solves the governing boundary-layer equations with Keller's box method, has been developed for calculating unsteady laminar flows with flow reversal. In this report, we extend this method to turbulent boundary layers with flow reversal. Using the algebraic eddy viscosity formulation of Cebeci and Smith, we consider several test cases to investigate the proposition that unsteady turbulent boundary layers also remain free of singularities. We also perform turbulent flow calculations by using the turbulence model of Bradshaw, Ferriss, and Atwell; we solve the governing equations for both models by using the same numerical scheme and compare the predictions with each other.		18. Distribution Statement		19. Security Class. (of this page)	
The study reveals that, as in laminar flows, the unsteady turbulent boundary layers are free from singularities, but there is a clear indication of rapid thickening of the boundary layer with increasing flow reversal. The study also reveals that the predictions of both turbulence models are the same for all practical purposes.		Unlimited		Unclassified	
STAR Category - 34		20. Security Class. (of this report)		21. No. of Pages	
Unclassified		Unclassified		61	
22. Price*		23. No. of Pages		24. Price*	
\$8.00		61		\$8.00	

\*For sale by the National Technical Information Service, Springfield, Virginia 22161

388090

492