

Final Report  
Propeller Propulsion Integration Phase 1

by

George Bennett  
Keith Koenig  
Stan Miley  
John McWhorter  
Graham Wells

Report Number MSSU-EIRS-ASE-81-4

Prepared by

Mississippi State University  
Engineering and Industrial Research Station  
Department of Aerospace Engineering  
Mississippi State, MS 39762

Under Grant No. 1402

for

National Aeronautics and Space Administration  
Langley Research Center  
Hampton, Virginia 23665

February 1981



(NASA-CR-163921) PROPELLER PROPULSION N81-16058  
INTEGRATION, PHASE 1 Final Report  
(Mississippi State Univ., Mississippi  
State.) 131 p HC A07/MF A01 CSCL 01C Unclas  
G3/07 41326

Final Report  
Propeller Propulsion Integration Phase I

by

George Bennett  
Keith Koenig  
Stan Miley  
John McWhorter  
Graham Wells

Report Number MSSU-EIRS-ASE-81-4

Prepared by

Mississippi State University  
Engineering and Industrial Research Station  
Department of Aerospace Engineering  
Mississippi State, MS 39762

Under Grant No. NSG 1402

for

National Aeronautics and Space Administration  
Langley Research Center  
Hampton, Virginia 23665

February 1981

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS . . . . .	ii
ABSTRACT. . . . .	iii
1. INTRODUCTION. . . . .	1
2. PROPELLER TEST STAND DEVELOPMENT	
2.1 Test Stand Design. . . . .	6
2.2 Structural Vibration Analysis Summary. . . . .	9
2.3 Wind Tunnel Installation . . . . .	12
2.4 Instrumentation Description. . . . .	12
3. ENTRY I WIND TUNNEL TEST	
3.1 Test Plan. . . . .	13
3.2 Results. . . . .	15
4. CONCLUSIONS . . . . .	17
REFERENCES. . . . .	18
APPENDIX A: A BIBLIOGRAPHY OF PROPELLER RESEARCH . . . . .	A1
APPENDIX B: STRUCTURAL INTEGRITY REPORT FOR PROPELLER TEST STAND . . . . .	B1

#### ACKNOWLEDGMENTS

The authors would like to thank the following people for their significant contribution to this study. Mr. Wayne Livingston and Mr. Pat Swan were responsible for the excellent quality of the steel structure. Mr. Jerry Benoist and Ms. Charm McIngvale were responsible for the aluminum structure. Ms. Rachel Koeniger contributed her typing and editorial skills.

The authors would like to thank the staff of the LaRC 30 x 60 foot full scale wind tunnel for their fine support during this grant. In particular we would like to thank Mr. Clyde McLemore and Mr. Dale Satran.

## ABSTRACT

This report summarizes the propeller propulsion integration (PPI) study conducted under this grant. The work is continuing under the Lewis Research Center direction. A bibliography has been compiled of all readily available sources of propeller analytical and experimental studies conducted during the 1930 through 1960 period. A propeller test stand was developed for the measurement of thrust and torque characteristics of full scale general aviation propellers and installed in the LaRC 30 x 60 foot full scale wind tunnel.

A tunnel entry was made during the January through February 1980 period. Several propellers were tested, but unforeseen difficulties with the shaft thrust-torque balance severely degraded the data quality.

## I. INTRODUCTION

The Propeller Propulsion Integration (PPI) research program, initiated in April 1977, under this Grant NSG 1402, was established to help the general aviation industry design propeller propulsion systems. There has always been concern about the lack of definitive experimental data and of useable analytical methods to define the interactions between propeller and the airframe.

The escalating cost of fuel has placed increased emphasis upon the fuel efficiency of general aviation aircraft. The increasing level of sophistication of the panel methods for the analysis of flow about wings and bodies has made possible the prospect of being able to model the complex propeller/airframe interaction problem. Thus, the PPI program was initiated to carry out a set of experiments which would establish a data base for the definition of interference effects and for the validation of analytical methods. After each wind tunnel experiment, comparisons are to be made between theory and experiment.

To carry out these objectives the PPI overall research program can be summarized in the following major steps.

1. Define state-of-the-art of General Aviation Propulsion System Design (Phase Zero).
2. Define General Aviation Isolated Propeller Characteristics (Phase I).
3. Define General Aviation Propeller/Nacelle Interference Characteristics (Phase II).

4. Define General Aviation Propeller/Nacelle/Wing/Fuselage Interference Characteristics (Phase III).
5. Develop Analytical Propulsion Integration Methods for General Aviation Aircraft Design (Phase I through Phase IV).

Phase Zero was a review of the state-of-the-art in terms of current design practice and a determination of industry design requirements and recommendations for program emphasis. A detailed account of the discussions with industry design teams is reported in Reference 1.

The industry state-of-the-art design process is best represented as table look-up methods. One or more catalogues, such as the Hamilton Standard "Red Book" or the "Gray Charts," which list isolated propeller performance characteristics in terms of geometric parameters, are used to select propeller candidates. Performance flight test measurements are then used to make the final choice. In most cases, little account is taken, either during the airframe design stage or during propeller selection, of the interference between propeller and airframe upon the predicted installed propulsive efficiencies. This is due to the absence of suitable design data and practical analytical tools.

A comprehensive review of the literature has been undertaken also as a part of Phase Zero and is included in this report as Appendix A. Over one thousand reports and papers have been identified which relate to propeller design or selection, but, few of these consider the mutual influence of propeller and airframe. None considered the geometry peculiar to contemporary flat engine designs with asymmetric blockage-area distribution around the propeller shaft. Some insight can, however, be gained by analysis of the available data. Figure 1, which was obtained by a plot

of Reference 2 data, shows clearly the influence of an afterbody on apparent propeller efficiency, which becomes greater than 1 with a blockage ratio,  $(a/D)$ , over 0.5. The net efficiency, which is directly proportional to the available thrust power decreased dramatically so that the net thrust available for propelling the airplane is greatly and adversely affected by a blunt afterbody even though apparent propeller efficiency is over 100%. Figure 2 shows data for a simple streamline afterbody shape and the effect is less pronounced. The influence of thrust line displacement and thrust line angle relative to a wing chord is shown in Figure 3. The data shows a maximum variance of 10 percentage points for a 15% displacement of the thrust line and  $5^\circ$  thrust line angle. Thus, the thrust line location and angle are also quite important in determining the net efficiency of the propulsion system. All of these effects upon propulsive efficiency need to be explored further through experiment and analysis.

The goal of the PPI research program is to develop such design data and analytical tools. This goal is to be attained through a combined program of wind tunnel investigations in the NASA Langley 30' x 60' Full Scale Wind Tunnel and the development of appropriate analytical design methods. Where possible, specific tests or analyses are to be performed to bring into use results generated from previous investigations during the 1930's and 1940's involving primarily radial engine configurations.

In the Phase I program, a Propeller Test Stand (PTS), for use in the full scale tunnel, was designed and fabricated. The test stand is shown in Figure 4 and the installation in the full scale tunnel is shown in Figure 5. The Propeller Test Stand is capable of testing full general



aviation propellers using a variable frequency electric drive. The propellers can be operated over a 10 degree angle of attack range. A thrust/torque balance is used to measure shaft thrust. The PTS is attached to the wind tunnel balance to measure total forces. The first tunnel entry was made during the period January through early March 1980. The goal of this entry was to develop the isolated propeller baseline data for future airframe interference tests. A family of 13 test propellers were selected and arrangements were made to acquire the propellers at no cost to the program. The propellers and first entry test plan are described in Reference 3. Comparisons were to be made between the measured data and a current analytical propeller model.

This report summarizes the first wind tunnel entry for Phase I of the PPI study. At this point the management of the PPI investigation was transferred to the Lewis Research Center under Grant NAG-3-56. The LeRC Grant was supposed to conduct Phase II of the PPI study, but due to unforeseen shaft balance problems, the isolated propeller tests will also be repeated using an abbreviated test program. Phase II, is designed to explore propeller/nacelle interference effects. The PTS developed during Phase I will be used for this experiment. Two nacelle shapes are to be considered; a single engine nacelle, Figure 6, and an axisymmetric body, Figure 7. The shaft thrust is to be measured along with body pressure distribution and wake surveys. A critical survey of analysis programs available for the analysis of propeller performance in a nonuniform flow field and of the interaction of a propeller slipstream upon an airframe will be made. Comparisons will be made between the analytical methods and data obtained from the PPI wind tunnel experiments and other sources.

Phase III, is the final experimental step in the development of a more complete understanding of the propeller/nacelle/wing/fuselage interference problem. It is contemplated that the PTS will be utilized as shown in Figures 8, 9, and 10, for this experiment. This test stand will be quite flexible and capable of a wide range of configurations.

Phase IV is contemplated as an attempt to optimize the propeller/airframe configuration for overall aircraft efficiency. In this case, the analytical methods will be used to define a configuration (Ref. 4), and the experiment conducted for verification.

This report describes the details of the propeller test stand and examines the data obtained in the first entry in the LaRc 30 x 60 foot full scale wind tunnel. The test stand is capable of a wide range of propeller experiments as outlined in the PPI overview. Further development of the prop shaft thrust-torque balance is required to full exploit the concept.

## 2. PROPELLER TEST STAND DEVELOPMENT

### 2.1 Test Stand Design

In Chapter I the three propeller test programs defined for the PPI investigation were described. A study was undertaken to determine the best configuration for a propeller test stand which would allow these three study segments to be conducted using a single drive motor support configuration. Other design considerations were.

1. Utilize two GFE 266 horsepower variable frequency electric motors connected in tandem as the propeller drive motors.
2. Propeller angle of attack range -10 to +20 degree.
3. Motor support structure must minimize interference with propeller flow field.
4. System must be capable of being mounted within a Piper Chieftain nacelle.
5. PTS must be mounted on the 30 x 60 foot wind tunnel force balance to measure total forces.

Figure 4 shows the configuration which was developed to satisfy the specifications outlined above. To minimize propeller interference effects, to minimize propeller vibration levels, and to ease angle of attack change mechanism design difficulties, a steel cantilever beam structure was chosen.

The propeller test stand includes six pieces of structural hardware. These are the motor case, the motor case cradle, the mast, the mast fairing, nacelle, and the sector fairing. The motor case, cradle, nacelle, and sector fairing carry the aerodynamic loads on the propeller,

## 2. PROPELLER TEST STAND DEVELOPMENT

### 2.1 Test Stand Design

In Chapter 1 the three propeller test programs defined for the PPI investigation were described. A study was undertaken to determine the best configuration for a propeller test stand which would allow these three study segments to be conducted using a single drive motor support configuration. Other design considerations were:

1. Utilize two GPE 200 horsepower variable frequency electric motors connected in tandem as the propeller drive motors.
2. Propeller angle of attack range  $-10$  to  $+20$  degree.
3. Motor support structure must minimize interference with propeller flow field.
4. System must be capable of being mounted within a Piper Chieftain nacelle.
5. PTS must be mounted on the 30 x 60 foot wind tunnel force balance to measure total forces.

Figure 4 shows the configuration which was developed to satisfy the specifications outlined above. To minimize propeller interference effects, to minimize propeller vibration levels, and to ease angle of attack change mechanism design difficulties, a steel cantilever beam structure was chosen.

The propeller test stand includes six pieces of structural hardware. These are the motor case, the motor case cradle, the mast, the mast fairing, nacelle, and the sector fairing. The motor case, cradle, nacelle, and sector fairing carry the aerodynamic loads on the propeller,

nacelle, and sector fairing through the mast to the wind tunnel balance system. The aerodynamic loads on the mast are shielded from the wind tunnel balance by the mast fairing which is cantilevered from the tunnel floor independently of the balance system.

Figure 11 shows the steel structure of the PTS. An electric jackscrew was used to vary the angle of attack (AOA) while the tunnel was operating. To ensure a fail-safe design a counterweight was added to the structure so that the motor system would pitch up to preclude the propeller from striking the support column if the jackscrew should fail.

The maximum design torque and thrust developed by the propellers are 600 lbf thrust and 4200 in lbf torque. At a speed of 500 RPM and an angle of attack of 12 degrees maximum harmonic variations of 180 lbf in thrust and 6360 in lbf in yaw moment are estimated. The structure must safely support the static loads and must not be excited to vibrate by the harmonic loads. To accomplish this it was decided to design the mast strong enough to support the static loads but flexible enough so that the lowest exciting frequency of 17HZ (500 RPM for a two blade propeller) would be well above the natural frequency of the system. The natural frequencies of bending and torsion were found to be 3.5HZ, 6.18HZ, and 6.7HZ. These were calculated assuming a rigid support (the balance system is not rigid so the frequencies are actually lower than those calculated), no aerodynamic or structural damping, and the mass of the mast was neglected. The mass on the end of the mast is about seven times the mast mass so one would expect little influence on the natural frequencies due to the mast mass. However, a lumped mass analysis including the mast mass was made to confirm this assumption, and

it produced the same frequencies as above. Complete details of the static and dynamic structural analysis of the PTS are given in Appendix B.

Structural details of the support column of the PTS is given in Figure 12. The structure was conventional welded steel plate construction. Especial care was taken to weld the structure in steps to minimize warping. The details of the motor support structure is given in Figure 13. The drive motors were encased in a 0.5 in. steel tube, thus the structure was not required to align the motors, but rather transfer the motor weight onto the support column with a minimum distortion. Also the motor support structure was constrained to minimize the cross-sectional area of the nacelle. Also the structure was originally required to fit inside a Piper Chieftain nacelle. This design requirement was followed for the counterweight design.

The details of the nacelle structure are given in Figure 14. The nacelle was configured to minimize the interference with the propeller flow. The nacelle was constructed using standard aluminum structural practice. The tail cone was constructed of fiberglass to achieve the desired shape. The nacelle was attached to the motor support structure at only two points to allow the installation of a nacelle force balance at a later time. The upper half of the nacelle structure carries all of the loads with the lower half divided into two parts for ease of assembly and access.

Figure 15 shows the fairing constructed to shield the support column from the tunnel flow. The fairing was constructed of aluminum in two parts to allow easy erection and access to the jackscrew motor,

power cables, and instrumentation lines. A two segment fairing was designed to ensure the intersection between the nacelle and the support column remained a low drag configuration over the -10 to +20 degree AOA range. The constraint was for the fairing to clear the support column when the propeller was at +20 degree and yet fill the gap when the propeller AOA was -10 degrees. The sector fairing is attached to the motor support structure, thus the forces on the sector fairing are measured by the wind tunnel external balance. The sector fairing was constructed of 0.125 soft aluminum plate and contoured using a segmented welded approach.

## 2.2 Structural Vibration Analysis Summary

This section summarizes the vibration analysis of the PTS given in Appendix B. The initial study showed that the stresses in the structure were well below the allowable except the bolts which attach the PTS to the wind tunnel balance frame. These bolts do not have sufficient strength to withstand the loads induced on them for the case of the loss of a propeller at speed. The remainder of the structure can withstand this condition.

The mast used to support the propeller test drive motors must be cantilevered from the balance table and offer minimum wind resistance. It was also desirable that the mast be tapered to minimize mast thickness at the motor attachment location. A mast height of about fourteen feet was required to place the propellers at the centerline of the tunnel.

The maximum anticipated loads expected for the most extreme test cases were 600 lbf thrust and 290 ft. lbf torque steady loads. The

weight of the motors and structure when added to the applied propeller loads gave a loading which was not severe for a design with even a modest cross-section. Thus it was decided to choose a design based on stiffness criterion rather than strength, since there was no over-riding reason for minimizing the weight or size of the beam. The approach was to design a beam with natural frequencies well below the minimum expected harmonic excitations. This approach allows dynamic amplitudes somewhat greater than static deflections, but the static deflections are small due to the smallness of the loads. The applied loads shown in Figure B2 produced the bending moments, torque, and axial load distributions for the analysis.

The mast deflections and rotations under the assumed loads were computed using Castigliano's Theorem. Using Castigliano's method the strain energy was first calculated from which the deflections and rotations were found as derivatives of the strain energy. A matrix formulation of the deflections and rotations in terms of the applied loads was made. If the mass of the mast is neglected and the equations of motion for the motor case - motor cradle - propeller and counterweight system are formulated, the natural frequencies of vibration can be found. Solving the free vibration equations for the five natural frequencies and mode shape gives the following table.



MODE	DESCRIPTION	FREQUENCY (HZ)	MODE AMPLITUDE				
			A	B	C	D	E
1	lateral bending	3.5	6.77	0	0	.1	.031
2	fore and aft bending	6.18	0	-8.5	.1	0	0
3	torsion or pitching mode	6.20	1.865	0	0	.02766	-.1
4	rolling mode	39.0	.0536	0	0	.1	.0004
5	yaw mode	59.0	0	3.357	.1	0	0

Each mode has been normalized to a maximum rotation of .1 radian. The fore and aft bending mode and the yaw mode are uncoupled from the lateral bending, pitching, and rolling modes.

For a forced vibration analysis, propeller loads must be converted to an equivalent force system at the center of gravity of the motor assembly. At a speed of 500 RPM there is a harmonic thrust force of 180 lbf and a harmonic yaw moment of 6360 in lbf with frequency twice the rotational speed for a two blade propeller. This condition occurs at an angle of attack of 12 degrees and is the lowest frequency (17HZ) excitation expected other than an unbalance in the propeller shaft. 17HZ is well above the bending and torsion frequencies but is below the rolling and yawing frequencies. The maximum dynamic stress is at the base of the mast and is 336 psi which is very small. At the lowest propeller frequency expected, the vibrational modes of the mast are not excited. The magnitude of the exciting loads are also low which helps account for the low dynamic stresses.

The worst case of failure would be to lose a propeller blade while in operation. The maximum stress induced by this condition is 45,000 psi which is greater than the yield stress but less than the ultimate stress.

It is possible that the mast would hold together until the motors could be stopped. The critical component is the mast holddown bolts which would probably fail.

### 2.3 Wind Tunnel Installation

The PTS was installed in the LaRC 30 x 60 foot full scale wind tunnel as shown in Figure 5. The steel support column was attached directly to the wind tunnel balance frame. The fairing for the support column was attached to the floor plane. The electric motors were driven by a variable frequency master generator set. The nacelle angle of attack was controlled through the jackscrew and sensed by an inclinometer installed on the motor support frame.

### 2.4 Instrumentation Description

The test was conducted using the LaRC full scale wind tunnel data acquisition system. The propeller thrust-torque balance output was transmitted through a slip ring to data lines installed in the stationary structure. The wind tunnel balance forces were recorded and proved to be the primary source of thrust data. The drive motor currents were monitored, but since the motor torque versus current relationship was not known, torque could not be determined from this source. Vibration accelerometers were installed on the motor support structure near the propeller plane to monitor the vibration levels at the propeller thrust-torque balance. An automatic shut down system was installed to prevent divergence.

### 3. ENTRY I WIND TUNNEL TEST

#### 3.1 Test Program

A total of fifteen different propellers had originally been selected to test in the NASA Langley Full Scale Wind Tunnel. These propellers are listed in Table 1. The actual test program included seven of these propellers and consisted of 163 runs (each run being a test of a particular propeller at a particular blade angle, angle of attack and tunnel speed with the propeller speed variable during the run). Of these 163 runs only about half yielded useful information concerning propeller performance; the remaining runs were judged unacceptable due to problems which will be discussed shortly. Table 2 lists the propellers, tunnel speeds and blade angles for which possibly useful data was obtained.

The large number of unacceptable runs was the result of several equipment related problems which were encountered during the tests. Approximately 60 runs were initially required to sort out the instrumentation and obtain what was considered to be "good" data. Just as this status had finally been reached the propeller shaft bent during a run. After the shaft was repaired the program essentially started over again. A further 100 runs were made but these were plagued by drift in the output of the thrust-torque balance. This was first observed as a change in the zero tunnel speed-zero propeller speed balance readings (or "zeroes") before and after a run. At least 20 runs made after the shaft was repaired are unacceptable because of a large change in the balance zeroes. Many more runs are of questionable use for this

same reason. There were also situations when vibration of the propeller-afterbody unit became excessive and forced a run to be stopped before the desired range of propeller speeds could be obtained. Finally, some data which initially looked acceptable turned out to yield meaningless results due to a mismatch in the size of the thrust-torque balance. That is, for lightly loaded or small propellers the loads generated were too small to be accurately measured by the balance (which was designed for 1200 lbs. maximum thrust). Therefore the results for the Yankee propellers (configurations 7 and 8), for example, are not valid although the measurements themselves were not subject to excess vibration or zero shift. As a consequence of these various difficulties only a limited quantity of reliable data has been taken and only three propellers can be thought of as being reasonably well-documented (configurations 1, 4 and 10).

Further comments on the thrust-torque balance drift are appropriate. Several tests were made to establish the nature of the drift. Here the propeller and tunnel speeds were set at fixed values and the thrust-torque balance output was monitored. An example of these tests is shown in Figure 16 where the thrust and torque of the Hartzell 2-bladed propeller are plotted versus time. The continual decrease in measured output with time is quite clear. There were also instances when the test engineers observed sudden jumps in the balance output although these were not documented. The reasons for these changes is still unexplained. The drift could, at times, be minimized or eliminated by running the propeller for 10 to 30 minutes prior to taking data for a

given run. This warmup procedure was used in the latter stages of the test program with apparently some success.

### 3.2 Results

The measured quantities include the thrust,  $T$ , and torque,  $Q$ , acting on the propeller as obtained from the thrust-torque balance, the total force acting on the propeller-afterbody combination as measured by the tunnel scales, the propeller blade angle,  $\beta$ , the propeller rpm,  $N$ , and the free stream air velocity,  $V_\infty$ . Measurements of the afterbody drag with no propeller along with a correction to the drag to account for the propeller slipstream permitted the tunnel scales data to be used to provide a second and independent measurement of the propeller thrust. From these measurements the advance ratio  $J$ , thrust coefficient  $C_T$ , torque coefficient  $C_Q$ , power coefficient  $C_P$  and efficiency  $\eta_p$  are determined. Figures 17 through 22 present  $C_T$ ,  $C_P$  and  $\eta_p$  for the McCauley 3-bladed prop (configuration 10) at  $\beta = 16^\circ$ ,  $28^\circ$  and  $40^\circ$  and for the basic Hartzell 2-bladed prop (configuration 1) at the same blade angles. The open symbols refer to data entirely from the thrust-torque balance; the filled symbols are for scales measured thrust.

The thrust coefficients of the McCauley propeller (Figure 17) form reasonable curves with fairly small scatter and close agreement in the two measurement methods. The scatter and disagreement become greater at large values of  $J$  as the loading goes to zero. Here the noise and accuracy of the balances is the same magnitude as the thrust so the poorer behavior might be expected. The significance of the fact that

at  $\beta = 16^\circ$  the scale  $C_T$  is slightly below the thrust-torque balance  $C_T$  while at  $\beta = 40^\circ$  the situation is reversed is not quite clear. The power coefficients (Figure 18) (which could only be determined from the thrust-torque balance) also form fairly smooth curves with little scatter.

That problems may still exist becomes more apparent when the efficiencies (Figure 19) are examined. The scatter is now greater (though the plotting scale makes the scatter appear worse than it is) and the disagreement between the two thrust measuring techniques is increased, especially for  $\beta = 40^\circ$ . More serious, however, are the highly suspicious magnitudes of the peak efficiencies which approach, and even exceed,  $\eta_p = 1$ . Whether the thrust is being overestimated, the torque underestimated or both is not yet certain.

The results for the Hartzell propeller are not as good, especially in terms of agreement between the two thrust measurement methods, as the McCauley results. Figure 20 shows that there are substantial differences in  $C_T$  as determined by the two methods for the entire range of  $J$  investigated, with the thrust-torque balance yielding consistently smaller coefficients. There is also increased scatter in the  $C_T$  curves for this propeller. The plots for  $C_p$ , on the other hand, (Figure 21) are reasonably smooth with small scatter. The scatter and disagreement of the  $C_T$  data are also reflected in the efficiency curves in Figure 22. One noticeable aspect of the efficiencies, however, is that, except for two obviously erroneous points, the maximum efficiencies are considerably smaller and more reasonable than the McCauley values.

#### 4. CONCLUSIONS

The propeller test stand proved to be structurally sound and exhibited the predicted supercritical structural modes. The unresolvable thrust-torque balance drift problems precluded a successful test of a range of full scale general aviation propellers. The following recommendations are made.

1. Find the source of drift in the thrust-torque balance.
2. Measure the electric motor torque-current relationship experimentally to allow an independent measurement of propeller torque.

#### References

1. Cross, E. J., Jr., "Trip Report - Propeller Propulsion Integration," NASA Grant Number 1402, June 1977.
2. Lesley, E. P., Woods, B. M., "The Effect of Slipstream Obstructions on Air Propellers," NACA Report No. 177, 1923.
3. Cross, E. J., Jr., and Miley, S. J., "Semi-Annual Progress Report - Propeller Propulsion Integration," NASA Grant Number 1402, September 1978.



Table I  
Test Propellers

Configuration Number	Designation	Blades	Configuration	Diameter cm (in.)	Manufacturer	Blade	Activity Factor
1	H-12	2	Basic	213 (84)	Hartzell	8459	90
2	H-22	2	Twist Change	213 (84)	Hartzell	8459	90
3	H-32	2	Activity Factor Change	213 (84)	Hartzell	9587	127
4	H-42	2	Diameter Change	198 (78)	Hartzell	8459	108
5		2	ATLIT				
6		2	Supercritical ATLIT				
7		2	Yankee 46" Pitch				
8		2	Yankee 57" Pitch				
9	M-12	2		229 (90)	McCauley	90DEA	82
10	M-13	3		229 (90)	McCauley	90UMB	107
11	H-13	3	Basic	218 (86)	Hartzell	8459	90
12	H-23	3	Twist Change	218 (86)	Hartzell	8459	90
13	H-33	3	Activity Factor Change	218 (86)	Hartzell	9587	127
14	H-43	3	Diameter Change	203 (80)	Hartzell	8459	108
15		2	Cessna 172				

Table II

## Propellers Tested

$\beta$ 0.75 (degrees)	Tunnel RPM	Configuration						
		1	2	4	7	8	10	12
16	0	x	x				x	
	90	x	x	x			x	x
	170	x	x	x	x		x	x
	275	x			x			
20	0							
	90						x	x
	170	x				x	x	x
	275	x				x		
24	0							
	90						x	x
	170	x		x			x	x
	275	x		x			x	x
28	0							
	90						x	
	170	x					x	
	275	x					x	
32	0							
	90						x	
	170	x		x			x	
	275	x		x			x	
36	0							
	90						x	
	170	x					x	
	275	x					x	
40	0							
	90							
	170	x		x			x	
	275	x		x			x	

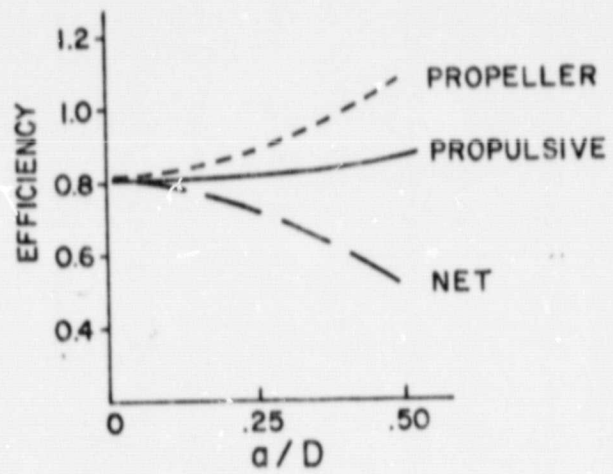
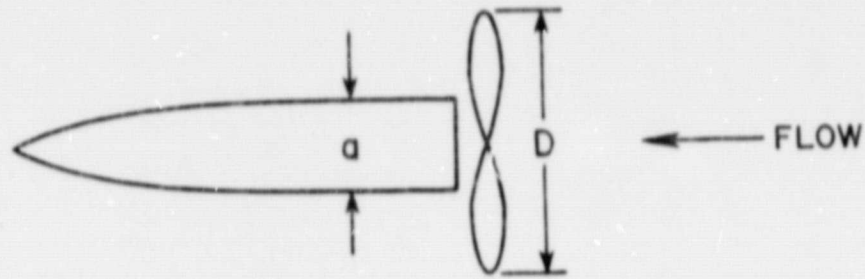


Figure 1. Nacelle Blockage Effects (NACA Report 177, 1923)

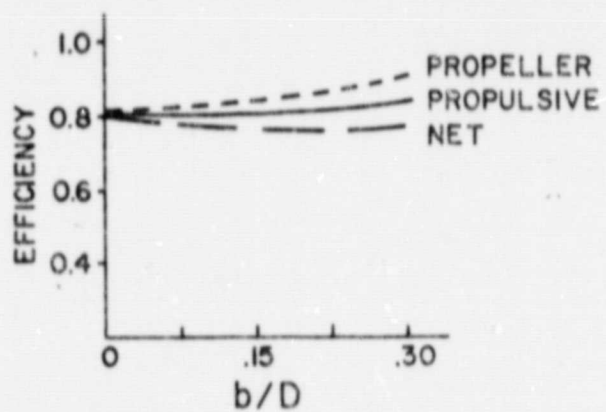
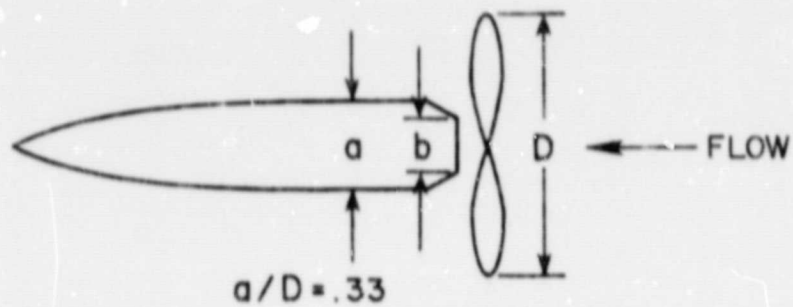


Figure 2. Nacelle Blockage Effects - Partial Streamlining  
(NACA Report 177, 1923)

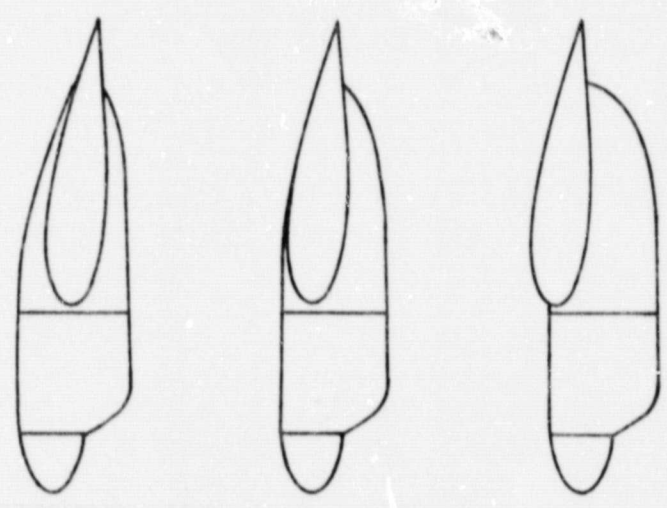
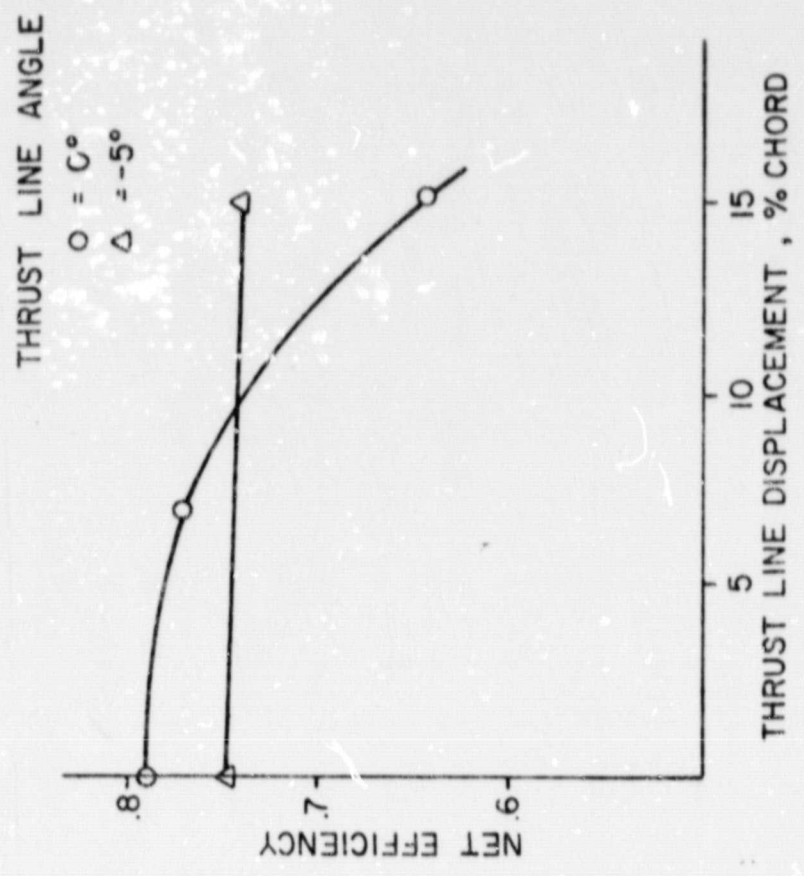


Figure 3. Wing Position Effects (A.R.C. R & M 2374, 1950)

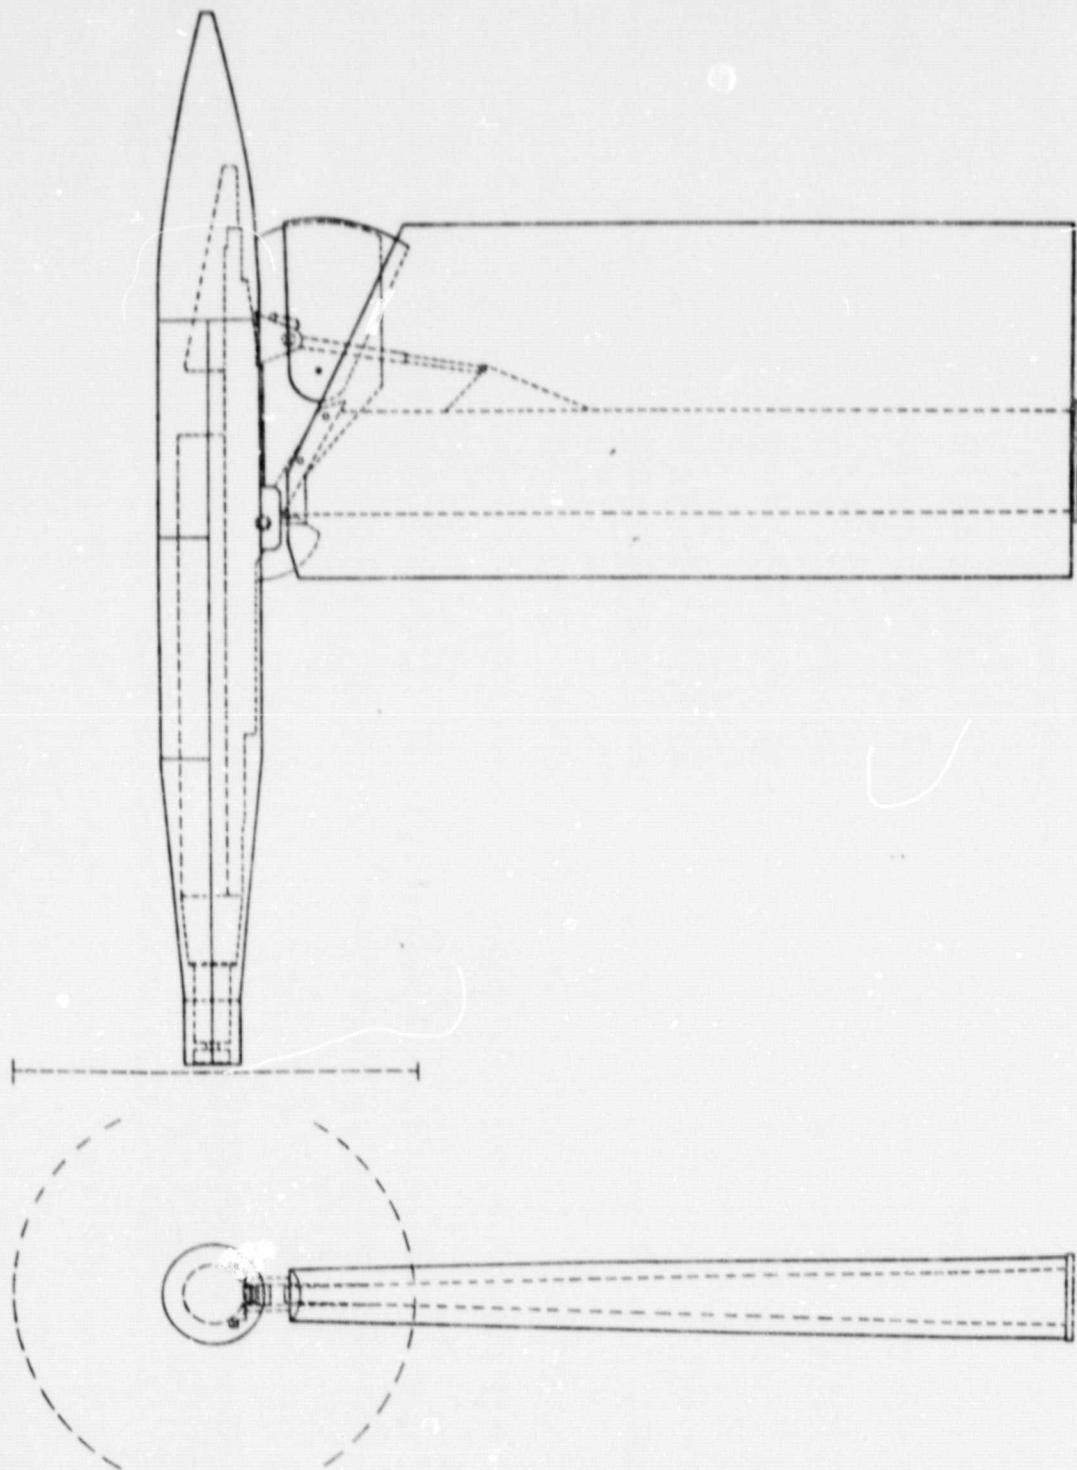


Figure 4. Schematic of Propeller Test Stand

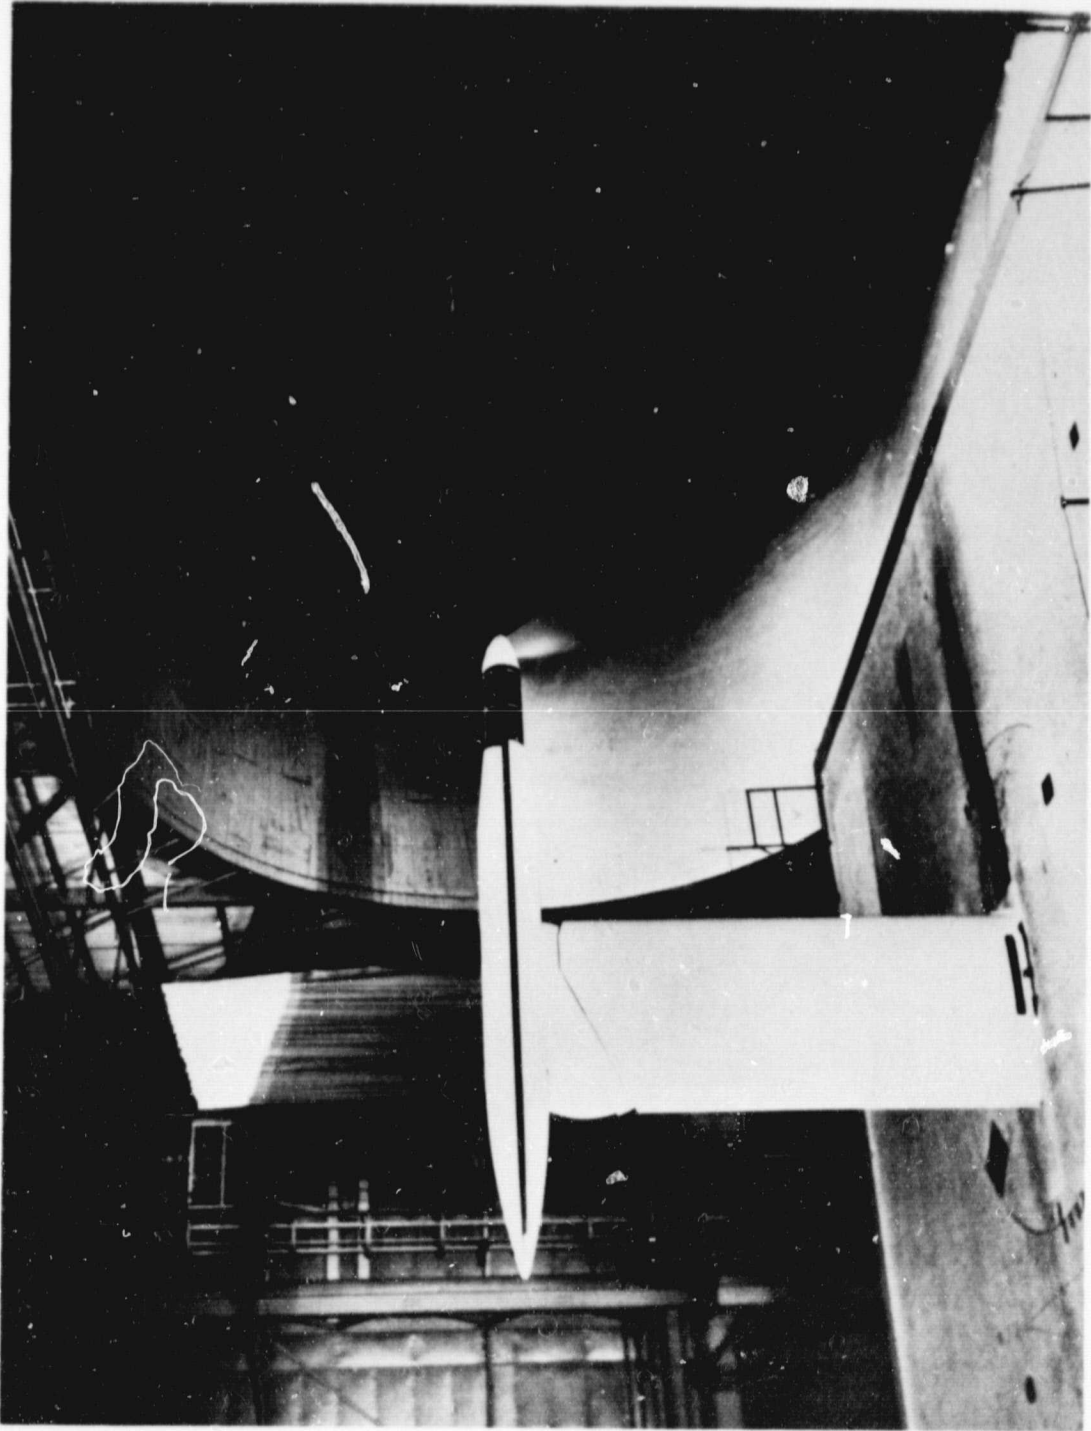


Figure 5. Installation of Propeller Test Stand in  
LaRC 30 x 60 Foot Full Scale Wind Tunnel

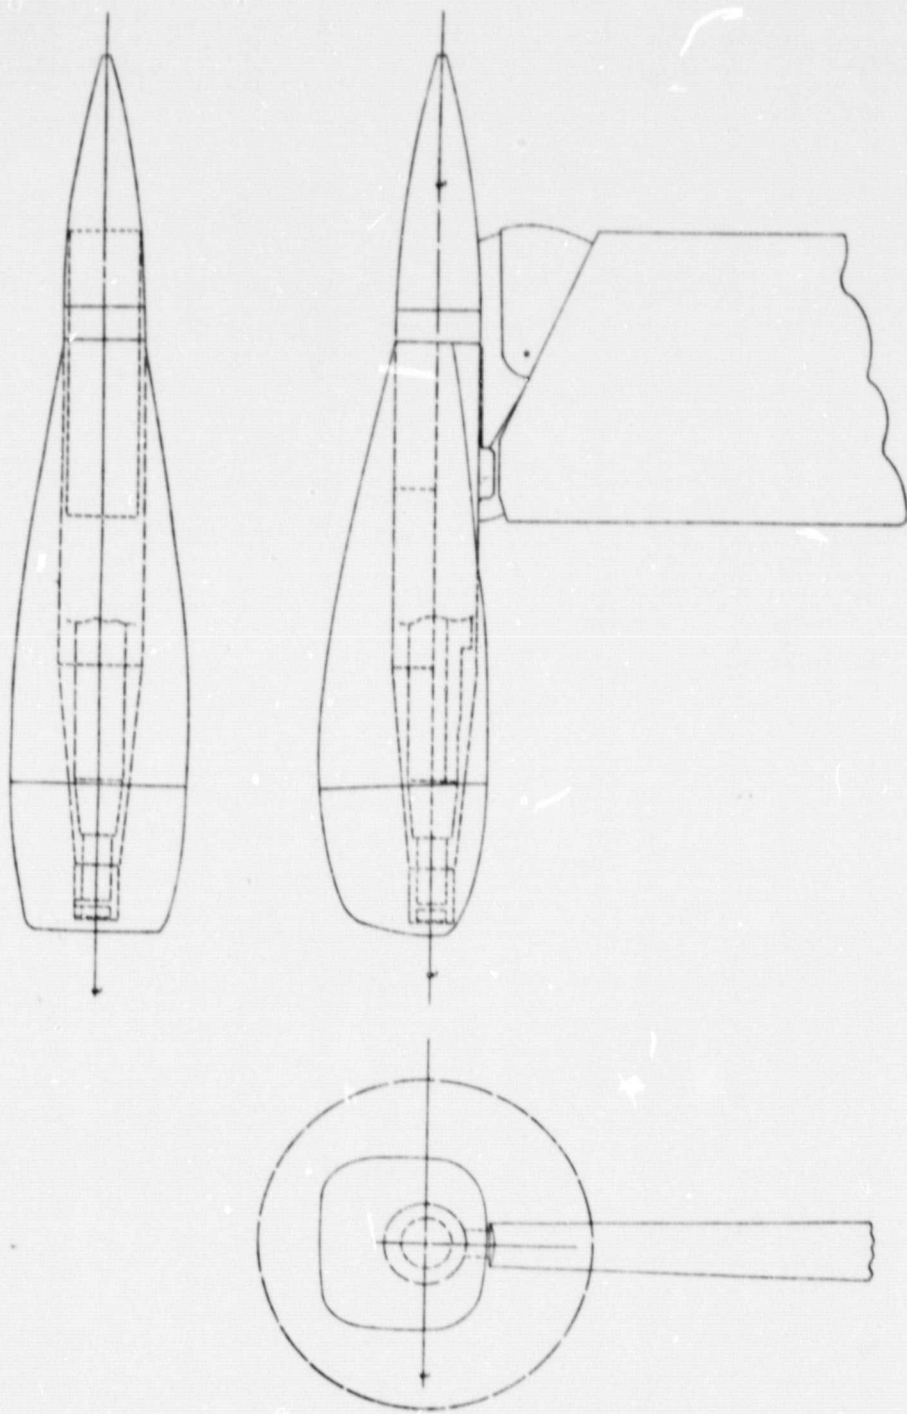


Figure 6. Agvagon Nacelle Fairing for Propeller/Fuselage Interference Studies



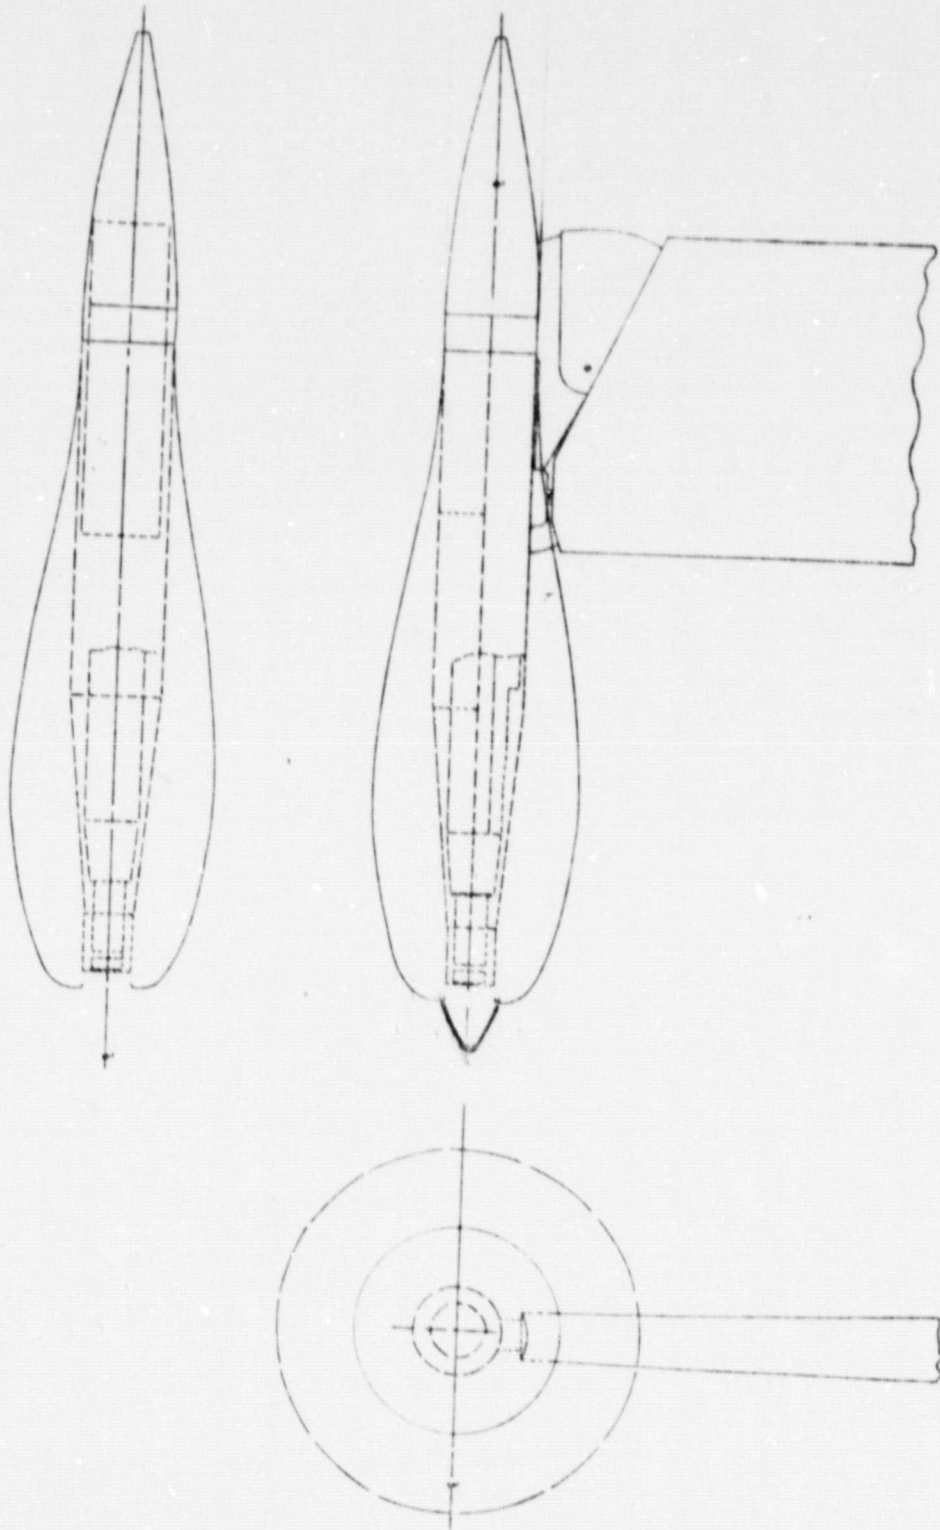


Figure 7. Axisymmetric Nacelle Fairing  
for Propeller/Fuselage Interference  
Studies.

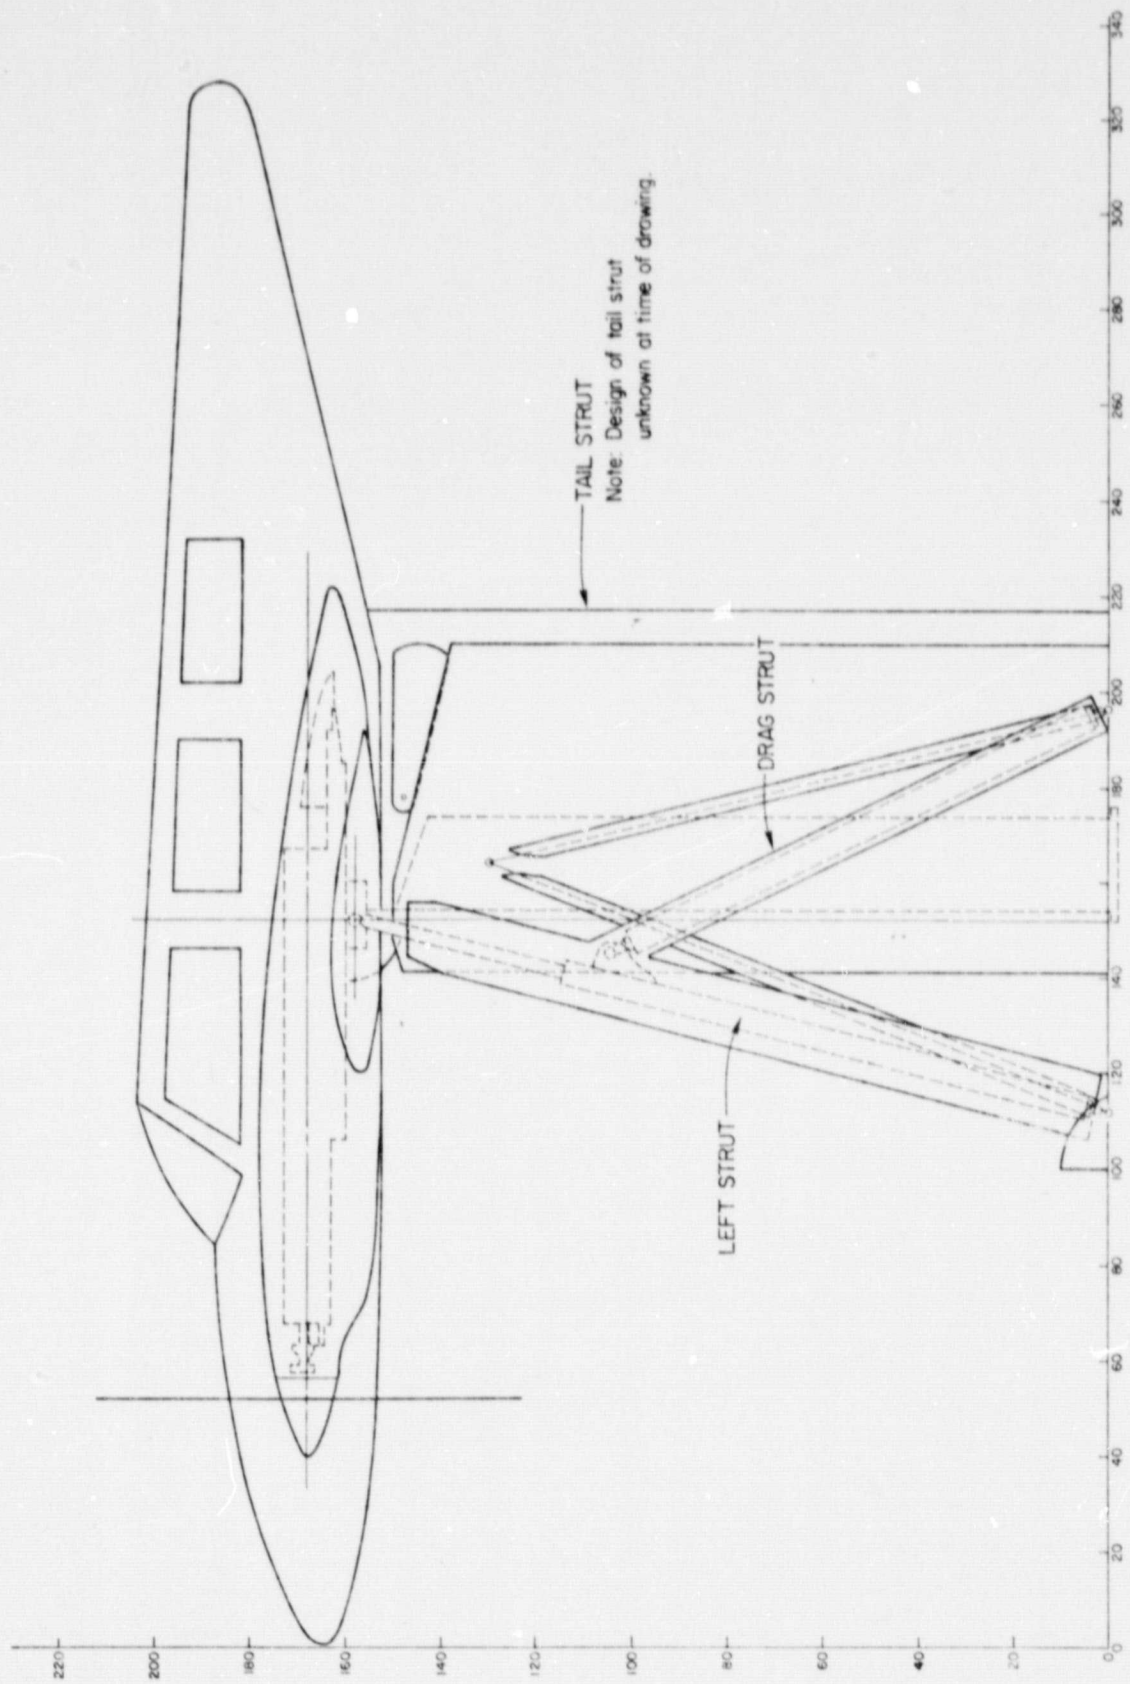


Figure 8. Side View of Preliminary Configuration  
 for Propeller/Nacelle/Wing/Fuselage  
 Interference Test Model

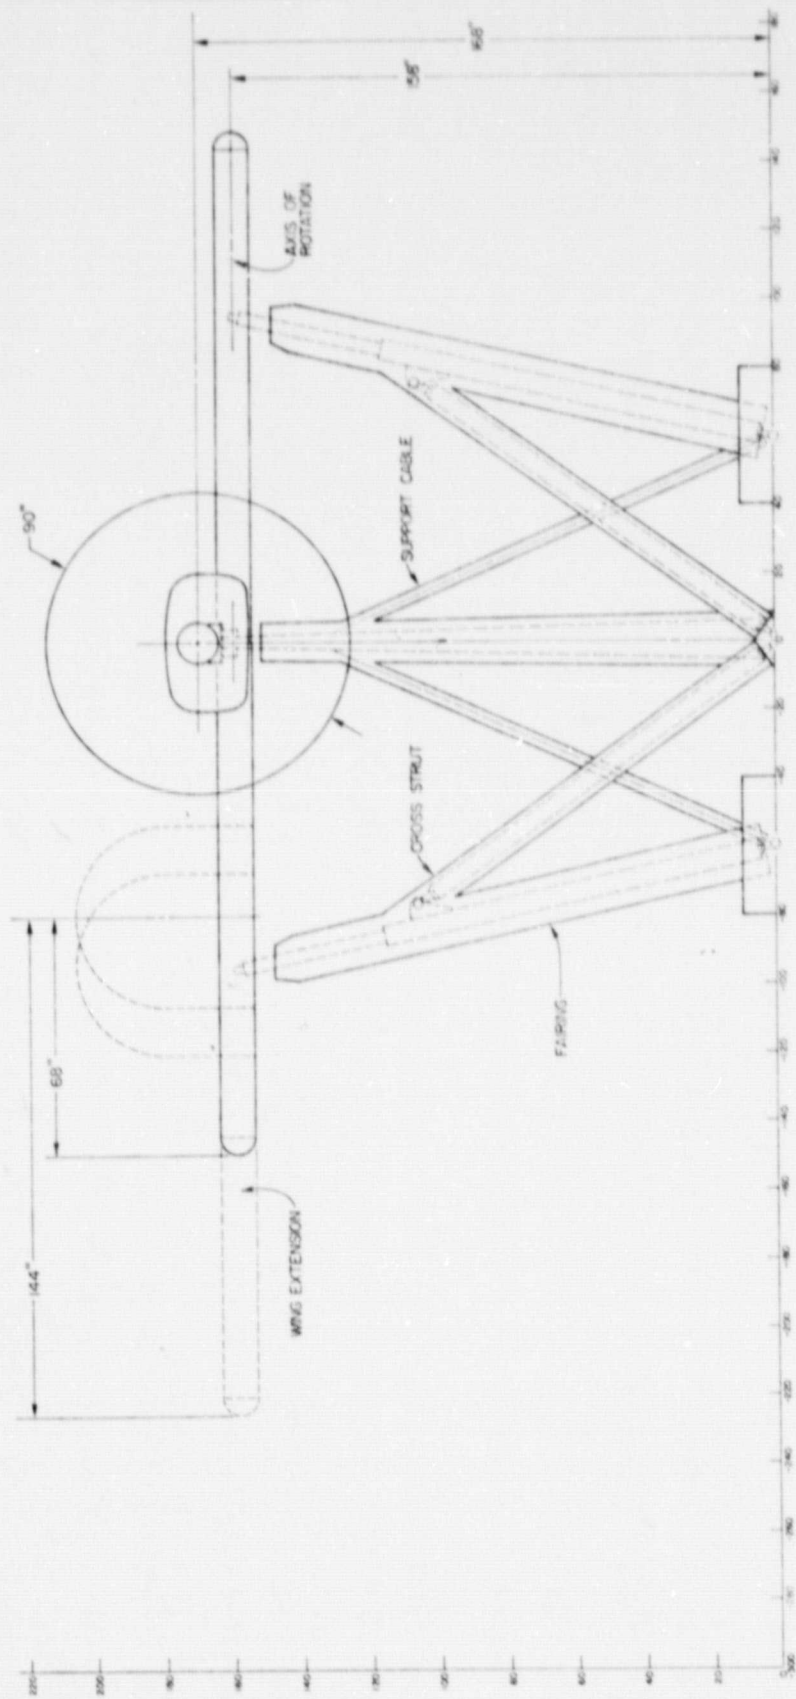


Figure 9. Front View of Preliminary Configuration for Propeller/Nacelle/Wing/Fuselage Interference Test Model

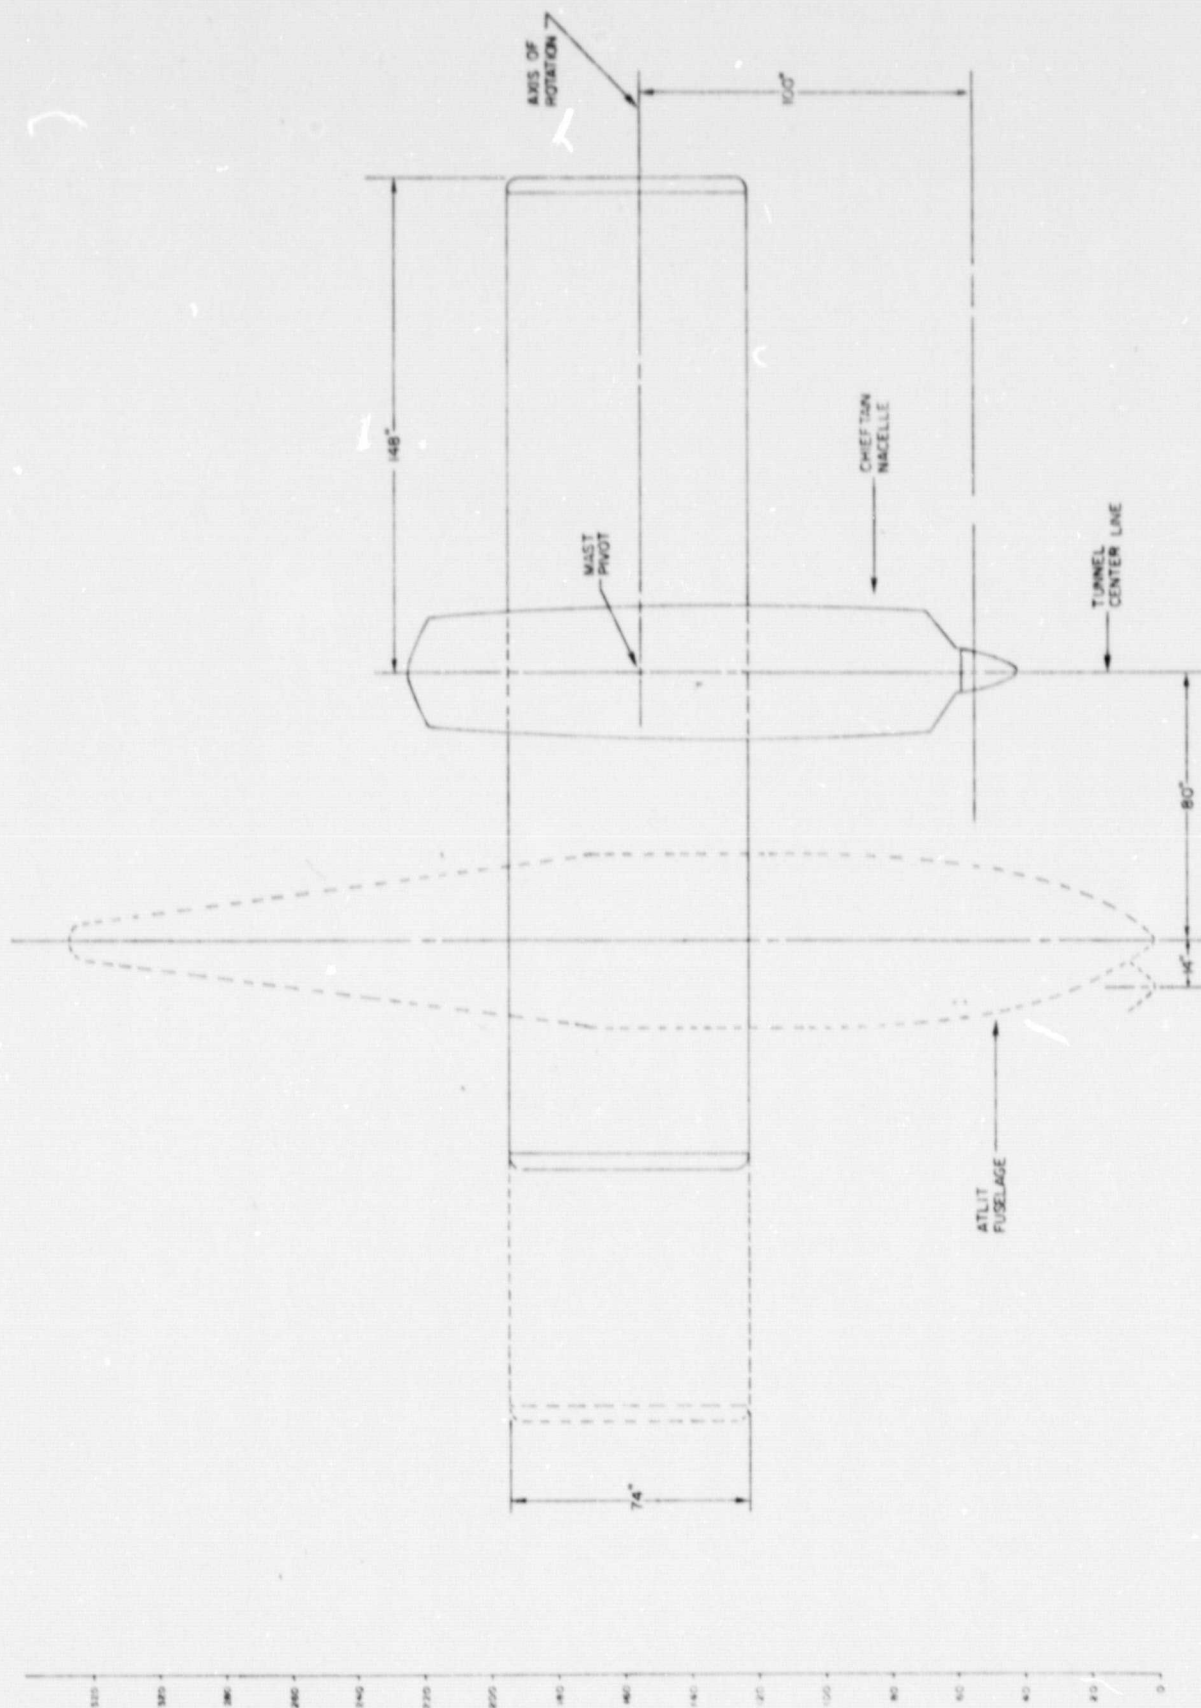


Figure 10. Top View of Preliminary Configuration  
 for Propeller/Nacelle/Wing/Fuselage  
 Interference Test Model

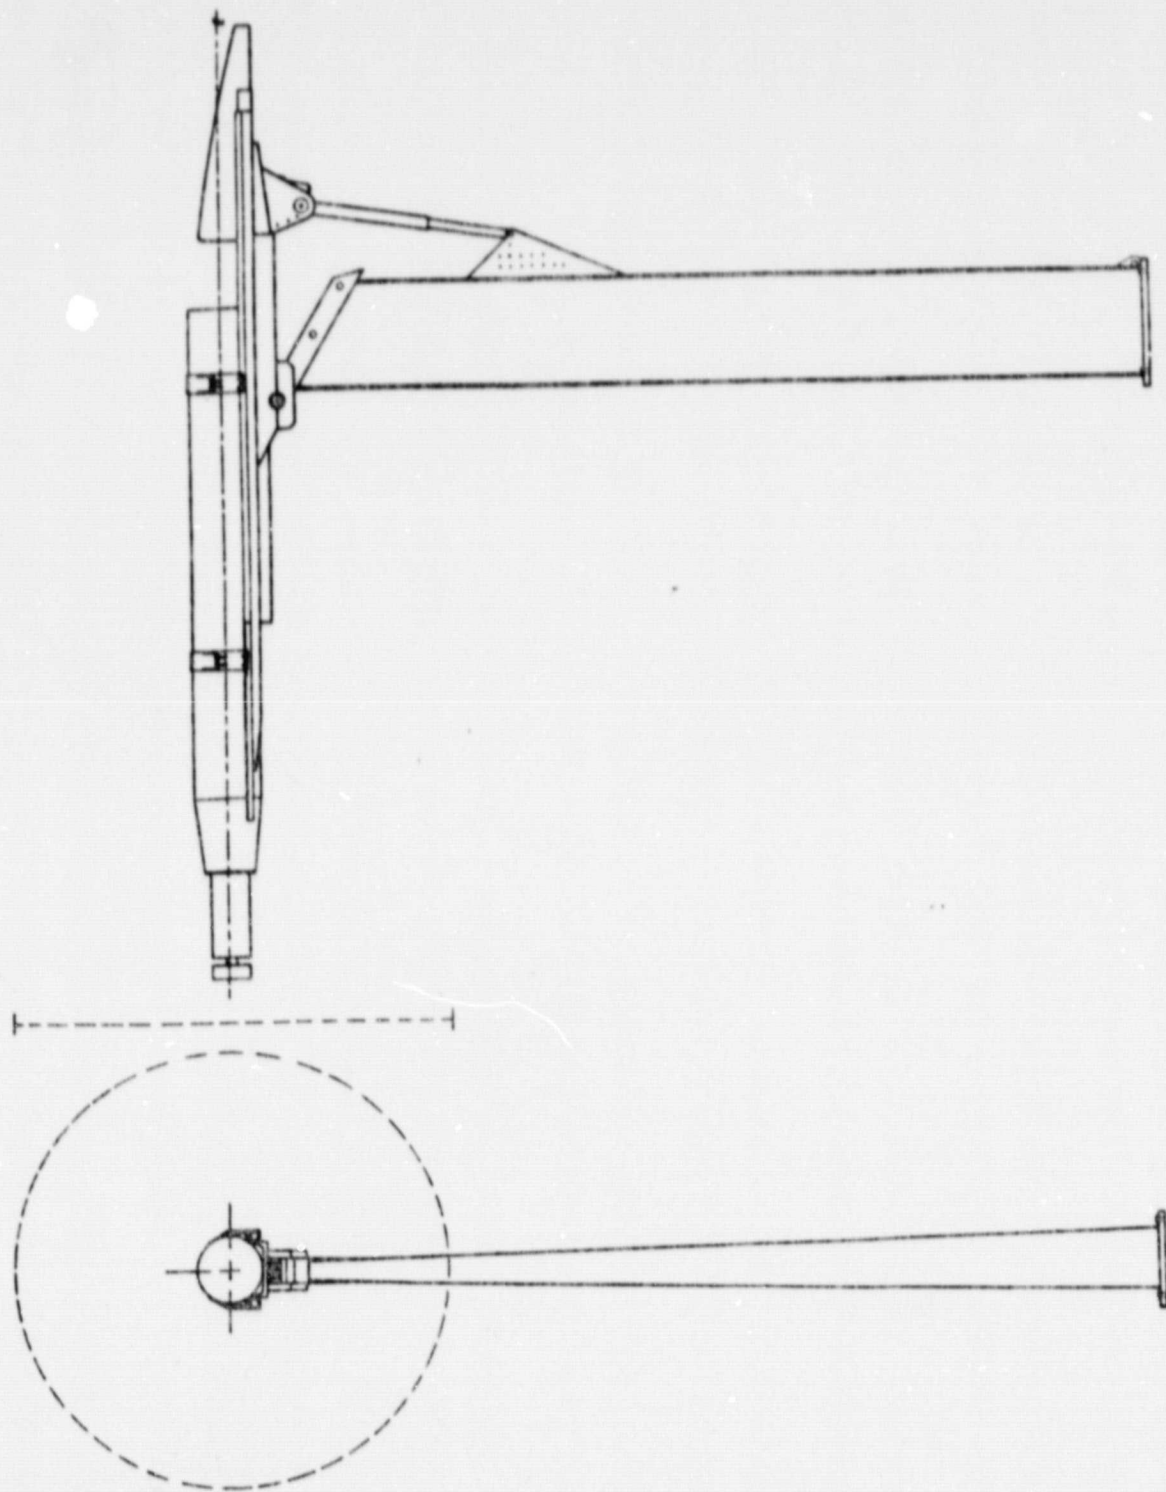


Figure 11. Steel Structure Assembly  
for Propeller Test Stand.

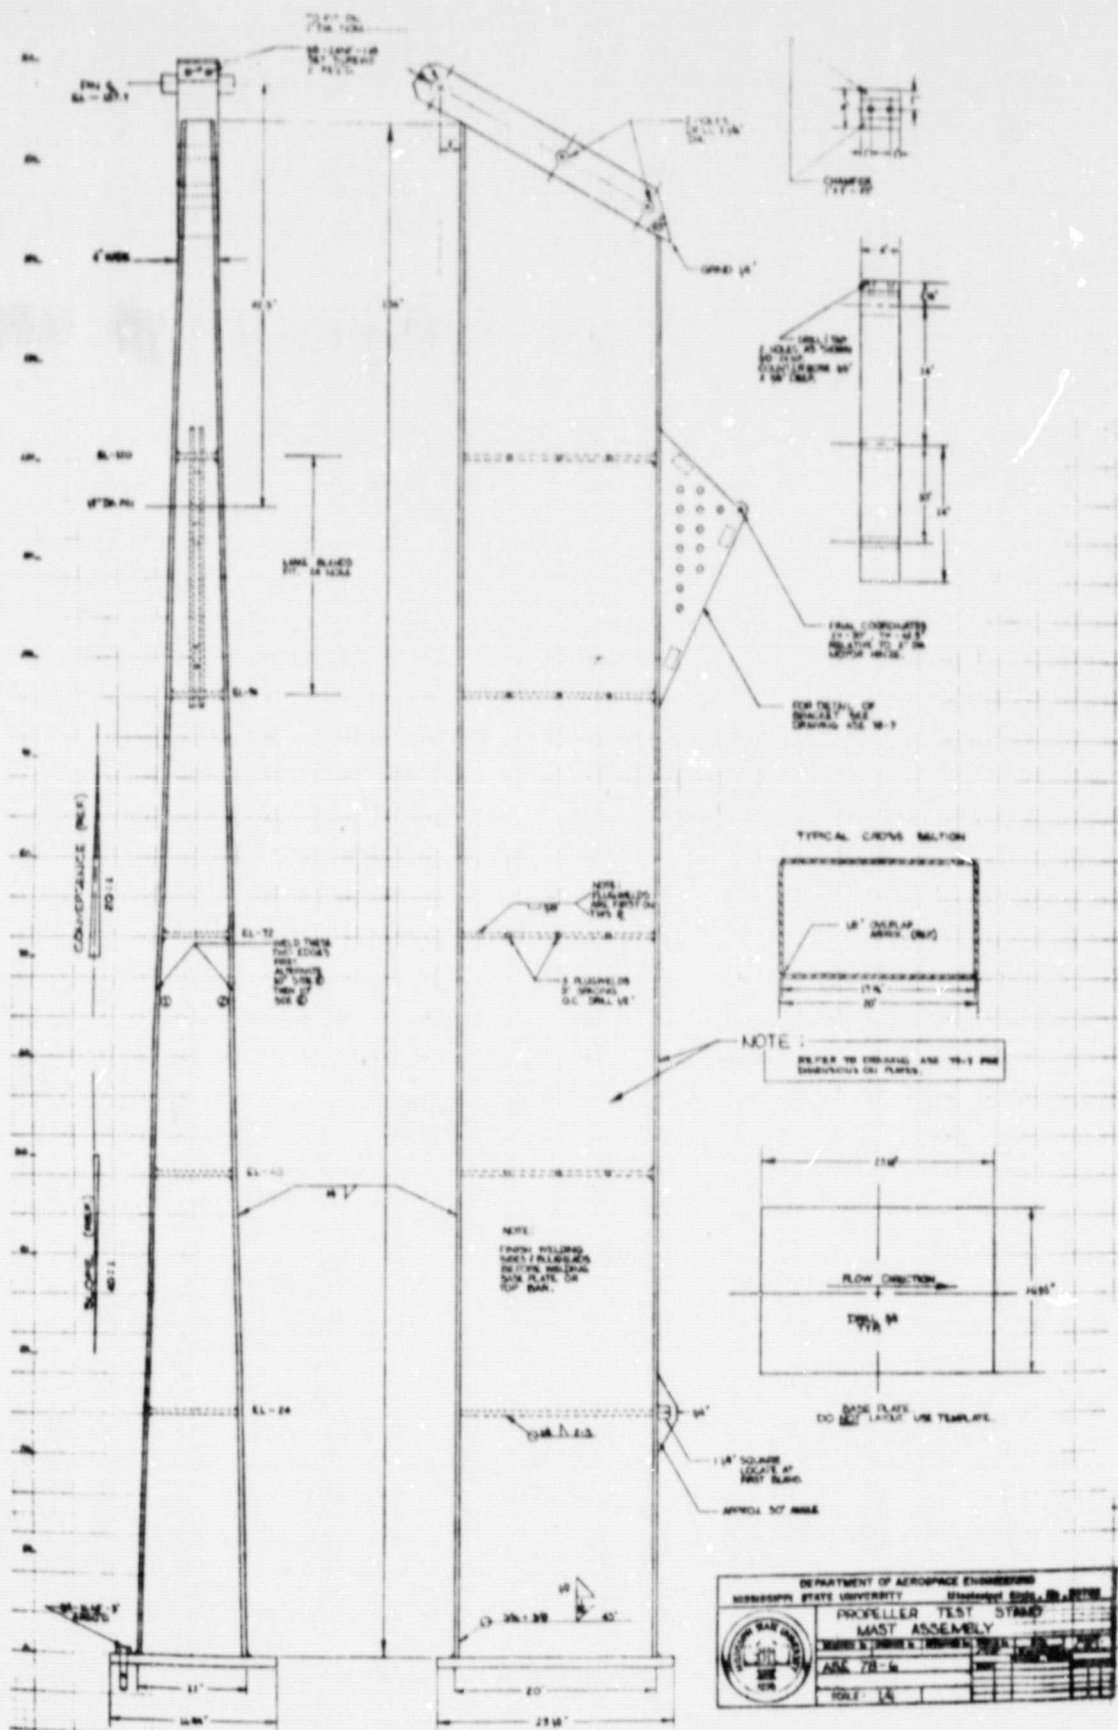


Figure 12. Details of Steel Support Column.

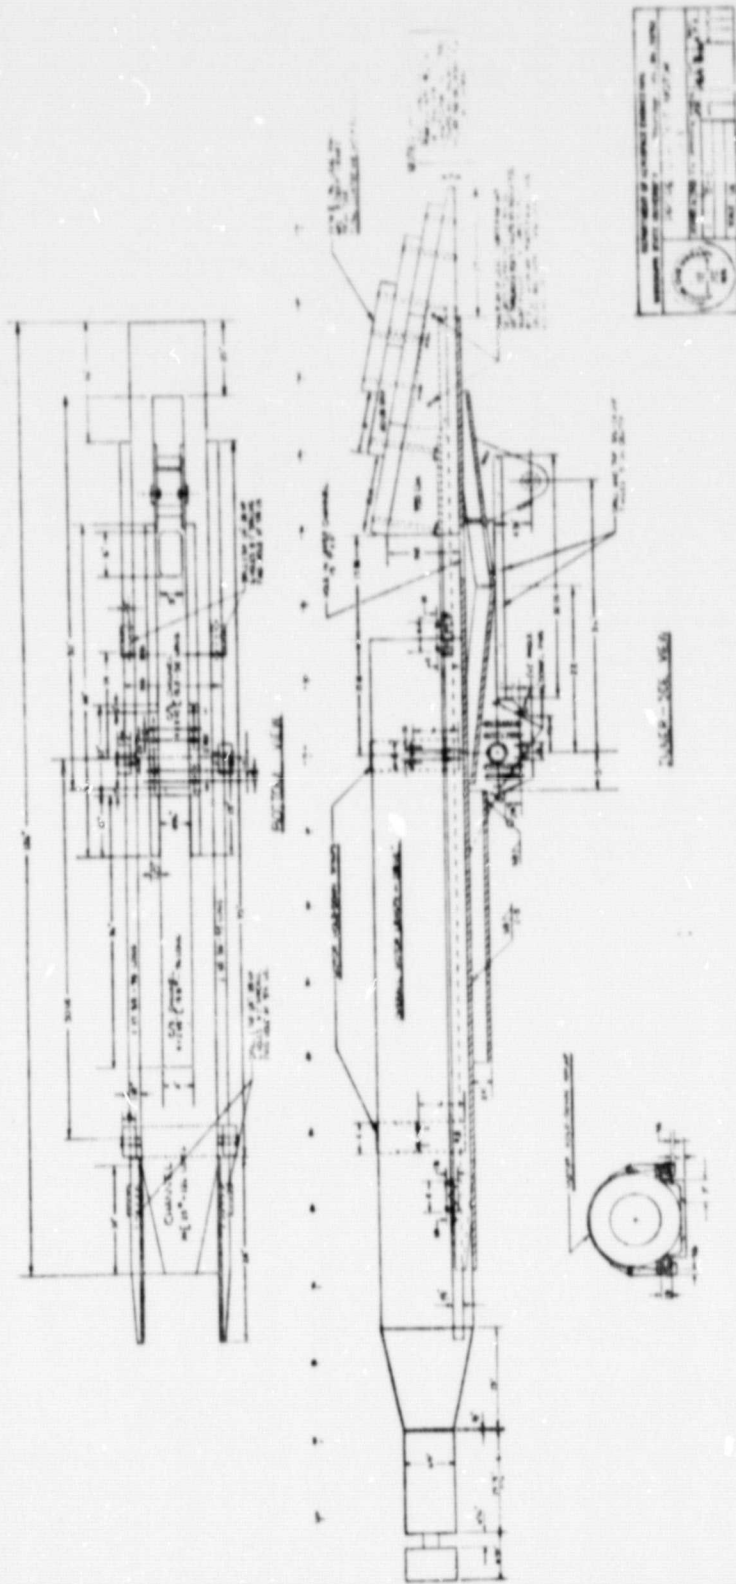


Figure 13. Details of Steel Motor Support Drive Structure.



ORIGINAL PAGE IS  
OF POOR QUALITY

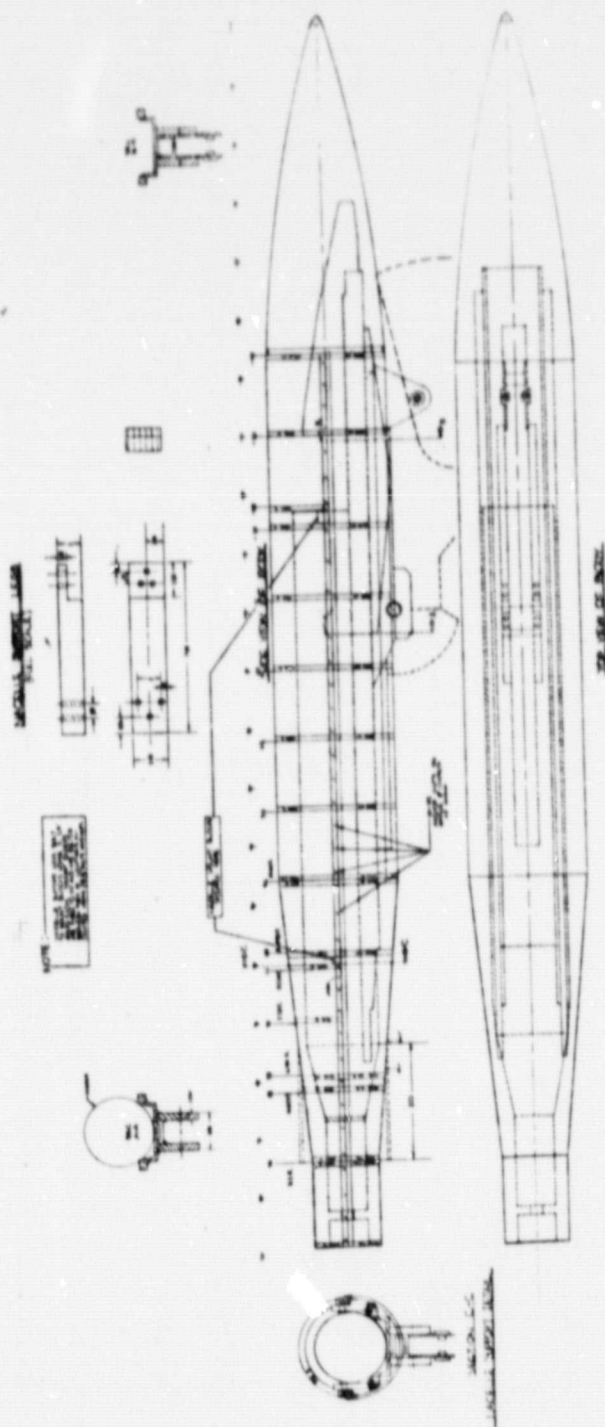


Figure 14. Details of Aluminum/  
Fiberglass Nacelle.



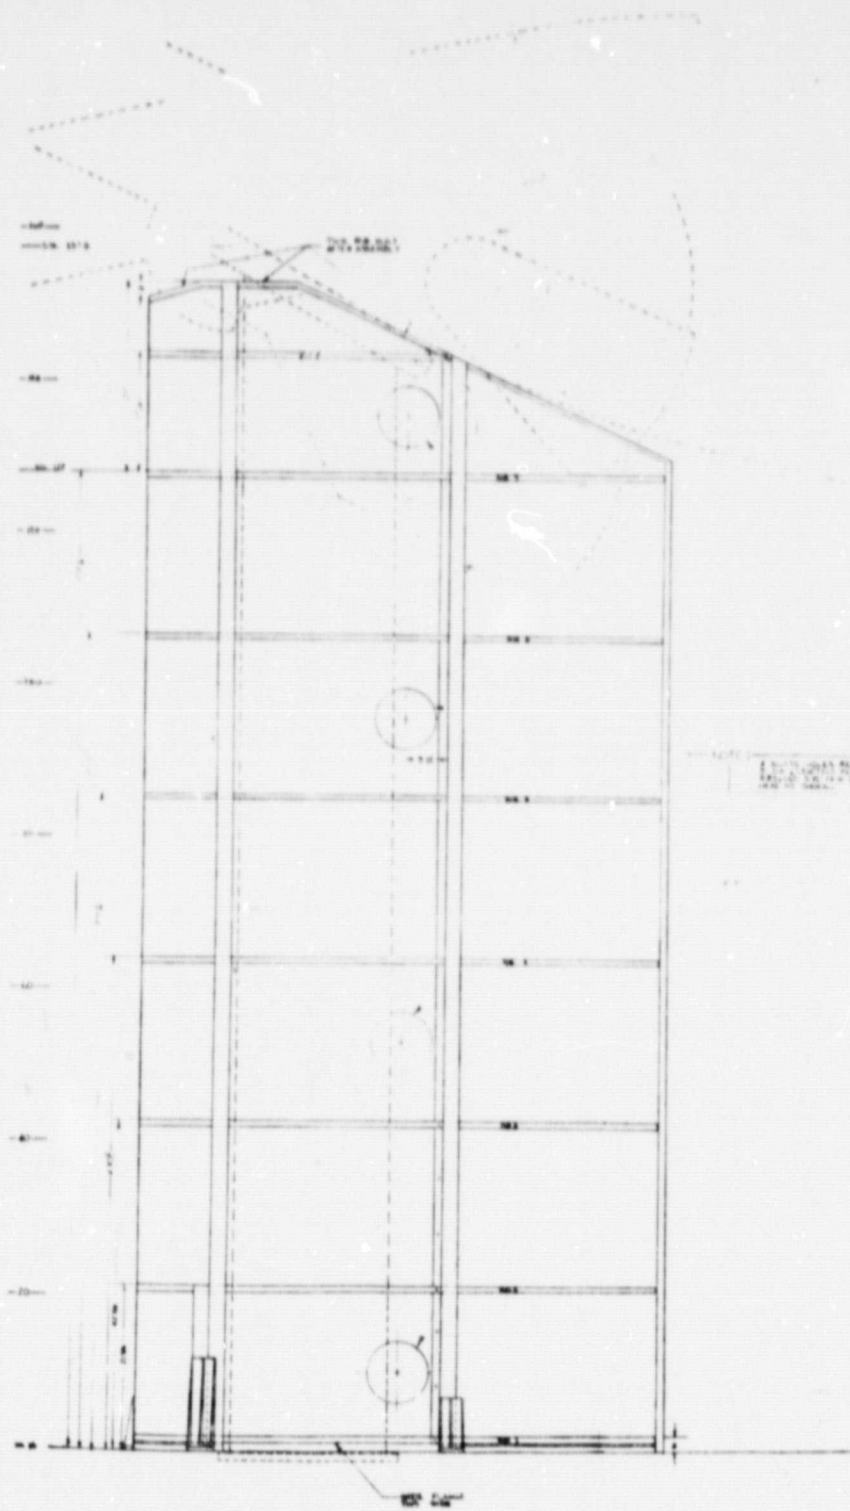


Figure 15. Details of Aluminum Support Column Wing Shield Fairing.

Thrust and Torque Time History  
 Hartzell Basic 2 Blade  
 Configuration 1  
 $\beta=24^\circ$ , Tunnel RPM=170  
 Propellor RPM=1500

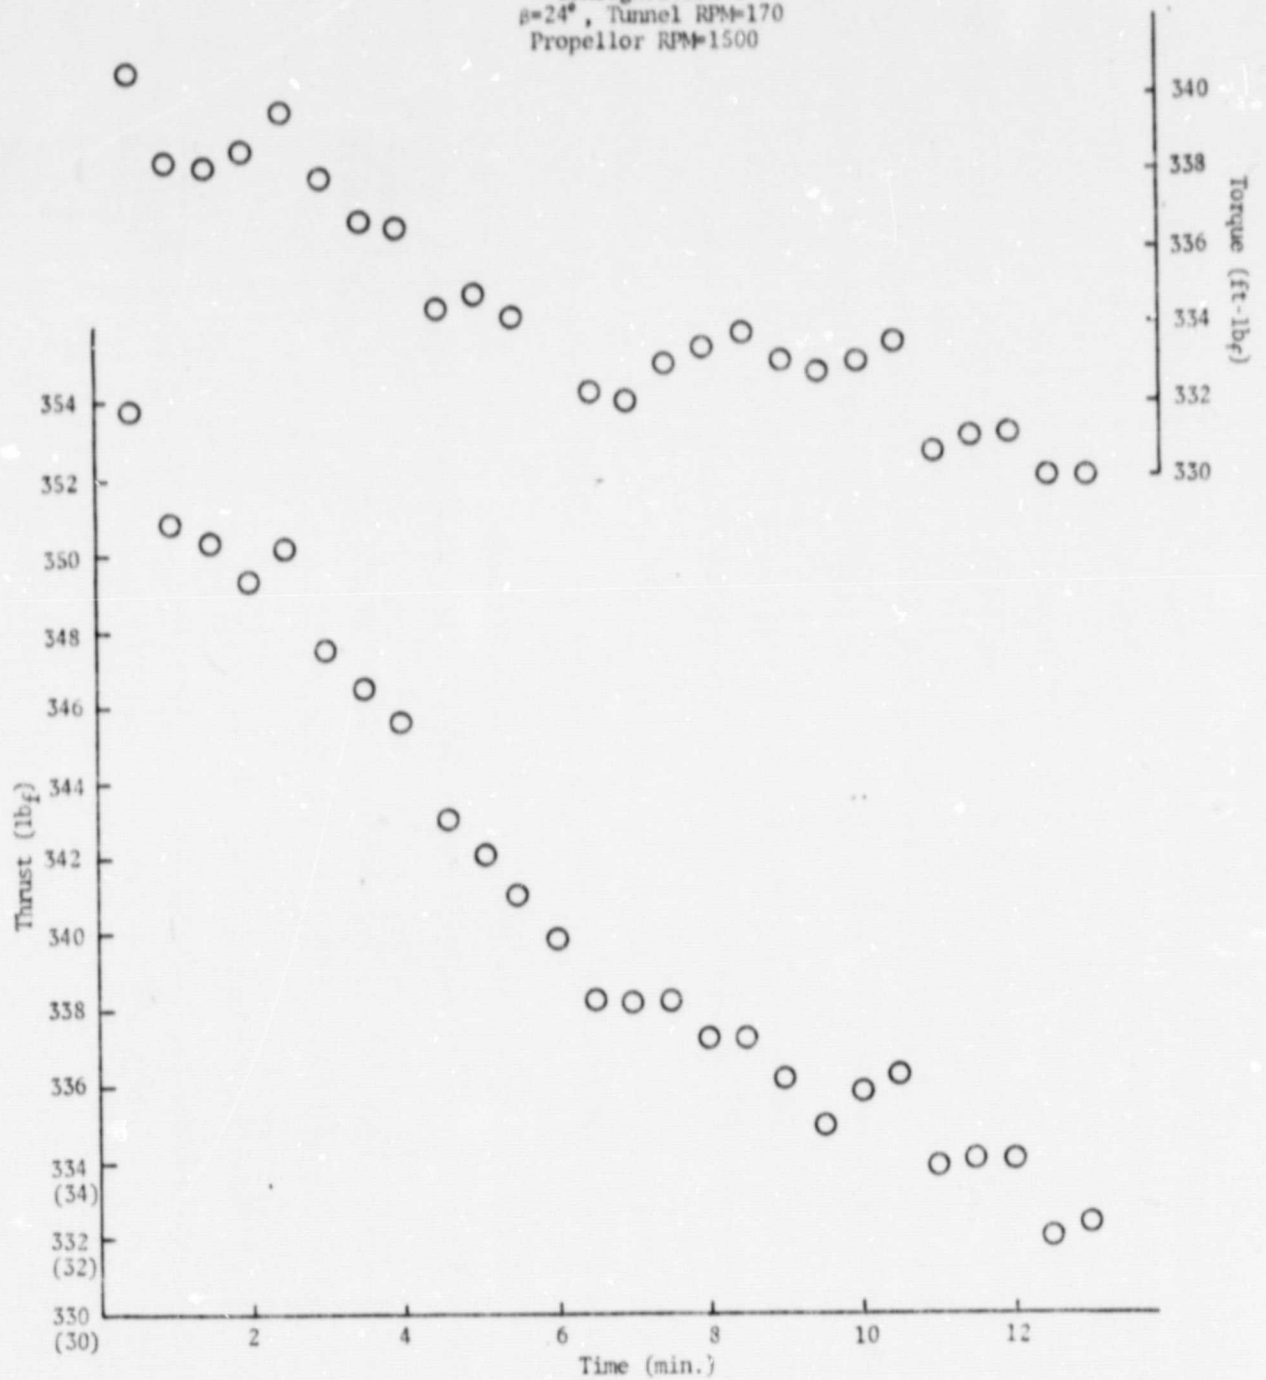


Figure 16. Time History of Shaft Balance Thrust and Torque Outputs.

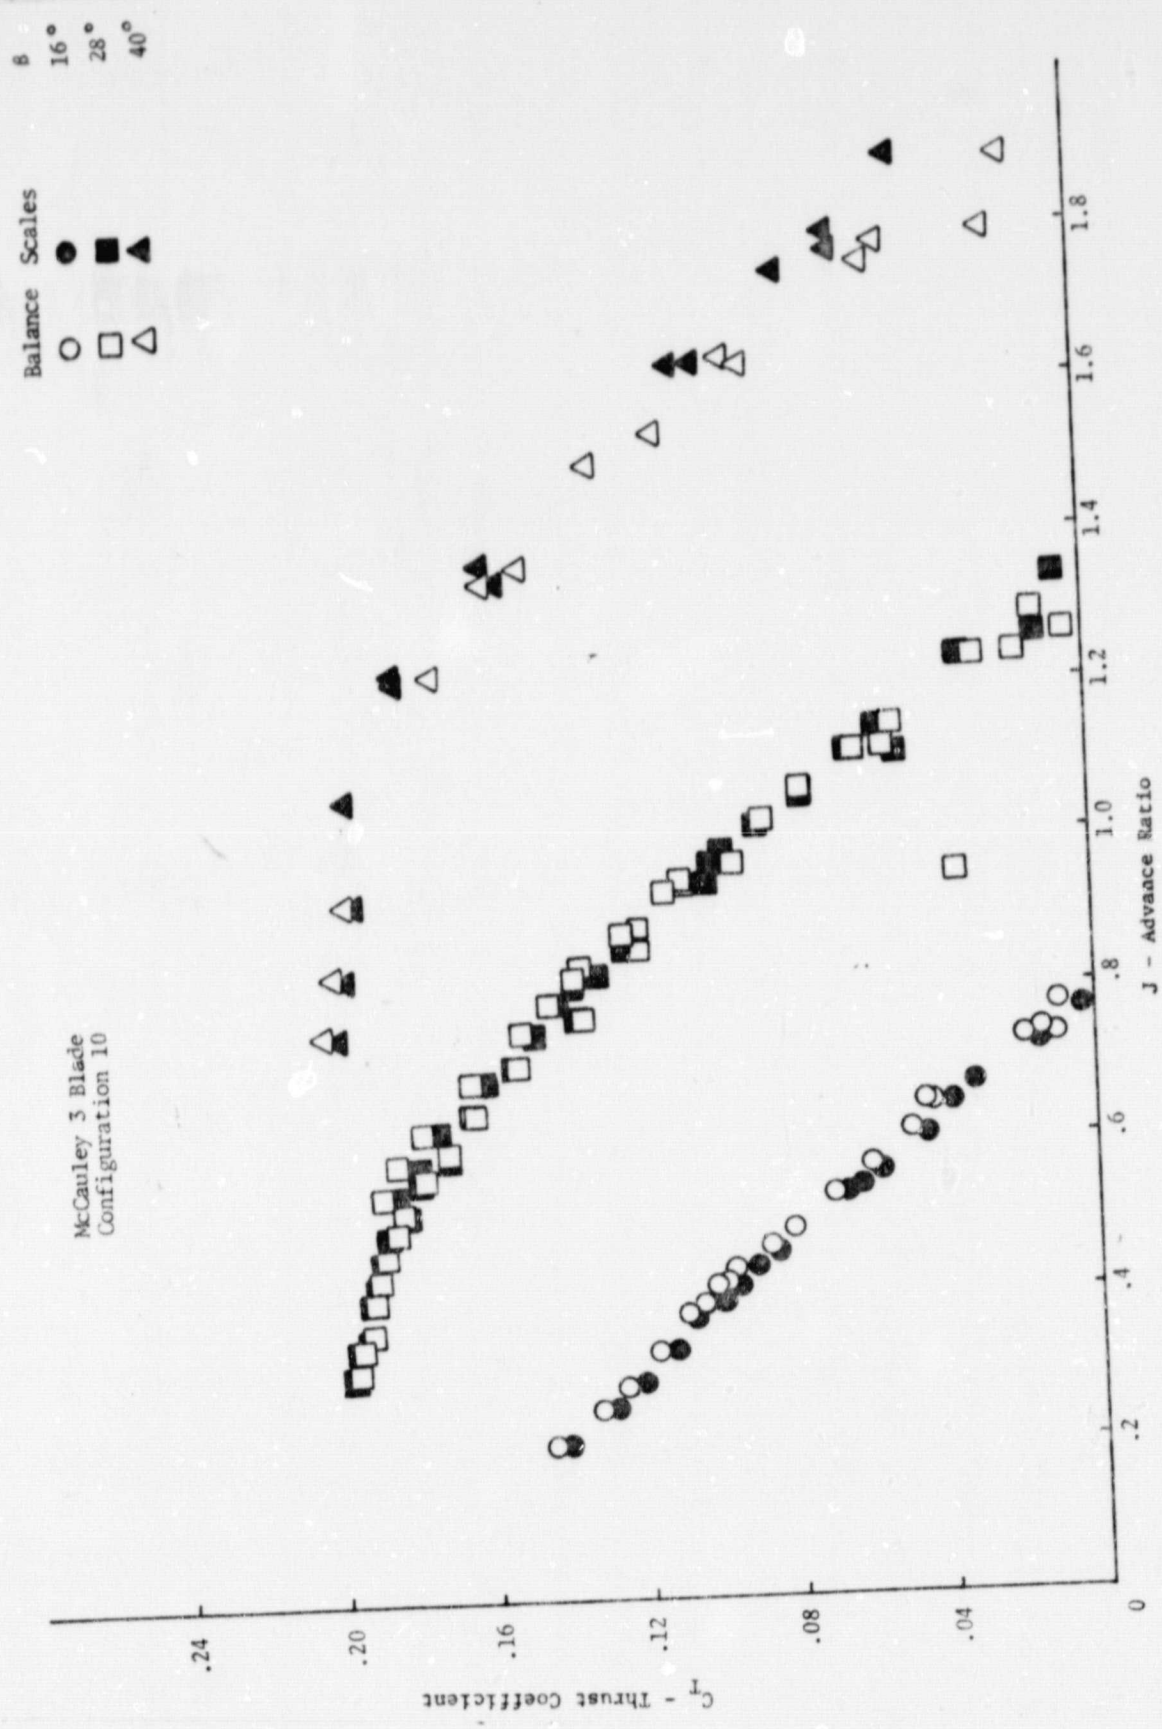


Figure 17. Thrust Coefficient Versus Advance Ratio for the McCauley 3 Blade Propeller.

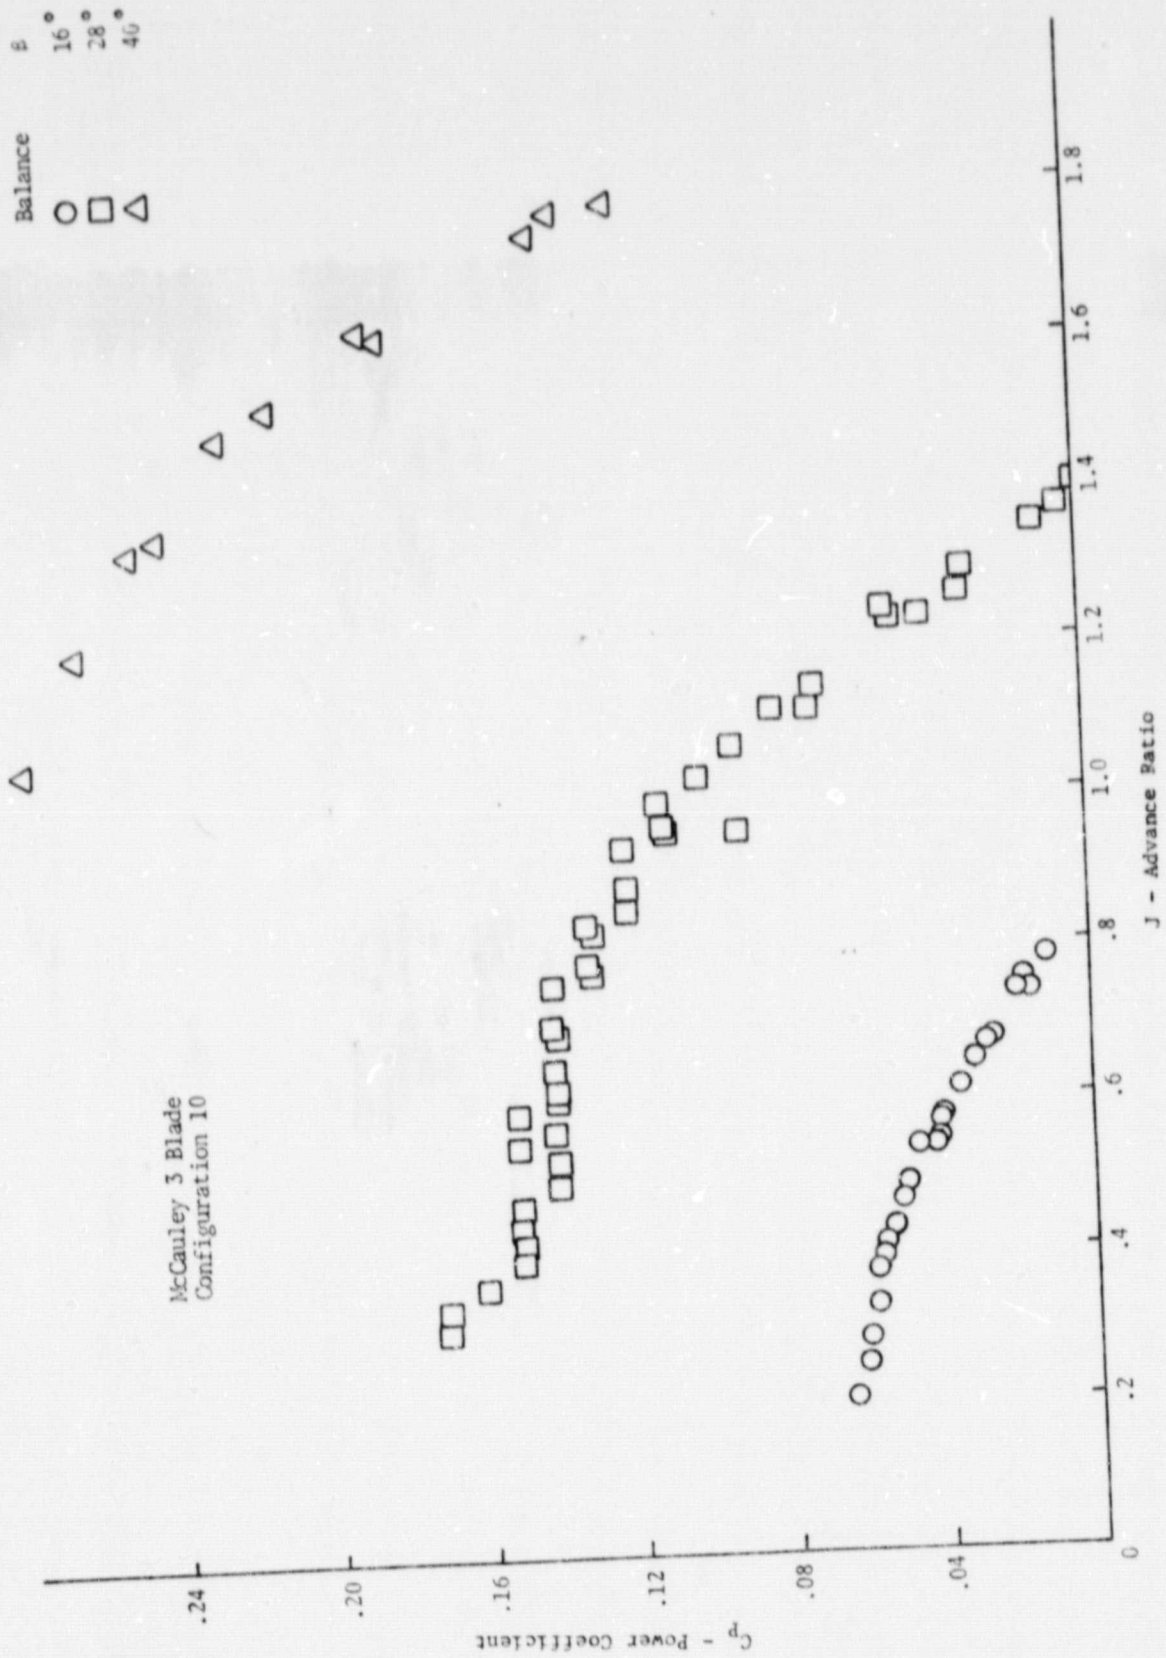


Figure 18. Power Coefficient Versus Advance Ratio for the McCauley 3 Blade Propeller.

○ Balance  
● Scales

McCauley 3 Blade  
Configuration 10,  $\delta = 16^\circ$

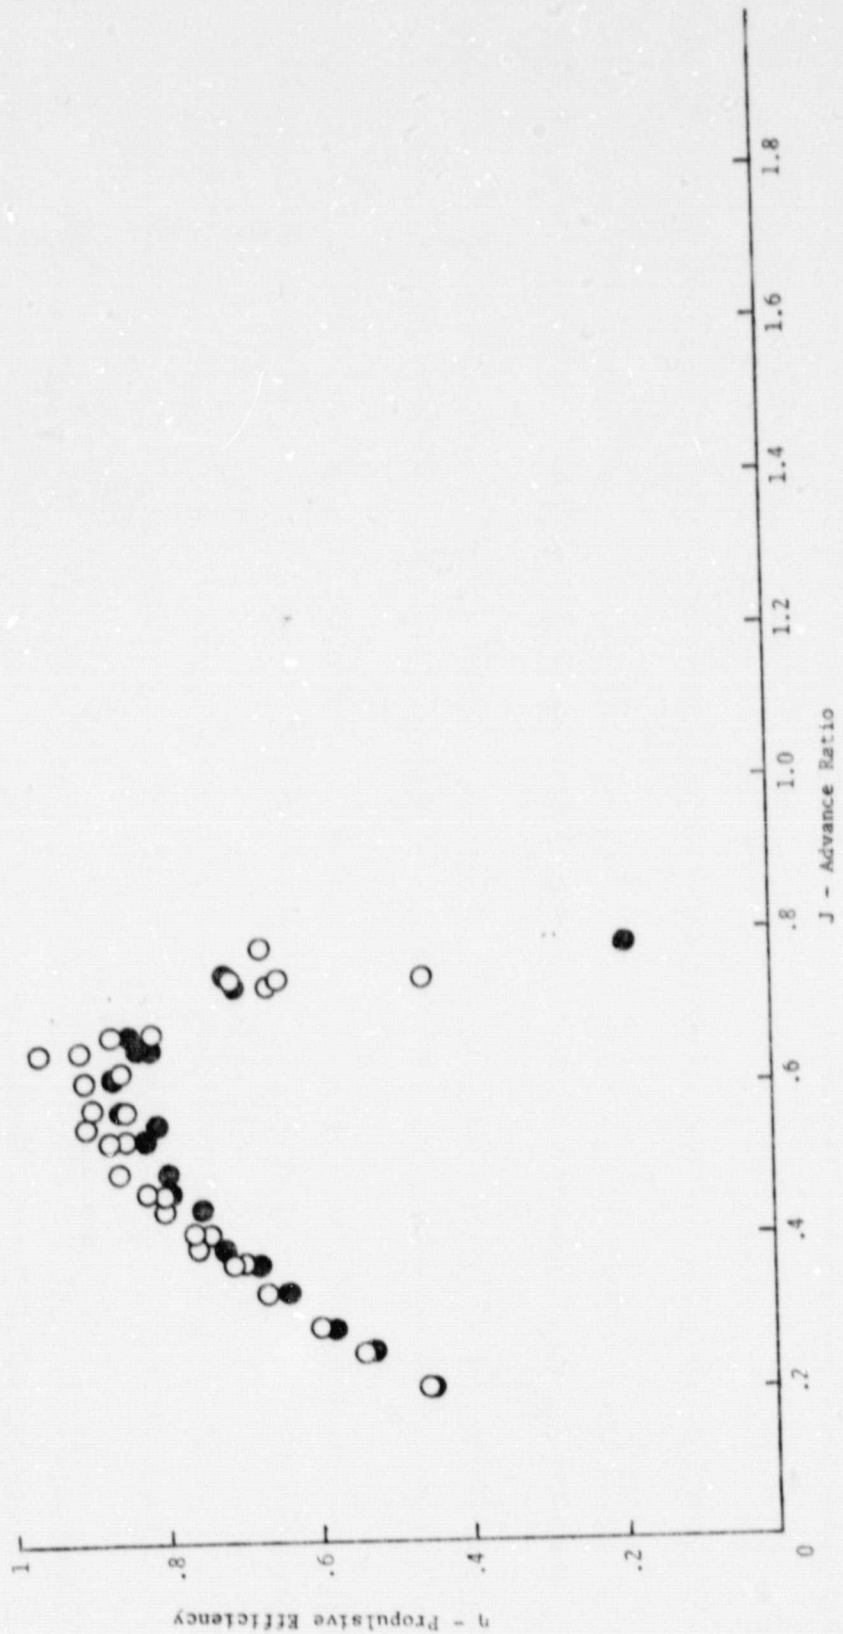


Figure 19a. Propulsion Efficiency Versus Advance Ratio for the McCauley 3 Blade Propeller at a Blade Angle of  $16^\circ$ .

□ Balance  
■ Scales

McCauley 3 Blade  
Configuration 10,  $\beta = 28^\circ$

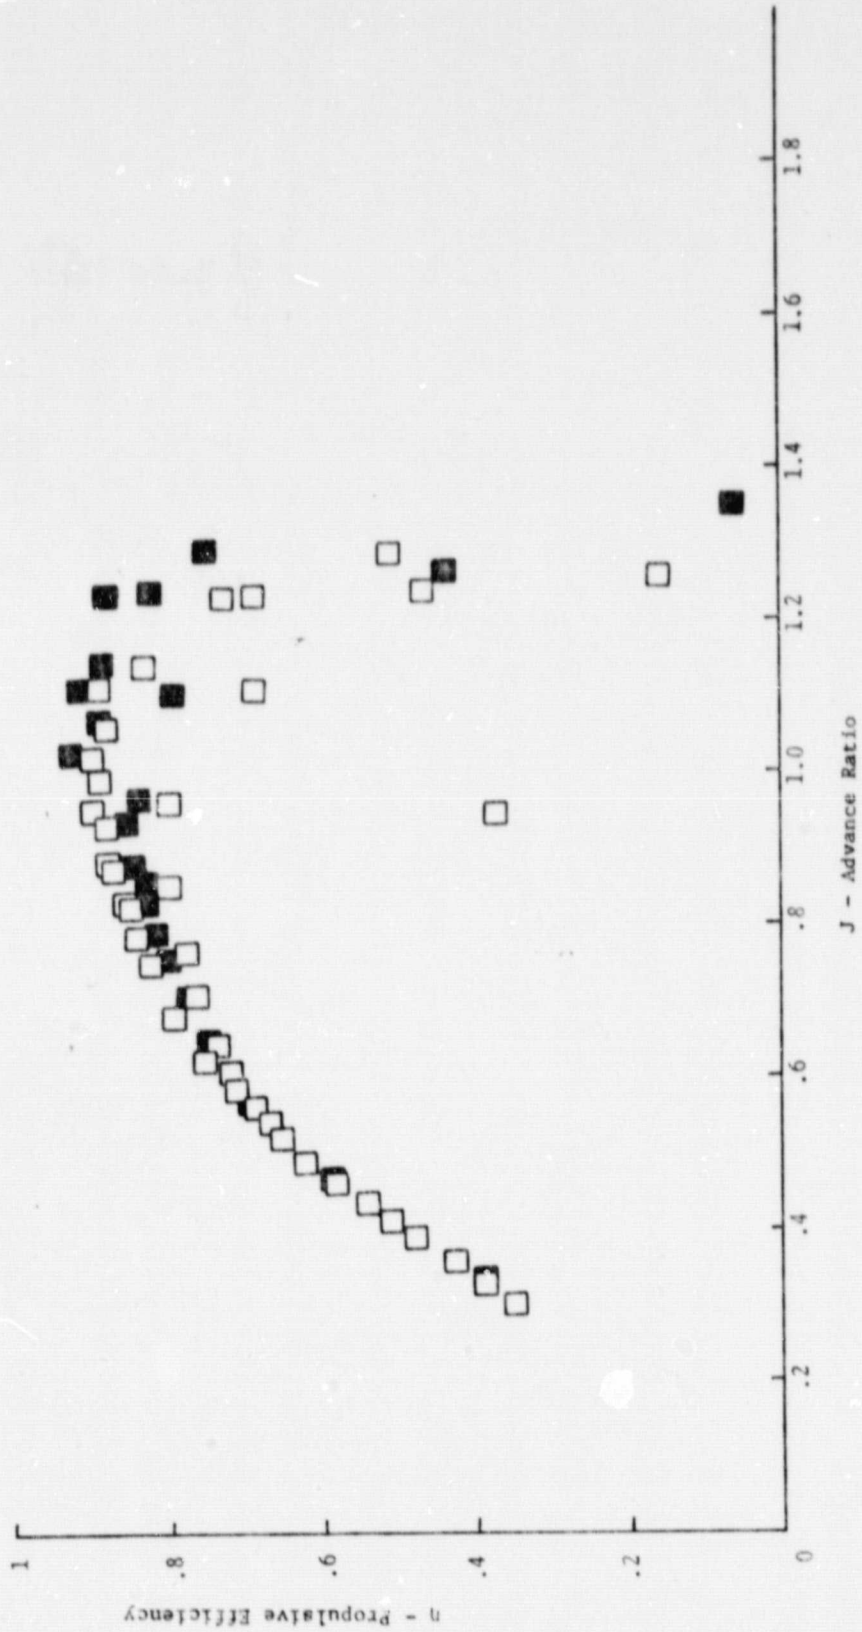


Figure 19b. Propulsion Efficiency Versus Advance Ratio for the McCauley 3 Blade Propeller at a Blade Angle of  $28^\circ$ .

△ Balance  
 ▲ Scales

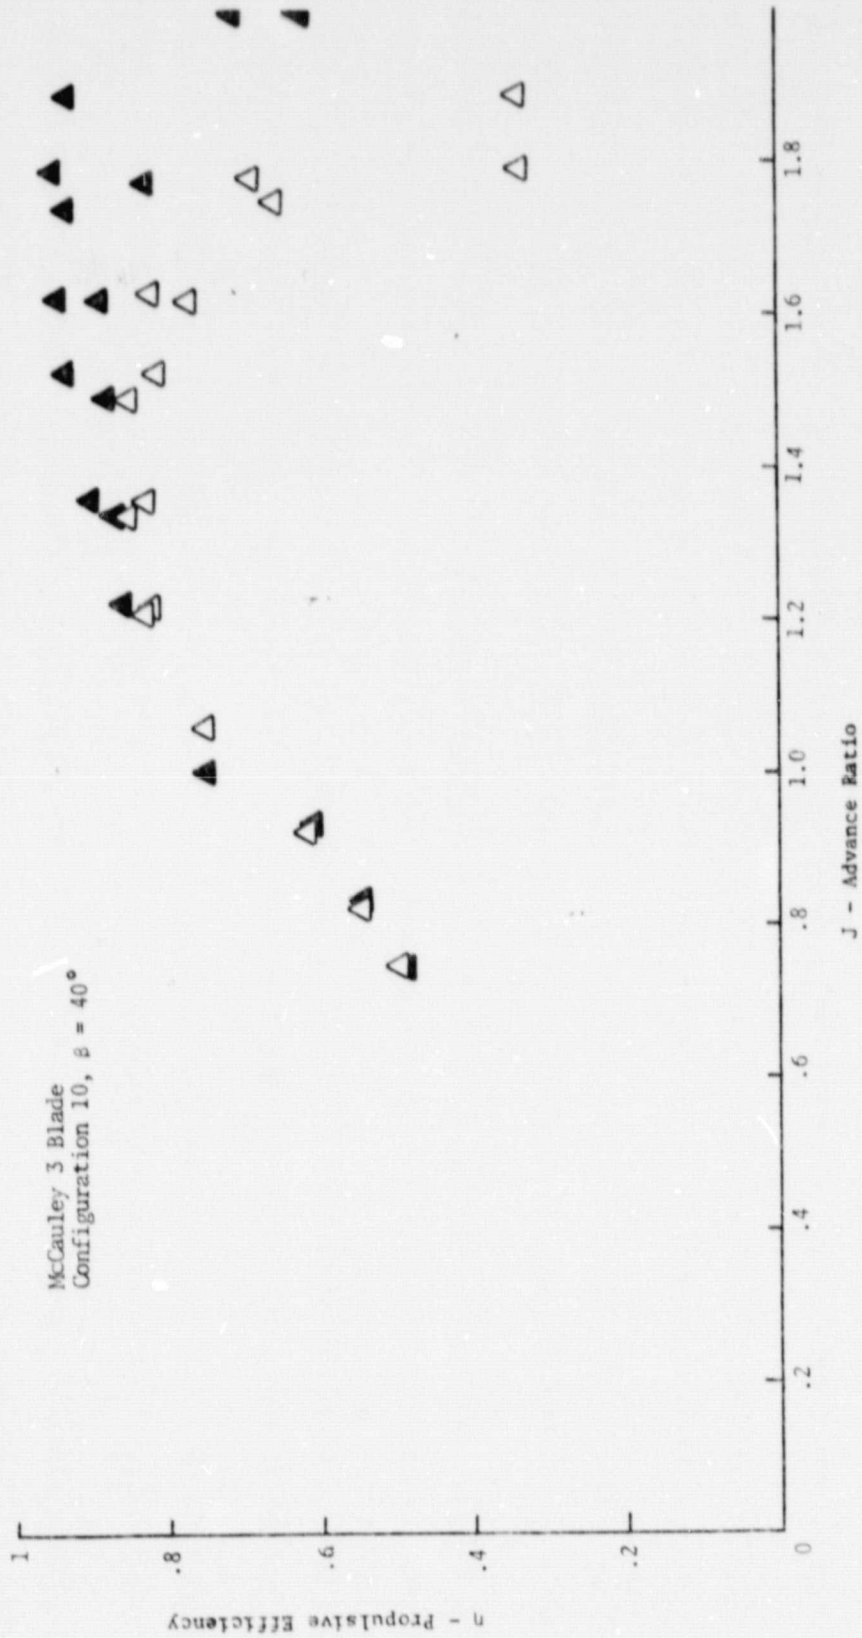


Figure 19c. Propulsion Efficiency Versus Advance Ratio for the McCauley 3 Blade Propeller at a Blade Angle of  $40^\circ$ .

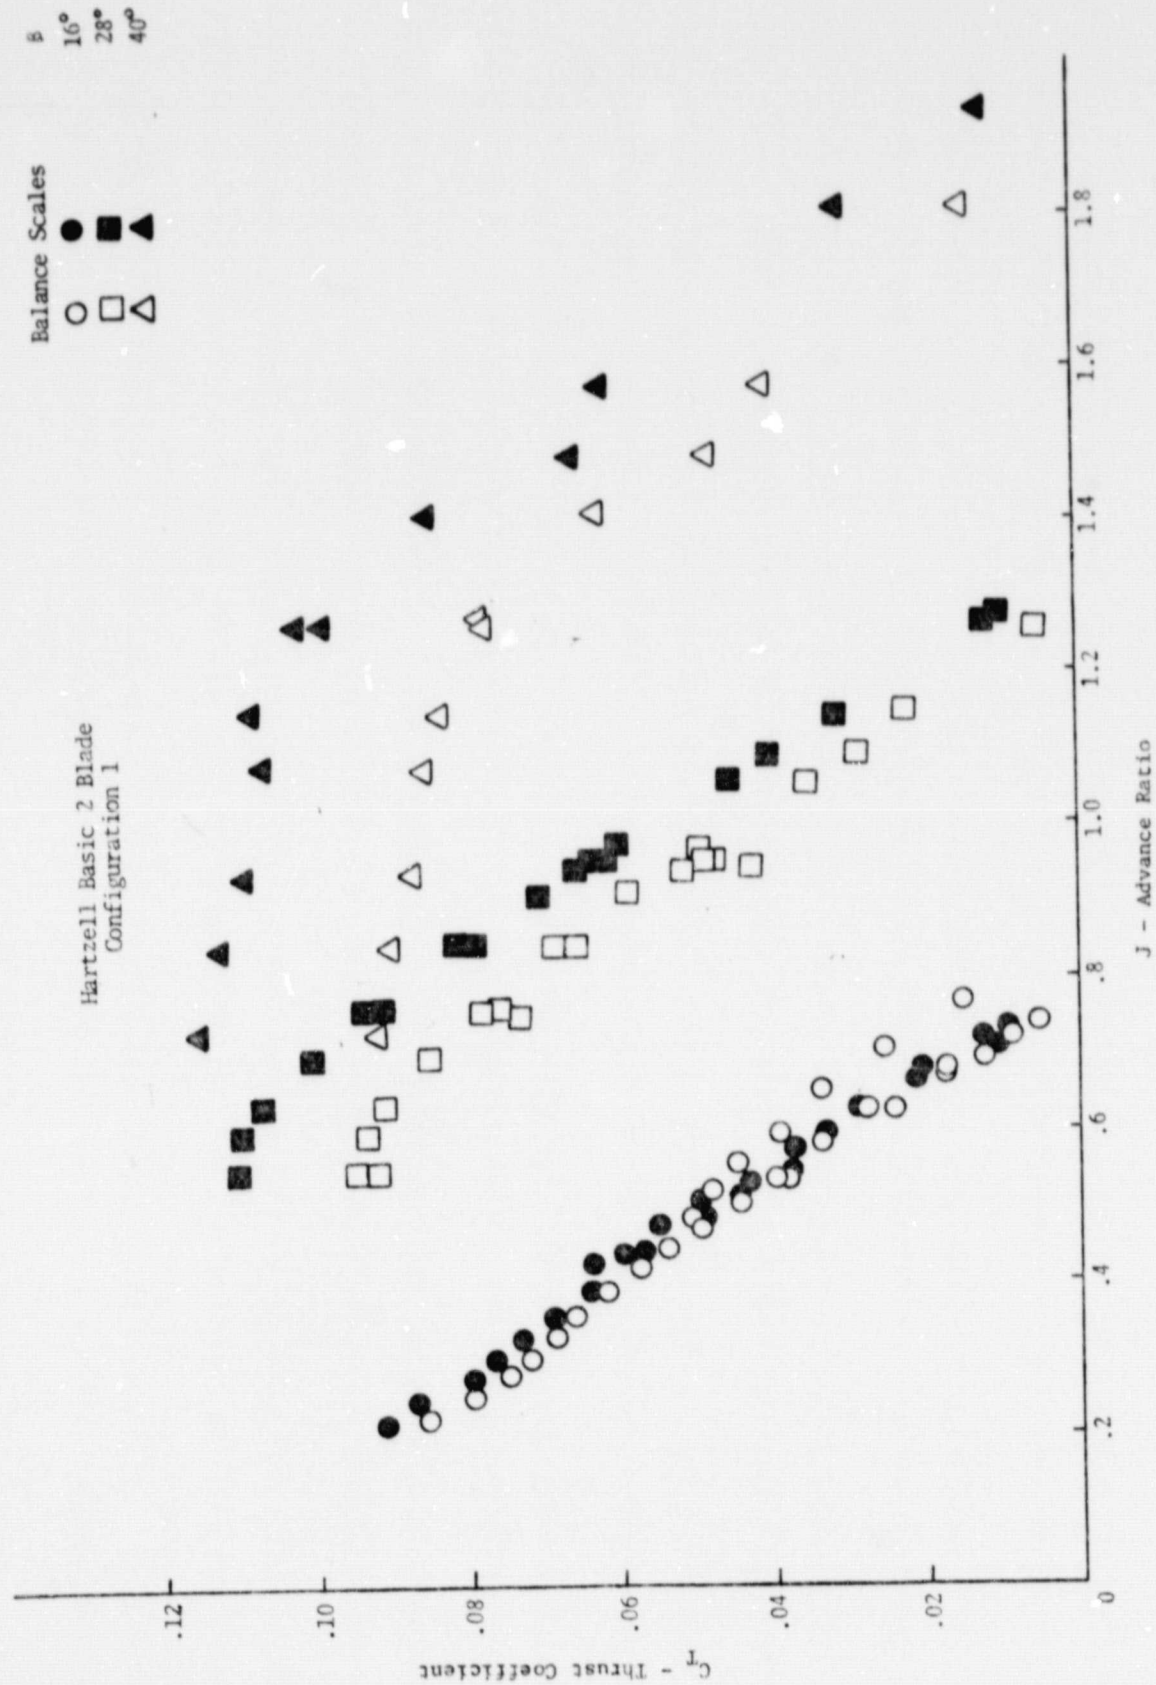


Figure 20. Thrust Coefficient Versus Advance Ratio for the Hartzell Two Blade Propeller.



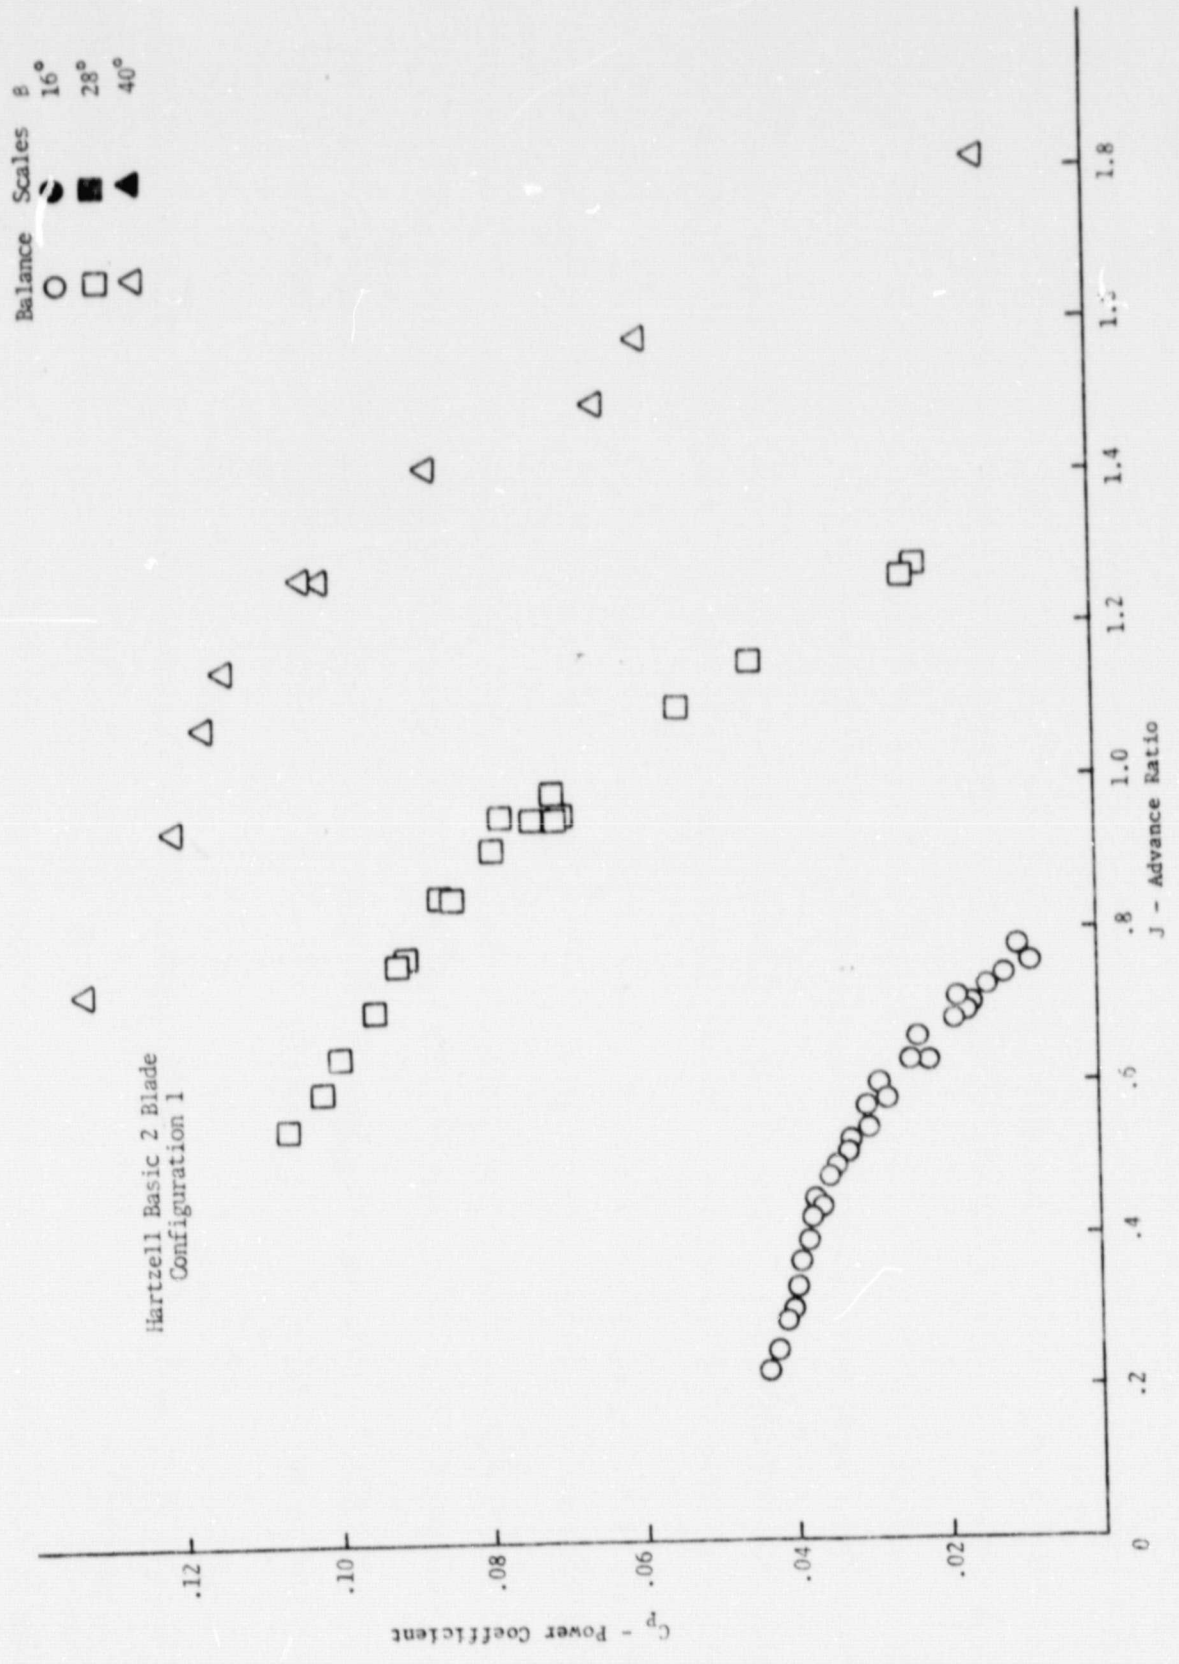


Figure 21. Power Coefficient Versus Advance Ratio for the Hartzell 2 Blade Propeller.

○ Balance  
● Scales

Hartzell Basic 2 Blade  
Configuration 1,  $\beta = 16^\circ$

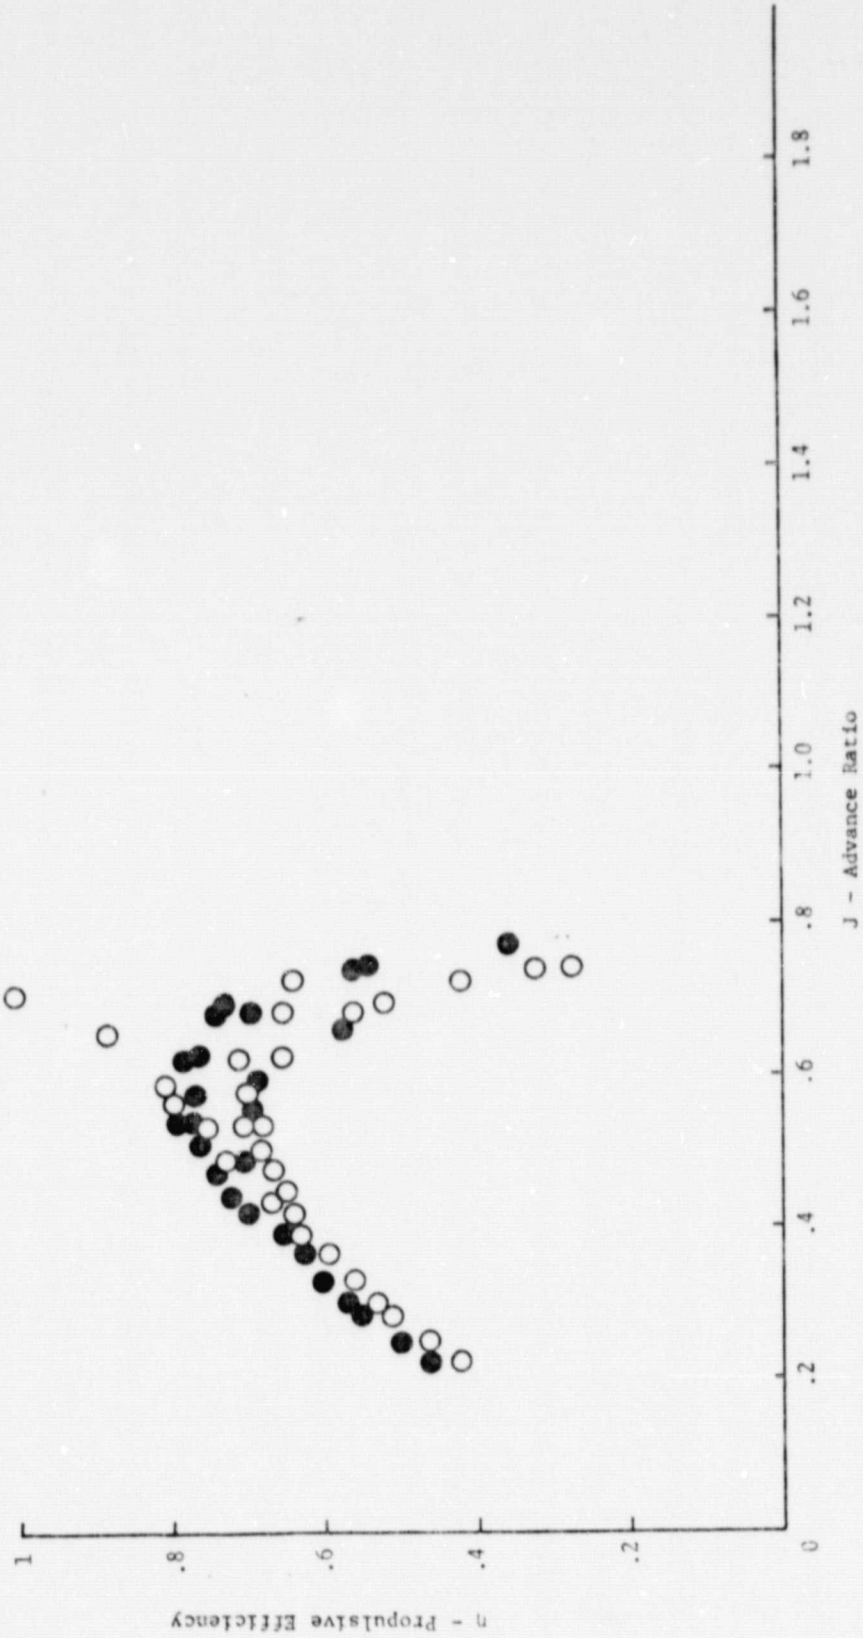


Figure 22a. Propeller Efficiency Versus Advance Ratio for the Hartzell 2 Blade Propeller at a Blade Angle of  $16^\circ$ .

□ Balance  
 ■ Scales

Hartzell Basic 2 Blade  
 Configuration 1,  $\beta = 28^\circ$

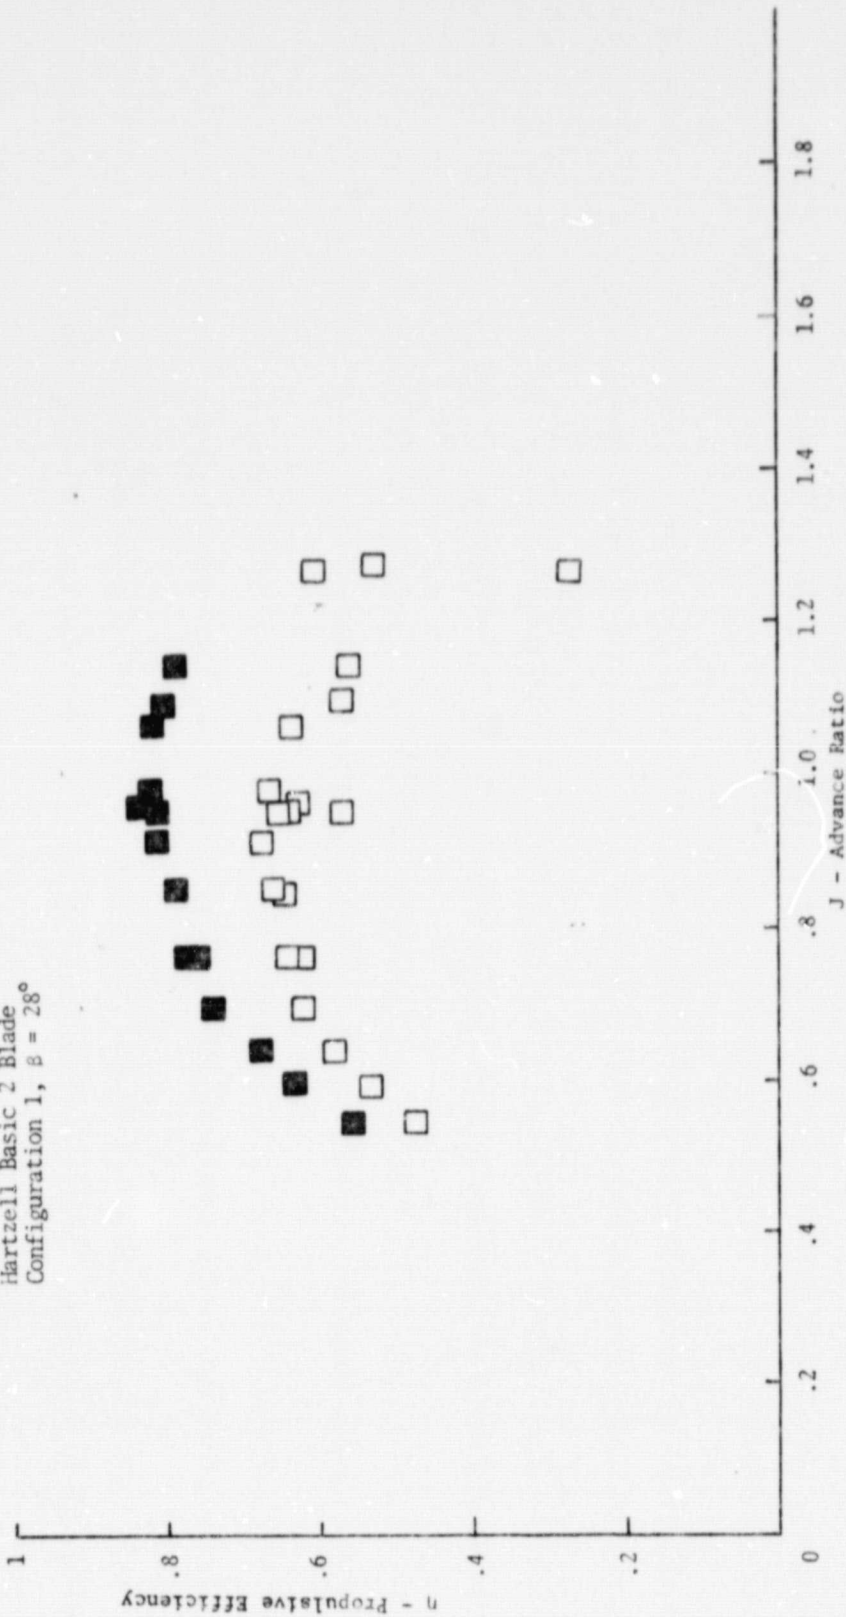


Figure 22b. Propeller Efficiency Versus Advance Ratio for the Hartzell 2 Blade Propeller at a Blade Angle of  $28^\circ$ .

ORIGINAL PAGE IS  
 OF POOR QUALITY

△ Balance  
 ▲ Scales

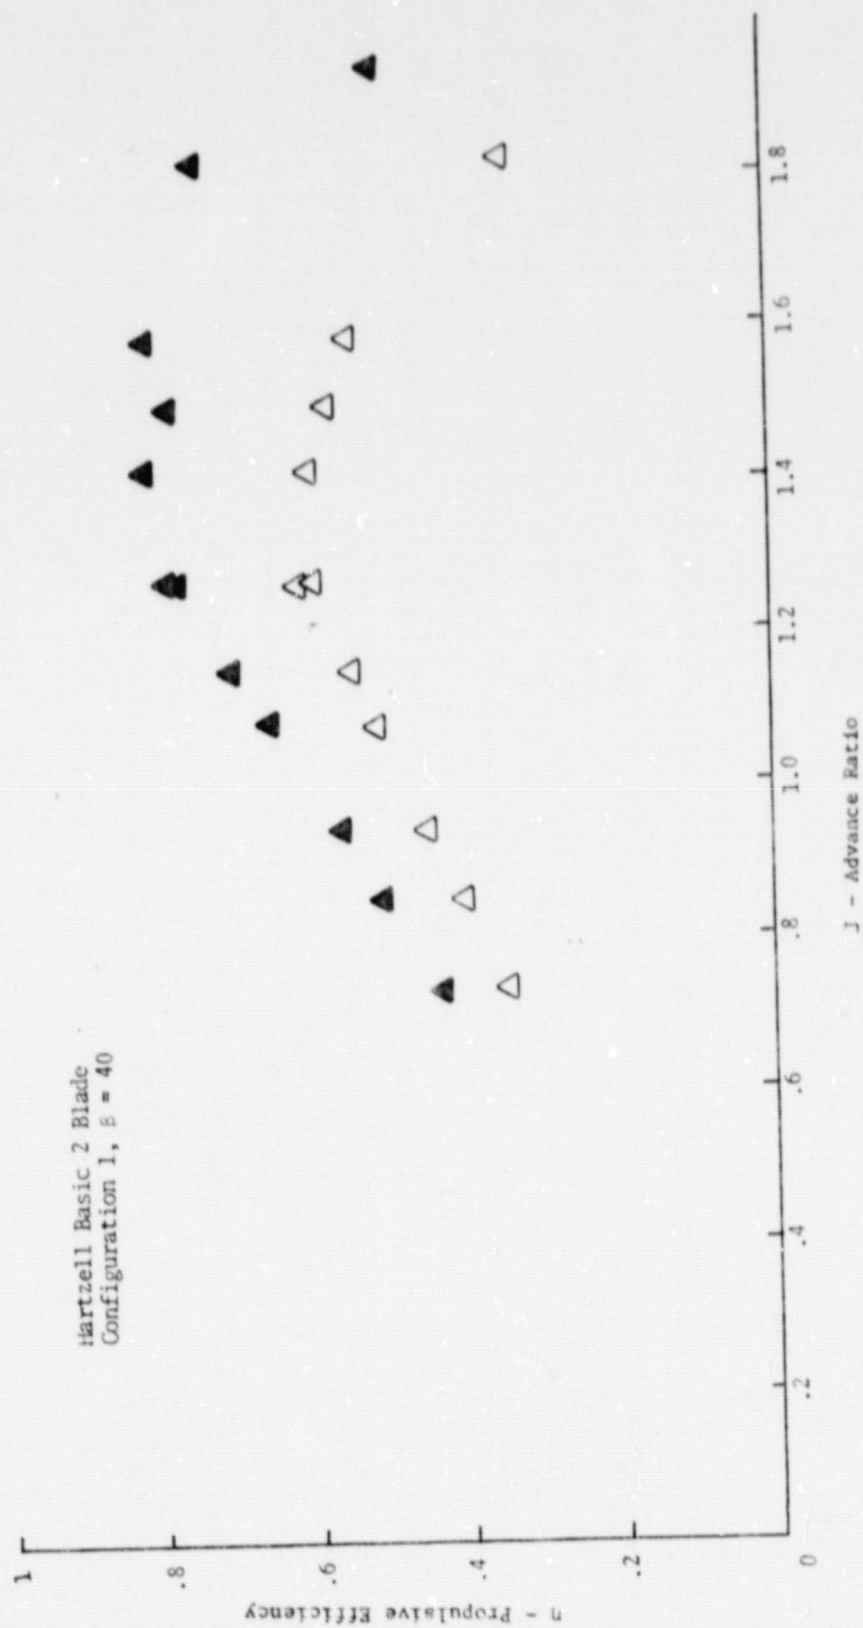


Figure 22c. Propeller Efficiency Versus Advance Ratio for the Hartzell 2 Blade Propeller at a Blade Angle of  $40^\circ$ .

APPENDIX A

A Bibliography of Propeller Research

by

Stan Miley

- Abbott, Frank T., Jr. "Lift and Drag Data for 30 pusher-propeller shaft housings on an NACA 65, 3-018 air foil section." NACA WRL-299, November 1943.
- Abbott, Frank T.; Kelly, H. Neale; Hampton, Kenneth D. "Investigation of propeller-power-plant auto-precision boundaries for a dynamic-aeroelastic model of a four engine turboprop transport airplane." NASA TND-1806, 1963.
- Achenback, W. "Variation in the number of revolutions of air propellers." NACA TN-131, March 1923.
- Adams, G. N. & Gilmore, D. C. "Some observations of vortex core structure." Can. Aero. & Sp. Journal, vol. 18, June 1972.
- Aero Digest. "1947 Annual Directory of Aircraft Propellers." Aero Digest, vol. 54, No. 1, January 1947.
- Aero Digest. "1948 Annual Directory of Aircraft Propellers." Aero Digest, vol. 56, No. 3, March 1948.
- Aero Digest. "Propeller Strip Analysis." Aero Digest, vol. 60, No. 1, January 1950.
- The Aeroplane. "Airscrew Design Problems." The Aeroplane, vol. 76, No. 1973, April 1, 1949.
- Aircraft Propeller Handbook. ANC-9 Bulletin, September 1956.
- Aircraft propulsion. NACA-10-20, 21, 22 - 1954.
- Allen, E. T.; Troller, T. H. ; Weick, F. E. "Discussion on 'propeller advances'." Journal of the Aeronaut. Sc. Vol. 3.
- Allis, Arthur E. & Foss, W. E. "Measurement and calculation of blade torsional deflections of three subsonic type propellers." NACA RML-53I16, May 1954.
- Allis, A. E. & Swihart, John M. "The effect of blade-section camber on the stall-flutter characteristics of three NACA propellers at zero advance. NACA RML-53B17, April 1953.
- Ames, Joseph S. "A resume of the advances in theoretical aerodynamics made by Max M. Munk." NACA Rept 213, 1925.
- Andes, John P. "Propellers and vanishing Race?" Cornell Aero Lab, Vol. VI, No. I, Spring 1955.
- Andrews, W.R. "Notes on airscrew-body interference." Aircraft Engineer, Suppl. to Flight, Vol. 24, No. 44 (1244), October 1932.

- Apparao, T. A. P. S. "An experimental and theoretical investigation of propellers in turbulence." STAR - N73 \_ 15039, UTIAS - 183.
- Arnoldi, Walter E. "Response of a rotating propeller to aerodynamic excitement." NACA RM8107, January 21, 1949.
- Boals, D. H. & Mourhess, M. J. "Numerical evaluation of the wake-survey equations for subsonic flow including the effect of energy addition." NACA WRL-5, 1945.
- Bailey, F. J., Jr. & Johnston, J. Ford. "Flight investigations of the NACA Ds cowlings on the XP-42 airplane. I. - High - Inlet - velocity cowling with propeller cuffs cested in high speed level flight. NACA ARR (WRL-383), January 1943.
- Bailey, Watson, C. B. "Quest for Efficiency; Work of the de Havillaud Propeller Company's Development Establishment." Flight vol. 57, No. 2151, March 16, 1950, p. 346-351.
- Baker, J. E. "The Effects of Various Parameters, Including Mach Number on Propeller-Blade Flutter with Emphasis on Stall Flutter." January 1955, NACA TN 3357
- Baker, J. E. & Paulnock, Russels. "Experimental investigation of flutter of a propeller with Clark Y section operating at zero forward velocity at positive and negative blade angle settings." Dec. 1949, NACA TN 1966.
- Baker, K. E., Smith, R. & Toulson, K. W. Notes on Propeller Whirl Flutter. Canadian Aeronautics and Space Journal. vol.11, Oct. 1965, p. 305-313.
- Barlow, Jewel Bradford. Theory of propeller forces in a turbulent atmosphere. PhD Thesis-University of Toronto, 1970.
- Barlow, William H. Flight investigation of the dray of three air foils and a circular cylander representing full scale propeller shanks. NACA Rept. 582 . 1946.
- Bartle, H., Walter, A., Jr. & Marino, Alfred A. An investigation of the mutual interference effects of a tail surface- stern propeller installation on a Model simulating the Douglass XB-4Z Empennage. Nov. 1944. NACA WRL-625.
- Batchelor, G. K. "Interferance on Wings, Bodies & Airscrews in a Closed tunnel of octagonal section. Australian Coun. for Aeronautics. Rept ACA-5, March 1944.
- Bateman, H.; Townsend, H.C.H.; Kirkup, T.A. Experiments with a family of airscrews, including effect of tractor and pusher bodies; Part IV. On the effect of placing an airscrew in various positions within the nose of a streamline body. Feb. 1926. British A.R.C. R&M No. 1030.

- Becker, John V. High-speed tests of radial-engine nacelles on a thick low-drag wing. May, 1942. NACA WRL - 229.
- Becker, John V. & Baals, Donald H. Wind tunnel tests of a submerged-engine fuselage design. Oct. 1940. NACA WRL-485.
- Becker, John V. & Mattson, Axel T. The effects of spinner-body gap on the pressures available for cooling in the NACA E-type cowling. March 1943. NACA WRL-497.
- Benson, William M. Tests of a Contra-propeller for aircraft. Nov. 1938. NACA TN. 667.
- Betz, A. Development of the inflow theory of the propeller. Nov. 1920. NACA TN. 24.
- Betz, A. The theory of the screw propeller. Feb. 1922. NACA TN. 83.
- Betz, A. Propeller problems. Aug. 1928. NACA TN. 474.
- Betz, A. Considerations on propeller efficiency. Sept. 1928. NACA TM 481.
- Betz, Albert The theory of contravanes applied to propellers. Sept. 1939. NACA TM 909.
- Bien, Theodor. Calculating thrust distributions and efficiency of Air propellers. Dec. 1927. NACA TM 444.
- Bierman, David. Compromises in propeller design. Jour. of the Aeronaut. Sc. vol. 3. p. 142.
- Bierman, D. Propeller Design for high performance utility aircraft. Aero Digest, Feb. 1955. p. 30-32, 37.
- Biermann, David, & Conway, Robert N. The selection of propellers for high thrust at low air speeds. Oct. 1941. NACA ARR WRL-483.
- Biermann, David & Conway, Robert N. Wind tunnel tests of propellers having a biplane arrangement of blades. March 1942. NACA ARR.
- Biermann, David & Gray, W.H. Wind tunnel tests of single & dual rotation pusher propellers having from 3-6 blades. Feb. 1942. NACA WRL-359.
- Biermann, David & Gray, W.H. Wind tunnel tests of eight blade single and dual rotation propellers in the tractor position. Nov. 1941. NACA WRL-384.
- Biermann, David; Gray, W.H. & Maynard, Julian D. Wind tunnel tests of single and dual rotating tractor propellers of large blade width. Sept. 1942. NACA ARR (WRL-385).
- Biermann, David & Hartman, Edwin P. Tests of five full-scale propellers in the presence of a liquid cooled & a radial engine nacelle, including tests of two spinners. 1938. NACA Rept 642.



- Biermann, David & Hartman, Edwin P. The effect of compressibility on eight full-scale propellers operating in the take-off & climbing range. 1938. NACA Rept 639.
- Biermann, David & Hartmann, Edwin P. Tests of five full-scale propellers in the presence of a radial & a liquid-cooled enging nacelle, including tests of two spinners. NACA Rept 642. 1938.
- Biermann, David & Hartman, Edwin P. The aerodynamic characteristics of six full-scale propellers having different airfoil sections. 1939. NACA Rept. 650.
- Biermann, David & Hartman, Edwin P. Tests of two full-scale propellers with different pitch distributions, at blade angles up to  $60^{\circ}$ . 1939. NACA Rept. 658.
- Biermann, David & Hartman, E.P. Wind tunnel tests of 4-6 blade single and dual rotating tractor propellers. 1942. NACA Rept 747.
- Biermann, David; Hartman, E.P. & Pepper, Edward. Full scale tests of several propellers equipped with spinners, cuffs, airfoil and rounded shanks & NACA 1b-series sections. Oct. 1940. NACA ACR.
- Biermann, David & Pepper, Edward. Tests of several propeller cuffs designed for different loadings. Feb. 1942. NACA ARR WRL-359.
- Bingham, G. J. & Keith, A.L. Effects of compressibility at mach numbers up to .8 on internal flow characteristics of a cowling-spinner combination equipped with an 8-blade dual rotation propeller. June 1953. NACA RML 53E12.
- Bishop, J. R. The efficiency loss of a propeller due to slipstream efficiency. Jan. 1968. NPL - Hovercraft -1 STAR. V69-26477.
- Black, E.L. & Brownrigg, W. E. Factors affecting the coorelation of V/STOL wind tunnel data obtained from several test facilities. ALAA, Aero. Testing Conf., Los Angelos. Sept. 21-23, 1966. Paper 66-737.
- Bock, G. & Nikodemus, R. Aussichten Des Luftschrauben-antriebes fuer hohe flugges schwindigkeiten. 1938. NACA TM 884.
- Borck, Hermann. Dependance of propeller efficiency on angle of attack of propeller blade. Dec. 1921. NACA TM 54.
- Borst, Henry V. Summary of propeller design procedures & data. Vol. 1 Aerodynamics design & installation. Nov. 1972. AD-774831. USAAMRDL-TR-73-34A-vol. 1. STAR N74-21667.
- Borst, H.V. ; Sand, Edward; Elliot, D.A., Jr. Summary of propeller design procedures and data. Vol. 3: Hub, actuator, and control designs. AD - 776998. USAAMRDL -TR-73-34C. STAR - N74 - 25614.
- Boxer, Emanuel. Wind tunnel investigation of alternative propellers operating behing deflected wing flaps for the XB-36 airplane. Dec. 1945. NACA WR L-533.

- Brady, G.W. Propellers for high power & transonic speeds. Anglo-American Aeronautics Conference. Brighton 1951. 629.13 Ae82a.
- Brady, W.G. & Crimi, P. Representation of propeller wakes by systems of finite core vortices. Dec. 1964. CAL-BB-1667-S-2. AD - 612V07. STAR N65-20535.
- Br. Inf. Services. Notices from the scientific & technical press. Directorates of Scientific Research & Tech. Development, Ministry of Air production.
- Br. Intell. Objectives. Gesmau propellers for aircraft and marine craft; Interrogation of Professor Tietjeus on 3rd February, 1947. Ct. Brit., British Intelligence Objectives Subcommittee, Final Report No. 1337. Feb. 3, 1947.
- Brockett, Terry Eugene. Propeller perturbation problems. PhD Dissertation-University of Cal. at Berkley, 1972.
- Broclzki, Z. Influence of geometrical parameters on propeller performance at low advance ratios. Instytut Lotnictwa, Prace, No. 54, 1973. p. 27-46. In Polish.
- Broz, Vaclav. Distribution of the circulation on a propeller blade. Zpravoda VZLU, vol. 41, No.5, 1963 p. 17-24.
- Broz, Vaclav. Aerodynamic design of a highly efficient propeller blade. Sept. 1967. NASA TT-F-11218. STAR -N67-36705.
- Brusse, J.; Croak, A.E.; Kettleborough, C. F. Tests on propellers under static thrust conditions. Dec. 1969. NASA -CR -1501. STAR -N70-14134.
- Brusse, J. & Kettleborough, C.F. Improvement of propeller static thrust estimation. NASA-CR-132680. STAR-N75-23567.
- Bryan, T.C. Flight measurements for the vibratory bending and tensional stresses on a Modified Supersonic Propeller for Forward Mach numbers up to 0.95. June 1958. NACA TN 4342.
- Bryan, T.C. Flight measurements for the vibratory stress on a Propeller Designed for an Advance Ratio of 4.0 and a Mach No. 0.82. Sept. 1958. NACA TN 4410.
- Cafarelli, Gerald, T. & Chopin, Mathew H. Computer program for reducing static propeller data. June 1968. AD -675643. ASD-TR-68-19. STAR N69-31040.
- Caldwell, Frank W. Propeller advances. Jour. of the Aeronaut. Sc. Vol. 3. p. 219.
- Caldwell, Frank W. Propellers for aircraft engines of high power output. Jour. of the Aeronautical Sc. vol. 5. p.37.
- Caldwell, Frank W. The effects of a variable gear reduction on propeller performance in modern airplanes. Jour. of the Aeronaut. Sc. vol. 7. p. 244. 1939-40.

- Carmal, M.M. & Milillo, J.R. Investigation of the NACA 4-(0) (03)-045 2 blade propeller at forward mach numbers up to .925. March 1950 NACA RM L50A31a.
- Carmel, M.M. & Morgan, Francis G. Effect of compressibility and camber as determined from an investigation of the NACA4-(3) (08) -03 & 4-(5) (08) -03- 2 bladed propellers up to forward mach numbers of .925. June, 1950, NACA RM L50D28.
- Carmel, M.M. & Robinson, H. L. Further investigation of NACA 4-(5) (08)-03 two-bladed propeller at high forward speeds. May, 1947. NACA RM L7E12.
- Casselini, L.M. Unsteady propeller forces. June 30, 1965. TM - 504.2461-06 AD-618486. STAR N 65-34119.
- Castles, Walter Jr. & Ducoffe, A. L. Static thrust analysis for helicopter rotors & airplane propellers. Jour. of the Aeron. Sc. vol.15 p. 293. 1948.
- Chapel, C. E.; Bent, R.D.; McKinley, J.L. Northrop Aeronautical Institute Aircraft power plants. 1955. 629.1343 N818a.
- Chester, D.H. The Lift of a Propeller-Wing combination due to the slip-stream. A65-23069. Israel Journal of Technology vol.3, Feb. 1965. p. 102-119.
- Chopin, M.H. Propeller static performance tests for V/STOL aircraft. Part 2. Test Data, Appendix 3, Report for July 1965- Nov. 1967. Jan. 1970. AD-70 8742. ASD-TR-69-15-PE-2-App-3. STAR\_ N70-40594.
- Chopin, M.H. Propeller Static Performance tests for V/STOL aircraft. Part 1. Jan. 1969. AD -708501. ASD-TR-69-15-PE-1. STAR N 70-40939.
- Cleary, Harold E. Effects of compressibility on maximum lift coefficients for six propeller airfoils. Jan. 1945. NACA WRL-514.
- Cleary, Harold E. The effects of Reynolds number on the application of NACA 16-series airfoil characteristics to propeller design. Jan. 1952. NACA TN 2591.
- Cliett, C.B.; Thompson, J.F.; Warsi, Z.U.A.; Boatwright, D.W. Aerodynamics of rotors & propellers. Aug. 1972. AD-750175. EIRS-ASE-73-1. AROD-10234-5-E. STAR-N73-15326.
- Computer Program. Calculation of unducted propellers, notice of use of programs for the IBM computer 650. Dec. 1964 - In French. RAA/R/64. STAR N 65-28515.
- Conn, J.F.C. & Love, E.M. Propellers in high speed dives. Br. ARC R&M 2040.
- Conway, Robert N. Miscellaneous information on the effect spinner cutouts on propeller performance. July 1942. NACA ARR.
- Cook, D.L. Propellers control at low airspeed. Can. Aer. & Sp. Jour. vol. 12, No. 1. Jan. 1966.
- Cooper, J.P. The "Linearized Inflow" Propeller Strip Analysis. AD-118078. USAF WADC TR 56-615.

- Cooper, J.P. & Tate, S.E. Development of a propeller aerodynamic strip analysis employing an iterative induced inflow treatment for solution on a high speed digital computer. USAF WOAC TR 57 - 527. AD-130997.
- Cooper, J.P. Investigations toward the development of an aerodynamic strip analysis for single rotation propellers operating at low air-speed and /or low advance ratios- USAF WADC TN 58-98. AD-151146.
- Cooper, Morton. Comparisons of tests of a 4-foot-diameter propeller in the Langley 8-foot and 16-foot high speed tunnels. March 1946. NACA ACR L 5H31.
- Cordes, G. The design of propeller blade roots. Jan, 1942. NACA TM 1001.
- Corsaw, L.H. Electric motor calibration of three 4-blade, Hamilton Std. Hydromatic propellers for use with R-2800-57 engine on P-47M airplane. Feb. 24, 1947. U.S. Army Air Forces, TR - 5555.
- Corson, Blake W. A review of propeller theory. NACA University Conference on Aerodynamics, p. 71. 1948.
- Corson, Blake W. Jr., & Mastrocola, Nicholas. Static characteristics of Hamilton- Standard Propellers having Clark Y & NACA 16-series blade sections. Aug. 1941. NACA MR (WR L-529).
- Corson, Blake W., Jr. & Mastrocola, Nicholas. Static characteristics of Curtiss propellers having different blade sections. Aug. 1941. NACA MR (WR L-568).
- Corson, B.W. & Maynard, J.D. Langley 2,000 -tp Propeller dynamometer and terdax at high speed of an NACA 10 - (3) (08) -03. Two- blade propeller. Dec. 1952. NACA TN 2859.
- Corson, Blake W., Jr. & Miller, Mason F. Considerations of wake excited vibratory stress in a pusher propeller. NACA ACRL 4 B28 (WR L -146) Feb. 1944.
- Costachescu, Traian. Methods for determining performance in horizontal flight and in uniform rectilinear ascent & descent for low speed propeller -type aircraft. Revista Transporturilor, vol. 15. March 1968, p. 121-124. in Rumanian.
- Coward, Ken S. Propeller Static thrust. Paper & reports. May 1955. Aero/space Engrg., March 1959. p 64-68.
- Crigler, John L. The effect of trailing - edge extension flaps on propeller characteristics. NACA WR L -165. Jan 1945.
- Crigler, J.C. Comparison of calculated and experimental propeller characteristics for four- six and eight blade single- rotating propellers. Feb. 1944. NACA WR L -362.
- Crigler, John L. Application of Theodorsen's Theory to Propeller design. 1949. NACA Rept 924.
- Crigler, John L. & Gilman, Jean Jr. Calculation of aerodynamic forces on a propeller in pitch or yaw. NACA RM L 8K26.

- Crigler, John L. & Jaquis, Robert E. Propeller - efficiency charts for light airplanes. NACA TN 1338, July 1947.
- Crigler, John L. & Talkin, Herbert W. Charts for determining propeller efficiency. NACA ACR L4129 (WR L-144) Sept. 1944.
- Crigler, J.L. & Talkin, H.W. Propeller selection from aerodynamic considerations. July 1942. NACA WR L-363.
- Cristescu, Jean. Doublet d' Helices Coaxiales- Helice Unique (several methods of calculation of paired coaxial counter rotating propellers & single propellers comp. with wind tunnel results). France, Min. de l'Air PST 356, 1959.
- Critzus, Chris C. & Heyson, Harry H. Aerodynamic characteristics of NACA 0012 airfoil at angle of attack from 0° to 180°. Jan. 1955. NACA TN 3361.
- Crowley, J.W., Jr. Investigation of slipstream velocity. 1924. NACA Rept 194.
- Crowley, J.W., Jr. & Mixson, R.E. Characteristics of five propellers in flight. 1928. NACA Rept. 292.
- Cummings, Damon Ellis. Vortex interaction in a propeller wake. PhD dissertation - Mass. Inst. of Tech. 1968.
- Currie, D.P. Propeller design considerations for turbine powered aircraft. SAE Paper No. 680227.
- Curtis-Wright Corp. Experimental "Swept Back" Propeller. Curtis-Wright Corp., Propeller Division.
- Daley, Bernard N. & Humphreys, Milton D. Effects of compressibility on the flow past thick airfoil sections. July 1948. NACA TN 1657.
- Dat, Rolland. Lifting surface theory applied to fixed wings & propellers. STAR N 75-1011 01-02.
- Dathe, H. M. Distribution of induced velocities in the plane of rotation of a propeller in oblique flow, and its effect upon aerodynamic force distributions and blade loads- Zeitschrift for Flugwissenschatten. vol. 11, May 1963 p. 177-192. A63-24277.
- Davidson, R. E. Aerodynamic characteristics of a 3-blade propeller having NACA 10-(3)(08)-03 blades. NACA RML8H16, October 29, 1948.
- Davidson, R. E. Propeller Lift and Thrust Distribution From Wake Surveys of Stagnation Conditions. NACA RM-L51K29, January 1952.
- Davidson, R. E. Linearized potential theory of propeller induction in a compressible flow. NACA TN2983, September 1953.
- DeBothezat, George. The general theory of blade screws. NACA Rept. 29, 1919.
- Degroff, Harold M., Jr. Aerodynamic forces on a propeller in nonstationary motion. Ph. D dissertation - Cal. Inst. of Tech. - 1950.

- de Haviland Co., Ltd. Airscrew performance estimation. Aircraft Engineering, February 1942.
- de Haviland Propellers, Ltd. Aerodynamic characteristics in the approach, superfine, and negative pitch ranges of two 4-bladed prop. with NACA Series 16 blade sections. Gt. Brt. ARC R&M 3105, April 1957.
- Delano, James B. Investigation of two-blade propellers at high forward speeds in the NACA 8-foot high-speed tunnel. III - Effects of Camber & Compressibility NACA 4-(5)(08)-03 blades. NACA ACR L5F15 NACA Rept. 1012, August 1945.
- Delano, James B. The effect of high solidity on propeller characteristics at high forward speeds from wind-tunnel tests of the NACA 4-(3)(06.3)-06 & NACA 4-(3)(06.4)-09 two bladed propellers. NACA RML6L19, February 1947.
- Delano, James B. & Carmel, Melvin M. Effect of shank design on propeller performance at high speed. NACA ARR L6D23, June 1946.
- Delano, J. B. & Carmel, M. M. Investigation of NACA 4-(0)(03)-045 & NACA 4-(0)(08)-045 two blade propellers at forward Mach numbers to .925. NACA RML9L060, January 18, 1950.
- Delano, J. B. and Camel, M. M. Tests of Two-Blade Propellers in the Langley 8-Foot High - Speed Tunnel to Determine the Effect on Propeller Performance of a Modification of Inboard Pitch Distribution. NACA TN 2268, February, 1951.
- Delano, J.B. & Crigler, J. L. Compressible flow solutions for the actuator disk. NACA PML53A07, March 1953.
- Delano, J. B. & Harrison, D. E. Investigation of the NACA 4-(4)(06)-04 two bladed propeller at Mach numbers up to .925. NACA RML9I07, October 1949.
- Delana, J. B. & Harrison, D. E. Investigation of the NACA 4-(4)(06)-057-45A and NACA 4-(4)(06)-057-47B 2-blade swept propellers at Forward Mach numbers up to .925. NACA RML9L05, February 1950.
- Delano, J. B. and Morgan, F. C. Investigation of the NACA 4-(3)(08)-03 two blade propeller at forward Mach numbers up to .925. NACA RML9I06, November 1949.
- Demele, F. A. & Kolbe, Carl D. The effect of trailing edge bluntness on the performance of a small scale supersonic propeller at forward Mach numbers up to .92. NACA RM A55J12, January 1956.
- Demele, Fred A. & Otey, W. R. Investigation of the NACA 1.167-(0)(03)-058 & NACA 1.167-(0)(05)-058 3-blade propellers at forward Mach numbers to .92 including effects of thrust-axis inclination. NACA RMA53F16, August 1953.
- Demele, Fred A. & Otey, W. R. Investigation of the normal force accompanying thrust-axis inclination of NACA 1.167-(0)(03)-058 and the NACA 1.167-(0)(05)-058 3-blade propellers at forward Mach numbers to .9. NACA RMA54D22, June, 1954.

- Desmond, Gerald L. & Freitag, Robert F. Working charts for the computation of propeller thrust throughout the takeoff range. NACA WRW-100, July 1943.
- De Young, John. Force and moment derivatives due to propellers of arbitrary configuration inclined with respect to free stream. Journal of A/C, vol. 2, May-June 1965.
- Dickerson, Mary. Induced velocities forward & aft of a propeller. David Taylor Model Basin, Navy Dept., Washington D. C. Rept. No. 1310, March 1959.
- Dickinson, H. B. Propeller-design problems of high speed airplanes. NACA ACR, April 1941.
- Diehl, Walter S. The general efficiency curve for airplane propellers. NACA Rept 168, 1923.
- Diehl, W. S. Relative efficiency of direct & geared drive propellers. NACA Rept 178, 1923.
- Diehl, Walter S. The Application of propeller test data to design and performance calculations, NACA Rept. 186, 1924.
- Diehl, Walter S. Static thrust of airplane propellers. NACA Rept. 447, 1932.
- Dietsius, H. The airplane propeller, its strength and correct shape. NACA TN127, February 1923.
- Dingleldein, R. C. & Raymond F. Scheefer. High speed photographs of a YR-4B production rotor blade for simulated flight conditions in the Langley full scale tunnel. NACA MRL5C12c (WRL-631), March 1945.
- Dommasch, Daniel Otto. Elements of propeller and helicopter aerodynamics. 629.1343 D713e, 1953.
- Dorshimer, R. C. Aircraft propeller vibration measurement system. AD-694009, FAA-NA-69-23, FAA-DS-69-5, STAR N70-16135, September 1969.
- Draper, J. W. & Kuhn, Richard E. Investigation of the aerodynamic characteristics of a model wing-propeller combination and of the wing and propeller separately at angles of attack up to  $90^{\circ}$ . NACA TN 3304, NACA Rept. 1263, November 1954.
- Driggs, Ivan H. Simplified propeller calculations. Journal of the Aeronautical Science, vol. 5.
- Duke, James B. & Turner, M.J. Propeller flutter. Journal of the Aeron. Sc., vol. 16, 1949.
- Durand, W. F. Researches on the performance of the screw propeller. Washington, D.C., Carnegie Institute of Washington, 1907.
- Durand, William F. Experimental research on air propellers. NACA Rept. 14, 1917.

- Durand, W. F. & Lesley, E. P. Experimental research on Air propellers - II. NACA Rept. 30, 1920.
- Durand, W. F. & Lesley, E. P. Experimental research on air propellers- III. NACA Rept. 64, 1920.
- Durand, W. F. Interaction between airplane propellers and airplane structures. NACA Rept. 235, 1926.
- Durand, W. F. Test on thirteen Navy type model propellers. NACA Rept. 237, 1926.
- Durand, W. F. & Lesley, E. P. Experimental research on air propellers - IV. NACA Rept. 109, 1921.
- Durand, W. E. & Lesley, E. P. Tests on Air propellers in yaw. NACA Rept. 113, 1921.
- Durand, W. F. & Lesley, E. P. Experimental research on air propellers - V. NACA Rept. 141, 1922.
- Durand, William F. & Lesley, E. P. Comparison of model propeller tests with airfoil theory. NACA Rept. 196, 1924.
- Durand, W. F. & Lesley, E. P. Comparison of tests on airplane propellers in flight with wind tunnel model tests of similar forms. NACA Rept. 220, 1926.
- Eisenhuth, J. J. & McCormick, B. W. An observation on the vortex system of dual-rotation propellers. Journal of the Aer. Sc. vol. 20, 1953.
- Eisenhuth, J. J. Propellers with distorted Inflow. Penn. St. Univ. Ordinance Res. Lab. Ad-408556, June 1963.
- Enos, Louis H. Some full scale static propeller characteristics. Journal of the Aeronautical Sc. vol. 5.
- Erickson, J. C., Jr. New considerations of the fluctuating flow field in propeller theory. AD-680232, CAL-BB-2670-S-1, AROD-7989-1-E, STAR-N69-24707, November 1968.
- Erickson, J. C., Jr. Theoretical & experimental investigation of V/Stol propeller operation in a static condition. USSAAVLABS TR69-55, October 1969.
- Erickson, J. C., Jr. Fluctuating Flowfield of propellers in Cruise and static operation. Journal of A/C., vol. 7, Jan.-Feb. 1970.
- Erickson, J. C., Jr. & Hough, G. R. Fluctuating flow field of propellers in cruise and static operation. Journal of Aircraft 7:78-84, January 1970.
- Erickson, J. C., Jr. & Ordway, D. E. A theory for static propeller performance. CAL/AVLABS, June 22, 24 1966.



- Evans, Alber J. Propeller section aerodynamic characteristics as determined by measuring the section surface pressure on a NACA 10-(3)(08)-03 propeller under operating conditions. NACA RML50H03, November 1950.
- Evans, A. J. & Klunker, E. Bernard. Preliminary investigation of two full scale propellers to determine the effect of swept-back blade tips on propeller Aerodynamic characteristics. NACA RML6J21, May 1947.
- Evans, A. J. & Liner, George. Preliminary investigation to determine propeller section characteristics by measuring the pressure distribution on an NACA 10-(3)(08)-03 propeller under operating conditions. NACA RML8E11, July 14, 1948.
- Evans, A. J. & Liner, George. A wind tunnel investigation of the aerodynamic characteristics of a full scale swept back propeller and two related straight propellers. NACA RML50J15, January 1951.
- Evans, A. J. & Liner, George. A wind-tunnel investigation of the aerodynamic characteristics of a full-scale supersonic-type 3-blade propeller at Mach numbers of .96. NACA RML53F01, NACA rept. 1375, July 1953.
- Evans, A. J. & Luchuk, W. Pressure Distributions on the Blade Sections of the NACA 10-(5)(066)-03 Propeller Under Operating Conditions. NACA RML50B21, April 1950.
- Evans, A. J. & Salters, L. B., Jr. Aerodynamic characteristics of a two blade NACA 10-(3)(08)-03R propeller. NACA RML8E24, September 2, 1948.
- Ewing, H. G., Kettlewell, J., & Gaukroger, D. R. Comparative Flutter Tests on Two, Three, Four, and Five-blade Propellers. Gt. Brit. ARC R&M number 2634, March 1948.
- Eyre, K. The Determination of Propeller Efficiency in Flight; Preliminary Tests with a Rotol Propeller. Gt. Brit. ARC R&M number 2414, July 1950.
- Fage, A. A Note on the Method of Estimating from Observations of Total Head, the Total Thrust of an Airscrew. Gt. Brit. ARC R&M number 699.
- Fabri, Jean & Siestrunk, Raymond. Study of the supersonic propeller. NACA TM1355, March 1953.
- Fage, A. & Collins, H. E. An investigation of the magnitude of the inflow velocity of the air in the immediate vicinity of an airscrew with a view to an improvement in the accuracy of prediction from airfoil data of the performance of an airscrew. Br. ARC R&M 328, May 1917.
- Fage, Arthur & Collins, H. E. An investigation of the mutual interference of an airscrew & the body of a tractor type airplane. Tech. Rept. Adv. Comm. Aeronautics, 1917-1918, Vol. 2, London 1921, R&M 393, 1921.
- Fage, A.; Lock, C. N.; Bateman, H.; & Williams, D. H. Experiments with a family of airscrews including effect of tractor & pusher bodies. British ARC R&M number 829, 830, November 1922.

- Fairhurst, L. G. The Future Scope of Propellers. Journal of the Royal Aeron. Sc., December 1945.
- Fairhurst, L. G. Propellers for Military and Civil Aircraft. Journal of the Royal Aeronautical Society, August 1956.
- Fales, E.N. Apparatus for high speed research, applicable to propeller tip effect; and comments of Mr. Ackeret and Dr. Prandtl on certain features of the Gottingen Wind Tunnel. NACA MP19, January 1926.
- Fanoë, O. Optimum propeller in viscous flow. Journal of A/C, vol. 11, April 1974.
- Favier, O. Induced velocity determination behind a four-blade propeller by means of hot-film constant-temperature anemometer. Mathematiques, vol. 278, number 1, January 2, 1974.
- Ferrari, C. Some experiments on the slipstream effect. NACA TM820, March 1937.
- Flachsbart, O. & Krober G. Experimental investigation of aircraft propellers exposed to oblique air currents. NACA TM562, April 1930.
- Flader, Fredric & Child, E. Rushmore. Studies of high speed airplanes. Curtis Aeroplane Division, Curtis Wright Corporation.
- Florine, N. On Some Problems of the Vortex Theory of Airplane Propellers & Wings. Bulletin In Service Technique, Rhode Saint-Genese, Bel. 1944.
- Focke, Henrich. New consideration of the theory of slipstream propulsion. Zeitschrift fur Flugwissenschaften, vol. 15, March 1967.
- Focke, Henrich. Further reflections on the theory of slip stream propulsion. NLL-T-6232-(5809.95)-National Lending Libr., STAR-N69-14234, May 1969.
- Forshaw, J. R.; Squire, H. B.; Eigg, F. J. Vibration of propellers due to non-uniform in flow. Br. ARC R&M 2054.
- Fraas, Arthur P. Aircraft power plants. 1943.
- Freeman, Hugh B. Comparison of full scale propellers having RAF-6 and Clark Y airfoil sections. NACA Rept. 378, 1931.
- Froude, W. On the elementary relation between pitch, slip, and propulsive efficiency. NACA TM 1, 1920.
- Gail, Albert, & Lu, Ho Shen On propeller - tip interference due to the proximity of a fuselage. Jour. of the Aeron. Sc. vol 9., p 11. 1942.
- Ganzer, Victor M. & Rae, William H. An experimental investigation of the effect of wind tunnel walls on the aerodynamics performance of a helicopter rotor. May 1960. NASA TN D-415.
- Gardner, Clifford S. & LaHatte, James A., Jr. Determination of induced velocity in front of an inclined propeller by a magnetic-energy method. Feb. 1946. NACA WR L -154.

- Gardiner, G.C.I. & Millin, J. "The Design of Propellers" Royal Aeronautical Society, Journal, vol. 53, No. 464. Aug. 1949, p.745-762.
- Gardner, John J. Effect of blade loading on the climb & high-speed performance of a three-blade Hamilton Standard Republic P-47D Airplane. July 1945. NACA WR L-594.
- Garrick, I.E. & Watkins, C.E. A theoretical study of the effect of forward speed on the free-space sound-pressure field around propellers. Oct. 1953. NACA TN 3016.
- Gartshore, I.S. An application of vortex theory to propellers operating at zero advance ratio. June 1966. (TN-66-3)cs STAR-N66-35141 CFSTI.
- Gattfried, R.N. Whirl test of metal rotor blade incorporating boundary layer slot. USAAF Technical Report No. 5552. Feb. 1947.
- German Research Institute for Aviation-Correction & Adjustment of aerodynamic setting & development of the propeller. vol. I. Aug. 1947. ATI-83023.
- Gibbons, J. B. Feasibility study of propeller vibration recording system. March 1966. ADS-45. STAR N66-32171.
- Gilman, Jean, Jr. Wind tunnel tests and analysis of three 10-foot-diameter three-blade tractor propellers differing in pitch distribution. Aug. 1946. NACA ARRL6E22 WR L -712.
- Gilman, Jean, Jr. Application of Theodorsen's theory to propeller design. July 1948. NACA RML 8F30.
- Gilman, Jean Application of Theodorsen's propeller theory to the calculation of the performance of dual rotating propellers. Mar. 1951. NACA RM L 51A17.
- Gilman, Jean, Jr. Analytical study static and low-speed performance of thin propellers using 2-speed optimum rotational speeds. June, 1953. NACA RML 52I09.
- Gilman, Jean, Jr. Propeller-performance charts for transport airplanes. July, 1953. NACA TN 2966.
- Gilmore, David C. An evaluation of methods for predicting the performance of propellers operating at zero advance ratio. April 1967. McGill University. TN-67-2. STAR N67-34434.
- Gilmore, D.C. The performance of propellers operating at zero advance ratio. Sep. 1967. McGill University. Rept. 67-9. AD -669653. STAR N68-30465.
- Gilmore, K.B. & Cleaver, A.V. The airscrew weight. The Aeroplane. July 18, 25, 1941. p. 70-72, 105-106.
- Giuzel, G.I. Theory of the Broad-Bladed Propeller. Gt. Brit. ARC CP 208 (June 1952) 1955.
- Giordano, V. Circulation for Betz's optimal propeller & Goldsteins solution. L'Aeronecnica-Missili c Spazio, vol. 53. Apr. 1974. P. 112-127.

- Glauert, Hermann. "The elements of airfoil & airscrew theory. 1926.  
629.1343 G467e.
- Glauert, H. "Airplane Propellers, vol. IV of "Aerodynamic Theory, div. L",  
W.F. Durand, ed. Listed under Durand.
- Glauert, H. The analysis of experimental results in the wind mill, brake,  
& vortex ring states of an airscrew. Tech. Rep. Aer. Res. Com. 1925-  
26, London, His majesty's stationary office, 1927.
- Glauert, H. The elements of aerfoil and airscrew theory. McMillen.  
New York. 1943.
- Glauert, H. Wind Tunnel interference on wings, bodies, and airscrews.  
Br. ARC R&M1566.
- Goldstein, Sidney. On the vortex theory of screw propellers. Communicated  
by L. Prandtl, For. Mem. R. B. - January 21, 1929.
- Goodman, Theodore R. The tip correction for wind tunnel tests of a propeller.  
J. of the Aeron. Sc., Vol. 23, 1956.
- Goorjian, P. M. An invalid equation in the general momentum theory of the  
acuator disc. AIAA Journal, vol. 10, April 1972.
- Goranson, R. Fabian. Flight tests of an SB2c-3 airplane with a production  
and tilted propeller axis TED No. NACA 2202. NACA WRL-675, May 1945.
- Graham, Martha E. Calculation of laminar boundary flow on rotating blades.  
Cornell Univ. Aero. Dept., PDC AD55, 328, September 1954.
- Gray, W. H. Wind Tunnel Tests of Single and Dual Rotating Tractor Propellers  
at Low Blade Angles and of Two- and three-Blade Tractor Propellers with  
Blade angles up to 65°. NACA WRL - 316, February 1943.
- Gray, W. H. Wind-tunnel test of two Hamilton Standard propellers employing  
Clark Y & NACA 16-series blade section. NACA MR (WRL-530), August 1941.
- Gray, W. H. Wind-tunnel test of four Curtiss propellers embodying different  
blade sections. NACA MR (WRL-569), August 1941.
- Gray, W. H. Wind Tunnel Tests of a swept-blade propeller and related straight  
blades having thickness ratios of 5 & 6<sup>o</sup>/o. NACA RML8H19, November 1948.
- Gray, W. H. and Ellis, A. E. Aerodynamic characteristics of a 2-blade NACA  
10-(3)(12)-03 propeller. NACA RML8D01, August 30, 1948.
- Gray, W. H. and Ellis, A. E. The torsional deflections of several propellers  
under operating conditions. NACA RM L 51A19, June 1951.
- Gray, W. H. and Gilman, Jean Jr. Characteristics of Several Single- and  
Dual- Rotating Propellers in Negative Thrust. NACA WR L-634, March 1945.
- Gray, W. H.; Hallissy, J. M.; Heath, A. R. A wind tunnel investigation  
of the effects of thrust-axis inclination on propeller 1st order vibration.  
NACA RM L50D13, June 1950.

- Gray, W. H. and Hunt, R. M. Pressure distributions on the blade sections of the NACA 10-(3)(049)-033 propeller under operating conditions. NACA RML9L23, February 1950.
- Gray, W. H. and Solomon, W. An Investigation of Propellers Vibrations Edited by Wing Wakes. NACA RM L51G13, January 1956.
- Greenburg, M. D. The unsteady loading on a propeller in uniform flow. PhD Thesis - Cornell Univ., 1964.
- Greenberg, M. D. & Powers, S. R. Nonlinear actuator disk theory and flow field calculations, including nonuniform loading. NASA-CR-1672, STAR-N70-38435, September 1970.
- Greensted, L. B. The virtues of Feathering Airscrew. The Aeroplane, December 20, 1940.
- Greensted, L. B. The importance of feathering airscrews. Commercial Aviation, June 1943.
- Haines, A. B. The effect of differing thickness distributions on a propeller's efficiency. Br. ARC R&M 1992.
- Haines, A. B. A comparison of Aerofoil Data for Use in Single Radius Propeller Calculations. Gr. Brit. ARC R&M No. 2188, January 1947.
- Haines, A. B. Design of a fixed pitch pusher propeller coupled to a free running turbine. Br. ARC R&M 2207.
- Haines, A. B. A Comparison of the Measured and Calculated Twist Along a Propeller Blade. Gt. Brit. ARC R&M No. 2360, 1950.
- Haines, A. B. 24-Ft. Wind-Tunnel Tests on a "Paddle-Blade" Propeller. Gt. Brit. ARC R&M No. 2493, 1952.
- Haines, A. B. & Chater, P. B. 24-Ft. Tunnel Tests on a Rotol Wooden Spitfire Propeller; Test Results, and Data for Single Radius Calculations. Gt. Brit. ARC R&M No. 2357, 1950.
- Haines, A. B. & Chater, P. B. Revised Charts for the Determination of the Static Take-Off Thrusts of a Propeller. Gt. Brit. ARC R&M No. 2358, 1950.
- Haines, A. B. & Diprose, K. V. The Application of the Calculus of Variations to Propeller Design with Particular Reference to Spitfire VII with Merlin 61 Engine. Gt. Brit. ARC R&M No. 2083, May 1943.
- Haines, A. B.; MacDougall, ARC; & Monaghan, R.J. Charts for the Determination of the Performance of a Propeller Under Static, Take-Off, Climbing out Cruising Conditions. Gt. Brit. ARC R&M No. 2086, March 1946.
- Haines, A. B. & Monaghan, R. J. High-Speed Lift and Drag Data for Propeller Performance Calculations. Gt. Brit. ARC R&M No. 2036, November 1945.

- Haines, A. B. & Monaghan, R. J. The validity of full scale braking studies in the RAE 24ft. tunnel. Br. ARC R&M 2471.
- Haines, J. F. Propeller Requirements for Light Aircraft. Preprint, S. A. E. Annual Meeting Detroit, January 6 - 10, 1947.
- Hale, Richard W. Aerodynamic Tip Theory of a Supersonic Propeller. M. A. TN 58-335, February 1958.
- Hall, Gerald F. A method of analysis for propellers at extreme angles of attack. Journal of a/c, vol. 6, January-February 1969.
- Hall, Gerald Forest. Unsteady vortex lattice techniques applied to wake formation and performance of the statically thrusting propeller. Avail. Univ. Microfilms, STAR - N75 - 32010.
- Hall, J. B. High mach number tests of four propellers varying in thickness & camber. United Aircraft Corp. UAC - R - 24 103 - 2.
- Hamelet, Jean H. Opposite propeller rotation... "shall it be inboard or outboard. Aviation, May 1943.
- Anon - Hamilton Std. " Hamilton Standard Method of Propeller Performance Calculation." ( Black Book ). Hamilton Standard, 1941.
- Anon - Hamilton Std. " Generalized method of propeller performance estimation." ( Red Book ) Hamilton Std. PDB1601, Revision A, June 1963.
- Hamilton - Standard. Variable camber propeller, Potential application for Hamilton Standard. ONR code 461.
- Hammack, Jerome B. Investigation of thrust losses due to shanks of a flared-shank two-blade Propeller on a slender nosed airplane. NACA TN1414, August 1947.
- Hammack, J. B. Flight Investigation in climb and at High Speeds of a Two- Blade and a Three- Blade Propeller. NACA TN 1784, January 1949.
- Hammack, J. B. and Bryan, T. C. Effect of Advance Ratio on Flight Performance of a Modified Supersonic Propeller. NACA TN 4389, September 1958.
- Hammack, J. B.; Kurbjun, M. C.; O'Bryan, T. C. Flight investigation of a supersonic propeller on a propeller research vehicle at Mach numbers to 1.01. NACA RM L57E20, July 1957.
- Hammack, J. B. & O'Brian, T. C. Flight measurements of section efficiency, thrust, and power of a supersonic type propeller at Mach numbers to .9. NACA RM L55I21, January 1956.
- Hammack, J. B. & Vegely, A. W. Propeller Flight Investigation to Determine the Effects of Blade Loading. NACA TN 2022, January 1930.
- Hammond, C. E. Application of Unsteady lifting surface theory to propellers in forward flight. AIAA Paper 74 - 419, A74 - 28169.

- Hanser, M. Misc. German Document. GoHingen, October 19, 1943.
- Harmon, Hubert N. Wind-tunnel tests of several model tractor-propeller and pusher propeller wing extension-shaft arrangements. NACA ACR, June 1941.
- Harrison, Daniel E. & Milillo, Joseph R. The effect of thickness ratio on section thrust distribution as determined from a study of wake surveys of the NACA 4-(0)(03)-045 and 4-(0)(08)-045 2-blade propellers up to forward mach numbers of .925. NACA RM L51B05, April 1951.
- Hartman, E. P. Negative Thrust & Torque characteristics of an adjustable-pitch metal propellers. NACA Rept. 464, 1933.
- Hartman, E. P. Working Charts for the determination of propeller thrust at various airspeeds. NACA Rept. 481, 1934.
- Hartman, Edwin P. A method of calculating the performance of controllable propellers with sample computations. NACA TN 484, January 1934.
- Hartman, Edwin P. & Biermann, David. The aerodynamic characteristics of full scale propellers having 2, 3, & 4 blades of Clark Y & RAF 6 airfoil sections. NACA Rept. 640, 1938.
- Hartman, Edwin P. & Biermann, David. The negative thrust & torque of several full-scale propellers & their applications to various flight problems. NACA Rept. 641, 1938.
- Hartman, Edwin P. & Biermann, David. The aerodynamic characteristics of four full-scale propellers having different plan forms. NACA Rept. 643, 1938.
- Hartman, Edwin P. & Biermann, David. The torsional & bending deflection of full-scale aluminum-alloy propeller blades under normal operating conditions. NACA Rept. 644, 1938.
- Hartman, Edwin P. & Biermann, David. Static thrust & power characteristics of six full scale propellers. NACA Rept. 684, 1940.
- Hartman, Edwin P. & Feldman, Lewis. Aerodynamic problems in the design of efficient propellers. NACA ACR (WRL-753), August 1942.
- Heath, Atwood R. & O'Neal, Robert L. A wind tunnel investigation of the first order vibratory stresses on a full scale supersonic-type propeller operating in an assumetric air flow. NACA RML54B17a, November 1954.
- Heath, Atwood R. and O'Neal, Robert L. Vibratory-stress investigation of six & 8 blade dual rotating propellers operating at zero advance ratios. NACA RML54J28, February 1955.
- Hedrick, William S. & Douglass, William M. An experimental investigation of the thrust & torque produced by propellers used as aerodynamic brakes. NACA WRA-27, August 1944.
- Heinz, W. B. Design problems of controllable pitch propellers. Reprint-Aeronautical Engineering, November 1931.

- Helmbold, H. B. Goldstein's solution of the problem of aircraft propeller with a finite number of blades. NACA TM 652, December 1931.
- Hensel, Rudolph W. Rectangular wind-tunnel blocking corrections using the velocity-ratio method. NACA TN 2372, June 1951.
- Heyson, H. H. Nomographic solution of the momentum equation for VTOL-STOL aircraft. NASA TNA-814, April 1961.
- Heyson, H. H. Method for Calculating Induced Velocities at the Blades of a Slightly Inclined Propeller with Constant Circulation. NASA TND-818, May 1961.
- Hickey, David H. Preliminary investigation of the characteristics of a two-dimensional wing & propeller with the propeller plane of rotation in the wing chord line. NACA RMA57F03, August 1957.
- Hilton, W. F. Theory & Use of a supersonic airscrew. Br. ARC R&M 2345.
- Himmelskamp, H. Profile researchers on a rotating propeller. M. Planck Institute fur shom. number 2, 1956.
- Hirt R. J. A review of static thrust and cyclic pitch technology for VISTOL propellers, DGLR-71-021, STAR N72-23015, December 1971.
- Hislop, G. S.; Hughes, G. F.; & Capps, D. S. Overall Thrust, Thrust Grading, and Torque Measurements on a Two-blade, 6½ per cent thick, NACA 16 Section Propeller in the High-Speed Tunnel. Gt. Brit. ARC R&M number 2515 and 2516, July 1947.
- Hislop, G. S. & Caldwell, J. Tests of Model Propellers in the High Speed Tunnel; Thrust and Torque Measurements on a 2-Blade, 6 Per Cent Thick Clark Y Section Propeller. Gt. Brit. ARC R&M number 2595, 1951.
- Hoff, Wilhelm. Contribution to the ideal efficiency of screw propellers. NACA TM 1002, January 1942.
- Hoffmann, Ludwig. Prospects in special-purpose propeller design. STAR-N69-34736, avail. CFSTI, April 1969.
- Hofmann, William O. A study of mixing & agitation ( the effect of a variable pitch propeller on power consumption ). Ph. D dissertation - Rensselaer Polytechnic Ins. - 1948.
- Hoppner, Heinzjochen. The propeller propulsion as compared to other propulsion systems. STAR N69-34733, April 1969.
- Houbolt, J. C. & Reed, W. H. III. Propeller - Nacelle Whirl Flutter. IAS Paper 61-34, January 1961.
- Houbolt, J. C. & Reed, W. H. Propeller - Nacelle Whirl Flutter. Jour. Aerospace Sci. 29'333-46, March 1962.
- Hough, Gary R. A numerical study of the fluctuating flowfield of a uniformly loaded propeller. Journal of A/C., vol. 4, January - February 1967.



- Hough, G. R. & Ordway, P. E. The Generalized Actuator Disk. Developments in Theoretical and Applied Mechanics; Southwestern Conference on Theoretical and Applied Technology, 1964, Proceedings, Volume II.
- Hough, G. R. & Ordway, P. E. The generalized actuator disk. TAR-TR-6400, AD-433976, STAR N64-21754, 1964.
- Hough, G. R. & Ordway, D. E. The Steady Velocity Field of a Propeller with Constant Circulation Distribution. American Helicopter Society, Journal vol. 10, April 1965.
- Hough, G. R. & Ordway, D. E. Mean flow streamlines of a finite-bladed propeller. Journal of A/C, vol. 4, November-December 1967.
- Hovey, R. Simplified propellers for low speed homebuilt aircraft. 639-13436, 1972.
- Hubbard, H. H.; Burgess, M. F.; Sylvester, M. A. Flutter of thin propeller blades, including effects of Mach number, structural damping, and vibratory stress measurements near the flutter boundary. NACA TN3707, June 1956.
- Hubbard, Harvey H. & Lassiter, Leslie L. Oscillating pressures near a static pusher propeller at tip mach numbers up to 1.20 with special reference to the effects of the presence of the wing. NACA TN3228, July 1954.
- Hubbard, Harvey H. & Regier, Arthur A. Free-space oscillating pressures near the tips of rotating propellers. NACA TN1870, April 1949.
- Hujecek, Zdenek. Experimentalni Zpusoby Zkoumani Dynamiky Vrtule ( Discussion of exp. meth. of prop. dun. inves. used in the devel. of all metal var. pitch prop. ) Zpravodaj VZLU No. 4, 1959.
- Hujecek, Zdenek. The aerodynamic characteristics of a family of propellers in the dimensional mode. Zpravodaj VZLU, vol. 41, No. 5, 1963.
- Hunter, William F. Integrating - matrix method for determining the natural vibration characteristics of propeller blades. NASA-TN-D-6064;L-5539, STAR-N71-13023, December 1970.
- Hutter, Ulrich. Proceedings of the meeting of the committee on propellers, shrouded propellers, & rotors, January 23, 1962 in Stuttgart. WC-LR Ber 3/1962, STAR N63-20126.
- Igoe, W. B. & Davidson, R. E. Propeller induced angles of attack & section angles of attack for the NACA 10-(3)(066)-03, 10-(3)(049)-03, 10-(3)(090)-03, 10-(5)(066)-03, 10-(0)(66)-03 propellers. NACA RM L51L06, May 1952.
- Isay, W. H. Modern problems of propeller theory. Springer-Verlag.
- Iwasaki, M. The Experimental and Theoretical Investigations of Windmills. Kyushu U., Japan, Rep. Res. Inst. Appl. Mech., December 1953.
- Iwasaki, M. Diagrams for use in calculation of Induced velocity by propellers. Kyushu U. Rep. Res. Inst. App. Mech., No. 23, 1958.

- Iwasaki, M. Vortex theory of an airscrew in consideration of contraction or Expansion of slipstream and variation of pitch of Vortex sheets in it. Kyushu U. Rep. Res. Inst. Appl. Mech. Np. 27, 1959.
- Iwasaki, M. Theoretical & experimental investigation of a propeller working at static condition. Kyushu Univ., Res. Ins. for App. Mech., Reports, vol. 16, nos. 52, 1968.
- Jacobs, Eastman N. Characteristics of propeller sections tested in the Variable Density Wind Tunnel. NACA Report 259, 1927.
- James, Edwin Charles. A small perturbation theory for cycloicidal propellers. Ph. D dissertation - Cal. Ins. of Tech. - 1971.
- Johnson, Arthur E. Shrouded propeller tests of the effect of shroud camber on the thrust coefficient for minimum shroud drag. DTMB-2005, DTMB-AERO-1090, AD-465895, STAR N65-29907.
- Johnson, Peter J. Aerodynamic characteristics at high speeds of full-scale propellers having Clark Y blade sections. NACA RM L8E07, October 26, 1948.
- Johnson, Peter J. Pressure distributions on the blade sections of the NACA 10-(3)(090)-03 propeller under operating conditions. NACA RML50A26, March 1950.
- Johnston, J. Ford & Voglewede, T. J. Flight investigation of NACA Ds cowlings on the XP-42 Airplane II - Low Inlet - Velocity Cowling with axial flow fan and propeller cuffs. NACA ARR (WRL-243), January 1943.
- Johnston, J. Ford & Voglewede, T. J. Flight investigation of the NACA Ds cowlings on the XP-42 airplane IV - High - inlet - velocity cowling tested in climb with & without propeller cuffs and in high speed level flight without propeller cuffs. NACA ARR (WRL-285), January 1943.
- Johnston, J. Ford & Voglewede, T. J. Flight Investigation of NACA Ds Cowlings on the XP-42 airplane III - Low inlet velocity cowling without fan or propeller cuffs, with axial flow fan alone, and with two different sets of propeller cuffs. NACA WRL-508, January 1943.
- Johnston, J. Ford; Klawans, B. B.; Danfort, Edward, C. B., III. Flight investigation of factors affecting the carburetor ram and nacelle drag of an A-26B airplane. NACA WRL-740, July 1946.
- Jones, E. T. The Distribution of Pressure over a section of an Airscrew Blade in Flight, and the Variation of Lift Coefficient with the Speed of the Section. Gt. Brit. ARC R&M No. 1256.
- Jones, J. P. The Torsional Oscillations of Airscrew Blades at Low Mean Incidences. ARC R&M 3177, 1960.
- Kampe de Feriet, J. & Fauquet, A. Influence of Propeller Slipstream on the Aerodynamic Characteristics of a Powered Model. I, II, III. Groupement Frauceis pour le Developpement des Pecherches Aeronautiques Note Technique Nos. 2, 4, 5, 1939.

- Katzmayer, R. "Deflection of propeller blades while running." NACA TM 145, Oct. 1922.
- Keith, A.L. Jr. & Bingham, G.J. & Rubin, A.J. Effects of propeller-shank geometry and propeller-spinner-juncture configuration on characteristics of an NACA 1-series cowling-spinner combination with an eight-blade dual-rotation propeller. Sept. 1951. NACA RM L51F26.
- Kemper, Richard B. The effect of aft body shape on the performance of a pusher propeller. Wichita University - Thesis. Aug. 1961.
- Kenyon, G.C. & Reynolds, R.M. Investigation of A 3-blade propeller in-combination with 2 different spinners and an NACA D type cowl at Mach numbers up to .8. Apr. 1954. NACA RMA54B18a.
- Kerwin, Justin Elliot. Solution of propeller lifting surface problems by vortex lattice methods. PhD - Dissertation - MIT, 1961.
- Kettleborough, C.F. Improvement of propeller static thrust estimation status report. Aug. 1969. Tex. A&A University. NASA CR66836.
- Klawans, Bernard B. & Vogeley, Arthur W. A cascade - general-momentum theory of operation of a supersonic propeller annulus. Jan. 1953. NACA RML 52506.
- Kleinstein, G. & Liu, C.H. Application of airfoil theory for nonuniform streams to wing propeller interaction. Journal of A.C., vol. 9, Feb. 1972, p. 137-142.
- Kramer, K.N. The aims and problems of aerodynamics research on airscrews, which in the opinion of V.D.M., are of Immediate Importance. Gt. Brit. MOS Trans. GDC -3E/11T.
- Krzywoblocki, M.Z.V. Remarks on "Subsonic Compressibility corrections for propellers & helicopter rotors." Jour. of the Aer. Sc. vol. 21. p. 214. 1954.
- Kuhn, R.E. and Draper, J.W. An investigation of a wing - propeller configuration employing large-chord plain flaps and large diameter propellers for low speed flight and vertical takeoffs. Dec. 1954. NACA TN 3307.
- Kuhn, Richard E. & Draper, John W. Investigation of the aerodynamics characteristics of a model wing-propeller combination & of the wing and propeller separately at angles of attack up to 90°. 1956. NACA Rpt. 1263.
- Kurjun, Max C. Effects of blade plan form on free-space oscillating pressures near propellers at flight mach numbers to .72. Aug. 1957. NACA TN 4068.
- Kurbjun, Max C. & Vogely, A.W. Measurements of free space oscillating pressures near propellers at flight mach no.s to .72. 1958. NACA Rept. 1377.

- Ladson, Charles L. Chordwise pressure distributions over several NACA 16-series airfoils at transonic Mach numbers up to 1.25. June 1959. NASA Memo 6-1-59L.
- Laitone, E.V. Actuator Disc Theory for compressible flow and a subsonic correction for propellers. Jour. of the Aeronaut. Sc. vol. 20, p. 365. 1953.
- Laitone, E.V. & Talbot, L. Subsonic compressibility corrections for propellers and helicopter rotors. Journal of the Aeronautical Sciences. Oct. 1953. p. 683. IAS Preprint 398. Jan. 1953.
- Lame, M. Abstracts from the French technical press, study of resistance offered by propellers rotating in an airstream. Apr. 1921. NACA TM 21.
- Lancaster, F.W. "The Propeller: How Many Blades." R. Ae. S. Jour. Aug. 1941. p.p. 267-274.
- Lane, F. Optimum single propellers in radially varying, incompressible inflow. Journal of Applied Mechanics. vol. 19, No. 3, Sept. 1952. p.p. 252-256.
- Laschka, B.; Mueller, A.; & Ebeling, P. A contribution on the determination of overall forces on inclined propellers. 1963. STAR N68-13656 In AGARD fluid Dy. of rotor & fan supp. aircraft at subsonic speeds. Sept. 1967.
- Lantou, F. Notes on propellers with swept back tips. American helicopter, vol. 6. No. 5. p.p. 29-30. April, 1947.
- Leclere, G. Propeller tests in the S' wind-tunnel at Modane-Avrieux. La Recherche Aerospatiale. May-June, 1964, p. 45-54.
- Leclère, Guy. Test propellers in the S-1 wind tunnel at the Onera Test Center of Modane. 1964. Trans into Eng. from Rech. Aerospatiale(France) No. 90. May-June 1964. (ARA-Trans-a) STAR \_N65-16324.
- Leishman, Douglas K. Propeller intergral gear box model 73EGB1 and propeller, variable camber model VC86260 Flight Test Report. HSER-4076. AD-638632. STAR-N67-13901.
- Lesley, E.P. Report on test of metal model propellers in combination with a model VE-7 airplane. Aug, 1926. NACA TN 245.
- Lesley, E.P. Test of a model propeller with summetrical blade sections. Sept. 1926. NACA TN 246.
- Lesley, E.P. Test of an adjustable pitch model propeller at four blade sections. Feb. 1930. NACA TN 333.
- Lesley, E.P. Experiments with a counter-propeller. NACA TN 453. March 1933.
- Lesley, E.P. Tandem air propellers. Feb. 1936. NACA TN 689.

- Lesley, E.P. Propeller tests to determine the effect of number of blades at two typical solidities. NACA TN 698. April 1939.
- Lesley, E.P. Tandem propeller II. Aug. 1941. NACA TN 822.
- Lesley, E.P. & Reid, E.G. Tests of five metal model propellers with various pitch distributions in a free stream and in combination with a model VE-7 fuselage. 1928. NACA Rept. 326.
- Lesley, E.P. & Woods, B. M. The effect of slipstream obstructions on air propellers. 1924. NACA Rept. 177.
- Lesley, E.P. ; Worley, George F. & May, Stanley. Air propeller in Yaw. 1937. NACA Rept. 597.
- Lieber, P. Wau, K. & Spiegel, M. An investigation of aerodynamic forces generated by a propeller in a compressible flow. USAF WADC TR 55-312 Sept, 1955 (June 1956) PB-121462.
- Lieberman, Edward. Propeller blade vibration and stress analysis. 1963. Tech. Rept 283. AD-423377. STAR N64-15421.
- Liebers, F. Contribution to the theory of propeller vibration. NACA TM568.
- Liebers, Fritz. Resonance vibrations of aircraft propellers. NACA TM657. Feb. 1932.
- Lindsey, W.F.; Stevenson, D. S.; Daley, B.N. Aerodynamic characteristics of 24 NACA 16-series airfoils at Mach No.s . Between .3 & .8. Sept. 1948. NACA TN 1546.
- Liss, A. Yu. & Margulis, G.U. Applications of the method of integrating matrices for calculating the natural oscillations of a propeller blade with considerations of deflection in two planes & twisting. NASA-TT-F-15365. STAR-N74-16724.
- Liu, Chen-Huei. Interference for wing with single & with mult-propellers. PhD-Dissertation-NewYork University, School of Eng. & Sci. 1971.
- Lock, C.N.H. "Analysis of experiments on an airscrew in various positions within the nose of a tractor body." Br. ARC R & M 1120. Sept. 1927.
- Lock, C.N.H. The effect of body interference on the efficiency of an airscrew. Aer. Res. Comm. Rep. Mem, No. 1238. (Ae. 393). Dec. 1929.
- Lock, C.N.H. "Application of Goldstein's Airscrew Theory of Design." Br. ARC-R & M 1377. Nov. 193.
- Lock, C.N.H. "Theory of airscrew body interference. Applications to experiments on a body of fineness ratio 3.0 with tractor airscrew." Br. ARC R & M 1378. May, 1930. revised May, 1932.
- Lock, C.N.H. "A graphical method of calculating the performance of an airscrew. ARC R. & M. 1675. Oct. 25, 1934.

- Lock, C.N.H. "Airscrew theory: a paper delivered before the fourth international congress for applied mechanics," Cambridge, 1934. BR. ARC. R & M 1746. Nov. 1936.
- Lock, C.N.H. "A graphical method of calculating the performance of an airscrew." Br. ARC R & M 1849. Aug. 1938.
- Lock, C.N.H. "Interference velocities for a close pair of contra-rotating airscrews." Br. ARC R & M 2084.
- Lock, C.N.H. "Measurement of thrust & torque gralling on high - pitch model airscrews." Br. ARC R & M 2477.
- Lock, C.N.H. "Note on the characteristics curves for an airscrew or helicopter." Br. ARC R & M 2673.
- Lock, C.N.H. & Bateman, H. Analysis of the family of airscrews by means of the vortex theory & measurements of total head. Br. A.R.C. R & M 892. Dec. 1923.
- Lock, C.N.H. & Bateman, H. Analysis of experiments on the interference between bodies & tractor & pusher airscrews. June 1931. Aer. Res. Comm, Rep. Mem. No. 1445.
- Lock, C.N.H.; Bateman, H.; Nixon, H.L. Measurements of thrust & torque grading on high-pitch model airscrews. Br. ARC R & M 2477. Aug. 3, 1939.
- Lock, C.N.H. & Johansen, F.C. Pressure plotting a streamline body with tractor airscrew running. Br. ARC R & M 1230. Jan. 1929.
- Lock, C.N.H. & Knowler, A.E. Integrating coefficients for airscrew analysis. Gt. Brit. ARC R & M.No. 2043. July, 1941.
- Lock, C.N.H., Paukhurst, R.C., & Conn, J.F.C. Strip theory method of calculation for airscrews on high speed aeroplanes. Gt. Brit. ARC. R & M. No. 2035. Oct. 1945.
- Lock, C.N.H., Paukhurst, R.C., & Fowler, R.G. Determination of the optimum twist of an airscrew blade by the "Calculus of the variations." Gr. Brit. ARC. R & M. No. 2088. Jan. 1942.
- Lock, C.N.H. & Yeatman, D. Tables for use in an improved method of airscrew strip theory calculations. Br. ARC. R & M. 1674. Oct. 22, 1934.
- Loftin, Laurence, K., McKinney, Marion O., Jr. NASA aerodynamics research applicable to business aircraft. SAE, Nat. Bus. Aircraft Meeting, Wichita, Kan, March 24-26, 1971. Paper 710378.
- Lopes, A.E. & Dickson, J.K. The effects of compressibility on the upwash at the propeller plane of a four-engine tractor airplane configuration. Having a wing with  $40^\circ$  of sweepback and a aspect ratio of 10. July, 1956. NACA TN 3675.

- Losch, F. Calculation of the induced efficiency of heavily loaded propellers having infinite number of blades. Kramer, K.N.: The induced efficiency of optimum propellers having a finite number of blades. Bock, G. & Nikodemus, R.: Prospects of propellers drive for high flying speeds. NACA TN 884. Jan. 1939.
- Low, A.R. A review of airscrew theories. Aeronautical Jour. vol. 27, 1923. p. 37.
- Luck, C.A., Lowes, W. The determination of the fixed root frequencies of propeller blades using scale models & the results compared to calculations. Br. ARC. R & M 2391.
- Luoma, Arvo A. Critical speeds and profile drag of the inboard sections of a conventional propeller. NACA-ARR WR L-369. Sept. 1941.
- Luu, T.S. & Sulmont, P. Calculations of the performances of a supercavitating propeller ( $\sigma = .4$ ) for different advance ratios (J)-confoontation, theory, experiment. July 1969. AD-691821. STAR-N69-40425.
- Lyman, F.C. Airscrew blade roots & their effect on performance. Aeronautics. June 1941. p.p. 48-50.
- MacDougal, A.R.C. "Lift characteristics for thin Clark Y propeller sections at low & negative angles of incidence." Br. ARC. R & M 2203.
- MacDougall, A.R.C. "Revised high-speed lift and drag data for Clark Y sections for propeller performance claculations. Gt. Brit. ARC. R & M. No. 2474, 1951.
- MacDougall, A.R.C. & Haines, A.B. 24-ft. wind tunnel tests on a propeller with NACA 16 series sections; Test results and analysis into mean lift-frag data. Gt. Brit, ARC. R & M . 2602. Aug. 1948.
- Mager, Arthur. Generalization of boundary - layer momentum-integral equations to three dimensional flows including those of rotating system. March 1951. NACA TN 2310 - NACA Rept 1067.
- Maquire, William B. A wing tunnel investigation of some short-chord low-solidity shrouded propellers in the cruise condition. Nov. 1964. DTMB -1919. AD - 612184. STAR -N65-19999.
- Majcherczylr, A.R. & Hislop, G.S. The determination of propeller power coefficients by flight tests on a spitfire Vc aircraft. Gt. Brit. ARC. R & M . No. 2092. Jan. 1944.
- Malavard, L. & Sulmont, P. Application of the lifting foil theory solved by Rheoelectric analogy to the calculation & design of sub- & supercavitating propellers. March 1967. AD - 652981. STAR N67-32791.
- Malina, F.J. & Jenney, W.W. Characteristics of braked, locked, and free wheeling 2 & 3 bladed propellers. Jour. of the Aeronautical Sciences. vol. 3 - Sept. 1935 - Oct. 1936. p/ 237.

- Mandl, P. Analytic determination of the axial velocity through a propeller moving perpendicular to its axis. 1965. Carleton University. STAR- N 68-13036. In AGARD fluid dyn. of rotor & fan supported aircraft at subsonic speeds. Sep. 1967.
- Margoulis, W. Propeller theory of Professor Joukowski and his pupils. NACA TM 79, April 1922.
- Maynard, Julian D. Aerodynamics characteristics at high speeds of full scale propellers having different shank designs. Feb. 13, 1947. NACA RML6L27a.
- Maynard, Julian D. & Evan, Albert J. Tests of four full-scale propellers to determine the effect of trailing-edge extensions on propeller aerodynamic characteristics. July, 1945. NACA WRL-582.
- Maynard, J.D. & Murphy, M.P. Pressure distribution on the blade sections of the NACA 10-(3)(066)-033 propeller under operating conditions. Jan. 1950. NACA RM L9L12.
- Maynard, J.D. & Salters, L.B. Aerodynamic characteristics at high speeds of related full-scale propellers having different blade section cambers. 1957. NACA Rept. 1309.
- Maynard, J.D. & Steinberg, S. The effect of blade section thickness ratios on the aerodynamic characteristics of related full scale propellers at mach numbers up to .65. 1953. NACA Rept. 1126. formerly RML9D29.
- Maynard, J.D., Swihart J.M., Norton, H.T. Effects of blade setion camber on aerodynamic characteristics of full-scale supersonic-type propelles at mach numbers to 1.04. Oct. 1956. NACA RML56E10.
- Meacock, F.T. The elements of aircraft propeller design. E.& F. Spou, Ltd. London - 1947.
- Mendenhall, Michael R. , Kriebal, A.R., Spangler, S.B. Theoretical study of ducted propeller blade loading, duct stall and interference. Sept. 19, 1966. VIDYA-229 - AD-646022 - STAR - N67-22671.
- Mendenhall, M.R. & Spangler, S.B. Theoretical analysis of cycloidal propellers. AD-768910 - NEAR-TR-53 - STAR-N74-14984.
- Mendenhall, M.R. & Spangler, S.B. Theoretical analysis of cycloidal propellers. Part II: Program Manuel. AD-768911 - NEAR-TR-53-Pt-2. STAR - N74-17026.
- Michaelson, O.E. Aerodynamic research relates to propeller driven V/STOL aircraft. In aerodynamics of rotary wing & V/Stol aircraft. Cornell Aero. Lab. & U.S. Army Aviat. Mat. Lab., symposium, 3rd, Buffalo, N.Y., June 18-20, 1969. Proceedings vol. 3-Panel session on recommendations for future aero. research, panel summaries & featured speakers. A69-4136923-01.



- Middleton, W.A. Solution of an integral occurring in propeller theory. Journal of Aircraft. vol. 2 Nov-Dec. 1965. p. 556. A66-15082
- Milner, H.L. Variable pitch propellers. NACA TM 459, April 1928.
- Ministry of Supply - List of translations made by or received in TPA3/TIB During the period 1935 to 1946 inclusive. TPA3/ Technical Information Bureau London S.W.1. Ministry of Supply.
- Misztal, Franz. The problem of the propeller in yaw with special reference to airplane stability. NACA TM 696. Jan. 1933.
- Moberg, R.J. & Palazzó, E.B. The NACA hydraulic torque system for indicating propeller torque. Instruments vol. 21, No. 12. Dec. 1948. p. 1100-1102.
- Mokrzycki, G.A. Some effects of propeller side forces. Aero Digest. April 1, 1945. p.p. 94-97, 170.
- Monaghan, R.J. The performance of stalled propellers. Br. ARC. R & M. 2340.
- Monaghan, R.J. Body interference on a tractor propeller. Br. ARC R&M2341.
- Montieth, Charles N. Slip stream effect. March 1926. NACA TM 355.
- Moore, Clifford J. & Phillips, Dennis M. A study of NASA & NACA published information of pertinance in the design of light aircraft. vol. 3: propulsion substems, performance, stability and control, propellers, and flight safety. NASA-CR-1486 - STAR-N70-22030.
- Mort, K.W. & Yaggy, Paul F. Aerodynamic characteristics of a full scale propeller tested with both rigid & flapping blades & with cyclic pitch control. May 1963. NASA TN D-1774.
- Motycka, D.L., Disaberto, V.J., McCall, J.E., Sr. Powered model wind tunnel investigation to determine performance trends with nacelle location. AIAA & SAE, Joint Propulsion Specialist Conference, 8th, New Orleans, Nov. 29-Dec. 1, 1972. AIAA paper 72-1116.
- Mueller, A. Blow-out, A means for thrust augmentation of V/STOL propellers. 1969. STAR - N 70-24745.
- Multhopp, H. Aerodynamics of wing-propeller interaction. Amer. Asto. Soc. Sci. And Tech. vol. 24, 1970.
- Munk, Max M. Notes on propeller design - the energy losses of the propeller - I. NACA TN 91, Apr. 1922.
- Munk, Max M. Notes on propeller design - II. The distribution of thrust over a propeller blade. TN 94, April, 1922.
- Munk, Max M. Notes on propeller design -III. The aerodynamical equations of the propeller blade elements. NACA TN 95. May 1922.

- Munk, Max M. Notes on propeller design - IV. General proceeding in design. NACA TN 96, May 1922.
- Munk, Max M. Analysis of Dr. Schraffran's propeller model tests. Sept. 1923. NACA TN 158.
- Munk, Max M. Reduction in efficiency of propellers due to slipstream. NACA TN 170 Dec. 1923.
- Munk, Max M. Analysis of W.F. Durand's & E.P. Lesley's propeller tests. NACA Rept. 175, 1923.
- Munk, Max M. The analysis of free flight propeller tests & its application to design. NACA Rept. 183. 1924.
- Murray, James C., & Carta, Frank O. Lifting surface theory for statically operating propellers. Computer program-vortex lattice method. AD-757264. AFAPL -TR-72-100. STAR -N73-22998.
- Murray, M.T. & Tubby, J. Blade-rate force fluctuations of a propeller in non-uniform flow. Fortran program. ARL/M/P-33A. Br. 37674. P2/3.85. STAR-N74-18667.
- McCarthy, Justin H. On the calculations of thrust & torque fluctuations of propellers in non-uniform wake fields. Oct. 1951. DIMB. ASTIAAD 265193.
- McCormick, B.W. The effect of a finite hub on the optimum propeller. Journal of the Aerospace sciences. Sept. 1955, p.p. 645-650.
- McCoy, H.M. Full feathering propellers. Jour. of the Aeronautical Sci. vol. 5. p. 258.
- McCoy, H.M. A discussion of propeller efficiency. Jour. of the Aeronaut. Sc. vol.6. p. 227. 1934-39.
- McCoy, H. Propeller design requirements. Jour. of the Aero. Sc. vol. 11, p.p. 261. 1944.
- McCrieshey, W.J. & others. Turbulent boundary layers flow over a rotating flat-plate blade. ALAA Jour. 9:188-9, Jan 1971.
- McCroskey, W.J. & Dwyer, H.A. Methods of analyzing propeller & rotor boundary layers with cross flow. NASA Wash., Anal Methods in Aircraft Design. STAR N70-21371.
- McHugh, James G. Tests of nacelle-propeller combinations in various positions in reference to wings. IV - Thick wing- various radial engine cowlings- Tandem propellers. 1934. NACA Rept. 505.
- McHugh, James G. & Derring, Eldridge H. The effect of nacelle-propeller diameter ratio on body interference and on propeller and cooling characteristics. 1939. NACA Rept. 680.
- McHugh, J.G. Tests of several model-nacelle arrangements in front of a wing. Sept. 1939. NACA WRL-510.

- Mc Hugh, James G. & Pepper, Edward. The propeller and cooling - air -flow characteristics of a twin engine airplane model equipped with NACA Ds-type cowlings and with propellers of NACA 16-series airfoil sections. Sept. 1944. NACA WRL-638.
- McLarren, R. High speed propeller design. Aero Digest.vol. 63. No. 1 July 1951. p.p. 99-107.
- McLemore, H.C. & Cannon, M.D. Aerodynamic investigations of a 4-blade propeller operating through an angle of attack from  $0^{\circ}$  to  $180^{\circ}$ . June 1954. NACA TN 3228.
- Naylor, V.D. A master curve for airscrews (supplements R&M 1673). Aircraft Engineering. Nov. 1944. p.p. 310-312.
- Naylor, V.D. The stalling of Airscrew blades. Aircraft Engineering. Feb. 1945. p.p. 48-50.
- Naylor, V.D. Airscrew Torque Coefficient. Aircraft Engineering. Aug. 1945. p.p. 229-231.
- Nelson, D.M. A lifting-surface propeller design method for high speed computers. 1964. NAVWEPS-8442; NOTS-TP3399: AD-430928. STAR-N64-16964.
- Nelson, D.M. The effect of propeller cavitation on thrust deduction. Sept. 1964. NAVWEPS -8549. NOTS - TP-3564. AD-606967. STAR N 65-10501.
- Nelson, D.M. Numerical results form the NOTS lifting-surface propeller design method. Aug. 1965. STAR-N66-11313. NOTS-TO-3856. NAYWEPS -8772. AD-620929.
- Nelson, Wilbur Clifton. Airplane propeller principles. 1944. 629.1343 N338a
- Niedenfuhr, F.W. On the possibility of aeroelastic reversal of a propeller blade. Jour. of the Aeron. Sc. vol. 22, p. 438. 1955.
- Nishiyama, T. & Sasajima, T. Curved flow effect in the lifting-surface theory of propellers of wide blade. A67-16427. In: Japan Nat. Congress for App. Mech., 14th, KYOTO University, Kyota, Japan, Sept. 7,8, 1964. Proceedings, (A67-16415 05-23)
- O'Bryan, Thomas C. Flight measurements of the vibratory bending & torsion stress on a supersonic type propeller for flight mach numbers up to .95. NACA RML56D20a, July 1956.
- O'Bryan, T. C. Flight measurements of the vibratory bending & torsional stresses on a modified subsonic propeller for forward mach numbers to .95. NACA TN4342, June 1958.
- O'Bryan, T. C. Flight measurements of the vibratory stresses on a propeller designed for an advance ratio of 4. and a mach number of .82. NACA TN4410, September 1958.

- O'Bryan, T. C. & Hammack, J. B. Flight performance of a transonic turbine-driver propeller designed for minimum noise. NASA Memo 4-19-59L, May 1959.
- Olcott, John W. Tests of a Hamilton Standard Four-Way, 21 inch diameter model propeller employing the U. S. Navy Airbourne Model Test Facility. STAR N65-14132, Rept-675, AD-603791, 1964.
- Ordway, D. E. & Hale, R. W. Theory of Supersonic-propeller aerodynamics. Cornell U. Grad. Sch. Aero. Eng., APOSR TN56-287, TN58-335, Jour. Aero/Space Science, June 1960.
- Ower, E. & Warden, R. The Efficiency of Airscrews on Wings of Large chord. Gt. Brit. ARC R&M No. 2438, 1951.
- Ower, E., Warden, R. & Paudhurst, R. C. Note on Wing-Nacelle-Airscrew Interference. Gt. Brit. ARC R&M No. 2439, 1950.
- Panetti, M. Experimental apparatus for the study of propellers. NACA TM 819, March 1937.
- Pankhurst, R. C. Airscrew Thrust Grading by Pitot Traverse: Allowance for Rotation of Slipstream of High Rates Advance. Gt. Brit. ARC R&M No. 2049, May 1945.
- Pankhurst, R. C. Effect of Variation Airscrew Tip Speed and Drag Critical Speeds at Two Forward Speeds. Gt. Brit. ARC R&M No. 2179, August 1943.
- Pankhurst, R. C.; Conn, J. F., Fowler, R. G.; Love, E. M. The effect of variation of gear ratio on the performance of a variable pitch airscrew for a high speed plane. Br. ARC R&M 2039.
- Pankhurst, R. C. & Fowler, R. G. Calculation of the performance of two airscrews for a high speed airplane. Br. ARC R&M 2021.
- Pankhurst, R. C. & Haines, A. B. Account of the Derivation of High-Speed Lift and Drag Data for Propeller Blade Sections. Gt. Brit. ARC R&M No. 2020, August 1945.
- Pankhurst, R. C. & Love, E. M. A shortened method of airscrew strip theory calculations for high speed airplanes. Br. ARC R&M 2069.
- Pankhurst, R. C. & Love, E. M. Comparison of Flight Test Determinations of Power Absorption with Airscrew Strip Theory. Gt. Brit. ARC R&M No. 2087, November 1945.
- Pauling, David P. The effects of uncertainties on predicting rotor & propeller performance. AD-A008419, PSU-AERSP-75-3, ARO-12096-RTL, STAR-N75-24687.
- Pelissier, R.; Clarion, C.; Velensi, J. Distribution of the pitch of vortex sheets along a propeller blade of constant aerodynamic pitch for different operating regimes. Sciences Mathematiques, vol. 269, no. 21, November 24, 1969.

- Pendley, R. E. Effect of Propeller-Axis Angle of Attack on Thrust Distribution over the Propeller Disk in Relation to Wake-Survey Measurement of Thrust. NACA WR L-517.
- Pinkus, O.; Lurye, J. R.; Feit, D. The unsteady forces due to propeller-appendage interaction. TRG-146-FR, STAR N65-22326, 1962.
- Pinkus, O.; Lurye, J. R.; & Karp, S. The Unsteady Forces due to Propeller-Appendage Interactions. ASME, Transactions, Series E, Journal of Applied Mechanics, vol. 30, June 1963.
- Pingel, L. C. Propeller Blade Angle Meter. Canada, RCAF, Experimental and Proving Establishment, Rockcliff Report, No. 961, January 1951.
- Pistoiesi, Enrico. Variable pitch propeller. NACA TM216, July 1923.
- Pistoiesi, E. Mutual interference between airscrew & fuselage, with some other airscrew problems. L'Aerotecnica, v. 22, No. 6, June 1942.
- Pivko, Svetopolk. Effectiveness of propellers at high speeds. Aircraft Eng., December 1959.
- Platt, Robert J., Jr. Static tests of a shrouded propeller. NACA RML7H25, February 1948.
- Platt, Robert J. Static tests of four 2-bladed NACA propellers differing in camber & solidity. NACA RM L8H25a, December 1948.
- Platt, Robert J., Jr. Thrust loading of the NACA 3-(3)(05)-05 8 blade dual rotating propeller as determined from wake surveys. NACA RML52I03, October 1952.
- Platt, R. J., Jr. & Shumaker, R. A. Investigation of the NACA 3-(3)(05)-05 8 blade dual rotating propeller at forward mach numbers up to .925. NACA RM L50D21, June 1950.
- Poliakhov, N. The minimum energy loss propeller. NACA TM 1067, March 1945.
- Poliakhov, N. N. The theory of the propeller lifting surface. Leningradskii Universitet, Vestnik, Serii Matematiki, Mekhaniki, i Astronomii, vol. 18, No. 13, 1963.
- Postlethwaite, F.; Carter, B. C.; Perring, W. G.; Diprose, K. V. Vibrations of propeller due to aerodynamic forces. Part I - permissible proximity of a propeller to the leading edge of a wing, as decided by propeller blade vibration. Br. ARC R&M 2054.
- Prandtl, L. Mutual influence of wings and propellers. NACA TN74, December 1921.
- Priestly, E. Theory of propeller fin effect including a review of existing theories. Br. ARC R&M 2030.
- Prosnak, W. J. & Luczywek, E. Urzadzenie Wagowe Do Badania Smigiel Przeciwbieznych (model test stand used in contra-rotating propeller thrust & torque measurements). Archiwum Budowy Maszyn, vol. 9, No. 1, 1962.

- Pusher Aircraft. Collection of material on pushers. Microfilm documents.
- Queijo, M. J. & Fletcher, H. S. Low speed experimental investigation of the magnus effect on various sections of a body of revolution with and without a propeller. NACA TN4013, August 1957.
- Quick, A. W. Aerodynamics and Flight Mechanics in the Development of Propellers. USAAF Translation No. F-TS-757-RE, November 1946.
- Ram, G. J. & Acharya, Y. V. G. Circulation Distributions on, and Induced Efficiencies of Propellers with Three, Four, & Infinite Number of Blades. Journal of the Aeronautical Society of India, August 1953.
- Rateau, A. Resume of the Theory of Naval and Aerial Propulsive Propellers and of Airplanes in Rectilinear Flight. NACA TM17, April 1921.
- Rebeske, John J., Jr. Investigation of a NACA high speed strain torque meter. NACA TN2003, January 1950.
- Rebeske, John J., Jr. Investigation of a NACA high speed optical torque meter. NACA TN2118, June 1950.
- Rebuffet, Pierre. Experimental aerodynamics, vol. 1. Paris, Dunod Editeur, 1969.
- Reed, S. Albert. Air reactions to objects moving at rates above the velocity of sound with application to the air propeller. NACA TM168, November 1922.
- Reed, W. H., III & Blaud, S. R. An Analytical Treatment of Aircraft Propeller Precession Instability. NASA TN D-659, January 1961.
- Reid, E. G. The Influence of Blade-Width Distribution of Propeller Characteristics. NACA TN 1834, March 1949.
- Reid, Elliot G. Wake studies of eight model propellers. NACA TN1040, July 1946.
- Reid, Elliot G. Studies of Blade Shank Form and Pitch Distribution for constant-speed propellers. NACA TN947, January 1945.
- Reissner, Hans. A Generalized Vortex Theory of the Screw Propeller and its Application. NACA TN 750, February 1940.
- Reissner, H. On the vortex theory of the screw propeller. Journal of the Aeronautical Sc., vol. 5.
- Reynolds, R. M. Preliminary results of an investigation of the effects of spinner shape on the characteristics of an NACA D-type cowl behind a three-blade propeller, including the characteristics of the propeller at negative thrust. NACA TM A53502, November 1953.
- Reynolds, R. M. & Buell, D. A. & Walker, J. H. Investigation of an NACA 4-(5)(05)-041 four bladed propeller with several spinners at Mach numbers up to .90. NACA RM A52I19a, December 1952.

- Reynolds, R. M.; Sammonds, R. I.; Kenyon, G. C. An investigation of a 4-blade single-rotation propeller in combination with the NACA 1-series D-type cowling at mach numbers up to .83. NACA RM A53B06, April 1953.
- Reynolds, R. M.; Sammonds, R. I.; Walker, J. H. An investigation of single- & dual- rotation propellers at positive & negative thrust, and in combination with an NACA 1-series D-type cowling at Mach numbers to .84. NACA Rept 1336, 1957.
- Rhines, T. B. Design Refinements in Modern Propellers. Aeronautical Engineering Review, Vol. 9, No. 8, August 1950.
- Rhode, Richard V. & Pearson, Henry A. Flight tests of the drag & torque of the propeller in terminal velocity dives. NACA Rept 599, 1937.
- Ribner, Herberts. A transonic propeller of triangular plan form. NACA TN 1303, May 1947.
- Ribner, Herbert S. Notes on the propeller slipstream in relation to stability. NACA WR L-25, October 1944.
- Ribner, Herbert S. Proposal for a propeller side-force factor. NACA RB 3L02, WRL-336, December 1943.
- Ribner, Herbert S. Formulas for propellers in yaw and charts of the side-force derivatives. NACA Rept 819, 1945.
- Ribner, Herbert S. Propellers in yaw. NACA Rept. 820, 1945.
- Roberts, J. C. & Yaggy, P. A Survey of the Flow at the Plane of the Propeller of a Twin-Engine Airplane. NACA TN2192, September 1950.
- Roberts, Sean C. The Marvel Project. Part C. An investigation of the shrouded propeller propulsive system on the marvelette aircraft. STAR N65-13069, TRECOM-TR-64-41, AD-608187, 1964.
- Roberts, Sean C. Research in the area of aerodynamics of rotors and propellers. State College, MS.
- Robinson, Russell G. & Herrnstein, W. H., Jr. Wing-nacelle-propeller interference for wings of various span, force, and pressure distributions tests. NACA Rept 569, 1936.
- Rogallo, Vernon L. Effects of wing sweep on the upwash at the propeller planes of multi-engine planes. NACA TN 2795, September 1952.
- Rogallo, V. & et al. Vibratory Stresses in Propellers Operating in the Flow Field of a Wing-Nacelle-Fuselage Combination. NACA TN 2308, March 1951.
- Rogallo, Vernon L. & McCloud III, John L. Surveys of the flow fields at the propeller planes of 6  $40^\circ$  swept back wing-fuselage-nacelle combinations. NACA TN 2957, June 1953.
- Rogallo, Vernon L. & Yaggy, Paul F. On the calculation of the 1-P oscillating aerodynamic loads on single rotation propellers in pitch on tractor airplanes. NACA TN 3395, May 1955.

- Rogallo, Vernon L. & Yaggy, Paul F. A wind tunnel investigation of the stall-flutter characteristics of a supersonic-type propeller at positive & negative thrust. NASA Memo. 3-9-59A, May 1959.
- Rogallo, Vernon L. Propeller Blade Loading Control. NASA-Case-XAC-00139, STAR-N70-34856.
- Rosen, G. New problem areas in aircraft propeller design. ( CAI Mid-season Meeting, Edminton, Feb. 20, 1960 ), Can. Aero. Journ, June 1960.
- Rosen, G. Development of the Variable Camber Propeller. IAS Paper 62 - 25, January 1962.
- Rosen, G. & Adamson, W. M. Next generation V/STOL propellers. SAE Paper no. 680281.
- Rosen, G. & Rohrbach, C. The quiet propeller - A new potential. AIAA paper, No. 69-1038.
- Rotol Ltd. Choice of propellers for turbine engines in the medium power range. Performance Office Rept. No. 1104, Issue II, July 1959.
- Rumph, L. B.; White, R. J.; Grumann, H. R. Propeller forces due to Yaw & their effect on airplane stability. Journal of the Aer. Sc., October 1942.
- Runckel, J. F. The Effect of Pitch on Force Moment Characteristics of Full-Scale Propellers of Five Solidities. NACA WR L-445, June 1942.
- Russel, J. G. Wake Survey and Strain-Gauge Measurements on an Inclined Propeller in the R. A. E. 24-ft. Tunnel. Gt. Brit. ARC CP 117, February 1952.
- Ryazanov, G. A. & Kopeyskiy, V. V. A method of modeling the profiles on wings & propellers. FTD-TT-65-1936, AD-639151, STAR-N67-11146, November 1963.
- Saari, M. J. & Wallne, L. E. Altitude-wind-tunnel investigation of performance of several propellers of YP-47m airplane at high blade loadings, I - Aeroproducts H20C-162-X11mz 4 blade propeller. NACA RM E6I24, October 1946.
- Sachse, H. Kirsten-Boeing Propeller. NACA TM 351, February 1926.
- Safronov, E. D. Theory of induction of heavily loaded propeller. TsAGI, UchengeZapiski, vol. 4, no. 4, 1973.
- Salters, Leland B., Jr. Velocity distributions measured in the slipstream of eight- & six- blade propellers at zero advance. NACA RM L55D21, June 1955.
- Salters, Leland B. Investigation at Mach nos. to 1.04 of blade loading characteristics of two full-scale three-blade supersonic propellers differing in blade-section camber. NACA RML57C19, September 1957.



- Salters, L. B., Jr. & Lewis, Martha C. Aerodynamic loading on three-bladed propeller acting as a brake at low and negative blade angles. NACA RM L58A03, NASA N62-64659.
- Sammonds, Robert I. & Molk, Ashley J. Effects of the propeller-spinner juncture on the pressure-recovery characteristics of an NACA 1-series D-type cowl in combination with a four blade single rotation propeller at Mach numbers up to .83 and at an angle of attack of  $0^{\circ}$ . NACA RM A52D01a, June 1952.
- Sammonds, R. I. & Reynolds, R. M. The pressure-recovery & propeller force characteristics of a propeller-spinner-cowling combination employing NACA 4-(5)(05)-037 6 & 8 blade dual rotation propellers with an NACA 1-series D-type cowl. NACA RM A54J22, January 1955.
- Sauter, John W. An aerodynamic study of tractor vs. pusher plant location. ATI-128 92, Rensselaer Polytechnical Ins., Troy, N. Y.
- Schames, L. The Determination of the Blade Angle of A Variable Pitch Propeller. Flug wehr and Technik, vol. 9, No. 10, October 1947.
- Schmidt, R. Coupling between oscillations of Aircraft Engine and Bending Stresses of Propeller Blades. Wissens, Zeits, vol. 10, no. 3, 1961.
- Scoles, Albert B. & Schoech, W. B. Range & takeoff calculations for planes with continuously controllable pitch propellers. Jour. of the Aeronautical Sc., vol. 5.
- Senouque, A. Propeller Tests on airplanes. NACA TM 120, July 1922.
- Sewall, J. L. An Analytical Trend Study of Propeller Whirl Instability. NASA TN D-996, April 1962.
- Shannon, J. F. & Forshaw, J. R. Propeller blade vibration; Nature & severity of vibration at edge-wise resonance influenced by coupling effects due to blade twist. Br. ARC R&M 2561.
- Shaw, Robert Linford. Computerized aerodynamic optimization of aircraft propellers. M. S. Thesis - Naval Res. Grad. School, Monterey, CA, June 1970.
- Shields, R. T. & Adams, D. H. Pressure measurements on two propeller blade roots. Br. ARC R&M 2354.
- Shutler, A. G. An Experimental Investigation of the Influence of the Wake of the Torsional Oscillation of Airscrew Blades at Low Mean Incidences. Southampton, Univ., Dept Aero. & Astron., Rept 152, December 1960.
- Silverstein, A. and Wilson H. A. Aerodynamic Characteristics of a 4-Engine Monoplane Showing Effects of Enclosing the Engines in the Wing and Comparisons on Tractor- and Pusher- Propeller Arrangements. NACA WR L-456, April 1938.
- Sladek, Jan. Optimalna vrtule ( optimizing propellers ). Zpravodaj VALU, No. 4, 1959.

- Slutski, A. I. & Zhustrin, K. V. Fairing of the propeller blade shank. Tekhnika Vozdushnogo Flota, May 1945.
- Smith, C. B. & Rustemeyer, A. H. Wind tunnel tests indicating the effect of section thickness & solidity on the performance of the supersonic propeller. United Aircraft Co., Res. Corp. R-24 102-11, June 21, 1950.
- Smith, J. E. & Templin, R. J. Flight & wind tunnel investigation of several transpor propeller-nacelle-combinations. NACA Report Ma-234, October 25, 1950.
- Smolin, V. Ustranenie Ruskrutki Vinta na Samolete I 1-14, ( preventing propeller from wind milling). Grazhdanskaia Aviatsiia, April 1958.
- ANON.- Society of Br. Aircraft Cons., Ltd. "SBAC Standard Method of Propeller Performance Estimation." Society of British Aircraft Constructors, Ltd.
- Solomon, William. Aerodynamic characteristics of a two-blade NACA 10-(3)(062)-045 propeller & a two-blade NACA 10-(3)(08)-045 propeller. NACA TN2881, January 1953.
- Spence, A. Effect of Propeller Thrust on Downwash and Velocity at Tailplane; A Collection of Data from Low Speed Tunnel Tests. Gt. Brit. ARC CP No. 21, 1950.
- Stack, John. The NACA high-speed wind tunnel and tests of six propeller sections. NACA Rept. 463, 1933.
- Stack, John; Draley, Eugene C.; Delano, James B.; & Feldman, Lewis. Investigation of 2-blade propellers at high forward speeds in the NACA 8-foot high speed wind tunnel. I - Effects of compressibility. NACA 4-309-03 blade. NACA ACR 4A10, January 1944.
- Stack, J.; Draley, E. C.; Delano, J. B.; Feldman, L. Investigation of the NACA 4-(3)(08)-03 and NACA 4-(3)(08)-045 two-blade propellers at forward Mach numbers to .725 to determine the effects of compressibility and solidity on performance. NACA Rept 999, 1950.
- Stack, John & Lindsey, W. F. Tests of N-85, N-86, & N-87 airfoil sections in the 11-Inch High Speed Wind Tunnel. NACA TN665, September 1938.
- Stack, John & von Doenhoff, Albert E. Tests of 16 related airfoils at high speeds. NACA Rept 492, 1934.
- Stambles, I. Variable-camber propeller promises major performance gains. Spacel Aeronautics 37' 93+, January 1962.
- Statecnh, Jiri. Propeller balancing during operation. NASA-TT-F1141, STAR-N69-29239, 1966.
- Statecny, Jiri. Propeller balancing during operation. NASA-TT-F-11411, STAR-N68-29958, January 1968.
- Steinberg, S. & Milling, R. W. Pressure distributions on the blade sections of the NACA 10-(0)(066)-03 propeller under operating conditions. NACA RM L50C03, May 1950.

- Sterne, L. H. G. Spinning test on fluttering propellers. Br. ARC R&M 2020.
- Stickle, George W. Measurement of the differential and total thrust and torque of six Full-Scale adjustable pitch propellers. NACA Rept 421, 1932.
- Stickle, George W. & Crigler, John L. Propeller analysis from experimental data. NACA Rept 712, 1941.
- Stickle, George W.; Crigler, J. L.; Naiman, Irven. Effect of body nose shape propeller efficiency. NACA Rept 725, 1941.
- Strohmeier, G. The ZWB Classification and Its Relation to German Aeronautical Activities. USAF Memorandum Report No. F-MX-1-RE, November 1947.
- Sveda, Jiri. Aerodynamics of a highly efficient propeller blade. Zpravodaj VZLU, no. 5, 1966.
- Swihart, John M. Experimental and calculated Static characteristics of a 2-blade NACA 10-(3)(062)-045 Propeller. NACA RM L54A19, March 1954.
- Swihart, J. M. & Norton, H. T. Wake surveys in the slipstream of a full scale supersonic - type three-blade propeller at Mach Nos. to .96. NACA RM 53I09, October 1953.
- Tachmindji, A. J. The potential problem of the optimum propeller with finite hub. DWT med. BAS R&D report 1051, August 1956.
- Talbot, Lawrence & Laitone, E. V. Remarks on compressible flow actuator disc theory. J. of the Aeron. Sc., vol. 21, 1954.
- Talbot, L. & Oppenheim, A. X. On the propeller discontinuity. Jour. of the Aeron. Sc., vol. 21, 1954.
- Tanner, W. H. & Wohlfeld, R.M. Vortex field, tip vortex, and shock formation on a model propeller. In Aerodynamics of rotary wing & V?STOL Aircraft; Cornell Aer. Lab. & U. S. Army Aviat. Mat. Lab., Symposium, 3rd, Buffalo, NY, June 18-20, 1969, Proceedings Vol. 1 - Rotor/Prop. Aero., rotor noise.
- Taylor, Robert T. Wind-tunnel investigation of effect of ratio of wing chord to propeller diameter with addition of slats on the aerodynamic characteristics of tilt-wing VTOL configurations in the transition speed range. NASA TN D-17, September 1959.
- Taylor, William Harold. Some studies on the flutter of airfoils & propellers. Ph.D. dissertation - the University of Michigan, 1933.
- Theodorsen, Theodore. Theory of Propellers. 629-1343 T342t, 1948.
- Theodorsen, Theodore. The theory of propellers. II - Method for calculating the axial interference velocity. NACA Rept 776, 1944.
- Theodorsen, Theodore. The Theory of Propellers III. - The slipstream contraction with numerical values for two-blade and four-blade propellers. NACA Rept 777, 1944.

- Theodorsen, Theodore. The theory of propellers IV. - Thrust, energy, and efficiency formulas for single- and dual- rotating propellers with ideal circulation distribution. NACA Rept 778, 1944.
- Theodorsen, Theodore & Stickle, George W. Effect of a trailing edge extension on the characteristics of a propeller section. NACA WR L-637, September 1944.
- Theodorsen, T.; Stickle, G. W.; Brevoort, M. J. Characteristics of six propellers including high speed range. NACA Rept 594, 1937.
- Thomas, F. M.; Caldwell, F. M.; Rhines, T. B. Practical airscrew performance calculations. From the Proceedings of the RAeS 624th Lecture - October 21, 1937.
- Thomas, Louie P., III. Flight investigation of the surface pressure distribution and flow field around an elliptical spinner. NASA Memo 1-26-59L, February 1959.
- Thompson, D. E. Time dependent thrust generated by a propeller operating in a turbulent inflow. AD-A001337, TM-74-99, STAR N75-19600.
- Thompson, J. S.; Smelt, R.; Davison, B.; & Smith, F. Comparison of Pusher and Tractor Propellers Mounted on a Wing. Gt. Brit. ARC R&M No. 2516, 1951.
- Tibery, C. L. & Wrench, J. W., Jr. Tables of the Goldstein factor. DTMB-1534, AD-261744, STAR N65-19998, December 1964.
- Troller, Theodor. Influence of Fuselage on propeller design. NACA TM 492, December 1928.
- Trotman, A. R. The Future of the Propeller. Aero Digest, Vol. 58, No. 1, January 1949.
- Tsakonas, Stavros; Chen, Chu-yung; Jacobs, W. R. Exact treatment of the helicoidal wake in the propeller lifting - surface theory. Steph. Ins. of Tech., Rept 1117, AD-642937, STAR-N67-20557, August 1966.
- Tumlinson, R. R. Propeller Blockage Research Needs. In Kansas Univ. Proc. of the NASA, Ind., Univ., Gen. Aviation Drag Reduction Workshop 1975.
- U.S. Bureau of Naval Personnel. Aircraft propellers - 1945. 629.1343. Un 3ai.
- U.S. Minitions Board Aircraft Committee. Subcommittee on Air Force- Navy- Civil Aircraft Design Criteria. Aircraft propeller handbook. 1956. R629.134 Un.3a.
- U.S. Army Desert test of propeller for L19AK. CONARC BD 6.
- Valentine, E. Floyd. Test of nacell-propeller combinations in various positions with reference to wings. V - Clark Y biplane cellule- NACA cowled nacelle - tractor propeller. 1934. NACA Rept 506.
- Valentine, E. Floyd & Mastrocola, Nicholas. Wind tunnel tests of wicker-wire spencer propeller. March 1942. NACA WR L-770.

- Variable Pitch Propellers. Translated from L' Aeronautique. Sept. 30, 1920. NACA TM 2.
- Vogeley, A.W. Preliminary results of flight tests of a conventional 3-blade propeller at high speeds. Apr. 1942. NACA C.B.
- Vogelay, A.W. Flight measurements of compressibility effects on a 3-blade thin Clark Y propeller operating at constant advance-diameter ration and blade angle. July 1943. NACA WR L-505.
- Vogeley, A.W. Axial-momentum theory for propellers in compressible flow. 1950. NACA TN 2164.
- Vogeley, A.W. Calculation of the effect of thrust-axis inclination on propeller disk loading and comparison with flight measurements. Oct. 1948. NACA TN 1721.
- Vogeley, A.W. Flight measurements fo compressibility effects on a two-blade thin Clark Y propeller. Nov. 1943. NACA ACR 3K06.
- Vogeley, A.W. & Hart, H.A. Circumferential distribution of propeller-slipstream total-pressure fise at one radial station of a twin engine transport airplane. April 1955. NACA TN3432.
- Vogeley, A.W. Climb and high-speed tests of a Curtiss No. 714-1C2-12 four-blade propeller on the Republic P-476 airplane. Dec. 1944. NACA WR L-177.
- Vogeley, A. W & Kurbjun, Max C. Measurements of a free-space oscillating pressures near a propeller at flight mach numbers up to .72. May, 1955. NACA TN 3417.
- Vokoun, Vaclav. Mereni Rotacnich Soucinitely Vrtuli na Elektomoru s Pulsujicim Krouticim momentum. (measuring propeller rotation coefficients with an electric motor with pulsating torque). Zpravodaj VZLU Nov-Dec. 1958. p.p.65-68.
- Walker, John H. & Reynolds, R.M. Investigation of the NACA 4-(5)(05)-037 6-and 8-blade, dual rotation porpellers at positive and negative thrust at mach numbers up to .90, including some aerodynamics characteristics of the NACA 4-(5)(05)-041 2- and 4-blade single rotation propellers. Oct. 1954. NACA RM A 54G13.
- Walker, M.J. Development of a new slip-ringles propeller blade measurement system. A70-25891. SAE, Nat. Bus. Aircraft Meeting, Wichita, Kan., Mar. 18-20, 1970, Paper 700223.
- Walker, M.J. Application of a new slip-ringless propeller blade measurement sustem. A75-28771. IAS Instrument Symp., 8th, Cranfield, Beds, England. MAR. 24-27, 1975. Proceedings (A75-28765 12-06) London, RAS, 1975.
- Warden, Harold H. Designing propellers to meet performance requirements. Aviation, Apr. 1942. p.p.70-72, 202.
- Warden, H.H. Propeller considerations for high-speed aircraft. Aeronautical Engineering Review. vol.7, No. 10, Oct. 1945. p. 32-35.

- Warner, Edward P. Slip stream corrections in performance computations. 1920. NACA Rept 71.
- Watkins, C.E. & Durling, B.J. A method for calculation of free-space sound pressures near a propeller in flight including considerations of the chordwise blade loading. Nov. 1956. NACA TN 3809.
- Weaver, C.S. Report index on German Aeronautical Research Documents. U.S. Field Information Agency Technical Report No. 948. April 22, 1947.
- Webb, Dana Mathematical Intigration of propeller thrust & torque leading curves. 5/53 WADC TN WCLB 53-3 AD 40, 416.
- Weick, Fred E. Simplified propeller design for low powered airplanes. NACA TN 212 Jan. 1925.
- Weick, Fred E. Propeller scalk effect and body interefrance. Sept. 1925. NACA TN 225.
- Weick, Fred, E. Propeller DesignI- Practical application of the blade element theory. NACA TN235 May 1926.
- Weick, Fred E. Propeller design. II - Extension of test data on a family of model propellers by means of the modified blade element theory. NACA TN 236, May 1926.
- Weick, Fred E. Propeller Design III - A simple system based on model propeller test data. NACA TN 237 - May 1926.
- Weick, Fred E. Navy propeller section characteristics as used in propeller design. Aug. 1926. NACA TN 244.
- Weick, Fred E. The effect of the Sperry Messenger Fuselage on the air-flow at the propeller plane. Jan, 1928. NACA TN 274.
- Weick, Fred, E. Determination of propeller deflections by means of static load tests on models. NACA TN 275, Jan. 1928.
- Weick, F.E. The effect of reduction gearing on propeller-body interefrance as show by full scale wind tunnel tests. Oct. 1929. NACA TN322.
- Weick, F.E. & Wood, D.E. The twenty foot propeller research tunnel of the NACA. 1928. NACA Rept. 300.
- Weick, F.E. Full scale tests of wood propellers on a VE-7 airplane in the propeller research tunnel. 1929. NACA Rept. 301.
- Weick, F.E. Full scale tests on a thin metal propeller at various tip speeds. 1928. NACA Rept. 302.
- Weick, F.E. Full wind tunnel tests with a series of propellers of different diameters on a single fuselage. Mar. 1930. NACA Rept. 339.

- Weick, F.E. Working charts for the selection of Aluminum alloy propellers of a standard form to operate with various aircraft engines & blades. 1935. NACA Rept. 350.
- Weick, F.E. Aircraft propeller design. 1930. 629.1343 w 42a.
- Weinig, F. Airscrew for high speed flight. The Journal of the R. Ae.S. May 1942. p.p. 115-124.
- Weinig, F. Aerodynamics of the propeller. U.S. Air Force AMC ASTIA ATI-10825.
- Weinig, F. Airscrew for high speed aircraft. Luftfahrt for schung, vol. 14, No. 4-5. 20/4/37. p.p. 168-172. Translated.
- Weiss, Herbert K. Dynamics of constant - speed propellers. Jour. of the Aeron. Sc. Feb. 1943. p.p. 58 - 67. 70.
- Wells, M.J. Analytical investigation of propeller interference in a transonic tunnel, monthly progress reports for Oct. 5, 1954 to Jan. 6, 1955. Unit. Aircraft Corp. UAC - R - M- 95776-1,2,3,4.
- Wenk, F. Investigation of maximum lift due to the propeller slipstream deflection. Luftfahrttechnik Raumfahrttechnik, vol. 10., Jan. 1964. p.p. 21-24. A64-14449.
- Whitcomb, R.T. Method for stress analysis of a swept propeller. Sept. 27, 1948. NACA RML8FN.
- Whitcomb, R.T. A discussion of the design of highly swept propeller blades. May, 1950. NACA RM L 50A23.
- Wick, Bradford, & Anderson, Adriene E. An investigation in the 40- by 80- foot wing tunnel of tip speed effects on propeller characteristics in the take-off and climb range. Feb. 1946. NACA ACR A5L12.
- Wickens, R.H. Wind tunnel and static thrust measurements on a four-blade constant chord propeller. NRC Aero. Rept. LR-291. Oct. 20, 1960. A 61-3609.
- Wickens, R.H. Aspects of efficient propeller selection with particular reference to man powered aircraft. Canadian Aero. Jour. vol.7, Nov. 1961. p.p. 319-330.
- Wickens, R.H. The aerodynamic characteristics & trailing vortex wake of propeller V/STOL configurations. Can. Aero. & Ap. Jour. vol. 21, March 1975. p.p.81-98.
- Wiener, Juan The dynamic balance of propellers. Aeronautica. Nov. 1941 p.p.36-38.
- Wieselberger, C. Contribution to the mutual interference of wing and propeller. NACA TM 754 Sept. 1934.

- Williams, D. H. & Brown, A. F. Tests on Thick Cuff Sections in the Compressed Air Tunnel. *Gt. Brit. ARC R&M No. 2457*, 1951.
- Wilson, A. J. Tests of a landing brake propeller on a fighter aircraft. *Br. ARC R&M 2228*.
- Wilson, H. A. Full-Scale-Tunnel Investigation of a Multiengine Pusher-Propeller Installation. *NACA WR L-246*, November 1942.
- Windler, Ray. The effect of propellers & nacelles on the landing speeds of tractor monoplanes. *NACA TN 420*, May 1932.
- Windler, Ray. Tests of wing-Nacelle-propeller combination at several pitch settings up to  $42^{\circ}$ . *NACA Rept 564*, 1936.
- Winter, K. G. & Dorward, J. Wind tunnel tests on the exhaust & propeller interference drag of a Merlin universal power plant installed in a wing. *Br. ARC R&M 2374*.
- Wohlfed, R. M. Density gradient visualization with a shlieren optical system. *Nat. SAMPE Tech. Conf. Proceedings*, vol. 2, 1970.
- Wood, Donald H. Full scale wind tunnel tests of a propeller with the diameter changed by cutting off the blade tips. *NACA Rept 351*, 1930.
- Wood, Donald H. Full scale tests of metal propellers at high tip speeds. *NACA Rept 375*, 1931.
- Wood, Donald H. Tests of Nacelle-propeller combinations in various position with reference to wings. II - Thick wings, - various radial engine cowlings - tractor propeller. *NACA Rept 436*, 1932.
- Wood, Donald H. Tests of nacelle-propeller combinations with - reference to wings. III - Clard Y wing - various radial engine cowlings - tractor propeller. *NACA Rept 462*, 1933.
- Wood, Donald H. Wing-nacelle-propeller test - Comparative tests of liquid-cooled and air-cooled engine nacelles. *NACA ACR*, January 1934.
- Wood, Donald H. & Bioletti, Carlton. Tests of nacelle-propeller combinations to various positions with reference to wings. VI - wings & nacelles with pusher propeller. *NACA Rept 507*, 1934.
- Wood, Donald H. & Windler, Ray. The effect of lateral inclination of the thrust axis and of sweepback of the leading edge of the wing on propulsive & net efficiencies of a wing-nacelle-propeller combination. *NACA ACR*, April 1935.
- Wood, Donald H. Engine Nacelles & Propellers & Airplane performance. *SAE Journal*, April 1936.
- Wood, J. H. & Swihart, J. M. The effect of blade section camber on the characteristics of three NACA propellers. *NACA RM L51L28*, April 1952.
- Wood, K. D. Aerospace vehicle design, Vol. I Aircraft Design 2nd Edition. *Johnson Publishing Co., Boulder, CO*, 1966.



Worobel, R. & Mayo, M. G. Advanced General Aviation Propeller Study. NASA CR 114289, April 1971.

Worobel, Rose & Mayo, Millard G. Advanced General aviation propeller study. NASA-CR-114399, STAR-N72-18004, December 21, 1971.

Worobel, Rose. Computer Program user's manual for advanced general aviation propeller study. NASA-CR-2066, STAR-N72-25005.

Yaggy, P. A Method for Predicting the Upwash Angles Induced at the Propeller Plane of a Combination of Bodies With An Unswept Wing. NACA TN 2528, October 1951.

Yaggy, Paul F. & Rogallo, Vernon L. A wind tunnel investigation of three propellers through an angle-of-attack range from  $0^{\circ}$  -  $80^{\circ}$ . NASA TN D-318, May 1960.

Young, A. D. Note on the application of linear perturbation theory to determine the effect of compressibility on the wind tunnel constraints on a propeller. Br. ARC R&M 2113.

Young, M. I. The influence of pitch and twist on blade vibrations. Journal of A/C, vol. 10, June 1973.

Zahm, A. F. Period in gyroscopic bodies, with applications to air screws. NACA, Rept 19, 1917.

Zwasaki, Matsunosuke. Vortex theory of an airscrew in consideration of contraction or expansion of slipstream & variation on of pitch of vortex sheets in it. Reports of Research for App. Mech., Vol II; No. 27, 1959.

APPENDIX B

Structural Integrity Report for Propeller Test Stand  
for Langley Full Scale Wind Tunnel

by

John C. McWhorter

## Table of Contents

	Page
List of Symbols	11
Structural Integrity Report	1
Aerodynamic Loads	1
Analysis of Nacelle	2
Analysis of Mast Fairing	2
Analysis of Mast	3
Dimensions of Mast and Internal Loads	4
Deflection Analysis of Mast	6
Dynamic Analysis of Mast	9
Calculation of Maximum Static Stresses	12
Calculation of Maximum Dynamic Stresses	15
Calculation of Hold Down Bolt Stresses	19
Appendix A	22

C-2

## List of Symbols

$x, y, z$	Cartesian Coordinates - Origin at Base of Mast
$x^1, y^1, z^1$	Cartesian Coordinates - Origin at Top of Mast
$x_G, y_G, z_G$	Cartesian Coordinates - Origin at Center of Gravity of Motor Assembly
$I_x, I_y$	Second Moments of Area
$S_x, S_y$	Section Moduli
$J$	Torsion Constant
$A$	Cross-sectional Area of Mast
$L$	Height of Mast
$E, G, \mu$	Elastic Constants
$\sigma$	Normal Stress
$\tau$	Shear Stress
$\sigma_{cr}$	Buckling Stress
$\sigma_e$	Yield Strength
$P_x, P_y$	Transverse Shear Force in Mast and Applied Shear Loads at Top of Mast
$P_z$	Axial Load in Mast
$P_{za}$	Applied Axial Load at Top of Mast
$M_x, M_y$	Bending Moments in Mast
$M_z$	Twisting Moments in Mast
$M_{xa}, M_{ya}, M_{za}$	Applied Moments at Top of Mast
$\delta_x, \delta_y, \delta_z$	Displacement Components of Top of Mast
$\theta_x, \theta_y, \theta_z$	Rotation components of Top of Mast
$U$	Strain Energy
$\bar{r}_G$	Location of Motor Assembly Center of Gravity from Top of Mast

## N O T I C E

THIS DOCUMENT HAS BEEN REPRODUCED FROM  
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT  
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED  
IN THE INTEREST OF MAKING AVAILABLE AS MUCH  
INFORMATION AS POSSIBLE

$\bar{x}, \bar{y}$	Components of $\bar{r}_G$
M	Mass of Motor Assembly
W	Weight of Motor Assembly
$A_{Gx}, A_{Gy}, A_{Gz}$	Acceleration Components of Center of Gravity of Motor Assembly
$\ddot{\theta}_x, \ddot{\theta}_y, \ddot{\theta}_z$	Angular Acceleration Components of Motor Assembly
$IM_{xc}, IM_{yc}, IM_{zc}$	Moments of Inertia about Body Centroidal Axes
$IM_x, IM_y, IM_z$	Moments of Inertia of Motor Assembly about $x^1, y^1, z^1$ Axes
$I_{Gx}, I_{Gy}, I_{Gz}$	Moments of Inertia of Motor Assembly about $x_G, y_G, z_G$ Axes
A, B, C, D, E	Amplitudes of Motion of Top of Mast
$\omega$	Frequency
t	Time
$F_o$	Magnitude of Exciting Force

## STRUCTURAL INTEGRITY REPORT

The propeller test project includes six pieces of structural hardware (see drawings). These are the motor case, the motor case cradle, the mast, the mast fairing, nacelle, and the sector fairing. The motor case, cradle, nacelle, and sector fairing carry the aerodynamic load on the propeller, nacelle, and sector fairing through the mast to the balance system. The aerodynamic loads on the mast are shielded from the balance by the mast fairing which is cantilevered from the tunnel floor independently of the balance system.

### Aerodynamic Loads

The maximum torque and thrust developed by the propellers is 600 lbf thrust and 4200 in lbf torque. At a speed of 500 RPM and an angle of attack of 12 degrees maximum harmonic variations of 180 lbf in thrust and 6360 in lbf in yaw moment are experienced. The structure must safely support the static loads and must not be excited to vibrate by the harmonic loads. To accomplish this it was decided to design the mast strong enough to support the static loads but flexible enough so that the lowest exciting frequency of 17HZ (500 RPM for a two blade propeller) would be well above the natural frequency of the system. The natural frequencies of bending and torsion were 3.5HZ, 6.18HZ, and 6.2HZ. These were calculated assuming a rigid support (the balance system is not rigid so the frequencies are actually lower than those calculated), no aerodynamic or structural damping, and the mass of the mast was neglected. The mass on the end of the mast is about seven times the mast

mass so one would expect little influence on the natural frequencies due to the mast mass. However, a lumped mass analysis including the mast mass was made to confirm this assumption, and it produced the same frequencies as above.

The aerodynamic load on the nacelle at 20 degrees angle of attack is about 400 lbf of lift normal to the nacelle. The sector fairing is parallel to the flow and has only small shear loads on it. The mast fairing would have a lift load of about 200 lbf at one degree yaw angle (angle of attack) at a tunnel speed of 100 MPH.

#### Analysis of Nacelle

The nacelle is a cylindrical shell stiffened with rings attached to the cradle at four points so that it approximates a simply supported beam with a distributed load of 400 lbf total over a span of eight feet.

$$M = 4800 \text{ in lbf}$$

$$I = \frac{1}{2} J = \frac{1}{2} r^2 A = \frac{1}{2} r^2 2\pi r t = \pi r^3 t$$

$$\sigma = \frac{Mr}{I} = \frac{M}{\pi r^2 t} = \frac{4800}{\pi (10)^2 (.05)}$$

$$\sigma = 305 \text{ psi}$$

$$\sigma_{cr} = C_b E \left(\frac{t}{r}\right) = .16 (10^7) \left(\frac{1}{200}\right) = 8000 \text{ psi}$$

Thus the actual stress 305 psi is about  $\frac{1}{26}$  th of the bending stress which would cause buckling of the cylinder.

#### Analysis of Mast Fairing

The mast fairing is a rigid shell structure stiffened with ribs at two foot intervals. The chord is five feet nine inches and the span is approximately fourteen feet. At a tunnel speed of 100 MPH and an angle of incidence of one degree, the symmetric airfoil would generate 210 lbf of lift located



conservatively at mid span. This lift would produce a root moment of 17,640 in lbf to be reacted by the front and rear spars (neglect bending strength of skin except over spar caps - conservative assumption). The moment of inertia is 84 in<sup>4</sup> and

$$\sigma = \frac{MC}{I} = \frac{17,640 (7)}{84} = 1470 \text{ psi}$$

which is well below both the tensile yield and compressive crippling stress for the spar. Rather massive steel hold down fittings are attached to the base of each spar cap by epoxy and by rivets. These fittings allow the fairing to be bolted to the floor of the tunnel to form a cantilever beam which surrounds the mast with a clearance of one inch on all sides. The fairing deflection under a distributed 200 lbf lift load is less than .03 inches so there should be no interference between the mast and mast fairing.

#### Analysis of Mast

The mast used to support the propeller test drive motors must be cantilevered from the balance table and offer minimum wind resistance. It was also desirable that the mast be tapered to minimize mast thickness at the motor attachment location. Other design considerations were ease of construction, economy of construction, static response to propeller loads, dynamic response to harmonic loads induced by the propellers, and stress levels at critical points due to propeller loads. A mast height of about fourteen feet was required to place the propellers at the centerline of the tunnel.

The maximum anticipated loads expected for the most extreme test cases were 600 lbf thrust and 290 ft lbf torque steady loads. The weight of the motors and structure when added to the applied propeller loads gave a loading which was not severe for a design with even a modest cross-section. Thus it


was decided to choose a design based on stiffness criterion rather than strength, since there was no over-riding reason for minimizing the weight or size of the beam. To withstand dynamic loads two approaches were considered. First the beam could be made stiff enough so its natural frequency was well above the frequencies of all harmonic loads. This would have required a massive cross-section. The second approach was to design a beam with natural frequencies well below the minimum expected harmonic excitations. This approach allows dynamic amplitudes somewhat greater than static deflections, but the static deflections are small due to the smallness of the loads.

Several cross-sections were analyzed with 0.5 inch and 0.375 inch steel plate being considered for structural material. The final design dimensions will be used to explain the analysis procedure used to determine the frequencies of vibration and the stresses in the mast.

#### Dimensions of Mast and Internal Loads

The mast is a tapered box beam stiffened with bulkheads (Figure 1). It has base dimensions of 20 inches by 11 inches and a top 20 inches by 3.6 inches. Dimensions of 20 inches by 3.5 inches were used in the analysis and later changed to 20 inches by 3.6 inches to produce an integer number for the taper ratio. This produced negligible changes in the stresses and frequencies. A plate thickness of .375 inches was used.

Equations for the variation in the moments of inertia, torsion constant, and area are given on the following page:

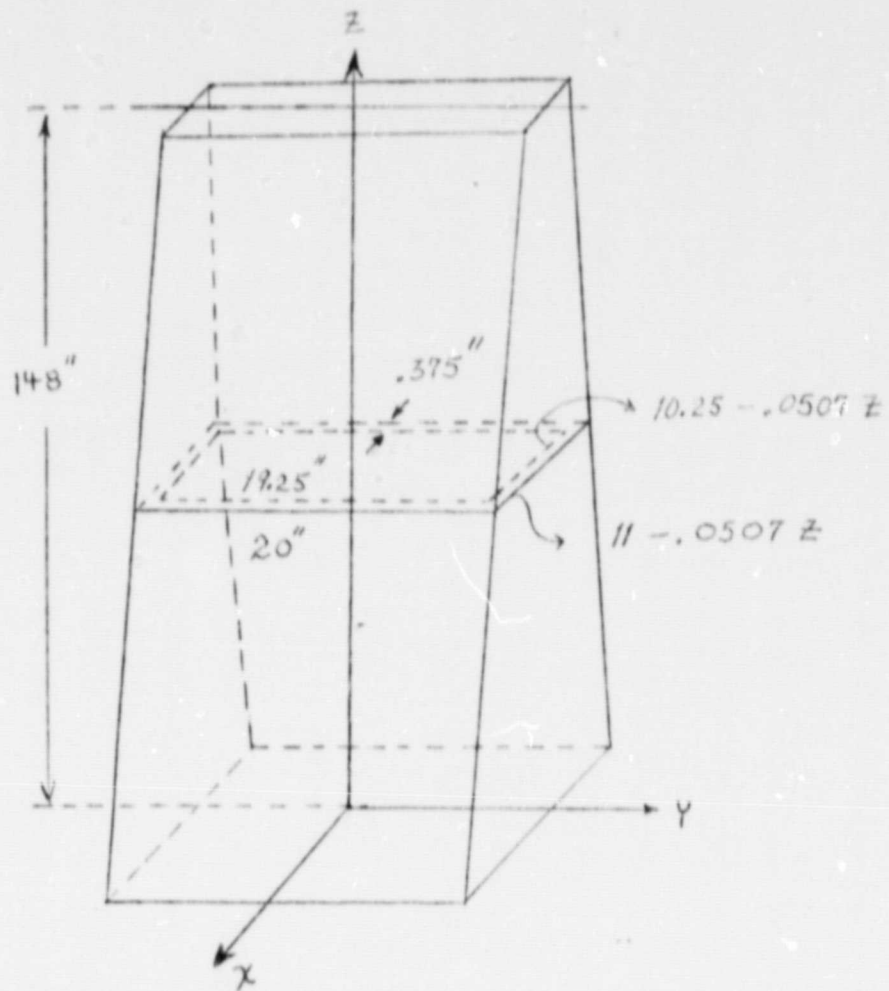

$$I_x = 1240 - 3.66Z \dots \dots \dots (1a)$$

$$I_y = 490.8 - 5.037Z + .01457Z^2 - .00000814Z^3 \dots \dots (1b)$$

$$J = \frac{155,729. - 1540.Z + 3.807Z^2}{157.333 - .2703Z} \dots \dots \dots (1c)$$

$$A = 22.6875 - .03801Z \dots \dots \dots (1d)$$

where  $I_x$ ,  $I_y$ , and  $J$  have units of  $\text{in}^4$ , area has units of  $\text{in}^2$ , and  $Z$  is in inches.

The applied loads shown in Figure 2 produce the following bending moments, torque, and axial load distributions.

$$M_z = M_{za} \dots \dots \dots (2a)$$

$$M_y = M_{ya} + P_x L - P_x Z \dots \dots \dots (2b)$$

$$M_x = -M_{xa} + P_y L - P_y Z \dots \dots \dots (2c)$$

$$P_z = -P_{za} - 817.7 + 6.307Z - .005282Z^2 \dots \dots \dots (2d)$$

where moments are in inch pounds, forces in pounds, and Z and L in inches.

#### Deflection Analysis of Mast

The mast deflections under the above loads can be computed by fundamental beam theory or by Castigliano's Theorem. Using Castigliano's method we first calculate the strain energy from

$$U = \frac{1}{2E} \int_0^L \left[ \frac{M_x^2}{I_x} + \frac{M_y^2}{I_y} + \frac{E}{G} \frac{M_z^2}{J} \right] dZ \dots \dots \dots (3)$$

from which we find deflections

$$\delta_x = \frac{\partial U}{\partial P_x} \dots \dots \dots (4a)$$

$$\delta_y = \frac{\partial U}{\partial P_y} \dots \dots \dots (4b)$$

$$\theta_x = \frac{\partial U}{\partial M_{xa}} \dots \dots \dots (4c)$$

$$\theta_y = \frac{\partial U}{\partial M_{ya}} \dots \dots \dots (4d)$$

$$\theta_z = \frac{\partial U}{\partial M_{za}} \dots \dots \dots (4e)$$

Substituting Equations 2 into Equations 4 and taking the respective derivatives gives

$$\delta_x = \frac{1}{E} \int_0^L \frac{1}{I_y} (M_{ya} + P_x L - P_x Z)(L - Z) dZ \dots \dots \dots (5a)$$

$$\delta_y = \frac{1}{E} \int_0^L \frac{1}{I_x} (-M_{xa} + P_y L - P_y Z)(L - Z) dZ \dots \dots \dots (5b)$$

$$\theta_x = \frac{1}{E} \int_0^L \frac{1}{I_x} (M_{xa} - P_y L + P_y Z) dZ \dots \dots \dots (5c)$$

$$\theta_y = \frac{1}{E} \int_0^L \frac{1}{I_y} (M_{ya} + P_x L - P_x Z) dZ \dots \dots \dots (5d)$$

$$\theta_z = \frac{1}{G} \int_0^L \frac{M_{za}}{J} dZ \dots \dots \dots (5e)$$

Now substitute the moments of inertia, Equation 1, and integrate. The expression for  $\delta_x$  will be used as an example of the procedure and the results for the other deflection given without details of algebra.

$$\delta_x = \frac{1}{E} \int_0^L \frac{[(M_{ya} + P_x L)L - P_x LZ - (M_{ya} + P_x L)Z + P_x Z^2]}{490.8 - 5.037Z + .014,57Z^2 - .000,008,14Z^3} dZ$$

Normalize the Z coordinate by letting  $Z = \bar{Z}L$  and  $dZ = Ld\bar{Z}$ .

$$\delta_x = \frac{1}{E} \int_0^1 \frac{[(M_{ya} + P_x L)L - (2P_x L + M_{ya})\bar{Z}L + P_x L^2\bar{Z}^2]Ld\bar{Z}}{490.8 - 5.037L\bar{Z} + .014,57L^2\bar{Z}^2 - .000,008,14L^3\bar{Z}^3}$$

L = 148 inches

$$\delta_x = \frac{L^2}{E} \int_0^1 \frac{[(M_{ya} + P_x L) - (M_{ya} + 2P_x L)\bar{Z} + P_x L\bar{Z}^2]d\bar{Z}}{490.8 - 745.48\bar{Z} + 319.14\bar{Z}^2 - 26.388\bar{Z}^3}$$

Now factor the demoninator into the form  $(1 + a\bar{Z})(1 + b\bar{Z})(1 + c\bar{Z})$

$$\delta_x = \frac{L}{490.8E} \int_0^1 \frac{[(M_{ya} + P_x L) - (M_{ya} + 2P_x L)\bar{Z} + P_x L\bar{Z}^2]d\bar{Z}}{(1 - .108\bar{Z})(1 - .7053\bar{Z})^2}$$

$$\delta_x = \frac{L^2}{490.8E} \left[ (M_{ya} + P_x L) \int_0^1 \frac{d\bar{z}}{(1.0 - .108\bar{z})(1.0 - 7053\bar{z})^2} + \right. \\ \left. - (M_{ya} + 2P_x L) \int_0^1 \frac{\bar{z} d\bar{z}}{(1.0 - .108\bar{z})(1.0 - .7053\bar{z})^2} + \right. \\ \left. + P_x L \int_0^1 \frac{\bar{z}^2 d\bar{z}}{(1.0 - .108\bar{z})(1.0 - .7053\bar{z})^2} \right]$$

These expressions can be integrated by reference to a book of integral tables. More algebraic manipulation yields

$$\delta_x = \frac{1}{E} [3780 P_x + 48.9 M_{ya}] \dots \dots \dots (6a)$$

Similar work for  $\delta_y$ ,  $\theta_x$ ,  $\theta_y$  and  $\theta_z$  yields

$$\delta_y = \frac{1}{E} [986.8 P_y - 10.5 M_{xa}] \dots \dots \dots (6b)$$

$$\theta_x = \frac{1}{E} [-10.5 P_y + .1568 M_{xa}] \dots \dots \dots (6c)$$

$$\theta_y = \frac{1}{E} [48.87 P_x + 1.107 M_{ya}] \dots \dots \dots (6d)$$

$$\theta_z = \frac{1}{E} [1.1428 M_{za}] \dots \dots \dots (6e)$$

In matrix form the results for the 20 x 11 mast made of .375 inch thick plate are


$$\begin{bmatrix} \delta_x \\ \delta_y \\ \theta_x \\ \theta_y \\ \theta_z \end{bmatrix} = \frac{1}{E} \begin{bmatrix} 3780 & 0 & 0 & 48.87 & 0 \\ 0 & 986.8 & -10.5 & 0 & 0 \\ 0 & -10.5 & .1568 & 0 & 0 \\ 48.87 & 0 & 0 & 1.107 & 0 \\ 0 & 0 & 0 & 0 & 1.1428 \end{bmatrix} \begin{bmatrix} P_x \\ P_y \\ M_{xa} \\ M_{ya} \\ M_{za} \end{bmatrix} \dots \dots (7a)$$

Similar results for a 23 x 16.25 mast made of .5 inch thick plate are

$$\begin{bmatrix} \delta_x \\ \delta_y \\ \theta_x \\ \theta_y \\ \theta_z \end{bmatrix} = \frac{1}{E} \begin{bmatrix} 1177 & 0 & 0 & 16.5 & 0 \\ 0 & 410 & 4.409 & 0 & 0 \\ 0 & 4.409 & .068 & 0 & 0 \\ 16.5 & 0 & 0 & .4515 & 0 \\ 0 & 0 & 0 & 0 & .26 \end{bmatrix} \begin{bmatrix} P_x \\ P_y \\ M_{xa} \\ M_{ya} \\ M_{za} \end{bmatrix} \dots (7b)$$

### Dynamic Analysis of Mast

If we neglect the mass of the mast and write the equations of motion for the motor case - motor cradle - propeller and counterweight, the natural frequencies of vibration can be found. Let  $\bar{r}_G$  be a position vector from the center of gravity of the motor-propeller assembly to the end of the mast (station 148 inches). Assume the motor-propeller assembly and that portion of the mast above station 148 inches to be rigid. Inertial and mass properties of the assembly can be found in Appendix A.

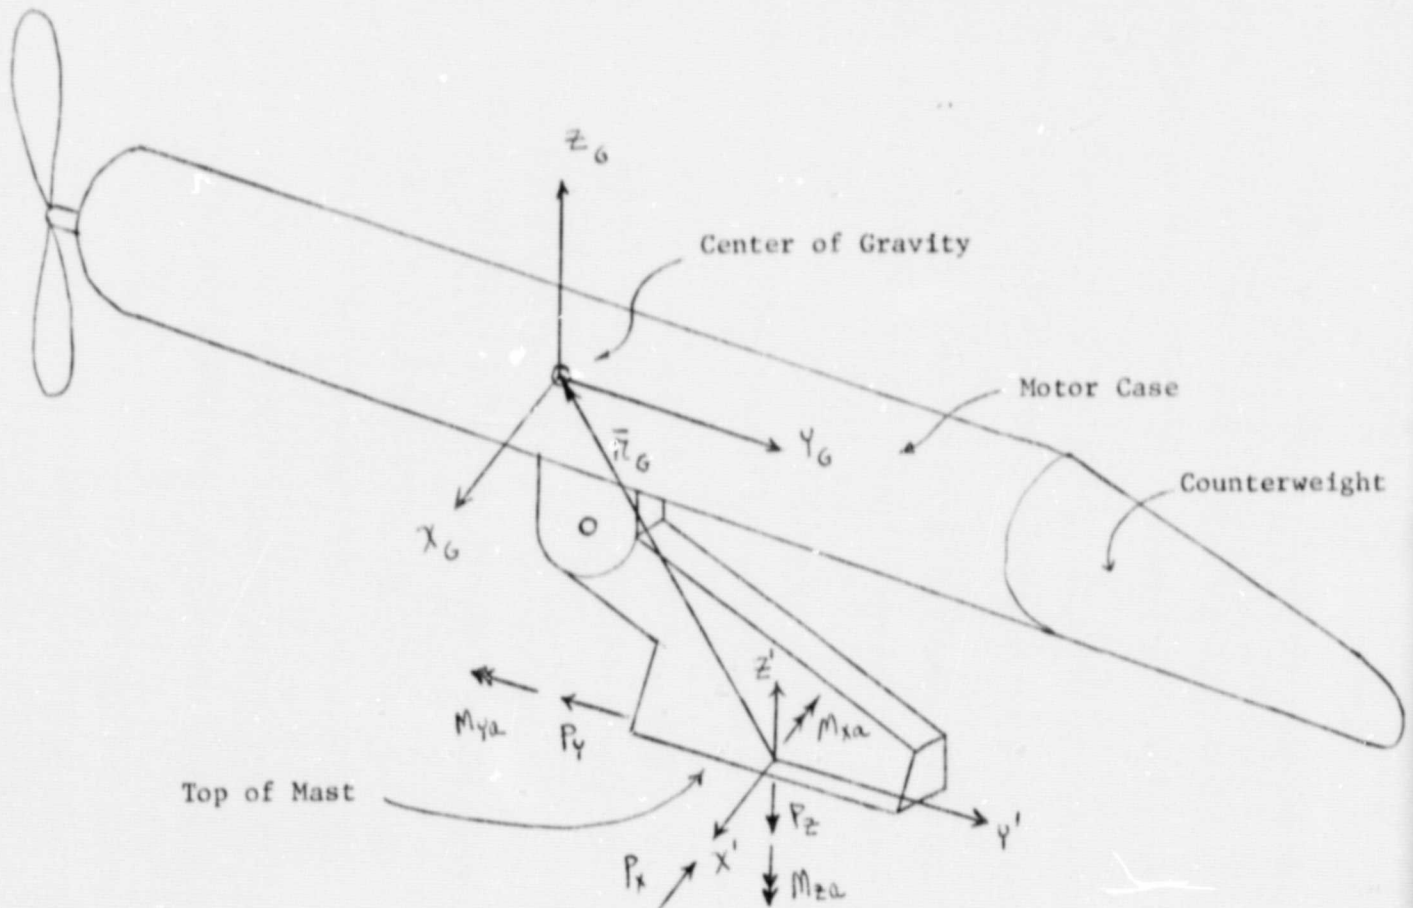

$$\vec{r}_G = -\bar{y}\hat{j} + \bar{z}\hat{k}$$

$$\Sigma F_x = MA_{Gx}$$

$$-P_x = M(\delta + \bar{y}\ddot{\theta}_z) \dots \dots \dots (8a)$$

$$\Sigma F_y = MA_{Gy}$$

$$-P_y = M(\delta_y - \bar{z}\ddot{\theta}_x) \dots \dots \dots (8b)$$

$$\Sigma F_z = MA_{Gz}$$

$$-P_z - W = -M\bar{y}\ddot{\theta}_x \dots \dots \dots (8c)$$

$$\Sigma M_{xG} = I_{Gx}\ddot{\theta}_x$$

$$-M_{xa} - P_z\bar{y} - P_y\bar{z} = I_{Gx}\ddot{\theta}_x \dots \dots \dots (8d)$$

$$\Sigma M_{yG} = I_{Gy}\ddot{\theta}_y$$

$$-M_{ya} + P_{xz} = I_{Gy}\ddot{\theta}_y \dots \dots \dots (8e)$$

$$\Sigma M_{zG} = I_{Gz}\ddot{\theta}_z$$

$$-M_{za} + P_x\bar{y} = I_{Gz}\ddot{\theta}_z \dots \dots \dots (8f)$$

Now invert matrix (7a) to get

$$\begin{bmatrix} P_x \\ P_y \\ M_{xa} \\ M_{ya} \\ M_{za} \end{bmatrix} = 10^6 \times \begin{bmatrix} .01849 & 0 & 0 & -.8162 & 0 \\ 0 & .10575 & 7.0818 & 0 & 0 \\ 0 & 7.0818 & 665.554 & 0 & 0 \\ .8162 & 0 & 0 & 63.13 & 0 \\ 0 & 0 & 0 & 0 & 26.25 \end{bmatrix} \begin{bmatrix} \delta_x \\ \delta_y \\ \theta_x \\ \theta_y \\ \theta_z \end{bmatrix} \dots \dots (9)$$

Assume simple harmonic motion

$$\begin{aligned} \delta_x &= A \sin \omega t \\ \delta_y &= B \sin \omega t \\ \theta_x &= C \sin \omega t \dots \dots \dots (10) \\ \theta_y &= D \sin \omega t \\ \theta_z &= E \sin \omega t \end{aligned}$$



and substitute equations (9) and (10) into equations(8) and simplify to get

$$\begin{aligned}
 (18,490 - 12.31\omega^2)A - 816,200D - 151.413\omega^2E &= 0 \\
 (105,750 - 12.31\omega^2)B + (7,081,800 + 215.37\omega^2)C &= 0 \\
 8,933,483 B + (789,556,318 - 20,243.4\omega^2)C &= 0 \quad \dots \dots \dots (11) \\
 -1,139,960 A + (77,422,000 - 570\omega^2)D &= 0 \\
 -18,490 A + 816,200 D + (2,134,146 - 1479\omega^2)E &= 0
 \end{aligned}$$

Solving these free vibration equations for the five natural frequencies and mode shape gives:

MODE	DESCRIPTION	FREQUENCY (HZ)	A	B	C	D	E
1	lateral bending	3.5	6.77	0	0	.1	.031
2	fore and aft bending	6.18	0	-8.5	.1	0	0
3	torsion or pitching mode	6.20	1.865	0	0	.02766	-.1
4	rolling mode	39.0	.0536	0	0	.1	.0004
5	yaw mode	59.0	0	3.357	.1	0	0

Each mode has been normalized to a maximum rotation of .1 radian.

The fore and aft bending mode and the yaw mode are uncoupled from the lateral bending, pitching, and rolling modes.

For a forced vibration analysis, propeller loads must be converted to an equivalent force system at the center of gravity of the motor assembly. The equations of motion of the motor assembly (11) would be modified by including the magnitude of the harmonic applied loads on the right hand side of the equations and interpreting  $\omega$  as the frequency of the applied loads and A,B,C,D, and E as the amplitudes of the resulting forced motion. These five simultaneous equations can be solved for the amplitudes of forced motion from which the bending moments and twisting moment distribution can be computed via equations (9) and (2).

### Calculation of Maximum Static Stresses

The maximum static loads are 600 lbf thrust and 4200 in lbf torque. At zero angle of attack the thrust force lies 2.49 inches above the center of gravity of the motor - prop assembly. The equivalent force system at the center of gravity for this worst static condition would then be:

$$P_{yG} = -600 \text{ lbf}, M_{yG} = -4200 \text{ in lbf}, M_{xG} = 2.5(600) = 1500 \text{ in lbf}.$$

Put these static loads on the right hand side of equation (11) and set  $\omega = 0$

$$18,490 A - 816,200 D = 0$$

$$105,750 B + 7,081,800 C = -600$$

$$8,933,483 B + 789,556,318 C = 1500$$

$$-1,139,960 A + 77,422,000 D = -4200$$

$$-18,490 A + 816,200 D + 2,134,146 E = 0$$

Solving yields:  $A = -.006841 \text{ in}$

$$B = -.02394 \text{ in}$$

$$C = .0002728 \text{ radian}$$

$$D = -.000155 \text{ radian}$$

$$E = 0.0 \text{ rad}$$

Insert these deflections into equations (9) to get equivalent loads on top of mast

$$\begin{bmatrix} P_x \\ P_y \\ M_{xa} \\ M_{ya} \\ M_{za} \end{bmatrix} = 10^6 \times \begin{bmatrix} .01849 & C & 0 & -.8162 & 0 \\ 0 & .10575 & 7.0818 & 0 & 0 \\ 0 & 7.0818 & 665.554 & 0 & 0 \\ -.8162 & 0 & 0 & 63.13 & 0 \\ 0 & 0 & 0 & 0 & 26.25 \end{bmatrix} \begin{bmatrix} -68.41 \\ -239.4 \\ 2.728 \\ -1.55 \\ 0 \end{bmatrix} \times 10^4$$

$$\begin{aligned}
P_x &= .02 \text{ lbf} && (0) \\
P_y &= -599.74 \text{ lbf} && (-600) \\
M_{xa} &= 12,024.8 \text{ in lbf} && (-12,000) \\
M_{ya} &= -4201.5 \text{ in lbf} && (-4200) \\
M_{za} &= 0 && (0)
\end{aligned}$$

These results could have been determined by reducing the propeller loads to an equivalent force system at the top of mast. The values above in parenthesis indicate results obtained by statics. This provides a partial check on the equations(11) and (9).

Now substitute the loads into equations (2).

$$\begin{aligned}
M_x &= -100,800 + 600Z \\
M_y &= -4200 \\
M_z &= 0
\end{aligned}$$

Normal stress in the mast is given by:

$$\sigma = \frac{M_y}{I_y} x + \frac{M_x}{I_x} y - \frac{W}{A} \dots \dots \dots (12)$$

Moments of inertia given by equations (1) when inserted into (12) gives

$$\begin{aligned}
\sigma &= - \frac{(-4200)}{490.8} x + \frac{(-100,800)}{1240} y - \frac{5600}{22.68} \text{ for } Z = 0. \\
\sigma &= 8.5575x - 81.290y - 247.0 \\
\text{@}x &= -5.5 \text{ in and } y = 10.0 \text{ in} \\
\sigma &= -1107 \text{ psi (compression)} \\
\text{@}x &= 5.5 \text{ in, } y = -10.0 \text{ in} \\
\sigma &= 613 \text{ psi (tension)}
\end{aligned}$$

On the next page is a table for properties, moments, and stress at the quarter points of the mast.

Z (in)	X (in)	Y (in)	M <sub>x</sub> (in lbf)	M <sub>y</sub> (in lbf)	I <sub>x</sub> (in <sup>4</sup> )	I <sub>y</sub> (in <sup>4</sup> )	A (in <sup>2</sup> )	σ (comp) (psi)	σ (tension) (psi)
0	5.5	10	-100,800	-42000	1240	490.8	22.7	1107	613
37	4.56	10	-78,000	-42000	1104.6	324.	21.3	1017	513
74	3.63	10	-56,400	-42000	969.2	194.5	19.9	919	401
111	2.69	10	-34,200	-42000	833.7	100.1	18.5	791	255
148	1.75	10	-12,000	-42000	697.3	38.1	17.1	645	85

The mast is constructed of standard structure steel plate with a yield stress of 36,000 psi. This gives an allowable stress of 12,000 psi and the maximum static stresses are well within this value.

The critical buckling stress can be calculated for the steel plate at the bottom of the mast assuming unrestrained edges (conservative).

$$\sigma_{CR} = \frac{K\pi^2 E}{12(1-\nu^2)} \left(\frac{t}{b}\right)^2$$

$$\sigma_{CR} = \frac{(4)(\pi^2)(30 \times 10^6)}{10.92} \left(\frac{.375}{20}\right)^2$$

$$\sigma_{CR} = 38,000 \text{ psi (conservative)}$$

This stress is above the yield point so the plate would buckle inelastically. The allowable stress remains 12,000 psi.

The recommended working stress for various welds of low carbon steel is 16,000 psi for static loads and 8,000 psi for dynamic loads.\* Stress concentration factors up to 2 should be used for certain butt joints with sharp corners. The edges of the mast welded to the base plate were beveled to eliminate the sharp corners. Even using the stress concentration factor and the working stress for dynamic loads, an allowable stress of 4000 psi is obtained which is well above the tensile stress of 613 psi and the compressive

\* Spotts, M.F., Design of Machine Elements, 3rd ed., page 269.

stress of 1107 psi on the base weld. Thus the mast is well within the allowable stress limits for static loads.

#### Calculation of Maximum Dynamic Stresses

At a speed of 500 RPM there is a harmonic thrust force of 180 lbf and a harmonic yaw moment of 6360 in lbf with frequency twice the rotational speed for a two blade propeller. This condition occurs at an angle of attack of 12 degrees and is the lowest frequency (17HZ) excitation expected other than an unbalance in the propeller shaft. 17HZ is well above the bending and torsion frequencies but is below the rolling and yawing frequencies.

These load produce an equivalent force system at the center of gravity of  $P_{yG} = -176.1$  lbf,  $P_{zG} = 37.4$  lbf,  $M_{xG} = 450$  in lb, and  $M_{zG} = 6360$  in lb. The moments of inertia and center of gravity of the motor - propeller assembly are not changed significantly by a rotation of 12 degrees. Put the exciting forces and moments on the right hand side of equation (11) and inserting  $\omega = 16.66\text{HZ} = 104.7$  radians/sec gives:

$$-116,493 A - 816,200 D - 1,660,296 E = 0$$

$$-29,233 B + 9,443,400 C = -176.1$$

$$8,933,483 B + 567,580,000 C = 450$$

$$-1,139,960 A + 71,172,000 D = 0$$

$$-18,490 A + 816,200 D - 14,083,600 E = 6360$$

Solution of these equations for the dynamic displacements gives:

$$A = 581.56 \times 10^{-5} \text{ inches}$$

$$B = 103.22 \times 10^{-5} \text{ inches}$$

$$C = -1.5454 \times 10^{-5} \text{ radians}$$

$$D = 9.315 \times 10^{-5} \text{ radians}$$

$$E = -45.383 \times 10^{-5} \text{ radians}$$

These displacements produce equivalent loads on the top of the mast of

$$P_x = 31.5 \text{ lbf,}$$

$$P_y = -.3 \text{ lbf,}$$

$$M_{xa} = -2976 \text{ in lbf,}$$

$$M_{ya} = 1134 \text{ in lbf,}$$

$$M_{za} = 11,913 \text{ in lbf,}$$

which produce moments at the base of the beam of

$$M_x = 2932 \text{ in lbf}$$

$$M_y = 5796 \text{ in lbf}$$

$$M_z = 11,913 \text{ in lbf.}$$

The maximum dynamic stress is

$$\sigma = \frac{5796}{490.8} x + \frac{2932}{1240} y - \frac{5600}{22.68} \text{ at the base of the mast.}$$

$$\sigma_{\max} = -159 \text{ psi}$$

$$\sigma_{\min} = -336 \text{ psi}$$

At the lowest frequency expected, the vibrational modes of the mast are not excited. The magnitude of the exciting loads are also low which helps account for the low dynamic stresses.

The absolutely worst case of failure would be to lose a propeller blade at low speed. This rotating unbalance would produce exciting loads at the center of gravity of

$$P_{xG} = -F_o \cos \omega t$$

$$P_{zG} = F_o \sin \omega t$$

$$M_{xG} = -94.7 F_o \cos \omega t$$

$$M_{yG} = -2.5 F_o \cos \omega t$$

$$M_{zG} = -94.7 F_o \cos \omega t$$

At  $\omega = 500$  RPM or  $52.36$  rad/sec,  $F_o = me \omega^2$  where  $m$  is the propeller blade mass and  $e$  is the centroidal distance of the blade from the propeller shaft.  $F_o = 5000$  lbf for  $me = 1.82$  ft-slugs. For  $\omega = 52.36$  rad/sec equations(11) become:

$$-15,231 A - 816,200 D - 415,110 E = P_x(t)$$

$$72,029 B + 7,672,252 C = P_y(t)$$

$$8,933,483 B + 734,057,000 C = M_{xa}(t)$$

$$-1,139,960 A + 75,859,000 D = M_{ya}(t)$$

$$-18,490 A + 816,200 D - 1,920,600 E = M_{za}(t)$$

Now solve for the dynamic amplitudes resulting from  $F = F_1 + F_2$  where

$$F_1 = \begin{bmatrix} 0 \\ 0 \\ -473,500 \\ 0 \\ 0 \end{bmatrix} \sin 52t \text{ and } F_2 = \begin{bmatrix} -5000 \text{ lbf} \\ 0 \\ 0 \\ -12,500 \text{ in lbf} \\ -473,500 \text{ in lbf} \end{bmatrix} \cos 52t$$

For  $F_1$

$$72.03 B + 7672.25 C = 0$$

$$8933.5 B + 734,057 C = -473.5$$

$$A = 0$$

$$B = -.2319 \text{ inches}$$

$$C = .002177 \text{ radians}$$

$$D = 0$$

$$E = 0$$

For  $F_2$

$$+15.23 A + 81612 D + 415.1 E = +5$$

$$72.03 B + 7,672.25 C = 0$$

$$8933.5 B + 734,057 C = 0$$

$$-1140 A + 75,859 D = -12.5$$

$$-18.49 A + 816.2 D - 1920.6 E = -473.5$$

$$A = -3.72$$

$$B = 0$$

$$C = 0$$

$$D = -.056$$

$$E = .2585$$

Now combining equations (2) and (9)

$$\begin{bmatrix} M_x \\ M_y \\ M_z \end{bmatrix} = 10^6 \begin{bmatrix} 0 & 8.569 & 382.55 & 0 & 0 \\ 1.92 & 0 & 0 & -57.668 & 0 \\ 0 & 0 & 0 & 0 & 26.25 \end{bmatrix} \begin{bmatrix} \delta_x \\ \delta_y \\ \theta_x \\ \theta_y \\ \theta_z \end{bmatrix}$$

For  $F_1$

$$\begin{bmatrix} M_x \\ M_y \\ M_z \end{bmatrix} = 10^6 \begin{bmatrix} 0 & 8.569 & 382.55 & 0 & 0 \\ 1.92 & 0 & 0 & -57.668 & 0 \\ 0 & 0 & 0 & 0 & 26.25 \end{bmatrix} \begin{bmatrix} 0 \\ -.2319 \\ .002177 \\ 0 \\ 0 \end{bmatrix} \sin 52t$$

For  $F_2$

$$\begin{bmatrix} M_x \\ M_y \\ M_z \end{bmatrix} = 10^6 \begin{bmatrix} 0 & 8.569 & 382.55 & 0 & 0 \\ 1.92 & 0 & 0 & -57.668 & 0 \\ 0 & 0 & 0 & 0 & 26.25 \end{bmatrix} \begin{bmatrix} -3.72 \\ 0 \\ 0 \\ -.056 \\ .2585 \end{bmatrix} \cos 52t$$

$$M_x = 1.154 \times 10^6 \sin 52t$$

$$M_y = -3.913 \times 10^6 \cos 52t$$

$$M_z = 6.785 \times 10^6 \cos 52t$$



$$\sigma = \frac{3.913 \times 10^6 \cos 52t}{490.8} x + \frac{-1.154 \times 10^6 \sin 52t}{1240} y - 247 + \frac{5000 \sin 52t}{22.68}$$

$$\sigma = -7973 x \cos 52t - 930.6 y \sin 52t - 247 + 220.5 \sin 52t$$

Consider three points on the cross-section located at

$$x = 0 \quad y = -10 \quad \text{pt a}$$

$$x = 5.5 \quad y = 0 \quad \text{pt c}$$

$$x = 5.5 \quad y = 10 \quad \text{pt b}$$

$$\sigma_a = 9306 \sin 52 t - 247 + 220 \sin 52t$$

$$\sigma_a = 9526 \sin 52t - 247$$

$$\sigma_c = -43,852 \cos 52t - 247 + 220 \sin 52t$$

$$\sigma_b = -43,852 \cos 52t + 9306 \sin 52t - 247 + 220 \sin 52t$$

$$\sigma_b = -43,852 \cos 52t + 9526 \sin 52t - 247$$

$$\sigma_b = 44,875 \sin (52t - 1.36) - 247$$

point	max tensile stress	max comp. stress
a	9279	9773
b	44,628	45,122
c	43,605	44,099

These stresses are greater than the yield stress but less than the ultimate stress. It is possible that the mast would hold together until the motors could be stopped.

#### Calculation of Hold Down Bolt Stresses

The mast is connected to the balance system by four 3/4 inch 16NF bolts three inches long with a recommended yield strength of 100,000 psi (Figure 3). These bolts are subjected to essentially the loads at the base

of the mast, specifically  $M_x = 2932$  in lb,  $M_y = 5707$  in lb, and  $M_z = 11,913$  in lb for the maximum dynamic loads at 17HZ. For the bolts  $I_x = .3724 (9.5)^2 \times 4 = 134.4$  in<sup>4</sup> where .3724 is the area at the root of the bolt threads.  $I_y = .3724 (6.8)^2 \times 4 = 69$  in<sup>4</sup>.

$$\sigma = \frac{M_x}{I_x} y + \frac{M_y}{I_y} x$$

$$\sigma = \frac{2932}{134.3} (9.5) + \frac{5795}{69} (6.8)$$

$$\sigma = 778.3 \text{ psi}$$

$M_z = 2V \times d$  where  $V$  is the shear force on a bolt and  $d$  is the diagonal distance between the bolts. The four bolts form two couples  $V \times d$  which resist  $M_z$ .

$$V = \frac{M_z}{2d} = \frac{11,913}{2(23.86)} = 252 \text{ lbf}$$

$$\tau = \frac{V}{A} = \frac{252}{.3724} \text{ psi}$$

$$\tau = 677 \text{ psi}$$

These dynamic stresses are well within the allowable stress for the bolt material which is  $\tau_{al} = \frac{1}{6} \sigma_e = \frac{1}{6} (100,000) = 16,667$  psi.

The maximum static loads are  $M_x = 100,800$  in lbs and  $M_y = 4200$  in lbs.

$$\sigma = \frac{M_x}{I_x} y + \frac{M_y}{I_y} x$$

$$\sigma = \frac{100,800}{134.4} (9.5) + \frac{4200}{69} (6.8)$$

$$\sigma = 7539 \text{ psi}$$

Resisting the bending moments by a couple does not take into account the area in bearing which is much greater than the bolt area. Thus the above stresses are conservative. For bolted joints carrying moments it is desirable that the bolts be torqued to provide a bolt pre-load which is at least equal to 1.25 M divided by the section modulus of the contact area times the contact area.

$$A = 16.75 (23.5) = 394 \text{ in}^2$$

$$S_x = \frac{\frac{1}{12} (16.75) (23.5)^3}{23.5/2} = 1542 \text{ in}^3$$

$$S_y = \frac{\frac{1}{12} (23.5) (16.75)^3}{16.75/2} = 1099 \text{ in}^3$$

$$T_{\text{PRE}} = 4T = \frac{1.25 M_x A}{S_x} = \frac{1.25 (100,800) (394)}{(1542)} = 32,194 \text{ lb}$$

$$T = 8049 \text{ lb}$$

$$T_{\text{PRE}} = 4T = \frac{1.25 M_y A}{S_y} = \frac{1.25 (4300) (394)}{(1099)} = 1882 \text{ lb}$$

$$T = 471 \text{ lb}$$

Thus a bolt pre-load of 8049 lb per bolt is necessary to keep the joint in compression. This is a stress of 21,614 psi, well less than  $.5 \sigma_e = 50,000$  psi. A torque of 100 ft lbf on the bolts would be required to induce a load of 8049 lbf. This value is obtained from  $\text{Torque} = .2d T^*$

$$(.2) \left(\frac{3}{4}\right) \left(\frac{1}{12}\right) (8049) \text{ ft lbf.}$$

If a propeller blade was lost, the dynamic loads induced would be sufficient to fail the hold down bolts although the rest of the structure (mast) would remain intact.

---

\*Ibid., page 204.

Appendix A

Inertial Properties of Motor - Cradle - Counterweight

ITEM	Weight (1f)	Y <sup>1</sup> (in)	Z <sup>1</sup> (in)	WY <sup>1</sup> (in lb)	WZ <sup>1</sup> (in lb)	WY <sup>1 2</sup> (in <sup>2</sup> lb)	WZ <sup>1 2</sup> (in <sup>2</sup> lb)	IM <sub>yc</sub> (in <sup>2</sup> lb)	IM <sub>zc</sub> (in <sup>2</sup> lb)
Motor	2000	-40	20	-80	40	3200	800	35	1350
Prop	100	-107	20	-10.7	2	1145	40	40	0
Counterweight	1700	24	18	40.8	30.6	979	551	20	90
Actuator	60	24	5	1.44	.3	34.6	1.5	8	0
Top of Mast	150	0	3	0	.45	0	1.35	0	40
Channel	312	-17	14	-5.3	4.37	90.17	61	5	410
Square Bars	120	6	16	.72	1.92	4.3	31	3	90
Thick Channel	60	-25	12	-1.5	.72	37.5	8.6	0	16
Hubs & Balance	40	-98	20	-3.92	.8	384	16	0	0
Misc.	200	0	10	0	2	0	20	10	0
Pivot	8	-12	5	0	0	0	0	0	0
	4750			-58,460	83,160	5,875,000	1,530,000	122,000	1,996,000

$$\bar{Y} = \frac{-58,460}{4750} = 12.3$$

$$\bar{Z} = \frac{83,160}{4750} = 17.5$$

$$IM_{xc} = IM_{zc}$$

$$IM_x = \Sigma WY^2 + \Sigma WZ^2 + IM_{xc}$$

$$IM_x = (5.875 + 1.53 + 1.996)10^6 \text{ lb in}^2$$

$$IM_x = 9.401 \times 10^6 \text{ lb in}^2$$

$$IM_{Gx} = 9.401 \times 10^6 - 4750 (12.3^2 + 17.5^2)$$

$$IM_{Gx} = 7.23 \times 10^6 \text{ lb in}^2$$

$$IM_{Gx} = 18,725$$

$$IM_y = \Sigma Wz^2 + IM_{yc}$$

$$IM_y = (1.53 + .122)10^6 \text{ lb in}^2 = 1.634 \times 10^6 \text{ lb in}^2$$

$$IM_{Gy} = 1.654 \times 10^6 - 4750 (17.5)^2 = .20 \times 10^6 \text{ lb in}^2$$

$$IM_{Gy} = 511 \text{ sec}^2 - \text{in}$$

$$IM_z = \Sigma WY^2 + IM_{zc}$$

$$IM_z = 5.875 \times 10^6 + 1.996 \times 10^6 = 7.871 \times 10^6 \text{ lb in}^2$$

$$IM_{Gz} = 7.871 \times 10^6 - 4750 (12.3)^2$$

$$IM_{Gz} = 18,529 \text{ sec}^2 - \text{in}$$

These moments of inertia about the centroidal  $x_G$ ,  $y_G$ ,  $z_G$  axes differ slightly from the ones used in the calculations due to slight changes in the design made after the computations were completed. The variations are small enough that the results are essentially unaffected.

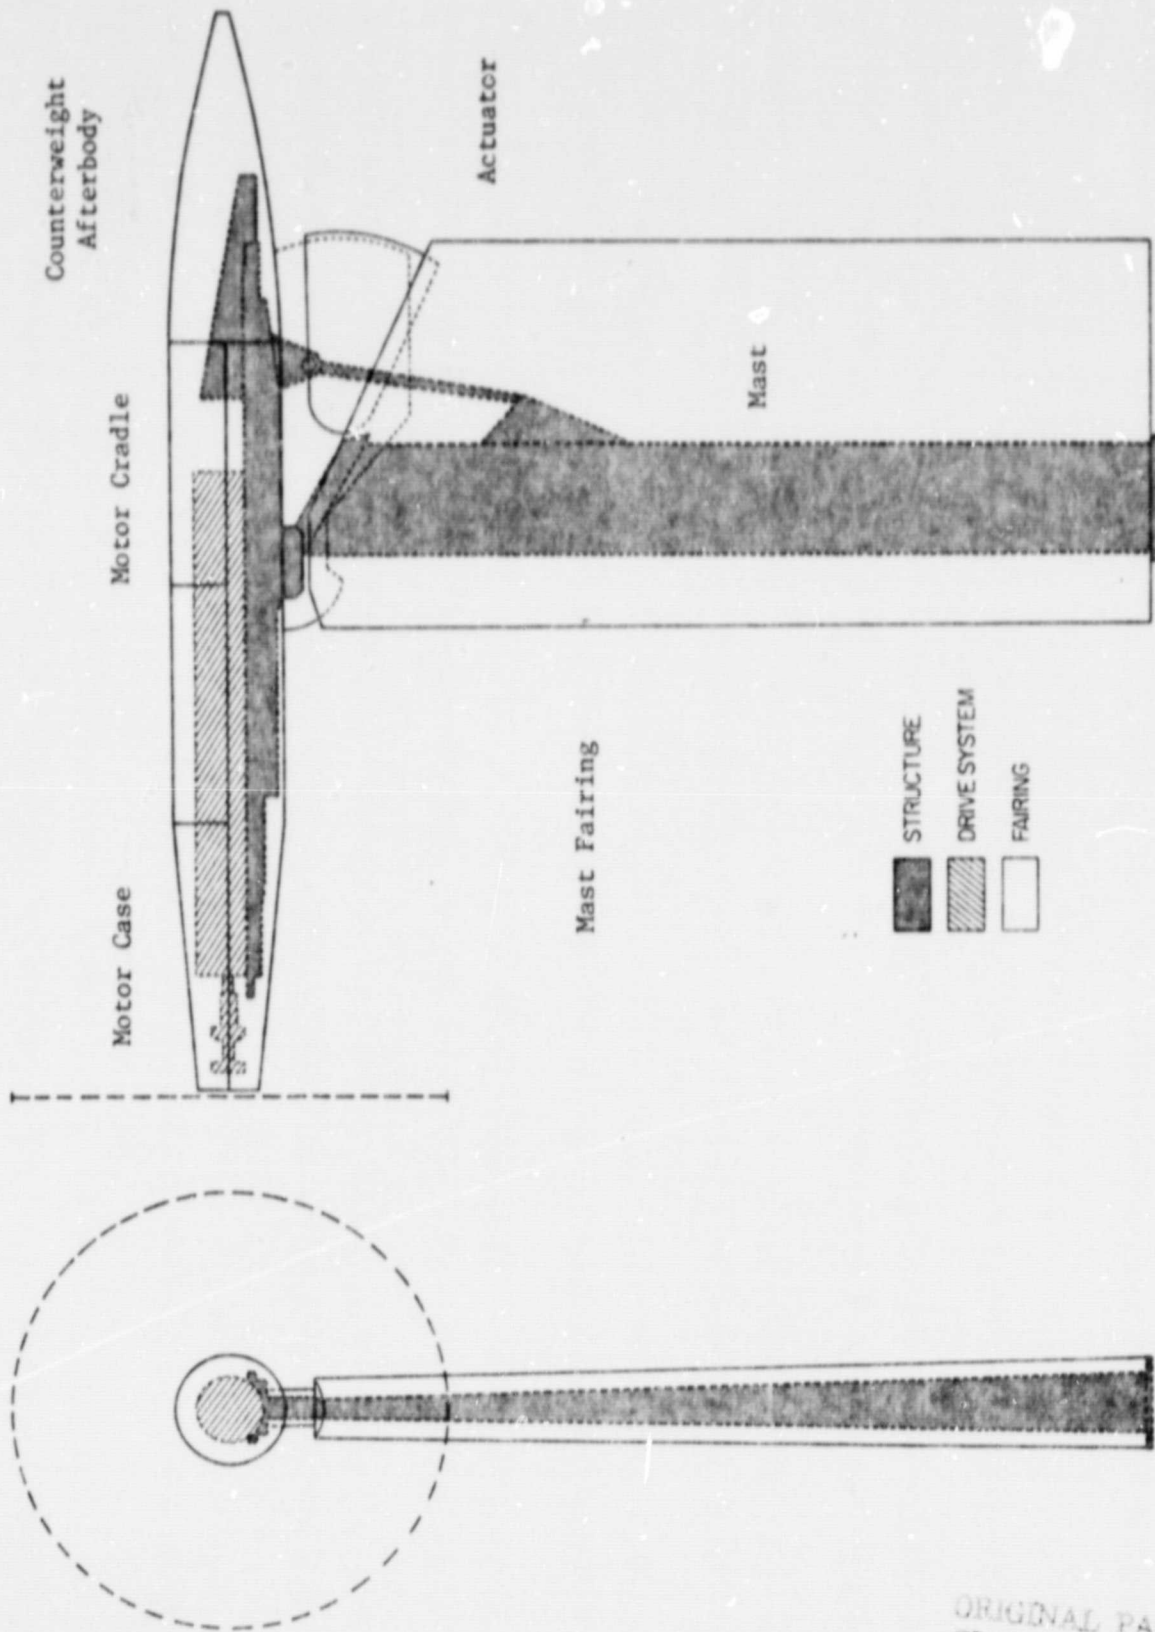


Figure B1. Propeller Test Stand.

ORIGINAL PAGE IS  
OF POOR QUALITY

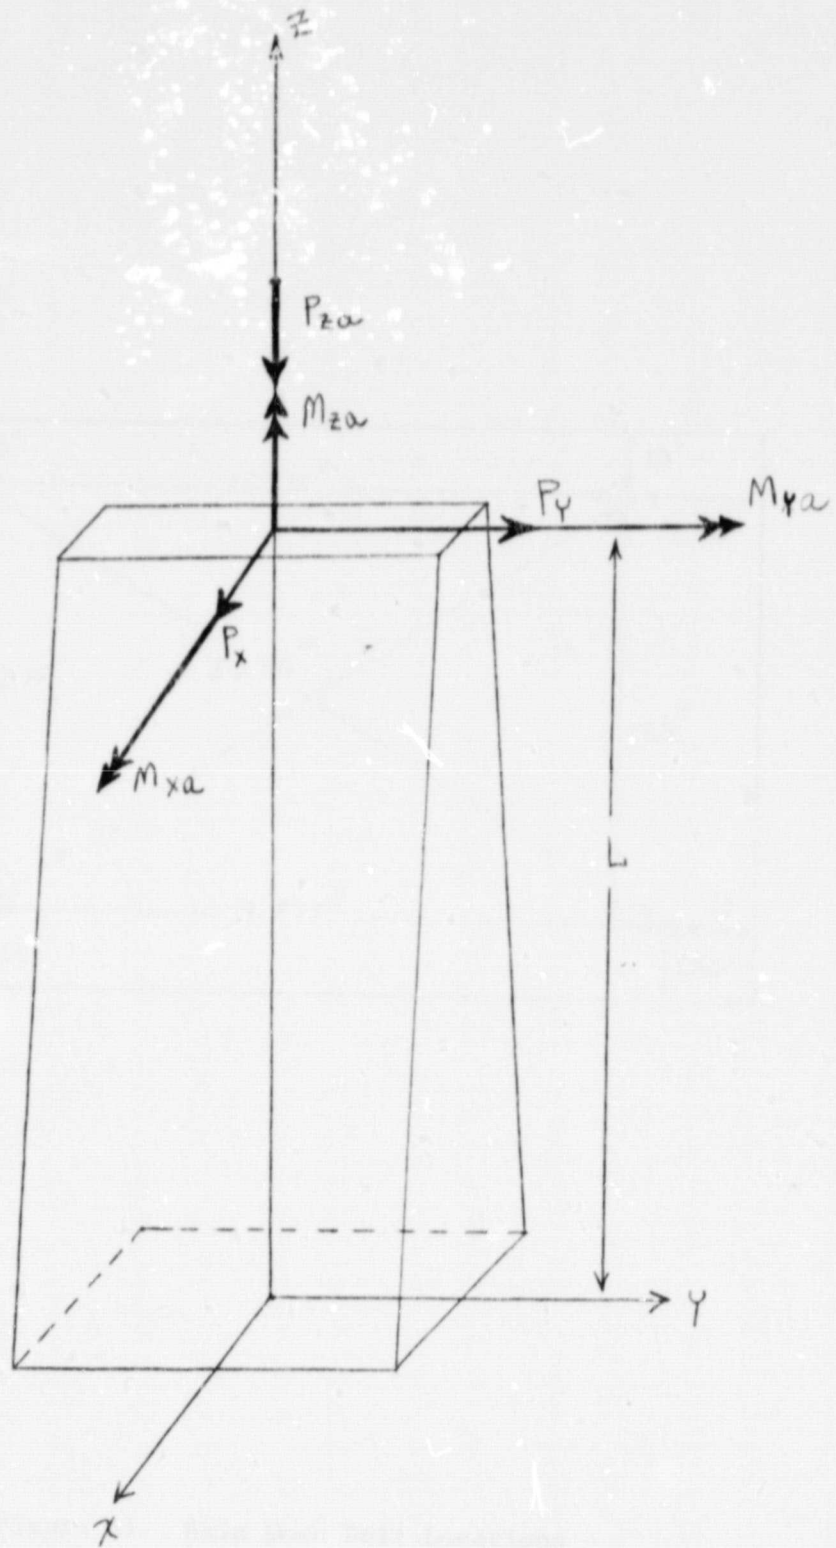


Figure B2. Loads on Mast

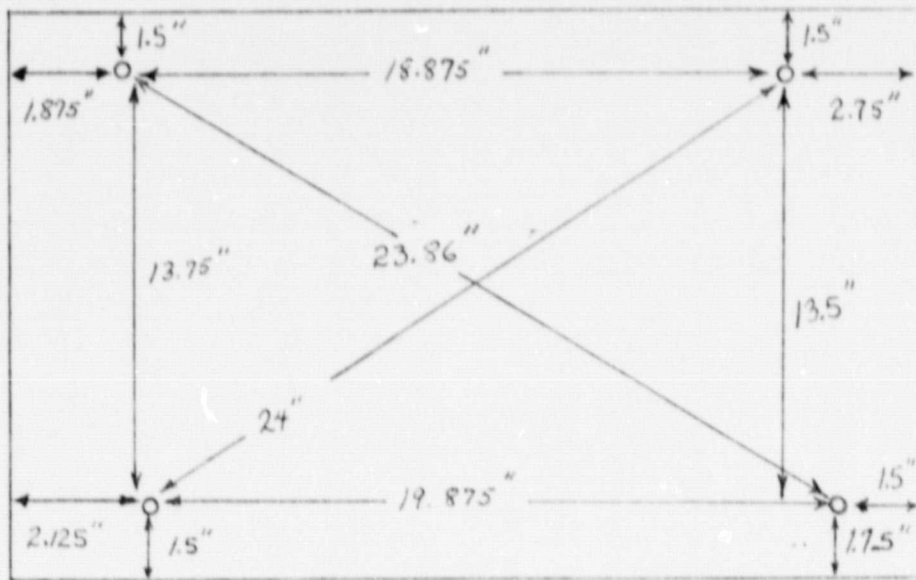


Figure B3. Hold Down Bolt Locations