

N O T I C E

THIS DOCUMENT HAS BEEN REPRODUCED FROM
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED
IN THE INTEREST OF MAKING AVAILABLE AS MUCH
INFORMATION AS POSSIBLE

NASA Technical Memorandum 81593

(NASA-TM-81593) THE METHOD OF LINES IN
THREE DIMENSIONAL FRACTURE MECHANICS (NASA)
19 p HC A02/MF A01 CSCL 20K


N80-32753

G3/39 **Unclas**
28839

The Method of Lines in Three-Dimensional Fracture Mechanics

John Gyekenyesi and Laszlo Berke
Lewis Research Center
Cleveland, Ohio

Prepared for the
International Symposium on Absorbed Specific Energy
and/or Strain Energy Density Criterion
sponsored by Lehigh University and the
Hungarian Academy of Sciences
Budapest, Hungary, September 17-19, 1980

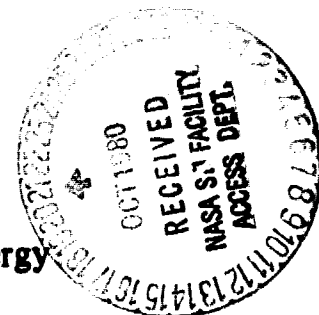

NASA

THE METHOD OF LINES IN THREE-DIMENSIONAL FRACTURE MECHANICS

John Gyekenyesi and Laszlo Berke
National Aeronautics and Space Administration
Lewis Research Center
Cleveland, Ohio 44135

ABSTRACT. A review is presented of recent developments in the calculation of design parameters for fracture mechanics by the method of lines (MOL). Three-dimensional elastic and elasto-plastic formulations are examined and results are reported from previous and current research activities. The application of MOL to the appropriate partial differential equations of equilibrium leads to coupled sets of simultaneous ordinary differential equations. Solutions of these equations are obtained by the Peano-Baker and by the recurrence relations methods. The advantages and limitations of both solution methods from the computational standpoint are summarized.

INTRODUCTION. The main goal of fracture mechanics is the prediction of the load at which a structure weakened by a crack will fail. Knowledge of the stress and displacement fields near the crack tip is of fundamental importance in evaluating this load at failure. Because of the geometric singularity associated with any crack type problem, there is almost no possibility of a simple closed form type of solution. For this reason, three-dimensional elastic solutions have been obtained only for a restricted class of problems. Furthermore, the calculation of stress and strain distributions in elasto-plastic/work hardening materials containing inherent crack-like flaws is a non-linear and three-dimensional problem. Due to the finite boundary effect and the nonlinearity of the material response, solutions in existence are obtained almost exclusively through numerical computer methods of continuum mechanics. Notable among these are the finite element method [1,2], the finite difference method [3], and the boundary integral equation method [4]. These methods are useful in solving either elastic or elasto-plastic fracture mechanics problems; it is known, however that practical problems usually require a very large amount of data storage and computation time.

An alternate semi-analytical method suitable for the solution of crack problems is the line method of analysis. Successful application of this method to finite geometry solids containing cracks has been demonstrated recently for both elastic [5] and elasto-plastic [6] problems. Although the concept of the line method for solving partial differential equations is not new [7,8], its application in structural analysis has been limited to simple examples [9]. By far the most common approach to fracture problems has been the finite element method, and it is the purpose of this paper to review a simple, systematic, alternate method, the method of lines (MOL) for these problems.

The line method lies midway between completely analytical and discretized numerical methods. The basis of this technique is the substitution of finite differences for the derivatives with respect to all the independent variables except one for which the derivatives are retained. This approach replaces a given partial differential equation with a system of ordi-

nary differential equations whose solutions can then be obtained, at least in some cases, by analytic methods. These equations describe the dependent variable along lines which are parallel to the coordinate in whose direction the derivatives were retained. Application of the line method is most useful when the resulting ordinary differential equations are linear and have constant coefficients [10].

An inherent advantage of the line method over other numerical methods is that good results are obtained from the use of relatively coarse grids. This use of a coarse grid is permissible because parts of the solutions are obtained in terms of continuous functions. It is known that MOL methods tend to keep the advantages and discard the disadvantages of both the analytical and grid methods, thereby leading to accurate solutions with minimum computation times. The disadvantage of MOL, on the other hand, is that it tends to become numerically unstable as the number of dividing lines increases and the finite difference strip size becomes too small [8,11,12]. To realize a very fine space discretization with this method would require word length with much larger number of bits, leading to excessive requirements on computer resources. Current research emphasis in MOL solution methods is to overcome this problem in engineering applications [13].

GOVERNING EQUATIONS AND MOL FORMULATION. It is assumed, for simplicity of this presentation, that the material is homogeneous, isotropic and that the deformations are quasi-static and small. The structure is assumed to be elastic first and the elastic solution is taken to be known before the in-cipient loading is applied. As loading gradually increases, the structure becomes elasto-plastic and the governing equations are written in terms of displacement increments. Using the standard summation convention, the Navier equations for the elastic problem in terms of displacements, u_i , are

$$u_{i,jj} + \left(\frac{1}{1-2\nu}\right) u_{j,ji} = 0 \quad i, j = 1, 2, 3 \quad (1)$$

and for the elasto-plastic regime, the displacement increments, du_i , can be obtained from

$$du_{i,jj} + \left(\frac{1}{1-2\nu}\right) du_{j,ji} = \left(\frac{1}{1-2\nu}\right) \left(\frac{d\epsilon_p}{\sigma_e}\right) E u_{j,ji} + 3S_{ij} \left(\frac{d\epsilon_p}{\sigma_e}\right)_{,j} \quad (2)$$

where the body forces are assumed to be zero, $d\epsilon_p$ is the effective plastic strain increment, S_{ij} is the stress deviator tensor and σ_e is the equivalent stress. In the plastic region the von Mises yield condition and the associated Prandtl-Reuss flow rule is taken to prevail. The incremental stress-strain relations are obtained as [6],

$$\frac{d\sigma_{ij}}{2G} = d\epsilon_{ij} + \left(\frac{\nu}{1-2\nu}\right) d\epsilon_{kk} \delta_{ij} + \frac{3}{2} \left(\frac{d\epsilon_p}{\sigma_e}\right) \left[\frac{E}{3(1-2\nu)}\right] \epsilon_{kk} \delta_{ij} - \frac{3}{2} \left(\frac{d\epsilon_p}{\sigma_e}\right) \sigma_{ij} \quad (3)$$

where ν , G , E are the conventional elastic properties, δ_{ij} is the Kronecker delta and σ_{ij} are the stresses.

In order to solve equations (1) or (2), we apply MOL and reduce these equations to systems of simultaneous ordinary differential equations. For

problems in Cartesian coordinates, the region is discretized by x , y and z -directional lines as shown in figure 1. The displacements along the x -directional lines are defined as u_1, u_2, \dots, u_ℓ . The derivatives of the y -directional displacements on these lines with respect to y are defined as $v'|_1, v'|_2, \dots, v'|_\ell$, and the derivatives of the z -directional displacements with respect to z are defined as $w'|_1, w'|_2, \dots, w'|_\ell$. When these definitions are used the ordinary differential equation along a generic line ij (a double subscript is used here for simplicity of writing and the subscripts obviously are not related to those in the equations) in figure 1, using central differences with truncation errors of $O(h^2)$, may be written as

$$\frac{d^2 u_{ij}}{dx^2} + \frac{(1-2\nu)}{2(1-\nu)} \left[-\left(\frac{2}{h_y^2} + \frac{2}{h_z^2}\right) + \frac{1}{h_y^2} (u_{i+1,j} - u_{i-1,j}) + \frac{1}{h_z^2} (u_{i,j+1} + u_{i,j-1}) \right] + \frac{f_{ij}(x)}{2(1-\nu)} = 0 \quad (4)$$

where

$$f_{ij}(x) = \frac{dv'}{dx} \Big|_{ij} + \frac{dw'}{dx} \Big|_{ij} \quad (5)$$

and

$$v' = \frac{dv}{dy}; \quad w' = \frac{dw}{dz}$$

Similar differential equations are obtained along the other x -directional lines. The set of ℓ second order differential equations represented by (4) can be reduced to a set of 2ℓ first order differential equations by treating the derivatives of the u 's as an additional set of ℓ unknowns. The resulting equations can now be written as a single first order matrix differential equation

$$\frac{dU}{dx} = A_1 U + R(x) \quad (6)$$

where U and R are column matrices of 2ℓ elements each and A_1 is $2\ell \times 2\ell$ matrix of coefficients. In a similar manner to solve the other two Navier equations for the elastic problem, we construct ordinary differential equations along the y - and z -directional lines, respectively. These equations are also expressed in an analogous form to equation (6); they are

$$\frac{dV}{dy} = A_2 V + S(y) \quad (7)$$

$$\frac{dW}{dz} = A_3 W + T(z) \quad (8)$$

Equations (6) to (8) are linear, first-order, ordinary differential equations. They are, however, not independent, but are coupled through the vectors R , S and T .

Noting that a second order ordinary differential equation can satisfy only a total of two boundary conditions and since three-dimensional elasticity problems have three conditions at every point of the bounding surface, the shear stress boundary data must be incorporated into the differential equations of the surface lines. The application of the specified shear conditions permits the use of a single layer of boundary image lines when surface line differential equations are constructed.

For an elasto-plastic solid the governing differential equations for displacement increments and the incremental stress-displacement relations are found in [6]. The x -directional displacement increments, in an analogous manner to equation (6), can be obtained from

$$\frac{d}{dx} (dU) = A_1 dU + d\bar{R}(x) \quad (9)$$

where the coupling vector $d\bar{R}(x)$ contains mixed derivative terms for elastic and plastic regions in addition to terms involving the ratio of $d\epsilon_p/\sigma_e$.

The system of ordinary differential equation (6) can be solved by any of a number of standard techniques. The method employed in [5,6,9] is the Peano-Baker method of integration. The solution can be written as

$$U(x) = e^{A_1 x} U(0) + e^{A_1 x} \int_0^x e^{-A_1 n} R(n) dn \quad (10)$$

where $U(0)$ is the initial value vector determined from the boundary conditions and the matrizant $e^{A_1 x}$ is generally evaluated by its matrix series. For larger values of x , when convergence becomes slow, additive formulas may be used. In addition, similarity transformations can be used to diagonalize the coefficient matrix A_1 . It should be noted that, in general, the matrix A_1 is a function of Poisson's ratio and the coordinate finite difference increments. Uniform line spacing in the three coordinate directions makes closed form diagonalization of A_1 possible. However, refinement of the mesh with uniform line spacing rapidly increases the required computer time and storage as well as raises the probability of numerical difficulties in the matrix exponential power series computations. Consequently, variable mesh spacing is recommended as one method of obtaining improved answers without an increase in problem size.

Most of the recently obtained MOL solutions in fracture mechanics involved the use of finite difference formulas with truncation errors of $O(h^2)$. Current work by Mendelson and Alam [13], uses higher order finite difference approximations as an alternate method of obtaining more accurate results. These five point finite difference approximations for the first and second y -derivatives of a function $f(x,y,z)$ at (x,y,z) can be written as [8],

$$\begin{aligned}
 \left(\frac{\partial f}{\partial y}\right)_{x,y,z} &= \frac{4}{3} \left[\frac{f(x,y+h_y,z) - f(x,y-h_y,z)}{2h_y} \right] \\
 &\quad - \frac{1}{3} \left[\frac{f(x,y+2h_y,z) - f(x,y-2h_y,z)}{4h_y} \right] + O(h_y^4) \\
 \left(\frac{\partial^2 f}{\partial y^2}\right)_{x,y,z} &= \frac{4}{3} \left[\frac{f(x,y+h_y,z) + f(x,y-h_y,z) - 2f(x,y,z)}{h_y^2} \right] \\
 &\quad - \frac{1}{3} \left[\frac{f(x,y+2h_y,z) + f(x,y-2h_y,z) - 2f(x,y,z)}{4h_y^2} \right] + O(h_y^4)
 \end{aligned} \tag{11}$$

Since the evaluation of the matrix exponential power series becomes increasingly difficult with the coefficients obtained through the use of equations (11), a recurrence relations method is used to solve the resulting systems of ordinary differential equations. An error analysis in [8] indicates that approximately six times as many dividing lines must be used with $O(h^2)$ approximations to get equivalent accuracy to that obtained when equations (11) are used.

The solution of equation (6) by recurrence relations can be obtained by taking N equal intervals along the x -axis, each having a length of h_m . Then by using finite differences for $(dU/dx)_m$ and average values of $(A_1U + R)_m$, the following linear recurrence formula will be obtained [13], expressing U_m in terms of U_{m-1} :

$$U_m = L_m U_{m-1} + M_m \tag{12}$$

where L_m is a known function of h_m and A_1 while M_m will depend on R in addition to h_m and A_1 . We can also express U_m in terms of U_1 by repeated application of equation (12), leading to

$$U_m = D_m U_1 + F_m \tag{13}$$

where D_m and F_m are known functions of L_m and M_m . By suitable partitioning of the D and F matrices at the boundaries, we can use given boundary data at the last station, U_n , to calculate unknown elements of U_1 , where $n = N + 1$. The advantage of using equation (13) to calculate U_m , $m = 1, 2, \dots, n$, is that the coefficient matrix A_1 has no limitation on its format or on the arrangement of its elements. The interval h_m can be decreased to any fraction of h_x , the initially established finite difference increment obtained from the application of MOL. Results of test problems indicate that two or three subintervals are adequate for the solution of a typical problem.

All of the MOL work in three-dimensional fracture mechanics has been done using double precision arithmetic. With larger word sizes, 128 bits or greater, improved results can be obtained or more lines can be used. Typical problems on third generation computers can usually be handled with 100 to 200 lines in each direction using Cartesian coordinates, and up to 20

lines in each direction using cylindrical coordinates. Corresponding CPU times are of the order of 3 minutes for the elastic solution and 25 minutes for the entire elasto-plastic problem [6]. Most of the computer time is spent in decoupling the three systems of simultaneous ordinary differential equations which arise in a general problem. Decoupling is done by a successive approximation procedure. With cyclic resubstitution of the obtained solutions into the coupling vectors and the boundary conditions good numerical convergence behavior was observed.

Elastic solutions have been obtained for typical fracture test specimen geometries such as the central crack, single edge crack, double edge crack and rectangular surface crack problems, all with uniform tensile loadings normal to the crack plane. In cylindrical coordinates, the problem of an embedded penny-shaped crack and the externally cracked circular cylinder in tension have been treated. Although shear and torsionally loaded specimens have not been analyzed previously by MOL, the necessary boundary conditions for these problems can be imposed without difficulties. Presently, the thumbnail-crack problem is being investigated in connection with applying MOL to curved crack boundaries. In addition, it seems that the common three-point bend specimen could also be analyzed in a systematic manner using this method.

Elasto-plastic solutions of certain crack problems have also been obtained using the incremental displacement formulation in connection with MOL. The nonlinear response of finite length cylinders with external annular cracks and a finite thickness rectangular plate containing a through-thickness central crack under uniaxial tension were studied in detail. In addition to the stresses and displacements, fracture mechanics parameters such as the stress intensity factor, the J-integral and the load versus load point displacement plots were determined.

STRESS INTENSITY AND STRAIN ENERGY DENSITY FACTORS. Since the application of boundary conditions for MOL allows the crack tip to remain between two successive node points, the exact location of crack tip together with the determination of K values for the elastic case is done by the first two terms in the Williams eigenfunction expansion. The crack face displacement and maximum normal stress near the crack front are used to find the coefficients in the two-term expansion. Assuming that $y = 0$ is the crack plane and that the crack is under normal tensile loading, we have

$$v = \alpha K_I \left[\sqrt{\frac{R+r}{2\pi}} + \frac{L_I}{K_I} \sqrt{(R+r)^3} \right] \quad (14)$$

$$\sigma_y = K_I \left[\frac{1}{\sqrt{2\pi(R-r)}} + \frac{L_I}{K_I} \sqrt{R-r} \right] \quad (15)$$

where α is a function of Poisson's ratio, the stress singularity is assumed to be $-1/2$, r is the crack edge position correction, v is the crack opening displacement, σ_y is the maximum normal stress and K_I and L_I are the mode I Williams expansion coefficients. Using displacement data from three adjacent nodes to the crack edge in equation (14), v is

ues of αK_I , L_I/K_I and r are calculated for each value of z , with R also measured from the halfway point between nodes specifying boundary stresses and displacements, respectively. Substituting values of L_I/K_I and r into equation (15), we can calculate K_I as a function of the corrected crack edge distance, $\rho = R - r$. Note that α would be equal to 3.56 for the plane strain case and 4.0 for the plane stress case with $\nu = 1/3$. Another approach to calculate K_I is to first determine the J_I integral and then use the linear elastic $J_I - K_I$ relation of the form [6]

$$K_I = \sqrt{\frac{EJ_I}{1-\nu^2}} \quad (16)$$

Linear fracture mechanics technology assumes then that the crack will propagate if K_I reaches its critical value K_{Ic} , usually called its fracture toughness. It should be noted that the K -concept is restricted to symmetric systems with the applied loads perpendicular to the crack plane and the crack propagating in a self-similar manner. In general, a complete description of the crack border stress field requires three stress intensity factors, and a mixed mode fracture criterion is needed to predict failure. To this end Sih [14] has defined a strain energy density factor, S , as

$$S = a_{11}k_1^2 + 2a_{12}k_1k_2 + a_{22}k_2^2 + a_{33}k_3^2 \quad (17)$$

where the coefficients a_{ij} ($i, j = 1, 2$) depend on the material constants and the angles θ and ω . Consistent with equation (17), the local stresses near the crack tip are of the form [14],

$$\sigma_x = \frac{k_1}{\sqrt{2\rho \cos \omega}} \cos \frac{\theta}{2} \left(1 - \sin \frac{\theta}{2} \sin \frac{3\theta}{2} \right) - \frac{k_2}{\sqrt{2\rho \cos \omega}} \sin \frac{\theta}{2} \left(2 + \cos \frac{\theta}{2} \cos \frac{3\theta}{2} \right) + O(1) \quad (18)$$

Note that $k_i = K_i/\sqrt{\pi}$ and the coefficients a_{ij} are then given by equations of the form

$$16G \cos \omega a_{11} = (3 - 4\nu - \cos \theta)(1 + \cos \theta) \quad (19)$$

As can be seen from equation (17), the stress intensity factors k_i still play an important role in the fracture process. Hence, the correct determination of these factors is a necessary step in the safe design of any structure. In the strain energy density failure criterion, it is assumed that the minimum value of S yields the direction of crack initiation and that the critical value of S_{min} , S_c , determines incipient fracture and is an intrinsic material property independent of the loading conditions and crack configurations.

Other multi-mode failure criteria have been proposed previously in the literature and a brief description of each fracture theory along with

limited experimental data can be found in [15,16]. In general, little difference exists between theories predicting mode I, mode II interaction and combined damage crack propagation direction.


NUMERICAL RESULTS. A great amount of experimental work has been done in fracture mechanics using cracked specimens. Selected results for some common specimen geometries are shown in figures 2 to 12. Figure 2 shows a rectangular bar under normal tensile loading containing a traction free, through-thickness, central crack. The crack opening displacement at the middle and at the surface of the bar is plotted in figure 3, along with Raju's finite element results. Stress intensity factor variations as a function of bar thickness are shown in figure 4. Variation of the constraint parameter β , defined as the quantity $\sigma_z / [\nu(\sigma_x + \sigma_y)]$, along the plate thickness is shown in figure 5. Note that for plane strain $\beta = 1$ and for plane stress case it vanishes. Figure 6 shows a bar with uniform tension containing a rectangular surface crack. Surface crack opening displacement as a function of crack depth is shown in figure 7 while the variation of the maximum normal stress σ_y is shown in figure 8 for a selected crack geometry. For the same rectangular surface crack problem, a plot of K_I along the crack periphery is shown in figure 9. The discretization of an externally cracked cylindrical fracture specimen is shown in figure 10. Crack face displacements for various crack lengths are plotted in figure 11 while the variation of K_I with crack length is shown in figure 12. It is obvious from these results that a variety of plots familiar to the fracture mechanics community can be constructed, since MOL methods give complete field solutions.

CONCLUDING REMARKS. The line method of analysis is a practical approach for the solution of three-dimensional crack problems, at least for bodies with reasonably regular boundaries. Both elastic and inelastic solutions can be obtained. Just how efficient the method is or can be made is not fully established. It is known, however, that good results are obtained from the use of relatively coarse grids. Interestingly, displacements and normal stresses are determined with equal accuracy since numerical differentiation of the displacements is not required. Applications to curved boundaries, bending or shear modes of loading and variable mesh spacing are some of the current areas that need additional investigations. Furthermore, it seems that MOL could also be used to study the stable crack growth behavior of engineering materials.


REFERENCES

- [1] Gallagher, R. H., "A Review of Finite Element Techniques in Fracture Mechanics," Numerical Methods in Fracture Mechanics, University College Swansea, pp. 1-25, 1978.
- [2] Levy, N. and Marcal, P. V., "Three-Dimensional Elastic-Plastic Stress and Strain Analysis for Fracture Mechanics, Phase I: Simple Flawed Specimens, Phase II: Advanced Flawed Specimens," USAEC Report HSST-TR-12, 1970.
- [3] Ayres, D. J., "A Numerical Procedure for Calculating Stress and Deformation near a Slit in a Three-Dimensional Elastic-Plastic Solid," NASA TM X-52440, 1968.

- [4] Cruse, T. A. and Wilson, R. B., "Boundary Integral Equation Method for Elastic Fracture Mechanics Analysis," Air Force Office of Scientific Research, AFOSR-TR-78-0355, 1978.
- [5] Gyekenyesi, J. P. and Mendelson, A., "Three-Dimensional Elastic Stress and Displacement Analysis of Finite Geometry Solids Containing Cracks," Int. Journ. of Frac., 11, 2, pp. 409-429, 1975.
- [6] Malik, S. N., "Elasto-Plastic Analysis for Finite Geometry Cracked Members by the Method of Lines," Ph. D. Dissertation, Ohio State University, 1979.
- [7] Liskovets, O. A., "The Method of Lines (Review)," Differential Equations 1, pp. 1308-1323, 1965.
- [8] Jones, D. J., South, J. C. and Klunker, E. B., "On the Numerical Solution of Elliptic Partial Differential Equations by the Method of Lines," Journ. of Comp. Phys., 9, pp. 496-527, 1972.
- [9] Irode, M., "Method of Numerical Analysis for Three-Dimensional Elastic Problems," Japan National Congress of Applied Mechanics Proceedings, Central Scientific Publ., pp. 1-7, 1968.
- [10] Faddeva, V. N., "The Method of Lines Applied to Some Boundary Problems," Trudy Mat. Inst. Steklov., 28, pp. 73-103, 1949.
- [11] Loeb, A. M. and Schiesser, W. E., "Stiffness and Accuracy in the Method of Lines Integration of Partial Differential Equations," Stiff Differential Systems, Edited by R. A. Willoughby, Plenum Press. New York and London, pp. 229-243.
- [12] Janac, K., "Adaptive CSDT Algorithms for Multidimensional Equations," Advances in Computer Methods for Partial Differential Equations - 11, Edited by R. Vichnevetsky, Publ. IMACS, 1977.
- [13] Mendelson, A. and Alam, J., "Method of Lines Applied to Curved Crack Fronts," NASA Grant to Case Western Reserve University, 1980.
- [14] Sih, G. C., "Mechanics of Fracture: Linear Response," Numerical Methods in Fracture Mechanics, University College Swansea, pp. 155-192, 1978.
- [15] Feldman, A., Smith, F. W., and Holston, A., Jr., "Characterization of Crack Growth under Combined Loading," NASA CR-135197, 1977.
- [16] Shah, R. C., "Effects of Proof Loads and Combined Mode Loadings on Fracture and Flaw Growth Characteristics of Aerospace Alloys," NASA CR-134611, 1974.

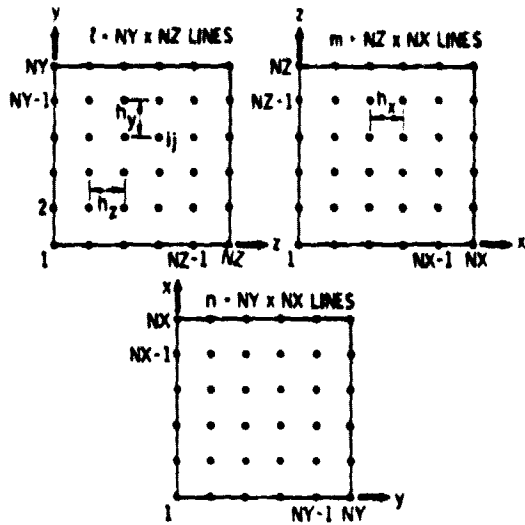


(a) THREE SETS OF LINES PARALLEL TO x -, y -, AND z -COORDINATES AND PERPENDICULAR TO CORRESPONDING COORDINATE PLANES.

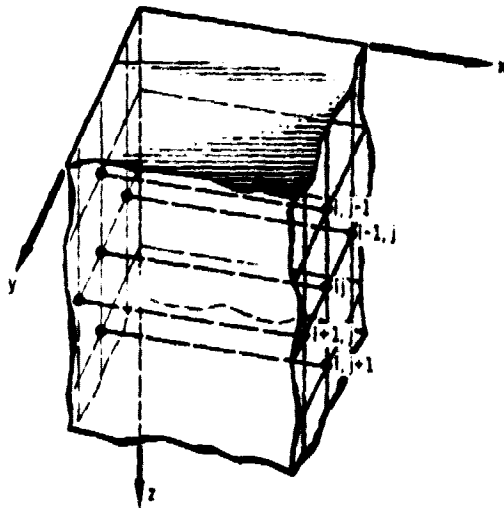


(b) SET OF INTERIOR LINES PARALLEL TO x -COORDINATE.

Figure 1. - Sets of lines parallel to Cartesian coordinates.

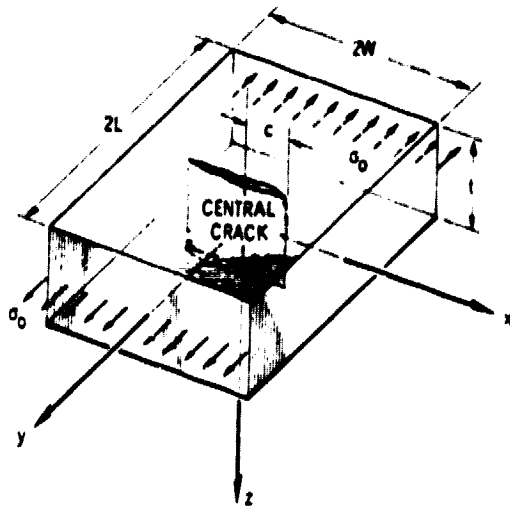

(a) RECTANGULAR BAR WITH THROUGH-THICKNESS CENTRAL CRACK.

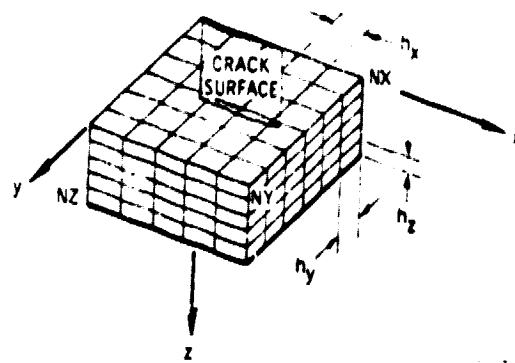

(b) DISCRETIZED REGION OF RECTANGULAR BAR WITH THROUGH-THICKNESS CENTRAL CRACK.

Figure 2 - Rectangular bar with through-thickness central crack under uniform tension.

ORIGINAL PAGE IS
OF POOR QUALITY

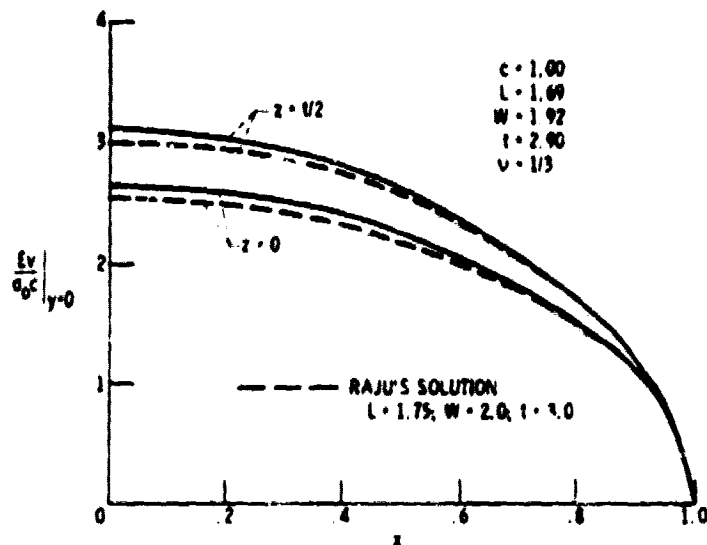


Figure 3 - Crack opening displacement for center-cracked bar under uniform tension.

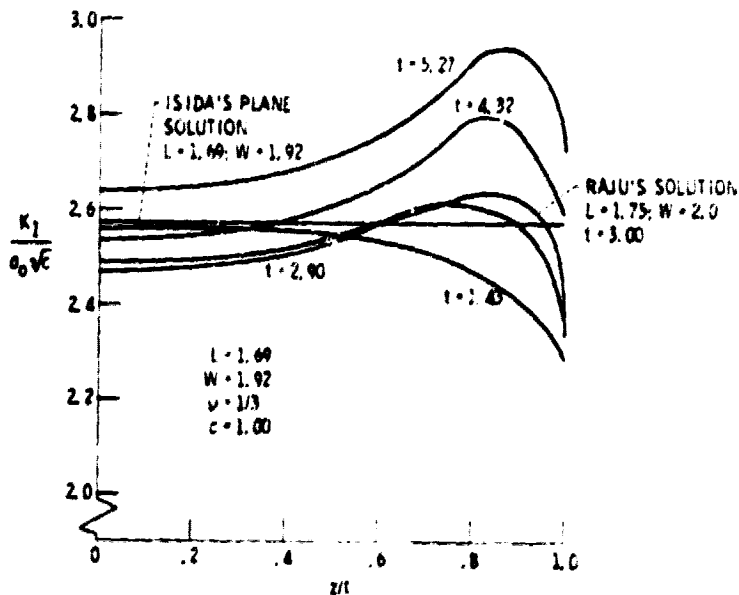


Figure 4 - Stress intensity factor variation as a function of bar thickness for a center-cracked rectangular bar under uniform tension.



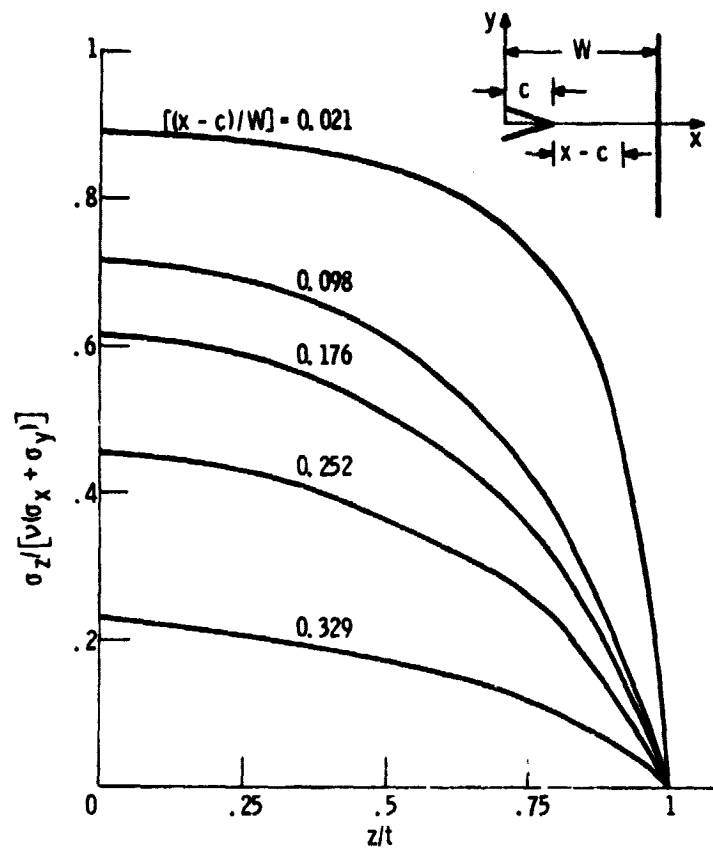


Figure 5. - Variation of $\beta = \sigma_z / [\nu(\sigma_x + \sigma_y)]$ on crack plane, $y = 0$, across plate thickness. $(c/W) = 0.5174$. For ideal plane strain case: $\beta = 1$, and for plane stress: $\beta = 0$.

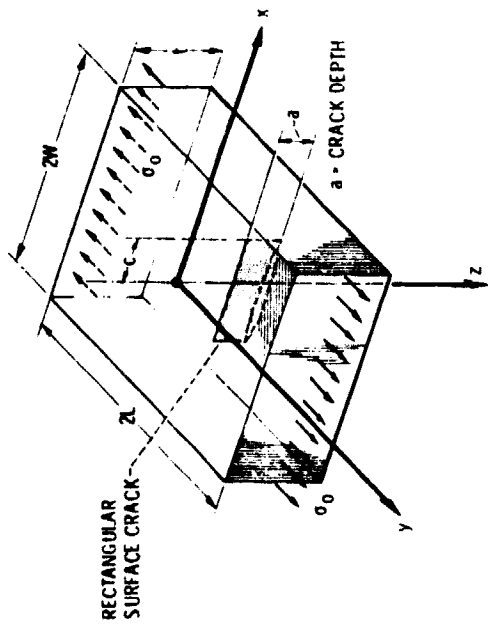

(a) BAR WITH RECTANGULAR SURFACE CRACK.

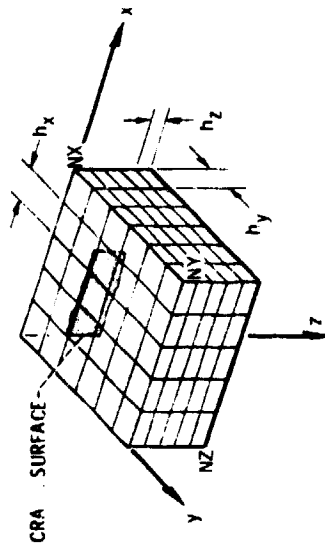

(b) DISCRETIZED REGION OF BAR WITH RECTANGULAR SURFACE CRACK.

Figure 6 Bar with rectangular surface crack under uniform tension.



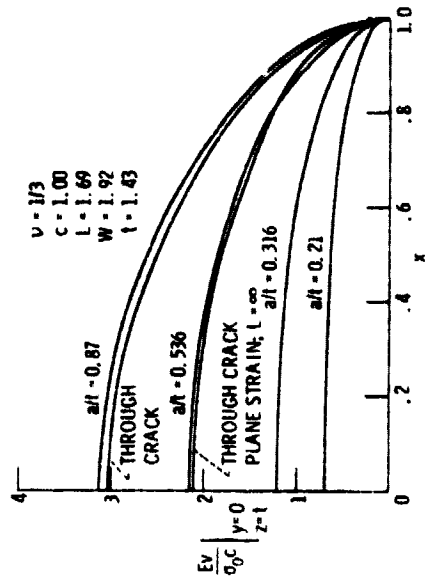


Figure 7. - Surface crack opening displacement variation as a function of crack depth for a rectangular bar under uniform tension.

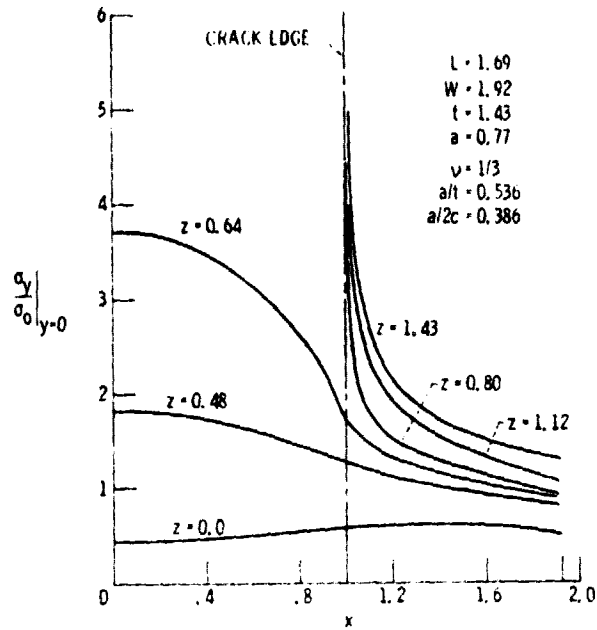

(a) DIMENSIONLESS y-DIRECTIONAL NORMAL STRESS VARIATION ALONG BAR WIDTH.

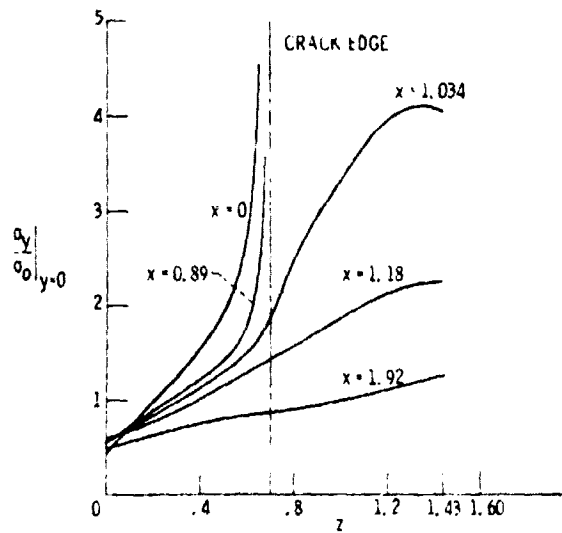

(b) DIMENSIONLESS y-DIRECTIONAL NORMAL STRESS VARIATION ACROSS BAR THICKNESS

Figure 8. - Dimensionless y-directional normal stress distribution in the crack plane for a bar under uniform tension containing a rectangular surface crack.

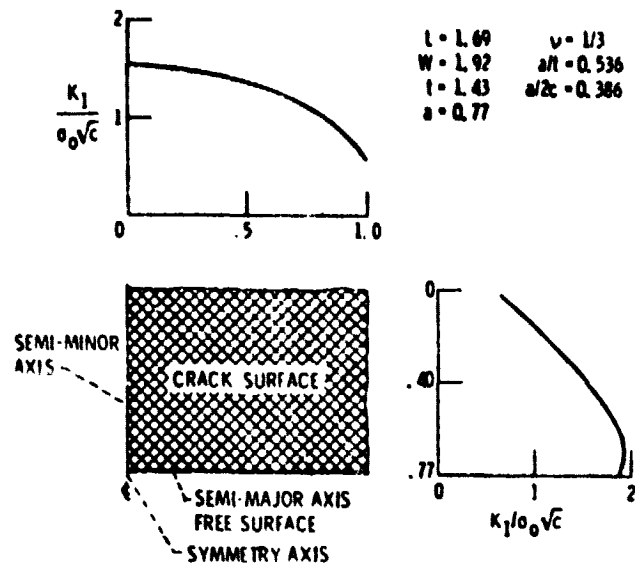


Figure 9. - Variation of stress-intensity factor k_I along the crack periphery for a bar under tension containing a rectangular surface crack.

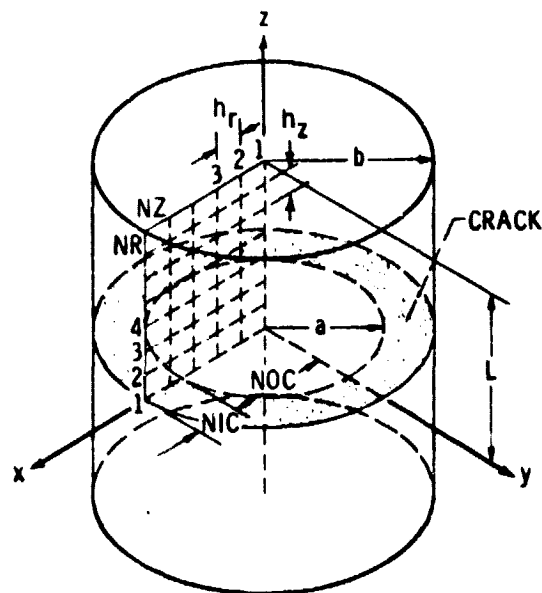


Figure 10. - Discretization of an externally cracked cylindrical specimen.

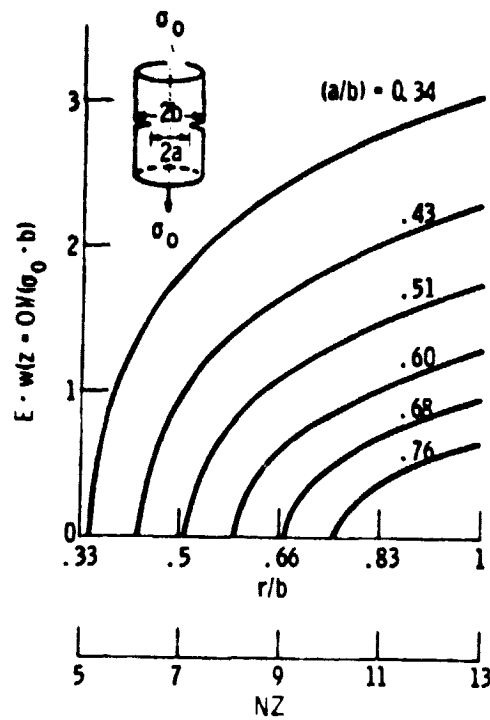


Figure 11. - Crack face displacements for various crack lengths.

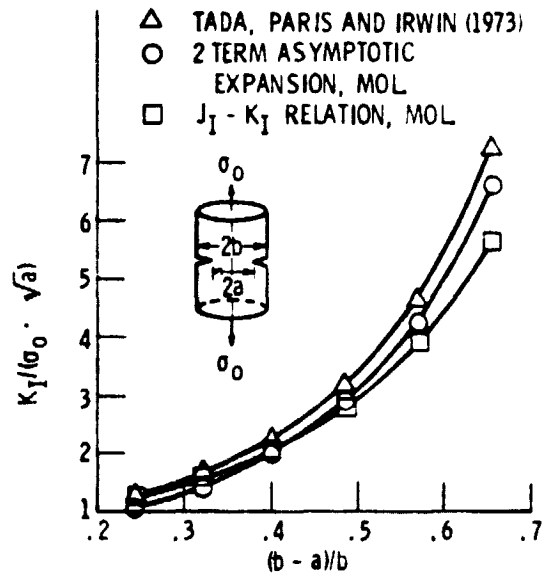


Figure 12. - Variation of K_I with crack length.