

## N O T I C E

THIS DOCUMENT HAS BEEN REPRODUCED FROM  
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT  
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED  
IN THE INTEREST OF MAKING AVAILABLE AS MUCH  
INFORMATION AS POSSIBLE

... AUTHORITY

34902-H002-RO-00

NASA CR-  
160769

# ADVANCED FLIGHT DESIGN SYSTEMS SUBSYSTEM PERFORMANCE MODELS

JUNE 1980

CONTRACT NO. NAS9-15793

(NASA-CR-160769)	ADVANCED FLIGHT DESIGN	N80-31045
SYSTEMS SUBSYSTEM PERFORMANCE MODELS.	USER	
GUIDE: ENVIRONMENTAL ANALYSIS ROUTINE		
LIBRARY (TRW Defense and Space Systems		Unclas
Group) 138 p HC A07/MF A01	CSSL 06K G3/54	28522

## USER GUIDE ENVIRONMENTAL ANALYSIS ROUTINE LIBRARY

Prepared By

K. C. Parker

J. G. Torian

Systems Engineering and Analysis

Department

**TRW**  
DEFENSE AND SPACE SYSTEMS GROUP



---

**ADVANCED FLIGHT DESIGN SYSTEMS  
SUBSYSTEM PERFORMANCE MODELS**

---

**JUNE 1980**

**CONTRACT NO. NAS9-15793**

**USER GUIDE  
ENVIRONMENTAL ANALYSIS ROUTINE LIBRARY**

**Prepared By  
K. C. Parker  
J. G. Torian**

**Systems Engineering and Analysis**

**Department**

**TRW**  
DEFENSE AND SPACE SYSTEMS GROUP

## PREFACE

Subsystem performance analysis is required in Flight Design to assess the capability of the Environmental Control and Life Support System (ECLSS) to support the flight requirements and define operational procedures under contingency flight conditions. Current ECLSS modeling techniques are limited in the variety of configurations and they employ batch mode computer programs execution methods. Future spacecraft will require analysis of both a greater variety and a greater number of ECLSS than for previous spacecraft programs. Improvements in the variety of configurations that can be modeled and a reduction in effort required for modeling and analysis can be accomplished by developing a modular computer program which operates interactively.

An effort has been conducted to develop a modular interactive ECLSS performance analysis tool. The final reports on the effort are included in an Executive Summary and two Technical Reports. The Technical Reports include a User Guide and a sample model.

The Executive Summary presents an overview of the effort.

This Technical Reports presents a User Guide which, due to the modular nature of the Program Library, includes a greater degree of technical detail than one for a conventional program. A sample model report supplements the User Guide and illustrates a complete ECLSS model set up and execution.

## CONTENTS

	Page
1. Introduction . . . . .	1.1
2. Formulation of Environmental Control and Life Support System Analytical Models . . . . .	2.1
3. Library of Routines . . . . .	3.1
3.1 Referenced Routines . . . . .	3.1.1
3.1.1 Program Control Routines . . . . .	3.1.1.1
3.1.1.1 Routine START . . . . .	3.1.1.1.1
3.1.1.2 Routine PRINT . . . . .	3.1.1.2.1
3.1.1.3 Routine LOOP . . . . .	3.1.1.3.1
3.1.1.4 Routine CONVRG . . . . .	3.1.1.4.1
3.1.2 Component Performance Routines . . . . .	3.1.2.1
3.1.2.1 Routine PLATE . . . . .	3.1.2.1.1
3.1.2.2 Routine EVAP . . . . .	3.1.2.2.1
3.1.2.3 Routine SPLIT . . . . .	3.1.2.3.1
3.1.2.4 Routine MIX . . . . .	3.1.2.4.1
3.1.2.5 Routine MOD . . . . .	3.1.2.5.1
3.1.2.6 Routine RAD . . . . .	3.1.2.6.1
3.1.2.7 Routine EXCH . . . . .	3.1.2.7.1
3.1.2.8 Routine HEATER . . . . .	3.1.2.8.1
3.1.2.9 Routine ATMO . . . . .	3.1.2.9.1
3.1.2.10 Routine LIOH . . . . .	3.1.2.10.1
3.1.2.11 Routine CONXG . . . . .	3.1.2.11.1
3.1.2.12 Routine CONXI . . . . .	3.1.2.12.1

## CONTENTS (Continued)

	Page
3.1.3 Input Utility Routines . . . . .	3.1.3.1
3.1.3.1 Routine TABLE . . . . .	3.1.3.1.1
3.1.3.2 Routine STEP . . . . .	3.1.3.2.1
3.2 Unreferenced Routines . . . . .	3.2.1
3.2.1 Boundary Condition Routines . . . . .	3.2.1.1
3.2.1.1 Routine COUPL . . . . .	3.2.1.1.1
3.2.1.2 Routine REPS . . . . .	3.2.1.2.1
3.2.1.3 Routine CONSUM . . . . .	3.2.1.3.1
3.2.1.4 Routine TRAJ . . . . .	3.2.1.4.1
3.2.1.5 Routine SHAD . . . . .	3.2.1.5.1
3.2.2 Output Routines . . . . .	3.2.2.1
3.2.2.1 Routine NODPRT . . . . .	3.2.2.1.1
3.2.2.2 Routine NASPRT . . . . .	3.2.2.2.1
3.2.2.3 Routine GASPR . . . . .	3.2.2.3.1
3.2.2.4 Routine CONPRT . . . . .	3.2.2.4.1
3.2.2.5 Routine PLOOT . . . . .	3.2.2.5.1
3.2.2.6 Routine SCHEM . . . . .	3.2.2.6.1

## LIST OF FIGURES

		Page
2.1	ECLSS Program Assembly Procedure . . . . .	2.4
2.2	ECLSS Program Execution Procedure . . . . .	2.5
3.1.1.1.1	Routine START . . . . .	3.1.1.1.2
3.1.1.1.2	Typical Run Mode Option Display . . . . .	3.1.1.1.4
3.1.1.1.3	Typical Initialization Data Display . . . . .	3.1.1.1.5
3.1.1.2.1	Routine PRINT . . . . .	3.1.1.2.2
3.1.1.2.2	Typical Print Option Display . . . . .	3.1.1.2.8
3.1.2.1.1	Typical Cold Plate Interactive Display . . . . .	3.1.2.1.4
3.1.2.1.2	Typical Atmospheric Property Display . . . . .	3.1.2.1.5
3.1.2.1.3	Typical EPS Data Assignment Interactive Display . . . . .	3.1.2.1.6
3.1.2.1.4	Typical Thermal Coupling Interactive Display . . . . .	3.1.2.1.7
3.1.2.2.1	Typical Evaporate Interactive Display . . . . .	3.1.2.2.3
3.1.2.2.2	Typical Consumables Source Display . . . . .	3.1.2.2.4
3.1.2.3.1	Typical Branching of Flow Interactive Display . . . . .	3.1.2.3.2
3.1.2.4.1	Typical Junction Interactive Display . . . . .	3.1.2.4.2
3.1.2.5.1	Typical Modulation Value Interactive Display . . . . .	3.1.2.5.2
3.1.2.6.1	Typical Radiator Panel Interactive Display . . . . .	3.1.2.6.3
3.1.2.6.2	Panel Positioning with Respect to Spacecraft Axes . . . . .	3.1.2.6.4
3.1.2.6.3	Typical Shadowing Parameter Interactive Display . . . . .	3.1.2.6.5
3.1.2.7.1	Typical Counter or Parallel Flow Heat Exchanger Interactive Display . . . . .	3.1.2.7.2
3.1.2.8.1	Typical In-line Heater Interactive Display . . . . .	3.1.2.8.3
3.1.2.9.1	Typical Atmospheric Compartment Interactive Display . . . . .	3.1.2.9.2
3.1.2.9.2	Typical Crew Metabolic Data Interactive Display . . . . .	3.1.2.9.3

## LIST OF FIGURES (Continued)

	Page
3.1.2.10.1 Typical Lithium Hydroxide Interactive Display . . . . .	3.1.2.10.3
3.1.2.11.1 Counterflow Condensing Heat Exchanger Performance . . . . .	3.1.2.11.3
3.1.2.11.2 Typical Condensing Heat Exchanger (Condensing Side) Interactive Display . . . . .	3.1.2.11.4
3.1.2.12.1 Typical Condensing Heat Exchanger (Interface Side) Interactive Display . . . . .	3.1.2.12.2
3.1.3.1.1 Typical Interactive Tabular Display . . . . .	3.1.3.1.2
3.2.1.2.1 Electrical Power Assignment Menu . . . . .	3.2.1.2.2
3.2.1.3.1 Typical Interactive Source Initial Loading Quantity Display	3.2.1.3.3
3.2.1.4.1 Typical Interactive Orbital Heating Control Display . . . . .	3.2.1.4.7
3.2.1.4.2 Typical Interactive Orbital Parameter Display . . . . .	3.2.1.4.9
3.2.1.4.3 Illustration of Euler Angle Sequence Showing Spacecraft Position . . . . .	3.2.1.4.10
3.2.1.4.4 Planetary Thermal Radiation to a Flat Plate . . . . .	3.2.1.4.12
3.2.1.4.5 Planetary Albedo to a Flat Plate . . . . .	3.2.1.4.13
3.2.1.5.1 Typical Solar Shadowing Illustration . . . . .	3.2.1.5.3
3.2.2.1.1 Typical Fluid Property Output Data-Generic Names . . . . .	3.2.2.1.2
3.2.2.2.1 Typical Fluid Property Output Data-Assigned Names . . . . .	3.2.2.2.2
3.2.2.3.1 Typical Atmospheric Data Output . . . . .	3.2.2.3.2
3.2.2.4.1 Typical Consumables Data Output . . . . .	3.2.2.4.2
3.2.2.5.1 Typical Plot Control Data Display . . . . .	3.2.2.5.2
3.2.2.6.1 Typical Schematic Output . . . . .	3.2.2.6.2



## LIST OF TABLES

		Page
2.1	Typical MAIN Contents . . . . .	2.3
3.1.1.1	Summary of Program Control Routines . . . . .	3.1.1.2
3.1.1.1.1	Dynamic Communication Cross Reference for Program Control.	3.1.1.1.6
3.1.2.1	Summary of ECLSS Component Routines . . . . .	3.1.2.2
3.1.2.1.1	Dynamic Communication Cross Reference for Routine PLATE Parameters at Node I . . . . .	3.1.2.1.8
3.1.2.2.1	Dynamic Communication Cross Reference for Routine EVAP Parameters at Node I . . . . .	3.1.2.2.5
3.1.2.3.1	Dynamic Communication Cross Reference for Routine SPLIT Parameters at Node I . . . . .	3.1.2.3.3
3.1.2.4.1	Dynamic Communication Cross Reference for Routine MIX Parameters at Node I . . . . .	3.1.2.4.3
3.1.2.5.1	Dynamic Communication Cross Reference for Routine MOD Parameters at Node I . . . . .	3.1.2.5.3
3.1.2.6.1	Dynamic Communication Cross Reference for Routine RAD Parameters at Node I . . . . .	3.1.2.6.6
3.1.2.7.1	Dynamic Communication Cross Reference for Routine EXCH Parameters at Node I . . . . .	3.1.2.7.3
3.1.2.8.1	Dynamic Communication Cross Reference for Routine HEATER Parameters at Node I . . . . .	3.1.2.8.4
3.1.2.9.1	Dynamic Communication Cross Reference for Routine ATMO Parameters at Node I . . . . .	3.1.2.9.4
3.1.2.10.1	Dynamic Communication Cross Reference for Routine LIOH Parameters at Node I . . . . .	3.1.2.10.4
3.1.2.11.1	Dynamic Communication Cross Reference to Routine CONXG Parameters at Node I Interfaced to Node M . . . . .	3.1.2.11.5
3.1.2.12.1	Dynamic Communication Cross Reference to Routine CONXI Parameters at Node M . . . . .	3.1.2.12.3
3.1.3.1	Summary of Input Utility Routines . . . . .	3.1.3.2

LIST OF TABLES (Continued)

		Page
3.2.1.1	Summary of Boundary Condition Routines . . . . .	3.2.1.2
3.2.1.3.1	Consumables Media Index for Source I . . . . .	3.2.1.3.3
3.2.1.4.1	Edited Trajectory Tape Format . . . . .	3.2.1.4.8
3.2.1.4.2	Classical Elements of an Orbit . . . . .	3.2.1.4.11
3.2.1.4.3	Dynamic Cross Reference to Orbital Parameters . . . . .	3.2.1.4.14
3.2.1.5.1	Dynamic Cross Reference for Node I Shadowed by Node J with Stand-Off Vector Storage in M . . . . .	3.2.1.5.4
3.2.2.1	Summary of Output Routines . . . . .	3.2.2.2

## 1. INTRODUCTION

This report presents a user guide for a library of interactive computer routines used to develop performance analysis models of specific Environmental Control and Life Support Subsystems (ECLSS). This volume is supplemented by a second volume in this series of reports which presents an example of a complete model set up and execution.

The Environmental Analysis Routine Library (EARL) is designed such that additional ECLSS component performance routines may be added as required. To facilitate report revisions associated with such additions a page, Table, and Figure numbering system based on the sections numbers is used. In this system the last number identifies the page, Table, or Figure number for that section whose number precedes. This system facilitates revisions and additions without requiring complete renumbering.

## 2. FORMULATION OF ENVIRONMENTAL CONTROL AND LIFE SUPPORT SYSTEM ANALYTICAL MODELS

Evaluation of various Environmental Control and Life Support Systems (ECLSS) performance may be conducted by the application of the subject interactive computer program with which the user accesses a library of routines simulating the performance of various components and functions common to ECLSS. These routines are assembled with a driver routine (MAIN) to simulate the particular ECLSS under consideration. The assembled program is then loaded and executed to produce the transient performance parameters of the ECLSS under prescribed boundary conditions. The contents of the MAIN are typified on Table 2.1.

The assembly procedures for a program are shown in Figure 2.1. The master library of routines is extracted from a secure file. The user has the option to enter a MAIN routine (as for initial development of an ECLSS model), or extract a particular MAIN from his individual library (as for update/edit and/or additional studies with a previously developed ECLSS model). The extracted MAIN may be altered as part of the update/edit process. The program is then MAP'ed and the MAIN may be stored in the user's file for future use. The particular ECLSS program is then ready for execution.

The execution procedure including a variety of input/output options is shown in Figure 2.2. The component characteristic data and initial conditions may be read in from restart data stored previously or entered directly. If the user desires, the system will output a schematic of the ECLSS modeled. The user has the option to select particular nodes (component locations) to be included in tabular output or the system will default to include output for all nodes defined in the model. If plots are desired, the user simply defines the particular parameters to be plotted. Restart data may be stored for future use. Up to this point the program is executed in an interactive mode. The

program then transfers to a second stage of execution.

The second stage of execution is passive in the sense the data is processed with no interaction on the part of the user except to produce hard copy of the output. The processing accesses Electrical Power System (EPS) data and/or trajectory data automatically, if required. The data can be accessed from tape, secure files, or interface to other programs resident in the system. This stage of execution produces the tabular and plot data.

O  
C

Table 2.1. Typical MAIN Contents

	CALL START	}	PROGRAM CONTROL
333	CONTINUE		
	CALL STEP(.... )	}	CALL TO INPUT UTILITY ROUTINES
3133	CONTINUE		
	CALL LOOP(.... )	}	CONVERGENCE CONTROL
	CALL PLATE(.... )	}	CALL TO COMPONENT ROUTINES
	....		
	CALL MIX(.... )	}	
	CALL CONVRG(.... )	}	CONVERGENCE CONTROL
	CALL PRINT	}	PROGRAM CONTROL AND TIMING UPDATE
	GO TO 333		
	END		

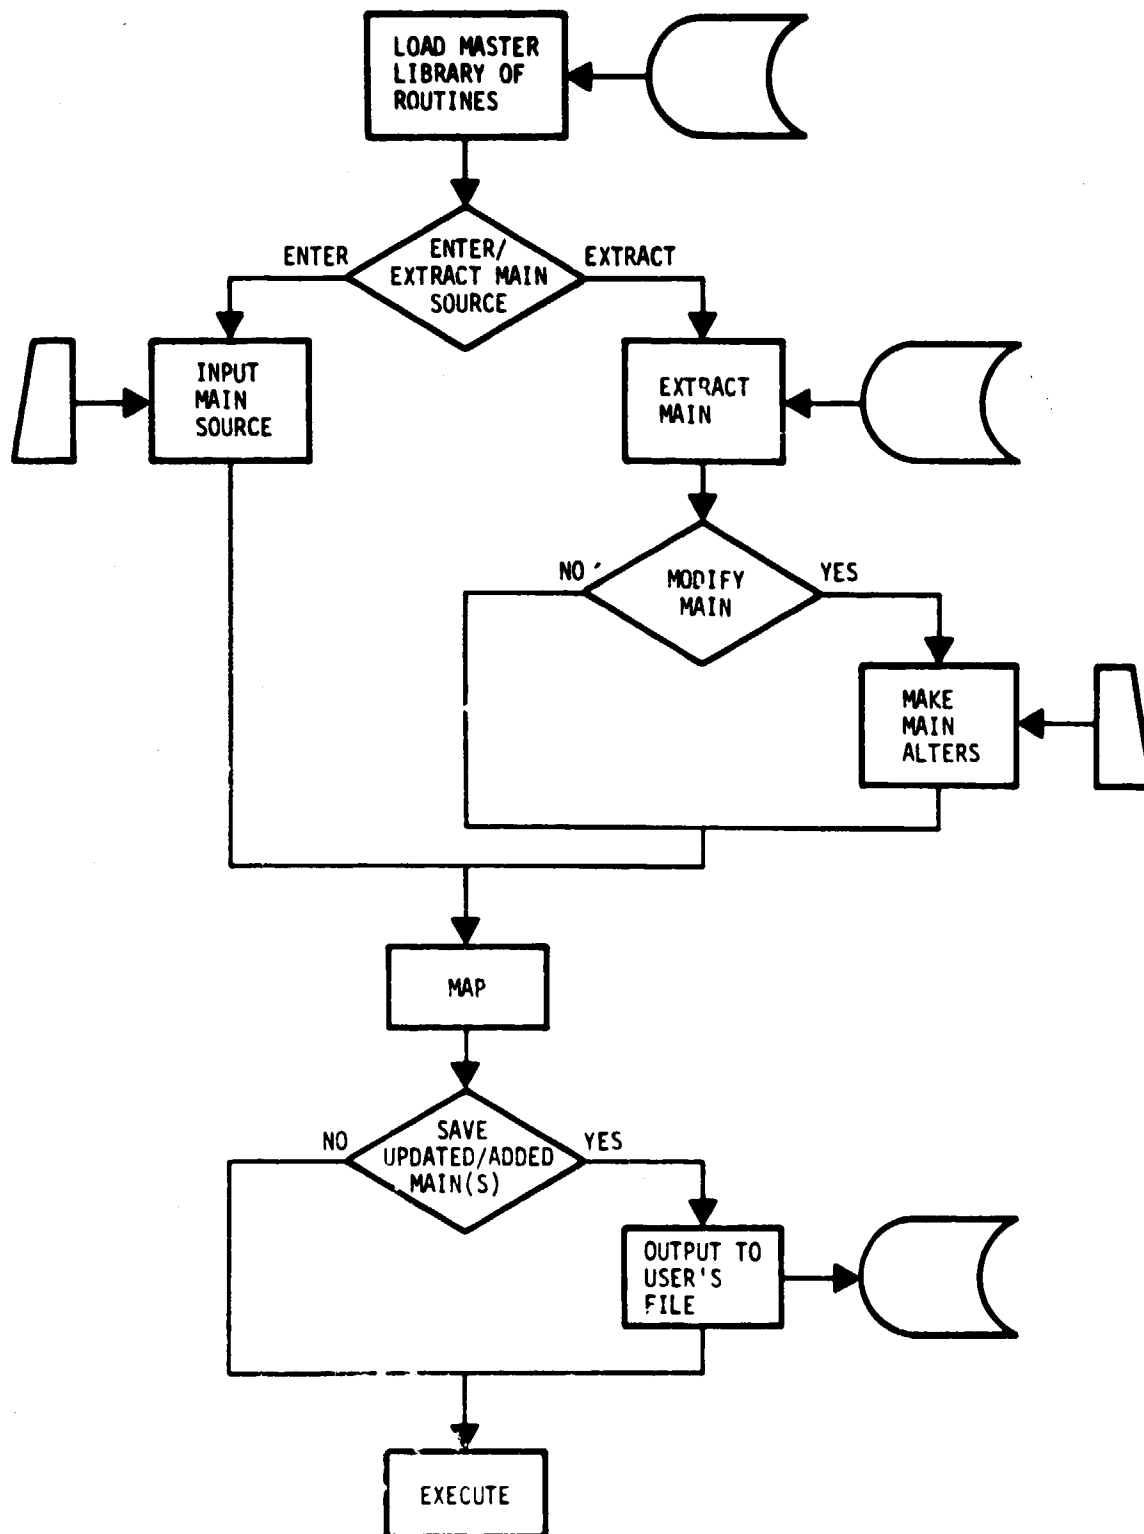


Figure 2.1. ECLSS Program Assembly Procedure

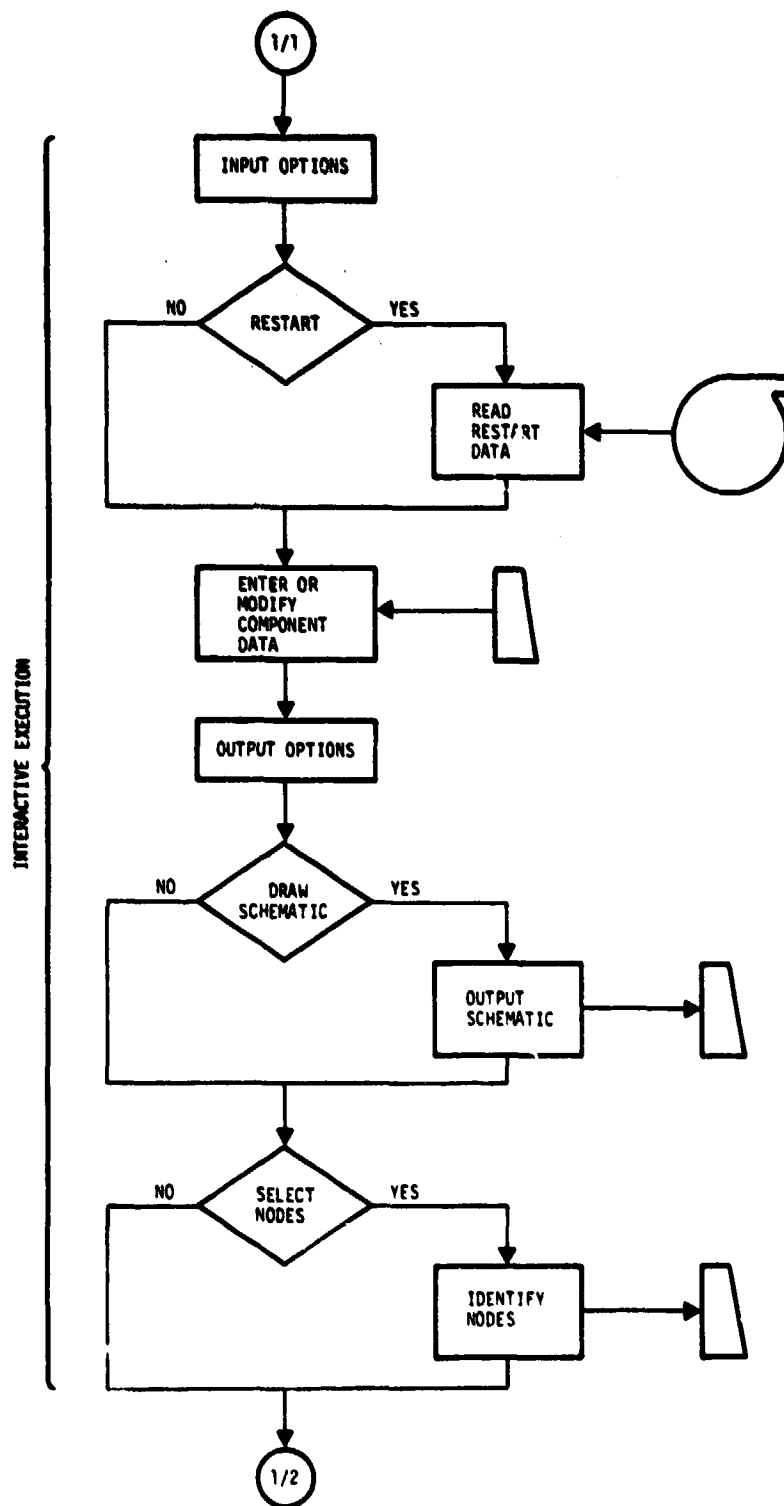


Figure 2.2. ECLSS Program Execution Procedure



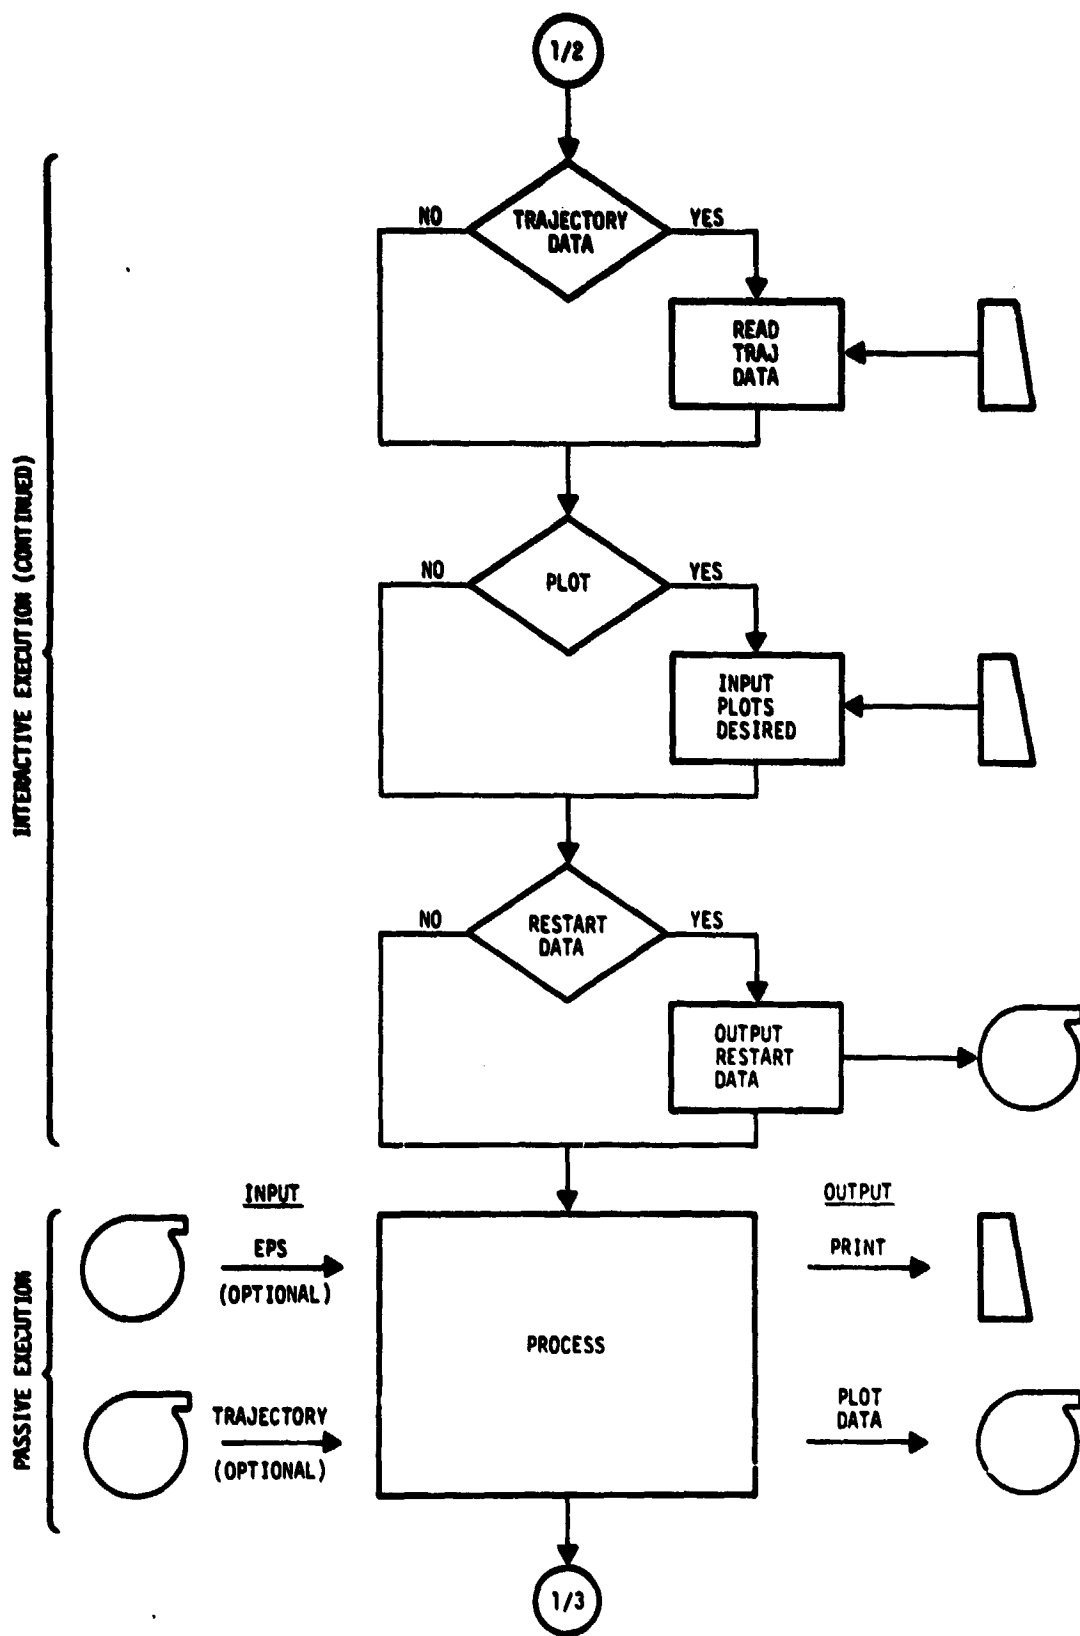


Figure 2.2. ECLSS Program Execution Procedure (Continued)

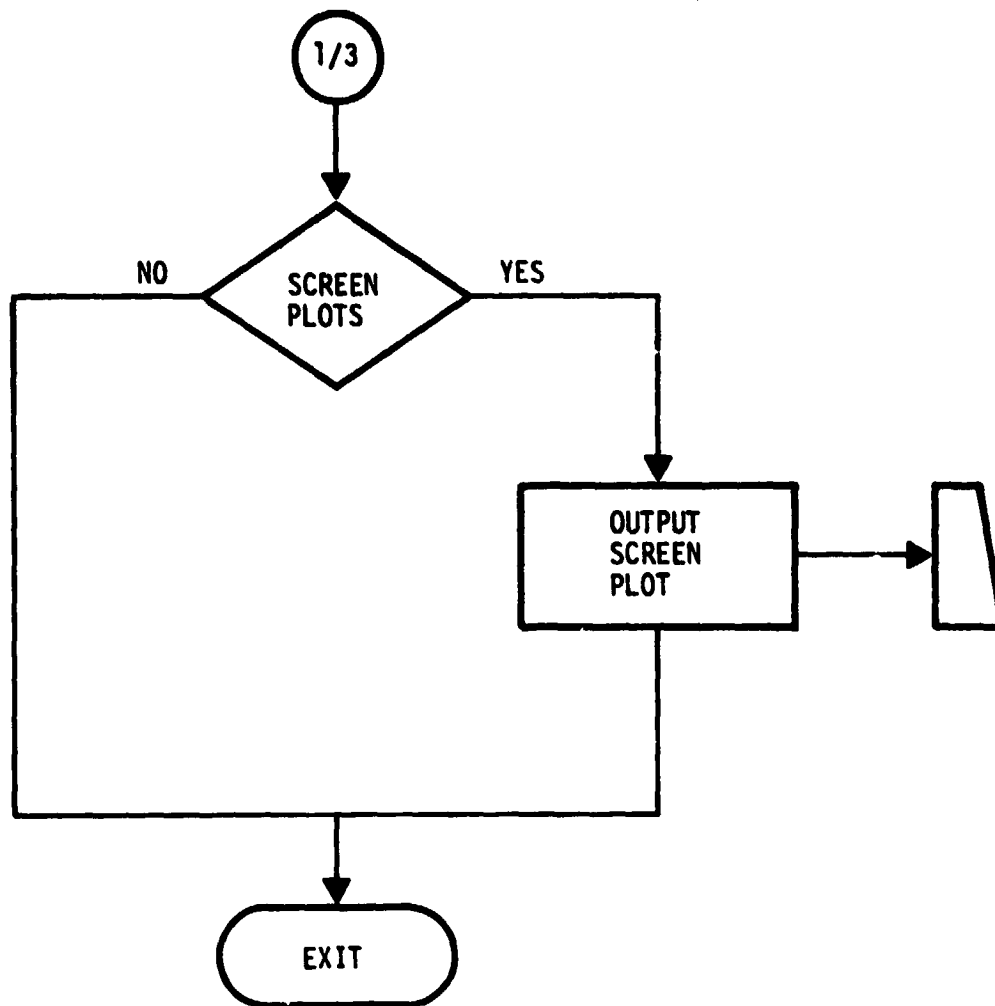


Figure 2.2. ECLSS Program Execution Procedure (Conciuded)

### 3. LIBRARY OF ROUTINES

Two categories of Routines make up the library. The first category is Referenced Routines, which are directly referenced in the user's MAIN. The second category includes the Unreferenced Routines which are automatically executed, but are not referenced directly by the user. All Referenced Routines are discussed in the following section. Those Unreferenced Routines with which the user may desire indirect communication are discussed in the subsequent section. Unreferenced Routines also include a variety of Control, Computational, and Support Routines.

### 3.1 REFERENCED ROUTINES

This section presents a description of the functions, application, and parameters associated with those Library Routines which are directly referenced in the user's MAIN. These include Program Control Routines, Component Performance Routines, and Input Utility Routines. The following discussion includes the reference procedure, interactive communication, and a cross reference to the various parameters for dynamic communication.

### 3.1.1 Program Control Routines

Four Routines are used for basic program control. These control Routines are summarized on Table 3.1.1.1. Routines START and PRINT are mandatory as they control initialization, communication with boundary condition routines, timing, and output. Routines LOOP and CONVRG are optional depending on the configuration of the ECLSS model.

Control and timing parameters are entered through interactive displays during active execution of START and PRINT. It may be desirable to dynamically communicate with the timing parameters during passive execution. This type of communication is affected by entries in the user's MAIN. The following Control Routine descriptions include information on the interactive displays as well as cross reference to the timing parameters. Examples of dynamic communication are included in the sample model text.

Table 3.1.1.1. Summary of Program Control Routines

START	Initialization control
PRINT	Boundary Condition Routine communication, timing control, and output control
LOOP	Timing control for first referenced ECLSS component in closed loop system
CONVRG	Convergence control in closed loop system

### 3.1.1.1 Routine START

A flow diagram of the functions of Routine START is given on Figure 3.1.1.1.1.

A reference procedure is

CALL START

for program execution initialization. The call to Routine START is the mandatory first executable statement in the MAIN.

Interactive communication with the initialization parameters is through console displays as shown on Figures 3.1.1.1.2 and 3.1.1.1.3.

The cross reference to initialization parameters is shown on Table 3.1.1.1.1.

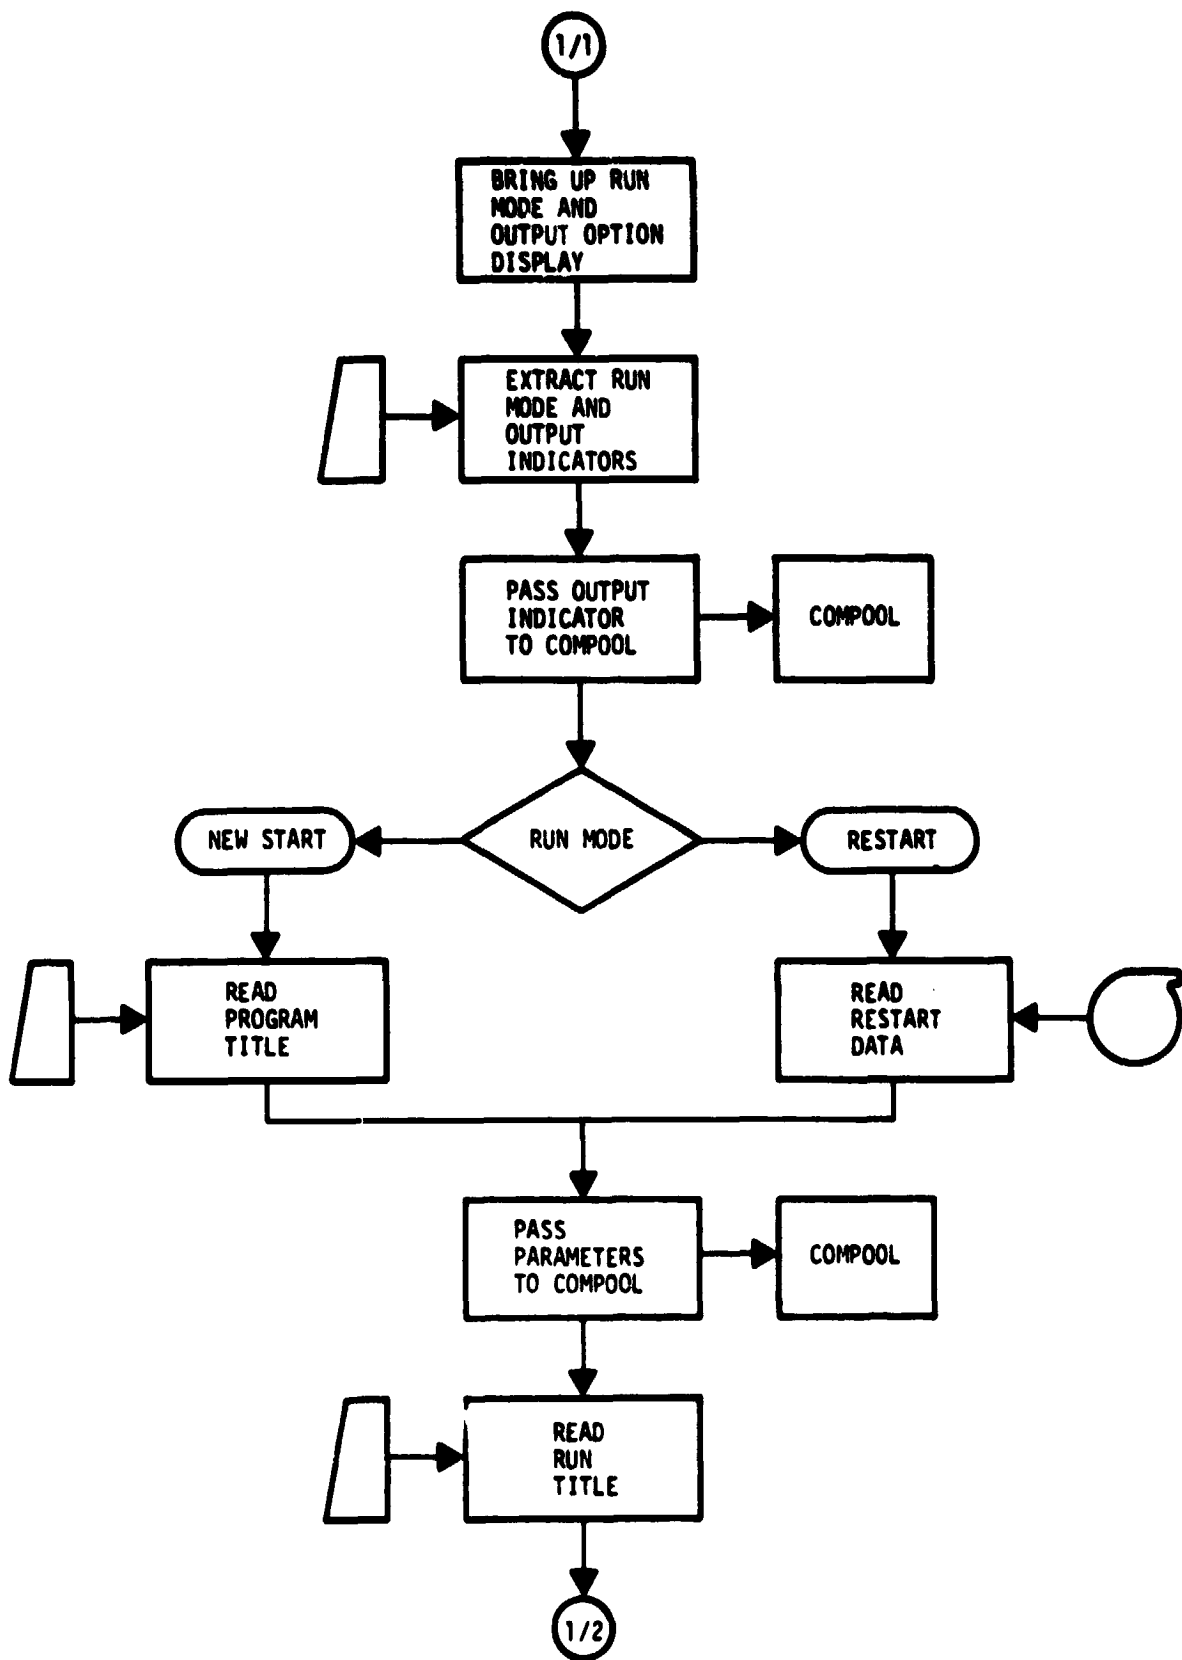


Figure 3.1.1.1.1. Routine START

3.1.1.1.2



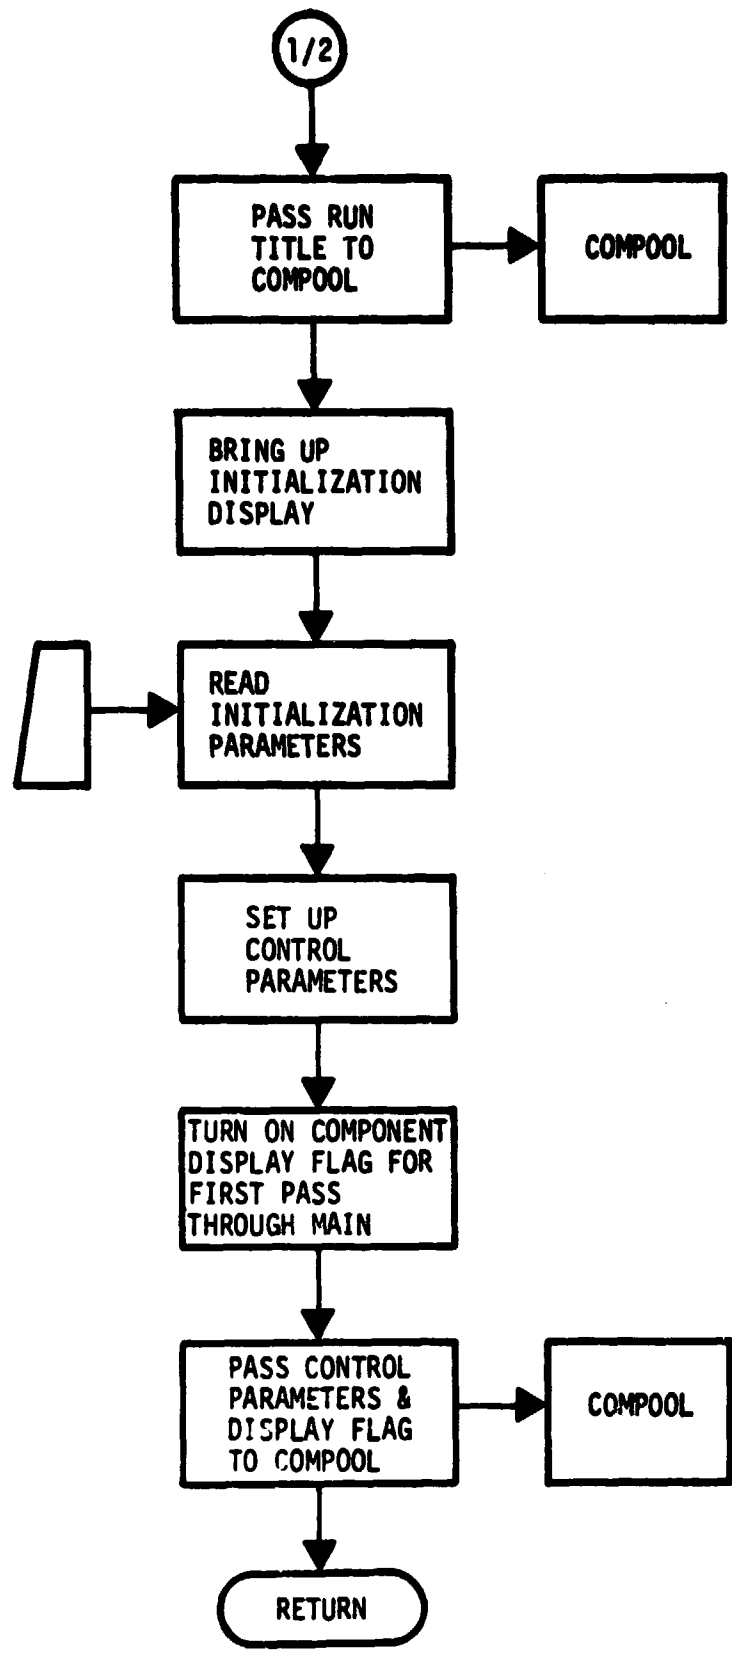


Figure 3.1.1.1.1. Routine START (Concluded)

3.1.1.1.3

```
*****  
FORTRAN ENVIRONMENTAL  
ANALYSIS ROUTINES  
CONTROL DISPLAY  
ENTER RUN MODE (INTEGER)  
NEW START = 0  
RESTART = 1  
ENTER OUTPUT OPTION  
NO RESTART TAPE = 0  
WRITE BEGINNING RESTART TAPE = 1  
WRITE ENDING RESTART TAPE = 2  
*****
```

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.1.1.1.2. Typical Run Mode Option Display

```

*****
      INITIALIZATION CONTROL
      TFEAR
      TEST TFEAR
ITEM
1  COMP. TIME INCREMENT      .010 HR
2  START TIME                .001 HR
3  STOP TIME                 .050 HR
4  PRINT INCREMENT          .010 HR
5  INITIAL SYSTEM TEMP      521.100 DEG
*****

```

Figure 3.1.1.1.3. Typical Initialization Data Display

3.1.1.1.5

**Table 3.1.1.1.1. Dynamic Communication Cross Reference for Program Control**

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Compute time increment	$\Delta T$	HRS	DELTA*	R	TIMES
Start Time	$t_0$	HRS	TIME	R	TIMES
Stop Time	-	HRS	TSTOP	R	TIMES
Print increment	-	HRS	PRNT	R	TIMES
Initial System Temp.	-	DEG	TEMP <sup>†</sup>	R	TIMES
Simulated Time	t	HRS	TIME	R	TIMES
Present Time index	-	INTEGER	L	I	MEAT
Previous Time index	-	INTEGER	K	I	MEAT

\* $\Delta t$  is stored in DELT02 also. DELT is set equal to zero for first pass through MAIN at  $t_0$ .

<sup>†</sup>Default value for component temperatures.

### 3.1.1.2 Routine PRINT

A flow diagram of the functions of Routine PRINT is given on Figure 3.1.1.2.1.

The reference procedure is

**CALL PRINT**

for program control. The call to PRINT is the last Routine call in the timing loop.

Basic interactive communication is through the console display shown on Figure 3.1.1.2.2. If the MAIN references component simulation routines which imply consumables usage and/or orbital heating data is required the display shown on Figure 3.1.1.2.2 will be preceded by initialization and control data displays for these boundary condition functions. The Boundary Condition Routines are discussed in Section 3.2.1. Selection of the various output options will bring the various Output Routines and their associated control displays into effect. The Output Routines are discussed in Section 3.2.2.

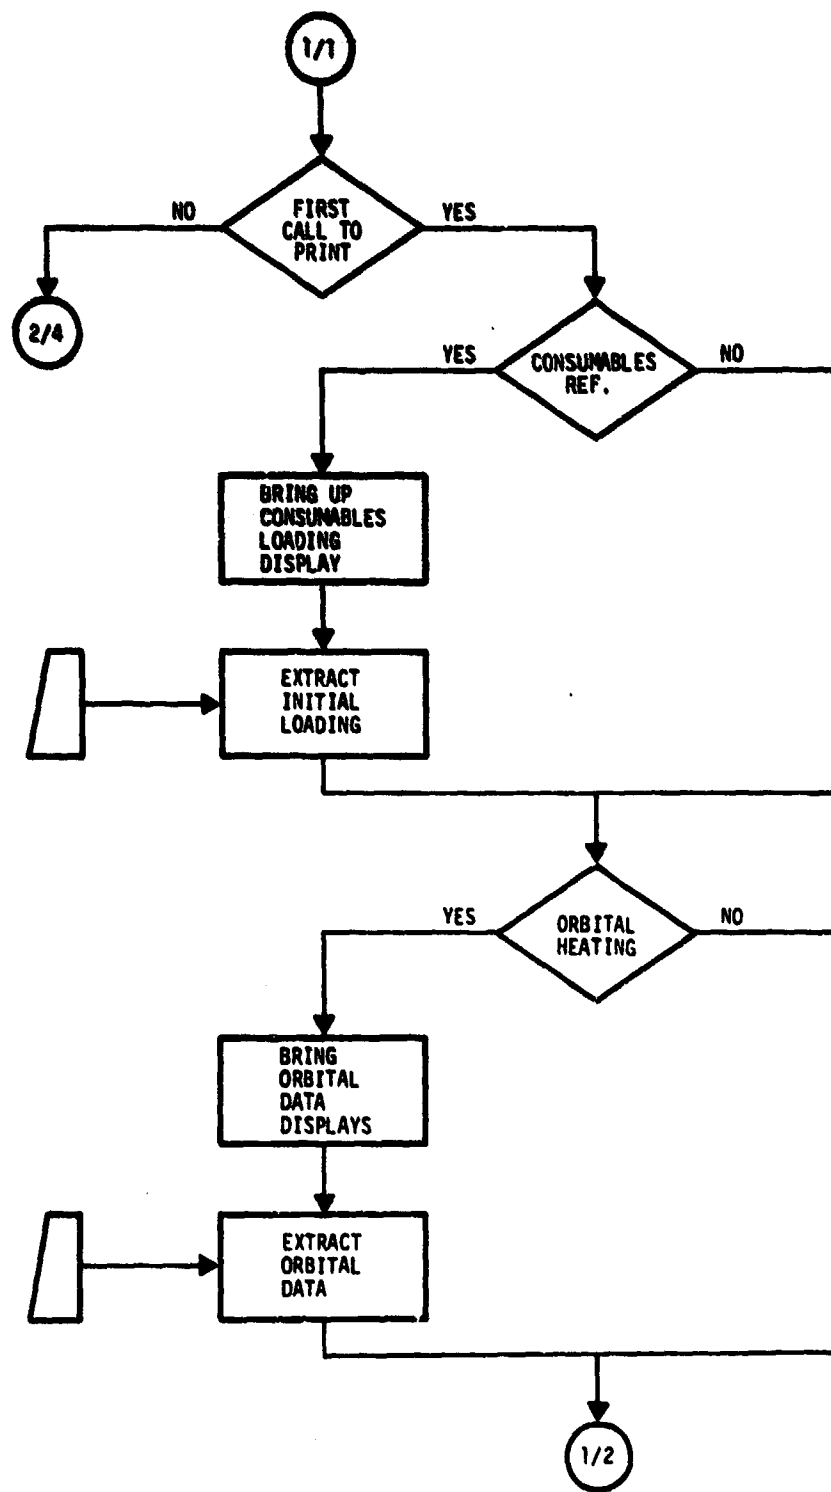


Figure 3.1.1.2.1. Routine PRINT

3.1.1.2.2

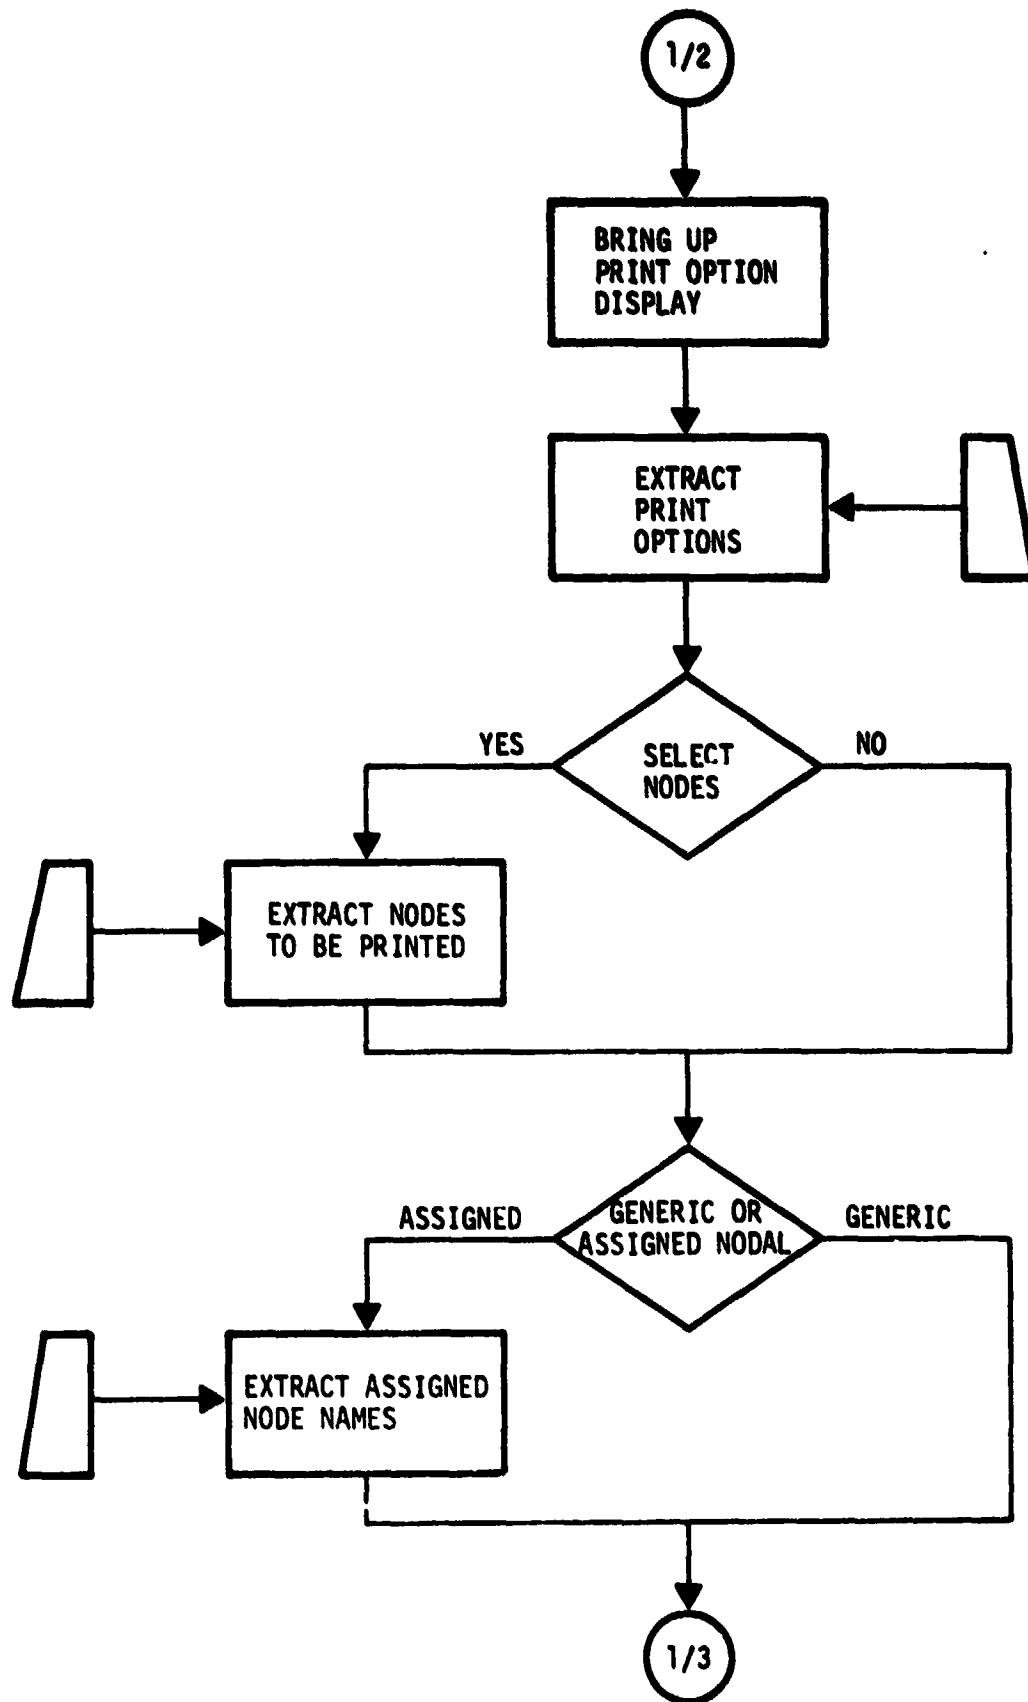


Figure 3.1.1.2.1. Routine PRINT (Continued)

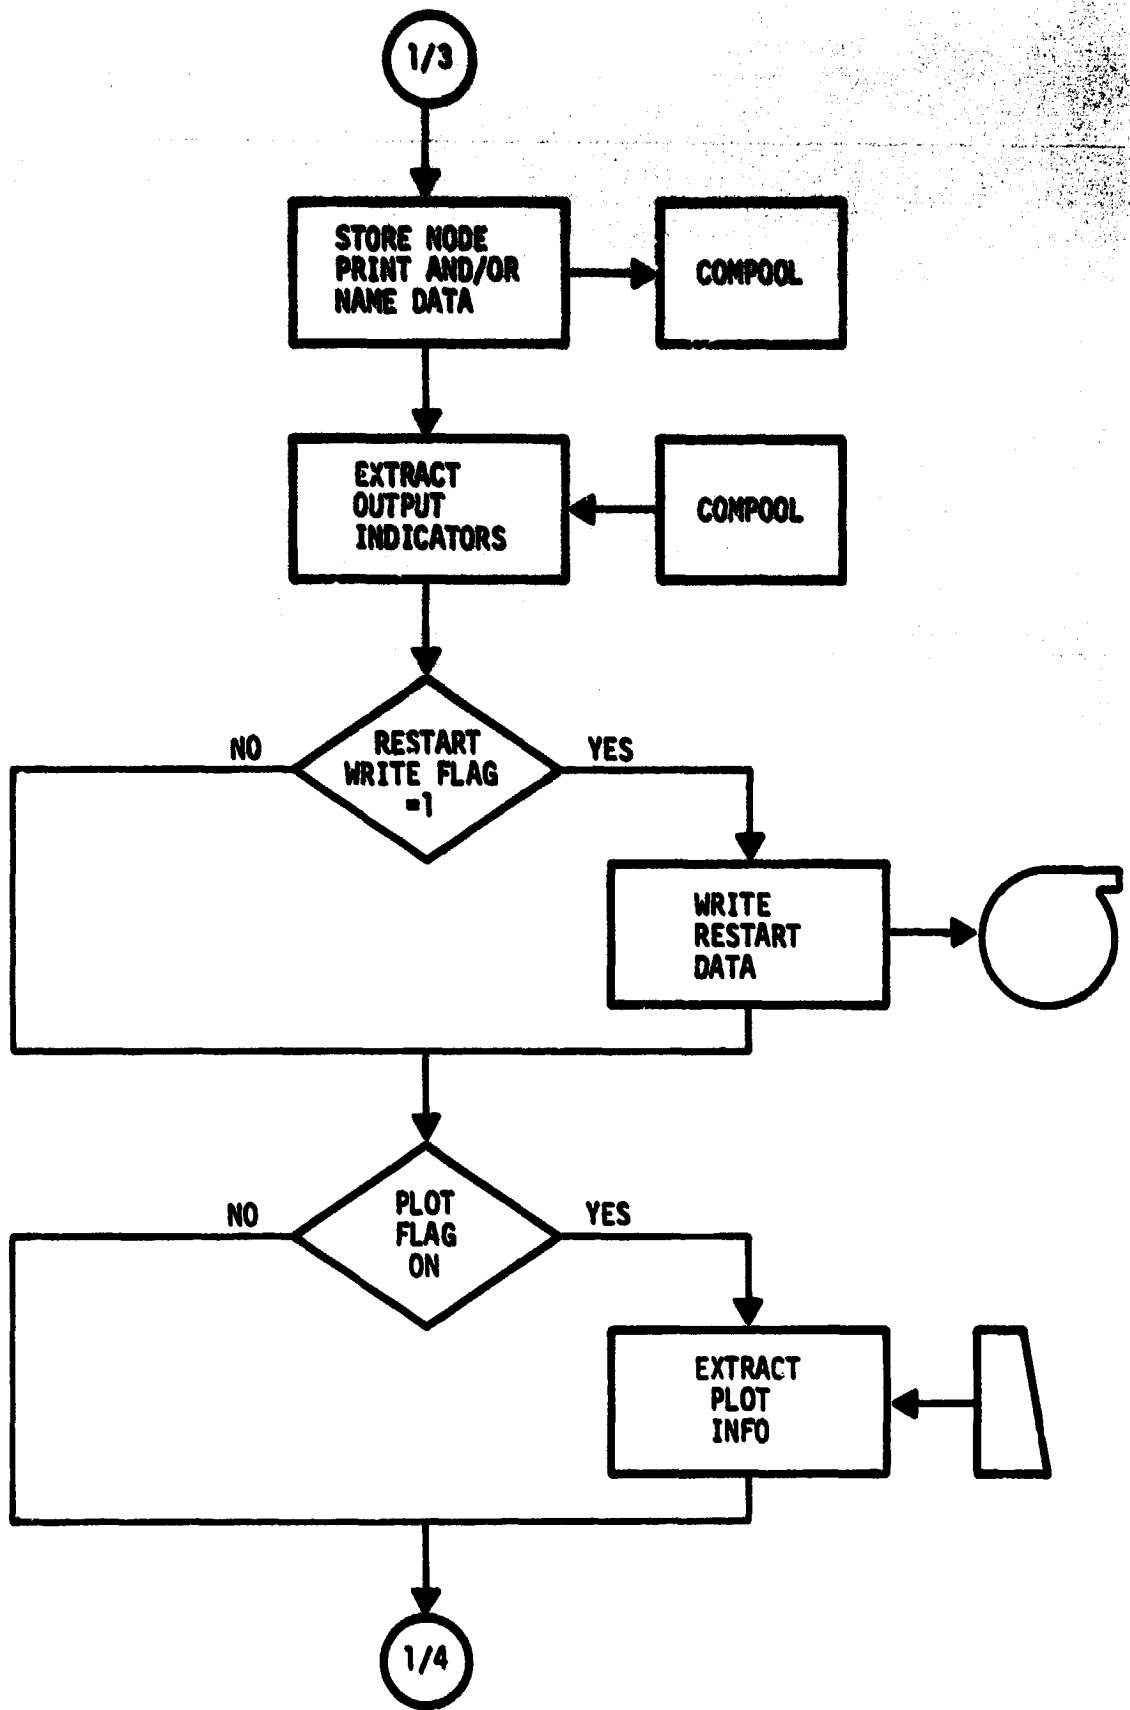


Figure 3.1.1.2.1. Routine PRINT (Continued)

3.1.1.2.4



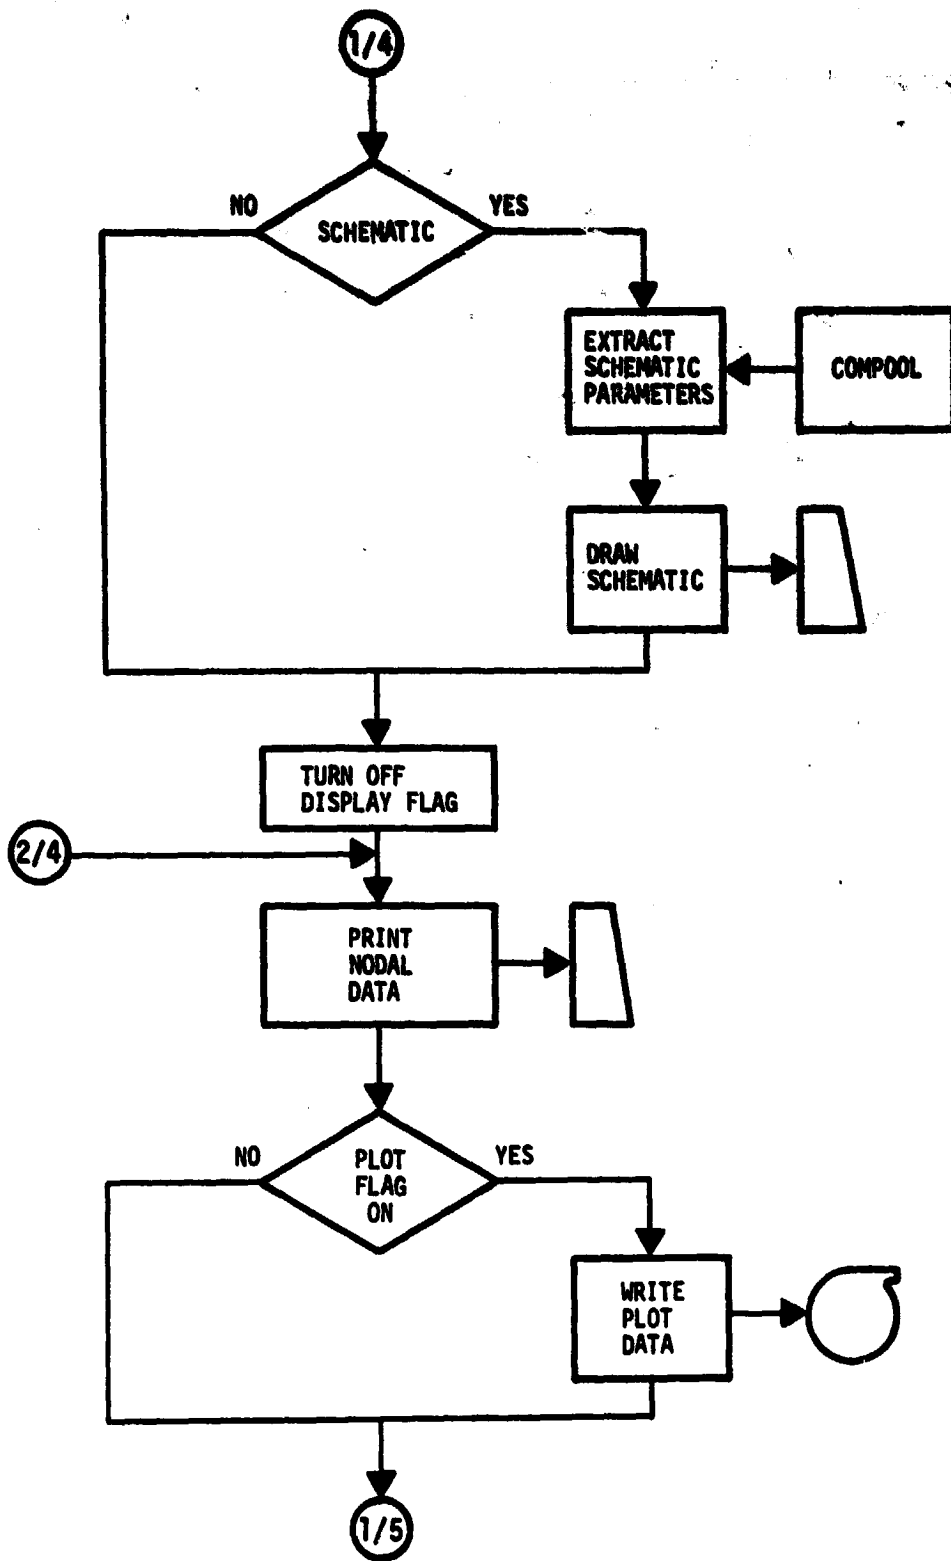


Figure 3.1.1.2.1. Routine PRINT (Continued)

3.1.1.2.5

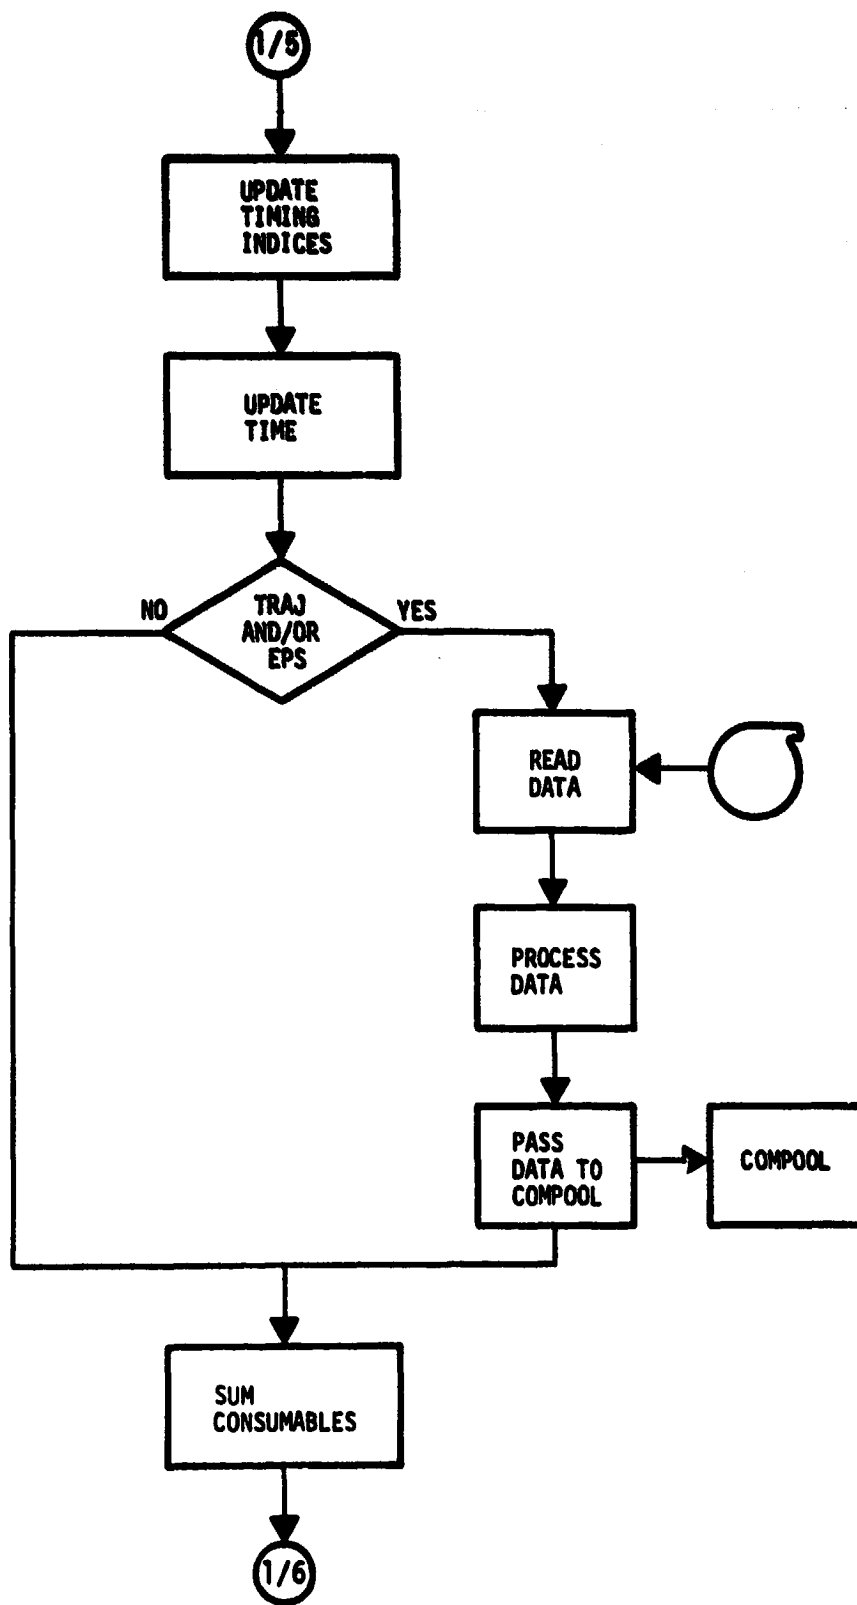


Figure 3.1.1.2.1. Routine PRINT (Continued)

3.1.1.2.6

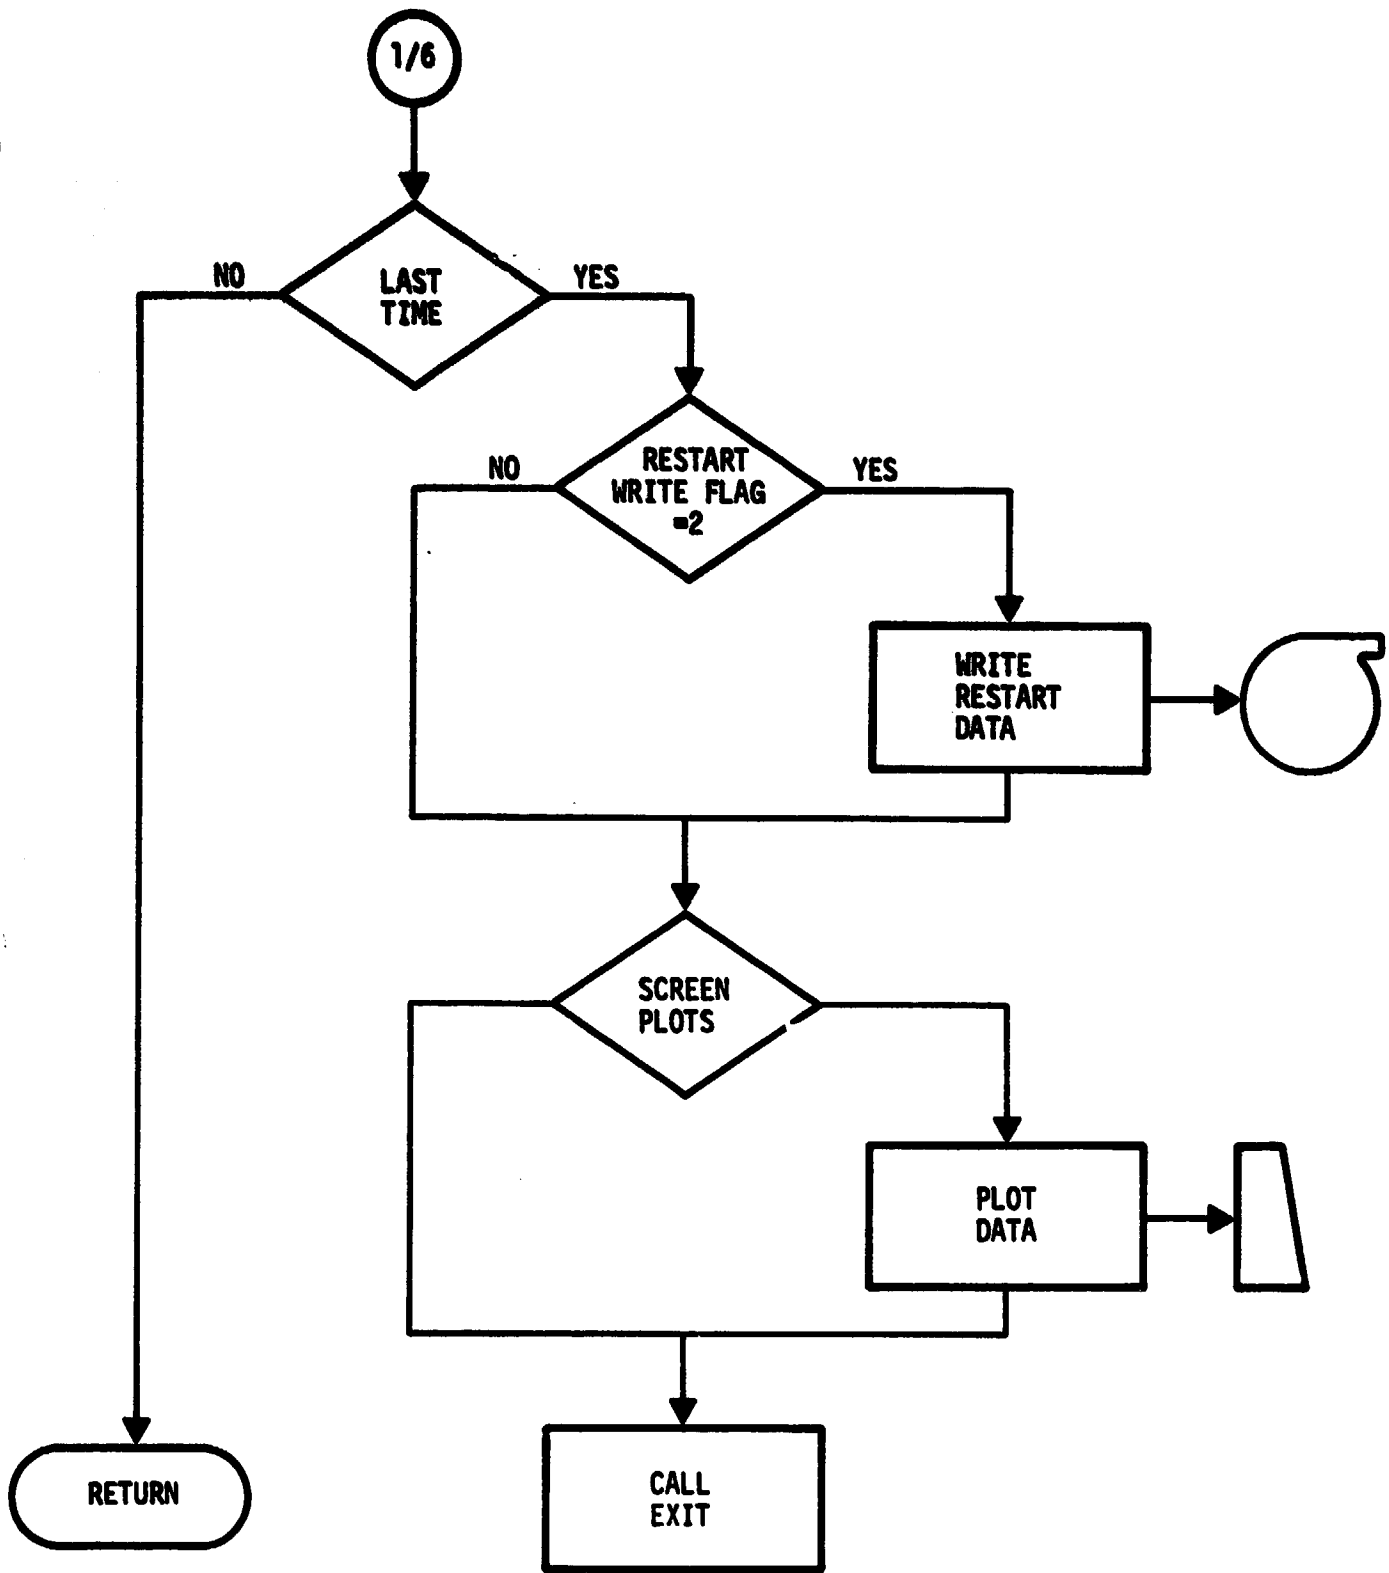


Figure 3.1.1.2.1. Routine PRINT (Concluded)

3.1.1.2.7

```
*****  
          PRINT OPTION  
          DISPLAY  
  
ITEM   OPTION                FLAG  
  1    SELECT NODES          STATUS  
  2    PLOTS                  0  
  3    SCHEMATIC              1  
*****
```

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.1.1.2.2. Typical Print Option Display

### 3.1.1.3 Routine LOOP

Special timing control is required for the nodal designation *i* associated with the first referenced ECLSS component in a closed loop system. Routine LOOP provides this control.

The reference procedure

```
CALL LOOP(I)
```

which precedes the call to a component simulation routine with the nodal designation *I*.

There is no further user communication with the functions or parameters of this Routine. The use of this routine is mandatory for closed loop systems.

#### 3.1.1.4 Routine CONVRG

Routines LOOP and CONVRG are used in conjunction for a closed loop system to control iteration to a prescribed convergence tolerance. A typical application for iteration about the node *i* follows:

```
    NN1 CONTINUE
      CALL LOOP(I)
      CALL PLATE(I,J)
      .
      .
      .
      CALL EVAP(M,I)
      CALL CONVRG(I,TOL,MAX,$NN2,$NN1)
    NN2 CONTINUE
```

} Typical component simulation calls

The call to CONVRG compares the inlet fluid temperature at node *I* used in the first component call to the outlet fluid temperature at node *I* calculated by the last component call. If the two temperatures agree within the tolerance specified by the value of TOL, a return to statement number NN2 in the MAIN is made. Whereas, if the agreement is not in effect, the value of the temperature at node *I* for the first component call will be modified and the return will be to statement number NN1 in the MAIN. The parameter MAX is a user selected maximum number of non-converging iterations before CONVRG will terminate the execution.

There is no further user communication with the functions of Routine CONVRG. The use of Routine CONVRG is optional.

### **3.1.2 Component Performance Routine**

This section provides information on the simulation of various ECLSS components through application of the Library of Component Routines. This Library and a brief description of their function is summarized on Table 3.1.2.1.

Initial characteristics of the various components are entered or updated through an interactive display during active execution. It is often desirable to dynamically update or access various characteristics and variables during the passive execution. This latter updating is accomplished by entries in the user's MAIN which communicate with the subject routine variables. The following component routine descriptions include information on the interactive display as well as cross reference data for dynamic communication. Several simple dynamic updating examples are included in the sample model.

**Table 3.1.2.1. Summary of ECLSS Component Performance Routines**

<b>PLATE</b>	<b>Forced cooled internal heat generating equipment</b>
<b>EVAP</b>	<b>Evaporator</b>
<b>SPLIT</b>	<b>Branching of coolant flow</b>
<b>MIX</b>	<b>Mixing of coolant legs into a single junction</b>
<b>MOD</b>	<b>Controlled proportioning of flow between two branches</b>
<b>RAD</b>	<b>Radiator panel</b>
<b>EXCH</b>	<b>Counterflow and parallel flow heat exchanges</b>
<b>HEATER</b>	<b>Controlled fluid line heater</b>
<b>ATMO</b>	<b>Atmospheric compartment (Cabin)</b>
<b>LIOH</b>	<b>Carbon Dioxide removal with Expendable Lithium Hydroxide</b>
<b>CONXG</b>	<b>Condensing Heat Exchanger, condensing side</b>
<b>CONXI</b>	<b>Condensing Heat Exchanger, interface (sink) side</b>



### 3.1.2.1 Routine PLATE

The transient performance of forced cooled internal heat generating equipment is simulated by Routine Plate. The routine is an adaptive transfer function for the fluid flow segment from node i to j which processes the following equations.

$$(\rho C)_i \frac{dT_{c_i}}{dt} = Q_{I_i} - Q_C - (UA)_i \Delta T_{lm}$$

and

$$(\rho C_p)_j (T_j - T_i) = (UA)_i \Delta T_{lm}$$

where

$$\Delta T_{lm} = \frac{(T_{c_i} - T_i) - (T_{c_i} - T_j)}{\ln \left[ \frac{T_{c_i} - T_i}{T_{c_i} - T_j} \right]}$$

The net loss of heat due to thermal coupling to m nodes defined by  $K(\ell)$  is given by

$$Q_C = \sum_{K=1}^m C_{iK(\ell)} (T_{c_i}^a - T_{cK(\ell)}^a)$$

where

$$C_{iK(\ell)} = (UA)_{iK(\ell)}$$

and

$$a = 1$$

for conduction or convective coupling, and,

$$C_{1K(L)} = \sigma_c A F_{1K(L)}$$

and

$$a = 4$$

for radiation coupling of node 1 to  $K(L)$ .

The reference procedure is

```
CALL PLATE(I,J)
```

to process the transfer function through node I to J.

Interactive communication with the parameters and functions of the simulated component is through a console display as illustrated on Figure 3.1.2.1.1. An integer value greater than zero assigned to item 6, 7, and/or 8 will extend the communication upon exit from this display as follows:

ITEM 6 Atmospheric Coolant. The atmospheric parameters shown on Figure 3.1.2.1.2 will be put through to node J. This feature is used for continuity and mass conservation when PLATE is used as a component simulation.

ITEM 7 EPS Data Assignment. The interactive display shown on Figure 3.1.2.1.3 is used to assign word numbers in the EPS data array to  $Q_{1_i}$ . (See Routine REPS.)

ITEM 8 Thermal Coupling. The interactive display shown on Figure 3.1.2.1.4 is used to thermally couple node I to m nodes defined by  $K(L)$ . The 100 series nodes are used for convective coupling. The 200 series nodes are used for radiation coupling. To thermally couple node i to node 8 by conduction or convection assign 108 as the coupling code. Assignment of a 208 as the coupling will result in node I being coupled

to node 8 by radiation. Note the respective units of the coupling values as displayed.

The cross reference to Routine PLATE parameters is shown on Table 3.1.2.1.1. Additional information related to communication with the Thermal Coupling parameters is given in the section on Routine COUPL.

```

*****
                                NODE NUMBER 6
                                COLD PLATE
ITEM
1  THERMAL CAPACITY           150.000      BTU/DEG
2  OVERALL HEAT TRANSFER      2500.000    BTU/HR DEG
   COEF.                       1490.484    BTU/HR DEG
3  COOLANT FLOW RATE          521.000      DEG
4  INITIAL COMPONENT          498.474      DEG
   TEMP.
5  INITIAL COOLANT           0
   INLET TEMP.
6  ATMOSPHERIC COOLANT        0
   0 = NO
   1 = YES
7  EPS DATA ASSIGNMENT      0
   0 = NO
   1 = YES
8  THERMAL COUPLING          0
   0 = NO
   1 = YES
   INLET NODE NUMBER          6
                                OUTLET NODE NUMBER
                                7
*****

```

Figure 3.1.2.1.1. Typical Cold Plate Interactive Display

```

*****
      ATMOSPHERIC COOLANT
      PROPERTIES FOR
      NODE NUMBER 3
      INFORMATION ONLY
      NOT EDITABLE
PARTIAL PRESSURE OF WATER          .154      PSIA
PARTIAL PRESSURE OF NITROGEN      11.600   PSIA
PARTIAL PRESSURE OF OXYGEN        3.100   PSIA
PARTIAL PRESSURE OF CARBON        .097    PSIA
      DIOXIDE
ATMOSPHERIC PRESSURE              14.700   PSIA
*****

```

Figure 3.1.2.1.2. Typical Atmospheric Property Display

```
*****
EPS DATA ASSIGNMENT
FOR
NODE NUMBER 6
WORD
ITEM NUMBER
1 38 INTEGER
2 39 INTEGER
3 40 INTEGER
*****
```

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.1.2.1.3. Typical EPS Data Assignment Interactive Display

```

*****
THERMAL COUPLING DATA
FOR NODE NO. 22
COUPLED TO 1 NODES
ITEM TYPE OF HEAT TRANSFER AND VALUE
1 COUPLING NODE NUMBER CODE .500
VALUES ARE:
BTU/HR FOR SERIES 100 COUPLING
BTU/HR DEG**4 FOR SERIES 200 COUPLING
*****

```

Figure 3.1.2.1.4. Typical Thermal Coupling Interactive Display

Table 3.1.2.1.1. Dynamic Communication Cross Reference for Routine PLATE Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Component temperature	$T_{C_i}$	DEG	$P(I, X^{\dagger})$	R	MEAT
Fluid inlet temperature	$T_i$	DEG	$F(I, X^{\dagger})$	R	MEAT
Thermal capacitance	$(MC)_i$	BTU/DEG	$C(I, 1)$	R	MEAT
Heat transfer coefficient	$(UA)_i$	BTU/HR DEG	$C(I, 2)$	R	MEAT
Coolant flow rate	$(WC_p)_i$	BTU/HR DEG	$C(I, 3)$	R	MEAT
Internal heat generation	$Q_{I_i}$	BTU/HR	$C(I, 4)$	R	MEAT
Specific heat of gas mixture	-	BTU/LB DEG	$C(I, 5)$	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	$C(I, 6)$	R	MEAT
N <sub>2</sub>	-	PSI	$C(I, 7)$	R	MEAT
O <sub>2</sub>	-	PSI	$C(I, 8)$	R	MEAT
CO <sub>2</sub>	-	PSI	$C(I, 9)$	R	MEAT
Pressure of gas mixture	-	PSI	$C(I, 10)$	R	MEAT
Coupling values 1st ref. node	$C_{iK(1)}$	*	$C(I, 15)$	R	MEAT
2nd ref. node	$C_{iK(2)}$	*	$C(I, 16)$	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
6th ref. node	$C_{iK(6)}$	*	$C(I, 20)$	R	MEAT
Number of coupled nodes	m	INTEGER	$IC(I, 4)$	R	MEAT
Coupling node number 1st ref.	K(1)	INTEGER	$IC(I, 5)$	R	MEAT
2nd ref.	K(2)	INTEGER	$IC(I, 6)$	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
6th ref.	K(6)	INTEGER	$IC(I, 10)$	R	MEAT

$\dagger X = L$  present value  
 $X = K$  previous value

\* BTU/HR DEG for convection and conduction coupling (series 100).  
 BTU/HR DEG<sup>4</sup> for radiation coupling (series 200).



### 3.1.2.2 Routine EVAP

The transient performance of an evaporator used as an ultimate heat sink is simulated by Routine EVAP. The routine is a transfer function for the fluid flow segment from node  $i$  to  $j$  which processes the following equations.

$$(WC_p)_i (T_j - T_i) = (UA)_i \Delta T_{lm}$$

where

$$\Delta T_{lm} = \frac{T_j - T_i}{\ln \left[ \frac{T_s - T_i}{T_s - T_j} \right]}$$

The media evaporated over the time span  $a$  to  $b$  is calculated as

$$M = \frac{1}{h_{fg}} \int_a^b (WC_p)_i (T_j - T_i) dt$$

and is withdrawn from a source  $n$  as prescribed by the user.

The simulation assumes the media to be at the saturation temperature  $T_s$  and does not account for sensible heat requirements to achieve this temperature.

The reference procedure is

```
CALL EVAP(I,J)
```

to process the transfer function through node  $I$  to  $J$ .

Interactive communication with the parameters and functions of the simulated component is through a console display as illustrated on Figure 3.1.2.2.1. Reference to this Routine will automatically bring up the consumables source initial loading display as illustrated on Figure 3.1.2.2.2. This display is brought up immediately prior to passive execution and includes all referenced consumables sources as well as the source referenced through a particular call to EVAP.

The cross reference to Routine EVAP parameters is shown on Table 3.1.2.2.1. Additional information related to source assignment and initial loading quantity for the evaporating media is given in the section on Routine CONSUM.

```

*****
                                NODE NUMBER 5
                                EVAPORATOR
ITEM
1  HEAT OF VAPORAZATION          1060.000  BTU/LB
2  OVERALL HEAT TRANSFER COEF.   3000.000  BTU/HR DEG
3  COOLANT FLOW RATE             1000.000  BTU/HR DEG
4  SATURATION TEMP               495.000  DEG
5  INITAL FLUID INLET TEMP       .000  DEG
6  CONSUMABLE                     1  INTEGER .LE. 10
   1 = POTABLE WATER
   2 = WATER
   3 = AMMONIA
   4 = OTHER
7  TANK ASSIGNMENT                6  INTEGER .LE. 20
   INLET NODE NUMBER              5  OUTLET NODE NUMBER
   5                               6
*****

```

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.1.2.2.1. Typical Evaporator Interactive Display

```

*****
CONSUMABLES
SOURCES
ITEM SOURCE TYPE OF, UNIT INITIAL
NO. CONSUMABLE LOADING
1 1 NITROGEN LBS .000
2 2 OXYGEN LBS .000
3 3 LITHIUM HYDROXIDE LBS .000
4 4 WATER LBS .000
5 5 ELECTRIC POWER WATT HRS .000
6 6 POTABLE WATER LBS .000
*****

```

Figure 3.1.2.2.2. Typical Consumables Source Display

Table 3.1.2.2.1. Dynamic Communication Cross Reference for the Routine EVAP Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Saturation temperature	$T_s$	DEG	$P(I, X^\dagger)$	R	MEAT
Fluid inlet temperature	$T_i$	DEG	$F(I, X^\dagger)$	R	MEAT
Heat of vaporation	$h_{fg}$	BTU/LB	$C(I, 1)$	R	MEAT
Heat transfer coefficient	$(UA)_i$	BTU/HR DEG	$C(I, 2)$	R	MEAT
Coolant flow rate	$(WC_p)_i$	BTU/HR DEG	$C(I, 3)$	R	MEAT
Consumables type	-	INTEGER	$IC(I, 3)^*$	I	MEAT
Tank (source) number	$n$	INTEGER	$IC(I, 4)$	I	MEAT
Media consumed	$M$	LBS	$CONTOT(N)$	R	CONS

$^\dagger X = L$  present value  
 $X = K$  previous value

\*The consumables type is used only for print out heading control and is transferred to  $IAMCON(N)$  during initialization.  $IAMCON(N)$  is stored in the common CONS. (See Routine CONSUM.)

### 3.1.2.3 Routine SPLIT

The splitting of flow at node  $i$  in  $n$  branches with a fixed flow proportion  $m_{j(k)}$  at each node  $j(k)$  is simulated by Routine SPLIT. The routine processes the equations

$$\left. \begin{aligned} (WC_p)_{j(k)} &= m_{j(k)} (WC_p)_i \\ T_{j(k)} &= T_i \end{aligned} \right\} K = 1, n$$

The reference procedure is

```
CALL SPLIT(I,N)
```

to split node  $I$  onto  $N$  branches.

Interactive communication with the parameters and functions of the branching is through a console display as shown on Figure 3.1.2.3.1. An integer value of unity assigned to item 4 will bring up the Atmospheric Property display as shown on Figure 3.1.2.1.2. The atmospheric properties at node  $I$  will be put through to the branches  $j(k)$ .

The cross reference to Routine SPLIT parameters is shown on Table 3.1.2.3.1.

```

*****
      NODE NO. 12
      BRANCH
      SPLIT INTO 2 LEGS
      LEG NODE   FLOW
ITEM  NUMBER   PROPORTION
  1     13     .500
  2     17     .500
3  ATMOSPHERIC COOLANT  0 INTEGER
      0 = NO
      1 = YES
4  COOLANT FLOW RATE  769.090  BTU/HR DEG
5  COOLANT INLET TEMP 520.317  DEG
*****

```

Figure 3.1.2.3.1. Typical Branching of Flow Interactive Display

Table 3.1.2.3.1. Dynamic Communication Cross Reference for the Routine SPLIT Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Fluid inlet temperature	$T_1$	DEG	$F(I, X^\dagger)$	R	MEAT
Coolant flow rate	$(WC_p)_1$	BTU/HR DEG	$C(I, 3)$	R	MEAT
1st branch node number	$j(1)$	INTEGER	$IC(I, 2)$	I	MEAT
2nd branch node number	$j(2)$	INTEGER	$IC(I, 3)$	I	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
9th branch node number	$j(9)$	INTEGER	$IC(I, 10)$	I	MEAT
1st branch flow proportion	$M_j(1)$	FRACTION	$C(I, 12)$	R	MEAT
2nd branch flow proportion	$M_j(2)$	FRACTION	$C(I, 13)$	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
9th branch flow proportion	$M_j(9)$	FRACTION	$C(I, 20)$	R	MEAT
Specific heat of gas mixture	-	BTU/LB DEG	$C(I, 5)$	R	MEAT
Partial pressure of $H_2O$	-	PSI	$C(I, 6)$	R	MEAT
$N_2$	-	PSI	$C(I, 7)$	R	MEAT
$O_2$	-	PSI	$C(I, 8)$	R	MEAT
$CO_2$	-	PSI	$C(I, 9)$	R	MEAT
Pressure of gas mixture	-	PSI	$C(I, 10)$	R	MEAT

$^\dagger X = L$  present  
 $X = K$  previous



### 3.1.2.4 Routine MIX

The mixing of flow from  $n$  legs defined by the nodes  $j(K)$  into a single node  $i$  is simulated by Routine MIX. The routine processes the equations

$$(WC_p)_i = \sum_{K=1}^n (WC_p)_{j(K)}$$

$$T_i = \frac{\sum_{K=1}^n (WC_p)_{j(K)} T_{j(K)}}{(WC_p)_i}$$

The reference procedure is

```
CALL MIX(I,N)
```

to mix  $N$  legs into the junction  $I$ .

Interactive communication with the parameters and functions of the mixing is through a console display as shown on Figure 3.1.2.4.1. An integer value of unity assigned to item 4 will result in processing of the atmospheric properties at the  $N$  nodes into the node  $I$ .

The cross reference to Routine MIX parameters is shown on Table 3.1.2.4.1.

```

*****|*****|*****
          NODE NO. 5
          JUNCTION
          MIXING 3 NODES
          MIXED NODE
ITEM      NUMBER      UNIT
  1         11      INTEGER
  2         16      INTEGER
  3         20      INTEGER
  4  ATMOSPHERIC COOLANT  0  INTEGER
      0 = NO
      1 = YES
*****|*****|*****

```

Figure 3.1.2.4.1. Typical Junction Interactive Display

3.1.2.4.2

Table 3.1.2.4.1. Dynamic Communication Cross Reference for Routine MIX at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Fluid temperature at junction	$T_j$	DEG	$F(I, X^\dagger)$	R	MEAT
Coolant flow rate at junction	$(WC_p)_j$	BTU/HR DEG	$C(I, 3)$	R	MEAT
1st mixing node number	J(1)	INTEGER	MIXUM(M)*	I	MIXUP
2nd mixing node number	J(2)	INTEGER	MINUM(M+1)	I	MIXUP
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
nth mixing node number	J(n)	INTEGER	MIXUM(M+N-1)	I	MIXUP
Specific heat of gas mixture	-	BTU/LB DEG	$C(I, 5)$	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	$C(I, 6)$	R	MEAT
N <sub>2</sub>	-	PSI	$C(I, 7)$	R	MEAT
O <sub>2</sub>	-	PSI	$C(I, 8)$	R	MEAT
CO <sub>2</sub>	-	PSI	$C(I, 9)$	R	MEAT
Pressure of gas mixture	-	PSI	$C(I, 10)$	R	MEAT

†X = L present  
X = K previous

\*The value of M is dynamically assigned during initialization and is one greater than the total number of mixed nodes referenced prior to a particular call to MIX. M can be determined as the location of the value I in the IMIX array. That is, IMIX(M) = I. IMIX is in the common MIXUP.

### 3.1.2.5 Routine MOD

The branching of flow at node  $i$  onto two legs defined by nodes  $j$  and  $n$  such that the flow proportioning  $f_j$  and  $f_n$  is modulated to maintain a fixed temperature  $T_c$  at a control node  $m$  is simulated by routine MOD. The routine processes equations similar to Routine SPLIT except that the flow proportioning is dynamic, such that

$$\Delta f_j = g(T_m - T_c)$$

where  $\Delta f_j$  is a change in the flow proportioning factor from the previous calculation,  $g$  is a proportional gains, and

$$f_n = 1 - f_j .$$

A maximum and minimum value for  $f_j$  is prescribed by the user. Note that a positive gains will favor node  $j$  if  $T_n$  is greater than  $T_c$  (i.e., node  $j$  in this case is assumed to be the cooling leg).

The reference procedure is

```
CALL MOD(I)
```

to modulate the branching of flow at node  $I$ .

Interactive communication with the parameters and functions of the modulation is through a console display as shown on Figure 3.1.2.5.1. An integer value of unity assigned to item 11 will bring up the atmospheric properties display for node  $I$  (see Figure 3.1.2.1.2) and put through the properties to the branches  $J$  and  $N$ .

The cross reference to Routine MOD parameters is shown on Table 3.1.2.5.1.

```

*****
                                NODE NUMBER 10
                                MODULATION VALUE
ITEM  DESCRIPTION                                VALUE  UNIT
1*   LEG 1 NODE NUMBER                                12  INTEGER
2*   LEG 2 NODE NUMBER                                11  INTEGER
3*   CONTROL NODE NUMBER                                5  INTEGER
4    CONTROL TEMP                                505.000  DEG
5    INITIAL TEMP AT CONTROL NODE                    521.000  DEG
6    PROPORTIONAL GAINS                                .001  FRACTION/DEG
7    MAX HARD OVER                                    1.000  FRACTION
8    MIN HARD OVER                                    .000  FRACTION
9    INITIAL TEMP AT MOD NODE                          518.891  DEG
10   COOLANT FLOW AT MOD NODE                        1490.484 BTU/HR. DEG.
11   ATMOSPHERIC COOLANT                                0  INTEGER
      0 = NO
      1 = YES
* MUST BE DEFINED BEFORE YOU EXIT DISPLAY
*****

```

Figure 3.1.2.5.1. Typical Modulation Value Interactive Display

Table 3.1.2.5.1. Dynamic Communication Cross Reference  
for Routine MOD at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Leg 1 node number	j	INTEGER	IC(I,4)	I	MEAT
Leg 2 node number	n	INTEGER	IC(I,5)	I	MEAT
Control node	m	INTEGER	IC(I,6)	I	MEAT
Control temperature	$T_c$	DEG	C(I,15)	R	MEAT
Temperature at control node	$T_m$	DEG	F(M,X <sup>†</sup> )	R	MEAT
Proportional gains	g	FRACTION	C(I,16)	R	MEAT
Maximum hard over	MAX $f_j$	FRACTION	C(I,17)	R	MEAT
Minimum hard over	MIN $f_j$	FRACTION	C(I, 18)	R	MEAT
Coolant temperature at MOD node	$T_i$	DEG	F(I,X <sup>†</sup> )	R	MEAT
Coolant flow at MOD node	$(WC_p)_i$	BTU/HR DEG	C(I,3)	R	MEAT
Specific heat of gas mixture	-	BTU/LB DEG	C(I,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(I,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(I,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(I,8)	R	MEAT
C <sub>2</sub>	-	PSI	C(I,9)	R	MEAT
Pressure of gas mixture	-	PSI	C(I,10)	R	MEAT

†X = L present  
X = K previous

### 3.1.2.6 Routine RAD

The transient performance of a radiator consisting of fluid flow paths attached to, or integral with, a panel is simulated by Routine RAD. Each fluid flow path is paralleled by a right and left section of the panel. The panel is subject to incident heat resulting from on-orbit operation. The Routine is an adaptive transfer function for the fluid flow segment from node  $i$  to  $j$  which processes the following equations.

$$(MC)_i \frac{dT_{c_i}}{dt} = - (Q_{REJ} + Q_c) - (UA)_i \Delta T_{lm}$$

and

$$(WC_p)_i (T_j - T_i) = (UA)_i \Delta T_{lm}$$

where

$$\Delta T_{lm} = \frac{(T_{c_i} - T_i) - (T_{c_i} - T_j)}{\ln \left[ \frac{T_{c_i} - T_i}{T_{c_i} - T_j} \right]}$$

$$Q_{REJ} = \sigma \epsilon \sum_{n=1}^2 A_n T_{c_i}^4 \left[ 1 - \frac{Q_{ABS}}{\sigma \epsilon T_{c_i}^4} \right] \eta_n$$

$Q_{ABS}$  is the absorbed heat, and  $Q_c$  is the net flow of heat resulting from thermal coupling. (The thermal coupling calculations are the same as those used for a cold plate, Section 3.1.2.1.)

The reference procedure is

```
CALL RAD(I,J)
```

to process the transfer function through node  $I$  to  $J$ . Reference to this routine

will automatically bring up an interactive display for definition of orbital information immediately prior to passive execution. (See Routine TRAJ.)

Interactive communication with the parameters and functions is through a console display as illustrated on Figure 3.1.2.6.1. Positioning of the panel with respect to the spacecraft axes is defined by the angle of incident and dihedral angle as shown on Figure 3.1.2.6.2. The normal vector is calculated internally. An integer value of unity assigned to item 14 will bring up the interactive node coupling display as for a cold plate. (See Section 3.1.2.1, Figure 3.1.2.1.4.) An integer value greater than zero for item 15 indicates shadowing by the node number indicated. The interactive display for communication with the shadowing parameters shown on Figure 3.1.2.6.3 is brought up in this case. This display is in communication with the shadowing routines. (See Routine SHAD.)

The cross reference to Routine RAD parameters is shown on Table 3.1.2.6.1.



```

*****
                          NODE NUMBER 13
                          RADIATOR PANEL

ITEM                        VALUE      UNIT

1  THERMAL CAPACITANCE      25.000  BTU/DEG
2  OVERALL HEAT TRANSFER   COEF.   1500.000 BTU/HR DEG
3  COOLANT FLOW RATE       384.545 BTU/HR DEG
4  SOLAR ABSORBIVITY       .100    FRACTION
5  EMMISIVITY              .900    FRACTION
6  RIGHT FIN EFFECTIVENESS .800    FRACTION
7  LEFT FIN EFFECTIVENESS .800    FRACTION
8  RIGHT FIN AREA          10.000  SQ FT
9  LEFT FIN AREA           10.000  SQ FT
10 ANGLE OF INCIDNCE       .000    RAD
11 DIHEDERIAL ANGLE       .000    RAD
12 INITIAL FIN TEMP       521.000 DEG
13 INITIAL COOLANT        INLET TEMP. 518.891 DEG
14 NODE COUPLING          0      INTEGER

      NO = 0
      YES = 1
15 SHADOW NODE NUMBER      25     INTEGER
    INLET NODE NUMBER      13
                                14
*****

```

Figure 3.1.2.6.1. Typical Radiator Panel Interactive Display

X,Y,Z = SPACE CRAFT AXES

$\alpha$  = ANGLE OF INCIDENCE

$\beta$  = DIHEDRAL ANGLE

$\vec{N}$  = NORMAL TO SURFACE

=  $(-\sin \alpha)\mathbf{i}$

+  $(\cos \alpha \sin \beta)\mathbf{j}$

+  $(\cos \alpha \cos \beta)\mathbf{k}$

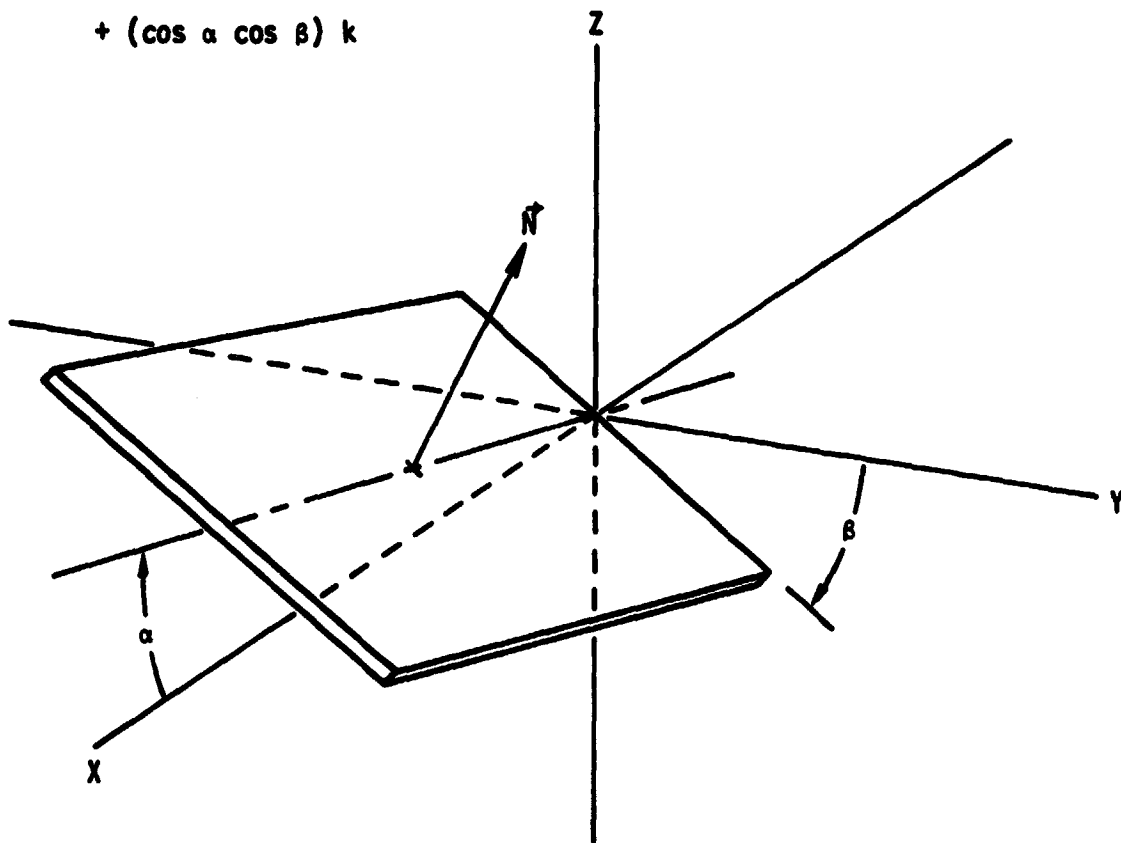


Figure 3.1.2.6.2. Panel Positioning with Respect to Spacecraft Axes

```

*****
SHADOWING DATA
FOR NODE NO. 13
SHADOWED BY 25

ITEM
1 SHADOW NODE AREA 1.000 SQ FT
2 ANGLE OF INCIDENCE .000 RAD
3 DIHEDRAL ANGLE .000 RAD
4 STAND-OFF VECTOR DATA 26 INTEGER
5 STAND-OFF DISTANCE 2.000 FT
6 EQUIV. STAND-OFF ANGLE OF INCIDENCE .000 RAD
7 EQUIV. STAND-OFF DIHEDRAL ANGLE .000 RAD
*****

```

Figure 3.1.2.6.3. Typical Shadowing Parameter Interactive Display

Table 3.1.2.6.1. Dynamic Communication Cross Reference for Routine RAD Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Base temperature	$T_{c_1}$	DEG	P(I,X <sup>†</sup> )	R	MEAT
Fluid inlet temperature	$T_1$	DEG	F(I,X)	R	MEAT
Thermal capacitance	$(MC)_1$	BTU/DEG	C(I,1)	R	MEAT
Heat transfer coefficient	$(UA)_1$	BTU/HR DEG	C(I,2)	R	MEAT
Coolant flow rate	$(WC_p)_1$	BTU/HR DEG	C(I,3)	R	MEAT
Incident heat	$Q_{ABS}$	BTU/HR FT <sup>2</sup>	C(I,4)	R	MEAT
Solar absorbability	$\alpha$	FRACTION	C(I,5)	R	MEAT
Thermal emissivity	$\beta$	FRACTION	C(I,6)	R	MEAT
Right fin effectivity	$r_1$	FRACTION	C(I,7)	R	MEAT
Left fin effectivity	$r_2$	FRACTION	C(I,8)	R	MEAT
Right fin surface area	$A_1$	FT <sup>2</sup>	C(I,9)	R	MEAT
Left fin surface area	$A_2$	FT <sup>2</sup>	C(I,10)	R	MEAT
Angle of incidence	$\alpha$	RAD	C(I,11)	R	MEAT
Dihedral angle	$\beta$	RAD	C(I,12)	R	MEAT
Coupling value 1st ref node	$C_{1K(1)}$	*	C(I,15)	R	MEAT
2nd ref node	$C_{1K(2)}$	*	C(I,16)	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
6th ref node	$C_{1K(6)}$	*	C(I,20)	R	MEAT
Number of coupled nodes	M	INTEGER	IC(I,4)	I	MEAT
Coupling node number 1st ref	K(1)	INTEGER	IC(I,5)	I	MEAT
2nd ref	K(2)	INTEGER	IC(I,6)	I	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
6th ref	K(6)	INTEGER	IC(I,10)	I	MEAT
Shadowing node number	-	INTEGER	IC(I,2)	I	MEAT

†X = L present value  
X = K previous value

\* BTU/HR DEG<sub>4</sub> for convection and conduction coupling (series 100).  
BTU/HR DEG<sup>4</sup> for radiation coupling (series 200).

### 3.1.2.7 Routine EXCH

The exchange of heat in counter flow and parallel flow heat exchangers is simulated by Routine EXCH. The routine is a transfer function for the fluid flow segment from node i to j where the interfacing fluid flow from m to n. The routine processes the equation for counter and parallel flow heat exchangers based on the methods of Reference 1.

The reference procedure is

```
CALL EXCH(I,J,M,N)
```

to process the transfer function through node I to J based on the interfacing condition at nodes M and N. A second call is normally referenced in the interfacing coolant loop part of the model as

```
CALL EXCH(M,N,I,J)
```

which processes the transfer function through node M to N based on conditions at nodes I and J. The second call is not mandatory. It is used only as the model requires updating of the conditions at node N in the interfacing loop.

Interactive communication is through a console display as illustrated on Figure 3.1.2.7.1. Note that information pertaining to the interfacing side is also included.

An integer value of unity for item 5 will cause the routine to put through the atmospheric properties from node I to J. This routine should not be used when the conditions at the interface could result in condensation. (See Routines CONXG and CONXI.)

The cross reference to Routine EXCH parameters is shown on Table 3.1.2.7.1.

```

*****
                                NODE NO. 21
                                HEAT EXCHANGER
ITEM                                VALUE      UNIT
.
                                *** CALLING SIDE ***
.
1  HEAT TRANSFER COEF.             300.000  BTU/HR DEG
.
2  COOLANT FLOW RATE               100.000  BTU/HR DEG
.
3  FLUID INLET TEMPERATURE         521.000  DEG
.
4  TYPE                             0        INTEGER
.
    COUNTERFLOW = 0
    PARALLEL FLOW = 1
5  ATMOSPHERIC COOLANT             0        INTEGER
.
    NO = 0
    YES = 1
                                *** INTERFACE SIDE ***
.
6  HEAT TRANSFER COEF.             3000.000 BTU/HR DEG
.
7  COOLANT FLOW RATE               1490.484 BTU/HR DEG
.
8  FLUID INLET TEMPERATURE         518.751  DEG
*****

```

Figure 3.1.2.7.1. Typical Counter or Parallel Flow Heat Exchanger Interactive Display

Table 3.1.2.7.1. Dynamic Communication Cross Reference for Routine EXCH Parameters at Node I Interfaced to Node M

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
<u>Calling Side</u>					
Fluid inlet temperature	$T_i$	DEG	F(I,X <sup>†</sup> )	R	MEAT
Heat transfer coefficient	$(UA)_i^*$	BTU/HR DEG	C(I,2)	R	MEAT
Coolant flow rate	$(WC_p)_i$	BTU/HR DEG	C(I,3)	R	MEAT
Specific heat of mixture	-	BTU/LB DEG	C(I,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(I,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(I,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(I,8)	R	MEAT
CO <sub>2</sub>	-	PSI	C(I,9)	R	MEAT
Pressure of mixture	-	PSI	C(I,10)	R	MEAT
<u>Interface Side</u>					
Fluid inlet temperature	$T_m$	DEG	F(M,X <sup>†</sup> )	R	MEAT
Heat transfer coefficient	$(UA)_m^*$	BTU/HR DEG	C(M,2)	R	MEAT
Coolant flow rate	$(WC_p)_m$	BTU/HR DEG	C(M,3)	R	MEAT

† X = L present value  
 X = K previous value

\* The Routine processes an overall heat transfer coefficient

$$(UA)_o = \frac{1}{\frac{1}{(UA)_i} + \frac{1}{(UA)_m}}$$

### 3.1.2.8 Routine HEATER

The performance of an in-line fluid heater, whose power is  $Q_{PWR}$  switched in response to the fluid temperature at a control node  $n$  and a control temperature of  $T_c$ . The routine is an adaptive transfer function for the fluid flow segment  $i$  to  $j$  and processes equations as for Routine PLATE except that  $Q_{I_i}$ , is either  $Q_{PWR}$  or zero depending on the on/off configuration, respectively.

The on/off configuration is control to a dead-band  $\Delta T$  about the control temperature  $T_c$ . The heater is switched on when  $T_n$  is less than  $T_c - \Delta T$  and does not go off until  $T_n$  is greater than  $T_c + \Delta T$ . The energy in watt hours consumed over the time span  $a$  to  $b$  is calculated as

$$E = 3.4130 \int_a^b Q_{I_i} dt.$$

and is drawn from a source  $ix$  as prescribed by the user.

The reference procedure is

```
CALL HEATER(I,J)
```

to process the transfer function through node  $I$  to  $J$ .

Interactive communication with the parameters and functions of the in-line heater is through a console display as illustrated on Figure 3.1.2.8.1. Integer values of unity for items 10 and/or 11 will put through the atmospheric properties and/or set up for thermal coupling data entry, respectively. (See Routine PLATE). Reference to this Routine will automatically bring up the consumables source initial loading display as illustrated on Figure 3.1.2.2.2. This display is brought up immediately prior to passive execution and includes all referenced consumables sources as well as the source referenced through a particular call to HEATER.



The cross reference to Routine HEATER parameters is shown on Table 3.1.2.8.1. Additional information related to source assignment for the energy is given in the section on Routine CONSUM.

```

*****
NODE NUMBER 4
HEATER
ITEM          VALUE          UNIT
1  THERMAL CAPACITY      200.000    BTU/DEG
2  OVERALL HEAT TRANSFER COEF. 1500.000   BTU/HR DEG
3  COOLANT FLOW RATE      501.000   BTU/HR DEG
4  INITIAL COMPONENT TEMPERATURE 521.000    DEG.
5  INITIAL INLET TEMPERATURE  500.830    DEG.
6  HEATER POWER           450.000   BTU/HR DEG.
7  CONTROL NODE NUMBER           2    INTEGER
8  CONTROL TEMPERATURE      532.000    DEG.
9  DEAD BAND                2.000     DEG.
10 INITIAL TEMP AT CONTROL NODE 510.165    DEG
11 ATMOSPHERIC COOLANT           1    INTEGER
    0 = NO
    1 = YES
12 THERMAL COUPLING           0    INTEGER
    0 = NO
    1 = YES
13 POWER SOURCE               5    INTEGER
    INLET NODE NO.           4
    OUTLET NODE NO.          1
*****

```

Figure 3.1.2.8.1. Typical In-line Heater Interactive Display

Table 3.1.2.8.1. Dynamic Communication Cross Reference for Routine HEATER Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Component temperature	$T_{c_i}$	DEG	P(I,X <sup>†</sup> )	R	MEAT
Fluid inlet temperature	$T_i$	DEG	F(I,X <sup>†</sup> )	R	MEAT
Thermal Capacitance	(MC) <sub>i</sub>	BTU/DEG	C(I,1)	R	MEAT
Heat transfer coefficient	(UA) <sub>i</sub>	BTU/HR DEG	C(I,2)	R	MEAT
Coolant flow rate	(WC <sub>p</sub> ) <sub>i</sub>	BTU/HR DEG	C(I,3)	R	MEAT
Power Applied	$Q_{I_i}$	BTU/HR	C(I,4)	R	MEAT
Control node number	$n_i$	INTEGER	IC(I,2)	I	MEAT
Control temperature	$T_c$	DEG	C(I,11)	R	MEAT
Deadband	$\Delta T$	DEG	C(I,13)	R	MEAT
Temperature at control node	$T_n$	DEG	F(N,X <sup>†</sup> )	R	MEAT
Heater power (ON)	$Q_{PWR}$	BTU/HR	C(I,12)	R	MEAT
Energy source	$ix$	INTEGER	IC(I,3)	I	MEAT
Energy	E	WATT HRS	CONTOT(IX)	R	CONS
Specific heat of mixture	-	BTU/LB DEG	C(I,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(I,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(I,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(I,8)	R	MEAT
CO <sub>2</sub>	-	PSI	C(I,9)	R	MEAT
Pressure of mixture	-	PSI	C(I,10)	R	MEAT
Coupling value 1st ref. node	$C_{iK(1)}$	*	C(I,15)	R	MEAT
2nd ref. node	$C_{iK(2)}$	*	C(I,16)	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
6th ref. node	$C_{iK(6)}$	*	C(I,20)	R	MEAT
Number of coupled nodes	M	INTEGER	IC(I,4)	I	MEAT
Coupling node number 1st ref.	K(1)	INTEGER	IC(I,5)	I	MEAT
2nd ref.	K(2)	INTEGER	IC(I,6)	I	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
6th ref.	K(6)	INTEGER	IC(I,10)	I	MEAT

<sup>†</sup>X = L present value  
X = K previous value

\* BTU/HR DEG for convection and conduction coupling (series 100).  
BTU/HR DEG<sup>4</sup> for radiation coupling (series 200).

### 3.1.2.9 Routine ATMO

Processing of a gas stream through atmospheric compartment subject to heat addition, moisture generation, carbon dioxide generation, oxygen consumption, and external leakage is simulated by Routine ATMO. The heat addition results from equipment heat generation,  $Q_{T_i}$ , and the sensible metabolic heat of up to six crew members. Crew sensible heat, water addition, carbon dioxide addition, and oxygen consumption are proportional to the user specified metabolic load of the occupants. Oxygen and Nitrogen external leakage make up is supplied from sources  $n_1$  and  $n_2$  specified by the user. The routine is an adaptive transfer function for the gas flow segment from the inlet  $i$  to the exit  $j$  and performs a mass balance on the atmospheric constituents. The atmospheric conditions at node  $j$  represent the compartment conditions.

The reference procedure is

```
CALL ATMO(I,J)
```

to process the transfer function from node  $I$  to  $J$ . The first component simulation call in an atmospheric loop should reference this routine.

Interactive communication with the parameters and functions of the atmospheric compartment simulation is through console displays as shown on Figures 3.1.2.9.1 and 3.1.2.9.2. Reference to this routine will automatically bring up the consumables source initial loading display as illustrated on Figure 3.1.2.2.2. This display is brought up immediately prior to passive execution and includes all referenced consumables sources as well as the source referenced through a particular call to ATMO.

The cross reference to Routine ATMO parameters is shown on Table 3.1.2.9.1. Additional information related to source assignment for the oxygen and nitrogen is given in the section on Routine CONSUM.

```

*****
                                NODE 1
                                ATMOSPHERIC COMPARTMENT
ITEM                               VALUE                               UNIT
1  COMPARTMENT VOLUME             1000.000                       CUBIC FT
2  LEAKAGE RATE                    2.000                           LB/HR
3  COOLANT FLOW RATE              501.000                       BTU/HR DEG
4  HEAT LOAD                       2001.000                       BTU/HR
5  SPECIFIC HEAT OF GAS           .210                             BTU/LB DEG
6  PARTIAL PRESSURE OF WATER      .130                             PSI
7  PARTIAL PRESSURE OF NITROGEN   11.600                          PSI
8  PARTIAL PRESSURE OF OXYGEN     3.100                            PSI
9  PARTIAL PRESSURE OF CARBON DIOXIDE .093                             PSI
10 TOTAL PRESSURE                 14.700                          PSI
11 NITROGEN TANK                   1                                INTEGER
12 OXYGEN TANK                     2                                INTEGER
13 INLET GAS TEMPERATURE         505.100                          DEG
*****

```

Figure 3.1.2.9.1. Typical Atmospheric Compartment Interactive Display

```

*****
CREW MEMBER
METABOLIC RATES
NODE NO. 1
ITEM          METABOLIC RATE          UNIT
1             .000          BTU/HR
2             .000          BTU/HR
3             .000          BTU/HR
4             600.000        BTU/HR
5             .000          BTU/HR
6             .000          BTU/HR
*****

```

Figure 3.1.2.9.2. Typical Crew Metabolic Data Interactive Display

Table 3.1.2.9.1 Dynamic Communication Cross Reference  
Parameters for ATMO Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Gas inlet temperature	$T_i$	DEG	$F(I, X^{\dagger})$	R	MEAT
Compartment volume	$V_i$	FT <sup>3</sup>	C(I,1)	R	MEAT
Leakage rate	$W_{ei}$	LB/HR	C(I,2)	R	MEAT
Gas flow rate	$(WC_p)_i$	LB/HR DEG	C(I,3)	R	MEAT
Equipment heat load	$QI_i$	BTU/HR	C(I,4)	R	MEAT
Specific heat of gas mixture	-	BTU/LB DEG	C(I,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(I,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(I,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(I,8)	R	MEAT
CO <sub>2</sub>	-	PSI	C(I,9)	R	MEAT
Pressure of gas mixture	-	PSI	C(,10)	R	MEAT
Metabolic rate 1st member	-	BTU/HR	C(I,15)	R	MEAT
2nd member	-	BTU/HR	C(I,16)	R	MEAT
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
6th member	-	BTU/HR	C(I,20)	R	MEAT
Source of N <sub>2</sub>	$n_1$	INTEGER	IC(I,5)	I	MEAT
Same for O <sub>2</sub>	$n_2$	INTEGER	IC(I,6)	I	MEAT
N <sub>2</sub> consumed	$M_{N2}$	LBS	CONTOT(N1)	R	MEAT
O <sub>2</sub> consumed	$M_{O2}$	LBS	CONTOT(N2)	R	MEAT

$\dagger X = L$  present value  
 $X = K$  previous value

### 3.1.2.10 Routine LIOH

The removal of Carbon Dioxide from a gas stream by a Lithium Hydroxide canister is simulated by Routine LIOH. The routine is an adaptive transfer function for the gas stream segment from node i to j which processes the following equations.

$$P_{CO_2j} = P_{CO_2i} (1 - \phi)$$

where  $\phi$ , an efficiency factor is given by

$$\phi = \frac{1 - e^{-\alpha}}{1 - e^{-\alpha} + e^{\alpha\beta - \alpha}}$$

here

$$\alpha = \frac{K M_i \rho_i}{W_i},$$

where K is an empirically determined reaction rate (Reference 1) given by

$$K = 1100. - 700. (1 - e^{10.\beta}) \quad 0. \leq \beta \leq .8$$

$$K = 400. \quad \beta > .8$$

and

$$\beta = \int_a^b \frac{C_{CO_2} W_i}{M_i} dt$$

where  $C_{CO_2}$  is the Carbon Dioxide concentration. Heat and moisture is added to the stream by the reaction.

The amount of Lithium Hydroxide consumed is equal to the number of canister changes time the mass of the canisters. A canister is automatically changed when



$$P_{CO_2J} > (P_{CO_2J})_{MAX}$$

The Lithium Hydroxide is withdrawn from a source n specified by the user. The reference procedure is

CALL LIOH(I,J)

to process the transfer function through node I to J.

Interactive communication with the parameters and functions of the canister is through a console display as shown on Figure 3.1.2.10.1. Reference to this routine will automatically bring up the consumables source initial loading display as illustrated on Figure 3.1.2.2.2. This display is brought up immediately prior to passive execution and includes all referenced consumables sources as well as the source referenced through a particular call to LIOH. The routine automatically processes the remaining atmospheric properties.

The cross reference to Routine LIOH parameters is shown on Table 3.1.2.10.1. Additional information related to source assignment for the Lithium Hydroxide is given in the section on Routine CONSUM.

C

```
*****
                                NODE NO.  2
                                .
                                LITHIUM HYDROXIDE
                                .
                                CANISTER

ITEM                               VALUE           UNITS
.
1  CANISTER MASS                    1.000         LBS
.
2  GAS FLOW RATE                     501.000       BTU/HR DEG
.
3  CANISTER PRESSURE CHANGE          .150         PSI
.
4  SPECIFIC HEAT OF GAS              .210         BTU/LB DEG
.
5  PARTIAL PRESSURE OF WATER         .130         PSI
.
6  PARTIAL PRESSURE OF NITROGEN     11.600        PSI
.
7                                OXYGEN          3.100        PSI
.
8                                CARBON          .093         PSI
.
                                DIOXIDE
.
9  TOTAL PRESSURE                    14.700        PSI
.
10 INITIAL ABSORBED QUANTITY         .000         FRACTION
.
11 CANISTER SOURCE                    3           INTEGER
.
12 INLET GAS TEMPERATURE            510.165       DEG
*****
```

Figure 3.1.2.10.1. Typical Lithium Hydroxide Canister Interactive Display

Table 3.1.2.10.1. Dynamic Cross Reference to Routine LIOH Parameters at Node I

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Gas inlet temperature	$T_1$	DEG	F(I,X <sup>†</sup> )	R	MEAT
Canister mass	$M_1$	DEG	C(I,1)	R	MEAT
Gas flow rate	$(WC_p)_1$	BTU/HR DEG	C(I,3)	R	MEAT
Canister change pressure	$(P_{CO_2})_{MAX}$	PSI	C(I,11)	R	MEAT
Heat added	-	BTU/HR	C(I,4)	R	MEAT
Specific heat of mixture	-	BTU/LB DEG	C(I,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(I,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(I,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(I,8)	R	MEAT
CO <sub>2</sub>	$P_{CO_2}$	PSI	C(I,9)	R	MEAT
Pressure of gas mixture	-	PSI	C(I,10)	R	MEAT
Lithium Hydroxide source	n	INTEGER	IC(I,5)	I	MEAT
Consumed Lithium Hydroxide		LBS	CONTOT(N)	R	CONS

†X = L present value  
 X = K previous value

### 3.1.2.11 Routine CONXG

The performance of a counterflow condensing heat exchanger is simulated by Routines CONXG and CONXI. Routine CONXG, discussed in this section, processes the condensing side of the heat exchanger. Routine CONXI, discussed in the next section, processes the interface (or sink) side of the heat exchanger. The routine discussed in this section is a transfer function for the gas stream segment  $i$  to  $j$  interfacing with a counterflow segment  $m$  to  $n$ . Processing is as follows and is illustrated on Figure 3.1.2.11.1.

The gas and water vapor mixture enter at a temperature  $t_i$  and partial pressure  $P_{H_2O_i}$ . The mixture experiences only sensible cooling until the dew point is reached. The remaining portion of the heat exchanger dehumidifies and cools the mixture to  $t_j$  and  $P_{H_2O_j}$  at the exit. The sensible cooling portion of the heat exchanger is referred to as the "dry" section with a heat transfer coefficient of  $UA_{D_i}$  if the entire heat exchanger were dry. The dehumidifying section is referred to as the "wet" section with a heat transfer coefficient of  $UA_{W_i}$  if the entire heat exchanger were wet. Internal calculation proportion the dry and wet sections and the applicable value of the heat transfer coefficients. The condensation is stored in a source (tank)  $n_i$  as prescribed by the user.

The reference procedure is

```
CALL CONXG(I,J M,N)
```

to process the condensing side from node  $I$  through node  $J$  with nodes  $M$  and  $N$  as the respective inlet and outlet of the interfacing sink fluid. A call to CONXI is mandatory in the interfacing coolant loop part of the model.

Interactive communication with the parameters and functions of the condensing side of the heat exchanger is through a console display as shown on Figure

3.1.2.11.2. Reference to this routine will automatically bring up the consumables source initial loading display as illustrated on Figure 3.1.2.2.2. This display is brought up immediately prior to passive execution and includes all reference consumables sources as well as the source referenced through a particular call to CONXG. The routine automatically processes the remaining atmospheric properties.

The cross reference to Routine CONXG parameters is shown on Table 3.1.2.11.1. Additional information related to storage assignment for the condensation is given in the section on Routine CONSUM.

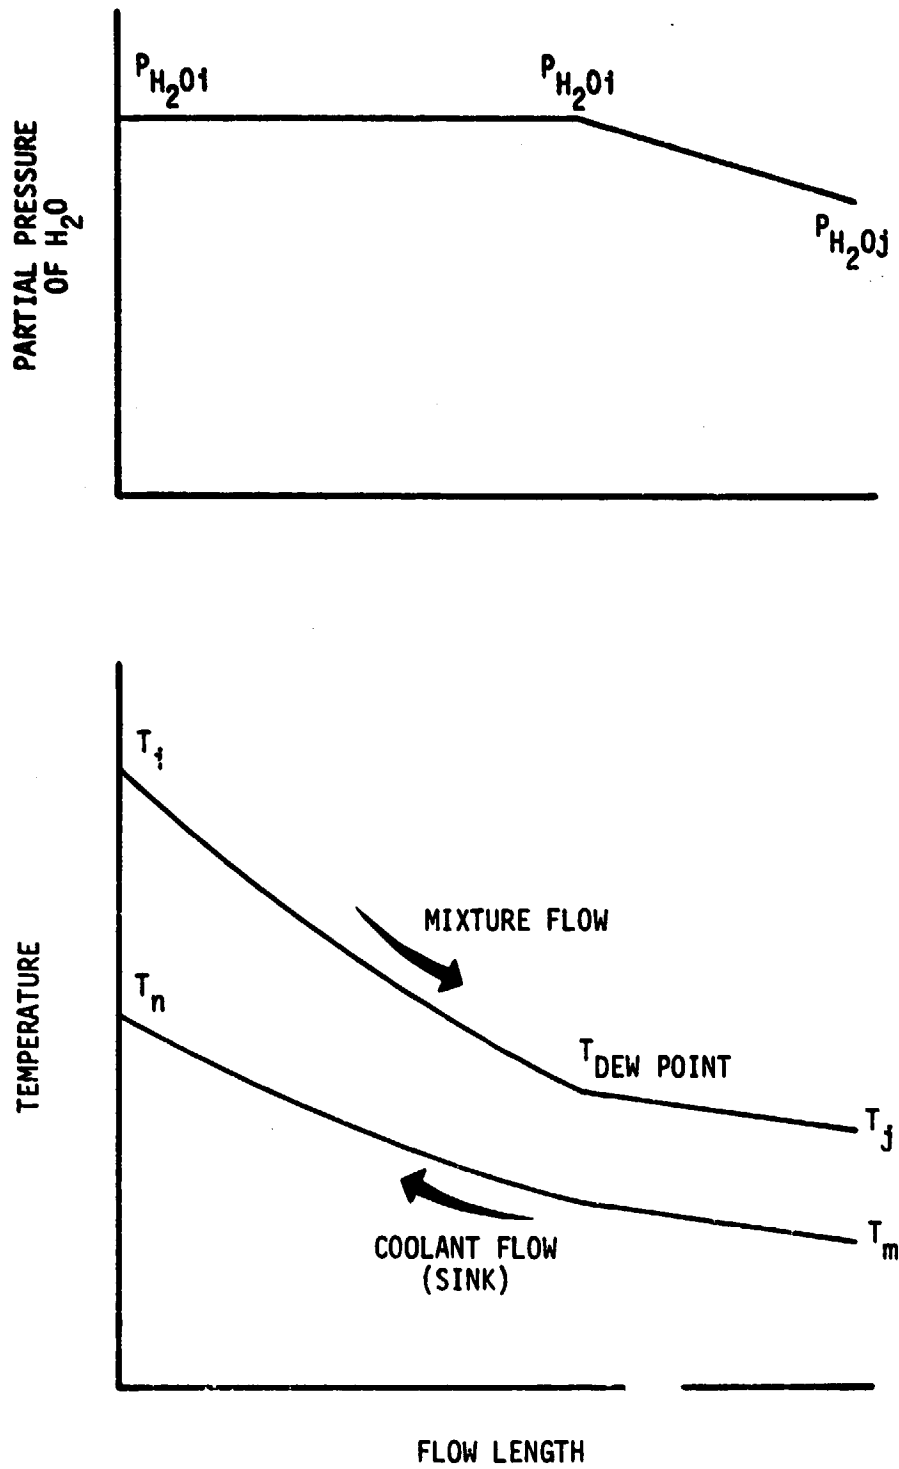


Figure 3.1.2.11.1. Counterflow Condensing Heat Exchanger Performance

```

*****
                                NODE NO. 3
                                CONDENSING HEAT EXCHANGER
                                ATMOSPHERIC SIDE
ITEM                                VALUE                                UNIT
                                *** CALLING SIDE ***
1  CONDENSING HEAT TRANSFER COEF.  2000.000                        BTU/HR DEG
2  DRY HEAT TRANSFER COEF.        1000.000                        BTU/HR DEG
3  COOLANT FLOW RATE              501.000                        BTU/HR DEG
4  FLUID INLET TEMP              512.278                        DEG
5  CONDENSATE TANK NO.           4                                INTEGER
                                *** INTERFACE SIDE ***
6  COOLANT FLOW RATE              1490.484                        BTU/HR DEG
7  FLUID INLET TEMP              499.000                        DEG
                                CALLING SIDE NODES   IN   3   OUT   4
                                INTERFACE SIDE NODES   IN   7   OUT   8
*****

```

Figure 3.1.2.11.2. Typical Condensing Heat Exchanger  
(Condensing Side) Interactive Display

Table 3.1.2.11.1. Dynamic Cross Reference to Routine  
CONXG at Node I Interfaced to Node M

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Gas inlet temperature	$T_i$	DEG	$F(I, X^\dagger)$	R	MEAT
Heat transfer coefficient, wet	$UA_{W_i}$	BTU/HR DEG	$C(I, 1)$	R	MEAT
Heat transfer coefficient, dry	$UA_{D_i}$	BTU/HR DEG	$C(I, 2)$	R	MEAT
Gas flow rate	$(WC_p)_i$	BTU/HR DEG	$C(I, 3)$	R	MEAT
Heat rejected	-	BTU/HR	$C(M, 4)$	R	MEAT
Specific heat of mixture	-	BRU/LB DEG	$C(I, 5)$	R	MEAT
Partial pressure of $H_2O$	$P_{H_2O_i}$	PSI	$C(I, 6)$	R	MEAT
$N_2$	-	PSI	$C(I, 7)$	R	MEAT
$O_2$	-	PSI	$C(I, 8)$	R	MEAT
$CO_2$	-	PSI	$C(I, 9)$	R	MEAT
Pressure of mixture	-	PSI	$C(I, 10)$	R	MEAT
Condensate tank number	$n_1$	INTEGER	$IC(I, 3)$	I	MEAT
Condensate stored	-	LBS	$CONTOT(N1)$	R	CONS

$^\dagger X = L$  present value  
 $X = K$  previous value



### 3.1.2.12 Routine CONXI

Routine CONXI is a mandatory companion routine to CONXG of the preceding section for simulation of a counterflow condensing heat exchanger. The routine discussed in this section is a transfer function for the interfacing side of a condensing heat exchanger fluid segment m to n with counterflow on the condensing segment from i to J. The routine processes the following equation

$$T_n = T_m + Q_m / (WC_p)_m$$

where  $Q_m$  has been assigned by the processing of Routine CONXG.

Interactive communication with the parameters and functions of the interface side of a condensing heat exchanger is through a console display as shown on Figure 3.1.2.12.1. Entry of an integer value of unity for item 3 will put through the atmospheric properties of node m to node n.

The cross reference to the parameters for interfacing side of a condensing heat exchanger are shown on Table 3.1.2.12.1.

```

*****
                                NODE NO. 7
                                CONDENSING HEAT EXCHANGER
                                INTERFACE SIDE
ITEM                                VALUE                                UNIT
                                *** CALLING SIDE ***
1  COOLANT FLOW RATE                1440.484                BTU/HR DEG
2  FLUID INLET TEMP.                499.715                 DEG
3  ATMOSPHERIC COOLANT                0                       INTEGER
    NO = 0
    YES = 1
                                *** ATMOSPHERIC SIDE ***
4  COOLANT FLOW RATE                1.01.000                BTU/HR DEG
5  FLUID INLET TEMP.                1.12.278                DEG
    CALLING SIDE NODES      IN 7      OUT 8
    ATMOSPHERIC SIDE NODES  IN 3      OUT 4
*****

```

Figure 3.1.2.12.1. Typical Condensing Heat Exchanger (Interface Side) Interactive Display  
3.1.2.12.2

Table 3.1.2.12.1. Dynamic Cross Reference to Routine CONXI at Node M

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Fluid inlet temperature	$T_m$	DEG	$F(I, X^{\dagger})$	R	MEAT
Coolant flow rate	$(WC_p)_m$	BTU/HR DEG	C(M,3)	R	MEAT
Heat absorbed	$Q_m$	BTU/HR	C(M,4)*	R	MEAT
Specific heat of mixture	-	BTU/LB DEG	C(M,5)	R	MEAT
Partial pressure of H <sub>2</sub> O	-	PSI	C(M,6)	R	MEAT
N <sub>2</sub>	-	PSI	C(M,7)	R	MEAT
O <sub>2</sub>	-	PSI	C(M,8)	R	MEAT
CO <sub>2</sub>	-	PSI	C(M,9)	R	MEAT
Pressure of mixture	-	PSI	C(M,10)	R	MEAT

$\dagger X = L$  present value  
 $X = K$  previous value

\* Value assigned by companion call to CONXG.

### 3.1.3 Input Utility Routine

Two routines are available for tabular data look-up and interpolation. The routines TABLE and STEP as summarized on Table 3.1.3.1 differ only in the manner of interpolation.

The Input Utility Routine descriptions which follow include reference procedure and interactive communication in the table data set up.

**Table 3.1.3.1. Summary of Input Utility Routines**

<b>TABLE</b>	<b>Linear interpolation of dependent variable in tabular data.</b>
<b>STEP</b>	<b>Interpolates tabular data as step function.</b>

### 3.1.3.1. Routine TABLE

Linear interpolation of input tabular data is performed by Routine TABLE.

The reference procedure is

```
CALL TABLE(NTAB,XX1,YY1)
```

where NTAB is the table number. The Routine returns the linear interpolated value of YY1 for the prescribed independent variable XX1 from the tabular arrays XX and YY.

Interactive communication is through a console display as shown on Figure 3.1.3.1.1.

```

*****
      TABLE 2
      XX      YY
1      .000    200.000
2      2.500    400.000
*****

```

Figure 3.1.3.1.1. Typical Interactive Tabular Data Display

### 3.1.3.2 Routine STEP

Interpolation of input step function tabular data is performed by Routine STEP.

The reference procedure is

```
CALL STEP(NTAB,XX1,YY1).
```

The functions and interactive communication with the routine is the same as for Routine TABLE except for the method of interpolation.



## **3.2 UNREFERENCED ROUTINES**

This section presents a description of the functions and parameters of those library routines which are automatically brought into execution as a result of use of and/or specific option selection with respect to the referenced routines of Section 3.1. Only those library routines with which the user has interactive communication and/or may desire dynamic communication are included. These types of routines include Boundary Condition Routines and Output Routines.

### **3.2.1 Boundary Condition Routines**

Five routines are directly associated with development of Boundary Conditions. The function of these routines are summarized on Table 3.2.1.1.

**Table 3.2.1.1. Summary of Boundary Condition Control Routines**

<b>COUPL</b>	<b>Provides for initial cross coupling of thermally connected nodes.</b>
<b>REPS</b>	<b>Provides data array for electrical power assignment.</b>
<b>CONSUM</b>	<b>Provides for integration of expended or generated media for various source assignments.</b>
<b>TRAJ</b>	<b>Performs incident (orbital) heating calculations.</b>
<b>SHAD</b>	<b>Assembles absorbed (orbital) heat for a panel.</b>

### 3.2.1.1 Routine COUPL

All thermal coupling data is performed internal to the argumented component performance routines. Initial coupling data is loaded through the interactive displays associated with these routines. Routine COUPL performs the cross coupling during this initial loading. If the user specifies node I is coupled to node J, Routine COUPL automatically couples node J to I with the same coupling value. This function is performed only during initial loading. Accordingly, any dynamic communication with coupling values and/or type of coupling requires that the user search out the location and change the coupling data for both node I and J.

### 3.2.1.2 Routine REPS

Electric power data assignment is controlled through the initial interactive communication with the argument component performance routine reference. Routine REPS provides the interface of the data assignment to the electrical power data to be read from tape or assigned through an interface to another program. The communication is through the dimensioned variables NEPS(100) and DEPS(100) in the COMMON/EPS/. The resident value  $P_j$  of electrical power (BTU/HR) in DEPS(I) is assigned to node J by setting

$$\text{NEPS}(I) = J.$$

The argued component performance routine at node J searches the NEPS array for the integer J and sums all corresponding values of DEPS into C(J,4). Dynamic reassignment is accomplished by control of the NEPS array.

The current version of Routine REPS assigns specific Shuttle Orbiter electrical power heating value to the NEPS array words shown on the menu illustrated on Figure 3.2.1.2.1. The routine reads a dictionary of active components from Unit 10 and the power timeline from Unit 11.

MPL3

>  
> IF YOU WANT TO DISPLAY MENU ENTER 1, OTHERWISE BLANK  
>1

STS  
HEAT LOAD MENU

WORD NO.	DESCRIPTION
1	AVIONICS AIR BAY 1
2	AVIONICS AIR BAY 2
3	AVIONICS AIR BAY 3
4	AVIONICS FAN 1A/1B BAY =1
5	AVIONICS FAN 2A/2B BAY =2
6	AVIONICS FAN 3A/3B BAY =3
7	CABIN AIR COOLED
8	CABIN FAN
9	COLDPLATE FREON DFI MID-BDY CONTAINER =1
10	COLDPLATE FREON DFI MID-BDY CONTAINER =2
11	COLDPLATE FREON DFI MID-BDY CONTAINER =3
12	TBD
13	COLDPLATE WATER DFI FWD CONTAINER
14	COLDPLATE FREON BAY = 4
15	COLDPLATE FREON BAY = 5
16	COLDPLATE FREON BAY = 6
17	COLDPLATE FREON OUTSIDE FREON BAYS
18	TBD
19	COLDPLATE FREON MIDSECTION
20	FREON PUMP
21	TBD
22	CABIN AIR COOLED(DIRECT TO HEAT EXCHANGER)
23	IMU
24	IMU FAN
25	NOT ACTIVELY COOLED
26	PAYLOAD HEAT EXCHANGER
27	COLDPLATE WATER BAY =1
28	COLDPLATE WATER BAY =2
29	COLDPLATE WATER BAY =3A
30	COLDPLATE WATER BAY =3B
31	CABIN COLDPLATE WATER
32	WATER PUMP
33	INVERTER =1
34	INVERTER =2
35	INVERTER =3
36	INVERTER =4
37	INVERTER =5
38	FUEL CELL =1
39	FUEL CELL =2
40	FUEL CELL =3
41	FOOD PREP

PAUSE FOR HARDCOPY. ENTER ANY CHARACTER TO CONTINUE  
>\_

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.2.1.2.1 Electrical Power Assignment Menu

### 3.2.1.3 Routine CONSUM

The integration of expended or generated media for the various sources assignments is performed in Routine CONSUM. The control is through the COMMON/CONS/ which contains the dimensioned variables CONRAT(20), CONTOT(20), and IAMCON(20),

where

IAMCON(I) = Type of media for source I indexed as shown on Table 3.2.1.3.1,

CONRAT(I) = Media expended (+) or generated (-) for source I during most recent time step,

and

CONTOT(I) = Total (integrated) expended (+) or generated for source I at current time.

The source assignment I and the type of media is assigned through the cross reference data for the argueded component performance routine(s) during active execution. The arrays CONRAT and CONTOT reflect the algebraic sum of all transaction referencing that source.

In the latter stages of active execution the IAMCON array is searched for nonzero values. The existance of one or more such values brings up the initial loading interactive display shown on Figure 3.2.1.3.1. The COMMON/CMORE/ which contains the variable NCON, and the dimensioned variables ICON(20) and CONSTA(20) is loaded at this time,

where

NCON = Number of nonzero elements in IAMCON,

ICON = Contains the NCON referenced source numbers in the first NCON locations,

and

**CONSTA(I) = Initial quantity for source I.**

It should be noted that the ICON array is used for initial loading and output (see Routine CONPR) control rather than a repeated search of IAMCON. The ICON array includes only those sources referenced immediately prior to initial loading. Accordingly, any dynamic communication must refer only to sources that have been referenced at this time. Additional source references may be enforced by setting

**IAMCON(I) = J,**

where I is the source number and J is the media index. Such an entry is best affected immediately after the call to START and outside the timing loop.

Quantity remaining for each of the sources is calculated in the output Routine CONPR.



**Table 3.2.1.3.1. Consumables Media Index for Source I**

IAMCON(I)		SYMBOL	UNITS
1	Potable water	H <sub>2</sub> O	LBS
2	Water	H <sub>2</sub> O	LBS
3	Carbon Dioxide	CO <sub>2</sub>	LBS
4	Oxygen	O <sub>2</sub>	LBS
5	Hydrogen	H <sub>2</sub>	LBS
6	Nitrogen	N <sub>2</sub>	LBS
7	Methane	CH <sub>4</sub>	LBS
8	Hydrogen Peroxide	H <sub>2</sub> O <sub>2</sub>	LBS
9	Ammonia	NH <sub>3</sub>	LBS
10	Other	-	LBS
11	Electrical Power	-	WATT HRS
12	Lithium Hydroxide	LIOH	LBS

```

*****
CONSUMABLES
SOURCES
ITEM SOURCE TYPE OF, UNIT INITIAL
NO. CONSUMABLE LBS LOADING
1 1 NITROGEN LBS .000
2 2 OXYGEN LBS .000
3 3 LITHIUM HYDROXIDE LBS .000
4 4 WATER LBS .000
5 5 ELECTRIC POWER WATT HRS .000
6 6 POTABLE WATER LBS .000
*****

```

Figure 3.2.1.3.1. Typical Interactive Source Initial Loading Quantity Display

#### **3.2.1.4 Routine TRAJ**

Reference to component simulation routines which imply incident (orbital) heating as a boundary condition automatically brings Routine TRAJ into execution. There are three components of incident heat resulting from orbital operation.

- (1) Solar radiation directly from the Sun,
- (2) Thermal radiation from the planet being orbited, and
- (3) Albedo (reflected solar radiation) from the planet.

Routine TRAJ controls the calculations for these three heating components.

The items required to evaluate the incident heating are:

- (1) Location of the panel with respect to the vehicle coordinate system,
- (2) Attitude of the spacecraft with respect to a geocentric inertial or local vertical,
- (3) Position of the Sun with respect to the geocentric system, and
- (4) Position of the spacecraft with respect to the geocentric system.

The first item is characteristic of the subject panel. These parameters are entered through the subject component simulation routine. Two options are available to establish the latter items. The data may be read in from a previously generated trajectory tape or calculated with respect to a prescribed set of orbital parameters. Both options use the following coordinate systems.

- (1) The Geocentric Inertial System (GCI). The coordinate system origin is at the center of the Earth. The X-axis lies in the equatorial plane and points toward the vernal equinox. The Z-axis passes through the North Pole. The Y-axis lies in the equatorial plane and forms a right-handed system.
- (2) The Vehicle System (VS). This is the principal system in which the flat plate vehicle geometry is defined. It differs from the geocentric inertial (GCI) system by the amount of pitch, yaw, and roll.

The interactive communication is initially through a console display requesting the selection of these options as shown on Figure 3.2.1.4.1. Item 2 on this display is a control parameter related to the dimensional units on the tape and is active only for the tape read option.

The format of the trajectory tape is shown on Table 3.2.1.4.1. With this option in effect dynamic communication should be limited to the characteristic of the subject panel.

Interactive communication is further extended through the console display shown on Figure 3.2.1.4.2 for the calculated trajectory option. The orbited parameters are initially loaded with a default inertial hold circular equatorial orbit with the Sun located out the X-axis.

The attitude hold key establishes whether the spacecraft defined pitch, yaw, and roll are referenced to the inertial (GCI) or the orbital plane (Local Vertical System). In the Local Vertical System the X-axis is along the planet to spacecraft vector, the Z-axis is perpendicular to the orbital plane, and the Y-axis completes a right-handed system.

The Euler angles which are defined as:

- $\psi$       Rotation about the Z-axis
- $\theta$       Rotation about the Y-axis
- $\phi$       Rotation about the X-axis

and are illustrated on Figure 3.2.1.4.3.

The orbital parameters, which are used to calculate the time dependent coordinate location of the spacecraft are illustrated on Table 3.2.4.1.2. Dynamic cross reference to these parameters is shown on Table 3.2.4.1.3.

Absorbed heat is processed and assembled for the panels through a call to Routine SHAD directly from the component performance routine. (See Routine SHAD.)

Having established the basic parameters the vector manipulation is performed to obtain the required angles and the components of incident heating are evaluated as follows:

### Solar Radiation to a Flat Plate

The direct solar radiation to a flat plate is given by

$$q_s = S \cos \theta_3$$

where

$$q_s = \text{Incident energy from the Sun (BTU/HR FT}^2\text{)}$$

$$S = \text{Solar constant (BTU/HR FT}^2\text{)}$$

$$\theta_3 = \text{The angle between the vehicle-Sun vector and a normal to a flat plate element (DEG)}$$

### Planetary Thermal Radiation to a Flat Plate

The planetary thermal radiation from an isothermal body to a flat plate is given by:

$$q_t = F_t I_t$$

where

$$q_t = \text{Incident planetary thermal radiation (BTU/HR FT}^2\text{)}$$

$$F_t = \text{View factor for a flat plate (nd)}$$

$$I_t = \text{Total energy emitted from planet unit area (BTU/HR FT}^2\text{)}$$

and

$$I_t = (1 - a) S \frac{A_p}{A_t} = (1 - a) S/4$$

where  $S$  is the solar constant,  $a$  is the planetary albedo constant,  $A_p$  is the projected area of the planet, and  $A_t$  is the total surface area of the planet. For a sphere,  $A_p/A_t = 1/4$ .

The view factor  $F_t$  for a flat plate is defined by the following:

$$F_t = \frac{1}{2\pi} \left[ \pi - 2 \sin^{-1} \frac{\sqrt{H^2 - R^2}}{H \sin \theta_2} \right] - \frac{1}{2\pi} \sin \left[ 2 \sin^{-1} \frac{\sqrt{H^2 - R^2}}{H \sin \theta_2} \right] + \frac{1}{2} \frac{R^2}{H^2} \left\{ -1 + \frac{2}{\pi} \sin^{-1} \frac{\sqrt{H^2 - R^2}}{R \tan \theta_2} + \frac{1}{\pi} \sin \left[ 2 \sin^{-1} \frac{\sqrt{H^2 - R^2}}{R \tan \theta_2} \right] \right\} \cos \theta_2$$

or if

$$\theta_2 < \tan^{-1} \frac{\sqrt{H^2 - R^2}}{R}$$

the expression for  $F_t$  is

$$F_t = \frac{R^2}{H^2} \cos \theta_2$$

where

$$H = R + h$$

$R$  = The radius of the planet (n mi)

$h$  = Vehicle altitude (n mi)

$\theta_2$  = The angle between a normal to the flat plate and the radius vector from the planet to the vehicle

Figure 3.2.1.4.4 shows the geometric relationships for planetary thermal radiation from an isothermal body to a flat plate.

### Planetary Albedo to a Flat Plate

The planetary albedo radiation to a flat plate is given by

$$q_a = aF_a$$

where

$$q_a = \text{Incident planetary albedo (BTU/HR FT}^2\text{)}$$

$$F_a = \text{View factor for a flat plate (nd)}$$

$$S = \text{Solar constant (BTU/HR FT}^2\text{)}$$

$$a = \text{Albedo constant}$$

The view factor  $F_a$  for a flat plate was obtained from Reference 2. This expression is a modified solution for planetary thermal radiation multiplied with a correction term, which, since planetary albedo obeys Lambert's Law, accounts for the cosine distribution not only with respect to the angular radiation from a given area but over the sunlit surface of the planet as well.

The view factor for planetary albedo is expressed as

$$F_a = F_t(\theta_2, h) \left( 0.86 + 0.14e^{-0.757 h/R} \right) \cos \left\{ \theta_1 - \left[ 0.1369 (\pi - \theta_2)^3 \cos(\theta_c) \left( 1 - e^{-5.66 h/R (\pi - \theta_2)^2} \right) \right] \right\}$$

where

$$h = \text{Vehicle altitude (n mi)}$$

$$\theta_2 = \text{Angle between a normal to the flat plate and the radius vector}$$

$$\theta_1 = \text{The angle between the planet-Sun vector and the radius vector from the planet to the vehicle}$$

$\theta_c$  = The angle of rotation of a normal to a flat plate element, measured from a plane containing the planet-Sun vector and the radius vector from the planet to the vehicle

Figure 3.2.1.4.5 shows the geometric relationships between the parameters.

When the spacecraft is shadowed by the planet it is orbiting, the solar heating rate to each flat element is set to zero. The position of the spacecraft relative to the Sun and the planet is checked in this subroutine to see if occultation has occurred.



```

*****
ORBITAL HEATING
CONTROL PARAMETERS

ITEM                VALUE                UNIT
1  CONTROL INDICATOR      2                INTEGER
   1 = READ TAPE
   2 = CALCULATE TRAJECTORY
2  UNIT CONVERSION FOR TAPE  1                INTEGER
   1 = EARTH RADI(ER.)
   2 = KILOMETERS (KM.)
*****

```

Figure 3.2.1.4.1. Typical Interactive Orbital Heating Control Display

Table 3.2.1.4.1. Edited Trajectory Tape Format

FORTTRAN Tape Number 13

Identification: Edited Trajectory Information Tape  
 Type: Binary  
 Density: 800  
 1108 File Letter: K

Record Description

<u>Word Number</u>	<u>Type</u>	<u>Description</u>	<u>Units</u>
1	R	Ground Elapsed Time (GET) in decimal hours	HR
2	I	Year	
3	I	Month	
4	I	Day	
5	I	Hour	Calendar date
6	I	Minute	
7	I	Second	
8	I	Revolution Counter	
9	I	Physical Eclipse indicator (0 Sun, 1 shadow)	
10	I	Noon indicator (1 noon, 0 other)	
11	I	Not Used	
12	I	Not Used	
13	R	Vehicle vector X	ER or KM
14	R	Vehicle vector Y	ER or KM
15	R	Vehicle vector Z	ER or KM
16	R	Vehicle vector X (x dot)	ER/HR or KM/HR
17	R	Vehicle vector Y (y dot)	ER/HR or KM/HR
18	R	Vehicle vector Z (z dot)	ER/HR or KM/HR
19	R	Vehicle vector R (radius vector to spacecraft)	ER or KM
20	R	Direction Cosines XTX	
21	R	Direction Cosines XTY	
22	R	Direction Cosines XTZ	
23	R	Direction Cosines YTX	
24	R	Direction Cosines YTY	
25	R	Direction Cosines YTZ	
26	R	Direction Cosines ZTX	
27	R	Direction Cosines ZTY	
28	R	Direction Cosines ZTZ	
29	R	Sun vectors X SUN	ER or KM
30	R	Sun vectors Y SUN	ER or KM
31	R	Sun vectors Z SUN	ER or KM
32	R	Solar Incidence Angle Beta	DEG
33	R	Orbital period	HR

\*\*\*\*\*



ORBITAL PARAMETERS

ITEM		VALUE	UNIT
1	COMP FREQUENCY	1	INTEGER
2	ATTITUDE HOLD KEY 1 = INERTIAL 2 = LOCAL VERTICAL	1	INTEGER
3	SUN COORDINATE X	2.3466000+04	ER.
4	Y	0.0000000	ER.
5	Z	0.0000000	ER.
6	EULER ANGLE ABOUT Z	.000	RAD.
7	Y	.000	RAD.
8	X	.000	RAD.
9	ORBIT SEMIMAJOR AXIS	1.029	ER.
10	ORBIT ECCENTRICITY	.000	N/D
11	ORBIT INCLINATION	.000	RAD.
12	RIGHT ASCENSION	.000	RAD.
13	ARGUMENT OF PERIGEE	.000	RAD.
14	TIME OF PERIGEE PASSAGE	.000	ER.



\*\*\*\*\*

Figure 3.2.1.4.2. Typical Interactive Orbital Parameter Display



1. SC axis initially aligned with GCI axis

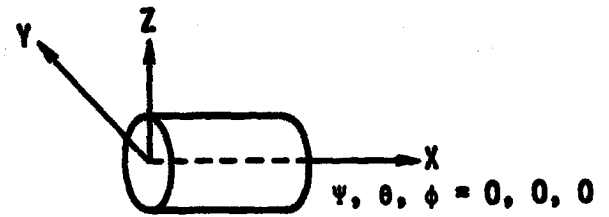

2. Rotate 90 degrees about Z-axis (Positive rotation is X-axis towards Y-axis)

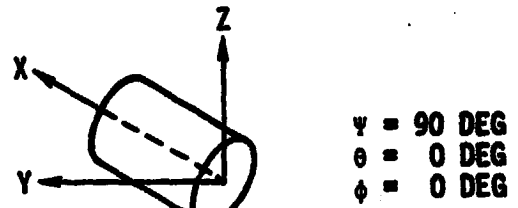

3. Rotate 90 degrees about Y-axis (Positive rotation is Z-axis towards X-axis)

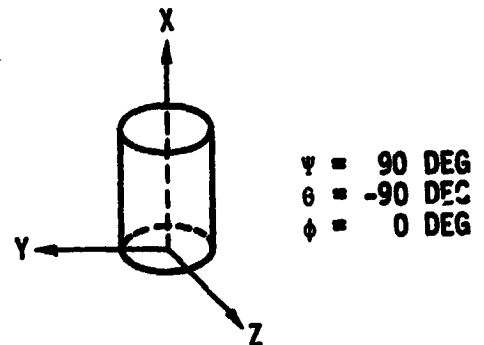

4. Rotate 90 degrees about X-axis (Positive rotation is Y-axis towards Z-axis)



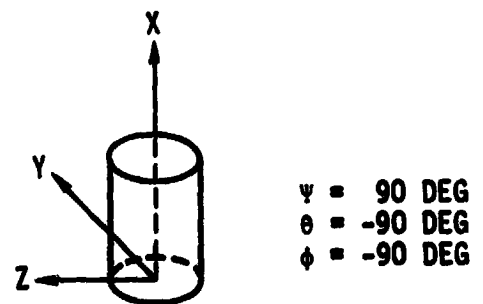


Figure 3.2.1.4.3. Illustration of Euler Angle Sequence Showing Spacecraft Position

3.2.1.4.10

Table 3.2.1.4.2. Classical Elements of an Orbit

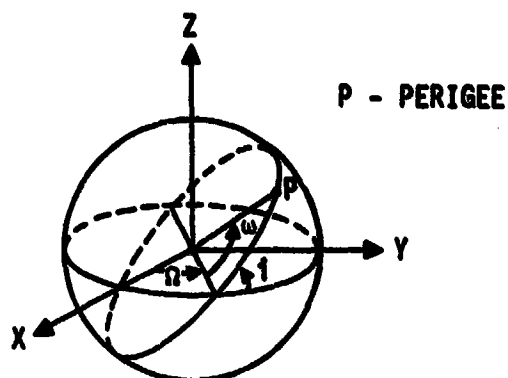

The elements which define an orbit are:

- a - Semimajor axis of the orbit
- e - Eccentricity of the orbit
- i - Inclination of the orbit, angle between the orbital plane and the equator  $0^\circ \leq i \leq 180^\circ$
- $\Omega$  - Right ascension of the ascending node  $0^\circ \leq \Omega \leq 360^\circ$
- $\omega$  - Argument of perigee
- $\tau$  - Time of perigee passage

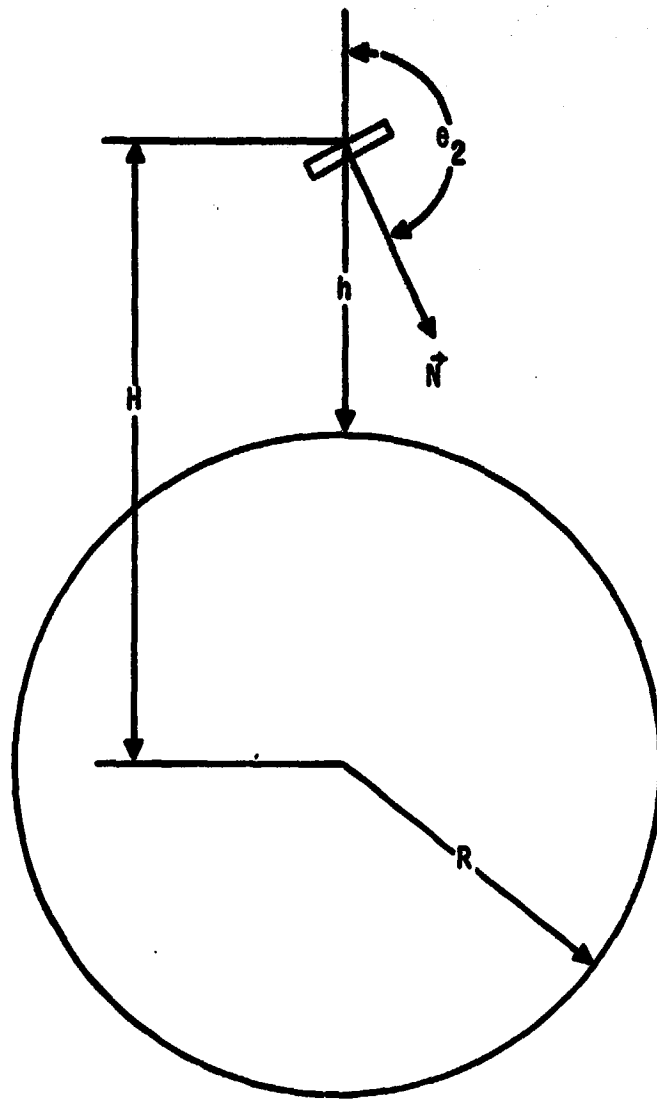


Figure 3.2.1.4.4. Planetary Thermal Radiation to a Flat Plate

3.2.1.4.12

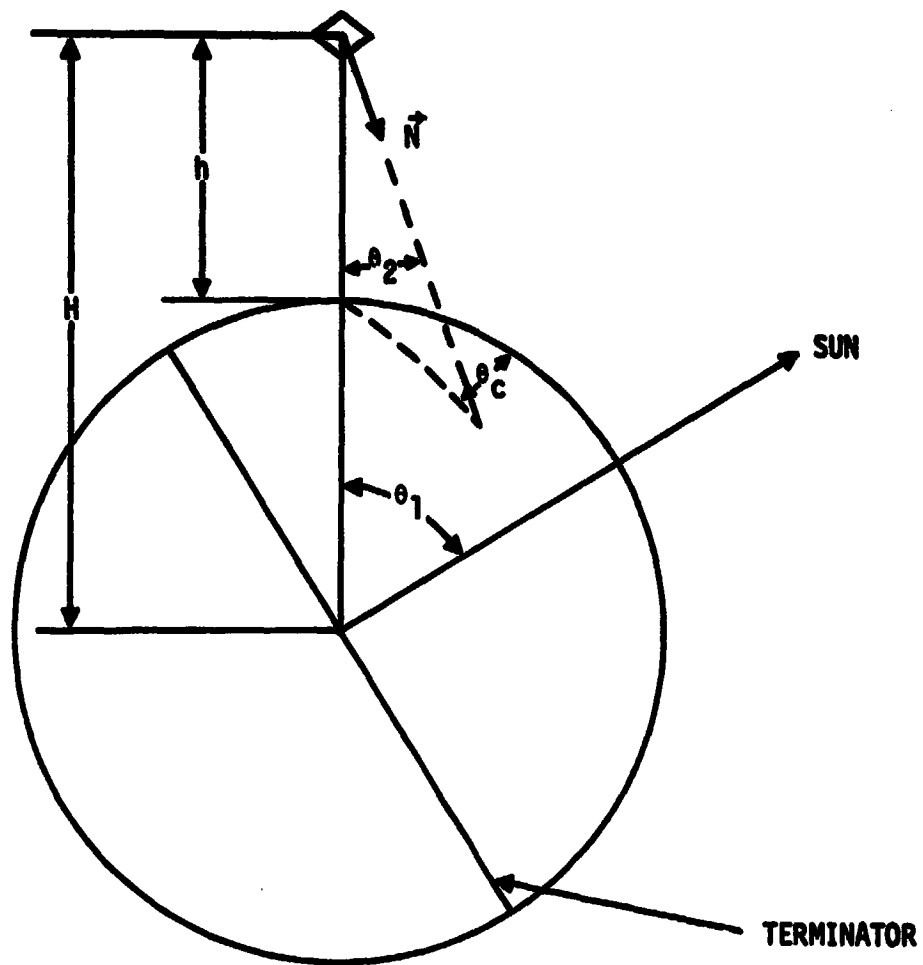


Figure 3.2.1.4.5. Planetary Albedo to a Flat Plate

3.2.1.4.13

Table 3.2.4.1.3. Dynamic Cross Reference  
to Orbital Parameters

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Compute frequency	-	INTEGER	IFREQ	I	HCONT
Attitude hold key	-	INTEGER	IHOLD	I	HEAT
Sun coordinate X	$X_S$	ER	SUN(1)	R	HEAT
Y	$Y_S$	ER	SUN(2)	R	HEAT
Z	$Z_S$	ER	SUN(3)	R	HEAT
Euler angle about Z	$\psi$	RAD	EULAN(1)	R	HEAT
Y	$\theta$	RAD	EULAN(2)	R	HEAT
X	$\phi$	RAD	EULAN(3)	R	HEAT
Orbit semimajor axis	a	ER	A	R	HEAT
Orbit eccentricity	e	FRACTION	E	R	HEAT
Right ascension	r	RAD	BO	R	HEAT
Argument of perigee	w	RAD	S $\phi$	R	HEAT
Time of perigee passage	$\tau$	HRS	TAU	R	HEAT
Inclination	i	RAD	E	R	HEAT



### 3.2.1.5 Routine SHAD

The absorbed heat for a panel  $i$  is assembled in Routine SHAD in response to a direct call from the component routine processing node  $i$ .

If the component routine processing node  $i$  does not reference shadowing the assembly is simply

$$q_{ABS} = \alpha(q_s + q_a) + \epsilon q_t$$

from the three incident heat components calculated by control through Routine TRAJ and the panel solar absorptivity and thermal emissivity prescribed for node  $i$ .

If the component routine processing node  $i$  references a shadowing node  $j$  and a stand-off vector storage location  $n$  the shadowing effect is taken into account before the absorbed heat is calculated.

The shadowing calculations set up two concentric solid angles defined by the angles of lune  $\alpha_1$  and  $\alpha_2$ , which define the total and partial shadowing bounds for solar radiation as shown for a simple configuration on Figure 3.2.1.5.1. For simplicity the configuration is representative of a system in which the normal to  $i$  and  $j$  and the stand-off vector coincide. The panels may have any relative position on the spacecraft defined by their dihedral angle ( $\beta$ ) and angle of incidence ( $\alpha$ ). Similarly for the stand-off vector parameters  $\beta_m$  and  $\alpha_m$ . The parameters  $\alpha_m$  and  $\beta_m$  are the angle of incidence and dihedral angles of a panel that result in a normal that is in the direction of a vector drawn from the center of panel  $i$  to the center of panel  $j$ . Panels  $i$  and  $j$  are separated by the distance  $m$  along this vector. Albedo and thermal shadowing effects are evaluated as:

$$0 \leq q_a = q_{a1} - q_{aj}$$

**C**  
and

$$0 \leq q_t = q_{ti} - q_{tj}$$

for node  $i$ .

Interactive communication with the shadowing node and stand-off vector parameters is through the console display shown on Figure 3.1.2.6.3.

The cross reference to shadowed node, shadowing node and stand-off vector parameters are shown on Table 3.2.1.5.1.

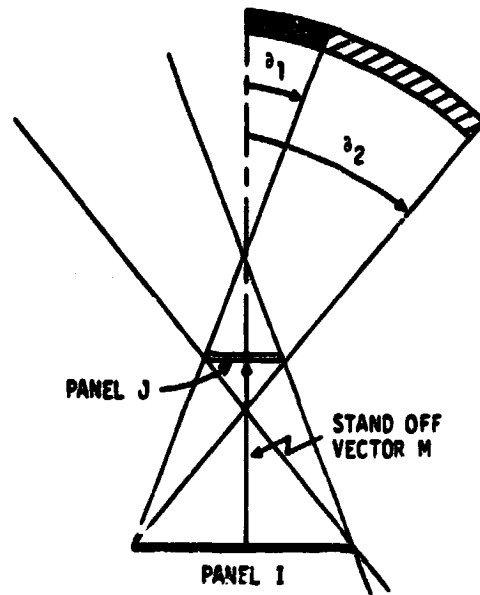
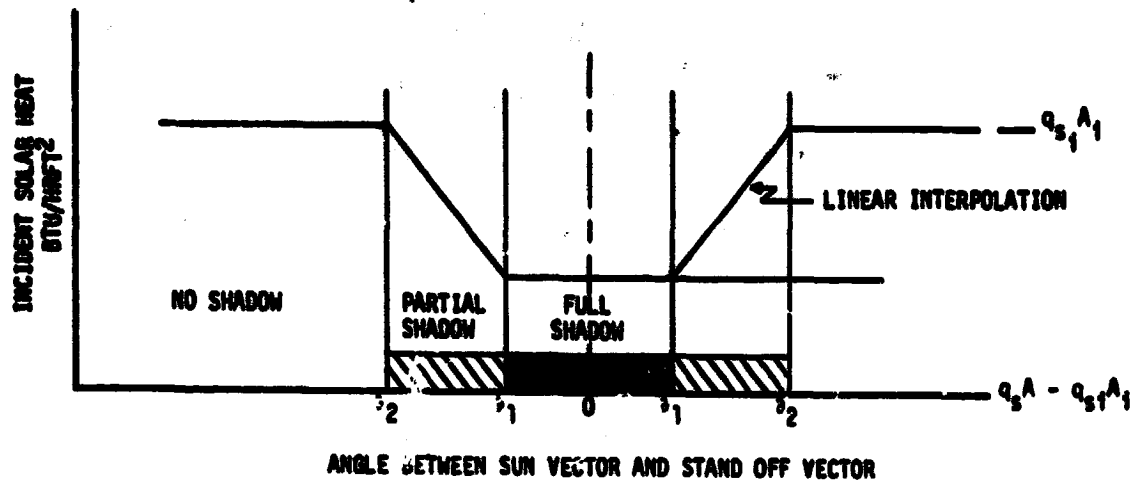


Figure 3.2 1.5.1. Typical Solar Shadowing Illustration

3.2.1.5.3

Table 3.2.1.5.1. Dynamic Cross Reference Parameters for Node I Shadowed by Node J With Stand-Off Vector Storage in M

VARIABLE	SYMBOL	UNITS	STORAGE	TYPE	COMMON
Shadowed node area	$A_i$	FT <sup>2</sup>	C(I,9) + C(I,10)	R	MEAT
Shadowing node area	$A_j$	FT <sup>2</sup>	C(J,10)	R	MEAT
Angle of incidence shadowed node	$\alpha_i$	RAD	C(I,11)	R	MEAT
Angle of incidence shadowing node	$\alpha_j$	RAD	C(J,11)	R	MEAT
Angle of incidence stand-off vector (equivalent)	$\alpha_m$	RAD	C(M,11)	R	MEAT
Dihedral angle shadowed node	$\beta_i$	RAD	C(I,12)	R	MEAT
Dihedral angle shadowing node	$\beta_j$	RAD	C(J,12)	R	MEAT
Dihedral angle stand-off vector (equivalent)	$\beta_m$	RAD	C(M,12)	R	MEAT
Stand-off distance	$m$	FT	C(M,10)	R	MEAT

### **3.2.2 Output Routines**

The basic control of output data is through the control Routine PRINT via initial Interactive Print Option Display shown on Figure 3.1.1.2.2. This section discusses the subsequent interactive, and possible dynamic, communication resulting from the selection of various print options, as well as various output functions which are automatically executed in response to the particular model component performance routines characteristics. A summary of the output routines is shown on Table 3.2.2.1.

**Table 3.2.2.1. Summary of Output Routines**

<b>NODPRT</b>	<b>Displays fluid property data with generic names at selected print frequency.</b>
<b>NASPRT</b>	<b>Displays fluid property data with assigned node names at selected print frequency.</b>
<b>GASPR</b>	<b>Displays atmospheric property data at selected print frequency.</b>
<b>CONPRT</b>	<b>Displays consumables data for referenced sources at selected print frequency.</b>
<b>PLOOT</b>	<b>Stores data for plotting.</b>
<b>SCHEM</b>	<b>Displays modelled system schematic.</b>

### **3.2.2.1. Routine NODPRT**

The basic output of fluid property data is written from Routine NODPRT. The routine automatically outputs data during passive execution for all referenced node numbers in the order of reference as shown on Figure 3.2.2.1.1 unless the user specifies the select node option. The output at the print frequency specified at the time of initialization control (Figure 3.1.1.1.3). The generic name of the referenced nodes is included.

```

*****
TFEAR
TEST TFEAR PLOT OPTION
FLUID PROPERTIES
TIME = 1.500

```

NODE NO			COMP TEMP DEG	FLUID TEMP DEG	WCP BTU/HR DEG	HEAT LOAD BTU/HR
1	CABIN IN	/HEATER OUT		498.364	501.000	2001.000
2	CABIN OUT	/LICH IN		503.450	501.000	
3	LICH OUT	/COND. IN		503.870	501.000	
4	COND. OUT	/HEATER IN	498.448	496.573	501.000	450.000
5	EVAP IN	/JUNCTION	495.000	495.630	1490.483	
6	EVAP OUT	/PLATE IN	495.601	495.755	1490.483	
7	PLATE OUT	/INTF IN		496.625	1490.483	3793.755
8	INTF OUT	/PLATE IN	499.816	498.170	1490.483	150.000
9	PLATE OUT	/EXCH IN		499.598	1490.483	
10	EXCH OUT	/DIVERT		501.023	1490.483	
12	LEG	/BRANCH		501.023	1483.452	
11	LEG	/MIXER		501.023	1483.031	
13	LEG	/RADIN	482.899	501.023	3.726	
17	LEG	/RADIN	482.899	501.023	3.726	
14	RADOUT	/RADIN	475.798	483.158	3.726	
15	RADOUT	/RADIN	470.936	476.049	3.726	
16	RADOUT	/MIXER		471.178	3.726	
18	RADOUT	/RADIN	475.798	483.158	3.726	
19	RADOUT	/RADIN	371.416	476.049	3.726	
20	RADOUT	/MIXER		373.764	3.726	
21	EXCH IN	/PLATE OUT		522.508	100.000	
22	EXCH OUT	/PLATE IN	523.615	501.291	100.000	200.000

```

*****

```

Figure 3.2.2.1.1. Typical Fluid Property Output Data - Generic Names



### **3.2.2.2 Routine NASPRT**

If the option to select nodes in is effect, output interactive communication is extended through a display requesting the node numbers to be output and whether or not to use assigned or generic node names. If the generic name option is in effect, the output is through Routine NODPRT, except that the selected set of node numbers (in the order they were input), rather than all referenced model nodes are printed. Selection of the option of assigning node names extends the interactive communication through a display requesting the nodal names in the same order as the node number selection. Subsequent output is through Routine NASPRT reflecting the selected node numbers and the assigned names as shown on Figure 3.2.2.2.1.

```

*****
TFEAR
TEST TAPE READ CAPABILITY
FLUID PROPERTIES
TIME = .000
NODE NO      COMP TEMP DEG      FLUID TEMP DEG      WCP BTU/HR DEG      HEAT LOAD BTU/HR
2  CABIN      521.000      510.165      501.000
6  FUEL CELL  521.000      498.474      1490.484
8  EQUIPMENT  521.000      515.559      1490.484
22 PAYLOAD    521.000      520.339      100.000
*****

```

Figure 3.2.2.2.1. Typical Fluid Property Output Data - Assigned Names

3.2.2.2.2

### **3.2.2.3 Routine GASPR**

Reference to atmospheric properties for one or more component performance routines will automatically execute the atmospheric data output Routine GASPR. The data as shown on Figure 3.2.2.3.1 is at the selected print frequency and includes all node numbers referencing atmospheric processing.

```

*****
          GAS PROPERTIES
TIME =      1.500
NODE NO   SPECIFIC   WATER   NITROGEN   OXYGEN   CO2   TOTAL
        HEAT      PSI      PSI      PSI      PSI      PSI
  1      .210      .106    11.600    3.100    .073    14.700
  2      .210      .107    11.600    3.100    .073    14.700
  3      .210      .107    11.600    3.100    .073    14.700
  4      .210      .106    11.600    3.100    .073    14.700
*****

```

Figure 3.2.2.3.1. Typical Atmospheric Data Output

3.2.2.3.2

#### 3.2.2.4 Routine CONPRT

Reference to one or more storage sources will automatically execute Routine CONPRT to output the summary of the status of the various sources. The output is at the selected print frequency and reflects the remaining quantity at the given time as shown on Figure 3.2.2.4.1. The remaining quantity for a source  $i$  is calculated internally as

$$\text{CONSTA}(I) - \text{CONTOT}(I)$$

referenced in the discussion of Routine CONSUM. Dynamic communication with the remaining quantity should reference these variables.

\*\*\*\*\*

CONSUMABLES  
USAGE

TIME =	1.500		
	INITIAL	QUANTITY	QUANTITY
SOURCE	AVAILABLE	USED	REMAINING
1	.000	2.298	-2.298
2	.000	.848	-.848
3	.000	.000	.000
4	.000	.324	-.324
5	.000	197.947	-197.947
6	.000	11.900	-11.900

ORIGINAL PAGE IS  
OF POOR QUALITY

Figure 3.2.2.4.1. Typical Consumables Data Output

### **3.2.2.5 Routine PLOOT**

Selection of the Plot Option will extend the interactive communication through a display requesting the node numbers and type of information to be plotted. A completed display of this type is shown on Figure 3.2.2.5.

The Plot Option automatically executes Routine PLOOT which stores the data to be plotted at each calculated time point. Near run termination the data stored is prepared in screen plots by Routine DRAW.

```

*****
                FUNCTION MENU
                DESCRIPTION
TYPE 1  FLUID TEMP      (DEG/R)
      2  COMP TEMP     (DEG/R)
      3  FLOW RATE     (LBS/HR)
      4  HEAT          (BTU/HR)
      5  ACC CONSUM    (LBS)
      6  HEATER PWR    (BTU/HR)
      7  PRT PRES H2O  (PSI)
      8  PRT PRES N2   (PSI)
      9  PRT PRES O2   (PSI)
     10 PRT PRES CO2   (MMHG)
     11 HTR ENERGY   (BTU)
*****

```

```

*****
                PLOT CONTROL
TEM   NODE NO   TYPE           MAX      MIN
  1     2     FLUID TEMP     .000     .000
  2     12    FLOW RATE     .000     .000
  3     22    HEAT          .000     .000
*****

```

Figure 3.2.2.5. Typical Plot Control Data Display



### 3.2.2.6 Routine SCHEM

Request for a schematic of the modelled system will automatically execute Routine SCHEM immediately prior to passive execution. Routine SCHEM processes the referenced node numbers and their generic names to assign a node number and type to each subplot in a composite display of the system schematic. Routine SCHEM prepares the control parameters for a single page of the schematics and then processes a call to Routine PICT to display that page. The paging process continues until the schematic is complete. A typical single page schematic is shown on Figure 3.2.2.6.1.

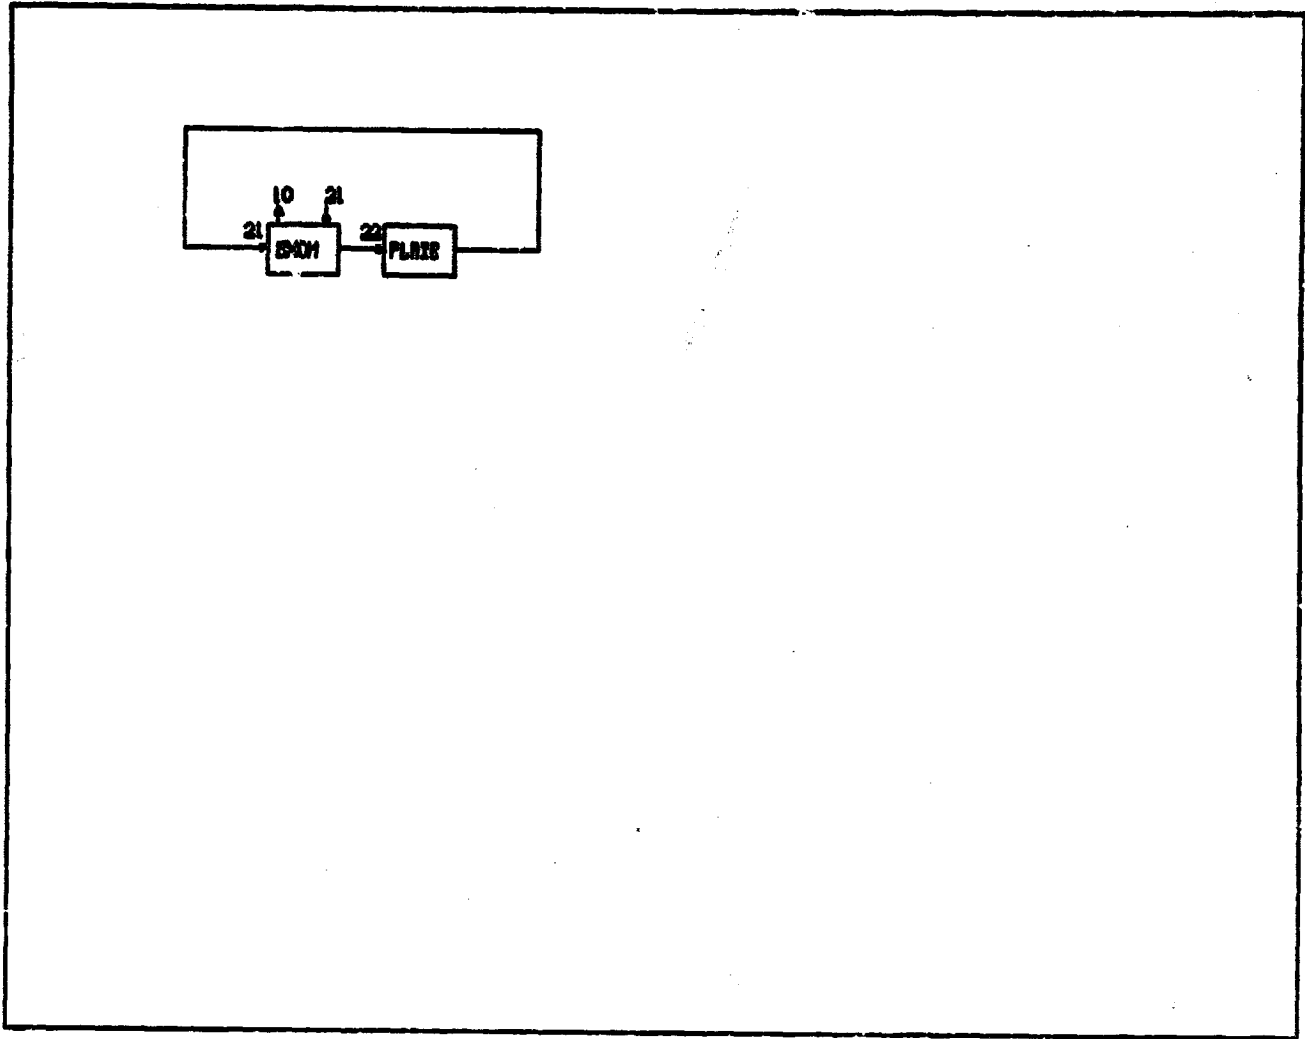


Figure 3.2.2.6.1. Typical Schematic Output  
3.2.2.6.2

## REFERENCES

1. Paul D. Aaron and M. R. Reumont, "Correlation of Carbon Dioxide System Performance with Qualification Test Data and Apollo 11 through 15 Flights," TRW 72.4910.1-3, 29 March 1972.
2. R. R. McMurphy and A. J. Kessler, "ASIS Incident Heating Model Computer Program," TRW 3141-23.111, 3 March 1967.