

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.



National Aeronautics and
Space Administration

JSC-16229

OCT 25 1979
8.0 - 10.098

Lyndon B. Johnson Space Center
Houston Texas 77058
September 1979

NASA CR-

160473

**AGRICULTURAL SOIL MOISTURE EXPERIMENT: 1978 COLBY (KANSAS)
DATA CATALOG AND DOCUMENTATION**

**"Made available under NASA sponsorship
in the interest of early and wide dis-
semination of Earth Resources Survey
Program information and without liability
for any use made thereof."**

Job Order 73-156

**(E80-10098) AGRICULTURAL SOIL MOISTURE N80-23725
EXPERIMENT: 1978 COLBY (KANSAS) DATA
CATALOG AND DOCUMENTATION (Lockheed
Electronics Co.) 176 p HC A09/MF A01
CSSL 02C G3/43 00098**

Unclas
00098

Prepared By

Lockheed Electronics Company, Inc.
Systems and Services Division
Houston, Texas

Contract NAS 9-15800

For


EARTH OBSERVATIONS DIVISION
SPACE AND LIFE SCIENCES DIRECTORATE

LEC-13226

AGRICULTURAL SOIL MOISTURE EXPERIMENT: 1978 COLBY (KANSAS)
DATA CATALOG AND DOCUMENTATION


Job Order 73-156

PREPARED BY


B. W. Milstead

APPROVED BY


D. E. Phinney, Supervisor
Earth Observations Development and Evaluation Dept.

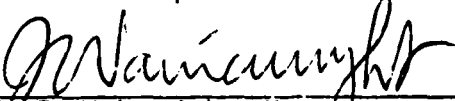
J. E. Wainwright, Manager
Earth Observations Development and Evaluation Dept.

Prepared By

Lockheed Electronics Company, Inc.

For

Earth Observations Division

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
LYNDON B. JOHNSON SPACE CENTER
HOUSTON, TEXAS

September 1979

CONTENTS

Section	Page
1. INTRODUCTION	1
2. TEST SITE DESCRIPTION	3
3. TYPE I DATA	9
3.1 <u>SOIL MOISTURE DATA</u>	9
3.2 <u>SOIL DATA</u>	12
3.3 <u>VEGETATION DATA</u>	12
3.4 <u>WEATHER AND IRRIGATION DATA</u>	15
4. TYPE II DATA.	67
4.1 <u>SOIL MOISTURE</u>	67
4.1.1 SAMPLE ACQUISITIONS.	67
4.1.2 SAMPLE PROCESSING.	70
4.2 <u>BULK DENSITY</u>	70
4.3 <u>SOIL TEMPERATURE MEASUREMENTS</u>	77
4.4 <u>VEGETATION SAMPLES</u>	77
4.5 <u>SURFACE ROUGHNESS</u>	77
5. REFERENCES.	95
Appendices	
A. ADDITIONAL COLBY DATA AVAILABLE	A-3
B. EQUIPMENT LIST.	B-3
C. ASME TEST FIELD OPERATORS	C-3
D. ON THE DESIGN OF AN EXPERIMENT TO MEASURE SOIL MOISTURE USING MICROWAVE DATA.	D-3

PRECEDING PAGE BLANK NOT FILMED

Section	Page
E. SUMMARY OF NASA AIRCRAFT (NC-130) DATA COLLECTED FOR THE AGRICULTURAL SOIL MOISTURE EXPERIMENT (ASME) DURING 1978.	E-3
F. SOIL SAMPLING PROCEDURE	F-3
G. MOISTURE LOSS FROM SAMPLE CONTAINERS USED FOR SOIL MEASUREMENTS.	G-3

TABLES

Table	Page
1 TEST FIELD LOCATIONS.	5
2 SOIL TYPE AND CROP.	6
3 AN EXAMPLE OF TYPE I SOIL MOISTURE DATA	10
4 BULK-DENSITY AND WATER RETENTION CHARACTERISTICS.	13
5 SATURATED HYDRAULIC CONDUCTIVITY.	14
6 WATER RETENTION CHARACTERISTICS	14
7 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 1.	16
8 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 2.	18
9 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 3.	20
10 LEAF AREA INDEX FOR FIELD 5	22
11 LEAF AREA INDEX FOR FIELD 8	24
12 LEAF AREA INDEX FOR FIELD 14.	26
13 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 4.	28
14 LEAF AREA INDEX GROWTH STAGE FOR FIELD 7.	30
15 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 10	32
16 LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 11	34
17 RAIN GAGE LOCATIONS, SECTION, TOWNSHIP, RANGE	36
18 RECORDING RAIN GAGE DATA EXAMPLE.	38
19 NWS DATA.	63
20 IRRIGATION DATA	65
21 SOIL MOISTURE SAMPLING ACTIVITY BY FIELD AND DAY.	68
22 SOIL MOISTURE DATA.	71
23 BULK DENSITY.	72

Table	Page
24 ASME GROUND-TRUTH TEMPERATURE DATA FOR THOMAS COUNTY, KANSAS	
(a) Field 3.	78
(b) Field 4.	80
(c) Field 7.	81
(d) Field 8.	83
(e) Field 9.	87
25 DATA SET II - VEGETATION DATA	91

FIGURES

Figure		Page
1	Location of the 43 test fields used for data acquisition. . .	7
2	Colby data acquisition schedule	8
3	Sampling locations for type I data.	11
4	Rain gage locations	37
5	Irrigation system as related to test fields 1, 2, and 3 . . .	66
6	Sample locations and depths	69
7	Surface roughness photograph.	93

1. INTRODUCTION

During the summer of 1978, two data acquisition activities of the Agricultural Soil Moisture Experiment (ASME) were conducted at an agricultural site near Colby, Kansas. One activity was designed to obtain data to support the testing of soil moisture point profile models; the other was designed to obtain data to support the development of algorithms for estimating surface zone soil moisture from remotely sensed data.

This document describes the above two activities and catalogs all acquired ground-truth data. Additional Colby data that will be available are discussed in appendix A.

Section 2 briefly discusses the criteria used in the selection of the test site, flight lines, and individual test fields. General information about the area is included, and maps of the specific test field locations are provided.

Section 3 discusses the data acquired for use in testing soil moisture point profile models. These data were collected from May 19 through August 30, 1978, and are referred to as "type I Data."

Section 4 discusses the data acquired to support development of algorithms for estimating surface zone soil moisture. These data were collected in conjunction with aircraft overflights between July 18 and August 11, 1978, and are referred to as "type II Data."

Some of the data subsets collected at Colby are included in this report; other subsets, which were too voluminous for inclusion, are available on magnetic tapes.¹

¹To obtain any of the data listed in this report, contact J. D. Erickson, SF3, Lyndon B. Johnson Space Center, Houston, Texas 77058.

Much of the data were acquired on operating farms. This data acquisition was possible only with the extensive cooperation shown by many individuals, farm operators, and land owners in the Colby area. A list of operators of ASME test fields is given in appendix C.

2. TEST SITE DESCRIPTION

Several criteria were used for selection of a test site. The desired characteristics of a test site were as follows:

1. It should be a typical farming area with only a few crop types.
2. It must have a generally flat terrain.
3. It must be accessible to both the University of Kansas and Texas A&M University, with a consideration of characteristics and limitations of available trucks, travel time, etc.
4. If available, an operating rain gage network that could be used to measure rainfall would be desirable.
5. It should have relatively uniform soils.

A survey was conducted to locate all operating rain gage networks in the United States. Of the several potentially useful sites located, the site at Colby, Kansas, offered the following advantages:

1. It is a typical farming area with wheat, corn, sorghum, and pasture as the principal crops.
2. It consists of large areas with relatively uniform soils.
3. The terrain is relatively flat.
4. There was an operating rain gage network with 39 recording rain gages operated by the High Plains Experiment (HIPLÉX) project of the U.S. Department of the Interior.
5. Additionally, three recording weather stations are operated by the Kansas Water Resources Board in the same area as the rain gages.

The boundaries of the potential test site area at Colby were defined by the rain gage network operated by HIPLÉX personnel. A preliminary soils map of this area was obtained from the Soil Conservation Service of the U.S. Department of Agriculture in Colby. The test site consisted of major east-west drainage areas having a mixture of soil types. Between the drainage areas

there are relatively large areas of uniform soil types several miles long in an east-west direction and up to 4.8 kilometers (3 miles) wide in a north-south direction.

Selection of the individual flight lines and test fields was based on the following criteria.

1. Flight lines in a north-south and an east-west direction were required. Test fields for type I data should be located at the intersection of these lines.
2. Test fields for type I data should be located near a recording rain gage.
3. The crop mix for type I data should approximate the crop mix of the general area.
4. The total number of test fields for type II data should meet the minimum requirements defined in appendix D of this report.
5. All test fields should be of a relatively uniform soil type across the field.
6. Each test field should be approximately 16 hectares (40 acres) in size.

Initially, the 14 test fields for acquisition of type I data were selected on the basis of the above criteria. These fields defined flight lines 1, 2, and 3 and 5, 6, and 7. Flight line 4 was added later when personnel from the University of Kansas determined that test fields on this line met their specific requirements. Along the seven flight lines, 56 potential test fields that met the requirements for type II data were identified, including the 14 test fields used for acquisition of type I data. All fields were numbered (1 through 56), and final selection of 43 fields was made prior to the first aircraft overflight. Figure 1 shows the location of each of the 43 test fields used for data acquisition. Table 1 gives the legal description of each test field by quarter section, section, township, and range. Table 2 lists the soil type, slope, and crop for each test field. Figure 2 shows the relative timing for both data acquisition efforts. Appendix E summarizes ASME remotely sensed aircraft data collected during overflight.

TABLE 1.— TEST FIELD LEGAL DESCRIPTIONS

Field number	Legal description	Field number	Legal description
1	S Center 40 SE 28-9-33	28	SW SE 29-9-32
2	S Center 40 SE 30-9-32	29	NW NE 32-9-32
3	S Center 40 SW 28-9-32	30	NE NE 32-9-32
4	SE SE 27-9-32	31	NE NW 33-9-32
5	SW SE 26-9-32	34	SE SE 28-9-32
6	SW SE 14-8-32	37	NW NE 34-9-32
7	SW SE 25-9-32	38	NE NE 34-9-32
8	SE SE 31-8-31	39	SW SW 15-8-32
9	SE SE 18-8-31	40	S Center 40 SE 15-8-32
10	SE SE 13-8-32	43	SE SE 14-8-32
11	SE SE 18-8-32	44	SW SE 13-8-32
12	SW SE 35-8-32	45	SW SE 18-8-31
13	SE SE 31-8-32	46	NE SE 18-8-31
14	SW SW 36-8-32	47	SE SE 19-8-31
19	SW SE 26-9-33	49	NE NE 19-9-31
20	SE SE 26-9-33	50	NW NE 23-9-32
21	NW NW 36-9-33	52	SW SE 23-8-32
22	NE NW 36-9-33	53	SE SE 19-9-32
24	SW SW 29-9-32	54	S Center 40 SE 7-9-32
25	NW NW 32-9-32	55	N Center 40 NE 30-9-32
26	SE SW 29-9-32	56	SE 30 SE 30-9-31
27	NE NW 32-9-32		

TABLE 2.— SOIL TYPE AND CROP

Field no.	Soil type*	Crop [†]	Field no.	Soil type	Crop [†]
1	B	Corn	28	A	Corn
2	C	Corn	29	B	Wheat
3	B	Corn	30	B	Wheat
4	B	Wheat	31	B	Milo
5	B	Pasture	34	C, E	Milo
6	B	Fallow	37	B, E	Corn
7	B	Wheat	38	B	Wheat
8	A	Pasture	39	A	Milo
9	B	Fallow	40	B	Corn
10	A	Wheat	43	C	Fallow
11	A	Wheat	44	A	Wheat
12	A	Fallow	45	A	Fallow
13	A	Fallow	46	B	Wheat
14	B	Pasture	47	B, F	Wheat
19	A, D	Corn	49	A	Fallow
20	A, D	Corn	50	A	Fallow
21	A, D	Corn	52	B, E	Fallow
22	A	Corn	53	A	Wheat
24	B	Milo	54	A	Fallow
25	A	Wheat	55	C	Corn
26	B	Corn	56	B	Fallow
27	C	Wheat			

*The following notations are used in this column:

A -- Keith silt loam, 0% to 1% slope.

B -- Keith silt loam, 0% to 3% slope.

C -- Keith silt loam, 1% to 3% slope.

D -- Richfield silty clay loam.

E -- Goshen silty loam.

F -- Ulysses silt loam, 1% to 3% slope (eroded).

These data were taken from an unpublished soils map provided by the USDA Soil Conservation Service in Colby.

[†]All corn fields were irrigated.

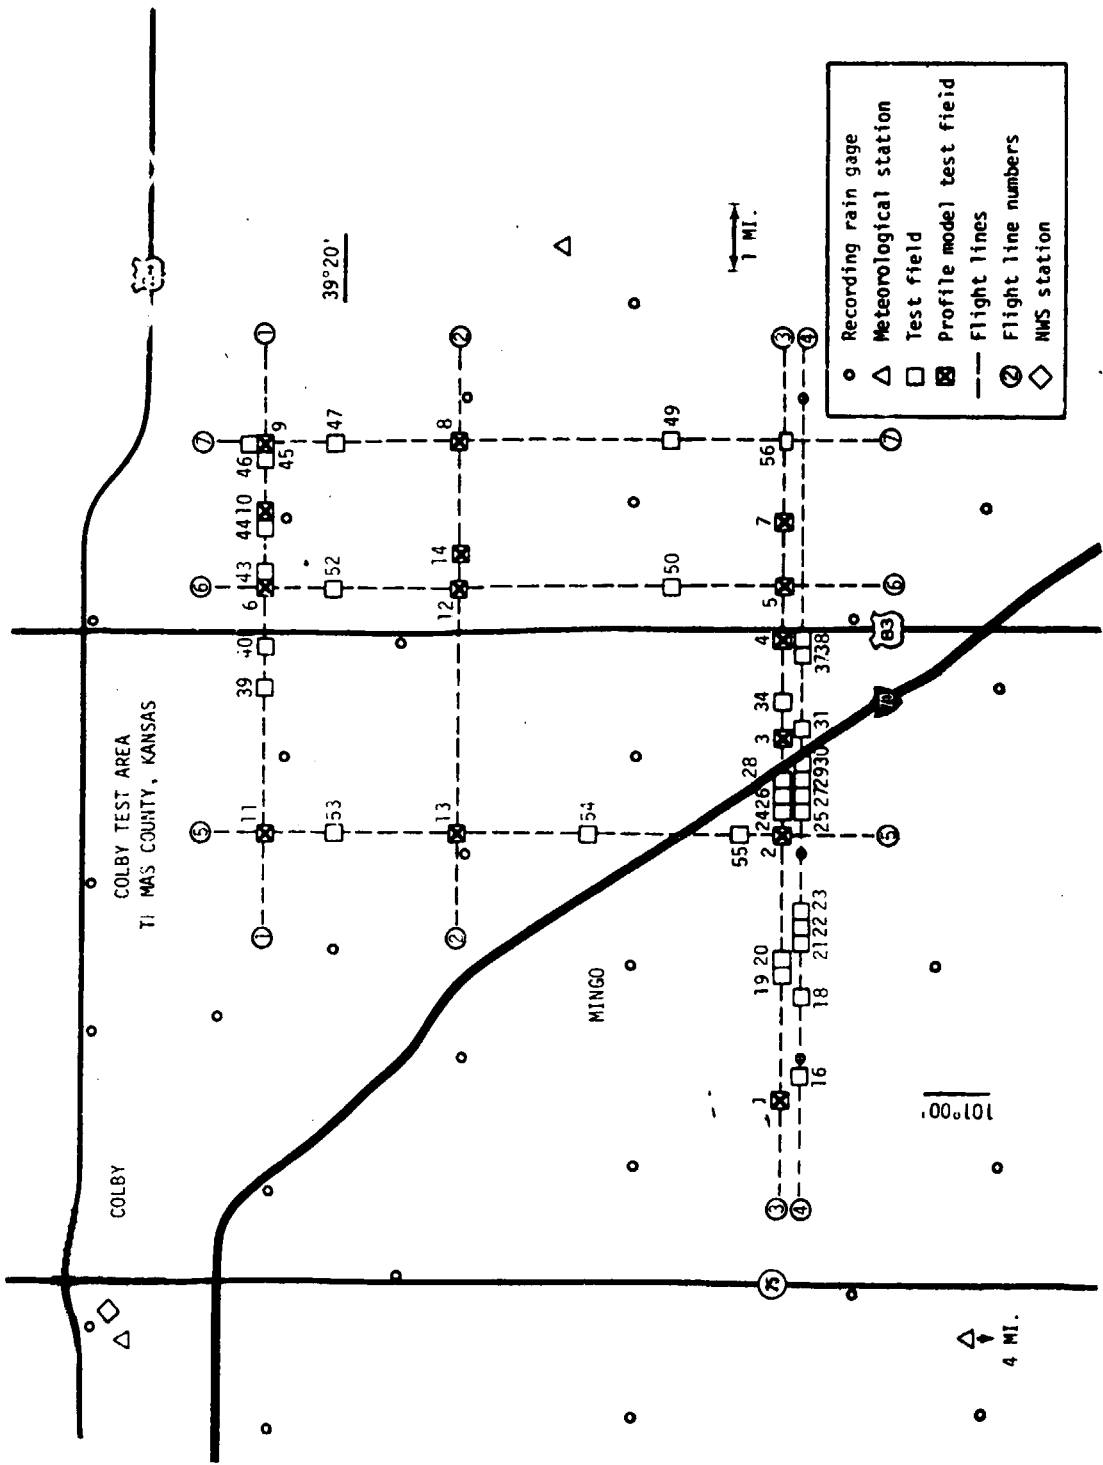


Figure 1.— Locations of the 43 test fields used for data acquisition.

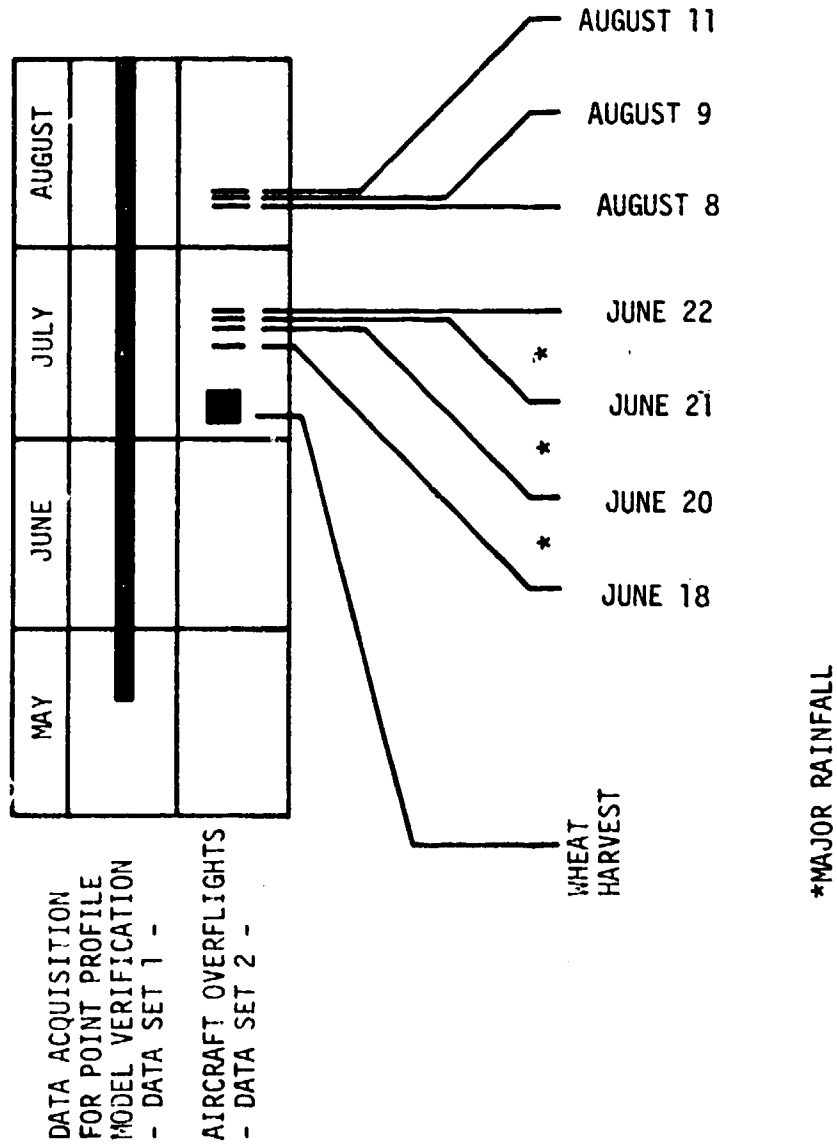


Figure 2.— Colby data acquisition schedule.

3. TYPE I DATA

The type I data were obtained to support testing of various soil moisture profile models. They were collected in fields 1 through 14 from May 19 through August 30, 1978. The type I data consist of soil moisture, bulk density, and soil hydrologic characteristics; vegetation data (leaf area index and growth stage); and weather and irrigation data.

3.1 SOIL MOISTURE DATA


Soil moisture data were collected weekly from four locations in each of the 14 test fields. Sampling locations for each field are shown in figure 3. At each location, readings were taken at depths of 0 to 7.6 centimeters (0 to 3 inches), 7.6 to 15 centimeters (3 to 6 inches), and thereafter every 15 centimeters (6 inches) down to 182.8 centimeters (72 inches).

During the initial 2 weeks, soil moisture readings for all depths were taken by gravimetrically sampling. Soil samples were taken with a coring tool at depths of 0 to 7.6 centimeters (0 to 3 inches) and 7.6 to 15 centimeters (3 to 6 inches); and a 3-centimeter sample was centered at 30.4-centimeter (12-inch) and at 15-centimeter (6-inch) intervals down to 182.8 centimeters (72 inches). The samples were placed in metal cans and returned to the laboratory. They were then weighed, dried in forced-air ovens at 120° F for 48 hours, and reweighed. The soil samples were dumped and the can and lid weighed. This weight was subtracted from the sample weight, and the gravimetric soil moisture was calculated by

$$\text{Gravimetric soil moisture} = \frac{\text{wet weight} - \text{dry weight}}{\text{dry weight}} \times 100 = \theta_g.$$

Thereafter, a neutron meter was employed to monitor the soil moisture from 6- to 72-inch depths. Gravimetric sampling of 0- to 3-inch and 3- to 6-inch layers continued through the season.

The soil moisture data are available on magnetic tape, which is nonlabeled EBCIDIC IBM format with 80-character card images blocked in 10 cards per record and with 9 tracks at 800 bits per inch (bpi). An example of the data listing is shown in table 3.

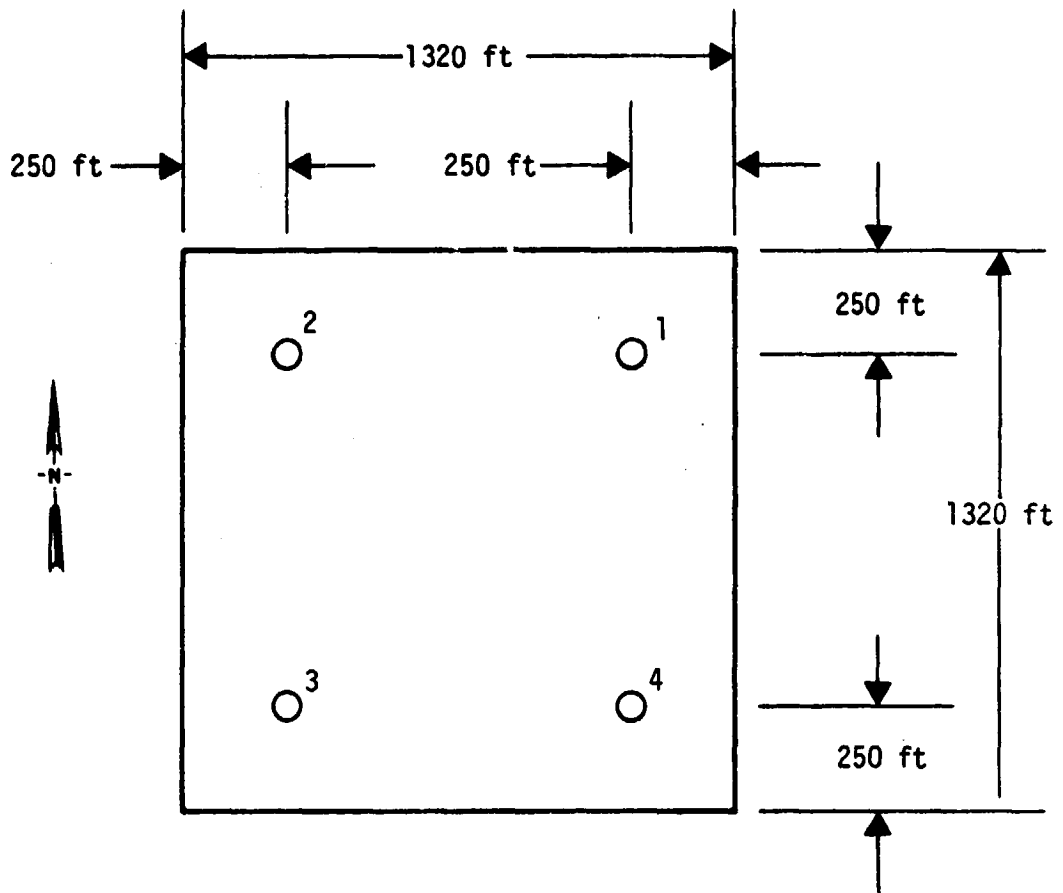

Soil moisture sampling depths at each location:

1. Neutron probe measurements every 15 centimeters (6 inches) from 15 to 182.8 centimeters (6 to 72 inches).
2. Gravimetric soil samples at 0 to 4.8 centimeters (0 to 3 inches) and 4.8 to 9.6 centimeters (3 to 6 inches).

Vegetation samples were acquired within 6 meters (20 feet) of the same locations.

Figure 3.— Sampling locations for type I data.

3.2 SOIL DATA

The measured soil characteristics were bulk density, saturated hydraulic conductivity, and water retention.

Samples for bulk density determination were acquired during the first 3 weeks of the sampling period. These samples were acquired in each of the 14 fields at depths of 7.6, 20, 71, and 137 centimeters (3, 8, 28, and 54 inches). Each sample was taken with a coring tool (6 centimeters in diameter) specifically designed for acquiring undisturbed soil samples for use in determining bulk density. At each of the sample depths, the soil sample was 3 centimeters deep. These samples were dried at 105° C and weighed. This sample weight, from a known volume, was used to calculate the bulk density. These results are given in table 4.

Soil samples for determining water retention were acquired at the same locations and depths as the bulk density samples. A pressure membrane apparatus was used to determine the water retention at 1/3 and 15 bars for each sample. These results are given in table 4.

Additional soil core samples were acquired for determining saturated hydraulic conductivity (table 5) and water retention at 1/3, 1, 3, 6, 10, and 15 bars (table 6). These samples were taken in fields 2, 6, 11, and 14 at depths of 20, 63.5, and 121.9 centimeters (8, 25, and 48 inches).

3.3 VEGETATION DATA

Vegetation samples were acquired twice weekly during the period of the experiment. Samples were taken at two locations in each field with green growth. These consisted of three plants for corn, 0.6 meter (2 linear feet) of wheat, and 0.092 square meter (1 square foot) of pasture. Along with these samples, the plant growth stage was recorded, using the Hanway scale for corn and the Feekes scale for wheat.

TABLE 4.— BULK-DENSITY AND WATER RETENTION CHARACTERISTICS

Field number	Soil depth, inches	Bulk density, grams per cubic centimeter	Soil moisture, percent	
			1/3 bar	15 bars
1	3	1.05	24.3	11.6
	8	1.17	25.0	12.2
	28	1.22	25.0	12.0
	54	1.09	26.1	12.7
2	3	1.26	25.1	10.8
	8	1.22	25.9	12.1
	28	1.40	26.2	11.3
	54	1.27	26.3	13.2
3	3	1.34	24.5	10.4
	8	1.22	23.6	10.7
	28	1.59	25.8	11.2
	54	1.25	26.2	11.7
4	3	1.09	25.3	11.2
	8	1.29	27.0	13.3
	28	1.43	27.7	12.7
	54	1.31	27.4	12.2
5	3	1.29	26.7	12.1
	8	1.36	25.7	12.2
	28	1.28	27.8	12.4
	54	1.31	27.8	14.4
6	3	1.07	28.1	13.8
	8	1.03	27.8	14.1
	24	1.10	27.7	14.4
	52	1.51	27.9	15.3
7	3	1.39	24.0	9.9
	8	1.25	24.6	11.8
	28	1.27	26.2	12.2
	52	1.29	25.4	11.6
8	3	0.94	25.2	11.6
	8	1.14	22.3	10.5
	26	1.51	26.5	12.4
	54	1.47	29.2	15.9
9	3	1.39	25.3	10.6
	8	1.27	23.6	11.1
	20	1.38	25.8	12.2
	52	1.34	26.2	11.5
10	3	1.14	21.6	8.9
	8	1.13	21.1	9.1
	26	1.31	23.9	10.2
	52	1.11	25.1	11.5
11	3	1.12	23.9	9.8
	8	1.13	24.7	13.3
	28	1.31	24.9	12.8
	52	1.11	25.4	12.3
12	3	1.12	27.0	10.1
	8	1.03	26.8	11.2
	28	1.47	25.9	12.0
	52	1.39	25.8	11.8
13	3	1.29	26.2	10.0
	8	1.10	25.9	12.5
	28	1.34	25.7	11.9
	52	1.23	26.2	12.1
14	3	1.06	28.0	10.7
	8	1.28	26.2	11.4
	28	1.20	26.8	11.5
	52	1.20	26.9	10.6

TABLE 5.— SATURATED HYDRAULIC CONDUCTIVITY

Field number	Soil depth, inches	Hydraulic conductivity, inches per hour					
		1 hour	2 hours	4 hours	8 hours	24 hours	48 hours
2	8	0.40	0.36	0.46	0.45	0.45	0.31
	25	1.15	0.93	1.08	1.03	1.07	1.15
	48	0.48	0.41	0.48	0.48	0.46	0.37
6	8	1.98	1.72	2.06	1.94	2.11	1.51
	25	0.26	0.22	0.26	0.26	0.29	0.33
	48	0.95	0.79	1.03	1.00	1.07	1.08
11	8	0.69	0.55	0.65	0.55	0.67	0.77
	25	0.40		0.43	0.40	0.46	0.48
	48	0.43	0.40	0.52	0.46	0.48	0.48
14	8	0.72	0.64	0.77	0.77	1.03	1.19
	25	1.38	1.20	1.46	1.43	1.44	1.62
	48	0.41	0.38	0.43			0.33

TABLE 6.— WATER RETENTION CHARACTERISTICS

Field number	Soil depth, inches	Soil moisture, percent					
		1/3 bar	1 bar	3 bars	6 bars	10 bars	15 bars
2	8	33.3	24.8	19.8	16.0	15.0	14.8
	25	32.8	23.8	18.9	16.0	15.3	14.9
	48	27.9	21.8	16.1	13.8	13.3	11.9
6	8	35.6	27.4	21.6	20.3	18.5	18.3
	25	29.8	21.7	16.4	14.2	13.9	13.4
	48	28.4	19.8	14.1	12.3	11.7	11.3
11	8	32.8	24.6	19.8	18.1	13.9	13.5
	25	32.6	23.6	18.7	15.6	15.1	14.6
	48	27.9	21.5	15.8	13.9	12.4	11.8
14	8	29.8	22.7	17.6	17.4	14.7	14.2
	25	30.9	24.5	19.3	17.0	13.5	13.4
	48	27.9	21.8	15.9	13.6	13.0	12.5

Vegetation samples were divided into stalk, stem, leaves, head, or cob and grain. The leaf area was measured with an electronic meter, and the leaf area index (LAI) was calculated by the formula:

$$\text{LAI} = \text{leaf area per plant} \times \text{plant density.}$$

The individual sections of the plant samples were weighed to determine plant dry matter for each section of the plant. The results are given in tables 7 to 16.

3.4 WEATHER AND IRRIGATION DATA

The acquired weather data consist of rainfall, air temperature, solar radiation, pan evaporation, and wind run. Irrigation information was obtained for fields 1, 2, and 3.

Rainfall data were obtained from the HIPLEX. A network of 38 recording rain gages is located throughout the test area. The locations of these gages are given in figure 4 and table 17. A sample of daily totals of rainfall is given in table 18. Fifteen-minute interval rainfall data are also available.

The National Weather Service (NWS) station at Colby acquires, on a daily basis, maximum and minimum temperatures, rainfall, solar radiation, wind run, and pan evaporation; these data are given in table 19.

Initially, it was planned to obtain data from three Climatronics recording weather stations located adjacent to the test site. These systems are operated by the Kansas Water Resources Board. Two of these stations experienced hardware failures before the start of data acquisition in May, and the units were returned to the factory for repair. They were still not operational when data acquisition ended on August 30. Data from the third Climatronics recording weather station contain several inconsistencies and missing data. This is presently being reviewed and may be available at a later date.

Irrigation information for fields 1, 2, and 3 is given in table 20 in terms of total water delivered over the time the irrigation system was in operation.

TABLE 7.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 1

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
1	1	146	CORN		
1	1	150	CORN		
1	1	152	CORN		
1	1	157	CORN	1.50	.06
1	1	159	CORN	1.00	.04
1	1	160	CORN	1.00	.14
1	1	163	CORN	1.00	.14
1	1	165	CORN	1.00	.16
1	1	171	CORN	1.00	.71
1	1	173	CORN	1.50	.72
1	1	175	CORN		.76
1	1	180	CORN	1.50	.81
1	1	185	CORN	2.00	.46
1	1	186	CORN	2.50	.23
1	1	192	CORN	2.50	.75
1	1	194	CORN	3.00	.49
1	1	194	CORN	2.50	.25
1	1	202	CORN	3.00	.52
1	1	208	CORN	4.00	.35
1	1	209	CORN	5.00	.64
1	1	213	CORN	5.00	.06
1	1	215	CORN	7.00	.27
1	1	220	CORN	7.00	.84
1	1	222	CORN	7.00	.70
1	1	225	CORN	8.00	.76
1	1	229	CORN	8.00	.19
1	1	233	CORN	8.00	.26
1	1	237	CORN	8.00	.22
1	1	240	CORN	8.00	.27
1	1	242	CORN	8.00	.29
1	2	146	CORN		
1	2	150	CORN		
1	2	152	CORN	1.50	.05
1	2	157	CORN	1.00	.06
1	2	159	CORN	1.00	.07
1	2	160	CORN	1.00	.09
1	2	163	CORN	1.00	.12
1	2	171	CORN	1.00	.74
1	2	173	CORN	1.50	.74
1	2	175	CORN		.78
1	2	180	CORN	1.50	.43
1	2	185	CORN	2.00	.49
1	2	186	CORN	2.50	.07
1	2	192	CORN	2.50	.44
1	2	194	CORN	3.00	.13
1	2	194	CORN	2.50	.44
1	2	202	CORN	3.00	.24
1	2	208	CORN	4.00	.15
1	2	209	CORN	5.00	.46
1	2	213	CORN	5.00	.24
1	2	215	CORN	7.00	.11
1	2	220	CORN	7.00	.12
1	2	222	CORN	7.00	.06
1	2	225	CORN	8.00	.53
1	2	229	CORN	8.00	.92
1	2	233	CORN	8.00	1.50
1	2	237	CORN	8.00	.61
1	2	240	CORN	8.00	.13
1	2	242	CORN	8.00	.40
1	3	146	CORN		
1	3	150	CORN		

TABLE 7.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
1	3	152	CORN	.50	.05
1	3	157	CORN	1.00	.05
1	3	159	CORN	1.00	.11
1	3	163	CORN	1.00	.11
1	3	166	CORN	1.00	.12
1	3	171	CORN	1.00	.76
1	3	173	CORN	1.50	.76
1	3	178	CORN		.81
1	3	180	CORN	1.50	.46
1	3	185	CORN	2.00	2.45
1	3	188	CORN	2.50	3.29
1	3	192	CORN	2.50	3.72
1	3	194	CORN	3.00	3.98
1	3	194	CORN	2.50	5.17
1	3	202	CORN	3.00	5.46
1	3	205	CORN	4.00	4.74
1	3	209	CORN	5.00	5.30
1	3	213	CORN	6.00	5.12
1	3	215	CORN	7.00	4.84
1	3	220	CORN	7.00	2.48
1	3	222	CORN	7.00	4.23
1	3	225	CORN	7.00	2.25
1	3	229	CORN	7.00	2.43
1	3	235	CORN	7.00	1.25
1	3	237	CORN	7.00	4.05
1	3	240	CORN	7.00	1.97
1	3	242	CORN	7.00	2.33
1	4	145	CORN		
1	4	150	CORN		
1	4	152	CORN	.50	.06
1	4	157	CORN	1.00	.05
1	4	159	CORN	1.00	.13
1	4	163	CORN	1.00	.14
1	4	166	CORN	1.00	.15
1	4	171	CORN	1.00	.74
1	4	173	CORN	1.50	.74
1	4	178	CORN		.85
1	4	180	CORN	1.50	.49
1	4	185	CORN	2.00	2.40
1	4	188	CORN	2.50	3.46
1	4	192	CORN	2.50	3.98
1	4	194	CORN	3.00	4.12
1	4	194	CORN	2.50	5.15
1	4	202	CORN	3.00	5.75
1	4	205	CORN	4.00	5.02
1	4	209	CORN	5.00	5.26
1	4	213	CORN	6.00	5.70
1	4	215	CORN	7.00	5.47
1	4	220	CORN	7.00	2.37
1	4	222	CORN	7.00	4.22
1	4	225	CORN	7.00	3.42
1	4	225	CORN	7.00	4.22
1	4	235	CORN	7.00	1.25
1	4	237	CORN	7.00	3.55
1	4	240	CORN	7.00	2.53
1	4	242	CORN	7.00	1.56

TABLE 8.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 2

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
1	145		CORN		
1	150		CORN		
1	152		CORN		
1	157		CORN	1.00	.03
1	172		CORN	1.00	.04
1	173		CORN	1.00	.08
1	175		CORN	1.00	.08
1	176		CORN	1.00	.08
1	171		CORN	1.00	.47
1	173		CORN	1.50	.47
1	178		CORN		.48
1	185		CORN		.48
1	185		CORN	1.50	.52
1	185		CORN	2.00	1.21
1	185		CORN	2.50	2.29
1	192		CORN	2.50	2.37
1	194		CORN	3.00	2.85
1	199		CORN	2.50	3.34
1	202		CORN	3.00	3.51
1	205		CORN	4.00	3.58
1	209		CORN	5.00	3.76
1	213		CORN	5.00	3.90
1	215		CORN	7.00	3.84
1	220		CORN	7.00	2.16
1	222		CORN	7.00	2.87
1	223		CORN	1.00	1.77
1	224		CORN	1.00	2.36
1	233		CORN	1.00	1.16
1	237		CORN	1.00	1.56
1	240		CORN	1.00	1.82
1	242		CORN	1.00	1.92
1	145		CORN		
1	152		CORN		
1	157		CORN	1.50	.03
1	172		CORN	1.00	.05
1	173		CORN	1.00	.06
1	175		CORN	1.00	.06
1	176		CORN	1.00	.07
1	171		CORN	1.00	.48
1	173		CORN	1.50	.49
1	178		CORN		.53
1	185		CORN	1.50	.54
1	185		CORN	2.00	1.79
1	185		CORN	2.50	2.18
1	192		CORN	2.50	2.27
1	194		CORN	3.00	2.75
1	199		CORN	2.50	3.14
1	202		CORN	3.00	3.52
1	205		CORN	4.00	3.53
1	209		CORN	5.00	4.56
1	213		CORN	5.00	3.90
1	215		CORN	7.00	3.90
1	220		CORN	7.00	1.98
1	222		CORN	7.00	3.45
1	223		CORN	1.00	1.59
1	224		CORN	1.00	1.42
1	233		CORN	1.00	1.40
1	237		CORN	1.00	1.19
1	240		CORN	1.00	1.17
1	242		CORN	1.00	1.11

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 8.- Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
11	150	150	CORN		.03
11	157	157	CORN		.03
11	159	159	CORN	1.50	.07
11	163	163	CORN	1.00	.07
11	165	165	CORN	1.00	.08
11	171	171	CORN	1.00	.66
11	173	173	CORN	1.50	.67
11	177	177	CORN		.50
11	185	185	CORN	1.50	.53
11	185	185	CORN	2.00	1.70
11	185	185	CORN	2.50	2.29
11	192	192	CORN	2.50	2.27
11	194	194	CORN	3.00	2.51
11	194	194	CORN	3.50	2.71
11	207	207	CORN	4.00	3.54
11	209	209	CORN	5.00	4.00
11	213	213	CORN	6.00	4.68
11	213	213	CORN	7.00	4.70
11	220	220	CORN	7.00	4.74
11	222	222	CORN	7.00	4.13
11	223	223	CORN	8.00	5.29
11	223	223	CORN	8.00	5.53
11	237	237	CORN	8.00	4.41
11	240	240	CORN	8.00	5.53
11	242	242	CORN	8.00	5.23
11	242	242	CORN		
11	150	150	CORN		.03
11	157	157	CORN	1.50	.03
11	160	160	CORN	1.00	.04
11	163	163	CORN	1.00	.10
11	171	171	CORN	1.00	.67
11	173	173	CORN	1.50	.60
11	175	175	CORN	1.50	.55
11	185	185	CORN	2.00	1.71
11	185	185	CORN	2.50	2.29
11	192	192	CORN	3.00	2.76
11	194	194	CORN	3.50	3.77
11	207	207	CORN	4.00	4.40
11	209	209	CORN	5.00	4.22
11	213	213	CORN	6.00	4.66
11	213	213	CORN	7.00	4.66
11	220	220	CORN	7.00	3.36
11	222	222	CORN	7.00	3.20
11	223	223	CORN	8.00	3.31
11	223	223	CORN	8.00	1.23
11	237	237	CORN	8.00	.32
11	240	240	CORN	8.00	.74
11	242	242	CORN	8.00	1.44
11	242	242	CORN	8.00	1.64

TABLE 9.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 3

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
3	1	146	CORN		
3	1	150	CORN		
3	1	152	CORN		.01
3	1	157	CORN	.50	.01
3	1	160	CORN	.50	.07
3	1	163	CORN	.50	.07
3	1	166	CORN	.50	.04
3	1	171	CORN	.50	.17
3	1	173	CORN	1.00	.18
3	1	178	CORN		.19
3	1	180	CORN	1.00	.20
3	1	185	CORN	1.50	.61
3	1	188	CORN	2.00	1.07
3	1	192	CORN	2.00	1.20
3	1	194	CORN	2.50	1.53
3	1	199	CORN	2.00	2.04
3	1	202	CORN	2.50	3.16
3	1	205	CORN	3.00	3.22
3	1	209	CORN	3.50	3.30
3	1	213	CORN	4.00	2.74
3	1	215	CORN	5.00	2.01
3	1	220	CORN	5.00	2.41
3	1	222	CORN	6.00	3.18
3	1	225	CORN	5.00	1.68
3	1	229	CORN	6.00	2.45
3	1	235	CORN	6.00	1.65
3	1	237	CORN	7.00	3.44
3	1	240	CORN	7.00	1.68
3	1	242	CORN	7.00	1.00
3	2	146	CORN		
3	2	150	CORN		
3	2	152	CORN		
3	2	157	CORN	.50	.02
3	2	160	CORN	.50	.07
3	2	163	CORN	.50	.07
3	2	166	CORN	.50	.05
3	2	171	CORN	.50	.18
3	2	173	CORN	1.00	.17
3	2	178	CORN		.19
3	2	180	CORN	1.00	.20
3	2	185	CORN	1.50	.63
3	2	188	CORN	2.00	1.10
3	2	192	CORN	2.00	1.22
3	2	194	CORN	2.50	1.64
3	2	199	CORN	2.00	2.64
3	2	202	CORN	2.50	2.21
3	2	205	CORN	3.00	3.26
3	2	209	CORN	3.50	3.05
3	2	213	CORN	4.00	3.10
3	2	215	CORN	5.00	3.08
3	2	220	CORN	5.00	1.33
3	2	222	CORN	6.00	3.37
3	2	225	CORN	5.00	3.08
3	2	229	CORN	6.00	2.54
3	2	235	CORN	6.00	2.45
3	2	237	CORN	6.00	2.07
3	2	240	CORN	6.00	1.83
3	2	242	CORN	7.00	2.00
4	3	146	CORN		

TABLE 9.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	HANWAY SCALE	LEAF AREA INDEX
3	3	150	CORN		.01
3	3	152	CORN		.01
3	3	157	CORN	.50	.01
3	3	159	CORN	.50	.12
3	3	163	CORN	.50	.02
3	3	166	CORN	.50	.05
3	3	171	CORN	.50	.17
3	3	173	CORN	1.00	.17
3	3	175	CORN		.18
3	3	180	CORN	1.00	.19
3	3	185	CORN	1.50	.65
3	3	188	CORN	2.00	1.01
3	3	192	CORN	2.00	1.26
3	3	194	CORN	2.50	1.70
3	3	199	CORN	2.00	2.76
3	3	202	CORN	2.50	2.84
3	3	206	CORN	3.00	3.00
3	3	209	CORN	3.50	3.24
3	3	213	CORN	4.00	2.90
3	3	215	CORN	5.00	3.02
3	3	220	CORN	5.00	2.07
3	3	222	CORN	5.00	2.20
3	3	225	CORN	5.00	2.29
3	3	229	CORN	5.00	2.41
3	3	235	CORN	6.00	2.56
3	3	237	CORN	6.00	2.73
3	3	240	CORN	7.00	2.21
3	3	242	CORN	7.00	2.40
3	4	145	CORN		
3	4	150	CORN		.01
3	4	152	CORN		.01
3	4	157	CORN	.50	.08
3	4	159	CORN	.50	.01
3	4	163	CORN	.50	.04
3	4	166	CORN	.50	.18
3	4	171	CORN	.50	.18
3	4	173	CORN	1.00	.19
3	4	175	CORN		.21
3	4	180	CORN	1.00	.61
3	4	185	CORN	1.50	1.06
3	4	188	CORN	2.00	1.23
3	4	192	CORN	2.00	1.51
3	4	194	CORN	2.50	2.01
3	4	199	CORN	2.00	3.16
3	4	202	CORN	2.50	3.24
3	4	206	CORN	3.00	3.29
3	4	209	CORN	3.50	2.73
3	4	213	CORN	4.00	2.83
3	4	215	CORN	5.00	2.79
3	4	220	CORN	5.00	2.05
3	4	222	CORN	5.00	3.24
3	4	225	CORN	5.00	2.07
3	4	229	CORN	5.00	2.43
3	4	235	CORN	5.00	2.52
3	4	237	CORN	5.00	1.55
3	4	240	CORN	7.00	1.85
3	4	242	CORN	7.00	1.85

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 10.— LEAF AREA INDEX FOR FIELD 5

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
J	J	145	PASTURE	.76
J	J	150	PASTURE	.78
J	J	152	PASTURE	.54
J	J	157	PASTURE	.20
J	J	160	PASTURE	.53
J	J	163	PASTURE	.55
J	J	165	PASTURE	.53
J	J	171	PASTURE	.51
J	J	173	PASTURE	.51
J	J	178	PASTURE	.54
J	J	180	PASTURE	.56
J	J	185	PASTURE	.59
J	J	188	PASTURE	.60
J	J	192	PASTURE	.74
J	J	194	PASTURE	.61
J	J	194	PASTURE	
J	J	202	PASTURE	
J	J	205	PASTURE	.09
J	J	209	PASTURE	.11
J	J	213	PASTURE	.11
J	J	215	PASTURE	.06
J	J	220	PASTURE	.14
J	J	222	PASTURE	.05
J	J	226	PASTURE	
J	J	229	PASTURE	
J	J	235	PASTURE	
J	J	237	PASTURE	
J	J	240	PASTURE	
J	J	242	PASTURE	
J	V	146	PASTURE	.78
J	V	150	PASTURE	.78
J	V	152	PASTURE	.52
J	V	157	PASTURE	.25
J	V	160	PASTURE	.40
J	V	163	PASTURE	.59
J	V	165	PASTURE	.70
J	V	171	PASTURE	.64
J	V	173	PASTURE	.65
J	V	175	PASTURE	.57
J	V	180	PASTURE	.66
J	V	185	PASTURE	.68
J	V	188	PASTURE	.68
J	V	192	PASTURE	.71
J	V	194	PASTURE	.29
J	V	194	PASTURE	
J	V	202	PASTURE	
J	V	206	PASTURE	.07
J	V	209	PASTURE	.06
J	V	213	PASTURE	.10
J	V	215	PASTURE	.10
J	V	220	PASTURE	.51
J	V	222	PASTURE	.06
J	V	226	PASTURE	
J	V	229	PASTURE	
J	V	235	PASTURE	
J	V	237	PASTURE	
J	V	240	PASTURE	
J	V	242	PASTURE	
J	V	146	PASTURE	.69

TABLE 10.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
555	333	155	PASTURE	.77
555	333	152	PASTURE	.51
555	333	157	PASTURE	.73
555	333	150	PASTURE	.54
555	333	153	PASTURE	.50
555	333	156	PASTURE	.56
555	333	173	PASTURE	.45
555	333	170	PASTURE	.57
555	333	186	PASTURE	.51
555	333	183	PASTURE	.57
555	333	182	PASTURE	.54
555	333	182	PASTURE	.54
555	333	184	PASTURE	.23
555	333	184	PASTURE	.23
555	333	202	PASTURE	.04
555	333	205	PASTURE	.04
555	333	204	PASTURE	.11
555	333	213	PASTURE	.11
555	333	215	PASTURE	.11
555	333	220	PASTURE	.20
555	333	222	PASTURE	.22
555	333	225	PASTURE	.04
555	333	224	PASTURE	.04
555	333	235	PASTURE	.04
555	333	237	PASTURE	.04
555	333	240	PASTURE	.04
555	333	242	PASTURE	.04
555	444	145	PASTURE	.67
555	444	150	PASTURE	.20
555	444	152	PASTURE	.25
555	444	157	PASTURE	.58
555	444	150	PASTURE	.65
555	444	153	PASTURE	.64
555	444	155	PASTURE	.63
555	444	171	PASTURE	.54
555	444	173	PASTURE	.52
555	444	175	PASTURE	.55
555	444	180	PASTURE	.71
555	444	185	PASTURE	.53
555	444	183	PASTURE	.57
555	444	182	PASTURE	.53
555	444	184	PASTURE	.24
555	444	184	PASTURE	.24
555	444	202	PASTURE	.04
555	444	205	PASTURE	.04
555	444	204	PASTURE	.04
555	444	213	PASTURE	.04
555	444	215	PASTURE	.10
555	444	220	PASTURE	.24
555	444	222	PASTURE	.05
555	444	225	PASTURE	.04
555	444	224	PASTURE	.04
555	444	235	PASTURE	.04
555	444	237	PASTURE	.04
555	444	240	PASTURE	.04
555	444	242	PASTURE	.04

TABLE 11.— LEAF AREA INDEX FOR FIELD 8

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
X	1	145	PASTURE	.30
X	1	150	PASTURE	.30
X	1	152	PASTURE	.31
X	1	152	PASTURE	.52
X	1	157	PASTURE	.52
X	1	160	PASTURE	.53
X	1	163	PASTURE	.45
X	1	166	PASTURE	.27
X	1	171	PASTURE	.31
X	1	173	PASTURE	.32
X	1	178	PASTURE	.23
X	1	180	PASTURE	.34
X	1	185	PASTURE	.43
X	1	188	PASTURE	.43
X	1	192	PASTURE	.52
X	1	194	PASTURE	.29
X	1	196	PASTURE	.26
X	1	202	PASTURE	
X	1	205	PASTURE	.03
X	1	209	PASTURE	.07
X	1	213	PASTURE	.10
X	1	215	PASTURE	.10
X	1	220	PASTURE	.10
X	1	222	PASTURE	.03
X	1	225	PASTURE	
X	1	229	PASTURE	
X	1	235	PASTURE	
X	1	237	PASTURE	
X	1	240	PASTURE	
X	2	242	PASTURE	
X	2	145	PASTURE	.39
X	2	150	PASTURE	.51
X	2	152	PASTURE	.26
X	2	157	PASTURE	.42
X	2	160	PASTURE	.32
X	2	163	PASTURE	.34
X	2	166	PASTURE	.33
X	2	171	PASTURE	.33
X	2	173	PASTURE	.33
X	2	178	PASTURE	.35
X	2	180	PASTURE	.45
X	2	185	PASTURE	.41
X	2	188	PASTURE	.44
X	2	192	PASTURE	.45
X	2	194	PASTURE	.21
X	2	196	PASTURE	.08
X	2	204	PASTURE	.11
X	2	213	PASTURE	.01
X	2	215	PASTURE	.10
X	2	220	PASTURE	.16
X	2	222	PASTURE	.14
X	2	225	PASTURE	
X	2	229	PASTURE	
X	2	235	PASTURE	
X	2	237	PASTURE	
X	2	240	PASTURE	
X	2	242	PASTURE	
X	2	145	PASTURE	.38
X	2	150	PASTURE	.43

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 11.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
X	3	152	PASTURE	.38
X	3	157	PASTURE	.44
X	3	160	PASTURE	.35
X	3	163	PASTURE	.32
X	3	165	PASTURE	.41
X	3	171	PASTURE	.44
X	3	173	PASTURE	.49
X	3	178	PASTURE	.47
J	3	186	PASTURE	.50
X	3	185	PASTURE	.44
X	3	188	PASTURE	.42
X	3	192	PASTURE	.53
X	3	194	PASTURE	.24
X	3	199	PASTURE	.05
X	3	202	PASTURE	
X	3	205	PASTURE	.04
X	3	209	PASTURE	.06
X	3	213	PASTURE	.07
X	3	215	PASTURE	.07
X	3	220	PASTURE	.02
X	3	222	PASTURE	
X	3	225	PASTURE	
X	3	229	PASTURE	
X	3	235	PASTURE	
X	3	237	PASTURE	
X	3	240	PASTURE	
X	3	242	PASTURE	
X	4	146	PASTURE	.58
X	4	150	PASTURE	.70
X	4	157	PASTURE	.50
X	4	160	PASTURE	.46
X	4	163	PASTURE	.42
X	4	165	PASTURE	.45
X	4	171	PASTURE	.45
X	4	173	PASTURE	.47
X	4	178	PASTURE	.45
X	4	180	PASTURE	.52
X	4	185	PASTURE	.45
X	4	188	PASTURE	.46
X	4	192	PASTURE	.55
X	4	194	PASTURE	.22
X	4	199	PASTURE	.24
X	4	202	PASTURE	
X	4	205	PASTURE	.06
X	4	209	PASTURE	.08
X	4	213	PASTURE	.10
X	4	215	PASTURE	.09
X	4	220	PASTURE	.20
X	4	222	PASTURE	.04
X	4	225	PASTURE	
X	4	229	PASTURE	
X	4	235	PASTURE	
X	4	237	PASTURE	
X	4	240	PASTURE	
X	4	242	PASTURE	

TABLE 12.— LEAF AREA INDEX FOR FIELD 14

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
14	1	146	PASTURE	.47
14	1	150	PASTURE	.49
14	1	152	PASTURE	.47
14	1	157	PASTURE	.48
14	1	153	PASTURE	.45
14	1	156	PASTURE	.52
14	1	171	PASTURE	.54
14	1	173	PASTURE	.52
14	1	176	PASTURE	.53
14	1	180	PASTURE	.55
14	1	185	PASTURE	.53
14	1	188	PASTURE	.54
14	1	192	PASTURE	.55
14	1	194	PASTURE	.41
14	1	194	PASTURE	.08
14	1	202	PASTURE	
14	1	206	PASTURE	.07
14	1	209	PASTURE	.08
14	1	213	PASTURE	.11
14	1	215	PASTURE	.11
14	1	220	PASTURE	.30
14	1	222	PASTURE	.08
14	1	226	PASTURE	
14	1	229	PASTURE	
14	1	235	PASTURE	
14	1	237	PASTURE	
14	1	240	PASTURE	
14	1	242	PASTURE	
14	2	146	PASTURE	.56
14	2	150	PASTURE	.36
14	2	152	PASTURE	.38
14	2	157	PASTURE	.52
14	2	153	PASTURE	.54
14	2	156	PASTURE	.53
14	2	156	PASTURE	.56
14	2	171	PASTURE	.57
14	2	173	PASTURE	.55
14	2	176	PASTURE	.57
14	2	180	PASTURE	.57
14	2	185	PASTURE	.70
14	2	188	PASTURE	.57
14	2	192	PASTURE	.56
14	2	194	PASTURE	.42
14	2	194	PASTURE	.08
14	2	202	PASTURE	
14	2	206	PASTURE	.07
14	2	209	PASTURE	.09
14	2	213	PASTURE	.10
14	2	215	PASTURE	.12
14	2	220	PASTURE	.11
14	2	222	PASTURE	.07
14	2	226	PASTURE	
14	2	229	PASTURE	
14	2	235	PASTURE	
14	2	237	PASTURE	
14	2	240	PASTURE	
14	2	242	PASTURE	
14	3	146	PASTURE	.26
14	3	150	PASTURE	.57

TABLE 12.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	LEAF AREA INDEX
14	3	152	PASTURE	.70
14	3	157	PASTURE	.62
14	3	160		.54
14	3	163	PASTURE	.53
14	3	165	PASTURE	.58
14	3	171	PASTURE	.66
14	3	173	PASTURE	.71
14	3	178	PASTURE	.75
14	3	180	PASTURE	.73
14	3	185	PASTURE	.77
14	3	188	PASTURE	.70
14	3	192	PASTURE	.69
14	3	194	PASTURE	.63
14	3	199	PASTURE	.66
14	3	202	PASTURE	
14	3	205	PASTURE	.63
14	3	209	PASTURE	.66
14	3	213	PASTURE	.69
14	3	215	PASTURE	.71
14	3	220	PASTURE	.75
14	3	222	PASTURE	.68
14	3	225	PASTURE	
14	3	226	PASTURE	
14	3	235	PASTURE	
14	3	237	PASTURE	
14	3	240	PASTURE	
14	3	242	PASTURE	
14	4	146	PASTURE	.40
14	4	150	PASTURE	.23
14	4	152	PASTURE	.34
14	4	157	PASTURE	.56
14	4	160		.60
14	4	163	PASTURE	.70
14	4	165	PASTURE	.75
14	4	171	PASTURE	.64
14	4	173	PASTURE	.77
14	4	176	PASTURE	.45
14	4	180	PASTURE	.66
14	4	185	PASTURE	.81
14	4	188	PASTURE	.86
14	4	192	PASTURE	.76
14	4	194	PASTURE	.48
14	4	199	PASTURE	.66
14	4	202	PASTURE	
14	4	205	PASTURE	.63
14	4	209	PASTURE	.65
14	4	213	PASTURE	.66
14	4	215	PASTURE	.69
14	4	220	PASTURE	.27
14	4	222	PASTURE	.63
14	4	225	PASTURE	
14	4	226	PASTURE	
14	4	229	PASTURE	
14	4	235	PASTURE	
14	4	237	PASTURE	
14	4	240	PASTURE	
14	4	242	PASTURE	

TABLE 13.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 4

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
4	1	145	WHEAT	10.50	.57
4	1	150	WHEAT	10.50	.67
4	1	152	WHEAT	10.53	1.02
4	1	157	WHEAT	10.54	.94
4	1	160	WHEAT	10.54	.34
4	1	163	WHEAT	11.20	.32
4	1	166	WHEAT	11.20	.13
4	1	171	WHEAT	11.30	.01
4	1	173	WHEAT	11.30	
4	1	176	WHEAT	11.30	
4	1	180	WHEAT	11.30	
4	1	185	WHEAT	11.50	
4	1	188	WHEAT	11.50	
4	1	192	WHEAT	H	
4	1	194	WHEAT	H	
4	1	199	WHEAT	H	
4	1	202	WHEAT	H	
4	2	145	WHEAT	10.50	.55
4	2	150	WHEAT	10.50	.55
4	2	152	WHEAT	10.53	.50
4	2	157	WHEAT	10.54	.96
4	2	160	WHEAT	10.54	.35
4	2	163	WHEAT	11.20	.32
4	2	166	WHEAT	11.20	.14
4	2	171	WHEAT	11.30	.01
4	2	173	WHEAT	11.30	
4	2	176	WHEAT	11.30	
4	2	180	WHEAT	11.30	
4	2	185	WHEAT	11.50	
4	2	188	WHEAT	11.50	
4	2	192	WHEAT	H	
4	2	194	WHEAT	H	
4	2	199	WHEAT	H	
4	2	202	WHEAT	H	
4	3	145	WHEAT	10.50	.51
4	3	150	WHEAT	10.50	.56
4	3	152	WHEAT	10.53	.75
4	3	157	WHEAT	10.54	.94
4	3	160	WHEAT	10.54	.37
4	3	163	WHEAT	11.20	.35
4	3	166	WHEAT	11.20	.14
4	3	171	WHEAT	11.30	.01
4	3	173	WHEAT	11.30	
4	3	176	WHEAT	11.30	
4	3	180	WHEAT	11.30	
4	3	185	WHEAT	11.50	
4	3	188	WHEAT	11.50	
4	3	192	WHEAT	H	
4	3	194	WHEAT	H	
4	3	199	WHEAT	H	
4	3	202	WHEAT	H	
4	4	145	WHEAT	10.50	.54
4	4	150	WHEAT	10.50	.51
4	4	152	WHEAT	10.53	1.26
4	4	157	WHEAT	10.54	.98
4	4	160	WHEAT	10.54	.33
4	4	163	WHEAT	11.20	.32
4	4	166	WHEAT	11.20	.15
4	4	171	WHEAT	11.30	.01

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 13.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
4	4	175	WHEAT	11.30	
4	4	178	WHEAT	11.30	
4	4	180	WHEAT	11.30	
4	4	185	WHEAT	11.50	
4	4	185	WHEAT	11.50	
4	4	192	WHEAT	H	
4	4	194	WHEAT	H	
4	4	194	WHEAT	H	
4	4	202	WHEAT	H	

TABLE 14.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 7

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
7	1	145	WHEAT	10.50	.54
7	1	150	WHEAT	10.50	.42
7	1	152	WHEAT	10.53	.41
7	1	157	WHEAT	10.54	.06
7	1	160	WHEAT	10.54	.25
7	1	165	WHEAT	11.20	.24
7	1	166	WHEAT	11.20	.25
7	1	171	WHEAT	11.30	.01
7	1	173	WHEAT	11.30	
7	1	176	WHEAT	11.30	
7	1	180	WHEAT	11.30	
7	1	185	WHEAT	11.50	
7	1	186	WHEAT	11.50	
7	1	192	WHEAT		
7	1	194	WHEAT		
7	1	199	WHEAT		
7	1	202	WHEAT		
7	2	146	WHEAT	10.50	.52
7	2	150	WHEAT	10.50	.57
7	2	152	WHEAT	10.53	.43
7	2	157	WHEAT	10.54	1.01
7	2	160	WHEAT	10.54	.28
7	2	165	WHEAT	11.20	.26
7	2	166	WHEAT	11.20	.26
7	2	171	WHEAT	11.30	.01
7	2	173	WHEAT	11.30	
7	2	176	WHEAT	11.30	
7	2	180	WHEAT	11.30	
7	2	185	WHEAT	11.50	
7	2	186	WHEAT	11.50	
7	2	192	WHEAT		
7	2	194	WHEAT		
7	2	199	WHEAT		
7	2	202	WHEAT		
7	3	146	WHEAT	10.50	.55
7	3	150	WHEAT	10.50	.43
7	3	152	WHEAT	10.53	.40
7	3	157	WHEAT	10.54	.80
7	3	160	WHEAT	10.54	.22
7	3	165	WHEAT	11.20	.17
7	3	166	WHEAT	11.20	.17
7	3	171	WHEAT	11.30	.01
7	3	173	WHEAT	11.30	
7	3	176	WHEAT	11.30	
7	3	180	WHEAT	11.30	
7	3	185	WHEAT	11.50	
7	3	186	WHEAT	11.50	
7	3	192	WHEAT		
7	3	194	WHEAT		
7	3	199	WHEAT		
7	3	202	WHEAT		
7	4	146	WHEAT	10.50	.50
7	4	150	WHEAT	10.50	.25
7	4	152	WHEAT	10.53	.44
7	4	157	WHEAT	10.54	.48
7	4	160	WHEAT	10.54	.24
7	4	165	WHEAT	11.20	.23
7	4	166	WHEAT	11.20	.23
7	4	171	WHEAT	11.30	.01

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 14.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
7 4	173	173	WHEAT	11.30	
7 4	174	174	WHEAT	11.30	
7 4	180	180	WHEAT	11.30	
7 4	185	185	WHEAT	11.50	
7 4	188	188	WHEAT	11.50	
7 4	192	192	WHEAT	M	
7 4	194	194	WHEAT	M	
7 4	196	196	WHEAT	M	
7 4	202	202	WHEAT	M	

TABLE 15.— LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 10

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
10	1	146	WHEAT	10.50	.78
10	1	150	WHEAT	10.50	.85
10	1	152	WHEAT	10.53	.86
10	1	157	WHEAT	10.54	.90
10	1	159		11.10	.61
10	1	163	WHEAT	11.10	.60
10	1	165	WHEAT	11.10	.23
10	1	171	WHEAT	11.30	.01
10	1	173	WHEAT	11.30	
10	1	175	WHEAT	11.30	
10	1	180	WHEAT	11.30	
10	1	185	WHEAT	11.50	
10	1	185	WHEAT	11.50	
10	1	192	WHEAT		
10	1	194	WHEAT		
10	1	194	WHEAT		
10	1	202	WHEAT		
10	2	146	WHEAT	10.50	.01
10	2	150	WHEAT	10.50	.03
10	2	152	WHEAT	10.53	.60
10	2	157	WHEAT	10.54	.04
10	2	159		11.10	.72
10	2	163	WHEAT	11.10	.59
10	2	165	WHEAT	11.10	.27
10	2	171	WHEAT	11.30	.01
10	2	173	WHEAT	11.30	
10	2	175	WHEAT	11.30	
10	2	180	WHEAT	11.50	
10	2	185	WHEAT	11.50	
10	2	185	WHEAT	11.50	
10	2	192	WHEAT		
10	2	194	WHEAT		
10	2	194	WHEAT		
10	2	202	WHEAT		
10	3	146	WHEAT	10.50	.44
10	3	150	WHEAT	10.50	.04
10	3	152	WHEAT	10.53	.61
10	3	157	WHEAT	10.54	.07
10	3	159		11.10	.27
10	3	163	WHEAT	11.10	.67
10	3	165	WHEAT	11.10	.25
10	3	171	WHEAT	11.30	.01
10	3	173	WHEAT	11.30	
10	3	175	WHEAT	11.30	
10	3	180	WHEAT	11.50	
10	3	185	WHEAT	11.50	
10	3	185	WHEAT	11.50	
10	3	192	WHEAT		
10	3	194	WHEAT		
10	3	194	WHEAT		
10	3	202	WHEAT		
10	4	146	WHEAT	10.50	1.00
10	4	150	WHEAT	10.50	.05
10	4	152	WHEAT	10.53	.74
10	4	157	WHEAT	10.54	.03
10	4	159		11.10	.22
10	4	163	WHEAT	11.10	.61
10	4	165	WHEAT	11.10	.31
10	4	171	WHEAT	11.30	.01

TABLE 15.-- Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
10	4	173	WHEAT	11.30	
10	4	175	WHEAT	11.30	
10	4	180	WHEAT	11.30	
10	4	185	WHEAT	11.50	
10	4	188	WHEAT	11.50	
10	4	192	WHEAT	H	
10	4	194	WHEAT	H	
10	4	199	WHEAT	H	
10	4	202	WHEAT	H	

TABLE 16.—LEAF AREA INDEX AND GROWTH STAGE FOR FIELD 11

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
11	1	146	WHEAT	10.50	.41
11	1	150	WHEAT	10.50	.50
11	1	152	WHEAT	10.53	.40
11	1	157	WHEAT	10.54	.34
11	1	160		11.10	.13
11	1	163	WHEAT	11.20	.15
11	1	165	WHEAT	11.20	.13
11	1	171	WHEAT	11.30	.02
11	1	173	WHEAT	11.30	
11	1	175	WHEAT	11.30	
11	1	180	WHEAT	11.30	
11	1	185	WHEAT	11.50	
11	1	188	WHEAT	11.50	
11	1	192	WHEAT		
11	1	194	WHEAT		
11	1	199	WHEAT		
11	1	202	WHEAT		
11	2	146	WHEAT	10.50	.51
11	2	150	WHEAT	10.50	.56
11	2	152	WHEAT	10.53	.33
11	2	157	WHEAT	10.54	.32
11	2	160		11.10	.17
11	2	163	WHEAT	11.20	.17
11	2	165	WHEAT	11.20	.16
11	2	171	WHEAT	11.30	.02
11	2	173	WHEAT	11.30	
11	2	175	WHEAT	11.30	
11	2	180	WHEAT	11.30	
11	2	185	WHEAT	11.50	
11	2	188	WHEAT	11.50	
11	2	192	WHEAT		
11	2	194	WHEAT		
11	2	199	WHEAT		
11	2	202	WHEAT		
11	3	146	WHEAT	10.50	.50
11	3	150	WHEAT	10.50	.34
11	3	152	WHEAT	10.53	.33
11	3	157	WHEAT	10.54	.35
11	3	160		11.10	.16
11	3	163	WHEAT	11.20	.16
11	3	165	WHEAT	11.20	.16
11	3	171	WHEAT	11.30	.03
11	3	173	WHEAT	11.30	
11	3	175	WHEAT	11.30	
11	3	180	WHEAT	11.30	
11	3	185	WHEAT	11.50	
11	3	188	WHEAT	11.50	
11	3	192	WHEAT		
11	3	194	WHEAT		
11	3	199	WHEAT		
11	3	202	WHEAT		
11	4	146	WHEAT	10.50	.29
11	4	150	WHEAT	10.50	.63
11	4	152	WHEAT	10.53	.34
11	4	157	WHEAT	10.54	.32
11	4	160		11.10	.16
11	4	163	WHEAT	11.20	.15
11	4	165	WHEAT	11.20	.15
11	4	171	WHEAT	11.30	.03

TABLE 16.— Concluded.

FIELD NUMBER	SAMPLE LOCATION	JULIAN DAY	CROP	FEEKES SCALE	LEAF AREA INDEX
11	4	173	wht alf	11.30	
11	4	178	wht alf	11.30	
11	4	180	wht alf	11.30	
11	4	185	wht alf	11.50	
11	4	188	wht alf	11.50	
11	4	192	wht alf	H	
11	4	194	wht alf	H	
11	4	194	wht alf	H	
11	4	202	wht alf	H	

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 17.— RAIN GAGE LOCATIONS, SECTION, TOWNSHIP, RANGE

Gage number	Location		
	Section	Township	Range
K2*	1	8	34
K3	3	8	33
K4	6	8	32
K5	21	8	32
K6	2	8	32
K7	24	8	32
K8	24	8	33
K9	31	8	32
K10	27	8	32
K11	32	8	31
K12	16	9	31
K13	13	9	32
K14	16	9	32
K15	32	9	31
K16	31	9	31
K17	12	10	32
K18	17	8	33
K19	15	8	34
K20	30	8	33
K21	4	9	34
K22	18	9	34
K23	14	9	34
K24	17	9	33
K25	34	8	33
K26	14	9	33
K27	31	9	32
K28	11	10	33
K29	34	9	33
K30	36	9	34
K31	28	9	34
K32	11	10	34
K33	8	10	33
K34	15	10	32
K35	30	10	33
K36	27	10	33
K37	31	10	32
K38	27	10	32
K39	14	8	33

*Gage K1 is located at Goodland Airport in Goodland, Kansas.

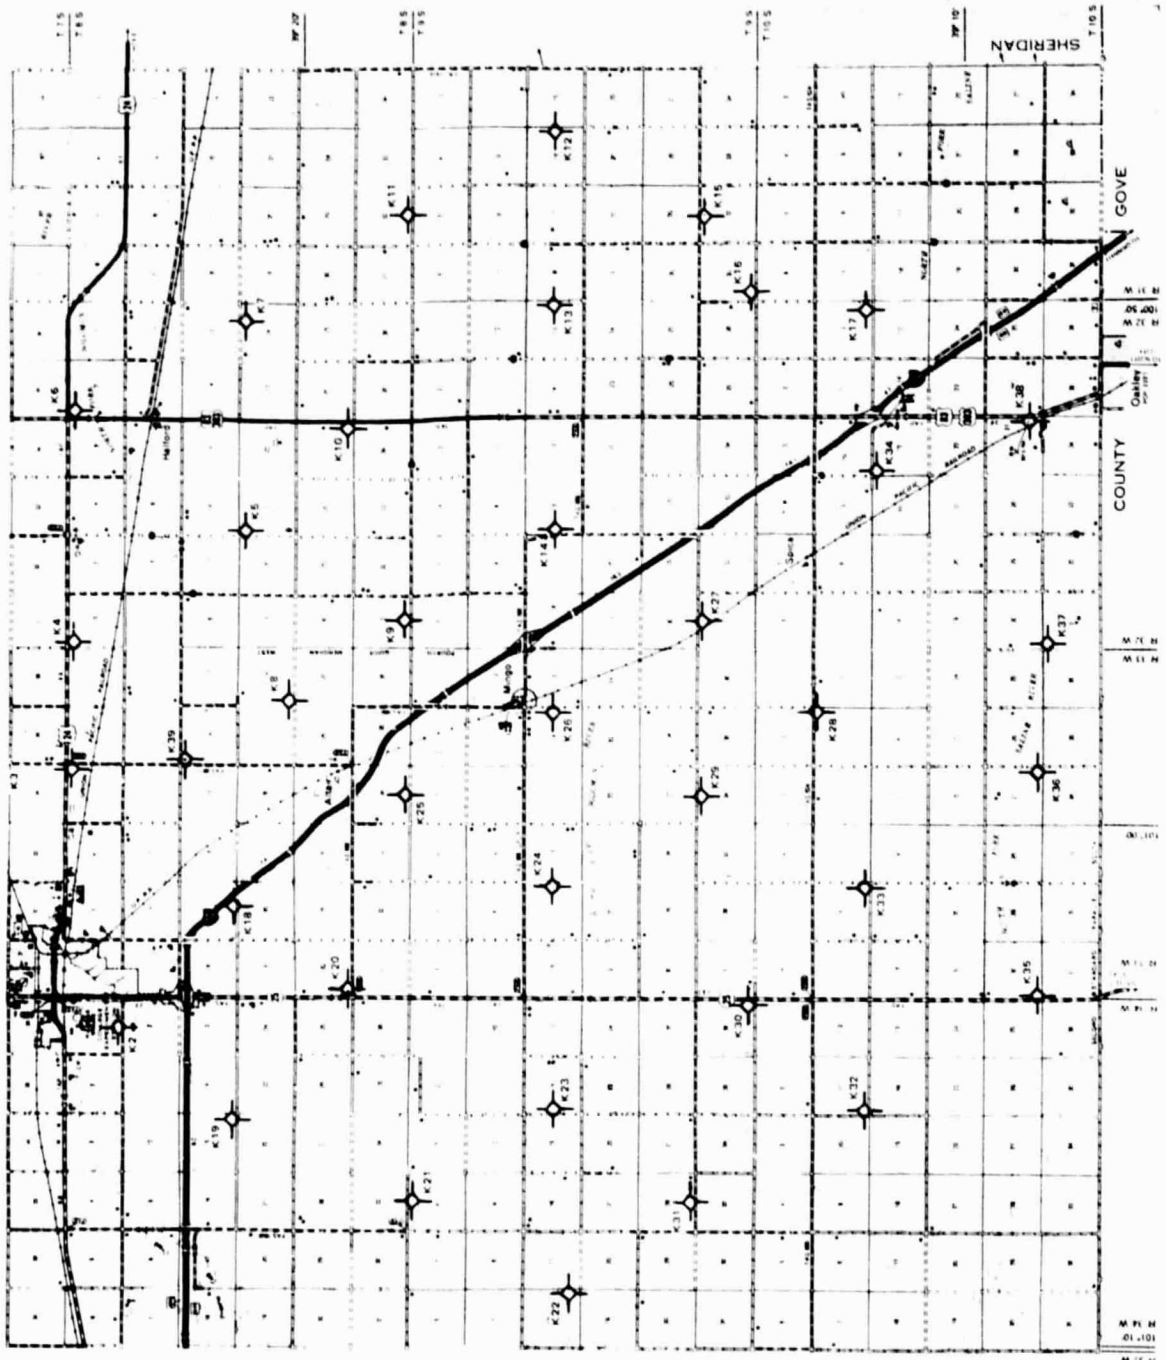


Figure 4.— Rain gage locations.

TABLE 18.— RECORDING RAIN GAGE DATA EXAMPLE

Rain gage number	Year	Day	Rainfall	
			mm	in.
K01	7A	121	24.9	1.0
K01	7A	122	7.4	0.3
K01	7A	123	0.0	0.0
K01	7A	124	0.0	0.0
K01	7A	125	1.0	0.0
K01	7A	126	24.9	1.0
K01	7A	127	2.0	0.1
K01	7A	131	0.0	0.0
K01	7A	132	0.0	0.0
K01	7A	133	0.0	0.0
K01	7A	134	0.0	0.0
K01	7A	135	0.0	0.0
K01	7A	136	0.0	0.0
K01	7A	137	0.0	0.0
K01	7A	13A	4.3	0.2
K01	7A	139	0.0	0.0
K01	7A	140	0.0	0.0
K01	7A	141	0.0	0.0
K01	7A	142	1.0	0.0
K01	7A	143	0.0	0.0
K01	7A	144	1.5	0.1
K01	7A	145	4.3	0.2
K01	7A	146	0.0	0.0
K01	7A	147	0.0	0.0
K01	7A	14A	14.2	0.6
K01	7A	153	0.0	0.0
K01	7A	154	0.0	0.0
K01	7A	155	23.9	0.9
K01	7A	156	0.0	0.0
K01	7A	157	10.2	0.4
K01	7A	15A	0.0	0.0
K01	7A	162	0.0	0.0
K01	7A	163	0.0	0.0
K01	7A	164	0.0	0.0
K01	7A	165	0.0	0.0
K01	7A	166	0.0	0.0
K01	7A	167	0.0	0.0
K01	7A	168	0.0	0.0
K01	7A	169	1.0	0.0
K01	7A	170	0.0	0.0
K01	7A	171	0.0	0.0
K01	7A	172	0.3	0.0
K01	7A	173	0.0	0.0
K01	7A	174	0.0	0.0
K01	7A	175	1.0	0.0
K01	7A	176	0.0	0.0
K01	7A	177	0.0	0.0
K01	7A	178	9.7	0.4
K01	7A	179	0.0	0.0
K01	7A	180	0.0	0.0
K01	7A	182	0.0	0.0
K01	7A	183	0.0	0.0
K01	7A	184	0.0	0.0
K01	7A	185	0.0	0.0
K01	7A	186	0.0	0.0
K01	7A	187	0.0	0.0
K01	7A	193	0.0	0.0
K01	7A	194	2.5	0.1
K01	7A	195	0.0	0.0
K01	7A	196	0.0	0.0
K01	7A	197	0.0	0.0
K01	7A	198	0.0	0.0
K01	7A	199	0.0	0.0
K01	7A	200	0.0	0.0
K01	7A	201	19.6	0.8
K01	7A	202	3.3	0.1
K01	7A	203	4.3	0.2
K01	7A	204	0.0	0.0
K01	7A	205	0.0	0.0
K01	7A	206	0.0	0.0
K01	7A	207	0.0	0.0
K01	7A	208	0.0	0.0
K01	7A	209	0.0	0.0
K01	7A	210	0.0	0.0
K01	7A	211	0.0	0.0
K01	7A	213	0.0	0.0
K01	7A	214	1.0	0.0
K01	7A	215	3.0	0.1
K01	7A	216	2.0	0.1
K01	7A	217	0.0	0.0
K01	7A	218	0.0	0.0
K01	7A	219	0.0	0.0
K01	7A	220	0.0	0.0
K01	7A	221	0.0	0.0
K01	7A	222	0.0	0.0
K01	7A	223	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K02	7A	138	26.2	1.0
K02	7A	139	0.0	0.0
K02	7A	140	0.0	0.0
K02	7A	141	0.0	0.0
K02	7A	142	0.0	0.0
K02	7A	143	0.0	0.0
K02	7A	144	0.0	0.0
K02	7A	145	0.0	0.0
K02	7A	146	0.0	0.0
K02	7A	147	0.0	0.0
K02	7A	153	0.5	0.0
K02	7A	154	0.0	0.0
K02	7A	155	38.4	1.5
K02	7A	156	0.0	0.0
K02	7A	157	33.0	1.3
K02	7A	158	0.5	0.0
K02	7A	159	0.0	0.0
K02	7A	160	0.0	0.0
K02	7A	161	0.0	0.0
K02	7A	162	0.0	0.0
K02	7A	163	0.0	0.0
K02	7A	164	0.0	0.0
K02	7A	165	0.0	0.0
K02	7A	166	0.0	0.0
K02	7A	167	0.0	0.0
K02	7A	168	0.0	0.0
K02	7A	169	0.0	0.0
K02	7A	170	0.0	0.0
K02	7A	171	0.0	0.0
K02	7A	172	0.0	0.0
K02	7A	173	0.0	0.0
K02	7A	174	0.0	0.0
K02	7A	175	0.0	0.0
K02	7A	176	0.0	0.0
K02	7A	177	0.0	0.0
K02	7A	178	2.8	0.1
K02	7A	179	6.1	0.2
K02	7A	180	0.0	0.0
K02	7A	182	0.3	0.0
K02	7A	183	0.0	0.0
K02	7A	184	0.0	0.0
K02	7A	185	0.0	0.0
K02	7A	186	0.0	0.0
K02	7A	187	0.0	0.0
K02	7A	188	0.0	0.0
K02	7A	189	0.0	0.0
K02	7A	190	0.0	0.0
K02	7A	191	0.0	0.0
K02	7A	192	0.0	0.0
K02	7A	193	0.0	0.0
K02	7A	194	0.3	0.0
K02	7A	195	0.0	0.0
K02	7A	196	0.0	0.0
K02	7A	197	0.0	0.0
K02	7A	198	0.0	0.0
K02	7A	199	0.0	0.0
K02	7A	200	0.0	0.0
K02	7A	201	19.6	0.8
K02	7A	202	3.3	0.1
K02	7A	203	4.3	0.2
K02	7A	204	0.0	0.0
K02	7A	205	0.0	0.0
K02	7A	206	0.0	0.0
K02	7A	207	0.0	0.0
K02	7A	208	0.0	0.0
K02	7A	209	0.0	0.0
K02	7A	210	0.0	0.0
K02	7A	211	0.0	0.0
K02	7A	213	0.0	0.0
K02	7A	214	1.0	0.0
K02	7A	215	3.0	0.1
K02	7A	216	2.0	0.1
K02	7A	217	0.0	0.0
K02	7A	218	0.0	0.0
K02	7A	219	0.0	0.0
K02	7A	220	0.0	0.0
K02	7A	221	0.0	0.0
K02	7A	222	0.0	0.0
K02	7A	223	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K02	78	224	0.0	0.0
K02	78	225	0.0	0.0
K02	78	226	0.8	0.0
K02	78	227	0.0	0.0
K02	78	228	0.0	0.0
K02	78	229	0.0	0.0
K02	78	230	0.0	0.0
K02	78	231	0.0	0.0
K02	78	232	0.0	0.0
K02	75	233	0.0	0.0
K02	78	234	0.0	0.0
K02	78	235	0.0	0.0
K02	78	236	0.0	0.0
K02	78	237	0.0	0.0
K02	78	238	1.8	0.1
K02	78	239	0.0	0.0
K02	78	240	0.0	0.0
K02	78	241	0.0	0.0
K02	78	242	0.0	0.0
K03	78	221	16.3	0.6
K03	78	222	8.1	0.3
K03	78	223	0.0	0.0
K03	78	224	0.0	0.0
K03	78	225	0.0	0.0
K03	78	226	34.3	1.3
K03	78	227	2.3	0.1
K03	78	228	0.0	0.0
K03	78	229	0.0	0.0
K03	78	130	0.0	0.0
K03	78	131	0.0	0.0
K03	78	132	0.8	0.0
K03	78	133	0.0	0.0
K03	78	134	0.0	0.0
K03	78	135	0.0	0.0
K03	78	136	0.0	0.0
K03	78	137	0.0	0.0
K03	78	138	16.5	0.6
K03	78	139	0.0	0.0
K03	78	140	0.0	0.0
K03	78	141	0.0	0.0
K03	78	142	0.0	0.0
K03	78	143	0.0	0.0
K03	78	144	0.0	0.0
K03	78	145	0.0	0.0
K03	78	146	0.0	0.0
K03	78	147	0.0	0.0
K03	78	153	0.5	0.0
K03	78	154	0.0	0.0
K03	78	155	0.0	0.0
K03	78	156	0.0	0.0
K03	78	157	0.0	0.0
K03	78	158	0.0	0.0
K03	78	159	0.0	0.0
K03	78	160	0.0	0.0
K03	78	161	0.0	0.0
K03	78	162	0.0	0.0
K03	78	163	0.0	0.0
K03	78	164	0.0	0.0
K03	78	165	0.0	0.0
K03	78	166	0.0	0.0
K03	78	167	0.0	0.0
K03	78	168	0.0	0.0
K03	78	169	0.0	0.0
K03	78	170	0.0	0.0
K03	78	171	0.0	0.0
K03	78	172	0.0	0.0
K03	78	173	0.0	0.0
K03	78	174	0.0	0.0
K03	78	175	0.0	0.0
K03	78	176	0.0	0.0
K03	78	177	0.0	0.0
K03	78	178	4.8	0.2
K03	78	179	2.3	0.1
K03	78	180	0.0	0.0
K03	78	181	0.5	0.0
K03	78	182	0.0	0.0
K03	78	183	0.0	0.0
K03	78	184	0.0	0.0
K03	78	185	0.0	0.0
K03	78	186	0.0	0.0
K03	78	187	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K03	78	188	0.0	0.0
K03	78	189	0.0	0.0
K03	78	190	0.0	0.0
K03	78	191	0.0	0.0
K03	78	192	0.0	0.0
K03	78	193	0.0	0.0
K03	78	194	0.0	0.0
K03	78	195	0.0	0.0
K03	78	196	0.0	0.0
K03	78	197	0.0	0.0
K03	78	198	0.0	0.0
K03	78	199	0.0	0.0
K03	78	200	0.0	0.0
K03	78	201	22.6	0.9
K03	78	202	9.9	0.4
K03	78	203	2.5	0.1
K03	78	204	0.0	0.0
K03	78	205	0.0	0.0
K03	78	206	0.0	0.0
K03	78	207	0.0	0.0
K03	78	208	0.0	0.0
K03	78	209	0.0	0.0
K03	78	210	0.0	0.0
K03	78	211	0.8	0.0
K03	78	213	6.0	0.2
K03	78	214	1.5	0.1
K03	78	215	2.0	0.1
K03	78	216	0.0	0.0
K03	78	217	0.0	0.0
K03	78	218	0.0	0.0
K03	78	219	0.0	0.0
K03	78	220	0.0	0.0
K03	78	221	0.0	0.0
K03	78	222	0.0	0.0
K03	78	223	0.0	0.0
K03	78	224	0.0	0.0
K03	78	225	0.0	0.0
K03	78	234	0.0	0.0
K03	78	235	0.0	0.0
K03	78	236	0.0	0.0
K03	78	237	0.3	0.0
K03	78	238	2.8	0.1
K03	78	239	0.0	0.0
K03	78	240	0.0	0.0
K03	78	241	0.6	0.0
K03	78	242	0.0	0.0
K04	78	121	14.0	0.5
K04	78	122	9.7	0.4
K04	78	123	0.0	0.0
K04	78	124	0.0	0.0
K04	78	125	0.3	0.0
K04	78	126	25.7	1.0
K04	78	127	0.8	0.0
K04	78	128	0.0	0.0
K04	78	129	0.0	0.0
K04	78	130	0.0	0.0
K04	78	131	0.0	0.0
K04	78	132	0.3	0.0
K04	78	133	0.0	0.0
K04	78	134	0.0	0.0
K04	78	135	0.0	0.0
K04	78	136	0.0	0.0
K04	78	137	0.0	0.0
K04	78	138	0.0	0.0
K04	78	139	10.7	0.4
K04	78	140	0.0	0.0
K04	78	141	0.0	0.0
K04	78	142	0.0	0.0
K04	78	143	0.0	0.0
K04	78	144	0.0	0.0
K04	78	145	0.0	0.0
K04	78	146	0.0	0.0
K04	78	147	0.0	0.0
K04	78	153	1.3	0.0
K04	78	154	0.0	0.0
K04	78	155	43.2	1.7
K04	78	156	0.0	0.0
K04	78	158	0.0	0.0
K04	78	159	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K04	78	160	0.0	0.0
K04	78	161	0.0	0.0
K04	78	162	0.0	0.0
K04	78	163	0.0	0.0
K04	78	164	0.0	0.0
K04	78	165	0.0	0.0
K04	78	166	0.0	0.0
K04	78	167	0.0	0.0
K04	78	168	0.0	0.0
K04	78	169	0.0	0.0
K04	78	170	0.0	0.0
K04	78	171	0.0	0.0
K04	78	172	0.0	0.0
K04	78	173	0.0	0.0
K04	78	174	0.0	0.0
K04	78	175	0.0	0.0
K04	78	176	0.0	0.0
K04	78	177	0.0	0.0
K04	78	178	3.6	0.1
K04	78	179	0.0	0.0
K04	78	180	0.0	0.0
K04	78	182	0.0	0.0
K04	78	183	0.0	0.0
K04	78	184	0.0	0.0
K04	78	185	0.0	0.0
K04	78	186	0.0	0.0
K04	78	187	0.5	0.0
K04	78	188	0.0	0.0
K04	78	189	0.0	0.0
K04	78	190	0.0	0.0
K04	78	191	0.0	0.0
K04	78	192	0.0	0.0
K04	78	193	0.0	0.0
K04	78	194	0.0	0.0
K04	78	195	0.0	0.0
K04	78	196	0.0	0.0
K04	78	197	0.0	0.0
K04	78	206	0.0	0.0
K04	78	207	0.0	0.0
K04	78	208	0.0	0.0
K04	78	209	0.0	0.0
K04	78	210	0.0	0.0
K04	78	211	1.0	0.0
K04	78	213	9.0	0.3
K04	78	214	1.0	0.0
K04	78	215	1.3	0.0
K04	78	216	0.0	0.0
K04	78	217	0.0	0.0
K04	78	218	0.0	0.0
K04	78	219	0.0	0.0
K04	78	220	0.0	0.0
K04	78	221	0.0	0.0
K04	78	222	0.0	0.0
K04	78	223	0.0	0.0
K04	78	224	0.0	0.0
K04	78	225	0.0	0.0
K04	78	226	0.0	0.0
K04	78	227	24.1	0.9
K04	78	228	0.0	0.0
K04	78	229	0.0	0.0
K04	78	230	0.0	0.0
K04	78	231	0.0	0.0
K04	78	232	0.0	0.0
K04	78	233	0.0	0.0
K04	78	234	0.0	0.0
K04	78	235	0.0	0.0
K04	78	236	0.0	0.0
K04	78	237	0.3	0.0
K04	78	238	0.8	0.0
K04	78	239	0.0	0.0
K04	78	240	0.0	0.0
K04	78	241	0.0	0.0
K04	78	242	0.0	0.0
K05	78	121	20.1	0.8
K05	78	122	9.7	0.4
K05	78	123	0.0	0.0
K05	78	124	0.0	0.0
K05	78	125	0.3	0.0
K05	78	126	41.4	1.6

Rain gage number	Year	Day	Rainfall	
			mm	in.
K05	78	127	5.8	0.2
K05	78	128	0.0	0.0
K05	78	129	0.0	0.0
K05	78	130	0.0	0.0
K05	78	131	0.0	0.0
K05	78	132	0.5	0.0
K05	78	133	0.0	0.0
K05	78	134	0.0	0.0
K05	78	135	0.0	0.0
K05	78	136	0.0	0.0
K05	78	137	0.0	0.0
K05	78	138	17.0	0.7
K05	78	139	0.0	0.0
K05	78	140	0.0	0.0
K05	78	141	0.0	0.0
K05	78	142	0.0	0.0
K05	78	143	0.0	0.0
K05	78	144	0.0	0.0
K05	78	145	0.0	0.0
K05	78	146	0.0	0.0
K05	78	147	0.0	0.0
K05	78	153	0.8	0.0
K05	78	154	3.6	0.1
K05	78	155	53.8	2.1
K05	78	156	0.8	0.0
K05	78	157	22.6	0.9
K05	78	158	1.3	0.0
K05	78	159	0.0	0.0
K05	78	160	0.0	0.0
K05	78	161	0.0	0.0
K05	78	162	0.0	0.0
K05	78	163	0.0	0.0
K05	78	164	0.0	0.0
K05	78	165	0.0	0.0
K05	78	166	0.0	0.0
K05	78	167	0.0	0.0
K05	78	168	0.0	0.0
K05	78	169	1.3	0.0
K05	78	170	0.0	0.0
K05	78	171	2.8	0.1
K05	78	172	0.0	0.0
K05	78	173	0.0	0.0
K05	78	174	0.0	0.0
K05	78	175	0.0	0.0
K05	78	176	0.0	0.0
K05	78	177	0.0	0.0
K05	78	178	8.1	0.3
K05	78	179	0.3	0.0
K05	78	180	0.0	0.0
K05	78	182	0.3	0.0
K05	78	183	0.0	0.0
K05	78	184	0.0	0.0
K05	78	185	0.0	0.0
K05	78	186	0.0	0.0
K05	78	187	0.0	0.0
K05	78	188	0.0	0.0
K05	78	189	0.0	0.0
K05	78	190	0.0	0.0
K05	78	191	0.0	0.0
K05	78	192	0.0	0.0
K05	78	193	1.3	0.0
K05	78	194	0.0	0.0
K05	78	195	0.0	0.0
K05	78	196	0.0	0.0
K05	78	197	0.0	0.0
K05	78	198	0.0	0.0
K05	78	199	0.0	0.0
K05	78	200	0.0	0.0
K05	78	201	20.3	0.8
K05	78	202	10.4	0.4
K05	78	203	5.8	0.2
K05	78	204	2.0	0.1
K05	78	205	1.3	0.0
K05	78	206	0.0	0.0
K05	78	207	0.0	0.0
K05	78	208	0.0	0.0
K05	78	209	0.0	0.0
K05	78	210	0.0	0.0
K05	78	211	3.0	0.1

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K05	78	213	9.0	0.3
K05	78	214	1.8	0.1
K05	78	215	1.5	0.1
K05	78	216	0.0	0.0
K05	78	217	0.0	0.0
K05	78	218	0.0	0.0
K05	78	219	0.0	0.0
K05	78	220	0.0	0.0
K05	78	221	0.0	0.0
K05	78	222	0.0	0.0
K05	78	223	0.0	0.0
K05	78	224	0.0	0.0
K05	78	225	0.0	0.0
K05	78	226	0.0	0.0
K05	78	227	13.2	0.5
K05	78	228	0.0	0.0
K05	78	229	0.0	0.0
K05	78	230	0.0	0.0
K05	78	231	0.0	0.0
K05	78	232	0.0	0.0
K05	78	233	0.0	0.0
K05	78	234	0.0	0.0
K05	78	235	0.0	0.0
K05	78	236	0.0	0.0
K05	78	237	0.3	0.0
K05	78	238	3.3	0.1
K05	78	239	0.0	0.0
K05	78	240	0.0	0.0
K05	78	241	0.0	0.0
K05	78	242	0.5	0.0
K06	78	121	15.7	0.6
K06	78	122	7.4	0.3
K06	78	123	0.0	0.0
K06	78	124	0.0	0.0
K06	78	125	0.3	0.0
K06	78	126	26.7	1.0
K06	78	127	0.0	0.0
K06	78	128	0.0	0.0
K06	78	129	0.0	0.0
K06	78	130	0.0	0.0
K06	78	131	0.0	0.0
K06	78	132	0.8	0.0
K06	78	133	0.0	0.0
K06	78	134	0.0	0.0
K06	78	135	0.0	0.0
K06	78	136	0.0	0.0
K06	78	137	0.0	0.0
K06	78	138	11.4	0.4
K06	78	139	0.0	0.0
K06	78	140	0.0	0.0
K06	78	141	0.0	0.0
K06	78	142	0.0	0.0
K06	78	143	0.0	0.0
K06	78	144	0.0	0.0
K06	78	145	0.0	0.0
K06	78	146	0.0	0.0
K06	78	147	0.0	0.0
K06	78	153	1.5	0.1
K06	78	154	0.3	0.0
K06	78	155	41.9	1.6
K06	78	156	0.0	0.0
K06	78	157	19.8	0.8
K06	78	158	0.0	0.0
K06	78	159	0.0	0.0
K06	78	160	0.0	0.0
K06	78	161	0.0	0.0
K06	78	162	0.0	0.0
K06	78	163	0.0	0.0
K06	78	164	0.0	0.0
K06	78	165	0.0	0.0
K06	78	166	0.0	0.0
K06	78	167	0.0	0.0
K06	78	168	0.0	0.0
K06	78	169	0.0	0.0
K06	78	170	0.0	0.0
K06	78	171	0.0	0.0
K06	78	172	0.0	0.0
K06	78	173	0.0	0.0
K06	78	174	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K06	78	175	0.0	0.0
K06	78	176	0.0	0.0
K06	78	177	0.0	0.0
K06	78	178	4.3	0.2
K06	78	179	0.0	0.0
K06	78	180	0.0	0.0
K06	78	182	0.0	0.0
K06	78	183	0.0	0.0
K06	78	184	0.0	0.0
K06	78	185	0.0	0.0
K06	78	186	0.0	0.0
K06	78	187	0.3	0.0
K06	78	188	0.0	0.0
K06	78	189	0.0	0.0
K06	78	190	0.0	0.0
K06	78	191	0.0	0.0
K06	78	192	0.0	0.0
K06	78	193	0.0	0.0
K06	78	194	0.0	0.0
K06	78	195	0.0	0.0
K06	78	196	0.0	0.0
K06	78	197	0.0	0.0
K06	78	198	0.0	0.0
K06	78	199	0.0	0.0
K06	78	200	0.0	0.0
K06	78	201	18.3	0.7
K06	78	202	8.1	0.3
K06	78	203	6.3	0.2
K06	78	204	0.0	0.0
K06	78	205	0.0	0.0
K06	78	206	0.0	0.0
K06	78	207	0.0	0.0
K06	78	208	0.0	0.0
K06	78	209	0.0	0.0
K06	78	210	0.0	0.0
K06	78	211	1.8	0.1
K06	78	213	13.0	0.5
K06	78	214	0.8	0.0
K06	78	215	0.0	0.0
K06	78	216	0.0	0.0
K06	78	217	0.0	0.0
K06	78	218	0.0	0.0
K06	78	219	0.0	0.0
K06	78	220	0.0	0.0
K06	78	221	0.0	0.0
K06	78	222	0.0	0.0
K06	78	223	0.0	0.0
K06	78	224	0.0	0.0
K06	78	225	0.0	0.0
K06	78	226	0.0	0.0
K06	78	227	0.0	0.0
K06	78	228	0.0	0.0
K06	78	229	0.0	0.0
K06	78	230	0.0	0.0
K06	78	231	0.0	0.0
K06	78	232	0.0	0.0
K06	78	233	0.0	0.0
K06	78	234	0.0	0.0
K06	78	235	0.0	0.0
K06	78	236	0.0	0.0
K06	78	237	0.5	0.0
K06	78	238	0.0	0.0
K06	78	239	0.0	0.0
K06	78	240	0.0	0.0
K06	78	241	0.0	0.0
K06	78	242	0.0	0.0
K07	78	121	17.3	0.7
K07	78	122	5.8	0.2
K07	78	123	0.0	0.0
K07	78	124	0.0	0.0
K07	78	125	0.0	0.0
K07	78	126	0.0	0.0
K07	78	127	26.2	1.0
K07	78	128	0.0	0.0
K07	78	129	0.0	0.0
K07	78	130	0.0	0.0
K07	78	131	0.0	0.0
K07	78	132	0.0	0.0
K07	78	133	0.0	0.0
K07	78	134	0.0	0.0
K07	78	135	0.0	0.0
K07	78	136	0.0	0.0
K07	78	137	0.0	0.0
K07	78	138	13.0	0.5
K07	78	139	0.0	0.0
K07	78	140	0.0	0.0
K07	78	141	0.0	0.0
K07	78	142	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K07	78	143	0.0	0.0
K07	78	144	0.0	0.0
K07	78	145	0.0	0.0
K07	78	145	0.0	0.0
K07	78	147	0.0	0.0
K07	78	153	1.3	0.2
K07	78	154	4.3	0.7
K07	78	155	31.7	1.2
K07	78	156	0.0	0.0
K07	78	157	34.3	1.3
K07	78	158	0.3	0.0
K07	78	159	0.0	0.0
K07	78	160	0.0	0.0
K07	78	161	0.0	0.0
K07	78	162	0.0	0.0
K07	78	163	0.0	0.0
K07	78	164	0.0	0.0
K07	78	165	0.0	0.0
K07	78	166	0.0	0.0
K07	78	167	0.0	0.0
K07	78	168	0.0	0.0
K07	78	169	0.8	0.0
K07	78	170	0.0	0.0
K07	78	171	4.6	0.2
K07	78	172	0.0	0.0
K07	78	173	0.0	0.0
K07	78	174	0.0	0.0
K07	78	175	0.0	0.0
K07	78	176	0.0	0.0
K07	78	177	0.0	0.0
K07	78	178	8.1	0.3
K07	78	179	0.0	0.0
K07	78	180	0.0	0.0
K07	78	182	0.0	0.0
K07	78	183	0.0	0.0
K07	78	184	0.3	0.0
K07	78	185	0.0	0.0
K07	78	186	0.0	0.0
K07	78	187	1.5	0.1
K07	78	188	0.0	0.0
K07	78	189	0.0	0.0
K07	78	190	0.0	0.0
K07	78	191	0.0	0.0
K07	78	192	0.0	0.0
K07	78	193	0.0	0.0
K07	78	194	0.0	0.0
K07	78	195	0.0	0.0
K07	78	196	0.0	0.0
K07	78	197	0.0	0.0
K07	78	198	0.0	0.0
K07	78	199	0.0	0.0
K07	78	200	0.0	0.0
K07	78	201	9.7	0.4
K07	78	202	10.7	0.4
K07	78	203	12.2	0.5
K07	78	204	0.0	0.0
K07	78	205	0.0	0.0
K07	78	206	0.0	0.0
K07	78	207	0.0	0.0
K07	78	208	0.0	0.0
K07	78	209	0.0	0.0
K07	78	210	0.0	0.0
K07	78	211	1.8	0.1
K07	78	212	0.0	0.0
K07	78	213	12.0	0.5
K07	78	214	1.0	0.0
K07	78	215	0.3	0.0
K07	78	216	0.0	0.0
K07	78	217	0.8	0.0
K07	78	218	0.0	0.0
K07	78	219	0.0	0.0
K07	78	220	0.0	0.0
K07	78	221	0.0	0.0
K07	78	222	0.3	0.0
K07	78	223	0.0	0.0
K07	78	224	0.0	0.0
K07	78	225	0.0	0.0
K07	78	226	0.0	0.0
K07	78	227	0.0	0.0
K07	78	228	0.0	0.0
K07	78	229	0.0	0.0
K07	78	230	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K07	78	231	0.0	0.0
K07	78	232	0.0	0.0
K07	78	233	0.0	0.0
K07	78	234	0.0	0.0
K07	78	235	0.0	0.0
K07	78	236	0.0	0.0
K07	78	237	0.5	0.0
K07	78	238	1.8	0.1
K07	78	239	0.0	0.0
K07	78	240	0.0	0.0
K07	78	241	0.0	0.0
K07	78	242	0.0	0.0
K07	78	243	18.5	0.7
K07	78	244	7.1	0.3
K07	78	245	0.0	0.0
K07	78	246	0.0	0.0
K07	78	247	0.0	0.0
K07	78	248	29.0	1.1
K07	78	249	0.3	0.0
K07	78	250	0.0	0.0
K07	78	251	0.0	0.0
K07	78	252	0.0	0.0
K07	78	253	0.0	0.0
K07	78	254	0.0	0.0
K07	78	255	0.0	0.0
K07	78	256	0.0	0.0
K07	78	257	0.0	0.0
K07	78	258	0.0	0.0
K07	78	259	0.0	0.0
K07	78	260	0.0	0.0
K07	78	261	0.0	0.0
K07	78	262	0.0	0.0
K07	78	263	0.0	0.0
K07	78	264	0.0	0.0
K07	78	265	0.0	0.0
K07	78	266	0.0	0.0
K07	78	267	0.0	0.0
K07	78	268	0.0	0.0
K07	78	269	0.0	0.0
K07	78	270	0.0	0.0
K07	78	271	0.0	0.0
K07	78	272	0.0	0.0
K07	78	273	0.0	0.0
K07	78	274	0.0	0.0
K07	78	275	0.0	0.0
K07	78	276	0.0	0.0
K07	78	277	0.0	0.0
K07	78	278	0.0	0.0
K07	78	279	13.2	0.5
K07	78	280	0.0	0.0
K07	78	281	0.0	0.0
K07	78	282	0.0	0.0
K07	78	283	0.0	0.0
K07	78	284	0.0	0.0
K07	78	285	0.0	0.0
K07	78	286	0.0	0.0
K07	78	287	0.0	0.0
K07	78	288	0.0	0.0
K07	78	289	0.0	0.0
K07	78	290	0.0	0.0
K07	78	291	0.0	0.0
K07	78	292	0.0	0.0
K07	78	293	0.0	0.0
K07	78	294	0.0	0.0
K07	78	295	0.0	0.0
K07	78	296	0.0	0.0
K07	78	297	0.0	0.0
K07	78	298	0.0	0.0
K07	78	299	0.0	0.0
K07	78	300	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K08	78	197	0.0	0.0
K08	78	198	0.0	0.0
K08	78	199	0.0	0.0
K08	78	200	0.0	0.0
K08	78	201	1.6	0.6
K08	78	202	5.5	0.2
K08	78	203	0.0	0.0
K08	78	204	0.0	0.0
K08	78	205	0.0	0.0
K08	78	206	0.0	0.0
K08	78	207	0.0	0.0
K08	78	208	0.0	0.0
K08	78	209	0.0	0.0
K08	78	210	0.0	0.0
K08	78	211	1.8	0.1
K08	78	212	0.0	0.0
K08	78	213	2.5	0.1
K08	78	214	1.5	0.1
K08	78	215	0.5	0.0
K08	78	216	0.0	0.0
K08	78	217	0.0	0.0
K08	78	218	0.0	0.0
K08	78	219	0.0	0.0
K08	78	220	0.0	0.0
K08	78	221	0.0	0.0
K08	78	222	0.0	0.0
K08	78	223	0.0	0.0
K08	78	224	0.0	0.0
K08	78	225	0.0	0.0
K08	78	226	0.0	0.0
K08	78	227	1.2	0.5
K08	78	228	0.0	0.0
K08	78	229	0.0	0.0
K08	78	230	0.0	0.0
K08	78	231	0.0	0.0
K08	78	232	0.0	0.0
K08	78	233	0.0	0.0
K08	78	234	0.0	0.0
K08	78	235	0.0	0.0
K08	78	236	0.0	0.0
K08	78	237	1.8	0.1
K08	78	238	0.0	0.0
K08	78	239	0.0	0.0
K08	78	240	0.0	0.0
K08	78	241	0.0	0.0
K08	78	242	0.3	0.0
K08	78	243	1.8	0.7
K08	78	244	0.3	0.0
K08	78	245	0.0	0.0
K08	78	246	0.0	0.0
K08	78	247	0.0	0.0
K08	78	248	3.3	1.1
K08	78	249	0.0	0.0
K08	78	250	0.0	0.0
K08	78	251	0.0	0.0
K08	78	252	0.0	0.0
K08	78	253	0.0	0.0
K08	78	254	0.0	0.0
K08	78	255	0.0	0.0
K08	78	256	0.0	0.0
K08	78	257	0.0	0.0
K08	78	258	0.0	0.0
K08	78	259	1.2	0.4
K08	78	260	0.0	0.0
K08	78	261	0.0	0.0
K08	78	262	0.0	0.0
K08	78	263	0.0	0.0
K08	78	264	0.0	0.0
K08	78	265	0.0	0.0
K08	78	266	0.0	0.0
K08	78	267	0.0	0.0
K08	78	268	0.0	0.0
K08	78	269	0.0	0.0
K08	78	270	0.0	0.0
K08	78	271	0.0	0.0
K08	78	272	0.0	0.0
K08	78	273	0.0	0.0
K08	78	274	0.0	0.0
K08	78	275	0.0	0.0
K08	78	276	0.0	0.0
K08	78	277	0.0	0.0
K08	78	278	0.0	0.0
K08	78	279	0.0	0.0
K08	78	280	0.0	0.0
K08	78	281	0.0	0.0
K08	78	282	0.0	0.0
K08	78	283	0.0	0.0
K08	78	284	0.0	0.0
K08	78	285	0.0	0.0
K08	78	286	0.0	0.0
K08	78	287	0.0	0.0
K08	78	288	0.0	0.0
K08	78	289	0.0	0.0
K08	78	290	0.0	0.0
K08	78	291	0.0	0.0
K08	78	292	0.0	0.0
K08	78	293	0.0	0.0
K08	78	294	0.0	0.0
K08	78	295	0.0	0.0
K08	78	296	0.0	0.0
K08	78	297	0.0	0.0
K08	78	298	0.0	0.0
K08	78	299	0.0	0.0
K08	78	300	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K09	78	166	0.0	0.0
K09	78	167	0.0	0.0
K09	78	168	0.0	0.0
K09	78	169	1.3	0.0
K09	78	170	0.0	0.0
K09	78	171	5.6	0.2
K09	78	172	0.0	0.0
K09	78	173	0.0	0.0
K09	78	174	0.0	0.0
K09	78	175	0.0	0.0
K09	78	176	0.0	0.0
K09	78	177	0.0	0.0
K09	78	178	4.7	0.4
K09	78	179	1.3	0.0
K09	78	180	0.0	0.0
K09	78	181	0.3	0.0
K09	78	182	0.0	0.0
K09	78	183	0.0	0.0
K09	78	184	0.3	0.0
K09	78	185	0.0	0.0
K09	78	186	0.0	0.0
K09	78	187	0.0	0.0
K09	78	188	0.0	0.0
K09	78	189	0.0	0.0
K09	78	190	0.0	0.0
K09	78	191	0.0	0.0
K09	78	192	0.0	0.0
K09	78	193	0.0	0.0
K09	78	194	0.0	0.0
K09	78	195	0.0	0.0
K09	78	196	0.0	0.0
K09	78	197	0.0	0.0
K09	78	198	0.0	0.0
K09	78	199	0.0	0.0
K09	78	200	0.0	0.0
K09	78	201	0.0	0.0
K09	78	202	17.3	0.7
K09	78	203	5.3	0.3
K09	78	204	0.0	0.0
K09	78	205	0.0	0.0
K09	78	206	0.0	0.0
K09	78	207	0.0	0.0
K09	78	208	0.0	0.0
K09	78	209	0.0	0.0
K09	78	210	0.0	0.0
K09	78	211	1.3	0.0
K09	78	212	0.0	0.0
K09	78	213	2.8	0.1
K09	78	214	1.3	0.0
K09	78	215	0.0	0.0
K09	78	216	0.3	0.0
K09	78	217	0.0	0.0
K09	78	218	0.0	0.0
K09	78	219	0.0	0.0
K09	78	220	0.0	0.0
K09	78	221	0.0	0.0
K09	78	222	0.0	0.0
K09	78	223	0.0	0.0
K09	78	224	0.0	0.0
K09	78	225	0.0	0.0
K09	78	226	0.0	0.0
K09	78	227	1.8	0.7
K09	78	228	0.0	0.0
K09	78	229	0.0	0.0
K09	78	230	0.0	0.0
K09	78	231	0.0	0.0
K09	78	232	0.0	0.0
K09	78	233	0.0	0.0
K09	78	234	0.0	0.0
K09	78	235	0.0	0.0
K09	78	236	0.0	0.0
K09	78	237	0.0	0.0
K09	78	238	7.4	0.3
K09	78	239	0.0	0.0
K09	78	240	0.0	0.0
K09	78	241	0.0	0.0
K09	78	242	0.0	0.0
K09	78	243	0.0	0.0
K09	78	244	0.0	0.0
K09	78	245	0.0	0.0
K09	78	246	0.0	0.0
K09	78	247	0.0	0.0
K09	78	248	0.0	0.0
K09	78	249	0.0	0.0
K09	78	250	0.0	0.0
K09	78	251	0.0	0.0
K09	78	252	0.0	0.0
K09	78	253	0.0	0.0
K09	78	254	0.0	0.0
K09	78	255	0.0	0.0
K09	78	256	0.0	0.0
K09	78	257	0.0	0.0
K09	78	258	0.0	0.0
K09	78	259	0.0	0.0
K09	78	260	0.0	0.0
K09	78	261	0.0	0.0
K09	78	262	0.0	0.0
K09	78	263	0.0	0.0
K09	78	264	0.0	0.0
K09	78	265	0.0	0.0
K09	78	266	0.0	0.0
K09	78	267	0.0	0.0
K09	78	268	0.0	0.0
K09	78	269	0.0	0.0
K09	78	270	0.0	0.0
K09	78	271	0.0	0.0
K09	78	272	0.0	0.0
K09	78	273	0.0	0.0
K09	78	274	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall		Rain gage number	Year	Day	Rainfall	
			mm	in.				mm	in.
K10	78	126	27.4	1.1	K10	78	216	0.0	0.0
K10	78	127	0.5	0.0	K10	78	217	0.0	0.0
K10	78	128	0.0	0.0	K10	78	218	0.0	0.0
K10	78	129	0.0	0.0	K10	78	219	0.0	0.0
K10	78	134	0.0	0.0	K10	78	220	0.0	0.0
K10	78	135	0.0	0.0	K10	78	221	0.0	0.0
K10	78	136	0.0	0.0	K10	78	222	0.0	0.0
K10	78	137	0.0	0.0	K10	78	223	0.0	0.0
K10	78	138	16.3	0.6	K10	78	224	0.0	0.0
K10	78	139	0.0	0.0	K10	78	225	0.0	0.0
K10	78	140	0.0	0.0	K10	78	226	0.0	0.0
K10	78	141	0.0	0.0	K10	78	227	14.3	0.8
K10	78	142	0.0	0.0	K10	78	228	0.0	0.0
K10	78	143	0.0	0.0	K10	78	229	0.0	0.0
K10	78	144	0.0	0.0	K10	78	230	0.0	0.0
K10	78	145	0.0	0.0	K10	78	231	0.0	0.0
K10	78	146	0.0	0.0	K10	78	232	0.0	0.0
K10	78	147	0.5	0.0	K10	78	233	0.0	0.0
K10	78	153	2.8	0.1	K10	78	234	0.0	0.0
K10	78	154	1.8	0.1	K10	78	235	0.0	0.0
K10	78	155	4.8	1.9	K10	78	236	0.0	0.0
K10	78	156	0.0	0.0	K10	78	237	0.3	0.0
K10	78	157	5.0	2.0	K10	78	238	3.3	0.1
K10	78	158	0.0	0.0	K10	78	239	0.0	0.0
K10	78	159	0.0	0.0	K10	78	240	0.0	0.0
K10	78	160	0.0	0.0	K10	78	241	0.0	0.0
K10	78	161	0.0	0.0	K10	78	242	0.0	0.0
K10	78	162	0.0	0.0	K11	78	121	16.3	0.6
K10	78	163	0.0	0.0	K11	78	122	5.3	0.2
K10	78	164	0.0	0.0	K11	78	123	0.0	0.0
K10	78	165	0.0	0.0	K11	78	124	0.0	0.0
K10	78	166	0.0	0.0	K11	78	126	2.2	1.0
K10	78	167	0.0	0.0	K11	78	127	0.0	0.0
K10	78	168	0.0	0.0	K11	78	128	0.0	0.0
K10	78	169	1.3	0.0	K11	78	129	0.0	0.0
K10	78	170	0.0	0.0	K11	78	130	0.0	0.0
K10	78	171	0.8	0.0	K11	78	131	0.0	0.0
K10	78	172	0.0	0.0	K11	78	132	0.0	0.0
K10	78	173	0.0	0.0	K11	78	133	0.0	0.0
K10	78	174	0.0	0.0	K11	78	134	0.0	0.0
K10	78	175	0.0	0.0	K11	78	135	0.0	0.0
K10	78	176	0.0	0.0	K11	78	136	0.0	0.0
K10	78	177	0.0	0.0	K11	78	137	0.0	0.0
K10	78	178	1.3	0.5	K11	78	138	9.1	0.4
K10	78	179	0.0	0.0	K11	78	141	0.0	0.0
K10	78	180	0.0	0.0	K11	78	142	0.0	0.0
K10	78	182	0.0	0.0	K11	78	143	0.0	0.0
K10	78	183	0.0	0.0	K11	78	144	1.8	0.1
K10	78	184	0.0	0.0	K11	78	145	0.0	0.0
K10	78	185	0.0	0.0	K11	78	147	0.0	0.0
K10	78	186	0.0	0.0	K11	78	148	0.0	0.0
K10	78	187	0.0	0.0	K11	78	153	2.0	0.1
K10	78	188	0.0	0.0	K11	78	154	0.3	0.0
K10	78	189	0.0	0.0	K11	78	155	4.3	1.7
K10	78	190	0.0	0.0	K11	78	156	0.0	0.0
K10	78	191	0.0	0.0	K11	78	157	22.1	0.9
K10	78	192	0.0	0.0	K11	78	158	0.5	0.0
K10	78	193	0.0	0.0	K11	78	159	0.0	0.0
K10	78	194	0.0	0.0	K11	78	160	0.0	0.0
K10	78	195	0.0	0.0	K11	78	161	0.0	0.0
K10	78	196	0.0	0.0	K11	78	162	0.0	0.0
K10	78	197	0.0	0.0	K11	78	163	0.0	0.0
K10	78	198	0.0	0.0	K11	78	164	0.0	0.0
K10	78	199	0.0	0.0	K11	78	165	0.0	0.0
K10	78	200	0.0	0.0	K11	78	166	0.0	0.0
K10	78	201	10.4	0.4	K11	78	167	0.0	0.0
K10	78	202	14.0	0.5	K11	78	168	0.0	0.0
K10	78	203	8.6	0.3	K11	78	169	0.5	0.0
K10	78	204	0.0	0.0	K11	78	170	0.0	0.0
K10	78	205	0.0	0.0	K11	78	171	0.5	0.0
K10	78	206	0.0	0.0	K11	78	172	0.0	0.0
K10	78	207	0.0	0.0	K11	78	173	0.0	0.0
K10	78	208	0.0	0.0	K11	78	174	0.0	0.0
K10	78	209	0.0	0.0	K11	78	175	0.0	0.0
K10	78	210	0.0	0.0	K11	78	176	0.0	0.0
K10	78	211	1.3	0.0	K11	78	177	0.0	0.0
K10	78	213	4.0	0.2	K11	78	178	23.6	0.9
K10	78	214	0.8	0.0	K11	78	179	1.3	0.0
K10	78	215	0.8	0.0	K11	78	180	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
7A	78	232	0.0	0.0
7A	78	233	0.0	0.0
7A	78	234	0.0	0.0
7A	78	235	0.0	0.0
7A	78	236	0.0	0.0
7A	78	237	0.5	0.0
7A	78	238	0.0	0.0
7A	78	239	0.0	0.0
7A	78	240	0.0	0.0
7A	78	241	0.0	0.0
7A	78	242	0.0	0.0
7A	78	243	1.6	0.6
7A	78	244	0.0	0.3
7A	78	245	0.0	0.0
7A	78	246	0.0	0.0
7A	78	247	2.8	1.1
7A	78	248	0.0	0.0
7A	78	249	0.0	0.0
7A	78	250	0.0	0.0
7A	78	251	0.0	0.0
7A	78	252	0.0	0.0
7A	78	253	0.0	0.0
7A	78	254	0.0	0.0
7A	78	255	0.0	0.0
7A	78	256	0.0	0.0
7A	78	257	0.0	0.0
7A	78	258	0.0	0.0
7A	78	259	0.0	0.0
7A	78	260	0.0	0.0
7A	78	261	0.0	0.0
7A	78	262	0.0	0.0
7A	78	263	0.0	0.0
7A	78	264	0.0	0.0
7A	78	265	0.0	0.0
7A	78	266	0.0	0.0
7A	78	267	0.0	0.0
7A	78	268	0.0	0.0
7A	78	269	0.0	0.1
7A	78	270	0.0	0.0
7A	78	271	0.3	0.1
7A	78	272	0.0	0.0
7A	78	273	0.0	0.0
7A	78	274	0.0	0.0
7A	78	275	0.0	0.0
7A	78	276	0.0	0.0
7A	78	277	0.0	0.0
7A	78	278	0.0	0.0
7A	78	279	1.6	0.8
7A	78	280	0.0	0.1
7A	78	281	0.0	0.0
7A	78	282	0.0	0.0
7A	78	283	0.0	0.0
7A	78	284	0.0	0.0
7A	78	285	0.0	0.0
7A	78	286	0.0	0.0
7A	78	287	0.0	0.0
7A	78	288	0.0	0.0
7A	78	289	0.0	0.0
7A	78	290	0.0	0.0
7A	78	291	0.0	0.0
7A	78	292	0.0	0.0
7A	78	293	0.0	0.0
7A	78	294	0.0	0.0
7A	78	295	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 13	7A	196	0.0	0.0
7A	78	197	0.0	0.0
7A	78	198	0.0	0.0
7A	78	199	0.0	0.0
7A	78	200	0.0	0.0
7A	78	201	0.0	0.0
7A	78	202	5.5	2.2
7A	78	203	0.0	0.0
7A	78	204	0.0	0.0
7A	78	205	0.0	0.0
7A	78	206	0.0	0.0
7A	78	207	0.0	0.0
7A	78	208	0.0	0.0
7A	78	209	0.0	0.0
7A	78	210	0.0	0.0
7A	78	211	0.0	0.0
7A	78	212	0.0	0.0
7A	78	213	0.0	0.0
7A	78	214	0.0	0.0
7A	78	215	0.0	0.0
7A	78	216	0.0	0.0
7A	78	217	0.0	0.0
7A	78	218	0.0	0.0
7A	78	219	0.0	0.0
7A	78	220	0.0	0.0
7A	78	221	0.0	0.0
7A	78	222	0.0	0.0
7A	78	223	0.0	0.0
7A	78	224	0.0	0.0
7A	78	225	0.0	0.0
7A	78	226	0.0	0.0
7A	78	227	0.0	0.0
7A	78	228	0.0	0.0
7A	78	229	0.0	0.0
7A	78	230	0.0	0.0
7A	78	231	0.0	0.0
7A	78	232	0.0	0.0
7A	78	233	0.0	0.0
7A	78	234	0.0	0.0
7A	78	235	0.0	0.0
7A	78	236	0.0	0.0
7A	78	237	0.0	0.0
7A	78	238	0.0	0.0
7A	78	239	0.0	0.0
7A	78	240	0.0	0.0
7A	78	241	0.0	0.0
7A	78	242	0.0	0.0
7A	78	243	0.0	0.0
7A	78	244	0.0	0.0
7A	78	245	0.0	0.0
7A	78	246	0.0	0.0
7A	78	247	0.0	0.0
7A	78	248	0.0	0.0
7A	78	249	0.0	0.0
7A	78	250	0.0	0.0
7A	78	251	0.0	0.0
7A	78	252	0.0	0.0
7A	78	253	0.0	0.0
7A	78	254	0.0	0.0
7A	78	255	0.0	0.0
7A	78	256	0.0	0.0
7A	78	257	0.0	0.0
7A	78	258	0.0	0.0
7A	78	259	0.0	0.0
7A	78	260	0.0	0.0
7A	78	261	0.0	0.0
7A	78	262	0.0	0.0
7A	78	263	0.0	0.0
7A	78	264	0.0	0.0
7A	78	265	0.0	0.0
7A	78	266	0.0	0.0
7A	78	267	0.0	0.0
7A	78	268	0.0	0.0
7A	78	269	0.0	0.0
7A	78	270	0.0	0.0
7A	78	271	0.0	0.0
7A	78	272	0.0	0.0
7A	78	273	0.0	0.0
7A	78	274	0.0	0.0
7A	78	275	0.0	0.0
7A	78	276	0.0	0.0
7A	78	277	0.0	0.0
7A	78	278	0.0	0.0
7A	78	279	0.0	0.0
7A	78	280	0.0	0.0
7A	78	281	0.0	0.0
7A	78	282	0.0	0.0
7A	78	283	0.0	0.0
7A	78	284	0.0	0.0
7A	78	285	0.0	0.0
7A	78	286	0.0	0.0
7A	78	287	0.0	0.0
7A	78	288	0.0	0.0
7A	78	289	0.0	0.0
7A	78	290	0.0	0.0
7A	78	291	0.0	0.0
7A	78	292	0.0	0.0
7A	78	293	0.0	0.0
7A	78	294	0.0	0.0
7A	78	295	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K15	78	224	0.0	0.0
K15	78	225	0.0	0.0
K15	78	226	0.0	0.0
K15	78	227	0.0	0.0
K15	78	228	0.0	0.0
K15	78	229	0.0	0.0
K15	78	230	0.0	0.0
K15	78	231	0.0	0.0
K15	78	232	0.0	0.0
K15	78	233	0.0	0.0
K15	78	234	0.0	0.0
K15	78	235	0.0	0.0
K15	78	236	32.0	1.3
K15	78	237	1.5	0.1
K15	78	238	0.0	0.0
K15	78	239	0.0	0.0
K15	78	240	0.0	0.0
K15	78	241	0.0	0.0
K15	78	242	0.0	0.0
K15	78	243	0.0	0.0
K15	78	244	0.0	0.0
K15	78	245	0.0	0.0
K15	78	246	0.0	0.0
K15	78	247	0.0	0.0
K15	78	248	0.0	0.0
K15	78	249	0.0	0.0
K15	78	250	0.0	0.0
K15	78	251	0.0	0.0
K15	78	252	0.0	0.0
K15	78	253	0.0	0.0
K15	78	254	0.0	0.0
K15	78	255	0.0	0.0
K15	78	256	0.0	0.0
K15	78	257	0.0	0.0
K15	78	258	0.0	0.0
K15	78	259	0.0	0.0
K15	78	260	0.0	0.0
K15	78	261	0.0	0.0
K15	78	262	0.0	0.0
K15	78	263	0.0	0.0
K15	78	264	0.0	0.0
K15	78	265	0.0	0.0
K15	78	266	0.0	0.0
K15	78	267	0.0	0.0
K15	78	268	0.0	0.0
K15	78	269	0.0	0.0
K15	78	270	0.0	0.0
K15	78	271	0.0	0.0
K15	78	272	0.0	0.0
K15	78	273	0.0	0.0
K15	78	274	0.0	0.0
K15	78	275	0.0	0.0
K15	78	276	0.0	0.0
K15	78	277	0.0	0.0
K15	78	278	0.0	0.0
K15	78	279	0.0	0.0
K15	78	280	0.0	0.0
K15	78	281	0.0	0.0
K15	78	282	0.0	0.0
K15	78	283	0.0	0.0
K15	78	284	0.0	0.0
K15	78	285	0.0	0.0
K15	78	286	0.0	0.0
K15	78	287	0.0	0.0
K15	78	288	0.0	0.0
K15	78	289	0.0	0.0
K15	78	290	0.0	0.0
K15	78	291	0.0	0.0
K15	78	292	0.0	0.0
K15	78	293	0.0	0.0
K15	78	294	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K16	78	195	0.5	0.0
K16	78	196	0.0	0.0
K16	78	197	1.0	0.0
K16	78	198	0.0	0.0
K16	78	199	0.0	0.0
K16	78	200	0.0	0.0
K16	78	201	0.0	0.0
K16	78	202	9.1	0.4
K16	78	203	40.4	1.6
K16	78	204	0.0	0.0
K16	78	205	0.0	0.0
K16	78	206	0.0	0.0
K16	78	207	0.0	0.0
K16	78	208	0.0	0.0
K16	78	209	0.0	0.0
K16	78	210	0.0	0.0
K16	78	211	0.5	0.0
K16	78	212	3.0	0.1
K16	78	213	3.6	0.1
K16	78	214	1.3	0.0
K16	78	215	0.0	0.0
K16	78	216	0.0	0.0
K16	78	217	0.0	0.0
K16	78	218	0.0	0.0
K16	78	219	0.0	0.0
K16	78	220	0.0	0.0
K16	78	221	0.0	0.0
K16	78	222	0.0	0.0
K16	78	223	0.0	0.0
K16	78	224	0.0	0.0
K16	78	225	0.0	0.0
K16	78	226	0.0	0.0
K16	78	227	0.0	0.0
K16	78	228	0.0	0.0
K16	78	229	0.0	0.0
K16	78	230	0.0	0.0
K16	78	231	0.0	0.0
K16	78	232	0.0	0.0
K16	78	233	0.0	0.0
K16	78	234	0.0	0.0
K16	78	235	0.0	0.0
K16	78	236	0.0	0.0
K16	78	237	0.0	0.0
K16	78	238	0.0	0.0
K16	78	239	0.0	0.0
K16	78	240	0.0	0.0
K16	78	241	0.0	0.0
K16	78	242	0.0	0.0
K16	78	243	0.0	0.0
K16	78	244	0.0	0.0
K16	78	245	0.0	0.0
K16	78	246	0.0	0.0
K16	78	247	0.0	0.0
K16	78	248	0.0	0.0
K16	78	249	0.0	0.0
K16	78	250	0.0	0.0
K16	78	251	0.0	0.0
K16	78	252	0.0	0.0
K16	78	253	0.0	0.0
K16	78	254	0.0	0.0
K16	78	255	0.0	0.0
K16	78	256	0.0	0.0
K16	78	257	0.0	0.0
K16	78	258	0.0	0.0
K16	78	259	0.0	0.0
K16	78	260	0.0	0.0
K16	78	261	0.0	0.0
K16	78	262	0.0	0.0
K16	78	263	0.0	0.0
K16	78	264	0.0	0.0
K16	78	265	0.0	0.0
K16	78	266	0.0	0.0
K16	78	267	0.0	0.0
K16	78	268	0.0	0.0
K16	78	269	0.0	0.0
K16	78	270	0.0	0.0
K16	78	271	0.0	0.0
K16	78	272	0.0	0.0
K16	78	273	0.0	0.0
K16	78	274	0.0	0.0
K16	78	275	0.0	0.0
K16	78	276	0.0	0.0
K16	78	277	0.0	0.0
K16	78	278	0.0	0.0
K16	78	279	0.0	0.0
K16	78	280	0.0	0.0
K16	78	281	0.0	0.0
K16	78	282	0.0	0.0
K16	78	283	0.0	0.0
K16	78	284	0.0	0.0
K16	78	285	0.0	0.0
K16	78	286	0.0	0.0
K16	78	287	0.0	0.0
K16	78	288	0.0	0.0
K16	78	289	0.0	0.0
K16	78	290	0.0	0.0
K16	78	291	0.0	0.0
K16	78	292	0.0	0.0
K16	78	293	0.0	0.0
K16	78	294	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K17	78	161	0.0	0.0
K17	78	162	0.0	0.0
K17	78	163	0.0	0.0
K17	78	164	6.0	0.0
K17	78	165	0.0	0.0
K17	78	166	0.0	0.0
K17	78	167	0.0	0.0
K17	78	168	0.0	0.0
K17	78	169	1.3	0.0
K17	78	170	0.0	0.0
K17	78	171	1.8	0.1
K17	78	172	0.0	0.0
K17	78	173	0.0	0.0
K17	78	174	0.0	0.0
K17	78	175	0.0	0.0
K17	78	176	0.0	0.0
K17	78	177	0.0	0.0
K17	78	178	15.2	0.6
K17	78	179	10.7	0.4
K17	78	180	0.0	0.0
K17	76	182	2.8	0.1
K17	78	183	0.0	0.0
K17	78	184	0.0	0.0
K17	78	185	0.0	0.0
K17	78	186	0.0	0.0
K17	78	187	0.5	0.0
K17	78	188	0.0	0.0
K17	78	189	0.0	0.0
K17	78	190	0.8	0.0
K17	78	191	0.0	0.0
K17	78	192	0.0	0.0
K17	78	193	0.0	0.0
K17	78	194	0.0	0.0
K17	78	195	0.0	0.0
K17	78	196	0.0	0.0
K17	78	197	0.0	0.0
K17	78	198	0.0	0.0
K17	78	199	0.0	0.0
K17	78	200	0.0	0.0
K17	78	201	6.3	0.2
K17	78	202	16.0	0.6
K17	78	203	22.9	0.9
K17	78	204	0.0	0.0
K17	78	205	0.0	0.0
K17	78	206	0.0	0.0
K17	78	207	0.0	0.0
K17	78	208	0.0	0.0
K17	78	209	0.0	0.0
K17	78	210	0.0	0.0
K17	78	211	0.0	0.0
K17	78	213	3.3	0.1
K17	78	214	17.5	0.7
K17	78	215	0.0	0.0
K17	78	216	0.3	0.0
K17	78	217	0.0	0.0
K17	78	218	0.0	0.0
K17	78	219	0.0	0.0
K17	78	220	0.0	0.0
K17	78	221	0.0	0.0
K17	78	222	0.0	0.0
K17	78	223	0.0	0.0
K17	78	224	0.0	0.0
K17	78	225	0.0	0.0
K17	78	226	1.0	0.0
K17	78	227	11.9	0.5
K17	78	228	0.0	0.0
K17	78	229	0.0	0.0
K17	78	230	0.0	0.0
K17	78	231	0.0	0.0
K17	78	232	0.0	0.0
K17	78	233	0.0	0.0
K17	78	234	0.0	0.0
K17	78	235	0.0	0.0
K17	78	236	0.0	0.0
K17	78	237	0.0	0.0
K17	78	238	0.0	0.0
K17	76	239	0.0	0.0
K17	78	240	0.0	0.0
K17	78	241	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K17	78	242	0.0	0.0
K18	78	121	19.0	0.7
K18	78	122	0.0	0.0
K18	78	123	6.6	0.3
K18	78	124	0.0	0.0
K18	78	125	0.0	0.0
K18	78	126	28.2	1.1
K18	78	127	1.5	0.1
K18	78	128	0.0	0.0
K18	78	129	0.0	0.0
K18	78	130	0.0	0.0
K18	78	131	0.0	0.0
K18	78	132	0.0	0.0
K18	78	133	0.0	0.0
K18	78	134	0.0	0.0
K18	78	135	0.0	0.0
K18	78	136	0.0	0.0
K18	78	137	0.0	0.0
K18	78	138	19.0	0.7
K18	78	139	0.0	0.0
K18	78	140	0.0	0.0
K18	78	141	0.0	0.0
K18	78	142	0.0	0.0
K18	78	143	0.0	0.0
K18	78	144	0.0	0.0
K18	78	145	0.0	0.0
K18	78	146	0.0	0.0
K18	78	147	0.0	0.0
K18	78	148	1.5	0.1
K18	78	149	0.0	0.0
K18	78	150	0.0	0.0
K18	78	152	0.0	0.0
K18	78	153	1.0	0.0
K18	78	154	0.0	0.0
K18	78	155	58.4	2.3
K18	78	156	0.0	0.0
K18	78	157	47.2	1.9
K18	78	158	0.0	0.0
K18	78	160	0.0	0.0
K18	78	161	0.0	0.0
K18	78	162	0.0	0.0
K18	78	163	0.0	0.0
K18	78	164	0.0	0.0
K18	78	165	0.0	0.0
K18	78	166	0.0	0.0
K18	78	167	0.0	0.0
K18	78	168	0.0	0.0
K18	78	169	0.5	0.0
K18	78	170	0.0	0.0
K18	78	171	0.0	0.0
K18	78	172	0.0	0.0
K18	78	173	0.0	0.0
K18	78	174	0.0	0.0
K18	78	175	0.0	0.0
K18	78	176	0.0	0.0
K18	78	177	0.0	0.0
K18	78	178	8.6	0.3
K18	78	179	1.5	0.1
K18	78	180	0.0	0.0
K18	78	182	0.0	0.0
K18	78	183	0.0	0.0
K18	78	184	0.0	0.0
K18	78	185	0.0	0.0
K18	78	186	0.0	0.0
K18	78	187	0.0	0.0
K18	78	188	0.0	0.0
K18	78	189	0.0	0.0
K18	78	190	0.0	0.0
K18	78	191	0.0	0.0
K18	78	192	0.0	0.0
K18	78	193	0.0	0.0
K18	78	194	0.0	0.0
K18	78	195	0.3	0.0
K18	78	196	0.0	0.0
K18	78	197	0.0	0.0
K18	78	198	0.0	0.0
K18	78	199	0.0	0.0
K18	78	200	0.0	0.0
K18	78	201	18.0	0.7

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K1A	7A	202	14.7	0.6
K1A	7A	203	4.8	0.2
K1A	7A	204	0.0	0.0
K1A	7A	205	0.0	0.0
K1A	7A	206	0.0	0.0
K1A	7A	207	0.0	0.0
K1A	7A	208	0.0	0.0
K1A	7A	209	0.0	0.0
K1A	7A	210	0.0	0.0
K1A	7A	211	1.5	0.1
K1A	7A	213	1.8	0.1
K1A	7A	214	6.9	0.3
K1A	7A	215	1.3	0.0
K1A	7A	216	1.0	0.0
K1A	7A	217	0.0	0.0
K1A	7A	218	0.0	0.0
K1A	7A	219	0.0	0.0
K1A	7A	220	0.0	0.0
K1A	7A	221	0.0	0.0
K1A	7A	222	0.0	0.0
K1A	7A	223	0.0	0.0
K1A	7A	224	0.0	0.0
K1A	7A	225	0.0	0.0
K1A	7A	226	2.0	0.1
K1A	7A	227	10.4	0.4
K1A	7A	228	0.0	0.0
K1A	7A	229	0.0	0.0
K1A	7A	230	0.0	0.0
K1A	7A	231	0.0	0.0
K1A	7A	232	0.0	0.0
K1A	7A	233	0.0	0.0
K1A	7A	234	0.0	0.0
K1A	7A	235	0.0	0.0
K1A	7A	236	0.0	0.0
K1A	7A	237	0.0	0.0
K1A	7A	238	1.0	0.0
K1A	7A	239	0.0	0.0
K1A	7A	240	0.0	0.0
K1A	7A	241	0.0	0.0
K1C	7A	121	21.6	0.8
K1O	7A	122	7.4	0.3
K1O	7A	123	0.0	0.0
K1O	7A	124	0.0	0.0
K1O	7A	125	0.0	0.0
K1O	7A	126	30.0	1.2
K1O	7A	127	1.5	0.1
K1O	7A	128	0.0	0.0
K1O	7A	129	0.0	0.0
K1O	7A	130	0.0	0.0
K1O	7A	131	0.0	0.0
K1O	7A	132	0.3	0.0
K1O	7A	133	0.0	0.0
K1O	7A	134	0.0	0.0
K1O	7A	135	0.0	0.0
K1O	7A	136	0.0	0.0
K1O	7A	137	0.0	0.0
K1O	7A	138	19.0	0.7
K1O	7A	139	0.0	0.0
K1O	7A	140	0.0	0.0
K1O	7A	141	0.0	0.0
K1O	7A	142	0.0	0.0
K1O	7A	143	0.0	0.0
K1O	7A	144	0.0	0.0
K1O	7A	145	0.0	0.0
K1O	7A	146	0.0	0.0
K1O	7A	147	0.0	0.0
K1O	7A	148	11.4	0.4
K1O	7A	149	0.0	0.0
K1O	7A	150	0.0	0.0
K1O	7A	152	0.0	0.0
K1O	7A	153	0.5	0.0
K1O	7A	154	0.0	0.0
K1O	7A	155	70.6	2.8
K1O	7A	156	0.0	0.0
K1O	7A	157	10.8	0.8
K1O	7A	158	0.3	0.0
K1O	7A	159	0.0	0.0
K1O	7A	160	0.0	0.0
K1O	7A	161	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K1O	7A	162	0.0	0.0
K1O	7A	163	0.0	0.0
K1O	7A	164	0.0	0.0
K1O	7A	165	0.0	0.0
K1O	7A	166	0.0	0.0
K1O	7A	167	0.0	0.0
K1O	7A	168	0.0	0.0
K1O	7A	169	0.5	0.0
K1O	7A	170	0.0	0.0
K1O	7A	171	0.0	0.0
K1O	7A	172	0.0	0.0
K1O	7A	173	0.0	0.0
K1O	7A	174	0.0	0.0
K1O	7A	175	0.0	0.0
K1O	7A	176	0.0	0.0
K1O	7A	177	0.0	0.0
K1O	7A	178	8.1	0.3
K1O	7A	179	8.9	0.3
K1O	7A	180	0.0	0.0
K1O	7A	182	2.0	0.1
K1O	7A	183	0.0	0.0
K1O	7A	184	0.0	0.0
K1O	7A	185	0.0	0.0
K1O	7A	186	1.0	0.0
K1O	7A	187	0.0	0.0
K1O	7A	188	0.0	0.0
K1O	7A	189	0.0	0.0
K1O	7A	190	0.0	0.0
K1O	7A	191	0.0	0.0
K1O	7A	192	0.0	0.0
K1O	7A	193	0.0	0.0
K1O	7A	194	0.0	0.0
K1O	7A	195	0.0	0.0
K1O	7A	196	0.0	0.0
K1O	7A	197	0.0	0.0
K1O	7A	198	0.0	0.0
K1O	7A	208	0.0	0.0
K1O	7A	209	0.0	0.0
K1O	7A	210	0.0	0.0
K1O	7A	211	1.5	0.1
K1O	7A	213	0.0	0.0
K2O	7A	121	22.4	0.9
K2O	7A	122	6.9	0.3
K2O	7A	123	0.0	0.0
K2O	7A	124	0.0	0.0
K2O	7A	125	0.0	0.0
K2O	7A	126	30.2	1.2
K2O	7A	127	0.3	0.0
K2O	7A	128	0.0	0.0
K2O	7A	129	0.0	0.0
K2O	7A	130	0.0	0.0
K2O	7A	131	0.0	0.0
K2O	7A	132	0.0	0.0
K2O	7A	133	0.0	0.0
K2O	7A	134	0.0	0.0
K2O	7A	135	0.0	0.0
K2O	7A	136	0.0	0.0
K2O	7A	137	0.0	0.0
K2O	7A	138	22.4	0.9
K2O	7A	140	0.0	0.0
K2O	7A	141	0.0	0.0
K2O	7A	142	0.0	0.0
K2O	7A	143	0.0	0.0
K2O	7A	144	0.0	0.0
K2O	7A	145	0.0	0.0
K2O	7A	146	0.0	0.0
K2O	7A	147	0.0	0.0
K2O	7A	148	2.3	0.1
K2O	7A	149	0.0	0.0
K2O	7A	150	0.0	0.0
K2O	7A	152	0.0	0.0
K2O	7A	153	0.5	0.0
K2O	7A	154	0.0	0.0
K2O	7A	155	54.4	2.1
K2O	7A	156	0.0	0.0
K2O	7A	157	32.8	1.3
K2O	7A	158	0.0	0.0
K2O	7A	159	0.0	0.0
K2O	7A	160	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
KK20	78	161	0.0	0.0
KK21	78	162	0.0	0.0
KK22	78	163	0.0	0.0
KK23	78	164	0.0	0.0
KK24	78	165	0.0	0.0
KK25	78	166	0.0	0.0
KK26	78	167	0.0	0.0
KK27	78	168	0.0	0.0
KK28	78	169	1.3	0.0
KK29	78	170	0.0	0.0
KK30	78	171	0.5	0.0
KK31	78	172	0.0	0.0
KK32	78	173	0.0	0.0
KK33	78	174	0.0	0.0
KK34	78	175	0.0	0.0
KK35	78	176	0.0	0.0
KK36	78	177	0.0	0.0
KK37	78	178	9.7	0.4
KK38	78	179	1.5	0.1
KK39	78	180	0.0	0.0
KK40	78	182	1.0	0.0
KK41	78	183	0.0	0.0
KK42	78	184	0.3	0.0
KK43	78	185	0.0	0.0
KK44	78	186	0.0	0.0
KK45	78	187	0.0	0.0
KK46	78	188	0.0	0.0
KK47	78	189	0.0	0.0
KK48	78	190	0.0	0.0
KK49	78	191	0.0	0.0
KK50	78	192	0.0	0.0
KK51	78	193	0.0	0.0
KK52	78	194	0.0	0.0
KK53	78	195	0.0	0.0
KK54	78	196	0.0	0.0
KK55	78	197	0.0	0.0
KK56	78	198	0.0	0.0
KK57	78	199	0.0	0.0
KK58	78	200	0.0	0.0
KK59	78	201	21.4	0.8
KK60	78	202	14.2	0.6
KK61	78	203	0.0	0.2
KK62	78	204	0.0	0.0
KK63	78	205	0.0	0.0
KK64	78	206	0.0	0.0
KK65	78	207	0.0	0.0
KK66	78	208	0.0	0.0
KK67	78	209	0.0	0.0
KK68	78	210	0.0	0.0
KK69	78	211	0.0	0.0
KK70	78	212	0.0	0.0
KK71	78	213	0.0	0.0
KK72	78	214	0.0	0.0
KK73	78	215	0.0	0.0
KK74	78	216	1.0	0.0
KK75	78	217	0.0	0.0
KK76	78	218	0.0	0.0
KK77	78	219	0.0	0.0
KK78	78	220	0.0	0.0
KK79	78	221	0.0	0.0
KK80	78	222	0.0	0.0
KK81	78	223	0.0	0.0
KK82	78	224	0.0	0.0
KK83	78	225	0.0	0.0
KK84	78	226	0.0	0.0
KK85	78	227	0.6	0.0
KK86	78	228	0.6	0.0
KK87	78	229	0.0	0.0
KK88	78	230	0.0	0.0
KK89	78	231	0.0	0.0
KK90	78	232	0.0	0.0
KK91	78	233	0.0	0.0
KK92	78	234	0.0	0.0
KK93	78	235	0.0	0.0
KK94	78	236	0.0	0.0
KK95	78	237	0.0	0.0
KK96	78	238	0.0	0.0
KK97	78	239	0.0	0.0
KK98	78	240	0.3	0.0
KK99	78	241	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
KK21	78	121	22.6	0.9
KK22	78	122	6.3	0.2
KK23	78	123	0.0	0.0
KK24	78	142	0.0	0.0
KK25	78	143	0.0	0.0
KK26	78	144	0.0	0.0
KK27	78	153	2.3	0.1
KK28	78	154	0.0	0.0
KK29	78	155	7.5	0.3
KK30	78	156	0.0	0.0
KK31	78	157	16.3	0.6
KK32	78	158	0.0	0.0
KK33	78	159	0.0	0.0
KK34	78	160	0.0	0.0
KK35	78	161	0.0	0.0
KK36	78	162	0.0	0.0
KK37	78	163	0.0	0.0
KK38	78	164	0.0	0.0
KK39	78	165	0.0	0.0
KK40	78	166	0.0	0.0
KK41	78	167	0.0	0.0
KK42	78	168	0.0	0.0
KK43	78	169	0.0	0.0
KK44	78	170	0.0	0.0
KK45	78	171	0.3	0.0
KK46	78	172	0.0	0.0
KK47	78	173	0.0	0.0
KK48	78	174	0.0	0.0
KK49	78	175	0.0	0.0
KK50	78	176	0.0	0.0
KK51	78	177	0.0	0.0
KK52	78	178	0.0	0.0
KK53	78	179	0.0	0.0
KK54	78	180	0.0	0.0
KK55	78	181	0.0	0.0
KK56	78	182	0.0	0.0
KK57	78	183	0.0	0.0
KK58	78	184	0.0	0.0
KK59	78	185	0.0	0.0
KK60	78	186	0.0	0.0
KK61	78	187	0.0	0.0
KK62	78	188	0.0	0.0
KK63	78	189	0.0	0.0
KK64	78	190	0.0	0.0
KK65	78	191	0.0	0.0
KK66	78	192	0.0	0.0
KK67	78	193	0.0	0.0
KK68	78	194	0.0	0.0
KK69	78	195	0.0	0.0
KK70	78	196	0.0	0.0
KK71	78	197	0.0	0.0
KK72	78	198	0.0	0.0
KK73	78	199	0.0	0.0
KK74	78	200	0.0	0.0
KK75	78	201	21.5	0.8
KK76	78	202	15.5	0.6
KK77	78	203	0.0	0.0
KK78	78	204	0.0	0.0
KK79	78	205	0.0	0.0
KK80	78	206	0.0	0.0
KK81	78	207	0.0	0.0
KK82	78	208	0.0	0.0
KK83	78	209	0.0	0.0
KK84	78	210	0.0	0.0
KK85	78	211	1.3	0.0
KK86	78	212	0.0	0.0
KK87	78	213	0.0	0.0
KK88	78	214	21.1	0.8
KK89	78	215	4.6	0.2
KK90	78	216	0.0	0.0
KK91	78	217	0.0	0.0
KK92	78	218	0.0	0.0
KK93	78	219	0.0	0.0
KK94	78	220	31.7	1.2
KK95	78	221	1.0	0.0
KK96	78	222	0.0	0.0
KK97	78	223	0.0	0.0
KK98	78	224	0.0	0.0
KK99	78	225	0.0	0.0
KK00	78	226	0.0	0.0
KK01	78	227	0.0	0.0
KK02	78	228	0.0	0.0
KK03	78	229	0.0	0.0
KK04	78	230	0.0	0.0
KK05	78	231	0.0	0.0
KK06	78	232	0.0	0.0
KK07	78	233	0.0	0.0
KK08	78	234	0.0	0.0
KK09	78	235	0.0	0.0
KK10	78	236	0.0	0.0
KK11	78	237	0.0	0.0
KK12	78	238	0.0	0.0
KK13	78	239	0.0	0.0
KK14	78	240	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K22	78	135	0.0	0.0
K22	78	136	0.0	0.0
K22	78	137	0.0	0.0
K22	78	138	17.3	0.7
K22	78	139	0.0	0.0
K22	78	140	0.0	0.0
K22	78	142	0.0	0.0
K22	78	143	0.0	0.0
K22	78	144	0.0	0.0
K22	78	145	0.0	0.0
K22	78	146	0.0	0.0
K22	78	147	0.0	0.0
K22	78	148	0.0	0.0
K22	78	149	0.0	0.0
K22	78	150	0.0	0.0
K22	78	151	0.0	0.0
K22	78	152	0.0	0.0
K22	78	153	1.8	0.1
K22	78	154	0.0	0.0
K22	78	155	61.5	2.4
K22	78	156	0.0	0.0
K22	78	157	23.9	0.9
K22	78	158	0.0	0.0
K22	78	159	0.0	0.0
K22	78	160	0.0	0.0
K22	78	161	0.0	0.0
K22	78	162	0.0	0.0
K22	78	163	0.0	0.0
K22	78	164	0.0	0.0
K22	78	165	0.0	0.0
K22	78	166	0.0	0.0
K22	78	167	0.0	0.0
K22	78	168	0.0	0.0
K22	78	169	1.5	0.1
K22	78	170	0.0	0.0
K22	78	171	0.3	0.0
K22	78	172	0.5	0.0
K22	78	173	0.0	0.0
K22	78	174	0.0	0.0
K22	78	175	0.0	0.0
K22	78	176	0.0	0.0
K22	78	177	0.0	0.0
K22	78	178	14.0	0.5
K22	78	179	0.0	0.0
K22	78	180	0.0	0.0
K22	78	182	0.8	0.0
K22	78	183	0.0	0.0
K22	78	184	0.0	0.0
K22	78	185	0.0	0.0
K22	78	186	0.0	0.0
K22	78	187	0.0	0.0
K22	78	188	0.0	0.0
K22	78	189	0.0	0.0
K22	78	190	2.0	0.1
K22	78	191	0.0	0.0
K22	78	192	0.0	0.0
K22	78	193	0.0	0.0
K22	78	194	0.0	0.0
K22	78	195	0.8	0.0
K22	78	196	0.0	0.0
K22	78	197	0.8	0.0
K22	78	198	0.0	0.0
K22	78	199	0.0	0.0
K22	78	200	0.0	0.0
K22	78	201	0.0	0.0
K22	78	202	0.0	0.0
K22	78	203	0.0	0.0
K22	78	204	0.0	0.0
K22	78	205	0.0	0.0
K22	78	206	0.0	0.0
K22	78	207	0.0	0.0
K22	78	208	0.0	0.0
K22	78	209	0.0	0.0
K22	78	210	0.0	0.0
K22	78	211	1.3	0.0
K22	78	212	22.4	0.9
K22	78	213	4.8	0.2
K22	78	214	0.0	0.0
K22	78	215	0.0	0.0
K22	78	216	0.0	0.0
K22	78	217	29.7	1.2
K22	78	218	1.5	0.1
K22	78	219	0.0	0.0
K22	78	220	0.0	0.0
K22	78	221	0.0	0.0
K22	78	222	0.0	0.0
K22	78	223	0.0	0.0
K22	78	224	0.0	0.0
K22	78	225	0.0	0.0
K22	78	226	0.0	0.0
K22	78	227	0.0	0.0
K22	78	228	0.0	0.0
K22	78	229	0.0	0.0
K22	78	230	0.0	0.0
K22	78	231	0.0	0.0
K22	78	232	0.0	0.0
K22	78	233	0.0	0.0
K22	78	234	0.0	0.0
K22	78	235	0.0	0.0
K22	78	236	0.0	0.0
K22	78	237	0.0	0.0
K22	78	238	0.0	0.0
K22	78	239	0.0	0.0
K22	78	240	0.0	0.0
K22	78	241	0.0	0.0
K22	78	242	0.0	0.0
K22	78	243	0.0	0.0
K22	78	244	0.0	0.0
K22	78	245	0.0	0.0
K22	78	246	0.0	0.0
K22	78	247	0.0	0.0
K22	78	248	0.0	0.0
K22	78	249	0.0	0.0
K22	78	250	0.0	0.0
K22	78	251	0.0	0.0
K22	78	252	0.0	0.0
K22	78	253	0.0	0.0
K22	78	254	0.0	0.0
K22	78	255	0.0	0.0
K22	78	256	0.0	0.0
K22	78	257	0.0	0.0
K22	78	258	0.0	0.0
K22	78	259	0.0	0.0
K22	78	260	0.0	0.0
K22	78	261	0.0	0.0
K22	78	262	0.0	0.0
K22	78	263	0.0	0.0
K22	78	264	0.0	0.0
K22	78	265	0.0	0.0
K22	78	266	0.0	0.0
K22	78	267	0.0	0.0
K22	78	268	0.0	0.0
K22	78	269	0.0	0.0
K22	78	270	0.0	0.0
K22	78	271	0.0	0.0
K22	78	272	0.0	0.0
K22	78	273	0.0	0.0
K22	78	274	0.0	0.0
K22	78	275	0.0	0.0
K22	78	276	0.0	0.0
K22	78	277	0.0	0.0
K22	78	278	0.0	0.0
K22	78	279	0.0	0.0
K22	78	280	0.0	0.0
K22	78	281	0.0	0.0
K22	78	282	0.0	0.0
K22	78	283	0.0	0.0
K22	78	284	0.0	0.0
K22	78	285	0.0	0.0
K22	78	286	0.0	0.0
K22	78	287	0.0	0.0
K22	78	288	0.0	0.0
K22	78	289	0.0	0.0
K22	78	290	0.0	0.0
K22	78	291	0.0	0.0
K22	78	292	0.0	0.0
K22	78	293	0.0	0.0
K22	78	294	0.0	0.0
K22	78	295	0.0	0.0
K22	78	296	0.0	0.0
K22	78	297	0.0	0.0
K22	78	298	0.0	0.0
K22	78	299	0.0	0.0
K22	78	300	0.0	0.0
K22	78	301	0.0	0.0
K22	78	302	0.0	0.0
K22	78	303	0.0	0.0
K22	78	304	0.0	0.0
K22	78	305	0.0	0.0
K22	78	306	0.0	0.0
K22	78	307	0.0	0.0
K22	78	308	0.0	0.0
K22	78	309	0.0	0.0
K22	78	310	0.0	0.0
K22	78	311	0.0	0.0
K22	78	312	0.0	0.0
K22	78	313	0.0	0.0
K22	78	314	0.0	0.0
K22	78	315	0.0	0.0
K22	78	316	0.0	0.0
K22	78	317	0.0	0.0
K22	78	318	0.0	0.0
K22	78	319	0.0	0.0
K22	78	320	0.0	0.0
K22	78	321	0.0	0.0
K22	78	322	0.0	0.0
K22	78	323	0.0	0.0
K22	78	324	0.0	0.0
K22	78	325	0.0	0.0
K22	78	326	0.0	0.0
K22	78	327	0.0	0.0
K22	78	328	0.0	0.0
K22	78	329	0.0	0.0
K22	78	330	0.0	0.0
K22	78	331	0.0	0.0
K22	78	332	0.0	0.0
K22	78	333	0.0	0.0
K22	78	334	0.0	0.0
K22	78	335	0.0	0.0
K22	78	336	0.0	0.0
K22	78	337	0.0	0.0
K22	78	338	33.8	1.3

Rain gage number	Year	Day	Rainfall	
			mm	in.
K23	78	139	0.0	0.0
K23	78	140	0.0	0.0
K23	78	141	0.0	0.0
K23	78	142	0.0	0.0
K23	78	143	0.0	0.0
K23	78	144	0.0	0.0
K23	78	145	0.0	0.0
K23	78	146	0.0	0.0
K23	78	147	0.0	0.0
K23	78	148	0.0	0.0
K23	78	149	0.0	0.0
K23	78	150	0.0	0.0
K23	78	151	0.0	0.0
K23	78	152	0.0	0.0
K23	78	153	0.0	0.0
K23	78	154	0.0	0.0
K23	78	155	63.2	2.5
K23	78	156	0.0	0.0
K23	78	157	21.3	0.8
K23	78	158	0.0	0.0
K23	78	159	0.0	0.0
K23	78	160	0.0	0.0
K23	78	161	0.0	0.0
K23	78	162	0.0	0.0
K23	78	163	0.0	0.0
K23	78	164	0.0	0.0
K23	78	165	0.0	0.0
K23	78	166	0.0	0.0
K23	78	167	0.0	0.0
K23	78	168	0.0	0.0
K23	78	169	0.0	0.0
K23	78	170	2.0	0.1
K23	78	171	0.0	0.0
K23	78	172	0.5	0.0
K23	78	173	0.3	0.0
K23	78	174	0.0	0.0
K23	78	175	0.0	0.0
K23	78	176	0.0	0.0
K23	78	177	0.0	0.0
K23	78	178	13.7	0.5
K23	78	179	0.5	0.0
K23	78	180	0.0	0.0
K23	78	181	0.0	0.0
K23	78	182	0.0	0.0
K23	78	183	0.0	0.0
K23	78	184	0.0	0.0
K23	78	185	0.0	0.0
K23	78	186	0.0	0.0
K23	78	187	0.0	0.0
K23	78	188	0.0	0.0
K23	78	189	0.0	0.0
K23	78	190	0.0	0.0
K23	78	191	0.0	0.0
K23	78	192	0.0	0.0
K23	78	193	0.0	0.0
K23	78	194	0.0	0.0
K23	78	195	0.0	0.0
K23	78	196	0.0	0.0
K23	78	197	2.3	0.1
K23	78	198	0.0	0.0
K23	78	199	0.0	0.0
K23	78	200	0.0	0.0
K23	78	201	24.6	1.0
K23	78	202	9.7	0.4
K23	78	203	10.2	0.4
K23	78	204	0.0	0.0
K23	78	205	0.0	0.0
K23	78	206	0.0	0.0
K23	78	207	0.0	0.0
K23	78	208	0.0	0.0
K23	78	209	0.0	0.0
K23	78	210	0.0	0.0
K23	78	211	1.3	0.0
K23	78	212	22.4	0.9
K23	78	213	4.8	0.2
K23	78	214	0.0	0.0
K23	78	215	0.0	0.0
K23	78	216	0.0	0.0
K23	78	217	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K24	78	136	0.0	0.0
K24	78	137	0.0	0.0
K24	78	138	10.7	0.4
K24	78	139	0.0	0.0
K24	78	140	0.0	0.0
K24	78	141	0.0	0.0
K24	78	142	0.0	0.0
K24	78	143	0.0	0.0
K24	78	144	0.0	0.0
K24	78	145	0.0	0.0
K24	78	146	0.0	0.0
K24	78	147	0.3	0.0
K24	78	148	1.3	0.0
K24	78	149	0.0	0.0
K24	78	150	0.0	0.0
K24	78	151	0.0	0.0
K24	78	152	0.0	0.0
K24	78	153	3.0	0.1
K24	78	154	0.0	0.0
K24	78	155	65.3	2.6
K24	78	156	0.0	0.0
K24	78	157	21.6	0.8
K24	78	158	0.0	0.0
K24	78	159	0.0	0.0
K24	78	160	0.0	0.0
K24	78	161	0.0	0.0
K24	78	162	0.0	0.0
K24	78	163	0.0	0.0
K24	78	164	0.0	0.0
K24	78	165	0.0	0.0
K24	78	166	0.0	0.0
K24	78	167	0.0	0.0
K24	78	168	0.0	0.0
K24	78	169	1.5	0.1
K24	78	170	0.0	0.0
K24	78	171	1.3	0.0
K24	78	172	0.0	0.0
K24	78	173	0.0	0.0
K24	78	174	0.0	0.0
K24	78	175	0.0	0.0
K24	78	176	0.0	0.0
K24	78	177	0.0	0.0
K24	78	178	13.0	0.5
K24	78	179	0.5	0.0
K24	78	180	0.0	0.0
K24	78	181	0.0	0.0
K24	78	182	0.0	0.0
K24	78	183	0.0	0.0
K24	78	184	0.0	0.0
K24	78	185	0.0	0.0
K24	78	186	0.0	0.0
K24	78	187	0.0	0.0
K24	78	188	0.0	0.0
K24	78	189	0.0	0.0
K24	78	190	0.0	0.0
K24	78	191	0.0	0.0
K24	78	192	0.0	0.0
K24	78	193	0.0	0.0
K24	78	194	0.0	0.0
K24	78	195	1.0	0.0
K24	78	196	0.0	0.0
K24	78	197	7.4	0.3
K24	78	198	0.0	0.0
K24	78	199	0.0	0.0
K24	78	200	0.0	0.0
K24	78	201	19.6	0.8
K24	78	202	5.8	0.2
K24	78	203	21.6	0.8
K24	78	204	0.0	0.0
K24	78	205	0.0	0.0
K24	78	206	0.0	0.0
K24	78	207	0.0	0.0
K24	78	208	0.0	0.0
K24	78	209	0.0	0.0
K24	78	210	0.0	0.0
K24	78	211	1.0	0.0
K24	78	212	0.0	0.0
K24	78	213	0.0	0.0
K24	78	214	1.0	0.0
K24	78	215	1.0	0.0
K24	78	216	0.8	0.0
K24	78	217	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K24	78	218	0.0	0.0
K24	78	219	0.0	0.0
K24	78	220	0.0	0.0
K24	78	221	0.0	0.0
K24	78	222	0.0	0.0
K24	78	223	0.0	0.0
K24	78	224	0.0	0.0
K24	78	225	0.0	0.0
K24	78	226	0.0	0.0
K24	78	227	0.0	0.0
K24	78	228	0.0	0.0
K24	78	229	0.0	0.0
K24	78	230	0.0	0.0
K24	78	231	0.0	0.0
K24	78	232	0.0	0.0
K24	78	233	0.0	0.0
K24	78	234	0.0	0.0
K24	78	235	0.0	0.0
K24	78	236	0.0	0.0
K24	78	237	0.0	0.0
K24	78	238	1.0	0.0
K24	78	239	0.0	0.0
K24	78	240	0.5	0.0
K24	78	241	0.0	0.0
K24	78	242	25.3	0.9
K24	78	243	5.8	0.2
K24	78	244	0.0	0.0
K24	78	245	0.0	0.0
K24	78	246	32.5	1.3
K24	78	247	1.0	0.0
K24	78	248	0.0	0.0
K24	78	249	0.0	0.0
K24	78	250	0.0	0.0
K24	78	251	0.0	0.0
K24	78	252	0.3	0.0
K24	78	253	0.0	0.0
K24	78	254	0.0	0.0
K24	78	255	0.0	0.0
K24	78	256	0.0	0.0
K24	78	257	14.7	0.6
K24	78	258	0.0	0.0
K24	78	259	0.0	0.0
K24	78	260	0.0	0.0
K24	78	261	0.0	0.0
K24	78	262	0.0	0.0
K24	78	263	0.0	0.0
K24	78	264	0.0	0.0
K24	78	265	0.0	0.0
K24	78	266	0.0	0.0
K24	78	267	0.0	0.0
K24	78	268	0.0	0.0
K24	78	269	0.0	0.0
K24	78	270	0.0	0.0
K24	78	271	0.0	0.0
K24	78	272	5.1	0.2
K24	78	273	0.0	0.0
K24	78	274	0.0	0.0
K24	78	275	0.0	0.0
K24	78	276	0.0	0.0
K24	78	277	0.0	0.0
K24	78	278	13.2	0.5
K24	78	279	2.0	0.1
K24	78	280	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K25	78	182	0.0	0.0
K25	78	183	0.0	0.0
K25	78	184	0.3	0.0
K25	78	185	0.0	0.0
K25	78	186	0.0	0.0
K25	78	187	0.0	0.0
K25	78	188	0.0	0.0
K25	78	189	0.0	0.0
K25	78	190	0.0	0.0
K25	78	191	0.0	0.0
K25	78	192	0.0	0.0
K25	78	193	0.0	0.0
K25	78	194	0.0	0.0
K25	78	195	0.0	0.0
K25	78	196	0.0	0.0
K25	78	197	0.0	0.0
K25	78	198	0.0	0.0
K25	78	199	0.0	0.0
K25	78	200	0.0	0.0
K25	78	201	19.8	0.8
K25	78	202	6.3	0.2
K25	78	203	5.8	0.2
K25	78	204	0.0	0.0
K25	78	205	0.0	0.0
K25	78	206	0.0	0.0
K25	78	207	0.0	0.0
K25	78	208	0.0	0.0
K25	78	209	0.0	0.0
K25	78	210	0.0	0.0
K25	78	211	1.5	0.1
K25	78	213	0.0	0.0
K25	78	214	2.5	0.1
K25	78	215	1.3	0.0
K25	78	216	0.0	0.0
K25	78	217	0.0	0.0
K25	78	218	0.0	0.0
K25	78	219	0.0	0.0
K25	78	220	0.0	0.0
K25	78	221	0.0	0.0
K25	78	222	0.0	0.0
K25	78	223	0.0	0.0
K25	78	224	0.0	0.0
K25	78	225	0.0	0.0
K25	78	226	0.0	0.0
K25	78	235	0.0	0.0
K25	78	236	0.0	0.0
K25	78	237	0.0	0.0
K25	78	238	1.3	0.0
K25	78	239	0.0	0.0
K25	78	240	0.0	0.0
K25	78	241	0.0	0.0
K26	78	121	19.8	0.8
K26	78	122	5.3	0.2
K26	78	123	0.0	0.0
K26	78	124	0.0	0.0
K26	78	125	0.0	0.0
K26	78	126	29.5	1.2
K26	78	127	0.8	0.0
K26	78	128	0.0	0.0
K26	78	129	0.0	0.0
K26	78	130	0.0	0.0
K26	78	131	0.0	0.0
K26	78	132	0.3	0.0
K26	78	133	0.0	0.0
K26	78	134	0.0	0.0
K26	78	135	0.0	0.0
K26	78	136	0.0	0.0
K26	78	137	0.0	0.0
K26	78	138	11.4	0.4
K26	78	146	0.0	0.0
K26	78	169	1.5	0.1
K26	78	170	0.0	0.0
K26	78	171	6.4	0.3
K26	78	172	0.0	0.0
K26	78	173	0.0	0.0
K26	78	174	0.0	0.0
K26	78	175	0.0	0.0
K26	78	176	0.0	0.0
K26	78	177	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K26	78	178	13.7	0.5
K26	78	179	3.0	0.1
K26	78	180	0.0	0.0
K26	78	182	2.0	0.1
K26	78	183	0.0	0.0
K26	78	184	0.5	0.0
K26	78	185	0.0	0.0
K26	78	186	0.0	0.0
K26	78	187	0.0	0.0
K26	78	188	0.0	0.0
K26	78	189	0.0	0.0
K26	78	190	0.0	0.0
K26	78	191	0.0	0.0
K26	78	192	0.0	0.0
K26	78	193	0.0	0.0
K26	78	194	0.0	0.0
K26	78	195	1.3	0.0
K26	78	196	0.0	0.0
K26	78	197	8.1	0.3
K26	78	198	0.0	0.0
K26	78	199	0.0	0.0
K26	78	200	0.0	0.0
K26	78	201	14.5	0.6
K26	78	202	11.4	0.4
K26	78	203	25.1	1.0
K26	78	204	0.0	0.0
K26	78	205	0.0	0.0
K26	78	206	0.0	0.0
K26	78	207	0.0	0.0
K26	78	208	0.0	0.0
K26	78	209	0.0	0.0
K26	78	210	0.0	0.0
K26	78	211	1.0	0.0
K26	78	213	0.0	0.0
K26	78	214	5.8	0.2
K26	78	215	0.0	0.0
K26	78	216	1.0	0.0
K26	78	217	0.0	0.0
K26	78	218	0.0	0.0
K26	78	219	0.0	0.0
K26	78	220	0.0	0.0
K26	78	221	0.0	0.0
K26	78	222	0.0	0.0
K26	78	223	0.0	0.0
K26	78	224	0.0	0.0
K26	78	225	0.0	0.0
K26	78	226	0.0	0.0
K26	78	227	15.7	0.6
K26	78	228	0.0	0.0
K26	78	229	0.0	0.0
K26	78	230	0.0	0.0
K26	78	231	0.0	0.0
K26	78	232	0.0	0.0
K26	78	233	0.0	0.0
K26	78	234	0.0	0.0
K26	78	235	0.0	0.0
K26	78	236	0.0	0.0
K26	78	237	0.3	0.0
K26	78	238	3.3	0.1
K26	78	239	0.0	0.0
K26	78	240	0.0	0.0
K26	78	241	0.0	0.0
K27	78	121	20.1	0.8
K27	78	122	5.8	0.2
K27	78	123	0.0	0.0
K27	78	124	0.0	0.0
K27	78	125	0.0	0.0
K27	78	126	29.7	1.2
K27	78	127	0.5	0.0
K27	78	128	0.0	0.0
K27	78	129	0.0	0.0
K27	78	130	0.0	0.0
K27	78	131	0.0	0.0
K27	78	132	0.0	0.0
K27	78	133	0.0	0.0
K27	78	134	0.0	0.0
K27	78	135	0.0	0.0
K27	78	136	0.0	0.0
K27	78	137	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall		Rain gage number	Year	Day	Rainfall	
			mm	in.				mm	in.
K27	78	138	23.1	0.9	K27	78	221	0.0	0.0
K27	78	140	0.0	0.0	K27	78	222	0.0	0.0
K27	78	141	0.0	0.0	K27	78	223	0.0	0.0
K27	78	142	0.0	0.0	K27	78	224	0.0	0.0
K27	78	143	0.0	0.0	K27	78	225	0.0	0.0
K27	78	144	0.0	0.0	K27	78	226	0.0	0.0
K27	78	145	0.0	0.0	K27	78	227	15.5	0.6
K27	78	146	0.0	0.0	K27	78	228	0.0	0.0
K27	78	147	2.5	0.1	K27	78	229	0.0	0.0
K27	78	148	0.0	0.0	K27	78	230	0.0	0.0
K27	78	149	0.0	0.0	K27	78	231	0.0	0.0
K27	78	150	0.0	0.0	K27	78	232	0.0	0.0
K27	78	152	0.0	0.0	K27	78	233	0.0	0.0
K27	78	153	2.8	0.1	K27	78	234	0.0	0.0
K27	78	154	0.3	0.0	K27	78	235	0.0	0.0
K27	78	155	62.7	2.5	K27	78	236	0.0	0.0
K27	78	156	0.0	0.0	K27	78	237	0.0	0.0
K27	78	157	9.9	0.4	K27	78	238	13.2	0.5
K27	78	158	0.0	0.0	K27	78	239	0.0	0.0
K27	78	159	0.0	0.0	K27	78	240	0.0	0.0
K27	78	160	0.0	0.0	K27	78	241	0.0	0.0
K27	78	161	0.0	0.0	K27	78	242	18.0	0.7
K27	78	162	0.0	0.0	K27	78	243	4.6	0.2
K27	78	163	0.0	0.0	K27	78	244	0.0	0.0
K27	78	164	0.0	0.0	K27	78	245	0.0	0.0
K27	78	165	0.0	0.0	K27	78	246	0.0	0.0
K27	78	166	0.0	0.0	K27	78	247	30.7	1.2
K27	78	167	0.0	0.0	K27	78	248	1.0	0.0
K27	78	168	0.0	0.0	K27	78	249	0.0	0.0
K27	78	169	1.5	0.1	K27	78	250	0.0	0.0
K27	78	170	0.0	0.0	K27	78	251	0.0	0.0
K27	78	171	3.0	0.1	K27	78	252	0.0	0.0
K27	78	172	0.0	0.0	K27	78	253	0.0	0.0
K27	78	173	0.0	0.0	K27	78	254	0.0	0.0
K27	78	174	0.0	0.0	K27	78	255	0.0	0.0
K27	78	175	0.0	0.0	K27	78	256	0.0	0.0
K27	78	176	0.0	0.0	K27	78	257	0.0	0.0
K27	78	177	0.0	0.0	K27	78	258	0.0	0.0
K27	78	178	22.4	0.9	K27	78	259	19.0	0.7
K27	78	179	33.6	1.1	K27	78	260	0.0	0.0
K27	78	180	0.0	0.0	K27	78	261	0.0	0.0
K27	78	182	0.8	0.0	K27	78	262	0.0	0.0
K27	78	183	0.0	0.0	K27	78	263	0.0	0.0
K27	78	184	0.0	0.0	K27	78	264	0.0	0.0
K27	78	185	0.0	0.0	K27	78	265	0.0	0.0
K27	78	186	0.0	0.0	K27	78	266	0.0	0.0
K27	78	187	0.3	0.0	K27	78	267	3.6	0.1
K27	78	188	0.0	0.0	K27	78	268	0.0	0.0
K27	78	189	0.0	0.0	K27	78	269	0.0	0.0
K27	78	190	1.3	0.0	K27	78	270	0.0	0.0
K27	78	191	0.0	0.0	K27	78	271	0.0	0.0
K27	78	192	0.0	0.0	K27	78	272	1.5	0.1
K27	78	193	0.0	0.0	K27	78	273	0.0	0.0
K27	78	194	0.0	0.0	K27	78	274	52.1	2.0
K27	78	195	2.0	0.1	K27	78	275	0.0	0.0
K27	78	196	0.0	0.0	K27	78	276	9.1	0.4
K27	78	197	1.8	0.1	K27	78	277	0.0	0.0
K27	78	198	0.0	0.0	K27	78	278	0.0	0.0
K27	78	199	0.0	0.0	K27	78	279	0.0	0.0
K27	78	200	0.0	0.0	K27	78	280	0.0	0.0
K27	78	201	7.9	0.3	K27	78	281	0.0	0.0
K27	78	202	10.2	0.4	K27	78	282	0.0	0.0
K27	78	203	47.5	1.9	K27	78	283	0.0	0.0
K27	78	204	0.0	0.0	K27	78	284	0.0	0.0
K27	78	205	0.0	0.0	K27	78	285	0.0	0.0
K27	78	206	0.0	0.0	K27	78	286	0.0	0.0
K27	78	207	0.0	0.0	K27	78	287	0.0	0.0
K27	78	208	0.0	0.0	K27	78	288	0.0	0.0
K27	78	209	0.0	0.0	K27	78	289	1.8	0.1
K27	78	210	0.0	0.0	K27	78	290	0.0	0.0
K27	78	211	1.0	0.0	K27	78	291	1.3	0.0
K27	78	212	0.0	0.0	K27	78	292	0.0	0.0
K27	78	213	0.0	0.0	K27	78	293	0.0	0.0
K27	78	214	3.0	0.1	K27	78	294	0.0	0.0
K27	78	215	1.8	0.1	K27	78	295	0.3	0.0
K27	78	216	1.0	0.0	K27	78	296	0.0	0.0
K27	78	217	0.0	0.0	K27	78	297	0.0	0.0
K27	78	218	0.0	0.0	K27	78	298	14.2	0.6
K27	78	219	0.0	0.0	K27	78	299	4.6	0.2
K27	78	220	0.0	0.0	K27	78	300	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 330	78	138	9.7	0.4
K 330	78	139	0.0	0.0
K 330	78	140	0.0	0.0
K 330	78	141	0.0	0.0
K 330	78	142	0.0	0.0
K 330	78	143	0.0	0.0
K 330	78	144	0.3	0.0
K 330	78	153	2.0	0.1
K 330	78	154	0.0	0.0
K 330	78	155	46.7	1.8
K 330	78	156	0.0	0.0
K 330	78	157	31.7	1.2
K 330	78	158	0.0	0.0
K 330	78	159	0.0	0.0
K 330	78	160	0.0	0.0
K 330	78	161	0.0	0.0
K 330	78	162	0.0	0.0
K 330	78	163	0.0	0.0
K 330	78	164	0.0	0.0
K 330	78	165	0.0	0.0
K 330	78	166	0.0	0.0
K 330	78	167	0.0	0.0
K 330	78	168	0.0	0.0
K 330	78	169	1.5	0.1
K 330	78	170	0.0	0.0
K 330	78	171	3.3	0.1
K 330	78	172	0.0	0.0
K 330	78	173	0.0	0.0
K 330	78	174	0.0	0.0
K 330	78	175	0.0	0.0
K 330	78	176	0.0	0.0
K 330	78	177	0.0	0.0
K 330	78	178	32.4	1.3
K 330	78	179	2.8	0.1
K 330	78	180	0.0	0.0
K 330	78	181	0.0	0.0
K 330	78	182	0.0	0.0
K 330	78	183	0.0	0.0
K 330	78	184	0.0	0.0
K 330	78	185	0.0	0.0
K 330	78	186	0.0	0.0
K 330	78	187	0.0	0.0
K 330	78	188	0.0	0.0
K 330	78	189	0.0	0.0
K 330	78	190	0.0	0.0
K 330	78	191	0.0	0.0
K 330	78	192	0.0	0.0
K 330	78	193	0.0	0.0
K 330	78	194	0.0	0.0
K 330	78	195	0.0	0.0
K 330	78	196	0.0	0.0
K 330	78	197	0.0	0.0
K 330	78	198	0.0	0.0
K 330	78	199	0.0	0.0
K 330	78	200	0.0	0.0
K 330	78	201	20.6	0.8
K 330	78	202	7.1	0.3
K 330	78	203	5.2	0.2
K 330	78	204	0.0	0.0
K 330	78	205	0.0	0.0
K 330	78	206	0.0	0.0
K 330	78	207	0.0	0.0
K 330	78	208	0.0	0.0
K 330	78	209	0.0	0.0
K 330	78	210	6.0	0.2
K 330	78	211	0.5	0.0
K 330	78	212	0.0	0.0
K 330	78	213	0.0	0.0
K 330	78	214	2.3	0.1
K 330	78	215	0.0	0.0
K 330	78	216	2.8	0.1
K 330	78	217	0.0	0.0
K 330	78	218	0.0	0.0
K 330	78	219	0.0	0.0
K 330	78	220	0.0	0.0
K 330	78	221	0.0	0.0
K 330	78	222	0.0	0.0
K 330	78	223	0.0	0.0
K 330	78	224	0.0	0.0
K 330	78	225	0.0	0.0
K 330	78	226	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 330	78	227	8.9	0.3
K 330	78	228	0.0	0.0
K 330	78	229	0.0	0.0
K 330	78	230	0.0	0.0
K 330	78	231	0.0	0.0
K 330	78	232	0.0	0.0
K 330	78	233	0.0	0.0
K 330	78	234	0.0	0.0
K 330	78	235	0.0	0.0
K 330	78	236	0.0	0.0
K 330	78	237	0.0	0.0
K 330	78	238	1.5	0.1
K 330	78	239	0.0	0.0
K 330	78	240	0.0	0.0
K 330	78	241	0.0	0.0
K 331	78	121	17.5	0.7
K 331	78	122	3.8	0.1
K 331	78	123	0.0	0.0
K 331	78	124	0.0	0.0
K 331	78	125	0.0	0.0
K 331	78	126	32.0	1.3
K 331	78	127	1.0	0.1
K 331	78	128	0.0	0.0
K 331	78	129	0.0	0.0
K 331	78	130	0.0	0.0
K 331	78	131	0.0	0.0
K 331	78	132	0.0	0.0
K 331	78	133	0.0	0.0
K 331	78	134	0.0	0.0
K 331	78	135	0.0	0.0
K 331	78	136	0.0	0.0
K 331	78	137	0.0	0.0
K 331	78	138	0.0	0.0
K 331	78	139	3.0	0.1
K 331	78	140	0.0	0.0
K 331	78	141	0.0	0.0
K 331	78	142	0.0	0.0
K 331	78	143	0.0	0.0
K 331	78	144	0.0	0.0
K 331	78	145	6.8	0.3
K 331	78	146	0.0	0.0
K 331	78	147	2.8	0.1
K 331	78	148	0.0	0.0
K 331	78	149	0.0	0.0
K 331	78	150	0.0	0.0
K 331	78	151	0.0	0.0
K 331	78	152	0.0	0.0
K 331	78	153	0.0	0.0
K 331	78	154	0.0	0.0
K 331	78	155	0.0	0.0
K 331	78	156	0.0	0.0
K 331	78	157	0.0	0.0
K 331	78	158	0.0	0.0
K 331	78	159	0.0	0.0
K 331	78	160	0.0	0.0
K 331	78	161	0.0	0.0
K 331	78	162	0.0	0.0
K 331	78	163	0.0	0.0
K 331	78	164	0.0	0.0
K 331	78	165	0.0	0.0
K 331	78	166	0.0	0.0
K 331	78	167	0.0	0.0
K 331	78	168	0.0	0.0
K 331	78	169	0.0	0.0
K 331	78	170	0.0	0.0
K 331	78	171	0.0	0.0
K 331	78	172	0.0	0.0
K 331	78	173	0.0	0.0
K 331	78	174	0.0	0.0
K 331	78	175	0.0	0.0
K 331	78	176	0.0	0.0
K 331	78	177	0.0	0.0
K 331	78	178	0.0	0.0
K 331	78	179	21.1	0.8
K 331	78	180	0.0	0.0
K 331	78	181	0.0	0.0
K 331	78	182	0.0	0.0
K 331	78	183	0.0	0.0
K 331	78	184	0.0	0.0
K 331	78	185	0.0	0.0
K 331	78	186	0.0	0.0
K 331	78	187	0.0	0.0
K 331	78	188	0.0	0.0
K 331	78	189	0.0	0.0
K 331	78	190	0.0	0.0
K 331	78	191	0.0	0.0
K 331	78	192	0.0	0.0
K 331	78	193	0.0	0.0
K 331	78	194	0.0	0.0
K 331	78	195	0.8	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K31	7A	196	0.0	0.0
K31	7A	197	0.0	0.0
K31	7A	198	0.0	0.0
K31	7A	199	0.0	0.0
K31	7A	200	0.0	0.0
K31	7A	201	23.9	0.9
K31	7A	202	9.4	0.4
K31	7A	203	26.2	1.0
K31	7A	204	0.0	0.0
K31	7A	205	0.0	0.0
K31	7A	206	0.0	0.0
K31	7A	207	0.0	0.0
K31	7A	208	0.0	0.0
K31	7A	209	0.0	0.0
K31	7A	210	0.0	0.0
K31	7A	211	1.0	0.0
K31	7A	213	0.0	0.0
K32	7A	213	17.3	0.7
K32	7A	122	4.6	0.2
K32	7A	123	0.0	0.0
K32	7A	124	0.0	0.0
K32	7A	125	0.0	0.0
K32	7A	126	34.8	1.4
K32	7A	127	0.8	0.0
K32	7A	128	0.0	0.0
K32	7A	129	0.0	0.0
K32	7A	130	0.0	0.0
K32	7A	131	0.0	0.0
K32	7A	132	0.0	0.0
K32	7A	133	0.0	0.0
K32	7A	134	0.0	0.0
K32	7A	135	0.0	0.0
K32	7A	136	0.0	0.0
K32	7A	137	0.0	0.0
K32	7A	138	14.0	0.5
K32	7A	139	0.0	0.0
K32	7A	140	0.0	0.0
K32	7A	142	0.0	0.0
K32	7A	143	0.0	0.0
K32	7A	144	0.0	0.0
K32	7A	153	1.5	0.1
K32	7A	154	0.0	0.0
K32	7A	155	62.5	2.5
K32	7A	156	0.0	0.0
K32	7A	157	33.8	1.3
K32	7A	158	0.0	0.0
K32	7A	159	0.0	0.0
K32	7A	160	0.0	0.0
K32	7A	161	0.0	0.0
K32	7A	162	0.0	0.0
K32	7A	163	0.0	0.0
K32	7A	164	0.0	0.0
K32	7A	165	0.0	0.0
K32	7A	166	0.0	0.0
K32	7A	167	0.0	0.0
K32	7A	168	0.0	0.0
K32	7A	169	2.0	0.1
K32	7A	170	0.0	0.0
K32	7A	172	0.8	0.0
K32	7A	173	0.0	0.0
K32	7A	174	0.0	0.0
K32	7A	175	0.0	0.0
K32	7A	176	0.0	0.0
K32	7A	177	0.0	0.0
K32	7A	178	35.8	1.4
K32	7A	179	6.3	0.2
K32	7A	180	0.0	0.0
K32	7A	181	0.0	0.0
K32	7A	182	0.0	0.0
K32	7A	183	0.0	0.0
K32	7A	184	0.0	0.0
K32	7A	185	0.0	0.0
K32	7A	186	0.3	0.0
K32	7A	187	0.5	0.0
K32	7A	188	0.0	0.0
K32	7A	189	0.0	0.0
K32	7A	190	8.4	0.3
K32	7A	191	0.0	0.0
K32	7A	192	0.0	0.0
K32	7A	193	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K32	7A	194	0.3	0.0
K32	7A	195	0.0	0.0
K32	7A	196	0.0	0.0
K32	7A	197	0.0	0.0
K32	7A	198	0.0	0.0
K32	7A	199	0.0	0.0
K32	7A	200	0.0	0.0
K32	7A	201	20.8	0.8
K32	7A	202	10.9	0.4
K32	7A	203	43.4	1.7
K32	7A	204	0.0	0.0
K32	7A	205	0.0	0.0
K32	7A	206	0.0	0.0
K32	7A	207	0.0	0.0
K32	7A	208	0.0	0.0
K32	7A	209	0.0	0.0
K32	7A	210	0.0	0.0
K32	7A	211	0.3	0.0
K32	7A	213	0.0	0.0
K33	7A	121	17.3	0.7
K33	7A	122	4.3	0.2
K33	7A	123	0.0	0.0
K33	7A	124	0.0	0.0
K33	7A	125	0.0	0.0
K33	7A	126	31.0	1.2
K33	7A	127	0.5	0.0
K33	7A	128	0.0	0.0
K33	7A	129	0.0	0.0
K33	7A	130	0.0	0.0
K33	7A	131	0.0	0.0
K33	7A	132	0.3	0.0
K33	7A	133	0.0	0.0
K33	7A	134	0.0	0.0
K33	7A	135	0.0	0.0
K33	7A	136	0.0	0.0
K33	7A	137	0.0	0.0
K33	7A	138	24.4	1.0
K33	7A	140	0.0	0.0
K33	7A	141	0.0	0.0
K33	7A	142	0.0	0.0
K33	7A	143	0.0	0.0
K33	7A	144	1.0	0.0
K33	7A	153	0.8	0.0
K33	7A	154	0.0	0.0
K33	7A	155	52.6	2.1
K33	7A	156	0.0	0.0
K33	7A	157	14.5	0.6
K33	7A	158	0.0	0.0
K33	7A	159	0.0	0.0
K33	7A	160	0.0	0.0
K33	7A	161	0.0	0.0
K33	7A	162	0.0	0.0
K33	7A	163	0.0	0.0
K33	7A	164	0.0	0.0
K33	7A	166	0.0	0.0
K33	7A	167	0.0	0.0
K33	7A	168	0.0	0.0
K33	7A	169	2.3	0.1
K33	7A	170	0.0	0.0
K33	7A	171	0.3	0.0
K33	7A	172	1.0	0.0
K33	7A	173	0.0	0.0
K33	7A	174	0.0	0.0
K33	7A	175	0.0	0.0
K33	7A	176	0.0	0.0
K33	7A	177	0.0	0.0
K33	7A	178	20.1	0.8
K33	7A	179	7.1	0.3
K33	7A	180	0.0	0.0
K33	7A	182	0.3	0.0
K33	7A	183	0.0	0.0
K33	7A	184	0.0	0.0
K33	7A	185	0.0	0.0
K33	7A	186	1.8	0.1
K33	7A	187	0.0	0.0
K33	7A	188	0.0	0.0
K33	7A	189	0.0	0.0
K33	7A	190	1.0	0.0
K33	7A	191	0.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall		Rain gage number	Year	Day	Rainfall	
			mm	in.				mm	in.
K33	7A	192	0.0	0.0	K34	7A	157	13.0	0.5
K33	7A	193	0.0	0.0	K34	7A	158	0.0	0.0
K33	7A	194	0.0	0.0	K34	7A	159	0.0	0.0
K33	7A	195	0.0	0.0	K34	7A	160	0.0	0.0
K33	7A	196	0.0	0.0	K34	7A	161	0.0	0.0
K33	7A	197	0.0	0.0	K34	7A	162	0.0	0.0
K33	7A	198	0.0	0.0	K34	7A	163	0.0	0.0
K33	7A	199	0.0	0.0	K34	7A	164	0.0	0.0
K33	7A	200	0.0	0.0	K34	7A	165	0.0	0.0
K33	7A	201	9.4	0.4	K34	7A	166	0.0	0.0
K33	7A	202	10.9	0.4	K34	7A	167	0.0	0.0
K33	7A	203	17.3	0.7	K34	7A	168	0.0	0.0
K33	7A	204	0.0	0.0	K34	7A	169	1.0	0.0
K33	7A	205	0.0	0.0	K34	7A	170	0.0	0.0
K33	7A	206	0.0	0.0	K34	7A	171	3.0	0.1
K33	7A	207	0.0	0.0	K34	7A	172	0.0	0.0
K33	7A	208	0.0	0.0	K34	7A	173	0.0	0.0
K33	7A	209	0.0	0.0	K34	7A	174	0.0	0.0
K33	7A	210	0.0	0.0	K34	7A	175	0.0	0.0
K33	7A	211	0.0	0.0	K34	7A	176	0.0	0.0
K33	7A	212	0.0	0.0	K34	7A	177	0.0	0.0
K33	7A	213	2.3	0.1	K34	7A	178	2.1	0.3
K33	7A	214	2.3	0.1	K34	7A	179	3.8	0.1
K33	7A	215	1.0	0.0	K34	7A	180	0.0	0.0
K33	7A	216	0.0	0.0	K34	7A	181	0.0	0.0
K33	7A	217	0.0	0.0	K34	7A	182	0.5	0.0
K33	7A	218	0.0	0.0	K34	7A	183	0.0	0.0
K33	7A	219	0.0	0.0	K34	7A	184	0.5	0.0
K33	7A	220	0.0	0.0	K34	7A	185	0.0	0.0
K33	7A	221	0.0	0.0	K34	7A	186	0.0	0.0
K33	7A	222	0.0	0.0	K34	7A	187	0.3	0.0
K33	7A	223	0.0	0.0	K34	7A	188	0.0	0.0
K33	7A	224	0.0	0.0	K34	7A	189	0.0	0.0
K33	7A	225	0.0	0.0	K34	7A	190	1.3	0.0
K33	7A	226	0.0	0.0	K34	7A	191	0.0	0.0
K33	7A	227	10.4	0.4	K34	7A	192	0.0	0.0
K33	7A	228	0.0	0.0	K34	7A	193	0.0	0.0
K33	7A	229	0.0	0.0	K34	7A	194	0.0	0.0
K33	7A	230	0.0	0.0	K34	7A	195	0.0	0.0
K33	7A	231	0.0	0.0	K34	7A	196	0.0	0.0
K33	7A	232	0.0	0.0	K34	7A	197	0.0	0.0
K33	7A	233	0.0	0.0	K34	7A	198	0.0	0.0
K33	7A	234	0.0	0.0	K34	7A	199	0.0	0.0
K33	7A	235	0.0	0.0	K34	7A	200	0.0	0.0
K33	7A	236	0.0	0.0	K34	7A	201	8.9	0.3
K33	7A	237	0.0	0.0	K34	7A	202	2.7	0.5
K33	7A	238	2.3	0.1	K34	7A	203	2.9	1.0
K33	7A	239	0.0	0.0	K34	7A	204	0.0	0.0
K33	7A	240	0.0	0.0	K34	7A	205	0.0	0.0
K33	7A	241	0.0	0.0	K34	7A	206	0.0	0.0
K34	7A	121	15.3	0.6	K34	7A	207	0.0	0.0
K34	7A	122	5.5	0.2	K34	7A	208	0.0	0.0
K34	7A	123	0.0	0.0	K34	7A	209	0.0	0.0
K34	7A	124	0.0	0.0	K34	7A	210	0.0	0.0
K34	7A	125	0.0	0.0	K34	7A	211	0.0	0.0
K34	7A	126	30.0	1.2	K34	7A	212	0.0	0.0
K34	7A	127	1.3	0.0	K34	7A	213	2.0	0.0
K34	7A	128	0.0	0.0	K34	7A	214	5.1	0.2
K34	7A	129	0.0	0.0	K34	7A	215	0.4	0.0
K34	7A	130	0.0	0.0	K34	7A	216	1.3	0.0
K34	7A	131	0.0	0.0	K34	7A	217	0.0	0.0
K34	7A	132	0.0	0.0	K34	7A	218	0.0	0.0
K34	7A	133	0.0	0.0	K34	7A	219	0.0	0.0
K34	7A	135	0.0	0.0	K34	7A	220	0.0	0.0
K34	7A	136	0.0	0.0	K34	7A	221	0.5	0.0
K34	7A	137	0.0	0.0	K34	7A	222	0.0	0.0
K34	7A	138	12.4	0.5	K34	7A	223	0.0	0.0
K34	7A	139	0.0	0.0	K34	7A	224	0.0	0.0
K34	7A	140	0.0	0.0	K34	7A	225	0.0	0.0
K34	7A	141	0.0	0.0	K34	7A	226	0.5	0.0
K34	7A	142	0.0	0.0	K34	7A	227	16.4	0.7
K34	7A	143	0.0	0.0	K34	7A	228	0.0	0.0
K34	7A	144	0.0	0.0	K34	7A	229	0.0	0.0
K34	7A	145	0.0	0.0	K34	7A	230	0.0	0.0
K34	7A	146	0.0	0.0	K34	7A	231	0.0	0.0
K34	7A	147	0.0	0.0	K34	7A	232	0.0	0.0
K34	7A	153	2.0	0.1	K34	7A	233	0.0	0.0
K34	7A	154	0.0	0.0	K34	7A	234	0.0	0.0
K34	7A	155	30.7	1.2	K34	7A	235	0.0	0.0
K34	7A	156	0.0	0.0	K34	7A	236	0.0	0.0
					K34	7A	237	1.0	0.0

TABLE 18.- Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 34	7A	238	1.3	0.0
K 34	7A	239	0.0	0.0
K 34	7A	240	0.3	0.0
K 34	7A	241	0.0	0.0
K 34	7A	242	0.0	0.0
K 34	7A	243	0.0	0.0
K 35	7A	213	0.0	0.0
K 35	7A	122	15.3	0.7
K 35	7A	121	3.3	0.1
K 35	7A	123	0.0	0.0
K 35	7A	124	0.0	0.0
K 35	7A	125	0.0	0.0
K 35	7A	126	29.0	1.1
K 35	7A	127	0.5	0.0
K 35	7A	128	0.0	0.0
K 35	7A	129	0.0	0.0
K 35	7A	130	0.0	0.0
K 35	7A	131	0.0	0.0
K 35	7A	132	0.0	0.0
K 35	7A	133	0.0	0.0
K 35	7A	134	0.0	0.0
K 35	7A	135	0.0	0.0
K 35	7A	136	0.0	0.0
K 35	7A	137	0.0	0.0
K 35	7A	138	20.1	0.8
K 35	7A	139	0.0	0.0
K 35	7A	140	0.0	0.0
K 35	7A	141	0.0	0.0
K 35	7A	142	0.0	0.0
K 35	7A	143	0.0	0.0
K 35	7A	144	0.0	0.0
K 35	7A	145	0.0	0.0
K 35	7A	146	0.0	0.0
K 35	7A	147	0.3	0.0
K 35	7A	148	1.0	0.0
K 35	7A	149	0.0	0.0
K 35	7A	150	0.0	0.0
K 35	7A	152	0.0	0.0
K 35	7A	153	1.3	0.0
K 35	7A	154	0.0	0.0
K 35	7A	155	67.1	2.6
K 35	7A	156	0.0	0.0
K 35	7A	157	15.5	0.6
K 35	7A	158	0.0	0.0
K 35	7A	159	0.0	0.0
K 35	7A	160	0.0	0.0
K 35	7A	161	0.0	0.0
K 35	7A	162	0.0	0.0
K 35	7A	163	0.0	0.0
K 35	7A	164	0.0	0.0
K 35	7A	165	0.0	0.0
K 35	7A	166	0.0	0.0
K 35	7A	167	0.0	0.0
K 35	7A	168	0.0	0.0
K 35	7A	169	1.0	0.0
K 35	7A	170	0.0	0.0
K 35	7A	171	0.5	0.0
K 35	7A	172	0.3	0.0
K 35	7A	173	0.0	0.0
K 35	7A	174	0.0	0.0
K 35	7A	175	0.0	0.0
K 35	7A	176	0.0	0.0
K 35	7A	177	0.0	0.0
K 35	7A	178	15.8	0.7
K 35	7A	179	5.8	0.2
K 35	7A	180	0.0	0.0
K 35	7A	181	0.0	0.0
K 35	7A	182	0.0	0.0
K 35	7A	183	0.0	0.0
K 35	7A	184	0.0	0.0
K 35	7A	185	0.0	0.0
K 35	7A	186	3.0	0.1
K 35	7A	187	2.3	0.1
K 35	7A	188	0.0	0.0
K 35	7A	189	0.0	0.0
K 35	7A	190	0.0	0.0
K 35	7A	191	0.0	0.0
K 35	7A	192	0.0	0.0
K 35	7A	193	0.0	0.0
K 35	7A	194	0.0	0.0
K 35	7A	195	0.8	0.0
K 35	7A	196	0.0	0.0
K 35	7A	197	0.0	0.0
K 35	7A	198	0.0	0.0
K 35	7A	199	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 35	7A	200	0.0	0.0
K 35	7A	201	11.9	0.5
K 35	7A	202	5.1	0.2
K 35	7A	207	0.0	0.0
K 35	7A	208	0.0	0.0
K 35	7A	209	0.0	0.0
K 35	7A	210	0.0	0.0
K 35	7A	211	0.0	0.0
K 35	7A	212	14.0	0.6
K 36	7A	112	3.0	0.1
K 36	7A	113	0.0	0.0
K 36	7A	114	0.0	0.0
K 36	7A	115	0.0	0.0
K 36	7A	116	0.0	0.0
K 36	7A	117	0.0	0.0
K 36	7A	118	27.9	1.1
K 36	7A	119	0.3	0.0
K 36	7A	120	0.0	0.0
K 36	7A	121	0.0	0.0
K 36	7A	122	0.0	0.0
K 36	7A	123	0.0	0.0
K 36	7A	124	0.0	0.0
K 36	7A	125	0.0	0.0
K 36	7A	126	0.0	0.0
K 36	7A	127	0.0	0.0
K 36	7A	128	0.0	0.0
K 36	7A	129	0.0	0.0
K 36	7A	130	0.0	0.0
K 36	7A	131	0.0	0.0
K 36	7A	132	0.0	0.0
K 36	7A	133	0.0	0.0
K 36	7A	134	0.0	0.0
K 36	7A	135	0.0	0.0
K 36	7A	136	0.0	0.0
K 36	7A	137	0.0	0.0
K 36	7A	138	0.0	0.0
K 36	7A	139	15.0	0.6
K 36	7A	140	0.0	0.0
K 36	7A	141	0.0	0.0
K 36	7A	142	0.0	0.0
K 36	7A	143	0.0	0.0
K 36	7A	144	0.0	0.0
K 36	7A	145	0.0	0.0
K 36	7A	146	0.0	0.0
K 36	7A	147	1.3	0.0
K 36	7A	148	0.0	0.0
K 36	7A	149	1.5	0.1
K 36	7A	150	0.0	0.0
K 36	7A	151	0.0	0.0
K 36	7A	152	0.0	0.0
K 36	7A	153	1.0	0.0
K 36	7A	154	0.0	0.0
K 36	7A	155	64.0	2.7
K 36	7A	156	0.0	0.0
K 36	7A	157	12.2	0.5
K 36	7A	158	0.0	0.0
K 36	7A	159	0.0	0.0
K 36	7A	160	0.0	0.0
K 36	7A	161	0.0	0.0
K 36	7A	162	0.0	0.0
K 36	7A	163	0.0	0.0
K 36	7A	164	0.0	0.0
K 36	7A	165	0.0	0.0
K 36	7A	166	0.0	0.0
K 36	7A	167	0.0	0.0
K 36	7A	168	0.0	0.0
K 36	7A	169	0.5	0.0
K 36	7A	170	0.0	0.0
K 36	7A	171	1.3	0.0
K 36	7A	172	0.0	0.0
K 36	7A	173	0.0	0.0
K 36	7A	174	0.0	0.0
K 36	7A	175	0.0	0.0
K 36	7A	176	0.0	0.0
K 36	7A	177	0.0	0.0
K 36	7A	178	8.4	0.3
K 36	7A	179	5.6	0.2
K 36	7A	180	0.0	0.0
K 36	7A	181	0.0	0.0
K 36	7A	182	0.0	0.0
K 36	7A	183	0.0	0.0
K 36	7A	184	0.0	0.0
K 36	7A	185	0.0	0.0
K 36	7A	186	0.0	0.0
K 36	7A	187	0.5	0.0
K 36	7A	188	0.0	0.0
K 36	7A	189	0.0	0.0
K 36	7A	190	23.9	0.9
K 36	7A	191	0.0	0.0
K 36	7A	192	0.0	0.0
K 36	7A	193	0.0	0.0
K 36	7A	194	0.0	0.0

TABLE 18.— Continued.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 36	7A	195	0.0	0.0
K 36	7A	196	0.0	0.0
K 36	7A	197	0.0	0.0
K 36	7A	198	0.0	0.0
K 36	7A	199	0.0	0.0
K 36	7A	200	0.0	0.0
K 36	7A	201	0.0	0.3
K 36	7A	202	11.9	0.5
K 36	7A	203	10.4	0.4
K 36	7A	204	0.0	0.0
K 36	7A	205	0.0	0.0
K 36	7A	206	0.0	0.0
K 36	7A	207	0.0	0.0
K 36	7A	208	0.0	0.0
K 36	7A	209	0.0	0.0
K 36	7A	210	0.0	0.0
K 36	7A	211	0.0	0.0
K 36	7A	213	0.0	0.0
K 37	7A	195	10.4	0.4
K 37	7A	196	1.5	0.1
K 37	7A	197	0.0	0.0
K 37	7A	198	0.0	0.0
K 37	7A	199	0.0	0.0
K 37	7A	200	0.0	0.0
K 37	7A	201	0.0	0.0
K 37	7A	202	0.0	0.0
K 37	7A	203	0.0	0.0
K 37	7A	204	0.0	0.0
K 37	7A	205	0.0	0.0
K 37	7A	206	0.0	0.0
K 37	7A	207	0.0	0.0
K 37	7A	208	0.0	0.0
K 37	7A	209	0.0	0.0
K 37	7A	210	0.0	0.0
K 37	7A	211	0.0	0.0
K 37	7A	213	0.0	0.0
K 37	7A	137	0.0	0.0
K 37	7A	137	0.0	0.0
K 37	7A	133	0.0	0.0
K 37	7A	134	0.0	0.0
K 37	7A	135	0.0	0.0
K 37	7A	136	0.0	0.0
K 37	7A	137	0.0	0.0
K 37	7A	138	0.0	0.0
K 37	7A	139	0.0	0.0
K 37	7A	140	0.0	0.0
K 37	7A	142	0.0	0.0
K 37	7A	143	0.0	0.0
K 37	7A	144	0.0	0.0
K 37	7A	145	0.0	0.0
K 37	7A	146	0.0	0.0
K 37	7A	147	0.0	0.0
K 37	7A	148	0.5	0.0
K 37	7A	149	0.0	0.0
K 37	7A	150	0.0	0.0
K 37	7A	152	0.0	0.0
K 37	7A	153	2.3	0.1
K 37	7A	154	0.0	0.0
K 37	7A	155	66.5	2.6
K 37	7A	156	0.0	0.0
K 37	7A	157	18.5	0.7
K 37	7A	158	0.0	0.0
K 37	7A	159	0.0	0.0
K 37	7A	160	0.0	0.0
K 37	7A	161	0.0	0.0
K 37	7A	162	0.0	0.0
K 37	7A	163	0.0	0.0
K 37	7A	164	0.0	0.0
K 37	7A	165	0.0	0.0
K 37	7A	166	0.0	0.0
K 37	7A	167	0.0	0.0
K 37	7A	168	0.0	0.0
K 37	7A	169	0.0	0.0
K 37	7A	170	0.0	0.0
K 37	7A	171	2.5	0.1
K 37	7A	172	0.0	0.0
K 37	7A	173	0.0	0.0
K 37	7A	174	0.0	0.0
K 37	7A	175	0.0	0.0
K 37	7A	176	0.0	0.0
K 37	7A	177	0.0	0.0
K 37	7A	178	0.0	0.0
K 37	7A	179	11.2	0.4
K 37	7A	180	6.1	0.2
K 37	7A	181	0.0	0.0
K 37	7A	182	0.0	0.0
K 37	7A	183	0.0	0.0
K 37	7A	184	0.3	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 37	7A	185	0.0	0.0
K 37	7A	186	0.0	0.0
K 37	7A	187	0.0	0.0
K 37	7A	188	0.0	0.0
K 37	7A	189	0.0	0.0
K 37	7A	190	16.3	0.6
K 37	7A	191	0.0	0.0
K 37	7A	192	0.0	0.0
K 37	7A	193	0.0	0.0
K 37	7A	194	0.0	0.0
K 37	7A	195	0.3	0.0
K 37	7A	196	0.0	0.0
K 37	7A	197	0.0	0.0
K 37	7A	198	0.0	0.0
K 37	7A	199	0.0	0.0
K 37	7A	200	0.0	0.0
K 37	7A	201	5.1	0.2
K 37	7A	202	15.5	0.6
K 37	7A	203	0.0	0.0
K 37	7A	204	0.0	0.0
K 37	7A	205	0.0	0.0
K 37	7A	206	0.0	0.0
K 37	7A	207	0.0	0.0
K 37	7A	208	0.0	0.0
K 37	7A	209	0.0	0.0
K 37	7A	210	0.0	0.0
K 37	7A	211	0.0	0.0
K 37	7A	213	0.0	0.0
K 37	7A	124	0.0	0.0
K 37	7A	125	0.0	0.0
K 37	7A	126	33.5	1.3
K 37	7A	127	1.5	0.1
K 37	7A	128	0.0	0.0
K 37	7A	129	0.0	0.0
K 37	7A	130	0.0	0.0
K 37	7A	131	0.0	0.0
K 37	7A	132	0.0	0.0
K 37	7A	133	0.0	0.0
K 37	7A	134	0.0	0.0
K 37	7A	135	0.0	0.0
K 37	7A	136	0.0	0.0
K 37	7A	137	0.0	0.0
K 37	7A	138	15.2	0.6
K 37	7A	139	0.0	0.0
K 37	7A	140	0.0	0.0
K 37	7A	141	0.0	0.0
K 37	7A	142	0.0	0.0
K 37	7A	143	0.0	0.0
K 37	7A	144	2.0	0.1
K 37	7A	145	0.0	0.0
K 37	7A	146	0.0	0.0
K 37	7A	147	0.0	0.0
K 37	7A	148	0.0	0.0
K 37	7A	149	0.0	0.0
K 37	7A	150	1.3	0.0
K 37	7A	151	0.0	0.0
K 37	7A	152	26.7	1.0
K 37	7A	153	0.0	0.0
K 37	7A	154	0.0	0.0
K 37	7A	155	24.7	0.9
K 37	7A	156	0.0	0.0
K 37	7A	157	0.0	0.0
K 37	7A	158	0.0	0.0
K 37	7A	159	0.0	0.0
K 37	7A	160	0.0	0.0
K 37	7A	161	0.0	0.0
K 37	7A	162	0.0	0.0
K 37	7A	163	0.0	0.0
K 37	7A	164	0.0	0.0
K 37	7A	165	0.0	0.0
K 37	7A	166	0.0	0.0
K 37	7A	167	0.0	0.0
K 37	7A	168	0.0	0.0
K 37	7A	169	0.3	0.0
K 37	7A	170	0.0	0.0
K 37	7A	171	1.3	0.0
K 37	7A	172	0.0	0.0
K 37	7A	173	0.0	0.0
K 37	7A	174	0.0	0.0
K 37	7A	175	0.0	0.0
K 37	7A	176	0.0	0.0
K 37	7A	177	0.0	0.0
K 37	7A	178	18.4	0.7
K 37	7A	179	9.7	0.4
K 37	7A	180	0.0	0.0
K 37	7A	181	0.0	0.0
K 37	7A	182	2.4	0.1
K 37	7A	183	0.0	0.0
K 37	7A	184	7.4	0.3
K 37	7A	191	0.0	0.0
K 37	7A	207	0.0	0.0

TABLE 18.— Concluded.

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 3A	7A	20A	0.0	0.0
K 3A	7A	20B	0.0	0.0
K 3A	7A	20C	0.0	0.0
K 3A	7A	20D	0.0	0.0
K 3A	7A	20E	0.0	0.0
K 3A	7A	20F	0.0	0.0
K 3A	7A	20G	0.0	0.0
K 3A	7A	20H	0.0	0.0
K 3A	7A	20I	0.0	0.0
K 3A	7A	20J	0.0	0.0
K 3A	7A	20K	0.0	0.0
K 3A	7A	20L	0.0	0.0
K 3A	7A	20M	0.0	0.0
K 3A	7A	20N	0.0	0.0
K 3A	7A	20O	0.0	0.0
K 3A	7A	20P	0.0	0.0
K 3A	7A	20Q	0.0	0.0
K 3A	7A	20R	0.0	0.0
K 3A	7A	20S	0.0	0.0
K 3A	7A	20T	0.0	0.0
K 3A	7A	20U	0.0	0.0
K 3A	7A	20V	0.0	0.0
K 3A	7A	20W	0.0	0.0
K 3A	7A	20X	0.0	0.0
K 3A	7A	20Y	0.0	0.0
K 3A	7A	20Z	0.0	0.0
K 3A	7A	21A	0.0	0.0
K 3A	7A	21B	0.0	0.0
K 3A	7A	21C	0.0	0.0
K 3A	7A	21D	0.0	0.0
K 3A	7A	21E	0.0	0.0
K 3A	7A	21F	0.0	0.0
K 3A	7A	21G	0.0	0.0
K 3A	7A	21H	0.0	0.0
K 3A	7A	21I	0.0	0.0
K 3A	7A	21J	0.0	0.0
K 3A	7A	21K	0.0	0.0
K 3A	7A	21L	0.0	0.0
K 3A	7A	21M	0.0	0.0
K 3A	7A	21N	0.0	0.0
K 3A	7A	21O	0.0	0.0
K 3A	7A	21P	0.0	0.0
K 3A	7A	21Q	0.0	0.0
K 3A	7A	21R	0.0	0.0
K 3A	7A	21S	0.0	0.0
K 3A	7A	21T	0.0	0.0
K 3A	7A	21U	0.0	0.0
K 3A	7A	21V	0.0	0.0
K 3A	7A	21W	0.0	0.0
K 3A	7A	21X	0.0	0.0
K 3A	7A	21Y	0.0	0.0
K 3A	7A	21Z	0.0	0.0
K 3A	7A	22A	0.0	0.0
K 3A	7A	22B	0.0	0.0
K 3A	7A	22C	0.0	0.0
K 3A	7A	22D	0.0	0.0
K 3A	7A	22E	0.0	0.0
K 3A	7A	22F	0.0	0.0
K 3A	7A	22G	0.0	0.0
K 3A	7A	22H	0.0	0.0
K 3A	7A	22I	0.0	0.0
K 3A	7A	22J	0.0	0.0
K 3A	7A	22K	0.0	0.0
K 3A	7A	22L	0.0	0.0
K 3A	7A	22M	0.0	0.0
K 3A	7A	22N	0.0	0.0
K 3A	7A	22O	0.0	0.0
K 3A	7A	22P	0.0	0.0
K 3A	7A	22Q	0.0	0.0
K 3A	7A	22R	0.0	0.0

Rain gage number	Year	Day	Rainfall	
			mm	in.
K 3A	7A	22S	0.0	0.0
K 3A	7A	22T	0.0	0.0
K 3A	7A	22U	0.0	0.0
K 3A	7A	22V	0.0	0.0
K 3A	7A	22W	0.0	0.0
K 3A	7A	22X	0.0	0.0
K 3A	7A	22Y	0.0	0.0
K 3A	7A	22Z	0.0	0.0
K 3A	7A	23A	0.0	0.0
K 3A	7A	23B	0.0	0.0
K 3A	7A	23C	0.0	0.0
K 3A	7A	23D	0.0	0.0
K 3A	7A	23E	0.0	0.0
K 3A	7A	23F	0.0	0.0
K 3A	7A	23G	0.0	0.0
K 3A	7A	23H	0.0	0.0
K 3A	7A	23I	0.0	0.0
K 3A	7A	23J	0.0	0.0
K 3A	7A	23K	0.0	0.0
K 3A	7A	23L	0.0	0.0
K 3A	7A	23M	0.0	0.0
K 3A	7A	23N	0.0	0.0
K 3A	7A	23O	0.0	0.0
K 3A	7A	23P	0.0	0.0
K 3A	7A	23Q	0.0	0.0
K 3A	7A	23R	0.0	0.0
K 3A	7A	23S	0.0	0.0
K 3A	7A	23T	0.0	0.0
K 3A	7A	23U	0.0	0.0
K 3A	7A	23V	0.0	0.0
K 3A	7A	23W	0.0	0.0
K 3A	7A	23X	0.0	0.0
K 3A	7A	23Y	0.0	0.0
K 3A	7A	23Z	0.0	0.0
K 3A	7A	24A	0.0	0.0

TABLE 19.— NWS DATA

Day	Temperature, °F		Rainfall, 0.01 in.	Solar radiation, langleys	Wind run, statute miles	Pan Evaporation, 0.01 in.
	Max.	Min.				
121	54	47	93	89	143	00
122	54	38	36	310	141	08
123	50	35		374	38	10
124	52	31		324	68	14
125	54	34	02	70	55	11
126	46	35	120	58	124	00
127	41	35	25	426	98	00
128	54	35		440	111	23
129	61	33		560	179	28
130	64	40		540	111	30
131	83	40	0	445	161	34
132	70	48	01	570	113	67
133	65	46	0	571	224	65
134	74	47		547	98	28
135	85	42		561	86	30
136	72	48		541	180	40
137	60	48	0	69	123	30
138	61	44	122	554	142	22
139	74	49		372	90	25
140	75	44		544	80	26
141	70	47		352	69	26
142	72	54	T	501	120	17
143	70	53		531	64	25
144	86	50	T	380	120	51
145	80	50		457	198	60
146	80	56		532	202	41
147	96	58	T	421	142	40
148	70	40	36	420	47	34
149	73	48		534	202	30
150	74	52		567	105	30
151	82	52		327	135	42
152	65	49		315	92	18
153	61	40	03	156	84	13
154	50	53		248	34	10
155	68	53	157	483	73	29
156	73	56	T	134	54	16
157	67	47	146	465	63	43
158	73	51		527	35	15
159	73	47		574	87	29
160	78	52		568	59	29
161	80	61		584	246	56
162	93	57		609	239	57
163	82	55		544	116	46
164	70	52		584	80	45
165	80	66		571	215	47
166	96	75		583	188	50
167	102	71		545	130	56
168	94	57		564	110	65
169	80	57	01	511	130	65
170	85	58	T	444	145	62
171	94	59	T	494	120	66
172	72	55	T	330	90	35
173	78	50		524	156	20
174	93	65		524	114	48
175	92	68	T	452	114	43
176	100	66		461	93	44
177	98	62		478	38	45
178	89	60	18	372	148	45
179	84	62	32	500	116	40
180	80	64		504	120	50
181	93	61		455	148	47
182	90	61	04	527	142	41
183	94	50		487	81	43
184	97	61	03	532	126	56
185	102	60		495	213	81
186	102	70	04	510	253	73
187	101	60		528	181	64
188	90	60		555	125	47
189	84	64		433	107	48
190	107	68		272	172	60
191	70	57		444	146	37
192	80	61		435	109	31
193	94	65		535	170	57
194	103	64	T	468	100	50
195	87	62	01	572	113	43
196	90	70		508	113	47
197	97	61	T	517	105	54
198	101	68		533	151	64
199	104	71		470	99	54

[T = trace, less than 0.01 inches]

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 19.— Concluded.

Day	Temperature, °F		Rainfall, 0.01 in.	Solar radiation, langleys	Wind run, statute miles	Pan Evaporation, 0.01 in.
	Max.	Min.				
200	89	58	T	440	109	41
201	90	55	91	427	118	34
202	80	56	20	322	90	30
203	80	58	25	444	80	22
204	75	53		526	94	30
205	81	53		577	124	37
206	94	52		584	165	45
207	101	55		588	106	53
208	91	57		552	75	45
209	95	57		587	161	60
210	102	71		506	175	71
211	84	52	35	437	108	41
212	80	54		429	62	35
213	90	50	32	455	127	35
214	87	50	12	454	84	36
215	82	56	15	140	129	33
216	82	51	37	262	65	11
217	80	53	T	542	73	15
218	83	55	T	544	104	34
219	90	50		324	49	42
220	80	54	T	511	91	35
221	91	57		502	83	41
222	80	54		506	66	39
223	91	57		542	64	34
224	90	57		524	56	34
225	101	60	T	535	88	51
226	102	64	27	322	186	87
227	93	52	57	542	127	55
228	94	51		543	113	42
229	97	56		552	99	43
230	100	50		504	28	52
231	78	51		527	215	41
232	81	55		460	114	42
233	92	55		501	189	46
234	95	54		494	72	38
235	97	57	T	525	224	56
236	98	51		441	56	42
237	90	50	32	311	112	50
238	90	51	16	491	39	20
239	91	53		241	61	32
240	84	52	32	420	71	23
241	81	57	T	274	67	25
242	77	57	32	441	84	21
243	78	55		475	111	32

[T = trace, less than 0.01 inches]

TABLE 20.- IRRIGATION DATA

[The irrigation information given below is for the entire quarter section (160 acres)]

Field 1

Start date: June 16, 1978
Stop date: Sept. 12, 1978
Irrigation rate: 550 gal/min
Approximate system revolution time: 9 days
System off time: Approximately 1 day from start date
to stop date
Total water applied: \approx 19.7 inches

Field 2

Start date: May 20, 1978
Stop date: Sept. 27, 1978
Irrigation rate: 550 gal/min
Approximate system revolution time: 9 to 10 days
System off time: about 7 days from start date to
stop date
Total water applied: \approx 27.8 inches

Field 3

Start date: June 17, 1978
Stop date: Sept. 8, 1978
Irrigation rate: 425 gal/min
Approximate system revolution time: 8 to 11 days
Total number of revolutions: 8
Boom position: June 17, south; June 23, ESE;
June 30, south; July 7, east; July 14, NE; July 21, NW;
July 28, SE; Aug. 4, SE; Aug. 11, ENE; Aug. 18, SW;
Aug. 25, SE; Sept. 1, north; Sept. 8, south.
Total water applied: \approx 16.3 inches

These systems operated continuously unless otherwise noted in the table. Each irrigation system is a rotary system located in the center of a quarter section (160 acres). The location of each of the three fields, in relation to the irrigation system, is shown in figure 5.

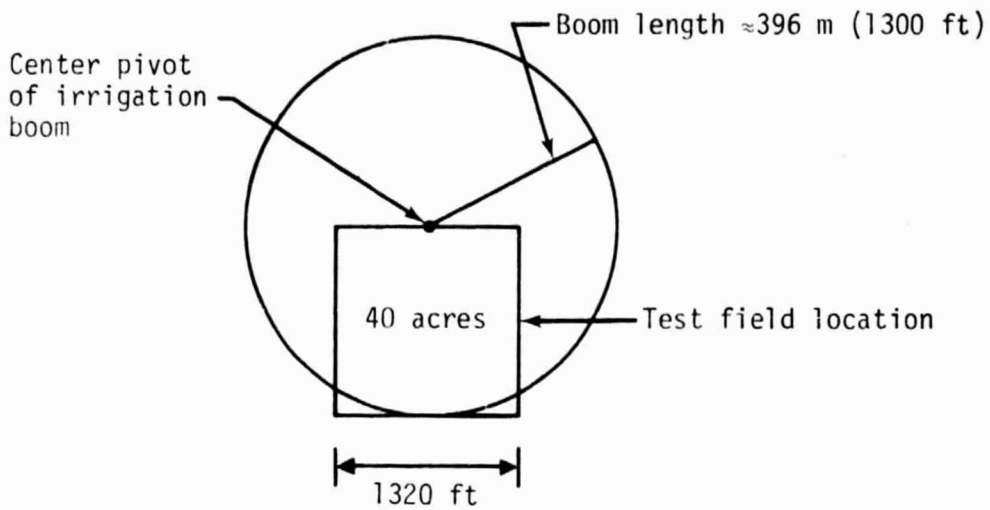


Figure 5.— Irrigation system location as related to test fields 1, 2, and 3.

4. TYPE II DATA

Data and samples were acquired from 43 fields in conjunction with seven aircraft overflights. Fields 1 through 14 were included in these 43 fields. Data consisted of soil moisture, bulk density, soil temperature measurements, vegetation samples, and photographs for estimating surface roughness.

Aircraft overflights occurred on July 18, 20, 21, and 22 and August 8, 9, and 11. Soil moisture and soil temperature measurements were made the same day as the aircraft overflights. Bulk density data, vegetation samples, and photographs for estimating surface roughness were acquired the same week as the aircraft overflights.

Date	Julian date	Aircraft flight	Data flight	Site
7/18	199	6	4	76
7/20	201	7	5	76
7/21	202	8	6/12	76/194
7/22	203	9	7	76
8/8	220	25	8	76
8/9	221	26	9/13	76/194
8/11	223	28	10	76

Soil moisture data and soil temperature data are available on magnetic tape.

4.1 SOIL MOISTURE

4.1.1 SAMPLE ACQUISITION


Gravimetric soil moisture data were acquired at each of the 35 locations and depths shown in figure 6. The samples for soil moisture were taken by local personnel hired in the Colby area. These personnel were given a training session along with the handout shown in appendix F, which defines the sampling procedure used. Table 21 gives the sampling activity by field and day.

TABLE 21.— SOIL MOISTURE SAMPLING ACTIVITY BY FIELD AND DAY^a

Field no.	Julian day								
	199	200	201	202	203	220	221	223	
1	—	—	X	X	X	P	—	—	
2	X	—	X	X	X	X	X	P	
3	X	—	X	X	C	X	X	X	
4	X	—	X	X	X	X	X	X	
5	C	—	X	X	X	X	X	X	
6	X	—	X	X	X	X	X	X	
7	X	—	X	X	X	X	X	X	
8	C	—	X	X	X	X	X	X	
9	X	—	X	X	X	X	X	X	
10	X	—	X	X	X	X	X	X	
11	X	—	X	X	X	X	X	X	
12	X	—	X	X	X	X	X	X	
13	X	—	X	X	X	X	X	X	
14	X	—	X	X	X	X	X	X	
19	X	—	—	C	C	—	—	—	
20	X	—	X	—	P	—	—	—	
21	X	—	X	P	P	—	—	—	
22	X	—	—	—	—	—	—	—	
24	X	—	—	—	—	X	X	—	
25	X	—	X	X	X	X	—	X	
26	X	—	X	P	P	P	—	—	
27	X	—	X	X	X	X	X	X	
28	—	C	—	—	—	—	P	P	
29	—	C	—	P	P	P	X	X	
30	—	C	—	—	P	P	X	X	
31	—	C	—	—	P	X	—	—	
34	C	—	—	—	C	—	X	—	
37	—	C	—	C	P	X	X	X	
38	—	C	C	C	—	P	X	X	
39	P	—	X	—	X	X	X	X	
40	X	—	—	—	C	X	P	X	
43	—	C	—	—	P	X	X	X	
44	X	C	X	X	X	—	P	—	
45	—	—	—	—	—	X	X	X	
46	X	—	X	X	X	X	X	X	
47	X	—	X	—	X	X	X	X	
49	X	—	X	X	X	X	X	X	
50	X	—	X	X	C	X	X	X	
52	X	—	X	X	X	X	X	X	
53	X	—	X	X	X	X	X	—	
54	X	—	X	X	X	X	X	P	
55	X	—	X	X	X	—	—	—	
56	—	—	—	—	—	P	P	P	

^aThe following notations are used in the table:

- X: Field well sampled (90 to 148 samples).
- P: Partial data set (20 to 90 samples).
- C: Abbreviated data set (usually core samples only; up to 20 samples).
- : No data available.

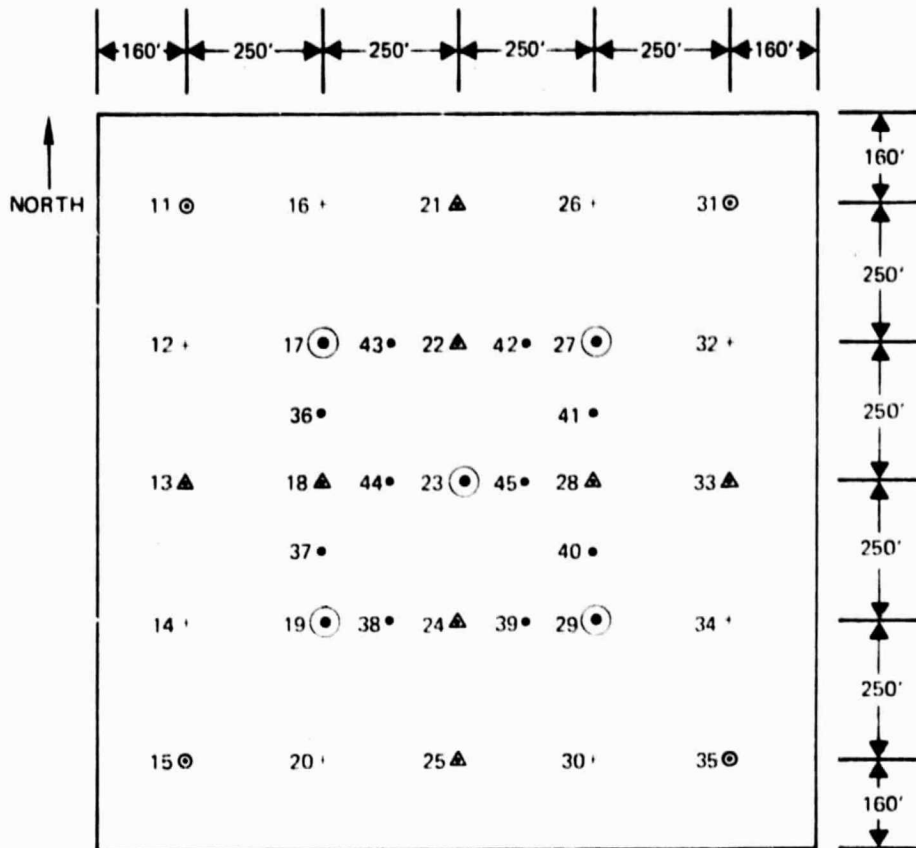

Symbol	Sample depths, cm	No. of locations	No. of samples per location	Total
•	0-1, 1-2	10	2	20
+	0-1, 1-2, 2-5	8	3	24
Δ	0-1, 1-2, 2-5, 5-9, 9-15	8	5	40
⊙	0-1, 1-2, 2-5, 5-9, 9-15, 0-15	4	6	24
⊖	0-1, 1-2, 2-5, 5-9, 9-15, 0-15, 15-30, 30-45	5	8	40
Total samples				148

Figure 6.— Sample locations and depth.

4.1.2 SAMPLE PROCESSING

Soil samples were boxed and sent by truck to Agricultural Technology, Incorporated, in McCook, Nebraska. The soil samples were initially weighed within 48 hours of acquisition, then dried for 24 hours in a forced air oven at 105° to 110° C, and reweighed. Soil moisture by weight was calculated as follows:

$$\theta_g = \frac{\text{wet weight} - \text{dry weight}}{\text{dry weight}} \times 100.$$

The sampler container (metal can and lid) was weighed along with the soil sample during all weighings. After drying, the soil sample was removed, the container and lid weighed, and this weight subtracted from sample weights.

Tests were conducted at the site to determine whether loss of soil moisture from the cans, before they were weighed for the first time, would lead to unacceptable errors in the soil moisture estimates. Later, other laboratory tests were performed to investigate this question (see appendix G). All of these tests indicated that the moisture losses were minimal.

Soil moisture data are available on magnetic tape (nonlabeled EBCIDIC IBM format with 80-character card images blocked in 10 cards per record and with 9 tracks at 800 bpi). An example of the data listing is shown in table 22. Table 22 gives the soil moisture by weight and provides two columns for the times of acquisition. The appearance of only one time indicates the time the sample was taken. Time given in both the T1 and the T2 columns indicates that the exact time of sampling is uncertain but that sampling occurred between T1 and T2. The appearance of a zero in both columns indicates that the time of sampling is unknown.

4.2 BULK DENSITY

Bulk densities were measured using undisturbed core samples, from indicated depths, from locations 12, 19, 27, and 29. This was completed for 36 fields. The results are given in table 23.

TABLE 23.— BULK DENSITY
 [Bulk density in g/cm³; sample depth in cm]

FIELD	LOCATION	SAMPLE DEPTH					
		0-2	2-5	5-9	9-15	15-30	30-45
1	17	1.13	1.11	1.07	1.27	1.40	1.47
1	19	1.08	1.09	1.29	1.44	1.37	1.41
1	27	1.32	1.23	0.99	1.44	1.39	1.39
1	29	0.94	1.17	1.41	1.42	1.25	1.32
2	17	0.98	1.03	1.01	1.02	1.05	1.37
2	19	1.05	1.05	1.23	1.25	1.34	1.45
2	27	1.12	1.05	1.13	1.29	1.27	1.44
2	29	1.02	1.16	1.13	0.96	1.05	1.28
3	17	0.96	1.02	1.06	1.22	1.31	1.51
3	19	1.03	0.99	1.13	1.25	1.26	1.30
3	27	1.19	1.36	1.22	1.23	1.27	1.27
3	29	0.98	1.02	1.06	1.25	1.39	1.24
4	17	1.02	1.05	1.01	1.24	1.30	1.28
4	19	1.26	0.99	0.99	0.95	1.28	1.32
4	27	1.05	1.11	1.12	1.30	1.37	1.23
4	29	1.22	1.23	1.12	1.23	1.42	1.21
5	17	1.09	1.21	1.30	1.30	1.25	1.23
5	19	1.24	1.26	1.26	1.20	1.43	1.55
5	27	1.13	1.22	1.29	1.25	1.32	1.45
5	29	1.16	1.23	1.28	1.25	1.33	1.43
6	17	1.19	1.04	1.08	1.42	1.34	1.39
6	19	1.17	1.10	1.05	1.24	1.40	1.37
6	27	1.17	1.12	1.01	1.34	1.30	1.42
6	29	1.19	1.07	1.06	1.36	1.35	1.37
7	17	1.32	1.27	1.18	1.31	1.27	1.35
7	19	1.08	1.05	1.30	1.26	1.33	1.37
7	27	1.18	1.13	1.13	1.21	1.30	1.21
7	29	1.24	1.18	1.13	1.16	1.31	1.31
8	17	1.02	1.14	1.06	1.07	1.19	1.33
8	19	0.95	1.20	1.16	1.05	1.25	1.37
8	27	1.17	1.17	1.19	1.26	1.19	1.28
8	29	0.95	1.21	1.18	1.02	1.25	1.19

ORIGINAL PAGE IS
 OF POOR QUALITY

ORIGINAL PAGE IS
 OF POOR QUALITY

TABLE 23.— Continued.

FIELD	LOCATION	SAMPLE DEPTH					
		0-2	2-5	5-9	9-15	15-30	30-45
9	17	1.09	1.15	1.16	1.35	1.22	1.26
9	19	1.09	1.04	1.08	1.22	1.32	1.41
9	27	0.99	1.10	1.06	1.30	1.31	1.26
9	29	1.09	1.18	1.34	1.34	1.43	1.43
10	17	0.95	1.11	1.30	1.07	1.22	1.41
10	19	1.25	1.27	1.25	1.30	1.15	1.29
10	27	1.26	1.04	1.15	1.35	1.30	1.39
10	29	1.05	1.07	1.21	1.22	1.26	1.26
11	17	1.23	1.17	1.16	1.39	1.32	1.44
11	19	1.34	1.24	1.17	1.48	1.28	1.34
11	27	1.17	1.16	1.10	1.33	1.39	1.41
11	29	1.18	1.14	1.11	1.39	1.52	1.45
12	17	0.99	1.08	1.20	1.39	1.27	1.40
12	19	1.13	1.17	1.20	1.42	1.32	1.25
12	27	1.13	1.09	1.19	1.36	1.41	1.37
12	29	1.07	1.16	1.00	1.33	1.39	1.26
13	17	1.02	0.99	1.14	1.20	1.27	1.35
13	19	0.92	0.99	1.00	1.04	1.36	1.37
13	27	1.00	1.02	0.93	1.26	1.23	1.20
13	29	0.95	1.05	1.06	1.14	1.25	1.25
14	17	1.00	1.26	1.18	1.12	1.25	1.10
14	19	1.20	1.33	1.27	1.13	1.11	1.11
14	27	1.06	1.27	1.19	1.05	1.23	1.21
14	29	0.63	1.20	1.32	1.28	1.21	1.35
19	17	0.94	1.00	1.03	1.41	1.34	1.33
19	19	0.94	1.10	1.29	1.28	1.31	1.45
19	27	1.09	1.04	1.11	1.25	1.31	1.22
19	29	1.00	0.96	1.13	1.01	1.39	1.48
20	17	0.86	0.97	1.00	1.02	1.31	1.36
20	19	1.18	1.07	1.16	1.14	1.30	1.29
20	27	1.28	1.23	1.25	1.16	1.35	1.48
20	29	0.96	1.14	1.45	1.15	1.19	1.38

TABLE 23.— Continued.

FIELD	LOCATION	SAMPLE DEPTH					
		0-2	2-5	5-9	9-15	15-30	30-45
21	17	1.12	1.05	1.07	1.04	1.35	1.12
	19	1.29	1.22	1.32	1.31	1.35	1.23
	27	1.39	1.19	1.22	1.07	1.32	1.41
	29	1.00	1.00	1.31	1.15	1.40	1.38
22	17	0.93	0.99	0.94	1.03	1.30	1.25
	19	1.14	1.12	1.11	1.24	1.36	1.31
	27	1.04	1.04	1.06	1.24	1.32	1.40
	29	1.11	1.03	1.03	1.28	1.36	1.30
24	17	1.08	1.08	1.19	1.22	1.43	1.30
	19	1.14	1.12	1.12	1.19	1.30	1.32
	27	1.05	1.61	0.87	1.05	1.30	1.36
	29	1.07	1.15	1.38	1.42	1.23	1.40
26	17	0.97	1.05	1.24	1.28	1.25	1.24
	19	1.29	1.32	1.34	1.44	1.34	1.26
	27	1.11	1.04	1.25	1.41	1.30	1.34
	29	1.11	1.11	1.13	1.25	1.24	1.50
26	17	1.15	1.22	0.96	1.18	1.24	1.37
	19	1.22	1.00	1.22	1.30	1.38	1.39
	27	1.16	1.16	1.11	1.23	1.40	1.41
	29	1.08	1.12	1.10	1.20	1.40	1.25
27	17	1.26	1.17	1.20	1.53	1.35	1.32
	19	1.17	1.16	1.48	1.44	1.24	1.34
	27	1.12	1.14	1.22	1.37	1.29	1.37
	29	1.02	1.04	1.02	1.21	1.23	1.38
28	17	1.29	1.25	1.16	1.20	1.39	1.43
	19	1.07	1.01	1.01	1.14	1.35	1.33
	27	0.93	1.01	0.99	1.14	1.50	1.40
	29	0.93	1.00	1.04	1.17	1.35	1.32
27	17	1.39	1.22	1.11	1.33	1.35	1.22
	19	0.96	0.95	1.25	1.46	1.52	1.33
	27	1.00	1.11	1.36	1.23	1.35	1.41
	29	1.13	1.10	1.03	1.28	1.29	1.25

TABLE 23.— Continued.

FIELD	LOCATION	SAMPLE DEPTH					
		0-2	2-5	5-9	9-15	15-30	30-45
38	17	1.11	1.14	1.37	1.42	1.30	1.40
38	19	1.02	1.08	1.24	1.46	1.32	1.33
38	27	1.09	1.09	1.09	1.26	1.38	1.41
38	29	1.05	0.83	1.10	1.22	1.21	1.34
39	17	1.42	1.37	1.50	1.56	1.40	1.38
39	19	0.93	1.07	0.94	1.45	1.24	1.42
39	27	1.30	1.26	1.21	1.21	1.34	1.39
39	29	0.98	1.03	1.08	1.45	1.41	1.16
40	17	1.21	1.20	1.09	1.19	1.30	1.38
40	19	1.35	1.21	1.32	1.37	1.34	1.34
40	27	1.19	1.24	1.28	1.43	1.31	1.23
40	29	1.16	1.06	0.87	1.34	1.12	1.31
44	17	1.11	1.09	1.20	1.19	1.23	1.21
44	19	1.25	1.36	1.36	1.43	1.19	1.20
44	27	1.25	1.12	1.34	1.54	1.32	1.20
44	29	1.33	1.28	1.33	1.46	1.24	1.16
46	17	1.17	1.22	1.25	1.46	1.25	1.36
46	19	1.16	1.10	1.12	1.25	1.30	1.36
46	27	1.24	1.21	1.36	1.42	1.27	1.31
46	29	1.18	1.27	1.32	1.36	1.25	1.27
47	17	1.18	1.06	1.18	1.29	1.25	1.20
47	19	1.44	1.41	1.01	1.38	1.25	1.32
47	27	1.49	1.47	1.47	1.44	1.40	1.37
47	29	1.17	1.26	1.38	1.50	1.44	1.19
49	17	1.02	0.94	1.01	1.27	1.36	1.28
49	19	1.07	0.97	1.00	1.30	1.33	1.40
49	27	1.03	0.93	1.02	1.30	1.40	1.34
49	29	1.12	1.05	0.92	1.26	1.36	1.28
50	17	1.21	1.07	1.24	1.42	1.26	1.29
50	19	1.09	1.12	1.09	1.33	1.27	1.35
50	27	1.03	1.02	1.09	1.32	1.36	1.36
50	29	0.86	1.32	1.01	1.27	1.25	1.23

TABLE 23.— Continued.

FIELD	LOCATION	SAMPLE DEPTH					
		0-2	2-5	5-9	9-15	15-30	30-45
97000	17	1.05	0.93	1.19	1.39	1.44	1.44
	19	1.12	1.77	1.17	1.21	1.32	1.44
	27	1.02	1.07	1.15	1.39	1.35	1.49
	29	1.00	1.04	0.95	1.14	1.29	1.39
98000	17	1.21	1.00	1.30	1.44	1.33	1.23
	19	1.25	1.11	1.11	1.26	1.24	1.33
	27	1.13	1.13	1.30	1.24	1.29	1.27
	29	1.15	1.11	0.99	1.17	1.26	1.28
99000	17	1.09	1.00	1.00	1.19	1.39	1.42
	19	1.08	1.19	1.13	1.39	1.34	1.41
	27	1.18	1.20	0.90	1.36	1.44	1.42
	29	1.18	1.17	1.04	1.25	1.35	1.37
99500	17	1.12	1.09	1.23	1.25	1.20	1.29
	19	1.19	1.05	1.35	1.23	1.33	1.32
	27	1.00	1.35	1.35	1.47	1.32	1.29
	29	1.19	1.14	1.35	1.41	1.35	1.41

ORIGINAL PAGE IS
OF POOR QUALITY

4.3 SOIL TEMPERATURE MEASUREMENTS

Both soil thermometers and thermocouples were used to measure soil temperatures during the first set of overflights, and only thermocouples were used during the second set of overflights. Measurements were made in four fields, during each flight day, at 0.5, 1.5, 3.5, 7.0, 12.0 and 22.0 centimeter depths. Measurement locations are listed in table 24 and shown in figure 6.

All thermometers and thermocouples were calibrated in the laboratory after all flights were complete. The corrected soil temperature readings are given in table 24.

4.4 VEGETATION SAMPLES

Vegetation samples were acquired in fields with green growth. Samples consisted of three plants for corn and milo and 0.092 square meter (1 foot square) for pasture. Samples were acquired at two locations in each field. Measurements of row spacing and plant density were made for each field. Plant samples were weighed, dried, and reweighed to determine total moisture content. Moisture density was computed for each plant sample from the relation:

$$\text{Moisture density} = \frac{\text{wet weight of plant} - \text{dry weight of plant}}{\text{plant height}} = \text{plant density.}$$

The data are given in table 25.

4.5 SURFACE ROUGHNESS

Surface roughness data consist of a series of photographs. Panels 3 by 4 feet were placed edgewise in the ground so that the interface between the panel and the soil surface formed a line across the face of the panel. The panel was marked with a 2.54-centimeter (1-inch) grid. This panel was placed both perpendicularly and horizontally to row direction, or north-south and east-west for non-row fields, and was photographed. An example of the photograph is shown in figure 7.

Surface roughness photographs were acquired from fields 1 through 14, 20, 31, 37, 39, 40, 44, 46, 47, 49, 50, 52, and 53.

TABLE 24.— ASME GROUND-TRUTH TEMPERATURE DATA FOR THOMAS COUNTY, KANSAS

[Temperature values in °C; depths in cm]

(a) Field 3

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	199	23	1050	22.6	22.7	22.6	23.2	24.4	23.8 *
78	199	23	1430	36.1	30.8	29.5	27.1	25.2	25.5 *
78	199	23	1450	33.9	31.3	29.0	27.1	-	- *
78	199	23	1630	32.6	29.8	28.4	27.1	-	- *
78	202	23	1235	31.7	24.5	23.6	22.8	-	- *
78	202	23	1235	28.2	28.0	26.8	25.4	-	- *
78	202	23	1610	29.8	27.8	29.5	28.3	-	-
78	203	23	1118	24.4	20.5	22.4	21.0	-	- *
78	203	23	1121	24.2	21.3	-	-	-	-
78	203	23	1310	24.4	25.2	26.2	22.7	-	- *
78	203	23	1313	31.2	22.5	-	-	-	-
78	203	23	1445	27.9	29.8	26.5	23.8	-	- *
78	203	23	1450	25.9	24.5	26.5	27.5	22.7	22.3
78	203	23	1610	23.5	25.6	24.9	23.8	22.5	- *
78	203	23	1615	27.7	25.7	26.4	25.7	23.3	22.5
78	220	38	1325	28.6	24.2	27.1	28.0	-	-
78	220	38	1600	33.6	24.8	27.2	26.6	22.6	-
78	220	39	1250	23.4	23.2	22.5	20.5	-	-
78	220	39	1545	25.4	24.7	24.5	22.2	-	-
78	220	42	1240	24.0	24.6	-	19.9	-	-
78	220	42	1540	25.6	26.3	-	22.6	-	-
78	220	43	1310	26.8	23.4	23.4	22.4	-	-
78	220	43	1555	25.6	23.9	24.2	-	-	-
78	220	44	1305	24.3	23.0	23.9	22.1	21.4	19.6
78	220	44	1550	32.2	24.1	25.2	23.2	21.9	20.1
78	220	45	1230	22.9	26.2	23.2	19.4	20.3	19.3
78	220	45	1535	25.4	25.6	24.7	21.5	22.9	19.6
78	221	38	1135	24.6	22.0	23.6	28.6	-	-
78	221	38	1215	28.1	22.5	25.7	26.2	-	-
78	221	38	1525	23.5	24.0	25.6	29.0	-	-
78	221	38	1600	23.3	23.6	25.8	29.0	-	-
78	221	39	1130	21.5	20.9	21.1	19.5	-	-
78	221	39	1210	22.2	22.0	22.0	20.1	-	-
78	221	39	1520	24.2	23.7	23.7	22.1	-	-
78	221	39	1555	23.9	23.5	23.5	22.0	-	-
78	221	42	1120	21.4	21.3	-	19.5	-	-
78	221	42	1200	23.7	22.0	-	19.9	-	-
78	221	42	1510	25.2	25.1	-	21.9	-	-
78	221	42	1545	24.6	24.9	-	22.0	-	-
78	221	43	1145	21.9	20.7	20.3	19.4	-	-
78	221	43	1225	22.6	21.4	20.9	20.2	-	-
78	221	43	1535	24.4	23.4	23.1	22.6	-	-
78	221	43	1610	24.5	22.9	22.9	22.4	-	-
78	221	44	1140	24.8	20.6	20.9	19.8	19.3	20.2
78	221	44	1220	24.4	21.4	21.7	20.4	19.6	-
78	221	44	1530	24.0	23.6	23.9	23.2	21.6	-
78	221	44	1605	23.8	22.7	24.0	22.9	20.9	-
78	221	45	1125	21.0	21.2	20.6	19.2	19.6	19.6
78	221	45	1205	22.7	23.8	21.4	19.6	20.2	19.6
78	221	45	1515	24.1	24.6	23.6	21.4	22.2	19.9
78	221	45	1550	23.9	24.4	23.6	21.3	22.1	19.9
78	223	38	635	17.5	17.1	17.1	17.0	-	-
78	223	38	710	16.5	16.9	16.9	16.0	-	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(a) Field 3, concluded

<u>YEAR</u>	<u>DAY</u>	<u>LOCATION</u>	<u>TIME (S)</u>	<u>0.5</u>	<u>1.5</u>	<u>3.5</u>	<u>7.0</u>	<u>12.0</u>	<u>22.0</u>
78	223	38	915	19.1	18.4	18.7	19.6	-	-
78	223	39	630	16.4	17.5	17.7	18.9	-	-
78	223	39	705	16.0	17.3	17.7	18.9	-	-
78	223	39	910	18.5	18.4	18.4	18.8	-	-
78	223	42	620	17.9	17.7	-	19.4	-	-
78	223	42	655	17.8	17.6	-	19.4	-	-
78	223	42	900	18.6	18.6	-	19.2	-	-
78	223	43	645	16.8	17.6	17.4	18.2	-	-
78	223	43	720	16.6	17.4	17.1	17.9	-	-
78	223	43	925	18.4	18.3	18.1	17.9	-	-
78	223	44	640	17.1	17.6	17.2	18.4	19.0	-
78	223	44	715	16.8	17.5	16.9	18.2	18.9	-
78	223	44	920	18.4	18.4	18.3	18.5	18.9	-
78	223	45	625	16.9	17.3	17.4	19.0	18.5	19.6
78	223	45	700	16.3	17.1	17.4	18.9	18.5	19.6
78	223	45	905	18.4	18.3	18.3	18.9	18.6	19.4

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(b) Field 4

<u>YEAR</u>	<u>DAY</u>	<u>LOCATION</u>	<u>TIME (S)</u>	<u>0.5</u>	<u>1.5</u>	<u>3.5</u>	<u>7.0</u>	<u>12.0</u>	<u>22.0</u>
78	199	23	1150	36.3	34.5	30.3	31.7	32.1	- *
78	199	23	1230	51.9	46.7	37.6	32.3	30.1	- *
78	199	23	1520	60.6	51.4	40.0	34.1	31.2	29.1 *

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(c) Field 7

<u>YEAR</u>	<u>DAY</u>	<u>LOCATION</u>	<u>TIME (S)</u>	<u>0.5</u>	<u>1.5</u>	<u>3.5</u>	<u>7.0</u>	<u>12.0</u>	<u>22.0</u>
78	199	23	1205	49.9	38.7	28.3	28.2	30.5	- *
78	199	23	1230	47.7	41.9	30.0	30.1	29.6	- *
78	199	23	1605	58.8	54.3	38.2	36.1	33.0	- *
78	201	17	1113	28.9	30.2	27.6	26.8	26.2	26.2
78	201	18	1106	29.6	27.5	26.9	26.3	25.5	26.4
78	201	19	1121	30.0	29.3	30.1	31.2	29.2	26.5
78	201	23	1100	28.1	27.5	25.4	23.2	25.9	- *
78	201	23	1100	27.4	28.7	27.2	31.8	-	26.5
78	201	28	1055	30.1	28.1	27.2	26.5	26.2	-
78	201	29	1047	27.9	26.6	26.5	-	26.3	26.7
78	202	17	1120	23.5	25.6	23.5	23.6	24.1	25.3
78	202	18	1110	25.9	22.8	23.1	23.4	25.2	25.0
78	202	18	1540	33.0	32.4	32.8	31.5	27.9	26.0
78	202	19	1535	33.9	34.0	33.4	30.5	27.7	26.3
78	202	23	1130	22.3	23.1	23.4	23.3	-	- *
78	202	23	1132	23.9	24.5	24.6	23.2	-	25.0
78	202	28	1140	27.9	25.5	24.6	24.5	24.6	-
78	202	29	1150	25.6	25.4	25.6	-	24.4	28.2
78	203	17	1025	21.9	22.8	21.3	20.8	20.8	21.3
78	203	17	1209	25.1	26.0	25.0	23.5	22.7	22.4
78	203	17	1350	29.8	30.0	29.6	26.8	24.8	25.3
78	203	17	1525	30.4	31.5	30.8	28.4	25.9	25.0
78	203	18	1020	23.6	21.9	20.7	20.1	21.1	23.1
78	203	18	1204	26.6	26.3	24.5	22.9	22.1	23.0
78	203	18	1345	31.2	29.9	28.1	26.3	23.4	23.2
78	203	18	1521	31.3	30.4	28.8	28.2	24.9	23.6
78	203	19	1012	21.5	22.3	21.0	20.3	22.7	23.0
78	203	19	1155	25.4	29.7	25.5	22.1	-	22.8
78	203	19	1332	29.1	31.9	29.1	24.7	23.3	23.1
78	203	19	1515	30.1	33.1	29.9	25.6	35.5	23.1
78	203	23	1032	22.9	22.2	21.1	19.9	-	- *
78	203	23	1037	21.7	22.9	22.2	21.4	-	22.6
78	203	23	1215	26.5	26.3	22.7	-	-	- *
78	203	23	1220	26.3	27.8	26.2	24.2	-	23.2
78	203	23	1332	29.3	31.6	25.7	24.5	-	- *
78	203	23	1400	33.0	33.9	30.9	27.0	-	24.0
78	203	23	1532	30.7	31.6	26.6	25.9	25.3	- *
78	203	23	1535	29.4	28.8	29.7	27.1	-	24.9
78	203	28	1045	-	22.3	21.0	20.9	21.0	-
78	203	28	1228	33.9	25.2	23.8	22.9	21.8	-
78	203	28	1406	41.7	31.5	28.8	26.0	23.2	-
78	203	28	1540	34.3	29.4	38.3	26.9	24.2	-
78	203	29	1050	23.7	22.3	21.6	-	21.0	24.4
78	203	29	1240	28.7	25.9	24.8	-	22.3	28.9
78	203	29	1412	32.0	30.3	28.4	-	24.0	28.2
78	203	29	1545	31.3	29.4	29.0	-	25.2	26.7
78	220	13	1055	-	25.6	23.4	21.3	-	-
78	220	13	1405	47.6	47.1	34.3	32.3	25.7	-
78	220	17	1100	34.9	31.6	24.9	-	-	-
78	220	17	1410	44.0	44.2	32.6	-	-	-
78	220	18	1105	45.4	34.3	31.1	24.6	22.2	-
78	220	18	1415	44.9	42.5	30.1	25.8	-	-
78	220	19	1050	31.2	28.8	26.3	22.8	-	-
78	220	19	1400	43.6	40.2	34.1	31.2	-	-
78	220	22	1115	40.1	37.8	27.7	23.6	22.7	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(c) Field 7, concluded

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	220	22	1425	48.0	38.9	31.9	27.8	25.2	-
78	220	23	1110	-	37.3	29.6	26.6	23.0	23.1
78	220	23	1420	55+	55+	39.2	34.9	27.7	22.7
78	220	24	1140	42.4	25.4	25.7	23.0	-	-
78	220	24	1445	44.5	49.5	36.6	34.5	26.2	-
78	220	27	1120	38.0	37.4	29.7	23.9	-	-
78	220	27	1430	55+	55+	35.5	27.6	-	-
78	220	28	1125	42.1	34.9	27.6	23.6	-	23.3
78	220	28	1435	55+	47.6	37.0	27.6	-	24.8
78	220	29	1130	28.1	36.5	30.3	23.0	-	-
78	220	29	1440	35.9	49.6	38.0	34.1	-	-
78	221	13	1015	35.7	33.2	23.1	22.2	21.4	-
78	221	13	1320	55+	55+	33.2	31.0	25.6	-
78	221	13	1435	47.1	49.6	35.6	33.7	27.4	-
78	221	17	1020	28.3	26.9	23.2	-	-	-
78	221	17	1325	44.2	43.8	31.1	-	-	-
78	221	17	1440	44.6	46.0	33.5	55+	-	-
78	221	18	1025	28.4	-	22.9	22.1	-	-
78	221	18	1330	44.9	55+	29.1	25.6	-	-
78	221	18	1445	45.9	55+	30.7	27.1	55+	-
78	221	19	1010	25.8	25.2	22.1	-	-	-
78	221	19	1315	42.2	39.6	32.2	-	-	-
78	221	19	1430	45.1	40.9	35.1	-	-	-
78	221	22	1035	28.5	29.6	23.7	22.1	22.2	-
78	221	22	1340	55+	37.0	31.7	25.8	24.8	-
78	221	23	1030	37.1	30.6	25.7	23.7	22.6	23.3
78	221	23	1335	55+	55+	37.9	33.2	27.0	23.2
78	221	24	1055	28.6	30.5	23.9	23.2	22.4	-
78	221	24	1400	42.9	49.7	35.7	32.7	25.6	-
78	221	27	1040	34.2	30.4	25.5	22.6	-	-
78	221	27	1345	55+	45.4	36.3	26.8	-	-
78	221	28	1045	34.6	29.9	24.4	22.6	-	23.2
78	221	28	1350	45.0	40.6	33.5	27.0	-	24.8
78	221	29	1050	-	29.1	26.0	22.5	-	-
78	221	29	1355	37.3	48.7	36.9	32.0	-	-
78	223	13	515	16.6	15.4	21.6	22.1	23.1	-
78	223	13	750	17.9	17.4	20.6	20.9	22.3	-
78	223	13	940	36.1	34.2	22.6	21.7	22.2	-
78	223	17	520	19.4	19.0	21.9	-	-	-
78	223	18	525	19.1	-	22.9	24.1	-	-
78	223	19	510	16.1	19.9	20.9	20.6	-	-
78	223	22	535	18.2	19.2	21.7	23.1	23.9	-
78	223	22	820	20.1	20.8	21.1	22.4	23.2	-
78	223	22	950	29.1	29.1	24.5	22.6	23.0	-
78	223	23	530	17.0	18.5	21.4	22.5	24.3	25.4
78	223	23	815	-	19.0	20.7	21.4	23.3	24.8
78	223	23	945	-	29.1	24.6	23.1	23.1	24.3
78	223	24	555	18.9	17.2	20.6	21.9	24.2	-
78	223	24	833	-	-	20.6	21.1	23.4	-
78	223	24	955	-	-	22.6	22.7	23.1	-
78	223	27	540	18.0	19.4	21.5	23.8	-	-
78	223	28	545	15.8	20.0	-	23.9	-	25.6
78	223	29	550	17.6	19.2	20.5	22.1	-	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(d) Field 8

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	199	23	1320	49.8	37.8	38.6	30.7	31.5	- *
78	199	23	1615	39.3	40.6	41.9	35.0	31.0	- *
78	199	23	1650	47.0	40.6	42.7	35.5	31.5	- *
78	201	17	1158	-	-	-	29.1	27.2	27.3
78	201	17	1303	-	-	-	31.3	28.6	27.2
78	201	17	1407	-	-	-	33.3	30.3	27.5
78	201	17	1517	-	-	-	34.4	32.1	28.1
78	201	18	1155	-	-	-	-	-	26.7
78	201	18	1300	-	-	-	-	-	26.7
78	201	18	1404	-	-	-	-	-	26.8
78	201	18	1515	-	-	-	-	-	27.2
78	201	19	1203	-	31.2	29.7	29.4	26.6	26.6
78	201	19	1306	-	33.9	32.3	32.0	26.8	26.5
78	201	19	1410	-	36.8	34.9	33.9	27.6	26.6
78	201	19	1521	-	37.7	36.2	35.2	28.4	26.8
78	201	23	1152	-	-	38.0	28.0	26.5	27.0
78	201	23	1257	-	-	38.0	30.1	26.8	26.8
78	201	23	1402	-	-	41.4	32.1	27.4	26.7
78	201	23	1512	-	-	42.2	33.5	28.5	27.1
78	201	28	1147	32.3	-	30.0	29.5	27.4	28.3
78	201	28	1254	36.5	-	33.5	33.1	28.0	28.0
78	201	28	1359	40.5	-	35.8	35.1	29.0	27.8
78	201	28	1508	42.2	-	37.9	36.8	30.5	28.1
78	201	29	1145	29.7	29.8	28.7	-	26.6	26.9
78	201	29	1251	-	-	32.3	-	27.4	27.2
78	201	29	1356	-	-	34.5	-	28.4	27.8
78	201	29	1505	-	-	36.0	-	30.4	29.1
78	202	17	1045	-	-	-	24.0	24.6	26.6
78	202	17	1124	-	-	-	23.9	24.3	26.3
78	202	17	1152	-	-	-	24.4	24.5	26.1
78	202	17	1240	-	-	-	25.6	25.1	26.0
78	202	17	1402	-	-	-	27.4	26.6	26.0
78	202	17	1447	-	32.6	30.2	29.1	27.4	26.4
78	202	18	1043	-	-	-	-	-	26.9
78	202	18	1122	-	-	-	-	-	26.2
78	202	18	1149	-	-	-	-	-	26.0
78	202	18	1238	-	-	-	-	-	25.9
78	202	18	1357	-	-	-	-	-	25.9
78	202	18	1443	33.9	29.4	-	-	-	25.9
78	202	19	1048	-	23.1	23.2	23.4	25.4	26.5
78	202	19	1127	-	23.8	23.7	23.9	25.0	26.0
78	202	19	1155	-	26.6	25.0	26.0	24.9	25.9
78	202	19	1243	-	28.6	26.6	26.9	25.0	25.7
78	202	19	1406	-	29.6	28.1	28.3	25.7	25.2
78	202	19	1452	-	31.7	29.9	30.4	26.3	25.9
78	202	23	1040	-	-	23.4	24.8	26.6	26.7
78	202	23	1119	-	-	25.1	24.0	24.9	26.4
78	202	23	1147	-	-	32.5	24.2	24.6	26.2
78	202	23	1236	-	-	31.7	25.2	24.7	26.0
78	202	23	1352	-	-	28.2	27.1	25.6	26.0
78	202	23	1440	31.4	-	29.3	27.7	26.0	25.9
78	202	28	1037	23.8	-	23.9	24.6	26.1	27.2
78	202	28	1117	24.4	-	24.0	23.9	25.5	26.8
78	202	28	1145	26.6	-	24.5	25.1	25.2	26.6
78	202	28	1234	29.8	-	26.3	27.2	25.4	28.4
78	202	28	1336	30.7	-	29.0	29.1	26.4	27.0

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(d) Field 8, continued

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	202	28	1437	33.4	-	30.0	29.9	26.8	26.4
78	202	29	1033	-	-	-	23.9	24.5	25.3
78	202	29	1114	-	-	-	23.5	24.5	25.1
78	202	29	1142	-	-	-	24.2	24.4	25.0
78	202	29	1231	-	-	-	26.1	24.7	24.9
78	202	29	1330	-	-	-	27.5	26.0	25.7
78	202	29	1433	30.3	30.1	28.8	27.1	26.5	26.3
78	203	17	929	-	22.8	20.5	21.0	21.5	24.4
78	203	17	1055	-	30.0	22.3	22.4	22.1	24.2
78	203	17	1237	-	33.7	26.0	25.2	23.5	24.1
78	203	17	1348	-	33.8	28.0	27.3	25.1	24.1
78	203	17	1536	-	30.7	29.5	28.9	26.6	24.8
78	203	18	926	20.0	20.4	-	-	-	24.9
78	203	18	1051	23.0	21.5	-	-	-	24.4
78	203	18	1233	26.6	24.6	-	-	-	24.4
78	203	18	1346	29.4	26.0	-	-	-	24.3
78	203	18	1530	28.7	27.0	-	-	-	24.8
78	203	19	933	-	21.0	20.2	20.4	23.2	24.9
78	203	19	1058	-	23.8	22.2	22.7	23.2	24.7
78	203	19	1242	-	27.9	25.4	26.2	23.6	24.3
78	203	19	1352	-	29.5	27.2	27.9	24.1	24.3
78	203	19	1543	-	33.0	28.8	29.3	25.5	24.5
78	203	23	923	21.4	-	19.9	21.2	22.9	24.9
78	203	23	1048	23.0	-	26.7	21.7	22.9	24.5
78	203	23	1230	29.3	-	24.9	23.4	23.5	24.5
78	203	23	1343	31.8	-	26.9	24.9	24.2	24.3
78	203	23	1524	31.8	-	28.1	26.5	25.6	24.6
78	203	28	921	20.6	-	20.6	20.2	22.2	24.3
78	203	28	1045	23.1	-	22.1	21.7	22.3	24.1
78	203	28	1227	29.1	-	25.6	25.7	22.9	23.9
78	203	28	1340	31.4	-	28.2	27.0	24.0	24.0
78	203	28	1517	30.7	-	29.6	26.9	25.9	24.6
78	203	29	918	20.3	19.1	19.9	20.7	21.5	22.5
78	203	29	1042	21.9	21.0	21.3	21.3	21.8	22.4
78	203	29	1224	26.3	25.0	24.4	22.7	22.5	22.6
78	203	29	1337	28.3	27.5	26.5	24.1	23.3	23.1
78	203	29	1508	28.9	28.4	28.0	25.9	25.1	24.4
78	220	13	1148	-	46.2	32.3	-	-	-
78	220	13	1345	-	51.9	-	32.3	-	-
78	220	13	1455	-	53.0	-	34.4	-	-
78	220	17	1153	43.1	45.1	45.8	44.9	-	-
78	220	17	1349	60.4	46.1	39.6	29.9	-	-
78	220	17	1501	51.9	45.9	41.6	32.0	-	-
78	220	18	1158	48.4	45.0	31.2	26.4	-	-
78	220	18	1355	48.9	45.7	36.4	30.2	-	-
78	220	18	1505	52.8	49.4	38.4	32.2	-	-
78	220	19	1142	38.1	42.4	-	26.6	24.3	-
78	220	19	1339	52.4	48.4	-	31.4	27.0	-
78	220	19	1448	53.8	49.2	-	34.9	28.2	-
78	220	22	1208	44.3	41.8	40.5	27.4	-	-
78	220	22	1408	58.7	44.9	43.1	31.1	-	-
78	220	22	1521	59.5	46.7	43.8	33.0	-	-
78	220	23	1203	43.1	36.2	31.3	26.5	24.1	23.8
78	220	23	1403	49.2	49.7	37.3	30.2	26.8	23.9
78	220	23	1512	51.6	43.6	37.9	31.9	26.2	24.3
78	220	24	1231	47.6	51.6	31.8	27.0	25.3	-
78	220	24	1427	57.2	47.8	35.9	31.9	38.2	-
78	220	24	1546	56.4	42.7	37.3	34.4	29.9	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(d) Field 8, continued

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	220	27	1212	45.8	38.4	-	34.2	-	-
78	220	27	1411	53.3	44.3	-	39.1	-	-
78	220	27	1525	51.0	45.4	-	41.3	-	-
78	220	28	1220	44.7	39.8	35.1	33.7	25.2	-
78	220	28	1417	59.6	52.4	39.4	32.4	27.8	-
78	220	28	1531	52.4	47.4	41.8	37.7	34.7	-
78	220	29	1225	58.8	41.2	44.7	25.8	-	-
78	220	29	1420	47.9	43.9	43.1	28.2	-	-
78	220	29	1537	55.3	50.2	49.6	31.0	-	-
78	221	13	1043	-	35.7	30.7	25.7	-	-
78	221	13	1205	-	46.8	33.7	29.1	-	-
78	221	13	1335	-	49.0	38.5	33.6	-	-
78	221	13	1516	-	42.2	40.9	35.2	-	-
78	221	17	1046	38.7	32.5	29.0	24.3	-	-
78	221	17	1208	42.9	39.7	35.5	26.6	-	-
78	221	17	1340	42.6	44.0	40.9	30.1	-	-
78	221	17	1521	34.4	35.7	35.8	29.4	-	-
78	221	18	1051	35.0	36.0	27.6	24.6	-	-
78	221	18	1212	42.8	47.0	37.9	27.0	-	-
78	221	18	1347	52.5	50.2	44.7	30.6	-	-
78	221	18	1527	49.3	51.9	44.4	27.5	-	-
78	221	19	1035	30.2	32.8	-	24.5	23.9	-
78	221	19	1201	40.0	35.7	-	27.9	25.7	-
78	221	19	1331	47.7	39.9	-	31.9	27.9	-
78	221	19	1512	40.2	39.5	-	33.8	31.3	-
78	221	22	1104	35.8	34.0	34.1	45.1	-	-
78	221	22	1221	42.4	40.5	39.9	29.1	-	-
78	221	22	1406	44.5	41.8	40.2	29.5	-	-
78	221	22	1539	47.9	44.2	38.1	31.9	-	-
78	221	23	1057	38.3	-	40.8	24.4	23.8	24.3
78	221	23	1218	46.6	-	42.3	26.8	25.1	24.3
78	221	23	1401	45.8	-	42.8	30.1	27.0	-
78	221	23	1535	41.4	-	43.8	33.9	26.2	-
78	221	24	1129	42.9	46.7	28.5	34.3	40.1	-
78	221	24	1240	53.6	45.0	32.4	36.1	43.3	-
78	221	24	1425	61.7	46.5	36.1	43.1	30.4	-
78	221	27	1110	46.4	40.1	-	30.3	-	-
78	221	27	1225	53.4	48.3	-	35.0	-	-
78	221	27	1412	54.8	51.9	-	38.6	-	-
78	221	27	1543	48.5	50.3	-	35.6	-	-
78	221	28	1115	38.3	39.0	31.9	27.7	26.3	-
78	221	28	1231	45.0	42.4	-	31.6	29.1	-
78	221	28	1416	50.0	45.1	-	37.4	32.4	-
78	221	28	1548	39.9	41.4	-	33.4	29.5	-
78	221	29	1121	37.7	38.4	32.3	24.6	-	-
78	221	29	1235	41.2	39.6	32.9	25.9	-	-
76	221	29	1420	42.8	43.2	37.1	26.9	-	-
78	223	13	555	-	-	19.8	22.7	23.9	-
78	223	13	709	-	16.5	18.1	23.1	-	-
78	223	13	806	-	-	18.9	23.2	-	-
78	223	17	600	15.7	-	-	20.2	-	-
78	223	17	713	16.7	17.8	18.6	23.2	-	-
78	223	17	806	19.3	20.6	20.5	23.0	-	-
78	223	18	607	15.8	15.3	-	23.3	-	-
78	223	18	728	18.7	18.7	19.2	22.8	-	-
78	223	18	813	20.7	19.8	19.7	22.6	-	-
78	223	19	549	-	-	-	24.0	24.6	-
76	223	19	705	17.6	16.6	-	23.0	23.9	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(d) Field 8, concluded

<u>YEAR</u>	<u>DAY</u>	<u>LOCATION</u>	<u>TIME (S)</u>	<u>0.5</u>	<u>1.5</u>	<u>3.5</u>	<u>7.0</u>	<u>12.0</u>	<u>22.0</u>
78	223	19	803	19.3	19.6	-	22.5	20.0	-
78	223	22	616	16.1	18.3	18.7	22.5	-	-
78	223	22	735	18.3	19.4	18.4	22.5	-	-
78	223	22	824	21.9	21.1	21.1	22.6	-	-
78	223	23	612	15.7	-	20.0	24.7	17.8	21.3
78	223	23	733	18.9	-	19.6	20.4	24.4	25.8
78	223	23	819	21.2	-	21.0	23.0	24.3	25.7
78	223	24	642	16.8	-	22.4	20.8	24.1	-
78	223	24	755	-	17.7	22.2	21.0	21.7	-
78	223	24	840	23.0	22.4	22.8	23.0	19.9	-
78	223	27	622	18.8	19.4	-	21.6	-	-
78	223	27	740	19.3	19.5	-	21.7	-	-
78	223	27	829	21.5	20.7	-	22.2	-	-
78	223	28	632	18.6	17.5	-	22.0	19.2	-
78	223	28	745	17.3	20.3	-	22.3	22.9	-
78	223	28	833	23.8	22.0	-	22.7	22.6	-
78	223	29	637	18.7	16.5	17.3	20.9	-	-
78	223	29	749	19.6	18.5	18.5	23.9	-	-
78	223	29	835	22.6	22.3	19.9	24.3	-	-

* MEASUREMENT BY THERMOMETER

- MISSING OR DELETED DATA

TABLE 24.— Continued.

(e) Field 9

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	201	17	1229	32.1	33.2	30.8	27.7	26.2	25.8
78	201	17	1332	34.1	35.3	33.2	29.2	26.6	25.5
78	201	17	1442	36.5	37.9	35.9	31.5	28.1	25.9
78	201	17	1549	36.9	37.7	37.3	32.9	29.3	26.4
78	201	18	1226	33.6	31.7	30.6	28.5	-	24.3
78	201	18	1328	35.6	34.4	33.7	30.5	26.7	24.2
78	201	18	1439	38.5	37.2	34.2	33.0	28.7	24.6
78	201	18	1546	37.8	37.4	34.9	34.3	30.3	25.0
78	201	19	1233	31.8	32.1	30.3	29.2	-	-
78	201	19	1335	33.9	34.6	33.2	32.0	-	-
78	201	19	1445	36.6	36.1	35.5	34.4	-	-
78	201	19	1553	35.5	35.4	37.6	35.0	-	-
78	201	23	1223	34.7	32.9	31.0	28.2	26.4	24.7
78	201	23	1325	39.0	35.4	33.0	30.7	27.8	24.4
78	201	23	1430	43.2	38.4	36.8	32.8	29.8	24.7
78	201	23	1543	44.3	39.6	37.4	33.6	31.5	25.1
78	201	28	1220	33.1	31.8	30.6	28.1	-	24.4
78	201	28	1323	35.6	34.4	33.7	29.9	-	24.2
76	201	28	1433	38.2	37.3	35.6	31.9	-	24.4
78	201	28	1540	38.8	38.2	36.9	33.0	-	24.9
78	201	29	1217	34.2	35.2	36.0	31.2	24.4	-
78	201	29	1320	38.9	38.2	35.6	34.1	24.6	-
78	201	29	1430	35.6	42.3	39.9	36.9	25.3	-
78	201	29	1537	45.6	40.4	41.2	37.6	26.3	-
78	202	17	1415	29.7	29.2	28.5	26.9	25.6	24.6
78	202	17	1524	30.6	30.8	31.1	27.8	26.4	24.8
78	202	18	1424	31.5	30.3	28.6	-	33.5	26.5
78	202	18	1521	33.5	32.0	30.7	29.5	27.1	-
78	202	19	1100	23.0	23.7	23.6	23.6	24.9	25.6
78	202	19	1435	31.4	30.0	29.1	30.2	-	-
78	202	19	1528	31.2	32.0	30.5	31.0	-	-
78	202	23	1410	30.7	29.8	29.3	27.4	26.6	24.7
78	202	23	1518	37.4	32.8	31.6	29.0	27.0	24.2
78	202	28	1400	29.1	36.3	28.8	27.7	-	24.1
78	202	28	1515	32.8	32.0	30.3	28.7	-	23.9
78	202	29	1350	29.1	30.0	29.6	29.0	24.3	-
78	202	29	1512	33.4	34.0	32.4	31.1	24.9	-
78	203	17	1002	20.1	20.0	20.4	20.1	20.7	22.3
78	203	17	1132	24.8	24.2	22.4	21.1	21.1	22.2
78	203	17	1312	26.7	26.8	25.3	22.9	22.0	22.3
78	203	17	1433	27.2	27.2	25.8	23.8	22.8	22.4
78	203	17	1622	26.4	26.1	25.9	25.5	24.3	23.0
78	203	18	959	21.5	20.9	19.9	19.1	19.8	-
78	203	18	1129	25.0	22.9	21.4	20.9	20.9	-
78	203	18	1309	31.5	26.5	24.7	24.3	22.7	-
78	203	18	1430	33.7	28.5	26.6	26.8	24.2	-
78	203	18	1616	32.0	30.3	29.1	30.5	26.5	-
78	203	19	1006	21.4	21.8	19.7	20.8	-	-
78	203	19	1135	24.5	25.2	21.5	23.9	-	-
78	203	19	1315	27.2	27.6	24.0	26.5	-	-
78	203	19	1436	27.4	27.6	25.0	26.4	-	-
78	203	19	1627	26.6	25.9	26.8	25.4	-	-
78	203	23	955	22.7	21.2	21.3	20.5	20.8	22.6
78	203	23	1126	25.0	23.2	22.1	21.9	21.2	22.3
78	203	23	1306	30.6	27.0	25.3	24.6	22.7	22.3
78	203	23	1427	33.7	28.9	27.1	25.5	24.2	22.4

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(e) Field 9, continued

TIME	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	203	25	1611	33.1	32.9	30.3	27.5	26.5	22.9
78	203	28	952	22.4	19.7	20.0	20.0	-	22.2
78	203	28	1123	24.3	21.4	21.5	21.3	-	22.0
78	203	28	1303	28.8	25.3	24.4	23.9	-	22.1
78	203	28	1424	28.7	26.4	24.8	24.5	-	22.4
78	203	28	1605	29.6	27.7	26.2	25.5	-	22.6
78	203	29	948	22.0	21.3	20.4	20.0	20.5	-
78	203	29	1120	21.9	21.8	22.8	21.8	20.9	-
78	203	29	1300	26.0	25.8	26.5	24.3	21.7	-
78	203	29	1421	27.4	25.7	27.3	25.0	22.3	-
78	203	29	1600	26.5	29.0	27.1	28.0	23.1	-
78	220	13	1032	39.1	31.8	27.7	23.4	22.4	-
78	220	13	1311	55.3	42.9	33.8	28.4	24.7	-
78	220	13	1428	56.4	45.1	35.6	30.5	26.2	-
78	220	13	1515	54.1	44.7	35.8	31.4	26.8	-
78	220	17	1038	38.8	33.7	27.6	23.3	22.5	-
78	220	17	1316	50.5	43.1	36.7	27.3	27.0	-
78	220	17	1433	57.6	45.3	39.4	29.2	29.3	-
78	220	17	1519	52.0	45.2	40.0	30.0	30.4	-
78	220	18	1044	40.2	34.4	27.7	25.3	23.3	25.6
78	220	18	1322	53.4	47.0	35.4	30.6	26.2	24.4
78	220	18	1437	55.9	50.9	37.6	32.6	27.5	26.9
78	220	18	1522	56.3	51.7	37.9	33.4	28.1	27.5
78	220	19	1026	30.1	26.6	26.5	24.3	22.5	-
78	220	19	1306	37.7	35.5	35.0	28.9	25.6	-
78	220	19	1419	40.7	38.0	37.4	30.4	26.8	-
78	220	19	1512	41.1	38.6	37.9	31.3	27.7	-
78	220	22	1056	37.6	34.8	27.7	-	23.4	22.9
78	220	22	1333	49.7	45.4	43.6	-	30.5	-
78	220	22	1445	51.1	47.7	36.9	48.3	26.6	-
78	220	22	1529	51.0	47.9	37.4	-	27.3	23.5
78	220	23	1050	38.8	38.2	29.1	25.9	23.2	23.1
78	220	23	1327	49.1	45.9	34.5	30.8	25.2	25.1
78	220	23	1441	52.3	46.9	36.5	32.7	26.7	26.7
78	220	23	1525	52.5	47.8	36.7	33.2	26.8	26.9
78	220	24	1119	49.6	-	32.4	26.7	23.1	22.4
78	220	24	1356	50.8	-	39.6	31.9	25.5	22.6
78	220	24	1502	51.9	38.2	40.5	33.0	26.5	23.1
78	220	24	1548	50.7	-	40.4	33.3	27.0	23.7
78	220	27	1103	43.1	35.2	31.0	25.4	23.7	-
78	220	27	1337	53.2	43.8	39.5	30.0	26.2	-
78	220	27	1449	54.4	45.7	41.4	31.7	27.5	-
78	220	27	1533	54.4	45.7	42.2	32.5	28.2	-
78	220	28	1109	48.4	37.3	26.7	25.2	-	23.0
78	220	28	1344	56.1	45.9	33.5	30.5	-	23.5
78	220	28	1453	56.5	47.3	35.5	32.5	-	24.3
78	220	28	1540	54.1	47.0	36.2	33.3	-	24.6
78	220	29	1114	46.3	36.9	26.6	27.3	24.2	-
78	220	29	1351	41.8	47.6	31.5	32.3	25.7	-
78	220	29	1458	43.6	36.4	33.7	34.0	26.8	-
78	220	29	1544	43.1	43.8	35.5	34.7	27.2	-
78	221	13	1044	39.6	32.0	27.1	23.9	23.0	-
78	221	13	1141	46.1	37.1	30.6	26.0	23.8	-
78	221	13	1242	51.1	41.2	33.2	27.6	24.7	-
78	221	13	1347	57.1	45.5	35.2	29.5	25.7	-
78	221	13	1514	55.8	44.2	34.9	30.6	26.8	-
78	221	17	1047	35.7	31.9	27.3	23.6	23.1	-
78	221	17	1144	41.2	36.3	31.3	25.2	24.7	-

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Continued.

(e) Field 9, continued

YEAR	DAY	LOCATION	TIME (S)	0.5	1.5	3.5	7.0	12.0	22.0
78	221	17	1215	44.3	39.7	34.6	26.7	26.6	-
78	221	17	1354	54.5	43.5	38.3	28.3	28.1	-
78	221	17	1517	43.8	43.2	39.1	29.6	30.0	-
78	221	18	1052	38.3	32.6	27.7	25.3	23.7	23.6
78	221	18	1148	44.6	38.4	31.4	27.0	24.6	25.8
78	221	18	1247	45.9	41.3	34.4	29.6	26.3	24.7
78	221	18	1357	55.4	49.2	36.7	31.3	26.9	-
78	221	18	1521	54.9	51.1	37.1	32.4	28.3	26.7
78	221	19	1040	28.3	27.2	27.1	24.7	23.3	-
78	221	19	1136	32.6	31.2	30.9	26.7	24.4	-
78	221	19	1237	35.0	34.2	33.6	28.3	25.5	-
78	221	19	1344	41.9	36.9	36.4	29.7	26.6	-
78	221	19	1511	41.9	38.0	36.1	30.6	27.8	-
78	221	22	1068	40.6	34.5	27.9	-	23.5	23.2
78	221	22	1155	45.5	40.9	30.8	-	24.0	23.2
78	221	22	1255	45.9	42.1	32.7	-	25.0	23.4
78	221	22	1413	53.2	51.1	37.0	-	26.2	23.7
78	221	22	1527	53.4	51.3	44.7	-	27.1	24.5
78	221	23	1055	35.4	36.4	28.7	25.6	23.5	23.4
78	221	23	1152	41.4	41.4	31.8	27.7	24.3	24.0
78	221	23	1252	43.9	42.2	33.4	29.6	25.2	25.1
78	221	23	1409	50.8	48.0	36.1	31.9	26.3	26.1
78	221	23	1524	52.1	48.7	36.7	32.7	37.1	27.0
78	221	24	1114	43.4	-	36.7	35.4	26.2	22.7
78	221	24	1217	45.5	-	36.6	28.6	24.1	22.9
78	221	24	1317	42.1	40.6	37.9	30.3	25.2	23.4
78	221	24	1426	44.8	-	39.7	32.0	26.1	23.8
78	221	27	1102	40.7	34.4	31.4	25.2	23.9	-
78	221	27	1207	47.4	39.3	35.8	27.4	25.1	-
78	221	27	1258	47.8	39.8	36.8	28.3	25.7	-
78	221	27	1416	54.2	45.2	41.3	31.0	27.2	-
78	221	27	1531	49.1	44.7	42.1	32.0	28.4	-
78	221	28	1106	42.1	36.4	26.5	25.1	-	23.1
78	221	28	1212	49.0	41.6	30.0	27.4	-	23.3
78	221	28	1309	50.6	43.2	32.1	29.2	-	23.7
78	221	28	1419	55.2	47.5	34.7	31.5	-	24.4
78	221	28	1535	50.4	44.6	35.7	32.6	-	25.3
78	221	29	1109	36.4	28.8	33.1	26.6	23.5	-
78	221	29	1215	41.3	31.3	33.3	30.0	24.7	-
78	221	29	1314	43.8	32.7	32.9	32.4	25.9	-
78	221	29	1423	47.6	33.9	36.4	34.1	26.6	-
78	223	13	538	-	19.2	21.3	23.2	24.5	-
78	223	13	714	16.2	18.2	20.2	22.3	23.8	-
78	223	13	801	17.3	19.0	20.6	22.1	23.5	-
78	223	13	847	22.4	21.9	21.7	22.1	23.3	-
78	223	17	550	19.7	19.8	21.0	-	-	-
78	223	17	717	18.9	19.1	20.0	22.8	22.8	-
78	223	17	804	19.6	19.7	20.2	22.6	22.5	-
78	223	17	850	21.8	21.8	21.3	22.4	22.3	-
78	223	18	722	17.5	18.4	20.3	22.2	23.5	23.9
78	223	18	607	18.2	18.8	20.6	22.2	23.4	23.9
78	223	18	855	23.6	22.6	22.9	22.4	23.2	23.9
78	223	19	532	19.6	20.8	20.9	23.5	24.5	-
78	223	19	711	18.6	19.8	19.9	22.6	23.6	-
78	223	19	758	19.2	20.0	20.0	22.3	23.4	-
78	223	19	844	21.7	21.1	21.1	22.4	23.1	-
78	223	22	729	18.3	18.6	20.1	-	23.6	24.8
78	223	22	816	19.7	19.9	20.3	22.3	23.5	24.5
78	223	22	903	26.6	25.4	22.7	-	23.3	24.3

* MEASUREMENT BY THERMOMETER
 - MISSING OR DELETED DATA

TABLE 24.— Concluded.

(e) Field 9, concluded

<u>YEAR</u>	<u>DAY</u>	<u>LOCATION</u>	<u>TIME (S)</u>	<u>0.5</u>	<u>1.5</u>	<u>3.5</u>	<u>7.0</u>	<u>12.0</u>	<u>22.0</u>
78	223	23	725	18.6	18.7	20.9	22.0	23.8	24.0
78	223	23	814	19.2	19.6	21.1	22.0	23.6	23.7
78	223	23	859	24.9	26.4	23.6	22.5	23.5	23.5
78	223	24	745	18.6	-	19.4	21.4	23.2	23.9
78	223	24	827	21.2	-	22.3	21.3	22.9	22.7
78	223	24	922	26.6	-	27.3	22.3	22.7	23.2
78	223	27	735	17.7	19.2	19.6	22.2	23.8	-
78	223	27	818	19.9	19.8	19.9	22.1	23.5	-
78	223	27	907	26.6	24.3	22.7	22.3	23.4	-
78	223	28	738	17.6	18.7	20.8	21.4	-	24.6
78	223	28	822	22.0	20.1	20.9	21.3	-	24.3
78	223	28	912	30.0	25.4	21.9	21.8	-	24.0
78	223	29	741	18.3	20.1	20.4	21.0	23.6	-
78	223	29	825	19.8	20.5	22.6	21.0	23.3	-
78	223	29	916	26.6	23.6	26.5	21.8	23.1	-

* MEASUREMENT BY THERMOMETER

- MISSING OR DELETED DATA

TABLE 25.— DATA SET II — VEGETATION DATA

Field	Crop (a)	Day 199 (7/18/78)				Day 201 (7/20/78)				Day 202 (7/21/78)				
		H ₂ O, g/m ³		Plant height, m		H ₂ O, g/m ³		Plant height, m		H ₂ O, g/m ³		Plant height, m		Time
		W ₁	W ₂	H ₁	H ₂	W ₁	W ₂	H ₁	H ₂	W ₁	W ₂	H ₁	H ₂	
1	C	3466.8	4507.0	2.08	2.03	3445.8	3053.4	2.44	2.16	3044.2	3065.2	2.36	2.39	930
2	C					2047.3	2282.9	2.34	2.16	1822.3	2344.2	2.44	2.29	1040
3	C	2059.5	2058.6	1.22	1.37	2056.3	1882.9	1.42	1.65	1788.2	2268.4	1.91	1.65	1155
b ₅	P		21.458		.0381	9.144	81.93	.0508	.0127	22.92	32.19	.0762	.0762	1255
c ₈	P					9.720	26.33	.108	.0254	33.65	69.68	.0508	.0508	1335
c ₁₄	P	8.964	8.120	.114	.127	11.92	8.961	.127	.0508	26.21		.0762		1320
19	C	1921.5	2304.7	1.68	2.03	1952.8	1750.3	2.18	2.24	1761.7	2268.7	1.93	2.13	1000
20	C	2079.1		1.83		2085.0	1854.6	2.11	1.80	2199.9	2166.1	2.13	1.91	1015
21	C	2471.2	2474.6	2.24	2.13	2298.0	2142.7	2.39	1.98	2113.6	2551.8	2.39	2.39	1025
22	C	2158.7	2442.8	2.08	2.03	2375.1	2116.8	2.08	2.03	2339.1		2.31		1035
24	M		2128.1		1.52	1698.6	1784.4	1.83	1.78	1891.3	2207.0	1.93	1.98	1100
26	C	2085.2	1952.7	1.52	1.57	2346.3	1793.8	1.63	1.83	1518.1		1.93		1110
28	C	3111.7	2335.3	2.18	2.29	2763.9	2975.8	1.98	2.21	2314.5	2269.4	1.91	1.78	1120
37	C	2497.9	1627.6	1.52	1.07	2175.0	1738.9	1.42	1.55	1516.4	2233.5	1.47	1.30	1240
39	M	2058.6	2673.6	.660	.737	3592.7	2531.9	.660	.762	2394.2	4404.8	.914	.711	1405
40	C	1550.0	2075.0	1.83	1.78	1876.6	1692.4	1.93	2.21					1350

^aC = corn, M = milo, and P = pasture.

^bPlant samples consisted of three plants in each row, unless indicated otherwise.

^cPlant samples consisted of vegetation over a 1-ft² area.

TABLE 25.— Concluded.

Field	Crop (a)	Day 203 (7/22/78)						Day 222 (8/10/78)					
		H ₂ O, g/m ³		Plant height, m		Time	H ₂ O, g/m ³		Plant height, m		Time		
		W ₁	W ₂	H ₁	H ₂		W ₁	W ₂	H ₁	H ₂			
1	C	3339.8	3188.5	2.49	2.54	900	572.6	575.9	2.21	2.18	1230		
2	C	2136.6	2202.8	2.49	2.46	950	375.6	489.1	1.85	1.91	1215		
3	C	1795.6	2386.7	1.83	1.68	1035							
b ₅	P	16.76	14.39	.102	.0762	1055							
c ₈	P	20.73	94.05	.0762	.00889	1130							
c ₁₄	P	7.497	85.30	.114	.0762	1115							
19	C												
20	C	1924.4	1988.2	2.06	2.18	925							
21	C	2358.6	2108.7	1.80	2.39	935							
22	C												
24	M	1989.6	1934.3	1.83	1.98	1005							
26	C	2093.7	1997.4	1.98	1.98	1015	582.1	603.6	2.13	1.91	1315		
28	C												
37	C						500.9		1.91		1125		
39	M	2256.0	3089.0	.660	.762	1150	759.0	1804.3	1.04	.914	1130		
40	C						571.1	754.4	2.24	1.88	1240		

^a C = corn, M = milo, and P = pasture.

^b Plant samples consisted of three plants in each row, unless indicated otherwise.

^c Plant samples consisted of vegetation over a 1-ft² area.

ORIGINAL PAGE IS
OF POOR QUALITY

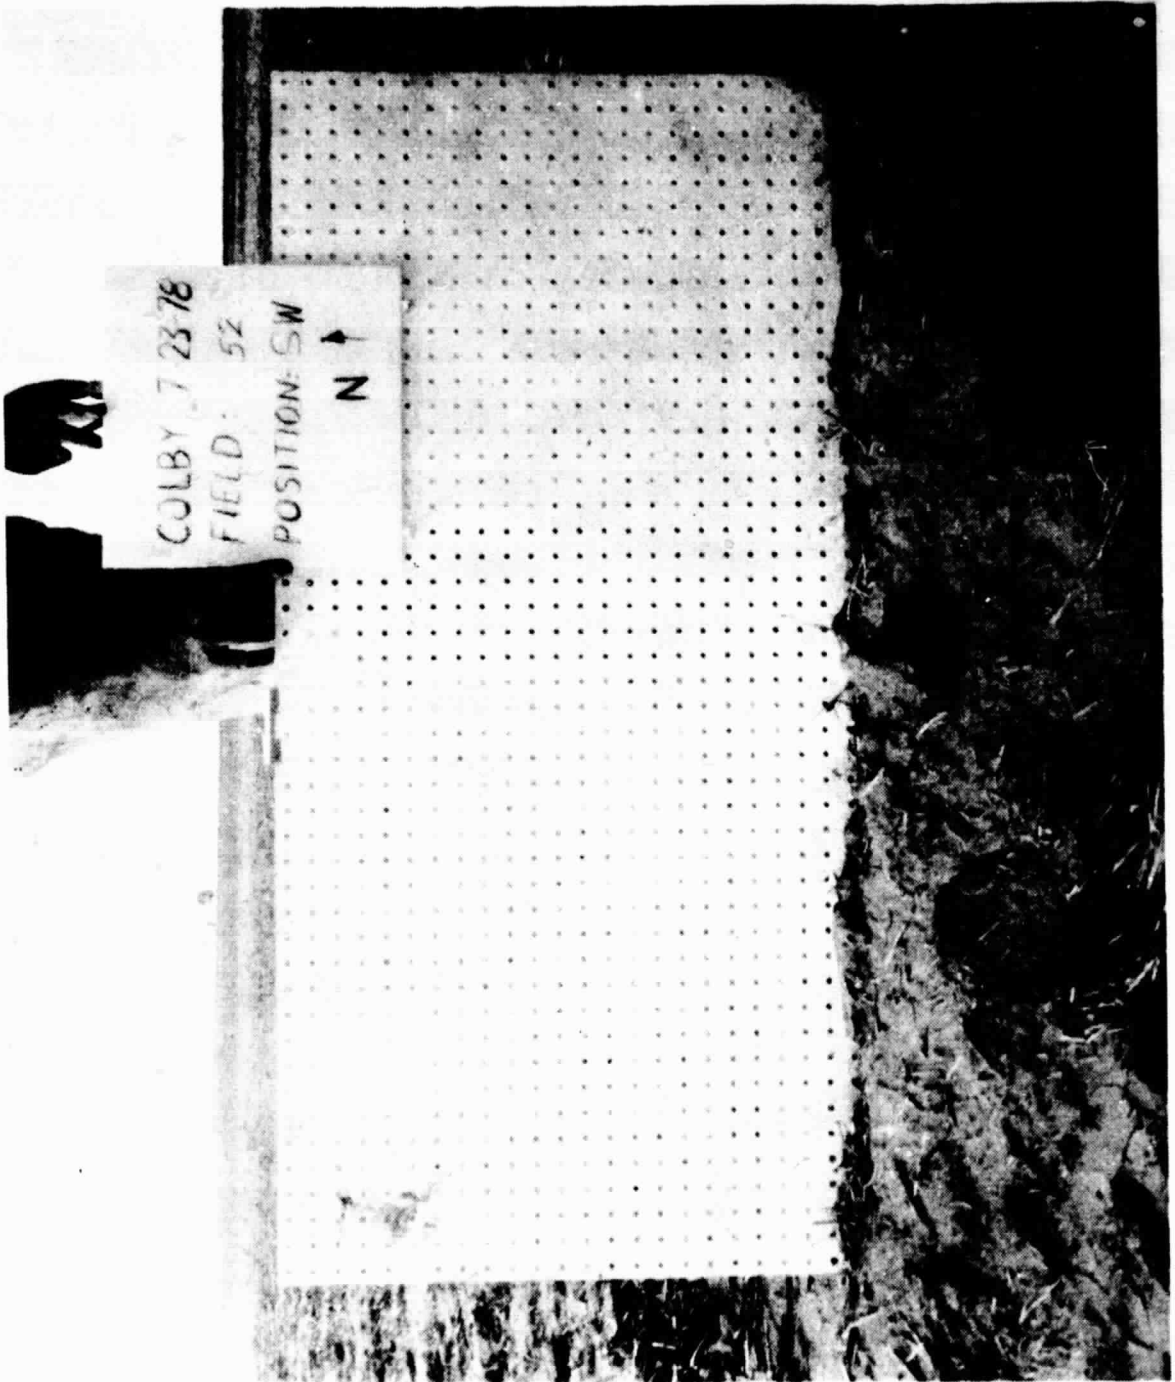


Figure 7.— Surface roughness photograph.

ORIGINAL PAGE IS
OF POOR QUALITY

5. REFERENCES

1. Richard, L. A.: Methods of Soil Analysis. Am. Soc. Agronomy, 1965, pp. 131-137.
2. Klute, Arnold: Methods of Soil Analysis. Am. Soc. Agronomy, 1965, pp. 210-215.

PRECEDING PAGE BLANK NOT FILMED

APPENDIX A
ADDITIONAL COLBY DATA AVAILABLE

APPENDIX A

ADDITIONAL COLBY DATA AVAILABLE

In addition to the data listed in the body of this report, the following information on the Colby area will be available in the near future.

1. Photomosaic – The seven flight lines were flown at 2438 meters (8000 feet) on June 18, 1978, by the C-130 aircraft. Photographs were acquired for construction of a semicontrolled photomosaic for locating aircraft sensor data on the ground to ± 15 meters (± 50 feet).

Available date: September 1979

Source: See note 1

2. Photograph overlays – Overlays defining principal point of each photograph are available for days 199 and 201. These are keyed to line and run.

Available date: September 1979

Source: See note 1

3. Thomas County soils map – A soils map is being constructed by the U.S. Department of Agriculture Soil Conservation Service in Colby. This map shows soil type and slope for individual fields.

Available date: January 1980

Source: Soil Conservation Service

Box 525

750 South Range

Colby, KS 67701

APPENDIX B
EQUIPMENT LIST

APPENDIX B
EQUIPMENT LIST

The following equipment was used in support of 1978 ASME data collection at Colby, Kansas.

Item	Vendor	Model no.	Serial no.
Thermistor thermometer	Omega Engineering	46	875011-45577
Thermocouple voltage measuring instrument	Wescor	TH65	8177134
Thermocouple voltage measuring instrument	Wescor	TH65	8177133
Thermocouple voltage measuring instrument	Wescor	TH50	1244
Reference standard/infrared field thermometer	Barnes Engineering Company	102315	
Scientific grievé mechanical oven	Fischer	13-261-32	992
Scientific grievé mechanical oven	Fischer	13-261-32	1013
Analytical balance	Mettler Instrument Corp.	E200	590986
Analytical balance top loading	Mettler Instrument Corp.	E200/344	590987
Scientific oven (forced air) 220 volts	Napco	630-7	2-73-1163-23
Portable meter area readout	Lambda Electronics	LI3000	PAM 156741
Conveyor belt accessories	Lambda Electronics	LI3050A	TBA 129-7501
15-bar ceramic plate extractor		Cat. #1500	
Pressure control manifolds		Cat. #700-2	
Soil core sampler (for bulk density samples)		Cat. #200	
Scientific thermometers (27)	Scientific		
Thermometer		Cal. #C14983	

APPENDIX C
ASME TEST FIELD OPERATORS

APPENDIX C

ASME TEST FIELD OPERATORS

The following is a list of ASME test field operators for Thomas County in 1978.

Operator	Address	Field no.
Ralph Albers	Oakley, Kansas	49
James Bartlett	Colby, Kansas	11
Clem Bremenkamp	Colby, Kansas	14
Cornstock Farms, Inc. Ed Goossen	Colby, Kansas	25, 27
William Engelhardt	Colby, Kansas	7, 31, 56
Glendora Grover	Oakley, Kansas	8
John G. Hansen	Colby, Kansas	21, 22
Harold Herbel	Colby, Kansas	1, 55
Frank Howard	Oakley, Kansas	5
Les Keller	Oakley, Kansas	3, 34
Verlan Olson	Russell, Kansas	4
H. A. Regier	Colby, Kansas	29, 30
Dennis P. Ryan	Colby, Kansas	12
Cyril H. Saddler	Colby, Kansas	9, 45, 46
Charles W. Schroeder	Colby, Kansas	52
Henry Siebert	Colby, Kansas	19, 20
Wight Sims	Oakley, Kansas	50
Ivan Steinle	Colby, Kansas	2, 6, 13, 24, 26, 28, 43, 54
Stephens Farms, Inc. Mrs. Carl Stephens	Menlo, Kansas	47
Joseph Stevens	Colby, Kansas	10, 44
Frank Vacin	Colby, Kansas	53
George Wiens	Monument, Kansas	16
Clarence F. Wilson	Colby, Kansas	37, 38
Robert E. Zelfer	Colby, Kansas	39, 40

APPENDIX D
ON THE DESIGN OF AN EXPERIMENT TO MEASURE SOIL MOISTURE USING MICROWAVE DATA

By R. S. Chhikara and N. E. Marquina

1. INTRODUCTION

An application of microwave sensing that has stimulated the interest of soil scientists in the last few years is the remote measurement of soil moisture. This application is felt to be viable because laboratory measurements have demonstrated that the microwave permittivity of soil is highly dependent on soil moisture. However, other factors such as nonhomogeneities in the soil, the geometry of the surface boundary, and vegetation above the soil interact with the electromagnetic energy and affect the microwave response of the soil (ref. 1).

Techniques have been developed for extracting soil moisture information from data acquired with microwave sensors. A significant correlation exists between the radar back scattering coefficient σ^0 and the soil moisture in the top layer of soil as shown in reference 2. However, to demonstrate the capability of estimating soil moisture remotely, more experimental work is required. Data collection and analyses should be based on a well-designed experiment, in which consideration is given to the full range of physical conditions influencing the soil moisture and the different microwave sensing factors that would influence σ^0 .

During July and August 1978, an extensive data set was gathered at a site near Colby, Kansas, to support the development of algorithms to estimate surface soil moisture from σ^0 and other remotely sensed parameters.

The study described here was carried out to aid in the determination of how many fields per crop type needed to be sampled at Colby. It includes the effect of physical factors affecting soil moisture such as soil, slope, and vegetation type and factors affecting the microwave sensors such as frequency, angle of incidence, and polarization.

2. STATISTICAL ANALYSIS

2.1 DATA ANALYSIS APPROACH

The regression analysis approach may be used to study the dependence between σ^0 and the soil moisture, X . However, when data for σ^0 are obtained using different frequencies, polarizations, and angles of incidence, a more suitable approach is to analyze the data by performing an analysis of covariance, a technique that combines the features of analysis of variance and regression (ref. 3). The analysis-of-variance part of the analysis of covariance is primarily to investigate the error sources resulting from different configurations in operating the microwave sensors.

The following model* relating σ^0 to the soil moisture X is assumed:

$$\sigma_{ijkl}^0 = \mu + \alpha_i + \delta_j + \gamma_k + \beta(X_{ijkl} - \bar{X}) + \epsilon_{ijkl} \quad (1)$$

where μ represents the overall mean for σ^0 , α_i is the effect of the i th polarization, δ_j is the effect of the j th frequency, γ_k is the effect of the k th angle of incidence, β is the regression coefficient of σ^0 on X , and the ϵ_{ijkl} are the residuals.

The choice of levels for the three factors (frequency, polarization, and angle of incidence) depends upon the availability of data for σ^0 . The following levels are considered in the present study:

- Frequency: 4.25 gigahertz, 5.25 gigahertz
- Polarization: horizontal, vertical
- Angle of incidence: 0, 10

The soil moisture is considered for the top 5-centimeter layer of the soil. The data analysis using model (1) is considered for both vegetative and

*For estimating soil moisture from σ^0 , it is more appropriate to regress X on σ^0 . However, not enough observations of X are available to permit an analysis of covariance if this change is made in the model.

nonvegetative (bare soil) conditions. Only wheat and corn fields are included for vegetation. This limitation was purely due to the availability of data described in section 2.2. A separate analysis is made for each crop.

The basic objective of the data analysis using the suggested approach is (1) to determine whether the dependence of σ^0 on soil moisture is significant, (2) to determine whether each of the factors (frequency, angle, and polarization) has a significant effect on σ^0 , and (3) to estimate the error variance (i.e., inherent variability) of σ^0 by removing the variability in σ^0 caused by soil moisture and the three factors. An unbiased and reliable estimate of the error variance is needed to estimate the number of fields to achieve an efficient sampling design. The estimation of the required number of fields is discussed in section 3.

2.2 DATA USED IN THE ANALYSIS

The data considered in the present analysis are given in the appendix and correspond to different experimental conditions. These data sets are described in detail in references 4 and 5. The data consist of soil moisture in the top 5 centimeters of the soil and σ^0 . They include (1) data on five bare soil fields near Garden City, Kansas, collected between September 12 and October 13, 1975 (ref. 4); (2) data on four corn fields near Lawrence, Kansas, collected between May 21 and August 22, 1975 (ref. 5); and (3) data on seven wheat fields near Lawrence, Kansas, collected between May 20 and July 9, 1975 (ref. 5). One observation per field was chosen for the analysis. The criterion for choosing the observations was the time factor. An attempt was made to select the observations to be as close as possible in time of day and time of year. Most of the selected observations were made between 10:00 a.m. and 12:00 noon, but they varied widely with respect to time of year. Thus, the data available did not allow complete removal of the time factor from the analysis.

For each soil moisture observation, there are $2 \times 2 \times 2 = 8$ observations for σ^0 corresponding to two frequencies (4.25 and 5.25 gigahertz), two polarizations (horizontal and vertical), and two angles of incidence (0° and 10°). The soil moisture in the top layer of 5 centimeters is obtained by taking the weighted

average of those in the 0- to 1-, 1- to 2-, and 2- and 5-centimeter depth layers. The width of a depth layer is used as weight.

2.3 RESULTS

2.3.1 ANALYSIS OF THE COMPLETE DATA SET

Tables 1, 2, and 3 give the results of the analysis of covariance performed on bare soil, wheat, and corn data, respectively. Each table shows the sources of variation in σ^0 , their mean square errors, the value of the Fisher statistic F , and the computed significance levels. Also given is the residual mean square error, which is an estimate of the error variance. The significance level measures the likelihood of committing error in rejecting the hypothesis of no effect on σ^0 due to a source of variation. The variation due to soil moisture indicates the degree to which σ^0 depends upon the soil moisture in the top 5-centimeter layer.

The following inferences are made from these results by testing the hypothesis of no effect at the 5-percent level of significance:

1. There is a highly significant dependence of σ^0 on soil moisture in the 0- to 5-centimeter depth layer for bare soil, wheat, and corn; it is the highest for bare soil.
2. The angle of incidence has a significant effect on σ^0 for bare soil, wheat, and corn.
3. The error variance estimates are 24.54, 35.25, and 16.89 for bare soil, wheat, and corn, respectively. A high error estimate for wheat seems partly due to the time factor since wheat data were collected over a period of 2 months.

2.3.2 ANALYSIS OF INDIVIDUAL DATA SETS

The relationship of σ^0 to soil moisture was studied separately for each configuration of instruments (i.e., a specified level for each frequency, polarization, and angle of incidence) and crop type. A set of regression analyses of different data sets was made using the simple linear regression model,

TABLE 1.— ANALYSIS OF COVARIANCE PERFORMED ON BARE SOIL DATA

Source of variation	Degrees of freedom	Sum of squares	Mean square error	F	Significance of F
Soil moisture	1	1601.21	1601.21	65.2	0.000
Polarization	1	.05	.05	.0	.965
Frequency	1	4.62	4.62	.19	.667
Angle	1	310.24	310.24	12.64	.001
Error	35	858.85	24.54		
Total	39	2774.97	71.15		

TABLE 2.— ANALYSIS OF COVARIANCE PERFORMED ON WHEAT DATA

Source of variation	Degrees of freedom	Sum of squares	Mean square error	F	Significance of F
Soil moisture	1	545.00	545.00	15.46	0.000
Polarization	1	2.08	2.08	.06	.809
Frequency	1	2.75	2.75	.08	.781
Angle	1	383.78	383.78	10.89	.002
Error	51	1797.97	35.25		
Total	55	2731.58	49.66		

TABLE 3.— ANALYSIS OF COVARIANCE PERFORMED ON CORN DATA

Source of variation	Degrees of freedom	Sum of squares	Mean square error	F	Significance of F
Soil moisture	1	200.70	200.70	21.78	0.000
Polarization	1	1.80	1.80	.20	.662
Frequency	1	4.96	4.96	.54	.469
Angle	1	67.28	67.28	7.30	.012
Error	27	248.76	9.21		
Total	31	523.50	16.89		

$$\sigma^0 = \beta_0 + \beta_1 X + \epsilon, \quad (2)$$

where β_0 and β_1 are the regression coefficients and ϵ , the random error for σ^0 , is assumed to be independent of X .

Let $\sigma^0 = b_0 + b_1 X$ be the regression equation obtained from the least-square fit of data to the above model. Suppose that s^2 is the residual mean square error given by

$$s^2 = \frac{1}{n-2} \sum_{i=1}^n (\sigma_i^0 - \hat{\sigma}_i^0)^2$$

where n is the number of data points used in obtaining a regression equation and σ_i^0 and $\hat{\sigma}_i^0$ are, respectively, the observed and the predicted back scattering coefficients for field i . A smaller s^2 would indicate that the soil moisture is a good predictor of σ^0 or vice versa.

Table 4 presents the results of these regression analyses. The table contains the values of b_0 , b_1 , r (the correlation coefficient between σ^0 and soil moisture), and s^2 . In addition to the two levels (0° and 10°) of the angle of incidence considered in section 2.3.1, the 5° angle is included for bare soil only. The σ^0 data corresponding to the 5° angle of incidence were not available for wheat or corn.

These results indicate a significant correlation between σ^0 and soil moisture. An exception occurred in the case of wheat using 4.25-gigahertz frequency and the 10° angle. The results for bare soil are more consistent and illuminating when compared to the other two cases. The value s^2 decreases significantly when going from 0° to either 5° or 10° , but there is no significant difference between the results at 5° and at 10° . Increasing the frequency from 4.25 to 5.25 gigahertz does not increase or reduce s^2 significantly. The instrument configuration of vertical polarization, 5.25-gigahertz frequency, and 5° angle gives the highest correlation coefficient and the smallest value for s^2 .

TABLE 4.— REGRESSION ANALYSES OF BACK SCATTERING COEFFICIENT DATA

Angle of incidence, °	Regression coefficients and parametric values	Horizontal polarization		Vertical polarization	
		Frequency, 4.25 GHz	Frequency, 5.25 GHz	Frequency, 4.25 GHz	Frequency, 5.25 GHz
Bare soil					
0	b_0	-46.5	-44.09	-45.73	-45.07
	b_1	166.86	154.59	165.94	158.25
	r	.84	.85	.83	.86
	s^2	31.152	24.801	34.617	24.480
5	b_0	-30.68	-31.62	-34.78	-34.15
	b_1	84.9	86.46	100.31	96.70
	r	.89	.91	.94	.94
	s^2	4.914	4.230	3.652	3.241
10	b_0	-30.36	-30.49	-31.39	-31.52
	b_1	79.78	77.08	82.12	83.78
	r	.86	.85	.92	.98
	s^2	5.962	6.355	3.195	4.583
Wheat					
0	b_0	-1.14	-3.84	-3.02	-4.50
	b_1	27.84	37.25	35.38	40.1
	r	.48	.59	.56	.60
	s^2	45.720	46.003	46.345	50.240
10	b_0	-0.028	-4.30	-1.00	-5.16
	b_1	1.25	16.51	8.56	22.55
	r	.06	.54	.32	.63
	s^2	8.232	11.203	11.403	13.256
Corn					
0	b_0	-11.09	-11.22	-11.09	-11.48
	b_1	72.56	78.52	72.38	82.30
	r	.76	.74	.76	.76
	s^2	8.882	11.813	9.074	11.428
10	b_0	-8.28	-9.67	-6.18	-8.64
	b_1	18.08	43.27	14.60	35.16
	r	.60	.85	.75	.63
	s^2	1.332	1.616	.392	4.267

Unfortunately, no meaningful inferences can be made from the results for wheat and corn. First of all, no data are available for the 5° angle. Next, since the data for wheat and corn varied widely with respect to time of year, the observations cover different growth stages.

Because the plant moisture changes with the growing season, changes in σ^0 due to plant water content rather than to soil moisture are expected. Ideally, in order to consider the time factor, data should be collected at a given time of the year and at a given time interval during the day for all fields. This should be repeated several times a year.

If there was indeed a significant effect due to any other factor, it was not detected by the analysis because of the small sample size (only five data points for bare soil, seven for wheat, and four for corn). In fact, the reliability of all results discussed here is low because not enough data points were available for error analysis.

In conclusion, the results for bare soil depict a well-defined pattern that is in line with the theory behind radar response to vegetation (refs. 1, 2, and 6). No such conclusion can be made for wheat and corn because of variations in the data with respect to crop growth stage. Ideally, the measurements should be made when the crops are at the same growth stage or time of year. It is imperative that the plant's water content be treated as a covariable affecting σ^0 . Data collected at the same time of year should provide the information needed to design a statistically valid experiment for soil moisture estimation.

3. SAMPLING REQUIREMENTS FOR CORN, WHEAT, AND BARE SOIL FIELDS FROM THE COLBY SITE

A statistically valid determination of the number of fields to be sampled at Colby would require estimates of the variability of soil moisture and σ^0 at that site. Since the data discussed above are from different sites, they can only provide a guideline for the sampling requirements.

Assuming the data given above can be applied at the Colby site, the Neyman sample allocation technique given in reference 7 was employed to determine the total number of sample fields and their distribution between crop types. This technique gives an optimum sample allocation for a stratified random sampling scheme provided that the inputs for strata variances and strata sizes are correct. In this case, it was designed to achieve a coefficient of variation of 5 percent for the sampling error. The total number of fields n needed to be sampled is given by

$$n = \frac{\left(\sum_{i=1}^3 N_i S_i \right)^2}{N^2 \sigma^2 + \sum_{i=1}^3 N_i S_i^2} \quad (3)$$

where

N_i = number of fields of the i th crop type,

S_i^2 = error variance of σ^0 values for the i th crop type,

σ^2 = specified precision (variance),

$$N = \sum_{i=1}^3 N_i,$$

and

$$i = 1, 2, 3.$$

Precision is generally specified in terms of the coefficient of variation V .

If μ is the mean parameter, then the specified precision can be expressed as $\mu^2 V^2 = \sigma^2$.

The distribution of n between the crop types is given by

$$n_i = \frac{N_i S_i}{\sum_{i=1}^3 N_i S_i} \times n, \quad i = 1, 2, 3.$$

For methodological details of the procedure, see reference 6.

Using the results given in table 5 for inputs in equation (3), an estimate of μ equal to -17.4 obtained from the data in the appendix, and a coefficient of variation of 5 percent (designed to achieve at least a 90-percent confidence in the estimate of σ^0), the number of sample fields is as follows:

<u>Crop type</u>	<u>No. of fields</u>
Bare soil	13
Wheat	15
Corn	4
Total	32

TABLE 5.— COLBY SITE DATA USED IN THE DESIGN OF EXPERIMENT

Crop type (i)	No. of fields (N_i)	Between-field variance (s_i^2)
1. Bare soil	480	24.54
2. Wheat	480	35.25
3. Corn	240	16.89

5. REFERENCES

1. Newton, Richard Wayne: Microwave Remote Sensing and Its Applications to Soil Moisture Detection. Tech. rpt. RCS-81, Texas A&M University, 1977.
2. Cihlar, Josef; and Ulaby, Fawwaz, T.: Dielectric Properties of Soil as a Function of Moisture Content. Univ. of Kans. Remote Sensing Laboratory, Tech. rpt. 177-47, 1974.
3. Snedecor, George W.; and Cochran, William G.: Statistical Methods. Sixth ed., The Iowa State University Press, 1967.
4. Batlivala, P. P.; and Dobson, C.: Soil Moisture Experiment (Kansas) Documentation of Radar Backscatter and Ground Truth Data. Univ. of Kans. Remote Sensing Laboratory, Tech. rpt. 264-7, Mar. 1976.
5. Dobson, C.; et al.: Data Documentation: 1975 MAS 1-8 and MAS 8-18 Vegetation Experiments. Univ. of Kans. Remote Sensing Laboratory, Tech. rpt. 264-15, 1977.
6. Ulaby, F. T.: Radar Response to Vegetation. IEEE Trans. Antennas and Propagation, vol. AP-23, no. 1, 1975, pp. 36-45.
7. Cochran, William G.: Sampling Techniques. Third ed., John Wiley and Sons, New York, 1977.

APPENDIX

BARE SOIL, WHEAT, AND CORN DATA

Back scattering coefficient data and soil moisture ground truth for bare soil, wheat, and corn are given in tables A-1 through A-3, respectively.

TABLE A-1.— BARE SOIL DATA
(a) Radar back scattering coefficients
[Ref. 4]

Observation	Frequency, GHz	Horizontal polarization		Vertical polarization	
		Angle of incidence, 0°	Angle of incidence, 10°	Angle of incidence, 0°	Angle of incidence, 10°
1	4.25	-6.5	-6.8	-6.1	-8.1
	5.25	-6.5	-7.9	-6.5	-5.4
2	4.25	-7.8	-6.6	-9.3	-8.1
	5.25	-9.7	-7.0	-9.5	-8.0
3	4.25	-11.3	-15.0	-11.3	-15.4
	5.25	-12.0	-17.0	-12.0	-16.5
4	4.25	-14.5	-18.0	-13.1	-18.0
	5.25	-14.1	-17.6	-14.8	-17.0
5	4.25	14.9	-7.1	15.6	-6.2
	5.25	12.3	-8.0	12.4	-7.5

TABLE A-1.— Concluded.

(b) Soil moisture ground truth

Field no.	Depth, cm			Combined depth, 0 to 5 cm
	0 to 1	1 to 2	2 to 5	
1	0.32	0.30	0.28	0.292
2	.26	.26	.23	.242
3	.18	.20	.20	.196
4	.08	.18	.22	.184
5	.34	.32	.31	.318

TABLE A-2.-- WHEAT DATA
(a) Radar back scattering coefficients
[Ref. 5]

Field no.	Frequency, GHz	Horizontal polarization		Vertical polarization	
		Angle of incidence, 0°	Angle of incidence, 10°	Angle of incidence, 0°	Angle of incidence, 10°
1	4.25	1.5	2.0	-6.4	-3.6
	5.25	-4.2	-2.9	-7.8	-4.9
2	4.25	-5.9	-4.8	-3.0	-3.0
	5.25	-4.2	-5.9	-2.7	-4.6
3	4.25	16.3	2.0	17.0	3.0
	5.25	17.6	4.8	17.8	5.8
4	4.25	13.8	3.6	14.5	7.0
	5.25	14.4	5.8	14.6	8.1
5	4.25	-2.0	-2.8	0.9	-0.1
	5.25	-1.9	-2.7	-1.0	-2.6
6	4.25	10.6	-0.2	10.5	0.5
	5.25	10.0	1.4	10.0	2.2
7	4.25	6.6	2.6	7.5	4.2
	5.25	6.8	-1.6	8.1	-0.5

TABLE A-2.— Concluded.

(b) Soil moisture ground truth

Field no.	Depth, cm			Combined depth, 0 to 5 cm
	0 to 1	1 to 2	2 to 5	
1	0.087	0.104	0.142	0.123
2	.423	.300	.361	.361
3	.396	.343	.434	.408
4	.425	.335	.399	.391
5	.034	.053	.105	.080
6	.154	.275	.319	.277
7	.079	.089	.134	.114

TABLE A-3.— CORN DATA

(a) Radar back scattering coefficients
[Ref. 5]

Field no.	Frequency, GHz	Horizontal polarization		Vertical polarization	
		Angle of incidence, 0°	Angle of incidence, 10°	Angle of incidence, 0°	Angle of incidence, 10°
1	4.25	-6.9	-8.4	-6.9	-4.9
	5.25	-6.4	-7.0	-6.4	-5.5
2	4.25	-2.4	-5.4	-2.4	-4.7
	5.25	-1.8	-5.0	-1.8	-4.7
3	4.25	-4.9	-6.0	-5.0	-5.2
	5.25	-5.1	-5.2	-4.7	-7.2
4	4.25	5.2	-4.5	5.2	-2.8
	5.25	6.7	-0.4	7.1	0.0

D
121
121

TABLE A-3.— Concluded.

(b) Soil moisture ground truth

Field no.	Depth, cm			Combined depth, 0 to 5 cm
	0 to 1	1 to 2	2 to 5	
1	0.061	0.064	0.099	0.084
2	.063	.060	.079	.072
3	.092	.094	.168	.138
4	.085	.200	.227	.193

APPENDIX E
SUMMARY OF NASA AIRCRAFT (NC-130) DATA COLLECTED
FOR THE AGRICULTURAL SOIL MOISTURE
EXPERIMENT (ASME) DURING 1978

By F. R. Brumbaugh

1. INTRODUCTION

During the period from July 18 to August 9, 1978, the NC-130 aircraft of the National Aeronautics and Space Administration (NASA) conducted a total of seven data-gathering flights over a test site near Colby, Kansas, as part of a project to develop algorithms for determining soil moisture from remotely sensed data.¹ At or near the time of overpass, field teams collected extensive ground-truth data for selected fields under the NC-130 flightpath. For some of these fields, active and passive microwave data were obtained from sensors on trucks.

This document catalogs the details of the data collected by the sensors in the aircraft, including times and tape numbers. The ground truth and truck data will be described elsewhere.

2. THE NC-130 DATA COLLECTION FLIGHTS

Figure 1 shows the test site, the fields where ground truth was taken, and the seven NC-130 flight lines. The flight lines were always flown in the same direction as shown by the arrows. The appendix gives the sensor configuration on the aircraft.

Table 1 summarizes the seven flights. It gives the dates, times, and altitudes flown, along with some details of the type of data obtained from each sensor. Each altitude flown consists of one or more sequences; each sequence consisting of a certain number of flight lines in a certain order. Three sequences were used; they consisted of the following flight lines:

<u>Sequence</u>	<u>Flight lines</u>
1	4, 3, 7, 1, 5, 6, 2
2	4, 3, 7, 1, 5
3	3, 7, 1, 5, 6, 2

¹Described in Project Support Plan OA-0387, JSC-10562.

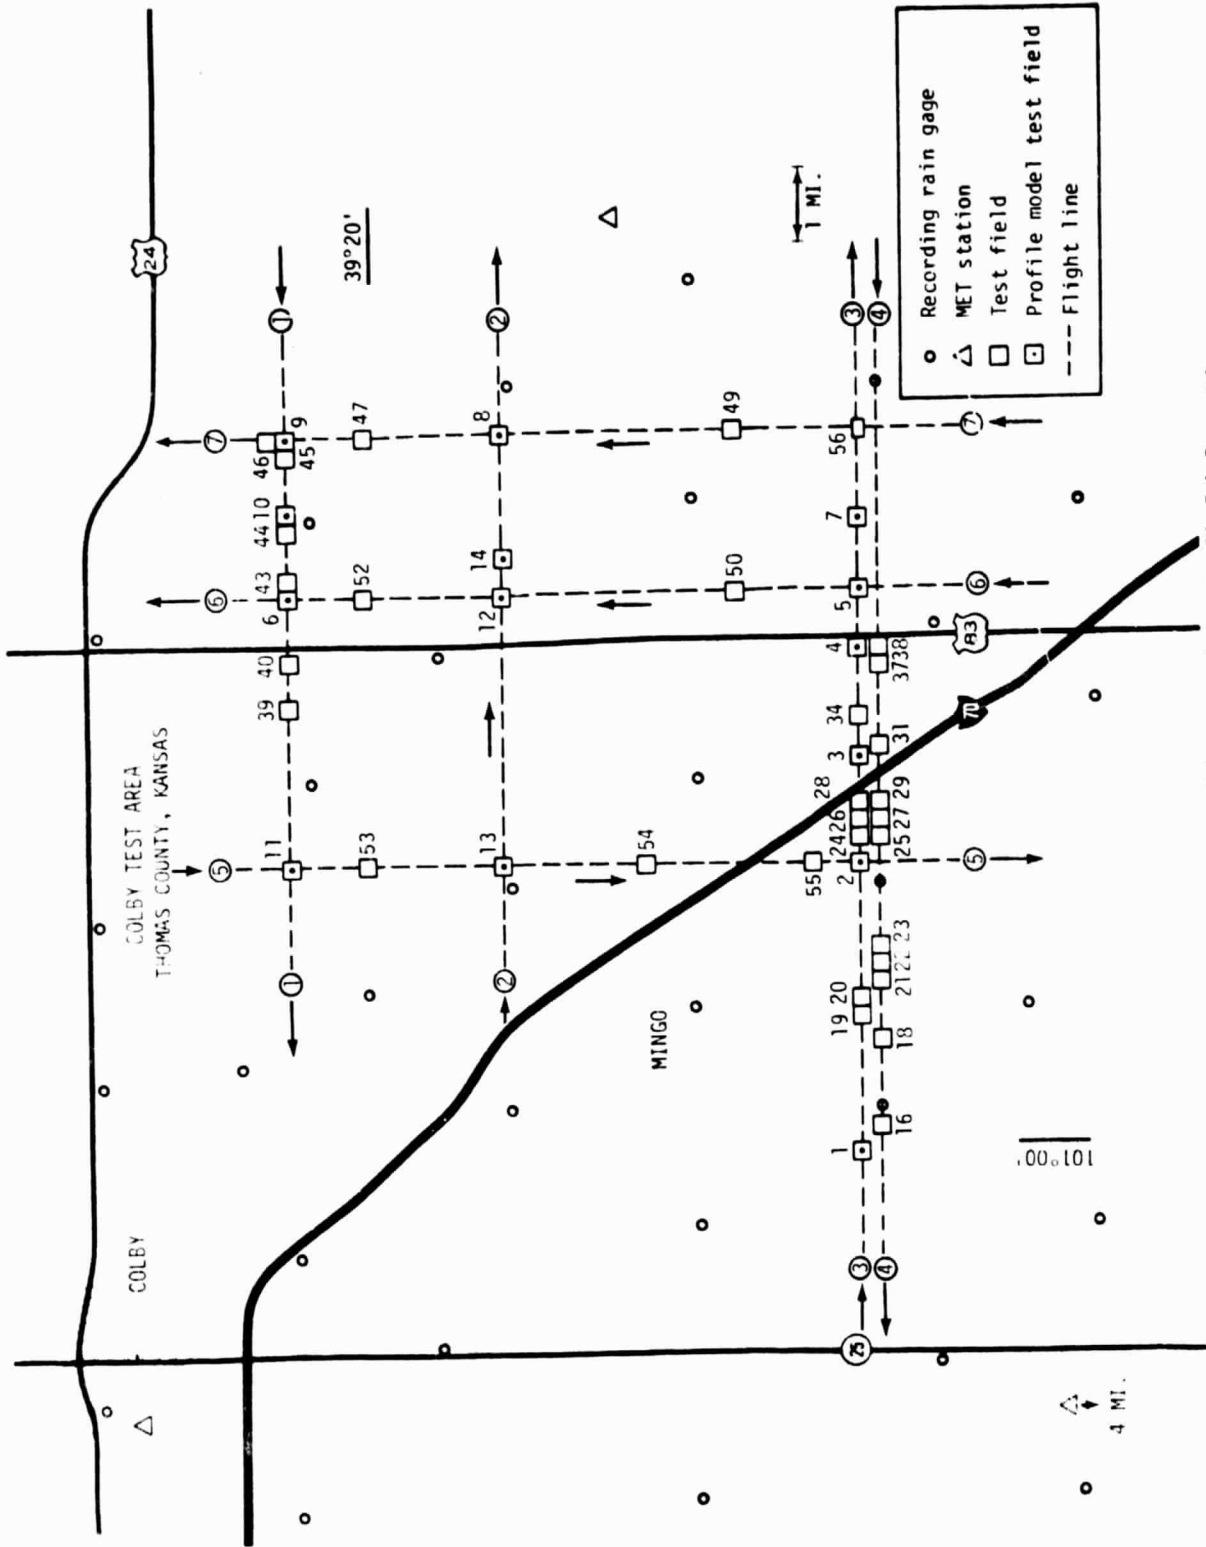


Figure 1.-- NC-130 aircraft flight lines and test field locations for the Colby, Kansas, test site.

TABLE 1. -- ASME NC-130 AIRCRAFT SENSOR DATA COLLECTION SUMMARY SHEET -- 1978

Flt. no. Data	Date	Site (e)	Camera data			PRT-5 (a)	WMS (a)	PMIS (10.69 GHz) (a)	Passive radiometers (WNR)				Active scatterometers				A/C avg. alt. (ft)
			Zeiss	AMPS	HASS				K-band (e)	C-band (5.0 GHz)	L-band (1.42 GHz)	P-band (0.4 GHz)	L-band (1.6 GHz)	C-band (4.76 GHz)	K-band (13.3 GHz) (a)		
4	7-16 (199)	Colby	CIR ^b	-	-	X	X	X	-	-	-	-	-	-	-	8000	
5	7-20 (201)	Colby	CIR	B/W ^c and B/WIR ^d	-	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	1500	
6	7-21 (202)	Colby	CIR	B/W ^c and B/WIR ^d	-	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	1500	
7	7-22 (203)	Colby	Color and B/W	B/W ^c and B/WIR ^d	-	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	1000	
8	8-8 (220)	Colby	CIR	B/W ^c and B/WIR ^d	CIR	X	X	X	-	-	-	-	-	-	-	8000	
9	8-9 (221)	Colby	B/W ^c and CIR	B/W ^c and B/WIR ^d	CIR	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	1500 1000	
10	8-11 (223)	Colby	B/W ^c	B/W ^c and B/WIR ^d	-	X	X	X	-	-	-	-	-	-	-	7000	
13	8-9 (221)	Yuma, Colo.	CIR	B/W ^c and B/WIR ^d	CIR	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	1500 1000	
10	8-11 (223)	Colby	B/W ^c	B/W ^c and B/WIR ^d	-	X	X	X	0° & 40°	0° & 40°	0° & 40°	H & V	H & V	H & V	X	450 1500 1000	

^a X indicates "sensor on."
^b CIR = Color infrared film.
^c B/W = Black-and-white negative film.
^d B/WIR = black and white infrared film.
^e K refers to K, Ka, and Ku. K is 22.05 GHz, Ka is 37.0 GHz, and Ku is 18.0 GHz.
^f Pre-dawn flight.

ORIGINAL PAGE IS
OF POOR QUALITY

ES
126

During this mission, some data were taken for another project at a site near Yuma, Colorado. Since the data are included with the Colby data, they are identified in the tables in this report.

Table 2 gives the data acquired by flight line and sequence. A line separates different sequences. The meaning of the column headings is as follows.

Alt. = The assigned altitude.

A/P = Active or passive sequence

L = Flight line number (see fig. 1)

R = Run number to identify a particular run over a flight line. Run numbers were assigned in the original plan, and R referred to the *R*th run that day over the line. However, because the actual flights sometimes were not in the planned order, the R's are not always in consecutive order.

GMT = Greenwich mean time in hours, minutes, and seconds for the start of the flight line.

A, B, C, D = Tape recorder designation. The numbers are the last three digits of the tape number. The prefix is L05-0-005.

GS = Ground speed (in knots) minus 100 knots.

DR = Drift of aircraft (in degrees), left or right.

TH = True heading (in degrees).

RA = Radar altimeter reading in thousands of feet.

KR, CR, LR = K-band, C-band, and L-band radiometer look angles and polarizations. The K-band is actually three bands -- K, Ka, and Ku. The numbers are look angles in degrees. H indicates horizontal polarization; V, vertical polarization.

PS, LS, CS, KS = P-band, L-band, C-band, and K-band scatterometers. H and V refer to horizontal and vertical polarization. X indicates "sensor on."

PMIS = Passive Microwave Imaging System. X indicates "sensor on."

PRT = PRT-5 passive radiometer; M = mid-range; H = high range.

MMS = Modular multispectral scanner. The numbers indicate the scan rate.

TABLE 2.- DATA ACQUIRED BY FLIGHT LINE AND SEQUENCE

(a) Data flight 4 - July 18 (Julian day 199).

Alt.	App	I	R	GMT	Time recorder				GS	UR	TD	RR	LD	LR	PS	LS	KS	PHYS	DRT	RMS	Z	AMP	H	KZ
					A	B	C	D																
B	A	1	0	17:00:45	148			149	90	2.1	94	1.00						X	H	16	X			
B	A	2	0	17:01:25	148			149	77	5.7	7	0.29						X	H	15	X			
B	A	3	0	17:02:20	148			149	60	0.1	76	0.19						X	H	14	X			
B	A	4	0	17:03:30	148			149	76	2.1	101	0.19						X	H	15	X			
B	A	5	0	17:04:20	148			149	75	4.2	158	0.12						X	H	15	X			
B	A	6	0	17:05:20	148			149	61	0.6	89	0.19						X	H	16	X			
1.5	A	4	1	17:02:20	148	350	351	149	64	6.1	273	1.11	0		H	H	H	X		M	72	X	X	
1.5	A	5	1	17:03:20	148	350	351	149	61	6.0	281	1.06	0		H	H	H	X		M	72	X	X	
1.5	A	7	1	17:05:45	148	350	351	149	40	1.0	1	1.39	0		H	H	H	X		M	63	X	X	
1.5	A	1	1	17:07:55	148	350	351	149	53	9.1	283	1.51	0		H	H	H	X		M	74	X	X	
1.5	A	5	1	17:07:45	148	350	351	149	82	4.3	175	1.44	0		H	H	H	X		H	79	X	X	
1.5	A	6	1	17:08:25	148	350	351	149	74	3.5	3	1.39	0		H	H	H	X		M	61	X	X	
1.5	A	7	1	17:09:50	148	350	351	149	50	2.5	104	1.40	0		H	H	H	X		M	67	X	X	
1.5	A	4	2	17:58:30	152	350	351	149	70	2.4	273	1.47	40		V	V	V	X		H	71	X		
1.5	A	5	2	17:06:20	152	350	351	149	46	6.1	25	1.29	40		V	V	V	X		M	67	X		
1.5	A	7	2	17:13:20	152	350	351	149	69	1.0	5	1.49	40		V	V	V	X		M	65	X		
1.5	A	1	2	17:26:45	152	354	355	151	69	5.9	273	1.53	40		V	V	V	X		H	76	X		
1.5	A	5	2	17:34:40	152	354	355	151	67	6.0	177	1.34	40		V	V	V	X		H	76	X		
1.5	F	4	1	17:31:25	152	354		151	63	4.2	273	1.53	0		H	H		X		H	74	X	X	
1.5	F	5	1	17:33:00	152	354		151	44	7.9	24	1.40	0		H	H		X		H	67	X	X	
1.5	F	7	1	17:00:14	152	354		151	41	2.3	4	1.40	0		H	H		X		H	61	X	X	
1.5	F	1	1	17:00:56	152	354		151	59	3.0	5	1.52	0		H	H		X		H	76	X	X	
1.5	F	5	1	17:01:10	152	354		151	66	3	1.5	1.50	0		H	H		X		H	76	X	X	
1.5	F	6	2	17:01:35	152	354		151	57	3.6	1	1.53	0		H	H		X		H	65	X	X	
1.5	F	7	2	17:02:00	152	354		151	5	1.4	21	1.56	0		H	H		X		H	67	X	X	
1	F	4	4	17:04:45	156	350		152	67	1.3	1	1.19	40		H	H		X		H	80	X	X	
1	F	5	4	17:05:30	156	350		152	46	5.0	1	1.40	40		H	H		X		H	80	X	X	
1	F	7	4	17:06:10	156	350		152	74	3.7	1	1.40	40		H	H		X		H	80	X	X	
1	F	1	4	17:06:10	156	350		152	55	2.5	2	1.40	40		H	H		X		H	80	X	X	
1	F	5	1	17:06:30	156	350		152	71	4.1	7	1.40	40		H	H		X		H	80	X	X	
1	F	1	5	17:07:00	156	350		152	69	4.1	2.0	1.00	4		V	V		X		H	80	X	X	
1	F	5	5	17:07:50	156	350		152	50	4.1	1	1.00	10		V	V		X		H	80	X	X	
1	F	7	5	17:08:10	156	350		152	40	5.4	1	1.00	10		V	V		X		H	80	X	X	
1	F	1	5	17:08:50	156	350		152	55	4.2	2.0	1.00	10		V	V		X		H	80	X	X	
1	F	5	5	17:09:10	156	350		152	60	2.4	1.0	1.00	10		V	V		X		H	80	X	X	

LOW SIGNAL GAIN IS
OF POOR QUALITY

E-7
128

TABLE 2.— Continued.

(b) Data flight 5 — July 20 (Julian day 201).

Alt.	A/P	L	R	GMT	Tape recorder				GS	DR	TH	RA	KR	CR	LR	PS	LS	CS	KS	PHIS	PRT	RMS	Z	AMPS	H	KZ
					A	B	C	D																		
1	P	4	4	16:05:40	359	360		362	63	4.7 L	276	.85	40°	40° H					X	X	H	80	X			
1	P	3	4	16:12:10	359	360		362	43	3.0 L	95	.93	40°	40° H					X	X	H	80	X			
1	P	7	4	16:19:30	359	360		362	47	5.2 L	7	1.00	40°	40° H					X	X	H	80	X			
1	P	1	4	16:25:00	359	360		362	58	1.2 L	269	1.09	40°	40° H					X	X	H	80	X			
1	P	5	4	16:29:40	359	360		362	51	1.6 R	172	1.03	40°	40° H					X	X	H	80	X			
1	P	4	5	16:39:20	359	360		362	59	1.7 L	272	1.01	40°	40° V					X	X	H	80	X			
1	P	3	5	16:45:30	359	360		362	39	2.3 L	92	.94	40°	40° V					X	X	H	80	X			
1	F	7	5	16:51:50	359	360		362	55	5.8 L	16	1.09	40°	40° V					X	X	H	80	X			
1	P	1	5	16:57:10	359	360		362	71	0.5 L	269	1.14	40°	40° V					X	X	H	80	X			
1	P	5	5	17:01:59	359	360		362	45	4.4 R	169	1.04	40°	40° V					X	X	H	70	X			
1.5	P	4	3	17:13:55	359	360		363	68	0	289	1.37	0°	0° H					X	X	H	76	X			
1.5	P	3	3	17:20:55	359	360		363	37	3.7 L	92	1.23	0°	0° H					X	X	H	61	X			
1.5	P	7	3	17:28:10	359	360		363	52	3.6 L	5	1.39	0°	0° H					X	X	H	61	X			
1.5	P	1	3	17:35:00	359	360		363	64	2.6 R	267	1.48	0°	0° H					X	X	H	74	X			
1.5	P	1	7	17:47:45	364	365		363	62	1.0 R	267	1.50	0°	0° H					X	X	H	74	X			
1.5	P	5	3	17:53:20	364	365		363	45	3.5 R	177	1.39	0°	0° H					X	X	H	65	X			
1.5	P	6	2	17:59:15	364	365		363	51	3.8 L	4	1.32	0°	0° H					X	X	H	65	X			
1.5	P	2	2	18:12:55	364	365		363	40	3.3 L	92	1.33	0°	0° H					X	X	H	63	X			
1.5	A	4	1	18:22:10	A	B	D	R	E	D																
1.5	A	4	1	18:25:54	364	365	361	363	55	5.4 R	267	1.50	0°	0° H	H	H	H	X			H	72	X	X		
1.5	A	3	1	18:32:20	364	365	361	363	34	3.4 L	92	1.25	0°	0° H	H	H	H	X			H	61	X	X		
1.5	A	7	1	18:44:15	364	365	361	363	53	7.7 L	18	1.39	0°	0° H	H	H	H	X			H	67	X	X		
1.5	A	1	1	18:57:25	364	365	361	366	61	2.5 R	267	1.49	0°	0° H	H	H	H	X			H	72	X	X		
1.5	A	5	1	19:03:50	364	365	361	366	54	3.5 R	177	1.59	0°	0° H	H	H	H	X			H	70	X	X		
1.5	A	6	1	19:16:40	364	365	361	366	60	0.8 L	0	1.49	0°	0° H	H	H	H	X			H	72	X	X		
1.5	A	2	1	19:25:15	364	365	361	366	60	0.8 R	94	1.40	0°	0° H	H	H	H	X			H	70	X	X		
1.5	A	4	2	19:32:45	364	365	361	366	67	3.9 R	265	1.55	40°	40° V	V	V	V	X			H	74	X			
1.5	A	1	2	19:38:35	364	365	361	366	53	3.6 L	95	1.48	40°	40° V	V	V	V	X			H	70	X			
1.5	F	7	2	19:44:25	364	365	361	366	59	4.2 L	5	1.41	40°	40° V	V	V	V	X			H	70	X			
1.5	A	1	2	19:52:15	364	367	361	366	60	5.1 R	266	1.42	40°	40° V	V	V	V	X			H	76	X			
1.5	A	5	2	19:57:50	364	367	361	366	54	3.6 R	175	1.55	40°	40° V	V	V	V	X			H	70	X			
1.5	A	7	7	20:05:35	368	367	361	366	77	1.9 L	0	1.49	40°	40° V	V	V	V	X			H	76	X			
1.5	A	5	7	20:11:50	368	367	361	366	40	4.0 R	175	1.48	40°	40° V	V	V	V	X			H	66	X			
8	A	3	6	20:27:40	368			369	82	5.3 L	90	0.03							X		H	13	X			
8	A	7	6	20:36:49	368			369	79	6.3 R	344	7.85							X		H	15	X			
8	A	1	6	20:45:10	368			369	57	4.9 R	259	0.06							X		H	13	X			
8	A	5	6	20:52:25	368			369	59	5.7 L	180	7.96							X		H	13	X			
8	A	6	3	20:58:35	368			369	96	2.2 R	4	7.80							X		H	15	X			
8	A	2	3	21:06:50	368			369	92	3.0 L	107	7.81							X		H	16	X			

E-8
129

TABLE 2.- Continued.

(c) Data flight 6/12 - July 21 (Julian day 202).

Alt.	A/P	L	R	GMT	Tape recorder				GS	DH	TH	HA	KR	CR	LR	PS	LS	CS	KS	PMS	PRT	HMS	Z	ANPS	H	KZ
					A	B	C	D																		
1.5	A	4	1	15:55:00	370	371	372	373	52	8.2 L	263	1.49		0		H	H	H	X		M	67	X			
1.5	A	3	1	16:03:00	370	371	372	373	50	3.0 L	93	1.33		0		H	H	H	X		M	67	X			
1.5	A	7	1	16:10:50	370	371	372	373	62	5.7 R	356	1.49		0		H	H	H	X		M	69	X			
1.5	A	1	1	16:17:55	370	371	372	373	52	7.0 R	259	1.59		0		H	H	H	X		M	69	X			
1.5	A	5	1	16:24:50	370	371	372	373	51	2.9 L	181	1.50		0		H	H	H	X		M	67	X			
1.5	A	6	1	16:30:45	370	371	372	373	54	4.3 R	355	1.39		0		H	H	H	X		M	67	X			
1.5	A	2	1	16:39:35	370	371	372	373	48	2.4 L	94	1.43		0		H	H	H	X		M	67	X			
1.5	A	4	2	16:46:15	370	371	372	373	45	7.7 R	258	1.54		40		V	V	V	X		M	67	X			
1.5	A	3	2	16:54:35	370	371	372	373	52	3.1 L	93	1.35		40		V	V	V	X		M	67	X			
1.5	A	7	2	17:02:10	370	371	372	373	56	6.4 R	354	1.29		40		V	V	V	X		M	67	X			
1.5	A	1	2	17:09:20	370	371	372	373	48	8.6 R	263	1.54		40		V	V	V	X		M	67	X			
1.5	A	5	2	17:16:35	370	371	372	374	40	1.6 R	100	1.48		40		V	V	V	X		M	67	X			
1.5	P	4	3	17:29:45	370	371		374	49	8.4 R	263	1.44	C*		0*				X	X	M	67	X			
1.5	P	3	3	17:45:05	376	375		374	46	2.3 L	95	1.49	0*		0*				X	X	M	67	X			
1.5	P	7	3	17:53:15	376	375		374	47	3.3 R	356	1.43	0*		0*				X	X	M	67	X			
1.5	P	1	3	18:01:00	376	375		374	53	4.2 R	266	1.53	0*		0*				X	X	M	67	X			
1.5	P	5	3	18:09:15	376	375		374	49	1.1 L	179	1.48	0*		0*				X	X	M	67	X			
1.5	P	6	2	18:15:35	376	375		374	49	1.9 R	01	1.39	0*		0*				X	X	M	67	X			
1.5	P	2	2	18:25:00	376	375		374	50	1.7 L	89	1.50	0*		0*				X	X	M	67	X			
1	P	4	4	18:31:50	376	375		374	47	2.4 R	270	.97	40*		40*				X	X	M	80	X			
1	P	3	4	18:39:35	376	375		374	50	2.6 R	85	.94	40*		40*				X	X	M	80	X			
1	P	7	4	18:47:00	376	375		374	52	0.5 R	354	.95	40*		40*				X	X	M	80	X			
1	P	1	4	18:54:00	376	375		377	51	1.1 R	272	1.07	40*		40*				X	X	M	80	X			
1	P	5	4	19:00:05	376	375		377	57	1.1 L	184	.96	40*		40*				X	X	-	80	X			
1	P	4	5	19:08:45	376	375		377	46	1.7 L	272	1.00	40*		40*				X	X	M	80	X			
1	P	3	5	19:22:55	376	378		377	51	5.2 R	85	.97	40*		40*				X	X	M	80	X			
1	P	7	5	19:29:50	376	378		377	47	0	01	.99	40*		40*				X	X	M	80	X			
1	P	1	5	19:39:15	379	378		377	49	3.4 L	277	.92	40*		40*				X	X	M	80	X			
1	P	5	5	19:45:20	379	378		377	53	2.2 R	179	.97	40*		40*				X	X	M	80	X			
1	P	7	7	19:51:45	379	378		377	41	0	.59	1.04	40*		40*				X	X	M	80	X			
8	A	1	6	20:04:05	379			377	69	9.3 R	256	7.89								X	M	28	X	X		
8	A	3	6	20:15:45	379			377	91	8.1 L	101	7.92								X	M	32	X	X		
		2	1	20:52:04	379			377	31	7.3 R	83	.42									M	80	X	X		
	Yuma, Colo.	3	1	20:55:20	379			377	32	6.6 R	85	.40									M	80	X	X		
		1	1	20:58:30	379			377	39	0	84	.41										M	80	X	X	
		1	2	21:02:10	379			377	37	3.2 R	90	.41										M	80	X	X	

A recorder off, rerun as Time 7-7.

*PRT-5 and TAT late.

130

TABLE 2.- Continued.

(d) Data flight 7 - July 22 (Julian day 203).

Alt.	A/P	L	R	GMT	Tape recorder				GS	DR	TH	RA	RR	CR	LR	PS	LS	ES	KS	PWIS	PRT	NWS	Z	AMP'S	H	KZ
					A	B	C	D																		
1	P	4	4	16:01:55	380	381			48	7.1	277	1.00	40"	40"					X	X*	M		X			
1	P	4	7	16:18:15	380	381		383	40	6.1	276	1.13	40"	40"					X	X	M	RO	X			
1	P	3	4	16:32:10	380	381		383	54	7.2	79	1.00	40"	40"					X	X	M	RO	X			
1	P	7	4	16:40:10	380	381		383	46	2.7	359	1.07	40"	40"					X	X	M	RO	X			
1	P	1	4	16:46:45	380	381		383	41	6.7	276	1.11	40"	40"					X	X	M	RO	X			
1	P	5	4	16:54:50	380	381		383	59	3.3	186	.93	40"	40"					X	X	M	RO	X			
1	P	4	5	17:03:25	380	381		383	49	6.6	277	1.06	40"	40"					X	X	M	RO	X			
1	P	2	5	17:11:40	380	381		383	52	8	82	.88	40"	40"					X	X	M	RO	X			
1	P	7	5	17:19:10	380	381		383	40	1.2	357	1.07	40"	40"					X	X	M	RO	X			
1	P	1	5	17:27:00	380	381		384	50	7.7	270	1.11	40"	40"					X	X	M	RO	X			
1	P	5	5	17:33:30	380	381		384	55	4.2	186	.93	40"	40"					X	X	M	RO	X			
1.5	P	4	3	17:42:15	380	381		384	44	5.9	280	1.04	0"	0"					X	X	M	67	X			
1.5	P	3	3	17:50:50	380	381		384	54	7.0	87	1.46	0"	0"					X	X	M	67	X			
1.5	P	7	3	18:02:00	385	386		384	42	5.0	354	1.57	0"	0"					X	X	M	67	X			
1.5	P	1	3	18:09:10	385	386		384	53	6.9	276	1.5	0"	0"					X	X	M	67	X			
1.5	P	5	3	18:15:34	385	386		384	60	2.4	185	1.45	0"	0"					X	X	M	70	X			
1.5	P	6	2	18:21:55	385	386		384	38	3.4	355	1.5	0"	0"					X	X	M	70	X			
1.5	P	2	2	18:31:00	385	386		384	45	7.7	81	1.48	0"	0"					X	X	M	67	X			
1.5	A	4	1	18:40:35	385	386	387	384	51	6.3	280	1.50	0"	0"	H	H	H	X			M	67	X			
1.5	A	3	1	18:47:55	385	386	387	387	51	5.0	84	1.39	0"	0"	H	H	H	X			M	67	X			
1.5	A	7	1	18:55:25	385	386	387	387	41	1.2	360	1.54	0"	0"	H	H	H	X			M	67	X			
1.5	A	1	1	19:02:20	385	386	387	387	53	6.1	276	1.58	0"	0"	H	H	H	X			M	67	X			
1.5	A	5	1	19:08:30	385	386	387	387	60	0.6	181	1.50	0"	0"	H	H	H	X			M	67	X			
1.5	A	6	1	19:15:00	385	386	387	387	48	0.7	358	1.66	0"	0"	H	H	H	X			M	67	X			
1.5	A	2	1	19:23:30	385	386	387	387	52	6.9	85	1.52	0"	0"	H	H	H	X			M	67	X			
1.5	A	4	2	19:33:00	385	386	387	387	50	9.4	278	1.57	40"	40"	V	V	V	X			M	67	X	X		
1.5	A	3	2	19:40:35	385	386	387	387	54	7.0	85	1.45	40"	40"	V	V	V	X			M	67	X	X		
1.5	A	7	2	19:52:55	388	389	387	387	47	1.5	5	1.49	40"	40"	V	V	V	X			M	67	X	X		
1.5	A	1	2	19:58:50	388	389	387	387	50	4.7	276	1.60	40"	40"	V	V	V	X			M	67	X	X		
1.5	A	5	2	20:06:30	388	389	387	387	52	2.2	180	1.47	40"	40"	V	V	V	X			M	60	X	X		

*PWIS not noted on Instrument Summary Inflight Log.

TABLE 2.- Continued.

(e) Data flight 8 - August 8 (Julian day 220).

Alt.	A/P	L	R	GMT	Tape recorder				GS	DH	TH	RA	KR	CR	LR	PS	LS	CS	KS	PHIS	PRT	RWS	Z	AMP	N	KZ
					A	B	C	D																		
8	A	3	6	18:11:15	415				418	60	3.4 R	87	7.67							X	H	14	X	X	X	
8	A	7	6	18:19:10	415				418	60	5.1 L	358	8.07							X	M	15	X	X	X	
5	A	1	6	18:27:15	415				418	89	2.2 L	269	7.98							X	M	15	X	X	X	
8	P	5	6	18:34:15	415				418	82	2.8 L	176	7.87							X	M	15	X	X	X	
8	A	6	5	18:39:45	415				418	60	4.9 L	8	8.15							X	M	15	X	X	X	
8	A	2	3	18:49:30	415				418	53	4.0 R	82	8.07							X	M	15	X	X	X	
1.5	P	4	3	19:01:40	415	416			418	51	5.8 R	269	1.54	0°	0° H				X	X	H	67			X	
1.5	P	3	3	19:09:40	415	416			418	50	1.7 L	95	1.35	0°	0° H				X	X	H	67			X	
1.5	P	7	3	19:17:20	415	416			418	44	3.0 L	6	1.39	0°	0° H				X	X	H	67			X	
1.5	P	1	3	19:25:20	415	416			418	53	3.2 R	270	1.40	0°	0° H				X	X	H	67			X	
1.5	P	5	3	19:31:50	415	416			418	54	2.9 R	178	1.60	0°	0° H				X	X	H	67			X	
1.5	P	6	2	19:38:15	415	416			418	47	3.2 L	4	1.42	0°	0° H				X	X	H	67			X	
1.5	P	2	7	19:52:50	419	420			418	47	0.9 L	92	1.54	0°	0° H				X	X	H	67			X	
1	P	4	4	20:00:50	419	420			418	54	3.6 R	269	1.01	40°	40° H				X	X	H	80			X	
1	P	3	4	20:09:00	419	420			422	49	1.4 L	92	1.05	40°	40° H				X	X	H	80			X	
1	P	7	4	20:15:40	419	420			422	48	5.9 L	9	.93	40°	40° H				X	X	H	80			X	
1	P	1	4	20:23:15	419	420			422	46	4.9 R	267	.99	40°	40° H				X	X	H	80			X	
1	P	5	4	20:31:15	419	420			422	50	3.4 R	177	1.09	40°	40° H				X	X	H	80			X	
1	P	4	5	20:39:25	419	420			422	50	2.2 R	268	.96	40°	40° V				X	X	H	80			X	
1	V	3	5	20:46:35	419	420			422	53	3.1 L	95	1.00	40°	40° V				X	X	H	80			X	
1	P	7	5	20:53:25	419	420			422	50	5.3 L	4	.96	40°	40° V				X	X	H	80			X	
1	P	1	5	21:00:45	419	420			422	45	5.7 R	266	.99	40°	40° V				X	X	H	80			X	
1	P	5	5	21:06:40	419	420			422	51	2.4 R	180	1.00	40°	40° V				X	X	H	80			X	
1.5	A	4	1	21:19:15	421	423	417	424	49	3.0 R	267	1.48		0°		H	H	H	X			H	80			X
1.5	A	3	1	21:27:20	421	423	417	424	41	0.6 R	91	1.49		0°		H	H	H	X			K	80			X
1.5	A	3	1	21:34:10	421	423	417	424	58	3.7 L	10	1.48		0°		H	H	H	X			M	80			X
1.5	A	1	1	21:41:55	421	423	417	424	53	4.9 R	264	1.48		0°		H	H	H	X			M	80			X
1.5	A	5	1	21:48:30	421	423	417	424	47	2.8 R	178	1.58		0°		H	H	H	X			M	80			X
1.5	A	6	1	21:54:25	421	423	417	424	47	6.2 L	4	1.57		0°		H	H	H	X			M	80			X
1.5	A	2	1	22:04:05	421	423	417	424	56	0.1 L	93	1.51		0°		H	H	H	X			M	67			X
1.5	A	4	2	22:13:30	421	423	417	424	54	1.7 R	268	1.48		40°		V	V	V	X			M	67			X
1.5	A	3	2	22:21:00	421	423	417	424	51	0.9 R	90	1.49		40°		V	V	V	X			M	67			X
1.5	A	7	2	22:29:05	421	423	417	425	49	5.5 L	4	1.41		40°		V	V	V	X			M	67			X
1.5	A	1	2	22:36:15	421	423	417	425	47	4.2 R	265	1.48		40°		V	V	V	X			M	67			X
1.5	A	5	2	22:41:55	421	423	417	425	56	4.8 R	178	1.47		40°		V	V	V	X			M	67			X

TABLE 2.- Continued.

(f) Data flight 9/13 - August 9 (Julian day 221).

Alt.	A/P	L	R	GMT	Tape recorder				GS	DR	TH	RA	KR	CR	LR	PS	LS	CS	KS	PHIS	PRT	HMS	Z	AMPS	H	K2
					A	B	C	D																		
1.5	A	4	1	15:45:00	426	427	428	429	41	1.2 R	266	1.30		0°		H	H	H	X		M	67			X	
1.5	A	3	1	15:52:05	426	427	428	429	53	2.7 L	94	1.45		0°		H	H	H	X		M	67			X	
1.5	A	7	1	15:59:10	426	427	428	429	65	0.3 L	7	1.46		0°		H	H	H	X		M	67			X	
1.5	A	1	1	16:05:50	426	427	428	429	56	0.7 R	271	1.53		0°		H	H	H	X		M	67			X	
1.5	A	5	1	16:13:35	426	427	428	429	51	0.8 R	177	1.48		0°		H	H	H	X		M	67			X	
1.5	A	6	1	16:19:40	426	427	428	429	53	0.9 R	351	1.45		0°		H	H	H	X		M	67			X	
1.5	A	2	1	16:28:45	426	427	428	429	51	0	90	1.43		0°		H	H	H	X		M	67			X	
1.5	A	4	2	16:35:43	426	427	428	429	49	2.3 R	265	1.49		40°		V	V	V	X		M	67			X	
1.5	A	3	2	16:43:20	426	427	428	429	48	0	91	1.49		40°		V	V	V	X		M	67			X	
1.5	A	7	2	16:50:45	426	427	428	429	57	0.4 L	6	1.40		40°		V	V	V	X		M	67			X	
1.5	A	1	2	16:58:25	426	427	428	430	50	2.8 R	270	1.57		40°		V	V	V	X		M	67			X	
1.5	A	5	2	17:05:15	426	427	428	430	56	2.4 R	180	1.49		40°		V	V	V	X		M	67			X	
1.5	P	4	3	17:21:50	431	432		430	49	1.3 L	267	1.48	0°	0° H					X	X	M	67			X	
1.5	P	3	3	17:33:45	431	432		430	49	3.4 L	91	1.5	0°	0° H				X	X	M	67			X		
1.5	P	7	3	17:41:55	431	432		430	52	2.0 L	3	1.47	0°	0° H				X	X	M	67			X		
1.5	P	1	3	17:49:05	431	432		430	50	2.0 R	268	1.56	0°	0° H				X	X	M	67			X		
1.5	P	5	3	17:57:05	431	432		430	44	1.7 R	179	1.49	0°	0° H				X	X	M	67			X		
1.5	P	6	2	18:03:05	431	432		430	49	1.5 L	2	1.49	0°	0° H				X	X	M	67			X		
1.5	P	2	2	18:12:30	431	432		430	43	3.0 L	94	1.47	0°	0° H				X	X	M	67			X		
1	P	4	4	18:19:50	431	432		430	49	2.1 R	268	1.06	40°	40° H				X	X	M	80			X		
1	P	3	4	18:29:10	431	432		433	52	1.5 L	93	.93	40°	40° H				X	X	M	80			X		
1	P	7	4	18:37:40	431	432		433	49	1.3 L	4	.94	40°	40° H				X	X	M	80			X		
1	P	1	4	18:44:45	431	432		433	55	1.4 R	268	1.08	40°	40° H				X	X	M	80			X		
1	P	5	4	18:51:40	431	432		433	52	1.5 R	179	.96	40°	40° H				X	X	M	80			X		
1	P	4	5	19:12:25	434	435		433	47	0.6 L	271	.96	40°	40° V				X	X	M	80	X		X		
1	P	3	5	19:20:30	434	435		433	47	0.4 L	90	1.05	40°	40° V				X	X	M	80	X		X		
1	P	7	5	19:32:45	434	435		433	49	2.8 L	1.2	1.14	40°	40° V				X	X	M	80	X		X		
1	P	1	5	19:39:55	434	435		433	52	4.5 R	269	1.01	40°	40° V				X	X	M	80	X		X		
1	P	5	5	19:51:05	434	435		436	48	3.0 R	180	1.0	40°	40° V				X	X	M	80	X		X		
7	A	3	6	20:05:40	434			436	66	2.2 L	93	7.2							X	M	30	X	X			
7	A	7	6	20:13:50	434			436	78	1.4 L	17	6.9							X	M	30	X	X			
7	A	1	6	20:20:45	434			436	79	0	270	7.0							X	M	30	X	X			
		2	1	20:49:20	434			436	40	2.9 L	93	.45								M	80	X	X			
Yuma, Colo.		1	1	20:53:35	434			436	33	1.8 L	90	.52								M	80	X	X			
		1	2	20:57:20	434			436	34	4.0 L	96	.45								M	80	X	X			
		3	1	21:01:35	434			436	39	3.2 L	91	.45								M	80	X	X			

¹No photographic coverage.

ORIGINAL PAGE IS
OF POOR QUALITY

E-12

TABLE 2.— Concluded.

(g) Data flight 10 — August 11 (Julian day 223).

Alt.	A/P	L	R	GHT	Tape recorder				GS	OR	TH	RA	KR	CR	LR	PS	LS	CS	KS	PMIS	PRT	HMS	Z	AMPS	H	K2
					A	B	C	D																		
1	P	4	2 ¹	09:15:35	437	438		440	55	7.6 R	263	1.03	40°	40° H					X	X	M	80				
1	P	3	2 ¹	09:25:35	437	438		440	59	7.6 L	98	.94	40°	40° H					X	X	M	80				
1	P	7	2 ¹	09:35:20	437	438		440	72	4.1 R	355	.93	40°	40° H					X	X	M	80				
1	P	1	2 ¹	09:44:35	437	438		440	51	7.3 R	261	1.14	40°	40° H					X	X	M	80				
1	P	5	2 ¹	09:53:35	437	438		440	51	3.6 L	177	1.04	40°	40° H					X	X	M	80				
1	P	4	3 ¹	10:08:35	437	438		440	47	7.5 R	262	.99	40°	40° V					X	X	M	80				
1.5	P	4	1 ¹	10:34:55	437	438		441	46	6.5 R	259	1.54	0°	0° H					X	X	M	67				
1.5	P	3	1 ¹	10:43:20	437	438		441	63	4.2 L	91	1.44	0°	0° H					X	X	M	67				
1.5	P	7	1 ¹	10:52:35	437	438		441	62	3.1 R	359	1.38	0°	0° H					X	X	M	74				
1.5	P	1	1 ¹	11:00:40	437	438		441	59	2.8 R	260	1.58	0°	0° H					X	X	M	67				
1.5	P	5	1 ¹	11:07:20	437	438		441	42	5.1 L	170	1.45	0°	0° H					X	X	M	67				
1.5	P	6	1 ¹	11:16:55	442	443		441	63	2.6 R	358	1.50	0°	0° H					X	X	M	67				
1.5	P	2	1 ¹	11:30:50	442	443		441	55	5.6 L	94	1.44	0°	0° H					X	X	M	67				
1.5	A	4	4	11:50:40	442	443	439	441	46	5.1 R	263	1.50	0°		H	H	H	X			M	67	X			
1.5	A	3	4	11:57:25	442	443	439	441	51	1.9 L	92	1.45	0°		H	H	H	X			M	67	X			
1.5	A	7	4	12:05:50	442	443	439	444	52	1.9 R	358	1.53	0°		H	H	H	X			M	67	X			
1.5	A	1	4	12:12:25	442	443	439	444	46	0	254	1.64	0°		H	H	H	X			M	67	X			
1.5	A	8	4	12:20:10	442	443	439	444	52	3.3 L	181	1.53	0°		H	H	H	X			M	67	X			
1.5	A	6	2	12:26:10	442	443	439	444	52	3.5 R	353	1.53	0°		H	H	H	X			M	67	X			
1.5	A	2	2	12:36:20	442	443	439	444	51	0	91	1.45	0°		H	H	H	X			M	67	X			
1.5	A	4	5	12:50:15	442	443	439	444	34	4.6 R	266	1.44	40°		V	V	V	X			M	67	X			
1.5	A	3	5	12:57:01	442	443	439	444	54	2.4 L	93	1.33	40°		V	V	V	X			M	67	X			
1.5	A	7	5	13:03:20	442	443	439	444	65	0	2	1.47	40°		V	V	V	X			M	67	X			
1.5	A	1	5	13:10:15	442	443	439	444	45	3.9 R	273	1.58	40°		V	V	V	X			M	63	X			
1.5	A	5	5	13:19:05	442	445	439	444	50	1.6	181	1.53	40°		V	V	V	X			M	67	X			

*No camera data — pre-dawn passes.

Z = Zeiss camera (6-inch lens). X indicates "camera on."

AMPS = AMPS camera (six-camera system). X indicates "camera on."

H = Hasselblad camera. X indicates "camera on."

KZ = K-band zenith radiometer (MFMR). X indicates "Radiometer on."

The four data tape recorders referred to as A, B, C, and D were used in the following manner:²

Data flt. no.	Sensor			
	Recorder A (PMIS, PRT-5, all radiometers, NERDAS, TAT)	Recorder B (K-band and C-band scatterometer)	Recorder C (P-band and L-band scatterometer)	Recorder D (MMS)
4	348, 352, 356	350, 354, 358	351, 355	349, 353, 357
5	359, 364, 368	360, 365, 367	361	362, 363, 366, 369
6	370, 376, 379	371, 375, 378	372	373, 374, 377
7	380, 385, 388	381, 386, 389	382	383, 384, 387
8	415, 419, 421	416, 420, 423	417	418, 422, 424, 425
9	426, 431, 434	427, 432, 435	428	429, 430, 433, 436
10	437, 442	438, 443, 445	439	440, 441, 444

In addition to the data shown in table 2, a complete set of data from the NASA Earth Resources Data Annotation System (NERDAS) was available for all runs, and the outside temperature (called total air temperature in the flight log) was available for all runs except run 4 of flight line 5 of data flight 6.

Table 3 catalogs the film data taken. It is arranged in the same sequence as table 2 and gives magazine (roll) number and frame numbers for each run over each flight line. In addition, it gives both the start and stop times for each run.

²The numbers in the following table are the last three digits of the raw data tape numbers. The prefix is L05-0-005.

TABLE 3.— SUMMARY SHEET SHOWING CAMERA FILM DATA BY DATA FLIGHT AND LINE-RUN FOR ASME — SUMMER 1978

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks			
			Zeiss			AMPS			Hasselblad			Film type						
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type							
4	3-6	17:00:45-17:04:40	3	1-17	CIR													
	7-6	17:08:25-17:12:00	3	18-32	CIR													
	1-6	17:16:28-17:19:55	3	33-46	CIR													
	5-6	17:23:30-17:27:05	3	47-60	CIR													
	6-3	17:29:20-17:33:10	3	61-75	CIR													
	2-3	17:38:20-17:41:10	3	76-87	CIR													
	4-1	17:57:20-18:01:05	3	88-125	CIR	4-9	1-114	B/W B/WIR										
	3-1	18:04:20-18:08:30	3	126-167	CIR	4-9	115-240											
	7-1	18:15:45-18:19:20	3	168-205	CIR	10-15	1-113											
	1-1	18:21:55-18:24:45	3	206-236	CIR	10-15	114-195											
	5-1	18:27:45-18:30:30	3	237-270	CIR	10-15	196-279											
	6-1	18:41:25-18:45:45	16	1-46	CIR	17-22	1-131											
	2-1	18:49:50-18:52:45	16	47-76	CIR	17-22	132-219											
	4-2	18:59:30-19:03:20	16	77-115	CIR													
	3-2	19:06:20-19:10:20	16	116-156	CIR													
	7-2	19:14:20-19:18:15	16	157-196	CIR													
	1-2	19:28:45-19:31:40	16	197-229	CIR													
	5-2	19:34:40-19:37:40	16	230-265	CIR													
	4-3	19:46:25-19:50:15	16	266-304	CIR													
	3-3	19:53:00-19:57:25	16	305-348	CIR													
7-3	20:00:14-20:04:00	16	349-386	CIR														
1-3	20:06:50-20:09:30	16	387-415	CIR														
5-3	20:13:35-20:16:45	23	1-32	CIR														
6-2	20:19:35-20:23:35	23	33-69	CIR														
2-2	20:28:55-20:31:45	23	70-94	CIR														

F-15
136

TABLE 3.— Continued.

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks
			Zeiss			AMPS			Hasselblad			Film type			
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type				
4	4-4	20:46:45-20:50:30	23	95-147	CIR										
	3-4	20:53:30-20:57:50	23	148-213	CIR										
	7-4	21:02:30-21:05:55	24	1-50	CIR										
	1-4	21:08:10-21:10:40	24	51-88	CIR										
	5-4	21:13:30-21:16:50	24	89-136	CIR										
	4-5	21:22:30-21:26:10	24	137-190	CIR										
	3-5	21:28:50-21:33:10	24	191-255	CIR										
	7-5	21:40:35-21:44:05	25	1-53	CIR										
	1-5	21:46:50-21:49:30	25	54-93	CIR										
	5-5	21:52:35-21:55:40	25	94-141	CIR										
5	4-4	16:05:40-16:09:20	26	1-56	CIR										
	3-4	16:12:10-16:16:25	26	57-121	CIR										
	7-4	16:19:30-16:22:45	26	122-171	CIR										
	1-4	16:25:00-16:27:35	26	172-210	CIR										
	5-4	16:29:40-16:33:00	26	211-261	CIR										
	4-5	16:39:20-16:42:45	27	1-52	CIR										
	3-5	16:45:30-16:49:40	27	53-116	CIR										
	7-5	16:51:50-16:55:00	27	117-164	CIR										
	1-5	16:57:10-16:59:50	27	165-205	CIR										
	5-5	17:01:59-17:05:20	27	206-256	CIR										
6	4-3	17:13:55-17:17:30	28	1-36	CIR										
	3-3	17:20:55-17:25:05	28	37-78	CIR										
	7-3	17:28:10-17:31:25	28	79-111	CIR										
	1-3	17:35:00-17:37:50	28	112-141	CIR										
	1-7	17:47:45-17:50:35	28	142-170	CIR										
	5-3	17:53:20-17:57:10	28	171-209	CIR										
	6-2	17:59:15-18:03:00	28	210-247	CIR										
	2-2	18:12:55-18:16:05	29	3-34	CIR										(Frames 1 and 2 — No data)

E 16
137

TABLE 3.— Continued

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks		
			Zeiss			AMPS			Hasselblad			Film type					
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type						
5	4-1	18:22:10-18:22:15	29	35-37	CIR	30-35	1-7	B/W & B/WIR									
	4-1	18:25:54-18:29:40	29	38-75	CIR	30-35	8-121										
	3-1	18:32:20-18:36:50	29	76-121	CIR	30-35	122-257										
	7-1	18:44:15-18:47:45	29	122-157	CIR	36-40 plus 47	1-107										
	1-1	18:57:25-19:00:20	29	158-187	CIR	"	108-195										
	5-1	19:03:50-19:07:20	29	188-223	CIR	"	196-301										
	6-1	19:16:40-19:20:10	29	224-259	CIR	41-46	1-103										
	2-1	19:25:15-19:28:10	48	1-29	CIR	41-46	104-191										
	4-2	19:32:45-19:36:20	48	30-66	CIR												
	3-2	19:38:35-19:42:35	48	67-107	CIR												
	7-2	19:44:25-19:47:40	48	108-140	CIR												
	1-2	19:52:15-19:55:10	48	141-170	CIR												
	5-2	19:57:50-20:01:29	48	171-211	CIR												
	7-7	20:05:35-20:09:00	48	212-245	CIR												
5-7	20:11:50-20:15:30	49	1-37	CIR													
3-6	20:27:40-20:31:55	49	38-55	CIR													
7-6	20:36:49-20:40:20	49	56-70	CIR													
1-6	20:45:10-20:48:50	49	71-84	CIR													
5-6	20:52:25-20:56:45	49	85-100	CIR													
6-3	20:58:35-21:02:05	49	101-115	CIR													
2-3	21:06:50-21:09:50	49	116-129	CIR													
4-1	15:55:00-15:59:10	50	1-42	Color													
3-1	16:03:00-16:07:10	50	43-84	Color													
7-1	16:10:50-16:13:55	50	85-116	Color													

138

TABLE 3.— Continued.

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks
			Zeiss			AMPS			Hasselblad						
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type				
6	1-1	16:17:55-16:20:50	50	117-145	Color										
	5-1	16:24:50-16:28:15	50	146-179	Color										
	6-1	16:30:45-16:34:25	50	180-216	Color										
	2-1	16:39:35-16:42:25	50	217-245	Color										
	4-2	16:46:15-16:50:15	51	1-41	Color										
	3-2	16:54:35-16:58:50	51	42-84	Color										
	7-2	17:02:10-17:05:20	51	85-116	Color										
	1-2	17:09:20-17:12:30	51	117-148	Color										
	5-2	17:16:35-17:20:05	51	149-183	Color										
	4-3	17:29:45-17:34:05	51	184-227	Color										
	3-3	17:45:05-17:49:15	52	4-45	Color										
	7-3	17:53:15-17:56:35	52	46-79	Color										
	1-3	18:01:00-18:03:55	52	80-109	Color										
	5-3	18:09:15-18:12:45	52	110-145	Color										
	6-2	18:15:35-18:19:20	52	146-183	Color										
	2-2	18:25:00-18:27:50	52	184-212	Color										
	4-4	18:31:50-18:36:05	52	213-275	Color										
	3-4	18:39:35-18:43:45	53	1-63	Color										
	7-4	18:47:00-18:50:30	53	64-111	Color										
	1-4	18:54:00-18:57:15	53	112-149	Color										
	5-4	19:00:05-19:03:35	53	150-191	Color										
4-5	19:08:45-19:12:50	53	192-253	Color											
3-5	19:22:55-19:27:10	54	1-64	Color											
7-5	19:29:50-19:33:20	54	65-117	Color											
1-5	19:39:15-19:42:25	54	118-165	Color											
5-5	19:45:20-19:48:50	54	166-218	Color											
7-7	19:51:45-19:53:25	54	219-244	Color											

TABLE 3.— Continued.

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera						Remarks						
			Zeiss			AMPS				Hasselblad					
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type		Mag.	Frame	Film type			
6	1-6	20:04:05-20:06:35	49	136-147	CIR	55-60	1-37	B/W & B/WIR					High altitude		
	3-6	20:15:45-20:19:10	49	148-162	CIR	55-60	38-89								
12	2-1	20:52:04-20:52:32	49	168-175	CIR	55-60	97-111							Yuma, Colorado	
	3-1	20:55:20-20:55:55	49	176-185	CIR	55-60	112-129								
	1-1	20:58:30-20:59:00	49	186-193	CIR	55-60	130-144								
	1-2	21:02:10-21:02:45	49	194-202	CIR	55-60	145-162								
	4-4	16:01:55-16:06:05	No exposure - Camera doors not opened												
7	4-7	16:18:15-16:22:35	61	64-119	Color										
	3-4	16:32:10-16:36:20	61	120-170	Color										
	7-4	16:40:10-16:43:50	61	171-215	Color										
	1-4	16:46:45-16:49:55	61	216-254	Color										
	5-4	16:54:50-16:58:05	62	1-48	B/W										
	4-5	17:03:25-17:07:40	62	49-113	B/W										
	3-5	17:11:40-17:15:40	62	114-174	B/W										
	7-5	17:19:10-17:23:10	62	175-224	B/W										
	1-5	17:27:00-17:30:15	62	225-264	B/W										
	5-5	17:33:30-17:36:50	62	265-314	B/W										
	4-3	17:42:15-17:46:40	62	315-353	B/W										
	3-3	17:50:50-17:55:05	62	354-390	B/W										
	7-3	18:02:00-18:05:45	62	391-422	B/W										
	1-3	18:09:10-18:12:15	62	423-453	B/W										
	5-3	18:15:35-18:18:55	62	454-482	B/W										
	6-2	18:21:55-18:25:55	62	483-518	B/W										
	2-2	18:31:00-18:34:05	62	519-545	B/W										
4-1	18:40:35-18:44:55	63	1-38	B/W											
3-1	18:47:55-18:52:10	63	39-80	B/W											

E-19
140

TABLE 3.-- Continued.

Data flt. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks			
			Zeiss			AMPS			Hasselblad			Film type						
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type							
7	7-1	18:55:25-18:59:15	63	81-110	B/W													
	1-1	19:02:20-19:05:20	63	111-134	B/W													
	5-1	19:08:30-19:11:50	63	135-166	B/W													
	6-1	19:15:00-19:18:45	62	167-196	B/W													
	2-1	19:23:30-19:26:30	63	197-222	B/W	55-60	166-255	B/W & B/WIR										
	4-2	19:33:00-19:37:10	63	223-254	B/W	64-69	1-127											
	3-2	19:40:35-19:44:50	63	255-290	B/W	64-69	128-256											
	7-2	19:52:55-19:56:40	63	291-319	B/W	70-75	1-114											
	1-2	19:59:50-20:03:00	63	320-343	B/W	70-75	118-211											
	5-2	20:06:30-20:09:50	63	344-372	B/W	70-75	212-312											
8	3-6	18:11:15-18:15:55	91	1-19	CIR	92-97	1-36					98	1-4	CIR				
	7-6	18:19:10-18:23:30	91	20-36	CIR	92-97	37-66					98	5-13	CIR				
	1-6	18:27:15-18:30:19	91	37-50	CIR	92-97	67-89					93	14-20	CIR				
	5-6	18:34:15-18:37:34	91	51-65	CIR	92-97	90-115					98	21-28	CIR				
	6-3	18:39:45-18:44:00	91	66-82	CIR	92-97	116-146					98	29-37	CIR				
	2-3	18:49:30-18:53:10	91	83-96	CIR	92-97	147-172					98	38-44	CIR				
	4-3	19:01:40-19:06:15											98	45-90	CIR			
	3-3	19:09:40-19:14:45											98	91-141	CIR			
	7-3	19:17:23-19:21:44											98	142-186	CIR			
	1-3	19:25:20-19:28:55											98	187-222	CIR			
5-3	19:31:50-19:35:55											98	223-263	CIR				
6-2	19:38:15-19:42:25											98	264-305	CIR				
2-2	19:52:50-19:56:50											98	306-345	CIR				
4-4	20:00:50-20:05:10											98	346-410	CIR				
3-4	20:09:00-20:13:30											98	411-478	CIR				

~~E-20~~
14

TABLE 3.— Continued.

Data fil. no.	Line-run	Line-run start-stop time, GMT (hr:min:sec)	Camera												Remarks	
			Zeiss			AMPS			Hasselblad			Film type				
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type					
8	7-4	20:15:40-20:19:30										98	479-536	CIR		
	1-4	20:23:15-20:26:45										98	537-589	CIR		
	5-4	20:31:15-20:34:55										99	1-55	CIR		
	4-5	20:39:25-20:44:00										99	56-123	CIR		
	3-5	20:46:35-20:51:10										99	124-192	CIR		
	7-5	20:53:25-20:57:10										99	193-249	CIR		
	1-5	21:00:45-21:04:00										99	250-298	CIR		
	5-5	21:06:40-21:10:20										99	299-354	CIR		
	4-1	21:19:15-21:23:20					91	97-157	CIR				99	355-416	CIR	
	3-1	21:27:20-21:31:40					91	158-199	CIR				99	417-458	CIR	
	7-1	21:34:10-21:37:50					91	200-231	CIR				99	459-490	CIR	
	1-1	21:41:55-21:45:00					100	1-27	B/W				99	491-517	CIR	
	5-1	21:46:30-21:52:00					100	28-56	B/W				99	518-546	CIR	
	6-1	21:54:25-21:58:05					100	57-93	B/W				99	547-583	CIR	
	2-1	22:04:05-22:07:30					100	94-128	B/W				101	1-48	CIR	
4-2	22:13:30-22:17:30											101	49-88	CIR		
3-2	22:21:00-22:25:15											101	89-131	CIR		
7-2	22:29:05-22:32:50											101	132-169	CIR		
1-2	22:36:15-22:39:15											101	170-200	CIR		
5-2	22:41:55-22:45:20											101	201-235	CIR		
4-1	15:45:00-15:49:25											101	240-284	CIR		
3-1	15:52:05-15:56:45											101	285-331	CIR		
7-1	15:59:10-16:03:10											101	332-372	CIR		
1-1	16:05:50-16:09:20											101	373-408	CIR		
5-1	16:13:35-16:17:10											101	409-444	CIR		
6-1	16:19:40-16:23:30											101	445-483	CIR		
2-1	16:28:45-16:32:15											101	484-519	CIR		

E-21
142

TABLE 3.— Continued.

Data flt. no.	Line-run	Line-run start-stop time, GITT (hr:min:sec)	Camera										Remarks			
			Zeiss			AMPS			Hasselblad			Film type				
			Mag. (roll)	Frame	Film type	Mag.	Frame	Film type	Mag.	Frame	Film type					
9	4-2	16:35:45-16:40:00										101	520-562	CIR		
	3-2	16:43:20-16:47:55										101	563-608	CIR		
	7-2	16:50:45-16:54:35										101	609-645	CIR		
	1-2	16:58:25-17:01:50										102	1-35	CIR		
	5-2	17:05:15-17:06:55										102	36-72	CIR		
	4-3	17:21:50-17:26:05										102	73-115	CIR		
	3-3	17:33:45-17:38:25										102	116-162	CIR		
	7-3	17:41:55-17:45:40										102	163-198	CIR		
	1-3	17:49:05-17:52:45										102	199-235	CIR		
	5-3	17:57:05-18:00:50										102	236-273	CIR		
	6-2	18:03:05-18:06:50										102	274-308	CIR		
	2-2	18:12:30-18:16:05										102	309-344	CIR		
	4-4	18:19:50-18:24:15										102	345-411	CIR		
	3-4	18:29:10-18:33:25										102	412-475	CIR		
	7-4	18:37:40-18:41:20										102	476-506	CIR		
	1-4	18:44:45-18:47:55										Hasselblad malfunctioned				
	5-4	18:51:40-18:55:25										no camera data				
												No camera data				
	4-5	19:12:25-19:16:30		100	132-193	B/W										
	3-5	19:20:30-19:25:15		100	194-265	B/W										
7-5	19:32:45-19:36:25		103	1-56	CIR											
1-5	19:39:55-19:43:10		103	57-105	CIR											
5-5	19:51:05-19:55:05		104	1-61*	CIR											
3-6	20:05:40-20:10:15		104	70-96	CIR		92-97	173-208							B/W & B/WIR	
7-6	20:13:50-20:17:25		104	97-112	CIR		92-97	212-238							"	
1-6	20:20:45-20:23:45		104	113-125	CIR			239-261							"	

*Frames 62-77 "extra pictures."

E-22
143

APPENDIX
AIRCRAFT SENSOR CONFIGURATION AND COMPATIBILITY

Figures A-1 and A-2 show the configuration of the various sensors on the NC-130 aircraft. Table A-1 shows the compatibility matrix for the sensors on the NC-130. No entry indicates that the sensors are compatible; i.e., there is no known reason why the two sensors should not be operated simultaneously. Mechanical incompatibility occurs when only one of the two sensors can be mounted in its operating position. However, in all cases, change-over in flight from one sensor to another can be accomplished with little difficulty. The one case of electromagnetic incompatibility observed was due to out-of-band emission of the 1.6-GHz scatterometer at the L-band radiometer frequency of 1.4 GHz. This effect is expected because of the radiometer's high sensitivity.

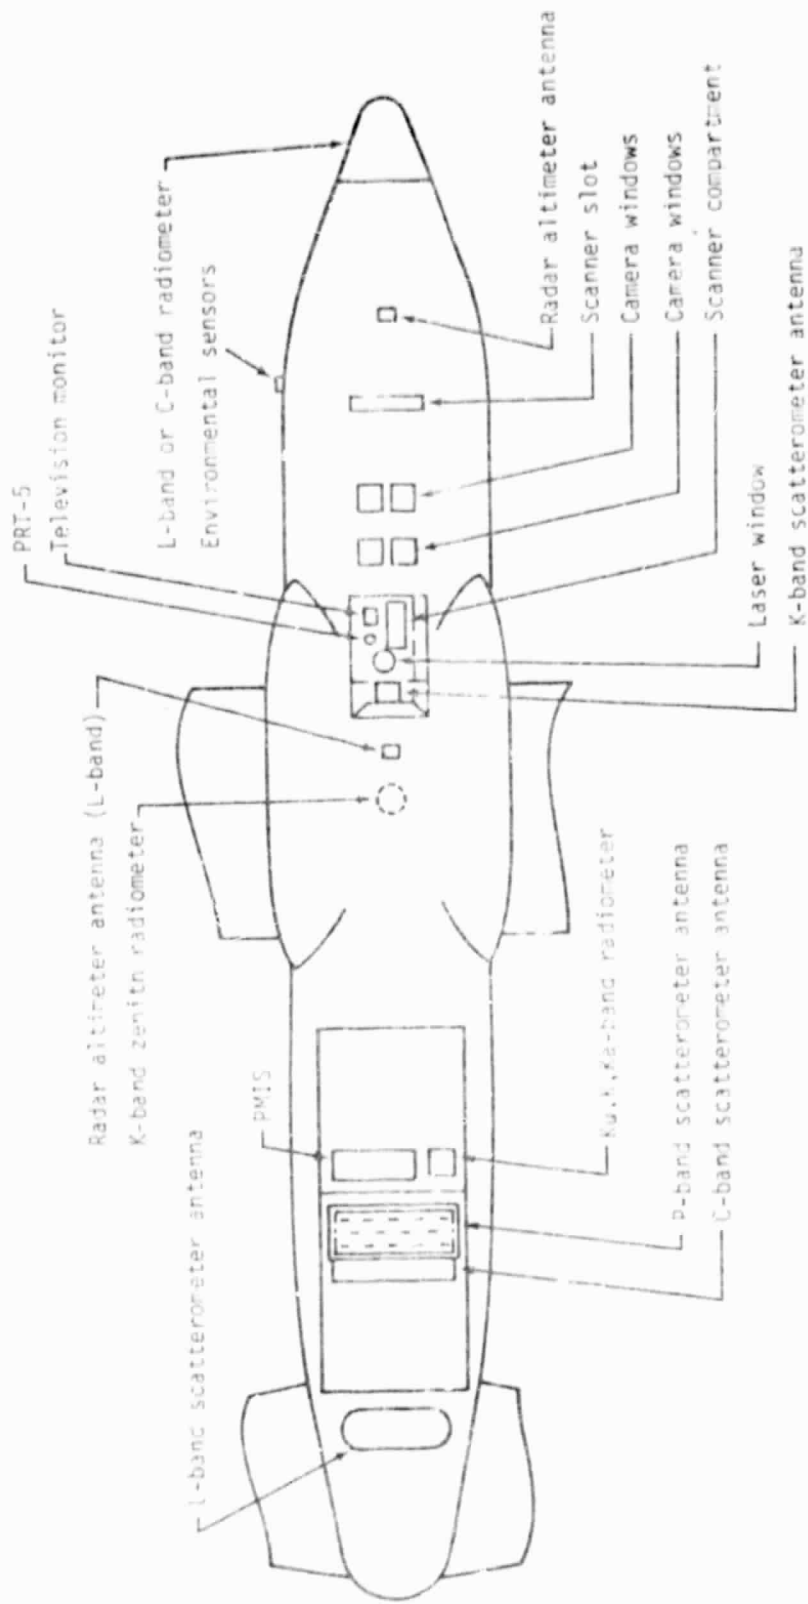


Figure A-1. - Bottom view of the NASA aircraft (NC-130).

1/26
 F-25

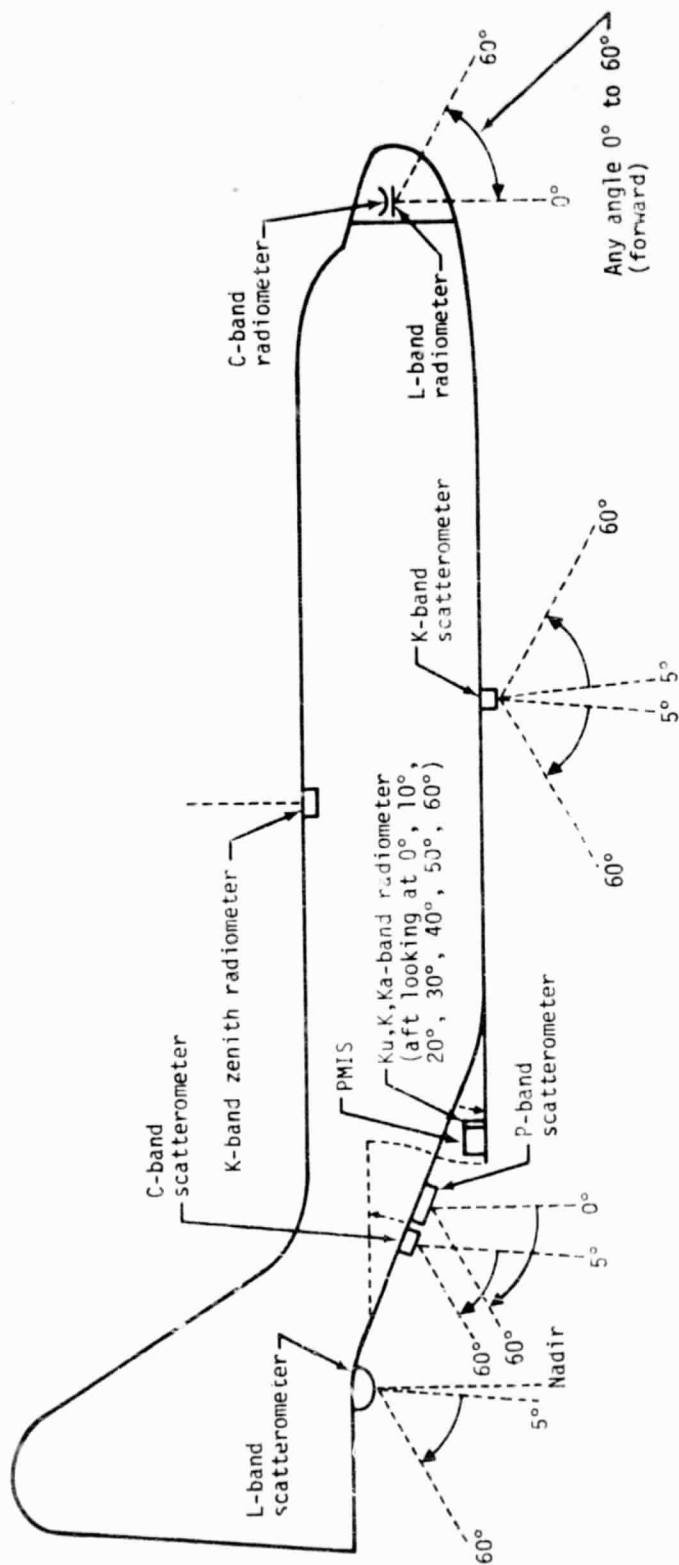


Figure A-2.— Side view of the NASA aircraft (NC-130).

TABLE A-1. NC-130 MICROWAVE SENSOR OPERATIONAL COMPATIBILITY MATRIX

[M = mechanical incompatibility; E = electromagnetic interference; no entry means that the instruments are compatible.]

Sensor	PMIS	Ku, K, Ka radiometers	L-band radiometer	C-band radiometer	Zenith K-band radiometer	0.4-GHz scatterometer	1.6-GHz scatterometer	4.75-GHz scatterometer	13.3-GHz scatterometer
PMIS						M	M	M	
Ku, K, Ka radiometers						M	M	M	
L-band radiometer				M			E		
C-band radiometer			M						
Zenith K-band radiometer									
0.4-GHz scatterometer	M	M							
1.6-GHz scatterometer	M	M	E						
4.75-GHz scatterometer	M	M							
4.75-GHz scatterometer									
13.3-GHz scatterometer									

APPENDIX F
SOIL SAMPLING PROCEDURE
AGRICULTURAL SOIL MOISTURE ESTIMATION PROJECT (ASME)
THOMAS COUNTY, KANSAS
SUMMER/FALL 1978

1. ORGANIZATION

The soil moisture and soil bulk density samples will be collected from 35 plots of 16.2 square hectometers (40 acres) each, within the Colby Test Area located in Thomas County, Kansas. The sample collection personnel will be divided into 17 five-man teams. Each team leader, who probably will be an employee of Lockheed Electronics Company, Inc., will direct the activities of two two-man squads in collecting samples from 2 of the 35 plots. The team leader will drive the team automobile or truck. He will ensure that proper sampling procedures are followed and that all required samples are obtained in a timely manner.

2. SOIL MOISTURE SAMPLING PROCEDURES

Each two-man squad will collect 148 soil moisture samples from one plot (field). These samples are to be collected over a 35-point grid which samples a 16.2-square-hectometer (40-acre) area. A diagram of the grid layout for a typical plot is given in figure 2-1. Each squad will have two inventory data sheets to complete *while sampling*. These data sheets are to be signed and included in the packing boxes with the soil moisture samples.


Two types of moisture samples will be taken: core samples covering 15-centimeter (6-inch) intervals to a depth of 45 centimeters (18 inches), and samples dug with a trowel to a depth of 15 centimeters (6 inches). The core samples will be collected several hours before or after an aircraft overpass. The samples to be dug, especially those for depths less than 5 centimeters (2 inches) must be taken within 4 ± 2 hours of an aircraft overflight. The team leader will determine the exact sampling schedule for each squad, depending on conditions at flight time.

2.1 CORE SAMPLING PROCEDURES

Core samples will represent soil moisture averaged over 15-centimeter (6-inch) depth intervals. Therefore, these samples may be obtained up to 12 hours prior to or after an overflight. A total of nine grid points will be used for the core sampling, as shown in figure 2-2.

The sampling should be done by two persons, who may either work together or individually. Each grid point will be marked by a 4.7-centimeter (12- by 12-inch) tile or stake. All samples for a grid point should be taken within a 3-meter (10-foot) radius of the marker.


At each of the four extreme corners of the grid pattern, a core measuring from 0 to 15 centimeters (0 to 6 inches) will be taken. Five additional points arranged along the diagonals between the corner grid points will be

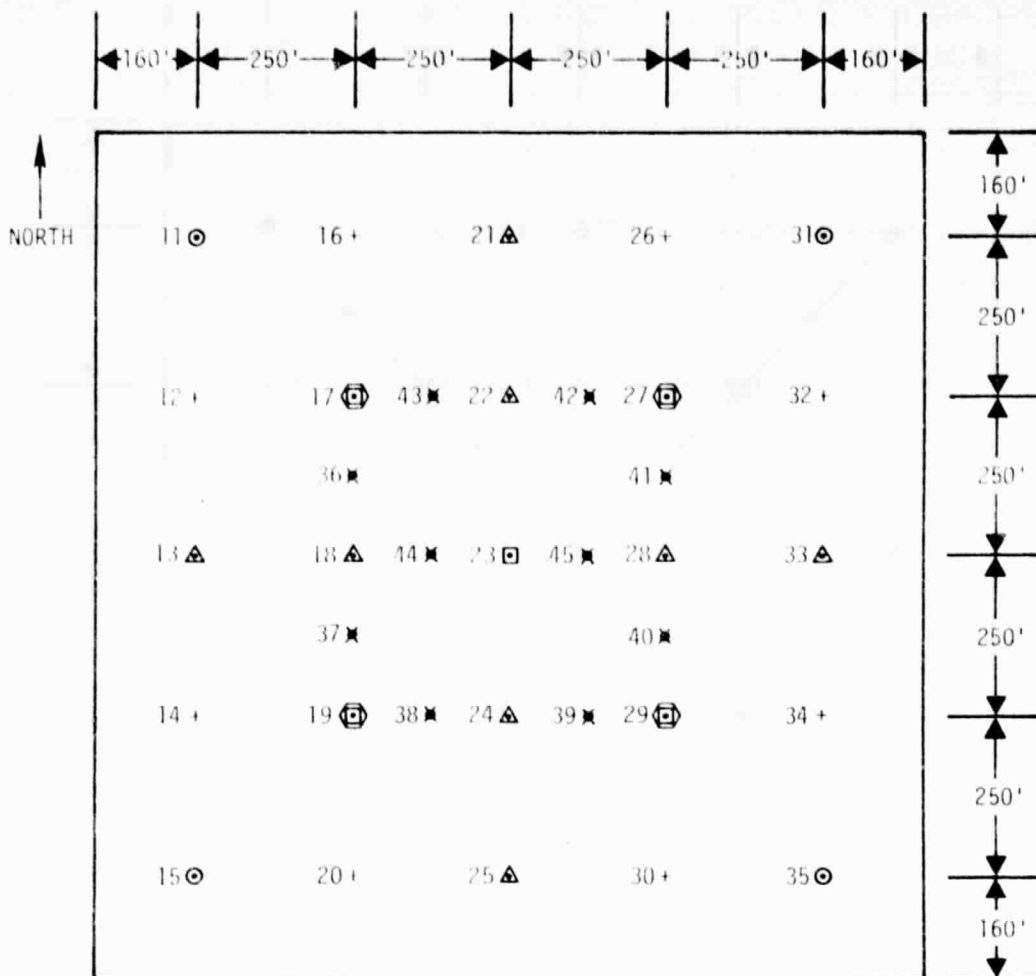

Symbol	Depth intervals, cm
*	0-1, 1-2
+	0-1, 1-2, 2-5
Δ	0-1, 1-2, 2-5, 5-9, 9-15
⊙	0-1, 1-2, 2-5, 5-9, 9-15 and 0-15 (core)
⊠	0-1, 1-2, 2-5, 5-9, 9-15 and 0-15, 15-30, 30-45 (core)
⊞	Bulk density samples

Figure 2-1. - Test point locations.

~~E-5~~
152

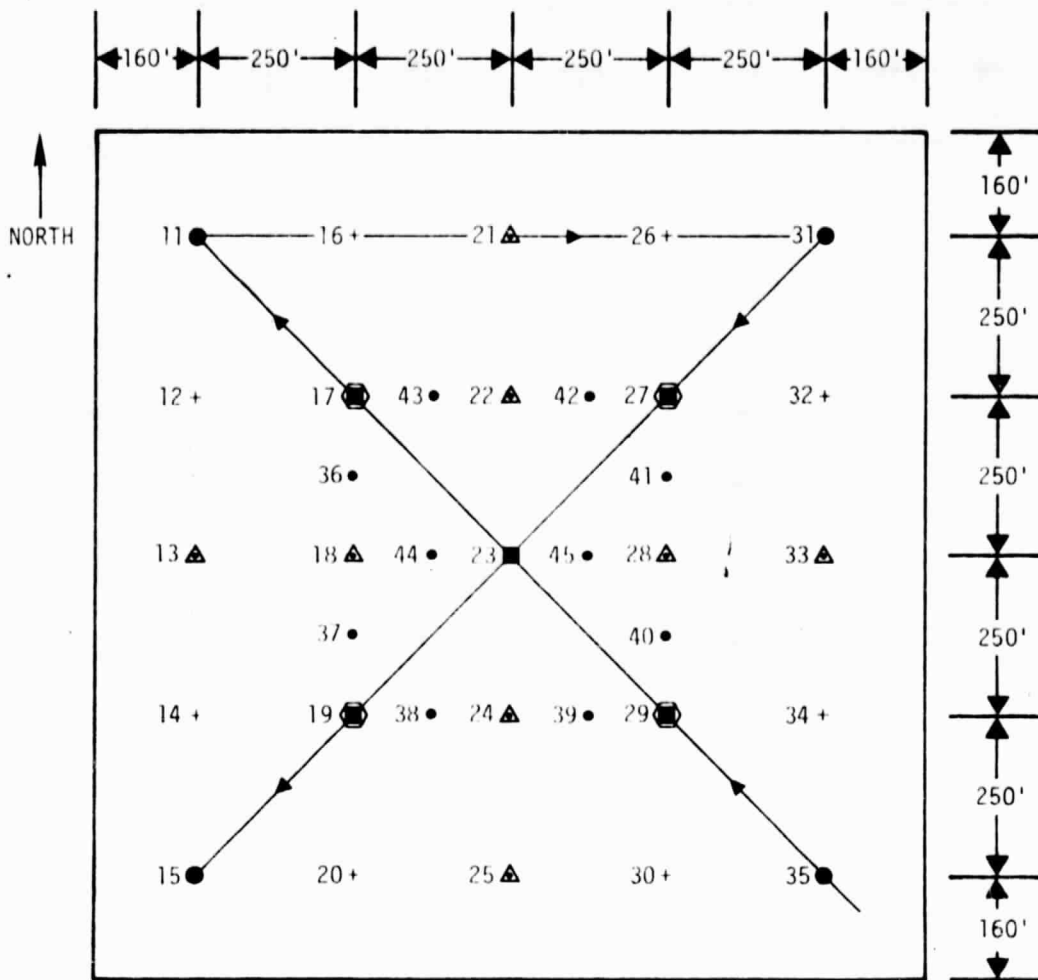

Symbol	Depth intervals, cm	No. of Locations	No. of Samples	Total
•	0-1, 1-2	10	2	20
+	0-1, 1-2, 2-5	8	3	24
△	0-1, 1-2, 2-5, 5-9, 9-15	8	5	40
⊙	0-1, 1-2, 2-5, 5-9, 9-15, 0-15	4	6	24
⊠	0-1, 1-2, 2-5, 5-9, 9-15, 0-15, 15-30, 30-45	5	8	40
⊕	Bulk density samples	4	—	—
				148

Figure 2-2.— Test point locations for core samples.

the locations for obtaining three core samples: one from 0 to 15 centimeters (0 to 6 inches), one from 15 to 30 centimeters (6 to 12 inches), and one from 30 to 45 centimeters (12 to 18 inches) in depth.

The core tool should be pushed into the soil until the 15-centimeter (6-inch) mark on the core barrel is flush with the surface. If the soil is too compacted to allow the tool to be pushed in, a leather mallet may be used to drive the tool into the soil. The tool should be removed carefully and the entire core placed into a sample can. Each can must be properly labeled when the soil is added and the lid put on immediately and secured. Then, the can should be put into the cardboard packing box. The squad will then proceed to the next depth, using the same hole, (or to the next point in the field). Of course, all core samples should be obtained for a given grid point at one time.

The squad should begin at one corner of the field and proceed across it along the diagonal bisecting the field; then, samples should be taken along the other (perpendicular) diagonal. A total of 19 cans will be filled during this procedure. Before beginning to dig samples using trowels, the inventory list should be completed for the core samples. The box of samples and core tools should be set at the edge of the field or put into the team vehicle if it is available.

2.2 TROWEL SAMPLES

Using brickmason's trowels, 129 soil samples will be dug. There will be from one to five samples collected at each grid point in each field. Pre-marked cans will be used whenever possible. Squad members should work individually - each carrying a box of sample cans, a trowel, a ruler, a marker, and a checklist. A suggested walking pattern for this phase of the work is shown in figure 2-3. Note that *all* of these samples must be collected within 2 hours of the overflight.

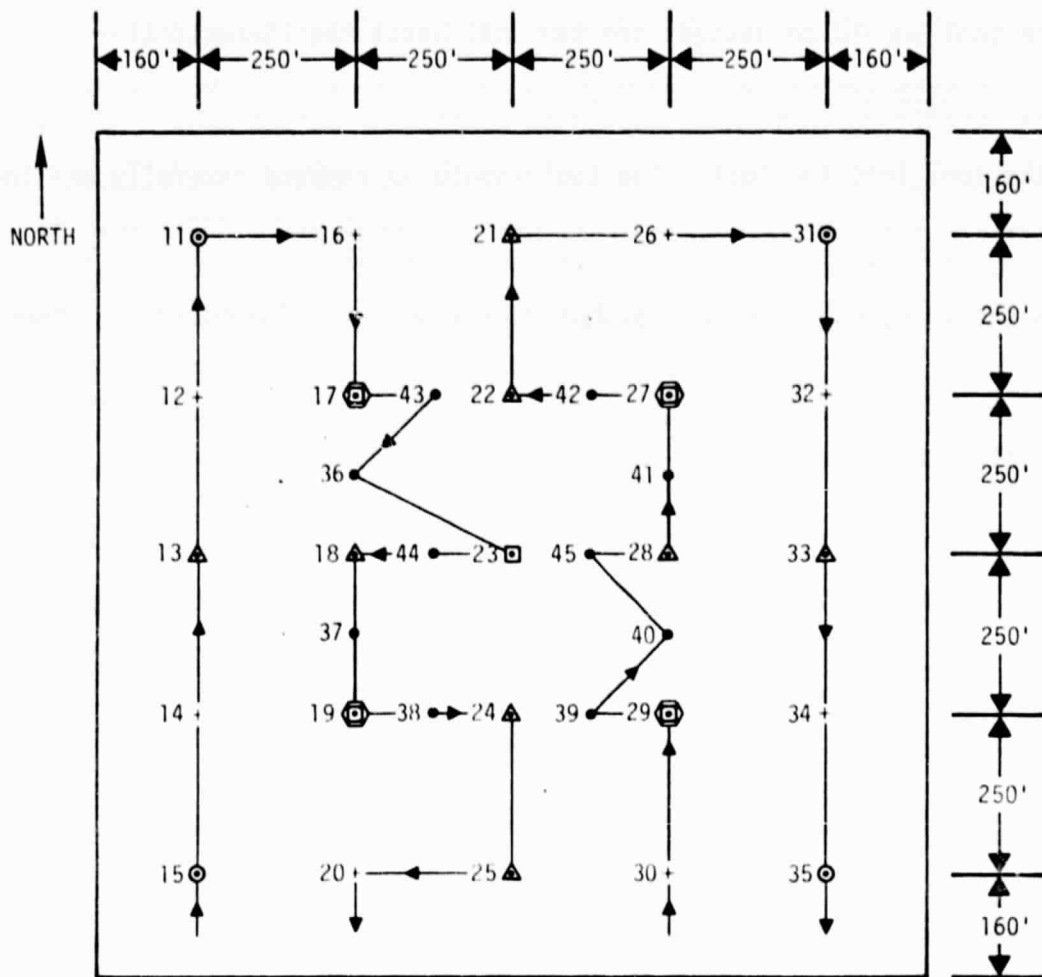


Figure 2-3.— Test point locations and walking pattern.

~~F-8~~
155

At a given point, a can must be prepared for the surface sample. The top centimeter (approximately $\frac{1}{2}$ inch) of soil should be skimmed from the surface over a large enough area to fill the can from 80 to 90 percent, but not entirely full. If the can is not already marked, it should be marked now. A ruler should be used to estimate the depth sampled; then, the top should be put on the can immediately. This procedure will be repeated for the next centimeter of depth over the same area at intervals of 1 to 2 centimeters.

A small hole should now be dug with the trowel so that the ruler can be used to measure deeper and so that the trowel can scoop soil from the correct intervals: 2 to 5 centimeters, 5 to 9 centimeters, and 9 to 15 centimeters (figure 2-4). Each sample should be put into the properly marked can and the lid put on tightly immediately after the sample is exposed. Each can should be checked to make sure it is correctly marked. As figure 2-3 indicates, at one-half of the grid points, all five depth intervals are sampled; however, there are eight points where sampling below 5 centimeters is not required. Also, there are 10 points near the center of the field where only the two surface samples (0 to 1 and 1 to 2 centimeters) are collected.

When both squad members have completed collecting their samples they should meet at the edge of the field. All samples should then be neatly packaged in two boxes with the completed inventory sheets included in each box.

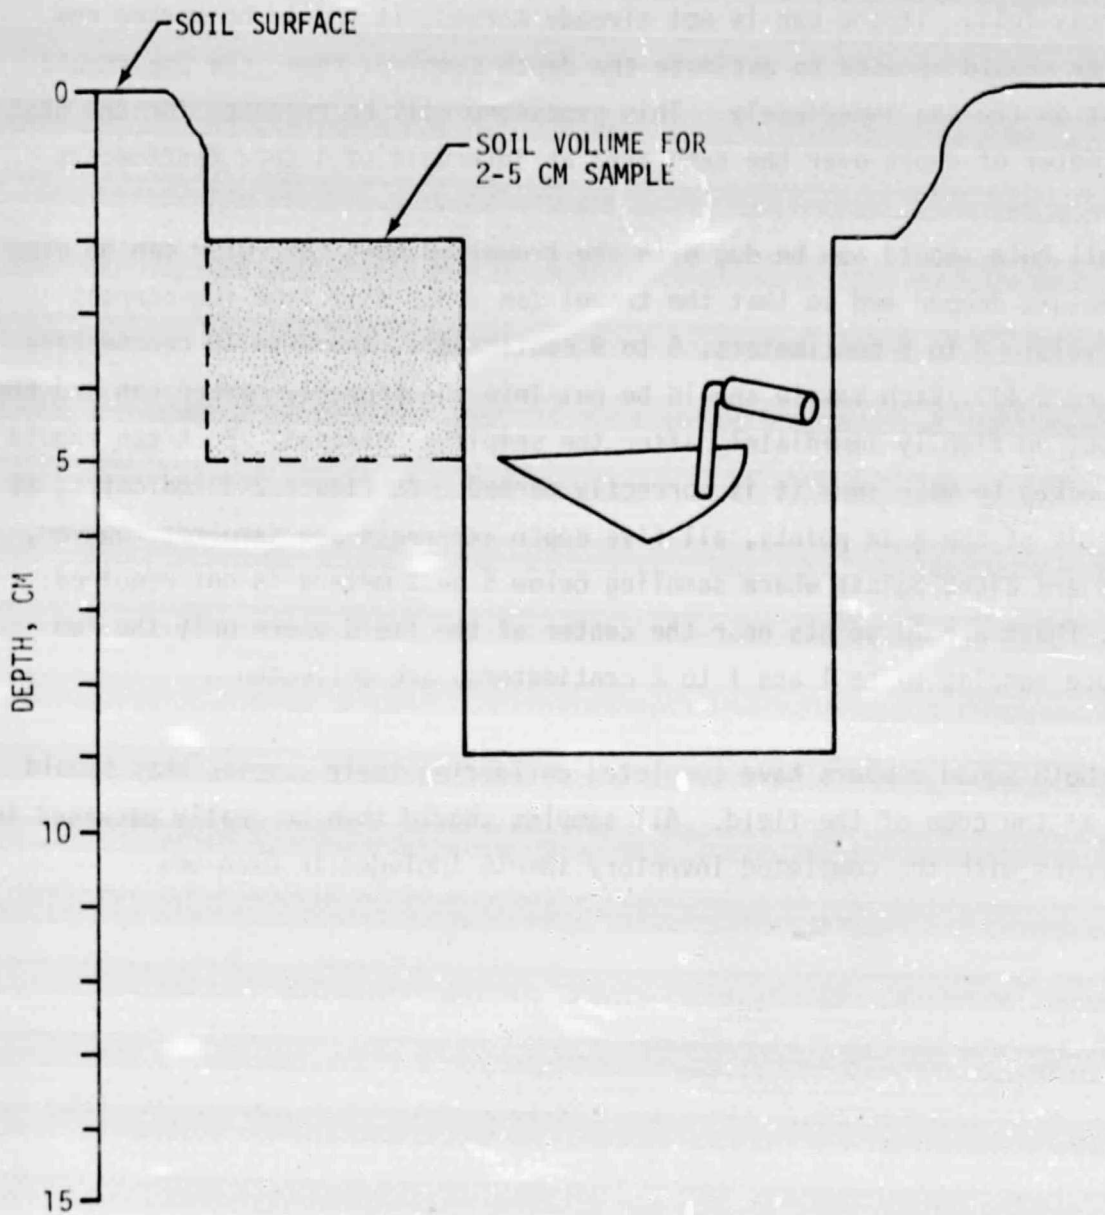


Figure 2-4.-- Schematic for digging soil samples.

F-10
157

APPENDIX G

MOISTURE LOSS FROM SAMPLE CONTAINERS USED FOR SOIL MEASUREMENTS

APPENDIX G

MOISTURE LOSS FROM SAMPLE CONTAINERS USED FOR SOIL MEASUREMENTS

1. INTRODUCTION

Determining the soil moisture content of soil samples from test sites is part of the Agricultural Soil Moisture Experiment (ASME) sponsored by the Earth Observations Division (EOD) at the Lyndon B. Johnson Space Center (JSC). Ground-truth data are gathered to test remote sensors and provide data for modeling the signal return with soil moisture.

During the summer of 1978, numerous soil samples were taken from a test site near Colby, Kansas, and stored in cans until the samples could be processed for soil moisture content. Since the accuracy of the soil moisture determination would be adversely affected if there were significant losses of moisture from these cans before they were processed, tests were performed at the site to estimate this loss. The results indicated that the moisture loss was tolerable. To verify these conclusions, the laboratory test described in this report were conducted. In addition to tests on the cans used at Colby, containers used for the same purpose on other missions were tested for comparison.

2. TREATMENT OF SAMPLES TAKEN FROM COLBY, KANSAS

The samples taken at Colby consisted of approximately 100 grams of soil placed in cans with lids. Because the lids did not give a hermetic seal, they were taped to the can body around the edges to reduce loss of moisture. The cans were transported to McCook, Nebraska, and were weighed. The interval between the time of sampling and the time of weighing was 1 to 2 days. A step-by-step procedure for soil sample handling is given in appendix G-1.

At McCook, Nebraska, each can was heated with the lid off in order to remove all moisture. Then the can, the dry soil, and the lid were weighed together. The difference in the two weight measurements (the weight before and after heating) was taken as the weight of the moisture in the original sample.

Next, only the empty can and the lid were weighed. The percentage of moisture content in the soil was calculated using these data.

3. ESTIMATION OF MOISTURE LOSS FROM THE CANS USED AT COLBY

The loss of moisture from the cans was probably caused by two effects:

- a. Daytime heating of the gas inside the can, causing increased pressure and forcing some of the gas out through seams in the can.
- b. Diffusion of water vapor through seams in the can.

Because the resources were not available to simulate the heating and cooling cycles experienced by the samples taken at Colby, the first effect was estimated mathematically. The calculations are described in the appendix.

The diffusion of water vapor through seams in the cans was estimated using the tests described below. The cans used were selected from the same batch used at Colby. All of the tests except test 4 were performed at JSC.

- Test 1 (taped cans, Texas soil). The soil used in this test was a local sandy loam similar to the Keith silt loam at the Colby test site, except that the local soil contained somewhat more clay. Approximately 100 grams of moist soil was placed in each of 10 cans, and the cans were taped around the edges of the lid using the same masking tape used at Colby. Each can was then weighed using a Mettler Instrument Corporation analytical balance and weighed again each day for 5 days at approximately the same time. The average daily weight loss is given in table 1. It was assumed that all weight losses were due to moisture losses. The consistency of the balance was checked by weighing a test weight (approximately 78 grams) each day. The maximum variation observed in the test weight was 0.02 gram. Throughout this test, the cans were kept in an air-conditioned room at a temperature of approximately 72° F.
- Test 2 (taped cans, water). To obtain an upper limit on water loss, pure water was substituted for the soil sample. The water was poured into a smaller container that was placed inside the can. Pure water would ensure

TABLE 1.— MEASURED AVERAGE DAILY MOISTURE LOSSES IN GRAMS

Sample	Test 1: taped cans, Texas soil	Test 2: taped cans, water	Test 3: untaped cans, water	Test 4: taped cans, Colby soil (a)	Test 5: type 1 cups, soil	Test 6: type 1 cups, water	Test 7: type 2 cups, soil
1	0.076	0.094	0.18	0.07	0.36	0.18	0.88
2	.078	.096	.17	.12	.32	.18	.96
3	.066	.084	.18	.08	.31	.18	.87
4	.078	.086	.16	.08	.30	.15	.94
5	.056	.068	.16	.08	.35	.19	.88
6	.058	.082	.17	.07	.34	.17	.93
7	.066	.082	.17	.10	.42	.20	.90
8	.070	.084	.16	.10	.30	.18	.99
9	.062	.086	b .16	.08	.41	.20	.93
10	.062	.098	c .20	.08	.46	.18	.87
11		.086		.08			
12		.092		.10			
13		.070		.10			
14		.096		.08			
15		.090		.10			
16				.08			
17				.07			
18				.10			
19				.10			
20				.08			
Average	0.067	0.086	0.17	0.088	0.36	0.18	0.92
SD	0.008	0.009	0.013	.013	0.056	0.014	0.041

^aTest 4 by Agricultural Technology, Inc.

^bLid slightly loose.

^cLid on part way.

85
161

the maximum water vapor partial pressure in the cans, and therefore, the greatest moisture loss. The smaller container had a diameter of 6.7 centimeters and therefore was large enough to ensure an equilibrium vapor pressure inside the can (diameter 8.5 centimeters). Otherwise, the test was carried out in the same way as test 1, except that 15 cans were used instead of 10.

- Test 3 (untaped cans, water). This test was the same as test 2, except that the cans were not taped and only 10 cans were used. It was designed to investigate the effect of taping the lid to the can.
- Test 4 (taped cans, Colby soil). This test was performed by Agricultural Technology, Inc., using soil from the Colby test site. This test was to determine whether the exact soil type was important and to provide an independent set of measurements to serve as a check on the tests conducted at JSC. It was conducted in a manner similar to test 1, except that 20 cans were used. They were initially weighed on September 27, 1978, and were subsequently weighed on September 28 and 29, 1978, and on October 3, 1978. The results given in table 1 are the average daily weight losses over the 6-day period.

4. ESTIMATION OF MOISTURE LOSS FROM PAPER CUPS

Moisture loss from two types of paper cups used to collect soil moisture samples in previous missions was studied.

"Type 1" cups were used by the University of Arkansas to hold soil samples taken at Garden City, Kansas, in 1976. These cups were of the coronet design made by the Solo Cup Company of Chicago, Illinois. They have a seam down the side and around the bottom.

"Type 2" cups were used by Texas A&M University for holding soil samples taken at several sites since 1975. They appear to be identical to the type 1 cups except they have a paper glued to the side of the cup.

The following tests were performed on these cups.

- Test 5 (type 1 cups, soil). This test was carried out in a manner similar to test 1. The cups were sealed by placing Baggies over the cup before the lids were pressed down, which is the procedure that was employed when these cups were used in the field.
- Test 6 (type 1 cups, water). This test was similar to test 2, except for the containers used. The cups were sealed in the same manner as in test 5.
- Test 7 (type 2 cups, soil). This test was the same as test 5, except for the difference in containers.

5. RESULTS AND CONCLUSIONS

The results are shown in table 1. All tests used 10 containers, except test 2, which used 15 containers and test 4, which used 20 containers.

Test 2 (taped cans, water), which would give an upper bound for moisture loss from taped cans, showed an average loss of approximately 29 percent more moisture than test 1 (taped cans, Texas soil). This loss was probably due to the lack of soil moisture in test 1 to maintain a saturated water vapor pressure in the can.

Test 3 showed that in the saturated case, the loss from untaped cans was twice the loss from taped cans (test 2). Even though the resulting loss was small, it showed that taping the cans significantly reduced the loss of soil moisture.

Test 4 showed that the Colby soil in taped cans had about the same moisture loss as the pure water in taped cans (test 2). This probably indicates that the soil was wet enough to maintain a saturated vapor pressure. This test also gave a moisture loss similar to that obtained using Texas soil (test 1).

Of the taped cans tested (tests 1, 2, and 4), the worst case for losing significant amounts of moisture was test 4, which had a slightly smaller mean

moisture loss than test 2 but had a larger variance. Assuming that the moisture losses estimated in test 4 were normally distributed, one would expect the moisture loss to be less than 0.12 gram per day in 95 percent of such measurements. Since the time between taking and weighing the samples was 1 to 2 days, the maximum moisture loss would be about 0.24 gram.

Most of the samples were estimated to contain 10 grams or more of water. An error of 0.24 gram (2.4 percent or less) is small compared to the within-field variability of the soil moisture measurements, which typically had a coefficient of variation of 15 percent or more. However, some of the samples were estimated to have less than 10 grams of water. The lowest estimates were 1 gram of water. An error of 0.24 gram is a sizable percentage of this amount but is still acceptable because

- the coefficient of variation for the within-field variance of these dry samples was typically 30 percent or more; and
- regardless of the error, the absolute value of the soil moisture determination is very small compared to the range of soil moisture measured.

It should also be kept in mind that the experiments were conducted in relatively wet soils; thus, the figure of 0.24 gram is probably much higher than the actual water lost from these dry samples.

Test 6 showed that the type 1 cups with water had about the same moisture loss as the untaped cans with water (test 3). Test 5 showed that the type 1 cups with soil had a moisture loss that was approximately twice that of tests 3 and 6. A possible explanation is that the cups were slightly porous; and because the soil was in contact with the cup, capillary action resulted in a substantial loss of moisture. In any case, the type 1 cups with soil lost more than four times more moisture than the taped cans. However, when these cups were used, the first weighing occurred within a half day; thus, the moisture loss was probably in the neighborhood of 0.17 gram.

Test 7 showed that the type 2 cups with soil had a much larger moisture loss than that shown by any of the other tests — 0.92 gram per day on the average.

It is estimated that when these cups were used, the maximum time between taking a sample and the first weighing was 8 hours. Therefore, the estimated maximum moisture loss is 0.31 gram.

For the same reasons given above for the taped cans, it is concluded that the moisture loss from the type 1 and type 2 cups was acceptable. However, it should be noted that the taped cans lost much less moisture than either type of cup and therefore appear to be much superior containers for soil moisture samples.

The above conclusions are based on the assumption that moisture loss in the field was similar to the moisture loss in these tests. This assumption may be an approximation because of differences in temperature, humidity, and air circulation.

APPENDIX G-1

STEP-BY-STEP PROCEDURE FOR HANDLING AND PROCESSING OF SOIL MOISTURE SAMPLES

The step-by-step procedure for soil sample handling is as follows:

1. Number can for identification.
2. Acquire soil sample by appropriate method and place in can.
3. Place lid on can.
4. Wrap can/lid jointly with masking tape and crimp in place.
5. Collect and box cans from individual fields and transport to weigh station.
6. At initial weighing, remove tape and weigh can, lid, and soil sample. (Residual tape adhesion was demonstrated to be considerably less than 0.05 gram.)
7. Place can and lid in oven and dry soil sample.
8. Remove dry sample and weigh can, lid, and soil sample.
9. Remove soil sample and weigh can and lid.
10. Compute gravimetric soil moisture as follows:

$$\begin{aligned} \text{S.M. g(\%)} &= \left\{ \frac{[(\text{weight from 6}) - (\text{weight from 9})]}{(\text{weight from 8} - \text{weight from 9})} - 1 \right\} \times 100 \\ &= \left(\frac{\text{wet weight} - \text{dry weight}}{\text{dry weight}} \right) \times 100 \end{aligned}$$

APPENDIX G-2

MOISTURE LOSS DUE TO DIURNAL TEMPERATURE CHANGES

Because the cans used at Colby were not airtight, moisture could be lost during heating portion of the day when the pressure inside the can increased, forcing air out of the can. In order to maximize estimated moisture loss, it will be assumed that the leaks in the can were large enough to relieve any increased pressure on the inside; i.e., that the inside pressure is atmospheric and that the water vapor pressure inside the can is at the saturated level.

When the can is heated, the pressure inside will be increased because of the expansion of the air due to an increase in temperature and because of an increase in the saturated water vapor pressure.

Assume a peak daytime temperature of 100° F or 311.8 K and a minimum night temperature of 60° F or 288.8 K. The corresponding saturated water vapor pressures are 49.2 and 13.3 millimeters of mercury. At the minimum temperature, the gas law $PV = nRT$ gives

$$N_1 = V_1(760 - p_1)/T_1R \quad (A-1)$$

and

$$n_1 = V_1 p_1 / T_1 R, \quad (A-2)$$

where the subscript 1 refers to the value of quantities at the minimum temperature and

N_1 = number of moles of dry air,

n_1 = number of moles of water vapor,

V_1 = the volume of gas in the can,

p_1 = 13.3 millimeters (the partial pressure of water vapor in the can, saturated value), and

T_1 = 288.8 K.

Assume that as the can is heated, an isobaric expansion to volume V_2 occurs. At the final temperature T_2 (311.8 K), the gas law gives

$$N_2 = N_1 = V_2(760 - p_2)/T_2R \quad (A-3)$$

and

$$n_2 = V_2 p_2 / T_2 R, \quad (A-4)$$

where the subscript 2 refers to the values of quantities at temperature T_2 . Note that the number of moles of air has not changed, but that the number of moles of water vapor has changed.

An upper limit on the moisture loss can be obtained by assuming that a volume $V_2 - V_1$ of the gas in the final state (i.e., at temperature T_2) is lost. The amount (in moles) of water vapor in this volume is given by the following.

$$n = n_2 (V_2 - V_1) / V_2 \quad (A-5)$$

From equations (A-1) through (A-4), the following equation is derived.

$$n = p_2 V_1 \left[(760 - p_1) / T_1 (760 - p_2) - 1 / T_2 \right] / R \quad (A-6)$$

Taking V_1 equals to the volume of the can (0.473 liter), one obtains $n = 1.58 \times 10^{-4}$ moles. Multiplying by the molecular weight of 18, one obtains a water loss of 2.8×10^{-3} grams per day. This is negligible compared to the diffusion losses shown in table 1.