

## N O T I C E

THIS DOCUMENT HAS BEEN REPRODUCED FROM  
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT  
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED  
IN THE INTEREST OF MAKING AVAILABLE AS MUCH  
INFORMATION AS POSSIBLE

# ICASE

NUMERICAL METHODS FOR  
LARGE-SCALE, TIME-DEPENDENT  
PARTIAL DIFFERENTIAL EQUATIONS

Eli Turkel

Report Number 79-20

August 20, 1979

(NASA-TM-80967) NUMERICAL METHODS FOR  
LARGE-SCALE, TIME-DEPENDENT PARTIAL  
DIFFERENTIAL EQUATIONS (NASA) 139 p  
HC A07/MF A01

CSCL 12A

N80-22017

Unclass

G3/64 46871


INSTITUTE FOR COMPUTER APPLICATIONS IN SCIENCE AND ENGINEERING  
NASA Langley Research Center, Hampton, Virginia

Operated by the

UNIVERSITIES SPACE



RESEARCH ASSOCIATION

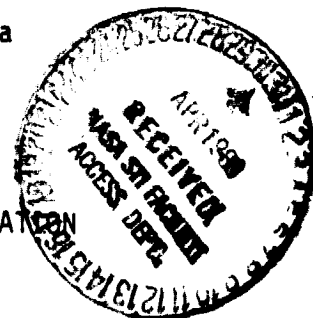

NUMERICAL METHODS FOR  
LARGE-SCALE, TIME-DEPENDENT  
PARTIAL DIFFERENTIAL EQUATIONS

Eli Turkel

*Courant Institute of Mathematical Sciences  
New York University, New York, NY 10012*

ABSTRACT

A survey of numerical methods for time dependent partial differential equations is presented. The emphasis is on practical applications to large scale problems. A discussion of new developments in high order methods and moving grids is given. The importance of boundary conditions is stressed for both internal and external flows. A description of implicit methods is presented including generalizations to multidimensions. Shocks, aerodynamics, meteorology, plasma physics and combustion applications are also briefly described.

---

This work was partially supported by the Department of Energy Grant DOE EY-76-C-02-3077 and partially supported by NASA Contract No. NAS1-14101 while the author was in residence at ICASE, NASA Langley Research Center, Hampton, VA 23665.

## TABLE OF CONTENTS

1. Introduction. . . . .	1
2. Boundary Treatment. . . . .	3
3. Higher Order Methods-Formulation. . . . .	11
4. Higher Order Methods-Results. . . . .	26
5. Implicit Methods. . . . .	34
6. Moving Boundaries and Adaptive Grids. . . . .	46
7. Radiation Boundary Conditions . . . . .	69
8. Applications. . . . .	80
A. Shocks. . . . .	80
B. Multidimensions . . . . .	86
C. Aerodynamics. . . . .	92
D. Meteorology . . . . .	96
E. Combustion. . . . .	102
F. Plasma Physics. . . . .	104
G. Other Applications. . . . .	107
9. References. . . . .	110

## 1. Introduction

In the construction of numerical solutions to large scale problems one wishes to have a code with many different characteristics. Examples of these properties include efficiency both in terms of computer time and computer storage and also ease of use. Frequently a code is constructed to be used by other people who do not have a detailed knowledge of the algorithm. Hence, one does not want a program which requires the specification of many nonphysical parameters or one that requires intervention on the part of the user. Lagrangian codes are frequently complex and may require operator intervention for rezoning. Hence, we shall concentrate on Eulerian methods.

In contrast to ordinary differential equations it does not seem advisable to introduce general packages for time dependent partial differential equations. In one space dimensions a number of packages exist usually based on an ODE solver. These packages are useful when one wants a quick answer to a simple problem. However, the programs are far from optimal both in terms of computer time and computer storage [115]. Hence, for realistic physical models with many complicated equations which are to be solved many times it is necessary to develop a code for each problem. This is especially true for multidimensional problems. The range of solutions including both smooth and discontinuous flows demands that the algorithm be carefully matched with the physics. Depending on many

factors one may need either an explicit or implicit scheme. Accuracy and geometrical considerations will determine whether high or low accuracy methods (in both space and time) are more appropriate.

In the following sections we will discuss in more detail many of the factors that influence the choice of a scheme. Special attention will be paid to the treatment of boundaries. After a general discussion of standard boundary treatments attention will be focused on moving boundaries. Artificial boundaries to simulate an infinite domain create other difficulties which will be analyzed. In all these cases the interplay between the physics and the numerics will be stressed. Implicit methods and applications to specific problems are discussed with special emphasis on shocks and on steady state solutions.

## 2. Boundary Treatment

Since much of this study deals with nonstandard boundary problems we shall first review the basic theory. For a numerical method to be useful we require that it be stable and also converge. Hence, small perturbations in the problem should give rise to small perturbations in the solution. We first consider the model equation

$$(2.1) \quad u_t + Au_x = 0$$

with  $A$  a constant  $n \times n$  matrix and  $0 \leq x \leq 1$ . Let  $A$  be symmetric and have  $k$  positive eigenvalues,  $n-k$  negative eigenvalues. It is then straightforward to show that (2.1) is well posed only if  $k$  linearly independent conditions are imposed at  $x = 0$  and  $n-k$  conditions at  $x = 1$ . This number of conditions is also sufficient for well posedness as long as no variables corresponding to characteristic variables coming into the boundary, from inside the region, are specified.

For a numerical method it is necessary to specify the correct number of boundary conditions as given by the differential equation. In general one requires some method to numerically determine the boundary values for the other, nonspecified variables. If the boundary treatment is not done correctly then errors are generated at the boundary which propagate into the domain of integration and create instabilities. Especially for nonlinear problems these instabilities frequently do not manifest themselves at the

boundaries but rather along sonic lines or stagnation points. It is a nontrivial task to trace the source of the difficulty to a mistreatment of the boundary [137].

For simplicity we shall assume that the numerical scheme uses information only at the point of interest and at its immediate two neighbors at various time levels. Then Kreiss has shown [81], [110] that the stability for a scalar equation can be analyzed by assuming a solution of the form

$$u_j^n = U \kappa^j z^n$$

and only considering the semi-infinite domain  $0 \leq x < \infty$ . If there are solutions to the interior and boundary difference schemes with  $|\kappa| < 1$  and  $|z| > 1$  then the initial-boundary scheme is unstable. If there are no nontrivial solutions with  $|\kappa| < 1$  and  $|z| > 1$  then the scheme is stable. If there are solutions with  $|\kappa| = 1$ ,  $|z| = 1$  more care is required. For additional details see the survey by Morton [140].

For systems of equations or schemes that require more than three mesh points at a time level the theory is more complicated. For systems, the algebra of solving the equations for complex  $\kappa$  and  $z$  is large and needs to be done for each system of equations. Gottlieb, Gunzburger and Turkel [72] have shown how the scalar results can be extended to systems of equations if one takes into account the characteristic variables (see also [28]). If this is not

done examples are given to show that troubles can occur. Several examples are presented in later chapters. Engquist and Smedsaas [55] have a method of lines code that automatically accounts for the characteristic variables.

For several of the standard schemes, boundary conditions have been analyzed by several authors. We shall present a brief outline of the results.

1. Leapfrog method:

- a. Extrapolation in space is unstable.
- b. Extrapolation in space-time is stable.
- c. A one-sided Euler method is stable.

We again emphasize that these results are true only for a scalar equation. As mentioned above the scalar results can be extended to systems if the numerical boundary treatment is done on the correct characteristic variables rather than on the natural variables. The given boundary conditions can consist of any combination of variables that yields a well posed differential problem.

2. Lax-Wendroff method:

This is usually implemented by a two step Richtmyer or a two step MacCormack method. The MacCormack method is easier to implement as no half points are required and boundary conditions can be imposed after the first step. The treatment of parabolic terms is also easier using the MacCormack scheme.

- a. Space extrapolation at the conclusion of the two steps is stable.
- b. A one-sided Euler method at the conclusion of the two steps is stable.

- c. Extrapolation at the intermediate step of the Richtmyer method is unstable.
- d. Extrapolation or one-sided differences at the intermediate step or final step of the MacCormack method is stable.

These boundary treatments are discussed in detail in [71]. Method d is particularly easy to implement and will be discussed in more detail in the next section where it is extended to higher order methods. In many cases one sided differences are equivalent to extrapolation of fluxes to artificial points exterior to the region. The choice between these options is based on programming ease.

### 3. Implicit methods:

- a. Space extrapolation is stable.
- b. The box scheme is stable and very accurate.
- c. Explicit one sided differences can lead to stability limits on  $\Delta t$  ([172]).

Many numerical tests have confirmed the analysis of Kreiss for both simple test cases and complicated problems. At present one difficulty is to extend these results, in a useful manner, to multidimensional problems. Abarbanel and Gottlieb [3] have considered the leapfrog scheme while Bayliss (private communication) has analyzed methods based on splitting techniques. In practice most of the one

dimensional results generalize to the multidimensional situation. In the coming chapters we shall consider practical generalizations to higher order methods, moving boundaries and radiation boundaries.

The numerical treatment of boundaries for parabolic equations is usually simpler than that described above since all the variables are prescribed. Some difficulties may arise when derivative boundary conditions are given, this is especially true for nonrectangular regions [195].

More serious difficulties occur when the highest space derivatives are multiplied by a small (but fixed) parameter, e.g. high Reynolds number flow. Most schemes contain some numerical viscosity and so one must ensure that the numerical viscosity does not overwhelm the physical viscosity. In general this is only true in boundary layers where the large gradients enhance the physical viscosity. Therefore, when the computations do not resolve the boundary layer it is not reasonable to impose parabolic-type boundary conditions. When one uses a coarse mesh near the boundary one is effectively ignoring the viscous effects and only considering the inviscid equations. So, with coarse grids near the boundary one should use hyperbolic-like boundary conditions. Failure to do this leads to cell Reynolds number restrictions [158].

To clarify this point we consider a model problem; the steady state linearized Burgers equation

$$(2.2a) \quad u_{xx} = Ru_x, \quad R > 0, \quad 0 \leq x \leq 1$$

with boundary conditions

$$(2.2b) \quad u(0) = 1 \quad u(1) = 0 .$$

The solution is given by

$$(2.3) \quad u(x) = (e^R - e^{Rx}) / (e^R - 1) .$$

For  $R$  large the solution is approximately equal to 1 everywhere except for a boundary layer near  $x = 1$ .

Solving (2.2) by central differences we have

$$(2.4a) \quad v_{j+1} - 2v_j + v_{j-1} = R_\Delta (v_{j+1} - v_{j-1}) \quad \text{with}$$

$$(2.4b) \quad R_\Delta = R\Delta x \quad , \quad v_0 = 1 \quad , \quad v_N = 0$$

This has the solution

$$(2.5) \quad v_j = \frac{Q^j - Q^N}{1 - Q^N} \quad , \quad Q = \frac{2 - R_\Delta}{2 + R_\Delta} .$$

$R_\Delta$  is generally called the cell Reynolds number or the Peclet number. For  $R_\Delta$  larger than 2,  $Q$  is negative and so  $v_j$  is oscillatory. As  $R_\Delta$  increases,  $Q$  approaches -1 and  $v_j$  acquires a large  $2\Delta x$  oscillation which has nothing in common with the analytic solution (see also [158]).

One way to avoid this situation is to construct schemes, at least near boundaries, which do not have any cell Reynolds number restriction [6], [36], [41]. Alternatively one can match the interior scheme with an asymptotic expansion for the boundary layer [82]. Where feasible stretched grids should be used to resolve the boundary layers. When the

position of the boundary layer is not known in advance or is nonuniform along the boundary this is a difficult process.

The important point is that this oscillation is entirely due to faulty boundary treatment, i.e., nonresolution of the boundary layers. For example, specifying  $u_x = 0$  at  $x = 1$  rather than  $u = 0$  eliminates these oscillations. This is a practical method for outflow boundary conditions [84]. Alternatively, one can specify combinations of  $u$  and higher order derivatives at the boundary. As  $\Delta x$  goes to zero this combination should reduce to  $u(1) = 0$  and so the scheme converges for fixed  $R$ . As  $R_\Delta$  increases the boundary condition should approximate some extrapolation formula which is stable for the hyperbolic difference approximation. For example, we can replace (2.4b) by

$$(2.4c) \quad v_N + R_\Delta (v_N - v_{N-1}) = 0$$

The solution to (2.4) is then given by

$$(2.6) \quad v_j = AQ^j + 1 - A; \quad A = (1 - Q^N + R_\Delta Q^{N-1}(1-Q))^{-1}$$

By inspection  $v_j$  converges to  $u(x_j)$  as  $\Delta x$  goes to zero. As  $R_\Delta$  increases beyond 2,  $Q$  becomes negative and oscillations appear. However, the factor  $A$  in front of the oscillatory part becomes small and so the oscillations do not disturb the solution. In more practical situations the first difference  $v_N - v_{N-1}$  can be replaced by higher differences for greater accuracy. Similarly, more complicated weights than simply  $R$  can be constructed. For

multidimensional problems  $R_\Delta$  varies locally in both space and time. The downstream boundary conditions can also create oscillations when the mesh does not resolve the boundary layers. Correct treatment of the downstream boundaries eliminates this difficulty [95].

This provides an additional example of the ill effects of improper boundary treatment. As before the effects propagate into the interior and cannot always be easily traced back to its proper source.

### 3. HIGHER ORDER METHODS — FORMULATION

As computer hardware improved, the need for more sophisticated numerical algorithms became obvious. In the early stages of software development a standard technique was a first order method while a high order method signified a second order method. Computers were not sufficiently fast to consider two dimensional problems with fine meshes and so only low accuracy results were obtained. With the advent of faster and more structured computers it is now reasonable to achieve one percent accuracy for many two dimensional time dependent problems. Three dimensional problems are being solved with coarse meshes. With this situation it is necessary to analyze higher order methods. When one wishes accuracies of the order of one to five percent the higher order methods allow for a coarser grid than first or second order methods with no loss in accuracy. This coarser grid means that both computer storage and computer running time can be decreased without any deterioration in the solution. When even more accurate solutions are needed the advantages of the higher order methods are more pronounced. The results of [188] show that even with low accuracy requirements the fourth order method was more efficient.

Higher order methods may not always be advantageous or feasible. Higher order methods usually require more computer time per time step than lower order methods. Hence, efficiency is increased only if a coarser mesh can be used. There are various circumstances where the mesh is

constrained by considerations other than accuracy and hence little is achieved by higher order methods. One case is when the geometry of the problem demands a large number of points. For example, if one wishes to describe the many perturbations on a real wing then one needs many more points than are needed for reasonable accuracy with a second order method. Another example occurs in meteorological flows over the globe. The accuracy of any algorithm is limited by uncertainties in the physics of the model and in observational data. However, one cannot choose too coarse a grid or the topography of the earth is distorted. Similar situations occur in other fields where the basic equations being integrated have only limited validity. However, for the majority of cases where the mesh is constructed mainly on accuracy considerations the use of higher order methods can lead to large savings in time and storage. Furthermore, the implementation of these methods frequently does not require large modifications to existing codes.

The construction of higher order methods has proceeded along one of three lines. Either extensions of existing finite difference methods, or finite element methods or spectral methods. Multidimensional finite element methods have not proven very successful for hyperbolic problems. There are problems with the inversion of a large unstructured but sparse matrix and have thus far not competed successfully with standard alternating direction

techniques or explicit methods. Furthermore, finite element methods do not automatically yield stable boundary treatment (see e.g. [72] and [80]) and so much of their justification for elliptic problems does not generalize. In this section we shall discuss finite difference methods and spectral methods.

High order finite difference methods have the advantage that they are similar to lower order methods. Hence, their implementation is easier and usually does not require major modifications to existing programs. Spectral methods are even higher order and frequently are "infinite" order methods. They have limited applicability to problems with complex boundaries (see however [151]) and their suitability for shock problems needs further investigation. It is possible to construct unconditionally stable spectral methods; also boundary conditions are more straightforward with spectral methods. We shall concentrate on the so called pseudo-spectral or collocation methods as they have wide range of applicability. Galerkin spectral methods are more costly because of the need to calculate convolution sums. Hence, they are limited to equations with a quadratic nonlinearity in which case fast methods are available to calculate the convolution sums [149]. Even in this case they are two to three times slower than a pseudospectral method.

We first consider the one-dimensional equation

$$(3.1) \quad u_t + f_x = 0$$

and some extensions of standard second order methods.

The leapfrog approximation to (3.1) is given by

$$(3.2) \quad u_j^{n+1} = u_j^{n-1} - \lambda (f_{j+1}^n - f_{j-1}^n)$$

with  $\lambda = \Delta t / \Delta x$ . A fourth order extension suggested by Kreiss and Oliger [111] is

$$(3.3) \quad u_j^{n+1} = u_j^{n-1} - \frac{\lambda}{6} [8(f_{j+1}^n - f_{j-1}^n) - (f_{j+2}^n - f_{j-2}^n)]$$

At the boundaries (3.3) can be supplemented by  
(see [64] and [143])

$$\begin{aligned} u_0^{n+1} = u_0^{n-1} - \frac{\lambda}{3} (-11f_0^n + 18f_1^n - 9f_2^n + 2f_3^n) \\ + \frac{11\lambda\rho}{6} (u_0^{n+1} - 2u_0^n + u_0^{n-1}) \end{aligned}$$

(3.4) and

$$\begin{aligned} u_1^{n+1} = u_1^{n-1} - \frac{\lambda}{3} (-2f_0^n - 3f_1^n + 6f_2^n - f_3^n) \\ + \frac{\lambda\rho}{2} (u_1^{n+1} - 2u_1^n + u_1^{n-1}) \end{aligned}$$

with  $\rho \geq$  spectral radius of  $A = \partial f / \partial u$ .

These equations can be trivially solved for  $u_0^{n+1}$  and  $u_1^{n+1}$ .

Similar expressions can be derived for  $u_N^{n+1}$  and  $u_{N-1}^{n+1}$ .

To these conditions must be appended the appropriate boundary conditions. This scheme is stable if  $\lambda \frac{\partial f}{\partial u} \leq .72$ .

Another standard scheme is the Lax-Wendroff method.

A two step version proposed by MacCormack [124] is

$$\begin{aligned} (3.5) \quad u_j^{(1)} &= u_j^n - \lambda (f_{j+1}^n - f_j^n) \\ u_j^{n+1} &= \frac{1}{2} [u_j^n + u_j^{(1)} - \lambda (f_j^{(1)} - f_{j-1}^{(1)})] . \end{aligned}$$

Another variant uses backward differences for the predictor and forward differences for the corrector. A fourth order extension is given by Gottlieb and Turkel [69], [188].

$$\begin{aligned}
 u_j^{(1)} &= u_j^n + \frac{\lambda}{6} (7f_j^n - 8f_{j+1}^n + f_{j+2}^n) \\
 (3.6) \quad u_j^{n+1} &= \frac{1}{2} [u_j^n + u_j^{(1)} - \frac{\lambda}{6} (7f_j^{(1)} - 8f_{j-1}^{(1)} + f_{j-2}^{(1)})] .
 \end{aligned}$$

The boundary treatment for the predictor is

$$\begin{aligned}
 u_{N-1}^{(1)} &= u_{N-1}^{(1)} - \frac{\lambda}{6} (4f_N^n - f_{N-1}^n - 4f_{N-2}^n + f_{N-3}^n) \\
 (3.7a) \quad u_N^{(1)} &= u_N^n - \frac{\lambda}{6} (15f_N^n - 28f_{N-1}^n + 17f_{N-2}^n - 4f_{N-3}^n)
 \end{aligned}$$

and for the corrector

$$\begin{aligned}
 u_0^{n+1} &= \frac{1}{2} [u_0^n + u_0^{(1)} - \frac{\lambda}{6} (4f_3^{(1)} - 17f_2^{(1)} + 28f_1^{(1)} - 15f_0^{(1)})] \\
 (3.7b) \quad u_1^{n+1} &= \frac{1}{2} [u_1^n + u_1^{(1)} - \frac{\lambda}{6} (-f_3^{(1)} + 4f_2^{(1)} + f_1^{(1)} - 4f_0^{(1)})] .
 \end{aligned}$$

The boundary conditions (3.7) are identical to using cubic extrapolation to calculate the fluxes exterior to the domain and then using (3.6). There exists another variant with backward differences in the predictor and forward differences for the corrector. For fourth order accuracy, in space, one must alternate the two variants. This scheme is stable if  $\lambda \frac{\partial f}{\partial u} \leq 2/3$ .

The schemes that have been presented are second order in time. It is possible to develop four step methods that are fourth order in both space and time. One such method is

$$\begin{aligned}
 u_{j+\frac{1}{2}}^{(1)} &= \frac{1}{2}(u_{j+1}^n + u_j^n) - \frac{\lambda}{2}(f_{j+1}^n - f_j^n) \\
 u_j^{(2)} &= \frac{-u_{j+1}^n + 10u_j^n - u_{j-1}^n}{8} - \frac{\lambda}{2}(f_{j+\frac{1}{2}}^{(1)} - f_{j-\frac{1}{2}}^{(1)}) \\
 (3.8) \quad u_{j+\frac{1}{2}}^{(3)} &= \frac{-(u_{j+2}^n + u_{j-1}^n) + 9(u_{j+1}^n + u_j^n)}{8} \\
 &\quad + \lambda[f_{j+1}^{(2)} - f_j^{(2)} + \frac{1}{8}(-f_{j+2}^n + 3f_{j+1}^n - 3f_j^n + f_{j-1}^n)] \\
 u_j^{n+1} &= u_j^n + \frac{\lambda}{6}[f_{j+\frac{1}{2}}^{(3)} - f_{j-\frac{1}{2}}^{(3)} + f_{j+1}^{(2)} - f_{j-1}^{(2)} \\
 &\quad + \frac{1}{2}(-f_{j+\frac{3}{2}}^{(1)} + 7f_{j+\frac{1}{2}}^{(1)} - 7f_{j-\frac{1}{2}}^{(1)} + f_{j-\frac{3}{2}}^{(1)}) \\
 &\quad + \frac{1}{16}(-f_{j+2}^n + 10f_{j+1}^n - 10f_{j-1}^n + f_{j-2}^n)] .
 \end{aligned}$$

This scheme is stable if  $\lambda \frac{\partial f}{\partial u} \leq 1$ .

Other variants are given in [1] and extensions to multidimensions are described in [186]. Third order methods in time are given by Burstein and Mirin [30] and Rusanov [164], [165]. Steppeler developed third order methods in space and time based on an explicit evaluation of the Taylor Series combined with a third order finite element approximation [175], [176].

An alternative approach is to use Richardson extrapolation at each time step to increase the local accuracy in time. For the leapfrog method, which is symmetric about  $t + \Delta t/2$ , this is straightforward while for the multistep methods it is more complicated. This approach increases the domain of dependence and also decreases the time step allowed by stability. It has the advantage of simplicity and of generalizing to multidimensions ([187]).

The schemes considered until now have been explicit methods that are fourth order in space. We now present higher order implicit methods. Comparisons between explicit and implicit schemes are presented in Section 5. We consider the compact implicit scheme [149], [202].

$$(3.9) \quad \left(\frac{1-\alpha}{2}\right) \Delta u_{j-1}^n + \alpha \Delta u_j^n + \left(\frac{1-\alpha}{2}\right) \Delta u_{j+1}^n \\ = -\frac{\lambda}{2} [\xi(f_{j+1}^{n+1} - f_{j-1}^{n+1}) + (1-\xi)(f_{j+1}^n - f_{j-1}^n)]$$

$$\text{with } \Delta u_j^n = u_j^{n+1} - u_j^n.$$

If  $\alpha = 1$  we have the standard implicit schemes. These are second order in time when  $\xi = 1/2$  and unconditionally stable for  $\xi \geq 1/2$ . If  $\alpha = 2/3$  the schemes are fourth order in space. To solve (3.8) requires an iteration procedure. An alternative is to expand  $f^{n+1}$ . Let  $A = \frac{\partial f}{\partial u}$ , then a substitute for (3.9) is

$$(3.10) \quad \left(\frac{1-\alpha}{2} - \lambda \xi A^n\right) \Delta u_{j-1}^n + \alpha \Delta u_j^n + \left(\frac{1-\alpha}{2} + \lambda \xi A^n\right) \Delta u_{j+1}^n \\ = -\frac{\lambda}{2} (f_{j+1}^n - f_{j-1}^n)$$

This scheme has the same formal order of accuracy in space and time as (3.9). Experience has shown that if one is approaching a steady state or else if the time evolution is slow then (3.10) is accurate even with large time steps (see [14]). However, for some problems the iteration procedure may be necessary. For sufficiently large time steps approaching a steady state and  $\xi = 1$  it can be shown that (3.10) is approximately Newton's method for solving nonlinear equations [105].

Using a trapezoidal rule with end corrections it is possible to construct a fourth order in space and time formula that requires only three mesh points in the  $x$  direction. Let  $A$  be the Jacobian of  $f$  with respect to  $u$ . Then (3.9) can be replaced by

$$\begin{aligned}
 (3.11) \quad & \frac{1}{6}(-4\Delta u_{j-1}^n + \Delta u_j^n - 4\Delta u_{j+1}^n) \\
 &= -\frac{\lambda}{4} [f_{j+1}^{n+1} - f_{j-1}^{n+1} + f_{j+1}^n - f_{j-1}^n] \\
 &\quad - \frac{\lambda^2}{12} [A_{j+\frac{1}{2}}^{n+1}(f_{j+1}^{n+1} - f_j^{n+1}) - A_{j-\frac{1}{2}}^{n+1}(f_j^{n+1} - f_{j-1}^{n+1}) \\
 &\quad + A_{j+\frac{1}{2}}^n(f_{j+1}^n - f_j^n) - A_{j-\frac{1}{2}}^n(f_j^n - f_{j-1}^n)]
 \end{aligned}$$

If one wishes to linearize this scheme with fourth order accuracy in time, one must first calculate a second order accurate predictor. Hence, the generalization of (3.10) requires a predictor and corrector step. An additional difficulty with (3.11) is that the matrix

inversion is stable only when  $A \frac{\Delta t}{\Delta x} \leq 1$ . Hence, even though the scheme is unconditionally stable one must restrict the time step in order to get a well conditioned matrix problem. Furthermore, it is difficult to generalize (3.11) to multi-dimensional problems since an alternating direction method will reduce the time accuracy of the algorithm. This scheme as well as some noncompact higher order implicit methods are described in [92]. Fourth order, in space, methods for equations with both hyperbolic and parabolic terms are considered in [41] and [161]. Some comparisons for the boundary layer equations are presented in [205]. It is also possible to construct higher order methods for these problems by combining high order Dufort-Frankel and leapfrog methods [68], [111].

Since these schemes are compact, special schemes are only required at the boundary. The author has found that the box scheme is especially accurate even though it reduces the order of accuracy. Hence, a boundary treatment for (3.10) would be

$$(3.12) \quad \left(\frac{1 - \lambda A^n}{2}\right) \Delta u_0^n + \left(\frac{1 + \lambda A^n}{2}\right) \Delta u_1^n = -\lambda (f_1^n - f_0^n) \quad .$$

Further discussion of implicit methods is presented in section 5.

All the above methods are extensions of standard finite difference formulas. Hence, they have the advantage that it would not involve much programming effort to change an existing code. However, although they are of higher order

they are still only fourth order accurate in space. An alternative is to use a pseudo-spectral scheme. For sufficiently smooth solutions these methods converge faster than any power of the mesh size (see [70]).

For periodic boundary conditions the most appropriate expansion series is the Fourier series. To solve (3.1) with a leapfrog-like method in time one algorithm is

$$(3.13) \quad u_j^{n+1} = u_j^{n-1} - 2(\Delta t f_x)_j^n$$

where

$$(3.14) \quad (\Delta t f_x)_j^n = \sum_{k=-N}^N i \hat{f}_k G(k \Delta t) e^{\pi i j k / N}$$

where  $G(k \Delta t) = k \Delta t + O((k \Delta t)^3)$ . Given  $f$  this requires two fast Fourier transforms. A good choice for  $G$  is

$$(3.15) \quad G(k \Delta t) = (8 \sin(k \sigma \Delta t) - \sin(2k \sigma \Delta t)) / 6\sigma$$

with  $\sigma \geq 1.4 \cdot (\text{spectral radius of } \frac{\partial f}{\partial u})$ . This scheme is unconditionally stable.

For problems requiring some dissipation one can replace the leapfrog method by a Runge-Kutta method. If one wishes to use a splitting method for multi-dimensional cases then in practice one is limited to second order in time methods. Unfortunately, the second order Runge-Kutta method is unconditionally unstable for the Fourier method. Hence, we consider a modified method similar to (3.13 - 3.14). The modified Euler scheme is given by

$$\begin{aligned}
 \bar{u} &= u^n - \Delta t f_x^{(n)} \\
 (3.16) \quad u^{n+1} &= \frac{1}{2}(\bar{u} + u^n - \Delta t \bar{f}_x)
 \end{aligned}$$

with

$$\begin{aligned}
 (\Delta t f_x)_j^n &= \sum_{k=-N}^N \hat{f}_k G_1(k\Delta t) e^{\pi i j k / N} \\
 (3.17) \quad (\Delta t \bar{f}_x)_j &= \sum_{k=-N}^N \hat{f}_k G_2(k\Delta t) e^{\pi i j k / N}
 \end{aligned}$$

with  $G_1(k\Delta t) = k\Delta t$ ,  $G_2(k\Delta t) = k\Delta t$  for small  $k\Delta t$ .

Choosing  $G_1(k\Delta t) = G_2(k\Delta t) = k\Delta t$  the stability condition is  $AN^2\Delta t \leq 8$  with  $A = \partial f / \partial u$  [70]. Since this is very restrictive we substitute this with

$$\begin{aligned}
 G_1(k\Delta t) &= (-e^{2z} + 8e^z - 7)/6\sigma \\
 (3.18) \quad G_2(k\Delta t) &= (7 - 8e^{-z} + e^{-2z})/6\sigma
 \end{aligned}$$

where  $z = ik\sigma\Delta t$  and  $\sigma > 1.4\rho(A)$ . As before the scheme is unconditionally stable with these parameters.

If we consider the simplified equation

$$(3.19) \quad u_t + a(x)u_x = 0,$$

the standard stability proof for the Fourier method is valid only if  $a(x)$  doesn't change sign (see [57]). The correct analysis of (3.19) when  $a(x_0) = 0$  depends on

distinguishing between mesh-stability and time-stability. The Fourier method for (3.19) is stable for  $0 < t < T$  as the number of modes increases. Hence, by the Lax-Equivalence theorem the approximation converges to the analytic solution. However, for a fixed number of modes the error may increase exponentially as time increases (when  $a(x_0) = 0$ ). Hence, the Fourier method in its original form may not be useful when  $a(x)$  changes sign [74]. To overcome this difficulty we replace  $G_1(k\Delta t)$  by  $G_1(k\Delta t)\rho(k)$  and similarly for  $G_2$  in (3.21). We choose the cutoff  $\rho(k)$  so that it is one for small  $k$  and goes to zero for the highest modes. Majda et al. [131] and Kreiss and Oliger [113] have shown that this modification to the Fourier method is stable. In fact, using these cutoffs with a Chebyshev method (to be described) one can solve the Riemann problem of fluid dynamics and resolve the shock and contact discontinuity within one mesh width (D. Gottlieb, private communication).

For bounded domains, an expansion in Chebyshev polynomials is more appropriate. Since the eigenvalues of the operator have a negative real part, we consider a two step scheme rather than a leapfrog method. Hence, we have

$$\begin{aligned}
 u_j^{n+\frac{1}{2}} &= u_j^n - \frac{1}{2}(\Delta t f_x)_j^n \\
 u_j^{n+1} &= u_j^n - (\Delta t f_x)_j^{n+\frac{1}{2}}.
 \end{aligned}
 \tag{3.20}$$

Let  $x_j = \cos \pi j/N$ , one can then expand

$$(3.21) \quad f_j = \sum_{k=0}^N a_k T_k(x_j) \quad j=0, \dots, N$$

where [70]

$$(3.22) \quad a_k = \frac{1}{c_k} \sum_{j=0}^N \frac{1}{c_j} f_j \cos \frac{\pi j k}{N} . \quad c_0 = c_N = 2$$

$$c_\ell = 1 \quad \ell = 1, \dots, N-1 .$$

Equation (3.22) is solved using the FFT. We then have

$$(3.23) \quad (\Delta t f_x)_j = \sum_{k=0}^N b_k T_k(x_j)$$

with

$$(3.24) \quad b_k = \frac{2}{c_k} \sum_{\substack{\ell=k+1 \\ \ell+k \text{ odd}}}^N a_\ell G(\ell \Delta t)$$

and  $G(\ell \Delta t) = \ell \Delta t + O((\Delta t)^3)$ . In this case a reasonable choice is (see [73]),  $z = e^{-\alpha \ell \Delta t}$ , and

$$(3.25) \quad G(\ell \Delta t) = (11 - 18z + 9z^2 - 2z^3)/6\alpha ,$$

with  $\alpha$  approximately equal to the spectral radius of  $\frac{\partial f}{\partial u}$ .

The extension to multidimensional problems in rectangular domains is straightforward. The leapfrog

methods generalize in the obvious manner. For the Runge-Kutta methods splitting techniques are available for multi-dimensions while for the implicit methods alternating direction techniques are the most appropriate.

We have stressed methods that are second order in time. There are several reasons why higher order methods in time are less appropriate. First, the extension to several dimensions is complicated as splitting and alternating direction methods are second order in time unless complicated algorithms are constructed. The necessity for a full multi-dimensional scheme usually results in a method which requires many operations per time step. For problems where the time dependent equations are being used as a relaxation scheme to a steady state there is no obvious advantage to a higher order method in time. Even for time dependent problems the important physical phenomena frequently move at speeds considerably slower than the fastest signal speed allowed by the equations. Hence, these motions are usually easy to resolve and only the variation in space is rapid requiring higher order techniques. The other major argument for second order schemes in time is that one can always increase the time accuracy by taking smaller time steps. The computer work involved varies linearly with the time step and so this may be more efficient than a costly high order method. Furthermore, choosing smaller time steps does not increase the storage. However,

for explicit methods doubling the mesh points increases the work by  $2^{d+1}$  in  $d$  dimensions and the storage requirements increase by  $2^d$ . Hence, the use of high order methods in space to limit the number of mesh points can be very advantageous. Furthermore, one can increase the accuracy in time by locally using Richardson extrapolation [187]. In general it is not known when higher order methods in space or time are more efficient than lower order methods. One case where the author has found higher order methods, in time, useful is instability studies. Time inaccuracies can introduce errors which cause artificial instabilities. As more experience is gained better guidelines should be available.

## 4. HIGH ORDER METHODS -- RESULTS

In [150] and [186] a range of problems are considered to demonstrate the advantage of high order methods. Here we consider two of these cases which illustrate many of the phenomena of more complex situations.

The first problem is flow in a nozzle. The equations are one dimensional but many two dimensional effects are included by specifying  $A(x)$  the area of the nozzle at position  $x$ . The equations of motion are

$$\begin{aligned}
 (A\rho)_t + (\rho Au)_x &= 0 \\
 (4.1) \quad (A\rho u)_t + [A(\rho u^2 + p)]_x &= A_x p \\
 (AE)_t + [Au(E + p)]_x &= 0
 \end{aligned}$$

with  $p = (\gamma - 1)(E - \frac{1}{2} \rho u^2)$  and  $\gamma = 1.4$ .

The solution to the steady state equations is known for both smooth and shocked profiles [43]. Hence, we march the equations toward a steady state and we can then compute the errors between the computational solution and the known analytical solution.

We linearize (4.1) about a constant state  $(\rho_0, u_0, E_0)$  and drop lower order terms. One then finds that the characteristic values  $\lambda$  and eigenfunctions  $v$  are given by

$$(4.2a) \quad \lambda_1 = u_0 \quad v_1 = \left[ \frac{u_0^2}{2} - \frac{c_0^2}{\gamma - 1} \right] \rho - u_0 \rho u + E$$

$$(4.2b) \quad \lambda_2 = u_0 + c_0 \quad v_2 = u_0 \left( \frac{u_0}{2} - \frac{c_0}{\gamma-1} \right) \rho - \left( u_0 - \frac{c_0}{\gamma-1} \right) \rho u + E$$

$$(4.2c) \quad \lambda_3 = u_0 - c_0 \quad v_3 = u_0 \left( \frac{u_0}{2} + \frac{c_0}{\gamma-1} \right) \rho - \left( u_0 + \frac{c_0}{\gamma-1} \right) u + E$$

$$\text{with} \quad c_0^2 = \gamma(\gamma-1) \left( \frac{E_0}{\rho_0} - \frac{1}{2} u_0^2 \right).$$

At the inlet the flow is subsonic and we specify  $\rho$  and  $E$  equal to the known steady solution. This is supplemented by a difference equation for the characteristic variable  $v_3$  which is coming into the boundary. Given  $\rho$ ,  $E$  and  $v_3$  one can trivially solve for  $\rho u$ . With the explicit method it was not found very important to solve for  $v_3$  rather than  $\rho u$ . However, with the implicit method and large time steps the use of (4.2c) was crucial. As pointed out before the use of noncharacteristic boundary treatment frequently manifested itself as a negative pressure at the sonic point. The only way of identifying it as a boundary difficulty was to observe that the difficulty disappeared when one solved for  $v_3$  rather than  $\rho u$  by the boundary difference scheme.

For smooth solutions no boundary conditions are specified at the exit. Hence, the special boundary treatment is used for all three variables. For a shocked profile the pressure is specified at the exit. Again, with the explicit schemes it was not found necessary to use characteristic variables. Instead we calculated  $\rho$  and  $\rho u$  by finite

difference approximations to (4.1).  $E$  was then calculated knowing  $\rho$ ,  $u$  and  $p$ . With the implicit methods one must first linearize the given boundary condition so that iteration is not required. This is similar to the manner in which (3.10) was derived. Then  $p^{n+1} = p_{\text{exit}}$  is replaced by

$$(4.3) \quad \frac{u_0^2}{2} \Delta \rho - u_0 \Delta m + \Delta E = \frac{p_{\text{exit}} - p^n}{\gamma - 1}; \quad \Delta \rho = \rho^{n+1} - \rho^n$$

By inspection one verifies that in the steady state  $p = p_{\text{exit}}$ . (4.3) is supplemented by two equations based on the box scheme (3.13) for the characteristic variables  $v_1$  and  $v_2$ . For the higher order methods  $A'(x)$  must be also calculated to the same order. Hence, for all problems both  $A(x)$  and  $A'(x)$  were given analytically. For the examples considered  $A(x)$  was chosen as a hyperbolic cosine.

For smooth profiles, it was found that the major difficulty occurred at the throat where the flow is sonic. When an artificial viscosity is not used many of the methods gave rise to an expansion shock. For most of the problems the solution is considered at steady state if  $p$  changed by less than  $\epsilon = 10^{-5}$  in one time step. For some of the runs with high resolution a smaller  $\epsilon$  was chosen.

In Table 4.1 we present the results for a smooth profile. The explicit MacCormack methods did not require an artificial viscosity while the implicit method did. When needed the artificial viscosity is added explicitly

at time  $t$  even for the implicit methods. We see from the table that the fourth order explicit method is more than twice as efficient as the corresponding second order method. It also requires less than half the storage to achieve three digit accuracy in the steady state. For four digit accuracy the efficiency factor increases to 16.

For implicit methods the accuracy and stability depends very much on the boundary treatment. In [72] it is proved that one does not need to include the given boundary conditions in the implicit method. Instead, after each time step one can correct for the boundary conditions. For equations (4.1) it was found that this worked only for time steps less than three times the Courant limit, otherwise nonlinear instabilities arose. For larger time steps it was necessary to incorporate the given boundary conditions in the matrix to be inverted. With time steps of about 15 times the Courant limit steady state was reached very rapidly. In this case the higher order method was only about thirty percent more efficient. We speculate that in going to a steady state the use of the lower order box scheme at the boundary deteriorates the accuracy. For a wave equation the fourth order implicit method was 3-4 times more efficient than the second order implicit method (see also [63]). For both these cases there is no improvement in either accuracy or in the rate of convergence when a second order in time method is used rather than a first order in time method.

This problem, (4.1), was also solved with the Chebyshev collocation method (3.16) - (3.17) with  $G_1(k\Delta t) = G_2(k\Delta t) = k\Delta t$ . This is stable with time steps about .1 times the Courant limit. The error at the steady state is concentrated at the sonic point. A simple automatic postprocessor at the conclusion of the code removes this error. The result is an error level 20 times smaller than with the fourth order method, as seen in table 4.1b.

We next consider (4.1) with a shocked profile. The solution to most of the methods is not a monotone function of the mesh. Hence, instead of comparing schemes for a given error tolerance we find the asymptotic rate of accuracy. This is found by a least square estimate based on about 50 runs with different meshes. If one includes the shock area in the error analysis then all the methods converge like  $(\Delta x)^{1/2}$  in the  $L_2$  norm and as  $\Delta x$  in the  $L_1$  norm. When we exclude a fixed physical distance about the shock the scheme behaves statistically according to the formal accuracy of the method. With the implicit methods instabilities appeared when time steps larger than five times the Courant limit were used.

As the second example we consider a two dimensional problem in dynamic acoustics. The equations are given by (7.1) where the radiation boundary treatment for this problem is discussed. The numerical algorithm used to solve this problem is the second and fourth order two step schemes (3.5) and (3.6) together with a splitting of

the two dimensional problem into a series of one dimensional problems. This code was run on the CDC-STAR at NASA Langley. More details of the algorithm are found in [10].

Two cases are considered here. In the first case the mean flow is zero and the forcing function is a delta function in space and harmonic in time; for this case the analytic solution is known. The fourth order method is more accurate than a second order method with twice as many mesh points. The efficiency gain is about 400 percent at large error tolerances and increases at lower error tolerances.

In the second case we use a realistic mean flow modeled after experiments and a harmonic source located two jet diameters downstream of the jet exit. Varying the mesh and boundaries demonstrates that the fourth order method with 12000 points yields essentially the analytic result. We then measure the peak acoustic pressure as a function of the angle. The fourth order method with 8800 points gives much better accuracy than the second order method with 16000 mesh points. The fourth order method is now being routinely used to solve problems with a variety of sources including pulses, convecting sources and quadrupoles. Second order methods would not be feasible for these problems because of storage and cost limitations.

In general we have found the fourth order methods to be three to five times faster while still giving accuracy

comparable with the second order method. The savings in storage is a factor of two per space dimensions. For error levels less than one percent the efficiency of the higher order methods increase. Similar conclusions were reached in [150]. Coding changes for the finite difference methods are minimal given a second order program with either an explicit or implicit scheme.

On some simple problems spectral methods behave even more efficiently than the fourth order schemes. However, they require coding a new program with careful attention being paid to the implementation. At present there has been little experience with these methods for large scale hyperbolic problems especially in complex geometries or with nonsmooth profiles.

TABLE 4.1a

33

Smooth Solution to System (4.1) with errors  $\approx 10^{-3}$ .

Method	Order	N	CFL	Viscosity Factor	$L^2$ Error Steady State
MacCormack (3.5)	2	41	0.90	0.0	$1.93 \times 10^{-3}$
Two Step (3.6)	4	21	0.60	0.0	$8.15 \times 10^{-3}$
Fully Implicit (3.9, $\xi = 1$ , $\alpha = 1$ )	2	37	1.00	0.40	$1.05 \times 10^{-3}$
Fully Implicit	2	37	10.0	0.40	$9.97 \times 10^{-4}$
Crank-Nicolson (3.9, $\xi = \frac{1}{2}$ , $\alpha = 1$ )	2	35	1.0	0.40	$1.11 \times 10^{-3}$
Crank-Nicolson	2	35	10.0	0.40	$1.11 \times 10^{-3}$
Fully Implicit (3.9, $\xi = 1$ , $\alpha = 2/3$ )	4	23	1.0	0.40	$1.22 \times 10^{-3}$
Fully Implicit	4	29	10.0	0.30	$1.26 \times 10^{-3}$

TABLE 4.1b

Smooth Solution to System (4.1) with errors  $\approx 10^{-4}$ 

Method	Order	N	CFL	Viscosity Factor	$L^2$ Error Steady State
MacCormack (3.5)	2	171	0.90	0.0	$1.01 \times 10^{-4}$
Two Step (3.6)	4	39	0.60	0.0	$1.09 \times 10^{-4}$
Fully Implicit	2	111	10.0	0.4	$1.07 \times 10^{-4}$
Fully Implicit	4	51	10.0	0.4	$1.20 \times 10^{-4}$
Chebyshev	$\infty$	33	0.10	0.0	$1.16 \times 10^{-5}$

## 5. IMPLICIT METHODS

The use of implicit methods to solve hyperbolic equations has been increasing in recent years (see e.g. [20], [87]). The rationale behind this is that implicit methods are frequently unconditionally stable. Choosing large time steps can then more than compensate for the extra work per time step.

Even though there are no stability restrictions on the time step nevertheless the time step is still restricted by accuracy requirements. We consider the simplest equation

$$(5.1) \quad u_t - u_x = 0 \quad 0 \leq x \leq 2\pi$$

which we approximate by the Crank-Nicolson scheme

$$(5.2) \quad v_j^{n+1} - v_j^n = \frac{\Delta t}{4\Delta x} \left( v_{j+1}^{n+1} - v_{j-1}^{n+1} + v_{j+1}^n - v_{j-1}^n \right).$$

Assume  $v_j^n = \sin(jk\Delta x)$ . Since the Crank-Nicolson formula (5.2) is nondissipative the only errors are phase errors, so that  $v_j^{n+1} = \sin(jk\Delta x + \alpha)$ . For the differential equations  $\alpha_A = k\Delta t$ . The numerical phase for (5.2) is given by

$$(5.3) \quad \alpha_N = \sin^{-1} \left( \frac{\frac{\Delta t}{\Delta x} \sin(k\Delta x)}{1 + (\Delta t)^2 \sin^2(k\Delta x) / 4(\Delta x)^2} \right)$$

In Table 5.1 we present the phase errors  $\alpha_N/\alpha_A$  for  $k\Delta x = \frac{\pi}{20}$ ,  $\frac{\pi}{10}$ , and  $\frac{\pi}{4}$ . We note that the phase errors increase dramatically as we choose  $\Delta t/\Delta x$  much larger than one.

This is because the Courant condition  $\Delta t/\Delta x \leq 1$  has physical significance beyond a formal stability condition. With larger time steps we are not following the wave correctly.

The justification for implicit methods arises only by considering equations more complicated than a wave equation. A simple model is provided by

$$(5.4) \quad u_t + u_x = A(1-p)\cos(x-pt) \quad .$$

A solution to (5.4) is

$$(5.5) \quad u(x,t) = A \cos(x-pt) + B \cos(x-t) \quad .$$

If  $p \ll 1$  and  $B \ll 1$  then accuracy requirements only demand

$$(5.6) \quad \frac{p\Delta t}{\Delta x} \approx 1$$

which is much weaker than the stability criterion for explicit schemes  $\Delta t/\Delta x \leq 1$ .

Another example is provided by systems of equations with widely separated eigenvalues. For simplicity we consider the uncoupled system

$$(5.7) \quad \begin{aligned} u_t + au_x &= 0 \\ v_t + bv_x &= 0 \end{aligned}$$

with  $u = A \sin(x-at)$ ,  $v = B \sin(x-bt)$  and  $A \ll B$ ,  
 $a \gg b$ . As before explicit schemes require  $a\Delta t/\Delta x \leq 1$ .  
 However, since  $A \ll B$  accurate solutions only require  
 $b\Delta t/\Delta x \leq 1$ .

Both of these examples demonstrate the phenomena of different time scales. For these problems the time step of an explicit method would be limited by the speed of the fastest possible mode. For implicit methods the time step is chosen to resolve the slower modes which carry most of the energy. Both these simple illustrations have many practical applications. For example a slowly oscillating wing or rotor will induce wave motion with much slower speeds than that of free motion. In meteorology or plasma physics the usual speeds of propagation are much smaller than the fastest signal speed. These will be discussed further in chapter 8. The possible extensions of explicit methods for these problems will also be discussed.

A similar justification for implicit method occurs when the time step for an explicit method would vary dramatically between different regions. An extreme example occurs in laser fusion where the diffusivity can change by many orders of magnitude across the domain. In magnetic fusion the existence of near vacuum regions create areas of very high speeds compared with the center of the plasma. In other problems similar effects occur due to different mesh sizes in different regions. For problems

in meteorology the time step for an explicit scheme is determined by the small mesh volumes near the pole due to converging latitude lines. In Navier-Stokes problems with boundary layers extremely small mesh sizes occur near the body in order to resolve the boundary layer. In all these problems the time step of an explicit scheme is governed by a small region which may not be the area requiring the greatest resolution in time.

A second type of problem suitable for implicit method are those cases for which only the steady-state solution is desired. The time dependent equations are used merely as a device for obtaining iterative solutions to the steady state equations. In this case there is no need for the numerical method to accurately follow the transient. Indeed, one way to accelerate the iteration process is to make the scheme inconsistent with the transient solution. We only need guarantee that the numerical steady state achieved is independent of the iteration procedure. Consider the general equation

$$(5.8) \quad u_t = Lu .$$

A simple way to ensure the correct steady state is to solve for  $u^n = u^{n+1} - u^n$  at each time step. The algorithm then has the form

$$(5.9) \quad Q^n \Delta u^n = Lu^n .$$

The steady state is defined by  $\Delta u^n = 0$  and so we have  $Lu^n = 0$ . Since the time accuracy is not important we do not wish to iterate at each time step. In the interest of efficiency  $Q^n$  should not depend on the unknown variable  $u^{n+1}$ . In many cases this can be achieved without loss of accuracy by a linearization procedure such as introduced in [14], [23], and [122]. Higher order (in space) of these schemes were defined by (3.10) and (3.11).

If we use the backward Euler formula for (5.8) we have

$$(5.10) \quad \Delta u^{n+1} = \Delta t L u^{n+1} .$$

Linearizing, this equation we have that

$$(5.11) \quad \frac{1}{\Delta t} (I - \Delta t J^n) \Delta u^n = L u^n ,$$

$J$  is the Jacobian of  $L$  with respect to  $u$ . As  $\Delta t$  increases this scheme approaches the Newton-Raphson iteration

$$(5.12) \quad -J^n \Delta u^n = L u^n .$$

This is a property only of the backward Euler formula and is not true for other selections of parameters in (3.9).

In general it is not necessary that  $Q^n$  be a function of the exact Jacobian of  $L$  since we are only interested in the steady state. This freedom can be utilized in several different ways. One possibility is to change  $Q^n$  in such a

way as to simplify the solution of the linear set of equations (5.11). In most cases  $Q^n$  involves block tridiagonal matrices. If these matrices can be inverted by Gaussian eliminations without pivoting then the inversions can be accomplished by the Thomas algorithm in  $O(m^3N)$  operations where  $m$  is the block size and  $N$  is the number of mesh points (see [103]). Hence, for general block tridiagonal matrices and  $m$  larger than 3 or 4, most of the work is in inverting the full blocks. When the fluid dynamic equations are written in velocity form these blocks can be decomposed as a direct sum of smaller blocks and so the process can be speeded up [23]. When the momentum form of the fluid equations are used full blocks occur. However, by using the freedom in  $Q^n$  one can simplify these blocks at the expense of making the numerical scheme inconsistent with the time dependent equations [174]. In fact even when solving the steady equations directly using Newton's method [17]  $J$  need not be the Jacobian of  $L$ . This generalization leads to the use of quasi-Newton methods (for a survey see [46]).

Alternatively one can choose  $Q^n$  in such a manner as to speed up the convergence. McDonald and Briley [128] consider methods with different  $\Delta t$  at different mesh points. This can be viewed as a matrix conditioning of the linear equations. This is especially promising for parabolic equations in two space dimensions where the theory of parameter selection for A.D.I. methods is well developed.

Implicit methods have the disadvantage that they require the solution of a large number of coupled equations at each time step. Therefore, the reduction in the number of time steps compared with explicit methods must be weighed by the increase in the number of arithmetic operations required for each step. To simplify the inversion process in several dimensions alternating direction methods are generally used. In this case one needs to invert a block tridiagonal matrix for each direction. As mentioned previously this is very expensive when the block sizes get large. For example, in the magnetohydrodynamic case the blocks are  $8 \times 8$  matrixes. In combustion problems there is at least one partial differential equation per species. Hence, for complicated chemical processes very large blocks can be generated. These situations render standard implicit methods impractical as the work increases with the cube of the block size. In some cases one can use knowledge of the block structure to reduce this work [23]. However, when shocks appear and the conservative forms of the equations must be used, full matrices are unavoidable.

Furthermore, the Thomas algorithm is an inherently serial algorithm and so inefficient for many vector processors. In three space dimensions one can perform many tridiagonal inversion simultaneously to partially vectorize the procedure. However, this demands large storage requirements. The use of a cyclic reduction method is more efficient for a vector machine but is still very far from optimal for these pipeline machines. Hence, many of the advantages of A.D.I. are negated on machines as the STAR-100.

An additional difficulty with alternating direction methods is that they introduce  $O((\Delta t)^2)$  perturbations into the matrix  $Q^n$  of (5.10). In this case the scheme no longer approximates the Newton method for large  $\Delta t$  and consequently there is a reduction in the rate of convergence to a steady state. Marching to a steady state using large time steps one wants to use the delta form (5.10) so as to ensure that the steady state is independent of  $\Delta t$ . In two space dimensions the alternating direction methods which solve for  $u^{n+1}$  and  $\Delta u^n$  are equivalent, but in three dimensions they are not. The three dimensional algorithm is unconditionally stable in the linear case if one solves for  $u^{n+1}$  but the steady state depends on  $\Delta t$ . On the other hand if one solves for  $\Delta u^n$  to produce a steady solution independent of  $\Delta t$ , the algorithm is unconditionally unstable for scalar problems. As the entropy equation is essentially a scalar equation this method has difficulties for many systems. Only the addition of viscous terms can stabilize the procedure.

Several alternatives have recently been advanced as substitutes to alternating direction methods. Steger and Warming [176] have suggested splitting the flux vector into two parts corresponding to the positive and negative eigenvalues. Each part is then solved using the one sided differences appropriate for the corresponding eigenvalue. Jameson and Turkel [105] have proposed a method based on a LU decomposition. In this method the lower and upper factors

are chosen for computational ease. The resulting scheme can be chosen to be second order accurate in space. It is demonstrated that the crucial ingredient is that each of the  $L$  and  $U$  factors be diagonally dominant. The diagonal dominance of the final scheme is irrelevant. This scheme is stable for one, two and three dimensions. A common feature of both these schemes is that only two factors appear independent of the number of space dimensions. For one dimension this is a disadvantage since it introduces perturbations of order  $(\Delta t)^2$  and so slows down the convergence rate. However, for three space dimensions the A.D.I. schemes have changes of order  $(\Delta t)^3$  from the backward Euler method and so converge to a steady state even slower than these methods for large  $\Delta t$ . The requirement of three sweeps through the mesh for a three dimensional A.D.I. method is also a disadvantage when not all the information can be stored in core.

Since the backward Euler method is a good approximation to Newton's method it may be advantageous to use this method even for multidimensional problems. The resulting matrix is no longer tridiagonal and hence it is necessary to find some efficient method to invert the matrix. Band Gaussian elimination solvers require excessive core especially since pivoting must be used. For parabolic problems that arise in laser fusion Kershaw [108] has used a conjugate gradient method for inverting the matrix. Similarly Orszag [151] has advocated the use of conjugate gradient to invert the full

matrices that arise from spectral methods. Brackbill [20] has used a SOR method in conjunction with his implicit method for the nonlinear MHD equations.

Until now we have concentrated on the rate of convergence to a steady state. An equally important topic is the accuracy in the steady state. We wish to stop the iteration process in such a manner so that the error in the iteration process is below the truncation error of the steady state scheme. In using (5.10) we have assumed that in the steady state  $\Delta u^n = 0$ . In many codes, one iterates until  $\Delta u^n$  is below some given error tolerance,  $\epsilon$ . We then have that  $Lu^n = Q^n \epsilon$  so that the error in  $Lu$  is effected by the operator,  $Q$ . Therefore, it is better to use the residual  $Lu^n$  as a measure of the steady state rather than  $\Delta u^n$ . Since,  $L$  is in general not an elliptic operator it is difficult to measure the deviation of  $u^n$  from the steady state, even given that  $Lu^n = \epsilon$ . It is also important to choose initial conditions that are a reasonable guess to the steady state solution.

In summary, implicit methods have been successful when one is careful to match the physics with the method. These methods are less appropriate for wave-like equations where one wishes to follow all the possible modes of propagation.

Attention to boundary treatment is even more important for implicit methods than for explicit methods. This is mainly because one wishes to use the implicit methods with

large time steps. In many calculations one could use any one sided difference to some equation to supplement the given boundary conditions as long as small time steps were used. However, for large time steps it was essential, for nonlinear stability, that the characteristics variables, e.g. (4.2), be used. Skölleremo [172] gives examples where the use of an explicit boundary method can force a stability condition for the entire method.

For complicated flows the choice of a poor boundary treatment may be difficult to judge. For example, incorrect treatment of outflow boundaries will severely slow the rate of convergence to a steady state. Rudy and Strikwerda [162],[163] and Thomas [182] demonstrate that overspecification can be particularly inefficient. However, if one judges the results by comparison with experiment one would never sense the incorrect boundary treatment. Gustaffson and Kreiss [85] show that for this case the steady state may depend on the initial conditions. In any case it would not be obvious that the slow rate of convergence is due to the boundary treatment. Thomas [182] describes boundary treatments for other types of boundaries that occur in Navier-Stokes flow (see also [4]).

Due to the unconditional stability of implicit schemes it is not clear how to choose the time step. One simple procedure is

$$\frac{(\Delta t)^{n+1}}{(\Delta t)^n} = \frac{\frac{\|\Delta u^n\|}{\|u^n\|}}{\frac{\|\Delta u^{n-1}\|}{\|u^{n-1}\|}} \quad ; \quad \Delta u^n = u^n - u^{n-1}$$

for some choice of norm. This has been used successfully in plasma diffusion problems (D. Nelson, private communication). A more sophisticated choice is to compare two iterates for time  $t$  as is done in o.d.e. solvers. When going to a steady state  $\Delta t$  can be viewed as an iteration parameter, as discussed previously.

TABLE 5.1

Phase errors for the Crank-Nicolson method  
as a function of the time step.

$\frac{k\Delta x}{\Delta t/\Delta x}$	$\frac{\pi}{20}$	$\frac{\pi}{10}$	$\frac{\pi}{4}$
.1	.995	.983	.900
1.	.993	.976	.865
2.	.987	.954	.783
3.	.978	.921	.641
5.	.949	.837	.262
10.	.845	.365	.070
50.	.063	.016	.003

## 6. MOVING BOUNDARIES AND ADAPTIVE GRIDS

In the usual fluid dynamical situation boundaries are considered as fixed in time. In many situations, especially for analytical results, the fluid is considered as being confined to a rectangular or circular region. However, in many circumstances one must include the motion of the boundary as an important element of the problem. The movement of the boundary arises from many different factors which require different methods.

The simplest situation arises when the boundary moves in response to an external force. This may represent a moving piston, a diaphragm or similar devices. The next situation occurs when the boundary represents a free surface. In this case the boundary represents the separation between the domain of interest and some other region, for instance a vacuum or the general atmosphere. The outer region presents no resistance and the boundary moves in accordance with the forces exerted on it by the interior material. This occurs when metals are subject to a high temperature or pressure and begin to flow. Other examples occur when liquids are not in a container, as in water over a dam or water waves or raindrops. The most difficult problem arises when the moving boundary represents an interface between different materials. In many cases these are materials subject to the same differential equations. The two materials differ only in their density or other material properties. The simplest such case is a

contact discontinuity in fluid mechanics where both sides are the same material but jumps occur across the moving surface. In other situations the media on the two sides of the moving boundary are represented by different differential equations. Such conditions arise when an explosive gas impinges on a solid material. Another example is the interface between a plasma and a vacuum. In the latter case hyperbolic time dependent equations describe the motion of the plasma while the magnetic field in the vacuum is given by a time independent Poisson equation. In these cases the boundary moves as a result of imbalance of forces from the two sides.

The standard techniques to solve such problems are Lagrangian methods (see e.g. [19], [20], [96], [197]). With such schemes the boundaries are coordinate lines; this simplifies the algorithm. However, Lagrangian methods have several drawbacks. They are usually low order methods especially in regions where the mesh is nonuniform. When the motions are large the grid undergoes severe distortions which require rezoning the mesh. This rezoning is quite difficult in three dimensions. The rezoning usually results in a loss of mass and so should not be done too frequently. In addition, the rezoning formulas are usually not automated and require intervention by the user. The main drawback of Lagrangian methods is that they are very complicated and not user oriented. One method of simplifying the rezoning

difficulty is to use triangular meshes. At each time step reconnections are made when appropriate. This method developed by Fritts and Boris [60] has been applied to problems involving high shear. As a dual to this method is a scheme devised by Peskin [153] which is a grid free Lagrangian method. This latter scheme has been applied to the incompressible Navier-Stokes equations. A difficulty with both these methods are that they are difficult to couple with implicit time algorithms and also the extension to three dimensions is computationally complicated due to the many possible configurations.

At the opposite end one can use a strictly Eulerian approach and integrate across the boundary. To prevent smearing of the interface one adds some artificial compression after each time step [91]. The location of each material is identified by a color function which is 1 in one region and 0 in the other region. This color function satisfies a convection equation which itself must be solved numerically without smearing. This method has not been used extensively on large scale problems and its applicability for multidimensional problems is questionable. It would be difficult to implement at interfaces where jump conditions need to be satisfied. These jump conditions depend on the physics of the situation and cannot be derived just from properties of the differential equation.

One alternative is to map each region onto a rectangle. If this mapping is done at each time step then one must interpolate between the grids at successive time steps. Instead, one can initially find a grid by any package, e.g. [184]. This gives new coordinates  $\xi = \xi(x, y)$ ,  $\eta = \eta(x, y)$ . We now allow the new coordinates to vary with time, so that  $\xi = \xi(x, y, t)$  and  $\eta = \eta(x, y, t)$ . Given the differential equation

$$(6.1) \quad w_t + f_x + g_y = 0 \quad .$$

This gets transformed into (see [154], [193])

$$(6.2) \quad q_t + F_\xi + G_\eta = 0$$

with

$$q = IW$$

$$(6.3a) \quad F = I(\xi_t w + \xi_x f + \xi_y g)$$

$$G = I(\eta_t w + \eta_x f + \eta_y g)$$

and

$$(6.3b) \quad \xi_t = -x_t \xi_x - y_t \xi_y \quad .$$

$$\eta_t = -x_t \eta_x - y_t \eta_y$$

$$(6.3c) \quad I = x_\xi y_\eta - x_\eta y_\xi$$

$$J = \xi_x \eta_y - \xi_y \eta_x = 1/I$$

In order to determine all these quantities we require the grid point speeds  $(x_t, y_t)$ . One method is to construct a new grid at the advanced time. This can be done either as a function of gradients in the problem [50] or by solving an elliptic equation. Given  $(x, y)$  at  $t$  and  $t + \Delta t$   $(x_t, y_t)$  can be calculated. An iterative procedure would be more costly but also more stable. Hindeman et al. [98] prefer differentiating the elliptic equation for  $(x, y)$  with respect to  $t$ . This yields a linear elliptic equation for  $(x_t, y_t)$ . Given  $(x_t, y_t)$  on the boundary this equation is solved at each time level. It is also important to solve for the grid in a manner which is consistent with the numerical solution of the differential equations [183].

These procedures require the solution of an elliptic equation at each time step. It is not clear that the overhead required by the mapping justifies its use. In addition, we would like to use information about the gradients of the solution to construct the grid at the new time level. At this time it is not known what are reasonable ways of accomplishing this especially for multidimensions. For example, it is well known that we can not allow the image of a square in  $(\xi, \eta)$  to become too distorted or else inaccuracies and instabilities may occur. Also, if the grid changes too rapidly in time one would expect difficulties. An experimental program for a parabolic problem is presented in [50] while one for hyperbolic systems is presented in [98]. Oliger [146] and Yanenko [207] also investigate adaptive grids from a more theoretical viewpoint.

The differential equations are solved on the fixed Eulerian mesh. At mesh points far from the boundary the standard Eulerian scheme is used. At grid points near the boundary one sided differences are used. Alternatively the fluxes can be extrapolated to the outside of each domain and then the standard scheme is used. The boundary itself is identified by a series of Lagrangian tracer particles which are allowed to move through the fixed Eulerian mesh. This boundary is used only to keep the regions separate and prevent diffusion of one material into another region. The only communication between different regions is via jump conditions across an interface. No differential equations are integrated across a boundary.

As an example of the difficulties encountered with moving surfaces we discuss the impact of materials at high speeds. Metals impacted by gases or by other metals are subjected to high pressures which will deform the metal. The metals display elastic-plastic deformations. The differential system for these situations is given by the Prandtl-Reuss equations [97]. As usual,  $\rho$ ,  $u$ ,  $v$ ,  $e$  represent the density, velocities and internal energy respectively. The total stress are given by  $\tau_{ij} = S_{ij} - p\delta_{ij}$   $S_{ij}$  are stress deviatories and  $p$  is the thermodynamic pressure. When the deviatories are less than the stress limit, i.e.  $\{S_{ij}^2 \leq \kappa^2$  the flow is elastic. For  $\{S_{i,j}^2 = \kappa^2$  the flow is plastic.  $\kappa^2$  is constant in the simplest of models but is a function of various dependent

variables when work hardening is included. We shall consider these equations with cylindrical symmetry.

Let  $\frac{d}{dt} = \frac{\partial}{\partial t} + u \frac{\partial}{\partial z} + v \frac{\partial}{\partial r}$ . Then the equations in the generalized elastic regime are given by

$$\begin{aligned}
 \rho \frac{dp}{dt} + \rho \left( \frac{\partial u}{\partial z} + \frac{\partial v}{\partial r} \right) &= - \frac{\rho v}{r} \\
 \rho \frac{du}{dt} + \frac{\partial p}{\partial z} - \frac{\partial S_{11}}{\partial z} - \frac{\partial S_{12}}{\partial r} &= \frac{S_{12}}{r} \\
 \rho \frac{dv}{dt} + \frac{\partial p}{\partial r} - \frac{\partial S_{12}}{\partial z} - \frac{\partial S_{22}}{\partial r} &= \frac{\partial S_{22} + S_{11}}{r} \\
 \rho \frac{de}{dt} - (S_{11} - p) \frac{\partial u}{\partial z} - (S_{22} - p) \frac{\partial v}{\partial r} - S_{12} \left( \frac{\partial v}{\partial z} + \frac{\partial u}{\partial r} \right) \\
 (6.4) \qquad \qquad \qquad &= - \frac{v(S_{11} + S_{22} + p)}{r}
 \end{aligned}$$

$$\frac{dS_{11}}{dt} = 2 \mu \epsilon_{11}$$

$$\frac{dS_{12}}{dt} = 2 \mu \epsilon_{12}$$

$$\frac{dS_{22}}{dt} = 2 \mu \epsilon_{22}$$

with the strain rates  $\epsilon_{ij}$  given by

$$\begin{aligned}
 \epsilon_{11} &= \frac{1}{3} \left( 2 \frac{\partial u}{\partial z} - \frac{\partial v}{\partial r} - \frac{v}{r} \right) \\
 (6.5) \quad \epsilon_{12} &= \frac{1}{2} \left( \frac{\partial u}{\partial r} + \frac{\partial v}{\partial z} \right) \\
 \epsilon_{22} &= \frac{1}{3} \left( 2 \frac{\partial v}{\partial r} - \frac{\partial u}{\partial z} - \frac{v}{r} \right) .
 \end{aligned}$$

To this we append an equation of state

$$(6.6) \quad p = p(\rho, \epsilon) .$$

Since these equations are hyperbolic we can construct characteristic equations for which differentiations in only two space-time directions occur. In contrast to the fluid dynamic equation there are two speeds of propagation. The first is the shear or transverse speed given by

$$(6.7a) \quad c_s^2 = \mu / \rho .$$

There is also the compressive or longitudinal speed

$$(6.7b) \quad c_d^2 = c^2 + 4\mu/3\rho$$

where

$$(6.7c) \quad c^2 = \frac{\partial p}{\partial \rho}$$

is the fluid dynamic sound speed. In addition to these two conoids there are three quantities that propagate along stream lines. Hence, in total there are seven sets of bicharacteristics.

In the interior we solve (6.4) by any dissipative conservative scheme. We do not follow the shocks explicitly but instead capture them. The elimination of shock fitting eliminates many of the complexities of the problem and allows us to concentrate on fitting the interfaces. Since shocks are compressive it is possible to follow them without shock fitting. However, contact discontinuities will be unacceptably smeared unless some special procedure is followed. Hence, all free surfaces or interfaces are followed explicitly to prevent their diffusion.

Due to the complications of the boundary we have chosen a simple scheme for the Eulerian mesh. All the results were obtained using a two step scheme devised by Burstein [29]. This scheme uses data at a nine point rectangular lattice at the time level  $t$  to advance to  $t+\Delta t$ . At points far from the boundary the computation is straightforward. At mesh points near the boundary the fluxes at artificial points outside the domain are found by extrapolation. Quadratic extrapolation including the values at the boundary is used because of the complexities that arise

with an arbitrarily shaped boundary. After the flux extrapolation the nine point scheme can be used without any complications. Each side of an interface is updated independently. In no case are values on one side of the boundary used to update variables on the other side. In many cases different grids are used in different regions so that it would be difficult to integrate across an interface even for quantities that are continuous across the interface.

All boundaries, which move through the fixed Eulerian mesh, are marked by Lagrangian tracer particles with position  $(z,r)$  and velocity  $(u_B, v_B)$ . For interfaces between two regions there are marker particles on both sides of the moving boundary. The motion of these particles is governed by the equations

$$(6.8) \quad \begin{aligned} \frac{dz}{dt} &= u_B(z,r,t) \\ \frac{dr}{dt} &= v_B(z,r,t) . \end{aligned}$$

The velocity  $(u_B, v_B)$  is the local fluid velocity and is found by extrapolation from the interior. Across an interface only the normal velocity is continuous. Hence, there will be a tangential slippage of the position of the tracer particles on one side of the interface with respect to the other side. The system of equations (6.8) are solved for the new positions  $z(t + \Delta t)$ ,  $r(t + \Delta t)$  at each boundary point by a first order method.

Since each tracer particle is moved independently the distance between these particles will vary. In many cases the particles will bunch up in some regions with very few boundary particles in other sections. To prevent this the particles are rezoned if the distance between two particles differs by more than 25 percent from the average distance between particles. This rezoning consists of creating a new set of tracer particles which are equally spaced. Any information needed at the tracer particles are found by interpolation. All distances and interpolation formulas are calculated in terms of arc length along the boundary. This is a one dimensional operation and so much simpler than a full Lagrangian rezone of the entire two dimensional grid. Furthermore, since the interior values are unaffected by this transformation, the rezoning procedure cannot affect the conservation of mass, momentum or energy.

In order to advance the solution we need the dependent variables at the boundary itself. It is here that the jump conditions affect the solution. We first describe the boundary conditions at an interface separating two contiguous elastic domains. The physical laws that apply at material interface boundaries are (1) continuity of the normal velocity,  $u_n$ , (2) continuity of the normal stress,  $\tau_{nn}$ , and (3, 4) the specification of the shear stress,  $\tau_{ng}$ , on each side of the interface as a given function of

the normal stress. Here we only consider the condition that  $\tau_{ng} = 0$  on each side of the interface, which is the free slip condition. One could also consider welded surfaces where laws (3, 4) are replaced by the condition that the entire stress matrix be continuous across the interface.

It may be verified that, for the elastic equations, there are four characteristic waves emanating from the moving interface, i.e., from each side of the interface two waves propagate away from the boundary. Hence, at the interface boundary, a total of four conditions need to be specified, so that by satisfying the above physical laws at the interface boundary, the boundary motion can be determined.

To implement the boundary conditions we consider a coordinate system with coordinates,  $n$  the normal and  $s$  the tangent to the boundary at each marker point along the boundary. Let  $S(z,r)$  be the deviatoric stress tensor as a function of  $(z,r)$ . Let  $R$  be the rotation matrix

$$(6.9a) \quad R = \begin{pmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{pmatrix},$$

with  $\theta$  the angle measured clockwise from the  $z$  axis to the normal. Then

$$(6.9b) \quad S(n,s) = R S(z,r) R^t$$

is the rotated deviatoric tensor. In this reference frame, the stress tensor  $T$  with components  $\tau_{ij}$  can be computed. The velocity vector is given by

$$(6.9c) \quad \begin{pmatrix} u_n \\ u_s \end{pmatrix} = R \begin{pmatrix} u \\ v \end{pmatrix} .$$

To find the boundary values at the new time step we must calculate fourteen quantities corresponding to the seven dependent variables on each side of the interface. Since we are given four conditions we must supplement this by ten additional pieces of information. As discussed before we shall use the characteristic variables to obtain this information. We consider the interface as increasing in the counterclockwise direction. We denote by superscript 1 the region to the left and superscript 2 the region to the right of the interface. The normal direction is taken as going from region one to region and the tangential direction counterclockwise. As stated before the signals  $c_d$ ,  $c_s$  propagating to the right bring two pieces of information to the boundary from the interior of region one. Similarly for region two we consider the signals  $-c_d$ ,  $-c_s$  travelling from right to left. In addition, we have three pieces of information on each side that travels along stream lines. Using the characteristic variables (see [33]) we find that

$$(6.10a) \quad u_n^{(1)} - u_n^{(2)} = 0$$

$$(6.10b) \quad p^{(1)} - s_{nn}^{(1)} - \left[ p^{(2)} - s_{nn}^{(2)} \right] = 0$$

$$(6.10c) \quad s_{ns}^{(1)} = 0$$

$$(6.10d) \quad s_{ns}^{(2)} = 0$$

$$(6.10e) \quad \rho^{(1)} c^{(1)^2} - p^{(1)} = \bar{\rho}^{(1)} c^{(1)^2} - \bar{p}^{(1)}$$

$$(6.10f) \quad \rho^{(2)} c^{(2)^2} - p^{(2)} = \bar{\rho}^{(2)} c^{(2)^2} - \bar{p}^{(2)}$$

$$(6.10g) \quad \frac{4\mu^{(1)}}{3\rho_0^{(1)}} p^{(1)} + c^{(1)^2} s_{nn}^{(1)} = \frac{4\mu^{(1)}}{3\rho_0^{(1)}} \bar{p}^{(1)} + c^{(1)^2} \bar{s}_{nn}^{(1)}$$

$$(6.10h) \quad \frac{4\mu^{(2)}}{3\rho_0^{(2)}} p^{(2)} + c^{(2)^2} s_{nn}^{(2)} = \frac{4\mu^{(2)}}{3\rho_0^{(2)}} \bar{p}^{(2)} + c^{(2)^2} \bar{s}_{nn}^{(2)}$$

$$(6.10i) \quad \frac{2\mu^{(1)}}{3\rho_0^{(1)}} \left[ p^{(1)} - s_{nn}^{(1)} \right] - c_d^{(1)^2} s_{nn}^{(1)} \\ = \frac{2\mu^{(1)}}{3\rho_0^{(1)}} \left[ \bar{p}^{(1)} - \bar{s}_{nn}^{(1)} \right] - c_d^{(1)^2} \bar{s}_{nn}^{(1)}$$

$$(6.10j) \quad \frac{2\mu^{(2)}}{3\rho_0^{(2)}} \left[ p^{(2)} - s_{nn}^{(2)} \right] - c_d^{(2)^2} s_{nn}^{(2)} \\ = \frac{2\mu^{(2)}}{3\rho_0^{(2)}} \left[ \bar{p}^{(2)} - \bar{s}_{nn}^{(2)} \right] - c_d^{(2)^2} \bar{s}_{nn}^{(2)}$$

$$(6.10k) \quad u_s^{(1)} - \frac{1}{\rho_0^{(1)} c_d^{(1)}} S_{ns}^{(1)} = \bar{u}_s^{(1)} - \frac{1}{\rho_0^{(1)} c_d^{(1)}} \bar{S}_{ns}^{(1)}$$

$$(6.10l) \quad u_n^{(1)} + \frac{p^{(1)} - s_{nn}^{(1)}}{\rho_0^{(1)} c_d^{(1)}} = \bar{u}_n^{(1)} - \frac{\bar{p}^{(1)} - \bar{s}_{nn}^{(1)}}{\rho_0^{(1)} c_d^{(1)}}$$

$$(6.10m) \quad u_s^{(2)} + \frac{1}{\rho_0^{(2)} c_d^{(2)}} S_{ns}^{(2)} = \bar{u}_s^{(2)} + \frac{1}{\rho_0^{(2)} c_s^{(2)}} \bar{S}_{ns}^{(2)}$$

$$(6.10n) \quad u^{(2)} - \frac{p^{(2)} - s_{nn}^{(2)}}{\rho_0^{(2)} c_d^{(2)}} = \bar{u}_n^{(2)} - \frac{\bar{p}^{(2)} - \bar{s}_{nn}^{(2)}}{\rho_0^{(2)} c_d^{(2)}}$$

In these equations the bar on the right hand side indicates quantities that already have been computed. In all the examples presented they were computed using nearest point extrapolation from the interior of the appropriate domain (see also [40]). The subscripts  $n$  and  $s$  refer to the normal and tangential directions as given by (6.9). The sound speeds  $c_s$ ,  $c_d$ ,  $c$  were defined in (6.7), while  $\rho_0$  denotes a reference density usually taken as the density of the marker particle at the previous time step. Note, all material properties differ between the two sides of the interface.

Solving the system of equations (6.10) we find that

$$(6.11a) \quad u_n^{(1)} = u_n^{(2)} = \frac{\bar{u}_n^{(2)} + r \bar{u}_n^{(1)}}{r + 1} - \frac{\kappa}{r + 1} \frac{1}{\rho_0^{(1)} c_d^{(1)}} \left[ \bar{p}_{nn}^{(2)} - \bar{p}_{nn}^{(1)} \right]$$

with

$$(6.11b) \quad \kappa = \rho_0^{(1)} c_d^{(1)} / \rho_0^{(2)} c_d^{(2)} .$$

Thus, the normal velocity is a weighted average of the extrapolated normal velocities from the two sides, the weight being the ratio of the acoustic impedances. In addition there is a correction term dependent on the difference in the extrapolated normal stresses. As usual  $\tau_{nn} = p - S_{nn}$ . In a similar manner we have

$$(6.11c) \quad \tau_{nn}^{(1)} = \tau_{nn}^{(2)} = \frac{\tau_{11}^{(1)} + \kappa \tau_{11}^{(2)}}{\kappa + 1} + \frac{\rho_0^{(1)} c_d^{(1)}}{\kappa + 1} \left( \bar{u}_n^{(1)} - \bar{u}_n^{(2)} \right) .$$

and

$$(6.11d) \quad p^{(1)} = \bar{p}^{(1)} + \frac{c^{(1)2}}{c_d^{(1)2}} \left( \tau_{nn}^{(1)} - \bar{\tau}_{nn}^{(1)} \right) ;$$

$$S_{nn}^{(1)} = p^{(1)} - \tau_{nn}^{(1)}$$

$$(6.11e) \quad p^{(2)} = \bar{p}^{(2)} + \frac{c^{(2)2}}{c_d^{(2)2}} \left( \tau_{nn}^{(2)} - \bar{\tau}_{nn}^{(2)} \right) ;$$

$$S_{nn}^{(2)} = p^{(2)} - \tau_{nn}^{(2)} .$$

Similarly we can solve for  $u_s$  and  $S_{ss}$  on each side. The complete recipe for determining the values assigned to dependent variables on each side of the interface is given by the following algorithm.

- (i) Extrapolate, from the interior to the boundary, the deviatoric stresses  $S$ , pressure  $p$ , internal energy  $e$ , and velocity components  $u$ ,  $v$  on each side of the interface.
- (ii) Transform the stress and velocity components from the  $z, r$ -coordinate system, to the  $n, s$ -coordinate system.
- (iiia) Use (6.11c) to calculate  $\tau_{nn}$ , then
- (iiib) Calculate pressure on each side using  $p^{(i)} = S_{nn}^{(i)} - \tau_{nn}$ ,  $i = 1, 2$ .
- (iv) Apply the slip free condition:  $\tau_{ns}^{(i)} = S_{ns}^{(i)} = 0$ ,  $i = 1, 2$ .
- (v) Transform the deviatoric stresses back to the  $z, r$ -coordinate system using (iv) and the extrapolated values  $\tau_{nn}^{(i)}$ ,  $\tau_{ss}^{(i)}$ ,  $i = 1, 2$ .
- (vi) Calculate  $u_n$  using (6.11a); then
- (vii) Convert the velocity components to the  $z, r$ -coordinate system using (vi) and the extrapolated values  $u_s^{(i)}$ ,  $i = 1, 2$ .
- (viii) Calculate densities from the equation of state  $\rho^{(i)} = F_i(p^{(i)}, e^{(i)})$  using (iiib) and the extrapolated values  $e^{(i)}$ ,  $i = 1, 2$ .

We note that the continuity of normal stress is not used to calculate the deviatorics but instead is used to compute  $p$ . This algorithm has been chosen so that the formulas are valid even if one or both materials are purely inviscid. In the limiting case of infinite density ratio

across the interface, i.e.,  $\rho^{(1)}/\rho^{(2)} \rightarrow 0$ , the above algorithm coincides with the common driver-driven model where  $\tau_{nn} = \bar{\tau}_{nn}^{(1)}$  and  $u_n = \bar{u}_n^{(2)}$ .

The method described above applies equally well to free surfaces if we interpret one of the domains to exhibit material properties such that all dependent variables are zero. For definiteness denote the vacuum side by superscript (2); then

$$(6.10b') \quad \tau_{nn} = \tau_{nn}^{(2)} = 0 ,$$

and the slip free condition is

$$(6.10c') \quad \tau_{ns} = 0 .$$

In many problems there exist regions with large gradients. These gradients need to be resolved in order to have an accurate solution. To prevent an excess of grids a stretching is introduced which is a function of only one coordinate transform. We denote the transformed variables by  $(\alpha, \beta)$ . By use of the implicit function theorem it is possible to transform divergence free equations from the physical space  $(z, r)$  to the computational space  $(\alpha, \beta)$  in such a manner that the new equations are still in divergence free form. A consequence of this is that shocks will be computed with the correct jump conditions in the computational plane.

In most problems in ballistics the large gradients occur near the axis of symmetry. For these cases we used a transformation (see [160]).

$$(6.12a) \quad \beta = 1 - \log \left( \frac{b+a-r}{b-a+r} \right) / \log \left( \frac{b+a}{b-a} \right)$$

with  $b = 1/(1 - d/a)$ . This maps the interval  $(0, a)$  into  $(0, 1)$  and  $d$  is the boundary layer thickness. For the acoustic problem discussed in the next section an alternate stretching was used.

$$(6.12b) \quad r = \delta \left[ 1 - a e^{-b\delta^2} \right].$$

This is inverted numerically to find  $\beta = \beta(r)$ . For the acoustics problem the transform was used in both the  $z$  and  $r$  directions. In both cases one of the free parameters controls the size of the gradients while the other controls the size of the boundary layer effect induced by the transform.

Another alternative is to choose new coordinate points,  $\beta_i$ , in some a priori manner. Cubic splines can then be used to construct the derivatives at  $\beta_i$ . The coordinate transformation generated in this manner need not be monotone. To enforce monotonicity one may need to alter slightly the  $\beta_i$  so that no abrupt jumps occur. Even though this procedure is not automatic it allows the construction of flexible coordinate systems. Since the mesh generation is done only for each geometry the inconvenience is not great. The author has used this method to construct a mesh system for a generalization of (4.1) that is being used for optimization studies for the national transonic tunnel at NASA Langley Research Center.

Due to the complicated geometry of the tunnel it was necessary to refine the mesh in several different sections of the domain; this made it difficult to use analytic transformations. The disadvantage of this method is more pronounced when one wishes to frequently change the mesh or change the geometry of the configuration.


In other problems, as the shaped charge, transformations are needed because of the shape of the domain. Even if a domain is rectangular if it is not properly aligned with the coordinate axes a large waste of grids will occur. In the shaped charge the initial shape of the liner is a rectangle rotated about  $30^\circ$  with respect to the axis of symmetry. The length of the liner is about 100 times larger than the width. For this case it was necessary to introduce the computational coordinates  $(\alpha, \beta)$  via a full two dimensional transform. Even though this complicates the equations it presents an enormous savings in both computer time and storage. Due to the moving boundary it is sometimes necessary to introduce time dependent transformations. In all these cases the coordinate transform is given analytically. Hence, it does not map the physical region into a perfect rectangle but rather into a computational region which is in some sense reasonable.

The code described above, SMITE, has been applied to numerous problems in elasticity and plasticity. These include application to bars impacting on other bars or into plates as well as problems with shaped charges and explosives. All these applications involve highly distorted boundaries together with the interaction of many shocks.

To illustrate this method and its range of applicability we present two examples. In the first case we consider an aluminum sphere impacting on a tungsten disc. The initial configuration is shown in figure 6.1a. The configuration after 25 microseconds is shown in figure 6.1b. The sphere has flattened out and is extended normal to the axis of symmetry. The disc has also been indented. Obviously, large distortions have occurred in both materials. These graphs were obtaining the system (6.4) - (6.6) with the inclusion of plasticity.

The first example illustrated the interaction of two metals. In the second example we consider a gas-metal interface. The initial configuration is shown in figure 6.2a. The larger region is a gas with ignition occurring at the origin. A blast wave propagates through the gas and impinges on the metal. The solution after 35 microseconds is shown in figure 6.2b. The gas has expanded outward while the metal has split into two sections. The larger section is a slug which contains most of the mass. In addition, there is a jet region which moves rapidly to the right. Additional examples are given in [31] and [33].

T=0.000  
MICROSECS

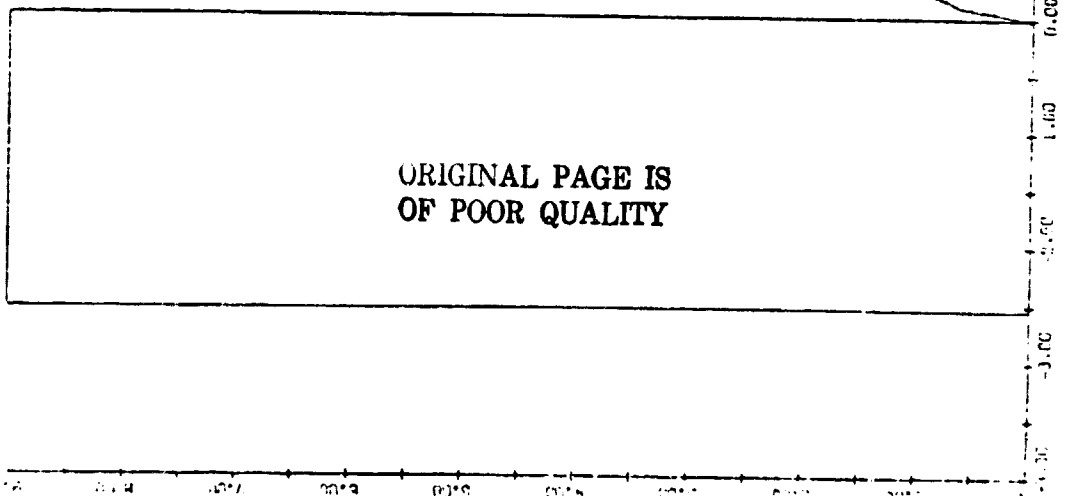

ORIGINAL PAGE IS  
OF POOR QUALITY

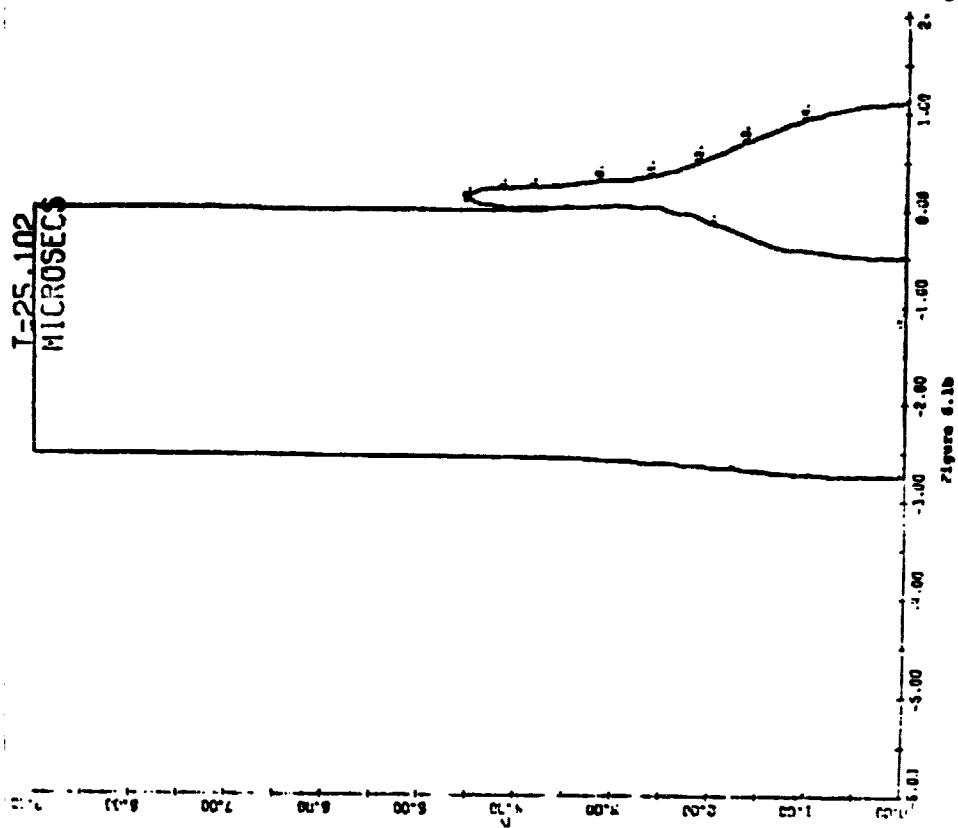


Figure 6.1b

Figure 6.1a

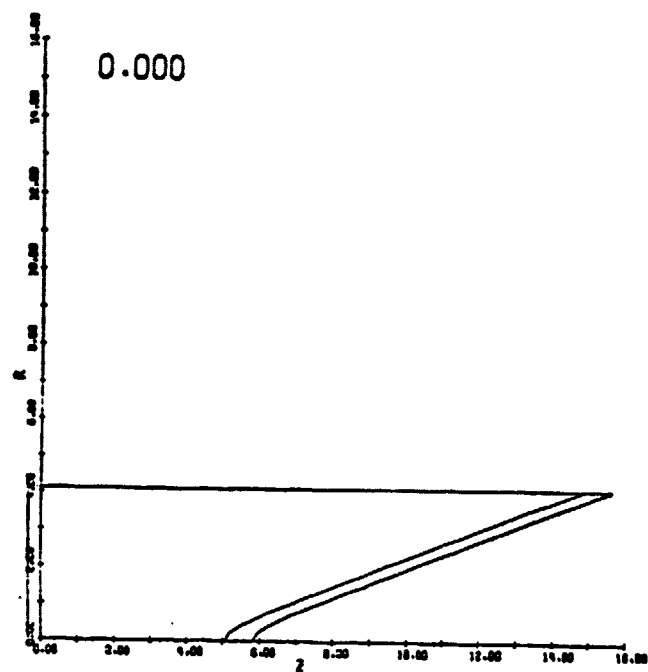


Figure 6.2a

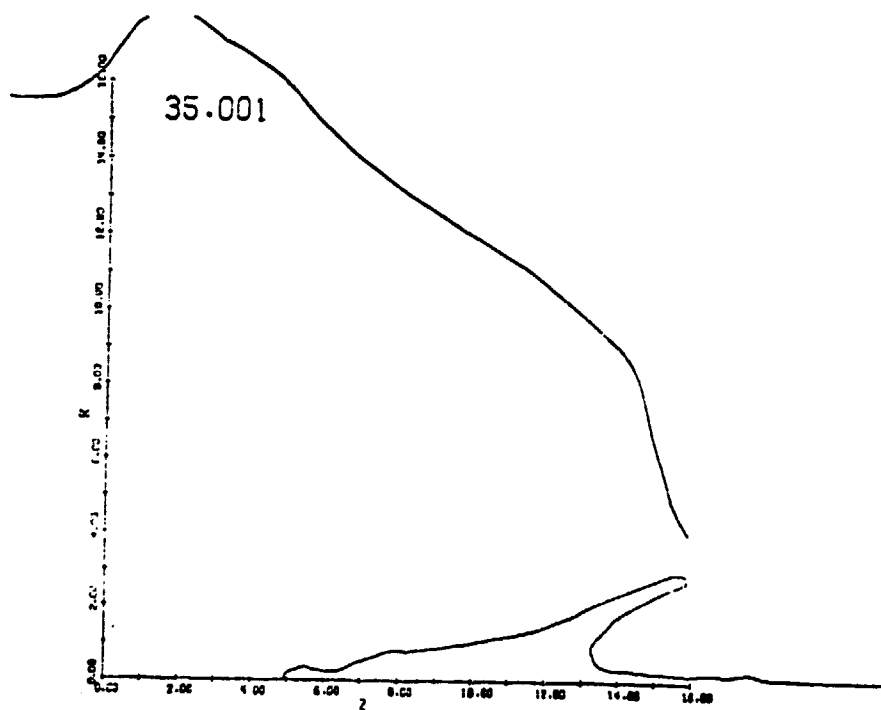


Figure 6.2b

## 7. RADIATION BOUNDARY CONDITIONS

In many problems of interest one is interested in solving the equations in an infinite domain. For computational expediency one needs to compute in a bounded domain. One possibility is to map the infinite domain onto a bounded one. However, in many circumstances this mapping can aggravate the situation especially if the solution is oscillatory at infinity or the mapping has a singularity (see [79]). An alternative possibility is to insert an artificial boundary and then impose boundary conditions on this surface to simulate an infinite domain, i.e. there should be no reflections from the boundary back into the domain. Unless certain restrictions are met this will in general not be possible [85].

In general one cannot construct boundary conditions that give no reflections. Instead one wishes to consider conditions which are in some sense better. The notion of better can be defined in many ways. Some of them are

- (1) the reflections decrease rapidly as the position of the boundary goes to infinity
- (2) the reflections decrease for longer wave lengths
- (3) the reflections decrease as the incident wave approaches in a direction more normal to the boundary
- (4) the reflections are decreased so that the approach to a steady state is accelerated.

One approach to decreasing reflections is to introduce a viscosity near the boundary or to introduce a sponge

layer [148]. With this approach it is not clear what effect the boundary treatment has on the interior dynamics. In addition it is difficult to improve these methods if one wishes to further decrease the reflections. Conditions 2 and 3 were used by Engquist and Majda [53], [54] to construct an asymptotic set of nonreflecting conditions based on pseudodifferential operators. The higher order methods require Padé approximations for stability. Rudy and Strikwerda [162] have constructed, by heuristic arguments, a radiation boundary condition based on (4).

Gustaffson and Kreiss [85] have shown that in general one can not construct nonreflecting boundary conditions unless the behavior of the solution is known in the neighborhood of infinity. We adopt their procedure and construct boundary conditions which are based on an asymptotic expansion of the solution valid for large distances. As with all asymptotic expansions we expect reasonable results even when the artificial boundary is brought in quite close to the region of interest. Extensive numerical tests indeed confirm that the domain of integration can be very constricted when one uses the higher order boundary operators.

Specifically, we consider the linearized Euler equations in cylindrical coordinates.

$$\begin{aligned}
 & \rho_t + (\rho u_0 + u)_z + (\rho v_0 + v)_r + \frac{\rho v_0 + v}{r} = F_1 \\
 (7.1) \quad & u_t + (uu_0 + \rho)_z + (uv_0)_r = uv_{0,r} - vu_{0,r} + F_2 \\
 & v_t + (vu_0)_z + (vv_0 + \rho)_r = vv_{0,z} - uv_{0,z} + F_3
 \end{aligned}$$

where  $(u_0(z,r), v_0(z,r))$  represents the mean flow. The mean density is assumed constant and is scaled so that  $\rho_0 = 1, c_0 = 1$ .

In order for it to be feasible to integrate (6.1) in a bounded domain it is necessary to assume that the mean flow and the forcing terms decay as  $r$  or  $z$  go to infinity (see e.g. [85]). Hence for sufficiently large  $d$  (where  $d^2 = r^2 + z^2$ ) (7.1) can be approximated by the wave system

$$(7.2) \quad \begin{aligned} \rho_t + u_z + v_r + \frac{v}{r} &= 0 \\ u_t + \rho_z &= 0 \\ v_t + \rho_r &= 0 \end{aligned}$$

or since  $p$  is linearly related to  $\rho$

$$(7.3) \quad p_{tt} - \nabla^2 p = 0$$

where  $\nabla^2$  is the Laplacian in cylindrical coordinates.

To find radiation conditions we first consider (7.3) in spherical coordinates and let  $d$  represent the spherical radius. It is known [11] and [59] that  $p$  has a formal expansion in terms of travelling waves

$$(7.4) \quad p = \sum_{j=1}^{\infty} \frac{f_j(t-d, \theta)}{d^j}$$

where  $\theta$  represents the angular dependence of  $p$ .

One can then verify that

$$(7.5) \quad \frac{\partial p}{\partial t} + \frac{\partial p}{\partial d} = O\left(\frac{1}{d^2}\right)$$

$$(7.6) \quad \frac{\partial p}{\partial t} + \frac{\partial p}{\partial d} + \frac{p}{d} = O\left(\frac{1}{d^3}\right)$$

We note that the approximation to (7.5)  $\frac{\partial p}{\partial t} + \frac{\partial p}{\partial d} = 0$  is just what one would obtain from a one dimensional characteristic theory. More generally, let

$$(7.7) \quad L = \frac{\partial}{\partial t} + \frac{\partial}{\partial d}$$

$$B_m = \prod_{j=1}^m \left( L + \frac{2j-1}{d} \right) = \left( L + \frac{2m-1}{d} \right) B_{m-1} .$$

It follows from (7.4) that

$$(7.8) \quad B_m p = O\left(\frac{1}{d^{2m+1}}\right)$$

It is shown in [11] that boundary conditions  $B_m p = 0$  all lead to well posed problems in the sense of Kreiss [81]. Furthermore, one can show that errors in the solution decrease as  $d$  goes to infinity. In particular for the first order approximation (7.6) we can show that the error  $\tilde{p}$  between the solutions in the bounded and infinite domains satisfies

$$(7.9) \quad \iint (\tilde{p}_t^2 + \tilde{p}_x^2) dv \leq \int g^2 ds$$

where  $g = O(1/d^3)$ . In general for the  $m$ th order approximation (7.8) we can show that

$$(7.10) \quad \|\tilde{p}\|^2 \leq K \|g\|$$

where  $g = O(1/d^{m+1})$  and  $||\cdot||$ ,  $|||\cdot|||$ , are appropriate norms.

The extension to cylindrical coordinates is straightforward since

$$(7.11) \quad \begin{aligned} r &= d \cos \theta, & d^2 &= r^2 + z^2 \\ z &= d \sin \theta, & \tan \theta &= \frac{z}{r} \end{aligned}$$

Hence, all derivatives with respect to  $d$  can be expressed as derivatives with respect to  $z$  and  $r$ . In fact one can show by induction that only derivatives tangential to the boundary need appear.

The lowest order approximations in spherical coordinates are given by

$$(7.12a) \quad B_1 p = \frac{\partial p}{\partial t} - \frac{\partial p}{\partial d} + \frac{p}{d} = 0$$

$$(7.12b) \quad B_2 p = \frac{\partial^2 p}{\partial t^2} + 2 \frac{\partial^2 p}{\partial t \partial d} + \frac{\partial^2 p}{\partial d^2} + \frac{4}{d} \frac{\partial p}{\partial t} + \frac{4}{d} \frac{\partial p}{\partial d} - \frac{2p}{d^2} = 0$$

For cylindrical symmetry we have by (7.11) that

$$(7.13) \quad \frac{\partial p}{\partial d} = \frac{\partial p}{\partial r} \cos \theta + \frac{\partial p}{\partial z} \sin \theta = - \left[ \frac{\partial v}{\partial t} \cos \theta + \frac{\partial u}{\partial t} \sin \theta \right]$$

Hence, we can replace (7.12) by

$$(7.14a) \quad B_1 p = \frac{\partial}{\partial t} [p - u \sin \theta - v \cos \theta] + \frac{p}{d} = 0$$

$$\begin{aligned}
 B_2 p = & (1 + \cos^2 \theta) \frac{\partial^2 p}{\partial t^2} - 2 \left( \cos \theta \frac{\partial^2 u}{\partial t^2} + \sin \theta \frac{\partial^2 v}{\partial t^2} \right) \\
 (7.14b) \quad & - \cos 2\theta \frac{\partial^2 v}{\partial r \partial t} - \sin 2\theta \frac{\partial^2 u}{\partial r \partial t} + \frac{\cos^2 \theta}{r} \frac{\partial v}{\partial t} \\
 & + \frac{4}{d} \left( \frac{\partial p}{\partial t} - \cos \theta \frac{\partial u}{\partial t} - \sin \theta \frac{\partial v}{\partial t} \right) + \frac{2p}{d^2} = 0
 \end{aligned}$$

In order to illustrate the advantage of even the first order boundary condition we present one example. (7.1) was integrated using a mean flow obtained from experimental data. The source was taken as a single monopole along the axis of symmetry. In figure (7.1) we plot the pressure as a function of time for a fixed axial point. In figure (7.1a) the characteristic (or Sommerfeld) condition

$$(7.15) \quad \frac{\partial p}{\partial t} + \frac{\partial p}{\partial r} = 0$$

was used. The spurious reflections from the boundary are evident. In figure (7.1b) we present the solution using the first order boundary condition,  $B_1 p = 0$ . This solution no longer has any spurious reflections. These comparisons were made with the boundary at fixed distance. Varying the position of the artificial boundary it was found that, using the first order boundary condition, one could bring the boundary quite close to the sources without loss of accuracy. For distributed sources, moving

sources or a quadrupole it became necessary to use higher order boundary conditions. Further comparisons are presented in [10] and [11].

The problems in dynamic jet acoustics present severe difficulties for any numerical scheme. One wishes to find the acoustic pressure in the far field which necessitates many grid points. However, the grid must be constructed so that there is high resolution near the origin to resolve the sources and the mean flow. In addition one wishes to verify long term patterns of the pressure. This requires accuracy over many time steps. To have any chance of solving this problem requires attention to the methods described in the past few sections. The use of high order methods is required to limit the number of mesh points. In addition the artificial boundaries must be brought in as far as possible to further limit the number of mesh points. This requires boundary conditions that severely restrict the reflection of waves from the artificial boundary. Careful attention to the stretching of the grid is also necessary. With all the above considerations a realistic two dimensional problem still requires about 35,000 mesh points for reasonable accuracy. This required the use of explicit methods that could be executed very efficiently on a pipeline computer. This problem shows that a successful code for a large scale problem requires an efficient algorithm and boundary conditions; a careful attention to the physics as well as to computer architecture.

For many applications one is interested in the fluid dynamic equations linearized about a mean state a uniform state which is nonzero at infinity. Let  $p_\infty, \rho_\infty, u_\infty$  represent the mean state in the far field and define  $c_\infty^2 = \gamma p_\infty / \rho_\infty$ . We assume that  $v_\infty$  is zero. The two dimensional analog of (7.2) is

$$\begin{aligned}
 (7.16) \quad & u_t + u_\infty u_x + \frac{1}{\rho_\infty} p_x = 0 \\
 & v_t + u_\infty v_x + \frac{1}{\rho_\infty} p_y = 0 \\
 & p_t + u p_x + \gamma p_\infty (u_x + v_y) = 0 .
 \end{aligned}$$

This is equivalent to the convective wave equation

$$(7.17) \quad p_{tt} + 2u_\infty p_{xt} + u_\infty^2 p_{xx} - c_\infty^2 (p_{xx} + p_{yy}) = 0 .$$

By a change of variables this can be transformed to the wave equation. We then transform the boundary conditions  $B_m p = 0$  to this coordinate system. When all is finished we transform back to the  $(x, y)$  system. The first order boundary condition for (7.16) then becomes, [13]

$$\begin{aligned}
 (7.18) \quad & \frac{r}{d} \frac{1}{\sqrt{c_\infty^2 - u_\infty^2}} \frac{\partial p}{\partial t} - \frac{\rho_\infty c_\infty^2}{c_\infty^2 - u_\infty^2} \frac{x}{d} \left( \frac{\partial u}{\partial t} + u_\infty \frac{\partial v}{\partial y} \right) \\
 & - \rho_\infty \frac{y}{d} \left( \frac{\partial v}{\partial t} + u_\infty \frac{\partial v}{\partial x} \right) + \frac{p - p_\infty}{2d} = 0
 \end{aligned}$$

where  $d^2 = x^2 + y^2$  and  $r^2 = \left( \frac{c_\infty^2}{c_\infty^2 - u_\infty^2} \right) x^2 + y^2$ . When  $u_\infty = 0$

this reduces to the previous boundary condition. When  $u_\infty$  is larger than  $c_\infty$  the outflow is supersonic and no boundary conditions can be specified at the artificial boundary. The boundary condition (7.18) has been used for the Navier-Stokes equations with a subsonic outflow. The use of (7.17) substantially increased the rate of convergence to a steady state solution. The unknown linearized state  $(\rho_\infty, u_\infty, c_\infty)$  was taken from the previous time step. A generalization of (7.15) for nonlinear problems is considered by Hedstrom [94].

It is also possible to generalize this theory to the three dimensional Helmholtz equation

$$(7.18) \quad \Delta p + k^2 p = 0 .$$

The analog of (7.4) is

$$(7.19) \quad p = e^{-ikr} \sum_{j=1}^{\infty} \frac{f_j(\theta, \phi)}{r^2} .$$

The radiation boundary conditions are then given by

$$B_m p = 0 \quad \text{with}$$

$$(7.20) \quad B_m = \prod_{j=1}^m \left( -ik + \frac{\partial}{\partial r} + \frac{2j-1}{r} \right) .$$

This procedure is ordered by first operating with  $j = 1$  and continuing until  $j = m$ . In [12] energy estimates are obtained for the error using (7.20). Numerical computations

presented in [12] demonstrate that for many cases one need only take ten mesh points normal to the boundary, independent of  $k$ , in solving (7.18). The boundary conditions apply to the Laplace equation when  $k = 0$  in (7.18) and (7.20). Extensions to two dimensions are also considered in [13].

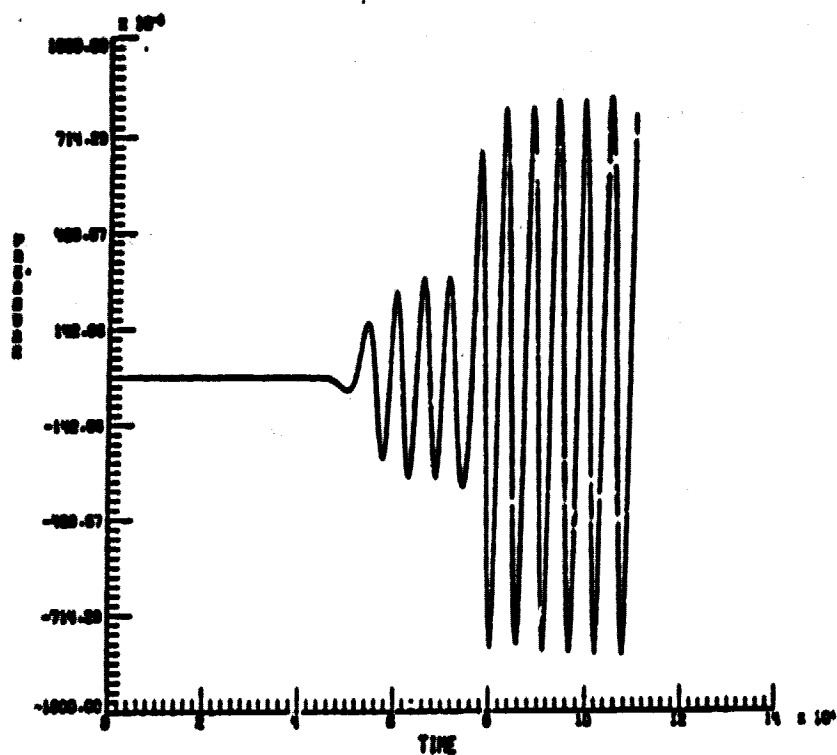
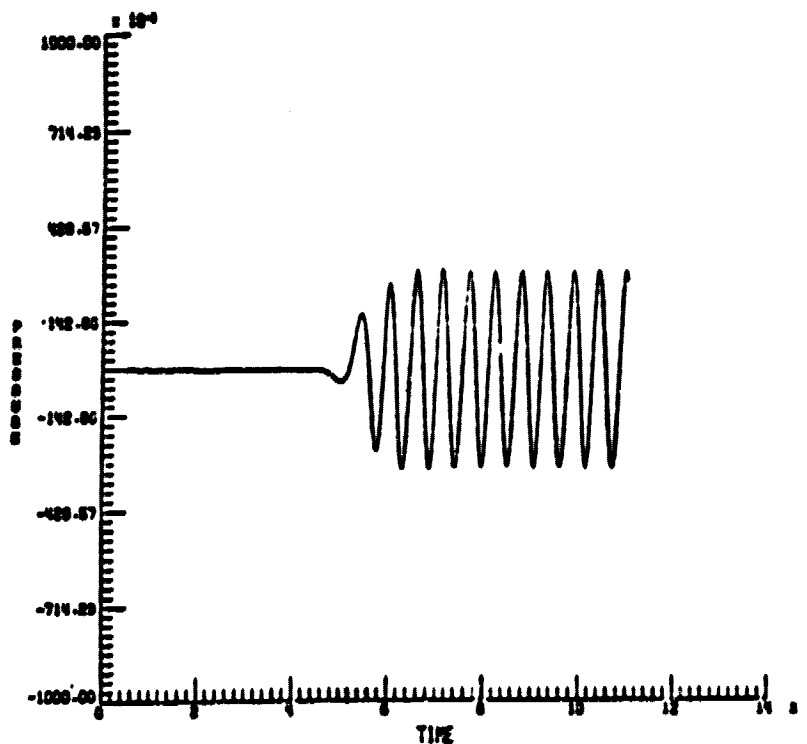


Figure 7.1a. Sommerfeld Condition

Figure 7.1b. Improved Radiation Condition.  $B_p = 0$ .

ORIGINAL PAGE IS  
OF POOR QUALITY

## 8. APPLICATIONS

In the previous sections we have tried to stress the interplay between the numerical scheme and the physics of the problem. In particular we strongly feel that there is no such thing as a universal or ultimate scheme. The variety of phenomena described by time dependent partial differential equations demands a variety of numerical methods. In this section we shall describe some difficulties that arise in particular situations. Due to a shortage of space we can only sketch these difficulties with a brief description of possible remedies. References to the literature will be given for a more extensive discussion of individual situations.

### A. Shocks

When dealing with nonlinear systems the solution does not always remain smooth even when the initial data is smooth. Instead surfaces of discontinuities, called shocks arise. The solution is smooth on either side of the shock and across the shock the solution is governed by jump conditions. These shocks are an inherently nonlinear phenomena. Linear discontinuities such as contact discontinuities can also occur. For a survey of the analytical theory of shocks see [118].

The standard convergence theorems for numerical schemes are based on the assumption that the solution is smooth (see [156]). When shocks occur it is well known that one can construct reasonable schemes that converge to a

solution with the wrong shock location (e.g. [116], [209]). One alternative is to use the differential equations only in smooth regions. The shock itself is followed explicitly using the Rankine-Hugoniot relations supplemented by characteristic data (see [140], [152], [166]). For complex flows with several intersecting shocks this is difficult. Furthermore, there is the additional difficulty of predicting the generation of shocks that do not exist initially. The introduction of viscous terms further complicates the method.

An alternative to fitting the shock is the so-called shock capturing method. Lax and Wendroff [116] showed that if the equations are written in divergence-free form

$$(8.1) \quad u_t + \operatorname{div} f = 0$$

and if the numerical method also has this property then when the scheme converges it will give the correct shock speeds. Because of the ease of use, this method has dominated the computation of shocked flows. We note that the use of divergence-free form is not necessary. Instead one can integrate (8.1) as a quasi-linear system and compensate for this by the addition of terms that depend on the mesh (see [209]). It is also well known that the use of the divergence free form is not sufficient to give the correct shock speed. Once one generalizes the definition of a solution to allow discontinuous solutions then the solution to (8.1) is no longer unique. One must demand additional constraints, e.g. that entropy increase across the shock, in order to have a

unique solution (see [118] for additional information). For first order systems necessary and sufficient conditions which guarantee entropy satisfying discrete shock profiles are given by Majda and Ralston [132].

The use of the difference scheme across the shock has several disadvantages. In some cases it has been found that non-physical rarefaction shocks can appear ([90], [125]) i.e., the entropy condition is violated. This generally happens at a sonic line or a stagnation point where an eigenvalue of the system becomes zero. All the known examples for model equations exhibit troubles only when the coefficient in the equation passes through zero. The usual second order schemes, Lax-Wendroff or MacCormack, have a dissipative mechanism which vanishes when an eigenvalue of  $\frac{\partial f}{\partial x}$  in (8.1) is zero. Hence, in these circumstances the scheme is effectively non-dissipative and so it is no surprise that difficulties can occur. Another difficulty of higher order method is that overshoots can occur in the neighborhood of shocks even when the shock speeds are calculated correctly.

The standard cure to these difficulties is to add an artificial viscosity term to the scheme. This viscosity should be constructed so that it does not affect the accuracy of the scheme in the smooth portion of flow. It also should not vanish at the sonic lines or the stagnation points. In practical computations several viscosities have been suggested which work reasonably well [29], [49]. Majda and Osher [130], [133] have suggested some viscosities for which they can prove the convergence of the scheme to the correct

solution. Lerat and Peyret [120] have shown that one can lessen the impact of the oscillations by choosing the correct variant of MacCormack's method (3.5). This becomes difficult for complicated flow patterns. Lerat [121] discusses the addition of nonlinear correction terms to reduce the oscillations. These latter studies are based on the modified equation approach [100], [171], [194]. These corrections have been of a very specialized and problem dependent nature.

It is known that monotone schemes have the property that overshoots do not occur and that they give the correct shock locations [90]. Unfortunately, linear monotone schemes are only first order accurate. Crandall and Majda [44] have considered generalizations of monotone schemes as well as extensions to several dimensions by using splitting methods. They demonstrate that splitting the equations into one dimensional portions can have strange effects on the shocked solution. The definition of monotonicity for systems of equations is not clear.

An alternative to using monotone first order methods everywhere is to use these methods only near the shock and to use a higher order method in the smooth portion of the flow [88]. Rather than using different schemes in different regions it is easier to automatically combine these schemes using hybrid techniques [89]. The monotone methods produce excessive smoothing of the shock profile. Several nonlinear corrections have been suggested [18], [91], [191], [200] to prevent this smearing.

A simpler technique is to use the scheme without the addition of any artificial viscosity. At the completion of each step one filters the solution to remove any oscillations. The simplest way to accomplish this is with a Shuman filter [88]. Let  $\bar{u}$  represent the solution to any finite difference scheme at time  $t$ . We then define the corrected solution to be

$$(8.2a) \quad u_j^n = \bar{u}_j + \theta_{j+\frac{1}{2}}(\bar{u}_{j+1} - \bar{u}_j) - \theta_{j-\frac{1}{2}}(\bar{u}_j - \bar{u}_{j-1}) \quad .$$

with

$$(8.2b) \quad 0 < \theta_j < \frac{1}{2} \quad .$$

For (8.2) to be second order accurate, in space, we require that  $\theta_j = O(\Delta x)$  in the smooth regions of the flow. (8.2) can be viewed as the second step of a splitting process which adds the viscous terms  $(\theta u_x)_x$ . Hence, stability is ensured whenever the basic numerical algorithm is absolutely stable. A reasonable choice for  $\theta$  is [92]

$$(8.2c) \quad \theta_{j+\frac{1}{2}} = \alpha \left[ \frac{\sigma_{j+2} - \sigma_{j+1} - 2(\sigma_{j+1} - \sigma_j) + (\sigma_j - \sigma_{j-1})}{|\sigma_{j+2} - \sigma_{j+1}| + 2|\sigma_{j+1} - \sigma_j| + |\sigma_j - \sigma_{j-1}|} \right]$$

where  $0 < \alpha < \frac{1}{2}$  and  $\sigma$  is a function of  $\bar{u}$ . For the fluid dynamic equations one frequently chooses  $\sigma$  as the density.

The various techniques discussed all reduce oscillations in the neighborhood of a shock. It is not clear

whether one needs to remove these oscillations except for aesthetic reasons. This seems to be problem dependent. For problems with combustion, it is imperative to prevent oscillations which may falsely trigger the combustion process. For steady state calculations with separate shocks the oscillations probably do little harm to the total solution. For dynamic situations with interacting shocks the situation is less clear.

Shocks are inherently stable and compressive phenomena. Hence, even without shock fitting the shock is smeared over only a few mesh points even for long periods of time. However, contact discontinuities continue to spread in time. Hence, in multidimensions where coarse grids are necessary one cannot resolve contact discontinuities over long periods of time. One can try to convert these discontinuities into pseudo-shocks [91]. Alternatively one can use fitting techniques only for contact discontinuities. One such technique was described in section 6 for the interface between different materials.

Numerical evidence indicates that if higher order methods are used in smooth parts of the flow then errors in the shock area do not propagate into the smooth region [188]. Since contact discontinuities are a linear phenomena it seems that errors in the discontinuity region may contaminate the entire domain of integration. For linear problems with discontinuities a straightforward method will yield only second order accuracy even in

smooth regions [129]. The accuracy of the method can be recovered by pre- and post-processing [138]. For non-linear problems preprocessing and postprocessing will not work. On the other hand there are indications that there is no need for any adjustments for shocks ([119], [188]). In fact preliminary computations demonstrate that one can achieve one point shocks and contact discontinuities using Chebyshev spectral methods (3.16 - 3.18). Small oscillations appear which can be removed by a postprocessor (D. Gottlieb, private communication).

When using implicit methods to compute the solution to shocked flows, computational experience indicates that one can not use time steps more than about three or four times the local Courant limit, even for stationary shocks (e.g. [93]). In many practical situations this is not a serious limitation as the time step for an explicit scheme would be governed by regions other than the shock region. For example, in a shock-boundary layer interaction the time step is governed by the boundary layer mesh and not the shock. Hence, an implicit method can still use time steps about fifty times larger than those used by an explicit method.

#### B. Multidimensional Problems

In several of the previous chapters we have discussed methods for one dimensional problems. For practical applications one needs multidimensional codes. For some

methods as leapfrog it is straightforward to construct a stable multidimensional scheme. Even in this case the most straightforward version can lead to restrictive time steps. Consider the equation

$$(8.3) \quad u_t + A u_x + B u_y = 0 .$$

The straightforward leapfrog method for this equation is

$$(8.4) \quad u_{i,j}^{n+1} = u_{i,j}^{n-1} - \frac{\Delta t}{\Delta x} A_{i,j}^n (u_{i+1,j}^n - u_{i-1,j}^n) \\ - \frac{\Delta t}{\Delta y} B_{i,j}^n (u_{i,j+1}^n - u_{i,j-1}^n) .$$

This is stable if

$$(8.5a) \quad A \sin \xi + B \sin \eta \leq 1$$

for all  $\xi$  and  $\eta$ . In the worst case this can demand

$\|A\| \leq \frac{1}{2}$ ,  $\|B\| \leq \frac{1}{2}$ . For the fluid dynamic equations (8.4) is stable when

$$(8.5b) \quad \Delta t \left( \sqrt{\left(\frac{u}{\Delta x}\right)^2 + \left(\frac{v}{\Delta y}\right)^2} + \sqrt{\left(\frac{1}{\Delta x}\right)^2 + \left(\frac{1}{\Delta y}\right)^2} c \right) \leq 1 .$$

Abarbanel and Gottlieb [2] have pointed out that one can improve this stable condition by averaging the derivatives. In particular we can replace (8.4) by

$$(8.6) \quad u_{i,j}^{n+1} = u_{i,j}^{n-1} - \frac{\Delta t}{2\Delta x} A_{i,j}^n$$

$$\cdot \left[ \left( u_{i+1,j+1}^n + u_{i+1,j-1}^n - u_{i-1,j+1}^n - u_{i-1,j-1}^n \right) \right]$$

$$- \frac{\Delta t}{2\Delta y} B_{i,j}^n$$

$$\cdot \left[ \left( u_{i+1,j+1}^n + u_{i-1,j+1}^n - u_{i+1,j-1}^n - u_{i-1,j-1}^n \right) \right] .$$

This is now stable when

$$(8.7) \quad \frac{\Delta t}{\Delta x} A \leq 1 \quad , \quad \frac{\Delta t}{\Delta y} B \leq 1$$

which is optimal. Similar extension to three dimensions exist except that the averaged scheme is no longer optimal but still better than the standard leapfrog method. Extensions to arbitrary dimensions are considered in [201]. A similar gain is achieved for the fourth order leapfrog method (S. Abarbanel and D. Gottlieb, private communication).

For implicit methods the extension to multidimensions is less straightforward. The obvious generalization of one dimensional schemes leads to the necessity of inverting large sparse matrices which are no longer tridiagonal. To avoid this problem one usually employs an alternating direction method to reduce the problem to a sequence of one dimensional problems. McDonald and Briley [128] have stressed the importance of doing this in such a manner that each portion of the split is consistent with the original equations. In chapter 5 we have indicated some of the disadvantages of

A.D.I. These include a reduction in the rate of convergence to a steady state and also instability for some important three dimensional versions.

For the usual multistep explicit methods one can construct full two dimensional versions. This has been done by Richtmyer [156], Burstein [29], MacCormack [124], Turkel, Abarbanel and Gottlieb [186] among others. These schemes usually have a restricted stability criterion. More important, it is difficult to treat different directions in a different manner in order to take advantage of the physics of the situation. Strang [179], Yanenko [206], and Marchuk [134] have introduced the concept of splitting the equation into several components. We consider the general equation

$$(8.8) \quad u_t = M_x u + M_y u + M_z u = M u .$$

Here, we have arbitrarily split the right hand side into three portions. Frequently these splits are identified with separate dimensions. However, in other applications other splits are indicated by the physics (see e.g. [135] and section D). We now consider the subsystems

$$(8.9) \quad v_t = M_x v \quad ; \quad v_t = M_y v \quad ; \quad v_t = M_z v$$

and we denote the numerical solution to these subsystems by

$$(8.10) \quad v^{n+1} = L_x v^n \quad ; \quad v^{n+1} = L_y v^n \quad ; \quad v^{n+1} = L_z v^n$$

respectively. We can reconstruct the solution to (8.8) by

$$(8.11a) \quad u^{n+1} = L_x L_y L_z u^n .$$

This is a first order, in time, approximation to (8.8).

In order to make the approximation second order in time we follow (8.11a) by

$$(8.11b) \quad u^{n+2} = L_x L_y L_z u^{n+1} .$$

This is stable if each of the one dimensional operators are strongly stable. Gourlay and Morris [75], [76] have considered the implementation using multistep methods. Gottlieb [67] has shown that this 2-cycle of permutations is second order even for nonlinear equations. This splitting in two or three space dimensions coupled with some multistep scheme has been very successful for many applications. One can show that one achieves the optimal time steps. One can also treat different directions in different manners. For example, MacCormack [125] uses the operator in the  $y$  direction more often, with smaller time steps, than the operator in the  $x$  direction. This compensates for the finer mesh in the  $y$  direction. Alternatively, one could couple Fourier methods in periodic directions with finite difference or Chebyshev methods in directions with boundaries. For a further description of details see [77].

As with all methods splitting techniques have their drawbacks. One immediate difficulty is that the intermediate steps have no physical interpretations. Hence, if the coefficients of the equations or the boundary conditions depend explicitly on time it is not clear which time to use for the middle steps. This is compounded if multi-step methods are used for the one-dimensional operator. Additional difficulties are encountered when the solution has a shock inclined to one of the coordinate directions. Crandall and Majda [45] have shown that unusual occurrences happen in this case. The efficiency of the random choice method also deteriorates in the presence of oblique shocks when splitting is used (Chorin, personal communication).

Another difficulty occurs when some subsidiary constraints are intrinsic to the solution. For example, for the Maxwell equations the condition  $\text{div } \mathbf{B} = 0$  can be viewed as an initial condition. For problems with variable coefficients (8.10) is not symmetric in  $x$  and  $y$  even though the operators appear in a symmetric fashion. Hence, numerically  $\frac{\partial}{\partial t} \text{div } \mathbf{B}$  is nonzero. This introduces a non-physical Lorenz force which can cause numerical instabilities. The author has done extensive calculations with the nonlinear ideal MHD equations. When dimensional splitting was used nonphysical instabilities always occurred. This also occurs when Lagrangian schemes are used in MHD (Brackbill and Barnes [21]). A similar situation occurs in the

incompressible Navier-Stokes equations where  $\text{div } u = 0$  must be satisfied. In this case the situation is improved by explicitly adding terms involving  $\frac{\partial}{\partial t} \text{div } u$  to the equations. This does not affect the analytic solution since  $\text{div } u = 0$ . However, the numerical solution can be stabilized by such a procedure (see [86], [99]).

### C. Aerodynamics

Aerodynamics is frequently divided into internal and external flows. Internal aerodynamics describes flows in nozzles, ducts and turbomachinery. These flows usually involve complex flow patterns and frequently require the addition of chemistry models to study the propagation of flames. Boundary conditions are extremely important for internal flows. These flows are usually subsonic or transonic with maximum Mach numbers of about 1.3. Hence, one is frequently not interested in shocks and can frequently dispense with the conservation forms of the difference equations. This is especially important for implicit methods. The block structure of the matrices to be inverted are much more complicated when the divergence form of the equations must be used. The velocity form of the equations frequently allows the decoupling of the blocks into a direct sum of smaller blocks (see [23]). It is much faster to invert three scalar tridiagonal matrices than to invert one block tridiagonal matrix with  $3 \times 3$  blocks. Hence, it is computationally important to utilize the proper form of the equations.

For large systems arising from chemical models this is even more important. An extensive discussion of implicit methods for internal flows is given by McDonald and Briley [128].

For both internal and external flows one must use a mesh that resolves the boundary layers. This can be done by a mesh stretching or a finite volume technique. In many situations one is only interested in the steady state solution. For this case implicit methods are becoming popular. As mentioned in section 5 the implicit methods become more inefficient as the complexity of the equations increase. This complexity can be created by the existence of many equations or the existence of cross derivatives. For many aerodynamic flows one simplifies the full Navier-Stokes equations to the so called "thin layer" approximations [175] so that the flow is essentially unidirectional [51]. This is useful only when the boundary layer has some simple structure parallel to the body. An alternative is the rapid solver proposed by MacCormack [126]. Details of these approaches are given in the article by Hollanders and Viviani [101]. An alternative to using the time dependent equations is trying to solve the steady state equations directly. Iterative methods have not proved to date, to be very promising. One possibility is to use Newton's method for linearizing the problem coupled with Gaussian elimination. This has been carried out by Blomster and Skölleremo [17] and Rizzi [157]. The major difficulty with this approach is that the bandwidth of the matrix

increases rapidly as finer meshes are needed for more realistic situations. This is especially severe in three space dimensions. Alternate linearizations, such as Schubert's methods, may alleviate the difficulty since one can account for the sparsity of the matrix to be inverted (see e.g. [136], [167]).

An important problem in using the time dependent equations to achieve a steady state is finding ways to accelerate the convergence to the steady state. One such method is to use different time steps at different mesh points. For explicit methods the time steps could be chosen so as to satisfy the local stability limit (Burstein, personal communication). For implicit methods large time steps can be viewed as an iteration parameter. Some ideas for optimizing this parameter were discussed in chapter 5.

Even more important is the proper implementation of initial and boundary conditions. Rudy and Strikwerda [163] have considered the effect of various boundary treatments on the acceleration to steady state. Over-specification at inflow can accelerate the convergence but frequently leads to oscillations in the steady state. Under-specification at outflow can prevent the achievement of the steady state. The use of a radiation boundary condition can dramatically decrease the number of steps required to achieve the steady state. An analytic treatment of several boundary treatments is provided in [147].

The correct choice of initial data is also important in achieving a rapid steady state. When the initial data does not satisfy the boundary conditions waves can arise which take a long time to dissipate. One procedure is to use a primitive form of the multi-grid method [22]. In this case we solve the equations on a coarse grid. This can be done rapidly and so the initial guess is not important. The converged solution is then used as an initial guess for the next finer grid. A pyramid of grids can be used until the finest grid is reached. Most of the work is done on the finest grid and so the coarser grids do not increase the work by very much. By providing an excellent initial guess this process can substantially accelerate the process of reaching a steady state.

For complex three dimensional flows it is likely that all the processes described above and in chapter 5 will be necessary to achieve a steady state within a reasonable number of iterations. For surveys of methods for the Navier-Stokes equations see [7], [35], [137], [154]. In addition there will be, in the future, more of a need for internal accuracy checks, e.g. changing the mesh size. This is crucial for investigating the effect of various acceleration techniques on the accuracy of the steady state solution. In most studies the only accuracy checks are comparisons of averaged quantities

C-2

with experimental data, e.g. skin friction, drag, etc. These comparisons ignore any oscillations or other difficulties that may occur locally in sections of the flow.

#### d. Meteorology

The problems that occur in computational meteorology are very different from those in aerodynamics. First, in meteorology one is interested in the dynamic behavior of the model. Even in climatology one wishes to find statistical averages rather than a steady state solution. Furthermore, the equations of motion are a classical example of a system with different time scales. Allowable speeds in the atmosphere range from sound waves down to Rossby waves. The physically dominating Rossby waves are about 20-30 times slower than the speed of sound. Nevertheless, if one uses an explicit scheme the time steps is restricted by the fastest possible modes of propagation. A further restriction on numerical methods is that one wishes to limit the amount of dissipation introduced by the scheme. The long term weather patterns are governed by a delicate balance between heating due to solar radiation and dissipation due to friction and interactions with the oceans. For long term weather prediction it is essential that the numerical method does not interfere with this balance.

As a simplified set of equations we analyze the shallow water equations in cartesian coordinates.

$$(8.12a) \quad u_t + uu_x + vu_y = -gh_x + fv$$

$$(8.12b) \quad v_t + uv_x + vv_y = -gh_y - fu$$

$$(8.12c) \quad h_t + uh_x + vh_y = -h(u_x + v_y).$$

$(u,v)$  are the velocity components and  $h$  is the equivalent height of the atmosphere.  $g$  and  $f$  are taken to be constants. The phase speeds of the system are

$$(8.13) \quad \begin{aligned} \omega_1 &= u \sin \theta + v \cos \theta \\ \omega_{2,3} &= \omega_1 \pm \sqrt{gh + f^2} \end{aligned}$$

In this simple system  $\omega_1$  represents the important Rossby wave while  $\omega_{2,3}$  are the relatively less important gravity waves. The flow is called geostrophic if the right hand side of (8.12a) and (8.12b) are zero. The flow is incompressible if the right hand side of (8.12c) is zero. The real atmosphere is quasi-geostrophic and almost incompressible. This is the cause of the small amount of energy in the gravity waves.

One way to overcome the difficulty with the different time scales is to use a semi-implicit method. In this method the right hand side of (8.12) is treated implicitly while the convective terms are treated explicitly. The resulting stability condition then depends only on the

velocities and not on the sound speed,  $\sqrt{gh}$ . A further analysis of this is presented in Elvius and Sundstrom [52]. Navon [144] has combined a semi-implicit method together with the linearization technique described in section 5. He found that it was necessary to iterate the procedure once in order to maintain the accuracy. Isaacson, Marchesin and Zwas [104] have used a fully implicit compact fourth order method coupled with linearization algorithm. The scheme (3.9) was generalized to two dimensions by using an alternating direction method. They found that the correct treatment of the singularity at the pole was necessary to maintain stability. The order of the factors in the A.D.I. method was also crucial for stability. Williamson [200] has compared the effectiveness of high order schemes for the primitive equations. He found that the horizontal diffusion term had a greater effect than the order of the scheme. The introduction of topography further complicates the comparison since for realistic grids large mountain chains are described by relatively few grid points leading to large gradients in the vertical variable.

Gadd [62] has suggested splitting the system into fast and slow components and treating each separately with a Lax-Wendroff method. This has the disadvantage of using a dissipative method. It is possible to use a similar idea with the leapfrog method by using two grids. The convective

terms are differenced on the fine grid while the right hand side of (8.12) is differenced on a coarse grid but with a compact fourth order method. The resulting approximation to (8.12) is given by

$$\begin{aligned}
 u_{i,j}^{n+1} = & u_{i,j}^{n-1} - \lambda \left[ u_{i,j}^n \left( u_{i+1,j}^n - u_{i-1,j}^n \right) \right. \\
 & + v_{i,j}^n \left( v_{i,j+1}^n - v_{i,j-1}^n \right) \Big] \\
 & - \frac{\lambda g}{p} \left( h_{i+p,j} - h_{i-p,j} \right) \\
 & + \frac{\Delta t f}{3} \left( 4v_{i,j}^n + v_{i+p,j}^n + v_{i-p,j}^n \right) , \\
 (8.14) \quad v_{i,j}^{n+1} = & v_{i,j}^{n-1} - \lambda \left[ u_{i,j}^n \left( v_{i+1,j}^n - v_{i-1,j}^n \right) \right. \\
 & + v_{i,j}^n \left( v_{i,j+1}^n - v_{i,j-1}^n \right) \Big] \\
 & - \frac{\lambda g}{p} \left( h_{i,j+p} - h_{i,j-p} \right) \\
 & - \frac{\Delta t f}{3} \left( 4u_{i,j}^n + u_{i,j+p}^n + u_{i,j-p}^n \right) ,
 \end{aligned}$$

$$\begin{aligned}
h_{i,j}^{n+1} = & h_{i,j}^{n-1} - \lambda \left[ u_{i,j}^n (h_{i+1,j}^n - h_{i-1,j}^n) \right. \\
& \left. + v_{i,j}^n (h_{i,j+1}^n - h_{i,j-1}^n) \right] \\
& - \frac{\lambda h_{i,j}^n}{p} \left[ 4 (u_{i+p,j}^n - u_{i-p,j}^n + v_{i,j+p}^n - v_{i,j-p}^n) \right. \\
& + u_{i+p,j+p}^n - u_{i-p,j+p}^n + u_{i+p,j-p}^n - u_{i-p,j-p}^n \\
& \left. + v_{i+p,j+p}^n - v_{i+p,j-p}^n + v_{i-p,j+p}^n - v_{i-p,j-p}^n \right]
\end{aligned}$$

with  $\lambda = \frac{\Delta t}{\Delta x} = \frac{\Delta t}{\Delta y}$ .

An additional difficulty that occurs in meteorology is due to the spherical coordinate system used for the globe. The coordinate singularity at the pole together with the convergence of the latitude lines at the poles forces an unrealistically small time step for explicit schemes. Many attempts at using other coordinate systems or patching several coordinate systems have not been very successful. To enable the use of larger time steps some smoothing algorithm is used near the poles to eliminate the higher frequencies. In figure (6.1) we display a contour map of  $h$  for the solution to the shallow water equations in spherical coordinates. This solution used 3 minute time steps and includes Fourier filtering near the poles (see [190], [199]). In figure (6.2) is shown a second graph using the scheme (8.14) together with

Fourier filtering. This allowed  $7\frac{1}{2}$  minute time steps. A leap frog method without any filtering could use only  $\frac{1}{2}$  minute time steps with the grid used.

More realistic models are based on the primitive equations and also contained many levels in the vertical direction. Usually a pressure-like coordinate is used in the vertical direction. Even though many calculations have been performed with the primitive equations Oliger and Sundström [147] have shown that the system is not well-posed. Browning [26] has proposed a substitute which is a proper limit of hyperbolic equations.

In volume 17 of *Methods of Computational Physics* a variety of methods are presented for solving these equations. Spectral, pseudospectral and finite element methods all present advantages and disadvantages for large scale problems. To date there has been little comparison of these numerical techniques under real-life situations.

#### e. Combustion

The replacement of an ideal gas by a real gas and the inclusion of chemical processes introduces several new difficulties into the computation. Because of the exponential dependence of the ignition on the temperature it is critical that there be no overshoots in the computation of shocks. False overshoots can ignite the chemistry at entirely incorrect places and times and completely invalidate the computation. As previously

mentioned one alternative is to introduce severe dissipation. Anti-diffusion is later added to sharpen the shock profile (see [18], [91], [191]). An additional difficulty is the introduction of many new equations when many chemical species are present. This is a particular difficulty for implicit methods as the work increases with  $m^3$  where  $m$  is the number of equations. In certain cases Briley and McDonald [24] have shown that these matrices can be simplified.

Since the flame occupies only a small region of the computational domain it is necessary to introduce a fine mesh which moves adaptively in time. Efficient ways of changing the grid, especially for several space dimensions are unknown. One way of moving the mesh for one space dimension is given in [50]. An additional difficulty with combustion problems is the stiffness of the ordinary differential equations which describe the chemistry. This necessitates much smaller time steps for the chemistry than for the fluid dynamics. This can be partially alleviated by using splitting techniques (section b) to split the chemical and fluid dynamical portions of the calculation.

A different approach to these problems was introduced by Chorin [38]. He extended a probabilistic method due to Glimm [65] into a practical method. The random choice method is based on the solution to many Riemann problems. In each interval the solution is considered to consist of two constant states with a discontinuity between them. The

solution is advanced to the next time level by analytically solving this local Riemann problem and then choosing the new constant state to be the solution evaluated at a randomly chosen point within the mesh. This method has the property that the discontinuity is sharp (in a probabilistic sense) without overshoots. Hence, there is no need for artificial dissipation or a moving grid. A drawback of the method is that it is at best first order accurate in the smooth regions of the flow. Since convergence is guaranteed only in a probabilistic sense accuracy for any given computation may be poor. This depends crucially on the choice of sampling. It is expensive to calculate exactly the solution to a Riemann problem at every mesh point and each time level. An alternative is to solve the Riemann problem with a finite difference method [93]. This also has the advantage that it easily generalizes to complex systems of equations. The present extension to several dimensions is based on splitting techniques. As this reduces the effectiveness of the method other approaches are being investigated [66]. Sod [173] has compared this method with some finite difference schemes for simple shock problems.

#### f. Plasma Physics

The simplest set of equations that describe a plasma are the ideal MHD equations developed by Lunquist [123]. These form a set of eight nonlinear symmetric hyperbolic equations. Grad [78] has shown that the full equations include all of standard fluid dynamics within a small range of parameter space in the MHD equations. Hence, all the difficulties discussed in the previous sections automatically occur in MHD. In order to make the problems manageable one can only treat simpler problems than those solved for the Navier-Stokes equations. This is even more true when more relevant equations, as the Vlasov or Fokker-Planck equations are considered. For these equations only one dimensional or simple geometries can be considered.

As a simple illustration we consider the steady state equations. For the Navier-Stokes equations we can solve the full system with the time derivatives set equal to zero. Some of these methods were described in section c and others are described in more detail by Hollanders and Viviand [101]. For ideal MHD even the case with no flow, i.e.,  $u = 0$ , is nontrivial. In this case the equations become

$$\begin{aligned} \nabla p &= \nabla \times \nabla \times B \\ \text{div } B &= 0 \end{aligned} \quad (8.15)$$

This system of four equations for  $p$ ,  $B_x$ ,  $B_y$ ,  $B_z$  has two real and two imaginary characteristics. Hence, this is a mixed hyperbolic-elliptic system. For three dimensional systems in a torus it is not even clear that the differential system is well posed. By imposing additional constraints Betancourt and Garabedian [16], [9] have obtained solutions to (8.15) for three dimensional configurations. Brackbill [20] has obtained solutions by using the full time dependent MHD equations and marching to a steady state while removing kinetic energy so that  $u = 0$  in the limit. It is obviously much more difficult to do the type of steady state calculations that are commonplace in aerodynamic flows.

In addition to the steady state, or equilibrium problems, one is also interested in the stability of the equilibrium. When one wishes to study nonlinear stability the main technique is to integrate the time dependent equations. As mentioned in section b one difficulty is introduced by the constraint  $\text{div } B = 0$ . If  $\frac{\partial}{\partial t} \text{div } B$  is nonzero numerically it can introduce false sources of instability. Hence, stable equilibria can appear as unstable equilibria (see also [21], [142]).

For the time dependent equations there are three sound speeds known as the fast (or magneto-acoustic) speed, the Alfvén speed and the slow speed (see e.g. [39]). Many of the instabilities in a torus occur at the Alfvén speed which can be much smaller than the fast speed. Hence, we again face the

phenomena of different time scales. We wish to use time steps based on the Alfvén speed without sacrificing stability. One approach is to use an implicit, alternating direction method (see [122]). However, this requires the inversion of block  $8 \times 8$  tridiagonal matrices which is time consuming. Plasma flow has the property that most of the change occurs along magnetic flux surfaces and not across them. By using flux surfaces on a coordinate system one can separate out the fast and slower motions. Since the Alfvén wave is incompressible this can be used to set up a scheme which uses time steps based on the Alfvén speed (see [106]). The main disadvantage is that the method fails when the flux lines no longer provide a reasonable coordinate system. Another approach is to use a semi-implicit method (Brackbill, private communication) similar to that in section d. One can now use a standard Eulerian or Lagrangian grid. The size of the matrices to be inverted are severely reduced while the time step is governed by the Alfvén time step.

When considering non-ideal effects the major effect is resistivity rather than viscosity. While this still introduces parabolic terms nevertheless the physical effects are quite different. It is well known that resistivity can frequently cause instabilities that did not exist in the ideal case [48]. As with the Navier-Stokes it is necessary to resolve boundary layers where the resistive effects are dominant. An additional difficulty with plasma physics is the existence of a vacuum outside

the plasma. The magnetic field in the vacuum is governed by an elliptic equation which must be coupled with the time dependent MHD equations across a moving interface. When solving the plasma-vacuum problem Lagrangian type methods or flux surface methods have been used. The Eulerian methods usually represent the plasma as a low density plasma.

We have concentrated on the application of MHD to magnetic controlled thermonuclear reactions. Another application is to astrophysics. For these problems radiation boundary conditions as described in chapter 7 are important. Another important area is laser fusion. In this area the introduction of artificial boundaries is also important. In addition, these problems frequently have regions with extremely different properties as the pellet is compressed. Hence, the methods must be capable of handling changes in coefficients in the range of 15 orders of magnitude. Further discussion of methods for plasma physics are given in [155] and also volume 16 of *Methods of Computational Physics*.

#### g. Other Applications

In this brief survey we have shown some of the difficulties that occur in specific applications. Naturally this survey cannot cover all topics. One major field which has not been discussed is two phase flow. Aspects of that field are discussed by H. Wirz [203].

Another field which was touched on briefly in chapter 8 is acoustics. This includes such diverse fields as seismology, underwater acoustics and jet acoustics. Each of these present their own difficulties. In seismology in particular one tends to use second order equations rather than first order systems. The occurrence of layered media introduces other difficulties. Both interior and exterior ballistics provide problems with extreme distortion of materials. Due to the high pressures and temperatures even metals deform. Hence, one cannot integrate in a region with fixed boundaries. Instead, the motion of the free surfaces and interfaces must be calculated. An additional difficulty is the existence of a plastic regime. For this regime the deviatoric stresses remain on the yield surface, i.e.,  $\{s_{i,j}^2 = K$ . It is a nontrivial problem to enforce this constraint numerically. A survey of numerical methods in elastodynamics is given in [5].

One major field which has not been discussed is that of incompressible flow. Discussion of finite difference methods is given in a companion article by Krause [109] (see also [61] and [185]). There has also been much work in the application of finite element approaches to solving the time dependent incompressible Navier-Stokes equations (see e.g. [58], [25], [102]). Of particular note is the recent use of grid-free methods. Chorin [37] used a method based on the interaction of a finite number of vortices.

Combination grid-vortex methods have considered in [27], [127], and [167]. Peskin [153] has advocated the use of a Lagrangian grid free method. These codes have been used for many aeronautical purposes. The use of these codes for biological studies is complicated by the fact the boundaries which represent tissue material, are permeable [151]. The spectral methods can also be viewed as grid-free methods. Applications of spectral methods to incompressible flows are surveyed in [150]

Boundary layer computations have been dominated by the use of fourth order finite difference and finite element algorithms (e.g. [41], [107], [161], [196], [205]). A major difficulty in the practical use of these codes is the lack of sufficiently accurate turbulence models. Extensions of the mathematical models to detached and reverse flow is also being investigated [34]. The boundary layer equations are a parabolic system. Other parabolic problems include heat flow and diffusion problems. Diffusion problems are of major importance for such diverse fields as oil studies, plasma diffusion and biological processes.

Transonic flow calculations have been mainly based on the potential equation. Recent progress in the field has been presented in [204] and in the Proceedings of the Fourth AIAA Computational Fluid Dynamics Conference.

## References

1. Abarbanel, S., Gottlieb, D., Turkel, E., Difference Schemes with Fourth Order Accuracy for Hyperbolic Equations, *SIAM J. Numer. Anal.*, Vol. 29, pp. 329-351, 1975
2. Abarbanel, S., Gottlieb, D., A Note on the Leapfrog Scheme in Two and Three Dimensions, *J. Comp. Phys.*, Vol. 21, pp. 351-355, 1976.
3. Abarbanel, S., Gottlieb, D., Stability of Two Dimensional Initial Boundary Value Problems Using Leapfrog Type Methods, to appear *Math. Comp.*
4. Abbett, M. J. Boundary Condition Calculation Procedures for Inviscid Supersonic Flow Fields, *AIAA First Comp. Fluid Dynamic Conf.*, pp. 153-172, 1973.
5. Aboudi, J., Numerical Methods in Elastodynamics, Modern Problems in Elastic Wave Propagation, J. Milkowitz, J. D. Achenbach, Editors, Wiley-Interscience, NY, pp. 45-65, 1978.
6. Abrahamson, L. R., Keller, H. B., Kreiss, H. O., Difference Approximation for Singular Perturbations of Systems of Ordinary Differential Equations, *Numer. Math.*, Vol. 22, pp. 367-392, 1974.
7. Ames, W. F., Numerical Methods for Partial Differential Equations, Academic Press, NY, Second Edition, 1977.

8. Arakawa, A., Numerical Simulation of Large Scale Atmospheric Motions, SIAM-AMS Proceedings, Vol. 2, G. Birkhoff, R. S. Varga, Editors, pp. 24-40, 1970.
9. Bauer, F., Betancourt, O., Garabedian, P., A Computational Method in Plasma Physics, Springer-Verlag Series in *Comp. Physics*, Springer-Verlag, NY, 1978.
10. Bayliss, A., Turkel, E., Computation of Acoustic Waves in a Jet, ICASE Report No. 78-6, 1978.
11. Bayliss, A., Turkel, E., Radiation Boundary Condition for Wave-like Equations, ICASE Report No. 79-26, 1979.
12. Bayliss, A., Gunzburger, M., Turkel, E., Extensions of the Sommerfeld Radiation Condition for the Computation of Exterior Elliptic Equations, ICASE Report, 1979.
13. Bayliss, A., Turkel, E., Outflow Boundary Conditions for Fluid Dynamics, to appear.
14. Beam, R. W., Warming, R. F., An Implicit Finite-Difference Algorithm for Hyperbolic Systems in Conservation Law Form, *J. Comp. Phys.*, Vol. 22, pp. 87-110, 1976.
15. Beam, R. W., Warming, R. F., An Implicit Factored Scheme for the Compressible Navier-Stokes Equations, *AIAA J.* Vol. 16, pp. 393-402, 1978.
16. Betancourt, O, Garabedian, P., Computer Simulation of the Toroidal Equilibrium and Stability of a Plasma in Three Dimensions, *Proc. Nat. Acad. Sci.*, Vol. 72, pp. 926-927, 1975.

17. Blomster, J., Skölleremo, G., Finite Difference Computation of Steady Transonic Nozzle Flow, Upssala Univ., Dept. Computer Sci., Reoort 66, 1977.
18. Boris, J. P., Book, D. L., Flux Corrected Transport, III, Minimal-Error FCT Algorithms, *J. Comp. Phys.*, Vol. 20, pp. 397-431, 1976.
19. Boris, J. P., ADINC: An Implicit Lagrangian Hydrodynamics Code, NRL Memo Report 4022, 1979.
20. Brackbill, J. U., Numerical Magnetohydrodynamics for High Beta Plasmas, Methods in Computational Physics, Vol. 16, Academic Press, NY, pp. 1-41, 1976.
21. Brackbill, J. U., Barnes, D. C., The Effect of Nonzero  $\nabla \cdot \mathbf{B}$  on the Numerical Solution of the Magnetohydrodynamic Equations, to appear *J. Comp. Phys.*
22. Brandt, A., Multi-level Adaptive Solutions to Boundary Value Problems, *Math. Comp.*, Vol. 31, pp 333-390, 1977.
23. Briley, W. R., McDonald, H., Solution of the Multi-dimensional Compressible Navier-Stokes Equations by a Generalized Implicit Method, *J. Comp. Phys.*, Vol. 24, pp. 372-397, 1977.
24. Briley, W. R., McDonald, H., On the Strucutre and Use of Linearized Block ADI and Related Schemes, to appear *J. Comp. Phys.*

25. Bristeau, M. O., Glowinski, R., Periaux, J., Perrier, P., Pironneau, O., Poirier, G., Applications of Optimal Control and Finite Element Methods to the Calculation of Transonic Flows and Incompressible Viscous Flows, IRIA Laboria, Report 294, 1978. See also Numerical Methods in Applied Fluid Dynamics, B. Hunt, Editor, Academic Press, London.
26. Browning, G. L., A New System of Equations for Numerical Weather Forecasting, Thesis, Courant Institute, Math. Sci., New York University, 1979.
27. Buneman, O., Couet, B., Leonard, A., Numerical Simulation of Turbulent Flows with a Three Dimensional Vortex-in-Cell Method, Proc. Sixth Inter. Conf. Numer. Methods in Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 90, pp. 108-114, 1978.
28. Burns, A. M., A Necessary Condition for the Stability of a Difference Approximation to a Hyperbolic System of Partial Differential Equations, *Math. Comp.*, Vol. 32, pp. 707-724, 1978.
29. Burstein, S., Numerical Methods in Multidimensional Shocked Flow, *AIAA J.*, Vol. 12, pp. 2111-2117, 1974.
30. Burstein, S., Mirin, A. A., Third Order Difference Methods for Hyperbolic Equations, *J. Comp. Phys.*, Vol. 5, pp. 547-571, 1970.
31. Burstein, S. Schechter, H., Turkel, E., An Accurate Numerical Model for Dynamic Problems in Continuum

- Mechanics, Proc. 1st Intl. Symp. Ballistics Amer. Defense Prep. Assoc., E. J. Bryant, Editor, pp. IV 27 - IV 44, 1974.
32. Burstein, S., Turkel, E., Eulerian Computations in Domains with Moving Boundaries, Proc. Fifth Intl. Conf. Numer. Meth. Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 59, pp. 114-122, 1976.
33. Burstein, S., Turkel, E., An Eulerian Method for Hyperbolic Systems with Moving Boundaries, to appear.
34. Cebeci, T., Keller, H. B., Williams, P. G., Separating Boundary Layer Flow Calculations, *J. Comp. Phys.*, Vol. 31, pp. 363-378, 1979.
35. Cheng, S. I., A Critical Review of Numerical Solution of Navier-Stokes Equations, Springer-Verlag Lecture Notes in Physics, Vol. 41, pp. 78-225, 1975.
36. Cheng, S. I., Shubin, G., Computation Accuracy and Mesh Reynolds Number, *J. Comp. Phys.*, Vol. 28, pp. 315-326, 1978.
37. Chorin, A. J., Numerical Study of Slightly Viscous Flow, *J. Fluid Mech.*, Vol. 57, pp. 785-796, 1973.
38. Chorin, A. J., Random Choice Solution of Hyperbolic Systems, *J. Comp. Phys.*, Vol. 22, pp. 517-533, 1976.
39. Chu, C. K., Grad, H., Magnetofluid Dynamics, Research Frontiers in Fluid Dynamics, Edited by R. J. Seger, G. Temple, Interscience, J. Wiley and Sons, NY, 1965.

40. Chu, C. K., Sereny, A., Boundary Conditions in Finite Difference Fluid Dynamic Codes, *J. Comp. Physics*, Vol. 15, pp. 476-491, 1974.
41. Ciment, M., Leventhal, S., Weinberg, M., The Operator Compact Implicit Method for Parabolic Equations, *J. Comp. Phys.*, Vol. 28, pp. 135-166, 1978.
42. Courant, R., Friedrichs, K., Lewy, H., On the Partial Difference Equations of Mathematical Physics, translation in *IBM J. Research Develop.*, Vol. 11, pp. 215-235, 1967.
43. Courant, R., Friedrichs, K., Supersonic Flow and Shock Waves, Interscience Publishers, NY, 1948.
44. Crandall, M. C., Majda, A., Monotone Difference Approximations for Scalar Conservation Laws, MRC Tech. Summary Report 1922, 1979.
45. Crandall, M. C., Majda, A., The Method of Fractional Steps for Conservation Laws, to appear.
46. Dennis, J. E., Jr., Moré, J. J., Quasi-Newton Methods, Motivation and Theory, *SIAM Review*, Vol. 19, pp. 46-89, 1977.
47. Desideri, J. A., Steger, J. L., Tannehill, J. C., On the Iterative Convergence Properties of an Implicit Approximate Factorization Finite Difference Algorithm Engng. Research Inst., Iowa State University Report, ERI-79049, 1978.

48. Dibiase, J. A., Killeen, J., A Numerical Model for Resistive Magnetohydrodynamic Instabilities, *J. Comp. Phys.*, Vol. 24, pp. 158-185, 1977.
49. Dukowicz, J. K., Ramshaw, J. D., Tensor-Viscosity Method for Convection in Numerical Fluid Dynamics, *J. Comp. Phys.*, Vol. 32, pp. 71-79, 1979.
50. Dwyer, H. A., Kee, R. J., Sanders, B. R., An Adaptive Grid Method for Problems in Fluid Mechanics and Heat Transfer, Fourth AIAA Comp. Fluid Dynamics Conf., pp. 195-203, 1979.
51. Eiseman, P. R., A Unification of Unidirectional Flow Approximations, Sixth Intl. Conf. Numer. Meth. Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 90, pp. 185-192, 1978.
52. Elvius, T., Sundström, A., Computationally Efficient Schemes and Boundary Conditions for a Fine Mesh Barotropic Model Based on the Shallow Water Equations, *Tellus*, Vol. 25, pp. 132-156, 1973.
53. Engquist, B., Majda, A., Absorbing Boundary Conditions for the Numerical Simulation of Waves, *Math. Comp.*, Vol. 31, pp. 629-651, 1977.
54. Engquist, B., Majda, A., Radiation Boundary Conditions for Acoustic and Elastic Wave Calculations, *Comm. Pure Appl. Math.*, Vol. 32, pp. 312-358, 1979.
55. Engquist, B., Smedsaas, T., A System of Automatic Code Generation for Hyperbolic Problems, Uppsala Univeristy, Department of Computer Science, Report 69, 1977.

56. Fornberg, G., On the Instability of Leapfrog and Crank-Nicolson Approximations of a Nonlinear Partial Differential Equation, *Math. Comp.*, Vol. 27, pp. 45-57, 1973.
57. Fornberg, G., On a Fourier Method for the Integration of Hyperbolic Equations, *SIAM J. Numer. Anal.*, Vol. 12, pp. 509-528, 1975.
58. Fortin, W., Thomasset, F., Mixed Finite Element Methods for Incompressible Flow Problems, *J. Comp. Phys.*, Vol. 31, pp. 113-145, 1979.
59. Friedlander, F. G., On the Radiation Field of Pulse Solutions of the Wave Equation, *Proc. Roy. Soc. London*, Vol. A269, pp. 53-65, 1962.
60. Fritts, M. J., Boris, J. P., The Lagrangian Solution of Transient Problems in Hydrodynamics using a Triangular Mesh, *J. Comp. Phys.*, Vol. 31, pp. 173-215, 1979.
61. Fromm, J. E., Numerical Method for Computing Nonlinear Time Dependent Bouyant Circulation of Air in Rooms, *IBM J. Res. Dev.*, Vol. 15, pp. 186-196, 1971.
62. Gadd, A. J., A Split Explicit Integration Scheme for Numerical Weather Prediction, *Quart. J. Royal Meteor. Soc.*, Vol. 104, pp. 569-582, 1978.
63. Gary, J. M., On the Optimal Time Step and Computational Efficiency of Difference Schemes for PDE's, *J. Comp. Phys.*, Vol. 16, pp. 298-303, 1974.

64. Gary, J. M., On the Boundary Conditions for Hyperbolic Difference Schemes, *J. Comp. Phys.*, Vol. 26, pp. 339-351, 1978.
65. Glimm, J., Solutions in the Large for Nonlinear Hyperbolic Systems of Equations, *Comm. Pure Appl. Math.*, Vol. 18, pp. 697-715, 1965.
66. Glimm, Jr., Marchesin, D., A. Random Numerical Scheme for One Dimensional Fluid Flow with High Order Accuracy, to appear.
67. Gottlieb, D., Strang Type Difference Schemes for Multidimensional Problems, *SIAM J. Numer. Anal.*, Vol. 9, pp. 650-661, 1972.
68. Gottlieb, D., Gustafsson, B., Generalized Dufort-Frankel Methods for Parabolic Initial-Boundary Value Problems, *SIAM J. Numer. Anal.*, Vol. 13, pp. 129-144, 1976.
69. Gottlieb, D., Turkel, E., Dissipative Two-Four Methods for Time Dependent Problems, *Math. Comp.*, Vol. 30, pp. 703-723, 1976.
70. Gottlieb, D., Orszag, S. A., Numerical Analysis of Spectral Methods: Theory and Applications, SIAM Regional Conference Series Appl. Math., SIAM, Philadelphia, 1977.
71. Gottlieb, D., Turkel, E., Boundary Conditions for Multistep Finite Difference Methods for Time Dependent Equations, *J. Comp. Phys.*, Vol. 26, pp. 181-196, 1978.
72. Gottlieb, D., Gunzburger, M., Turkel, E., On Numerical Boundary Treatment for Hyperbolic Systems, ICASE Report 78-13, 1978.

73. Gottlieb, D., Turkel, E., On Time Discretizations for Spectral Methods, to appear in *Studies in Appl. Math.*
74. Gottlieb, D., Orszag, S., Turkel, E., Spectral Fourier Method for Variable Coefficients, to appear.
75. Gourlay, A. R., Morris, J. Ll., A Multistep Formulation of the Optimized Lax-Wendroff Method for Nonlinear Hyperbolic Systems in Two Space Variables, *Math. Comp.*, Vol. 22, pp. 715-720, 1968.
76. Gourlay, A. R., Morris, J. Ll., On the Comparison of Multistep Formulations of the Optimized Lax-Wendroff Method for Nonlinear Hyperbolic Systems in Two Space Variables, *J. Comp. Phys.*, Vol. 5, pp. 229-243, 1970.
77. Gourlay, A. R., Splitting Methods for Time Dependent Partial Differential Equations, The State of the Art in Numerical Analysis, Academic Press, pp. 757-798, 1977.
78. Grad, H., Reducible Problems in Magnetofluid Dynamic Steady Flows, Reviews of Modern Physics, Vol. 32, pp. 830-847, 1960.
79. Grosch, C. E., Orszag, S. A., Numerical Solution of Problems in Unbounded Regions: Coordinate Transformations, *J. Comp. Phys.*, Vol. 25, pp. 273-295, 1977.
80. Ginzburger, M., On the Stability of Galerkin Methods for Initial-Boundary Value Problems for Hyperbolic Systems, *Math. Comp.*, Vol. 31, pp. 661-675, 1977.

81. Gustafsson, B., Kreiss, H.-O., Sundström, A.,  
Stability Theory of Difference Approximations for  
Mixed Initial Boundary Value Problems, II., *Math.*  
*Comp.*, Vol. 26, pp. 649-686, 1972.
82. Gustafsson, B., A Numerical Method for Solving Sin-  
gular Boundary Value Problems, *Numer. Math.*, Vol. 21,  
pp. 328-344, 1973.
83. Gustafsson, B., The Convergence Rate for Difference  
Approximations to Mixed Initial Boundary Value Pro-  
blems, *Math. Comp.*, Vol. 29, pp. 396-406, 1975.
84. Gustafsson, B., Sundström, A., Incompletely Parabolic  
Problems in Fluid Dynamics, *SIAM J. Appl. Math.*, Vol.  
35, pp. 343-357, 1978.
85. Gustafsson, B., Kreiss, H.-O., Boundary Conditions  
for Time Dependent Problems with an Artificial Boundary,  
*J. Comp. Phys.*, Vol. 30, pp. 333-351, 1979.
86. Harlow, F., Welch, J., Numerical Calculation of Time-  
Dependent Viscous Incompressible Flow of Fluid with Free  
Surface, *Phys. Fluids*, Vol. 8, pp. 2182-2189, 1965.
87. Harlow, F. H., Amsden, A. A., A Numerical Fluid Dynamics  
Calculation Method for all Flow Speeds, *J. Comp. Phys.*,  
Vol. 8, pp. 197-213, 1971.
88. Harten, A., Zwas, G., Switched Numerical Shuman Filters  
for Shock Calculations, *J. Engng. Math.*, Vol. 6, pp. 207-  
216, 1972.

89. Harten, A., Zwas, G., Self-Adjusting Hybrid Schemes for Shock Calculations, *J. Comp. Phys.*, Vol. 9, pp. 568-582, 1972.
90. Harten, A., Hyman, J. M., Lax, P. D., On Finite Difference Approximations and Entropy Conditions for Shocks, *Comm. Pure Appl. Math.*, Vol. 29, pp. 292-322, 1976.
91. Harten, A., The Artificial Compression Method for Computation of Shocks and Contact Discontinuities, III. Self-Adjusting Hybrid Schemes, *Math. Comp.*, Vol. 32, pp. 363-390, 1978.
92. Harten, A., Tal-Ezer, H., On a Fourth Order Accurate Implicit Finite Difference Scheme for Hyperbolic Conservation Laws, I. Nonstiff Strongly Dynamic Problems, ICASE Report 79-1, 1979; II. Five Point Scheme, ICASE Report 79-10, 1979.
93. Harten, A., Lax, P. D., A Random Choice Finite-Difference Scheme for Hyperbolic Conservation Laws, ICASE Report 79-28, 1979.
94. Hedstrom, G. W., Nonreflecting Boundary Conditions for Nonlinear Hyperbolic Systems, Lawrence Livermore Laboratory Report UCRL-80011, 1977.
95. Hedstrom, G. W., Osterwald, A., The Effect of Cell Reynolds Number on the Computation of a Boundary Layer, Lawrence Livermore Laboratory Report UCRL-92641, 1979.

96. Herrmann, W., Bertholf, L. D., Thompson, S. L.,  
Computational Methods for Stress Wave Propagation  
in Nonlinear Solid Mechanics, Intl. Conf. Comp.  
Meth. Nonlinear Mech., Springer-Verlag Lecture Notes  
in Math., Vol. 461, pp. 91-128, 1975.
97. Hill, R., The Mathematical Theory of Plasticity,  
Oxford University Press, 1950.
98. Hindman, R. G., Kutler, P., Anderson, P. A., Two  
Dimensional Unsteady Euler Equation Solver for Flow  
Regions with Arbitrary Boundaries, Proc. Fourth AIAA  
Comp. Fluid Dynamics Conf., pp. 204-217, 1979.
99. Hirt, C. W., Harlow, F. H., A General Corrective  
Procedure for the Numerical Solution of Initial-Value  
Problems, *J. Comp. Phys.*, Vol. 2, pp. 114-119, 1967.
100. Hirt, C. W., Heuristic Stability Theory for Finite  
Difference Equations, *J. Comp. Phys.*, Vol. 2, pp.  
339-355, 1968.
101. Hollanders, H., Viviand, H., The Numerical Treatment  
of Compressible High Reynolds Number Flows, this volume.
102. Hughes, T. J. R., Liu, W. K., Brooks, A., Finite Element  
Analysis of Incompressible Viscous Flows by the Penalty  
Function Formulation, *J. Comp. Phys.*, Vol. 30, pp. 1-60,  
1979.
103. Isaacson, E., Keller, H. B., Analysis of Numerical Methods,  
John Wiley & Sons, NY, 1966.

104. Isaacson, E., Marchesin, D., Zwas, G., Numerical Methods for Meteorology and Climatology, Fourth NASA Weather Climate Rev., Conf. Publication 2076, pp. 183-190, 1979.
105. Jameson, A., Turkel, E., Implicit Schemes and Lu Decompositions, ICASE Report 79-24, 1979.
106. Jardin, S. C., Johnson, J. L., Greene, J. M., Grimm, R. C., Dynamical Grid Method for Time Dependent Simulations of Axisymmetric Instabilities in Tokomaks, *J. Comp. Phys.*, Vol. 29, pp. 101-126, 1976.
107. Keller, H. B., A New Difference Scheme for Parabolic Problems, Numerical Solution Partial Difference Equation, Vol. II, J. Bramble, Editor, Academic Press, NY, 1970.
108. Kershaw, D. S., The Incomplete Cholesky Conjugate Gradient Method for the Iterative Solution of Systems of Linear Equations, *J. Comp. Phys.*, Vol. 26, pp. 43-65, 1978.
109. Krause, E., The Computation of Three Dimensional Viscous Flows, this volume.
110. Kreiss, H.-O., Stability Theory for Difference Approximations of Mixed Initial Boundary Value Problems, I. *Math. Comp.*, Vol. 22, pp. 703-714, 1968.
111. Kreiss, H.-O., Oliger, J., Comparison of Accurate Methods for the Integration of Hyperbolic Equations, *Tellus*, Vol. 24, pp. 199-215, 1972.

112. Kreiss, H.-O., Oliger, J., Methods for the Approximate Solution of Time Dependent Problems, GARP Publication Series, No. 10, 1973.
113. Kreiss, H.-O., Oliger, J., Stability of the Fourier Method, *SIAM J. Numer. Anal.*, Vol. 16, pp. 421-433, 1979.
114. Kreiss, H.-O., Problems with Different Time Scales for Partial Differential Equations, Uppsala University Department Computer Science Report 75, 1978.
115. Kurtz, L. A., Smith, R. E., Parks, C. L., Boney, L. R., A Comparison of the Method of Lines to Finite Difference Techniques in Solving Time Dependent Partial Differential Equations, *Comp. Fluids*, Vol. 6, pp. 49-70, 1978.
116. Lax, P. D., Wendroff, B., Systems of Conservation Laws, *Comm. Pure Appl. Math.*, Vol. 13, pp. 217-237, 1960.
117. Lax, P. D., Wendroff, B., Difference Schemes for Hyperbolic Equations with Higher Order Accuracy, *Comm. Pure Appl. Math.*, Vol. 17, pp. 381-398, 1964.
118. Lax, P. D., Hyperbolic Systems of Conservation Laws and the Mathematical Theory of Shock Waves, SIAM Regional Conference Series in Appl. Math., Vol. II, 1973.
119. Lax, P. D., Accuracy and Resolution in the Computation of Solutions of Linear and Nonlinear Equations, Recent Adv. Numer. Anal., Proc. Symp. MRC, Academic Press, pp. 107-117, 1978.

120. Lerat, A., Peyret, R., The Problem of Spurious Oscillations in the Numerical Solution of the Equations of Gas Dynamics, Fourth Intl. Conf. Numer. Methods Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 35, pp. 251-256, 1975.
121. Lerat, A., Numerical Shock Structure and Nonlinear Corrections for Difference Schemes in Conservations Laws, Sixth Intl. Conf. Numer. Methods Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 90, pp. 345-351, 1978.
122. Lindemuth, I., Killeen, J., Alternating Direction Implicit Techniques for Two Dimensional Magnetohydrodynamic Calculations, *J. Comp. Phys.*, Vol. 13, pp. 181-208, 1973.
123. Lundquist, S., Studies in Magnetogydrodynamics, *Archiv Fysik*, Band 5, nr. 15, 1952.
124. MacCormack, R. W., Numerical Solution of the Interaction of a Shock Wave with a Laminar Boundary Layer, Springer-Verlag Lecture Notes in Physics, Vol. 8, pp. 151-163, 1971.
125. MacCormack, R. W., Paullay, A. J., The Influence of the Computational Mesh on Accuracy for Initial Value Problems with Discontinuous or Nonunique Solutions, *Computers and Fluids*, Vol. 2, pp. 339-362, 1974.
126. MacCormack, R. W., An Efficient Numerical Method for Solving the Time-Dependent Compressible Navier-Stokes

- Equations at High Reynolds Number, Computing in Appl. Mech., AMD-Vol. 18, Amer. Soc. Mech. Engng., edited by R. F. Hartung, pp. 49-64, 1977.
127. McCracken, M. F., Peskin, C. S., A Vortex-Grid Method for Blood Through Heart Valves, Proc. Sixth Intl. Conf., Numer. Meth. Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 90, pp. 377-384, 1978.
128. McDonald, H., Briley, W. R., Computational Fluid Dynamic Aspects of Internal Flows, Proc. Fourth AIAA Comp. Fluid Dynamics Conf., pp. 266-283, 1979.
129. Majda, A., Osher, S., Propagation of Error into Regions of Smoothness for Accurate Difference Approximations to Hyperbolic Equations, *Comm. Pure Appl. Math.*, Vol. 30, pp. 671-706, 1977.
130. Majda, A., Osher, S., A Systematic Approach for Correcting Nonlinear Instabilities, *Numer. Math.*, Vol. 30, pp. 429-452, 1978.
131. Majda, A., McDonough, J., Osher, S., The Fourier Method for Nonsmooth Initial Data, *Math. Comp.*, Vol. 32, pp. 1041-1081, 1978.
132. Majda, A., Ralston, J., Discrete Shock Profiles for Systems of Conservation Laws, *Comm. Pure Appl. Math.*, Vol. 32, pp. 445-482, 1979.
133. Majda, A., Osher, S., Numerical Viscosity and the Entropy Condition, to appear.

134. Marchuk, G. I., On the Theory of the Splitting-up Method, Proc. Second Symp. Numer. Solution Partial Differential Equations, Synspade 70, B. Hubbard, Editor, Academic Press, 1970.
135. Marchuk, G. I., Methods of Numerical Mathematics, Springer-Verlag, NY, 1975.
136. Marwil, E., Convergence Results for Schubert's Method for Solving Sparse Nonlinear Equations, *SIAM J. Numer. Anal.*, Vol. 16, pp. 588-604, 1979.
137. Mitchell, A. R., Computational Methods in Partial Differential Equations, Wiley and Sons, NY, 1969.
138. Mock, M. M., Lax, P. D., The Computation of Discontinuous Solutions of Linear Hyperbolic Equations, *Comm. Pure Appl. Math.*, Vol. 31, pp. 423-430, 1978.
139. Morreti, G., Importance of Boundary Conditions in the Numerical Treatment of Hyperbolic Equations, *Physics of Fluids, Supp. II*, II(13), II(20), 1969.
140. Morreti, G., A Circumspect Exploration of a Difficult Feature of Multidimensional Imbedded Shocks, AIAA Second Comp. Fluid Dynamics Conf., pp. 10-16, 1975.
141. Morreti, G., Numerical Analysis of Compressible Flow: An Introspective Survey, AIAA 12th Fluid and Plasma Dynamics Conf., AIAA Paper 79-1510, 1979.
142. Morton, K. W., The Design of Difference Schemes for Studying Physical Instabilities, Springer-Verlag Lecture Notes in Math., Vol. 363, pp. 105-117, 1974.

- 143. Morton, K. W., Initial-Value Problems by Finite Difference and Other Methods, The State of the Art in Numerical Analysis, Academic Press, pp. 699-791, 1977.
- 144. Navon, I. M., Application of a New Partially Implicit Time Differencing Scheme for Solving the Shallow Water Equations, *Zeit. Physik Atmos.*, Vol. 51, pp. 281-305, 1978.
- 145. Olinger, J., Fourth Order Difference Methods for the Initial Boundary Value Problem for Hyperbolic Equations, *Math. Comp.*, Vol. 28, pp. 15-26, 1974.
- 146. Olinger, J., Approximate Methods for Atmospheric and Oceanographic Circulation Problems, Springer-Verlag Lecture Notes in Physics, Vol. 91, pp. 171-184, 1977.
- 147. Olinger, J., Sundstrom, A., Theoretical and Practical Aspects of Some Initial Boundary Value Problems in Fluid Dynamics, *SIAM J. Appl. Math.*, Vol. 35, pp. 419-446, 1978.
- 148. Orlianski, I., A Simple Boundary Condition for Unbounded Hyperbolic Flows, *J. Comp. Phys.*, Vol. 21, pp. 251-269, 1976.
- 149. Orszag, S. A., Numerical Simulation of Incompressible Flows Within Simple Boundaries: I. Galerkin (Spectral) Representations, *Stud. Appl. Math.*, Vol. 50, pp. 293-327, 1971.

150. Orszag, S. A., Israeli, M., Numerical Simulation of Viscous Incompressible Flows, Annual Rev. Fluid Mech., Vol. 6, pp. 281-318, 1974.
151. Orszag, S. A., Spectral Methods for Problems in Complex Geometries, Adv. in Computer Meth. for Partial Differential Equation III., Editor R. Vichnevetsky, R. S. Stepelman, IMACS, pp. 148-157, 1979.
152. Pandolfi, M., Zannetti, L., Some Permeable Boundaries in Multidimensional Unsteady Flows, Proc. Sixth Intl. Conf. Numer. Meth. Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 90, pp. 439-446, 1978.
153. Peskin, C. S., A Lagrangian Method for the Navier-Stokes Equations with Large Deformations, to appear.
154. Peyret, R., Viviani, H., Computation of Viscous Compressible Flows Based on the Navier-Stokes Equations, AGARD, AG-212, 1975.
155. Potter, D., Computational Physics, Wiley & Sons, NY, 1973.
156. Richtmyer, R. D., Morton, K. W., Difference Methods for Initial Value Problems, Second Edition, Interscience, NY, 1967.
157. Rizzi, A., Solution by Newton's Method to the Steady Transonic Euler Equations, Proc. Sixth Intl. Conf.

- Numerical Method Fluid Dynamics, Springer-Verlag  
Lecture Notes in Physics, Vol. 90, pp. 460-467,  
1978.
158. Roache, P. J., Computational Fluid Dynamics,  
Hermosa Publishers, Albuquerque, NM, Revised 1976.
159. Roache, P. J., Recent Developments and Problem  
Areas in Computational Fluid Dynamics, Intl. Conf.  
Computer Method Nonlinear Mechanics, Springer-Verlag  
Lecture Notes in Math., Vol. 461, pp. 195-256, 1975.
160. Roberts, G. O., Computational Meshes for Boundary  
Layer Problems, Proc. Second Intl. Conference Numerical  
Method Fluid Dynamics, Ed. M. Holt, 1970.
161. Rubin, S. G., Khosla, P. K., Polynomial Interpolation  
Methods for Viscous Flow Calculations, *J. Comp. Phys.*,  
Vol. 24, pp. 217-244, 1977.
162. Rudy, D., Strikwerda, J., Non-reflecting Outflow  
Boundary Condition for Subsonic Navier-Stokes Calcu-  
lations, ICASE Report 79-2, 1979.
163. Rudy, D., Strikwerda, J., Boundary Conditions for Sub-  
sonic Compressible Navier-Stokes Calculations, ICASE  
Report 79-18, 1979.
164. Rusanov, V. V., On Difference Schemes of Third Order  
Accuracy for Nonlinear Hyperbolic Systems, *J. Comp.*  
*Physics*, Vol. 5, pp. 507-516, 1970.
165. Rusanov, V. V., Some Properties of Difference Schemes  
of Third Order Accuracy, Fifth Intl. Conf. Numerical

- Method Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 59, pp. 378-383, 1977.
166. Salas, M. D., The Anatomy of Floating Shock Fitting, AIAA Second Computer Fluid Dynamics Conference, pp. 47-54, 1975.
167. Schubert, L. K., Modification of a Quasi-Newton Method for Nonlinear Equations with a Sparse Jacobian, *Math. Comp.*, Vol. 24, pp. 27-30, 1970.
168. Serra, R., Determination of Internal Gas Flows by a Transient Numerical Technique, *AIAA J.*, Vol. 10, pp. 603-611, 1972.
169. Shestakov, A. I., A Hybrid Vortex-ADI Solution for Flows of Low Viscosity, *J. Comp. Phys.*, Vol. 31, pp. 313-334, 1979.
170. Shubin, G., Cheng, S. I., Gasdynamic Modeling and Computational Accuracy, *J. Comp. Phys.*, Vol. 32, pp. 39-55, 1979.
171. Shokin, Y. I., Analysis of the Properties of Approximation Viscosity of Difference Schemes by Means of the Method of Differential Approximation, Fifth Intl. Conf. Numerical Method Fluid Dynamics, Springer-Verlag Lecture Notes in Physics, Vol. 59, pp. 410-414, 1977.
172. Skölleremo, G., Error Analysis of Finite Difference Schemes Applied to Hyperbolic Initial Boundary Value Problems, *Math. Comp.*, Vol. 33, pp. 11-36, 1979.

173. Sod, G. A., Review. A Survey of Several Finite Difference Methods for Systems of Nonlinear Hyperbolic Conservation Laws, *J. Comp. Phys.*, Vol. 29, pp. 1-31, 1978.
174. Steger, J. L., Coefficient Matrices for Implicit Finite Difference Solution of the Inviscid Fluid Conservation Law Equations, *Comp. Meth. Appl. Mech. Engng.*, Vol. 13, pp. 175-188, 1978.
175. Steger, J. L., Implicit Finite Difference Simulation of Flow about Arbitrary Two Dimensional Geometries, *AIAA J.*, Vol. 16, pp. 679-686, 1978.
176. Steger, J. L., Warming, R. W., Flux Vector Splitting of the Inviscid Gasdynamic Equations with Application to Finite Difference Methods, NASA Tech Memo 78605, 1979.
177. Steppler, J., On a High Accuracy Finite Difference Method, *J. Comp. Phys.*, Vol. 19, pp. 390-403, 1975.
178. Steppler, J., Difference Schemes with Uniform Second and Third Order Accuracy and Reduced Smoothing, *J. Comp. Phys.*, Vol. 31, pp. 438-449, 1979.
179. Strang, G. W., Accurate Partial Difference Method, I. Linear Cauchy Problems, *Arch. Rat. Mech. Anal.*, Vol. 12, pp. 392-402, 1963.
180. Strang, G. W., Accurate Partial Difference Methods, II. Nonlinear Problems, *Numer. Math.*, Vol. 6, pp. 37-46, 1964.

181. Sundstrom, A., Boundary Conditions for Limited Area Integration of the Viscous Forecast Equations, *Beit. Physik Atmos.*, Vol. 50, pp. 218-224, 1977.
182. Thomas, P. D., Boundary Conditions for Implicit Solutions to the Compressible Navier-Stokes Equations in Finite Computational Domains, Proc. Fourth AIAA Comp. Fluid Dynamics Conf., pp. 14-26, 1979.
183. Thomas, P. D., Lombard, C. K., The Geometric Conservation Law and its Application to Flow Computations on Moving Grids, to appear *AIAA J.*
184. Thompson, J. F., Thames, F. C., Mastin, C. W., TOMCAT, A Code for Numerical Generation of Boundary-Fitted Curvilinear Coordinate Systems on Fields Containing Any Number of Arbitrary Two Dimensional Bodies, *J. Comp. Phys.*, Vol. 24, pp. 274-302, 1977.
185. Tuann, S. Y., Olson, M. D., Review of Computing Methods for Recirculating Flows, *J. Comp. Phys.*, Vol. 29, pp. 1-19, 1978.
186. Turkel, E., Abarbanel, S., Gottlieb, D., Multidimensional Difference Schemes with Fourth Order Accuracy, *J. Comp. Phys.*, Vol. 21, pp 85-113, 1976.
187. Turkel, E., Extrapolation Methods for Dynamic Partial Differential Equations, *Numer. Math.*, Vol. 29, pp. 269-285, 1978.
188. Turkel, E., On the Practical Use of Higher Order Methods for Hyperbolic Systems, to appear *J. Comp. Phys.*

189. Turkel, E., Zwas, G., Explicit Large Time-Step Schemes for the Shallow Water Equations, Adv. Comp. Meth. PDE's III., Ed. R. Vichnevetsky, R. S. Stepelman, IMACS, pp. 65-69, 1979.
190. Umscheid, L., Jr., Sankar-Rao, M., Further Test of a Grid System for Global Numerical Prediction, *Mon. Wea. Rev.*, Vol. 99, pp 686-690, 1971.
191. Van Leer, B., Towards the Ultimate Conservation Difference Scheme, III. Monotonicity and Conservation Combined in a Second Order Scheme, *J. Comp. Phys.*, Vol. 14, pp. 361-370, 1974.
192. Van Leer, B., Towards the Ultimate Conservation Difference Scheme, V. A Second Order Sequel to Gudunov's Method, *J. Comp. Phys.*, Vol. 32, pp. 101-136, 1979.
193. Vinokor, M., Conservation Equations of Gasdynamics in Curvilinear Coordinate Systems, *J. Comp. Phys.*, Vol. 14, pp. 105-125, 1974.
194. Warming, R. F., Hyett, B. J., The Modified Equation Approach to the Stability and Accuracy Analysis of Finite Difference Methods, *J. Comp. Phys.*, Vol. 14, pp. 159-179, 1974.
195. Wearle, T. J., Errors Arising from Irregular Boundaries in ADI Solutions of the Shallow Water Equations, *Intl. J. Numer. Meth. Engng.*, Vol. 14, pp. 921-931, 1979.

196. Weinberg, B. C., Viscous Flow Calculations Employing a Fourth Order Generalized Operator Compact Implicit Scheme, Proc. Fourth AIAA Comp. Fluid Dynamics Conference, pp. 256-265, 1979.
197. Wilkins, M. L., Calculation of Elastic-Plastic Flow, Methods in Computational Physics, Vol. 3, pp. 211-263, 1964.
198. Wilkins, M. L., Finite Difference Scheme for Calculating Problems in Two Space Dimensions and Time, *J. Comp. Phys.*, Vol. 5, pp. 406-414, 1970.
199. Williamson, D. L., Browning, G. L., Comparison of Grids and Difference Approximations for Numerical Weather Prediction Over a Sphere, *J. Appl. Meteor.*, Vol. 12, pp. 264-274, 1973.
200. Williamson, D. L., The Relative Importance of Resolution, Accuracy and Diffusion in Short-Range Forecasts with the NCAR Global Circulation Model, *Monthly Weather Review*, Vol. 106, pp. 69-88, 1978.
201. Wilson, J. C., A Note on the Leap Frog Schemes in Any Number of Space Variables, *J. Comp. Phys.*, Vol. 28, pp. 433-436, 1978.
202. Wirz, H. J., DeSchutter, F., Turi, A., An Implicit, Compact, Finite Difference Method to Solve Hyperbolic Equations, *Math. Comp. Sim.*, Vol. 19, pp. 241-261, 1977.
203. Wirz, H. J., On Some Problems in Two and Single Phase Flows, this volume.

- 204. Wirz, H. J., Smolderen, J. J., Editors, Numerical Methods in Fluid Dynamics, von Karman Institute, Hemisphere Publishing Corp., 1978.
- 205. Wornom, S. F., Critical Study of Higher Order Numerical Methods for Solving the Boundary-Layer Equations, NASA Tech. Paper 1302, 1978.
- 206. Yanenko, N. N., The Method of Fractional Steps, Springer-Verlag, NY, 1971.
- 207. Yanenko, N. N., Lisseikin, V. D., Kovenia, V. M., The Method of the Solution of Gas Dynamical Problems in Moving Meshes, Springer-Verlag Lecture Notes in Physics, Vol. 91, pp. 48-61, 1977.
- 208. Zalesak, S. T., Fully Multidimensional Flux-Corrected Transport Algorithm for Fluids, *J. Comp. Phys.*, Vol. 31, pp. 335-362, 1979.
- 209. Zwas, G., Roseman, J., The Effect of Nonlinear Transformations on the Computation of Weak Solutions, *J. Comp. Phys.*, Vol. 12, pp. 179-186, 1973.

ORIGINAL PAGE IS  
OF POOR QUALITY