



Aeronautical  
Engineering  
A Continuing  
Bibliography  
with Indexes

NASA SP-7037 (104)  
January 1979

National Aeronautics and  
Space Administration

CASE FILE  
COPY

Aeronautical Engineering Aer  
ering Aeronautical Engineerin  
ngineering Aeronautical Engin  
cal Engineering Aeronautical E  
nautical Engineering Aeronau  
Aeronautical Engineering Aer  
ering Aeronautical Engineering  
ngineering Aeronautical Engin  
cal Engineering Aeronautical E  
nautical Engineering Aeronaut  
Aeronautical Engineering Aer  
ering Aeronautical Engineering

## ACCESSION NUMBER RANGES

Accession numbers cited in this Supplement fall within the following ranges:

STAR (N-10000 Series)    N78-32036—N78-34034

IAA (A-10000 Series)    A78-50239—A78-53918

# AERONAUTICAL ENGINEERING

## A Continuing Bibliography

### Supplement 104

A selection of annotated references to unclassified reports and journal articles that were introduced into the NASA scientific and technical information system and announced in December 1978 in

- *Scientific and Technical Aerospace Reports (STAR)*
- *International Aerospace Abstracts (IAA)*

---

This Supplement is available from the National Technical Information Service (NTIS), Springfield, Virginia 22161, at the price code E02 (\$4.75 domestic, \$9.50 foreign)

# INTRODUCTION

Under the terms of an interagency agreement with the Federal Aviation Administration this publication has been prepared by the National Aeronautics and Space Administration for the joint use of both agencies and the scientific and technical community concerned with the field of aeronautical engineering. The first issue of this bibliography was published in September 1970 and the first supplement in January 1971. Since that time, monthly supplements have been issued.

This supplement to *Aeronautical Engineering -- A Continuing Bibliography* (NASA SP-7037) lists 532 reports, journal articles, and other documents originally announced in December 1978 in *Scientific and Technical Aerospace Reports (STAR)* or in *International Aerospace Abstracts (IAA)*.

The coverage includes documents on the engineering and theoretical aspects of design, construction, evaluation, testing, operation, and performance of aircraft (including aircraft engines) and associated components, equipment, and systems. It also includes research and development in aerodynamics, aeronautics, and ground support equipment for aeronautical vehicles.

Each entry in the bibliography consists of a standard bibliographic citation accompanied in most cases by an abstract. The listing of the entries is arranged in two major sections, *IAA Entries* and *STAR Entries*, in that order. The citations, and abstracts when available, are reproduced exactly as they appeared originally in *IAA* and *STAR*, including the original accession numbers from the respective announcement journals. This procedure, which saves time and money, accounts for the slight variation in citation appearances.

Three indexes -- subject, personal author, and contract number -- are included.

An annual cumulative index will be published.

# AVAILABILITY OF CITED PUBLICATIONS

## **IAA ENTRIES (A78-10000 Series)**

All publications abstracted in this Section are available from the Technical Information Service, American Institute of Aeronautics and Astronautics, Inc (AIAA), as follows. Paper copies of accessions are available at \$6 00 per document up to a maximum of 20 pages. The charge for each additional page is \$0 25. Microfiche<sup>(1)</sup> of documents announced in *IAA* are available at the rate of \$2 50 per microfiche on demand, and at the rate of \$1 10 per microfiche for standing orders for all *IAA* microfiche. The price for the *IAA* microfiche by category is available at the rate of \$1 25 per microfiche plus a \$1 00 service charge per category per issue. Microfiche of all the current AIAA Meeting Papers are available on a standing order basis at the rate of \$1 35 per microfiche.

Minimum air-mail postage to foreign countries is \$1 00 and all foreign orders are shipped on payment of pro-forma invoices.

All inquiries and requests should be addressed to AIAA Technical Information Service. Please refer to the accession number when requesting publications.

## **STAR ENTRIES (N78-10000 Series)**

One or more sources from which a document announced in *STAR* is available to the public is ordinarily given on the last line of the citation. The most commonly indicated sources and their acronyms or abbreviations are listed below. If the publication is available from a source other than those listed, the publisher and his address will be displayed on the availability line or in combination with the corporate source line.

Avail NTIS Sold by the National Technical Information Service. Prices for hard copy (HC) and microfiche (MF) are indicated by a price code followed by the letters HC or MF in the *STAR* citation. Current values for the price codes are given in the tables on page viii.

Microfiche is available regardless of age for those accessions followed by a # symbol.

Initially distributed microfiche under the NTIS SRIM (Selected Research in Microfiche) is available at greatly reduced unit prices. For this service and for information concerning subscription to NASA printed reports, consult the NTIS Subscription Unit.

**NOTE ON ORDERING DOCUMENTS** When ordering NASA publications (those followed by the \* symbol), use the N accession number. NASA patent applications (only the specifications are offered) should be ordered by the US-Patent-Appl-SN number. Non-NASA publications (no asterisk) should be ordered by the AD, PB, or other *report* number shown on the last line of the citation, not by the N accession number. It is also advisable to cite the title and other bibliographic identification.

Avail SOD (or GPO) Sold by the Superintendent of Documents, U S Government Printing Office, in hard copy. The current price and order number are given following the availability line. (NTIS will fill microfiche requests, at the standard \$3 00 price, for those documents identified by a # symbol.)

(1) A microfiche is a transparent sheet of film 105 by 148 mm in size containing as many as 60 to 98 pages of information reduced to micro images (not to exceed 26:1 reduction).

- Avail NASA Public Document Rooms** Documents so indicated may be examined at or purchased from the National Aeronautics and Space Administration, Public Documents Room (Room 126), 600 Independence Ave., S.W., Washington, D.C. 20546, or public document rooms located at each of the NASA research centers, the NASA Space Technology Laboratories, and the NASA Pasadena Office at the Jet Propulsion Laboratory
- Avail DOE Depository Libraries** Organizations in U.S. cities and abroad that maintain collections of Department of Energy reports, usually in microfiche form, are listed in *Energy Research Abstracts*. Services available from the DOE and its depositories are described in a booklet, *DOE Technical Information Center - Its Functions and Services* (TID-4660), which may be obtained without charge from the DOE Technical Information Center
- Avail Univ Microfilms** Documents so indicated are dissertations selected from *Dissertation Abstracts* and are sold by University Microfilms as xerographic copy (HC) and microfilm. All requests should cite the author and the Order Number as they appear in the citation
- Avail USGS** Originals of many reports from the U.S. Geological Survey, which may contain color illustrations, or otherwise may not have the quality of illustrations preserved in the microfiche or facsimile reproduction, may be examined by the public at the libraries of the USGS field offices whose addresses are listed in this introduction. The libraries may be queried concerning the availability of specific documents and the possible utilization of local copying services, such as color reproduction
- Avail HMSO** Publications of Her Majesty's Stationery Office are sold in the U.S. by Pendragon House, Inc. (PHI), Redwood City, California. The U.S. price (including a service and mailing charge) is given, or a conversion table may be obtained from PHI
- Avail BLL (formerly NLL)** British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. Photocopies available from this organization at the price shown. (If none is given, inquiry should be addressed to the BLL.)
- Avail ZLDI** Sold by the Zentralstelle für Luftfahrt-dokumentation und -Information, Munich, Federal Republic of Germany, at the price shown in deutschmarks (DM)
- Avail Issuing Activity, or Corporate Author, or no indication of availability** Inquiries as to the availability of these documents should be addressed to the organization shown in the citation as the corporate author of the document
- Avail U.S. Patent and Trademark Office** Sold by Commissioner of Patents and Trademarks, U.S. Patent and Trademark Office, at the standard price of 50 cents each, postage free
- Other availabilities** If the publication is available from a source other than the above, the publisher and his address will be displayed entirely on the availability line or in combination with the corporate author line

### **GENERAL AVAILABILITY**

All publications abstracted in this bibliography are available to the public through the sources as indicated in the *STAR Entries* and *IAA Entries* sections. It is suggested that the bibliography user contact his own library or other local libraries prior to ordering any publication inasmuch as many of the documents have been widely distributed by the issuing agencies, especially NASA. A listing of public collections of NASA documents is included on the inside back cover.

### **SUBSCRIPTION AVAILABILITY**

This publication is available on subscription from the National Technical Information Service (NTIS). The annual subscription rate for the monthly supplements is \$45.00 domestic, \$75.00 foreign. All questions relating to the subscriptions should be referred to NTIS, Attn: Subscriptions, 5285 Port Royal Road, Springfield Virginia 22161.



## ADDRESSES OF ORGANIZATIONS

American Institute of Aeronautics  
and Astronautics  
Technical Information Service  
750 Third Ave  
New York, N Y 10017

British Library Lending Division,  
Boston Spa, Wetherby, Yorkshire,  
England

Commissioner of Patents and  
Trademarks  
U S Patent and Trademark Office  
Washington, D.C 20231

Department of Energy  
Technical Information Center  
P O Box 62  
Oak Ridge, Tennessee 37830

ESA-Information Retrieval Service  
ESRIN  
Via Galileo Galilei  
00044 Frascati (Rome) Italy

Her Majesty's Stationery Office  
P O Box 569, S E 1  
London, England

NASA Scientific and Technical Information  
Facility  
P O Box 8757  
B W I Airport, Maryland 21240

National Aeronautics and Space  
Administration  
Scientific and Technical Information  
Branch (NST-41)  
Washington, D C 20546

National Technical Information Service  
5285 Port Royal Road  
Springfield, Virginia 22161

Pendragon House, Inc  
899 Broadway Avenue  
Redwood City, California 94063

Superintendent of Documents  
U S Government Printing Office  
Washington, D C 20402

University Microfilms  
A Xerox Company  
300 North Zeeb Road  
Ann Arbor, Michigan 48106

University Microfilms, Ltd  
Tylers Green  
London, England

U S Geological Survey  
1033 General Services Administration  
Building  
Washington, D C 20242

U S Geological Survey  
601 E Cedar Avenue  
Flagstaff, Arizona 86002

U S Geological Survey  
345 Middlefield Road  
Menlo Park, California 94025

U S Geological Survey  
Bldg 25, Denver Federal Center  
Denver, Colorado 80225

Zentralstelle fuer Luft Raumfahrt  
Dokumentation U Information  
c/o Fachinformationszentrum E P M  
Attn Library  
Kernforschungszentrum  
7514 Eggenstein Leopoldsaffen  
Federal Republic of Germany

# NTIS PRICE SCHEDULES

## Schedule A STANDARD PAPER COPY PRICE SCHEDULE

(Effective October 1 1977)

Price Code	Page Range	North American Price	Foreign Price
A01	Microfiche	\$ 3 00	\$ 4 50
A02	001 025	4 00	8 00
A03	026 050	4 50	9 00
A04	051 075	5 25	10 50
A05	076-100	6 00	12 00
A06	101-125	6 50	13 00
A07	126 150	7 25	14 50
A08	151 175	8 00	16 00
A09	176-200	9 00	18 00
A10	201 225	9 25	18 50
A11	226-250	9 50	19 00
A12	251 275	10 75	21 50
A13	276 300	11 00	22 00
A14	301 325	11 75	23 50
A15	326-350	12 00	24 00
A16	351 375	12 50	25 00
A17	376 400	13 00	26 00
A18	401 425	13 25	26 50
A19	426 450	14 00	28 00
A20	451 475	14 50	29 00
A21	476 500	15 00	30 00
A22	501 525	15 25	30 50
A23	526 550	15 50	31 00
A24	551 575	16 25	32 50
A25	576 600	16 50	33 00
A99	601-up	1/	2/

1/ Add \$2 50 for each additional 100 page increment from 601 pages up

2/ Add \$5 00 for each additional 100 page increment from 601 pages up


## Schedule E EXCEPTION PRICE SCHEDULE Paper Copy & Microfiche

Price Code	North American Price	Foreign Price
E01	\$ 3 25	\$ 6 50
E02	4 75	9 50
E03	6 25	12 50
E04	7 50	15 00
E05	9 00	18 00
E06	10 50	21 00
E07	12 50	25 00
E08	15 00	30 00
E09	17 50	35 00
E10	20 00	40 00
E11	22 50	45 00
E12	25 00	50 00
E13	28 00	56 00
E14	31 00	62 00
E15	34 00	68 00
E16	37 00	74 00
E17	40 00	80 00
E18	45 00	90 00
E19	50 00	100 00
E20	60 00	120 00
E99	Write for quote	
N01	28 00	40 00


# TABLE OF CONTENTS

IAA Entries .....	569
STAR Entries .....	603
Subject Index .....	A-1
Personal Author Index .....	B-1
Contract Number Index .....	C-1

## TYPICAL CITATION AND ABSTRACT FROM STAR

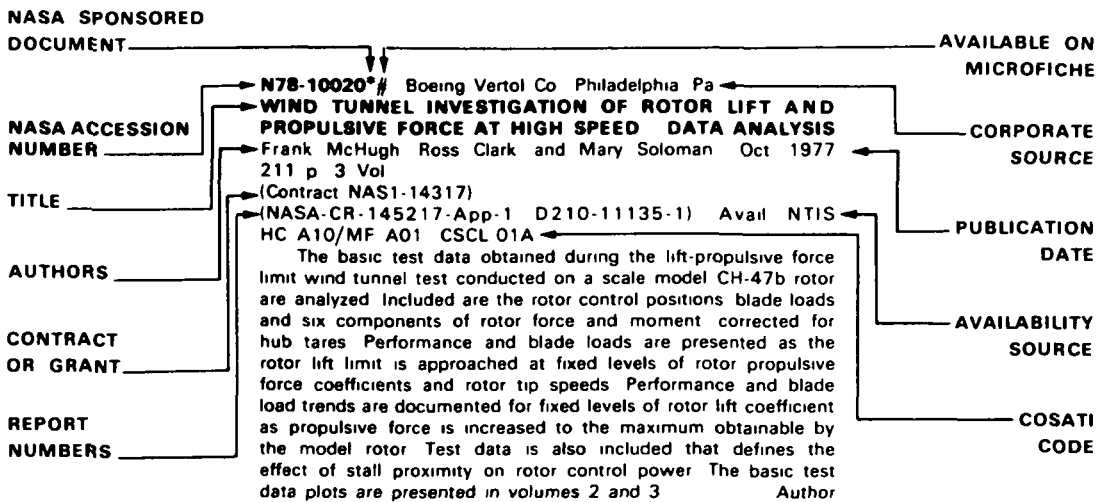

## TYPICAL CITATION AND ABSTRACT FROM IAA

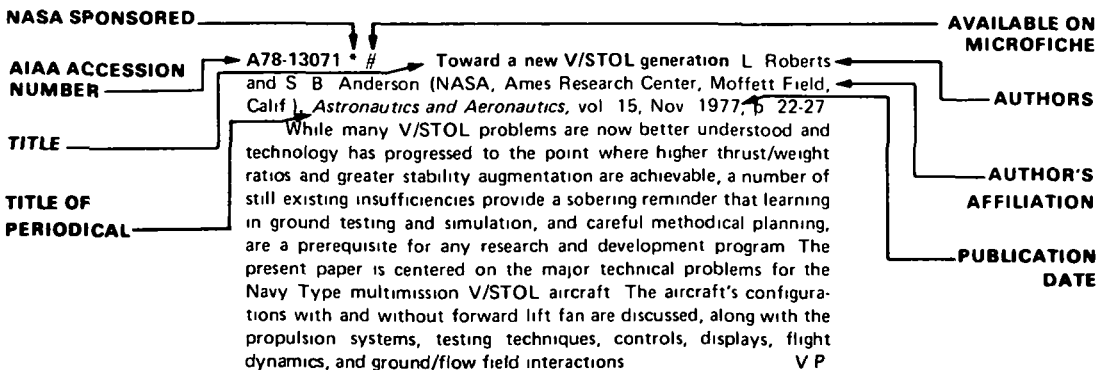

# AERONAUTICAL ENGINEERING

*A Continuing Bibliography (Suppl. 104)*

JANUARY 1979

## IAA ENTRIES

**A78-50263** Aircraft guidance and flight safety - Current and future problems for research and industry (*Flugführung und Flugsicherung - Gegenwartige und zukünftige Aufgaben für Forschung und Industrie*) F Thomas (Deutsche Forschungs- und Versuchsanstalt für Luft- und Raumfahrt, Braunschweig, West Germany) *DFVLR-Nachrichten*, Aug 1978, p 2-9 In German

The paper reviews state-of-the-art and future-generation design innovations which will lead to improvements in aircraft control and flight safety. Some of the innovations discussed are data bus systems, advanced engine concepts, the use of improved onboard computer systems, tracking radar, in-flight simulators, strapdown technology, electrohydraulic control of control surfaces, microwave landing systems, the utilization of communication and navigation systems, and the automation of flight safety functions. B J

**A78-50264** Improved safety in air transportation through the extension and automation of flight safety systems (*Hohere Sicherheit im Luftverkehr durch Ausbau und Automatisierung der Flugsicherung*) K Platz (Bundesanstalt für Flugsicherung, Frankfurt am Main, West Germany) *DFVLR-Nachrichten*, Aug 1978, p 9-13 In German

The contribution of flight safety systems (primarily radar guidance systems) to overall safety in air transportation is discussed. After a brief review of technical improvements of flight safety systems in recent years, the paper describes planning goals and system concepts for flight safety systems in the 1980s. A block diagram of a radar-based flight safety system proposed for the 1980s is presented. B J

**A78-50265** Current and future navigation and landing systems (*Gegenwartige und zukünftige Navigations- und Landesysteme*) M Bohm (Standard Elektrik Lorenz AG, Stuttgart, West Germany) *DFVLR-Nachrichten*, Aug 1978, p 13-19 In German

The basic problems and techniques of aircraft navigation and landing are reviewed from the standpoints of communications, navigation systems, and tracking. The state of the art of air navigation is reviewed with particular reference to systems in West Germany. Future systems, involving ground-based guidance, autonomous on-board systems, and satellite navigation systems, are discussed. B J

**A78-50266** Digital flight control system - Advanced technology of flight control (*Digitales Flugführungssystem - Verbesserte Technologie der Flugführung*) J Filz (Deutsche Lufthansa AG, Hamburg, West Germany) *DFVLR-Nachrichten*, Aug 1978, p 19-23 In German

The paper reviews the advantages of digital flight control systems (DFCS). The standard architecture - consisting of flight management computer, flight control computer, and thrust control computer - for a DFCS is described. Consideration is given to the system architecture for the A300 B 10 Airbus, it includes flight

control computer, energy management computer, and flight augmentation computer. West German contributions to advanced flight control technology are briefly reviewed. B J

**A78-50276 \*** Assess II - A simulated mission of Spacelab. H M Wegmann, R Hermann (Deutsche Forschungs und Versuchsanstalt für Luft und Raumfahrt, Institut für Flugmedizin, Bonn, West Germany), C M Wingett (NASA, Ames Research Center, Moffett Field, Calif.), M de Muizon, D Rouan, P Léna (Meudon, Observatoire, Meudon, Hauts-de-Seine, France), J Wijnbergen (Groningen, Rijksuniversiteit, Groningen, Netherlands), H Olthof, K W Michel (Max-Planck-Institut für Extraterrestrische Physik, Garching, West Germany), and Ch Werner (Deutsche Forschungs- und Versuchsanstalt für Luft und Raumfahrt, Institut für Physik der Atmosphäre, Oberpfaffenhofen, West Germany) *Nature*, vol 275, Sept 7, 1978, p 15-19 10 refs

For Assess II, the Spacelab mission simulation conducted in mid-1977, four payload specialists aboard a Convair 990 research aircraft performed six American and six European experiments during nine research flights each of six hours duration in order to evaluate the compatibility of training and experimental design. Mission organization and some initial data from the European experiments are reported. The experiments, conducted over the western U.S., involved infrared astronomy, solar brightness temperature, lidar, airglow TV, and a medical experiment for which physiological parameters were monitored. Conclusions concerning general principles of experiment design are discussed. M L

**A78-50288** Three dimensional free convection flow and heat transfer along a porous vertical plate. P Singh, V P Sharma, and U N Misra (Indian Institute of Technology, Kharagpur, India) *Applied Scientific Research*, vol 34, Spring 1978, p 105-115

In the present paper, the three dimensional free convection flow over a porous vertical plate with transverse sinusoidal suction is analyzed in the case where the difference in wall and flow temperatures gives rise to buoyancy forces acting in the direction of the flow. Skin friction in the flow direction and heat transfer intensity to the flow are calculated for asymptotic flow conditions. The wall shear stress is calculated as a function of the buoyancy parameter. V P

**A78-50302** Visual flight simulator for the investigation of the learning process during aircraft landing (*Ein Sichtsimulator zur Untersuchung des Lernvorgangs bei der Flugzeuglandung*) W Heumann (Darmstadt, Technische Hochschule, Darmstadt, West Germany) *Zeitschrift für Flugwissenschaften und Weltraumforschung*, vol 2, July-Aug 1978, p 228-242 17 refs In German

In training, a pilot must learn two basic landing skills: (1) how to estimate height above ground from exterior visual cues, and (2) how to control the dynamic response of the aircraft. This paper describes a visual flight simulator for the separate training of these two skills. A side-view simulator allows the pilot to become familiar with the dynamic characteristics of the aircraft, without the problem of height estimation, a runway simulator projects the correct wide-angle view of the runway during final approach and landing. B J

## A78-50303

**A78-50303** Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel (Eine Blockierungskorrektur für aerodynamische Messungen in geschlossenen Unterschallwindkanalen) E Mercker and H Fiedler (Berlin, Technische Universität, Berlin, West Germany) *Zeitschrift für Flugwissenschaften und Weltraumforschung*, vol 2, July-Aug 1978, p 242-248 11 refs In German Research supported by the Deutsche Forschungsgemeinschaft

A simple method is described by which the influence of wind-tunnel blockage for flow around bodies of arbitrary shape can be corrected. The correction factor  $n$  is obtained experimentally. Thus the geometrical blockage ratio  $F/A$ , the thickness of the boundary layer at the model as well as at the tunnel walls and lastly the model shape do not enter into the correction scheme explicitly but are taken care of by the correction factor. The method can be applied for total blockage ratios up to 25%. It has been tested for flows about two-dimensional wedges and cylinders. In principle the method is also applicable to flows around three-dimensional bodies. (Author)

**A78-50304** Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel (Eine Realgas-Version der gasdynamischen Formeln von de Saint-Venant und Wantzel) P A Thompson (Max-Planck-Institut für Stromungsforschung, Göttingen, West Germany) *Zeitschrift für Flugwissenschaften und Weltraumforschung*, vol 2, July-Aug 1978, p 249-253 14 refs In German

The elementary formulas of Saint-Venant and Wantzel for  $M$  equals 1 are reformulated for real gases. The real-gas effects in the formulas are incorporated in a small parameter  $b$ , determined from the temperature-dependent virial coefficients and heat capacity. Calculations using three standardized virial coefficients show good accuracy for gas densities up to approximately one-fourth the density at the critical point. B J

**A78-50311** Two extensions of a theorem of Levi-Civita to gyroscopic systems and some applications (Sur deux extensions d'un théorème de Levi-Civita aux systèmes gyroscopiques et quelques applications) P Capodanno (Besançon, Université, Besançon, France) *Journal de Mécanique*, vol 17, no 3, 1978, p 433-454 11 refs In French

The author gives two extensions of Levi-Civita's theorem on the Hamiltonian systems of gyroscopic systems. The extension is direct in the case when there is only one invariant relation. When there are many such relations, sufficient conditions are given for the existence of such extension. Some applications of these results are studied: a generalization of Routh's motions, a problem of profile dynamics, and a generalization of Hess's case of the motion of a heavy body about a fixed point. (Author)

**A78-50400** The potential of advanced technology for aircraft structures /10th J D North Memorial Lecture/ W G Molyneux (Royal Aircraft Establishment, Aircraft Structures Dept, Farnborough, Hants, England) *Aerospace* (UK), vol 5, Sept 1978, p 17-24 8 refs

Consideration is given to a series of recent developments in aircraft structural materials (fiber resin and metallic), the use of the computers in structural design, active control technology, and fatigue monitoring. It is predicted that these developments will lead, by the turn of the century, to an aircraft structure which, for a specified operational task, may be up to 50% lighter, of lower first cost, of improved fatigue life, and of lower maintenance cost than its present-day equivalent. B J

**A78-50434** Glass airports D Wegler (Architekturbüro Rodl-Kieferle, Boblingen, West Germany) *Airport Forum*, vol 8, Aug 1978, p 13, 15-17 (4 ff) 16 refs. In English and German

The use of glass in airport buildings is discussed, and several photographs of airport buildings are presented. Characteristics of glass are surveyed, special properties of some new glasses are described, possible ways of using glass are considered, and the benefits associated with access to sunlight are examined. It is suggested that glass helps people feel that the airport building is a friendly environment. M L

**A78-50435** Airports in the year 2000 - Suggestions for improving capacity P Walmsley *Airport Forum*, vol 8, Aug 1978, p 39, 40, 42 (4 ff) In English and German

Recommended airport modifications derived from consideration of the airport as a factory are discussed with attention to the proposals presented in an earlier report, 'Towards 2000'. The suggestions for the year 2000 include development of large nodal airports, particularly in Europe, the building of single large terminals capable of accommodating 60 million originating and terminating passengers as well as 40 million transfer passengers a year, and automated ticket processing, baggage handling, and passenger movement within the terminal. Minimization of airport space requirements is considered to be a chief goal. M L

**A78-50436** Toulouse combines elegance with economy. *Airport Forum*, vol 8, Aug 1978, p 57-60, 62-64 In English and German

The new airport terminal at Toulouse, France is described with attention to the separate levels for arriving and departing passengers. Air passenger volume data for this city which is the center of the French aircraft industry are presented. Terminal layout and opportunities for future expansion, costs and financing, architects, consultants, and contractors, and the development of adjoining land are discussed. M L

**A78-50437** Improved passenger flow through simulation A G Edge and D R Coleman (System Logistics, Inc, Honolulu, Hawaii) *Airport Forum*, vol 8, Aug 1978, p 93-98 In English and German

The described simulation model for passenger movements in the International Arrivals Building at Honolulu is applied to the problem of reducing long waits at the immigration and customs desk. Although features specific for Honolulu airport are taken into account, use of the generalized approach is recommended for determining the efficient use of resources at other airports. Application of the model is discussed in terms of planning for long term, tactics for medium term, and operations in short term. M L

**A78-50447 #** Strategic or tactical air traffic control S Ratcliffe (Royal Signals and Radar Establishment, Malvern, Worcs, England) *Journal of Navigation*, vol 31, Sept 1978, p 337-347

The reported investigation has the object to determine the payoff from an optimal strategy as a function of the accuracy with which the future situation can be predicted. The costs of delay are assumed to involve two components, one of which is independent of the time at which ATC attempts to deal with predicted congestion at the destination and a variable component, where savings are possible if there is advance notice of impending delay. This variable component is mainly the difference in fuel consumed when flying, in cruise or descent, at the speed for minimum fuel consumption and that consumed in normal flight followed by a 'hold' at relatively low flight level. The study examines the sensitivity of the results to the assumed ratio of the variable component to the other cost penalties associated with traffic delays. G R

**A78-50448 #** Airborne equipment for all weather operations D V Warren (Civil Aviation Authority, London, England) *Journal of Navigation*, vol 31, Sept 1978, p 480-483

The Runway Visual Range (RVR) is selected so as to provide for a reasonable probability of being able to continue the approach from the decision height, with sufficient visibility for a safe landing and roll-out along the runway. It is, therefore, largely dependent on the decision height, and on visual aids which are to be used below the decision height. Category I operations are based on the use of decision heights down to 200 ft, and the associated values of RVR are usually in the order of 500-600 m. The lowest minima are normally only achieved with the use of an automatic pilot or a flight director coupled to the ILS beam. Most aircraft types designed before the late sixties are fitted with 'simple' autopilots in which critical failures can cause significant control surface movement and aircraft response. An outline of aircraft guidance equipment for all weather operations is presented in a table. G R

**A78-50449 # The Turboclair process** M Bernard (Aéroport de Paris, Département Exploitation Aérienne, Paris, France) *Journal of Navigation*, vol 31, Sept 1978, p 483-488

Poor visibility is still the basic problem affecting air transport regularity. The employment of suitable fog dispersal techniques together with the use of appropriate automatic landing systems for aircraft, should make it possible to eliminate almost all the disadvantages resulting from fog. One possible method of fog dispersal is to clear the fog by vaporizing the water droplets suspended in the atmosphere. A fog dispersal process, called Turboclair, has been developed by using this approach. The Turboclair system makes use of a thermokinetic fog-dispersal process, in which hot gases are diffused above a runway. The ambient temperature is raised a few degrees, thus enabling the suspended water droplets to be vaporized. The hot gases are generated by means of turbojet engines which have been withdrawn from flight. G R

**A78-50450 # Estimating the average taxi speed of departing aircraft** S Nagaoka, P T Muto, and E Yoshioka (Ministry of Transport, Tokyo, Japan) *Journal of Navigation*, vol 31, Sept 1978, p 494-499

A description is presented of a theoretical method for estimating the average taxi speed of departing aircraft. The method is based on the use of simplified models. Data concerning the time and motion of departing aircraft obtained at an airport traffic control tower for 138 jet aircraft were analyzed for the purpose of studying the relation between average taxi speed and taxi distance. It was found that the average taxi speed is approximately proportional to the square root of the distance. The observations show that the time-speed curve for each type of aircraft can be regarded as a triangle or trapezoid. Equations are presented for estimating average taxi speed from the known distance. G R

**A78-50451 # Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams** B E Douglas (U S Naval Material Command, David W Taylor Naval Ship Research and Development Center, Annapolis, Md) and J C S Yang (Maryland, University, College Park, Md) *AIAA Journal*, vol 16, Sept 1978, p 925-930 9 refs

The effects of transverse compressional damping in the vibratory response of three-layer elastic-viscoelastic-elastic beams are considered both analytically and experimentally in a mechanical impedance format. The relative importance of this type of damping is assessed through comparison with the shear damping mechanism inherent in the composite using the Mead and Markus model. Results of this investigation suggest that the effects from transverse compressional damping have a relatively narrow frequency bandwidth dependent on the elastic loss tangent of the damping core and are centered at the compressional (delamination) frequency of the composite. Compressional damping is shown to have a minimal effect on the transverse dynamic response of thin three-layer damped beams for frequencies significantly less than the compressional frequency where a shear damping model provides a more accurate prediction of the composite loss factor. (Author)

**A78-50455 # Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies** A Prasad (Regional Institute of Technology, Jamshedpur, India) *AIAA Journal*, vol 16, Sept 1978, p 1004-1007 11 refs

The influence of temperature-dependent heat capacity on the ablation and temperature buildup at the surface of melting bodies is considered for the case where melting occurs due to aerodynamic heating. The melting body is assumed to be a semiinfinite solid having a constant cross-sectional area. Solutions are found by a variational method which predicts the surface-temperature time history and the melting-distance time history. Results in closed form are presented along with numerical solutions. S C S

**A78-50456 # Unsteady three-dimensional compressible stagnation-point boundary layers** G Nath (Indian Institute of Science, Bangalore, India) and M Kumari *AIAA Journal*, vol 16, Sept 1978, p 1007-1009 9 refs

Unsteady three-dimensional laminar compressible stagnation-point boundary layers are examined for the case when the wall temperature and the incident stream vary arbitrarily with time. Equations governing flow are numerically solved using an implicit finite-difference scheme. It is assumed that the dissipation terms are negligible at the stagnation point and that the external flow is homentropic. It is concluded that (1) the skin-friction and heat-transfer parameters are greatly influenced by variations of the density-viscosity product across the boundary layer and the nature of the stagnation point, (2) wall temperature greatly influences the heat-transfer parameter although it does not significantly influence the skin-friction parameter, and (3) skin-friction parameters are more sensitive to fluctuations of the freestream velocity than to the heat-transfer parameter. S C S

**A78-50457 # Investigation of a side force due to ablation** W C Ragsdale and E V Horanoff (U S Navy, Naval Surface Weapons Center, White Oak Laboratory, Silver Spring, Md) *AIAA Journal*, vol 16, Sept 1978, p 1010, 1011

A study has been made of the effects of ablation-induced side forces on reentry vehicle stability. Ablating and nonablating spherically blunted cone models were examined at Mach 18 in hypervelocity wind tunnels. The model was spun to the desired rate while the wind-tunnel supply pressure and temperature were brought to the run condition. When the conditions were achieved, the model was injected into the tunnel flow and force data were recorded. Side force data were plotted with and without ablation, with ablation at different spin rates, and with ablation at different Reynolds numbers. S C S

**A78-50459 # Integral equation formulation for transonic flow past lifting wings.** S K Chakrabarty (Indian Institute of Technology, Kharagpur, India) *AIAA Journal*, vol 16, Sept 1978, p 1015, 1016 6 refs

The paper presents an analytical solution to the transonic small perturbation equation in reduced coordinates derived by Norstrud (1973). In this derivation the reduced perturbation velocity potential is used as the unknown function. In the present paper the formulation is extended to the case of transonic flow past lifting wings. S C S

**A78-50461 # Generalized area rules and integral theorems for hypersonic wing-bodies** N D Malmuth (Rockwell International Science Center, Thousand Oaks, Calif) *AIAA Journal*, vol 16, Sept 1978, p 1019-1022 9 refs Contract No F44620-71-C-0021

With reference to complex configurations such as the Shuttle Orbiter, generalized relationships and integral theorems are obtained for a nonconical body and a conically supersonic conical shape. Attention is given to the work of Kutler et al (1973) concerning the calculation of Space Shuttle flowfields via noncentered finite difference schemes and that of Malmuth (1973) concerning pressure fields over hypersonic wing bodies at moderate incidence. S C S

**A78-50474 # Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation** C V V S Rao and A Thiruvengadathan (Meteorological Office, Bombay, India) *Indian Journal of Meteorology, Hydrology and Geophysics*, vol 28, July 1977, p 391-394

**A78-50503 Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point** M Kumari and G Nath (Indian Institute of Science, Bangalore, India) *Journal of Fluid Mechanics*, vol 87, Aug 29, 1978, p 705-717 16 refs

Consideration is given to the unsteady laminar compressible boundary-layer flow in the region of the stagnation points on a class of three-dimensional bodies including spheres, cylinders, and saddle shapes. Both cold and hot walls have been studied for the case when the velocity of the incident stream varies with time. An implicit finite-difference scheme is used to solve the partial differential equations describing the flow. It is found that the changes in the density-viscosity product across the boundary layer, the characteristics of the stagnation point, and the wall temperature influence the skin-friction and heat-transfer properties. S C S

**A78-50560 \* # Calculation of CO concentration for liquid fueled gas turbine combustor** P B Patil, M Sichel, and J A Nicholls (Michigan, University, Ann Arbor, Mich ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 17 p 7 refs Grant No NsG 3148*

The extensive computation time required for the numerical integration of the differential equations obtained in studies of the concentrations of pollutants emitted by gas turbine combustors, can be reduced significantly by assuming the heat releasing hydrocarbon reactions to be in local equilibrium. In determining the CO and NO concentrations produced in spray combustion, it is, therefore, tempting to use the same local equilibrium assumption in order to simplify the kinetic calculations. An investigation of the validity of the local equilibrium assumption is conducted by using a simple analytical model, and then by actually carrying out the kinetic and local equilibrium calculations for typical case. G R

**A78-50561 # Rotary combustion engine hydrocarbon source studies** R J Bayer, S F DeNagel, and J C Steiner (GM Research Laboratories, Warren, Mich ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 41 p 5 refs*

A description is presented of the experimental apparatus and procedures for the time-resolved measurements and the flame photography studies conducted in connection with the considered investigation. The results of the experiments are evaluated. It is concluded that time resolved exhaust sampling can only measure the concentration of constituents in the exhaust as a function of engine rotation. The changing concentrations at the sampling location can be related back to events which occurred earlier in the combustion chamber only in a general, qualitative way. The hydrocarbon concentration existing at a particular location in the chamber at the completion of combustion is subsequently modified during the expansion and exhaust strokes by seal leakage, mixing, and oxidation processes. G R

**A78-50564 # Design and verification of a turbofan Swirl augmentor** W J Egan and J H Shadowen (United Technologies Corp , Pratt and Whitney Aircraft Group, West Palm Beach, Fla ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 11 p*

The initial development of the Swirl augmentor concept from combustion centrifuge testing through subscale turbojet (single stream) rig verification has been discussed by Lewis et al (1977). A description is presented of an extension of that work to the design and initial testing of a full-scale Swirl augmentor on an F100 turbofan engine. A full-scale Swirl augmentor has been designed for an existing augmented turbofan engine to enable direct comparison of Swirl and conventional augmentor performance characteristics. Initial testing was done at sea level. The objective was to verify the Swirl augmentor concept in full size on a turbofan engine. Altitude testing was also performed. G R

**A78-50568 # Combustor performance of high availability fuels** C A Moses and D W Naegeli (U.S Army, Fuels and Lubricants Research Laboratory, San Antonio, Tex ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 10 p*

In connection with shortages which might occur with respect to currently used jet fuels, investigations have been conducted regarding the feasibility to employ other fuels, which are available in adequate quantities. The reported study is concerned with the effect which the substitution of such fuels will have on combustor performance. A 2-inch diameter cylindrical research combustor designed for high temperatures and pressures was used in the study. It was found, however, very difficult to draw significant conclusions about the effects of fuel properties on combustion efficiency. This difficulty was related to the geometry of the combustor which was such that if the flame could be stabilized in the primary zone, combustion was very efficient. Even the two fuels with the highest end points and viscosities were not significantly different. G R

**A78-50569 # Variability of emissions measurements on a small gas turbine engine** G Opdyke, Jr (Avco Corp , Avco Lycoming Stratford Div , Stratford, Conn ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 15 p*

A turboprop engine, rated at 620 equivalent shaft horsepower at takeoff, configured with a shaft engine gearbox for test convenience, was tested twenty times in a one-month period for measurement of emission levels. Ten different fuel manifold and injector assemblies were tested. The obtained results show that changing fuel injectors will have an impact on emission levels. The variability which results is larger than that caused by injector design differences or by the differences in the physical characteristics between Jet A and DF 2 fuels. The fuel injector effect could not be explained by the variation of fuel flow between individual injectors. It is concluded that the fuel spray droplet spatial distribution, probably unique to each single injector, is such that hydrocarbon emissions are significantly affected by fuel droplet or vapor impingement in the wall cooling film, and CO emissions vary because of reaction quenching in the mainstream and in the cooling film. G R

**A78-50570 # Aircraft afterburner catalytic flame stabilization** T J Rosfjord (United Technologies Research Center, East Hartford, Conn ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 11 p 9 refs*

A technique for stabilizing aircraft afterburner catalytic flames is presented. The performance of the porous, catalytically-active flameholder is discussed in terms of increased efficiency without a simultaneous increase in pressure loss. Values are given for variations in afterburner efficiency and pressure loss for a series of operating conditions. S C S

**A78-50571 # Alternative fuel effects upon combustion efficiency in continuous combustors** D A Schmidt and A M Mellor (Purdue University, West Lafayette, Ind ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 8 p 5 refs Army-supported research*

The ability of the gas turbine engine to burn a variety of fuels is an important asset in connection with considerations which take into account the undesirability of a dependency on foreign crude oil. A gas turbine engine will, therefore, power the next generation Army main battle tank. Effects related to the use of different fuels are to be investigated. A systematic study is in this connection conducted of fuel volatility and viscosity relationships with efficiency. It is found that an increase in combustion inefficiency with heavier fuels is due to the larger droplets in the spray penetrating through the shear layer into the relatively cooler free stream air where CO and HC oxidation reactions are quenched. Results to date show that Jet A blended exhibits slightly higher combustion inefficiency than no 2 diesel fuel. The 90% distillation point appears to be the important distillation regime relevant to combustion inefficiency. G R

**A78-50574 # Performance of the Vortex-Controlled Diffuser (VCD) in an annular combustor flowpath** A J Verdouw (General Motors Corp , Detroit Diesel Allison Div , Indianapolis, Ind ) *Combustion Institute, Spring Technical Meeting, West Lafayette, Ind , Apr 3, 4, 1978, Paper 15 p*

The Vortex Controlled Diffuser (VCD) represents an advanced diffuser concept which employs bleed at a flowpath step to accomplish low pressure loss diffusion in a short length. A description is presented of an investigation concerning the aerodynamic performance of the VCD as applied to a realistic gas turbine annular combustion system flowpath. VCD component parametric performance results show that effectiveness increases with secondary duct length and bleed amount. The VCD performance data were employed to design a complete annular combustion system flowpath incorporating a VCD. This system was fabricated and tested for aerodynamic performance. The VCD performance results obtained with the VCD as applied to a realistic gas turbine combustor flowpath with realistic diffuser inlet conditions indicate that the VCD is applicable to gas turbine combustion systems and offers significant diffuser pressure loss reduction. G R

**A78-50576** Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Congress sponsored by the Gas Turbine Society of Japan, JSME, and ASME Tokyo, Gas Turbine Society of Japan 1977 630 p \$61 50

Consideration is given to the following areas of gas turbine research: heat transfer in regenerators, combustors, gas emissions, gas turbine design and performance, steady and unsteady internal flow, noise, instrumentation control and mechanical design, and materials and thermal stress. Particular papers are presented on such topics as the development program for the FJR 710 turbofan engine, film cooling of turbine blades, interaction of jets with a mainstream turbulent flow, the application of impingement cooling to combustor design, and the static and dynamic performance of rotary regenerators. B J

**A78-50577** Recent status on research and development of FJR 710 turbofan engine. M Matsuki (National Aerospace Laboratory, Chofu, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 1-11

The paper reviews phase I (1971-1976) of a program to develop the FJR 710 five-ton-class high-bypass-ratio turbofan engine. Performance results are presented and attention is given to research on engine components, including the fan, the high-pressure test compressor, the combustor, the high-pressure turbine, the low-pressure turbine, the engine control system, and the noise abatement system. A brief outline of the phase II program (1976-1981) is presented. B J

**A78-50578** Measurements of film cooling effectiveness distributions for exhausting through a double row of holes. N Hirata (Tokyo Shibaura Electric Co., Ltd., Toshiba Research and Development Center, Kawasaki, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 20-23, Discussion, p 23

Experiments were carried out on a flat plate to determine adiabatic wall film cooling efficiency, with hot air exhausting through a double row of holes. The test facility consisted of boundary layer control section, exhaust section, and measuring section, results on time-average velocity and fluctuation distributions were obtained. It was found that cooling efficiency increased with increasing exhaust velocity. B J

**A78-50579** Near-hole region heat transfer in full-coverage film cooling. T Morimatsu, M Hirata (Tokyo University, Tokyo, Japan), and I Katsumata (Ishikawajima Harima Heavy Industries Co., Ltd., Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 24-28, Discussion, p 28, 29 7 refs

This paper presents a model for the conduction heat transfer within the full-coverage film-cooled wall for the use of high temperature gas turbines. The present model based on the idea of thermal symmetry planes is analyzed by using the finite element method and is verified experimentally. The investigation has been conducted under the conditions that the injection holes are distributed in staggered array with the hole spacing of 4 times the diameter and that the hole axis is normal to the surface of the wall which has a thickness of twice the hole diameter. The experimental results of the temperature distribution in the film-cooled wall with the mass velocity ratio of  $M = 0.094$  show good agreement with the calculated values and, in addition, the significant effect of heat conduction in the near-hole region is mentioned. (Author)

**A78-50580** Film cooling of a gas turbine blade. S Ito, R J Goldstein, and E R G Eckert (Minnesota University, Minneapolis, Minn) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 30-37, Discussion, p 37 13 refs Contract No N00014-76-C-0246

The local film-cooling produced by a row of jets on a gas turbine blade is measured by a mass transfer technique. The density of the secondary fluid is from 0.75 to two times that of the mainflow and the range of the mass flux ratio is from 0.2 to three. The effect of blade-wall curvature on the film-cooling effectiveness is very significant. On the convex wall, a near tangential jet is pushed towards the wall by the static pressure force around the jet. For a small momentum flux ratio, this results in a higher effectiveness compared with that on a flat wall. At a large momentum flux ratio, however, the jet tends to move away from the curved wall because of the effect of inertia of the jet resulting in a smaller effectiveness on the convex wall. On the concave wall, the effects of curvature are reverse of those described for the convex wall. (Author)

**A78-50581** Temperature profiles of rotating cooled blade. Y Shiota, Y Nagashima, Y Morigami, and T Tsuboi (Mitsui Engineering and Shipbuilding Co., Ltd., Tamano, Okayama, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 38-44, Discussion, p 44, 45 7 refs

By carrying out rotating tests of the cooled blade on a one-stage air turbine engine, the temperature profiles of a blade can be measured by means of an infrared camera for a rotating object. This paper describes the accuracy of the thermal images of the blade taken by the camera and the blade temperature profiles of all surfaces. The temperature profile of a blade can be obtained by superposing three thermal images, namely the suction side, the pressure side and the tip and platform. (Author)

**A78-50582** On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance. K Kadotani and R J Goldstein (Minnesota University, Minneapolis, Minn) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 46-59, Discussion, p 53, 54 32 refs Research supported by the Komatsu, Ltd and U.S. Navy

An experiment was devised to study the effects on mainstream turbulence intensity between 0.3% and 20.6% and turbulence scale normalized by the injection tube diameter between 0.06 and 0.33 on heated and unheated subsonic jets issuing from a row of inclined holes into a turbulent boundary layer. The mainstream turbulence scale has a significant effect on the temperature distribution of the injected jets and on the instantaneous velocity profiles of the flow following injection. In addition, consideration is given to the effects of mainstream turbulence on film cooling effectiveness. This effect is manifested through changes of (1) boundary layer thickness, (2) mixing between mainstream and injected flow, (3) shape of the injected flow due to vortex formation, and (4) penetration height of the injected flow. B J

**A78-50583** Experimental verification of a blade cooling system and comparison with design calculation. D K Mukherjee (Brown, Boveri et Cie AG, Baden, Switzerland), A Suzuki, and K Aizawa (Tokyo Shibaura Electric Co., Ltd., Turbine Development Dept., Yokohama, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 60-67, Discussion, p 68

High cooling effectiveness is required in first-row turbine blades. Special test vanes using a combined convective and film cooling system were prepared and tested in the high temperature facility at Toshiba. Test results demonstrate the reliability of the calculation method used. B J

**A78-50584** Impingement cooling and its application to combustor design. C O Folyan and J H Whitelaw (Imperial College of Science and Technology, London, England) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 69-75, Discussion, p 76 21 refs

Measured and calculated values of adiabatic wall effectiveness and heat-transfer coefficient are reported for the case of a plane,



two-dimensional jet impinging on a flat surface. The influence of jet Reynolds number, the ratio of the distance from the jet to the plate to the jet width and the angle of impingement are quantified by measurement and preliminary calculations, based on the solution of elliptic differential equations incorporating a two-equation turbulence model, shown to represent carefully the trends of the normal-impingement results. The implications of impingement, used in conjunction with film cooling, for the protection of the walls of combustors are demonstrated and shown to be reasonable. (Author)

**A78-50587** The development of a regenerator seal for vehicular use. M Kitano, H Okano (Toyota Motor Co., Ltd., Shizuoka, Japan), T Otani (Hino Motors, Ltd., Hino, Tokyo, Japan), and Y Kondo (Nippon Denso Co., Ltd., Kariya, Aichi, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 97-103, Discussion, p 104. 5 refs

The development of a regenerator seal for the GT-21 two-shaft regenerative gas turbine engine for the Hino RL bus is described. It was very important for seal durability that the mean contact pressure of the seal against the core should be small and that local contact pressure should not be excessive. Candidate materials were surveyed and graphite was found to be the most suitable for a cold side seal and for the peripheral part of the hot side seal. A modified seal, whose peripheral part was made of graphite and a thin metal plate, showed good performance and seemed to have good durability. B J

**A78-50588** Aluminous keatite - A durable ceramic material for rotary regenerator cores. D G Grossman and J G Lanning (Corning Glass Works, Corning, N Y). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 105-110. 7 refs

Operating characteristics of rotary ceramic regenerator cores in small gas turbines are discussed. Included in the discussion are material, configurations and structural considerations. Core performance in several different engine designs is described. (Author)

**A78-50590** Development of the can-type gas turbine combustors. K Mori, J Kitajima (Kawasaki Heavy Industries, Ltd., Technical Institute, Akashi, Japan), S Kajita, and H Sone (Kawasaki Heavy Industries, Ltd., Jet Engine Div., Akashi, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 120-127, Discussion, p 128. 7 refs

A basic design computer program for gas turbine combustors has been developed by the authors, and its usefulness was testified through the development of the reverse-flow can-type gas turbine combustors. Flow-visualization techniques were used to detect the causes of overheating or cracking of the combustor liner and further to find out the appropriate configurations of the guide vanes. These vanes have been devised to straighten or to control the complex airflow at the combustor inlet and they were the most practical and effective solution for the improvement of the liner durability in this type of combustors. (Author)

**A78-50591** Experimental investigation on the scale effects of gas turbine combustion chambers. G T Sato, O Kawaguchi (Keio University, Yokohama, Japan), K Suzuki (National Aerospace Laboratory, Chofu, Tokyo, Japan), A Saima (Nihon University, Tokyo, Japan), M Nakayama (Gumma University, Kiryu, Japan), and N Nagai (Tohoku University, Sendai, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 129-135, Discussion, p 135, 136. 6 refs

It is very significant at the design and development of a gas turbine combustion chamber to estimate the scale effects. From this view point an experimental study has been made on scale effects, using combustion chamber models with four different sizes (flame tube diameter ranged from 125 to 500 mm) but similar forms,

simulating the primary portions of practical gas turbine combustion chambers. From the experimental results it has been found that the flow patterns in cold state are similar to each other and same types of flames are observed for all the chambers. Moreover, the flame temperatures and gas concentrations measured have almost the same values and tendencies over a wide range of operating condition except for the case of the smallest chamber. (Author)

**A78-50592** A study on a premixed combustor for a vehicular gas turbine. T Morishita (Toyota Motor Co., Ltd., Susono, Shizuoka, Japan), K Nakamura (Toyota Motor Co., Ltd., Toyota, Aichi, Japan), and Y Tanasawa (Toyota Central Research and Development Laboratories, Inc., Nagoya, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 137-141, Discussion, p 142. 6 refs

A study on premixed combustion and its characteristics are presented. Its marginal air temperature and pressure at its flash back limits are quite high up to 700 C and 5 ata which are the conditions required to the premixed combustor as a component of a regenerative gas turbine engine with low pressure ratio. And also, combustion characteristics of a premixed annular combustor developed on this concept of the premixed combustion are presented as well. (Author)

**A78-50593** A new air blast type combustor - Design, performance and emission. T Tamaru, K Suzuki, H Yamada (National Aerospace Laboratory, Chofu, Tokyo, Japan), and S Nakano (Ishikawajima-Harima Heavy Industries Co., Ltd., Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 143-150, Discussion, p 150, 151. 14 refs. Research supported by the Ministry of International Trade and Industry of Japan.

A new type combustor for an aero gas turbine engine was designed and was investigated by a segment model being aimed at high performance and low emission level of pollutants. The fuel is atomized in ducts, provided outside of the combustion chamber, and the premixed air fuel mixture is injected so as to make a steady flame holding flow in its dump head. Experimental investigation was made on a series of combustors with different directed injectors, and the effect was examined. The test results of these combustors at atmospheric condition were satisfactory as the first phase of the development. This mixture preparation system was found prosperous for further development for high pressure combustors. The exhaust gas analysis results show that emission of NO<sub>x</sub> is deeply related to the combustion inefficiency. Plotting the NO<sub>x</sub> with respect to the combustion inefficiency is recommended to investigate emission levels of any combustor. (Author)

**A78-50594** Properties and evaporation of jet-engine fuels at pressurized conditions. T Aiba (National Aerospace Laboratory, Chofu, Tokyo, Japan) and Y Enzaki (Kawasaki Heavy Industries, Ltd., Akashi, Hyogo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 152-159, Discussion, p 160. 13 refs

Thermal and physical properties of jet-engine fuels JP-4 and JP-5 at pressurized conditions up to 30 atm are evaluated based on the general evaluation methods described by Sato (1958). The relevant properties are the critical temperatures, critical pressures, boiling points, densities, thermal conductivities, specific heats, latent heats of vaporization, and diffusion coefficients. These kinds of property are essential for the calculation of evaporation processes of fuel droplets in aircraft gas turbine combustors. The results obtained showed the dependence of the values on the distillation characteristics of the fuels, complex variations of the values at high pressures, and fairly good agreement with several data in other works. Evaporation processes of stationary or moving single fuel droplets in pressurized hot air were calculated based on the indicated fuel properties. Calculated evaporation rate of a stationary droplet showed a good agreement with experimental results. (Author)

**A78-50598** **Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels** K Kawaguty (Mitsubishi Heavy Industries, Ltd., Nagasaki Technical Institute, Nagasaki, Japan), C Turuto, and N Sato (Mitsubishi Heavy Industries, Ltd., Takasago Technical Institute, Takasago, Hyogo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 184-191, Discussion, p 192, 193 15 refs

This paper summarizes our gas turbine clean combustor program, covering smoke visibility analysis and practical solutions in minimizing exhaust emissions for use of distillate and heavier residual fuels. A semi-empirical technique for predicting smoke levels has been developed which shows considerable promise as a design criterion. Commercial gas turbine tests, consisting of smokeless combustors based on this analytical model, offer good combustion performance as well as the common reduction of both NO<sub>x</sub> and smoke levels. It is also proved that water mixed combustion systems proposed provide the additional control of smoke and NO<sub>x</sub> levels burning light/heavy fuels (Author)

**A78-50599** **Aerodynamic and cooling performances of a film cooled turbine** H Nouse, K Takahara, Y Yoshida, A Yamamoto, K Sakata, S Inoue, F Mimura, and H Usui (National Aerospace Laboratory, Chofu, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 206-214 5 refs

A high temperature turbine testing was conducted by using a full scale, air-cooled turbine test apparatus. Film cooling was employed in the leading edge, either of the stator vane and the rotor blade of the turbine which was designed for the first stage core turbine of a turbofan engine. The design value of the turbine inlet temperature was 1523 K. This paper presents the basic aerodynamic data obtained from cold air tests and the experimental temperature data of the film cooled stator vane and rotor blade that were taken at high temperature conditions. The aerodynamic adverse effects due to coolants are discussed by comparing the experimental data with a predicted turbine performance and the results of a convection cooled turbine testing. The cooling characteristics of the vane and blade are compared with the results of two dimensional cascade testings conducted at the reduced temperature condition (Author)

**A78-50600** **Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades** K Hiraoka, T Morishita, and S Kan (Ship Research Institute, Mitaka, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 215-222

The effect of blade failure on the aerodynamic and heat transfer characteristics of the cooled turbine cascade was investigated experimentally and theoretically. When a few blades are lost from normally operating cascade, the aerodynamic force exerted to and the heat transfer coefficient of the blade which faces the convex surface to the place with a few blades lost increase sharply. The method to calculate the aerodynamic and heat transfer characteristics of the cascade with some blades lost is given. A calculation shows there exists serious rise of stress and temperature in the blade adjacent to the place with the blades lost and it may cause continuous failure of blades (Author)

**A78-50601** **Development of the experimental gas turbine bus** S Yamazaki and T Itoh (Nissan Motor Co., Ltd., Central Engineering Laboratories, Yokosuka, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 223-229, Discussion, p 230

Nissan Motor Company has designed and built the experimental gas turbine buses to evaluate the performance of vehicles equipped with gas turbines. The purposes of developing a gas turbine bus are to purify exhaust gas emissions, eliminate smoke and odor, reduce

driving noise, and ultimately to manufacture a bus that permits greater riding comfort, with less pollution and less vibration. This paper describes the construction, performance, noise reduction and emission control of the Nissan Gas Turbine Bus (Author)

**A78-50602** **Advantages of 3-shaft KTT gas turbine configurations for automotive applications** S O Kronogard (United Turbine AB and Co., Malmo, Sweden) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 231-238, Discussion, p 238-240 6 refs

This paper gives a brief description of an experimental version of the KTT turbine system, its components and their relative arrangement as well as some of the basic thinking behind this new concept. The paper also gives a short description of the possibilities with this system to introduce ceramics at an early stage. It also describes a new way of obtaining fast acceleration, low idling speed and low part load fuel consumption (Author)

**A78-50603** **A development of advanced radial gas turbine for automobile** S Sasaki, K Takizawa (Toyota Motor Co., Ltd., Susono, Shizuoka, Japan), and N Mizumachi (Tokyo, University, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 241-247, Discussion, p 247, 248 5 refs

A performance estimation of a radial inflow turbine based commonly on the assumption in which the flow at rotor-exit was one-dimensional having no rotor-exit swirl. Through the investigation of the test results obtained from the turbine designed with this design procedure, it was found to be expectable to have some improvements by having an alternative design approach. The new design procedure would be described as follows. The flow at rotor-exit was analyzed two dimensionally in which the loss distribution from the rotor hub to tip was assumed to be a function of rotor-exit radius. The optimum rotor exit swirl corresponding to the maximum efficiency was obtained by estimating performances for various intensities of swirl. The efficiency of the turbine designed with the improved design procedure indicated the improvement by about 7 percent compared to the case of the turbine designed by using the conventional procedure (Author)

**A78-50604** **Energy economy with high temperature gas-turbine** H G Munzberg (Munich, Technische Universität, Munich, West Germany) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 249-258, Discussion, p 259 5 refs

Techniques for cooling high-temperature gas turbines are considered, and a comparison of air cooling and liquid-metal cooling of gas turbines with hollow blades shows the superior advantages of the latter technique. An optimization study for the liquid-metal cooling is reported, and the utilization of the liquid-metal heat and of the exhaust heat is considered. Gas turbines with good fuel consumption characteristics are compared with gas turbines with optimized construction features. M L

**A78-50605** **Thermodynamical performances of closed-cycle gas-turbine** T Shirakura and S Awano (Nihon University, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 260-267, Discussion, p 268-270 5 refs

This paper reports the analytical results on the thermodynamical performances of a closed-cycle gas-turbine, which comprises a compressor, heat-exchangers, gas heater and pre-cooler worked by various working gases such as air, helium, argon and carbon-dioxide. The performance changes with the choice of working gas are made clear under two kinds of conditions, one of which is the case wherein the working volume of the circuit is varied so that the total pressure loss coefficients of the heat-exchangers will be held constant, and the other is the case wherein the working volume is held constant and

the total pressure loss coefficients of the heat-exchangers are changed with the adopted working gases. The results show that helium is the most favorable gas, because it produces high efficiency and output at a low pressure ratio such as 2.5 to 3.8. The total pressure loss of heat-exchanger for helium is about one tenth of that for air, and its power loss decreases to about 21% of that for air. Air is another favorable gas, producing nearly the same thermal efficiency and output as those of helium at a higher pressure ratio such as 5-6.

(Author)

**A78-50606**      **Calculation of cascade flow by means of spline fit singularity** M Inoue and M Kuroumaru (Kyushu University, Fukuoka, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 288-295 14 refs

This paper includes a calculation of the potential flow through a cascade of airfoils by means of an improved singularity method. The continuous distribution of vortex as the solution can be obtained by use of the spline fit function. The accuracy becomes higher without a drastic increase of the number of surface elements as usual methods. The velocity distribution along the blade surface is represented by a set of cubic polynomials so as to facilitate computation of the boundary layer. It is possible to deal with a trailing edge condition in viscous flow by selecting appropriate end conditions of the spline fit. The method has been applied to turbine cascades and possible extension to the problem of the viscous trailing edge flow has been discussed.

(Author)

**A78-50607**      **Numerical analysis of flow through turbine cascade by the Modified FLIC Method** T Nagayama and T Adachi (Mitsubishi Heavy Industries, Ltd., Nagasaki Technical Institute, Nagasaki, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 296-300 7 refs

This paper presents a numerical method for a calculation of flow through turbine cascades. The method, named the Modified FLIC Method, uses the triangular finite difference mesh pattern which is different from the rectangular mesh pattern for the usual FLIC Method. Starting with a given flow distribution, the calculation is repeated until a steady state solution is obtained (Time-Marching). The numerical results are compared with the optical experimental data using a shock tunnel. Satisfactory agreements are shown between the calculation and the experiment.

(Author)

**A78-50608**      **Three-dimensional and relaminarization effects in turbine blade cascades - An experimental study** L Belik (Vysoka Skola Strojní a Elektrotechnická, Plzen, Czechoslovakia) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 301-309, Discussion, p 309, 310 14 refs

The wind tunnel experiments described were carried out to study the phenomena occurring in three-dimensional boundary layers within the blade apertures of linear turbine blade cascades with aspect ratios between 0.25 and 1.5 at flow velocities ranging from 15 to 60 m/sec. Shearing stresses were measured with a heated film element. Reverse transition in the turbulent blade-aperture boundary layer was observed at high flow velocities even in the case of high inlet-flow turbulence and nonuniform velocity profiles.

V P

**A78-50609**      **Development of velocity profile through a stage of axial flow turbomachinery** T Ikui, M Inoue, and M Kuroumaru (Kyushu University, Fukuoka, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p

311-318 26 refs

A single-stage axial flow fan has been used to evaluate the effect of the inlet velocity profile on the stage performance with the development through the stage. It is found that the development of the inlet velocity profile influences the pressure rise and the efficiency but not the shaft power. In order to predict the flow condition in the merged velocity profile, a calculation method has been devised. It utilizes cascade data and the radial equilibrium equation. It accounts for the effect of secondary flow, tip clearance, wall stall, and viscous shear stress.

S C S

**A78-50610**      **An experimental study of the annular diffusers in axial-flow compressors and turbines** A Takehira, M Tanaka, T Kawashima, and H Hanabusa (Kawasaki Heavy Industries, Ltd., Technical Institute, Akashi, Hyogo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 319-326, Discussion, p 327, 328

A study has been made of diffuser assemblies having annular cross sections and used in axial-flow compressors and turbines. The testing configuration consisted of a blower, main and bypass valves, an orifice pipeline, a settling section, and a working section. Measurements were made of total and static pressure in inlet and outlet measuring planes, static pressure on the surfaces of the entry length and the diffuser, and the pressure difference across the orifice. The results are presented on performance charts which may be used to predict the performance of any diffuser with a standard configuration.

S C S

**A78-50611**      **Radial equilibrium of flows in shock-in-rotor type rotors** T Hashimoto and S Otsuka (Nagoya University, Nagoya, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 329-336, Discussion, p 336

The necessity of radial equilibrium is pointed out in the treatment of such flows as in shock-in-rotor type rotors. Based on the assumptions that the flow is quasi-axisymmetric and the meridional streamline is parallel to the axis, an analysis is done of the flow in the axial-flow type rotor and the basic equations are derived. The establishment of radial equilibrium of quasi-axisymmetric flows are investigated in the entire passage of rotor containing supersonic region, normal shock, and subsonic region. Two examples, one with the known enthalpy addition to the flow from the rotor and another with the known turning angle, are calculated. The results show the possibility of the application of ideas stated in this report to the design of a shock-in-rotor type rotor.

(Author)

**A78-50612**      **A research on centrifugal compressor for small gas turbine - The effect of recirculating flow** S Higuchi (Toyota Motor Co., Ltd., Susono, Shizuoka, Japan) and K Nakamura (Toyota Motor Co., Ltd., Toyota, Aichi, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 337-342, Discussion, p 342, 343

The recirculating flow in centrifugal compressor was investigated on its effects to the performance through both the empirical and theoretical studies. The effects on compressor performance were investigated here by considering it for impeller and diffuser separately. This study indicated that the compressor stage characteristics were continuously deteriorated as the recirculating flow rate increased, which would adversely affect on the performance of a gas turbine engine especially when the engine size is small. Since the recirculating flow effects tend to increase as mass flow rate reduces. This study also indicated that the effects were predictable by considering both the pressure drop at diffuser inlet and the resulting mismatching of diffuser inlet angle due to the recirculating flow. It was suggested that the degree of the deterioration due to the recirculating flow would be minimized by guiding the recirculating flow towards radial direction at rotor tip.

(Author)

**A78-50613**      **Pressure at shroud and flow in a supersonic centrifugal impeller** Y Senoo, Y Kinoshita, H Hayami (Kyushu University, Fukuoka, Japan), K Hara (Nissan Motor Co., Ltd., Tsurumi, Yokohama, Japan), H Kobayashi (Hitachi, Ltd., Mechanical Engineering Laboratory, Tsuchiura, Ibaraki, Japan), and T Ishiuchi. In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 344-351, Discussion, p 352 8 refs

The impeller of a supersonic centrifugal compressor was tested in a casing without the diffuser so that the flow range was not limited by the diffuser. In the case of supersonic inlet relative velocity, the impeller ran into surge as soon as the inducer stalled. However, it was demonstrated that if the inlet relative velocity was

subsonic, the impeller ran stably even when the inducer was stalled and the surge limit was decided by the ratio of the relative velocities at the exit and the inlet of the impeller. It was demonstrated that the choked flow-rate was predictable by a one-dimensional flow-analysis providing that the preswirl is weak. Furthermore, the variation of shroud pressure with respect to time was utilized to guess the flow behavior between impeller blades. A detached shock-wave and a shock wave in the blade channel were clearly recognized, where the shock wave in the channel moved downstream as the back pressure was reduced (Author)

**A78-50614** Investigation of flow in centrifugal impeller with tandem inducer. M P Boyce (Texas A & M University, College Station, Tex.) and A Nishida (Komatsu, Ltd., Technical Research Laboratories, Kawasaki, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 353-361, Discussion, p 361, 362 17 refs

In this paper, both theoretical and experimental investigations of flow in a centrifugal impeller with a modified tandem inducer have been carried out with a view to gain a possible reduction of flow separation in the impeller. The compressor characteristics are obtained with the inducer section rotated relative to the radial impeller, and are compared with the unmodified impeller characteristics. As a result of the studies, the tandem inducer increases the stall-to-surge margin and improves the efficiency (Author)

**A78-50616** Surge responsibility and range characteristics of centrifugal compressors. T Yoshinaka (Pratt and Whitney Aircraft of Canada, Ltd., Longueuil, Quebec, Canada). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 381-388, Discussion, p 389, 390 15 refs. Research supported by the Department of Industry, Trade and Commerce of Canada.

This paper presents an analysis of the surge and range characteristics of centrifugal compressors based on a diagram comparing the inducer inlet flow coefficient to the diffuser leading edge flow angle for each compressor speed. This diagram readily identifies component responsible for compressor surge and choke, because of the geometric divergence of the choke and stall loci of both the diffuser and inducer. Using this diagram, experimental data for centrifugal compressors up to 12:1 pressure ratio are presented which support the proposed model. The effects of inducer inlet prewhirl and diffuser vane resetting on compressor surge and range characteristics are also discussed (Author)

**A78-50617** Unsteady dynamic responses of subsonic cascades to sinusoidal gust III - Stator and rotor blade cascades in oscillation. T Nishiyama (Tohoku University, Sendai, Japan) and T Kobayashi (Tokyo Shibaura Electric Co., Ltd., Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 409-417 12 refs

The unsteady aerodynamic characteristics by mutual interferences between stator and rotor blade cascades in bending and torsional oscillations are analyzed in subsonic flow by acceleration potential method. As its result, the compressibility effects on unsteady aerodynamic forces and also the flutter characteristics are clarified by numerical examples (Author)

**A78-50618** A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade. Y Hanamura and H Tanaka (Tokyo University, Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 418-425, Discussion, p 426, 427

A new method to improve the flutter characteristics of the cascade is developed. It is confirmed in both theory and experiment that, by changing the elastic nature of the neighbouring blades, the flutter velocity is increased greatly compared with the case of uniform elastic nature. Nonuniformity of natural frequency suppresses the aerodynamic coupling between adjacent blades and delays

the occurrence of flutter. Though too much discrepancy of natural frequency of course diminishes the merit, an increment of natural frequency ratio of a neighbouring blades up to some value (eg 1.2-1.3) makes the flutter velocity higher conspicuously. If both ratios of mass and natural frequency of the neighbouring blades are changed at the same time, the more merits are gained than in case of changing either ratio only (Author)

**A78-50619** Some considerations on pure tone noise generation in an axial-flow fan. S Fujii, H Nishiwaki, M Watanabe, and H Kobayashi (National Aerospace Laboratory, Chofu, Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 428-436, Discussion, p 436 16 refs

Acoustic survey data with flow measurements were obtained for a fan test rig operated in an anechoic room. These experimental data were then evaluated by an analytical method for the pure tone noise generation due to the upstream wake cut by the rotor blade. The analysis employed the Sears' and Horlock's lift forces as well as the flowing medium effect. In order to obtain more accurate solutions, the combined effects of turbulent shear force and rotor induced pressure were taken into consideration in estimating the wake profile. Agreements with the measured data were good (Author)

**A78-50620** A study of fan-rotating noise reduction. K Ishizawa, M Uyama, K Higashi (Ishikawajima Harima Heavy Industries Co., Ltd., Tokyo, Japan), and R Sasaki (Japan Defense Agency, Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 437-441, Discussion, p 442, 443 6 refs

The characteristics of fan-rotating noise are evaluated in order to determine the optimal acoustic treatment of engine inlets and to reduce aircraft noise levels. The study is conducted on the basis of a high-bypass-ratio, subsonic turbofan engine. It is found that contrary to a previous study based on the plane-wave theory, acoustically treated splitter rings are not required to reduce aircraft noise. To explain this disparity, it is assumed that fan inlet noise behaves according to the spinning-mode theory. The number of fan rotor blades determines the spinning-mode number. S C S

**A78-50621** Noise control analysis for gas turbine installations. F Y Tsuchiya (Donaldson Co., Inc., Minneapolis, Minn.). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 444-448 9 refs

The reported study was conducted in connection with the objective to assure consistency in noise measurement practices throughout the industry. A basic analysis procedure for sound measurement is shown. Problem determination or problem definition initially describes the general reason for desiring sound measurements. Once the problem is defined, it is then necessary to determine the type or magnitude of the sound survey needed to obtain the required data and information. Attention is given to the definition of the problem, the gas turbine noise, the measurement technique, and the microphone response curve. G R

**A78-50622** Noise from separated flow of flat plate. Y Maruta, S Kotake (Tokyo University, Tokyo, Japan), and K Takeda (National Aerospace Laboratory, Chofu, Tokyo, Japan). In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 449-454, Discussion, p 454 7 refs. Research supported by the Japan Society of Mechanical Engineers.

Measurements are made of the separated flow of a flat plate immersed in a uniform flow with a large attack angle. The noise is characterized by the acoustic radiation of a dipole source distributed on the plate surface. The flow condition around the plate determines its intensity. The time derivative of the fluctuating pressure on the plate surface is nearly the same as the acoustic field. The position of the intensive acoustic source on the separated region retreats from the leading edge to the chord center with increasing attack angle. S C S

**A78-50623** An automatic processing system for vibration data analysis of gas turbine engines K Jinboh, H Aono, and T Kawashima (Ishikawajima-Harima Heavy Industries Co., Ltd., Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 455-460

A new system to process vibration and acoustic data of gas turbine engines has been developed and installed at IHI to accelerate gas turbine engine development In order to get rapid and accurate results, the system combines the power of a digital computer together with a real time frequency analyzer This system accepts analog input data representing engine rotational speed and vibration, analyzes them in frequency domain and illustrates in Campbell diagram on Strage Scope automatically Practical application of this system to several engine behavior such as blade vibration, shaft vibration, casing vibration and others have been made with favorable results this system can save analysis time, improve engineering understanding and enable a more rapid turnround of engine tests In this paper, the system and its typical applications are described

(Author)

**A78-50625** Assessment of the structural-mechanical design of commercial aircraft gas turbine engines K Schuppisser (Boeing Co., Seattle, Wash.) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 471-482, Discussion, p 483 19 refs

The reported investigation has the objective to provide a guideline through the structural-mechanical design complexity of aircraft gas turbine engines A frame of reference is established by presenting an overview of the salient structural-mechanical aspects of engine design and operation as applicable to commercial aircraft propulsion The structural buildup of an engine is considered along with the choice of materials, aspects of mechanical design and engine reliability, mechanical design requirements, engine development experience, engine performance experience, engine maintenance experience, technical information requirements, engineering skill requirements, and questions of engine assessment G R

**A78-50626** Research and development of digital jet-engine controls M Endo, K Nishio, N Sugiyama, T Koshinuma, and Y Matsuda (National Aerospace Laboratory, Chofu, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 493-500, Discussion, p 501 6 refs

The research and development program of digital jet engine controls at the National Aerospace Laboratory, Tokyo, Japan is discussed Attention is given to (1) the real time simulation of jet engines, (2) the step responses of engine speeds, turbine inlet and outlet gas temperatures, and compressor discharge pressure, and (3) the general-purpose digital mini-computer The prototype hardware electronic engine controls are described noting demand and sensing devices, the digital electronic computer section, and variable stator vanes control S C S

**A78-50630** Silicon nitride ceramics for gas turbine engines K Komeya, A Tsuge, H Hashimoto, T Kubo (Tokyo Shibaura Electric Co., Ltd., Toshiba Research and Development Center, Kawasaki, Japan), and T Ochiai (Tokyo Shibaura Electric Co., Ltd., Metal Products Div., Yokohama, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 538-542, Discussion, p 543 21 refs

A specified Si<sub>3</sub>N<sub>4</sub> ceramic that retains its mean bending strength of more than about 100 kg/sq mm at temperatures up to 1300 C was developed by applying a new Grain-Boundary Crystallization (GBC) hot pressing process to Si<sub>3</sub>N<sub>4</sub> powder compacts with Y<sub>2</sub>O<sub>3</sub> and Al<sub>2</sub>O<sub>3</sub> additives Microstructural and mechanical properties of the material were investigated Weibull modulus values, calculated from high temperature strength data, were 13 to 17 This ceramic was not deformed at up to 1500 C and a strain rate of approximately 2.8-4.9 x 10 to the -5th power/min at 1600 C under a stress of 33.5 kg/sq

mm It could be thrown into water without any damage Applicability of the Si<sub>3</sub>N<sub>4</sub> to gas turbine uses was discussed

(Author)

**A78-50632** Development of ceramic components for an automotive gas turbine P Walzer (Volkswagenwerk AG, Wolfsburg, West Germany) and S Forster (Kernforschungsanlage Julich GmbH, Julich, West Germany) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 550-557, Discussion, p 557, 558 14 refs Research sponsored by the Bundesministerium fur Forschung und Technologie

The article surveys the development of components made from high-temperature ceramics for applications in automotive gas turbines Requirements for ceramic turbine components are identified for both steady-state and unsteady operation Various high-temperature ceramics are described including Si<sub>3</sub>N<sub>4</sub> (hot pressed, reaction sintered), SiC (hot pressed, reaction bonded, Si infiltrated), and glass ceramics Current research on the development of ceramic combustion chambers, turbine rotors, and rotors with metallic hubs and ceramic blades is reviewed S C S

**A78-50633** Application of self-cleaning air cleaners to aircraft and vehicular gas turbines G Bishop (Aircraft Porous Media, Inc., Glen Cove, N.Y.) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 559-564, Discussion, p 564, 565

The investigation demonstrates the ability of inertial separators and mist eliminators systems to provide a means of supplying compact, economical low maintenance air cleaning to a wide variety of gas turbine applications The design objectives with respect to these systems are related to helicopter and aircraft operational experience in dirty, sandy environments, which has drawn attention to the acute need for adequate cleaning of gas turbine inlet air The principle of separation is considered along with particle size vs separation efficiency, performance vs scavenge flow, the multistage inertial air cleaner panel, and aspects of mist removal G R

**A78-50634** An experiment of deposit formation on surface of an air-cooled gas-turbine blade M Nomura, T Morishita, and S Kan (Ship Research Institute, Mitaka, Tokyo, Japan) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 566-572, Discussion, p 573

An experimental investigation was made to study deposit formation around an air-cooled turbine blade by using a two-dimensional cascade Residual fuel oil was used to make actual corrosive combustion gases The experiment was done at the stream temperatures of 800 to 1100 C, the total pressures of 1.6 and 3.0 atm, and the cascade Reynolds numbers of 1.5 x 10 to the 5th power and 2.0 x 10 to the 5th power Distinct deposits were formed in the turbulent boundary layer region on the convex surface These deposits were influenced by the temperature of the cooled surface of the blade at a constant stream temperature and pressure In the vicinity of the leading edge and on the concave surface, deposits were scarcely formed The principal constituents of the deposits were Na<sub>2</sub>O V<sub>2</sub>O<sub>4</sub> V<sub>2</sub>O<sub>5</sub>, V<sub>3</sub>O<sub>5</sub> and Na<sub>2</sub>SO<sub>4</sub> (Author)

**A78-50635** Aerodynamic effects on erosion in turbomachinery W Tabakoff and A Hamed (Cincinnati, University, Cincinnati, Ohio) In Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings Tokyo, Gas Turbine Society of Japan, 1977, p 574-580, Discussion, p 581 11 refs Grant No DAAG29-76-G-0229, Contract No E(49-18)-2465

A unique erosion test facility was designed such that the aerodynamic effects are an integral part of the test parameters The alloys studied in this investigation are 2024 aluminum, 410 stainless steel and 6Al-4V titanium High-speed-movies were used to examine and determine the impact and rebound characteristics of the solid particles The effects of particle velocity and impact angle were

found to be statistical in nature. The statistical distributions of these impact parameters were determined experimentally. The rebound data was then related to the erosion damage incurred. In addition, the effect of temperature on the erosion of the alloys was also studied. (Author)

**A78-50650**      **Broadband noise in axial-fan blade cascade** N Yamaguchi, M Nishimura, T Tominaga, and M Kataoka (Mitsubishi Heavy Industries, Ltd., Takasago Technical Institute, Takasago, Hyogo, Japan) *Mitsubishi Heavy Industries Technical Review*, vol 15, June 1978, p 120-129 9 refs

In order to obtain a prediction method of axial-fan aerodynamic noise, the broadband noise, one of the important components of the fan noise, was estimated with a similarity relation using 'normalized blade noise'. The normalized blade noise is derived by two-dimensional cascade tests conducted on a low-speed wind tunnel in the large anechoic room of Takasago Technical Institute of Mitsubishi Heavy Industries and tests of actual fans as annular cascade. The normalized blade noise was found to be nearly constant regardless of cascade geometry. The difference between the two-dimensional and the annular value was small, and was considered to correspond with the difference in operating conditions of their respective blade element. Usefulness is shown of the noise prediction method using the normalized blade noise. (Author)

**A78-50659** #      **Circles, texture, etc - Alternate approaches to CIG scene detail** W M Bunker (General Electric Co., Daytona Beach, Fla.) and M L Ingalls (USAF, Human Resources Laboratory, Wright-Patterson AFB, Ohio) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 49-58 Contract No F33615-76-C-0038 (AIAA 78-1578)

The original goals of the discussed investigations were related to the development of techniques for providing the missing, and badly needed, scene detail over large gaming areas. As the effort proceeded and insight was gained, the goals were expanded to take advantage of the broader applicability of the techniques developed. Approaches to surface detail are discussed along with noise textures, details of computer image generation (CIG) processing, ellipsoidal features, surface-map texture, and the application of scene detail to training from the user's viewpoint. In an evaluation of the results of the investigations it is found that the effort to develop new primitives for CIG scene detail has been fruitful. The ellipsoidal features and surface-map texture have significant areas of application in which they are more efficient and more effective than edges in contributing to training requirements. G R

**A78-50660** #      **COMPUTROL - A new technique in image generation** R Swallow (Human Resources Research Organization, Alexandria, Va.), R Goodwin, and R Draudin (Austin Co., Advanced Technology Systems, Roselle, N.J.) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 59-67 (AIAA 78-1579)

The inadequacies of current daytime computer generated image (CGI) techniques led to the development of the COMPUTROL Day/Dusk/Night Image Display and Control System. The goal of this development was increased capability for the real time manipulation of perspective views of three-dimensional objects. The resulting system design will be capable of generating enhanced detail for terrain, cultural features, and moving target models while also displaying such special effects as weapon impacts and transparencies. The COMPUTROL system is a special purpose design and does not use general purpose hardware other than standard peripheral equipment such as magnetic tape or disk units. Attention is given to design capabilities, the basic system hardware configuration, and the functional operation of the CGI system. G R

**A78-50661** #      **Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363** W B Albery and G J Dickison (USAF, Human Resources Laboratory, Wright Patterson AFB, Ohio) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 68-72 (AIAA 78-1580)

The objective of ATACS is to develop and to demonstrate the technology necessary to provide full visual simulation of Tactical Air (TACAIR) combat missions, at an affordable cost, suitable for the next generation fighter/attack visual simulators. TACAIR combat missions are missions involving visual contact for delivery of air-to-surface weapons and visual air-to-air combat. The key components which must be developed and integrated to provide the TACAIR simulation capability include high-resolution, high-brightness color projectors capable of producing multiple high-resolution targets on a color background. Attention is given to a liquid crystal light valve projector, a trichromatic holographic pancake window, and details of computer image generation. G R

**A78-50662** #      **Correlated data bases for the present and future** T W Hoog (USAF, Aeronautical Systems Div., Wright Patterson AFB, Ohio) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 73-78 (AIAA 78-1583)

An analysis is conducted of the part of the overall simulation problem that deals with topographical data used in the simulation of ground mapping sensors, out the window visual scenes, electronic warfare environments, and navigation aids environments. A solution to the problem of maintaining correlation of these functional areas is proposed which emphasizes correlation of data-bases at the source. A demonstration is provided of problems which can arise if the radar, visual, electronic warfare, and navigational aids environments are modeled independently without regard for each other. A representation is given of the data sources used in a typical modern Air Force simulator. G R

**A78-50669** #      **Test instrumentation system for flight simulator handling characteristics** W L Curtice (USAF, Aeronautical Systems Div., Wright-Patterson AFB, Ohio) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 164-168 (AIAA 78-1595)

The Air Force is now developing the Simulator Data Test Instrumentation System as an in-house project at the Aeronautical Systems Division. Air Force engineers started detail design tasks in June of 1978. Development completion is targeted for June of 1979. The causes for poor simulation handling qualities fidelity are examined, taking into account the use of inaccurate aero data bases, model shortcutting, cue phasing and magnitude, and the lack of a comprehensive test and measurement capability. Attention is given to time delay measurements performed, the strengths and weaknesses identified, new system requirements/capabilities, and the system design approach employed. G R

**A78-50671** #      **Optical simulator with a holographic component** J A LaRussa (Farrand Optical Co., Inc., Valhalla, N.Y.) and A T Gill (USAF, Human Resources Laboratory, Wright Patterson AFB, Ohio) In *Flight Simulation Technologies Conference*, Arlington, Tex., September 18-20, 1978, Technical Papers. New York, American Institute of Aeronautics and Astronautics, Inc., 1978, p 176-179 (AIAA 78-1581)

The considered optical simulator was found to be very successful as an infinity display system in many applications where performance and cost are important. In connection with its minimal depth and, therefore, relatively flat appearance the device has been called Pancake Window. A typical Pancake Window system can provide a number of characteristics related to eye relief, a maximum decollimation of 9 arc minutes, and the absence of color or

distortion over an 84 deg total field where the only significant aberration is the spherical aberration Pancake Windows as first developed, both classical and holographic, suffer imperfections such as ghosts and bleedthrough. However, a recent improvement in Pancake Window design has succeeded in eliminating both bleed-through and ghost images from the viewing volume. G R

**A78-50673 # Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application** S Chu (National Taiwan University, Taipei, Nationalist China) *National Science Council, Proceedings*, vol 2, July 1, 1978, p 293-299 12 refs. National Science Council of Nationalist China Contract No 66E 0401-02(01)

The subsonic unsteady flow is characterized by the phenomenon that there is a complicated wake system consisting of both trailing and shedding vortices behind lifting surfaces. Therefore, in order to avoid the impractical task of applying Biot Savart law to each vortex element of this wake system, the perturbation pressure in the flow field is determined directly by formulating a boundary-value problem with unsteady pressure distributions on lifting surfaces as boundary conditions. In this approach, Galilean-Lorentz transformation is first taken to reduce the governing equation to the form of an acoustic wave equation. Then a general solution is obtained by superimposing acoustic sources and/or dipoles with their respective strengths being the Neumann and/or Dirichlet boundary conditions in the transformed space. By applying the result obtained, the pressure distribution on the body surface of a wing-body combination, which is induced by the unsteady airload acting on the wing, can be calculated. The wing-body interaction in unsteady flow can thus be determined. (Author)

**A78-50691 # Numerical study on the stability dependence of geostrophic drag and cross-isobar angle** N Yamada (Nihon University, Narashino, Japan) *Meteorological Society of Japan, Journal*, vol 56, June 1978, p 197-205 24 refs

The equation of motion on the unstably stratified PBL under stationary, horizontally homogeneous, and barotropic conditions is numerically solved with the use of so-called simple K theory. The numerical predictions on the stability dependences of the geostrophic drag coefficient and the surface cross isobar angle agree with the observational data of Wangara and AMTEX on the average. In addition, the present calculations predict that the surface cross isobar angle decreases as the value of ratio of the actual height of PBL to the dynamical scale height increases. This tendency is found in the data of Wangara but not in those of AMTEX. (Author)

**A78-50717 # Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure** (Sobstvennye chastoty miagkoi tiazheloi tsilindricheskoj obolochki pri deistvii vnutrennego davleniia) A A Chakhoian (Leningradskii Korablestroitel'nyi Institut, Leningrad, USSR) *Akademiia Nauk Armianskoi SSR, Izvestiia, Mekhanika* vol 31, no 2, 1978, p 13-18. In Russian

The plane problem of the free vibrations of a soft heavy cylindrical shell subjected to internal pressure is solved. Particular emphasis is placed on the influence of the weight of the shell on its dynamic behavior. The relationship between shell weight and natural frequencies is examined. B J

**A78-50751 Some problems of continuum mechanics** (Nekotorye voprosy mekhaniki sploshnoi sredy) Edited by S S Grigorian. Moscow, Izdatel'stvo Moskovskogo Universiteta, 1978. 291 p. In Russian

The papers compiled in the present volume deal with theoretical and experimental studies of actual problems of continuum mechanics. The topics studied include such fields as gasdynamics, hydrodynamics, the theory of plasticity, the development of models, and fluid flows involving electric, magnetic, and chemical effects. V P

**A78-50752 # Basic model concepts of fluid mechanics in wing theory** (Ob osnovnykh model'nykh predstavleniakh mekhaniki zhidkosti i gaza v teorii kryla) G Iu Stepanov. In *Some problems of continuum mechanics*. Moscow, Izdatel'stvo Moskovskogo Universiteta, 1978, p 5-28. 26 refs. In Russian

In the present paper, the principal model concepts of wing theory are reviewed with emphasis on two-dimensional flows past wings. Some common features and relationships of representative models are examined, along with theoretical considerations concerning the formulation of some problems within the framework of classical ideal and viscous fluid models. V P

**A78-50757 # Contribution to the theory of three-dimensional hypersonic viscous gas flow past blunted bodies in the presence of injection** (K teorii prostranstvennogo obtekaniiia zatuplennykh tel giperzvukovym potokom viazkogo gaza pri nalichii vduva) E A Gershbein. In *Some problems of continuum mechanics*. Moscow, Izdatel'stvo Moskovskogo Universiteta, 1978, p 144-156. 16 refs. In Russian

In the present paper, the equations of the three-dimensional hypersonic shock layer are written in an arbitrary system of coordinates, normally coupled to the surface of the body, with Dorodnitsyn transforms applied to the coordinates. An integral method of successive approximations is proposed for solving the equations. An analytical first-approximation solution is obtained to the problem of hypersonic flow past a triaxial ellipsoid, an elliptical paraboloid, and a hyperboloid in the presence and absence of injection. V P

**A78-50777 # A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior** (Raschetno-opytnyi analiz vliianiia sbrosa okhladitel'ia iz perforirovannykh turbinnykh lopatok na ikh aerodinamicheskie kharakteristiki) R S Agachev and B A Kumirov. *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 10-15. In Russian

A method for calculating the velocity loss coefficient in the steady two-dimensional flow behind air-cooled turbine blades is proposed, and the theoretical assumptions employed are verified experimentally. Experimental results obtained with blades perforated at the leading edge showed that the cooling-air blowing intensity has a very small effect on the velocity losses and the blade exit angle. Likewise, the influence of coolant discharge on the pressure distribution over a perforated blade was found to be insignificant. V P

**A78-50778 # Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment** (Teoriia dvukh chastotnykh diapazonov neustoiichivyykh kolebanii protsessa turbulentnogo goreniia v kamere reaktivnogo dvigatelia II - Analiz kharakteristicheskogo uravneniia, sravnenie s eksperimentom) S K Aslanov. *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 16-21. 6 refs. In Russian

**A78-50779 # Distortion of a flat jet in a bounded cross-stream in the presence of a wake space** (Iskrivlenie ploskoi strui v ogranichenom snosiashchem potoke pri nalichii zastoinoi zony) E N Bogomolov. *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 22-30. 5 refs. In Russian

In the present paper, the equation of motion along the normal to an element of a plane jet distorted by a cross-wind is integrated with allowance for the low-density region arising in the eddy zone below the jet. Formulas are derived for calculating the coordinates of the mean streamline of the jet. The pressure coefficient in the eddy zone is determined experimentally. V P

**A78-50780 # Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures** (Eksperimental'noe issledovanie termoakusticheskikh kolebanii v obogrevaemykh kanalakh pri sverkhkriticheskikh davleniiax) V A Gerliga and V I Vetrov. *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 31-36. 11 refs. In Russian

The thermoacoustic pressure fluctuations arising in heated kerosene-cooled channels at supercritical pressures were studied experimentally. The influence of the position of the heating center (region) on the excitation of the fluctuations is identified, along with the influence of the heat carrying agent's rate of flow, the heat flux, pressure, and inlet temperature on the frequency and amplitude of the pressure fluctuations. V P

**A78-50781 #** Unsteady fluid flow in a swirl injector (O neustoiichivosti techenia zhidkosti v tsentrobeznoi forsunke) B S Drobiazko and V P Pavlovskii *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 37-41. In Russian

The spontaneous changes in the mode of operation of two-component swirl injectors, leading to abrupt changes in flow rate and pressure gradient, were studied experimentally. This phenomenon is shown to be associated with the instability of the continuous swirling flow and rapid transition of the swirling flow to a cavitating flow. V P

**A78-50782 #** Calculations of flows in flat asymmetric nozzles for overexpanded conditions (Raschety techenia v ploskikh asimmetrichnykh soplakh na rezhimakh pererashhireniia) V V Duganov and V V Poliakov *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 42-48. 9 refs. In Russian

In the present paper, the overexpanded flow of an ideal perfect gas in axisymmetric flat nozzles with a rectilinear wall is calculated, using a straight-through difference analog. The calculated nozzle pressures, thrust coefficients, and flow patterns are diagrammed and discussed. The influence of the Mach number at the nozzle inlet on the flow characteristics is studied both for rectilinear and profiled walls. V P

**A78-50787 #** Influence of the bypass ratio on jet-engine weight (Vliianie stepeni dvukonturnosti na ves reaktivnogo dvigatelia) N S Lamekin and A S Bogdanov *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 68-73. In Russian

In the method proposed for calculating the weight of a bypass turbojet engine, the weight is expressed as a cubic polynomial in the characteristic dimension. The calculation of the weight of a bypass engine is illustrated by an example. The influence of the thrust and the bypass ratio on engine weight is evaluated. It is shown that bypass ratios between 5 and 7 should be used in minimum weight design. V P

**A78-50788 #** Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer (Mekhanizm vibratsionnogo goreniia zhidkogo topliva, podavaemogo v potok vozdukhha cherez zonu tsirkuliatzii za stabilizatorom plameni) V V Tokarev and A P Shaikin *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 74-80. 10 refs. In Russian

**A78-50790 #** Comparison of the characteristics of bypass turbojet engine employing a small size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight (Sravnenie kharakteristik TRDDM i TRD v kreiserskom sverkhzvukovom polete) B D Fishbein *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 86-92. 8 refs. In Russian

The paper deals with the nonlinear programming problem of fuel minimization for a boosted bypass turbojet engine at a thrust equal to that of a conventional turbojet engine. The problem is solved by a method of direct search without recourse to derivatives. The results are diagrammed and discussed. V P

**A78-50791 #** Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface (Teploobmen dvukhfaznogo potoka so stenoi sopla pri

nalichii plenki kondensata na ego poverkhnosti) V K Shchukin, N N Koval'nogov, V A Filin, Iu F Gortyshev, and A I Mironov *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 93-99. 9 refs. In Russian

An approximate method is proposed for calculating the flow parameters and heat transfer characteristics of laminar films which form by inertial precipitation of condensed particles on the nozzle wall and which move under the action of tangential friction stresses at the free surface and the momentum imparted by the particles. The influence of a condensate film on the heat transfer from a two-phase flow to the wall in front of the nozzle throat is calculated, and the results are analyzed. V P

**A78-50792 #** Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element (Konvektivnyi teploobmen potoka gazovzvesi v protochnoi chasti drosseliruiushchego ustroistva s povorotnym elementom v vide lopatki) V K Shukin, A A Iakshin, V A Filin, N S Idiatullin, and N A Nadyrov *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 100-104. 6 refs. In Russian

The experiments described were carried out to study the local convective heat transfer from a gas flow with suspended finely dispersed 0.2 to 12-micron aluminum oxide particles to the walls of a throttle whose flow area consists of two plane curvilinear supersonic nozzles. The presence of the particles was found to intensify substantially the heat release to the wall. V P

**A78-50793 #** Operation of an axial flow compressor in the case of radially nonuniform inlet flow (O rabote osevogo kompressora pri radial'no-neravnomernom vkhode potoka) A N Anjutin, A F Brekhov, V N Ershov, and V G Prokopovich *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 105-107. In Russian

The structure of the flow in two three-stage axial flow compressors was studied at uniform and radially nonuniform inlet flows, at a peripheral speed of 118 m/sec at the blade tips. Traversing of the flow behind the rotors and at the inlet was carried out. The results obtained indicate that the individual stages act to equalize the flow. This compensating action of the stages is quantitatively assessed. V P

**A78-50794 #** Influence of changes in bypass ratio on the aerodynamic behavior of a fan (Vliianie izmeneniia stepeni dvukkonturnosti na aerodinamicheskie kharakteristiki ventilatora) V P Gerasimenko, V N Ershov, V A Koval', and G V Pavlenko *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 108-111. In Russian

In the wind tunnel experiments described, the influence of changes in bypass ratio on the characteristics of the main duct, the region of stable fan operation, and the incipient traveling stall was studied. Bypass ratios of 0.5, 1.0, and 2.0 were used in the tests. The results are plotted and discussed. V P

**A78-50795 #** Search-method optimization of the balancing of flexible rotors of gas turbine engines (Optimizatsiia uravnoveshivaniia gibkikh rotorov gazoturbinnnykh dvigatelei metodom poiska) A I Gleizer *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 111-113. 7 refs. In Russian

The paper deals with the problem of optimizing the balancing of flexible gas turbine engine rotors by rational selection of the balancing parameters. A solution is obtained by a search technique where a point in the parameter space is defined by means of numbers which form a specific sequence (the so-called LP-sequence). The effectiveness of the balancing technique proposed is demonstrated by examples. V P

**A78-50796 #** A computer-aided method of calculating temperature fields in turbine disks (Metod rascheta na ETSVM nestatsionarnykh temperaturnykh polei v diskakh turbomashin) V V Zhuikov and V I Loka *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 114-120. In Russian

A numerical method is proposed for calculating steady and unsteady temperature fields in the meridional cross sections of turbine disks for time-variable boundary conditions over the disk profile. The temperature dependence of the disk material's heat



conductivity is taken into consideration For illustration, the method is applied to practical examples V P

**A78-50797 #** Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow (O vliianii tolshchiny stenki /vysoty podvodiashego patrubka/ na protsess smesheniia sistemy khordal'nykh strui v potoke) V A Zhuravskii, Iu A Spiridonov, and A V Talantov *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 120-124 In Russian

**A78-50798 #** Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces (Intensifikatsiia protsessia ispareniiia topliv v aviatsionnykh gazoturbinnnykh dvigatel'nykh za schet elektricheskikh sil) A S Kokin, B G Popov, and V A Bondar' *Aviatsionnaia Tekhnika*, vol 21, no 1, 1978, p 124-127 6 refs In Russian

**A78-50822** Sounding the runway (Auscultons la piste) H Escoffier *France Transports - Aviation Civile*, vol 47, Summer 1978, p 47-49 In French

A procedure for examining runways for the effects of fatigue and aging is presented A rating system based on determining the CBR (California Bearing Ratio) is discussed Consideration is given to runway fatigue due to traffic Calculation methods are noted A systematic sounding method is outlined with reference to soil and foundation assessment, surface sounding, and laboratory analysis S C S

**A78-50896** On moderate injection into a separated supersonic boundary layer, with reattachment C Diver and K Stewartson (University College, London, England) *Journal of Fluid Mechanics*, vol 88, Sept 13, 1978, p 115-132 26 refs

A semiinfinite flat plate immersed in a viscous fluid is considered The representative Reynolds number is taken to be large A second fluid is injected across a portion of the plate with a velocity in a direction normal to the mainstream An investigation is conducted concerning the problem of moderate blowing over a finite length of the plate to find an alternative solution free of a certain anomaly observed in earlier studies It is found that the solution upstream of cut-off contains an arbitrary constant and is, therefore, not independent of conditions downstream as was assumed by Amr and Kassoy (1976) This constant may be interpreted as an effective origin shift and as such its role is similar to the origin shift in the free-interaction problem studied by Stewartson (1974) G R

**A78-50904** An alternative treatment of lifting-line theory as a perturbation problem T Kida and Y Miyai (Osaka Prefecture, University, Osaka, Japan) *Zeitschrift fur angewandte Mathematik und Physik*, vol 29, July 25, 1978, p 591-607

A description is presented of a method by which the lifting-line theory can be obtained without an employment of the process of matched asymptotic expansions The first step of the new method involves the derivation of the governing integral equation of the lifting-surface theory The obtained integral is expanded asymptotically in powers of the inverse of the aspect ratio The simple integral equations are solved by applying the Carleman-Betz inversion formula The described method is compared with Van Dyke's procedure for the aerodynamic forces and the velocity potential in the inner and outer flow fields The comparison shows that the present method is convenient and reliable Attention is given to basic relations, asymptotic expansions, flat-plate wings, and the perturbation potential G R

**A78-50935 #** Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows (Vliianie tekhnologicheskikh faktorov na soprotivlenie razrusheniuiu zharoprochnykh materialov v skorostnykh vozdukhnykh potokakh) V G Sorokin and B N Guzanov (Ural'skii-Politekhniceskii Institut, Sverdlovsk, USSR) *Problemy Prochnosti*, July 1978, p 76-78 6 refs In Russian

It is shown experimentally that, for gas-turbine engine materials, the real fracture stress can be increased both by high temperature thermomechanical treatment and vacuum arc melting In the first case the increase is due primarily to changes in grain-boundary structure, while in the second case the increase results from improvements in grain and boundary purity Each of these operations leads to a decrease in intergranular deformation and, hence, to a better resistance to grain-boundary separation V P

**A78-50941 #** Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads (Eksperimental'noe issledovanie vyнослиvosti otkeskov kilia samoleta pri akusticheskom nagruzhении) L E Matokhniuk, Iu M Golovanov, V G Samokhin, I A Kashchuk, B K Karpenko, and T S Elezova (Akademiia Nauk Ukrainskoi SSR, Institut Problem Prochnosti, Kiev, Ukrainian SSR) *Problemy Prochnosti*, July 1978, p 117-120 In Russian

The acoustic endurance of rudder fin sections differing in the arrangement of the ribs was studied at acoustic loads between 142 and 150 dB, varying the frequency from 120 to 290 Hz Symmetric attachment of the ribs to the skin is shown to greatly improve acoustic resistance V P

**A78-51015 #** Natural vibrations of a rigid rotor mounted on elastic ball bearings (Svobodnye kolebaniia zhestkogo rotora v uprugikh sharikopodshipnikakh) N A Lebedev *Akademiia Nauk SSSR, Izvestiia, Mekhanika Tverdogo Tela*, May/June 1978, p 29-32 In Russian

A support consisting of a rigid rotor mounted on a pair of identical radial-thrust ball bearings is examined An analytical expression relating the natural vibration frequency to the amplitude is derived for preloaded and nonpreloaded bearings V P

**A78-51051** Vortex dynamics D W Moore (Imperial College of Science and Technology, London, England) *Science Progress*, vol 65, Autumn 1978, p 295-312 32 refs

Theoretical principles of vortex dynamics are discussed and applied in an analysis of the formation and properties of the trailing vortex behind aircraft A procedure for calculating vorticity fields is explained, and the production of sheets of vorticity at solid surfaces is considered Two-dimensional motion is examined, roll-up is demonstrated numerically, and it is suggested that the trailing vortices behind aircraft result from the roll-up of the shed vortex sheet Vortex filaments and strained vortex filaments are described M L

**A78-51096** Approximate transonic profile flow at incidence with shock P Niyogi (Jadavpur University, Calcutta, India) and R Sen (Lady Brabourne College, Calcutta, India) *Acta Mechanica*, vol 30, no 1-2, 1978, p 65-77 17 refs

The approximate integral equation method solution proposed by Chakraborty (1975) for shock-free transonic supercritical profile flow problems is extended to the case of unsymmetric profile flow at small incidence with shock Supercritical flow past the NACA 0012 profile was calculated by the method, and the results are in satisfactory agreement with theoretical results of Garabedian and Korn P T H

**A78-51127** And now 'the deregulators' - When will they learn F C Thayer (Pittsburgh, University, Pittsburgh, Pa) *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 661-689 64 refs

Deregulation of the airlines industry is opposed as a misguided preference for free competition in place of regulated public utilities Possible consequences of deregulation are discussed The competitive bidding system is criticized, and the role of supplemental airlines is examined Airline history and problems related to the aircraft manufacturing industry are considered M L

**A78-51128** British Airways v Port Authority - Its impact on aircraft noise regulation R B Donin *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 691-730 150 refs

Decisions generated by the Concorde landing rights dispute (British Airways Board v Port Authority of New York and New

Jersey) are examined with attention to the effect of the decisions on aircraft noise regulation. A history of court decisions and legal action is presented. The nature of the Concorde noise is described, and aircraft noise regulation before, during, and after the court decision is considered. The implications of this public and legal controversy for the resolution of future issues are discussed. M L

**A78-51129** Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases. J A Muss *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 753-798 206 refs

The legal history of the Concorde landing rights controversy is examined, and the conflict between federal preemption and local control of noise regulation at airports is discussed. Preemption doctrine is discussed, and the legislative history, administrative interpretation, and judicial background are reviewed. Attention is directed to the Burbank case and to its influence on subsequent legal decisions. It is suggested that the variant conclusions reached by the courts concerning this unsettled issue are a consequence of the differing perspectives in which the question has been framed. M L

**A78-51130** Current state of the law in aircraft noise pollution control. M K North *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 799-822 168 refs

The paper discusses control of aircraft noise pollution with attention to traditional legal remedies, political solutions, local regulation and federal preemption, local regulation and the commerce clause, the federal aviation act and the noise control act of 1972, and the aviation noise abatement policy. This policy, announced in November 1976, is intended to foster cooperation between the FAA and other groups concerned with noise control. Problems involved in the implementation of this policy are considered. M L

**A78-51131** Impact of federal noise abatement policy on aircraft financing. W P Whitcomb *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 823-846 149 refs

Federal Aviation Regulation Part 36 (FAR 36) noise limits and scheduled compliance are reviewed, and the financial state of the airlines industry is examined. The cost of compliance with FAR 36 is discussed with reference to the effect of this cost on future growth. Some proposed means of financing compliance with FAR 36 requirements are examined, and the relevance of short-term federal funding to the goal of replacing 500 aircraft is considered. M L

**A78-51132** Reflections on the economic implications of current noise abatement financing proposals. J R Boyer, Jr *Journal of Air Law and Commerce*, vol 43, no 4, 1977, p 847-873 125 refs

The paper discusses congressional proposals for providing financial assistance to the airlines to meet the costs of financing the noise reductions required by the new noise regulations. The Mineta proposal, the Wydler proposal, and two proposals presented by Anderson (H R 4539 and H R 8124) are discussed and compared. Impediments to the enactment of a noise abatement financing bill are considered, and the conclusions reported in a study by Greenslet on the ability of airlines to purchase new aircraft are described. M L

**A78-51149 #** Naval structural materials - Requirements, issues, and opportunities. L R Hettche (US Navy, Naval Research Laboratory, Washington, DC) *Naval Research Reviews*, vol 31, June 1978, p 1-25 21 refs

The paper presents a synoptic approach to the complexity and diversity of the challenges facing the US Navy's structural materials community over the next several decades. The relationships between structural material requirements and operational capabilities are examined for future high-performance ships, the next generation V/STOL aircraft, and current conventional ships. Technical issues as well as research and development opportunities are explored for high-strength marine alloys, thermostuctural alloys, and advanced composite materials. M L

**A78-51151** Gesellschaft fur angewandte Mathematik und Mechanik, Annual Scientific Meeting, Lyngby, Denmark, May 31-June 3, 1977, Reports Part 2 (Gesellschaft fur angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977, Vortrage Part 2) Meeting sponsored by the Danish Centre for Applied Mathematics and Mechanics *Zeitschrift fur angewandte Mathematik und Mechanik*, vol 58, July 1978 260 p. In German and English

Consideration is given to numerous topics in the field of fluid mechanics, including small perturbations in plane Poiseuille flow, turbulent boundary layer separation on curved airfoils, flow between rotating cylinders, viscous flow in straight divergent diffusers, MHD vortex flows, unsteady flow along a flat plate with a roughness element, experiments and theory concerning three-dimensional turbulent boundary layers, and slip flow near circular cylinders at low Reynolds numbers. Also examined are self-excited oscillations in supersonic ducts, thermoconvective waves, transonic shock-boundary layer interactions, creeping waves in water wave theory, electroconductive analogies of two-dimensional thermal radiation vector fields, and the computerized design of systems with optimal structure. B J

**A78-51153 #** Mathematical model of vortex-excited oscillations of thin, weakly damped structures (Mathematisches Modell der Wirbelanregung schlanker, schwach gedampfter Strukturen). H Bardowicks (Gesellschaft fur angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977) *Zeitschrift fur angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 242-T 244 5 refs. In German

**A78-51155 #** Turbulent boundary layer separation on a curved wall with normal compression shock (Ablosung der turbulenten Grenzschicht an der gekrummten Wand mit senkrechten Verdichtungstoss). R Bohning and J Zierop (Karlsruhe, Universitat, Karlsruhe, West Germany) (Gesellschaft fur angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977) *Zeitschrift fur angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 249, T 250. In German

A numerical three-layer model is presented for analyzing the interaction between a turbulent boundary layer on a curved airfoil and a weak normal compression-shock wave in transonic flow for different Reynolds numbers, the flow is assumed to be inviscid and compressible. An explicit solution is obtained which can be used to calculate wall shear stress, the behavior of pressure disturbances within the boundary layer is investigated for different wall conditions. Conditions under which boundary layer separation occurs are investigated. B J

**A78-51158 #** Calculation of viscous flow in straight weakly divergent diffusers (Die Berechnung reibender Stromungen in geraden Diffusoren schwacher Divergenz). U Brandt (Hannover, Technische Universitat, Hanover, West Germany) (Gesellschaft fur angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977) *Zeitschrift fur angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 254-T 256 5 refs. In German. Deutsche Forschungsgemeinschaft Contract No SFB-61

The paper develops a mathematical model for treating laminar and fully turbulent two-dimensional viscous flow between the weakly divergent walls of a straight diffuser of rectangular cross section. Distributions of pressure and wall shear stress are obtained for two-dimensional divergent channels in turbulent flow. B J

**A78-51163 #** Similarity considerations for nonequilibrium nozzle flows. M Fiebig and N K Mitra (Ruhr-Universitat, Bochum, West Germany) (Gesellschaft fur angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977) *Zeitschrift fur angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 269-T 271 5 refs

An attempt is made to relax the stringent similarity requirements for nonequilibrium nozzle flows so that approximate similarity still exists, but a much larger class of flows - in terms of varying initial conditions - is allowed. First, it is shown that the inclusion of viscous effects does not give rise to additional requirements. Then, it is demonstrated that the characteristic Damköhler number  $Q$  (based on stagnation chamber conditions) and the throat height can be used as parameters for approximate similarity over a broad range of initial conditions. Finally, consideration is given to the possibility of extending the present analysis to the vibrational nonequilibrium flow of gasdynamic laser mixtures (e.g., CO<sub>2</sub>-N<sub>2</sub>-He). B J

**A78-51165 #** Model calculations of the generation of self-excited oscillations in a supersonic duct with stepwise widening of cross section (Modellrechnungen zur Entstehung selbsterregter Schwingungen in einem Überschallkanal mit stufenförmiger Querschnittserweiterung) G Grabitz (Max-Planck-Institut für Stromungsforschung, Göttingen, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 273-T 275. In German.

Anderson et al (1977) have presented an experimental investigation of self-excited flow oscillations in a supersonic duct with stepwise widening of the rectangular cross section. The present paper describes a numerical model describing self-excited oscillations in a supersonic duct with the same kind of cross section. The numerical analysis is based on the continuity equation, the momentum equation transverse to the flow axis, and momentum equations along the axis and along the jet boundary. Results regarding dead-water oscillations and shock wave behavior are presented. B J

**A78-51172 #** Some comments on sonic boom focusing F Obermeier (Max-Planck-Institut für Stromungsforschung, Göttingen, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 295-T 297.

In the present paper, an analytical description is obtained for the pressure signature of an originally N-shaped sonic boom with a very short but finite rise time near the caustic. The analysis is based on the linear equations of wave acoustics. Using Fourier transforms, the problem is reduced to the description of converging harmonic waves near the caustic. V P

**A78-51175 #** Numerical implementation of solid-body boundary conditions for the Euler equations A Rizzi (Forsvarsdepartementet, Flygtekniska Forsöksanstalten, Bromma, Sweden) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 301-T 304. 7 refs.

The transformation to a body-aligned coordinate system in fluid dynamic problems is discussed with reference to procedures for relating unknown values of pressure to pressures in the interior. A general formulation, which requires no interpolation, is presented for describing this relationship. An example of the use of this procedure, which only requires data for the grid points, is presented. M L

**A78-51176 #** Three-dimensional boundary layer theory using shell geometrical concepts K Robert (Deutsche Forschungs- und Versuchsanstalt für Luft- und Raumfahrt, Cologne, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 304, T 305.

A geometrical approach to boundary theory, considered as a fluid mechanical analog to elastic shell theory, is described, and techniques of shell geometrical analysis and surface tensor analysis are applied to an analysis of compressible flow. Continuity and momentum equations for laminar compressible flow are presented,

and the use of a monoclinic (or 'normal') coordinate system is introduced. The shell geometrical concept for deriving boundary layer equations is shown to be applicable only when the maximum wall curvature is sufficiently small in comparison with the reciprocal of layer thickness. The complete set of governing equations in their described shifted form must be expressed in a nondimensional manner. M L

**A78-51181 #** Streamline coordinates and similarity transformation for the 3-D boundary layer W Schonauer, J Gruning, H-G Daubler, and G Glotz (Karlsruhe, Universität, Karlsruhe, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 320, T 321. Research supported by the Volkswagenwerk-Stiftung.

Metric coefficients are used to express continuity and momentum equations for a laminar three-dimensional boundary layer, and the application of streamline coordinates to arrive at a numerical solution for this parabolic system is considered. The stagnation point is characterized by letting one axis stand for a streamline and the other axis stand for a potential line on the surface. A similarity transformation from the boundary layer coordinates to the similarity coordinates is presented, and the mapping of the solution, whose domain is the whole surface, to a planar rectangle is discussed. M L

**A78-51184 #** Calculation of local three-dimensional supersonic fields (Die Berechnung lokaler räumlicher Überschallfelder) H Sobieczky (Deutsche Forschungs- und Versuchsanstalt für Luft- und Raumfahrt, Göttingen, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 331-T 333. In German.

An aerodynamic design method initially developed for two-dimensional flow is extended to the three-dimensional case, enabling the solution of initial-value problems for shock-free local supersonic fields. The method is based on the elliptic continuation principle for these supersonic fields. A procedure for solving the flow equations of a small-perturbation parallel supersonic potential flow is presented. The applicability of the method to the design of wings and cascades is discussed. B J

**A78-51185 #** Shock obliquity effect on transonic shock-boundary layer interaction G R Inger and H Sobieczky (Deutsche Forschungs- und Versuchsanstalt für Luft- und Raumfahrt, Institut für Stromungsmechanik, Göttingen, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 333-T 335. 5 refs.

In the present paper, two completely different approaches - a potential outer flow model and a viscous interaction flow model are applied to the calculation of the characteristics of shock boundary layer interaction. The established compatibility of these two approaches in describing shock boundary layer interactions, as well as the agreement with the experiment, points toward the feasibility of using these two theories in combination to develop a computational algorithm for analyzing transonic airfoil flows with shocks and viscous effects. V P

**A78-51198 #** Some mixed boundary value problems for subsonic flow past oscillating profiles (Einige gemischte Randwertprobleme für Unterschallströmungen um schwingende Profile) E Meister (Darmstadt, Technische Hochschule, Darmstadt, West Germany) (*Gesellschaft für angewandte Mathematik und Mechanik, Wissenschaftliche Jahrestagung, Lyngby, Denmark, May 31-June 3, 1977*) *Zeitschrift für angewandte Mathematik und Mechanik*, vol 58, July 1978, p T 383-T 386. 8 refs. In German.

A mixed boundary value problem is formulated for unsteady cavitated subsonic flow past a profile. The unsteady pressure distribution and the generation of a system of free vortices is taken into account. The Fourier transformation is used in solving the problem. B J

**A78-51223** Preventing helicopter mid-air collisions with the proximity warning device. O Schoenberger (U S Army, Avionics Laboratory, Fort Monmouth, NJ) *SAFE Journal*, vol 8, Fall, 1978, p 26-29

The use of the Proximity Warning Device (PWD) to prevent helicopter mid-air collision in US Army high aircraft density training environments is presented in this paper. The Proximity Warning Device which is, in effect, a C-Band pulse beacon ranging system provides a visual and oral warning to the helicopter pilot whenever other PWD-equipped intruder aircraft enter a predetermined volume of airspace around the protected aircraft. Approximately one-million flight hours have been flown with PWD equipped helicopters. With flight operations conducted in high air traffic density environments, mid-air collisions between PWD equipped aircraft have not occurred during this time. (Author)

**A78-51271** Linear machine power requirements and system comparisons. E Abel, J L. Mahtani, and R G Rhodes (Warwick, University, Coventry, England) (*International Magnetics Conference, Florence, Italy, May 9-12, 1978*) *IEEE Transactions on Magnetics*, vol MAG-14, Sept 1978, p 918-920 7 refs

A study is conducted of the German magnetic levitation (Maglev) revenue vehicles. The study evaluates and compares total substation power required by the German revenue vehicle designs. The evidence suggests that the linear induction motor does not appear to be a good choice for a propulsion subsystem at 500 km/h or indeed at 400 km/h. The long stator motor does not perform well either when loaded at 400 km/h or run at 500 km/h. The electrodynamic-linear synchronous motor system, on the other hand, appears to show definite promise for the envisaged operating speed range from 400 to 500 km/h. G R

**A78-51280** Thirty years of fluid dynamics. R J Emrich (Lehigh University, Bethlehem, Pa), F N Frenkiel (US Navy, Naval Research and Development Center, Bethesda, Md), J R Dorfman (Maryland, University, College Park, Md), W C Griffith (North Carolina State University, Raleigh, NC), and G Veronis (Yale University, New Haven, Conn) *Physics Today*, vol 31, Sept 1978, p 38-44, 46 6 refs

The article presents a review of thirty years of research in fluid dynamics with emphasis on turbulence and statistical mechanics as applied to aerodynamics and geophysical flows. Turbulence is discussed with reference to studies of breakdown in laminar boundary layers, spectral information behind grids in wind tunnels, and visualization techniques. Studies in statistical mechanics are outlined noting the Boltzmann equation, Bogoliubov's generalized Boltzmann equation, and the time correlation function method.

S C S

**A78-51284** # Simple numerical model for calculation of entry vehicle trim response. T D Burton (Washington State University, Pullman, Wash) *Journal of Spacecraft and Rockets*, vol 15, Sept-Oct 1978, p 319, 320 10 refs

In the numerically efficient trim response model proposed in the present paper, allowance is made for time variations in roll rate, mass and configurational asymmetries, aerodynamic coefficients, and longitudinal principal-axis misalignments in pitch and yaw. It is based on the fact that the coupling of trim and body fixed low-frequency oscillatory motion component dominates the trim-induced response. The model can be incorporated into standard point-mass trajectory simulators for calculation of trim-induced dispersion and angle-of-attack/load behavior. V P

**A78-51338** # Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 (Qualche considerazione introduttiva sulla circolazione stratosferica e mesosferica in vista dell'analisi del riscaldamento stratosferico del Dicembre 1976 - Gennaio 1977). M Conte and P Ernani (Aeronautica Militare, Servizio Meteorologico, Rome, Italy) (*Scuola Internazionale di Fisica dell'Atmosfera, Corso, Erice, Sicily, May 16-31, 1976*) *Rivista di Meteorologia Aeronautica*, vol 38, Apr-June 1978, p 107-116 22 refs. In Italian

Radiosonde and satellite data are used to study Northern-Hemisphere circulation during the stratospheric warming of December 1976-January 1977. Absolute topography charts for 30 mbar are presented for winter periods of 1974 and 1976 along with a description of cell patterns of circulation for the winter months. Polar-region temperature profiles for the stratosphere and mesosphere are examined. B J

**A78-51341** # Feasibility of landing at an alternate airport due to visibility conditions (Agibilita di un aeroporto e del suo alternato in funzione della visibilita). A Fantuzi (Aeronautica Militare, Servizio Meteorologico, Rome, Italy) (*Scuola Internazionale di Fisica dell'Atmosfera, Corso, Erice, Sicily, May 16-31, 1976*) *Rivista di Meteorologia Aeronautica*, vol 38, Apr-June 1978, p 151, 152. In Italian

The paper examines conditions under which an aircraft will be rerouted to a landing at an alternate airport. Three airports - Milano Linate, Venezia Tessera, and Torino Caselle - are considered along with their respective alternates - Milano Malpensa, Treviso S Angelo, and again Milano Malpensa. Meteorological conditions for these airports are examined for the period September-November 1977. B J

**A78-51355** # Influence of constrained arrestors on the operation of gyroscopic stabilizers (Vlianie ogranichitel'nykh uporov na rabotu girostabilizatorov). E N Tokar' (*Kosmicheskie Issledovaniia*, vol 16, July-Aug 1978, p 505-513 6 refs. In Russian)

In gyrostabilized platforms, the angles of rotation of the gyros do not exceed 10 degrees. In the present paper, the influence of this limitation on the range of variation of the kinetic moment of a system of aircraft gyrostabilizers is analyzed. V P

**A78-51379** # Nonlinear mathematical modeling of unsteady flow past a lifting propeller (K matematicheskomu nelineinomu modelirovaniu nestatsionarnogo obtekanii nesushchego vinta). S M Belotserkovskii, V A Vasin, and B E Loktev (*Akademiia Nauk SSSR, Doklady*, vol 240, June 21, 1978, p 1320-1323 6 refs. In Russian)

The problem of modeling unsteady flow past a helicopter propeller is solved in a nonlinear framework. Each blade is simulated by an infinitely thin midsurface, it is assumed that attached and free vortices are located on each blade, and free vortices are shed from the blade as it moves. Only the aerodynamic part of the problem is considered, the problem of determining deformations and Mach motions of blades is neglected. Some digital simulation results are presented. B J

**A78-51387** # Self-focusing of a Gaussian beam in a supersonic gas flow (O samofokusirovke Gaussova puchka v sverkhzvukovom potoke gaza). M N Kogan and A N Kucherov (Tsentral'nyi Aerogidrodinamicheskii Institut, Moscow, USSR) (*Akademiia Nauk SSSR, Doklady*, vol 241, July 1, 1978, p 48-51 9 refs. In Russian)

A theoretical analysis shows that, in a supersonic gas flow, acoustic disturbances can lead to the focusing of a Gaussian collimated light beam even in the absence of kinetic cooling. The thermal self-focusing effect is found to behave nonmonotonically from the moment the beam enters the gas to the moment the gasdynamic flow is stabilized. B J

**A78-51400** # Effect of nozzle inclination on the efficiency of a single-nozzle microturbine (Vlianie naklona sopla na effektivnost' odnosoplovoi mikroturbiny). K G Rodin, Iu P Batkov, and V P Stashkov (Leningradskii Politekhicheskii Institut, Leningrad, USSR) (*Energetika*, vol 21, June 1978, p 140-142. In Russian)

The paper presents experimental data on the effect of angle of inclination - in the range minus 5 deg to plus 15 deg - of a supersonic nozzle in the meridional plane on the efficiency of the microturbine. An optimal inclination angle is determined, and it is shown that positive nozzle inclination is a simple design tool for improving the efficiency of a single-nozzle microturbine. B J

**A78-51402 #** Investigations of the intensity of oscillations of the boundary of a turbulent wake (Issledovanie intensivnosti pul'satsii granitsy turbulentsnogo sleda) V G Ivanov (Akademiia Nauk SSSR, Fiziko-Tekhnicheskii Institut, Leningrad, USSR) *Pis'ma v Zhurnal Tekhnicheskoi Fiziki*, vol 4, May 26, 1978, p 590-592 6 refs In Russian

The paper examines the principal statistical characteristics - the mean square deviation and the microscale - of the boundary of a supersonic or hypersonic turbulent wake. It is shown that the intensity of oscillations of the turbulent-wake boundary is characterized by the ratio of mean-square deviation to the microscale. B J

**A78-51437 #** Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers (Teoreticheskoe i eksperimental'noe issledovanie struktury sleda za sferoi v sverkhzvukovom potoke gaza pri mal'kikh chislakh Reinal'dsa) A A Arutiunian, V M Zaikin, V V Krikunov, and Iu M Lipnitskii (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 46-51 13 refs In Russian

The present paper deals with the results of a theoretical and experimental study of the wake structure behind a sphere at free-stream Reynolds numbers of 100 and free-stream Mach numbers of 3.8 and at Re numbers of 50 and  $M = 7.7$ . The experimental data are found to correlate well with data calculated on the basis of a solution of the complete system of Navier-Stokes equations. V P

**A78-51441 #** Axisymmetric unsteady flow past obstacles in a cylindrical tube (Osesimmetrichnoe nestatsionarnoe obtekanie pregrad v tsilindricheskoi trube) L I Dubrovskaja and L V Komarovskii (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 81-86 9 refs In Russian

In the present paper, the interaction of gas flows with bodies in tubes is studied by applying Godunov's method to the numerical integration of the unsteady gasdynamics equations. The analysis is carried out for obstacles in the form of a circular cylinder having a common symmetry axis with the tube, an annulus, and a sphere whose center is situated on the symmetry axis. The result obtained are applied to the problem of propelling a body by means of an unsteady gas flow. V P

**A78-51443 #** Linear theory of supersonic flows past ruled bodies of three-dimensional configuration (Lineinaiia teoriia sverkhzvukovogo obtekania lineichatykh tel prostranstvennoi konfiguratsii) M I Folle (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 94-101 5 refs In Russian

A drag formula, previously derived by the author, is applied to the solution of the problem (in linear formulation) of the flow past bodies having a ruled surface, a star-shaped nose section, and a circular midsection. The superiority of such bodies over conventional nose cones with respect to the drag characteristics is demonstrated. V P

**A78-51444 #** Viscous carbon dioxide flow past a blunted cone (Viazkoe obtekanie zatuplennogo konusa uglekislym gazom) N E Afonina and V G Gromov (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 102-105 In Russian

A numerical analysis is carried out for the hypersonic viscous nonequilibrium flow of carbon dioxide past a spherically blunted cone. The distribution of the gasdynamic and thermochemical parameters in the shock layer, obtained from the analysis, are used as a basis to calculate the basic flow characteristics and to determine the upper and lower bounds for the existence of different flow modes within the framework of a theory of continuous media. V P

**A78-51448 #** Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space (Chislennoe modelirovanie nestatsionarnogo dvukhstadiinogo osesimmetrichnogo istecheniia gaza v zatuplennoe prostranstvo) G S Romanov and V V Urban (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 153-156 13 refs In Russian

The paper deals with the application of the large-particle finite-difference scheme to the numerical calculation of muzzle blast type flow fields. The wave pattern of the flow during the initial expansion stage and the structure of the underexpanded supersonic jet behind the shock wave are identified. V P

**A78-51449 #** Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators (Issledovanie tekheniia za sferoi pri giperzvukovoi skorosti poleta v vozdukhe otkrytym SVCh rezonatorom) N N Baulin, A K Dmitriev, N N Ivanchinov-Marinskii, V E Lopatin, N N Piliugin, and S Iu Cherniavskii (Akademiia Nauk SSSR, *Izvestiia, Mekhanika Zhidkosti i Gaza*, July-Aug 1978, p 156-160 15 refs In Russian

In the experiment described, an open microwave resonator was used to study the air flow behind a hypersonic sphere, made of a polymer material. Schlieren photography was used to visualize the flow. The electron concentration in the plasma and the effective collision frequency of electrons with heavy particles are determined as a function of the distance from the sphere. V P

**A78-51463** Changes in conical diffuser performance by swirl addition R S Neve and N E A Wirasinghe (City University, London, England) *Aeronautical Quarterly*, vol 29, Aug 1978, p 131-143 7 refs

It has been found that the addition of a whirl velocity component to an otherwise axial flow in a conical diffuser can lead to improvements in static pressure recovery and in efficiency, according to a restricted definition. Diffusers of total conical angle 10, 20 and 30 deg were tested in detail; improvements were evident only in the last two, which would otherwise have suffered from flow separation problems caused by their relatively large divergence angles. The agency for improvement seems to be a beneficial redistribution of axial velocities. (Author)

**A78-51464** The aerodynamic performance of a freely hinged door between two flows B L Hunt, S A Bizon, S A Taylor, and D A Wilson (Bristol, University, Bristol, England) *Aeronautical Quarterly*, vol 29, Aug 1978, p 144-160

This paper reports experimental results for the performance of a freely hinged door between two incompressible air flows of different total pressures and different velocities. The apparatus used is a laboratory idealization of the tertiary door system for an aircraft propulsion nozzle. The governing parameters are identified and the performance is presented in terms of the equilibrium door angle and the relative magnitude of the mass flow admitted. Three doors of different shapes were used and results are also presented for a plain opening. The main aerodynamic parameters are shown to be the velocity ratio and a nondimensional pressure difference across the door. The shape of the downstream door jamb is found to have a considerable influence on the operation of the door at low angles. Removal of the door results in a lower entry mass flow over most of the operating range. It is shown that the mass flow ratio can be predicted quite well from the measured door angles by means of a simple theory. (Author)

**A78-51466** The theory of fabric porosity as applied to parachutes in incompressible flow P R Payne (Payne, Inc, Annapolis, Md) *Aeronautical Quarterly*, vol 29, Aug 1978, p 175-206 54 refs Contract No F44620-76-C-0020

A general correlation based on the physics of fluid flow is presented for the pressure drop across cloths, gauzes, filter screens, and similar permeable fabrics used for parachute canopies. It is demonstrated that the correlation appears to work well for a very large range of porosity when the material is relatively unstrained. The effect of tension on the geometric porosity of a fabric is analyzed theoretically, and tension is shown to be a likely major factor. Specifically, it is found that for a given pressure drop, a stress equal to 50% of the ultimate stress can increase the air volume flow by an order of magnitude for cloths with low porosity when unloaded. In general, the increase in permeability is greatest at lower pressure-drop values, indicating that tension affects the viscous term more than the dynamic term. F G M

**A78-51470** Captive carriage vibration of air-to-air missiles on fighter aircraft W G Frost (USAF, Wright-Patterson AFB, Ohio), P B Tucker, and G R Waymon (McDonnell Aircraft Co., St. Louis, Mo.) *Journal of Environmental Sciences*, vol 21, Sept-Oct 1978, p 11-16 17 refs

Flight measurements obtained on F-15 fighter aircraft show that current missile vibration specifications do not adequately cover captive carriage. They include vibration caused by boundary layer noise, but not vibration induced by maneuvers. The latter occur at frequencies below approximately 200 hertz. Vibration at these frequencies is much higher than specification test levels. It is therefore considered important that these vibration levels be incorporated in vibration qualification test specifications for future air-to-air missiles. Recommended vibration test levels and test procedures based on the F-15 flight measurements are provided.

(Author)

**A78-51497 #** A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF Y Kakimoto (Japan Air Self Defense Force, Aeromedical Laboratory, Tachikawa, Japan) *Japan Air Self Defence Force, Aeromedical Laboratory, Reports*, vol 18, Mar 1978, p 161-176 73 refs. In Japanese, with abstract in English.

The investigations into human factors in aircraft studies over the past twenty years have involved (1) case studies of aircraft accidents, (2) epidemiological statistical analysis of accident data, and (3) investigation of behavior or situations involving accident potential. Men were regarded as a black box and were analyzed from the viewpoint of information processing. These methods are in some way related to inductive methods. Future studies should involve deductive methods. P T H

**A78-51516** The short-haul jet designed with ATC in mind T K Vickers *Journal of Air Traffic Control*, vol 20, July-Sept 1978, p 6-9

The Fokker-VFW F-28 aircraft is discussed in terms of air traffic control procedures. Particular attention is given to takeoff and climb specifications and the role of speedbrakes in cruising flight, descent, and approach. The low approach speed, lift dumpers, and short landing distance of the F-28 are described. It is noted that the absence of thrust reversers provides a noise-reduction feature. S C S

**A78-51517** The missed approach R E Burgin (National Transportation Safety Board, Washington, D C) *Journal of Air Traffic Control*, vol 20, July-Sept 1978, p 11-14

A survey of the success rate of instrument approaches in the United States is presented highlighting the so-called landing expectancy phenomenon. This subconscious anticipation affects the decision making processes of both the pilot and the air traffic controller and provides the basis of perception and subsequent action. An actual midair collision is discussed from the point of view of the landing expectancy phenomenon. Suggestions for counteracting the phenomenon on a conscious level are made, including studying of the missed approach environment via simulator. S C S

**A78-51518** Airline contributions to better air traffic control W G Osmun (Air Transport Association of America, Washington, D C) *Journal of Air Traffic Control*, vol 20, July-Sept 1978, p 16-19

The article reviews the services of the Air Transport Association of America with regard to air traffic control. Attention is given to the development of airborne radar systems, ground based primary radar, and secondary radar. Proposals for a system of airborne collision avoidance are described along with air ground communications systems such as radio telegraphy and the use of satellites for the relay of air-ground VHF communications. Cost-effective aspects of various navigation aids are noted and Category II Instrument Landing Systems are discussed. S C S

**A78-51519** Future large civil turbofans and powerplants /Seventeenth Short Bros Commemorative Lecture/ G L Wilde (Rolls-Royce, Ltd, Derby, England) *Aeronautical Journal*, vol 82, July 1978, p 281-299 13 refs

The historical development of the turbofan engine is briefly reviewed, and the major aspects of developing a large civil turbofan powerplant for future long-range subsonic transports with the aim of obtaining maximum fuel economy is discussed. Some specific engine designs are examined that enable the highest efficiency components to be adapted to advanced (low fuel consumption) cycles. V P

**A78-51520** European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/ R Watts (British Airways, Heathrow, Middx, England) *Aeronautical Journal*, vol 82, July 1978, p 300-312

Factors which influence the demand for transport in Europe and the split among road, rail, and air transportation are examined. Supply factors are discussed with a view toward obtaining estimates of the future demand for transport and its probable split among the transport modes. The aircraft scenario for the year 2000 implies that European airlines will use an increasing number of 100 to 130 seat transports in order to maintain frequencies adequate for stimulating business travel demand. V P

**A78-51524** Diffusion brazing titanium sandwich structures M M Schwartz (United Technologies Corp, Sikorsky Aircraft Div, Stratford, Conn) (*International Institute of Welding, Colloquium on High Temperature Brazing, Copenhagen, Denmark, July 3-9, 1977*) *Welding Journal*, vol 57, Sept 1978, p 35-38

The joining system described in the present paper involves diffusion welding and brazing, the tools and processing required for the system, and the heating methods and equipment. Products being diffusion brazed, using the new system, are vacuum bonded in a single operation directly to final component configuration, rather than formed from premanufactured titanium honeycomb planks. The results are less weight, greater strength and better fatigue resistance. Some typical fabrications are illustrated. V P

**A78-51543 #** A modular side looking airborne radar to fulfill a multitude of surveillance missions R Vollmers (U S Coast Guard, Office of Research and Development, Washington, D C) and G V Morris (Motorola, Inc, Government Electronics Div, Scottsdale, Ariz) In *European Microwave Conference, 7th, Copenhagen, Denmark, September 5-8, 1977, Proceedings* Sevenoaks, Kent, England, Microwave Exhibitions and Publishers, Ltd, 1978, p 414-418 7 refs

It is pointed out that in most surveillance missions a variety of sensors are needed because no single one is capable of fulfilling all mission requirements. Services provided by side looking airborne radar (SLAR) are related to large area coverage, operation in adverse weather, curing to other sensors, moving target indication, day/night operation, cooperative and noncooperative surveillance, higher resolution than forward looking airborne radar, and a near real-time hard copy map. Various configurations of real aperture SLAR's have been employed by the US and other countries for various uses such as border patrol and enforcement of territorial limits, search and rescue, oil and mineral exploration, shipping and oil pollution monitoring, ice mapping, geological fault determination, and flood damage assessment. Attention is given to the modular side looking radar concept, missions and their impact on radar requirements, a modular radar baseline system description, and antenna options. G R

**A78-51551 #** Precision approach monitoring and guidance using interferometer techniques A J Lambell (MEL Equipment Co, Ltd, Crawley, Sussex, England) and R P Vincent (Philips Research Laboratories, Redhill, Surrey, England) In *European Microwave Conference, 7th, Copenhagen, Denmark, September 5-8, 1977, Proceedings* Sevenoaks, Kent, England, Microwave Exhibitions and Publishers, Ltd, 1978, p 509-513

The PAIR (Precision Approach Interferometer Radar) system accurately measures the position of aircraft in the airfield approach

sector A ground-based interrogator transmits a conventional SSR code Aircraft transponder replies are received by an azimuth and elevation interferometer and the angular position measured to high accuracy Range is measured from the go-and-return time Aircraft identity is obtained from the SSR IDENT code Ground reflections are reduced by means of a null in the vertical pattern of the elevation interferometer Fruit and garbling effects are removed in the signal processing The aircraft positional information is processed in a mini-computer and presented to the operator on a bright graphical display, and automatic conflict detection can be provided (Author)

**A78-51594** # Some effects of temperature on the erosion of metals N Gat and W Tabakoff (Cincinnati, University, Cincinnati, Ohio) *Wear*, vol 50, Sept 1978, p 85-94 21 refs Grant No DA-ARO(D)-124-G154

The effect of temperature on the erosion of several metals was experimentally investigated Theoretical considerations based on the temperature dependence of basic metallurgical processes were applied to analyze the results obtained In general it was found that erosion damage may increase or decrease as the temperature increases, depending upon the angle at which the particles strike the material surface and upon the test temperature with respect to the thermal properties of the material (Author)

**A78-51598** # Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport (Optymalizacja struktury taboru PLL LOT dla potrzeb międzynarodowej komunikacji pasazerskiej) A Kieziels *Technika Lotnicza i Astronautyczna*, vol 33, Aug 1978, p 27-30 In Polish

A linear integer programming model is described for optimizing the structure of LOT's air fleet to meet the requirements for international passenger service for the years 1976-1990, during which period the purchase of new types of aircraft is envisaged The model enables one to calculate the numerical requirement for general types of aircraft as a function of year and the route and cost structures

P T H

**A78-51599** # New organization of air traffic over the North Atlantic region (Nowa organizacja ruchu lotniczego nad północnym rejonem Atlantyku) A Mokrowiecki *Technika Lotnicza i Astronautyczna*, vol 33, Aug 1978, p 31-34 In Polish

The paper describes the model studies used to set up the Organized Route System for the North Atlantic The modeling took into account projected air traffic, use of conventional long range navigation equipment, and the parameters of the current air fleet

P T H

**A78-51600** # Operation of oil ring seals for aircraft turbine engines under cavitation conditions II (Praca olejowych uszczelnieni pierścieniowych lotniczych silników turbinowych w warunkach kawitacji II) M Ostopkowicz *Technika Lotnicza i Astronautyczna*, vol 33, Aug 1978, p 34, 35 In Polish

The paper considers mechanisms of the cavitation corrosion of oil ring seals in gas turbine engines and suggested methods to protect the seals against this type of corrosion Particular attention is given to the choice and testing of seal materials The 38HMJ steel and the type-HM chromium-molybdenum alloys are considered as candidates, and attention is given to their microstructural characteristics B J

**A78-51621** # Turboexpanders for energy conservation J Holm and J S Swearingen (Rotoflow Corp., Los Angeles, Calif) *Mechanical Engineering*, vol 100, Sept 1978, p 34-40 13 refs

It is pointed out that significant amounts of energy are wasted in industrial and gas processing facilities where pressurized gas is reduced by throttling Approaches for conserving energy are discussed, taking into account the various types of turbines and the design qualifications needed to meet energy conservation requirements Attention is given to expander applications, efficiency considerations with respect to turbine design, the direct connected compressor, and arrangement consisting of a high-speed turboexpander and a generator, turboexpander qualities, variable flow control, the expansion of condensing streams, journal bearings, thrust bearing force meters, shaft seals, and the available sizes of turboexpanders G R

**A78-51670** # Calculation of combustion efficiency in gas-turbine-engine combustion chambers (K raschetu koeffitsienta polnoty sgoraniia topliva v kamerakh sgoraniia gazoturbinnykh dvigatelei) V P Lebedev and Iu M Pchelkin (Moskovskoe Vysshie Tekhnicheskoe Uchilishche, Moscow, USSR) *Energetika*, vol 21, July 1978, p 54-60 In Russian

A new heat-balance method is shown to be an effective tool for improving the calculation of combustion efficiency in a gas-turbine-engine combustion chamber The improved heat balance equation proposed here is compared to the old equation in terms of the effectiveness with which the combustion efficiency is calculated B J

**A78-51687** # Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer G I Chmyr' and A M Kuzemko (Zaporozhskii Mashinostroitel'nyi Institut, Zaporozhe, Ukrainian SSR) (*Prikladnaia Mekhanika*, vol 14, Feb 1978, p 108-114) *Soviet Applied Mechanics*, vol 14, no 2, Aug 1978 p 194-200 Translation

The paper examines the convergence of a successive-approximation method for solving the integral equation describing cascade flow in a layer of variable thickness It is demonstrated that, after certain necessary conditions are satisfied, the successive approximations of the velocity potential of the flow converge absolutely and uniformly to the function sought The velocity potential is estimated B J

**A78-51688** # Irrotational flow around a spherical segment P Ia Malits and V N Tishchenko (Simferopol'skii Gosudarstvennyi Universitet, Simferopol, Ukrainian SSR) (*Prikladnaia Mekhanika*, vol 14, Feb 1978, p 115-121) *Soviet Applied Mechanics*, vol 14, no 2, Aug 1978, p 200-205 6 refs Translation

The paper solves the problem of the potential flow of an ideal fluid which has moving in it a spherical surface with an arbitrary aperture-angle A method for solving the singular integral equations of the problem is proposed, the solution being in the form of quadratures Expressions of flow velocity on both sides of the moving surface are obtained for a variety of moving surfaces The solution enables determination of the aerodynamic coefficients of such bodies B J

**A78-51697** # Interaction of turbulent boundary layers in a right-angle corner (Vzaimodeistvie turbulentnykh pogranichnykh sloev v priamom dvugrannom ugle) V I Kornilov and A M Kharitonov *PMTF - Zhurnal Prikladnoi Mekhaniki i Tekhnicheskoi Fiziki*, May-June 1978, p 69-76 8 refs In Russian

Experiments were performed in a low-turbulence wind tunnel to study boundary layer characteristics in a right-angle corner model The extent of the turbulent boundary layer interaction region was determined for different Reynolds numbers, and particular attention was given to the effects of the longitudinal static pressure gradient on boundary layer characteristics B J

**A78-51711** # Mathematical analysis of impact erosion T Q McCawley, J S Mills, and J Peddieson, Jr (Tennessee Technological University, Cookeville, Tenn) In Environmental degradation of engineering materials, Proceedings of the Conference, Blacksburg, Va., October 10-12, 1977 Blacksburg, Va., Virginia Polytechnic Institute and State University, 1978, p 161-169

The requirement of an all-weather capability of high-speed aircraft, space shuttles, rockets, and missiles has made it vital to protect critical sensitive parts of these systems against erosion damage produced by collision with particulate matter in the form of dust, metal particles, or raindrops In order to develop rational design procedures for erosion protection it is necessary to know the distribution of impact positions and impact speeds over the surface of the body The reported investigation is concerned with the derivation of a closed-form solution for a calculation of the required data The mathematical study takes into account the motion of small particles near the stagnation line of a sphere or a circular cylinder G R

G R

**A78-51744 #** **Fatigue crack growth of titanium fan blades**  
W H Cullen and F R Stonesifer (U S Navy, Naval Research Laboratory, Washington, D C ) In *Environmental degradation of engineering materials*, Proceedings of the Conference, Blacksburg, Va , October 10-12, 1977 Blacksburg, Va , Virginia Polytechnic Institute and State University, 1978, p 771-781 11 refs

The actual occurrence and continued possibility of gas-turbine engine fan-blade failures has led to a study of fatigue-crack growth rates in production-quality forged titanium-alloy fan blades An experimental procedure has been developed for determining the stress intensity factor for transverse through-thickness cracks in turbine blades The nonuniform thickness and foil shape of the blades necessitate calculation of the stress intensity factor from the change in specimen compliance with respect to crack length Using this technique, crack growth rates were measured at ambient temperature in both air and 3.5% salt solution These two conditions should represent the environmental extremes to which these turbines are subjected The results indicate that fatigue-crack growth rates in salt water at 0.5 Hz are five to twenty times faster than the rates in air at 5.0 Hz for equivalent stress intensities These data prove comparable to literature data on forms of the same chemistry The implications of these results for gas turbine design and operation are discussed (Author)

**A78-51749 #** **Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent (Optimierung quasistationärer Streckenflüge bei unterschiedlichen Flugführungsvorschriften nach einem weitgehend idealisierten Modell)** B Faber Darmstadt, Technische Hochschule, Fachbereich Maschinenbau, Dr-Ing Dissertation, 1977 180 p 48 refs In German Research supported by the Deutsche Forschungsgemeinschaft

The optimization of quasi-stationary sections of the flight under various flight conditions with respect to flight duration, range, flight dependent costs, and cost per payload unit is considered, taking into account constant values for flight speed, altitude, lift coefficient, thrust adjustment, or dynamic pressure The decrease in weight as a result of fuel consumption is an important factor Performance differences for different flight conditions, in the case of comparable initial conditions, are examined The considered problem is partly a simple, but degenerate variational problem, and partly an ordinary extreme value problem G R

**A78-51752 #** **Technical-economic analysis of the direct operating costs of air transport companies (Technisch-Wirtschaftliche Analyse der direkten Betriebskosten von Luftverkehrsgesellschaften)** G Mentzel Darmstadt, Technische Hochschule, Fachbereich Maschinenbau, Dr Ing Dissertation, 1977 364 p 149 refs In German

The reported investigation is concerned with the characteristics of the direct operating costs of commercial aircraft and the factors affecting these costs The concepts used in the investigation are based on a description of the actual conditions, their representation in a model, the mathematical formulation of the model, and an application of the obtained results to the actual situation The currently existing conditions are analyzed, taking into account the experience of the airlines General relations are derived with the aid of mathematical statistical procedures, and an application-oriented planning and evaluation instrument is developed Attention is given to aspects of maintenance, questions of depreciation, operating performance, operating cost, and details of methodology G R

**A78-51816 \*** **Feasibility of an orbital simulator of stratospheric photochemistry** G L Matloff and M I Hoffert (New York University, Staten Island, N Y ) *Acta Astronautica*, vol 5, July-Aug 1978, p 619-621 6 refs Grant No NsG 1298

It is proposed that a stratospheric photochemistry simulator could be created in sun-synchronous orbit, so that diffusion and photochemistry could be decoupled and uncertainties in photochemical reaction rates could be substantially reduced The proposed

test chamber is described, and it is suggested that the technology of superpressure balloons seems to be the best short-term solution to the construction of the proposed facility Both unreinforced poly ester films and gelatin films are considered as candidate chamber coatings It is noted that the experiments can be performed early in the space-manufacturing era and that at least three dedicated Shuttle launches will be required to establish the proposed facility F G M

**A78-51817** **The shape of airliners to come** M Hewish *New Scientist*, vol 79, Sept 7, 1978, p 681-683

The advantages of designing a new commercial aircraft from scratch and the advantages of modifying designs used in earlier aircraft are compared with reference to a series of smaller aircraft known as JET (Joint European Transport) While JET will have many items in common with Airbus aircraft, JET is described as a completely new aircraft Characteristics of JET and of its new turbine (based on the RB 211) are reported M L

**A78-51822** **International jurisdiction related to the Warsaw Convention during the years from 1974 to 1976 II (Die internationale Rechtsprechung zum Warschauer Abkommen in den Jahren 1974 bis 1976 II)** D Schoner *Zeitschrift für Luft- und Weltraumrecht*, vol 27, Sept 1978, p 151-170 656 refs In German

The concept of embarkation and disembarkation as used in Article 17 of the Warsaw Convention is considered No definition is provided in the Convention regarding the exact meaning of the terms used in this connection in the original French text which speaks of 'toutes opérations d'embarquement et de débarquement' Juridical decisions in different countries involving an interpretation of these terms are discussed, taking into account an attack on passengers by terrorists at the airport of Athens in August 1973 G R

**A78-51823** **The legal basis for security measures in air traffic (Rechtsgrundlagen für Sicherungsmassnahmen im Luftverkehr)** E Grabberr *Zeitschrift für Luft- und Weltraumrecht*, vol 27, Sept 1978, p 171-178 11 refs In German

Security measures for the air traffic, as distinguished from the operational safety measures customarily practiced, were introduced into air traffic operations in 1970 These security measures include control procedures for passengers, baggage, and freight, in addition to the identification of baggage and special object protection measures It appears that these security measures will be retained as a permanent feature of the air traffic An investigation is in this connection conducted concerning the need to provide a legal basis for these measures in the territory of the Federal Republic of Germany, taking into account existing constitutional rights of a person and current laws and regulations related to the considered measures G R

**A78-51838 \*** **Fire resistivity and toxicity studies of candidate aircraft passenger seat materials** L L Fewell (NASA, Ames Research Center, Moffett Field, Calif ), E L Trabold, and H H Spieth (Douglas Aircraft Co , Long Beach, Calif ) *Journal of Fire and Flammability*, vol 9, July 1978, p 377-402 8 refs

This paper describes fire resistivity studies of a wide range of candidate nonmetallic materials for the construction of improved fire resistant aircraft passenger seats These materials were evaluated on the basis of FAA airworthiness burn and smoke generation tests, colorfastness, and animal toxicity tests Physical, mechanical, and aesthetic properties were also included in the evaluations Candidate seat materials that have significantly improved thermal response to various thermal loads corresponding to reasonable fire threats, as they relate to in-flight fire situations, are identified (Author)

**A78-51839** **Opportunities for cost-affordable titanium aerospace structures** N G Tupper, J K Elbaum, and H M Burte (USAF, Materials Laboratory, Wright-Patterson AFB, Ohio) *Journal of Metals*, vol 30, Sept 1978, p 7-13 20 refs

The development of cost-effective titanium structures for aircraft is outlined The design process is considered with reference to stress, fatigue, crack growth, and temperature parameters



Titanium and aluminum structures are compared on the bases of properties and manufacturing costs. The implementation of titanium aerospace structures is described in terms of cost reduction, isothermal forging, powder metallurgy, welding, and metal removal.

S C S

**A78-51889 # Accuracy of ship-position determination by means of NNSS Transit (Dokladnosc okreslenia pozycji statku za pomoca NNSS 'Transit')** K Wielebski and J Wereszczynski (Lodz, Politechnika, Lodz, Poland) (*Symposium na temat Problemow Nawigacji Kosmicznej, Lodz, Poland, Dec 19, 1977*) *Postepy Astronautyki*, vol 11, no 2, 1978, p 43-61 13 refs In Polish

The paper examines the accuracy of Transit, the Navy Navigation Satellite System in determining the accuracy of ship positions. The position of the ship relative to the satellite, ship velocity, and the altitude of the antenna above the reference ellipsoid are taken into account. Formulas for determining the accuracy of position determination are presented.

B J

**A78-51890 # The use of Doppler-shift position lines in satellite navigation systems (Izodoppa w nawigacji przy uzczeniu sztucznych satelitow)** J Wereszczynski (Lodz, Politechnika, Lodz, Poland) (*Symposium na temat Problemow Nawigacji Kosmicznej, Lodz, Poland, Dec 19, 1977*) *Postepy Astronautyki*, vol 11, no 2, 1978, p 63-78 7 refs In Polish

The utilization of the Doppler shift of satellite signals for purposes of navigation is considered. The use of Doppler-shift position lines for accurate determinations of ship positions is investigated. Particular attention is given to the Transit system.

B J

**A78-51896 Applications for airborne digital communications** N P Janus (Mitre Corp., Bedford, Mass.), J J McConnell (U S Army, Washington, D C), P H Phillips (Electrospase Systems, Inc., Richardson, Tex.), and L S Nored *Signal*, vol 33, Sept 1978, p 23-29

Techniques and capabilities for implementing high-speed digital communications aboard military aircraft are reviewed. The review is limited to line-of-sight, air-to-air, and air-to-ground communications requirements, with attention given to threat, countermeasures, system capability, antenna, radio, modem, and frequency band evaluation. Certain recommendations are made for a typical system.

B J

**A78-51933 Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog** V G Plank (USAF, Geophysics Laboratory, Bedford, Mass.), D M Johnson (Combustion Engineering Co., Windsor, Conn.), and A A Spatola *Journal of Applied Meteorology*, vol 17, Aug 1978, p 1190-1200 16 refs

The geometric and thermodynamic properties and observed closing times of certain clearings created in fog layers by helicopter downwash during hover experiments are examined. Modifications of Elliott's (1970) treatment are outlined which were required to estimate the diffusion coefficients for the particular situations studied. The values of the coefficients are found to range from 70,000 to 190,000 sq cm/s, which are appreciably larger than any reported previously for fog of similar type. It is concluded that the absolute values of the coefficients probably cannot be given too much credence since they are heavily dependent on assumptions concerning the geometry of the clearings as well as on the definition of closing time. However, it is noted that the relative values and trends seem to correlate sensibly with a turbulence index, such as the Richardson number.

F G M

**A78-51945 # Stochastic properties of conflict frequency at multiple connected air route intersections** D K Schmidt (Purdue University, West Lafayette, Ind.) *Journal of Aircraft*, vol 15, Oct 1978, p 682-685 5 refs

Previous results regarding the stochastic properties of the frequency of conflict situations at a single intersection of two air routes have been extended to the case of multiple connected intersections. Such a situation occurs when more than one aircraft stream intersects with another aircraft stream. Examples include multiple discrete velocity groups of vehicles on routes, intersections

in the horizontal plane involving more than two routes, and routes transiting through altitude strata or flight levels. It is determined that the conflict frequency at multiple intersections connected with a common vehicle stream are correlated, and the expression for the covariance is derived. With these results, not only the mean, but the variance of conflict frequency for an ATC sector may be predicted from traffic-flow and route-geometry information, both of which are important parameters for sector capacity analyses. (Author)

**A78-51946 # Detecting abnormal turbine engine deterioration using electrostatic methods** R P Couch (USAF, Aeronautical Systems Div., Wright Patterson AFB, Ohio) *Journal of Aircraft*, vol 15, Oct 1978, p 692-695 8 refs

A method of detecting abnormal turbine engine deterioration has been developed and tested. The method observes pulse electrostatic signals in the exhaust which have been determined to originate from component rubbing, chaffing, erosion, and burning (i.e., various forms of deterioration). The normal (healthy engine) deterioration rate is first studied as a function of engine cycling and power. This deterioration rate is then normalized with an engine power and an engine cycling parameter. Tenfold increases in the normalized deterioration rate are then used as an indication of impending component failure. Experience shows that about two out of three turbine engine gas-path failures can be predicted four or more hours ahead of time by this method. The false alarm rate is estimated to be about 5%. (Author)

**A78-51947 # Comparison of linear and nonlinear dampers for landing gears** C Venkatesan *Journal of Aircraft*, vol 15, Oct 1978, p 696-698 6 refs

For given aircraft weight and descent velocity, the parameters preload and linear or nonlinear damping, governing the performance of the landing gear, are optimized so as to obtain the minimum peak ground load with a constraint on the maximum stroke. It is assumed that the descent velocity is uniform, that the forward velocity of the aircraft is zero, and that the force-deflection characteristic of the tire is linear. The system behavior is studied at three different velocities of descent, viz 3, 886, and 11 ft/sec. Attention is given to a comparison of the results obtained with those of Hall (1967) for both the linear and the nonlinear dampers. It is shown that if the landing gears are optimized for a given descent velocity and then used at lower or higher descent velocities, the nonlinear orifice damper in the shock absorber exhibits a better performance, since the peak ground loads obtained are lower than those produced by a linear damper. (Author)

S D

**A78-51948 # Computation of two-dimensional potential flow using elementary vortex distributions** P Raj and R B Gray (Georgia Institute of Technology, Atlanta, Ga.) *Journal of Aircraft*, vol 15, Oct 1978, p 698-700 16 refs

The two-dimensional potential flow problem is formulated using surface-vorticity distribution coupled with the conventional zero-normal-flow boundary condition. More specifically, velocity and pressure distributions are computed on the surface of a circular cylinder and NACA basic thickness form airfoils. A second-order equation defines the profile curve of the cylinder, and the bounding surface of the airfoil is analytically represented by a higher-order expression. The surface-vorticity method coupled with zero-normal-velocity boundary condition gives a Fredholm integral equation of the first kind. An elementary vortex distribution technique which utilizes a linear distribution on each element is employed to approximate the integral equation by a set of linear algebraic equations. The resulting coefficient matrix has diagonal entries larger than other entries, which is a crucial factor in numerical solution. Nonlifting and lifting flows are computed for NACA symmetrical airfoils with very high accuracy. (Author)

S D

**A78-51949 # Minimum on-axis noise for a propeller or helicopter rotor** M R Fink (United Technologies Research Center, East Hartford, Conn.) *Journal of Aircraft*, vol 15, Oct 1978, p 700-702 6 refs

A method for predicting ultimate limits on noise for propellers or helicopter rotors is presented and evaluated by comparisons with

available data It is found that predicted on-axis broadband noise caused by flow of the blade turbulent boundary layer past the trailing edge generally matches the portion of a hovering helicopter rotor's spectrum called high-frequency broadband noise Noise radiation from nonlifting blades with their shed wakes blown downstream is overestimated near peak amplitude by this method

B J

**A78-51950 # Compressibility effects on parachute transient pressures** P C Klimas (Sandia Laboratories, Albuquerque, N Mex) *Journal of Aircraft*, vol 15, Oct 1978, p 702-704

The present work attempts to expand the available information in the area of parachute transient pressures and to determine the dependence of transient aerodynamics on freestream Mach number This is done on the basis of an experimental investigation of parachutes of three different geometric porosities (0, 12, and 25%) for a freestream Mach number range of 0.3-1.2 and a constant value freestream dynamic pressure (225 psf) Maximum values of transient differential pressure coefficients are given for various radial positions It is found that this coefficient is a reasonably strong and monotonically decreasing function of freestream Mach number B J

**A78-51968 Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures** H J Haussling and R T Van Eseltine (US Naval Material Command, David W Taylor Naval Ship Research and Development Center, Bethesda, Md) *Journal of Ship Research*, vol 22, Sept 1978, p 170-177 13 refs Navy supported research

Wave patterns and wave resistance are computed for air-cushion vehicles with time-dependent cushion pressures moving at uniform speed over deep and shallow water The effect of beam-to-length ratio, Froude number, and water depth on the resistance is investigated The resistance is found to exhibit a distinctive behavior at a critical frequency This behavior corresponds to a singularity in the resistance at the critical frequency The importance of this behavior is found to diminish with decreasing beam-to-length ratio and increasing Froude number (Author)

**A78-51971 Infrared passbands for clear-air-turbulence detection** P M Kuhn, L P Stearns (NOAA, Atmospheric Physics and Chemistry Laboratory, Boulder, Colo), I G Nolt, and J V Radostitz (Oregon University, Eugene, Ore) *Optics Letters*, vol 3, Oct 1978, p 130-132 5 refs

Clear air turbulence (CAT) ahead of an aircraft can be detected in real time by an infrared radiometer The alert time and reliability depend on the passband of the infrared filter used and the altitude of the aircraft Preliminary results and analyses show that a nominal passband of 26 to 35 microns appears optimal to alert CAT from 1.5 to 6.0 min ahead of the encounter The alert time increases with higher altitude as the atmospheric absorption, determining the horizontal weighting, is reduced (Author)

**A78-51977 # Solar power satellite construction and maintenance - The first large-scale use of man-in-space** K H Miller and E Davis (Boeing Aerospace Co., Seattle, Wash) *American Institute of Aeronautics and Astronautics, Conference on Large Space Platforms Future Needs and Capabilities, Los Angeles, Calif., Sept 27-29, 1978, Paper 78-1637* 10 p

The 10 GWe photovoltaic solar power satellite concept developed by NASA and Boeing Aerospace Company is described Current construction and maintenance approaches are discussed This concept requires several hundred people working in space They will be located at a low-earth-orbit construction base, a geosynchronous earth-orbit final assembly base, or on the satellites performing maintenance The text includes discussions of crew jobs, work schedules, rotation, transportation, productivity, and other human factors considerations (Author)

**A78-52042 # Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft** R M Kulfan

(Boeing Commercial Airplane Co., Seattle, Wash) *American Institute of Aeronautics and Astronautics, Aircraft Systems and Technology Conference, Los Angeles, Calif., Aug 21-23, 1978, Paper 78-1458* 28 p 41 refs

A study was made to identify hypersonic favorable aerodynamic interference concepts for application to supersonic aircraft. Preliminary aerodynamic analysis defined key design parameters, and scoped potential aerodynamic efficiency improvements The study included supersonic biplanes, ring wings, parasol wings, wave rider concepts, and flat-top wing/body arrangements Results indicate the parasol wing concept offers the greatest potential aerodynamic benefits for the study conditions However, the best aerodynamic concept is very dependent on the design Mach number, and on the airplane component size relationships It is shown that existing aerodynamic design/analysis methods can be used for parasol wing aerodynamics studies (Author)

**A78-52043 On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities** O S Ryzhov (Akademiia Nauk SSSR, Vychislitel'nyi Tsentr, Moscow, USSR) (*Akademiia Nauk SSSR, Doklady*, vol 236, Oct 11, 1977, p 1091-1094) *Soviet Physics - Doklady*, vol 22, Oct 1977, p 537-539 10 refs Translation

Unsteady transonic boundary layer flow with a self induced pressure gradient is studied using a mathematical model which divides the velocity field into three regions (1) an outer region of potential flow where viscosity and thermal conductivity can be neglected, (2) a midregion of vortices where dissipative factors can be neglected, and (3) a near wall region with viscous stresses The nature of the unsteady flow is determined by a freestream K parameter (derived in the paper) related to Mach number and temperature ratio and by initial flow conditions B J

**A78-52175 The force on a small sphere in slow viscous flow** D A Drew (Rensselaer Polytechnic Institute, Troy, N Y) *Journal of Fluid Mechanics*, vol 88, Sept 27, 1978, p 393-400 8 refs Navy-supported research

The force on a small sphere translating relative to a slow viscous flow is found to order of the 1/2 power of Re for two different fluid flows far from the sphere, namely pure rotation and pure shear For pure rotation, the correction of this order to the Stokes drag consists of an increase in the drag For pure shear, the force of this order contains a component perpendicular to the Stokes drag force (Author)

**A78-52244 Boeing launches the 767** J P Geddes *Interavia*, vol 33, Sept 1978, p 779-782

The 767 aircraft is described The aircraft will carry 197 passengers, has a gross takeoff weight of 127,000 kg, is powered by two JT9D-7R engines each rated at 20,100 kp, has a wing area about one third larger than the Airbus 300, and requires 2317 m take-off field length for maximum gross weight First flight is presently scheduled for August 1981 The integration of 767s into a fleet of 727s is considered The aircraft design is considered 'conventional', the most noticeable change being the adoption of a conventionally positioned horizontal stabilizer in place of the 'T' tail Topics examined include interior layout cargo space production work sharing, marketing predictions, and the effect of commonality on costs M L

**A78-52245 The L 1011 500 long range TriStar** J P Geddes *Interavia*, vol 33, Sept 1978, p 863-866

The L 1011 500 called the Dash 500 is described, its prospects are considered, and modifications made in the basic L 1011-1 design are examined The wide bodied Dash 500 can carry 250 passengers and 19 LD3 containers, the empty operating weight is 108,925 kg Design innovations, the flight management system, and the Dash 500/digital automatic flight control system are discussed The aircraft is intended to serve both as a replacement of 707s and DC 8s and as a substitute for 747s for city pairs with light traffic M L

**A78-52360 # Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles** E E Altshuler, M A Gallop, Jr, and L E Telford (USAF, Rome Air Development Center, Bedford, Mass) *Radio Science*, vol 13, Sept-Oct 1978, p 839-852 16 refs

The paper presents 440 sets of slant path attenuation data at 15 and 35 GHz frequencies. The attenuations were measured with an 8.8-m paraboloidal antenna using the sun as a source. Data were also obtained on surface temperature, pressure, and absolute humidity. The data made systematic analyses of the relations between attenuation, elevation angle, and atmospheric conditions possible. It is found that (1) the mean attenuations at both 15 and 35 GHz decrease smoothly with increasing elevation angle and at a 0-deg range from 5.44 to 8.80 dB and 15.47 to 24.12 dB, respectively, for clear to cloudy conditions, and (2) at an angle of 5 degrees, the mean attenuations at 15 and 35 GHz have a range of 6.9 to 1.08 dB and 2.45 to 9.02 dB, respectively. SCS

**A78-52401 # Optimization and differential games (Optimizatsia i differentsial'nye igry)** L S Pontriagin *Akademiya Nauk SSSR, Vestnik*, no 7, 1978, p 10-17. In Russian

Some applied problems in differential game theory are considered. Particular attention is given to optimal and time-optimal control in the pursuit tracking of one aircraft by another. BJ

**A78-52447 Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978** H A Wassenbergh (KLM Royal Dutch Airlines, Schiphol Airport, Netherlands) *Air Law*, vol 3, no 3, 1978, p 138-162 26 refs

The 'Protocol relating to the U.S.-Netherlands Air Transport Agreement of 1957' is discussed, with attention given to route authority, charter rights, fair competition, tariffs and prices, tariff participation, capacity, and enforcement. The full text of the Protocol is presented along with the full text of the Memorandum of Consultations. BJ

**A78-52448 The changing environment of international air commerce** A E Kahn (Civil Aeronautics Board, Washington, D.C.) *Air Law*, vol 3, no 3, 1978, p 163-174

The harmful effects of government protection in US air transportation are pointed out. It is emphasized that the loosening of regulation of the domestic aviation industry should be extended to the international market as well. Ways in which the American experience of competition could apply to the international market are discussed. BJ

**A78-52450 Design concepts for future air freighters** H W Withington (Boeing Commercial Airplane Co., Seattle, Wash.) *Exxon Air World*, vol 30, no 3, 1978, p 70-73

Use patterns of air freighters in the future are considered, and design concepts for fuselage, payload/range capabilities, wing configuration, and commonality of components are examined. A typical dedicated air freighter that could be introduced in the 1980's would use the horizontal double-lobe cross section concept and would be able to carry up to 60 8-foot by 10-foot containers in four cargo lanes. Characteristics of the tailless aircraft concept and of the tandem wing and flying wing configurations are discussed, and the distributed load freighter concept is described. ML

**A78-52498 # A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles (Ein Sichtsimulationsverfahren zur Aufbereitung von Fernseh Bildern mit reduzierten Bildraten bei Aussensichtdarstellungen aus ferngelenkten Fahrzeugen)** K D Schulz-Helbach Meckenheim, Forschungsinstitut für Anthropotechnik (Forschungsinstitut für Anthropotechnik, Bericht, No 35), 1977 42 p 17 refs. In German S5 25

The transmission of image information from a remotely piloted vehicle to the ground station is of importance for a successful mission. Particular attention must therefore be given to approaches

which will prevent a disturbance or interruption of this communication link. A description is presented of a number of such approaches, taking into account human factor considerations. Approaches which can be used with respect to picture transmission in the case of a disturbed information channel are discussed, taking into account a reduction of the amount of information transmitted per picture and an increase in image transmission time. The properties of image sensors for reduced frame rates are examined. Attention is also given to details of image processing, which in case of an employment of the considered approaches is necessary to add missing information regarding the motion of the remotely piloted vehicle. GR

**A78-52578 Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit** V Williams and A J Meadows (Leicester, University, Leicester, England) *Planetary and Space Science*, vol 26, Aug 1978, p 721-726 11 refs. Research supported by the Science Research Council

This paper considers the torques causing spin decay in cylindrical rocket bodies in orbit. Eddy current torques, due to the earth's magnetic field, are estimated by Smith's (1962) model - a hollow cylindrical conducting shell, tumbling about a transverse axis. Air torques are estimated by numerical integration of aerodynamic moments over the rocket surface. It is shown that for Cosmos rockets, 7.4 m long and 2.4 m in diameter, eddy current torques outweigh air torques by several orders of magnitude at altitudes near 500 km, and that they are dominant at altitudes down to 160 km. Visual observations of several such rockets illustrate a variation of spin decay time with altitude which supports this conclusion. The same observations suggest that a few Cosmos rockets may be special cases, different from the rest in construction. (Author)

**A78-52592 # Analysis of advanced variable camber concepts for combat aircraft** R F Siewert (US Naval Air Systems Command, Washington, D.C.) and R E Whitehead (US Navy, Office of Naval Research, Washington, D.C.) *Naval Research Reviews*, vol 31, July 1978, p 1-16 12 refs

The paper reviews current applications of variable camber and discusses advanced variable camber concepts, segmented variable camber, and the self-optimizing wing concept. Some conclusions concerning the use of variable camber concepts to enhance the 'off-design' performance of fighter aircraft are presented. In particular, the use of such concepts to improve the transonic maneuvering characteristics of fighter aircraft is discussed. BJ

**A78-52616 Duct effects on the heave stability of plenum air cushions** M J Hinchey and P A Sullivan (Toronto, University, Toronto, Canada) *Journal of Sound and Vibration*, vol 60, Sept 8, 1978, p 87-99 19 refs. Research supported by Transport Canada, National Research Council of Canada Grant No A-3378

Linear heave stability boundaries for a fan-duct-plenum air cushion suspension system were obtained by using a quasi-static pressure-flow relationship for the fan, a finite element discretization for one-dimensional unsteady duct flow, and a lumped capacitance model for the plenum. These studies indicate that even relatively short ducts can have a major effect, at practical flow rates, on the stability of cushion systems (e.g., tracked levitated vehicles) typically used for amphibious and overland operations. Reasons for considering the linear approach adequate for practical stability calculations are described. The duct effect is thought to be associated primarily with the inertance of the air in the duct. ML

**A78-52626 \* # The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft** R F Sturgeon (Lockheed Georgia Co., Marietta, Ga.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 16th, Huntsville, Ala, Jan 16-18, 1978, Paper 78-96* 9 p 11 refs. Contract No NAS1-13694

A study was conducted to evaluate the technical and economic feasibility of applying laminar flow control (LFC) to the wings and empennage of long-range subsonic transport aircraft for initial operation in 1985. For a design mission range of 5500 nm, advanced technology LFC and turbulent-flow aircraft were devel

oped for a 200 passenger payload, and compared on the basis of production costs, direct operating costs, and fuel efficiency. Parametric analyses were conducted to establish optimum geometry, advanced system concepts were evaluated, and configuration variations maximizing the effectiveness of LFC were developed. The final comparisons include consideration of maintenance costs and procedures, manufacturing costs and procedures, and operational considerations peculiar to LFC aircraft. (Author)

**A78-52628 \* #** An improved higher order panel method for linearized supersonic flow. F E Ehlers, M A Epton, F T Johnson, A E Magnus, and P E Rubbert (Boeing Commercial Airplane Co., Seattle, Wash.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 16th, Huntsville, Ala., Jan 16-18, 1978, Paper 78 15 7 p 8 refs* Contract No NAS2 7729

An improved higher order panel method for linearized supersonic flow is described. Each panel, defined by four points on the surface, is divided into eight subpanels in such a way that all subpanel and panel edges are contiguous. By prescribing a quadratic distribution of the doublet on each subpanel, the doublet strength is made strictly continuous on the paneled surface. A linear source distribution is also used. Numerical results are smoother and in better agreement with experiment than the previous method with less strict continuity. A brief discussion of superinclined panels used to eliminate interior interference in nacelles is included. (Author)

**A78-52629 #** Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers. A G Keel, Jr (U S Navy, Naval Surface Weapons Center, Silver Spring, Md.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 15th, Los Angeles, Calif., Jan 24-26, 1977, Paper 77 178 52 p 29 refs*

A systematic experimental investigation of the effects of uniformly distributed sand grain roughness on compressible turbulent boundary layers with heat transfer has recently been completed. An internally cooled five-degree conical model was used. Direct measurements of the local skin friction, heat transfer, and boundary-layer Pitot profile were made. Tests were conducted at free stream Mach numbers of 2.5 and 5.0 and at model wall-to-adiabatic wall temperature ratios of 0.3 and 1.0. Length Reynolds numbers from 1 to 25 million were considered, yielding measured momentum thickness Reynolds numbers from 2 to 20 thousand. Results were obtained with a smooth model wall, with a 23 mil surface roughness, and with a 43 mil roughness, providing roughness Reynolds numbers from 100 to 1000. (Author)

**A78 52630 \* #** Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows. A R Dusto, M A Epton, and F T Johnson (Boeing Co., Seattle, Wash.) *American Institute of Aeronautics and Astronautics, Aerospace Sciences Meeting, 16th, Huntsville, Ala., Jan 16-18, 1978, Paper 78-229 9 p 7 refs* Contract No NAS2 7729

A panel method for solving unsteady, subsonic wind body-tail flow problems is formulated and partially verified. The method is applicable to general aircraft configurations consisting of arbitrary arrangements of wings, bodies, tails, and nacelles. The wake may be located arbitrarily and the unsteady, transverse component of vorticity in the wake may be assigned any convection velocity. The wake in the unsteady flow problem, therefore, can be given the location and convection velocity of the wake produced by a steady flow which is the mean flow of the unsteady flow problem. The panel method has been used as a basis for expanding the unsteady kernel function in a power series to obtain panel influence coefficients which can be integrated in closed form. G R

**A78-52647** The response of a Hooke's-joint gyroscope to linear vibration. J S Burdess, C H J Fox, and L Maunder (Newcastle upon-Tyne, University, Newcastle-upon-Tyne, England) *Journal of Mechanical Engineering Science*, vol 20, Aug 1978, p 189-195

The response of an unbalanced Hooke's-joint gyroscope to linear vibration is considered. Six major resonant frequencies are identified. It is shown that, if the gyroscope is subjected to linear vibration either along the spin axis at the spin frequency, or perpendicular to the spin axis at twice the spin frequency, measurement errors may be generated as a result of mass unbalance. These errors are shown to depend not only upon the degree of unbalance but also upon the amplitude and phase characteristics of the vibration. Compensation by the application of suitable control torques is shown to be possible. (Author)

**A78-52648** A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow. V P Hill (Newcastle upon Tyne, University, Newcastle-upon Tyne, England) *Journal of Mechanical Engineering Science*, vol 20, Aug 1978, p 201-219 12 refs. Research supported by the Science Research Council

Starting from the basic Fredholm integral equations, a surface vorticity theory is developed for the prediction of annular airfoil performance in three dimensional flow. A mathematical model is proposed for the general case of the axisymmetric body in nonaxisymmetric flow, using a Fourier series to represent circumferential variations in bound vorticity strength. Using the pure incidence case as an example, it is indicated how an economical solution of the flow may be arrived at by use of a digital computer. The theoretical pressure distributions obtained are compared with the results of wind tunnel tests on an annular airfoil model. (Author)

**A78-52686** High temperature elastomers in gas turbine engine fuel sealing. K P Palmer and M W Aston (Lucas Aerospace, Ltd., Engine Management Div., Solihull, Warwicks, England) In *International Conference on Fluid Sealing, 8th, Durham, England, September 11-13, 1978, Proceedings Volume 1* Cranfield, Beds., England, British Hydromechanics Research Association Fluid Engineering, 1978, p F1-1 to F1 18 7 refs

The compression stress relaxation properties of fluorocarbon and fluorosilicone 'O' rings were correlated to their sealing performance and related to other properties which are commonly used for assessing this performance. Whilst the correlation with sealing performance was found to be very good, poor correlation was obtained with volume swell, compression set, low temperature brittle point and the Gehman T10 value in the cases examined. These properties could give a very misleading indication of the likely sealing performance of the elastomer. It is concluded that compression stress relaxation is the property which most closely conforms to the configuration in which most elastomeric seals are used and is the best property for indicating their likely sealing performance, particularly as it can be measured over the full range of environmental conditions that might be applied to the seal. (Author)

**A78-52763 #** Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations (Eksperimental'noe issledovanie perekhoda laminarnogo techeniya v turbulentnoe pod vozdeystviem akusticheskikh kolebaniy). A N Shel'piakov and G P Isupov (Izhevskii Mekhanicheskii Institut, Votkinsk, USSR) *Inzhenerno-Fizicheskii Zhurnal*, vol 35, Sept 1978, p 410-414. In Russian

Experimental results are presented regarding the effects of acoustic oscillations at frequencies up to 100 kHz on a free laminar jet. Experiments performed in a capillary setup show that the free laminar jet is turbulized by acoustic oscillations at certain frequencies. The effects of certain geometrical and aerodynamic parameters on the transition flow in the presence of acoustic oscillations are also discussed. B J

**A78-52926 #** Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine (Vliyanie protsesssa szhatiya v vozdukhobozornike na udel'nyye tagovyye kharakteristiki GPVRD). V V Zatoloka, V I Zvegintsev, and V V Shumskii (Akademiya Nauk SSSR, Institut Teoreticheskoi i Prikladnoi Mekhaniki, Novosibirsk, USSR) *Akademiya Nauk SSSR,*

*Sibirskoe Otdelenie, Izvestiia, Seria Tekhnicheskikh Nauk*, June 1978, p 3 12 7 refs In Russian

The dependence of the specific thrust of a hypersonic ramjet engine with supersonic combustion on the compression of the air-stream in an air scoop is analyzed for a Mach number range of 8 to 15, assuming hydrogen as the fuel. It is shown that the influence of the compression process is defined by two parameters: the compression ratio (which indicates the increase in pressure which the air-stream must overcome) and the relative throat area of the air intake (which is one of the basic requirements placed on the configuration of the surfaces which form the air intake). The thrust characteristics are plotted against a wide range of values of compression parameter. V P

**A78-52932 # Density of motions in the flutter of infinite plates (Plotnost' dvizhenii pri flattere beskonечnykh plastin)** V M Kornev (Akademii Nauk SSSR, Institut Gidrodinamiki, Novosibirsk, USSR) *Akademiia Nauk SSSR, Sibirskoe Otdelenie, Izvestiia, Seria Tekhnicheskikh Nauk*, June 1978, p 101-105 8 refs In Russian

In the present paper, the behavior of tensioned plates resting on an elastic base in a gas flow is analyzed for given external inputs. It is assumed that the arbitrarily clamped plate is infinite in the direction of the flow. Proper motions, in the form of traveling waves, are analyzed along the longitudinal coordinate. Along the transverse coordinate, the solution consists of the principal part and the dynamic edge effect. The boundary conditions are shown to have a weak effect on the principal part of the solution. The frequencies and lengths of the traveling waves and the critical flow parameters are calculated. An analysis of the density of proper motions of the plate in the gas flow reveals the existence of a point of condensation of proper motions about the minimal critical flow parameter. V P

**A78-52951 Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings and Supplement** Washington, D C., Air Traffic Control Association, 1978 Proceedings, 328 p., Supplement, 75 p. \$15

Papers are presented on the Navstar Global Positioning System and the Sanders AN/FYK 14 project. Consideration is given to air traffic surveillance systems, computer-driven displays, the Central Flow Control System, and a moving target detector radar system. The development of a wake vortex advisory system is discussed along with a system theory for metering and spacing. Financial considerations regarding airline operations are outlined and an overview of potential air traffic control developments is presented. The Iranian National Airspace System is described and plans for the automation of air traffic control in the Federal Republic of Germany are proposed. Prospects for the international standardization of air traffic control services are reviewed and advancements in air traffic control displays and computer controller interaction are noted. S C S

**A78-52952 # The Navstar Global Positioning System /GPS/** E G DeAvies (USAF, Office of the Secretary of Defense, Washington, D C.) In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings* Washington, D C., Air Traffic Control Association, 1978, p 16

The paper discusses the Navstar Global Positioning System which is being developed to support weapon delivery systems and other military missions. The Trimation I satellite and the Navigation Technology Satellite 2 are described with reference to their associated hardware, assembly, and instrumentation. The application of Navstar for precision approaches is considered. S C S

**A78-52954 # Sanders AN/FYK-14 - Bridging the gap between mission control and air traffic control** W C Goodrich (USAF, Space and Missile Test Center, Vandenberg AFB, Calif.), A Hastbacka, M Janosky, and J Cawley (Sanders Associates, Inc., Nashua, N H.) In *Air Traffic Control Association, Annual Meeting,*

22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 19 32

The AN/FYK-14 area surveillance and control system is discussed with reference to the SAMTEC (U S Air Force Space and Missile Test Center) problem. The major AN/FYK-14 subsystems are reviewed including the central processor, tracking processor, display processors, and display consoles. SAMTEC radar sites are identified in terms of location, primary and secondary radar, and common digitizer. A typical AN/FYK-14 data display is presented and the quick action functions and alphanumeric keyboard functions are described. S C S

**A78-52955 # The helicopter operators' viewpoint** G A Gilbert In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings* Washington, D C., Air Traffic Control Association, 1978, p 33-41

Helicopter operational considerations are reviewed noting the helicopter operational development program and design criteria for all weather heliports. Helicopter operations are categorized on the basis of weather considerations, air traffic control, off-shore operations, and remote area operations. The air traffic control interface is reviewed and on-board navigation equipment is described. Terminal instrument procedures are outlined and the basic aspects of a helicopter operational development are listed. S C S

**A78-52956 # Safety and communication requirements in air traffic control today** E C Krupinski (Air Line Pilots Association, Washington, D C.) In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings* Washington, D C., Air Traffic Control Association, 1978, p 46-50

Air traffic control is discussed from the point of view of safety and communications requirements proposed by the Air Line Pilots Association. Recent near midair collisions, system errors, and pilot deviations are noted. Recommendations are made with regard to the acknowledgement of clearances and/or instructions. The pilot's role in air traffic control is reviewed and the development of a total situation cockpit display is considered. S C S

**A78-52957 # Airport traffic surveillance** A D McComas (Bendix Corp., Communications Div., Baltimore, Md.) In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings* Washington, D C., Air Traffic Control Association, 1978, p 54 65

A technique is presented for the continuous beacon surveillance throughout the terminal area from enroute transition to the ramp. Consideration is given to the Geoscan interrogation process, a trilateration brassboard station, and a comparative analysis of position location systems. S C S

**A78-52958 # The ARTS III Umbrella - Concepts and applications** L G DuBois and J A Gersch (Sperry Rand Corp., Defense Systems Div., St Paul, Minn.) In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings* Washington, D C., Air Traffic Control Association, 1978, p 75 87

The paper discusses a terminal air traffic control automation concept for collecting and disseminating aircraft positional data within radar coverage regions containing two or more air traffic control facilities. The concept has been implemented in Tampa/Sarasota and New York TRACON. The Tampa/Sarasota system is outlined with reference to the radar remoting system, the remote tower displays, the operational impact, and the implementation procedure. The New York TRACON system is considered in terms of software and hardware specifications, the remote radar sites, tower sites, the TRACON site, controller impact, and implementation. S C S

**A78-52959 #** A more fully Automated En Route ATC system A W Bowers and R A Rucker (Mitre Corp., Metrek Div., McLean, Va.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 88 103 U.S. Department of Transportation Contract No FA70WA-2448

Attention is given to the Automated En Route ATC (AERA) program being developed for the automation of en route air traffic control clearance and advisory services. The design goals are identified as the accommodation of user flight preferences, reduction in system errors, improvement of system performance monitoring and supervision, increased controller productivity, and increased pilot participation in clearance planning. The experimental approach consists of refining the closed-loop algorithm and developing controller as manager concepts. The basic functions of the AERA system are reviewed, including the initial processing point, the inbound handoff point, progress monitoring, clearance delivery, final metering and spacing control point, and outbound handoff point.

S C S

**A78-52960 #** The Central Flow Control /CFC/ system C A Frum In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 108-116

The paper discusses the main features of the Central Flow Control (CFC) system. Attention is given to the communications network, the software system, and the hardware specifications. The information-flow characteristics of the system are noted with reference to the input/output devices, arrival and delay prediction, quota flow prediction, and fuel advisory prediction.

S C S

**A78-52961 #** Management of software development for advance ATC systems K R Dilks In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 117 121

The development of software for advance air traffic control systems is outlined noting the present-day management procedures and their associated shortcomings. A management methodology is proposed with reference to the relationships between designer and operator and the division of documents into subdocuments.

S C S

**A78-52963 #** Moving target detector /MTD/ radar system R S Bassford (FAA, National Aviation Facilities Experimental Center, Atlantic City, N.J.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 129 143

The paper outlines the development of the moving target detector radar system which operates as a multilevel radar digitizer and clutter eliminator. The system utilizes an integrated radar/processor concept and has coherent processing. Performance is discussed with reference to sensitivity flight testing, tangential target detection over clutter, subclutter visibility, subweather visibility, and target resolution.

S C S

**A78-52964 #** Development of a breadboard system for recording ATC displays E A Mack (FAA, National Aviation Facilities Experimental Center, Atlantic City, N.J.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 144 154

Techniques for the recording, storage, and display of air traffic control information are considered. The radar display subsystem is described noting the display generator, display control vector generators (DCVGs), and the radar keyboard multiplexer. The development of a plan view display (PVD) is outlined with reference to a television display system, the digital input to the PVD, and the DCVG input. Recording procedures are reported including the

recorded interface buffer and the playback/refresh alternating memory.

S C S

**A78-52965 #** Development and evaluation of a wake vortex advisory system H Dautolo (FAA, National Aviation Facilities Experimental Center, Atlantic City, N.J.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 155 170

A prototype wake vortex advisory system, presently being tested at Chicago O'Hare International Airport, is examined. The system utilizes a predictive algorithm described by an elliptical boundary drawn about the cross wind and head or tail wind. System testing procedures are outlined noting simulated and on site evaluations of procedural implications, capacity gains, delay decreases, reliability, and maintenance. Preliminary results are presented.

S C S

**A78-52966 #** Aviation futures to the year 2000 L E Jackson (FAA, Office of Aviation Policy, Washington, D.C.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 171-181

Aviation in the year 2000 is discussed in terms of changes in the population, the gross national product, and resource availability. Future air carrier trends are considered noting activity demand, the development of new aircraft, and trip-length statistics. Trends in fuel availability are outlined with reference to the development of solar energy, coal gasification, geothermal energy, and the production of oil from shale. Attention is given to air cargo and aviation safety regulations as well as air traffic control systems.

S C S

**A78-52967 \* #** Aircraft developments that hold promise for increased compatibility with an advanced ATC system K E Hodge (NASA, Washington, D.C.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 182 208

In terms of an advanced air traffic control environment, consideration is given to a wake vortex advisory system and V/STOL aircraft. The terminal configured vehicle program is described. Procedures for all weather operations are reviewed and the search and rescue satellite system is described. Predictions are made concerning an advanced national aviation system, digital communications, integrated control technology, and cockpit avionics. Human factors in both general and civil aviation are discussed.

S C S

**A78 52968 #** A system concept of metering and spacing B G Sakkappa (Mitre Corp., Metrek Div., McLean, Va.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 209 220

The paper discusses FAA research concerning the design of an en route metering function for operation with a digital interface with the terminal metering and spacing function. Attention is given to landing-sequence calculation, delay absorption, speed control, and holding and vectoring. Consideration is given to advisory generation with reference to time and metering fix, metering display, descent advisory, speed advisory, and hold advisory. Display systems are described including controller displays and metering position displays.

S C S

**A78-52969 #** The Navy's approach /Air traffic control/ H M Nordenberg (U.S. Naval Electronic Systems Command, Surveillance and Navigation Systems Div., Washington, D.C.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D.C., Air Traffic Control Association, 1978, p 242-251

An informal discussion is presented of the possible contribution of the U.S. Navy to future air traffic control systems. The Navy approach is discussed in relation to (1) the forces afloat, (2) the naval air stations, and (3) the fleet area control and surveillance facilities. Photographs of some Navy ATC facilities are presented.

along with a chart of warning and restricted areas for the United States with major air routes B J

**A78-52970 # Overview of potential ATC developments** D J Sheftel (FAA Systems Research and Development Service, Atlantic City, NJ) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 252-257

The paper presents a broad overview of developments in air traffic control. Projects related to improved aircraft safety are noted including the beacon collision avoidance system, the minimum safe altitude warning concept, and studies of wind shear. Improvements in controller productivity have been suggested in terms of the electronic tabular display subsystem, the discrete address beacon system, and the automation of flight service stations. Increases in capacity are discussed with reference to the wake vortex avoidance system, the microwave landing system, and airport surface traffic control. Energy conservation is considered and developments in the area of fuel conservation are proposed including flow control. Future air traffic control procedures are identified such as automated en route traffic control, automated terminal service, advanced computer systems, and the incorporation of satellite technology. S C S

**A78-52971 # Modernization program for the Iranian National Airspace System** G Izadpanah (Civil Aviation Organization, Teheran, Iran) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 264-271

A system program developed by the FAA for upgrading the air traffic control system for Iran is considered. The present Iranian National Airspace System is outlined noting air traffic control operations, communications, navigation and landing systems, air-space surveillance, and civil military air traffic control interfaces and coordination. The FAA improvement plan is outlined noting the specific steps of the first and second 6-year periods. Program management and procurement are reviewed. S C S

**A78-52972 # Concept and future plans for automation of air traffic control in the Federal Republic of Germany** K Platz (Bundesanstalt für Flugsicherung, Frankfurt am Main, West Germany) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 272-285

**A78-52973 # Preparing today, to meet the ATC challenges of tomorrow** Y T Mao (Civil Aeronautics Administration, Taipei International Airport, Nationalist China) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 286-291

The paper discusses some aspects of the future development of civil aircraft operations in Taiwan. The developments relate to short-term and long-term airport planning, air traffic control systems and facilities, automation, personnel and training, and international standardization. P T H

**A78-52974 # System measurement improves computer responses to the controller** W D Kandler (Logicon, Inc., Redondo Beach, Calif.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 303-315

The paper describes work on a program aimed at determining the cause of delays in message processing by computer systems used in air traffic control. The tested system was the En Route system, consisting of an input terminal, the computer, and one or more

output devices such as a plan view display (PVD), computer readout device (CRD), and flight strip printer (FSP). The unique feature in the approach to measuring the En Route system's performance was the use of the Tesdata MS 68 hardware monitor. Without affecting system performance, it was possible to measure the master CE storage address register, IOCE channel activities, primary disk seek address, keypushes, and other objects. Response times under various loading levels were measured. The data show what hardware utilization levels can be tolerated in order to still achieve proper system performance. P T H

**A78-52975 # Advancements in ATC information displays and controller-computer interaction** R A Amato and W A Manison (Mitre Corp., Metrek Div., McLean, Va.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings Washington, D C., Air Traffic Control Association, 1978, p 316-323

Air traffic control is discussed noting the current procedures for handling flight data and controller computer interaction. The development of the electronic tabular display subsystem is described in terms of reductions in the manual handling of flight information, simplifications in message entry, failure mode operations, and reductions in controller workload. The terminal information processing subsystem is reviewed. S C S

**A78-52976 # The direct access radar channel - A distributed minicomputer system** K R Schwerdt (Raytheon Co., ATC Systems Directorate, Wayland, Mass.) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Supplement Washington, D C., Air Traffic Control Association, 1978, p 11-22

The paper describes the direct access radar channel (DARC) system with attention to reliability, maintenance, and cost-effectiveness. The selection of the minicomputer network architecture is outlined noting data base and flow, system diagnostics, and fault analysis. The primary architectural features are described including the radar multiplexer, display processors, system control unit, and control processors. DARC performance is evaluated in terms of input and output data loads and throughput times. Typical display data capability is described and minicomputer characteristics are identified. S C S

**A78-52977 # Area navigation - Fast-time/real-time simulations in a high-altitude center environment** F M Willett, Jr (FAA, National Aviation Facilities Experimental Center, Atlantic City, NJ) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Supplement Washington, D C., Air Traffic Control Association, 1978, p 23-40

The paper discusses fast-time and real time simulation tests in a high altitude en route air route traffic control center environment. Results for jet VOR (very high frequency omnidirectional radio range) route structures are noted. The simulation procedures are outlined with reference to one- and five sector test conditions and the computer program designed to increase the number of test samples. Values are presented for the correlation of fast- and real time measures. S C S

**A78-52978 # ATC in the year 2000** J M Del Balzo (FAA, National Aviation Facilities Experimental Center, Atlantic City, NJ) In Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Supplement Washington, D C., Air Traffic Control Association, 1978, p 41-63

Trends for air traffic control in the year 2000 are reviewed. Consideration is given to (1) data entry and display (color display, voice data entry, computer data processing), (2) cockpit display of traffic information, (3) terminal-area guidance for en route air traffic control and precision approach and landing, (4) mass weather dissemination methods, (5) alternate energy sources (solar voltaics, wind, fuel cells), (6) data-link applications, (7) satellite communications and navigation, and (8) automated air traffic control techniques. S C S

**A78-52979 #** What's new in controller displays - Electronic flight strips and a color plan view display W D Hett (Raytheon Co., ATC Systems Directorate, Wayland, Mass.) In *Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Supplement* Washington, D C., Air Traffic Control Association, 1978, p 64-73

The paper discusses electronic flight strips noting design goals such as capacity, data entry, packaging, and applications The demonstration system is described, the flight-strip format is shown, and a sample display photograph is presented A four-color plan view display is discussed noting possible applications including the differentiation of data classes (maps, weather, controlled and uncontrolled flights) and warning systems (conflict alert, radio failure, severe weather) S C S

**A78-53050** Concorde emissions at Dulles International Airport - Results of measurements H Segal (FAA, Washington, D C.) *Air Pollution Control Association, Journal*, vol 28, Oct 1978, p 1039-1042 7 refs

Data on dispersion of Concorde emissions are presented, indicating much lower initial concentrations of emissions from Concorde and other aircraft than had previously been estimated The cause of these reduced concentrations appears to be related to the turbulence of the hot jet exhaust gases and the rise of the emission plume, which up to now had not been realistically determined in mathematical models Measurement data on the dispersion of Concorde emissions are used to develop a dispersion model in order to determine pollution concentrations over the entire ground path of the aircraft It is shown that a commercial aircraft is an insignificant source of CO pollution at Dulles International Airport S D

**A78-53063 \*** Reaction diffusion in the NiCrAl and CoCrAl systems S R Levine (NASA, Lewis Research Center, Coatings Section, Cleveland, Ohio) *Metallurgical Transactions A - Physical Metallurgy and Materials Science*, vol 9A, Sept 1978, p 1237-1250 18 refs

The paper assesses the effect of overlay coating and substrate composition on the kinetics of coating depletion by interdiffusion This is accomplished by examining the constitution, kinetics and activation energies for a series of diffusion couples primarily of the NiCrAl/Ni-10Cr or CoCrAl/Ni-10Cr type annealed at temperatures in the range 1000-1205 C for times up to 500 hr A general procedure is developed for analyzing diffusion in multicomponent multiphase systems It is shown that by introducing the concept of beta-source strength, which can be determined from appropriate phase diagrams, the Wagner solution for consumption of a second phase in a semiinfinite couple is successfully applied to the analysis of MCrAl couples Thus, correlation of beta-recession rate constants with couple composition, total and diffusional activation energies, and interdiffusion coefficients are determined S D

**A78-53087 #** Oscillating airfoils I - Wedges of arbitrary thickness in supersonic and hypersonic flow R M Barron (Windsor, University, Windsor, Ontario, Canada) *AIAA Journal*, vol 16, Oct 1978, p 1076-1083 11 refs

Equations are obtained, by a perturbation method, for straight and curved airfoils with attached shocks in supersonic and hypersonic flows and undergoing small harmonic oscillations The mode shape of the oscillation is arbitrary and hence may be used to describe rigid body motions as well as elastic deformations of the body surface The wedge problem is solved for small frequency and an exact expression for the pressure distribution is obtained as a function of the mode of oscillation The analysis presented can be easily modified to treat the case of arbitrary two-dimensional body shapes by developing an unsteady Newtonian flow theory These results are reported in a subsequent paper (Author)

**A78-53095 #** Inviscid flow through wide-angle diffuser with actuator disk. A L Loeffler, Jr (Grumman Aerospace Corp., Bethpage, NY) and D Vanderbilt *AIAA Journal*, vol 16, Oct 1978, p 1111, 1112 8 refs

A theoretical analysis is conducted of the inviscid flow past a diffuser turbine combination, using the method of singularities The

analysis makes use of a modification and extension of a method employed by Kuchemann and Weber (1953) The new approach, which does not constrain the vortices to lie on a cylinder, is expected to be more accurate than calculations performed by Kuchemann and Weber, Bagley et al (1958), Young (1971), and Mann (1974) An appropriate distribution of ring vortices has been combined with a uniform flow along the axis to yield the desired flow The boundary condition of zero normal velocity at the diffuser surface and at the wake bounding surface is used to determine the distribution of vorticity among the discrete vortices G R

**A78-53119 #** Optimal control of aircraft powerplant (Optimal'noe upravlenie silovoi ustanovkoi samoleta) O K Iugov, O D Selivanov, and L N Druzhinin Moscow, Izdatel'stvo Mashino stroenie, 1978 204 p 23 refs In Russian

Basic principles and methods of optimizing and coordinating the operation of the elements of the powerplant in steady operation under design and off design flight conditions are set forth The effects of different control laws for the air intake, engine, and nozzle on coordination of powerplant elements under different flight conditions are analyzed Optimization of powerplant control laws for optimal flight range is carried out The effect of random control errors on operating efficiency of the powerplant is elucidated, and statistical methods for taking these errors into account in computer studies of powerplant control systems are developed P T H

**A78-53174** Helicopter manufacturing technology III - Future manufacturing technologies R L Spangenberg (U S Army, Tank Automotive Research and Development Command, Warren, Mich) *ManTech Journal*, vol 2, no 3, 1977, p 40-48

The development of new manufacturing technologies by the Army Aviation Research and Development Command (AVRADCOM) is discussed with reference to several aspects of helicopter manufacture Cost drivers and potential actions for reducing costs are surveyed Problem areas and approaches to solutions are considered for the airframe system, rotor system, drive system, and turbine engine, technologies (e.g., joining, composites) requiring more research are indicated M L

**A78-53175** Maintenance of gas turbine accessory equipment P J Bingham, P H Huhtanen, and H G Starnes (General Electric Co., Fairfield, Conn) *Power Engineering*, vol 82, Sept 1978, p 74-77

The maintenance of several components associated with gas turbines is examined It is suggested that all minor items of 'running' maintenance should be completed during scheduled operational shutdown periods, while large items and systems should be maintained during a preplanned unit 'upkeep' outage The lubricating, cooling water, CO<sub>2</sub>, atomizing air, and starting systems as well as the load and accessory gear, batteries, and charger are discussed, and the preplanning of a maintenance program is considered M L

**A78-53238** Key beam weapons tests slated C A Robinson, Jr *Aviation Week and Space Technology*, vol 109, Oct 9, 1978, p 42, 43, 45 (5 ff)

The paper discusses charged particle beam weapons proposed for deployment onboard US Navy vessels for point defense against cruise missiles and describes propagation tests scheduled for late 1981 or early 1982 which will study the feasibility of the concept The tests will use a new 50-MeV advanced-technology accelerator at the Lawrence Livermore Laboratory in California and will follow closely the current testing which uses a 5 MeV accelerator The effective ranges for various operating modes could be a few hundred meters for a single pulse, 4.5 km for a wide interval pulse, and over 10 km for a continuous pulse propagation mode The beam could detonate explosives and disrupt electronics Fire control and miss distance measurement are considered, and the advantages of a charged beam system in comparison with alternate defense systems are examined M L



**A78-53239** New production methods gain E H Kolcum  
*Aviation Week and Space Technology*, vol 109, Oct 16, 1978, p 16-21

It is pointed out that the U S aerospace industry is moving into a new era of manufacturing innovation to meet the challenges of higher performance standards and soaring prices of alloys and other raw materials. The payoff potential for the industry is substantial in virtually all manufacturing disciplines. This potential is highest in engine manufacturing. New processes used are related to the use of powder metallurgy in a new isostatic forming process, a superalloy manufacturing process that will enable turbine blades to operate at 100 F, higher temperatures than the strongest cast turbine blade made today, advances in powder metallurgy and near net shape technology, and a new nickel-base powder alloy. Attention is given to forgings cost, tensile strength, gatorizing units, and powder metallurgy disks. G R

**A78-53249** Double row radial hydraulic piston pumps for aircraft hydraulic systems K P Palmer (Lucas Aerospace, Ltd, Engine Management Div., Solihull, Warwicks., England) In International Fluid Power Symposium, 5th, University of Durham, Durham, England, September 13-15, 1978, Proceedings Volume 1 Symposium sponsored by the British Hydromechanics Research Association Fluid Engineering Cranfield, Beds., England, British Hydromechanics Research Association Fluid Engineering, 1978, p B1-1 to B1-12

This paper describes the development of high speed radial hydraulic piston pumps for aircraft hydraulic systems. Pumps of this type have been designed to operate at appreciably higher speeds for their size than conventional hydraulic pumps. The scaling of pump size to speed is discussed and the operating speeds of different types of pump are compared. The reductions in total aircraft system mass obtainable by running pumps at high speed are outlined since these can be much greater than the direct saving in pump mass. It is concluded that the double row radial pump which is in a relatively early stage of development compared with axial piston pumps, will operate reliably at speeds well in excess of the maximum achievable on equivalent sizes of conventional pump. (Author)

**A78-53253** Methodology questions involved in systems engineering for devising an optimum radio-engineering system for trajectory measurements B A Striukov (*Radiotekhnika*, vol 32, Dec 1977, p 11-16) *Telecommunications and Radio Engineering, Part 2 - Radio Engineering*, vol 32, Dec 1977, p 37-41 10 refs Translation

The paper examines the optimal design of a radio-electronic system for measuring the trajectory of flight vehicles, the system involves the reception of radio signals from the flight vehicle by a ground-based antenna array and transmission of these data to a computer system for processing. The overall optimization problem is examined in the framework of the methodology of systems technology and involves the sequential ordering of individual optimization problems with a view to overall optimal design. Various optimality criteria are analyzed. B J

**A78-53257** The optimum shape of the aperture of an antenna array Iu F Uchaev (*Radiotekhnika*, vol 32, Dec 1977, p 50-54) *Telecommunications and Radio Engineering, Part 2 - Radio Engineering*, vol 32, Dec 1977, p 68-71 Translation

Cost-quality criteria are used to develop an optimization procedure for the aperture shape of a radionavigation-system antenna-array. The optimal shape for such an array is determined to be a surface of revolution with a curvilinear generatrix, determined in accordance with the obtained value of  $A \max(\beta)$  - the required relationship between the effective surface of the array and the angle of elevation. Since this optimal shape is difficult to realize, it is suggested that quasi-optimal shapes (an aperture composed of simpler apertures in the form of conical or cylindrical surfaces with a common axis of symmetry and placed one on top of the other) be used instead. B J

**A78-53309 #** Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces (Nekotorye voprosy teploobmena v pogranichnom sloe na osesimmetrichnykh nepreryvno dvizhushchikhsia poverkhnostiakh) A M Antonova, M M Belova, V R Borovskii, and N D Omeľchuk In Nonlinear differential equations in applied problems Kiev, Izdanie Instituta Matematiki AN USSR, 1977, p 132-137 In Russian

**A78-53324 #** Investigation of the weldability of heat-resistant titanium alloys (Izuchenie svarivaemosti zharoprochnykh titanovykh spлавov) V P Kuraeva and Zh D Tkhorovskaia (Vsesoiuznyi Nauchno Issledovatel'skii Institut Aviatsionnykh Materialov, Moscow, USSR) In All-Soviet Conference on Electron-Beam Welding, 5th, Kiev, Ukrainian SSR, December 17-19, 1975, Proceedings (Vsesoiuznaia Konferentsiia po Elektronno Luchevoi Svarke, 5th, Kiev, Ukrainian SSR, December 17-19, 1975, Materialy) Kiev, Izdatel'stvo Naukova Dumka, 1977, p 61-66 In Russian

Results are presented for an experimental study of the electron-beam weldability of VT25 and VT18Y titanium alloys containing limited amounts of aluminum and silicon. The quality of the weld seam is evaluated by X-ray metallography and measurement of the mechanical properties of welded joints. Optimal heat-treatment conditions are determined which provide the best combination of properties, achievable by standard high-temperature annealing of each alloy. S D

**A78-53371 #** Influence of compositions of NG 22-46 additive with phosphorus containing compounds on the antioxidative stability of T-7 fuel (Vliianie kompozitsii prisdadki NG 22-46 s fosforosoderzhashchimi soedineniiami na antiokislitel'nuu stabil'nost' topliva T 7) O P Lykov, I F Krylov, T P Vishniakova, N V Tumar, and O V Sergeeva (Moskovskii Institut Narodnogo Khoziaistva, Moscow, USSR) *Khimiia i Tekhnologia Topliv i Masel*, no 9, 1978, p 13-16 9 refs In Russian

**A78-53426 #** Antenna fairings for flight vehicles /2nd revised and enlarged edition/ (Obtekateli antenn letatel'nykh apparatov /2nd revised and enlarged edition/) B A Prigoda and V S Kokun'ko Moscow, Izdatel'stvo Mashinostroenie, 1978 120 p 41 refs In Russian

Principles of analysis and design of aircraft and spacecraft radomes are set forth. The study covers the transmission of electromagnetic energy through various dielectric materials and methods of calculating the effect of the radome on the antenna radiation pattern. Methods of compensating for the distortions of the radiation pattern caused by the radome are studied. The basic design notions for special purpose radomes such as those operating under space conditions, radomes for antennas with circularly polarized field, and radomes for IR and laser systems, are mentioned. Data on materials and testing of radomes are given. P T H

**A78-53428 #** VTOL aircraft dynamics (Dinamika samoleta s vertikal'nym vzletom i posadkoi) V T Taranenko Moscow, Izdatel'stvo Mashinostroenie, 1978 248 p 64 refs In Russian

The book deals with the aerodynamics and flight mechanics of an aircraft during vertical takeoff and vertical landing and with the reliability, stability, and safety aspects of these modes. A method of calculating the takeoff and landing characteristics of a VTOL aircraft is outlined, along with a computer-aided engineering method for solving optimal control problems for given boundary conditions and constrained phase coordinates and control functions. V P

**A78-53431 #** Investigation of the heat regime of gas turbine engine bearings (Issledovanie teplovogo rezhima podshipnikov GTD) V M Demidovich Moscow, Izdatel'stvo Mashinostroenie, 1978 172 p 87 refs In Russian

A new method is described for evaluating the heat regime of rolling-contact bearings used in gas turbine engines, with special emphasis on the experimental theoretical substantiation of the

established mathematical model of bearing calculations. The derivation of a universal criterion equation which constitutes the basis of the proposed method is outlined, along with current test rigs for examining gas turbine engine bearings. A generalized engineering methodology is presented for calculating the heat regime of ball and roller bearings of varying sizes in the presence and absence of external heating. Illustrative examples highlighting the effectiveness of the described methodology are provided. The appendix contains necessary reference data for evaluation of the heat regime of bearings. S D

**A78-53432 #** Fabrication and assembly of cable strands for aircraft engines (Izgotovlenie i montazh elektrozhtutov aviadvigateli) N I Tsibirzov. Moscow, Izdatel'stvo Mashinostroenie, 1978. 132 p. 7 refs. In Russian.

The work reviews methods of production of cable strands for electric drives in aircraft engines. Recommendations are presented on the development of fabrication procedures for the cable strands and on the mechanization of the basic operations of fabrication, assembly, quality control, and performance testing. B J

**A78-53434 #** Spacecraft flight control systems (Sistemy upravleniya poletom kosmicheskikh apparatov) G G Bebenin, B S Skrebushvskii, and G A Sokolov. Moscow, Izdatel'stvo Mashinostroenie, 1978. 272 p. 55 refs. In Russian.

The general problem of estimating the parameters of motion of a spacecraft and controlling the flight of a vehicle in space is formulated, and basic methods of solution are set forth. Problems investigated are linearization of nonlinear models of spacecraft motion, deterministic and stochastic models of motion, numerical prediction methods, orbit element prediction with nonsphericity of the earth taken into account, determining the conditions of mutual visibility of planetary satellites and conditions of visibility of an artificial satellite from an observation point, rendezvous of spacecraft along a long-range navigation segment, attitude control and stabilization systems, control of systems of satellites, statistical modeling of spacecraft control processes, and principles of distributing the control functions between ground and onboard control systems. P T H

**A78-53504 #** Nonlinear vibrations of an asymmetric flight vehicle (Nelineinnye kolebaniya asimmetrichnogo letatel'nogo aparata) A P Moroz and B N Penia. *Kosmicheskie Issledovaniia na Ukraine*, no 11, 1977, p 37-5. 5 refs. In Russian.

The problem of the vibrations of a rotating asymmetric flight vehicle with nonlinear dependence of aerodynamic characteristics on angle of attack and slip is considered. It is also assumed that the parameters of motion of the center of mass are variable. Differential equations are obtained for the first approximation for the amplitude and phase of the spatial angle of attack of an asymmetric flight vehicle. The effect of nonlinearity of the vehicle aerodynamic characteristics on the amplitude of the spatial angle of attack in the region of parametric resonance is studied. P T H

**A78-53506 #** An algorithm for complex study of the aerodynamic characteristics of spacecraft (Ob odnom algoritme dlia kompleksnogo issledovaniia aerodinamicheskikh kharakteristik kosmicheskikh apparatov) V P Bass. *Kosmicheskie Issledovaniia na Ukraine*, no 11, 1977, p 11-17. 13 refs. In Russian.

A variant of the Monte Carlo method is developed for application to the calculation of the aerodynamic characteristics of spacecraft having complicated shapes traveling through a rarefied gas at finite Mach number. Methods of reducing the statistical computational errors are considered. P T H

**A78-53508 #** Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone (O vzaimnom vliianii termokhimicheskogo razrusheniia poverkhnosti i viazkogo vzaimodeistviia pri giperzvukovom obtekanii ostrogo konusa) A V Limanski and V I Timoshenko. *Kosmicheskie Issledovaniia na Ukraine*, no 11, 1977, p 23-26. 15 refs. In Russian.

Numerical results on the hypersonic gas flow in viscous interaction regime past sharp circular cones with thermally destructible teflon surface are presented. Characteristics of the mutual influence between the thermochemical destruction of the surface and the viscous interaction are revealed. P T H

**A78-53511 #** Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines (Teoreticheskoe issledovanie teplovogo rezhima neokhlazhdaemykh kamer sgoraniia dvigateli letatel'nykh apparatov) V V Orlov, N D Kovalenko, and V G Pereverzev. *Kosmicheskie Issledovaniia na Ukraine*, no 11, 1977, p 34-37. In Russian.

A computational procedure is set forth for calculating the thermal regime of noncooled combustion chambers in the shape of shells of revolution with significantly varying diameter and thickness. The analysis takes into account nonuniformity of the heat removal from the combustion products, longitudinal and transverse heat flow in the structure, and temperature dependence of the thermophysical characteristics of the material. The substantial influence of longitudinal heat flow on the thermal regime is revealed. P T H

**A78-53556 #** Calculation of viscous radiant gas flows (Raschet techenii viazkogo izluchaiushchego gaza) Iu P Golovachev and F D Popov. In *Numerical methods in plasma physics*. Moscow, Izdatel'stvo Nauka, 1977, p 249-252.

In Russian.

The paper deals with flows and heat transfer in shock layers that form on the surface of blunted bodies entering planetary atmospheres. Hypersonic flows past spherically blunted cones are analyzed. A solution is obtained by a modification of the Lax-Wendroff method, using an implicit finite difference scheme of second-order accuracy with respect to the space variables. V P

**A78-53614 #** Spacelab hardware update. K Berge (ERNO Raumfahrttechnik GmbH, Bremen, West Germany). *American Astronautical Society and Deutsche Gesellschaft fur Luft- und Raumfahrt, Goddard Memorial Symposium, 16th, Washington, D C, Mar 8-10, 1978, AAS Paper 78-005*. 45 p.

The development of Spacelab, Europe's first manned space venture, is reviewed. Systems and hardware are examined from the viewpoint of conversion from paper designs and component development to full-system hardware integration and test. Topics include design reviews, interfaces with the orbiter, electrical system integration, ground support equipment, Spacelab engineering model, Spacelab system verification, crew system reviews, and overall technical status. Topics related to the hardware include the module, pallet structure, igloo structure, command and data management, electrical power distribution subsystem, computer software, system activation and monitoring, electrical and mechanical ground support equipment, environment control/life support system, crew habitability hardware, and transportation of equipment. M L

**A78-53664** Ballooning stability boundaries for the large-aspect-ratio tokamak. D Lortz and J Nuhrenberg (Max Planck-Institut fur Plasmaphysik GmbH, Garching, West Germany). *Physics Letters*, vol 68A, Sept 18, 1978, p 49, 50. 5 refs. EURATOM-sponsored research.

The ballooning mode criterion is reevaluated for a model problem representing a large-aspect-ratio tokamak with circular flux surfaces. It is found that an instability exists if both the shear and pressure gradient tend to zero. (Author)

**A78-53674 \*** Fire detector response in aircraft applications. S J Wiersma and R G McKee (SRI International, Menlo Park, Calif). *Aviation Engineering and Maintenance*, vol 2, Aug-Sept 1978, p 12, 13, 18. Contract No NAS2-8583.

Photoelectric, ionization, and gas sensors were used to detect the signatures from the radiant heat or flame of various aircraft materials. It was found that both ionization and photoelectric detectors are about equally capable of detecting products of pyrolysis and combustion of synthetic polymers, especially those

containing fire retardant additives Ionization detectors alone appeared to be sensitive to combustion products of simple cellulosic materials A gas sensor detector appeared to be insensitive to pyrolysis or combustion products of many of the materials P T H

**A78-53675 AIDS - Aircraft-integrated-data-system I** Hughes (United Technologies Corp , Hamilton Standard Div , Windsor Locks, Conn ) *Aviation Engineering and Maintenance*, vol 2, Aug -Sept 1978, p 24, 26, 27

The aircraft integrated data system (AIDS) provides onboard monitoring of engines, aircraft subsystems, and aircraft performance and makes these data readily available for subsequent analysis and diagnostics The system is comprised of data acquisition units for a magnetic tape recorder with quick-access tape cassette, and a data management unit for preprocessing the data or performing onboard diagnostics and analysis The cost of the AIDS is offset by the savings resulting from better maintenance planning, reduced engine removals, and lower test cell and repair shop costs For new aircraft, it is likely the Digital Information Transfer System ARINC 429 will be used A single digital bus carries all the information from a subsystem P T H

**A78-53716 The multirole cruise missile B Walsh** *Military Electronics/Countermeasures*, vol 4, Sept 1978, p 42 44, 46, 48

The new generation of cruise missiles represents a powerful and versatile addition to the U S Military's strategic and tactical force structure By the late 1950s, the Air Force had activated the first intercontinental cruise missile, Snark The newest cruise missiles currently in development evolved from earlier development programs The new cruise missiles have taken maximum advantage of new technology to overcome earlier limitations They are difficult to detect on radar, have low infrared observables, can fly at extremely low altitudes and slip in under enemy air defenses, and they are phenomenally accurate They are compatible with existing platforms' launch equipment, such as submarine torpedo tubes and bomber rotary rack launchers In recent months, there has been considerable speculation about cruise missile survivability if they were used against heavily defended targets The implications of the new developments are discussed G R

**A78-53751 Nickel brazing honeycomb for aircraft gas turbine engines W P McNeill** (Trans World Airlines, Inc , Kansas City, Mo ) *Welding Journal*, vol 57, Oct 1978, p 32-35

The paper describes the process of replacing worn gas turbine engine seals with honeycomb ribbon applied by a combination of spot welding and brazing with powdered filler material The powdered filler material is applied by means of a small dump chute with an opening of 0 25 mm The inner diameter of the seal surface is rotated as the powdered filler is applied, and clear adhesive is sprayed onto the filler to hold it in place The brazing is done in a vacuum furnace where temperature is raised quickly to 2100 F and held for 5 min Standard grinding procedures are used P T H

**A78-53764 The attachment of a ventilated plane jet to an inclined plane wall G F Marsters** (Queen's University, Kingston, Ontario, Canada) *Aeronautical Quarterly*, vol 29, May 1978, p 60-74 National Research Council of Canada Grant No A 4310

The behavior of a plane jet issuing in the neighborhood of a plane wall has been studied experimentally for possible applications in jet augmented flaps for STOL aircraft development The essential features are the gap between the wall and the jet nozzle permitting entrainment of secondary flow, and the inclination of the plane wall with respect to the nozzle axis Measurements of velocity profiles, wall static pressure distributions and turbulence intensities reveal the presence of extensive regions of low pressure over the wall, strong pressure gradients and self preservation of the mean velocities The size of the gap and the wall angle and length influence the reattachment location noting limits of gap, angle and length for which reattachment occurs The sub-ambient static pressure regions give rise to forces on the wall due to the entrainment feature

(Author)

**A78-53765 Experiments on the laminar flow in a rectangular streamwise corner H A El-Gamal** (Alexandria, University, Alexandria, Egypt) and W H Barclay (University College, London England) *Aeronautical Quarterly*, vol 29, May 1978, p 75-97 10 refs

Results of measurements in the flow along a rectangular corner are presented in the form of velocity profiles The profiles form two sets one for flow in a slightly favorable streamwise pressure gradient and one for flow when the pressure gradient is 'practically zero' The appearance of the profiles is quite different from that of previous experimental work noting that the primary cause of this is the different type of corner leading edges used in each case The flow appears to be only marginally stable and even very slightly changed entry conditions caused by alterations in the leading edge geometry may have a marked effect on the profiles further downstream The new results are consistent with the notion of corner layer similarity but there remains a significant difference between the experimental results and the theoretical solutions (Author)

**A78-53767 Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow M Tanner** (Aerodynamische Versuchsanstalt, Gottingen, West Germany) *Aeronautical Quarterly*, vol 29, May 1978, p 114-130 23 refs

A new theory for the prediction of the base pressure in two-dimensional and axisymmetric supersonic turbulent base flow has been developed by Tanner (1976, 1977) The basic physical concepts of the new theory are quite different from those of the theories based on the flow model reported by Chapman et al (1958) and Korst (1956) The essential physical characteristics of both theories are compared and some characteristic theoretical results are presented together with experimental data It appears that the experimental values agree better with the new theory than with the theory considered by Korst In the theory reported by Tanner difficulties regarding a satisfactory reattachment criterion are avoided by using a different approach to the base pressure problem G R

**A78-53781 # Influence of rarefaction and compression waves on base pressure O vliani voln razrezheniia i szhatia na donnoe davlenie A N Antonov** *Prikladnaia Mekhanika*, vol 14, Sept 1978, p 89 94 11 refs In Russian

Analytical methods are proposed for calculating flows through suddenly expanding channels and supersonic gas flows behind a recess Calculations show that rarefaction and compression waves in the near wake may produce appreciable changes of the base pressure, the rarefaction waves decreasing the base pressure and compression waves producing the opposite effect The results are in agreement with the experiment V P

**A78-53783 # Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades (Primenenie metoda integral'nykh uravnenii dlia rascheta obtakanii rechetok turbomashin dozvukovym potokom gaza) G I Chmyr'** (Zaporozhskii Mashinostroitel'nyi Institut, Zaporozhe, Ukrainian SSR) *Prikladnaia Mekhanika*, vol 14, Sept 1978, p 110 117 8 refs In Russian

**A78-53805 # Numerical calculation of magnetic levitation systems (O chislennom raschete ustroystv magnitnogo podvesa) V M Vorob'ev** (Zavod Arsenal, USSR), S S Romanovich, and L V Fedchun (Akademiia Nauk Ukrainskoi SSR, Institut Kibernetiki, Kiev, Ukrainian SSR) *Elektromekhanika*, July 1978, p 718-723 In Russian

The paper presents integral equations whose solution can be used to calculate the electromagnetic field, and force and moment characteristics of a magnetic levitation system An algorithm for the numerical calculation of the system is presented, and numerical results on the magnetic lift force and the transverse stiffness of the suspension are presented B J

**A78-53864**      **New materials in the Si-C-Al-O-N and related systems** I B Cutler, P D Miller, W Rafaniello (Utah, University, Salt Lake City, Utah), H K Park, D P Thompson, and K H Jack (Newcastle-upon Tyne, University, Newcastle-upon-Tyne, England) *Nature*, vol 275, Oct 5, 1978, p 434, 435 10 refs

The discovery of a continuous series of solid solution, with the 2H wurtzite type structure, between silicon carbide and aluminum nitride is reported SiC-AIN solid solutions were obtained by heating intimate mixtures in molecular nitrogen at 1400-1500 C of SiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, and C obtained by a sol-gel process. Some X-ray photographs of 2H solid solutions of 3AlN-SiC, AlN-SiC, and AlN-3SiC compared with some of pure AlN show shift of X-ray reflections indicating that c increases and a decreases as AlN is replaced by SiC. The mean expansion coefficients are probably too high for use in gas turbines, but the electrical and semiconducting properties should be of interest.

P T H

**A78-53903 #**      **Suboptimal adaptive filtering of radio signals** (Suboptimal'naya adaptivnaya fil'tratsiya signalov neskol'kikh radio-tekhnicheskikh izmeritelei) A V Semenychev *Radiotekhnika*, vol 33, July 1978, p 44-49. In Russian

The paper examines the effect of errors in determining unknown elements in the noise correlation matrix on the potential accuracy of linear Kalman filters as applied to radio signal processing. Methods for obtaining simple recursive adaptive filters with near-optimal potential accuracy are examined. The implementation of such filters in onboard computers is discussed.

B J

**A78-53911 #**      **Satellites for position determination** A Seward, A E Winter, and R Mamen (Department of Communications, Ottawa, Canada) (*Canadian Aeronautics and Space Institute, Canadian Symposium on Navigation, 3rd, Ottawa, Canada, Nov 16, 17, 1977*) *Canadian Aeronautics and Space Journal*, vol 24, Sept-Oct 1978, p 266-273. Research sponsored by the Department of National Defence.

The potential uses of satellites for position determination are considerable, and current experiments are expected to demonstrate techniques which offer unprecedented accuracy to an essentially unlimited number of users. Position determination, depending on the satellite system, may be performed aboard the user vehicle or remotely for such purposes as emergency beacon location. Three satellite systems are described in some detail: Sarsat, Aerosat and GPS/Navstar. The first, the Search and Rescue Satellite System, entails the determination at a ground station of the position of a remote vehicle. Aerosat will utilize two geostationary satellites over the Atlantic to provide voice and data links to transatlantic aircraft and to determine and monitor aircraft positions. The Global Positioning System (GPS) is being developed for high precision position and velocity determination by users anywhere around the globe. Canadian involvement in these programs is discussed. (Author)

**Page Intentionally Left Blank**

## STAR ENTRIES

**N78-32037\*#** FWG Associates Inc Tullahoma Tenn  
**INVESTIGATIONS OF SIMULATED AIRCRAFT FLIGHT THROUGH THUNDERSTORM OUTFLOWS**

Walter Frost and Bill Crosby Sep 1978 123 p refs (Contract NAS8 32217) (NASA CR 3057 M 263) Avail NTIS HC A06/MF A01 CSCL 01B

The effects of wind shear on aircraft flying through thunderstorm gust fronts were investigated. A computer program was developed to solve the two dimensional, nonlinear equations of aircraft motion including wind shear. The procedure described and documented accounts for spatial and temporal variations of the aircraft within the flow regime. Analysis of flight paths and control inputs necessary to maintain specified trajectories for aircraft having characteristics of DC-8 B-747 augmentor wing STOL, and DHC-6 aircraft was recorded. From the analysis an attempt was made to find criteria for reduction of the hazards associated with landing through thunderstorm gust fronts. B B

**N78-32038** Iowa State Univ of Science and Technology Ames  
**BLADE SURFACE BOUNDARY LAYER AND WAKE COMPUTATIONAL MODELS FOR ESTIMATION OF AXIAL-FLOW COMPRESSOR AND FAN BLADE-ROW TURNING ANGLES AND LOSSES** Ph D Thesis

Elmer Carl Hansen 1978 148 p  
 Avail Univ Microfilms Order No 78-13230

A method is developed for computation of the flow field around an arbitrary blade cascade on an axially symmetric blade-to-blade surface which takes into account the blade surface boundary layers separation of the boundary layers and mixing in the wake. The method predicts the overall fluid turning and total pressure loss in the context of an inviscid-viscous interaction scheme. Dissert Abstr

**N78-32040** Virginia Polytechnic Inst and State Univ Blacksburg  
**THREE DIMENSIONAL FULLY VISCOUS SHOCK-LAYER FLOWS OVER SPHERE-CONES AT HIGH ALTITUDES AND ANGLES OF ATTACK** Ph D Thesis

Alvin Lee Murray 1978 224 p  
 Avail Univ Microfilms Order No 7814040

The viscous shock-layer equations were extended to complete 3 D flowfields and applied to sphere cones at high altitudes and large angles of attack. A computer code was developed for the solution of these equations and calculations were done on a large matrix of test cases. Comparisons with Stanton number wall pressure and aerodynamic coefficient data show the predictions of the three-dimensional shock-layer code were in good to excellent agreement with experiments. Comparisons with solutions of the parabolized Navier-Stokes equations show the shock-layer calculations were in excellent agreement up to the cross-flow separation point. The Mach numbers for these test cases ranged from 10 to 25 and the Reynolds number ranged from  $5.28 \times 1000$  to  $2.0 \times 1,000,000$  ft. The effects of slip were significant at the low Reynolds numbers but the small mass transfer rates that were tested had little effect. Dissert Abstr

**N78-32041** Purdue Univ Lafayette Ind  
**THE FLOW FIELD CALCULATION IN SUPERSONIC MIXED-COMPRESSION AIRCRAFT INLETS AT ANGLE OF ATTACK USING THE THREE-DIMENSIONAL METHOD OF CHARACTERISTICS WITH DISCRETE SHOCK WAVE FITTING** Ph D Thesis

Joseph Vadyak 1977 258 p  
 Avail Univ Microfilms Order No 78-13132

The calculation of the flow field in supersonic mixed-compression aircraft inlets angle of attack is accomplished using

the method of characteristics for steady three-dimensional flow in conjunction with a discrete shock wave fitting procedure. The influence of molecular transport may be included in the computation by treating the viscous and thermal diffusion terms in the governing partial differential equations as correction terms in the method of characteristics scheme. The culmination of the research is the development of a production type computer program which is capable of calculating the flow field in a variety of axisymmetric mixed-compression aircraft inlets. Dissert Abstr

**N78-32042** California Univ Berkeley  
**ASYMMETRIC SUPERCRITICAL FLOW PAST A DOUBLE WEDGE WITH EMBEDDED SHOCKS** Ph D Thesis

Keun Sick Chang 1977 78 p  
 Avail Univ Microfilms Order No 7812516

Supercritical transonic flow past a double wedge at small angle of attack was analyzed in the hodograph plane. The flow is treated as steady two-dimensional and inviscid, and is assumed to be isentropic and irrotational. Along the wedge surface the stagnation points are assumed to be attached at the forward and rear vertices and sonic speed is, a priori, attained at the upper and lower shoulders of the double wedge. The flow was mapped onto a hodograph plane containing two folds of a Riemann surface which are subsequently separated by a cut inserted along a branch line. In each of the two Riemann folds a numerical technique based on Telenin's method and a double sweep method was used to solve the two boundary value problems, one for the stream function and the other for the velocity potential. Dissert Abstr

**N78-32043\*#** National Aeronautics and Space Administration  
 Washington D C

**THE TECHNOLOGY ASSESSMENT OF LTA AIRCRAFT SYSTEMS**

Sep 1976 362 p refs Transl into ENGLISH of LTA Kokuki System on Technology Assessment Rept on Res Commissioned in 1977 by the Technol Evaluation Comm, Agency of Ind Sci and Technol Japan Ind Technol Assoc, Mar 1978 p 1-269, chapters 1-4 Trans by Kanner (Leo) Associates Redwood City Calif Original doc prep by Japan Ind Technol Assoc (Contract NASw-3199)

(NASA-TM-75535) Avail NTIS HC A16/MF A01 CSCL 01A

The advantages of conventional small and large airships over heavier than air aircraft are reviewed and the need for developing hybrid aircraft for passenger and heavy charge transport is assessed. Performance requirements and estimated operating costs are discussed for roto-ships to be used for short distance transportation near large cities as well as for airlifting civil engineering machinery and supplies for the construction of power stations dams tunnels and roads in remote areas or on isolated islands. A R H

**N78-32044\*#** National Aeronautics and Space Administration  
 Ames Research Center Moffett Field Calif  
**HIGH ANGLE OF INCIDENCE IMPLICATIONS UPON AIR INTAKE DESIGN AND LOCATION FOR SUPERSONIC CRUISE AIRCRAFT AND HIGHLY MANEUVERABLE TRANSONIC AIRCRAFT**

Leroy S Presley Sep 1978 13 p refs  
 (NASA-TM 78530 A 7634) Avail NTIS HC A02/MF A01 CSCL 01A

Computational results which show the effects of angle of attack on supersonic mixed compression inlet performance at four different locations about a hypothetical forebody were obtained. These results demonstrate the power of the computational method to predict optimum inlet location, orientation, and centerbody control schedule for design and off design performance. The effects of inlet location and a forward canard on the angle-of-attack performance of a normal shock inlet at transonic speeds were studied. The data show that proper integration of inlet location and a forward canard can enhance the angle-of-attack performance of a normal shock inlet. Two lower lip treatments for improving the angle-of-attack performance of rectangular inlets at transonic speeds are discussed. Author

**N78-32046\*#** National Aeronautics and Space Administration Langley Research Center Hampton, Va  
**COMPARISON OF WING-SPAN AVERAGING EFFECTS ON LIFT, ROLLING MOMENT, AND BENDING MOMENT FOR TWO SPAN LOAD DISTRIBUTIONS AND FOR TWO TURBULENCE REPRESENTATIONS**

Jacob H Lichtenstein Sep 1978 49 p refs  
 (NASA-TM-78699 L-12014) Avail NTIS HC A03/MF A01 CSCL 01A

An analytical method of computing the averaging effect of wing-span size on the loading of a wing induced by random turbulence was adapted for use on a digital electronic computer. The turbulence input was assumed to have a Dryden power spectral density. The computations were made for lift, rolling moment, and bending moment for two span load distributions, rectangular and elliptic. Data are presented to show the wing-span averaging effect for wing-span ratios encompassing current airplane sizes. The rectangular wing-span loading showed a slightly greater averaging effect than did the elliptic loading. In the frequency range most bothersome to airplane passengers the wing-span averaging effect can reduce the normal lift load, and thus the acceleration, by about 7 percent for a typical medium-sized transport. Some calculations were made to evaluate the effect of using a Von Karman turbulence representation. These results showed that using the Von Karman representation generally resulted in a span averaging effect about 3 percent larger.

Author

**N78-32047\*#** Vought Corp., Hampton, Va Hampton Technical Center

**BOEING-747 AIRCRAFT WITH EXTERNAL CARGO POD**  
 C B Quartero G F Washburn and J E Price Jul 1978 25 p refs  
 (Contract NAS1-13500)  
 (NASA-CR-158932) Avail NTIS HC A02/MF A01 CSCL 01A

An analysis was conducted to investigate the feasibility of mounting a detachable pod to the underside of the fuselage of a Boeing Model 747 aircraft to carry outsized cargo in case of military emergency. The analysis showed that the 747 configured with the pod and carrying only a bridge launcher as payload attained a range of 8 70 Mm (4 700 n mi) at Mach 68. This range was based on a maximum take-off gross weight of 3 447 MN (775 000 lbf) which included 212 kN (47 700 lbf) pod weight and 543 kN (122 000 lbf) payload (bridge launcher).

B B

**N78-32048\*#** National Aeronautics and Space Administration Langley Research Center, Hampton, Va  
**WIND TUNNEL TESTS ON A TAIL-LESS SWEEP WING SPAN-DISTRIBUTED CARGO AIRCRAFT CONFIGURATION**

Dhanvada M Rao (Old Dominion Univ Research Foundation) and Jarrett K Huffman Sep 1978 140 p refs  
 (NASA-TM-78767) Avail NTIS HC A07/MF A01 CSCL 01A

The configuration consisted of a 30 deg swept untapered, untwisted wing utilizing a low-moment cambered airfoil of 20 percent streamwise thickness designed for low wave drag at  $M = 0.6$   $C_{sub} L = 0.4$ . The tests covered a range of Mach numbers 0.3 to 0.725 and chord Reynolds number 1 100 000 to 2 040 000, angles of attack up to model buffet and sideslip angles + or - 4 deg. Configuration build up, wing pod filleting, airfoil modification and trailing edge control deflection effects were briefly investigated. Three wing tip vertical tail designs were also tested. Wing body filleting and a simple airfoil modification both produced increments to maximum lift/drag ratio. Addition of pods eliminated pitch instability of the basic wing. While the magnitude of these benefits probably was Reynolds number sensitive, they underline the potential for improving the aerodynamics of the present configuration. The cruise parameter (product of Mach number and lift/drag ratio) attained a maximum close to the airfoil design point. The configuration was found to be positively stable with normal control effectiveness about all three axes in the Mach number and  $C_{sub} L$  range of interest.

Author

**N78-32049\*#** National Aeronautics and Space Administration Langley Research Center Hampton Va  
**AERODYNAMIC CHARACTERISTICS OF A 1/4 SCALE POWERED HELICOPTER MODEL WITH A V-TYPE EMPENNAGE**

Carl E Freeman, Arthur E Phelps, III and Raymond E Mineck Aug 1978 65 p refs  
 (NASA-TM-74033) Avail NTIS HC A04/MF A01 CSCL 01A

An investigation was made in the Langley V/STOL tunnel to determine rotor induced effects on a 1/4-scale helicopter model with a conventional empennage and also a V-type empennage with dihedral angles of 45 deg, 50 deg, 55 deg, and 60 deg. Static longitudinal and lateral directional stability data are presented for rotor advance ratios of 0.057, 0.102, and 0.192 in level flight and climb attitudes. The data are presented without analysis or discussion.

Author

**N78-32050\*#** National Aeronautics and Space Administration Langley Research Center Hampton Va  
**AERODYNAMIC CHARACTERISTICS OF A FIXED ARROW-WING SUPERSONIC CRUISE AIRCRAFT AT MACH NUMBERS OF 2.30, 2.70, AND 2.95**

Odell A Morris, Dennis E Fuller and Carolyn B Watson Aug 1978 199 p  
 (NASA-TM-78706 L-12249) Avail NTIS HC A09/MF A01 CSCL 01A

Tests were conducted in the Langley Unitary Plan wind tunnel at Mach numbers of 2.30, 2.70 and 2.95 to determine the performance, static stability, and control characteristics of a model of a fixed-wing supersonic cruise aircraft with a design Mach Number of 2.70 (SCAT 15-F-9898). The configuration had a 74 deg swept warped wing with a reflexed trailing edge and four engine nacelles mounted below the reflexed portion of the wing. A number of variations in the basic configuration were investigated, they included the effect of wing leading edge radius, the effect of various model components, and the effect of model control deflections.

Author

**N78-32051\*#** National Aeronautics and Space Administration Langley Research Center Hampton Va  
**DEVELOPMENT OF A NONLINEAR SWITCHING FUNCTION AND ITS APPLICATION TO STATIC LIFT CHARACTERISTICS OF STRAIGHT WINGS**

Donald E Hewes Sep 1978 44 p refs  
 (NASA-TM-78737 L-12270) Avail NTIS HC A03/MF A01 CSCL 01A

A mathematical modeling technique was developed for the lift characteristics of straight wings throughout a very wide angle of attack range. The technique employs a mathematical switching function that facilitates the representation of the nonlinear aerodynamic characteristics in the partially and fully stalled regions and permits matching empirical data within + or - 4 percent of maximum values. Although specifically developed for use in modeling the lift characteristics, the technique appears to have other applications in both aerodynamic and nonaerodynamic fields.

B B

**N78-32052\*#** National Aeronautics and Space Administration Washington, D C  
**DESIGN OF A TRANSONICALLY PROFILED WING**

B Kieckbusch Aug 1978 62 p refs. Transl into ENGLISH of conf paper from Messerschmitt-Boelkow-Blohm G m b H Hamburg, Paper-77-026 77 p. Presented at the 10th Jahrestagung Deutsche Ges fuer Luft- und Raumfahrt Berlin, 13-15 Sep 1977. Original language document was announced as A78-24417. Transl by SCITRAN, Santa Barbara, Calif  
 (Contract NASW-3198)  
 (NASA-TM-75440, Paper-77-026) Avail NTIS HC A04/MF A01 CSCL 01A

The application of well known design concepts with the combined use of thick transonic profiles to aircraft wing design was investigated. Optimization in terms of weight and operational costs was emphasized. It is shown that the usual design criteria and concepts are too restricted and do not sufficiently represent the physical processes over the wing. Suggestions are made for

improving this situation and a design example given. Compared with a wing design according to previously used criteria, the new design is found to be superior in the most important functions. It is concluded that an isobar concept adjusted to the planform in conjunction with an organically designed wing will lead to the weight optimum solutions of wing profiles. J M S

**N78-32064\***# National Aeronautics and Space Administration, Washington, D C

**PROFILE DESIGN FOR AN ADVANCED-TECHNOLOGY AIRFOIL FOR GENERAL AVIATION AIRCRAFT**

D Welte Aug 1978 24 p refs Transl into ENGLISH of "Profilentwurf fuer einen Tragflugel neuer Technologie fuer Flugzeuge der allgemeinen Luftfahrt", Paper-77-027 Deutsche Gesellschaft fuer Luft- und Raumfahrt, Berlin, 13-15 Sep 1977 25 p Original language document was announced as A78-24418 Transl by Kanner (Leo) Associates Redwood City Calif (Contract NASw-3199)

(NASA-TM-75323, Paper-77-027) Avail NTIS HC A02/MF A01 CSCL 01A

A profile from the NASA General Aviation Whitcomb series and NACA profiles are used as a starting point in designing an advanced airfoil for general aviation aircraft. Potential theory pressure distribution calculations, together with boundary layer calculations permit a decrease in the null moment and an optimization of the lift characteristics of the wing. Trailing edge flap design is also improved. Wind tunnel tests are used to compare the conventional profiles, the NASA profile, and the improved design. Author

**N78-32065\***# National Aeronautics and Space Administration Flight Research Center Edwards Calif

**YF-12 EXPERIMENTS SYMPOSIUM, VOLUME 1**

Aug 1978 286 p refs Symp held at Edwards Calif 13-15 Sep 1978 Prepared by James and Associates, Lancaster, Calif

(NASA-CP-2054, H-1059) Avail NTIS HC A13/MF A01 CSCL 01A

Papers presented by personnel from the Dryden Flight Research Center, the Lewis Research Center, and the Ames Research Center are presented. Topics cover propulsion system performance, inlet time varying distortion, structures aircraft controls propulsion controls and aerodynamics. The reports were based on analytical studies, laboratory experiments wind tunnel tests and extensive flight research with two YF-12 airplanes.

**N78-32066\***# National Aeronautics and Space Administration Flight Research Center, Edwards Calif

**OVERVIEW OF THE NASA YF-12 PROGRAM**

Berwin M Kock In its YF-12 Experiments Symp Vol 1 Aug 1978 p 3-25 refs

Avail NTIS HC A13/MF A01 CSCL 01C

The history of NASA's interest in supersonic research and the agency's contribution to the development of the YF-12 aircraft is reviewed as well as the program designed to use that aircraft as a test bed for supersonic cruise research. Topics cover elements of the program, project organization, and major accomplishments. A R H

**N78-32067\***# National Aeronautics and Space Administration Flight Research Center Edwards, Calif

**RECENT LOAD CALIBRATIONS EXPERIENCE WITH THE YF-12 AIRPLANE**

Jerald M Jenkins and Albert E Kuhl In its YF-12 Experiments Symp, Vol 1 Aug 1978 p 47-72 refs

Avail NTIS HC A13/MF A01 CSCL 01A

The use of calibrated strain gages to measure wing loads on the YF-12A airplane is discussed as well as structural configurations relative to the thermal environment and resulting thermal stresses. A thermal calibration of the YF-12A is described to illustrate how contaminating thermal effects can be removed from loads equations. The relationship between ground load calibrations and flight measurements is examined for possible

errors and an analytical approach to accommodate such errors is presented. A R H

**N78-32068\***# National Aeronautics and Space Administration Flight Research Center, Edwards Calif

**FLIGHT-MEASURED AERODYNAMIC LOADS ON A 0.92 ASPECT RATIO LIFTING SURFACE**

Robert R Meyer, Jr and V Michael DeAngelis In its YF-12 Experiments Symp Vol 1 Aug 1978 p 73-91 refs

Avail NTIS HC A13/MF A01 CSCL 01A

Ventral fin loads, expressed as normal force coefficients, bending moment coefficients, and torque coefficients, were measured during flight tests of a YF-12A airplane. Because of the proximity of the ventral fin to the ailerons the aerodynamic loads presented were the result of both sideslip loads and aileron crossflow loads. Aerodynamic data obtained from strain gage loads instrumentation and some flight pressure measurements are presented for several Mach numbers ranging from 0.70 to 2.00. Selected wind tunnel data and results of linear theoretical aerodynamic calculations are presented for comparison. Author

**N78-32069\***# National Aeronautics and Space Administration Flight Research Center Edwards Calif

**FLIGHT EXPERIENCE WITH ALTITUDE HOLD AND MACH HOLD AUTOPILOTS ON THE YF-12 AIRCRAFT AT MACH 3**

Glenn B Gilyard and John W Smith In its YF-12 Experiments Symp, Vol 1 Aug 1978 p 97-119 refs

Avail NTIS HC A13/MF A01 CSCL 01A

The altitude hold mode of the YF-12A airplane was modified to include a high-pass-filtered pitch rate feedback along with optimized inner loop altitude rate proportional and integral gains. An autothrottle control system was also developed to control either Mach number or KEAS at the high-speed flight conditions. Flight tests indicate that with the modified system, significant improvements are obtained in both altitude and speed control and the combination of altitude and autothrottle hold modes provides the most stable aircraft platform thus far demonstrated at Mach 3 conditions. A R H

**N78-32061\***# National Aeronautics and Space Administration Flight Research Center, Edwards, Calif

**THE YF-12 GUST VELOCITY MEASURING SYSTEM**

J Ehernberger In its YF-12 Experiments Symp, Vol 1 Aug 1978 p 135-154 refs

Avail NTIS HC A13/MF A01 CSCL 01D

A true gust velocity measuring system designed to alleviate complications resulting from airframe flexibility and from the high-speed, high-temperature environment of supersonic cruise aircraft was evaluated on a YF-12 airplane. The system uses fixed vanes on which airflow direction changes produce differential pressure variations that are measured. Airframe motions, obtained by postflight integration of recorded angular rate and linear acceleration data, are removed from the flow angle data. An example of turbulence data obtained at high-altitude, supersonic flight conditions is presented and compared with previous high-altitude turbulence measurements obtained with subsonic aircraft and with turbulence criteria contained in both military and civil design specifications for supersonic cruise vehicles. Results of these comparisons indicate that the YF-12 turbulence sample is representative of turbulence present in the supersonic cruise environment. A R H

**N78-32062\***# National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio

**WIND TUNNEL EVALUATION OF YF-12 INLET RESPONSE TO INTERNAL AIRFLOW DISTURBANCES WITH AND WITHOUT CONTROL**

Gary L Cole, George H Neiner, and Miles O Dustin In NASA Dryden Flight Res Center YF-12 Experiments Symp, Vol 1 Aug 1978 p 157-192 refs

Avail NTIS HC A13/MF A01 CSCL 01A



The response of terminal-shock position and static pressures in the subsonic duct of a YF-12 aircraft flight-hardware inlet to perturbations in simulated engine corrected airflow were obtained with and without inlet control. Frequency response data, obtained with inlet controls inactive, indicated the general nature of the inherent inlet dynamics, assisted in the design of controls, and provided a baseline reference for responses with active controls. All the control laws were implemented by means of a digital computer that could be programmed to behave like the flight inlet's existing analog control. The experimental controls were designed using an analytical optimization technique. The capabilities of the controls were limited primarily by the actuation hardware. The experimental controls provided somewhat better attenuation of terminal shock excursions than did the YF-13 inlet control. Controls using both the forward and aft bypass systems also provided somewhat better attenuation than those using just the forward bypass. The main advantage of using both bypasses is in the greater control flexibility that is achieved. ARH

**N78-32063\***# National Aeronautics and Space Administration, Flight Research Center, Edwards, Calif  
**FLIGHT-MEASURED PRESSURE CHARACTERISTICS OF AFT-FACING STEPS IN THICK BOUNDARY LAYER FLOW FOR TRANSONIC AND SUPERSONIC MACH NUMBERS**  
 Sheryll Goecke Powers *In its* YF-12 Experiments Symp. Vol 1 Aug 1978 p 201-226 refs

Avail NTIS HC A13/MF A01 CSCL 01A

Aft-facing step base pressure flight data were obtained for three step heights for nominal transonic Mach numbers of 0.80, 0.90 and 0.95 and for supersonic Mach numbers of 2.2, 2.5 and 2.8 with a Reynolds number, based on the fuselage length ahead of the step, of about 10 to the 8th power. Surface static pressures were measured ahead of the step, behind the step, and on the step face (base), and a boundary layer rake was used to obtain boundary layer reference conditions. A comparison of the data from the present and previous experiments shows the same trend of increasing base pressure ratio (decreasing drag) with increasing values of momentum thickness to step height ratios. However, the absolute level of these data does not always agree at the supersonic Mach numbers. For momentum thickness to height ratios near 1.0, the differences in the base pressure ratios appear to be primarily a function of Reynolds number based on the momentum thickness. Thus, for Mach numbers above 2, the data analyzed show that the base pressure ratio decreases (drag increases) as Reynolds number based on momentum thickness increases for a given momentum thickness and step height. ARH

**N78-32064\***# National Aeronautics and Space Administration, Flight Research Center, Edwards, Calif  
**BOUNDARY LAYER, SKIN FRICTION, AND BOATTAIL PRESSURE MEASUREMENTS FROM THE YF-12 AIRPLANE AT MACH NUMBERS UP TO 3**  
 David F Fisher *In its* YF-12 Experiments Symp. Vol 1 Aug 1978 p 227-258 refs

Avail NTIS HC A13/MF A01 CSCL 01A

In-flight measurements of boundary layer and skin friction data were made on YF-12 airplanes for Mach numbers between 2.0 and 3.0. Boattail pressures were also obtained for Mach numbers between 0.7 and 3.0 with Reynolds numbers up to four hundred million. Boundary layer data measured along the lower fuselage centerline indicate local displacement and momentum thicknesses can be much larger than predicted. Skin friction coefficients measured at two of five lower fuselage stations were significantly less than predicted by flat plate theory. The presence of large differences between measured boattail pressure drag and values calculated by a potential flow solution indicates the presence of vortex effects on the upper boattail surface. At both subsonic and supersonic speeds, pressure drag on the longer of two boattail configurations was equal to or less than the pressure drag on the shorter configuration. At subsonic and transonic speeds, the difference in the drag coefficient was on the order of 0.0008 to 0.0010. In the supersonic cruise range

the difference in the drag coefficient was on the order of 0.002. Boattail drag coefficients are based on wing reference area. ARH

**N78-32065\***# National Aeronautics and Space Administration, Flight Research Center, Edwards, Calif  
**IN-FLIGHT COMPRESSIBLE TURBULENT BOUNDARY LAYER MEASUREMENTS ON A HOLLOW CYLINDER AT A MACH NUMBER OF 3.0**  
 Robert D Quinn and Leslie Gong *In its* YF-12 Experiments Symp. Vol 1 Aug 1978 p 259-286 refs

Avail NTIS HC A13/MF A01 CSCL 01A

Skin temperatures, shearing forces, surface static pressures, and boundary layer pitot pressures and total temperatures were measured on a hollow cylinder 3.04 meters long and 0.437 meter in diameter mounted beneath the fuselage of the YF-12A airplane. The data were obtained at a nominal free stream Mach number of 3.0 and at wall-to-recovery temperature ratios of 0.66 to 0.91. The free stream Reynolds number had a minimal value of 4.2 million per meter. Heat transfer coefficients and skin friction coefficients were derived from skin temperature time histories and shear force measurements, respectively. Boundary layer velocity profiles were derived from pitot pressure measurements, and a Reynolds analogy factor of 1.11 was obtained from the measured heat transfer and skin friction data. The skin friction coefficients predicted by the theory of van Driest were in excellent agreement with the measurements. Theoretical heat transfer coefficients, in the form of Stanton numbers calculated by using a modified Reynolds analogy between skin friction and heat transfer, were compared with measured values. The measured velocity profiles were compared to Coles' incompressible law-of-the-wall profile. ARH

**N78-32066\***# Hamilton Standard Windsor Locks, Conn  
**AERODYNAMIC DESIGN AND PERFORMANCE TESTING OF AN ADVANCED 30 DEG SWEEP, EIGHT BLADED PROPELLER AT MACH NUMBERS FROM 0.2 TO 0.85**  
 Final Report

D M Black, R W Menthe and H S Wainauski Sep 1978 119 p refs

(Contract NAS3-20219)

(NASA-CR-3047) Avail NTIS HC A06/MF A01 CSCL 01A

The increased emphasis on fuel conservation in the world has stimulated a series of studies of both conventional and unconventional propulsion systems for commercial aircraft. Preliminary results from these studies indicate that a fuel saving of from 15 to 28 percent may be realized by the use of an advanced high speed turboprop. The turboprop must be capable of high efficiency at Mach 0.8 above 10,688 km (35,000 ft) altitude if it is to compete with turbofan powered commercial aircraft. An advanced turboprop concept was wind tunnel tested. The model included such concepts as an aerodynamically integrated propeller/nacelle, blade sweep and power (disk) loadings approximately three times higher than conventional propeller designs. The aerodynamic design for the model is discussed. Test results are presented which indicate propeller net efficiencies near 80 percent were obtained at high disk loadings at Mach 0.8. BB

**N78-32067\***# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va  
**WIND-TUNNEL INVESTIGATION AT SUPERSONIC SPEEDS OF A CANARD-CONTROLLED MISSILE WITH FIXED AND FREE-ROLLING TAIL FIN**

A B Blair, Jr Sep 1978 79 p refs

(NASA-TP-1316, L-12297) Avail NTIS HC A05/MF A01 CSCL 01A

A wind tunnel investigation was made at free stream Mach numbers from 1.70 to 2.86 to determine the effects of fixed and free rolling tail fin afterbodies on the static longitudinal and lateral aerodynamic characteristics of a cruciform canard controlled missile model. The effect of small canard roll and yaw control deflections was also examined. The results indicate that the fixed and free rolling tail configurations have about the same lift curve slope and longitudinal stability level at low angles of attack. For the free rolling tail configuration, the canards provide conventional roll control with no roll control reversal at low angles of attack. The free rolling tail configuration reduced induced roll due to model roll angle and canard yaw control. B B

**N78-32068#** ARO, Inc. Arnold Air Force Station Tenn  
**INFLUENCES OF SWAY BRACES AND MOUNTING GAPS ON THE STATIC AERODYNAMIC LOADING OF EXTERNAL STORES** Final Report, 1 Oct. 1976 - 30 Sep. 1977  
 R E Dix AEDC Feb 1978 135 p refs  
 (AD-A054963, AEDC-TR-77-117) Avail NTIS  
 HC A07/MF A01 CSCL 01/3

As the scale factor applied in the design of wind tunnel models is reduced, many details of the configuration being simulated are customarily omitted. A series of experiments was conducted in the Aerodynamic Wind Tunnel (4T) of the Propulsion Wind Tunnel Facility at the Arnold Engineering Development Center to evaluate the effect on captive store loading of model details such as sway braces and mounting gaps existing between store and aircraft components. Six components of aerodynamic loads acting on both pylon and rack-mounted stores in the captive position were measured, a limited number of store separation trajectories was predicted using the captive trajectory system, and a brief comparison of wind tunnel and in-flight measurements of captive loads was made. It was determined that the effects of mounting gaps or flow ventilation passages were generally small but that sway braces can significantly influence both captive loads and separation trajectories. It was also observed that better agreement between wind tunnel and in-flight measurements of captive store loading resulted when mounting gaps and sway braces were simulated on the wind-tunnel models. Author (GRA)

**N78-32069#** Naval Air Development Center, Warminster, Pa  
 Aircraft and Crew Systems Technology Directorate  
**V/STOL AERODYNAMIC TECHNOLOGY ASSESSMENT**  
 Interim Report  
 C Henderson and M Walters 15 May 1978 91 p refs  
 (WF41400000)  
 (AD-A054797, NADC-77272-60) Avail NTIS  
 HCA05/MF A01 CSCL 20/4

The objective of this investigation is to determine the status of V/STOL aerodynamics technology, evaluating the capabilities and limitations of various techniques and the validity of methods through correlations of predictions with wind tunnel and/or flight test results. This interim report presents the results of the first phase of this effort: a survey and assessment of published methods and test results and a survey of industry applied methods and technology problem areas. Author (GRA)

**N78-32070#** Aerospace Systems, Inc. Burlington Mass  
**ROTOR WAKE EFFECTS ON HUB/PYLON FLOW**  
**VOLUME 1 THEORETICAL FORMULATION** Final Report,  
 Jun. 1975 - Sep 1977  
 Paul Soohoo, Richard B Noll, Luigi Morino and Norman D  
 Hamm May 1978 120 p refs  
 (Contract DAAJ02-75-C-0041)  
 (AD-A055921, ASI-TR 76-38-Vol-1 USARTL-TR-78-1A Vol-1)  
 Avail NTIS HC A06/MF A01 CSCL 20/4

An investigation has been conducted to demonstrate the use of the Green's function method to study rotor wake effects on helicopter hub/pylon flow. This report consists of two volumes which document the theoretical formulation and the use of the digital computer program SHAPES (Subsonic Helicopter Aerodynamics Program with Effects of Separation). Volume 1 presents the theoretical formulation and corresponding numerical procedure for the study of incompressible potential aerodynamics with separated flow. While the formulation is valid for fully unsteady aerodynamics, this report is mainly concerned with rotor aerodynamics. A potential flow aerodynamic program, SHAPES, with suitable rotor wake representation was developed to predict the separation characteristics of arbitrary three-dimensional helicopter configurations. In particular, the effect of the rotor blade wake, blade shank wake, and hub wake in the separation of the flow over a lifting helicopter in forward flight is analyzed. The present method has potential application in the design of helicopters because it provides an analytical capability which can be used to develop low-drag profiles as well as to explore problem areas. Extensive numerical results obtained from Program SHAPES demonstrated the flexibility and accuracy of the method. These results are in excellent agreement with existing data. Author (GRA)

**N78-32071#** Aerospace Systems, Inc., Burlington, Mass  
**ROTOR WAKE EFFECTS ON HUB/PYLON FLOW**  
**VOLUME 2 PROGRAM SHAPES USER'S MANUAL**  
 Final Report, Jun. 1975 - Sep 1977  
 Paul Soohoo, Richard B Noll, Luigi Morino and Norman D  
 Hamm May 1978 192 p refs  
 (Contract DAAJ02-75-C-0041)  
 (AD-A055767, ASI-TR-76-38-Vol-2 USARTL-TR-78-1B-Vol-2)  
 Avail NTIS HC A09/MF A01 CSCL 20/4

An investigation has been conducted to demonstrate the use of the Green's function method to study rotor wake effects on helicopter hub/pylon flow. This report consists of two volumes which document the theoretical formulation and the use of the digital computer program SHAPES (Subsonic Helicopter Aerodynamics Program with Effects of Separation). Volume 2, The User's Manual, describes the structure and use of Program SHAPES. SHAPES is written in FORTRAN 4 for operation on the CDC 6600 digital computer system at the Applied Technology Laboratory, U.S. Army Research and Technology Laboratories, Fort Eustis, VA. The User's Manual (Volume 2) contains detailed information for preparing an input data deck and interpreting the computed data: a discussion of various subroutines, flow charts, common storage, and definition of FORTRAN variables; sample cases to illustrate the program output; and a FORTRAN listing of the program. GRA

**N78-32072#** Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio  
**M=3 TURBULENT BOUNDARY LAYER MEASUREMENTS AT VERY HIGH REYNOLDS NUMBERS** Interim Report,  
 Jan 1975 - Sep 1976  
 Anthony W Fiore Oct 1977 230 p refs  
 (AD-A055952, AFFDL-TR-77-80) Avail NTIS  
 HC A11/MF A01 CSCL 20/4

Experimental turbulent boundary layer measurements were made. Data was generated at supersonic speeds and very high Reynolds numbers to determine the effect of both unit and length Reynolds numbers on boundary layer profiles, thickness parameters, and skin friction measurements. GRA

**N78-32073#** National Technical Information Service, Springfield, Va  
**LIGHTER THAN AIR VEHICLES. CITATIONS FROM THE ENGINEERING INDEX DATA BASE** Progress Report,  
 1970 - Mar. 1978

**N78-32074**

Guy E Habercom Jr May 1978 82 p Supersedes NTIS/PS-77/0375  
(NTIS/PS-78/0410/7, NTIS/PS-77/0375) Avail NTIS  
HC \$28 00/MF \$28 00 CSCL 01C

Design and applications of balloons, dirigibles, and airships are investigated in these reports gathered in a worldwide literature survey Passenger or cargo transport timbering tethering, and fabric selection are among the aspects investigated GRA

**N78-32074#** Advisory Group for Aerospace Research and Development Paris (France)

**TECHNICAL EVALUATION REPORT ON THE FLUID DYNAMICS PANEL SYMPOSIUM ON PREDICTION OF AERODYNAMIC LOADING**

Rimantas Laugminas (Dept of AF, Wright-Patterson AFB, Ohio)  
Sep 1978 18 p refs Symp held at Moffett Field, Calif  
27-29 Sep 1976  
(AGARD-AR-125 ISBN-92-835-1296-0) Avail NTIS  
HC A02/MF A01

The fluid dynamic aspects of predicting aerodynamic loads that represent difficult design and operating problems are examined with emphasis on theoretical and semi-empirical methods for determining the level and distribution of the expected loading and on assessing and evaluating the accuracy of the predicted values through comparison with available experimental data from windtunnels and flight tests Advances in the state-of-art of aerodynamic load prediction are summarized and problem areas for further research effort are indicated Topics cover test techniques stores high angle of attack, high lift and drag, viscous/inviscid interactions in transonic flow maneuvering aircraft, unsteady loads on arbitrary bodies in supersonic flow, flow with separation dynamic stall, buffeting and special problem areas A R H

**N78-32075\*#** National Aeronautics and Space Administration Ames Research Center, Moffett Field, Calif

**NASA AVIATION SAFETY REPORTING SYSTEM Quarterly Report, 1 Jul - 30 Sep, 1977**

Jul 1978 62 p refs Prepared in cooperation with Battelle Columbus Labs, Mountain View, Calif  
(NASA-TM-78511 A-7559, QR-6) Avail NTIS  
HC A04/MF A01 CSCL 01C

An analytical study of reports relating to cockpit altitude alert systems was performed A recent change in the Federal Air Regulation permits the system to be modified so that the alerting signal approaching altitude has only a visual component the auditory signal would continue to be heard if a deviation from an assigned altitude occurred Failure to observe altitude alert signals and failure to reset the system were the commonest cause of altitude deviations related to this system Cockpit crew distraction was the most frequent reason for these failures It was noted by numerous reporters that the presence of altitude alert system made them less aware of altitude this lack of altitude awareness is discussed Failures of crew coordination were also noted It is suggested that although modification of the altitude alert system may be highly desirable in short-haul aircraft it may not be desirable for long-haul aircraft in which cockpit workloads are much lower for long periods of time In these cockpits the aural alert approaching altitudes is perceived as useful and helpful If the systems are to be modified, it appears that additional emphasis on altitude awareness during recurrent training will be necessary it is also possible that flight crew operating procedures during climb and descent may need examination with respect to monitoring responsibilities A selection of alert bulletins and responses to them is presented B B

**N78-32076\*#** National Aeronautics and Space Administration Langley Research Center Hampton Va

**A PRELIMINARY STUDY OF THE BENEFITS OF FLYING BY GROUND SPEED DURING FINAL APPROACH**

Earl C Hastings Jr Aug 1978 23 p refs  
(NASA-TM-78777) Avail NTIS HC A02/MF A01 CSCL 01C

A study was conducted to evaluate the benefits of an approach technique which utilized constant ground speed on approach It was determined that the technique reduced the capacity losses in headwinds experienced with the currently used constant airspeed technique The benefits of technique were found to increase as headwinds increased and as the wake avoidance separation intervals were reduced An additional benefit noted for the constant ground speed technique was a reduction in stopping distance variance due to the approach wind environment B B

**N78-32077#** Army Research and Technology Labs Fort Eustis Va

**CH-47 CRASH TEST (T-40) STRUCTURAL, CARGO RESTRAINT, AND AIR CREW INFLATABLE RESTRAINT EXPERIMENTS**

L Burrows R Lane and J McElhenney Apr 1978 111 p refs  
(AD-A055804 USARTL-TR-78-22) Avail NTIS  
HC A06/MF A01 CSCL 01/3

A full-scale crash test of a CH-47A troop/cargo helicopter was conducted at the NASA-Langley Research Center Impact Dynamics Research Facility This joint Army/NASA/Navy test program was performed as part of the Army's continuing research and development program to enhance the crashworthiness of helicopters This report describes the structural crashworthiness, the load attenuating cargo restraint and the aircrew inflatable crew restraint experiments that were conducted and presents the resulting data The test aircraft crashed with a 9 degree nose-down attitude this impact was representative of the 95th percentile potentially survivable accident crash pulse Results of the test can be compared with those of a CH-47C crash test (T-39) conducted in 1975 which impacted at a 10 degree nose-up attitude with approximately the same resultant impact velocity vector Author (GRA)

**N78-32078#** Sandia Labs, Albuquerque N Mex  
**ANALYSIS OF THE ENGINE FRAGMENT THREAT AND THE CRUSH ENVIRONMENT FOR SMALL PACKAGES CARRIED ON US COMMERCIAL JET AIRCRAFT**

W F Hartman J D McClure and W A VonRiesemann 1978  
8 p refs Presented at the 5th Symp on the Packaging and Transportation of Radioactive Mater Las Vegas, Nev 7 May 1978

(Contract EY-76-C-04-0789)  
(SAND-78-0244C CONF-780506-8) Avail NTIS  
HC A02/MF A01

The results of two separate analyses are reported The engine fragment analysis determined the probability of a small package being in the path of a fragment from a failure in a gas turbine engine The calculated values show that, depending on aircraft type the incidence rate varies by approximately an order of magnitude from a high of about once per 5 million flights to a low of nearly once every 40 million package flights for a flight of five hours' duration The analysis of the crush environment consisted of an examination of two principal crush modes, i.e vertical and longitudinal crush The vertical crush mode was examined by formulating a structural model of the cargo deck beams of the aircraft The longitudinal crush mode was studied by using dynamic models of the aircraft cargo and the radioactive material package (RAM) ERA

**N78-32079\*#** Litton Systems, Inc Woodland Hills Calif  
**STRAPDOWN SYSTEM REDUNDANCY MANAGEMENT FLIGHT DEMONSTRATION Final Report**

Sep 1978 73 p refs  
(Contract NAS1-15155)  
(NASA-CR-145356) Avail NTIS HC A04/MF A01 CSCL  
17G

The suitability of strapdown inertial systems in providing highly reliable short-term navigation for vertical take-off and landing (VTOL) aircraft operating in an intra-urban setting under all-weather conditions was assessed. A preliminary design configuration of a skewed sensor inertial reference system employing a redundancy management concept to achieve fail-operational, fail-operational performance was developed.

A R H

**N78-32080\*** Virginia Univ., Charlottesville School of Engineering and Applied Science  
**OPTIMIZATION OF MLS RECEIVERS FOR MULTIPATH ENVIRONMENTS Annual Report**

G A McAlpine, J H Highfill, III, C P J Tzeng and Ghassem Koleyri Oct 1978 62 p refs  
 (Grant NsG-1128)

(NASA-CR-157736, UVA/528062/EE78/106) Avail NTIS HC A04/MF A01 CSCL 17G

Reduced order receiver (suboptimal receiver) analysis in multipath environments is presented. The origin and objective of MLS is described briefly. Signal modeling in MLS the optimum receiver is also included and a description of a computer oriented technique which was used in the simulation study of the suboptimal receiver is provided. Results and conclusion obtained from the research for the suboptimal receiver are reported. B B

**N78-32084#** Aerospace Medical Research Labs., Wright-Patterson AFB, Ohio

**TERRAIN CONTOUR MATCHING (TERCOM) SENSITIVITY TO HEADING AND GROUND-SPEED ERRORS Final Report, Mar 1975 - Aug 1977**

Mark W Cannon Jr May 1978 25 p refs  
 (AF Proj 7233)

(AD-A056127 AMRL-TR-77-84) Avail NTIS HC A02/MF A01 CSCL 17/7

A simulation of the TERCOM navigation system is presented and the effects of a number of error sources are studied. Two error sources are course heading and ground-speed variation. A third source is the fact that the radar altimeter samples the terrain at geographical coordinates lying between coordinates that specify the locations of terrain altitudes stored in the on-board computer. The latter is shown to be an insignificant error with the 400 ft distance between sample points. Course heading and ground-speed errors are shown to be critical problems when they occur simultaneously. Maximum acceptable errors are approximately two degrees course heading at + or - 3% expected ground speed. Author (GRA)

**N78-32085#** National Technical Information Service, Springfield Va

**AIR TRAFFIC CONGESTION AND CAPACITY A BIBLIOGRAPHY WITH ABSTRACTS Final Report, 1964 - May 1978**

Guy E Habercom Jr Jun 1978 164 p Supersedes NTIS/PS-77/0567 NTIS/PS-76/0495, NTIS/PS-75/376 (NTIS/PS-78/0598/9, NTIS/PS-77/0567 NTIS/PS-76/0495 NTIS/PS-75/376) Avail NTIS HC \$28 00/MF \$28 00 CSCL 01E

Present and predicted air traffic density and capacity were analyzed for both, enroute and in airport environments. Terminal area scheduling, runway queuing, and airspace regulation are discussed. (This updated bibliography contains 159 abstracts, 13 of which are new entries to the previous edition.) GRA

**N78-32086\*** National Aeronautics and Space Administration Langley Research Center, Hampton, Va

**SUPERSONIC TRANSPORT Patent**

Paul Coe Jr, inventor (to NASA) issued 6 Jun 1978 7 p Filed 27 Aug 1976 Supersedes N76-31219 (14 - 22 p 2826)

(NASA-Case-LAR-11932-1 US-Patent-4 093,156

US-Patent-Appl-SN-7 18244, US-Patent-Class-244-45A

US-Patent-Class-244-46, US-Patent-Class-244-218) Avail US Patent Office CSCL 01C

An aircraft of supersonic transport configuration is described, featuring thrust vectoring in conjunction with wing apex segments used as canard surfaces during takeoff, landing and low-speed flight. The angle of incidence of the wing apex segments, when the segments were functioning as canard surfaces, was variable with respect to the aircraft angle of attack. The wing apex segments furthermore formed a portion of the main wing panel swept leading edge when not functioning as canard surfaces. The combination of thrust vectoring and deployable wing apex segments resulted in increased aircraft range and improved low speed longitudinal stability while providing acceptable takeoff length capabilities. Official Gazette of the U S Patent Office

**N78-32087\*** Douglas Aircraft Co Inc., Long Beach, Calif  
**REFERENCE AIRCRAFT FOR ICAO WORKING GROUP E**

Jul 1978 81 p refs  
 (Contract NAS1-14624)

(NASA-CR-158929) Avail NTIS HC A05/MF A01 CSCL 01C

The results of an advanced supersonic transport aircraft/engine integration study to be used as a detail preliminary design case to assist in the assessment of noise standards applicable to future supersonic transports are summarized. The design considered reflects the application of the advanced technologies which are projected to be available for program initiation in the 1980-1985 time period. Suppression characteristics included were obtained in simulated forward flight in the Rolls-Royce spin rig using a small scale model. The engine size selected produces a noise no greater than 108 EPNdB at any of the three Far Part 36 (Stage 2) defined measuring points and is sized slightly larger than the optimum cruise size to meet this noise constraint condition. J M S

**N78-32088#** Nielsen Engineering and Research Inc Mountain View Calif

**MODIFICATIONS AND IMPROVEMENTS IN A STRUCTURAL OPTIMIZATION SCHEME BASED ON AN OPTIMALITY CRITERION Final Report, 1 Mar 1977 - 28 Feb 1978**

S C McIntosh, Jr Jun 1978 81 p refs  
 (Contract F49620-77-C-0055)

(AD-A055941, AFOSR-78-1115TR) Avail NTIS HC A05/MF A01 CSCL 01/2

Three optimization algorithms based on optimality criteria are compared with an algorithm based on mathematical programming. Two of the optimality-criterion algorithms are adapted from previous work and the third is new. The example problem used is a simple 12-design-variable rectangular wing with three separate equality behavioral constraints: a fixed deflection at the tip under a transverse load, a fixed fundamental free-vibration frequency, and a fixed subsonic flutter speed. Minimum-gage constraints were also imposed. All of the algorithms gave virtually identical optimal designs. The optimality-criterion algorithms were generally more efficient than the mathematical-programming algorithm although comparisons with more complicated problems are needed to establish clearly the degree of superiority. The problems currently being considered are discussed and the research plan for the next year is briefly described. Author (GRA)

**N78-32089#** Technology Inc., Dayton, Ohio

**ACQUISITION OF OPERATIONAL DATA DURING NOE MISSIONS Final Report, Sep. 1976 - Oct. 1977**

Terry L Cox and F Joseph Giessler Apr 1978 95 p refs  
 (Contract DAAJ02-76-C-0065)

(AD-A055922, USARTL-TR-78-3) Avail NTIS HC A05/MF A01 CSCL 01/2

For the continued development and updating of the operational usage spectrum of Army helicopters a UH-1H helicopter assigned to nap-of-the-earth (NOE) training missions at Fort Rucker, Alabama was instrumented with an oscillograph and a photopanel recording system. Two oscillographs collectively recorded

**N78-32090**

20 different flight parameters and a photopanel assembly monitored 9 other flight parameters 149 hours of valid data over the NOE course were recorded For the optimum representation and interpretation of the helicopter's performance the data were processed by the Flight Condition Recognition (FCR) method In this program the FCR technique was used to identify 29 flight conditions (including maneuvers and operational categories) These included turns and steady-state flight according to the occurrence and duration of a single flight parameter or combinations of them each in a specific range The data presentation includes the operational usage spectrum expressed as the percentage of time in the flight condition categories and various graphic depictions of typical NOE mission profiles GRA

**N78-32090#** Clarkson Coll of Technology Potsdam NY  
**DYNAMIC RESPONSE OF AIRCRAFT TO UNLOADED AND LOADED PAVEMENT PROFILES** Final Report, May - Sep 1977

William H Hightler and Mark R Snyder Oct 1977 65 p refs (Contract F08635-77-C-0181)  
(AD-A055703 CEEDO-TR-77-42) Avail NTIS  
HC A04/MF A01 CSDL 01/3

This study sought to determine whether or not there exists a significant difference in the simulated dynamic response of an F-4C aircraft traversing either an unloaded (undeflected) or loaded (deflected) pavement profile The Air Force computer code TAXI calculates the vertical accelerations at three points on an aircraft as the aircraft traverses a pavement profile An unloaded pavement profile was determined on a 2100 foot-long test section at Eglin Air Force Base, Fla by measuring elevations along the pavement at 2 foot intervals Pavement deflections caused by a load cart equipped with an aircraft tire were measured at the same points that defined the unloaded profile These deflections were then subtracted from the unloaded profile point for point to obtain the loaded profile traversed by an F-4C aircraft It appears that there is no significant difference in the response of TAXI to unloaded and loaded pavement profiles at speeds up to 133.3 feet/second At higher speeds some rejections of the mean do occur but these are felt to be insignificant It appears that the present Air Force practice of using unloaded pavement profiles for aircraft dynamic response simulation is acceptable and loaded pavement profiles need not be obtained for this purpose GRA

**N78-32091#** Air Force Inst of Tech, Wright-Patterson AFB Ohio School of Engineering

**AN EXTENDED KALMAN FILTER FIRE CONTROL SYSTEM AGAINST AIR-TO-AIR MISSILES, VOLUME 2** M.S. Thesis Salvatore J Cusumano and Manuel DePonte Jr Dec 1977 353 p  
(AD-A055637 AFIT/GE/EE/77-13-Vol-2) Avail NTIS  
HC A16/MF A01 CSDL 19/5

This Appendix contains the graphical results of the Monte Carlo analysis of this study The plots will be presented in sets All sets will include the dynamic state error plots GRA

**N78-32092#** Naval Ship Research and Development Center, Bethesda Md Aviation and Surface Effects Dept  
**AIRCRAFT CONFIGURATIONS FOR HIGH-SPEED SHIPS** Thomas H Boyd Dec 1977 88 p refs  
(AD-A055540 DTNSRDC/ASED-397) Avail NTIS  
HC A05/MF A01 CSDL 01/3

An analytical study was conducted to establish high-speed ship compatible aircraft configurations and to determine their capabilities and limitations in Navy missions The study was restricted to subsonic aircraft configurations The interface problems and design constraints associated with the application of Navy aircraft to high-speed ships were identified Current aircraft in the Navy inventory and proposed advanced concepts were reviewed for applicability Three open-ocean scenarios using the high-speed potential of the surface effect ship were postulated, and associated airborne missions were identified and defined Findings confirm that the high-speed ship offers a number of benefits relative to small air capable ships Conventional takeoff and landing aircraft can operate from deck lengths less than

600 feet Short takeoff and landing aircraft can operate efficiently from deck lengths below 200 feet Vertical takeoff and landing aircraft acquire up to a 50 percent increase in load capability at deck length of 400 feet Author (GRA)

**N78-32093#** Army Test and Evaluation Command Aberdeen Proving Ground Md

**PHYSICAL CHARACTERISTICS AVIATION MATERIEL Test Operations Procedures**

Roy L Miller 27 Nov 1977 16 p Supersedes MTP-7-3-500 and the aviation portions of TOP-1-3-504 TOP-1-3-505 (AD-A055803, TOP-7-3-500 MTP-7-3-500 TOP-1-3-504 TOP-1-3-505) Avail NTIS HC A02/MF A01 CSDL 01/3

This document identifies testing methods and techniques necessary to determine the degree to which Army aviation materiel's physical characteristics are determined Author (GRA)

**N78-32094\*#** Illinois Univ Urbana-Champaign Aviation Research Lab

**AVIONICS PERFORMANCE ANALYSIS A HISTORICAL REVIEW AND A CURRENT ASSESSMENT OF FLIGHT INSTRUMENTATION AND CONTROL SYSTEMS IN CIVIL AVIATION** Final Report

Jul 1978 53 p refs (Contract NAS1-15145) (NASA-CR-145378) Avail NTIS HC A04/MF A01 CSDL 01D

The role of flight instrumentation and control systems in the advancement of civil aviation to the safest form of commercial transportation is discussed Safety, cost reduction and increased capabilities provided by recent developments are emphasized Cost/performance considerations are considered in terms of determining the relative values of comparable systems or the absolute worth of a system JMS

**N78-32095** Michigan Univ, Ann Arbor  
**COMBUSTION AND EMISSION CHARACTERISTICS OF A GAS TURBINE COMBUSTOR** Ph.D Thesis

Prabhakar Bapusaheb Patil 1978 257 p  
Avail Univ Microfilms Order No 78-13719

Physical and chemical processes such as spray formation, fuel and air mixing, droplet evaporation, and gas phase chemical reactions occur simultaneously in a gas turbine combustor By estimating the characteristic times associated with these processes it is shown that the flow can be divided into regions where only some of these processes are important The analysis presented is for two adjoining regions, (1) the heat up region where the incoming air and liquid fuel are heated, and (2) the evaporation/combustion region where the fuel evaporates and subsequently burns This simplified analysis shows that evaporation limits the rate of the combustion process The analysis provides an expression for estimating the flame speed and, with a simple numerical procedure, predicts the profiles of temperature and liquid fuel fraction It is shown that by including a simple chemical kinetic scheme, the profiles of CO and NO can also be predicted Dissert Abstr

**N78-32096\*#** Pratt and Whitney Aircraft Group, East Hartford, Conn Commercial Products Div

**COMPRESSOR SEAL RUB ENERGETICS STUDY** Final Report, 8 Apr. 1977 - 8 Apr. 1978

W F Lavery May 1978 139 p refs (Contract NAS 3-20613) (NASA-CR-159424 PWA-5616) Avail NTIS  
HC A07/MF A01 CSDL 21E

The rub mechanics of compressor abradable blade tip seals at simulated engine conditions were investigated Twelve statistically planned, instrumented rub tests were conducted with titanium blades and Feltmetal fibermetal rubstrips The tests were conducted with single stationary blades rubbing against seal material bonded to rotating test disks The instantaneous rub torque, speed, incursion rate and blade temperatures were continuously measured and recorded Basic rub parameters (incursion rate, rub depth, abradable density, blade thickness and rub velocity) were varied to determine the effects on rub energy and heat split between the blade, rubstrip surface and rub debris

The test data was reduced, energies were determined and statistical analyses were completed to determine the primary and interactive effects. Wear surface morphology, profile measurements and metallographic analysis were used to determine wear glazing, melting and material transfer. The rub energies for these tests were most significantly affected by the incursion rate while rub velocity and blade thickness were of secondary importance. The ratios of blade wear to seal wear were representative of those experienced in engine operation of these seal system materials. Author

**N78-32097\*** General Electric Co., Cincinnati, Ohio  
**AIRCRAFT GAS TURBINE LOW-POWER EMISSIONS REDUCTION TECHNOLOGY PROGRAM Final Report**

W J Dodds, C C Gleason, and D W Bahr Oct 1978 161 p refs

(Contract NAS3-20580)

(NASA-CR-135434, Doc-R78AEG408) Avail NTIS HC A08/MF A01 CSCL 21E

Advanced aircraft turbine engine combustor technology was used to reduce low-power emissions of carbon monoxide and unburned hydrocarbons to levels significantly lower than those which were achieved with current technology. Three combustor design concepts, which were designated as the hot-wall liner concept, the recuperative-cooled liner concept, and the catalyst converter concept were evaluated in a series of CF6-50 engine size 40 degree-sector combustor rig tests. Twenty-one configurations were tested at operating conditions spanning the design condition which was an inlet temperature and pressure of 422 K and 304 kPa, a reference velocity of 23 m/s and a fuel-air-ratio of 10.5 g/kg. At the design condition typical of aircraft turbine engine ground idle operation, the best configurations of all three concepts met the stringent emission goals which were 10, 1, and 4 g/kg for CO, HC, and NOx, respectively. G G

**N78-32088\*** Grumman Aerospace Corp., Bethpage, N Y  
**LARGE SCALE STATIC TESTS OF A TILT-NACELLE V/STOL PROPULSION/ATTITUDE CONTROL SYSTEM**

Jul 1978 166 p refs Sponsored by NASA  
 (NASA-CR-152181, PDR-698-8) Avail NTIS HC A08/MF A01 CSCL 21E

The concept of a combined V/STOL propulsion and aircraft attitude control system was subjected to large scale engine tests. The tilt nacelle/attitude control vane package consisted of the T55 powered Hamilton Standard Q-Fan demonstrator. Vane forces, moments, thermal and acoustic characteristics as well as the effects on propulsion system performance were measured under conditions simulating hover in and out of ground effect. G Y

**N78-32095\*** Ford Motor Co., Dearborn, Mich  
**BRITTLE MATERIALS DESIGN, HIGH TEMPERATURE GAS TURBINE. VOLUME 1 CERAMIC COMPONENT FABRICATION AND DEMONSTRATION Interim Report, 1 Jan. - 30 Sep. 1977**

Arthur F McLean and Robert R Baker Mar 1978 69 p refs 2 Vol

(Contract DAAG46-71-C-0162, ARPA Order 1849)  
 (AD-A055252, AMMRC-TR-78-14-Vol-1, IR-12-Vol-1) Avail NTIS HC A04/MF A01 CSCL 21/5

The progress made on the DARPA Ceramic Turbine Testing Program is presented. Duo-density rotor fabrication continued with over 600 rotor blade rings injection molded utilizing the automatic solid state control system. Eleven duo-density ceramic turbine rotors were cold spin tested to qualify them for further hot running. Development of the hot spin rigs continued. A combustor flame-out problem and a durability problem with the rotor tip shroud/failure detector were resolved. An important engine test of a duo-density silicon nitride rotor was accomplished. Fabrication development on injection molding of stators and nose cones of 2.7g/cc density was continued on a limited basis. Testing of stationary components continued in both qualification and durability rigs. A complete set of silicon nitride stationary components consisting of a nose cone, two stators, two rotor tip shrouds and a second-stage stator centering ring completed the program objective of 175 hours at 1930 F plus 25 hours

at 2500 F with over 40 lights. In addition a silicon carbide stator successfully completed over 175 hours at 1930 F plus over 28 hours at 2500 F with 52 lights. GRA

**N78-32100\*** Ford Motor Co., Dearborn, Mich  
**BRITTLE MATERIALS DESIGN, HIGH TEMPERATURE GAS TURBINE. VOLUME 2 CERAMIC TURBINE ROTOR TECHNOLOGY Interim Report, Jan. - Sep 1977**

Arthur F McLean and Robert R Baker Mar 1978 91 p refs 2 Vol

(Contract DAAG46-71-C-0162, ARPA Order 1849)  
 (AD-A055276, AMMRC-TR-78-14-Vol-2, IR-12-Vol-2) Avail NTIS HC A05/MF A01 CSCL 21/5

Investigations of the materials used to fabricate duo-density ceramic turbine rotors were conducted on injection molded reaction bonded and hot pressed silicon nitride. The injection molding process, utilized to fabricate rotor blade rings, was improved by optimizing the molding parameters with the automated control system and improving the molding mixture. The installation of nozzles, to apply mold release, and air blast jets, to clean the die and evenly distribute the mold release, resulted in a noticeable improvement in the surface finish of the blade rings. Duo-density turbine rotors were tested in the cold spin pit to evaluate the hot press to reaction sintered bond joints and the effect of ID voids, in the blade ring rim, on blade failure speeds. Degradation of the room temperature strength of the reaction bonded silicon nitride rotor blades was identified as resulting from the press-bonding operation. A procedure for determining whether statistically significant differences exist between two sets of data known as the Hypothesis Testing was outlined. The test was applied to data from duo-density turbine rotors and showed that blade strength did deteriorate after the press-bonding operation. Use of proof-testing as a means of enhancing the accuracy of life predictions was discussed. GRA

**N78-32101\*** Naval Postgraduate School, Monterey, Calif  
**A VALIDATION OF MATHEMATICAL MODELS FOR TURBOJET TEST CELLS Final Report**

John Justin Walters and David W Netzer Jun 1978 61 p refs

(AD-A055991, NPS-67NT78061) Avail NTIS HC A04/MF A01 CSCL 21/5

Previously developed one-dimensional and two-dimensional computer models for predicting turbojet test cell performance were compared with data obtained from a subscale test cell for the purpose of model validation. Comparisons were made for a variety of configurations and flow rates. A modified one-dimensional model was found to reasonably predict the variation of augmentation ratio with engine flow rate, although predicted magnitudes were consistently too small. The model incorporated excessive drag losses and an inaccurate jet spreading parameter for large engine-augmentor spacings. The two-dimensional model accurately predicted experimental velocity profiles, but over-predicted pressure variations except for low engine exit Mach numbers. Author (GRA)

**N78-32102\*** Naval Postgraduate School, Monterey, Calif  
**STRESS ANALYSIS OF CERAMIC GAS TURBINE BLADES BY THE FINITE ELEMENT METHOD, PART 2 M S Thesis**

John H Preisel Jr Mar 1978 130 p refs  
 (AD-A055538, NPS-69-78-010-Pt-2) Avail NTIS HC A07/MF A01 CSCL 21/5

The complex geometry of many parts of a ceramic gas turbine engine and the need to know the stresses in these parts to a high degree of accuracy indicate that the finite element method should be employed. One analysis code used a finite element program based on an isoparametric 12 node brick. This allowed quadratic variation in one coordinate direction but only linear variation in the other two coordinate directions. This introduced an artificial stiffness into the structure. This study was made to determine the effects of using a totally quadratic isoparametric brick, vice one which is quadratic in only one direction. A distributed load preprocessor was also developed and tested. FORTRAN 4 was used throughout. Author (GRA)

**N78-32103#** Mathtech Inc., Bethesda, Md  
**STUDY OF THE TURBINE ENGINE INDUSTRY**  
**Final Report**

David W Grissmer and Kwan H Kim 31 Jan 1978 189 p  
 refs

(Contract MDA903-76-C-0220)

(AD-A055895, Rept-7050-DG-KK-78-FR-1-DOD) Avail NTIS  
 HC A09/MF A01 CSCL 21/5

This report provides a summary and analysis of original data from seven major US aircraft engine manufacturers over a time period 1960-75. Analysis of large and small engine production, surge capacity, costs productivity, and industry structure was made and compared with historical trends and the use of econometric models. Emphasis was placed on the lead times shortages and roles of subcontractors component availability, and materials. Author (GRA)

**N78-32104#** Advisory Group for Aerospace Research and Development Paris (France)

**TECHNICAL EVALUATION REPORT ON THE 51ST(B) PEP SPECIALISTS' MEETING OF THE PROPULSION AND ENERGETICS PANEL ON SEAL TECHNOLOGY IN GAS TURBINE ENGINES**

B Wrigley (Rolls-Royce Ltd., Derby England) Jul 1978 10 p  
 refs Meeting held at London, 6-7 Apr 1978

(AGARD-AR-123 ISBN-92-835-1289-8) Avail NTIS  
 HC A02/MF A01

The following topics are discussed in relation to aircraft and industrial gas turbines: (1) material technology particularly as applied to main flow path blade tip seals, (2) user's view of seal technology, (3) measurements of seal behavior (4) laboratory experiments and (5) design aids. B B

**N78-32105#** Advisory Group for Aerospace Research and Development, Paris (France)

**TECHNICAL EVALUATION REPORT ON THE 51ST (A) SPECIALISTS' MEETING OF THE PROPULSION AND ENERGETICS PANEL ON ICING TESTING FOR AIRCRAFT ENGINES**

D Tedstone Aug 1978 8 p Meeting held at London 3-4 Apr 1978

(AGARD-AR-124, ISBN-92-835-1295-2) Avail NTIS  
 HC A02/MF A01

The Propulsion and Energetics 51st (A) Specialists' Meeting on Icing Testing for aircraft engines contains a survey of the thirteen papers presented. The discussions which followed each paper as well as of the concluding Round Table Session, are included. Conclusions are drawn and recommendations made regarding future work. Author

**N78-32106\*#** Systems Technology Inc., Mountain View, Calif  
**COMPUTED RESPONSES OF SEVERAL AIRCRAFT TO ATMOSPHERIC TURBULENCE AND DISCRETE WIND SHEARS** Final Report

Wayne F Jewell, Robert L Stapleford, and Robert K Heffley  
 Feb 1977 79 p refs

(Contract NAS2-8889)

(NASA-CR-152185 STI-TR-1063-2) Avail NTIS  
 HC A05/MF A01 CSCL 01C

The computed RMS and peak responses due to atmospheric turbulence and discrete wind shears respectively are presented for several aircraft in different flight conditions. The responses are presented with and without the effects of a typical second order washout filter. A complete set of dimensional stability derivatives for each aircraft/flight condition combination evaluated is also presented. Author

**N78-32107#** Air Force Inst of Tech., Wright-Patterson AFB Ohio

**PITCH RATE FLIGHT CONTROL FOR THE F-16 AIRCRAFT TO IMPROVE AIR-TO-AIR COMBAT** M.S. Thesis

Michael A Marchand Dec 1977 180 p refs

(AD-A055417, AFIT/GGC/EE/77-7) Avail NTIS  
 HC A09/MF A01 CSCL 01/3

Digital simulations were developed to implement a pitch rate control system for the F-16 aircraft engaged in aerial gunnery. First, the EASY Modelling and Analysis Program by Boeing Computer Services was adapted to implement a longitudinal axis F-16 aircraft, flight control system, and pilot model. Comparison of closed loop system responses indicated a proposed pitch rate flight control configuration would improve target tracking performance. The Terminal Aerial Weapon Delivery Simulation (TAWNDS) program by McDonnell Douglas Corporation was adapted for the F-16 aircraft. A non-linear six-degree-of-freedom aircraft model, multi-axis flight control system and multi-axis pilot model were developed to demonstrate target tracking capabilities. Eight different air-to-air scenarios were developed to simulate evasive encounters with a F-4 target aircraft. Time history target tracking errors indicated the improved tracking performance of the proposed pitch rate flight control configuration over the present normal acceleration configuration of the F-16 aircraft. Author (GRA)

**N78-32108** Virginia Univ Charlottesville  
**AERODYNAMIC STABILITY TESTING WITH MAGNETICALLY SUSPENDED MODELS** Ph.D. Thesis

Desikan Bharathan 1977 130 p

Avail Univ Microfilms Order No 7812113

The practicality of measuring aerodynamic stability derivatives using models suspended in a water-cooled electromagnetic suspension facility is examined. Two non-spinning models are tested in pitch and heave oscillation in a subsonic flow and both static and dynamic aerodynamic derivatives are determined from the measurements. The two models are 7 caliber and 5 caliber cone cylinders. Important factors in aerodynamic derivative measurements such as magnetic damping position sensing, and position-control stability are discussed and a comprehensive description of the apparatus is presented. Dissert Abstr

**N78-32109#** Bell Helicopter Co Fort Worth Tex  
**AUTOMATIC INSPECTION, DIAGNOSTIC AND PROGNOSTIC AIDAPS TEST CELL DATA COLLECTION AND TECHNICAL SUPPORT** Final Report

J V Hickey Aug 1977 471 p

(Contract DAAJ01-71-A-0335)

(AD-A055385 USAAVRADCOM-TR-78-4) Avail NTIS  
 HC A20/MF A01 CSCL 14/2

This report covers the work accomplished in direct support to the AIDAPS prototype development. Work covered includes test cell data for the AIDAPS developer to use in determining diagnostic and prognostic logic collection of engineering data and technical support for AIDAPS integration into the UH-1 and AH-1 aircraft and providing technical representation at AIDAPS development sites. AIDAPS was intended for use in Army aircraft and was intended to be used to reduce maintenance cost and improve flight safety by continuous in-flight monitoring of aircraft subsystems. GRA

**N78-32123#** Indian Inst of Science Bangalore Dept of Aeronautical Engineering  
**ROCKET STRUCTURES**

S Durvasula In its Space Sci., Technol and Appl An Overview  
 Apr 1978 17 p refs

Avail NTIS HC A10/MF A01

An attempt is made to focus attention on the features of structural practice as relevant to rocket structures and to give an overall view of the structural design aspects with particular emphasis on a few typical important facets of the approach to structural analysis and design. Estimation of loads and environmental conditions during ground operations and flight are considered. Analysis of overall structure the type of construction to be adopted and the choice of materials and methods of fabrication are presented. Other topics discussed are (1) dynamics and aeroelasticity, (2) vibration of overall vehicle, (3) aeroelastic divergence (4) vibration and flutter of rocket fins, (5) vibration of shell configurations (6) analytical techniques for solutions (7) experimental techniques tests and qualification aspects and (8) reliability considerations. G Y

**N78-32124#** Indian Inst of Science Bangalore Dept of Aeronautical Engineering  
**HYPERSONIC FLOWS**  
 N M Reddy *In its Space Sci Technol and Appl An Overview* Apr 1978 7 p refs

Avail NTIS HC A10/MF A01

Effects of hypersonic flow are dealt with in order to highlight important features Topics of discussion include (1) inviscid flow over bodies different flow regimes (free molecular flow, transition rarefied gas flow and continuum flow), (2) characteristic features of hypersonic flows, (3) flow over slender bodies (4) Newtonian Theory (5) aerodynamic heating (6) heating rates at hypersonic speeds (7) stagnation point heat transfer rate (8) hypersonic testing facilities and (9) principle of operation of a shock tube/shock tunnel G Y

**N78-32168\*#** National Aeronautics and Space Administration Langley Research Center, Hampton Va  
**HYPERSONIC AIRBREATHING MISSILE Patent Application**

James L. Hunt Pierce L Lawing, and Don C Marcum, Jr, inventors (to NASA) Filed 18 Sep 1978 21 p (NASA-Case-LAR-12264-1 US-Patent-Appl-SN-943087) Avail NTIS HC A02/MF A01 CSCL 16D

A hypersonic airbreathing missile using dual mode scramjet engines for propulsion is described The fuselage is constructed of a material with a high heat sink capacity and is covered with a thermal protective shield and lined with an internal insulating blanket The engine airframe integration uses the flat lower portion of the lower fuselage to precompress the air entering the scramjet engines The precompression of air entering the scramjet inlets increases as the angles of attack This feature results in a highly maneuverable missile which can accelerate as it banks into a turn NASA

**N78-32169#** Army Missile Research and Development Command Redstone Arsenal Ala Engineering Lab  
**A METHOD FOR VALIDATING MISSILE SYSTEM SIMULATION MODELS**

Thomas P Tytula Jun 1978 122 p refs (DA Proj 1T1-61101-A-91A) (AD-A055689, DRDMI-E-78-11) Avail NTIS HC A06/MF A01 CSCL 12/1

A method for deciding whether a missile system simulation model is sufficiently accurate for a specific purpose is presented The procedure uses time series models of test data to generate empirical distributions which can be compared to distributions obtained from simulation models Time series models are also used to generate empirical distributions of the error between simulated and test data These error distributions can then be used in decision models to decide whether the simulation model is valid for a specific purpose Examples demonstrate the validity of the time series transformation and illustrate its application to missile system data Author (GRA)

**N78-32173\*#** National Aeronautics and Space Administration Marshall Space Flight Center, Huntsville Ala  
**AERODYNAMIC ROLL CHARACTERISTICS OF A 0.00548 SCALE 146-INCH SOLID ROCKET BOOSTER REENTRY CONFIGURATION (MSFC MODEL NUMBER 486) OVER A PORTION OF THE REENTRY FLIGHT REGIME IN THE NASA MSF 14-INCH TRISONIC WIND TUNNEL**

Paul E Ramsey Jun 1977 139 p (NASA-TM-78195) Avail NTIS HC A07/MF A01 CSCL 01A

An experimental investigation was conducted in the MSFC 14 inch TWT to study the roll characteristics of a 0.00548 scale model of the 146 inch shuttle solid rocket booster to obtain more accurate rolling moment data on the solid rocket booster A sensitive single component roll balance was utilized Data were obtained for a single nose mounted sting The angle of attack range consisted of angles from 150 deg to 190 deg, roll angles consisted of angles from 0 deg to 337 1/2 deg in increments of 22 1/2 deg and Mach numbers were 1.46, 1.96, 2.74 and 2.48 B B

**N78-32177\*#** National Aeronautics and Space Administration Lyndon B Johnson Space Center Houston Tex  
**SPACE SHUTTLE SEPARATION MECHANISMS**  
 William F Rogers Sep 1978 26 p ref (NASA-TM-58210) Avail NTIS HC A03/MF A01 CSCL 22B

The development of space shuttle separation devices is reviewed to illustrate the mechanisms involved in separating the Orbiter from the Boeing 747 carrier aircraft and from the externally mounted propellant tank Other aspects of the separation device development discussed include design evolution operational experience during the orbiter approach and landing tests, and the work required to produce an operational system Author

**N78-32185\*#** Boeing Commercial Airplane Co Seattle Wash  
**ADVANCED COMPOSITES WING STUDY PROGRAM VOLUME 1 EXECUTIVE SUMMARY Final Report**

Stanley T Harvey and Gary L Michaelson Sep 1978 18 p 2 Vol (Contract NAS1-15003) (NASA-CR 145382-1) Avail NTIS HC A02/MF A01 CSCL 11D

The effort necessary to achieve a state of production readiness for the design and manufacturing of advanced composite wing structure is outlined Technical assessment and program options are also reviewed for the wing study results J A M

**N78-32186\*#** Boeing Commercial Airplane Co Seattle Wash  
**ADVANCED COMPOSITES WING STUDY PROGRAM, VOLUME 2 Final Report**

Stanley T Harvey and Gary L Michaelson 1 Aug 1978 119 p 2 Vol (Contract NAS1-15003) (NASA-CR-145382-2) Avail NTIS HC A06/MF A01 CSCL 11D

The study on utilization of advanced composites in commercial aircraft wing structures was conducted as a part of the NASA Aircraft Energy Efficiency Program to establish by the mid-1980s the technology for the design of a subsonic commercial transport aircraft leading to a 40% fuel savings The study objective was to develop a plan to define the effort needed to support a production commitment for the extensive use of composite materials in wings of new generation aircraft that will enter service in the 1985-1990 time period Identification and analysis of what was needed to meet the above plan requirements resulted in a program plan consisting of three key development areas (1) technology development, (2) production capability development, and (3) integration and validation by designing building and testing major development hardware J A M

**N78-32187\*#** Lockheed-California Co, Burbank  
**STUDY ON UTILIZATION OF ADVANCED COMPOSITES IN COMMERCIAL AIRCRAFT WING STRUCTURES VOLUME 1 EXECUTIVE SUMMARY Final Report**

I Frank Sakata Robert B Östrom, and Sal V Cardinale Aug 1978 23 p ref 2 Vol (Contract NAS1 28611) (NASA-CR-145381-1 LR-28611-Vol-1) Avail NTIS HC A02/MF A01 CSCL 11D

The effort required by commercial transport manufacturers to accomplish the transition from current construction materials and practices to extensive use of composites in aircraft wings was investigated The engineering and manufacturing disciplines which normally participate in the design development and production of an aircraft were employed to ensure that all of the factors that would enter a decision to commit to production of a composite wing structure were addressed A conceptual design of an advanced technology reduced energy aircraft provided the framework for identifying and investigating unique design aspects A plan development effort defined the essential technology needs and formulated approaches for effecting the required wing development The wing development program plans resource needs and recommendations are summarized J M S

**N78-32188\*#** Lockheed California Co Burbank  
**STUDY ON UTILIZATION OF ADVANCED COMPOSITES IN COMMERCIAL AIRCRAFT WING STRUCTURES, VOLUME 2 Final Report**



1 Frank Sakata and Robert B Ostrom Aug 1978 242 p refs  
2 Vol  
(Contract NAS1-15005)  
(NASA-CR-145381-2 LR 28610 Vol-2) Avail NTIS  
HC A11/MF A01 CSCL 11D

A plan is defined for a composite wing development effort which will assist commercial transport manufacturers in reaching a level of technology readiness where the utilization of composite wing structure is a cost competitive option for a new aircraft production plan. The recommended development effort consists of two programs: a joint government/industry material development program and a wing structure development program. Both programs are described in detail. JMS

**N78-32199#** National Bureau of Standards Washington D C  
Center for Fire Research

**IGNITION OF A LIQUID FUEL UNDER HIGH INTENSITY RADIATION Interim Report, 1 May 1977 - 30 Apr 1978**  
Takashi Kashiwagi and Howard R Baum 1978 33 p refs  
(AFOSR-ISSA-77-0016 AF Proj 2308)  
(AD-A054974 AFOSR-78-1008TR) Avail NTIS  
HC A03/MF A01 CSCL 21/4

Laser technology has been rapidly advancing in the last two decades. Power outputs of modern lasers increased significantly and these lasers can be used as tactical weapons. A high power laser weapon can ignite aircraft fuel through fuel tank penetration and can cause fire or explosion of the aircraft. The objective of this program is to obtain a fundamental understanding of physical and chemical mechanism of the ignition of liquid fuels under high intensity radiation. The program consists of an experimental study to clarify the key mechanisms of ignition and a theoretical study to predict the qualitative effects of physical and chemical parameters on ignition of flammable liquids. Since the radiative ignition of flammable liquids is hardly known, the theoretical study has been deferred until the key ignition process is confirmed from the experimental study. GRA

**N78-32235#** Pratt and Whitney Aircraft Group, West Palm Beach, Fla Government Products Div

**TITANIUM ALLOY IGNITION AND COMBUSTION Final Report, 10 Sep. 1976 - 10 Dec 1977**  
V G Anderson and B A Manty 15 Jan 1978 39 p refs  
(Contract N62269-76-C-0429)  
(AD-A055443, PWA-FR-9511, NADC-76083-30) Avail NTIS  
HC A03/MF A01 CSCL 11/6

The objective of this program was to determine the relative ignition and combustibility characteristics of titanium alloys. Nine titanium alloys and two coatings were subjected to a laser ignition source at each of two conditions of temperature, pressure and airstream velocity typical of gas turbine engine compressor environments. Three of the alloys did not burn and no significant difference could be established in the burning characteristics of six of the alloys. A chromium-molybdenum coating significantly reduced the magnitude of burn and an ion vapor deposited aluminum coating prevented ignition. The higher temperature environment was shown to produce a more severe burn. Comparison of one test run with results predicted by the analytical model currently under development showed good agreement. Author (GRA)

**N78-32264\*#** National Aeronautics and Space Administration Washington D C

**HIGH-TEMPERATURE CERAMICS FOR AUTOMOBILE GAS TURBINES**  
Peter Waizer Sep 1978 18 p ref Transl into ENGLISH of Conf Paper-77-073 from DGLR Presented at the Symp ueber Kleingasturbinen Stuttgart 11-12 Oct 1977 18 p Original language document was announced as A78-18708 Transl by SCITRAN, Santa Barbara Calif  
(Contract NASw 3198)  
(NASA-TM-75457 Paper-77-073) Avail NTIS  
HC A02/MF A01 CSCL 11B

The employment of the high operational temperatures makes it necessary to use for the construction of the turbines ceramic materials such as silicon nitride or silicon carbide. Investigations concerning the development of turbine components made of such materials are conducted by a German automobile manufacturer

and the ceramics industry. The current status of these investigations is reviewed. Flame tubes and guide-vane rings have successfully passed tests lasting 20 hours. Prototype turbine wheels have withstood the effects of peripheral speeds of 450 m/s. They also showed resistance to thermal shocks which were as high as 6-0 K/s. Author

**N78-32265\*#** National Aeronautics and Space Administration Washington D C

**HIGH TEMPERATURE CERAMICS FOR AUTOMOBILE GAS TURBINES PART 2 DEVELOPMENT OF CERAMIC COMPONENTS**

P Walzer M Koehler and P Rottenkolber Aug 1978 20 p refs Transl into ENGLISH from Motortech Z (West Ger), v 37 Dec 1976 p 525-529 Original language document was announced as A77-17591 Transl by Kanner (Leo) Associates Redwood City Calif Original doc prep by Volkswagenwerk AG  
(NASA-TM 75302) Avail NTIS HC A02/MF A01 CSCL 11B

The development of ceramic components for automobile gas turbine engines is described with attention given to the steady and unsteady thermal conditions the ceramics will experience and their anti-corrosion and strain resistant properties. The ceramics considered for use in the automobile turbines include hot-pressed Si<sub>3</sub>N<sub>4</sub>, reaction-sintered isostatically pressed Si<sub>3</sub>N<sub>4</sub>, hot-pressed SiC reaction-bonded SiC and glass ceramics. Attention is given to the stress analysis of ceramic structures and the state of the art of ceramic structural technology is reviewed emphasizing the use of ceramics for combustion chambers and ceramic shrouded turbomachinery (a fully ceramic impeller). Author

**N78-32270#** Boeing Commercial Airplane Co Seattle Wash  
**ADHESIVE BONDED AEROSPACE STRUCTURES STANDARDIZED REPAIR HANDBOOK Final Report, 1 Oct 1973 - 30 Sep 1977**

R E Horton and J E McCarty Dec 1977 347 p refs  
(Contract F33615-73-C-5171)  
(AD-A055684, AFML-TR-77-206 AFFDL-TR-77-139) Avail  
NTIS HC A15/MF A01 CSCL 01/3

This handbook is the culmination of a five-phase program to develop standardized repair procedures for adhesively bonded aircraft structures. It recommends repair materials and processing methods. It identifies repair procedures for both small and large size repairs. It additionally includes information on equipment and tools and nondestructive inspection techniques. Author (GRA)

**N78-32273#** Pennwalt Corp, King of Prussia Pa Central Research and Development Dept

**THE APPLICATION OF ULTRAVIOLET CURE RESINS FOR REPAIR OF COMPOSITES Final Report**

H D Gillman and J L Eichelberger Nov 1977 15 p refs  
(Contract N62269-77-M-7197)  
(AD-A055731) Avail NTIS HC A02/MF A01 CSCL 11/9

This investigation has shown that it is possible to quickly, easily and safely repair in the field damaged composites using UV curable resins. Although the best repair in this study restored 76% of the strength of the undamaged laminate, stronger repairs should be possible by optimizing the repair method. The nature of this study did not allow for a complete evaluation of all the variables which would affect the strength of these repairs. It is therefore reasonable to assume that stronger repairs would be possible by optimizing not only the resin system but also the method of cure (i.e. cure time, light intensity, and wavelength), the surface preparation and the reinforcing material. Author (GRA)

**N78-32321#** Hughes Aircraft Co Fullerton Calif  
**PORTABLE EARTH STATION ANTENNA STUDY SYSTEM Final Report**

1 Mar 1978 104 p Sponsored by Naval Res Lab  
(AD-A054791 FR 78-14-287) Avail NTIS HC A06/MF A01  
CSCL 17/2

The Mobile Antenna System requirements should be satisfied by solutions which offer the best antenna system approach and

provide the latest in the state-of-the-art technology with little or no risk. The antenna system should be very reliable yet cost effective. For the purpose of this study, only a single main reflector with a single beam system is considered. The recommended approach used to meet the requirements is the result of parametric tradeoffs of mechanical, electrical, logistic, reliability, and cost considerations. The recommended antenna system is a ten-foot diameter parabolic reflector mounted on an ax-el pedestal that is tied to an erectable tower. The tower and the antenna assembly is mounted on a 26-foot flat bed that can be easily transported by C130 cargo plane. The erection mechanism is hydraulic and requires no special tools. Outriggers are provided for stabilizing the flat bed, which becomes the pedestal for the tower. The system is designed for an antenna height of 25 feet. The feed is a center-fed cup dipole feed, the cup measuring approximately 9 inches in diameter and about 4 inches deep. The center support is a two-inch diameter lightweight pipe with a support cone at the attachment point of the reflector. The transmit and receive transmission lines plus a polarizing 90-degree hybrid are placed inside this support strut. The solid state transmitter filters and preamplifier are all located directly behind the vertex of the reflector. Author (GRA)

**N78-32327#** Army Cold Regions Research and Engineering Lab, Hanover, N.H.

**INTERACTION OF A SURFACE WAVE WITH A DIELECTRIC SLAB DISCONTINUITY**

Steven A. Arcone and Allan J. Delaney, Apr 1978, 19 p, refs (DA Proj 4A1-61102-AT-24) (AD A055956 CRREL-78-8) Avail NTIS HC A02/MF A01 CSCL 20/14

The interaction of a 5.1 GHz transverse electric surface wave with a dielectric slab is experimentally investigated. The wave is initially supported by a dielectric substrate resting upon a metallic ground-plane. A slab, made of the same dielectric material as the substrate and variable in height, is then placed upon the waveguide. The results for a small slab sitting on the substrate showed that the discontinuity was a very inefficient launcher of reflected surface waves. Investigations of these reflections with a trough waveguide showed that, for values of slab height comparable to the exponential decay height of the surface wave, the reflections remain very small. However, as the slab height is increased beyond the decay height, the reflected amplitude approaches the theoretical value for a plane wave reflected from the interface between air and the same dielectric. The results are applicable to surface wave methods of microwave deicing of wings and helicopter rotors. Author (GRA)

**N78-32330#** Arinc Research Corp., Annapolis, Md.  
**INVESTIGATION OF THE TECHNICAL AND OPERATIONAL FEASIBILITY OF USING A VHF DATA LINK FOR TRANSMISSION OF INTERMITTENT POSITIVE CONTROL (IPC), VOLUME 1, Final Report**

S. H. Kowalski, E. R. Carbone, D. A. Swann, and K. F. Peter, Aug 1977, 250 p (Contract DOT FA76WA 3788) (AD A055444 REPT 1326-21 01-1648-Vol 1) Avail NTIS HC A11/MF A01 CSCL 01/2

This report presents the results of an investigation of using a VHF Data Link to transmit collision avoidance commands to aircraft operating in the National Air Space. Operational scenarios are developed and system capacity evaluations are performed to establish the operational feasibility of the concept. Identification of potential concepts considered feasible generated the design and cost development of the avionics required in support of the prepared operation of IPC on a VHF Data Link. Author (GRA)

**N78-32371** Michigan Univ., Ann Arbor  
**HEAT TRANSFER AUGMENTATION IN FLOWS OVER AND NORMAL TO HIGH-POROSITY PERFORATED SURFACES**  
Ph.D. Thesis

Ching-Pang Lee, 1978, 193 p  
Avail Univ Microfilms Order No 7813691

Heat transfer and friction loss performances for flows over and normal to stacks of perforated plates were experimentally

studied by means of a single blow transient test technique in a subsonic wind tunnel. The hole diameter, pitch, plate spacing, and flow velocity were varied. Dissert Abstr

**N78-32384\*#** National Aeronautics and Space Administration, Washington, D.C.

**DYNAMIC STALL: AN EXAMPLE OF STRONG INTERACTION BETWEEN VISCOUS AND INVISCID FLOWS**

Jean-Jacques Philippe, Sep 1978, 57 p, refs. Transl into ENGLISH of "Le Déchrochage Dynamique: un Exemple d'Interaction Forte entre Écoulements Visqueux et Non-visqueux", Rept ONERA-TP-1977-135, Onera, Paris, 1977, 22 p. Presented at the Symp on Unsteady Aerodyn, Ottawa, 26-28 Sep 1977, sponsored by NATO and AGARD. Original language document was announced as A78-24467. Transl by SCITRAN, Santa Barbara, Calif.

(Contract NASw-3198)

(NASA-TM-75447 ONERA-TP-1977-135) Avail NTIS HC A04/MF A01 CSCL 20D

A study was done of the phenomena concerning profiles in dynamic stall configuration, and more specially those related to pitch oscillations. The most characteristic experimental results on flow separations with a vortex character, and their repercussions on local pressures and total forces were analyzed. Some aspects of the methods for predicting flows with the presence (or not) of boundary layer separation are examined, as well as the main simplified methods available to date for the calculation of total forces in such configurations. L.S.

**N78-32385\*#** National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

**INVERSE BOUNDARY-LAYER THEORY AND COMPARISON WITH EXPERIMENT**

James E. Carter, Sep 1978, 55 p, refs.

(NASA-TP-1208, L-12190) Avail NTIS HC A04/MF A01 CSCL 20D

Inverse boundary layer computational procedures which permit nonsingular solutions at separation and reattachment are presented in the first technique which is for incompressible flow, the displacement thickness is prescribed, in the second technique for compressible flow a perturbation mass flow is the prescribed condition. The pressure is deduced implicitly along with the solution in each of these techniques. Laminar and turbulent computations which are typical of separated flow are presented and comparisons are made with experimental data. In both inverse procedures finite difference techniques are used along with Newton iteration. The resulting procedure is no more complicated than conventional boundary layer computations. These separated boundary layer techniques appear to be well suited for complete viscous-inviscid interaction computations. Author

**N78-32391#** General Electric Co., Schenectady, N.Y.  
**UNSTEADY BLADE ROWS IN HIGH-SPEED FLOW**  
Final Report, 1 Jan 1974 - 31 Dec 1977

M. Kurosaka, May 1978, 167 p, refs.

(Contract F44620-74-C-0040)

(AD-A055620 SRD-78-063 AFOSR-78-1055TR) Avail NTIS HC A08/MF A01 CSCL 20/4

This report covers analytic investigations toward defining the instability boundaries of low incidence supersonic compressor flutter. A closed form expression was developed for the unsteady pressure distribution for a flat plate cascade in supersonic flow which is valid for a frequency range of practical interest. The work was extended to symmetric parabolic arc airfoils in cascade. Finite thickness was shown to have a first order effect on the flow field. Coupling the flow analysis with blade vibration modes indicates a bending instability in the frequency range of conventional design in general agreement with experimental data. An expression for the frequency of the unsteady pressure along the stationary rotor casing due to a vibrating blade row was derived. It indicates casing treatment tuned approximately to blade passing frequency and its harmonics should be effective in absorbing this unsteady flow energy. GRA

**N78-32392#** Texas A&M Research Foundation, College Station  
**AEROELASTIC CHARACTERISTICS OF A CASCADE OF BLADES**, Final Report, 1 Apr 1974 - 31 Dec 1977

Balusu M Rao and Louis Kronenberger Jr Feb 1978 32 p refs  
(Grant AF-AFOSR-2700-74 AF Proj 2307)  
(AD-A055619, AFOSR-78-1027TR) Avail NTIS  
HC A03/MF A01 CSCL 20/4

A general aerodynamic theory and a numerical lifting surface technique based on velocity potential formulation for predicting aerodynamic derivatives of a cascade of blades in subsonic flow is described. The unsteady airload prediction method is applied for predicting the flutter boundaries of a single degree-of-freedom in torsion of a cascade of blades. Also, a general flutter program is developed for a two degree-of-freedom staggered cascade in subsonic flow. By utilizing an iterative procedure which permits frequency variation. The flutter frequency and the flutter speed of the reference airfoil are obtained as a function of cascade parameters. The computer program uses very efficient techniques in computing unsteady loads, the flutter frequency and the flutter speeds. Author (GRA)

**N78-32395\*** National Aeronautics and Space Administration  
Ames Research Center Moffett Field Calif

**ANGLE DETECTOR Patent**

Gilbert T Parra inventor (to NASA) Issued 13 Jun 1978 8 p  
Filed 10 Nov 1976 Supersedes N77-11364 (15 - 02, p 0194)

(NASA-Case-ARC-11036-1 US-Patent 4 094 073  
US-Patent-Appl-SN-740457 US-Patent-Class-33-366) Avail  
US Patent Office CSCL 14B

An angle detector for determining a transducer's angular disposition to a capacitive pickup element is described. The transducer comprises a pendulum mounted inductive element moving past the capacitive pickup element. The capacitive pickup element divides the inductive element into two parts L sub 1 and L sub 2 which form the arms of one side of an a-c bridge. Two networks R sub 1 and R sub 2 having a plurality of binary weighted resistors and an equal number of digitally controlled switches for removing resistors from the networks form the arms of the other side of the a-c bridge. A binary counter controlled by a phase detector balances the bridge by adjusting the resistance of R sub 1 and R sub 2. The binary output of the counter is representative of the angle.

Official Gazette of the U S Patent Office

**N78-32424** Virginia Univ, Charlottesville  
**DYNAMIC ANALYSIS OF FLEXIBLE ROTOR-BEARING SYSTEMS USING A MODEL APPROACH Ph D Thesis**

Kat Chung Choy 1977 379 p  
Avail Univ Microfilms Order No 7812107

The generalized dynamic equations of motion were obtained by the direct stiffness method for multimass flexible rotor-bearing systems including the effects of unbalance, shaft bow, disk skew rotor acceleration gyroscopic moments and nonlinear bearing forces. The use of undamped and damped system mode shapes in the transformation are discussed. A set of undamped critical speed modes is used to transform the equations of motion into a set of coupled modal equations of motion. A rapid procedure for computing stability steady state unbalance response, and transient response is presented. Examples of the application of this modal approach are presented. The dynamics of the system is further investigated with frequency spectrum analysis of the transient response through the use of numerical fast Fourier transformations. Dissert Abstr

**N78-32427\*** National Aeronautics and Space Administration  
Washington D C

**CHEVRON CUTTING EXPERIMENT WITH NEW RUNWAY MIXTURES**

K Tyrn, comp Sep 1978 31 p Transl into ENGLISH of 'Chevron Cutting Versuch mit neuen Laufflaechenmischungen Rept Publ-72-758 Swissair Zurich, 22 Dec 1977 20 p Transl by Kanner (Leo) Associates Redwood City Calif  
(Contract NASw-3199)

(NASA-TM-75448, Publ-72-758) Avail NTIS  
HC A03/MF A01 CSCL 11J

Chevron cutting is shown to occur in different forms depending on the type of tire and the rubber on the running surface. Hardest wear is shown by the main tires of the B-747. Four

defects occurred in the form of two rip separation and two breakouts of the running surface. Tires capped by Thompson are more affected than any of the other rubber-capping fabrics. For Thompson tires Chevron Cutting is greatly reduced with a fiberglass-rubber mixture. For Goodyear tires it is eliminated with spiral wrap rubbercapping. Resistance to damages through cuts seems to be more positive for Goodyear tires. For Mader tires, the extent of Chevron Cutting is generally smaller than for Thompson cappings. J M S

**N78-32433\*** Tennessee Univ Space Inst Tullahoma  
**TRANSIENT DYNAMICS OF A FLEXIBLE ROTOR WITH SQUEEZE FILM DAMPERS Final Report**

D F Buono L D Schlitzer R G Hall III, and D H Hibner  
Sep 1978 85 p refs

(Contract NAS3-18523)  
(NASA-CR-3050, PWA-5548-9) Avail NTIS  
HC A05/MF A01 CSCL 13I

A series of simulated blade loss tests are reported on a test rotor designed to operate above its second bending critical speed. A series of analyses were performed which predicted the transient behavior of the test rig for each of the blade loss tests. The scope of the program included the investigation of transient rotor dynamics of a flexible rotor system similar to modern flexible jet engine rotors both with and without squeeze film dampers. The results substantiate the effectiveness of squeeze film dampers and document the ability of available analytical methods to predict their effectiveness and behavior. G G

**N78-32457** Ohio State Univ Columbus  
**FORCED VIBRATION OF THIN ELASTIC SHELLS WITH APPLICATION TO FRACTIONAL HORSEPOWER HERMETIC REFRIGERATION COMPRESSOR SHELLS Ph.D Thesis**

Earl Bruce Brookbank, III 1978 212 p  
Avail Univ Microfilms Order No 7812323

A method for determining the differential equations of motion for thin elastic shells with various types of external loading was developed. This technique consisted of determining the generalized force from the virtual work done by the shell loading. The generalized force for many types of point line and distributed loadings are derived and summarized. The derivation of these equations of motion showed that the reaction force from springs attached masses or external dampers excite all shell vibration mode shapes and crosscouple the shell differential equations of motion for each mode shape. These differential equations were applied to a fractional horsepower hermetic refrigeration compressor. Dissert Abstr

**N78-32458** Syracuse Univ N Y  
**SHEAR BUCKLING OF CORRUGATED PLATES WITH QUASI-SINUSOIDAL CORRUGATIONS Ph D Thesis**

Mirza Iqbal Hussain 1977 114 p  
Avail Univ Microfilms Order No 7811658

The usual approach to this problem was to idealize the corrugated plate as an orthotropic flat plate and apply the conventional techniques of flat plate buckling analysis. However there were doubts as to the applicability of orthotropic plate theory to corrugated plates. A somewhat more refined approach was used specifically in connection with simply supported corrugated plates of curvilinear cross section. In this approach the corrugated plate was regarded as a shell and its buckling load was determined by the method of stationary total potential energy. On the basis of this approach numerical buckling load data were obtained for simply supported curvilinearly corrugated plates covering a wide range of geometries. The results were compared with the predictions of orthotropic plate theory and it was seen that the latter generally underestimates the buckling strength by a significant amount. Dissert Abstr

**N78-32462#** Technion - Israel Inst of Tech Haifa Dept of Aeronautical Engineering

**EFFECT OF AIRCRAFT LOADING PROGRAM MODIFICATIONS ON THE FATIGUE LIFE AND DAMAGE CUMULATION PART 1 EFFECT OF LOAD PEAKS IN CASE OF CENTRAL HOLE SHEET SPECIMENS**

Alfred Buch Jul 1978 62 p refs  
(TAE 334 Pt 1 ICAF 1040) Avail NTIS HC A04/MF A01

Flight simulation and program tests were performed with different 2024-T3 sheet specimens containing a central hole. The effect of the peak-load frequency on the damage sum and flight number was investigated. For sufficiently close spectra with similar log-linear airborne stress distribution but different GAG cycle distribution the relative Miner rule yielded satisfactory results. In the case of truncation levels the investigated change of the frequency of stress cycles at the highest loading level had a weak effect on the damage sum while the effect of decrease of the frequency of the lowest stress amplitude was considerable in some cases. It was found that in particular loading program cases rare load peaks may have not only a beneficial but also a detrimental effect on the number of simulated flights. Truncation had a detrimental effect but the increase of the number of overload peaks above the number of cycles at the truncation level associated with the log-linear gust distribution had also a detrimental effect. L S

**N78-32486\*** Hughes Helicopters Culver City Calif  
**DYNAMIC ANALYSIS USING SUPERELEMENTS FOR A LARGE HELICOPTER MODEL**

Magan P Patel and Lalit C Shah (Multiple Access Inc) /n NASA Marshall Space Flight Center Seventh NASTRAN Users Colloq Oct 1978 p 335-354

Avail NTIS HC A21/MF A01 CSCL 20K

Using superelements (substructures), modal and frequency response analysis was performed for a large model of the Advanced Attack Helicopter developed for the U S Army Whiffletree concept was employed so that the residual structure along with the various superelements could be represented as beam-like structures for economical and accurate dynamic analysis. A very large DMAP alter to the rigid format was developed so that the modal analysis, the frequency response and the strain energy in each component could be computed in the same run. J A M

**N78-32504\*** Lockheed California Co Burbank  
**FLAW GROWTH IN COMPLEX STRUCTURE, VOLUME 3: SUMMARY, ASSESSMENTS, CONCLUSIONS Final Report, 12 May 1975 - 12 Sep 1977**

T R Brussat S I Chiu and M Creager Dec 1977 67 p refs (Contract F33615-75-C-3093)

(AD-A055483, LR-28272 Vol-3 AFFDL-TR-77-79 Vol-3) Avail NTIS HC A04/MF A01 CSCL 01/3

Fatigue crack growth testing and analysis was conducted to evaluate the effects of initial flaw location and multiplicity on fatigue crack growth life and element failure sequence in multiple element mechanically fastened metallic structure. The test program including 68 precracked structural specimens consisting of 26 joints and 42 stringer reinforced panels is summarized. The test results and corresponding analytical results are presented and compared. With respect to the test results for precracked joints the following effects are discussed: fastener torque faying surface friction under the fastener head; single and multiple initial flaws; fretting; transverse bending; flush-head and protruding-head fasteners; and spectrum loading effects. With respect to the results for precracked stringer reinforced panels the following are discussed: longitudinal splice versus continuous skin; initial flaw locations; single or multiple initial flaws; presence of continuing damage; flaws; crack growth in a tee or angle stringer; transverse bending; load shedding effects; spectrum loading; fracture surface; marking; stress level; and crack path. Guidelines and recommendations based on the results from this program are discussed. Author (GRA)

**N78-32539\*** National Aeronautics and Space Administration Langley Research Center, Hampton Va  
**INDEPENDENT POWER GENERATOR Patent**  
 Richard N Young inventor (to NASA) Issued 30 May 1978 6 p Filed 30 Jul 1976 Supersedes N78-10096 (16 - 01 p 14)

(NASA-Case-LAR-11208-1 US-Patent-4 091,613  
 US-Patent-Appl-SN-710036 US-Patent-Class-60-39 07  
 US-Patent-Class-60-39 14, US-Patent-Class-60-39 33

US-Patent-Class-98-1 5 US-Patent-Class-417-88) Avail US Patent Office CSCL 10B

A gas turbine powered aircraft auxiliary power system is described which is capable of efficiently supplying all aircraft auxiliary services both in flight and on the ground and is further capable of operating independently of the aircraft main engines. The system employs multiple gas turbine compressor stages, thereby accomplishing cabin pressurization, ventilation and heating. Official Gazette of the U S Patent Office

**N78-32601\*** California Univ, Livermore Lawrence Livermore Lab  
**THE HIGH ALTITUDE POLLUTION PROGRAM Annual Report, 1977**

F M Luther 30 Sep 1977 102 p refs

(Contract W-7405-eng-48)

(UCRL-50042-77) Avail NTIS HC A06/MF A01

The High Altitude Pollution Program (HAPP) was initiated by the Federal Aviation Administration to ensure that aircraft engine emissions in the stratosphere will not result in unacceptable effects on the biosphere. Lawrence Livermore Laboratory (LLL) has participated in HAPP since July 1975. The primary research emphasis at LLL is on numerical modeling of the atmospheric response to stratospheric perturbations. The modeling effort at LLL covers four major research areas: photochemical kinetics; coupled kinetics and transport; radiative transfer; and meteorological analysis. Progress since July 1, 1976 is reported. ERA

**N78-32604\*** National Technical Information Service, Springfield Va

**AIR POLLUTION EMISSION FACTORS A BIBLIOGRAPHY WITH ABSTRACTS Final Report, 1964 - May 1978**

Diane M Cavagnaro Jun 1978 138 p Supersedes NTIS/PS-77/0489 NTIS/PS-76/0392, NTIS/PS-75/410

(NTIS/PS-78/0548/4 NTIS/PS-77/0489 NTIS/PS-76/0392 NTIS/PS-75/410) Avail NTIS HC \$28 00/MF \$28 00 CSCL 13B

Emission factors for various industry, stationary, and mobile sources are presented in this annotated bibliography of research reports. The calculation and use of these factors are included. GRA

**N78-32620\*** Illinois Univ at Urbana-Champaign, Urbana Inst for Environmental Studies

**BASELINE DATA REQUIREMENTS FOR ASSESSING ENVIRONMENTAL IMPACT Final Report**

Glenn E Stout, Kent McGregor, Joe L Spaeth, Keturah A Reinbold, and G Larrin Wheeler May 1978 141 p refs

(PB-281148/7, IIEQ-78/05) Avail NTIS HC A07/MF A01 CSCL 13B

A guide used by technical personnel to perform an integrated baseline evaluation of changes in the total environment--in plants, soils, and animals (including man)--that is needed for a factual pinpoint assessment was developed. The methodology outlined requires substantial resources both in manpower and funds. GRA

**N78-32642\*** National Aeronautics and Space Administration, Washington D C

**SOME PRINCIPLES FOR STUDYING REDUCED VISIBILITY CONDITIONS IN REGIONS AROUND AIRPORTS**

N N Romanov, Z Ye Babenko and M N Yaroslavtseva Aug 1977 9 p Transl into ENGLISH from Vopr Sinopticheskoy i

Aviats Meteorologii Tr Sredneaziatskiy Regionalnyy Nauchno-Issled Gidrometeorol Inst (Leningrad) no 5, 1973 p 117-121

Original language document was announced as A74-37224 Transl by Kanner (Leo) Associates Redwood City Calif

(Contract NASw-2790)

(NASA-TM-75152) Avail NTIS HC A02/MF A01 CSCL 04B

A set of guidelines based on the experiences of the meteorological team at Tashkent airport is presented. These guidelines pertain to all the possible immediate and specific sources of relevant information in the vicinity of a given airport and to the combination of theoretical and experimental information which should be used in evaluating the data. B B

**N78-32673**

**N78-32673#** Joint Publications Research Service Arlington Va

**SOME PRESSING PROBLEMS OF SETTING PHYSIOLOGICAL-HYGIENIC STANDARDS FOR NOISE IN AEROSPACE MEDICINE**

Yu V Krylov *In its Space Biol and Aerospace Med* No 4 (JPRS-71830) 7 Sep 1978 p 15 refs Transl into ENGLISH from *Kosmich Biol Aviakosmich Med (Moscow)* no 4, Jul/Aug 1978 p 3-6

Avail NTIS HC A07/MF A01

Aircraft noise exposure tests established satisfactory human endurance of acoustic intensities of up to 60 dbA for exposure times of up to 60 days. Continuous exposure to acoustic energy levels of about 75 dbA produced fatigue and decreased efficiency. Specific suggestions are provided for the design of protective antinoise gear in accordance with noise intensity and cumulative exposure time. G G

**N78-32754#** Softech, Inc Waltham, Mass

**OPERATIONAL SOFTWARE CONCEPT OSC EXECUTIVE EVALUATION/REFINEMENT Final Technical Report, Sep. - Dec. 1976**

Michael G Willoughby and Carl K Hitchon Aug 1977 178 p (Contract F33615-76-C-1192)

(AD-A055902 AFAL-TR-77-87) Avail NTIS HC A09/MF A01 CSCL 09/2

This report describes executives built using the Operational Software Concept (OSC). These executives are designed to operate on a federated network of four DAIS processors connected by DAIS multiplex data buses. In fact, the executives and applications, represented by stubs, have been implemented on a two processor system. The applications supported by the executives are specified using Directed Flowgraphs (DFG) as described in AD-A010 415. This report is divided into three sections and an appendix. The first section describes the process of building an executive based on a DFG. The second section describes the parameters affecting system performance that are associated with the DFG supported by the executives. The third section presents the baseline executive statistics tuning method descriptions and statistics for the final tuned executive. The appendix provides program listings of intermediate tuning results of the final tuned executives. GRA

**N78-32816\*#** National Aeronautics and Space Administration Langley Research Center, Hampton Va

**LABORATORY AND COMMUNITY STUDIES OF AIRCRAFT NOISE EFFECTS**

David G Stephens and Clemans A Powell Sep 1978 16 p refs Presented at the Intern Congr on Noise as a Public Health Probl - Biol and Behavioral Effects Freiburg, West Ger 25-29 Sep 1978

(NASA-TM-78776) Avail NTIS HC A02/MF A01 CSCL 20A

The noise effects programs objective is to develop aircraft noise criteria and noise reduction methods for achieving greater community and passenger acceptance of air transportation systems. The approach consists of laboratory tests to subjectively evaluate the properties of aircraft-generated noise that are responsible for causing annoyance and field surveys to study the broader problems of community and passenger acceptability. The program is organized into two major thrusts: community acceptance and passenger acceptance. The community acceptance includes subjective response studies of single and multiple aircraft overflights as well as longer term community noise exposure. Emphasis is on the development of units and indices which accurately quantify annoyance. The passenger acceptance program includes studies to determine acceptable levels of interior noise and vibration for speech intelligibility and comfort of crew and passengers. Selected results from several recent studies are presented to indicate the nature, scope and methods of the research program. L S

**N78-32816\*#** National Aeronautics and Space Administration Langley Research Center, Hampton Va

**HELICOPTER ACOUSTICS**

Aug 1978 399 p refs Presented at the Intern Specialists Symp, Hampton Va, 22-24 May 1978 sponsored by the Am Helicopter Soc and AROD

(NASA-CP-2052-Pt-1, L-12339) Avail NTIS HC A17/MF A01 CSCL 20A

*Exterior and interior noise problems are addressed both from the physics and engineering as well as the human factors point of view. The role of technology in closing the gap between what the customers and regulating agencies would like to have and what is available is explored. Noise regulation concepts, design, operations and testing for noise control, helicopter noise prediction and research tools and measurements are among the topics covered.*

**N78-32817\*#** Federal Aviation Administration Washington, D C

**HELICOPTER EXTERNAL NOISE REQUIREMENTS FAA PERSPECTIVE**

Charles R Foster *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 1-16

Avail NTIS HC A17/MF A01 CSCL 20A

Enactment of helicopter noise certification standards for the control of noise impact contributing to community annoyance is considered in terms of the development of helicopters as an *environmentally compatible air transportation mode*. Increased use of helicopters for commercial applications and public awareness of aircraft noise are cited as factors making development of helicopter noise standards necessary both for the protection of the environmental interest of the community and to ensure the orderly growth of the helicopter industry itself. Noise sources, technology trends in helicopter design and design concepts to control helicopter noise are discussed along with the regulatory background and specific helicopter regulatory concepts. J M S

**N78-32818\*#** Helicopter Association of America, Washington, D C

**HELICOPTER NOISE REGULATIONS AN INDUSTRY PERSPECTIVE**

R A Wagner *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 17-32 refs

Avail NTIS HC A17/MF A01 CSCL 20A

A review of helicopter noise measurement programs and noise reduction/economic studies of FAA is given along with a critique of a study which addresses the economic impact of noise reduction on helicopter noise. Modification of several helicopters to reduce noise and demonstrate the economic impact of the application of the current state-of-the-art technology is discussed. Specific helicopters described include Boeing Vertol 347 Helicopter, Hughes OH-6 Helicopter and Hughes 269C Helicopter. Other topics covered include (1) noise trends and possible noise limits, (2) accuracy of helicopter noise prediction techniques, (3) limited change possibilities of derivatives, and (4) rotor impulsive noise. The unique operational capabilities of helicopters and the implications relative to noise regulations and certification are discussed. J M S

**N78-32819\*#** Army Aviation Research and Development Command St Louis Mo

**NOISE REQUIREMENTS FROM A MILITARY POINT OF VIEW**

Charles C Crawford, Jr *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 33-44 refs

Avail NTIS HC A17/MF A01 CSCL 20A

External and internal aircraft noise requirements are discussed in terms of application to military helicopters. The impact of the application of noise reduction technology to comply with FAA standards on cost and performance is emphasized J M S

**N78-32820\*#** Hughes Helicopters Culver City, Calif

**THE IMPACT OF URBAN OPERATIONS ON HELICOPTER NOISE REQUIREMENTS**

Stanley R Spector *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 45-59 refs

Avail NTIS HC A17/MF A01 CSCL 20A

The interrelationship of urban helicopter operations, helicopter noise and the establishment of urban public-use heliports is discussed. Public resistance to urban helicopter operations due to concern for safety and noise is shown to negatively impact the establishment of public-use heliports in urban centers. It is indicated that increased government and industry effort to reduce helicopter noise is needed to ensure continued growth in the helicopter industry J M S

**N78-32821\*#** Bolt Beranek and Newman, Inc., Cambridge Mass

**PREDICTION AND REDUCTION OF ROTOR BROADBAND NOISE**

Richard E Hayden and Krishna S Aravamudan *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 61-87 refs

Avail NTIS HC A17/MF A01 CSCL 20A

Prediction techniques which can be or have been applied to subsonic rotors, and methods for designing helicopter rotors for reduced broadband noise generation are summarized. It is shown how detailed physical models of the noise source can be used to identify approaches to noise control J M S

**N78-32822\*#** Westland Helicopters Ltd Hayes (England)

**THEORETICAL MODELS OF HELICOPTER ROTOR NOISE**

D L Hawkins *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 89-108 refs

Avail NTIS HC A17/MF A01 CSCL 20A

For low speed rotors it is shown that unsteady load models are only partially successful in predicting experimental levels. A theoretical model is presented which leads to the concept of unsteady thickness noise. This gives better agreement with test results. For high speed rotors it is argued that present models are incomplete and that other mechanisms are at work. Some possibilities are briefly discussed J M S

**N78-32823\*#** United Technologies Research Center East Hartford Conn

**NOISE DUE TO ROTOR-TURBULENCE INTERACTION**

R K Amiet *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 109-126 refs

Avail NTIS HC A17/MF A01 CSCL 20A

A procedure for calculating the noise due to turbulent inflow to a propeller or helicopter rotor in hover is summarized. The

method is based on a calculation of noise produced by an airfoil moving in rectilinear motion through turbulence. At high frequency the predicted spectrum is broadband while at low frequency the spectrum is peaked around multiples of blade passage frequency. The results of a parametric study of the variation of the noise with rotor tip speed, blade number, chord, turbulence scale and directivity angle are given. A comparison of the theory with preliminary experimental measurements shows good agreement J M S

**N78-32824\*#** Stanford Univ Calif

**THEORY ON ACOUSTIC SOURCES**

S E Wright *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 127-147 refs Sponsored by ONERA

Avail NTIS HC A17/MF A01 CSCL 20A

A theory is described for the radiation emission from acoustic multipole sources. The sources can be stationary or moving at speeds including supersonic and experience stationary or moving disturbances. The effect of finite source distributions and disturbances is investigated as well as the manner in which they interact. Distinction is made between source distributions that responded as a function of time and those that respond as a function of space J M S

**N78-32825\*#** Naval Ship Research and Development Center, Bethesda, Md

**POTENTIAL ACOUSTIC BENEFITS OF CIRCULATION CONTROL ROTORS**

Robert M Williams and Ian C Cheeseman (Southampton Univ) *In* NASA Langley Res Center Helicopter Acoustics Aug 1978 p 149-179 refs

Avail NTIS HC A17/MF A01 CSCL 20A

The fundamental aeroacoustic mechanisms responsible for noise generation on a rotating blade are theoretically examined. Their contribution to the overall rotor sound pressure level is predicted. Results from a theory for airfoil trailing edge noise are presented. Modifications and extensions to other source theories are described where it is necessary to account for unique aspects of circulation control (CC) aerodynamics. The circulation control rotor (CCR) as embodied on an X-wing vertical takeoff and landing (VTOL) aircraft, is used as an example for computational purposes, although many of the theoretical results presented are generally applicable to other CC applications (such as low speed rotors, propellers, compressors, and fixed wing aircraft). Using the analytical models it is shown that the utilization of CC aerodynamics theoretically makes possible unprecedented advances in rotor noise reduction. For the X-wing VTOL these reductions appear to be feasible without incurring significant attendant performance and weight penalties J M S

**N78-32826\*#** National Aeronautics and Space Administration Langley Research Center, Hampton Va

**HELICOPTER NOISE RESEARCH AT THE LANGLEY V/STOL TUNNEL**

Danny R Hoad (AVRADCOM Res and Technol Labs) and George C Green *In* its Helicopter Acoustics Aug 1978 p 181-204 refs

Avail NTIS HC A17/MF A01 CSCL 20A

The noise generated from a 1/4-scale AH-1G helicopter configuration was investigated in the Langley V/STOL tunnel. Microphones were installed in positions scaled to those for which flight test data were available. Model and tunnel conditions were carefully set to properly scaled flight conditions. Data presented indicate a high degree of similarity between model and flight test results. It was found that the pressure time history waveforms are very much alike in shape and amplitude. Blade slap when it occurred seemed to be generated in about the same location in the rotor disk as on the flight vehicle. If model and tunnel conditions were properly matched, including inflow turbulence characteristics, the intensity of the blade-slap impulse seemed to correlate well with flight J M S

**N78-32827\*** National Aeronautics and Space Administration  
Langley Research Center Hampton Va  
**EXPLORATORY WIND-TUNNEL INVESTIGATION OF THE EFFECT OF THE MAIN ROTOR WAKE ON TAIL ROTOR NOISE**

Robert J Pegg and Phillip A Shidler *In its Helicopter Acoustics*  
Aug 1978 p 205-219 refs

Avail NTIS HC A17/MF A01 CSCL 20A

Approaches to minimizing the noise generated by the interaction of the tail rotor blades with the wake of the main rotor considered include repositioning of the tail rotor with respect to the main rotor changes in the rotational direction of the tail rotor and modification of the main rotor tip vortex A variable geometry model was built which had the capability of varying tail rotor position relative to the main rotor as well as direction of tail rotor rotation Acoustic data taken from the model in the Langley anechoic noise facility indicates interaction effects due to both main rotor shed vortex and the main rotor turbulence

J M S

**N78-32828\*** Massachusetts Inst of Tech Cambridge  
**WIND TUNNEL INVESTIGATIONS OF MODEL ROTOR NOISE AT LOW TIP SPEEDS**

K S Aravamudan A Lee and W L Harris *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 221-261 refs

(Contract DAAG29-76-C-0027)

Avail NTIS HC A17/MF A01 CSCL 20A

Experimental and related analytical results on model rotor rotational and broadband noise obtained in the anechoic wind tunnel and rotor facility are summarized Factors studied include various noise sources effects of helicopter performance parameters on noise generated by a model main rotor, appropriate scaling laws for the various types of main rotor noise and the effects of intensity and size scales of injected turbulence on the intensity and spectra of broadband noise

J M S

**N78-32829\*** Textron Bell Helicopter, Ft Worth Tex  
**HELICOPTER EXTERNAL NOISE PREDICTION AND CORRELATION WITH FLIGHT TEST**

Bharat P Gupta *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 263-275 ref

Avail NTIS HC A17/MF A01 CSCL 20A

Mathematical analysis procedures for predicting the main and tail rotor rotational and broadband noise are presented The aerodynamic and acoustical data from Operational Loads Survey (OLS) flight program are used for validating the analysis and noise prediction methodology For the long method of rotational noise prediction the spanwise chordwise and azimuthwise airloading is used In the short method, the airloads are assumed to be concentrated at a single spanwise station and for higher harmonics an airloading harmonic exponent of 2.0 is assumed For the same flight condition the predictions from long and short methods of rotational noise prediction are compared with the flight test results The short method correlates as well or better than the long method

J M S

**N78-32830\*** National Aeronautics and Space Administration  
Langley Research Center Hampton Va  
**FULL-SCALE TESTING OF AN OGEE TIP ROTOR**

Wayne R Mantay (AVRADCOM Res and Technol Labs) Richard L Campbell, and Phillip A Shidler *In its Helicopter Acoustics*  
Aug 1978 p 277-308 refs

Avail NTIS HC A17/MF A01 CSCL 20A

Full scale tests were utilized to investigate the effect of the ogee tip on helicopter rotor acoustics performance and loads Two facilities were used the Langley whirl tower and a UH-1H helicopter The test matrix for hover on the whirl tower involved thrust values from 0 to 44 480 N (10,000 lb) at several tip Mach numbers for both standard and Ogee rotors The full scale testing on the UH-1H encompassed the major portion of the flight envelope for that aircraft Both near field acoustic measurements and far field flyover data were obtained for both

the ogee and standard rotors Data analysis of the whirl tower test shows that the ogee tip does significantly diffuse the tip vortex while providing some improvement in hover performance at low and moderate thrust coefficients Flight testing of both rotors indicates that the strong impulsive noise signature of the standard rotor can be reduced with the ogee rotor Analysis of the spectra indicates a reduction in energy in the 250 Hz and 1000 Hz range for the ogee rotor Forward flight performance was significantly improved with the ogee configuration for a large number of flight conditions Further rotor control loads were reduced through use of this advanced tip rotor

J M S

**N78-32831\*** National Aeronautics and Space Administration  
Ames Research Center, Moffett Field, Calif  
**HOVERING IMPULSIVE NOISE SOME MEASURED AND CALCULATED RESULTS**

D A Boxwell (AVRADCOM Res and Technol Labs), Y H Yu (AVRADCOM Res and Technol Labs), and F H Schmitz (AVRADCOM Res and Technol Labs) *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 309-322 refs

Avail NTIS HC A17/MF A01 CSCL 20A

In-plane impulsive noise radiating from a hovering model rotor was measured in an anechoic environment The hover acoustic signature was compared with existing theoretical prediction models with previous forward flight experiments using the same model rotor These hover tests showed good experimental consistency with forward flight measurements both in pressure level, and waveform character, over the range of Mach numbers tested (0.8 to 1.0) Generally poor correlation, however was confirmed with current linear theory prediction efforts Failure to predict both the peak pressure levels and the shape was reported especially with increasing tip Mach number

J M S

**N78-32832\*** Tokyo Univ (Japan)  
**IMPROVED METHODS FOR CALCULATING THE THICKNESS NOISE**

Yoshiya Nakamura and Akira Azuma *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 323-337 refs

Avail NTIS HC A17/MF A01 CSCL 20A

Advanced methods to compute the rotor thickness noise which is predominant in the case of high speed rotor were developed These methods were deduced from a previous method by transforming the integral coordinate, commuting the order of integration and differential and/or performing chordwise integration analytically with some adequate assumption The necessary computational times and waveforms obtained by the previous and three advanced methods were compared It was then concluded that the advanced methods could save the computational time compared with the previous method with the same accuracy

J M S

**N78-32833\*** Hamilton Standard, Windsor Locks, Conn  
**THE IMPORTANCE OF QUADRUPOLE SOURCES IN PREDICTION OF TRANSONIC TIP SPEED PROPELLER NOISE**

Donald B Hanson and Martin R Fink (United Technol Res Center) *In NASA Langley Res Center Helicopter Acoustics* Aug 1978 p 339-371 refs Presented at the Spring Meeting of the Inst of Acoustics Cambridge, England 7 Apr 1978 Submitted for publication

Avail NTIS HC A17/MF A01 CSCL 20A

A theoretical analysis is presented for the harmonic noise of high speed open rotors Far field acoustic radiation equations based on the Ffowcs-Williams/Hawkings theory are derived for a static rotor with thin blades and zero lift Near the plane of rotation the dominant sources are the volume displacement and the  $\rho U(2)$  quadrupole where  $U$  is the disturbance velocity component in the direction blade motion These sources are compared in both the time domain and the frequency domain using two dimensional airfoil theories valid in the subsonic, transonic and supersonic speed ranges For nonlifting parabolic arc blades the two sources are equally important at speeds between the section critical Mach number and a Mach number

of one However for moderately subsonic or fully supersonic flow over thin blade sections the quadrupole term is negligible It is concluded for thin blades that significant quadrupole noise radiation is strictly a transonic phenomenon and that it can be suppressed with blade sweep Noise calculations are presented for two rotors, one simulating a helicopter main rotor and the other a model propeller For the latter, agreement with test data was substantially improved by including the quadrupole source term  
J M S

**N78-32834\*** George Washington Univ Washington D C Joint Inst for Advancement of Flight Sciences  
**BOUNDS ON THICKNESS AND LOADING NOISE OF ROTATING BLADES AND THE FAVORABLE EFFECT OF BLADE SWEEP ON NOISE REDUCTION**

F Farassat Paul A Nystrom, and Thomas J Brown (AVRADCOM Res and Technol Labs) In NASA Langley Res Center Helicopter Acoustics Aug 1978 p 373-385 refs Sponsored in part by AROD

(Grant NsG-1474)

Avail NTIS HC A17/MF A01 CSCL 20A

The maxima of amplitudes of thickness and loading noise harmonics are established when the radial distribution of blade chord thickness ratio, and lift coefficient is specified It is first shown that only airfoils with thickness distribution and chordwise loading distributions which are symmetric with respect to midchord need be considered for finding the absolute maxima of thickness and loading noise The resulting chordwise thickness and load distributions for these maximum noise conditions require infinite slope at some points along the chord but otherwise are uniform It is shown that sweeping the blades reduces the thickness and loading noise, but there is no optimum sweep which generates the lowest noise  
J M S

**N78-32835\*** National Aeronautics and Space Administration Ames Research Center Moffett Field Calif  
**A STUDY OF THE NOISE RADIATION FROM FOUR HELICOPTER ROTOR BLADES**

Albert Lee (Beam Eng Inc) and Marianne Mosher In NASA Langley Res Center Helicopter Acoustics Aug 1978 p 387-402 refs

Avail NTIS HC A17/MF A01 CSCL 20A

Acoustic measurements were taken of a modern helicopter rotor with four blade tip shapes in the NASA Ames 40-by-80-Foot Wind Tunnel The four tip shapes are rectangular swept trapezoidal, and swept tapered in platform Acoustic effects due to tip shape changes were studied based on the dBA level peak noise pressure and subjective rating The swept tapered blade was found to be the quietest above an advancing tip Mach number of about 0.9, and the swept blade was the quietest at low speed The measured high speed impulsive noise was compared with theoretical predictions based on thickness effects good agreement was found  
J M S

**N78-32836\*** Pratt and Whitney Aircraft Group East Hartford Conn

**FLIGHT EFFECTS ON THE AERODYNAMIC AND ACOUSTIC CHARACTERISTICS OF INVERTED PROFILE COANNULAR NOZZLES Final Report**

Hilary Kozlowski and Allan B Packman Aug 1978 197 p refs

(Contract NAS3-17866)

(NASA-CR-3018 PWA-5501) Avail NTIS HC A09/MF A01 CSCL 20A

The effect of forward flight on the jet noise of coannular exhaust nozzles suitable for Variable Stream Control Engines (VSCE) was investigated in a series of wind tunnel tests The primary stream properties were maintained constant at 300 mps and 394 K A total of 230 acoustic data points was obtained Force measurement tests using an unheated air supply covered the same range of tunnel speeds and nozzle pressure ratios on each of the nozzle configurations A total of 80 points was taken The coannular nozzle OASPL and PNL noise reductions observed statically relative to synthesized values were basically retained under simulated flight conditions The effect of fan to primary stream area ratio on flight effects was minor At take-off

speed the peak jet noise for a VSCE was estimated to be over 6 PNdB lower than the static noise level High static thrust coefficients were obtained for the basic coannular nozzles with a decay of 0.75 percent at take-off speeds  
L S

**N78-32903#** Pennwalt Corp, King of Prussia, Pa Central Research and Development Dept

**PIEZOELECTRIC POLYMER TRANSDUCERS FOR DETECTION OF STRUCTURAL DEFECTS IN AIRCRAFT**

Final Report, 12 Jan. - 27 Apr 1977

Phillip E Bloomfield 22 Jul 1977 22 p

(Contract N62269-77-M-3186, Proj 989156)

(AD-A055729) Avail NTIS HC A02/MF A01 CSCL 09/1

A new versatile thin film material, PVF2 (poly-vinylidene fluoride), has been fabricated into sensors for ultrasonic transducers because of its outstanding piezoelectric properties as well as its mechanical strength and chemical stability PVF2 has a compliance ten times higher than that found in ceramics, and its g-constant (voltage per unit stress) is very high Since the material can be made into very thin films very wide-band electro-acoustic transducers can be incorporated into sensors that are flexible variable in shape and a wide range of sizes This fabrication versatility along with its relatively low cost and its attractive piezoelectric, mechanical strength, and chemical stability makes this material a prime candidate for a large range of applications to monitor or inspect aircraft structures A number of inspection techniques have been explored and are discussed These include acoustic impact testing for ball bearing wear and crack formation in metal structures pulse-echo and transmission ultrasonics to inspect composites  
Author (GRA)

**N78-32911#** Air Force Flight Dynamics Lab Wright-Patterson AFB Ohio

**AIR FORCE FLIGHT DYNAMICS LABORATORY FISCAL YEAR 1979 TECHNICAL OBJECTIVE DOCUMENT**

Jan 1978 57 p Supersedes AFFDL-TR-77-33

(AD-A055711 AFFDL-TR-78-6 AFFDL-TR-77-33) Avail NTIS HC A04/MF A01 CSCL 01/3

The document presents an overview of the Technical Planning Objectives and supporting data for each These are extracted from the technical plan of the Air Force Flight Dynamics Laboratory (AFFDL) Information is largely based on AFFDL fiscal 1979 technology plan omitting specific funding and timing information of an Official Use Only nature Technical objectives are described for the four technical areas of Structural Mechanics Vehicle Equipment/Subsystems and Flight Control and Aeromechanics Points of contact for more information in each of the areas are identified  
GRA

**N78-33015#** Joint Publications Research Service, Arlington Va

**TRANSLATIONS ON USSR SCIENCE AND TECHNOLOGY. PHYSICAL SCIENCE AND TECHNOLOGY, NO. 42**

3 Aug 1978 90 p refs Transl into ENGLISH from various Russian journals

(JPRS-71612) Copyright Avail NTIS HC A05/MF A01

Articles are presented on the following topics standard data processing in COBAL and PL-1, reliability of orbital stations, hydraulic weightlessness, communication between orbital station and control center, and remote sensing of earth resources

**N78-33019#** Joint Publications Research Service, Arlington, Va

**EARTH-TO-ORBITAL STATION RADIO BRIDGE**

B Pokrovskiy In its Transl on USSR Sci and Technol Phys Sci and Technol, No 42 (JPRS-71612) 3 Aug 1978 p 61-67 Transl into ENGLISH from Aviat Kosmonavt (Moscow), no 6, 1978 p 38-39

Copyright Avail NTIS HC A05/MF A01

A description is given of an USSR flight control center and the work of controlling and monitoring a spacecraft is explained  
L S

**N78-33024#** Joint Publications Research Service Arlington, Va

**TRANSLATIONS ON USSR SCIENCE AND TECHNOLOGY: PHYSICAL SCIENCE AND TECHNOLOGY, NO 44**



10 Aug 1978 92 p Transl into ENGLISH from various Russian journals

(JPRS-71659) Copyright Avail NTIS HC A05/MF A01

Topics discussed include editing and translating computer programs debugging processors instrument making, instrument modeling, and measurement systems

**N78-33036#** Office of Air Force History, Washington D C  
**ENCYCLOPEDIA OF US AIR FORCE AIRCRAFT AND MISSILE SYSTEMS. VOLUME 1 POST-WORLD WAR II FIGHTERS 1945 - 1973**

1978 178 p

(AD-A057002) Avail NTIS HC A09/MF A01 CSCL 01/3

This volume contains basic information on all Air Force fighters developed between World War II and 1973, including all configurations. It is based primarily on US Air Force sources. The origin of each aircraft is noted as well as its most troublesome development, production, and operational problems. Also covered are significant modifications, most of which can be attributed to ever-changing aeronautical technology. Production totals, delivery rates, unit costs, phaseout dates, and other important milestones are provided, as well as a brief description of each version's new features. The book begins with the first postwar American jet fighter the F-80 Shooting Star. It ends with Northrop's F-5 Freedom Fighter. Complete consistency of data on each fighter was not always available, but each section describes the aircraft's basic development, production, decision dates, program changes, test results, procurement methods, and the like. Technical data and operational characteristics also are provided.

Author (GRA)

**N78-33043#** National Aeronautics and Space Administration  
Ames Research Center, Moffett Field, Calif

**LASER-VELOCIMETER SURVEYS OF MERGING VORTICES IN A WIND TUNNEL. COMPLETE DATA AND ANALYSIS**

Victor R Corsiglia James D Iversen (Iowa State Univ., Ames) and Kenneth L Orloff Oct 1978 48 p refs

(NASA-TM-78449 A-7262) Avail NTIS HC A03/MF A01 CSCL 01A

The merger of two corotating vortices was studied with a laser velocimeter designed to measure the two cross-stream components of velocity. Measurements were made at several downstream distances in the vortex wake shed by two semispan wings mounted on the wind-tunnel walls. The velocity data provided well-defined contours of crossflow velocity, stream function, and vorticity for a variety of test conditions. Downstream of the merger point, the vorticity was found to be independent of the downstream distance for radii smaller than  $r/b = 0.05$ . For larger radii, the vorticity depended on the distance from the wing. Upstream of the merger, a multicell vorticity pattern was found.

Author

**N78-33045#** National Aeronautics and Space Administration  
Langley Research Center Hampton, Va

**AERODYNAMIC LOAD DISTRIBUTIONS AT TRANSONIC SPEEDS FOR A CLOSE-COUPLED WING-CANARD CONFIGURATION. TABULATED PRESSURE DATA**

Karen E Washburn and Blair B Gloss Oct 1978 231 p refs (NASA-TM-78780) Avail NTIS HC A11/MF A01 CSCL 01A

Wind tunnel studies are reported on both the canard and wing surfaces of a model that is geometrically identical to one used in several force and moment tests to provide insight into the various aerodynamic interference effects. In addition to detailed pressure measurements, the pressures were integrated to illustrate the effects of Mach number, canard location, and canard-wing interference on various aerodynamic parameters. Transonic pressure tunnel Mach numbers ranged from 0.70 to 1.20 for data taken from 0 deg to approximately 16 deg angle-of-attack at 0 deg sideslip.

G G

**N78-33046#** National Aeronautics and Space Administration  
Langley Research Center Hampton, Va

**GEOMETRY REQUIREMENTS FOR UNSTEADY AERODYNAMICS IN AEROELASTIC ANALYSIS AND DESIGN**

E Carson Yates, Jr and Luigi Morino Sep 1978 30 p (NASA-TM-78781) Avail NTIS HC A03/MF A01 CSCL 01A

Aircraft geometry requirements for unsteady aerodynamic computations are discussed and differences between requirements for steady and unsteady flow are emphasized within the framework of a general potential-flow aerodynamic formulation. Its implementation in a computer program called SOUSSA (Steady Oscillatory, and Unsteady Subsonic and Supersonic Aerodynamic) is detailed.

G G

**N78-33047#** National Aeronautics and Space Administration  
Langley Research Center, Hampton Va  
**EFFECTS OF WING LEADING-EDGE DEFLECTION ON THE LOW-SPEED AERODYNAMIC CHARACTERISTICS OF A LOW-ASPECT-RATIO HIGHLY SWEEPED ARROW-WING CONFIGURATION**

Paul L Coe Jr and Robert P Weston Sep 1978 70 p refs (NASA-TM-78787) Avail NTIS HC A04/MF A01 CSCL 01A

Wing leading-edge deflection effects on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration were determined. Static force tests were conducted in a V/STOL tunnel at a Reynolds number of about  $2.5 \times 10^6$  for an angle-of-attack range from -10 deg to 17 deg and an angle-of-sideslip range from -5 deg to 5 deg. Limited flow visualization studies were also conducted in order to provide a qualitative assessment of leading-edge upwash characteristics.

G G

**N78-33048#** Illinois Univ Urbana Dept of Aeronautical and Astronautical Engineering

**A DISTRIBUTION MODEL FOR THE AERIAL APPLICATION OF GRANULAR AGRICULTURAL PARTICLES. Final Report**

S T Fernandes and Allen I Ormsbee Sep 1978 75 p refs (Grant NsG-1400)

(NASA-CR-157745, AAE-TR-78-5, UIU-ENG-78-0505) Avail NTIS HC A04/MF A01 CSCL 01A

A model is developed to predict the shape of the distribution of granular agricultural particles applied by aircraft. The particle is assumed to have a random size and shape and the model includes the effect of air resistance, distributor geometry and aircraft wake. General requirements for the maintenance of similarity of the distribution for scale model tests are derived and are addressed to the problem of a nongeneral drag law. It is shown that if the mean and variance of the particle diameter and density are scaled according to the scaling laws governing the system, the shape of the distribution will be preserved. Distributions are calculated numerically and show the effect of a random initial lateral position, particle size and drag coefficient. A listing of the computer code is included.

Author

**N78-33049#** Naval Ship Research and Development Center  
Bethesda, Md Aviation and Surface Effects Dept

**ASSESSMENT OF LOAD ALLEVIATION DEVICES INSTALLED ON A POWER-AUGMENTED-RAM WING OVER IRREGULAR WAVES. Final Report, Oct 1976 - Aug 1977**

Earl F McCabe, Jr Aug 1977 70 p (AD-A045425, DTNSRDC-ASED-383) Avail NTIS

HC A04/MF A01 CSCL 01/1

An investigation was conducted to determine the motions and performance of a power-augmented wing-in-ground-effect model with load alleviation devices. The effects of soft and bumpered endplates and a flexible flap were investigated for a range of velocities, thrust-to-weight ratios and irregular wave sea states. Results showed that the flexible flap can provide a smoother, softer ride for a thrust-to-weight ratio of 0.20 but at the expense of decreased average heave and increased average drag. Results also indicated a transport efficiency degradation from 23.18 to 10.06 with increase in sea state from 0 to 5 for the model without load alleviation. The results were inconclusive for the soft and bumpered endplates.

Author

**N78-33050#** National Aeronautics and Space Administration  
Langley Research Center Hampton, Va

**SUBSONIC DYNAMIC STABILITY CHARACTERISTICS OF TWO CLOSE-COUPLED CANARD-WING CONFIGURATIONS**

Richard P Boyden Oct 1978 80 p refs  
(NASA-TP-1291 L-12057) Avail NTIS HC A05/MF A01  
CSCL 01A

The pitch yaw and roll damping as well as the oscillatory stability in pitch and in yaw were measured for two canard wing configurations with wing sweeps of 44 deg and 60 deg Tests were made at free stream Mach number of 0.3 0.4 and 0.7 and for angles of attack from about -4 deg to 20 deg The effects of various components such as the canard, nose strakes wings, vertical tail and horizontal tail were determined The basic canard wing vertical tail configurations generally had positive damping in pitch, yaw and roll The effect of the canard was generally beneficial except for its tendency to decrease the oscillatory directional stability J A M

**N78-33051\***# National Aeronautics and Space Administration Langley Research Center Hampton Va

**ESTIMATION OF LEADING-EDGE THRUST FOR SUPERSONIC WINGS OF ARBITRARY PLANFORM**

Harry W Carlson and Robert J Mack Oct 1978 51 p refs  
(NASA-TP-1270 L-12283) Avail NTIS HC A04/MF A01  
CSCL 01A

A numerical method for the estimation of leading edge thrust for supersonic wings of arbitrary planform was developed and was programmed as an extension to an existing high speed digital computer method for prediction of wing pressure distributions The accuracy of the method was assessed by comparison with linearized theory results for a series of flat delta wings Application of the method to wings of arbitrary planform both flat and cambered is illustrated in several examples J A M

**N78-33052\***# Southampton Univ (England) Dept of Aeronautics and Astronautics

**A THEORETICAL AND EXPERIMENTAL STUDY OF CIRCULATION CONTROL WITH REFERENCE TO FIXED WING APPLICATIONS Ph.D Thesis**

R V Smith Jul 1978 217 p refs  
(RP-582) Avail NTIS HC A10/MF A01

An experimental investigation is described of two circulation control aerofoils and the effects on them of short chord tabs designed to reduce the drag of such aerofoils at low lift coefficients Performance improvements are demonstrated at the expense of greater system complexity A new quasipotential flow model of circulation control applied to a circular cylinder is described This flow model is based on the use of discrete vortices to represent the shear layer between a Coanda wall jet and an external stream This prediction method is applicable to other Coanda and boundary layer control flows An arbitrary form of vortex decay is used to simulate dissipative processes within the wall jet and results in improvements in performance prediction L S

**N78-33053\***# National Aeronautics and Space Administration Hugh L Dryden Flight Research Center, Edwards Calif

**COMPARISON OF CONCURRENT STRAIN GAGE- AND PRESSURE TRANSDUCER-MEASURED FLIGHT LOADS ON A LIFTING REENTRY VEHICLE AND CORRELATION WITH WIND TUNNEL PREDICTIONS**

Ming H Tang, Walter J Sefic and Robert G Sheldon Oct 1978 42 p refs  
(NASA-TP-1331, H-1035) Avail NTIS HC A03/MF A01 CSCL 01A

Concurrent strain gage and pressure transducer measured flight loads on a lifting reentry vehicle are compared and correlated with wind tunnel-predicted loads Subsonic, transonic, and supersonic aerodynamic loads are presented for the left fin and control surfaces of the X-24B lifting reentry vehicle Typical left fin pressure distributions are shown The effects of variations in angle of attack angle of sideslip, and Mach number on the left fin loads and rudder hinge moments are presented in coefficient form Also presented are the effects of variations in angle of attack and Mach number on the upper flap lower flap, and aileron hinge-moment coefficients The effects of variations in lower flap hinge moments due to changes in lower flap deflection and Mach number are presented in terms of coefficient slopes Author

**N78-33054\***# National Aeronautics and Space Administration Hugh L Dryden Flight Research Center, Edwards Calif

**AERODYNAMIC DERIVATIVES FOR AN OBLIQUE WING AIRCRAFT ESTIMATED FROM FLIGHT DATA BY USING A MAXIMUM LIKELIHOOD TECHNIQUE**

Richard E Maine Oct 1978 73 p refs  
(NASA-TP-1336 H-1003) Avail NTIS HC A04/MF A01 CSCL 01A

There are several practical problems in using current techniques with five degree of freedom equations to estimate the stability and control derivatives of oblique wing aircraft from flight data A technique was developed to estimate these derivatives by separating the analysis of the longitudinal and lateral directional motion without neglecting cross coupling effects Although previously applied to symmetrical aircraft the technique was not expected to be adequate for oblique wing vehicles The application of the technique to flight data from a remotely piloted oblique wing aircraft is described The aircraft instrumentation and data processing were reviewed with particular emphasis on the digital filtering of the data A complete set of flight determined stability and control derivative estimates is presented and compared with predictions The results demonstrated that the relatively simple approach developed was adequate to obtain high quality estimates of the aerodynamic derivatives of such aircraft B B

**N78-33055\***# Analytic Sciences Corp Reading, Mass

**MISSILE AERODYNAMIC PARAMETER AND STRUCTURE IDENTIFICATION FROM FLIGHT TEST DATA Final Report, Feb - Oct, 1977**

James E Kain Charles M Brown Jr, and Jang G Lee Eglin AFB Fla AFATL Nov 1977 205 p refs  
(Contract F08635-77-C-0062, AF Proj 2068)  
(AD-A056343 TASC-TR-1019-2, AFATL-TR-77-129) Avail NTIS HC A10/MF A01 CSCL 09/3

An extended Kalman filter algorithm for aerodynamic parameter identification from missile postflight data is developed and verified for realistic test conditions The algorithm includes a general purpose six-degrees-of-freedom missile airframe model suitable for representing a variety of missile configurations Verification studies consider low order linear aerodynamic models and higher order models with extensive nonlinear and pitch-yaw coupling effects The sensitivity of filter performance to initial conditions measurement data rate and accuracy, input selection and modeling errors is investigated A structure identification technique is used to select the most probable aerodynamic model for a given data set from a group of candidate models In addition, actual flight test data from a complex aerodynamically controlled vehicle is processed with the filter algorithm The resulting identified model is shown to be an improvement over the preflight model Author (GRA)

**N78-33058\***# Dayton Univ Research Inst, Ohio

**A COMPARATIVE STUDY OF TWO COMPUTATIONAL METHODS FOR CALCULATING UNSTEADY TRANSONIC FLOWS ABOUT OSCILLATING AIRFOILS Final Report, Apr. - Jun 1977**

Donald P Rizzetta Nov 1977 44 p refs  
(Contract F33615-76-C-3146 AF Proj 2307)  
(AD-A056946 AFFDL-TR-77-118) Avail NTIS HC A03/MF A01 CSCL 20/4

This report provides a direct comparison of the calculations for the flow field about an oscillating airfoil in a transonic freestream predicted by two computational methods namely harmonic analysis and time integration Details of the two methods are summarized and results for NACA64A010 airfoil oscillating in pitch are considered Comparisons of the unsteady pressure distribution and resultant lift are presented for several values of free-stream Mach number, angle of attack and reduced frequency of oscillation Author (GRA)

**N78-33060\***# National Aeronautics and Space Administration Langley Research Center Hampton Va

**PROSPECTS FOR A CIVIL/MILITARY TRANSPORT AIRCRAFT**

Charles E Jobe (USAF/ASD), Larry W Noggle (USAF/ASD) and Allen H Whitehead Jr Sep 1978 46 p refs Presented at 1978 SAE Intern Air Transportation Meeting Boston, 3 May 1978

(NASA-TM-78724 Rept-791-40-13-01) Avail NTIS HC A03/MF A01 CSCL 01C

The similarities and disparities between commercial and military payloads design features missions and transport aircraft are enumerated Two matrices of civil/military transport aircraft designs were evaluated to determine the most cost effective payloads for a projected commercial route structure and air freight market The probability of this market developing and the prospects for alternate route structures and freight markets are evaluated along with the possible impact on the aircraft designs Proposals to stimulate the market and increase the viability of the common aircraft concept are reviewed and the possible impact of higher cargo demand on prospects for common civil/military freighters is postulated The implications of planned advanced technology developments on the aircraft performance and cost are also considered Author

**N78-33061\***# National Aeronautics and Space Administration Langley Research Center Hampton, Va

**CHARACTERISTICS OF FUTURE AIR CARGO DEMAND AND IMPACT ON AIRCRAFT DEVELOPMENT. A REPORT ON THE CARGO/LOGISTIC AIRLIFT SYSTEMS STUDY (CLASS) PROJECT**

Allen H Whitehead, Jr Oct 1978 45 p refs (NASA-TM-78774) Avail NTIS HC A03/MF A01 CSCL 01C

Current domestic and international air cargo operations are studied and the characteristics of 1990 air cargo demand are postulated from surveys conducted at airports and with shippers consignees and freight forwarders as well as air land, and ocean carriers Simulation and route optimization programs are exercised to evaluate advanced aircraft concepts The results show that proposed changes in the infrastructure and improved cargo loading efficiencies are as important enhancing the prospects of air cargo growth as is the advent of advanced freighter aircraft Potential reductions in aircraft direct operating costs are estimated and related to future total revenue Service and cost elasticities are established and utilized to estimate future potential tariff reductions that may be realized through direct and indirect operating cost reductions and economies of scale A R H

**N78-33062**# Transportation Systems Center Cambridge Mass **AIRLINE DELAY TRENDS, 1972-1977 Final Report**

Stephen Morin and Seymour M Horowitz Jul 1978 51 p ref

(AD-A056867 FAA-EM-78-11) Avail NTIS HC A04/MF A01 CSCL 01/5

Estimates of block, airborne and ground delays for approximately 325 route segments connecting 20 of the most active US airports and serviced by the domestic scheduled air carriers are presented Delay information consists of airborne and ground data displayed in both table and graph form for 20 airports for the years 1972 through 1977 A R H

**N78-33063**# National Aviation Facilities Experimental Center Atlantic City N J

**THE ANALYSIS OF NATIONAL TRANSPORTATION SAFETY BOARD SMALL MULTIENGINE FIXED-WING AIRCRAFT ACCIDENT/INCIDENT REPORTS FOR THE POTENTIAL PRESENCE OF LOW-LEVEL WIND SHEAR Final Report, Jun. - Nov. 1977**

Jack J Shrager Jun 1978 65 p refs (FAA Proj 154-451-110)

(AD-A056780 FAA-NA-78-5, FAA-RD-78-55) Avail NTIS HC A04/MF A01 CSCL 01/2

The National Transportation Safety Board aircraft accident/incident data base covering the years 1964 through 1975 was screened to select those accidents involving multiengine aircraft of less than 12,500 pounds gross weight in which the potential of low-level wind shear as a factor could not be discounted The successive filtering techniques employed eliminated all but 27 small multi-engine fixed-wing aircraft accidents/incidents which were approximately similar to the results obtained for the

large multiengine aircraft The presence of a low-level wind shear was a distinct possibility in these 27 takeoff approach or landing accidents/incidents The historical accident information indicates that orographic or local topographic induced wind shears are a more serious problem for this class aircraft than those shears related to thunderstorm and gust front activities Author

**N78-33064**# National Transportation Safety Board, Washington D C Bureau of Technology

**ANNUAL REVIEW OF AIRCRAFT ACCIDENT DATA, US GENERAL AVIATION, CALENDAR YEAR 1976**

8 Mar 1978 202 p (PB-281330/1 NTSB-ARG-78-1) Avail NTIS HC A10/MF A01 CSCL 01B

The record of aircraft accidents which occurred in US general aviation operations during the calendar year 1976 is presented It includes an analysis of accident data relating to an overview, types of accidents, accident causal factors kinds of flying, and conclusions A statistical compilation of accident information presented in the form of accident and rate tables analytic tables, injury tables and cause/factor tables was reviewed These statistical data are divided into sections pertaining to all operations, small fixed-wing aircraft large fixed-wing aircraft, rotorcraft gliders and collisions between aircraft There were 4,193 total and 695 fatal general aviation accidents that occurred during 1976 GRA

**N78-33065**# National Transportation Safety Board Washington D C Bureau of Technology

**ANNUAL REVIEW OF AIRCRAFT ACCIDENT DATA, US AIR CARRIER OPERATIONS, 1976**

5 Jan 1978 91 p (PB-281329/3, NTSB-ARC-78-1) Avail NTIS HC A05/MF A01 CSCL 01B

The record of aviation accidents in all operations of the US air carriers for calendar year 1976 is presented It includes an analysis by class of carrier and type of service in which the 1976 performances were compared with 5 year base period averages Scheduled passenger services of the certificated route carriers for the past 5 years (1972 through 1976) were compared with the previous 5 year period (1967 through 1971) for types of accidents and phases of operation Statistical tables which summarize the accidents, fatalities, and accident rates, causal tables, and briefs of accidents are included GRA

**N78-33066**# National Technical Information Service Springfield Va

**BIRD STRIKES AND AVIATION SAFETY. A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1964 - Jun. 1978**

Guy E Habercom Jr Jul 1978 79 p Supersedes NTIS/PS-77/0606 and NTIS/PS-76/0538

(NTIS/PS-78/0694/6 NTIS/PS-77/0606, NTIS/PS-76/0538) Avail NTIS HC \$28 00/MF \$28 00 CSCL 01B

Hazards to aircraft created by engine ingestion or airplane interception of birds are investigated in these Government-sponsored research reports Bird damage assessment, structural strengthening, windshield design, and bird tracking and dispersal methods are studied This updated bibliography contains 73 abstracts 11 of which are new entries to the previous edition GRA

**N78-33068**# Mitre Corp McLean, Va Metrek Div **PARAMETERS OF FUTURE ATC SYSTEMS RELATING TO AIRPORT CAPACITY/DELAY Final Report**

Andrew L Haines Jun 1978 26 p refs (Contract DOT-FA78WA-4075)

(AD-A057059 MTR-7766-Rev-1 FAA-EM-78-8A) Avail NTIS HC A03/MF A01 CSCL 17/7

A series of site specific case studies were conducted to show how to increase airport capacity Estimates of changes in longitudinal spacing on final approach are presented The potential for reducing interarrival errors and runway occupancy time is also discussed The parametric values presented are to be used by the FAA/User Group-Airport-Case Study Teams in assessing the potential impact of airport air traffic control changes on delay capacity B B

**N78-33069#** National Aviation Facilities Experimental Center  
Atlantic City N J

**VORTEX ADVISORY SYSTEM SIMULATION OF CHICAGO  
O'HARE AIRPORT Final Report, Mar - Jun 1977**

Barry E Keffe Jul 1978 26 p refs  
(AD-A057112, FAA-NA-78-12 FAA-RD-78-76) Avail NTIS  
HC A03/MF A01 CSCL 17/7

The procedural implications of the Vortex Advisory System (VAS) on the Chicago O Hare terminal air traffic control environment were evaluated and simulated. Cost benefits/capacity gains which may accrue using reduced VAS aircraft separation criteria on the final approach course based upon meteorological assurance of vortex dissipation were demonstrated. A real time simulation of the Chicago O Hare International Airport airside operations was conducted between March 28 and June 24 1977. There were 105 data runs of 1 hour and 20 minutes duration completed during this period and two favored runway configurations were identified. Three vortex clear zones were exercised. Middle marker to touchdown outer marker to touchdown and 20 nm fix to touchdown. Test results indicate that (1) no procedural implications emerged which would deter the implementation of VAS at Chicago O Hare Airport and (2) arrival rate increases are sufficient to support cost/benefit analysis studies.

B B

**N78-33070#** Applied Physics Lab Johns Hopkins Univ Laurel,  
Md Dept of Fleet Systems

**SYSTEM DEFINITION AND INVESTIGATION OF THE ON  
SITE PROCESSING OF EN ROUTE SENSOR SIGNALS  
ADDENDUM INVESTIGATION INTO POSSIBLE EN ROUTE  
ON SITE BEACON RING AROUND DISCRIMINANTS  
Final Report**

J W Thomas Feb 1978 187 p refs Original contains color  
illustrations

(Contract DOT-FA75WA-3553)  
(AD-A056941 FP2-E-034-Add FAA-RD-77-12.4) Avail NTIS  
HC A09/MF A01 CSCL 17/7

The characteristics existing in beacon reply data that could be used to identify false target reports generated by ring around were studied. A specific technique using run length is suggested and evaluated via statistical methods and computer simulation.

A R H

**N78-33071#** National Aviation Facilities Experimental Center  
Atlantic City N J

**TRSB MICROWAVE LANDING SYSTEM DEMONSTRATION  
PROGRAM AT SHIRAZ, IRAN Final Report**

Mar 1978 45 p  
(AD-A055526, FAA-NA-78-23, FAA-RD-78-23) Avail NTIS  
HC A03/MF A01 CSCL 17/7

An operational demonstration concerning the Time Reference Scanning Beam (TRSB) was carried out at Shiraz International Airport serving Shiraz Iran. Data acquisition and operational demonstration flights were flown with the FAA B-727 aircraft over the period March 3-8 1978. During the flights, a radio telemetry theodolite was used for aircraft space position data. Flight profiles included straight-in approaches at various elevation angles. Results of the flight tests indicate that the performance of the TRSB Small Community System was within U.S. design requirements and the ICAO's reduced capability system and full capability system requirements. The feasibility of having one TRSB ground system serving two parallel runways by using offset approaches was demonstrated.

B B

**N78-33072#** Federal Aviation Administration Washington  
D C Office of Systems Engineering Management

**THE FAA CONCEPT FOR A BEACON COLLISION AVOIDANCE  
SYSTEM (BCAS) VOLUME 1 EXECUTIVE  
SUMMARY**

E J Koenke, L Kleiman, E Lucier, L Schuchman and W Thedford  
Apr 1978 81 p refs

(AD-A056930 FAA-EM-78-5-Vol-1) Avail NTIS  
HC A05/MF A01 CSCL 01/4

A unique airborne aircraft collision avoidance system concept is presented which assures safe separation from the largest possible percentage of potential collision threats. The concept is designed to operate in all airspace as a compatible backup to the present and evolving ATC system and to be acceptable to the pilot and the user community. The system concept capitalizes on the aviation

community's large existing investment in ATCRBS transponders and on the ground based beacon surveillance system network for the basic sources of the collision avoidance information.

Author

**N78-33073#** Federal Aviation Administration, Washington D C  
Systems Research and Development Service

**ENGINEERING AND DEVELOPMENT PROGRAM PLAN  
DISCRETE ADDRESS BEACON SYSTEM (DABS)**

May 1978 42 p  
(AD-A057122 FAA-ED-03-1) Avail NTIS HC A03/MF A01  
CSCL 17/7

The DABS development program consists of three major phases: Phase 1, System Design & Validation; Phase 2, Engineering Development; and Phase 3, Production Deployment. In Phase 1, a single sensor design compatible with ATCRBS, including an integral data link, was realized. This effort resulted in developing Engineering Requirements for procurement of three industry built engineering model DABS sensors for further engineering development in Phase 2, the current phase of the program. Phase 2 is system oriented, focusing on investigations of such problems as multiple sensor coordination, target hand-off, ATC interface and procedures, failure mode operation, ATARS operation, etc. Primarily the second phase of the DABS development program is addressed since Phase 3 deployment is dependent upon efforts related to the decision to implement DABS and the attendant transition planning.

L S

**N78-33075#** Systems Control Inc Palo Alto, Calif  
**LORAN-C, OMEGA, AND DIFFERENTIAL OMEGA APPLIED  
TO THE CIVIL AIR NAVIGATION REQUIREMENT OF  
CONUS, ALASKA, AND OFFSHORE VOLUME 2 ANALYSIS  
Final Report, Jul 1976 - Dec 1977**

W Heine, F G Karkalik and E D McConkey Apr 1978  
222 p refs 3 Vol

(Contract DOT-FA75WA-3662)  
(AD-A056741, FAA-RD-78-30-2-Vol-2) Avail NTIS  
HC A10/MF A01 CSCL 17/7

A detailed analysis supporting information contained in the executive summary is presented.

B B

**N78-33085\*#** Kaman Aerospace Corp Bloomfield Conn  
**THEORETICAL STUDY OF MULTICYCLIC CONTROL OF A  
CONTROLLABLE TWIST ROTOR**

A Z Lemnios and Frank K Dunn Apr 1976 68 p refs  
(Contract NAS2-7738)

(NASA-CR-151959, R-1393) Avail NTIS HC A04/MF A01  
CSCL 01C

Analytical studies were performed to ascertain the feasibility of reducing helicopter rotor induced 4/rev vibratory forces by means of multicyclic flap control input on a dual control four bladed rotor system. The dual control consisted of a primary inboard pitch horn blade control and a secondary outboard flap control. Flap control was put in at frequencies greater than the rotor rotational speed.

Author

**N78-33088\*#** Lockheed-California Co Burbank  
**THE COMMON CASE STUDY LOCKHEED DESIGN OF A  
SUPERSONIC CRUISE VEHICLE Final Report, Jan - Aug  
1978**

J S Clauss, Jr, A P Hays, and J R Wilson 11 Aug 1978  
51 p refs

(Contract NAS1-14625)  
(NASA-CR-158935, LR-28705) Avail NTIS  
HC A04/MF A01 CSCL 01C

The objective was to compare the characteristics of SSTs designed for the same mission by Lockheed McDonnell Douglas, British Aerospace (UK), Aerospatiale (France), and the USSR. This comparison was to be used to calibrate parametric design studies of the tradeoff between SST direct operating cost (DOC) and noise levels at the FAR 36 certification points. The guidelines for this common case study were to design an aircraft with the following mission: payload 23,247 kg (51,250 lbm), range - 7,000 km (3,780 nm), and cruise Mach number - 2.2. Field length was constrained to 3,505 m (11,500 ft). Other airfield constraints and fuel reserves were also specified but no noise constraints were applied.

J A M

**N78-33037#** Vought Corp Hampton, Va Technical Center  
**PRELIMINARY DESIGN CHARACTERISTICS OF A SUBSONIC BUSINESS JET CONCEPT EMPLOYING LAMINAR FLOW CONTROL**

R V Turriziani W A Lovell J E Price C B Quartero and G F Washburn Sep 1978 48 p refs  
 (Contract NAS1-13500)  
 (NASA-CR-158958) Avail NTIS HC A03/MF A01 CSCL 01C

Aircraft configurations were developed with laminar flow control (LFC) and without LFC. The LFC configuration had approximately eleven percent less parasite drag and a seven percent increase in the maximum lift-to drag ratio. Although these aerodynamic advantages were partially offset by the additional weight of the LFC system, the LFC aircraft burned from six to eight percent less fuel for comparable missions. For the trans-atlantic design mission with the gross weight fixed, the LFC configuration would carry a greater payload for ten percent fuel per passenger mile. G G

**N78-33038#** Boeing Commercial Airplane Co, Seattle, Wash  
**WING PLANFORM GEOMETRY EFFECTS ON LARGE SUBSONIC MILITARY TRANSPORT AIRPLANES** Final Technical Report, Mar 1978 - Feb 1977

Robert M Klufan and John D Vachal Feb 1978 66 p refs  
 (Contract F33615-76-C-3035)  
 (AD-A056124 D6-46317, AFFDL-TR-78-16) Avail NTIS HC A04/MF A01 CSCL 01/3

A Preliminary Design Study of large turbulent flow military transport aircraft has been made. The study airplanes were designed to carry a heavy payload (350 000 lb) for a long range (10 000 nmi). The study tasks included Wing geometry/cruise speed optimization of a large cantilever wing military transport airplane. Preliminary design and performance evaluation of a strut-braced wing transport airplane, and Structural analyses of large-span cantilever and strut-braced wings of graphite/epoxy sandwich construction (1985 technology). The best cantilever wing planform for minimum takeoff gross weight, and minimum fuel requirements as determined using statistical weight evaluations has a high aspect ratio low sweep low thickness/chord ratio, and a cruise Mach number of 0.76. A near optimum wing planform with greater speed capability ( $M = 0.78$ ) has an aspect ratio = 12, quarter chord sweep = 20 deg, and thickness/chord ratio of 0.14/0.08 (inboard/outboard). GRA

**N78-33039#** Air Force Inst of Tech, Wright-Patterson AFB, Ohio School of Engineering  
**MECHANIZATION OF BLENDED A SUB N MODE FOR CCV YF-16** M S Thesis

Kenneth R Race Mar 1978 136 p refs  
 (AD-A056553, AFIT/GAE/AA/78M-16) Avail NTIS HC A07/MF A01 CSCL 01/3

A root locus analysis and computer simulation are used to determine the feasibility of one proposed method of mechanizing the blending of the normal acceleration mode with the basic aircraft response for the CCV YF-16. The root locus analysis predicts the stability and speed of response of the mechanized aircraft. The computer simulation confirms these results. Comparison is made of the responses of the basic, present CCV, and proposed mechanized YF-16. Author (GRA)

**N78-33091#** Army Troop Support and Aviation Materiel Readiness Command St Louis Mo  
**BELL UH-1H RAM/LOG REPORT** Final Report, 21 May 1975 - 19 Jun 1976

Apr 1978 380 p  
 (AD-A057231 TSARCOM-TR-78-4) Avail NTIS HC A17/MF A01 CSCL 01/3

This RAM/LOG report was generated to establish a comprehensive base line for the UH-1H helicopter and to debug the new RAM/LOG data collection system. The test used 7 aircraft for a total of 1339.4 flight hours over a period of 463 days. Some of the test results are as follows: System MTBR (362 hrs) Mission Reliability (99), Achieved Availability (95) and total number of parts replaced (455 items). Author (GRA)

**N78-33032#** Aeronautical Systems Div Wright-Patterson AFB, Ohio

**B-1 EMUX AUTOMATED LOGIC DIAGRAMMER DEMONSTRATION PROGRAM** Final Report, Jul. 1975 - Sep 1977  
 Ronald B Berger May 1978 53 p refs  
 (AD-A056964, ASD-TR-78-17) Avail NTIS HC A04/MF A01 CSCL 01/3

The B-1 aircraft Electrical Multiplex System (EMUX) is a programmable computer network which provides control of aircraft electrical loads, provides automatic electrical load management and provides digital data transfer Boolean (or logic) equations are used to program the system. A computer program was developed in-house to demonstrate the feasibility of automatically creating logic diagrams of the Boolean equations directly from the same EMUX computer files used to program the system. Program BOLD B-1 One (Logic Diagrammer) the result of this study is documented in this report. Author (GRA)

**N78-33033#** Cortland Line Co N Y  
**DESIGN AND DEVELOPMENT OF HELICOPTER EXTERNAL CARGO SLING LEGS MADE WITH KEVLAR** Final Report E Scala Jun 1978 27 p refs  
 (Contract DAAJ02-76-C-0025, DA Proj 1F2-62209-AH76-06) (AD-A056951, USARTL-TR-78-20) Avail NTIS HC A03/MF A01 CSCL 01/3

Quantitative equations and graphs for torque balanced Kevlar rope constructions have been applied to the preliminary design of sling legs for heavy lift helicopters. Fifty one 14 foot sling legs were made and tested to determine minimum break strengths for the 10,000 lb (10K) 25,000 lb (25K) and 40,000 lb (40K) load capacity assemblies. Three 10K assemblies using torque balanced Kevlar rope with eye-spliced terminations over No 2 SLIP-THRU thimbles were delivered to USAAMRDL (AVSCOM) for field testing. Three 25K and four 40K assemblies made by an alternative torque balanced Kevlar grommet design were also delivered for field testing. The four sling legs on each of these 10K assemblies were made using torque balanced Kevlar rope with eye-spliced terminations over No 2 SLIP-THRU thimbles. The three 25 K and four 40 K assemblies delivered for field testing were made by an alternative torque balanced Kevlar grommet design No 3 and 4 size thimbles. Author (GRA)

**N78-33034#** Army Test and Evaluation Command Aberdeen Proving Ground, Md

**AIRCRAFT DEFOGGING AND DEFROSTING (TRANSPARENT AREA)** Final Report

31 May 1978 15 p Supersedes MTP-7-3-522  
 (AD-A056976, TOP-7-3-522) Avail NTIS HC A02/MF A01 CSCL 01/3

Provides procedures for testing and evaluating aircraft defogging and defrosting equipment. The test item may be an integral part of the aircraft environmental control system or a separate system designed to operate independently or in conjunction with the aircraft environmental control system. The procedure is to determine if the test item can prevent or eliminate fogging or frosting of the interior and exterior surfaces of aircraft transparent areas in all aircraft operational modes. Author (GRA)

**N78-33035#** Douglas Aircraft Co Inc, Long Beach, Calif  
**PRIMARY ADHESIVELY BONDED STRUCTURE TECHNOLOGY (PABST). PHASE 1: DETAIL DESIGN** Final Report, Sep 1976 - Dec 1977

Wright-Patterson AFB, Ohio AFFDL Dec 1977 305 p refs  
 (Contract F33615-75-C-3016, AF Proj 486U)  
 (AD-A056857, AFFDL-TR-77-135) Avail NTIS HC A14/MF A01 CSCL 01/3

This report covers the design analysis, and trade studies conducted during Phase 2 Detail Design of the Primary Adhesively Bonded Structure Technology (PABST) Program. During this Phase, drawings were made and released to Manufacturing for the construction of a 42 foot long test component simulating the forward fuselage of the C-15 airplane. The design concept selected at the completion of Phase 1b-Preliminary Design consisted of wide spaced/close spaced internal longerons in the upper fuselage and external longerons in the lower (bilge area) fuselage. External loads were developed for both fatigue and ultimate loading conditions in conformance with the military

specifications The external shears and bending moments were matched to the Full Scale Demonstration Component test curves, adjusted for the actual test fixture loading points Internal loads were generated and static, damage tolerance and fatigue analyses were performed on the Full Scale Demonstration Component A spectra was developed based on a statistical analysis of information accumulated from Air Force operations and used for the fatigue and damage tolerance analyses Author (GRA)

**N78-33097#** Battelle Columbus Labs, Ohio  
**SYSTEM AVIONICS VALUE ESTIMATION (SAVE): AN AID FOR AVIONICS LOGISTICS AND SUPPORT-COST ANALYSES Final Report, 15 Jul. 1976 - 30 Jun. 1977**  
 Thomas R Cork and Joan F Mulcahy Sep 1977 284 p refs (Contract F33615-76-C-1299)  
 (AD-A056348, AFAL-TR-77-179) Avail NTIS  
 HC A13/MF A01 CSCL 01/3

This report documents a research effort to develop an interactive graphics computer system which will allow government cost analysts to exercise five existing logistics and support cost models in an integrated, consistent, and efficient manner GRA

**N78-33098#** Naval Postgraduate School, Monterey, Calif  
**A STUDY OF ALTERNATIVES FOR VSTOL COMPUTER SYSTEMS Final Report, Feb. - Dec. 1977**  
 Uno R Kodres, James D Buttinger Richard W Hamming, and Carl R Jones Apr 1978 252 p refs  
 (AD-A056105 NPS52-78-001) Avail NTIS  
 HC A12/MF A01 CSCL 01/3

This study assesses the impact of Large Scale Integration on future airborne digital systems, with a focus on the VSTOL systems The study addresses the design implementation testing, servicing and the associated life cycle costs of airborne digital computer systems both the hardware and the programs necessary for successful operation of the system The scope of the study is limited to the computer system not the sensors keyboards, displays and other peripheral equipment The study provides information for decision making on the future course of action, a design philosophy a process analysis methodology, and a life cycle cost analysis method Author (GRA)

**N78-33099#** Naval Aerospace Medical Research Lab Pensacola Fla  
**HUMAN FACTORS ENGINEERING FOR HEAD-UP DISPLAYS: A REVIEW OF MILITARY SPECIFICATIONS AND RECOMMENDATIONS FOR RESEARCH Interim Report**  
 Dennis E Egan and James E Goodson Apr 1978 52 p refs  
 (AD-A056944, NAMRL-Monograph-23) Avail NTIS  
 HC A04/MF A01 CSCL 01/4

This report is a review of Human Factors literature and military specifications concerning Head-Up Displays (HUDs) The objective is to identify important categories of Human Factors research concerning virtual-image displays These research categories are questions that must be answered before specifications can be written for the optimal design of HUDs The review encompassed an exhaustive list of references available through the Defense Documentation Center (DDC) as well as other pertinent sources not given in the DDC listing Each requirement in the General Specification for Head-Up Displays, MIL-D-81641 (AS) was compared with the available data The data base for requirements and the importance of further research concerning each requirement were qualitatively rated Categories of necessary research were established Human Factors knowledge has not kept pace with the proliferating uses of HUDs and the expansion of HUD technology Consequently, the majority of existing Human Factors specifications for HUDs are based on expert opinion rather than empirical data Several categories of research are required to provide an adequate data base for future specifications, and to understand how specific issues in the design of HUDs affect performance Author (GRA)

**N78-33100#** IBM Federal Systems Div Owego, N Y  
**STANDARD MODULAR POWER SUPPLIES FOR AVIONICS Final Report, 15 Apr. 1976 - 15 Feb 1978**  
 Craig D Smith and James F Malia May 1978 106 p  
 (Contract F33615-76-C-1240)  
 (AD-A057159, AFAL-TR-78-59) Avail NTIS  
 HC A06/MF A01 CSCL 10/2

The objective of this effort is to reduce avionic system life cycle cost by developing a set of standard power supply modules for application in Air Force avionics The results of this effort to develop such a set of power supply modules are discussed Included in this report are an examination of avionic power requirements to determine the extent of commonality in terms of output voltage and power level an analysis and evaluation of alternative power supply designs and selection of the optimum approach to meet the defined requirements and extension of these studies to include more equipment items of recent design and definition of other module types that offer cost advantages to the module set proposed and a prototype design, development and construction of a representative sample of the recommended module set and a life cycle cost comparison of the standard vs custom approach GRA

**N78-33101\*** National Aeronautics and Space Administration Lewis Research Center, Cleveland, Ohio  
**REDUNDANT DISC Patent**  
 William N Barack (GE, Cincinnati) Paul A Domas (GE, Cincinnati) and Stephen W Beekman, inventors (to NASA) (GE, Cincinnati) Issued 27 Jun 1978 7 p Filed 22 Mar 1976 Sponsored by NASA

(NASA-Case-LEW-12496-1, US-Patent-4 097 194, US-Patent-Appl-SN-668971, US-Patent-Class-416-244A, US-Patent-Class-416-214A US-Patent-Class-74-572, US-Patent-Class-29-463) Avail US Patent Office CSCL 21E

A rotatable disc is described that consists of parallel plates tightly joined together for rotation about a hub Each plate is provided with several angularly projecting spaced lands The lands of each plate are interposed in alternating relationship between the lands of the next adjacent plate In this manner, circumferential displacement of adjacent sectors in any one plate is prevented in the event that a crack develops Each plate is redundantly sized so that, in event of structural failure of one plate the remaining plates support a proportionate share of the load of the failed plate The plates are prevented from separating laterally through the inclusion of generally radially extending splines which are inserted to interlock cooperating, circumferentially adjacent lands Official Gazette of the U S Patent Office

**N78-33102\*#** National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio  
**RESULTS AND STATUS OF THE NASA AIRCRAFT ENGINE EMISSION REDUCTION TECHNOLOGY PROGRAMS**  
 R E Jones, L A Diehl D A Petrush, and J Grobman Oct 1978 53 p refs  
 (NASA-TM-79009 E-9793) Avail NTIS HC A04/MF A01 CSCL 21E

The results of an aircraft engine emission reduction study are reviewed in detail The capability of combustor concepts to produce significantly lower levels of exhaust emissions than present production combustors was evaluated The development status of each combustor concept is discussed relative to its potential for implementation in aircraft engines Also, the ability of these combustor concepts to achieve proposed NME and NCE EPA standards is discussed BB

**N78-33103\*#** General Electric Co, Cincinnati, Ohio Aircraft Engine Group  
**BLADE ROW DYNAMIC DIGITAL COMPRESSION PROGRAM. VOLUME 2 J85 CIRCUMFERENTIAL DISTORTION REDISTRIBUTION MODEL, EFFECT OF STATOR CHARACTERISTICS, AND STAGE CHARACTERISTICS SENSITIVITY STUDY**  
 W A Tesch and W G Steenken Jul 1978 76 p refs  
 (Contract NAS3-18526)  
 (NASA-CR-134953, R76AEG484-Vol-2) Avail NTIS  
 HC A04/MF A01 CSCL 21E

The results of dynamic digital blade row compressor model studies of a J85-13 engine are reported The initial portion of the study was concerned with the calculation of the circumferential redistribution effects in the blade-free volumes forward and aft of the compression component Although blade-free redistribution effects were estimated no significant improvement over the parallel-compressor type solution in the prediction of total-

pressure inlet distortion stability limit was obtained for the J85-13 engine. Further analysis was directed to identifying the rotor dynamic response to spatial circumferential distortions. Inclusion of the rotor dynamic response led to a considerable gain in the ability of the model to match the test data. The impact of variable stator loss on the prediction of the stability limit was evaluated. An assessment of measurement error on the derivation of the stage characteristics and predicted stability limit of the compressor was also performed. Author

**N78-33103#** AiResearch Mfg Co., Phoenix, Ariz  
**POLLUTION REDUCTION TECHNOLOGY PROGRAM FOR SMALL JET AIRCRAFT ENGINES, PHASE 2 Final Report**  
 T W Bruce, F G Davis, T E Kuhn, and H C Mongia, Sep 1978, 187 p refs  
 (Contract NAS3-20044)  
 (NASA-CR-159415, AiResearch-21-2817) Avail NTIS  
 HC A09/MF A01 CSCL 21A

A series of iterative combustor pressure rig tests were conducted on two combustor concepts applied to the AiResearch TFE731-2 turbofan engine combustion system for the purpose of optimizing combustor performance and operating characteristics consistent with low emissions. The two concepts were an axial air-assisted airblast fuel injection configuration with variable-geometry air swirlers and a staged premix/prevaporization configuration. The iterative rig testing and modification sequence on both concepts was intended to provide operational compatibility with the engine and determine one concept for further evaluation in a TFE731-2 engine. Author

**N78-33105#** Environmental Sciences Research Lab, Research Triangle Park, N.C. Emissions Measurement and Characterization Div  
**NON-EXTRACTIVE ELECTRO-OPTICAL MEASUREMENT OF JET-ENGINE EMISSIONS Final Report, May - Dec 1977**  
 William F Herget, Jan 1978, 27 p refs  
 (Contract DOT-FA77WAI-744)  
 (AD-A056783, FAA-RD-78-10) Avail NTIS  
 HC A03/MF A01 CSCL 21/2

A series of measurements of jet engine emissions were conducted in an airport environment using several infrared gas filter correlation (GFC) instruments and a high resolution Fourier transform infrared (FTIR) spectrometer system. The GFC instruments were shown to be suitable for measuring CO concentrations in the general airport environment and across the exhaust of a stationary jet. Attempts to determine jet plume rise velocity from the GFC data were unsuccessful. The FTIR system was used to make both absorption and emission measurements on single jets and to make long-path absorption measurements in the general airport environment. Species observed in the single jet absorption measurements were CO (28 ppm), formaldehyde (1 ppm), ethylene (32 ppm), and cumulative hydrocarbons (8.6 ppm hexane equivalent). The instrumentation and the measurement programs are described and recommendations for additional work are given. BB

**N78-33103#** IIT Research Inst, Chicago, Ill  
**TURBINE ENGINE PARTICULATE EMISSION CHARACTERIZATION, PHASE 2 Final Report**  
 D L Fenton, Oct 1977, 103 p refs  
 (Contract DOT-FA75WA-3722)  
 (AD-A057370, C6352-17, FAA-RD-77-165) Avail NTIS  
 HC A06/MF A01 CSCL 21/5

A particulate sampling system was designed and fabricated for the collection of exhaust particles emitted by aircraft turbine engines. The samples obtained by the sampling system were suitable for the determination of total mass emission rate and characterization of the exhaust particles. Two separate samples were necessary - a bulk sample for mass emission rate and a light deposit of particles for individual characterization. Operational adjustments and performance evaluations were made utilizing a TF-30 mixed-flow turbojet engine. The reliability of the data was established through repeated tests and the collaboration among the different techniques used to characterize the particles. Author

**N78-33107#** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio  
**PERFORMANCE OF A TRANSONIC FAN STAGE DESIGNED FOR A LOW MERIDIONAL VELOCITY RATIO**  
 Royce D Moore, George W Lewis Jr, and Walter M Osborn, Nov 1978, 83 p refs  
 (NASA-TP-1298, E-8994) Avail NTIS HC A05/MF A01 CSCL 21E

The aerodynamic performance and design parameters of a transonic fan stage are presented. The fan stage was designed for a meridional velocity ratio of 0.8 across the tip of the stage, a pressure ratio of 1.57, a flow of 29.5 kilograms per second and a tip speed of 426 meters per second. Radial surveys were obtained over the stable operating range from 50 to 100 percent of design speed. The measured peak efficiency (0.81) of the stage occurred at a pressure ratio of 1.58 and a flow of 28.7 kilograms per second. LS

**N78-33103#** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio  
**DESIGN AND OVERALL PERFORMANCE OF FOUR HIGHLY LOADED, HIGH SPEED INLET STAGES FOR AN ADVANCED HIGH-PRESSURE-RATIO CORE COMPRESSOR**  
 Lonnie Reid and Royce D Moore, Oct 1978, 122 p refs  
 (NASA-TP-1337, E-9302) Avail NTIS HC A06/MF A01 CSCL 21E

The detailed design and overall performances of four inlet stages for an advanced core compressor are presented. These four stages represent two levels of design total pressure ratio (1.82 and 2.05), two levels of rotor aspect ratio (1.19 and 1.63), and two levels of stator aspect ratio (1.26 and 1.78). The individual stages were tested over the stable operating flow range at 70, 90, and 100 percent of design speeds. The performances of the low aspect ratio configurations were substantially better than those of the high aspect ratio configurations. The two low aspect ratio configurations achieved peak efficiencies of 0.876 and 0.872 and corresponding stage efficiencies of 0.845 and 0.840. The high aspect ratio configurations achieved peak ratio efficiencies of 0.851 and 0.849 and corresponding stage efficiencies of 0.821 and 0.831. Author

**N78-33103#** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio  
**DESIGN AND PERFORMANCE OF A 427-METER-PER-SECOND-TIP-SPEED TWO-STAGE FAN HAVING A 2.40 PRESSURE RATIO**  
 Walter S Cunnan, William Stevans, and Donald C Urasek, Oct 1978, 96 p refs  
 (NASA-TP-1314, E-9005) Avail NTIS HC A05/MF A01 CSCL 21E

The aerodynamic design and the overall and blade-element performances are presented of a 427-meter-per-second-tip-speed two-stage fan designed with axially spaced blade rows to reduce noise transmitted upstream of the fan. At design speed the highest recorded adiabatic efficiency was 0.796 at a pressure of 2.30. Peak efficiency was not established at design speed because of a damper failure which terminated testing prematurely. The overall efficiencies at 60 and 80 percent of design speed peaked at approximately 0.83. Author

**N78-33110#** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio  
**DYGABCD: A PROGRAM FOR CALCULATING LINEAR A, B, C, AND D MATRICES FROM A NONLINEAR DYNAMIC ENGINE SIMULATION**  
 Lucille C Geyser, Sep 1978, 203 p refs  
 (NASA-TP-1295, E-9464) Avail NTIS HC A10/MF A01 CSCL 21E

A digital computer program DYGABCD was developed that generates linearized, dynamic models of simulated turbofan and turbojet engines. DYGABCD is based on an earlier computer program DYNGEN that is capable of calculating simulated nonlinear steady-state and transient performance of one- and two-spool turbojet engines or two- and three-spool turbofan engines. Most control design techniques require linear system descriptions. For multiple-input/multiple-output systems such as turbine engines, state space matrix descriptions of the system

are often desirable DYGABCD computes the state space matrices commonly referred to as the A B C, and D matrices required for a linear system description The report discusses the analytical approach and provides a users manual, FORTRAN listings, and a sample case LS

**N78-33111#** Naval Postgraduate School, Monterey Calif  
**STRESS ANALYSIS OF CERAMIC TURBINE BLADES BY FINITE ELEMENT METHOD, PART 1 M S Thesis**  
 Lael Ray Easterling Mar 1978 119 p refs  
 (AD-A056310 NPS69-78-009) Avail NTIS  
 HC A06/MF A01 CSCL 21/5

The search for more efficient gas turbine engines has led to the proposal for the replacement of metal high temperature components with ceramic components Essential to this effort is the numerical analysis of proposed designs This thesis report describes the model discretization of a proposed blade design, the development of pre- and post-processors for the ADINA finite element code and the initial stress analysis of the modeled blade Author (GRA)

**N78-33112** City Univ of New York  
**A LEARNING CONTROL SYSTEM WITH APPLICATION TO FLIGHT SYSTEMS Ph D Thesis**  
 Solomon Nachmias 1978 221 p  
 Avail Univ Microfilms Order No 78-16144

The formulation of a learning control system and its utilization as a flight control system for NASA's F-8 Digital Fly-By-Wire (DFBW) research aircraft is presented An artificial plant is also presented in order to illustrate the performance of the learning control system and to compare two different designs based upon two different information acquisition subsystems (1) Liapunov's method and (2) Newton-Raphson method In applying the learning control system to the piloted six-degree-of-freedom simulation of the F-8 aircraft reduced order discrete models were used for the information acquisition subsystem to conform with the real-time constraint Simulation experiments indicate that the learning control system was effective in compensating for parameter variations caused by changes in flight conditions over the entire flight envelope Dissert Abstr

**N78-33113\*#** General Dynamics/Fort Worth Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS PHASE 1 F-111A FLIGHT DATA ANALYSIS. VOLUME 1: SUMMARY OF TECHNICAL APPROACH, RESULTS AND CONCLUSIONS**  
 David B Benepe, Atlee M Cunningham Jr, and W David Dunmyer 1978 188 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152109) Avail NTIS HC A09/MF A01 CSCL 01C

The structural response to aerodynamic buffet during moderate to high-g maneuvers at subsonic and transonic speeds was investigated The investigation is reported in three volumes This volume presents a summary of the investigation with a complete description of the technical approach, description of the aircraft its instrumentation, the data reduction procedures results and conclusion GY

**N78-33114\*#** General Dynamics/Fort Worth, Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS PHASE 1 F-111A FLIGHT DATA ANALYSIS VOLUME 2 PLOTTED POWER SPECTRA**  
 David B Benepe, Atlee M Cunningham, Jr and W David Dunmyer 1978 282 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152110) Avail NTIS HC A13/MF A01 CSCL 01C

Volume 2 of this three volume report is presented This volume presents plotted variations of power spectral density data with frequency for each structural response item for each data sampled and analyzed during the course of the investigation Some of the information contained in Volume 1 are repeated to allow the reader to identify the specific conditions appropriate to each plot presented and to interpret the data GY

**N78-33115\*#** General Dynamics/Fort Worth, Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS PHASE 2 F-111A FLIGHT DATA ANALYSIS VOLUME 3 TABULATED POWER SPECTRA**

David B Benepe, Atlee M Cunningham Jr, and W David Dunmyer 1978 319 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152111) Avail NTIS HC A14/MF A01 CSCL 01C

Volume 3 of this three volume report is presented This volume presents power spectral density in tabular form for the convenience of those who might wish to perform additional analysis Some of the information contained in Volume 1 is again repeated (as in volume 2) in this volume to allow the reader to identify the specific conditions appropriate to each tabular listing and for further analysis GY

**N78-33116\*#** General Dynamics/Fort Worth, Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS. PHASE 2 F-3A FLIGHT DATA ANALYSIS. VOLUME 1: SUMMARY OF TECHNICAL APPROACH, RESULTS AND CONCLUSIONS**

David B Benepe, Atlee M Cunningham, Jr Sam Traylor Jr, and W David Dunmyer 1978 150 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152112) Avail NTIS HC A07/MF A01 CSCL 01C

A detailed investigation of the flight buffeting response of the F-111A was performed in two phases In Phase 1 stochastic analysis techniques were applied to wing and fuselage responses for maneuvers flown at subsonic speeds and wing leading edge sweep of 26 degrees Power spectra and rms values were obtained This report gives results of Phase 2 where the analyses were extended to include maneuvers flown at wing leading edge sweep values of 50 and 75.5 degrees at subsonic and supersonic speeds and the responses examined were expanded to include vertical shear bending moment, and hingeline torque of the left and right horizontal tails Power spectra, response time histories, variations of rms response with angle of attack and effects of wing sweep and Mach number are presented and discussed Some Phase 1 results are given for comparison purposes GY

**N78-33117\*#** General Dynamics/Fort Worth Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS. PHASE 2: F-111A FLIGHT DATA ANALYSIS. VOLUME 2: PLOTTED POWER SPECTRA**

David B Benepe Atlee M Cunningham, Jr, Sam Traylor, Jr, and W David Dunmyer 1978 724 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152113) Avail NTIS HC A99/MF A01 CSCL 10A

Plotted power spectra for all of the flight points examined during the Phase 2 flight data analysis are presented Detailed descriptions of the aircraft, the flight instrumentation and the analysis techniques are given Measured and calculated vibration mode frequencies are also presented to assist in further interpretation of the PSD data GY

**N78-33118\*#** General Dynamics/Fort Worth, Tex  
**AN INVESTIGATION OF WING BUFFETING RESPONSE AT SUBSONIC AND TRANSONIC SPEEDS. PHASE 2: F-111A FLIGHT DATA ANALYSIS VOLUME 3 TABULATED POWER SPECTRA**

David B Benepe Atlee M Cunningham Jr Sam Traylor, Jr and W David Dunmyer 1978 286 p refs  
 (Contract NAS2-7091)  
 (NASA-CR-152114) Avail NTIS HC A13/MF A01 CSCL 01C

Power spectral density (PSD) data for all of the flight points examined during the Phase 2 flight data analysis are presented in tabular form Detailed descriptions of the aircraft, the flight instrumentation and the analysis techniques are given Measured and calculated vibration mode frequencies are also presented to assist in further interpretation of the PSD data GY



**N78-33119#** Federal Aviation Administration, Washington D C  
Systems Research and Development Service  
**ENGINEERING AND DEVELOPMENT PROGRAM PLAN  
ADVANCED INTEGRATED FLIGHT SYSTEMS (AIFS)**  
May 1978 83 p refs  
(AD-A056770 FAA-ED-18-3) Avail NTIS HC A05/MF A01  
CSCL 01/3

It appears that active controls and digital flight control and avionics will significantly impact transport aircraft technology and therefore FAA must examine the impact of these advances on airworthiness criteria To comply with its charged responsibilities the FAA must stay abreast of technology advancements and establish the necessary safety standards In the areas of active controls technology and digital flight control and avionics, a technology program entitled Advanced Integrated Flight Systems (AIFS) was established to support this responsibility L S

**N78-33120#** Systems Research Labs Inc, Dayton Ohio  
**A THEORY FOR LONGITUDINAL SHORT-PERIOD PILOT  
INDUCED OSCILLATIONS Interim Report, Nov 1976 - Apr  
1977**

Ralph H Smith Jun 1977 141 p refs  
(Contract F33615-77-C-3011)  
(AD-A056982, AFFDL-TR-77-57) Avail NTIS  
HC A07/MF A01 CSCL 05/8

This report presents a theory for longitudinal, short-period pilot-induced oscillations (PIO) The theory explains how the airplane's pitch attitude and normal acceleration modes can couple with pilot dynamics to produce large-amplitude, uncontrollable oscillations The effects of control system dynamics and feel system nonlinearities are encompassed by this theory It is concluded that an airplane's potential for PIO can be determined based entirely on linear systems analysis the prediction of fully-developed PIO frequency and amplitude requires that all significant nonlinearities be considered The theory postulates that PIO can develop either as a result of closed loop control of pitch attitude or from abrupt control or atmospheric inputs of size sufficient to excite a lightly damped dominant, stick-free airplane mode A number of PIO case histories are examined it is shown that these confirm the proposed theory The implications of the theory to flight test and to simulation are discussed A generalized definition for PIO is given which permits distinctions to be made between pilot-vehicle system oscillations due only to attitude control and those due to attitude plus path control modes It is suggested that the theory can be easily extended to the study of lateral-directional PIO A bibliography of PIO source material is included with this report Author (GRA)

**N78-33121#** Sandia Labs, Albuquerque, N Mex  
**HYBRID COMPUTER STUDY OF THE SENSITIVITY OF  
AIRCRAFT DYNAMICS TO AERODYNAMIC CROSS-  
COUPLING**

W H Curry and K J Orlik-Rueckemann (National Aeronautical Establishment, Ottawa) 1978 16 p refs Presented at AGARD Symp on Dynamic Stability Parameters, Athens, 29-31 May 1978

(Contract EY-76-C-04-0789)  
(SAND-77-1309C, Conf-780524-1) Avail NTIS  
HC A02/MF A01

The sensitivity of the predicted motion time histories to aerodynamic cross coupling between the longitudinal and the lateral degrees of freedom was examined A hybrid computer was utilized for the six-degree-of-freedom flight simulations required to evaluate the effects of aerodynamic cross-coupling derivatives Noticeable effects of aerodynamic cross-coupling were recorded in flight simulations of a fighter aircraft at high angle of attack when perturbed from straight and level flight ERA

**N78-33122#** National Technical Information Service Springfield Va

**CLOSED LOOP CONTROL SYSTEMS PART 1 AIRCRAFT  
A BIBLIOGRAPHY WITH ABSTRACTS Progress Report,  
Mar 1976 - Jul 1976**

Guy E Habercom Jr Aug 1978 127 p Supersedes  
NTIS/PS-77/0800

(NTIS/PS-78/0809/0, NTIS/PS-77/0800) Avail NTIS  
HC \$28 00/MF \$28 00 CSCL 01C

Adaptive control and feedback control closed loop systems relative to aircraft flight control are investigated Studies on guidance and control of drones and remotely piloted vehicles are included GRA

**N78-33123\*#** National Aeronautics and Space Administration  
Langley Research Center Hampton Va  
**STATIC PRESSURE ORIFICE SYSTEM TESTING AND  
APPARATUS Patent Application**

Randolph F Culotta and Donald L Posey, inventors (to NASA)  
Filed 17 Aug 1978 14 p  
(NASA-Case-LAR-12269-1, US-Patent-Appl-SN-934576) Avail  
NTIS HC A02/MF A01 CSCL 14B

A method and apparatus for pressure testing the static pressure orifices and associated connections used in wind tunnels is presented A cylindrical module having in one end an open hemispherical calibration pressure chamber separated from and surrounded by an annular vacuum chamber is placed over the orifice of the system to be tested Ports lead from each of the chambers out the other end of the module to tubes connected to a control box consisting of calibration pressure and vacuum supply lines, bleeder valves and gauges The vacuum chamber is evacuated to seat the module and seal off the system The center chamber is pressurized and the control box pressure gauge is monitored for changes which would indicate leaks in the system Comparison against the control box pressure gauge allows for calibration of the orifice system pressure receiving gauge NASA

**N78-33124#** Air Force Inst of Tech Wright-Patterson AFB  
Ohio School of Engineering

**DEVELOPMENT OF A SYMBOLOGY EXERCISER FOR  
DISPLAY GENERATION AND ANALYSIS ON THE VISUAL-  
LY-COUPLED AIRBORNE SYSTEMS SIMULATOR (VCASS)**  
M S Thoburn

Hollace H Warner Mar 1978 170 p refs  
(AD-A055464 AFIT/GCS/EE/78-8) Avail NTIS  
HC A08/MF A01 CSCL 05/9

The Visually-Coupled Airborne Systems Simulator (VCASS) is being developed by the Aerospace Medical Research Laboratory to aid in lowering the cost and increasing the performance of aircraft simulators An important prerequisite for the VCASS display development is a symbology exerciser that will allow the display presentation designer to rapidly and accurately design new display formats to be tested for the VCASS system The Symbology Exerciser development was begun by first doing a requirements analysis to establish the functions of the software The analysis was performed by using a graphical technique which relates the activities and the input output and control data Once the functional requirements were established the data required by a visual display was analyzed in preparation for the software design Finally a structured design technique was applied to produce a software design which has high cohesion and low coupling The design is presented by using structure charts input/output lists and module descriptions Author (GRA)

**N78-33125#** Prototype Development Associates Inc, Santa  
Ana Calif

**MADENERE REENTRY VEHICLE DEVELOPMENT PRO-  
GRAM. EROSION-RESISTANT NOSETIP TECHNOLOGY**  
Final Report, Dec. 1974 - Sep 1976

M M Sherman Jan 1978 239 p refs  
(Contract DNA001-75-C-0054)  
(AD-A056390 AD-E300253, PDA-TR-1031-90-58,  
DNA-4507F) Avail NTIS HC A11/MF A01 CSCL 16/3

A series of programs has been conducted to develop erosion-resistant nosetip (ERN) concepts to provide an all-weather flight capability for high-performance reentry vehicles In a previous effort, two ERN designs utilizing monolithic (solid) tungsten subtypes were designed for flight tests on Advanced Nosetip Test (ANT) vehicles In the present program, ground tests were conducted in a rocket motor test facility to evaluate the thermal and structural performance of full-scale models of

these flight designs. The results of these tests indicated a low probability of survival for monolithic tungsten subtips in ICBM flight environments. Therefore, additional studies were performed to develop an improved subtip concept that would be more resistant to thermal stress failures. These studies resulted in a segmented construction approach that will reduce the applied thermal stresses to acceptable levels and provide a high probability of survival in flight. Two segmented and two monolithic tungsten subtips were then designed, fabricated and tested on HEARTS and FLAME flight test vehicles. All four nosetips survived to impact with no evidence of thermostructural failure and with no development of vehicle trim angles-of-attack at low altitudes. Additional tests at more severe conditions are required to verify the improvement in thermal stress performance provided by the segmented construction technique. GRA

**N78-33132#** Naval Surface Weapons Center Dahlgren, Va  
**NONLINEAR ROLLING MOTION ANALYSIS OF A CANARD-CONTROLLED MISSILE CONFIGURATION AT ANGLES OF ATTACK FROM 0 TO 30 DEGREES IN INCOMPRESSIBLE FLOW** Final Report

Samuel R Hardy May 1978 68 p refs  
 (AD-A056695, NSWC/DL-TR-3808) Avail NTIS  
 HC A04/MF A01 CSCL 20/4

Dynamic subsonic wind tunnel test data are presented for four canard-controlled missile configurations at angles of attack from 0 to 30 deg. The configurations included three body build-up configurations (canard plus body, body plus tail, and canard plus body plus tail) with zero fin deflections. A canard plus body plus tail configuration with a 15 deg canard pitch control deflection was also tested. Nonlinear static and dynamic roll moment coefficients were extracted from the test data by fitting a differential equation of rolling motion to the test data using a global nonlinear least-squares procedure. The results indicated that the equation of motion was adequate to describe the canard-controlled configurations' rolling motion. Extracted linear roll damping coefficients showed that the roll damping moment is a nonlinear function of angle of attack for all the configurations. Roll damping was also found to vary with the missiles' roll angle at angles of attack above 20 deg. The results for the body build-up configurations show that there is a significant canard/tail interference present on the canard plus body plus tail configuration. The canard contribution to the induced roll moment is small. The results for the canard plus body plus tail configuration with the 15 deg pitch control deflection on the canards show that the canard deflection generally increases the roll damping moment. Author (GRA)

**N78-33134\*#** Lockheed Missiles and Space Co Huntsville Ala  
 Research and Engineering Center  
**DEVELOPMENT OF BASE PRESSURE SIMILARITY PARAMETERS FOR APPLICATION TO SPACE SHUTTLE LAUNCH VEHICLE POWER-ON AERODYNAMIC TESTING** Final Report

Peter R Sulyma and Morris M Penny Sep 1978 156 p refs  
 (Contract NAS8-32658)  
 (NASA-CR-150826, LMSC-HREC-TR-D568366) Avail NTIS  
 HC A08/MF A01 CSCL 22B

A base pressure data correlation study was conducted to define exhaust plume similarity parameters for use in Space Shuttle power-on launch vehicle aerodynamic test programs. Data correlations were performed for single bodies having, respectively, single and triple nozzle configurations and for a triple body configuration with single nozzles on each of the outside bodies. Base pressure similarity parameters were found to differ for the single nozzle and triple nozzle configurations. However, the correlation parameter for each was found to be a strong function of the nozzle exit momentum. Results of the data base evaluation are presented indicating an assessment of all data points. Analytical/experimental data comparisons were made for nozzle calibrations and correction factors derived, where indicated, for use in nozzle exit plane data calculations. LS

**N78-33140\*** National Aeronautics and Space Administration  
 Washington, D C  
**FROM SPACE ON A PARACHUTE**

N Lobanov Oct 1978 9 p Transl into ENGLISH from Aviat Kosmonavt (USSR) no 19, Sep 1978 p 34-35 Transl by Kanner (Leo) Associates, Redwood City, Calif  
 (Contract NASw-3199)  
 (NASA-TM-75577) Copyright Avail NTIS HC A02/MF A01 CSCL 22B

Improvements in the landing system of the Soyuz spacecraft are discussed. The system of parachutes is designed to guarantee a safe landing. The design attempts to cover all possible emergency situations. Selection of the landing area and time of ejection is an important aspect of safe descent. Author

**N78-33142\*#** Aerojet Liquid Rocket Co, Sacramento, Calif  
**DUAL THROAT THRUSTER COLD FLOW ANALYSIS** Final Report

R B Lundgreen G R Nickerson, and C J OBrien Aug 1978 128 p refs  
 (Contract NAS8-32666)  
 (NASA-CR-150822) Avail NTIS HC A07/MF A01 CSCL 21/4

The concept was evaluated with cold flow (nitrogen gas) testing and through analysis for application as a tripropellant engine for single-stage-to-orbit type missions. Three modes of operation were tested and analyzed: (1) Mode 1 Series Burn, (2) Mode 1 Parallel Burn, and (3) Mode 2 Primary emphasis was placed on the Mode 2 plume attachment aerodynamics and performance. The conclusions from the test data analysis are as follows: (1) the concept is aerodynamically feasible, (2) the performance loss is as low as 0.5 percent, (3) the loss is minimized by an optimum nozzle spacing corresponding to an AF-ATS ratio of about 1.5 or an Le/Rtp ratio of 3.0 for the dual throat hardware tested, requiring only 4% bleed flow, (4) the Mode 1 and Mode 2 geometry requirements are compatible and pose no significant design problems. LS

**N78-33152\*#** National Aeronautics and Space Administration  
 Langley Research Center, Hampton Va  
**IMPACT TESTS ON FIBROUS COMPOSITE SANDWICH STRUCTURES**

Marvin D Rhodes Oct 1978 43 p refs  
 (NASA-TM-78719, L-12455) Avail NTIS HC A03/MF A01 CSCL 11D

The effect of low velocity impact on the strength of laminates fabricated from graphite/epoxy and Kevlar 49/epoxy composite materials was studied. The test laminates were loaded statically either in uniaxial tension or compression when impact occurred to evaluate the effect of loading on the initiation of damage and/or failure. Typical aircraft service conditions such as runway debris encountered during landing were simulated by impacting 1.27-cm-diameter projectiles normal to the plane of the test laminates at velocities between 5.2 and 48.8 m/s. GG

**N78-33197#** Naval Air Development Center, Warminster, Pa  
 Aircraft and Crew Systems Technology Directorate  
**GALVANIC CORROSION FATIGUE TESTING OF 7075-T6 ALUMINUM BONDED WITH GRAPHITE-EPOXY COMPOSITE**

S R Brown and J J DeLuccia 10 Jan 1978 18 p refs  
 (ZF54590001)  
 (AD-A055714, NADC-77328-60) Avail NTIS  
 HC A02/MF A01 CSCL 11/6

Galvanic corrosion effects were determined on 7075-T6 aluminum with attached adhesively bonded sections of graphite-epoxy composite material. Fatigue tests were conducted on specimens exposed to a sulfur dioxide-salt spray environment in a chamber constructed on a Krouse direct-stress fatigue machine. S-N curves were developed under tension-tension conditions (R = 0.1) and with unprotected specimens a 20 percent reduction in fatigue life was attributed to the contacting graphite-epoxy composite material. Protective coatings and nonconductive barriers to break the galvanic corrosion circuit were evaluated under the same corrosion fatigue (tension-tension) test conditions. Epoxy primer-polyurethane paint systems, polysulfide sealants and glass cloth barriers were used to measure their effectiveness in galvanic corrosion control. Metallograph and SEM (Scanning Electron Microscope) observations were made of corrosion sites and fatigue surfaces. Author (GRA)

**N78-33243#** Westinghouse Electric Corp., Crum Lynne, Pa  
Combustion Turbine Systems Div  
**CERAMICS TECHNOLOGY READINESS DEVELOPMENT  
PROGRAM PHASE 1 CONCEPTUAL DESIGNS AND  
MATERIAL SCREENING Monthly Technical Progress Report,  
Mar 1978**

K L Rieke Apr 1978 24 p ref  
(Contract EF-77-C-01-2786)  
(FE-2786-12, MTPR-6) Avail NTIS HC A02/MF A01

Critical planning information in the form of ceramic turbine conceptual designs and delivery of ceramic test specimens for DOE initial evaluation of erosion/corrosion capability is presented. Results include (1) The Weibull characteristic strength,  $\sigma/\sigma_0$  was developed for NCX-34 H P Si3N4 (2) the simplified method of estimating material uniaxial tensile strength was verified, (3) additional design study was initiated to improve ease of assembly and maintenance of the ceramic blading in the turbine rotor assembly (4) conceptual design arrangements of the use of ceramics for combustor transition ducting were developed to be used in conjunction with a catalytic combustor element and (5) concept 3 thermal barrier coating performance calculations for coal-derived liquid fuels were extended from the simple engine cycle to the combined cycle performance ERA

**N78-33278#** National Technical Information Service, Springfield, Va  
**CLOSED LOOP CONTROL SYSTEMS. PART 2: MISCELLANEOUS APPLICATIONS A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1975 - Jul. 1978**

Guy E Habercom, Jr Aug 1978 259 p Supersedes NTIS/PS-77/0801  
(NTIS/PS-78/0810/8, NTIS/PS-77/0801) Avail NTIS HC \$28 00/MF \$28 00 CSCL 16D

Closed loop control systems are investigated relevant to design, application, and performance. Such diversified application as gas turbine engine controls, feedback control of spacecraft and missiles, wind tunnel flow control, and feedback control of laser pulses are examined. This updated bibliography contains 252 abstracts, 46 of which are new entries to the previous edition. GRA

**N78-33283\*#** National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio  
**AN AIRBORNE METEOROLOGICAL DATA COLLECTION SYSTEM USING SATELLITE RELAY (ASDAR)**

James W Bagwell and Bruce G Lindow 1978 17 p ref To be presented at the Intern Telemetering Conf Los Angeles 14-16 Nov 1978 Sponsored by the Instr Soc of America (NASA-TM-78992, E-9768) Avail NTIS HC A02/MF A01 CSCL 17B

The National Aeronautics and Space Administration (NASA) has developed an airborne data acquisition and communication system for the National Oceanic and Atmospheric Administration (NOAA). This system known as ASDAR the Aircraft to Satellite Data Relay consists of a microprocessor based controller, time clock transmitter and antenna. Together they acquire meteorological and position information from existing aircraft systems on B-747 aircraft, convert and format these and transmit them to the ground via the GOES meteorological satellite series. The development and application of the ASDAR system is described with emphasis on unique features. Performance to date is exceptional, providing horizon-to-horizon coverage of aircraft flights. The data collected is of high quality and is considered a valuable addition to the data base from which NOAA generates its weather forecasts. Author

**N78-33290#** National Aviation Facilities Experimental Center, Atlantic City, N J  
**DIGITIZED RADAR DATA COMPRESSOR Final Report, Jan 1974 - Dec 1976**

Edwin A Mack and Arthur R Moss Jul 1978 107 p  
(AD-A057442 FAA-NA-78-2, FAA-RD-78-48) Avail NTIS HC A06/MF A01 CSCL-17/9

This special-purpose device is designed specifically to increase radar data recording capabilities at air route traffic control

centers. The DACOMP accomplishes this by compressing the number of channels each radar occupies prior to recording, thereby reducing the number of tape tracks required for each radar. The three 2400 bit-per-second channels of a digitized radar are compressed onto one high-speed (9375 bit-per-second) channel. Because of the threefold reduction in recording track requirements, DACOMP's will record information from an increased number of radar sites. The installation, use, theory of operation and maintenance of the DACOMP are detailed. G G

**N78-33311#** Ohio State Univ., Columbus Electroscience Lab

**NEAR FIELD PATTERN COMPUTATIONS FOR AIRBORNE ANTENNAS Final Report, 15 Mar 1977 - 14 Jun 1978**

W D Burnside, Nan Wang, and E L Pelton Jun 1978 47 p refs  
(Contract N00019-77-C-0299)

(AD-A057244 ESL-784685-4) Avail NTIS HC A03/MF A01 CSCL 09/5

This report presents the results of a newly formulated analysis for computing patterns of aperture or monopole antennas mounted on the fuselage of aircraft. Approximate models of the aircraft structure are employed in conjunction with the Geometrical Theory of Diffraction to obtain the computed fields. A major feature of the analysis is that it can accommodate receiver range specifications varying from as close as a wavelength to the aircraft surface to the true far field. This feature is especially useful in that computed on-aircraft pattern performance can be compared with measurements taken at any convenient range including the near field. Further, after such crucial checks between computations and measurements have been made, the numerical solution can be employed to accurately predict the far field performance of the on-aircraft antenna system. A general computer code, based on the new analysis, has been written. The accuracy of the numerical solutions obtainable with the analysis is demonstrated by comparison with numerous model measurements. Author (GRA)

**N78-33313#** Arinc Research Corp., Annapolis Md  
**DESCRIPTION OF A MODEL FOR EVALUATING OPERATIONAL PERFORMANCE OF COMMUNICATIONS SYSTEM**

J E Freedman Jun 1978 119 p refs  
(Contract DOT-FA75WA-3686)  
(AD-A057199, PUBL-1319-01-4-1775) Avail NTIS HC A06/MF A01 CSCL 17/2

This report documents on aeronautical communications operational performance model developed by ARINC Research Corporation in support of the Federal Aviation Administration's AEROSAT program. The model is operationally oriented. Its prime purpose is to serve as a tool for examining the impact of such factors as operational communications requirements and aircraft movements on the operational performance obtained by the user of a given communications system. The model has a generalized structure and is highly versatile. By judicious selection of input parameters, it can portray a wide variety of communications issues. In addition to providing a basic description of the model elements, this report reviews the background for the model's development, describes the technical scope, applications, and capabilities of the model, and presents some test runs. Author (GRA)

**N78-33330** Oregon State Univ., Corvallis  
**A STUDY OF THE EFFECT OF THE ROTOR COIL COUPLINGS OF A SYNCHRONOUS MACHINE ON ITS PREDICTED TRANSIENT RESPONSE Ph.D. Thesis**

Mohammad Hashem Nehrir 1978 108 p  
Avail Univ Microfilms Order No 7811990

Two linearized models of the machine are considered in the first model, the root-locus technique of classical control theory is used as a tool to investigate the effect of mutual inductances on the short-circuit eigenvalues of the general Park model. Transfer functions for the short-circuit stator and field current responses are derived in terms of the mutual inductances. Numerical examples are presented for two (solid-rotor) turbo-generators and one (salient pole) hydrogenerator unit with dampers. In the second model, the effect of the rotor coil mutual inductances

on the dynamic behavior of the synchronous machine are investigated for the machine connected to an infinite-bus via a transmission line. A numerical example is given for hydrogenerator unit  
Dissert Abstr

**N78-33405\***# Gustincic (J J) Consulting Engineer Marina Del Rey, Calif

**AN AIRCRAFT RADIOMETER FRONT END, ADDENDUM Final Report**

J J Gustincic 1 Aug 1978 19 p Prepared for JPL (Contracts NAS7-100, JPL-954492) (NASA-CR-157777 TR080) Avail NTIS HC A02/MF A01 CSCI 14B

A detailed description is given of a completely quasi-optical aircraft radiometer for use at frequencies of 150 GHz and above. The radiometer calibration and beam switching is described as well as a reflection isolator utilizing a reciprocating mirror and a quasi-optical local oscillator injection system. Receiver applications and performance levels are also given. Author

**N78-33413#** Texas Technological Univ Lubbock Optical Sciences Lab

**ELLIPSO-METRIC DETERMINATION OF PROPERTIES OF FILMS ON ROUGH SURFACES SUCH AS ALUMINUM ALLOY AIRCRAFT SKIN Interim Report, 1 Jan. 1976 - 1 Aug 1977**

John D Reichert and Janet Shotton Brock 1 Aug 1977 141 p refs

(Grants AF-AFOSR-3278-77, AF-AFOSR-2451-73G) (AD-A056782 TTCSL-OLT-3, AFOSR-78-1220TR) Avail NTIS HC A07/MF A01 CSCL 14/2

The properties of oxide layers on smooth and rough aluminum surfaces are considered in this study. Using ellipsometric techniques, the layer thickness and the four parameters describing the complex indices of refraction for film and substrate are assigned effective values and interrelations are deduced. The organizing feature of the work is the use of data trajectories generated by determining the ellipsometric parameters Psi and Delta over and over for samples that were heated between measurements. The heating caused increases in the oxide layer thickness so that the data trajectories could be used along with theoretical thickness curves to determine appropriate effective media parameters. One of the more interesting results was the representation of rolling grain marks on alclad by an effective complex index of refraction. The effective index determined was dependent on the sample orientation. Author (GRA)

**N78-33442** Purdue Univ, Lafayette, Ind  
**ANALYSIS OF A HIGH SPEED RING VALVE SYSTEM FOR A SINGLE CYLINDER RECIPROCATING COMPRESSOR Ph D Thesis**

Wanchai Pahnichaputt 1977 212 p  
Avail Univ Microfilms Order No 78-13100

The theoretical natural frequencies and mode shapes of the free-free valve ring were determined. These informations were then used to generate the theoretical natural frequencies and mode shapes of the spring supported ring valve by matching with the spring boundary conditions. Mode curves representing the relationship between the natural frequency and spring constant for the various modes of vibration of the spring supported ring valve were also developed. An analytical model of a discharge valve system which had a pocket behind the spring supported ring valve was derived. The model was obtained in terms of several differential equations. The effects of the pocket on the dynamics of the valve were determined by comparing the results from the simulation of the discharge valve system which had a pocket to those of the discharge valve system without a pocket. Dissert Abstr

**N78-33444\***# Kansas Univ Center for Research, Inc, Lawrence  
**AN INVESTIGATION OF DRAG REDUCTION FOR TRACTOR TRAILER VEHICLES Final Report**

Vincent U Muirhead Oct 1978 62 p refs  
(Grant NsG-4009) (NASA-CR-144877, KU-FRL-322-1) Avail NTIS HC A04/MF A01 CSCL 13F

Force and moment data were obtained from a one-twenty-fifth scale wind tunnel model of a cab-over-engine tractor trailer combination. The tests define the aerodynamic characteristics of the baseline (unmodified) vehicle and several modified configurations. The primary modifications consist of (1) greatly increased forebody corner radii, (2) a smooth fairing over the cab-to-trailer gap, (3) a smoothed underbody, and (4) rear streamlining (boattailing) of the trailer. Tests were conducted for yaw angles from 0 deg to 30 deg. The reduction in drag, relative to the baseline, obtained by combining the modifications are compared for the zero yaw condition with full scale coast down drag results for similar configurations. The drag reductions obtained from the model and full scale tests are in good agreement. Author

**N78-33478\***# General Electric Co, Cincinnati Ohio Aircraft Engine Group

**EVALUATION OF CYCLIC BEHAVIOR OF AIRCRAFT TURBINE DISK ALLOYS Final Report, Jun 1976 - 1978**

V Shahani and H G Pop Jun 1978 202 p refs  
(Contract NAS3-20368) (NASA-CR-159433) Avail NTIS HC A10/MF A01 CSCL 20K

An evaluation of the cyclic behavior of three aircraft engine turbine disk materials was conducted to compare their relative crack initiation and crack propagation resistance. The disk alloys investigated were Inconel 718, hot isostatically pressed and forged powder metallurgy Rene '95, and as-hot-isostatically pressed Rene '95. The objective was to compare the hot isostatically pressed powder metallurgy alloy forms with conventionally processed superalloys as represented by Inconel 718. Cyclic behavior was evaluated at 650 C both under continuously cycling and a fifteen minute tensile hold time cycle to simulate engine conditions. Analysis of the test data were made to evaluate the strain range partitioning and energy exhaustion concepts for predicting hold time effects on low cycle fatigue. Author

**N78-33483#** Lockheed-California Co, Burbank  
**FLAW GROWTH IN COMPLEX STRUCTURE VOLUME 1 TECHNICAL DISCUSSION Final Report, 12 May 1975 - 12 Sep 1977**

T R Brussat, S T Chiu and M Creager Dec 1977 309 p refs  
(Contract F33615-75-C-3093) (AD-A056372 LR-28272-Vol-1 AFFDL-TR-77-79-Vol-1) Avail NTIS HC A14/MF A01 CSCL 13/5

Fatigue crack growth testing and analysis were conducted to evaluate the effects of initial flaw location and multiplicity on fatigue crack growth life and element failure sequence in multiple element, mechanically fastened metallic structure. The test program, which included 68 precracked structural specimens consisting of 26 joints and 42 stringer-reinforced panels is described in detail. Stress intensity factor analyses and stress severity factor equations and the results of baseline static fatigue crack growth and fracture tests are presented for use in making crack growth predictions for the structural specimens. Procedures are described for machining precracking assembling and testing the structural specimens. The test results and corresponding analytical results are presented and compared. GRA

**N78-33599#** National Technical Information Service Springfield, Va

**FUEL CONSUMPTION: TRANSPORTATION, VOLUME 1 A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1964 - 1976**

Audrey S Hundemann Jul 1978 193 p  
(NTIS/PS-78/0707/6) Avail NTIS HC \$28 00/MF \$28 00 CSCL 10A

Fuel consumption by automobiles trucks buses and general aviation aircraft is discussed. Topic areas cover the effect of road conditions traffic conditions, and emission controls on fuel economy, projected growth and problems facing air transportation, energy efficiency of various urban transportation modes, energy use forecasts and projections of supply and demand in the transportation sector. This updated bibliography contains 187 abstracts. GRA

~~N78-33600~~ National Technical Information Service Springfield Va

**FUEL CONSUMPTION. TRANSPORTATION, VOLUME 2 A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1977 - Jun. 1978**

Audrey S Hundemann Jul 1978 115 p Supersedes NTIS/PS-77/0552  
(NTIS/PS-78/0708/4, NTIS/PS-77/0552) Avail NTIS HC \$28 00/MF \$28 00 CSCL 10A

This updated bibliography contains 109 abstracts dealing with fuel consumption by automobiles, trucks, buses and general aviation aircraft The effect of road conditions, traffic conditions and emission controls on energy efficiency is covered Projected growth and problems facing air transportation and energy use forecasts and projections of supply and demand in the transportation sector are included GRA

**N78-33613 George Washington Univ Washington D C ANNOYANCE DUE TO THE INTERACTION OF COMMUNITY NOISE SOURCES Ph.D Thesis**

Clemans Ancelan Powell Jr 1978 289 p  
Avail Univ Microfilms Order No 78-15803

The effects of a road traffic noise background on judgments of individual aircraft noise events were studied The results indicate that aircraft noise annoyance was reduced by increased levels of traffic noise Additional experiments were conducted to develop methodology for obtaining annoyance judgments to sessions of noise representative of situations with many aircraft noise events per day and to determine if the total noise energy concept was satisfactory in explaining subjects total annoyance to combined noises These experiments indicated that the total noise energy concept was not satisfactory A model which provides for the summation and inhibition of annoyance for combined noises was developed and subsequently tested with a final experiment good qualitative and quantitative agreement was found

Dissert Abstr

**N78-33616# MAN-Acoustics and Noise, Inc. Seattle Wash COMMERCIAL AIRPORT OPERATIONS AND COMMUNITY NOISE CRITERIA Final Report**

J E Mabry and B M S Sullivan Mar 1978 76 p refs  
(Contract DOT-FA77WAI-723)

(AD-A057451 MAN-1031 FAA-RD-78-36) Avail NTIS HC A05/MF A01 CSCL 20/1

The responses of 48 persons exposed to seven different simulated commercial airport noise environments were examined Each exposure period was of 1 to 1 1/2 hours duration and subjects experienced and rated eight of these noise exposure periods The test environment simulated a conventional living room environment Conclusions are (1) noise exposure from a newer aircraft fleet mix (circa 1980) is more acceptable than that from an old fleet mix (circa 1965), (2) commonly used noise exposure methods such as NEF Leq, and mean peak dBA are level dependent, (3) depending on the noise exposure method used, 2.5 to 4.0 dB is perceived as a reliable change in noise exposure, (4) predictive capability of a noise exposure method is a function of the engineering calculation procedure employed to weight the acoustic energy, and (5) mean peak level exposure methods have greater predictive capability than energy summation methods S B S

**N78-33617# National Aeronautics and Space Administration Langley Research Center Hampton, Va QUANTITATIVE MAPPING BY REMOTE SENSING OF AN OCEAN ACID-WASTE DUMP**

Craig W Ohlhorst Oct 1978 27 p refs  
(NASA-TP-1275 L-11927) Avail NTIS HC A02/MF A01 CSCL 13B

Results from quantitative analysis show that airplane remotely sensed spectral data can be used to quantify and map an acid-waste dump in terms of its particulate iron concentration These same data however could not be used to map the dump in terms of total suspended solids organic suspended solids or inorganic-suspended-solids concentrations A single-variable equation using the ratio of band 2 (440 to 490 nm) radiance to band 4 (540 to 580 nm) radiance was used to quantify the iron concentration in the acid-waste dump The acid waste that

was mapped varied in age from freshly dumped to 31/2 hr Particulate iron concentrations in the acid waste were estimated to range up to 1.1 mg/l at a depth of 0.46 m A classification technique was developed to identify pixels in the data set affected by sun glitter Author

**N78-33618# National Aeronautics and Space Administration Lewis Research Center, Cleveland Ohio OZONE CONCENTRATION IN THE CABIN OF A GATES LEARJET MEASURED SIMULTANEOUSLY WITH ATMOSPHERIC OZONE CONCENTRATIONS**

Daniel Briehl and Porter J Perkins Oct 1978 20 p refs  
(NASA-TP-1340 E-9653) Avail NTIS HC A02/MF A01 CSCL 13B

A Gates Learjet Model 23 was instrumented with monitors to measure simultaneously the atmospheric and the cabin concentrations of ozone at altitudes up to 13 kilometers Six data flights were made in February 1978 Results indicated that only a small amount of the atmospheric ozone is destroyed in the cabin pressurization system Ozone concentrations measured in the cabin near the conditioned-air outlets were only slightly lower than the atmospheric ozone concentration For the two cabin configurations tested, the ozone retention in the cabin was 63 and 41 percent of the atmospheric ozone concentration Maximum cabin ozone concentration measured during these flights was 410 parts per billion by volume Author

**N78-33634# National Technical Information Service Springfield Va**

**URBAN NOISE POLLUTION A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1970 - Jul 1978**

Edith Kenton Jul 1978 155 p Supersedes NTIS/PS-77/0653, NTIS/PS-76/0585, NTIS/PS-75/544 and NTIS/PS-74/106  
(NTIS/PS-78/0686/2 NTIS/PS-77/0653 NTIS/PS-76/0585 NTIS/PS-75/544 NTIS/PS-74/106) Avail NTIS HC \$28 00/MF \$28 00 CSCL 13B

Aspects of noise in the urban environment are covered The topics were chosen for their interest to urban planners and include citizen attitudes transportation noise, and noise abatement techniques (This updated bibliography contains 152 abstracts, 24 of which are new entries to the previous edition) GRA

**N78-33638# National Technical Information Service, Springfield Va**

**AIRPORT NOISE A BIBLIOGRAPHY WITH ABSTRACTS Progress Report, 1974 - Jun. 1978**

Guy E Habercom, Jr Aug 1978 253 p Supersedes NTIS/PS-77/0704, NTIS/PS-76/0625, NTIS/PS-75/530  
(NTIS/PS-78/0807/4 NTIS/PS-77/0704 NTIS/PS-76/0625, NTIS/PS-75/530) Avail NTIS HC \$28 00/MF \$28 00 CSCL 13B

Aircraft created noise, noise intensity noise exposure, and physiological effects, all in airport environments, are investigated (This updated bibliography contains 246 abstracts, 27 of which are new entries to the previous edition) GRA

**N78-33655# National Aviation Facilities Experimental Center Atlantic City N J**

**TWO LIGHTNING-FLASH COUNTER SYSTEMS Final Report, Dec 1975 - 1976**

L William Einbinder Nicholas Mercado, and Robert C Greenwood Jul 1978 43 p refs  
(AD-A057369 FAA-NA-77-18 FAA-RD-78-39) Avail NTIS HC A03/MF A01 CSCL 04/1

The battery operated recording instruments were used to determine local ambient lightning-flash activity and to evaluate the usefulness of these devices to air traffic control The first device CIGRE is an acronym for Conference International des Grande Reseaux Electrique The second device RSA-10, is an acronym for Republic of South Africa Data were collected for about 1-year and the resultant information indicates that the RSA-10 and the CIGRE lightning-flash counters are effective devices for determining the presence of lightning usually associated with cumulonimbus clouds G G

**N78-33677#** North American Weather Consultants, Goleta Calif  
**INITIAL DEVELOPMENT OF A TACTICAL SYSTEM FOR  
 DISPERSING SUPERCOOLED STRATUS Final Report, Sep.  
 1976 - Jan. 1978**

Chester Wisner John R Thompson and Don A Griffith 27 Jan  
 1978 127 p refs

(Contract F19628-76-C-0306)

(AD-A056570 AFGL-TR-78-0025, Rept-78-20) Avail NTIS  
 HC A07/MF A01 CSCL 04/2

A silver iodide pyrotechnic seeding system was selected for the development of a tactically useful approach to the dispersal of supercooled stratus. Various configurations of the pyrotechnic units were tested for nucleation effectiveness before choosing a 3/4-in diameter unit doped with a small amount of chlorine-bearing compound. The system was field tested in northern Michigan in February of 1977. The tests showed the system capable of producing clearings comparable to those of previous studies using dry ice as a seeding agent. Clearings were produced in clouds as warm as -8 C and as thick as 4000 feet. Targeting the clearings over a predetermined ground location was not especially difficult. While VFR flight conditions and good downward visibility were achieved, visibility on a slanted line-of-sight was poor. Author (GRA)

**N78-33692#** Oklahoma Univ., Norman Dept of Meteorology  
**DYNAMICAL MODEL OF GUST FRONT Final Report**

Y K Sasaki and Tom Baxter Sep 1977 43 p refs

(Contract DOT-FA76WAI-622, Grant NOAA-04-6-022-44031)  
 (PB-283425/7, NOAA-78042004) Avail NTIS  
 HC A03/MF A01 CSCL 04B

The dynamics of gust fronts generated by Great Plains thunderstorms were considered from the viewpoint of aviation safety. The past and current understanding of the structure and mechanics of gust fronts was thoroughly reviewed and the major problems which are currently obstructing progress were outlined. After a technical discussion of several simulation attempts, it is concluded that a well designed three dimensional simulation is required. GRA

**N78-33776\*#** National Aeronautics and Space Administration  
 Langley Research Center Hampton Va

**ENGINEERING AND SCIENTIFIC DATA MANAGEMENT  
 1978 255 p refs Proc of Conf held at Hampton, Va,  
 18-19 May 1978 Sponsored in part by the Inst for Computer  
 Appl in Sci and Eng and the George Washington Univ Joint  
 Inst for Advan of Flight Sci Hampton Va  
 (NASA-CP-2055 L 12043) Avail NTIS HC A12/MF A01  
 CSCL 09B**

The application of data management systems to engineering and scientific data is described.

**N78-33778\*#** Pratt and Whitney Aircraft East Hartford Conn  
**CAD/CAM DATA MANAGEMENT NEEDS, REQUIREMENTS  
 AND OPTIONS**

Richard S Lopatka and Thomas G Johnson In NASA Langley  
 Res Center Eng and Sci Data Management 1978 p 25-54  
 refs

Avail NTIS HC A12/MF A01 CSCL 09B

The requirements for a data management system in support of technical or scientific applications and possible courses of action were reviewed. Specific requirements were evolved while working towards higher level integration impacting all phases of the current design process and through examination of commercially marketed systems and related data base research. Arguments are proposed for varied approaches in implementing data base systems ranging from no action necessary to immediate procurement of an existing data base management system. G G

**N78-33780\*#** Bell Helicopter Co., Fort Worth, Tex  
**A DATA MANAGEMENT SYSTEM FOR WEIGHT CONTROL  
 AND DESIGN-TO-COST**

Jerry C Bryant In NASA Langley Res Center Eng and Sci  
 Data Management 1978 p 65-84

Avail NTIS HC A12/MF A01 CSCL 09B

The definition of the mass properties data of aircraft changed on a daily basis as do design details of the aircraft. This dynamic nature of the definition has generally encouraged those responsible for the data to update the data on a weekly or monthly basis. The by-product of these infrequent updates was the requirement of manual records to maintain daily activity. The development of WAVES changed the approach to management of mass properties data. WAVES has given the ability to update the data on a daily basis thereby eliminating the need for manual records. WAVES has demonstrated that a software product can support a data management system for engineering data. G G

**N78-33785\*#** Boeing Computer Services Inc Seattle Wash  
**RIM A PROTOTYPE FOR A RELATIONAL INFORMATION  
 MANAGEMENT SYSTEM**

Dennis L Comfort and Wayne J Erikson In NASA Langley  
 Res Center Eng and Sci Data Management 1978 p 183-196

Avail NTIS HC A12/MF A01 CSCL 09B

An overview of the relational information management (RIM) system is provided. RIM is a prototype data management system for the Aerospace Vehicle design (IPAD) project. G G

**N78-33873\*#** National Aeronautics and Space Administration  
 Langley Research Center Hampton, Va

**COMPARISON OF LOW-FREQUENCY NOISE LEVELS OF  
 THE CONCORDE SUPERSONIC TRANSPORT WITH OTHER  
 COMMERCIAL SERVICE AIRPLANES**

Clemens A Powell and David A McCurdy Oct 1978 48 p  
 refs

(NASA-TM-78736, L-12210) Avail NTIS HC A03/MF A01  
 CSCL 20A

Fifty-two airplane noise recordings made at several locations around Dulles International Airport, were analyzed to compare the low-frequency noise levels of the Concorde supersonic transport with those of other commercial jet airplanes. Comparisons of the relative low-frequency noise levels which were produced at close and distant locations for departures and arrivals were made for three noise measures: the sound pressure level in the 1/3 octave band centered at 20 Hz, the total sound pressure level in the 1/3 octave bands with center frequencies less than or equal to 125 Hz, and the total sound pressure level in the 1/3 octave bands with center frequencies less than or equal to 500 Hz. Although the absolute noise levels for Concorde were found, in general to be higher than those for the other airplane types, the level of low-frequency noise of the Concorde relative to the perceived noise level (PNL), effective perceived noise level (EPNL), and overall sound pressure level (OASPL) was within the range established by the other airplane types, except for the arrival operations of four-engine narrow-body airplanes. The measure OASPL was found to be a significantly better predictor of low-frequency noise level than PNL or EPNL. Author

**N78-33874\*#** National Aeronautics and Space Administration  
 Langley Research Center, Hampton, Va

**NOISE-INDUCED BUILDING VIBRATIONS CAUSED BY  
 CONCORDE AND CONVENTIONAL AIRCRAFT OPERA-  
 TIONS AT DULLES AND KENNEDY INTERNATIONAL  
 AIRPORTS Final Report**

W H Mayes, D G Stephens, H K Hoimes, R B Lewis, B G  
 Holliday, D W Ward, R DeLoach, J M Cawthorn, T D Finley,  
 J W Lynch et al Aug 1978 18 p refs Original contains  
 color illustrations

(NASA-TM-78769) Avail NTIS HC A02/MF A01 CSCL 20A

Outdoor and indoor noise levels resulting from aircraft flyovers and certain nonaircraft events were recorded, as were the associated vibration levels in the walls, windows and floors at building test sites. In addition, limited subjective tests were conducted to examine the human detection and annoyance thresholds for building vibration and rattle caused by aircraft noise. Representative peak levels of aircraft noise-induced building vibrations are reported and comparisons are made with structural damage criteria and with vibration levels induced by common

**N78-33876**

domestic events In addition, results of a pilot study are reported which indicate the human detection threshold for noise-induced floor vibrations  
G G

**N78-33876\*#** Nielsen Engineering and Research Inc., Mountain View Calif

**PROPAGATION OF SOUND THROUGH A SHEARED FLOW  
Final Report, 30 Aug. 1976 - 1 Jul. 1977**

James P Woolley, Charles A Smith, and Krishnamurty Karamcheti  
Aug 1978 83 p refs  
(Contract NAS2-9357)  
(NASA-CR-152196, NEAR-TR-171) Avail NTIS  
HC A05/MF A01 CSCL 20A

Sound generated in a moving fluid must propagate through a shear layer in order to be measured by a fixed instrument These propagation effects were evaluated for noise sources typically associated with single and co-flowing subsonic jets and for subcritical flow over airfoils in such jets The techniques for describing acoustic propagation fall into two categories geometric acoustics and wave acoustics Geometric acoustics is most convenient and accurate for high frequency sound In the frequency range of interest to the present study (greater than 150 Hz), the geometric acoustics approach was determined to be most useful and practical  
G G

**N78-33918#** National Technical Information Service, Springfield, Va

**FIBER OPTICS, VOLUME 2. CITATIONS FROM THE NTIS  
DATA BASE Progress Report, Jun 1976 - Jul 1977**

Mona F Smith Jul 1978 269 p  
(NTIS/PS-78/0713/4) Avail NTIS HC \$28 00/MF \$28 00  
CSCL 20F


This updated bibliography contains 263 abstracts The citations cover Federally-funded research on theory, fabrication properties and testing of fiber optical materials In addition, studies on fiber optical cables, connectors, waveguides, couplers, and other fiber optical system components are presented The uses of fiber optics in data transmission systems, optical communications, signal processing, display systems integrated optical circuits, measuring instruments detectors, avionics fire control systems, recording systems, and underwater communications are included  
GRA

# SUBJECT INDEX

AERONAUTICAL ENGINEERING / *A Continuing Bibliography (Suppl 104)*

JANUARY 1979

## Typical Subject Index Listing

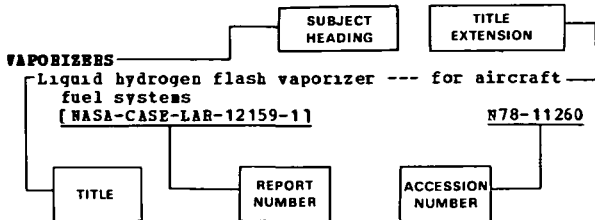

The title is used to provide a description of the subject matter. When the title is insufficiently descriptive of the document content a title extension is added separated from the title by three hyphens. The NASA or AIAA accession number is included in each entry to assist the user in locating the abstract in the abstract section of this supplement. If applicable a report number is also included as an aid in identifying the document.

## A

- ABLATION**  
 Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies A78-50455  
 Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests A78-50457
- ABLATIVE MATERIALS**  
 Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone A78-53508
- ABLATIVE NOSE CONES**  
 Hardened reentry vehicle development program. Erosion-resistant nosetip technology [AD-A056390] N78-33128
- ABSTRACTS**  
 Closed loop control systems. Part 1 Aircraft. A bibliography with abstracts [NTIS/PS-78/0809/0] N78-33122
- ACCESSORIES**  
 Maintenance of gas turbine accessory equipment A78-53175
- ACCIDENT PREVENTION**  
 Fire detector response in aircraft applications A78-53674
- ACIDS**  
 Quantitative mapping by remote sensing of an ocean acid-waste dump [NASA-TF-1275] N78-33617
- ACOUSTIC ATTENUATION**  
 A study of fan-rotating noise reduction A78-50620
- ACOUSTIC FATIGUE**  
 Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads A78-50941
- ACOUSTIC PROPERTIES**  
 Flight effects on the aerodynamic and acoustic characteristics of inverted profile cannular nozzles [NASA-CR-3018] N78-32836
- ACOUSTIC STREAMING**  
 Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations A78-52763
- ACOUSTO-OPTICS**  
 Self-focusing of a Gaussian beam in a supersonic gas flow A78-51387
- ADAPTIVE CONTROL**  
 A learning control system with application to flight systems N78-33112  
 Closed loop control systems. Part 1: Aircraft. A bibliography with abstracts [NTIS/PS-78/0809/0] N78-33122
- ADAPTIVE FILTERS**  
 Suboptimal adaptive filtering of radio signals A78-53903
- ADHESIVE BONDING**  
 Adhesive bonded aerospace structures standardized repair handbook [AD-A055684] N78-32270  
 Primary Adhesively Bonded Structure Technology (PABST). Phase 1: Detail design [AD-A056857] N78-33095
- AERIAL RECONNAISSANCE**  
 A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis A78-52498
- AEROACOUSTICS**  
 Some considerations on pure tone noise generation in an axial-flow fan A78-50619  
 A study of fan-rotating noise reduction A78-50620  
 Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures A78-50780  
 Helicopter Acoustics [NASA-CP-2052-PT-1] N78-32816  
 Theory on acoustic sources N78-32824  
 Potential acoustic benefits of circulation control rotors N78-32825
- AERODYNAMIC BALANCE**  
 Simple numerical model for calculation of entry vehicle trim response A78-51284
- AERODYNAMIC BRAKES**  
 Irrotational flow around a spherical segment --- aerodynamic brakes application A78-51688
- AERODYNAMIC CHARACTERISTICS**  
 Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades A78-50600  
 A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade A78-50618  
 A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior A78-50777  
 Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794  
 The aerodynamic performance of a freely hinged door between two flows --- for supersonic transport propulsion nozzles A78-51464  
 The short-haul jet designed with ATC in mind A78-51516



## AERODYNAMIC CONFIGURATIONS

## SUBJECT INDEX

- Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent --- German thesis  
A78-51749
- V70L aircraft dynamics --- Russian book  
A78-53428
- An algorithm for complex study of the aerodynamic characteristics of spacecraft  
A78-53506
- Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage --- conducted in the Langley V/STOI wind tunnel [NASA-TM-74033]  
N78-32049
- Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests [NASA-TM-78706]  
N78-32050
- V/STOI aerodynamic technology assessment [AD-A054797]  
N78-32069
- Aerodynamic roll characteristics of a 0.00548 scale 146-inch solid rocket booster reentry configuration (MSPC Model Number 486) over a portion of the reentry flight regime in the NASA MSF 14-inch trisomic wind tunnel [NASA-TM-78195]  
N78-32173
- Flight effects on the aerodynamic and acoustic characteristics of inverted profile coannular nozzles [NASA-CR-3018]  
N78-32836
- Geometry requirements for unsteady aerodynamics in aeroelastic analysis and design [NASA-TM-78781]  
N78-33046
- Effects of wing leading-edge deflection on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration [NASA-TM-78787]  
N78-33047
- Aerodynamic derivatives for an oblique wing aircraft estimated from flight data by using a maximum likelihood technique [NASA-TP-1336]  
N78-33054
- Missile aerodynamic parameter and structure identification from flight test data [AD-A056343]  
N78-33055
- AERODYNAMIC CONFIGURATIONS**  
The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation [NASA-TM-75535]  
N78-32043
- AERODYNAMIC DRAG**  
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing [NASA-CR-150826]  
N78-33134
- AERODYNAMIC FORCES**  
Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit  
A78-52578
- AERODYNAMIC HEAT TRANSFER**  
Aerodynamic and cooling performances of a film cooled turbine  
A78-50599
- AERODYNAMIC HEATING**  
Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies  
A78-50455
- Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests  
A78-50457
- Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone  
A78-53508
- Calculation of viscous radiant gas flows --- hypersonic reentry  
A78-53556
- Hypersonic flows  
N78-32124
- AERODYNAMIC INTERFERENCE**  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel  
A78-50303
- Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft [AIAA PAPER 78-1458]  
A78-52042
- On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities  
A78-52043
- AERODYNAMIC LOADS**  
Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application  
A78-50673
- Simple numerical model for calculation of entry vehicle trim response  
A78-51284
- Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins  
N78-32058
- Influences of sway braces and mounting gaps on the static aerodynamic loading of external stores [AD-A054963]  
N78-32068
- Technical evaluation report on the Fluid Dynamics Panel Symposium on Prediction of Aerodynamic Loading [AGARD-AR-125]  
N78-32074
- Aeroelastic characteristics of a cascade of blades [AD-A055619]  
N78-32392
- Effect of aircraft loading program modifications on the fatigue life and damage cumulation. Part 1: Effect of load peaks in case of central hole sheet specimens [TAE-334-PT-1]  
N78-32462
- Aerodynamic load distributions at transonic speeds for a close-coupled wing-canard configuration: Tabulated pressure data [NASA-TM-78780]  
N78-33045
- Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions [NASA-TP-1331]  
N78-33053
- An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: P-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109]  
N78-33113
- AERODYNAMIC NOISE**  
Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619
- Noise from separated flow of flat plate  
A78-50622
- Broadband noise in axial-fan blade cascade  
A78-50650
- Minimum on-axis noise for a propeller or helicopter rotor  
A78-51949
- Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine  
N78-32673
- AERODYNAMIC STABILITY**  
Aerodynamic stability testing with magnetically suspended models  
N78-32108
- Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling [SAND-77-1309C]  
N78-33121
- AERODYNAMIC STALLING**  
Surge responsibility and range characteristics of centrifugal compressors  
A78-50616
- Dynamic stall: An example of strong interaction between viscous and inviscid flows [NASA-TM-75447]  
N78-32384
- AERODYNAMICS**  
Thirty years of fluid dynamics  
A78-51280
- Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711]  
N78-32911
- Computation of two-dimensional potential flow using elementary vortex distributions  
A78-51948

- AEROELASTICITY**  
 Mathematical model of vortex-excited oscillations of thin, weakly damped structures A78-51153  
 Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow A78-53087  
 Nonlinear vibrations of an asymmetric flight vehicle A78-53504  
 Geometry requirements for unsteady aerodynamics in aeroelastic analysis and design [NASA-TM-78781] N78-33046
- AERONAUTICAL ENGINEERING**  
 The potential of advanced technology for aircraft structures /10th J. D. North Memorial Lecture/ A78-50400  
 Description of a model for evaluating operational performance of communications system [AD-A057199] N78-33313  
 Modifications and improvements in a structural optimization scheme based on an optimality criterion [AD-A055941] N78-32088
- AEROSPACE ENGINEERING**  
 Lighter than air vehicles. Citations from the engineering index data base [NTIS/PS-78/0410/71] N78-32073  
 From space on a parachute [NASA-TM-75577] N78-33140  
 CAD/CAM data management needs, requirements and options N78-33778
- AEROSPACE INDUSTRY**  
 New production methods gain --- in engine manufacturing for U.S. aerospace industry A78-53239
- AEROSPACE SYSTEMS**  
 Spacelab hardware update [AAS PAPER 78-005] A78-53614
- AEROSPACE VEHICLES**  
 Opportunities for cost-affordable titanium aerospace structures A78-51839  
 RIM: A prototype for a relational information management system N78-33785
- AEROTHERMOCHEMISTRY**  
 Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone A78-53508
- AEROTHERMODYNAMICS**  
 Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures A78-50780  
 A computer-aided method of calculating temperature fields in turbine disks A78-50796  
 Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces A78-53309
- AEROTHERMOELASTICITY**  
 Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows A78-50935
- AFTERBURNING**  
 Aircraft afterburner catalytic flame stabilization A78-50570
- AGREEMENTS**  
 Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978 A78-52447
- AGRICULTURE**  
 A distribution model for the aerial application of granular agricultural particles [NASA-CR-157745] N78-33048
- AIR CARGO**  
 Design concepts for future air freighters A78-52450  
 Boeing-747 aircraft with external cargo pod [NASA-CR-158932] N78-32047  
 Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project [NASA-TM-78774] N78-33061
- AIR COOLING**  
 Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades A78-50581  
 Aerodynamic and cooling performances of a film cooled turbine A78-50599  
 Energy economy with high temperature gasturbine A78-50604  
 An experiment of deposit formation on surface of an air-cooled gas-turbine blade A78-50634  
 A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior A78-50777
- AIR FILTERS**  
 Application of self-cleaning air cleaners to aircraft and vehicular gas turbines A78-50633
- AIR FLOW**  
 Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades A78-50578  
 Vortex dynamics A78-51051  
 The theory of fabric porosity as applied to parachutes in incompressible flow A78-51466
- AIR NAVIGATION**  
 Current and future navigation and landing systems A78-50265  
 New organization of air traffic over the North Atlantic region A78-51599  
 The Navy's approach /Air traffic control/ A78-52969
- AIR POLLUTION**  
 Concorde emissions at Dulles International Airport - Results of measurements A78-53050  
 The High Altitude Pollution Program [UCRL-50042-77] N78-32601  
 Air pollution emission factors: A bibliography with abstracts [NTIS/PS-78/0548/4] N78-32604
- AIR TO AIR MISSILES**  
 Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements A78-51470  
 An extended Kalman filter fire control system against air-to-air missiles, volume 2 [AD-A055637] N78-32091
- AIR TRAFFIC**  
 The legal basis for security measures in air traffic A78-51823  
 Air traffic congestion and capacity. A bibliography with abstracts [NTIS/PS-78/0598/9] N78-32085
- AIR TRAFFIC CONTROL**  
 Aircraft guidance and flight safety - Current and future problems for research and industry A78-50263  
 Improved safety in air transportation through the extension and automation of flight safety systems A78-50264  
 Digital flight control system - Advanced technology of flight control A78-50266  
 Strategic or tactical air traffic control A78-50447  
 Airborne equipment for all weather operations A78-50448  
 Estimating the average taxi speed of departing aircraft A78-50450  
 The short-haul jet designed with ATC in mind A78-51516

## AIR TRAFFIC CONTROLLERS (PERSONNEL)

## SUBJECT INDEX

Airline contributions to better air traffic control A78-51518	Engineering and development program plan: Discrete Address Beacon System (DABS) [AD-A057122] N78-33073
New organization of air traffic over the North Atlantic region A78-51599	Digitized radar data compressor --- for air traffic control N78-33290 [AD-A057442]
Stochastic properties of conflict frequency at multiple connected air route intersections A78-51945	Two lightning-flash counter systems [AD-A057369] N78-33655
Air Traffic Control Association, Annual Meeting, 22nd, Las Vegas, Nev., October 10-13, 1977, Proceedings and Supplement A78-52951	<b>AIR TRAFFIC CONTROLLERS (PERSONNEL)</b> System measurement improves computer responses to the controller --- for air traffic control A78-52974
Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control A78-52954	<b>AIR TRANSPORTATION</b> European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/ A78-51520
The helicopter operators' viewpoint --- airspace operational environments and requirements A78-52955	Technical-economic analysis of the direct operating costs of air transport companies --- German thesis A78-51752
Safety and communication requirements in air traffic control today A78-52956	International jurisdiction related to the Warsaw Convention during the years from 1974 to 1976. II A78-51822
Airport traffic surveillance A78-52957	Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978 A78-52447
The ARTS III Umbrella - Concepts and applications --- for collecting and distributing aircraft positional data within ATC radar coverage areas A78-52958	The changing environment of international air commerce A78-52448
A more fully Automated En Route ATC system A78-52959	Aviation futures to the year 2000 A78-52966
The Central Flow Control /CFC/ system --- for Air Traffic Control System Command Center A78-52960	Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project [NASA-TN-78774] N78-33061
Management of software development for advance ATC systems A78-52961	<b>AIRBORNE EQUIPMENT</b> Airborne equipment for all weather operations A78-50448
Moving target detector /MTD/ radar system A78-52963	Preventing helicopter mid-air collisions with the proximity warning device A78-51223
Development of a breadboard system for recording ATC displays A78-52964	<b>AIRBORNE SURVEILLANCE RADAR</b> A modular side looking airborne radar to fulfill a multitude of surveillance missions A78-51543
Development and evaluation of a wake vortex advisory system A78-52965	<b>AIRCRAFT</b> Adhesive bonded aerospace structures standardized repair handbook [AD-A055684] N78-32270
Aircraft developments that hold promise for increased compatibility with an advanced ATC system A78-52967	<b>AIRCRAFT ACCIDENT INVESTIGATION</b> A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF A78-51497
A system concept of metering and spacing --- for aircraft landing approach A78-52968	Annual review of aircraft accident data, US general aviation, calendar year 1976 [PB-281330/1] N78-33064
The Navy's approach /Air traffic control/ A78-52969	Annual review of aircraft accident data, US air carrier operations, 1976 [PB-281329/3] N78-33065
Overview of potential ATC developments A78-52970	<b>AIRCRAFT ACCIDENTS</b> The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear [AD-A056780] N78-33063
Modernization program for the Iranian National Airspace System A78-52971	Annual review of aircraft accident data, US general aviation, calendar year 1976 [PB-281330/1] N78-33064
Concept and future plans for automation of air traffic control in the Federal Republic of Germany A78-52972	Annual review of aircraft accident data, US air carrier operations, 1976 [PB-281329/3] N78-33065
Preparing today, to meet the ATC challenges of tomorrow --- for civil aircraft operations in Taiwan A78-52973	<b>AIRCRAFT ANTENNAS</b> Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book A78-53426
Advancements in ATC information displays and controller-computer interaction A78-52975	An airborne meteorological data collection system using satellite relay (ASDAR) [NASA-TM-78992] N78-33283
The direct access radar channel - A distributed minicomputer system A78-52976	Near field pattern computations for airborne antennas [AD-A057244] N78-33311
Area navigation - Fast-time/real-time simulations in a high-altitude center environment A78-52977	<b>AIRCRAFT APPROACH SPACING</b> Strategic or tactical air traffic control A78-50447
ATC in the year 2000 A78-52978	
What's new in controller displays - Electronic flight strips and a color plan view display A78-52979	
Parameters of future ATC systems relating to airport capacity/delay [AD-A057059] N78-33068	
System definition and investigation of the on site processing of en route sensor signals. Addendum: Investigation into possible en route on site beacon ring around discriminants [AD-A056941] N78-33070	
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary [AD-A056930] N78-33072	

## SUBJECT INDEX

## AIRCRAFT ENGINES

- A system concept of metering and spacing --- for aircraft landing approach A78-52968
- Parameters of future ATC systems relating to airport capacity/delay [AD-A057059] N78-33068
- AIRCRAFT CARRIERS**
- Key beam weapons tests slated --- for aircraft carrier particle beam defense against cruise missiles A78-53238
- AIRCRAFT COMMUNICATION**
- Applications for airborne digital communications A78-51896
- Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links A78-52360
- Safety and communication requirements in air traffic control today A78-52956
- AIRCRAFT COMPARTMENTS**
- Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations [NASA-TP-1340] N78-33618
- AIRCRAFT CONFIGURATIONS**
- An improved higher order panel method for linearized supersonic flow [AIAA PAPER 78-15] A78-52628
- Boeing-747 aircraft with external cargo pod [NASA-CR-158932] N78-32047
- Aircraft configurations for high-speed ships [AD-A055540] N78-32092
- Aerodynamic derivatives for an oblique wing aircraft estimated from flight data by using a maximum likelihood technique [NASA-TP-1336] N78-33054
- AIRCRAFT CONSTRUCTION MATERIALS**
- Opportunities for cost-affordable titanium aerospace structures A78-51839
- Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1: Executive summary [NASA-CR-145381-1] N78-32187
- Study on utilization of advanced composites in commercial aircraft wing structures, volume 2 [NASA-CR-145381-2] N78-32188
- AIRCRAFT CONTROL**
- The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft [AIAA PAPER 78-96] A78-52626
- AIRCRAFT DESIGN**
- The short-haul jet designed with ATC in mind A78-51516
- The shape of airliners to come A78-51817
- Boeing launches the 767 A78-52244
- The L-1011-500 long-range TriStar A78-52245
- Design concepts for future air freighters A78-52450
- The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft [AIAA PAPER 78-96] A78-52626
- An improved higher order panel method for linearized supersonic flow [AIAA PAPER 78-15] A78-52628
- Aircraft developments that hold promise for increased compatibility with an advanced ATC system A78-52967
- Design of a transonically profiled wing [NASA-TM-75440] N78-32052
- Profile design for an advanced-technology airfoil for general aviation aircraft [NASA-TM-75323] N78-32054
- Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85 [NASA-CR-3047] N78-32066
- Supersonic transport --- using canard surfaces [NASA-CASE-LAR-11932-1] N78-32086
- Reference aircraft for ICAO Working Group E [NASA-CR-158929] N78-32087
- Advanced composites wing study program. Volume 1: Executive summary [NASA-CR-145382-1] N78-32185
- Advanced composites wing study program, volume 2 [NASA-CR-145382-2] N78-32186
- Geometry requirements for unsteady aerodynamics in aeroelastic analysis and design [NASA-TM-78781] N78-33046
- Prospects for a civil/military transport aircraft [NASA-TM-78724] N78-33060
- Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project [NASA-TM-78774] N78-33061
- The common case study: Lockheed design of a supersonic cruise vehicle [NASA-CR-158935] N78-33086
- Preliminary design characteristics of a subsonic business jet concept employing laminar flow control [NASA-CR-158958] N78-33087
- Wing planform geometry effects on large subsonic military transport airplanes [AD-A056124] N78-33088
- A data management system for weight control and design-to-cost N78-33780
- AIRCRAFT ENGINES**
- A new air blast type combustor - Design, performance and emission A78-50593
- A study of fan-rotating noise reduction A78-50620
- Assessment of the structural-mechanical design of commercial aircraft gas turbine engines A78-50625
- Application of self-cleaning air cleaners to aircraft and vehicular gas turbines A78-50633
- Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight A78-50790
- Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element A78-50792
- Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798
- Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II A78-51600
- Optimal control of aircraft powerplant --- Russian book A78-53119
- Fabrication and assembly of cable strands for aircraft engines --- Russian book A78-53432
- Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines A78-53511
- Nickel brazing honeycomb for aircraft gas turbine engines A78-53751
- Aircraft gas turbine low-power emissions reduction technology program [NASA-CR-135434] N78-32097
- Study of the turbine engine industry [AD-A055895] N78-32103
- Technical evaluation report on the 51st(B) PEP Specialists' Meeting of the Propulsion and Energetics Panel on Seal Technology in Gas Turbine engines [AGARD-AR-123] N78-32104
- Technical evaluation report on the 51st (A) Specialists' Meeting of the Propulsion and Energetics Panel on Icing Testing for Aircraft Engines [AGARD-AR-124] N78-32105
- Air pollution emission factors: A bibliography with abstracts [NTIS/PS-78/0548/4] N78-32604
- Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TM-79009] N78-33102

## AIRCRAFT EQUIPMENT

## SUBJECT INDEX

Evaluation of cyclic behavior of aircraft turbine disk alloys  
[NASA-CR-159433] N78-33478

**AIRCRAFT EQUIPMENT**

An extended Kalman filter fire control system against air-to-air missiles, volume 2  
[AD-A055637] N78-32091

Aircraft defogging and defrosting (transparent area)  
[AD-A056976] N78-33094

An airborne meteorological data collection system using satellite relay (ASDAR)  
[NASA-TM-78992] N78-33283

**AIRCRAFT FUEL SYSTEMS**

Double row radial hydraulic piston pumps for aircraft hydraulic systems  
A78-53249

**AIRCRAFT FUELS**

Ignition of a liquid fuel under high intensity radiation --- laser weapon systems  
[AD-A054974] N78-32199

**AIRCRAFT GUIDANCE**

Precision approach monitoring and guidance using interferometer techniques  
A78-51551

**AIRCRAFT HAZARDS**

CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments  
[AD-A055804] N78-32077

**AIRCRAFT HYDRAULIC SYSTEMS**

Double row radial hydraulic piston pumps for aircraft hydraulic systems  
A78-53249

**AIRCRAFT INDUSTRY**

Impact of federal noise abatement policy on aircraft financing  
A78-51131

Study of the turbine engine industry  
[AD-A055895] N78-32103

**AIRCRAFT INSTRUMENTS**

Infrared passbands for clear-air-turbulence detection  
A78-51971

The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary  
[AD-A056930] N78-33072

An aircraft radiometer front end, addendum  
[NASA-CF-157777] N78-33405

**AIRCRAFT LANDING**

Visual flight simulator for the investigation of the learning process during aircraft landing  
A78-50302

Airborne equipment for all weather operations  
A78-50448

The Turboclair process --- fog dispersal techniques  
A78-50449

The missed approach --- psychological factors in aircraft instrument landing decisions  
A78-51517

Comparison of linear and nonlinear dampers for landing gears  
A78-51947

VTOL aircraft dynamics --- Russian book  
A78-53428

Investigations of simulated aircraft flight through thunderstorm outflows  
[NASA-CR-3052] N78-32037

Dynamic response of aircraft to unloaded and loaded pavement profiles  
[AD-A055703] N78-32090

Vortex advisory system simulation of Chicago O'Hare Airport  
[AD-A057112] N78-33069

**AIRCRAFT MAINTENANCE**

AIDS - Aircraft-integrated-data-system  
A78-53675

Adhesive bonded aerospace structures standardized repair handbook  
[AD-A055684] N78-32270

Bell UR-1H RAM/LOG report  
[AD-A057231] N78-33091

**AIRCRAFT MANEUVERS**

Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling  
[SAND-77-1309C] N78-33121

**AIRCRAFT MODELS**

Aerodynamic stability testing with magnetically suspended models  
N78-32108

A method for validating missile system simulation models  
[AD-A055689] N78-32169

Dynamic analysis using superelements for a large helicopter model  
N78-32486

**AIRCRAFT NOISE**

Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases  
A78-51129

Current state of the law in aircraft noise pollution control  
A78-51130

Impact of federal noise abatement policy on aircraft financing  
A78-51131

Laboratory and community studies of aircraft noise effects  
[NASA-TM-78776] N78-32815

Helicopter Acoustics  
[NASA-CF-2052-PT-1] N78-32816

Helicopter external noise requirements: FAA perspective  
N78-32817

Helicopter noise regulations: An industry perspective  
N78-32818

Noise requirements from a military point of view  
N78-32819

The impact of urban operations on helicopter noise requirements  
N78-32820

Prediction and reduction of rotor broadband noise  
N78-32821

Theoretical models of helicopter rotor noise  
N78-32822

Noise due to rotor-turbulence interaction  
N78-32823

Theory on acoustic sources  
N78-32824

Potential acoustic benefits of circulation control rotors  
N78-32825

Helicopter noise research at the Langley V/STOL tunnel  
N78-32826

Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- langley anechoic noise facility  
N78-32827

Wind tunnel investigations of model rotor noise at low tip speeds  
N78-32828

Helicopter external noise prediction and correlation with flight test  
N78-32829

Full-scale testing of an Ogee tip rotor --- in the Langley whirl tower  
N78-32830

Hovering impulsive noise: Some measured and calculated results  
N78-32831

Improved methods for calculating the thickness noise  
N78-32832

The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833

Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction  
N78-32834

A study of the noise radiation from four helicopter rotor blades --- tests in Ames 40 by 20 foot wind tunnel  
N78-32835

Annoyance due to the interaction of community noise sources  
N78-33613

Commercial airport operations and community noise criteria  
[AD-A057451] N78-33615

Airport noise. A bibliography with abstracts  
[NTIS/PS-78/0807/4] N78-33639

**AIRCRAFT PARTS**

Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941

## SUBJECT INDEX

## AIRPORTS

- AIRCRAFT PRODUCTION**  
Helicopter manufacturing technology. III - Future manufacturing technologies A78-53174
- AIRCRAFT SAFETY**  
The missed approach --- psychological factors in aircraft instrument landing decisions A78-51517  
Fire resistivity and toxicity studies of candidate aircraft passenger seat materials A78-51838  
Safety and communication requirements in air traffic control today A78-52956  
Aircraft developments that hold promise for increased compatibility with an advanced ATC system A78-52967  
Fire detector response in aircraft applications A78-53674  
NASA aviation safety reporting system [NASA-TM-78511] N78-32075  
Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330  
Bird strikes and aviation safety. A bibliography with abstracts [NTIS/PS-78/0694/6] N78-33066
- AIRCRAFT STABILITY**  
Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling [SAND-77-1309C] N78-33121
- AIRCRAFT STRUCTURES**  
The potential of advanced technology for aircraft structures /10th J. D. North Memorial Lecture/ A78-50400  
Diffusion brazing titanium sandwich structures A78-51524  
Opportunities for cost-affordable titanium aerospace structures A78-51839  
Effect of aircraft loading program modifications on the fatigue life and damage cumulation. Part 1: Effect of load peaks in case of central hole sheet specimens [TAE-334-PT-1] N78-32462  
Piezoelectric polymer transducers for detection of structural defects in aircraft [AD-A055729] N78-32903
- AIRCRAFT TIRES**  
Chevron cutting: Experiment with new runway mixtures [NASA-TM-75448] N78-32427
- AIRCRAFT WAKES**  
Vortex dynamics A78-51051  
Minimum on-axis noise for a propeller or helicopter rotor A78-51949  
Development and evaluation of a wake vortex advisory system A78-52965  
Aircraft developments that hold promise for increased compatibility with an advanced ATC system A78-52967
- AIRFOIL PROFILES**  
Some mixed boundary value problems for subsonic flow past oscillating profiles A78-51198  
A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow A78-52648  
Profile design for an advanced-technology airfoil for general aviation aircraft [NASA-TM-75323] N78-32054
- AIRFOILS**  
Turbulent boundary layer separation on a curved wall with normal compression shock A78-51155  
Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow A78-53087  
Interaction of a surface wave with a dielectric slab discontinuity [AD-A055956] N78-32327
- A comparative study of two computational methods for calculating unsteady transonic flows about oscillating airfoils [AD-A056946] N78-33058
- AIRFRAMES**  
Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions --- airframe fatigue cracking [AD-A055483] N78-32504  
Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite [AD-A055714] N78-33197  
Flaw growth in complex structure. Volume 1: Technical discussion [AD-A056372] N78-33483
- AIRLINE OPERATIONS**  
Airports in the year 2000 - Suggestions for improving capacity A78-50435  
Toulouse combines elegance with economy --- French airport design A78-50436  
Improved passenger flow through simulation A78-50437  
And now 'the deregulators' - When will they learn A78-51127  
British Airways v. Port Authority - Its impact on aircraft noise regulation A78-51128  
Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases A78-51129  
Airline contributions to better air traffic control A78-51518  
Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport A78-51598  
New organization of air traffic over the North Atlantic region A78-51599  
Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent --- German thesis A78-51749  
Technical-economic analysis of the direct operating costs of air transport companies --- German thesis A78-51752  
Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978 A78-52447  
Airline delay trends, 1972-1977 [AD-A056867] N78-33062
- AIRPORT PLANNING**  
Glass airports --- building design A78-50434  
Airports in the year 2000 - Suggestions for improving capacity A78-50435  
Toulouse combines elegance with economy --- French airport design A78-50436  
Improved passenger flow through simulation A78-50437  
Preparing today, to meet the ATC challenges of tomorrow --- for civil aircraft operations in Taiwan A78-52973  
ATC in the year 2000 A78-52978  
Air traffic congestion and capacity. A bibliography with abstracts [NTIS/PS-78/0598/9] N78-32085
- AIRPORT SURFACE DETECTION EQUIPMENT**  
Airport traffic surveillance A78-52957
- AIRPORTS**  
Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation A78-50474  
Concorde emissions at Dulles International Airport - Results of measurements A78-53050

- Some principles for studying reduced visibility conditions in regions around airports [NASA-TM-75152] N78-32642
- Vortex advisory system simulation of Chicago O'Hare Airport [AD-A057112] N78-33069
- Airport noise. A bibliography with abstracts [NTIS/PS-78/0807/4] N78-33639
- AIRSHIPS**
- The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation [NASA-TM-75535] N78-32043
- Lighter than air vehicles. Citations from the engineering index data base [NTIS/PS-78/0410/7] N78-32073
- AIRSPACE**
- The helicopter operators' viewpoint --- airspace operational environments and requirements A78-52955
- AIRSPEED**
- A preliminary study of the benefits of flying by ground speed during final approach [NASA-TM-78777] N78-32076
- ALASKA**
- Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis [AD-A056741] N78-33075
- ALGORITHMS**
- Missile aerodynamic parameter and structure identification from flight test data [AD-A056343] N78-33055
- ALL-WEATHER LANDING SYSTEMS**
- Airborne equipment for all weather operations A78-50448
- ALTITUDE CONTROL**
- Flight experience with altitudes hold and Mach hold autopilots on the YF-12 aircraft at Mach 3 N78-32059
- NASA aviation safety reporting system [NASA-TM-78511] N78-32075
- ALUMINUM ALLOYS**
- Aerodynamic effects on erosion in turbomachinery A78-50635
- Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite [AD-A055714] N78-33197
- ALUMINUM NITRIDES**
- New materials in the Si-C-Al-O-N and related systems --- for gas turbine and high temperature applications A78-53864
- ANGLE OF ATTACK**
- Nonlinear vibrations of an asymmetric flight vehicle A78-53504
- Three dimensional fully viscous shock-layer flows over sphere-cones at high altitudes and angles of attack N78-32040
- The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting N78-32041
- High angle of incidence implications upon air intake design and location for supersonic cruise aircraft and highly maneuverable transonic aircraft [NASA-TM-78530] N78-32044
- Angle detector [NASA-CASE-ARC-11036-1] N78-32395
- Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling [SAND-77-1309C] N78-33121
- ANNULAR FLOW**
- Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath A78-50574
- ANNULI**
- An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610
- ANTENNA ARRAYS**
- The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft A78-53257
- ANTENNA DESIGN**
- Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book A78-53426
- Near field pattern computations for airborne antennas [AD-A057244] N78-33311
- ANTENNA RADIATION PATTERNS**
- System definition and investigation of the on site processing of en route sensor signals. Addendum: Investigation into possible en route on site beacon ring around discriminants [AD-A056941] N78-33070
- Near field pattern computations for airborne antennas [AD-A057244] N78-33311
- ANTIOXIDANTS**
- Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel A78-53371
- APERTURES**
- The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft A78-53257
- APPLICATIONS OF MATHEMATICS**
- Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel A78-50304
- Gesellschaft fuer angewandte Mathematik und Mechanik, Annual Scientific Meeting, Lyngby, Denmark, May 31-June 3, 1977, Reports. Part 2 A78-51151
- APPROACH CONTROL**
- A more fully Automated En Route ATC system A78-52959
- A preliminary study of the benefits of flying by ground speed during final approach [NASA-TM-78777] N78-32076
- APPROACH INDICATORS**
- Precision approach monitoring and guidance using interferometer techniques A78-51551
- Optimization of MLS receivers for multipath environments [NASA-CR-157736] N78-32080
- ARCHITECTURE**
- Glass airports --- building design A78-50434
- AREA NAVIGATION**
- Area navigation - Past-time/real-time simulations in a high-altitude center environment A78-52977
- ARMED FORCES (UNITED STATES)**
- The multirole cruise missile A78-53716
- Encyclopedia of US Air Force aircraft and missile systems. Volume 1: Post-World War II fighters 1945 - 1973 [AD-A057002] N78-33036
- ARROW WINGS**
- Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests [NASA-TM-78706] N78-32050
- Effects of wing leading-edge deflection on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration [NASA-TM-78787] N78-33047
- ASSESS PROGRAM**
- Assess II - A simulated mission of Spacelab A78-50276
- ASSESSMENTS**
- Baseline data requirements for assessing environmental impact [PB-281148/7] N78-32620
- ASTRODYNAMICS**
- Spacecraft flight control systems --- Russian book A78-53434
- ASYMMETRY**
- Calculations of flows in flat asymmetric nozzles for overexpanded conditions A78-50782
- ASYMPTOTIC METHODS**
- An alternative treatment of lifting-line theory as a perturbation problem A78-50904

**SUBJECT INDEX**

**AXISYMMETRIC BODIES**

- ATMOSPHERIC ATTENUATION**  
 Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links A78-52360
- ATMOSPHERIC BOUNDARY LAYER**  
 Numerical study on the stability dependence of geostrophic drag and cross-isobar angle A78-50691
- ATMOSPHERIC CHEMISTRY**  
 Feasibility of an orbital simulator of stratospheric photochemistry A78-51816
- ATMOSPHERIC CIRCULATION**  
 Numerical study on the stability dependence of geostrophic drag and cross-isobar angle A78-50691  
 Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 A78-51338
- ATMOSPHERIC COMPOSITION**  
 Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations [NASA-TP-1340] N78-33618
- ATMOSPHERIC DIFFUSION**  
 Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog A78-51933
- ATMOSPHERIC HEATING**  
 Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 A78-51338
- ATMOSPHERIC TURBULENCE**  
 Computed responses of several aircraft to atmospheric turbulence and discrete wind shears [NASA-CR-152185] N78-32106
- ATTACK AIRCRAFT**  
 Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580] A78-50661
- ATTITUDE CONTROL**  
 Large scale static tests of a tilt-nacelle V/STOL propulsion/attitude control system [NASA-CR-152181] N78-32098  
 Nonlinear rolling motion analysis of a Canard-controlled missile configuration at angles of attack from 0 to 30 degrees in incompressible flow [AD-A056695] N78-33132
- AUTOMATIC CONTROL**  
 The ARTS III Umbrella - Concepts and applications --- for collecting and distributing aircraft positional data within ATC radar coverage areas A78-52958  
 Concept and future plans for automation of air traffic control in the Federal Republic of Germany A78-52972  
 Optimal control of aircraft powerplant --- Russian book A78-53119
- AUTOMATIC PILOTS**  
 Flight experience with altitudes hold and Mach hold autopilots on the YF-12 aircraft at Mach 3 N78-32059
- AUTOMATIC TEST EQUIPMENT**  
 An automatic processing system for vibration data analysis of gas turbine engines A78-50623  
 Automatic Inspection, Diagnostic and Prognostic AIDAPS: Test cell data collection and technical support [AD-A055385] N78-32109
- AUTOMATION**  
 Improved safety in air transportation through the extension and automation of flight safety systems A78-50264  
 A more fully Automated En Route ATC system A78-52959
- AUTOMOBILE ENGINES**  
 The development of a regenerator seal for vehicular use --- for automatic gas turbine engines A78-50587  
 Aluminoous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines A78-50588  
 A study on a premixed combustor for a vehicular gas turbine A78-50592  
 Development of the experimental gas turbine bus A78-50601  
 A development of advanced radial gas turbine for automobile A78-50603  
 A research on centrifugal compressor for small gas turbine - The effect of recirculating flow --- automobile engines A78-50612  
 Development of ceramic components for an automotive gas turbine A78-50632
- AUTOMOBILES**  
 High-temperature ceramics for automobile gas turbines [NASA-TM-75457] N78-32264  
 Fuel consumption: Transportation, volume 1. A bibliography with abstracts [NTIS/PS-78/0707/6] N78-33599  
 Fuel consumption: Transportation, volume 2. A bibliography with abstracts [NTIS/PS-78/0708/4] N78-33600
- AUXILIARY POWER SOURCES**  
 Independent power generator [NASA-CASE-LAR-11208-1] N78-32539
- AVIONICS**  
 Applications for airborne digital communications A78-51896  
 Avionics performance analysis: A historical review and a current assessment of flight instrumentation and control systems in civil aviation [NASA-CR-145378] N78-32094  
 Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330  
 Operational Software Concept OSC executive evaluation/refinement [AD-A055902] N78-32754  
 Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711] N78-32911  
 System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses [AD-A056348] N78-33097  
 Standard modular power supplies for avionics [AD-A057159] N78-33100
- AXIAL FLOW**  
 Blade-surface boundary layer and wake computational models for estimation of axial-flow compressor and fan blade-row turning angles and losses N78-32038
- AXIAL FLOW PUMPS**  
 Double row radial hydraulic piston pumps for aircraft hydraulic systems A78-53249
- AXIAL FLOW TURBINES**  
 Development of velocity profile through a stage of axial flow turbomachinery A78-50609  
 An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610  
 Some considerations on pure tone noise generation in an axial-flow fan A78-50619  
 Design and performance of a 427-meter-per-second-tip-speed two-stage fan having a 2.40 pressure ratio [NASA-TP-1314] N78-33109
- AXISYMMETRIC BODIES**  
 Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces A78-53309



**AXISYMMETRIC FLOW**

**SUBJECT INDEX**

**AXISYMMETRIC FLOW**

Axisymmetric unsteady flow past obstacles in a cylindrical tube  
A78-51441

Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space  
A78-51448

**B**

**B-1 AIRCRAFT**

B-1 EMUX automated logic diagrammer demonstration program  
[AD-A056964] N78-33092

**BACKGROUND NOISE**

Annoyance due to the interaction of community noise sources  
N78-33613

**BALANCING**

Search-method optimization of the balancing of flexible rotors of gas turbine engines  
A78-50795

**BALL BEARINGS**

Natural vibrations of a rigid rotor mounted on elastic ball bearings  
A78-51015

**BALLOONS**

Lighter than air vehicles. Citations from the engineering index data base  
[NTIS/PS-78/0410/7] N78-32073

**BASE PRESSURE**

Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow  
A78-53767

Influence of rarefaction and compression waves on base pressure  
A78-53781

Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing  
[NASA-CR-150826] N78-33134

**BEACON COLLISION AVOIDANCE SYSTEM**

The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary  
[AD-A056930] N78-33072

**BEACONS**

Engineering and development program plan: Discrete Address Beacon System (DABS)  
[AD-A057122] N78-33073

**BEAMS (SUPPORTS)**

Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams  
A78-50451

**BEARINGS**

Dynamic analysis of flexible rotor-bearing systems using a model approach  
N78-32424

**BENDING MOMENTS**

Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations  
[NASA-TM-78699] N78-32046

**BIBLIOGRAPHIES**

Lighter than air vehicles. Citations from the engineering index data base  
[NTIS/PS-78/0410/7] N78-32073

Air traffic congestion and capacity. A bibliography with abstracts  
[NTIS/PS-78/0598/9] N78-32085

Air pollution emission factors. A bibliography with abstracts  
[NTIS/PS-78/0548/4] N78-32604

Bird strikes and aviation safety. A bibliography with abstracts  
[NTIS/PS-78/0694/6] N78-33066

Closed loop control systems. Part 1: Aircraft. A bibliography with abstracts  
[NTIS/PS-78/0809/0] N78-33122

Closed loop control systems. Part 2: Miscellaneous applications. A bibliography with abstracts  
[NTIS/PS-78/0810/8] N78-33278

Fuel consumption: Transportation, volume 1. A bibliography with abstracts  
[NTIS/PS-78/0707/6] N78-33599

Fuel consumption: Transportation, volume 2. A bibliography with abstracts  
[NTIS/PS-78/0708/4] N78-33600

Urban noise pollution. A bibliography with abstracts  
[NTIS/PS-78/0686/2] N78-33634

Airport noise. A bibliography with abstracts  
[NTIS/PS-78/0807/4] N78-33639

Fiber optics, volume 2. Citations from the NTIS data base  
[NTIS/PS-78/0713/4] N78-33918

**BIRD-AIRCRAFT COLLISIONS**  
Bird strikes and aviation safety. A bibliography with abstracts  
[NTIS/PS-78/0694/6] N78-33066

**BLADE TIPS**  
Compressor seal rub energetics study  
[NASA-CR-159424] N78-32096

Full-scale testing of an Ogee tip rotor --- in the Langley whirl tower  
N78-32830

The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833

**BLOWING**  
Contribution to the theory of three-dimensional hypersonic viscous gas flow past blunted bodies in the presence of injection  
A78-50757

**BLUNT BODIES**  
Contribution to the theory of three-dimensional hypersonic viscous gas flow past blunted bodies in the presence of injection  
A78-50757

Viscous carbon dioxide flow past a blunted cone  
A78-51444

**BOATTAILS**  
Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3  
N78-32064

**BODY-WING CONFIGURATIONS**  
Generalized area rules and integral theorems for hypersonic wing-bodies  
A78-50461

Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application  
A78-50673

Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft  
[AIAA PAPER 78-1458] A78-52042

**BOEING AIRCRAFT**  
Boeing launches the 767  
A78-52244

**BOEING 727 AIRCRAFT**  
TRSB microwave landing system demonstration program at Shiraz, Iran  
[AD-A055526] N78-33071

**BOEING 747 AIRCRAFT**  
Space shuttle separation mechanisms  
[NASA-TM-58210] N78-32177

**BOMBER AIRCRAFT**  
B-1 EMUX automated logic diagrammer demonstration program  
[AD-A056964] N78-33092

**BOUNDARY LAYER CONTROL**  
Three dimensional free convection flow and heat transfer along a porous vertical plate  
A78-50288

The attachment of a ventilated plane jet to an inclined plane wall  
A78-53764

Preliminary design characteristics of a subsonic business jet concept employing laminar flow control  
[NASA-CR-158958] N78-33087

**BOUNDARY-LAYER EQUATIONS--**  
Three-dimensional boundary layer theory using shell geometrical concepts  
A78-51176

- Streamline coordinates and similarity transformation for the 3-D boundary layer A78-51181
- Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces A78-53309
- BOUNDARY LAYER FLOW**
- Film cooling of a gas turbine blade A78-50580
- Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics A78-51175
- Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer A78-51687
- Blade-surface boundary layer and wake computational models for estimation of axial-flow compressor and fan blade-row turning angles and losses N78-32038
- Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers N78-32063
- Inverse boundary-layer theory and comparison with experiment [NASA-TP-1208] N78-32385
- BOUNDARY LAYER SEPARATION**
- On moderate injection into a separated supersonic boundary layer, with reattachment A78-50896
- Turbulent boundary layer separation on a curved wall with normal compression shock A78-51155
- BOUNDARY LAYER STABILITY**
- Unsteady three-dimensional compressible stagnation-point boundary layers A78-50456
- Investigations of the intensity of oscillations of the boundary of a turbulent wake A78-51402
- On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities A78-52043
- BOUNDARY LAYER TRANSITION**
- Three-dimensional and relaminarization effects in turbine blade cascades - An experimental study A78-50608
- Shock obliquity effect on transonic shock-boundary layer interaction A78-51185
- Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations A78-52763
- BOUNDARY LAYERS**
- Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3 N78-32064
- BOUNDARY VALUE PROBLEMS**
- Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application A78-50673
- Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics A78-51175
- Calculation of local three-dimensional supersonic fields A78-51184
- Some mixed boundary value problems for subsonic flow past oscillating profiles A78-51198
- BRAZING**
- Diffusion brazing titanium sandwich structures A78-51524
- Nickel brazing honeycomb for aircraft gas turbine engines A78-53751
- BREADBOARD MODELS**
- Development of a breadboard system for recording ATC displays A78-52964
- Description of a model for evaluating operational performance of communications system [AD-A057199] N78-33313
- BRITTLENESS**
- Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration [AD-A055252] N78-32099
- Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology [AD-A055276] N78-32100
- BROADBAND**
- Broadband noise in axial-fan blade cascade A78-50E50
- BUCKLING**
- Shear buckling of corrugated plates with quasi-sinusoidal corrugations N78-32458
- BUFFETING**
- An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109] N78-33113
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110] N78-33114
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152111] N78-33115
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2 P-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112] N78-33116
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152113] N78-33117
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152114] N78-33118
- BUILDINGS**
- Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769] N78-33874
- BYPASSES**
- Influence of the bypass ratio on jet-engine weight A78-50787
- Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight A78-50790
- Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794
- C**
- CABIN ATMOSPHERES**
- Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations [NASA-TP-1340] N78-33618
- CABLES**
- Fabrication and assembly of cable strands for aircraft engines --- Russian book A78-53432
- CABLES (ROPES)**
- Design and development of helicopter external cargo sling legs made with Kevlar [AD-A056951] N78-33093
- CALIBRATING**
- Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing N78-32057

## CAMBERED WINGS

Analysis of advanced variable camber concepts for combat aircraft  
A78-52592

**CANARD CONFIGURATIONS**  
Wind-tunnel investigation at supersonic speeds of a canard-controlled missile with fixed and free-rolling tail fins  
[NASA-TP-1316] N78-32067  
Supersonic transport --- using canard surfaces  
[NASA-CASE-LAR-11932-1] N78-32086  
Aerodynamic load distributions at transonic speeds for a close-coupled wing-canard configuration: tabulated pressure data  
[NASA-TM-78780] N78-33045  
Subsonic dynamic stability characteristics of two close-coupled canard-wing configurations  
[NASA-TP-1291] N78-33050  
Nonlinear rolling motion analysis of a Canard-controlled missile configuration at angles of attack from 0 to 30 degrees in incompressible flow  
[AD-A056695] N78-33132

**CANONICAL FORMS**  
Two extensions of a theorem of Levi-Civita to gyroscopic systems and some applications  
A78-50311

**CAPACITY**  
Air traffic congestion and capacity. A bibliography with abstracts  
[NTIS/PS-78/0598/9] N78-32085

**CARBON DIOXIDE**  
Viscous carbon dioxide flow past a blunted cone  
A78-51444

**CARBON MONOXIDE**  
Calculation of CO concentration for liquid fueled gas turbine combustor  
A78-50560  
Concorde emissions at Dulles International Airport - Results of measurements  
A78-53050

**CARGO AIRCRAFT**  
Design concepts for future air freighters  
A78-52450  
The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation  
[NASA-TM-75535] N78-32043  
Wind tunnel tests on a tail-less swept wing span-distributed cargo aircraft configuration  
[NASA-TM-78767] N78-32048  
Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project  
[NASA-TM-78774] N78-33061

**CASCADE FLOW**  
Calculation of cascade flow by means of spline fit singularity  
A78-50606  
Numerical analysis of flow through turbine cascade by the Modified FLIC Method  
A78-50607  
Three-dimensional and relaminarization effects in turbine blade cascades - An experimental study  
A78-50608  
Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation  
A78-50617  
A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade  
A78-50618  
Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer  
A78-51687  
Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades  
A78-53783  
Unsteady blade rows in high-speed flow  
[AD-A055620] N78-32391  
Aeroelastic characteristics of a cascade of blades  
[AD-A055619] N78-32392

**CASCADES**  
Broadband noise in axial-fan blade cascade  
A78-50650

## CATALYTIC ACTIVITY

Aircraft afterburner catalytic flame stabilization  
A78-50570

**CAVITATION CORROSION**  
Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II  
A78-51600

**CENTRIFUGAL COMPRESSORS**  
A research on centrifugal compressor for small gas turbine - The effect of recirculating flow --- automobile engines  
A78-50612  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613  
Investigation of flow in centrifugal impeller with tandem inducer  
A78-50614  
Surge responsibility and range characteristics of centrifugal compressors  
A78-50616

**CERAMICS**  
Aluminous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines  
A78-50588  
Silicon nitride ceramics for gas turbine engines  
A78-50630  
Development of ceramic components for an automotive gas turbine  
A78-50632  
New materials in the Si-C-Al-O-N and related systems --- for gas turbine and high temperature applications  
A78-53864  
Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration  
[AD-A055252] N78-32099  
Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology  
[AD-A055276] N78-32100  
Stress analysis of ceramic gas turbine blades by the finite element method, part 2  
[AD-A055538] N78-32102  
High-temperature ceramics for automobile gas turbines  
[NASA-TM-75457] N78-32264  
High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components  
[NASA-TM-75302] N78-32265  
Ceramics technology readiness development program. Phase 1: Conceptual designs and material screening --- erosion/corrosion resistance  
[PE-2786-12] N78-33243

**CH-47 HELICOPTER**  
CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments  
[AD-A055804] N78-32077

**CHANNEL FLOW**  
Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures  
A78-50780  
Calculation of viscous flow in straight weakly divergent diffusors  
A78-51158  
Model calculations of the generation of self-excited oscillations in a supersonic duct with stepwise widening of cross section  
A78-51165  
Influence of rarefaction and compression waves on base pressure  
A78-53781

**CHINA**  
Preparing today, to meet the ATC challenges of tomorrow --- for civil aircraft operations in Taiwan  
A78-52973

**CIVIL AVIATION**  
Aircraft guidance and flight safety - Current and future problems for research and industry  
A78-50263  
Toulouse combines elegance with economy --- French airport design  
A78-50436

**SUBJECT INDEX**

**COMBUSTION STABILITY**

Sounding the runway A78-50822  
 Airline contributions to better air traffic control A78-51518  
 Future large civil turbofans and powerplants /Seventeenth Short Bros. Commemorative Lecture/ A78-51519  
 European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/ A78-51520  
 The shape of airliners to come A78-51817  
 Boeing launches the 767 A78-52244  
 The L-1011-500 long-range TriStar A78-52245  
 Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978 A78-52447  
 The changing environment of international air commerce A78-52448  
 Aviation futures to the year 2000 A78-52966  
 Overview of potential ATC developments A78-52970  
 Preparing today, to meet the ATC challenges of tomorrow --- for civil aircraft operations in Taiwan A78-52973  
 Avionics performance analysis: A historical review and a current assessment of flight instrumentation and control systems in civil aviation [NASA-CR-145378] N78-32094  
 Airline delay trends, 1972-1977 [AD-A056867] N78-33062  
 Annual review of aircraft accident data, US air carrier operations, 1976 [PB-281329/3] N78-33065  
 Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis [AD-A056741] N78-33075  
**CLEAR AIR TURBULENCE**  
 Infrared passbands for clear-air-turbulence detection A78-51971  
**CLOSED CYCLES**  
 Thermodynamical performances of closed-cycle gas-turbine A78-50605  
**CLOUD SEEDING**  
 Initial development of a tactical system for dispersing supercooled stratus [AD-A056570] N78-33677  
**COBALT ALLOYS**  
 Reaction diffusion in the NiCrAl and CoCrAl systems A78-53063  
**COLD FLOW TESTS**  
 Dual throat thruster cold flow analysis [NASA-CR-150822] N78-33142  
**COLLISION AVOIDANCE**  
 Preventing helicopter mid-air collisions with the proximity warning device A78-51223  
 Stochastic properties of conflict frequency at multiple connected air route intersections A78-51945  
 Development and evaluation of a wake vortex advisory system A78-52965  
 Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330  
**COMBAT**  
 Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580] A78-50661  
**COMBUSTION**  
 Pollution Reduction Technology Program for small jet aircraft engines, phase 2 [NASA-CR-159415] N78-33104

**COMBUSTION CHAMBERS**  
 Rotary combustion engine hydrocarbon source studies A78-50561  
 Combustor performance of high availability fuels A78-50568  
 Variability of emissions measurements on a small gas turbine engine A78-50569  
 Alternative fuel effects upon combustion efficiency in continuous combustors A78-50571  
 Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath A78-50574  
 Impingement cooling and its application to combustor design A78-50584  
 Development of the can-type gas turbine combustors A78-50590  
 Experimental investigation on the scale effects of gas turbine combustion chambers A78-50591  
 A study on a premixed combustor for a vehicular gas turbine A78-50592  
 A new air blast type combustor - Design, performance and emission A78-50593  
 Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment A78-50778  
 Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670  
 Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines A78-53511  
 Combustion and emission characteristics of a gas turbine combustor N78-32095  
 Aircraft gas turbine low-power emissions reduction technology program [NASA-CR-135434] N78-32097  
**COMBUSTION CONTROL**  
 Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798  
**COMBUSTION EFFICIENCY**  
 Rotary combustion engine hydrocarbon source studies A78-50561  
 Design and verification of a turbofan Swirl augmentor A78-50564  
 Combustor performance of high availability fuels A78-50568  
 Alternative fuel effects upon combustion efficiency in continuous combustors A78-50571  
 Development of the can-type gas turbine combustors A78-50590  
 A new air blast type combustor - Design, performance and emission A78-50593  
 Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670  
**COMBUSTION PRODUCTS**  
 Calculation of CO concentration for liquid fueled gas turbine combustor A78-50560  
 Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels A78-50598  
 An experiment of deposit formation on surface of an air-cooled gas-turbine blade A78-50634  
 Fire resistivity and toxicity studies of candidate aircraft passenger seat materials A78-51838  
 Air pollution emission factors: A bibliography with abstracts [NTIS/PS-78/0548/4] N78-32604  
**COMBUSTION STABILITY**  
 Aircraft afterburner catalytic flame stabilization A78-50570

COMBUSTION VIBRATION

SUBJECT INDEX

<b>COMBUSTION VIBRATION</b>		In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction	N78-32065
Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment	A78-50778		
Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer	A78-50788		
<b>COMMERCE</b>			
The changing environment of international air commerce	A78-52448		
<b>COMMERCIAL AIRCRAFT</b>			
Assessment of the structural-mechanical design of commercial aircraft gas turbine engines	A78-50625		
Impact of federal noise abatement policy on aircraft financing	A78-51131		
Reflections on the economic implications of current noise abatement financing proposals	A78-51132		
Analysis of the engine fragrant threat and the crush environment for small packages carried on US commercial jet aircraft	N78-32078		
[SAND-78-0244C]			
Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1: Executive summary	N78-32187		
[NASA-CR-145381-1]			
Study on utilization of advanced composites in commercial aircraft wing structures, volume 2	N78-32188		
[NASA-CR-145381-2]			
Airline delay trends, 1972-1977	N78-33062		
[AD-A056867]			
Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes	N78-33873		
[NASA-TM-78736]			
<b>COMMUNICATION</b>			
An airborne meteorological data collection system using satellite relay (ASDAR)	N78-33283		
[NASA-TM-78992]			
<b>COMMUNICATION NETWORKS</b>			
The Central Flow Control /CFC/ system --- for Air Traffic Control System Command Center	A78-52960		
<b>COMPOSITE MATERIALS</b>			
Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1: Executive summary	N78-32187		
[NASA-CR-145381-1]			
Study on utilization of advanced composites in commercial aircraft wing structures, volume 2	N78-32188		
[NASA-CR-145381-2]			
The application of ultraviolet cure resins for repair of composites	N78-32273		
[AD-A055731]			
<b>COMPOSITE STRUCTURES</b>			
Advanced composites wing study program, volume 2	N78-32186		
[NASA-CR-145382-2]			
<b>COMPRESSED AIR</b>			
Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine	A78-52926		
<b>COMPRESSIBILITY EFFECTS</b>			
Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams	A78-50451		
Compressibility effects on parachute transient pressures	A78-51950		
<b>COMPRESSIBLE BOUNDARY LAYER</b>			
Unsteady three-dimensional compressible stagnation-point boundary layers	A78-50456		
Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point	A78-50503		
Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers	A78-52629		
[AIAA PAPER 77-178]			
<b>COMPRESSIBLE FLOW</b>			
Some mixed boundary value problems for subsonic flow past oscillating profiles	A78-51198		
<b>COMPRESSION WAVES</b>			
Influence of rarefaction and compression waves on base pressure	A78-53781		
<b>COMPRESSOR BLADES</b>			
Pressure at shroud and flow in a supersonic centrifugal impeller	A78-50613		
Blade-surface boundary layer and wake computational models for estimation of axial-flow compressor and fan blade-row turning angles and losses	N78-32038		
Compressor seal rub energetics study	N78-32096		
[NASA-CR-159424]			
Aeroelastic characteristics of a cascade of blades	N78-32392		
[AD-A055619]			
Blade row dynamic digital compression program. Volume 2: J85 circumferential distortion redistribution model, effect of stator characteristics, and stage characteristics sensitivity study	N78-33103		
[NASA-CR-134953]			
<b>COMPRESSOR EFFICIENCY</b>			
Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor	N78-33108		
[NASA-TP-1337]			
<b>COMPRESSOR ROTORS</b>			
Radial equilibrium of flows in shock-in-rotor type rotors	A78-50611		
Performance of a transonic fan stage designed for a low meridional velocity ratio	N78-33107		
[NASA-TP-1298]			
Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor	N78-33108		
[NASA-TP-1337]			
Design and performance of a 427-meter-per-second-tip-speed two-stage fan having a 2.40 pressure ratio	N78-33109		
[NASA-TP-1314]			
<b>COMPRESSORS</b>			
Unsteady blade rows in high-speed flow	N78-32391		
[AD-A055620]			
<b>COMPUTER GRAPHICS</b>			
Circles, texture, etc. - Alternate approaches to CG scene detail --- computer image generation for flight simulators	A78-50659		
[AIAA 78-1578]			
COMPUTROL - A new technique in image generation --- advanced computerized visual environment simulator	A78-50660		
[AIAA 78-1579]			
Advancements in ATC information displays and controller-computer interaction	A78-52975		
System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses	N78-33097		
[AD-A056348]			
<b>COMPUTER PROGRAMMING</b>			
Operational Software Concept OSC executive evaluation/refinement	N78-32754		
[AD-A055902]			
<b>COMPUTER PROGRAMS</b>			
A computer-aided method of calculating temperature fields in turbine disks	A78-50796		
A study of alternatives for VSTOL computer systems	N78-33098		
[AD-A056105]			
DYGABCD: A program for calculating linear A, B, C, and D matrices from a nonlinear dynamic engine simulation	N78-33110		
[NASA-TP-1295]			
<b>COMPUTER SYSTEMS DESIGN</b>			
Digital flight control system - Advanced technology of flight control	A78-50266		

## SUBJECT INDEX

## CONVERGENT-DIVERGENT NOZZLES

- Correlated data bases for the present and future  
--- aircrew training simulator acquisitions  
flexibility  
[AIAA 78-1583] A78-50662
- The Central Flow Control /CFC/ system --- for Air  
Traffic Control System Command Center A78-52960
- System measurement improves computer responses to  
the controller --- for air traffic control A78-52974
- COMPUTER SYSTEMS PROGRAMS**
- Management of software development for advance ATC  
systems A78-52961
- A data management system for weight control and  
design-to-cost N78-33780
- COMPUTER TECHNIQUES**
- Engineering and Scientific Data Management  
[NASA-CP-2055] N78-33776
- CAD/CAM data management needs, requirements and  
options N78-33778
- COMPUTERIZED DESIGN**
- Development of the can-type gas turbine combustors  
A78-50590
- RIM: A prototype for a relational information  
management system N78-33785
- COMPUTERIZED SIMULATION**
- Improved passenger flow through simulation A78-50437
- Circles, texture, etc. - Alternate approaches to  
CIG scene detail --- computer image generation  
for flight simulators  
[AIAA 78-1578] A78-50659
- COMPUTROL - A new technique in image generation  
--- advanced computerized visual environment  
simulator  
[AIAA 78-1579] A78-50660
- Area navigation - Past-time/real-time simulations  
in a high-altitude center environment A78-52977
- Rotor wake effects on hub/pylon flow. Volume 2:  
Program SHAPES user's manual  
[AD-A055767] N78-32071
- A method for validating missile system simulation  
models  
[AD-A055689] N78-32169
- Mechanization of blended A sub N mode for CCV YF-16  
[AD-A056553] N78-33089
- DYGABCD: A program for calculating linear A, B,  
C, and D matrices from a nonlinear dynamic  
engine simulation  
[NASA-TP-1295] N78-33110
- CONCENTRATION (COMPOSITION)**
- Ozone concentration in the cabin of a Gates  
Learjet measured simultaneously with atmospheric  
ozone concentrations  
[NASA-TP-1340] N78-33618
- CONCORDE AIRCRAFT**
- British Airways v. Port Authority - Its impact on  
aircraft noise regulation A78-51128
- Aircraft noise - Federal pre-emption of local  
control, Concorde and other recent cases A78-51129
- Concorde emissions at Dulles International Airport  
- Results of measurements A78-53050
- Comparison of low-frequency noise levels of the  
Concorde supersonic transport with other  
commercial service airplanes  
[NASA-TM-78736] N78-33873
- CONDUCTIVE HEAT TRANSFER**
- Heat transfer from two-phase flow to the nozzle  
walls in the presence of a condensate film on  
the nozzle surface A78-50791
- CONFERENCES**
- Tokyo Joint Gas Turbine Congress, Tokyo, Japan,  
May 22-27, 1977, Proceedings A78-50576
- Gesellschaft fuer angewandte Mathematik und  
Mechanik, Annual Scientific Meeting, Lyngby,  
Denmark, May 31-June 3, 1977, Reports. Part 2  
A78-51151
- Air Traffic Control Association, Annual Meeting,  
22nd, Las Vegas, Nev., October 10-13, 1977,  
Proceedings and Supplement A78-52951
- YP-12 experiments symposium, volume 1  
[NASA-CP-2054] N78-32055
- Technical evaluation report on the 51st (A)  
Specialists' Meeting of the Propulsion and  
Energetics Panel on Icing Testing for Aircraft  
Engines  
[AGARD-AR-124] N78-32105
- Helicopter Acoustics  
[NASA-CP-2052-PT-1] N78-32816
- Engineering and Scientific Data Management  
[NASA-CP-2055] N78-33776
- CONICAL BODIES**
- Three dimensional fully viscous shock-layer flows  
over sphere-cones at high altitudes and angles  
of attack N78-32040
- CONICAL FLOW**
- Changes in conical diffuser performance by swirl  
addition A78-51463
- Mutual effect of thermochemical destruction of the  
surface and viscous interaction for hypersonic  
flow past a sharp cone A78-53508
- CONSTRUCTION MATERIALS**
- Glass airports --- building design A78-50434
- Naval structural materials - Requirements, issues,  
and opportunities A78-51149
- CONTINUUM MECHANICS**
- Some problems of continuum mechanics --- Russian  
book A78-50751
- CONTROL CONFIGURED VEHICLES**
- Mechanization of blended A sub N mode for CCV YF-16  
[AD-A056553] N78-33089
- CONTROL EQUIPMENT**
- Closed loop control systems. Part 2:  
Miscellaneous applications. A bibliography with  
abstracts  
[NTIS/PS-78/0810/8] N78-33278
- CONTROL MOMENT GYROSCOPES**
- Influence of constrained arrestors on the  
operation of gyroscopic stabilizers A78-51355
- CONTROL STABILITY**
- Flight experience with altitudes hold and Mach  
hold autopilots on the YF-12 aircraft at Mach 3  
N78-32059
- Theoretical study of multicyclic control of a  
controllable twist rotor  
[NASA-CR-151959] N78-33085
- CONTROL THEORY**
- A learning control system with application to  
flight systems N78-33112
- CONTROLLABILITY**
- Test instrumentation system for flight simulator  
handling characteristics  
[AIAA 78-1595] A78-50669
- CONVECTIVE FLOW**
- Experimental verification of a blade cooling  
system and comparison with design calculation  
--- in high temperature test turbine A78-50583
- CONVECTIVE HEAT TRANSFER**
- Three dimensional free convection flow and heat  
transfer along a porous vertical plate A78-50288
- Convective heat transfer from a gas suspension to  
the flow area of a throttle with a blade-shaped  
throttling element A78-50792
- CONVERGENCE**
- Investigation of the convergence of a method of  
computing the flow around cascades in a variable  
thickness layer A78-51687
- CONVERGENT-DIVERGENT NOZZLES**
- The aerodynamic performance of a freely hinged  
door between two flows --- for supersonic  
transport propulsion nozzles A78-51464

## COOLING SYSTEMS

## SUBJECT INDEX

## COOLING SYSTEMS

Experimental verification of a blade cooling system and comparison with design calculation --- in high temperature test turbine A78-50583

Impingement cooling and its application to combustor design A78-50584

Energy economy with high temperature gasturbine A78-50604

## COORDINATES

Streamline coordinates and similarity transformation for the 3-D boundary layer A78-51181

## CORNER FLOW

Interaction of turbulent boundary layers in a right-angle corner A78-51697

Experiments on the laminar flow in a rectangular streamwise corner A78-53765

## CORROSION RESISTANCE

High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components [NASA-TM-75302] N78-32265

Ceramics technology readiness development program. Phase 1: Conceptual designs and material screening --- erosion/corrosion resistance [FE-2786-12] N78-33243

## CORRUGATED PLATES

Shear buckling of corrugated plates with quasi-sinusoidal corrugations N78-32458

## COST ANALYSIS

Technical-economic analysis of the direct operating costs of air transport companies --- German thesis A78-51752

Opportunities for cost-affordable titanium aerospace structures A78-51839

System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses [AD-A056348] N78-33097

## COST EFFECTIVENESS

The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft [AIAA PAPER 78-96] A78-52626

The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft A78-53257

Prospects for a civil/military transport aircraft [NASA-TM-78724] N78-33060

## COUPLINGS

A study of the effect of the rotor coil couplings of a synchronous machine on its predicted transient response N78-33330

## COWLINGS

A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow A78-52648

## CRACK PROPAGATION

Fatigue crack growth of titanium fan blades A78-51744

Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions --- airframe fatigue cracking [AD-A055483] N78-32504

Flaw growth in complex structure. Volume 1: Technical discussion [AD-A056372] N78-33483

## CRASH LANDING

CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments [AD-A055804] N78-32077

## CROSS FLOW

Distortion of a flat jet in a bounded cross-stream in the presence of a wake space A78-50779

## CRUISE MISSILES

Key beam weapons tests slated --- for aircraft carrier particle beam defense against cruise missiles A78-53238

The multirole cruise missile A78-53716

## CURING

The application of ultraviolet cure resins for repair of composites [AD-A055731] N78-32273

## CYLINDRICAL BODIES

Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit A78-52578

In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction N78-32065

Analysis of a high speed ring valve system for a single cylinder reciprocating compressor N78-33442

## CYLINDRICAL SHELLS

Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure A78-50717

## D

## DATA ACQUISITION

Acquisition of operational data during NOE missions [AD-A055922] N78-32089

TRSB microwave landing system demonstration program at Shiraz, Iran [AD-A055526] N78-33071

Bell UR-1H RAM/LOG report [AD-A057231] N78-33091

## DATA BASES

Correlated data bases for the present and future --- aircrew training simulator acquisitions flexibility [AIAA 78-1583] A78-50662

Engineering and Scientific Data Management [NASA-CP-2055] N78-33776

CAD/CAM data management needs, requirements and options N78-33778

A data management system for weight control and design-to-cost N78-33780

## DATA COMPRESSION

Digitized radar data compressor --- for air traffic control [AD-A057442] N78-33290

## DATA LINKS

Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links A78-52360

Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055044] N78-32330

## DATA MANAGEMENT

Engineering and Scientific Data Management [NASA-CP-2055] N78-33776

CAD/CAM data management needs, requirements and options N78-33778

A data management system for weight control and design-to-cost N78-33780

RIM: A prototype for a relational information management system N78-33785

## DATA PROCESSING

An automatic processing system for vibration data analysis of gas turbine engines A78-50623

Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control A78-52954

The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear [AD-A056780] N78-33063

## DATA RECORDING

Development of a breadboard system for recording ATC displays A78-52964

SUBJECT INDEX

DISPLAY DEVICES

**DATA REDUCTION**  
 A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF  
 A78-51497

**DATA SYSTEMS**  
 AIDS - Aircraft-integrated-data-system  
 A78-53675  
 An airborne meteorological data collection system using satellite relay (ASDAR) [NASA-TM-78992]  
 N78-33283

**DC 8 AIRCRAFT**  
 Investigations of simulated aircraft flight through thunderstorm outflows [NASA-CR-3052]  
 N78-32037

**DECISION MAKING**  
 The missed approach --- psychological factors in aircraft instrument landing decisions  
 A78-51517

**DEFROSTING**  
 Aircraft defogging and defrosting (transparent area) [AD-A056976]  
 N78-33094

**DEGREES OF FREEDOM**  
 Aerodynamic derivatives for an oblique wing aircraft estimated from flight data by using a maximum likelihood technique [NASA-TP-1336]  
 N78-33054

**DEICING**  
 Interaction of a surface wave with a dielectric slab discontinuity [AD-A055956]  
 N78-32327

**DELAY**  
 Airline delay trends, 1972-1977 [AD-A056867]  
 N78-33062

**DELTA WINGS**  
 Generalized area rules and integral theorems for hypersonic wing-bodies  
 A78-50461  
 Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing  
 N78-32057  
 Estimation of leading-edge thrust for supersonic wings of arbitrary planform [NASA-TP-1270]  
 N78-33051

**DEMAND (ECONOMIC)**  
 Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project [NASA-TM-78774]  
 N78-33061

**DEPOSITION**  
 An experiment of deposit formation on surface of an air-cooled gas-turbine blade  
 A78-50634

**DESCRIPTIVE GEOMETRY**  
 Geometry requirements for unsteady aerodynamics in aeroelastic analysis and design [NASA-TM-78781]  
 N78-33046

**DESIGN ANALYSIS**  
 Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles  
 A78-51271  
 Wing planform geometry effects on large subsonic military transport airplanes [AD-A056124]  
 N78-33088  
 Primary Adhesively Bonded Structure Technology (PABST). Phase 1: Detail design [AD-A056857]  
 N78-33095

**DIELECTRICS**  
 Interaction of a surface wave with a dielectric slab discontinuity [AD-A055956]  
 N78-32327

**DIFFUSERS**  
 Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath  
 A78-50574  
 An experimental study of the annular diffusers in axial-flow compressors and turbines  
 A78-50610  
 Surge responsibility and range characteristics of centrifugal compressors  
 A78-50616  
 Calculation of viscous flow in straight weakly divergent diffusers  
 A78-51158  
 Changes in conical diffuser performance by swirl addition  
 A78-51463

Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation  
 A78-53095

**DIFFUSION COEFFICIENT**  
 Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog  
 A78-51933

**DIFFUSION WELDING**  
 Diffusion brazing titanium sandwich structures  
 A78-51524

**DIGITAL COMMAND SYSTEMS**  
 Concept and future plans for automation of air traffic control in the Federal Republic of Germany  
 A78-52972  
 Engineering and development program plan: Advanced Integrated Flight Systems (AIPS) [AD-A056770]  
 N78-33119

**DIGITAL COMPUTERS**  
 Research and development of digital jet-engine controls  
 A78-50626

**DIGITAL RADAR SYSTEMS**  
 Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control  
 A78-52954  
 Moving target detector /MTD/ radar system  
 A78-52963  
 Development of a breadboard system for recording ATC displays  
 A78-52964  
 The direct access radar channel - A distributed maincomputer system  
 A78-52976  
 Digitized radar data compressor --- for air traffic control [AD-A057442]  
 N78-33290

**DIGITAL SYSTEMS**  
 Digital flight control system - Advanced technology of flight control  
 A78-50266  
 Applications for airborne digital communications  
 A78-51896  
 A study of alternatives for VSTOL computer systems [AD-A056105]  
 N78-33098

**DIGITAL TRANSDUCERS**  
 Angle detector [NASA-CASE-ARC-11036-1]  
 N78-32395

**DISCONNECT DEVICES**  
 Space shuttle separation mechanisms [NASA-TM-58210]  
 N78-32177

**DISCRETE FUNCTIONS**  
 The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting  
 N78-32041

**DISCRIMINATION**  
 System definition and investigation of the on site processing of en route sensor signals. Addendum: Investigation into possible en route on site beacon ring around discriminants [AD-A056941]  
 N78-33070

**DISPERSING**  
 A distribution model for the aerial application of granular agricultural particles [NASA-CR-157745]  
 N78-33048

**DISPLAY DEVICES**  
 Circles, texture, etc. - Alternate approaches to CIG scene detail --- computer image generation for flight simulators [AIAA 78-1578]  
 A78-50659  
 COMPUTROL - A new technique in image generation --- advanced computerized visual environment simulator [AIAA 78-1579]  
 A78-50660  
 Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580]  
 A78-50661  
 Optical simulator with a holographic component --- infinity display system [AIAA 78-1581]  
 A78-50671  
 Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control  
 A78-52954  
 Development of a breadboard system for recording ATC displays  
 A78-52964



## DISTRIBUTION FUNCTIONS

## SUBJECT INDEX

System measurement improves computer responses to the controller --- for air traffic control A78-52974	Subsonic dynamic stability characteristics of two close-coupled canard-wing configurations [NASA-TP-1291] N78-33050
Advancements in ATC information displays and controller-computer interaction A78-52975	<b>DYNAMIC STRUCTURAL ANALYSIS</b> Density of motions in the flutter of infinite plates A78-52932
What's new in controller displays - Electronic flight strips and a color plan view display A78-52979	Dynamic analysis using superelements for a large helicopter model N78-32486
Human factors engineering for head-up displays: A review of military specifications and recommendations for research [AD-A056944] N78-33099	<b>E</b>
Development of a symbology exerciser for display generation and analysis on the visually-coupled airborne systems simulator (VCASS) [AD-A055464] N78-33124	<b>E-0A AIRCRAFT</b> Boeing-747 aircraft with external cargo pod [NASA-CR-158932] N78-32047
<b>DISTRIBUTION FUNCTIONS</b> A distribution model for the aerial application of granular agricultural particles [NASA-CR-157745] N78-33048	<b>EARTH ORBITS</b> Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit A78-52578
<b>DOORS</b> The aerodynamic performance of a freely hinged door between two flows --- for supersonic transport propulsion nozzles A78-51464	<b>ECOLOGY</b> Baseline data requirements for assessing environmental impact [PB-281148/7] N78-32620
<b>DOPPLER NAVIGATION</b> Accuracy of ship-position determination by means of NNSST Transit A78-51889	<b>ECONOMIC ANALYSIS</b> European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/ A78-51520
The use of Doppler-shift position lines in satellite navigation systems A78-51890	Technical-economic analysis of the direct operating costs of air transport companies --- German thesis A78-51752
<b>DRAG</b> Numerical study on the stability dependence of geostrophic drag and cross-isobar angle A78-50691	The changing environment of international air commerce A78-52448
<b>DRAG REDUCTION</b> An investigation of drag reduction for tractor trailer vehicles [NASA-CR-144877] N78-33444	<b>ECONOMIC FACTORS</b> Aviation futures to the year 2000 A78-52966
<b>DUAL THRUST NOZZLES</b> Dual throat thruster cold flow analysis [NASA-CR-150822] N78-33142	<b>ECONOMIC IMPACT</b> Reflections on the economic implications of current noise abatement financing proposals A78-51132
<b>DUCTED FLOW</b> Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794	<b>ECONOMICS</b> And now 'the deregulators' - When will they learn A78-51127
Duct effects on the heave stability of plenum air cushions A78-52616	<b>EDDY CURRENTS</b> Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit A78-52578
<b>DYNAMIC CHARACTERISTICS</b> Dynamic analysis of flexible rotor-bearing systems using a model approach N78-32424	<b>EFFECTIVE PERCEIVED NOISE LEVELS</b> Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine N78-32673
<b>DYNAMIC LOADS</b> Dynamic response of aircraft to unloaded and loaded pavement profiles [AD-A055703] N78-32090	Annoyance due to the interaction of community noise sources N78-33613
<b>DYNAMIC MODELS</b> Simple numerical model for calculation of entry vehicle trim response A78-51284	<b>ELASTIC DAMPING</b> Natural vibrations of a rigid rotor mounted on elastic ball bearings A78-51015
Blade row dynamic digital compression program. Volume 2: J85 circumferential distortion redistribution model, effect of Stator characteristics, and stage characteristics sensitivity study [NASA-CR-134953] N78-33103	<b>ELASTIC PROPERTIES</b> A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade A78-50618
<b>DYNAMIC RESPONSE</b> Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation A78-50617	<b>ELASTIC SHELLS</b> Forced vibration of thin elastic shells with application to fractional horsepower hermetic refrigeration compressor shells N78-32457
The response of a Hooke's-joint gyroscope to linear vibration A78-52647	<b>ELASTIC WAVES</b> Influence of rarefaction and compression waves on base pressure A78-53781
Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests N78-32062	<b>ELASTODYNAMICS</b> Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams A78-50451
Dynamic response of aircraft to unloaded and loaded pavement profiles [AD-A055703] N78-32090	<b>ELASTOMERS</b> High temperature elastomers in gas turbine engine fuel sealing A78-52686
<b>DYNAMIC STABILITY</b> Duct effects on the heave stability of plenum air cushions A78-52616	<b>ELECTRIC CURRENT</b> B-1 EMUX automated logic diagrammer demonstration program [AD-A056964] N78-33092

SUBJECT INDEX

ENGINE PARTS

<b>ELECTRIC FIELDS</b> Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798	Recent status on research and development of FJR 710 turbofan engine --- for subsonic civil transport aircraft A78-50577
<b>ELECTRIC POWER SUPPLIES</b> Standard modular power supplies for avionics [AD-A057159] N78-33100	Experimental verification of a blade cooling system and comparison with design calculation --- in high temperature test turbine A78-50583
<b>ELECTRIC WIRE</b> Fabrication and assembly of cable strands for aircraft engines --- Russian book A78-53432	Development of the can-type gas turbine combustors A78-50590
<b>ELECTRO-OPTICS</b> Non-extractive electro-optical measurement of jet-engine emissions [AD-A056783] N78-33105	A new air blast type combustor - Design, performance and emission A78-50593
<b>ELECTRON BEAM WELDING</b> Investigation of the weldability of heat-resistant titanium alloys A78-53324	Development of the experimental gas turbine bus A78-50601
<b>ELECTRON DENSITY (CONCENTRATION)</b> Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators A78-51449	Advantages of 3-shaft KTT gas turbine configurations for automotive applications A78-50602
<b>ELECTRONIC CONTROL</b> Research and development of digital jet-engine controls A78-50626	A development of advanced radial gas turbine for automobile A78-50603
<b>ELECTRONIC EQUIPMENT</b> What's new in controller displays - Electronic flight strips and a color plan view display A78-52979	An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610
Methodology questions involved in systems engineering for devising an optimum radio-engineering system for trajectory measurements --- of space vehicles A78-53253	A research on centrifugal compressor for small gas turbine - The effect of recirculating flow --- automobile engines A78-50612
<b>ELECTRONIC MODULES</b> Standard modular power supplies for avionics [AD-A057159] N78-33100	Noise control analysis for gas turbine installations A78-50621
<b>ELECTROSTATIC PROBES</b> Detecting abnormal turbine engine deterioration using electrostatic methods A78-51946	Assessment of the structural-mechanical design of commercial aircraft gas turbine engines A78-50625
<b>ELEVATION ANGLE</b> Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links A78-52360	Influence of the bypass ratio on jet-engine weight A78-50787
<b>ELLIPSOIDMETERS</b> Ellipsometric determination of properties of films on rough surfaces such as aluminum alloy aircraft skin [AD-A056782] N78-33413	Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794
<b>ENERGY CONSERVATION</b> Turboexpanders for energy conservation A78-51621	Search-method optimization of the balancing of flexible rotors of gas turbine engines A78-50795
Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85 [NASA-CR-3047] N78-32066	Future large civil turbofans and powerplants /Seventeenth Short Bros. Commemorative Lecture/ A78-51519
<b>ENERGY REQUIREMENTS</b> Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles A78-51271	Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670
<b>ENERGY SOURCES</b> Aviation futures to the year 2000 A78-52966	Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines A78-53511
<b>ENGINE CONTROL</b> Research and development of digital jet-engine controls A78-50626	Reference aircraft for ICAO Working Group E [NASA-CR-158929] N78-32087
Optimal control of aircraft powerplant --- Russian book A78-53119	Aircraft gas turbine low-power emissions reduction technology program [NASA-CR-135434] N78-32097
<b>ENGINE COOLANTS</b> Aerodynamic and cooling performances of a film cooled turbine A78-50599	Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor [NASA-TP-1337] N78-33108
A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior A78-50777	<b>ENGINE FAILURE</b> Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades A78-50600
<b>ENGINE DESIGN</b> Design and verification of a turbofan Swirl augmentor A78-50564	Detecting abnormal turbine engine deterioration using electrostatic methods A78-51946
	<b>ENGINE INLETS</b> Development of velocity profile through a stage of axial flow turbomachinery A78-50609
	Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine A78-52926
	<b>ENGINE MONITORING INSTRUMENTS</b> Detecting abnormal turbine engine deterioration using electrostatic methods A78-51946
	AIDS - Aircraft-integrated-data-system A78-53675
	<b>ENGINE NOISE</b> Noise control analysis for gas turbine installations A78-50621
	<b>ENGINE PARTS</b> Development of ceramic components for an automotive gas turbine A78-50632

## ENGINE TESTS

High temperature elastomers in gas turbine engine fuel sealing A78-52686

Maintenance of gas turbine accessory equipment A78-53175

Investigation of the heat regime of gas turbine engine bearings --- Russian book A78-53431

Fabrication and assembly of cable strands for aircraft engines --- Russian book A78-53432

Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration [AD-A055252] N78-32099

**ENGINE TESTS**

Rotary combustion engine hydrocarbon source studies A78-50561

Variability of emissions measurements on a small gas turbine engine A78-50569

A study on a premixed combustor for a vehicular gas turbine A78-50592

An automatic processing system for vibration data analysis of gas turbine engines A78-50623

Large scale static tests of a tilt-nacelle propulsion/attitude control system [NASA-CR-152181] N78-32098

**ENGINEERING MANAGEMENT**

Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711] N78-32911

**ENVIRONMENT EFFECTS**

Baseline data requirements for assessing environmental impact [PB-281148/7] N78-32620

**ENVIRONMENT SIMULATION**

Compressor seal rub energetics study [NASA-CR-159424] N78-32096

**ENVIRONMENT SIMULATORS**

Optical simulator with a holographic component --- infinity display system [AIAA 78-1581] A78-50671

**ENVIRONMENTAL SURVEYS**

Quantitative mapping by remote sensing of an ocean acid-waste dump [NASA-TP-1275] N78-33617

Urban noise pollution. A bibliography with abstracts [NTIS/PS-78/0686/2] N78-33634

**EOSS**

Earth-to-orbital station radio bridge N78-33019

**EPOXY RESINS**

The application of ultraviolet cure resins for repair of composites [AD-A055731] N78-32273

**EQUATIONS OF MOTION**

Numerical study on the stability dependence of geostrophic drag and cross-isobar angle A78-50691

Dynamic analysis of flexible rotor-bearing systems using a model approach N78-32424

Forced vibration of thin elastic shells with application to fractional horsepower hermetic refrigeration compressor shells N78-32457

**EQUILIBRIUM FLOW**

Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel A78-50303

Radial equilibrium of flows in shock-in-rotor type rotors A78-50611

**EQUIPMENT SPECIFICATIONS**

Physical characteristics: Aviation materiel --- Army test facilities and equipment [AD-A055803] N78-32093

**EROSION**

Aerodynamic effects on erosion in turbomachinery A78-50635

Some effects of temperature on the erosion of metals A78-51594

Mathematical analysis of impact erosion --- of supersonic flight vehicles A78-51711

## SUBJECT INDEX

Hardened reentry vehicle development program. Erosion-resistant nosetip technology [AD-A056390] N78-33128

Ceramics technology readiness development program. Phase 1: Conceptual designs and material screening --- erosion/corrosion resistance [PE-2786-12] N78-33243

**ERROR ANALYSIS**

A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF A78-51497

Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670

Accuracy of ship-position determination by means of NWSS Transit A78-51889

**EULER EQUATIONS OF MOTION**

Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics A78-51175

**EUROPE**

European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/ A78-51520

**EUROPEAN SPACE AGENCY**

Assess II - A simulated mission of Spacelab A78-50276

**EVALUATION**

Baseline data requirements for assessing environmental impact [PB-281148/7] N78-32620

**EVAPORATION**

Properties and evaporation of jet-engine fuels at pressurized conditions A78-50594

Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798

**EXHAUST GASES**

Variability of emissions measurements on a small gas turbine engine A78-50569

A study on a premixed combustor for a vehicular gas turbine A78-50592

A new air blast type combustor - Design, performance and emission A78-50593

Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels A78-50598

Combustion and emission characteristics of a gas turbine combustor N78-32095

Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TN-79009] N78-33102

Pollution Reduction Technology Program for small jet aircraft engines, phase 2 [NASA-CR-159415] N78-33104

Non-extractive electro-optical measurement of jet-engine emissions [AD-A056783] N78-33105

Turbine engine particulate emission characterization, phase 2 [AD-A057370] N78-33106

**EXHAUST NOZZLES**

Flight effects on the aerodynamic and acoustic characteristics of inverted profile coannular nozzles [NASA-CR-3018] N78-32836

**EXTERNAL STORES**

Influences of sway braces and mounting gaps on the static aerodynamic loading of external stores [AD-A054963] N78-32068

**F**

**F-4 AIRCRAFT**

Dynamic response of aircraft to unloaded and loaded pavement profiles [AD-A055703] N78-32090

**F-8 AIRCRAFT**

A learning control system with application to flight systems N78-33112

**F-15 AIRCRAFT**

Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements  
A78-51470

**F-16 AIRCRAFT**

Pitch rate flight control for the F-16 aircraft to improve air-to-air combat  
[AD-A055417] N78-32107

**F-28 TRANSPORT AIRCRAFT**

The short-haul jet designed with ATC in mind  
A78-51516

**F-111 AIRCRAFT**

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions  
[NASA-CR-152109] N78-33113

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152110] N78-33114

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152111] N78-33115

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2 F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions  
[NASA-CR-152112] N78-33116

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152113] N78-33117

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152114] N78-33118

**FABRICATION**

Fabrication and assembly of cable strands for aircraft engines --- Russian book  
A78-53432

**FAIRINGS**

Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book  
A78-53426

**FATIGUE (MATERIALS)**

Effect of aircraft loading program modifications on the fatigue life and damage cumulation. Part 1: Effect of load peaks in case of central hole sheet specimens  
[TAE-334-PT-1] N78-32462

**FATIGUE LIFE**

Fatigue crack growth of titanium fan blades  
A78-51744

**FATIGUE TESTS**

Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941

**FEASIBILITY ANALYSIS**

Mechanization of blended A sub N mode for CCV YF-16  
[AD-A056553] N78-33089

**FEEDBACK CONTROL**

Closed loop control systems. Part 1: Aircraft. A bibliography with abstracts  
[NTIS/PS-78/0809/0] N78-33122

Closed loop control systems. Part 2: Miscellaneous applications. A bibliography with abstracts  
[NTIS/PS-78/0810/8] N78-33278

**FIBER OPTICS**

Fiber optics, volume 2. Citations from the NTIS data base  
[NTIS/PS-78/0713/4] N78-33918

**FIGHTER AIRCRAFT**

Analysis of advanced variable camber concepts for combat aircraft  
A78-52592

Encyclopedia of US Air Force aircraft and missile systems. Volume 1: Post-World War II fighters 1945 - 1973  
[AD-A057002] N78-33036

**FILM COOLING**

Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades  
A78-50578

Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines  
A78-50579

Film cooling of a gas turbine blade  
A78-50580

On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance  
A78-50582

Experimental verification of a blade cooling system and comparison with design calculation --- in high temperature test turbine  
A78-50583

Aerodynamic and cooling performances of a film cooled turbine  
A78-50599

**FINANCIAL MANAGEMENT**

Impact of federal noise abatement policy on aircraft financing  
A78-51131

Reflections on the economic implications of current noise abatement financing proposals  
A78-51132

**FINITE DIFFERENCE THEORY**

Numerical analysis of flow through turbine cascade by the Modified PLIC Method  
A78-50607

Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics  
A78-51175

Inverse boundary-layer theory and comparison with experiment  
[NASA-TP-1208] N78-32385

**FINITE ELEMENT METHOD**

Stress analysis of ceramic gas turbine blades by the finite element method, part 2  
[AD-A055538] N78-32102

Stress analysis of ceramic turbine blades by finite element method, part 1  
[AD-A056310] N78-33111

**FIRE CONTROL**

An extended Kalman filter fire control system against air-to-air missiles, volume 2  
[AD-A055637] N78-32091

**FIRE PREVENTION**

Fire detector response in aircraft applications  
A78-53674

**FIXED WINGS**

Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests  
[NASA-TM-78706] N78-32050

A theoretical and experimental study of circulation control with reference to fixed wing applications  
[RP-582] N78-33052

**FLAME RETARDANTS**

Fire resistivity and toxicity studies of candidate aircraft passenger seat materials  
A78-51838

**FLAME STABILITY**

Combustor performance of high availability fuels  
A78-50568

Aircraft afterburner catalytic flame stabilization  
A78-50570

Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer  
A78-50788

**FLAMMABILITY**

Titanium alloy ignition and combustion  
[AD-A055443] N78-32235

**FLAT PLATES**

Noise from separated flow of flat plate  
A78-50622

Density of motions in the flutter of infinite plates  
A78-52932

**FLEXIBLE BODIES**

Search-method optimization of the balancing of flexible rotors of gas turbine engines  
A78-50795

**FLIGHT CHARACTERISTICS**

**SUBJECT INDEX**

**FLIGHT CHARACTERISTICS**

Test instrumentation system for flight simulator handling characteristics [AIAA 78-1595] A78-50669  
 Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight A78-50790

**FLIGHT CONDITIONS**

Computed responses of several aircraft to atmospheric turbulence and discrete wind shears [NASA-CR-152185] N78-32106  
 Some principles for studying reduced visibility conditions in regions around airports [NASA-TM-75152] N78-32642

**FLIGHT CONTROL**

Digital flight control system - Advanced technology of flight control A78-50266  
 Spacecraft flight control systems --- Russian book A78-53434

Avionics performance analysis: A historical review and a current assessment of flight instrumentation and control systems in civil aviation [NASA-CR-145378] N78-32094

Pitch rate flight control for the F-16 aircraft to improve air-to-air combat [AD-A055417] N78-32107

A theoretical and experimental study of circulation control with reference to fixed wing applications [RP-582] N78-33052

A learning control system with application to flight systems N78-33112

Engineering and development program plan: Advanced Integrated Flight Systems (AIFS) [AD-A056770] N78-33119

**FLIGHT HAZARDS**

Bird strikes and aviation safety. A bibliography with abstracts [NTIS/PS-78/0694/6] N78-33066

**FLIGHT INSTRUMENTS**

Avionics performance analysis: A historical review and a current assessment of flight instrumentation and control systems in civil aviation [NASA-CR-145378] N78-32094

**FLIGHT LOAD RECORDERS**

Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions [NASA-TP-1331] N78-33053

**FLIGHT OPTIMIZATION**

Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent --- German thesis A78-51749

Optimal control of aircraft powerplant --- Russian book A78-53119

**FLIGHT PATHS**

Stochastic properties of conflict frequency at multiple connected air route intersections A78-51945

Terrain Contour Matching (TERCOM): Sensitivity to heading and ground-speed errors [AD-A056127] N78-32084

**FLIGHT RECORDERS**

Acquisition of operational data during NOE missions [AD-A055922] N78-32089

**FLIGHT SAFETY**

Aircraft guidance and flight safety - Current and future problems for research and industry A78-50263

Improved safety in air transportation through the extension and automation of flight safety systems A78-50264

Airborne equipment for all weather operations A78-50448

Feasibility of landing at an alternate airport due to visibility conditions A78-51341

VTOL aircraft dynamics --- Russian book A78-53428

Some principles for studying reduced visibility conditions in regions around airports [NASA-TM-75152] N78-32642

Annual review of aircraft accident data, US air carrier operations, 1976 [PB-281329/3] N78-33065

Vortex advisory system simulation of Chicago O'Hare Airport [AD-A057112] N78-33069

Dynamical model of gust front [PB-283425/7] N78-33692

**FLIGHT SIMULATION**

Investigations of simulated aircraft flight through thunderstorm outflows [NASA-CR-3052] N78-32037

**FLIGHT SIMULATORS**

Visual flight simulator for the investigation of the learning process during aircraft landing A78-50302

Circles, texture, etc. - Alternate approaches to CIG scene detail --- computer image generation for flight simulators [AIAA 78-1578] A78-50659

Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580] A78-50661

Correlated data bases for the present and future --- arcwre training simulator acquisitions flexibility [AIAA 78-1583] A78-50662

Test instrumentation system for flight simulator handling characteristics [AIAA 78-1595] A78-50669

Feasibility of an orbital simulator of stratospheric photochemistry A78-51816

A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis A78-52498

Development of a symbology exerciser for display generation and analysis on the visually-coupled airborne systems simulator (VCASS) [AD-A055464] N78-33124

**FLIGHT TESTS**

Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements A78-51470

Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins N78-32058

Flight experience with altitudes hold and Mach hold autopilots on the YF-12 aircraft at Mach 3 N78-32059

Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers N78-32063

In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction N78-32065

Strapdown system redundancy management flight demonstration --- vertical takeoff and landing aircraft [NASA-CR-145356] N78-32079

Missile aerodynamic parameter and structure identification from flight test data [AD-A056343] N78-33055

TRSB microwave landing system demonstration program at Shiraz, Iran [AD-A055526] N78-33071

Bell UB-1H RAM/LOG report [AD-A057231] N78-33091

An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109] N78-33113

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110] N78-33114

- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: P-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152111] N78-33115
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112] N78-33116
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152113] N78-33117
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152114] N78-33118
- FLIGHT TIME**
- Strategic or tactical air traffic control A78-50447
- Estimating the average taxi speed of departing aircraft A78-50450
- FLIGHT VEHICLES**
- Methodology questions involved in systems engineering for devising an optimum radio-engineering system for trajectory measurements --- of space vehicles A78-53253
- Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book A78-53426
- Nonlinear vibrations of an asymmetric flight vehicle A78-53504
- FLOW CHARACTERISTICS**
- Investigation of flow in centrifugal impeller with tandem inducer A78-50614
- Hypersonic flows N78-32124
- FLOW DISTORTION**
- Distortion of a flat jet in a bounded cross-stream in the presence of a wake space A78-50779
- Axisymmetric unsteady flow past obstacles in a cylindrical tube A78-51441
- Linear theory of supersonic flows past ruled bodies of three-dimensional configuration A78-51443
- FLOW DISTRIBUTION**
- Generalized area rules and integral theorems for hypersonic wing-bodies A78-50461
- Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades A78-50578
- Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics A78-51175
- The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting N78-32041
- Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests N78-32062
- A theoretical and experimental study of circulation control with reference to fixed wing applications [RP-582] N78-33052
- FLOW EQUATIONS**
- Integral equation formulation for transonic flow past lifting wings A78-50459
- Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer A78-51687
- Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades A78-53783
- FLOW GEOMETRY**
- An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610
- Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow A78-50797
- Three-dimensional boundary layer theory using shell geometrical concepts A78-51176
- Propagation of sound through a sheared flow [NASA-CR-152196] N78-33876
- FLOW STABILITY**
- Operation of an axial-flow compressor in the case of radially nonuniform inlet flow A78-50793
- FLOW THEORY**
- Basic model concepts of fluid mechanics in wing theory A78-50752
- FLOW VELOCITY**
- Irrotational flow around a spherical segment --- aerodynamic brakes application A78-51688
- Experiments on the laminar flow in a rectangular streamwise corner A78-53765
- The YF-12 gust velocity measuring system N78-32061
- FLOW VISUALIZATION**
- Development of the can-type gas turbine combustors A78-50590
- FLUID BOUNDARIES**
- Numerical implementation of solid-body boundary conditions for the Euler equations --- in fluid dynamics A78-51175
- FLUID DYNAMICS**
- Thirty years of fluid dynamics A78-51280
- Technical evaluation report on the Fluid Dynamics Panel Symposium on Prediction of Aerodynamic Loading [AGARD-AR-125] N78-32074
- Aeroelastic characteristics of a cascade of blades [AD-A055619] N78-32392
- FLUID FILMS**
- Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface A78-50791
- FLUID FLOW**
- Blade-surface boundary layer and wake computational models for estimation of axial-flow compressor and fan blade-row turning angles and losses N78-32038
- Heat transfer augmentation in flows over and normal to high-porosity perforated surfaces N78-32371
- FLUID INJECTION**
- Unsteady fluid flow in a swirl injector A78-50781
- Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow A78-50797
- On moderate injection into a separated supersonic boundary layer, with reattachment A78-50896
- FLUID MECHANICS**
- Basic model concepts of fluid mechanics in wing theory A78-50752
- Gesellschaft fuer angewandte Mathematik und Mechanik, Annual Scientific Meeting, Lyngby, Denmark, May 31-June 3, 1977, Reports. Part 2 A78-51151
- FLUORO COMPOUNDS**
- High temperature elastomers in gas turbine engine fuel sealing A78-52686

**FLUOROPOLYMERS**

**SUBJECT INDEX**

**FLUOROPOLYMERS**

Piezoelectric polymer transducers for detection of structural defects in aircraft [AD-A055729] N78-32903

**FLUTTER**  
Unsteady blade rows in high-speed flow [AD-A055620] N78-32391

**FLUTTER ANALYSIS**  
A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade A78-50618

Density of motions in the flutter of infinite plates A78-52932

Nonlinear vibrations of an asymmetric flight vehicle A78-53504

**FLUX DENSITY**

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110] N78-33114

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152111] N78-33115

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152113] N78-33117

**FOCUSING**

Some comments on sonic boom focusing A78-51172

**FOG DISPERSAL**

The Turboclair process --- fog dispersal techniques A78-50449

Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog A78-51933

**FORCE DISTRIBUTION**

Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests A78-50457

**FORCED VIBRATION**

Forced vibration of thin elastic shells with application to fractional horsepower hermetic refrigeration compressor shells N78-32457

**FRACTURE MECHANICS**

Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions --- airframe fatigue cracking [AD-A055483] N78-32504

**FRACTURE STRENGTH**

Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows A78-50935

**FREE CONVECTION**

Three dimensional free convection flow and heat transfer along a porous vertical plate A78-50288

**FREE FLOW**

Wind-tunnel investigation at supersonic speeds of a canard-controlled missile with fixed and free-rolling tail fins [NASA-TP-1316] N78-32067

**FREE JETS**

Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations A78-52763

**FREE VIBRATION**

Natural vibrations of a rigid rotor mounted on elastic ball bearings A78-51015

**FREIGHTERS**

Design concepts for future air freighters A78-52450

**FREQUENCY RANGES**

Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment A78-50778

**FRICTION DRAG**

Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3 N78-32064

**FRICTION FACTOR**

Heat transfer augmentation in flows over and normal to high-porosity perforated surfaces N78-32371

**FRONTS (METEOROLOGY)**

Dynamical model of gust front [PB-283425/7] N78-33692

**FROUDE NUMBER**

Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures A78-51968

**FUEL COMBUSTION**

Calculation of CO concentration for liquid fueled gas turbine combustor A78-50560

Combustor performance of high availability fuels A78-50568

Variability of emissions measurements on a small gas turbine engine A78-50569

Alternative fuel effects upon combustion efficiency in continuous combustors A78-50571

Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer A78-50788

Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798

Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TM-79009] N78-33102

**FUEL CONSUMPTION**

Advantages of 3-shaft KTT gas turbine configurations for automotive applications A78-50602

Energy economy with high temperature gasturbine A78-50604

Preliminary design characteristics of a subsonic business jet concept employing laminar flow control [NASA-CR-158958] N78-33087

Fuel consumption: Transportation, volume 1. A bibliography with abstracts [NTIS/PS-78/0707/6] N78-33599

Fuel consumption: Transportation, volume 2. A bibliography with abstracts [NTIS/PS-78/0708/4] N78-33600

**FUEL FLOW**

Double row radial hydraulic piston pumps for aircraft hydraulic systems A78-53249

**FUEL PUMPS**

Double row radial hydraulic piston pumps for aircraft hydraulic systems A78-53249

**FUEL TESTS**

Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel A78-53371

**FUEL-AIR RATIO**

Experimental investigation on the scale effects of gas turbine combustion chambers A78-50591

**FUNCTIONS (MATHEMATICS)**

Rocket structures N78-32123

**FUSELAGES**

Primary Adhesively Bonded Structure Technology (PABST). Phase 1: Detail design [AD-A056857] N78-33095

**G**

**GAME THEORY**

Optimization and differential games A78-52401

**GAS DETECTORS**

Fire detector response in aircraft applications A78-53674

## SUBJECT INDEX

## GAS TURBINES

## GAS DYNAMICS

- Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel  
A78-50304
- Some problems of continuum mechanics --- Russian book  
A78-50751
- Self-focusing of a Gaussian beam in a supersonic gas flow  
A78-51387

## GAS EXPANSION

- Calculations of flows in flat asymmetric nozzles for overexpanded conditions  
A78-50782
- Turboexpanders for energy conservation  
A78-51621

## GAS FLOW

- Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space  
A78-51448
- Calculation of viscous radiant gas flows --- hypersonic reentry  
A78-53556
- Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades  
A78-53783

## GAS TURBINE ENGINES

- Variability of the emissions measurements on a small gas turbine engine  
A78-50569
- Alternative fuel effects upon combustion efficiency in continuous combustors  
A78-50571
- Tokyo Joint Gas Turbine Congress, Tokyo, Japan, May 22-27, 1977, Proceedings  
A78-50576
- Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades  
A78-50581
- The development of a regenerator seal for vehicular use --- for automatic gas turbine engines  
A78-50587
- Aluminous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines  
A78-50588
- A study on a premixed combustor for a vehicular gas turbine  
A78-50592
- A new air blast type combustor - Design, performance and emission  
A78-50593
- Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels  
A78-50598
- Aerodynamic and cooling performances of a film cooled turbine  
A78-50599
- Development of the experimental gas turbine bus  
A78-50601
- Advantages of 3-shaft KTT gas turbine configurations for automotive applications  
A78-50602
- A development of advanced radial gas turbine for automobile  
A78-50603
- Energy economy with high temperature gasturbine  
A78-50604
- A research on centrifugal compressor for small gas turbine - The effect of recirculating flow --- automobile engines  
A78-50612
- Noise control analysis for gas turbine installations  
A78-50621
- An automatic processing system for vibration data analysis of gas turbine engines  
A78-50623
- Assessment of the structural-mechanical design of commercial aircraft gas turbine engines  
A78-50625
- Silicon nitride ceramics for gas turbine engines  
A78-50630
- Development of ceramic components for an automotive gas turbine  
A78-50632

- Application of self-cleaning air cleaners to aircraft and vehicular gas turbines  
A78-50633
- An experiment of deposit formation on surface of an air-cooled gas-turbine blade  
A78-50634
- Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight  
A78-50790
- Search-method optimization of the balancing of flexible rotors of gas turbine engines  
A78-50795
- Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces  
A78-50798
- Calculation of combustion efficiency in gas-turbine-engine combustion chambers  
A78-51670
- Detecting abnormal turbine engine deterioration using electrostatic methods  
A78-51946
- Maintenance of gas turbine accessory equipment  
A78-53175
- New production methods gain --- in engine manufacturing for U.S. aerospace industry  
A78-53239
- Investigation of the heat regime of gas turbine engine bearings --- Russian book  
A78-53431
- Nickel brazing honeycomb for aircraft gas turbine engines  
A78-53751
- Analysis of the engine fragment threat and the crush environment for small packages carried on US commercial jet aircraft [SAND-78-0244C]  
N78-32078
- Combustion and emission characteristics of a gas turbine combustor  
N78-32095
- Aircraft gas turbine low-power emissions reduction technology program [NASA-CR-135434]  
N78-32097
- Stress analysis of ceramic gas turbine blades by the finite element method, part 2 [AD-A055538]  
N78-32102
- Study of the turbine engine industry [AD-A055895]  
N78-32103
- Technical evaluation report on the 51st (F) PEP Specialists' Meeting of the Propulsion and Energetics Panel on Seal Technology in Gas Turbine engines [AGARD-AR-123]  
N78-32104
- High-temperature ceramics for automobile gas turbines [NASA-TM-75457]  
N78-32264
- High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components [NASA-TM-75302]  
N78-32765
- Independent power generator [NASA-CASE-LAR-11208-1]  
N78-32539
- Redundant disc [NASA-CASE-LEW-12496-1]  
N78-33101
- Ceramics technology readiness development program. Phase 1: Conceptual designs and material screening --- erosion/corrosion resistance [PE-2786-12]  
N78-33243
- GAS TURBINES**
- Calculation of CO concentration for liquid fueled gas turbine combustor  
A78-50560
- Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades  
A78-50578
- Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines  
A78-50579
- Film cooling of a gas turbine blade  
A78-50580
- Impingement cooling and its application to combustor design  
A78-50584
- Development of the can-type gas turbine combustors  
A78-50590



## GAS VALVES

## SUBJECT INDEX

Experimental investigation on the scale effects of gas turbine combustion chambers A78-50591

Thermodynamical performances of closed-cycle gas-turbine A78-50605

Turboexpanders for energy conservation A78-51621

Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration [AD-A055252] N78-32099

Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology [AD-A055276] N78-32100

**GAS VALVES**

Analysis of a high speed ring valve system for a single cylinder reciprocating compressor N78-33442

**GENERAL AVIATION AIRCRAFT**

Profile design for an advanced-technology airfoil for general aviation aircraft [NASA-TM-75323] N78-32054

Annual review of aircraft accident data, US general aviation, calendar year 1976 [PB-281330/1] N78-33064

Fuel consumption: Transportation, volume 1. A bibliography with abstracts [NTIS/PS-78/0707/6] N78-33599

Fuel consumption: Transportation, volume 2. A bibliography with abstracts [NTIS/PS-78/0708/4] N78-33600

**GEOPHYSICS**

Thirty years of fluid dynamics A78-51280

**GESTROPHIC WIND**

Numerical study on the stability dependence of geostrophic drag and cross-isobar angle A78-50691

**GERMANY**

Concept and future plans for automation of air traffic control in the Federal Republic of Germany A78-52972

**GLASS**

Glass airports --- building design A78-50434

**GLOBAL POSITIONING SYSTEM**

The Navstar Global Positioning System /GPS/ A78-52952

**GLOBAL TRACKING NETWORK**

Satellites for position determination A78-53911

**GOVERNMENT/INDUSTRY RELATIONS**

And now 'the deregulators' - When will they learn A78-51127

Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases A78-51129

Impact of federal noise abatement policy on aircraft financing A78-51131

Reflections on the economic implications of current noise abatement financing proposals A78-51132

The changing environment of international air commerce A78-52448

**GRANULAR MATERIALS**

A distribution model for the aerial application of granular agricultural particles [NASA-CR-157745] N78-33048

**GRAPHITE-EPOXY COMPOSITE MATERIALS**

Impact tests on fibrous composite sandwich structures [NASA-TM-78719] N78-33152

Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite [AD-A055714] N78-33197

**GREAT PLAINS CORRIDOR (NORTH AMERICA)**

Dynamical model of gust front [PB-283425/7] N78-33692

**GREEN FUNCTION**

Rotor wake effects on hub/pylon flow. Volume 1: - Theoretical formulation [AD-A055921] N78-32070

**GROUND EFFECT MACHINES**

Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures A78-51968

Duct effects on the heave stability of plenum air cushions A78-52616

**GROUND SPEED**

A preliminary study of the benefits of flying by ground speed during final approach [NASA-TM-78777] N78-32076

Terrain Contour Matching (TERCOM): Sensitivity to heading and ground-speed errors [AD-A056127] N78-32084

**GUST LOADS**

Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation A78-50617

The YF-12 gust velocity measuring system N78-32061

Dynamical model of gust front [PB-283425/7] N78-33692

**GYROSCOPES**

Two extensions of a theorem of Levi-Civita to gyroscopic systems and some applications A78-50311

The response of a Hooke's-joint gyroscope to linear vibration A78-52647

**GYROSTABILIZERS**

Influence of constrained arrestors on the operation of gyroscopic stabilizers A78-51355

**H****HAMILTONIAN FUNCTIONS**

Two extensions of a theorem of Levi-Civita to gyroscopic systems and some applications A78-50311

**HASTELLOY (TRADEMARK)**

Nickel brazing honeycomb for aircraft gas turbine engines A78-53751

**HEAD-UP DISPLAYS**

Human factors engineering for head-up displays: A review of military specifications and recommendations for research [AD-A056944] N78-33099

**HEAT BALANCE**

Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670

**HEAT RESISTANT ALLOYS**

Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows A78-50935

New production methods gain --- in engine manufacturing for U.S. aerospace industry A78-53239

Investigation of the weldability of heat-resistant titanium alloys A78-53324

Evaluation of cyclic behavior of aircraft turbine disk alloys [NASA-CR-159433] N78-33478

**HEAT SINKS**

Hypersonic airbreathing missile [NASA-CASE-LAR-12264-1] N78-32168

**HEAT TRANSFER**

Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines A78-50579

On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance A78-50582

Impingement cooling and its application to combustor design A78-50584

Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers. [AIAA PAPER 77-178] A78-52629

Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces A78-53309

## SUBJECT INDEX

## HUMAN FACTORS ENGINEERING

- Investigation of the heat regime of gas turbine engine bearings --- Russian book  
A78-53431
- Heat transfer augmentation in flows over and normal to high-porosity perforated surfaces  
N78-32371
- HEAT TRANSFER COEFFICIENTS**  
Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades  
A78-50600
- HEAVY LIFT HELICOPTERS**  
Design and development of helicopter external cargo sling legs made with Kevlar  
[AD-A056951] N78-33093
- HELICOPTER DESIGN**  
Helicopter manufacturing technology. III - Future manufacturing technologies  
A78-53174
- Theoretical study of multicyclic control of a controllable twist rotor  
[NASA-CR-151959] N78-33085
- HELICOPTER PERFORMANCE**  
The helicopter operators' viewpoint --- airspace operational environments and requirements  
A78-52955
- HELICOPTER WAKES**  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage --- conducted in the Langley V/STOL wind tunnel  
[NASA-TM-74033] N78-32049
- Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation  
[AD-A055921] N78-32070
- Rotor wake effects on hub/pylon flow. Volume 2: Program SHAPES user's manual  
[AD-A055767] N78-32071
- HELICOPTERS**  
Preventing helicopter mid-air collisions with the proximity warning device  
A78-51223
- Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog  
A78-51933
- Dynamic analysis using superelements for a large helicopter model  
N78-32486
- Helicopter Acoustics  
[NASA-CP-2052-PT-1] N78-32816
- Helicopter external noise requirements: PAA perspective  
N78-32817
- Helicopter noise regulations: An industry perspective  
N78-32818
- The impact of urban operations on helicopter noise requirements  
N78-32820
- Prediction and reduction of rotor broadband noise  
N78-32821
- Theoretical models of helicopter rotor noise  
N78-32822
- Noise due to rotor-turbulence interaction  
N78-32823
- Theory on acoustic sources  
N78-32824
- Potential acoustic benefits of circulation control rotors  
N78-32825
- Helicopter noise research at the Langley V/STOL tunnel  
N78-32826
- Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- langley anechoic noise facility  
N78-32827
- Wind tunnel investigations of model rotor noise at low tip speeds  
N78-32828
- Helicopter external noise prediction and correlation with flight test  
N78-32829
- Full-scale testing of an Ogee tip rotor --- in the Langley whirl tower  
N78-32830
- Hovering impulsive noise: Some measured and calculated results  
N78-32831
- Improved methods for calculating the thickness noise  
N78-32832
- The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833
- Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction  
N78-32834
- A study of the noise radiation from four helicopter rotor blades --- tests in Ames 40 by 20 foot wind tunnel  
N78-32835
- HELIPORTS**  
The helicopter operators' viewpoint --- airspace operational environments and requirements  
A78-52955
- The impact of urban operations on helicopter noise requirements  
N78-32820
- HIGH ALTITUDE**  
Three dimensional fully viscous shock-layer flows over sphere-cones at high altitudes and angles of attack  
N78-32040
- HIGH ALTITUDE ENVIRONMENTS**  
The High Altitude Pollution Program  
[UCRL-50042-77] N78-32601
- HIGH ALTITUDE TESTS**  
Area navigation - Fast-time/real-time simulations in a high-altitude center environment  
A78-52977
- HIGH ASPECT RATIO**  
Ballooning stability boundaries for the large-aspect-ratio tokamak  
A78-53664
- HIGH SPEED**  
Aircraft configurations for high-speed ships  
[AD-A055540] N78-32092
- HIGH TEMPERATURE AIR**  
Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows  
A78-50935
- HIGH TEMPERATURE TESTS**  
Experimental verification of a blade cooling system and comparison with design calculation --- in high temperature test turbine  
A78-50583
- SOLE DISTRIBUTION (MECHANICS)**  
Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades  
A78-50578
- Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines  
A78-50579
- HOLOGRAPHY**  
Optical simulator with a holographic component --- infinity display system  
[AIAA 78-1581] A78-50671
- HONEYCOMB STRUCTURES**  
Nickel brazing honeycomb for aircraft gas turbine engines  
A78-53751
- HOVERING**  
Hovering impulsive noise: Some measured and calculated results  
N78-32831
- HUBS**  
Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation  
[AD-A055921] N78-32070
- HUMAN FACTORS ENGINEERING**  
A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF  
A78-51497
- Solar power satellite construction and maintenance - The first large-scale use of man-in-space  
[AIAA PAPER 78-1637] A78-51977
- NASA aviation safety reporting system  
[NASA-TM-78511] N78-32075
- Human factors engineering for head-up displays: A review of military specifications and recommendations for research  
[AD-A056944] N78-33099

## HUMAN REACTIONS

Development of a symbology exerciser for display generation and analysis on the visually-coupled airborne systems simulator (VCASS)  
[AD-A055464] N78-33124

**HUMAN REACTIONS**  
Commercial airport operations and community noise criteria  
[AD-A057451] N78-33615

**HUMAN TOLERANCES**  
Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine  
N78-32673

**HYDROCARBON COMBUSTION**  
Calculation of CO concentration for liquid fueled gas turbine combustor  
A78-50560

**HYDROCARBON FUELS**  
Rotary combustion engine hydrocarbon source studies  
A78-50561

**HYDRODYNAMICS**  
Some problems of continuum mechanics --- Russian book  
A78-50751

**HYPERBOLAS**  
The use of poppler-shift position lines in satellite navigation systems  
A78-51890

**HYPERSONIC BOUNDARY LAYER**  
Investigations of the intensity of oscillations of the boundary of a turbulent wake  
A78-51402

**HYPERSONIC FLIGHT**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators  
A78-51449

Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine  
A78-52926

Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1] N78-32168

**HYPERSONIC FLOW**  
Contribution to the theory of three-dimensional hypersonic viscous gas flow past blunted bodies in the presence of injection  
A78-50757

Viscous carbon dioxide flow past a blunted cone  
A78-51444

Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft  
[AIAA PAPER 78-1458] A78-52042

Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow  
A78-53087

Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone  
A78-53508

Hypersonic flows  
N78-32124

**HYPERSONIC REENTRY**  
Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests  
A78-50457

Calculation of viscous radiant gas flows --- hypersonic reentry  
A78-53556

**HYPERSONIC VEHICLES**  
Generalized area rules and integral theorems for hypersonic wing-bodies  
A78-50461

**ICE FORMATION**  
Technical evaluation report on the 51st (A) Specialists' Meeting of the Propulsion and Energetics Panel on Icing Testing for Aircraft Engines  
[AGARD-AR-124] N78-32105

**IDEAL FLUIDS**  
Basic model concepts of fluid mechanics in wing theory  
A78-50752

**IDEAL GAS**  
Calculations of flows in flat asymmetric nozzles for overexpanded conditions  
A78-50782

## SUBJECT INDEX

**IGNITION**  
Ignition of a liquid fuel under high intensity radiation --- laser weapon systems  
[AD-A054974] N78-32199

Titanium alloy ignition and combustion  
[AD-A055443] N78-32235

**IMAGE PROCESSING**  
A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis  
A78-52498

**IMPACT DAMAGE**  
Mathematical analysis of impact erosion --- of supersonic flight vehicles  
A78-51711

**IMPACT TESTS**  
CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments  
[AD-A055804] N78-32077

Impact tests on fibrous composite sandwich structures  
[NASA-TM-78719] N78-33152

**IMPELLERS**  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613

Investigation of flow in centrifugal impeller with tandem inducer  
A78-50614

**IN-FLIGHT MONITORING**  
Precision approach monitoring and guidance using interferometer techniques  
A78-51551

AIDS - Aircraft-integrated-data-system  
A78-53675

Automatic Inspection, Diagnostic and Prognostic AIDAPS: Test cell data collection and technical support  
[AD-A055385] N78-32109

**INCOMPRESSIBLE BOUNDARY LAYER**  
Interaction of turbulent boundary layers in a right-angle corner  
A78-51697

**INCOMPRESSIBLE FLOW**  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel  
A78-50303

The aerodynamic performance of a freely hinged door between two flows --- for supersonic transport propulsion nozzles  
A78-51464

The theory of fabric porosity as applied to parachutes in incompressible flow  
A78-51466

**INDIA**  
Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation  
A78-50474

**INDUCTION MOTORS**  
Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles  
A78-51271

**INDUSTRIAL PLANTS**  
Technical evaluation report on the 51st(B) PEP Specialists' Meeting of the Propulsion and Energetics Panel on Seal Technology in Gas Turbine engines  
[AGARD-AR-123] N78-32104

**INFLUENCE COEFFICIENT**  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows  
[AIAA PAPER 78-229] A78-52630

**INFORMATION DISSEMINATION**  
The ARTS III Umbrella - Concepts and applications --- for collecting and distributing aircraft positional data within ATC radar coverage areas  
A78-52958

**INFORMATION FLOW**  
The Central Flow Control /CFC/ system --- for Air Traffic Control System Command Center  
A78-52960

SUBJECT INDEX

JET FLOW

**INFRARED DETECTORS**  
 Infrared passbands for clear-air-turbulence detection  
 A78-51971

**INFRARED FILTERS**  
 Infrared passbands for clear-air-turbulence detection  
 A78-51971

**INFRARED PHOTOGRAPHY**  
 Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades  
 A78-50581

**INJECTORS**  
 Unsteady fluid flow in a swirl injector  
 A78-50781

**INLET FLOW**  
 Development of velocity profile through a stage of axial flow turbomachinery  
 A78-50609  
 Surge responsibility and range characteristics of centrifugal compressors  
 A78-50616  
 Operation of an axial-flow compressor in the case of radially nonuniform inlet flow  
 A78-50793  
 The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting  
 N78-32041  
 Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests  
 N78-32062

**INSPECTION**  
 Automatic Inspection, Diagnostic and Prognostic AIDAPS: Test cell data collection and technical support  
 [AD-A055385] N78-32109

**INSTRUMENT APPROACH**  
 The missed approach --- psychological factors in aircraft instrument landing decisions  
 A78-51517

**INSTRUMENT FLIGHT RULES**  
 The missed approach --- psychological factors in aircraft instrument landing decisions  
 A78-51517

**INTAKE SYSTEMS**  
 High angle of incidence implications upon air intake design and location for supersonic cruise aircraft and highly maneuverable transonic aircraft  
 [NASA-TM-78530] N78-32044  
 Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor  
 [NASA-TP-1337] N78-33108

**INTEGRAL EQUATIONS**  
 Integral equation formulation for transonic flow past lifting wings  
 A78-50459  
 Approximate transonic profile flow at incidence with shock  
 A78-51096  
 Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades  
 A78-53783

**INTEGRATED CIRCUITS**  
 A study of alternatives for VSTOL computer systems  
 [AD-A056105] N78-33098

**INTERFEROMETERS**  
 Precision approach monitoring and guidance using interferometer techniques  
 A78-51551

**INTERNAL PRESSURE**  
 Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure  
 A78-50717

**INTERNATIONAL COOPERATION**  
 The changing environment of international air commerce  
 A78-52448

**INTERNATIONAL LAW**  
 International jurisdiction related to the Warsaw Convention during the years from 1974 to 1976. II  
 A78-51822

**INVISCID FLOW**  
 Approximate transonic profile flow at incidence with shock  
 A78-51096  
 Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation  
 A78-53095  
 Dynamic stall: An example of strong interaction between viscous and inviscid flows  
 [NASA-TM-75447] N78-32384

**IRAN**  
 Modernization program for the Iranian National Airspace System  
 A78-52971  
 TRSB microwave landing system demonstration program at Shiraz, Iran  
 [AD-A055526] N78-33071

**ITERATIVE SOLUTION**  
 Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer  
 A78-51687

J

**J-85 ENGINE**  
 Blade row dynamic digital compression program. Volume 2: J85 circumferential distortion redistribution model, effect of Stator characteristics, and stage characteristics sensitivity study  
 [NASA-CR-134953] N78-33103

**JET AIRCRAFT**  
 Analysis of the engine fragment threat and the crush environment for small packages carried on US commercial jet aircraft  
 [SAND-78-0244C] N78-32078

**JET AIRCRAFT NOISE**  
 British Airways v. Port Authority - Its impact on aircraft noise regulation  
 A78-51128  
 Reflections on the economic implications of current noise abatement financing proposals  
 A78-51132  
 Reference aircraft for ICAO Working Group E  
 [NASA-CR-158929] N78-32087  
 Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes  
 [NASA-TM-78736] N78-33873  
 Noise-induced building vibrations caused by Concorde and conventional aircraft operations at Dulles and Kennedy International Airports  
 [NASA-TM-78769] N78-33874  
 Propagation of sound through a sheared flow  
 [NASA-CR-152196] N78-33876

**JET ENGINE FUELS**  
 Properties and evaporation of jet-engine fuels at pressurized conditions  
 A78-50594  
 Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
 A78-53371

**JET ENGINES**  
 Aircraft afterburner catalytic flame stabilization  
 A78-50570  
 Research and development of digital jet-engine controls  
 A78-50626  
 Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment  
 A78-50778  
 Non-extractive electro-optical measurement of jet-engine emissions  
 [AD-A056783] N78-33105

**JET EXHAUST**  
 Detecting abnormal turbine engine deterioration using electrostatic methods  
 A78-51946

**JET FLOW**  
 Film cooling of a gas turbine blade  
 A78-50580  
 Distortion of a flat jet in a bounded cross-stream in the presence of a wake space  
 A78-50779

## JET IMPINGEMENT

## SUBJECT INDEX

## JET IMPINGEMENT

Impingement cooling and its application to combustor design  
A78-50584

## JET MIXING FLOW

On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance  
A78-50582

Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow  
A78-50797

## JOINTS (JUNCTIONS)

Flaw growth in complex structure. Volume 1: Technical discussion  
[AD-A056372] N78-33483

## K

## KALMAN FILTERS

Suboptimal adaptive filtering of radio signals  
A78-53903

An extended Kalman filter fire control system against air-to-air missiles, volume 2  
[AD-A055637] N78-32091

Missile aerodynamic parameter and structure identification from flight test data  
[AD-A056343] N78-33055

## KEVLAR (TRADEMARK)

Impact tests on fibrous composite sandwich structures  
[NASA-TM-78719] N78-33152

## L

## L-1011 AIRCRAFT

The L-1011-500 long-range TriStar  
A78-52745

## LAMINAR BOUNDARY LAYER

Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point  
A78-50503

## LAMINAR FLOW

The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft  
[AIAA PAPER 78-96] A78-52626

Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations  
A78-52763

Experiments on the laminar flow in a rectangular streamwise corner  
A78-53765

## LANDING AIDS

Current and future navigation and landing systems  
A78-50265

The Turboclair process --- fog dispersal techniques  
A78-50449

A system concept of metering and spacing --- for aircraft landing approach  
A78-52968

## LANDING GEAR

Comparison of linear and nonlinear dampers for landing gears  
A78-51947

## LANDING SIMULATION

Visual flight simulator for the investigation of the learning process during aircraft landing  
A78-50302

## LANDING SPEED

Comparison of linear and nonlinear dampers for landing gears  
A78-51947

## LARGE SCALE INTEGRATION

A study of alternatives for VSTOL computer systems  
[AD-A056105] N78-33098

## LASER APPLICATIONS

Ignition of a liquid fuel under high intensity radiation --- laser weapon systems  
[AD-A054974] N78-32199

## LASER DOPPLER VELOCIMETERS

Laser-velocimeter surveys of merging vortices in a wind tunnel: Complete data and analysis  
[NASA-TM-78449] N78-33043

## LASER OUTPUTS

Titanium alloy ignition and combustion  
[AD-A055443] N78-32235

## LATENESS

Airline delay trends, 1972-1977  
[AD-A056867] N78-33062

## LAW (JURISPRUDENCE)

British Airways v. Port Authority - Its impact on aircraft noise regulation  
A78-51128

Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases  
A78-51129

Current state of the law in aircraft noise pollution control  
A78-51130

## LEADING EDGES

On moderate injection into a separated supersonic boundary layer, with reattachment  
A78-50896

Effects of wing leading-edge deflection on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration  
[NASA-TM-78787] N78-33047

Estimation of leading-edge thrust for supersonic wings of arbitrary planform  
[NASA-TP-1270] N78-33051

## LEAR JET AIRCRAFT

Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations  
[NASA-TP-1340] N78-33618

## LEGAL LIABILITY

International jurisdiction related to the Warsaw Convention during the years from 1974 to 1976. II  
A78-51822

The legal basis for security measures in air traffic  
A78-51823

## LIFT

An alternative treatment of lifting-line theory as a perturbation problem  
A78-50904

Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations  
[NASA-TM-78699] N78-32046

Development of a nonlinear switching function and its application to static lift characteristics of straight wings  
[NASA-TM-78737] N78-32051

## LIFT DRAG RATIO

Generalized area rules and integral theorems for hypersonic wing-bodies  
A78-50461

## LIFTING BODIES

Integral equation formulation for transonic flow past lifting wings  
A78-50459

Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application  
A78-50673

## LIFTING REENTRY VEHICLES

Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions  
[NASA-TP-1331] N78-33053

## LIFTING ROTORS

Nonlinear mathematical modeling of unsteady flow past a lifting propeller  
A78-51379

## LIGHT AIRCRAFT

The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear  
[AD-A056780] N78-33063

## LIGHT BEAMS

Self-focusing of a Gaussian beam in a supersonic gas flow  
A78-51387

## LIGHTNING

Two lightning-flash counter systems  
[AD-A057369] N78-33655

## LINE OF SIGHT COMMUNICATION

Applications for airborne digital communications  
A78-51896

SUBJECT INDEX

MATRICES (MATHEMATICS)

**LINEAR EQUATIONS**  
 Linear theory of supersonic flows past ruled bodies of three-dimensional configuration  
 A78-51443

**LINEAR PROGRAMMING**  
 Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport  
 A78-51598

**LINEAR SYSTEMS**  
 Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles  
 A78-51271

**LINEAR VIBRATION**  
 The response of a Hooke's-joint gyroscope to linear vibration  
 A78-52647

**LIQUID COOLING**  
 Energy economy with high temperature gasturbine  
 A78-50604

**LIQUID-GAS MIXTURES**  
 Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer  
 A78-50788

**LITHIUM COMPOUNDS**  
 Aluminoous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines  
 A78-50588

**LOAD DISTRIBUTION (FORCES)**  
 An alternative treatment of lifting-line theory as a perturbation problem  
 A78-50904

Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations  
 [NASA-TM-78E99] N78-32046

**LOADS (FORCES)**  
 Assessment of load alleviation devices installed on a power-augmented-ram wing over irregular waves  
 [AD-A045425] N78-33049

**LOGIC CIRCUITS**  
 B-1 EMUX automated logic diagrammer demonstration program  
 [AD-A056964] N78-33092

**LOGISTICS MANAGEMENT**  
 System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses  
 [AD-A056348] N78-33097

**LONGITUDINAL CONTROL**  
 Pitch rate flight control for the F-16 aircraft to improve air-to-air combat  
 [AD-A055417] N78-32107

**LORAN**  
 New organization of air traffic over the North Atlantic region  
 A78-51599

**LORAN C**  
 Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis  
 [AD-A056741] N78-33075

**LOW ASPECT RATIO**  
 Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins  
 N78-32058

**LOW FREQUENCIES**  
 Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes  
 [NASA-TM-78736] N78-33873

**LOW SPEED**  
 Wind tunnel investigations of model rotor noise at low tip speeds  
 N78-32828

**LOW VISIBILITY**  
 The Turboclair process --- fog dispersal techniques  
 A78-50449

**M**

**MAGNETIC LEVITATION VEHICLES**  
 Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles  
 A78-51271

Numerical calculation of magnetic levitation systems  
 A78-53805

**MAGNETIC SUSPENSION**  
 Numerical calculation of magnetic levitation systems  
 A78-53805

**MAGNETOHYDRODYNAMIC STABILITY**  
 Ballooning stability boundaries for the large-aspect-ratio tokamak  
 A78-53664

**MAINTENANCE**  
 Maintenance of gas turbine accessory equipment  
 A78-53175

**MAN MACHINE SYSTEMS**  
 System measurement improves computer responses to the controller --- for air traffic control  
 A78-52974

Advancements in ATC information displays and controller-computer interaction  
 A78-52975

**MANAGEMENT PLANNING**  
 Strategic or tactical air traffic control  
 A78-50447

**MANEUVERABILITY**  
 VTOL aircraft dynamics --- Russian book  
 A78-53428

**MANNED SPACE FLIGHT**  
 Solar power satellite construction and maintenance - The first large-scale use of man-in-space [AIAA PAPER 78-1637]  
 A78-51977

**MANUFACTURING**  
 New production methods gain --- in engine manufacturing for U.S. aerospace industry  
 A78-53239

**MAPPING**  
 Quantitative mapping by remote sensing of an ocean acid-waste dump  
 [NASA-TP-1275] N78-33617

**MARITIME SATELLITES**  
 Accuracy of ship-position determination by means of NNSS Transit  
 A78-51889

The use of Doppler-shift position lines in satellite navigation systems  
 A78-51890

**MASS TRANSFER**  
 Film cooling of a gas turbine blade  
 A78-50580

**MATHEMATICAL LOGIC**  
 Modifications and improvements in a structural optimization scheme based on an optimality criterion  
 [AD-A055941] N78-32088

**MATHEMATICAL MODELS**  
 Basic model concepts of fluid mechanics in wing theory  
 A78-50752

Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport  
 A78-51598

A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow  
 A78-52648

Development of a nonlinear switching function and its application to static lift characteristics of straight wings  
 [NASA-TM-78737] N78-32051

Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation  
 [AD-A055921] N78-32070

A validation of mathematical models for turbojet test cells  
 [AD-A055991] N78-32101

Dynamic analysis of flexible rotor-bearing systems using a model approach  
 N78-32424

A distribution model for the aerial application of granular agricultural particles  
 [NASA-CR-157745] N78-33048

Dynamical model of gust front  
 [PB-283425/7] N78-33692

**MATRICES (MATHEMATICS)**  
 DIGABCD: A program for calculating linear A, B, C, and D matrices from a nonlinear dynamic engine simulation  
 [NASA-TP-1295] N78-33110

- MELTING**  
Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies A78-50455
- MESOSPHERE**  
Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 A78-51338
- METAL BONDING**  
Diffusion brazing titanium sandwich structures A78-51524
- METAL FATIGUE**  
Fatigue crack growth of titanium fan blades A78-51744  
Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions --- airframe fatigue cracking [AD-A055483] N78-32504
- METAL SHEETS**  
Effect of aircraft loading program modifications on the fatigue life and damage cumulation. Part 1: Effect of load peaks in case of central hole sheet specimens [TAB-334-PT-1] N78-32462
- METAL SURFACES**  
Some effects of temperature on the erosion of metals A78-51594
- METEOROLOGICAL PARAMETERS**  
Feasibility of landing at an alternate airport due to visibility conditions A78-51341  
Some principles for studying reduced visibility conditions in regions around airports [NASA-TM-75152] N78-32642
- MICROPROCESSORS**  
Research and development of digital jet-engine controls A78-50626
- MICROSTRUCTURE**  
Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II A78-51600
- MICROWAVE ANTENNAS**  
The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft A78-53257
- MICROWAVE ATTENUATION**  
Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links A78-52360
- MICROWAVE LANDING SYSTEMS**  
Optimization of MLS receivers for multipath environments [NASA-CR-157736] N78-32080
- MICROWAVE OSCILLATORS**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators A78-51449
- MICROWAVE SCANNING BEAM LANDING SYSTEM**  
TPSB microwave landing system demonstration program at Shiraz, Iran [AD-A055526] N78-33071
- MIDAIR COLLISIONS**  
Preventing helicopter mid-air collisions with the proximity warning device A78-51223  
Annual review of aircraft accident data, US general aviation, calendar year 1976 [PB-281330/1] N78-33064
- MILITARY AVIATION**  
Applications for airborne digital communications A78-51896  
Physical characteristics: Aviation materiel --- Army test facilities and equipment [AD-A055803] N78-32093
- MILITARY HELICOPTERS**  
Physical characteristics: Aviation materiel --- Army test facilities and equipment [AD-A055803] N78-32093  
Automatic Inspection, Diagnostic and Prognostic AIDAPS: Test cell data collection and technical support [AD-A055385] N78-32109  
Noise requirements from a military point of view A78-32819
- MILITARY OPERATIONS**  
Boeing-747 aircraft with external cargo pod [NASA-CR-158932] N78-32047  
Wing planform geometry effects on large subsonic military transport airplanes [AD-A056124] N78-33088
- MILITARY TECHNOLOGY**  
The Navstar Global Positioning System /GPS/ A78-52952  
Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711] N78-32911
- MINICOMPUTERS**  
The direct access radar channel - A distributed minicomputer system A78-52976
- MISSILE CONFIGURATIONS**  
Missile aerodynamic parameter and structure identification from flight test data [AD-A056343] N78-33055  
Nonlinear rolling motion analysis of a Canard-controlled missile configuration at angles of attack from 0 to 30 degrees in incompressible flow [AD-A056695] N78-33132
- MISSILE DEFENSE**  
Key beam weapons tests slated --- for aircraft carrier particle beam defense against cruise missiles A78-53238
- MISSILE SYSTEMS**  
Encyclopedia of US Air Force aircraft and missile systems. Volume 1: Post-World War II fighters 1945 - 1973 [AD-A057002] N78-33036
- MISSILES**  
Hypersonic airbreathing missile [NASA-CASE-LAR-12264-1] N78-32168  
A method for validating missile system simulation models [AD-A055689] N78-32169
- MONITORS**  
Automatic Inspection, Diagnostic and Prognostic AIDAPS: Test cell data collection and technical support [AD-A055385] N78-32109
- MOTOR VEHICLES**  
Development of the experimental gas turbine bus A78-50601  
Advantages of 3-shaft KTT gas turbine configurations for automotive applications A78-50602
- MOVING TARGET INDICATORS**  
Moving target detector /MTD/ radar system A78-52963
- MULTIENGINE VEHICLES**  
The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear [AD-A056780] N78-33063
- MULTIMISSION MODULAR SPACECRAFT**  
Spacelab hardware update [AAS PAPER 78-005] A78-53614
- MULTIPATH TRANSMISSION**  
Optimization of MLS receivers for multipath environments [NASA-CR-157736] N78-32080
- MULTIPHASE FLOW**  
The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting N78-32041
- MULTIPLEXING**  
B-1 EMUX automated logic diagrammer demonstration program [AD-A056964] N78-33092

## N

- NASA PROGRAMS**  
OF-12 experiments symposium, volume 1 [NASA-CP-2054] N78-32055  
Overview of the NASA YF-12 program N78-32056  
NASA aviation safety reporting system [NASA-TM-78511] N78-32075

## SUBJECT INDEX

## NOZZLE FLOW

Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TM-79009]	N78-33102	Noise requirements from a military point of view	N78-32819
<b>NATIONAL AIRSPACE UTILIZATION SYSTEM</b>		The impact of urban operations on helicopter noise requirements	N78-32820
Modernization program for the Iranian National Airspace System	A78-52971	Theoretical models of helicopter rotor noise	N78-32822
<b>NATIONAL AVIATION SYSTEM</b>		Noise due to rotor-turbulence interaction	N78-32823
Aviation futures to the year 2000	A78-52966	Annoyance due to the interaction of community noise sources	N78-33613
Aircraft developments that hold promise for increased compatibility with an advanced ATC system	A78-52967	Commercial airport operations and community noise criteria [AD-A057451]	N78-33615
<b>NAVIGATION AIDS</b>		Urban noise pollution. A bibliography with abstracts [NTIS/PS-78/0686/2]	N78-33634
Aircraft guidance and flight safety - Current and future problems for research and industry	A78-50263	<b>NOISE PROPAGATION</b>	
Current and future navigation and landing systems	A78-50265	Theory on acoustic sources	N78-32824
Strategic or tactical air traffic control	A78-50447	A study of the noise radiation from four helicopter rotor blades --- tests in Ames 40 by 20 foot wind tunnel	N78-32835
<b>NAVIGATION SATELLITES</b>		<b>NOISE REDUCTION</b>	
The use of Doppler-shift position lines in satellite navigation systems	A78-51890	A study of fan-rotating noise reduction	A78-50620
Satellites for position determination	A78-53911	Noise control analysis for gas turbine installations	A78-50621
<b>NAVSTAR SATELLITES</b>		Broadband noise in axial-fan blade cascade	A78-50650
The Navstar Global Positioning System /GPS/	A78-52952	Impact of federal noise abatement policy on aircraft financing	A78-51131
<b>NAVY</b>		Reflections on the economic implications of current noise abatement financing proposals	A78-51132
Naval structural materials - Requirements, issues, and opportunities	A78-51149	Reference aircraft for ICAO Working Group E [NASA-CR-158929]	N78-32087
The Navy's approach /Air traffic control/	A78-52969	Laboratory and community studies of aircraft noise effects [NASA-TM-78776]	N78-32815
Aircraft configurations for high-speed ships [AD-A055540]	N78-32092	Prediction and reduction of rotor broadband noise	N78-32821
<b>NETHERLANDS</b>		Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction	N78-32834
Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978	A78-52447	<b>NOISE SPECTRA</b>	
<b>NEWTON THEORY</b>		Minimum on-axis noise for a propeller or helicopter rotor	A78-51949
Hypersonic flows	N78-32124	<b>NONDESTRUCTIVE TESTS</b>	
<b>NICKEL ALLOYS</b>		Piezoelectric polymer transducers for detection of structural defects in aircraft [AD-A055729]	N78-32903
Reaction diffusion in the NiCrAl and CoCrAl systems	A78-53063	<b>NONEQUILIBRIUM FLOW</b>	
Evaluation of cyclic behavior of aircraft turbine disk alloys [NASA-CR-159433]	N78-33478	Similarity considerations for nonequilibrium nozzle flows	A78-51163
<b>NITRIC OXIDE</b>		<b>NONLINEAR SYSTEMS</b>	
Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels	A78-50598	Nonlinear vibrations of an asymmetric flight vehicle induced oscillations [AD-A056982]	N78-33120
<b>NOISE GENERATORS</b>		<b>NONUNIFORM FLOW</b>	
Some considerations on pure tone noise generation in an axial-flow fan	A78-50619	Operation of an axial-flow compressor in the case of radially nonuniform inlet flow	A78-50793
Noise from separated flow of flat plate	A78-50622	<b>NORMAL SHOCK WAVES</b>	
Noise due to rotor-turbulence interaction	N78-32823	Turbulent boundary layer separation on a curved wall with normal compression shock	A78-51155
<b>NOISE INTENSITY</b>		<b>NOSE CONES</b>	
Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine	N78-32673	Viscous carbon dioxide flow past a blunted cone	A78-51444
Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes [NASA-TM-78736]	N78-33873	<b>NOZZLE EFFICIENCY</b>	
<b>NOISE MEASUREMENT</b>		Effect of nozzle inclination on the efficiency of a single-nozzle microturbine	A78-51400
Noise-induced building vibrations caused by Concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769]	N78-33874	<b>NOZZLE FLOW</b>	
<b>NOISE POLLUTION</b>		Calculations of flows in flat asymmetric nozzles for overexpanded conditions	A78-50782
Current state of the law in aircraft noise pollution control	A78-51130	Similarity considerations for nonequilibrium nozzle flows	A78-51163
Helicopter external noise requirements: FAA perspective	N78-32817		
Helicopter noise regulations: An industry perspective	N78-32818		



## NOZZLE INSERTS

## SUBJECT INDEX

## NOZZLE INSERTS

- The aerodynamic performance of a freely hinged door between two flows --- for supersonic transport propulsion nozzles  
A78-51464
- NOZZLE WALLS**  
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface  
A78-50791
- NUMERICAL ANALYSIS**  
Gesellschaft fuer angewandte Mathematik und Mechanik, Annual Scientific Meeting, Lyngby, Denmark, May 31-June 3, 1977, Reports. Part 2  
A78-51151
- Calculation of local three-dimensional supersonic fields  
A78-51184
- Mathematical analysis of impact erosion --- of supersonic flight vehicles  
A78-51711
- NUMERICAL CONTROL**  
Research and development of digital jet-engine controls  
A78-50626
- NUMERICAL FLOW VISUALIZATION**  
Nonlinear mathematical modeling of unsteady flow past a lifting propeller  
A78-51379
- Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space  
A78-51448

## O

- O RING SEALS**  
Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II  
A78-51600
- High temperature elastomers in gas turbine engine fuel sealing  
A78-52686
- OBLIQUE SHOCK WAVES**  
Shock obliquity effect on transonic shock-boundary layer interaction  
A78-51185
- OCEAN SURFACE**  
Quantitative mapping by remote sensing of an ocean acid-waste dump  
[NASA-TP-1275]  
N78-33617
- Ogee SHAPE**  
Full-scale testing of an Ogee tip rotor --- in the Langley whirl tower  
N78-32830
- OMEGA NAVIGATION SYSTEM**  
Ioran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis  
[AD-A056741]  
N78-33075
- ONBOARD EQUIPMENT**  
AIDS - Aircraft-integrated-data-system  
A78-53675
- OPERATIONS RESEARCH**  
Estimating the average taxi speed of departing aircraft  
A78-50450
- Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project  
[NASA-TM-78774]  
N78-33061
- OPTICAL EQUIPMENT**  
Optical simulator with a holographic component --- infinity display system  
[AIAA 78-1581]  
A78-50671
- OPTICAL MEASURING INSTRUMENTS**  
Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation  
A78-50474
- OPTICAL WAVEGUIDES**  
Fiber optics, volume 2. Citations from the NTIS data base  
[NTIS/PS-78/0713/4]  
N78-33918
- OPTIMAL CONTROL**  
Optimization and differential games  
A78-52401

- Optimal control of aircraft powerplant --- Russian book  
A78-53119
- OPTIMIZATION**  
Search-method optimization of the balancing of flexible rotors of gas turbine engines  
A78-50795
- Methodology questions involved in systems engineering for devising an optimum radio-engineering system for trajectory measurements --- of space vehicles  
A78-53253
- The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft  
A78-53257
- Optimization of MLS receivers for multipath environments  
[NASA-CR-157736]  
N78-32080
- Modifications and improvements in a structural optimization scheme based on an optimality criterion  
[AD-A055941]  
N78-32088
- ORBITAL ASSEMBLY**  
Solar power satellite construction and maintenance - The first large-scale use of man-in-space  
[AIAA PAPER 78-1637]  
A78-51977
- OSCILLATING FLOW**  
Model calculations of the generation of self-excited oscillations in a supersonic duct with stepwise widening of cross section  
A78-51165
- Some mixed boundary value problems for subsonic flow past oscillating profiles  
A78-51198
- Investigations of the intensity of oscillations of the boundary of a turbulent wake  
A78-51402
- Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow  
A78-53087
- OZONOMETRY**  
Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations  
[NASA-TP-1340]  
N78-33618

## P

- PANEL FLUTTER**  
Density of motions in the flutter of infinite plates  
A78-52932
- PANELS**  
An improved higher order panel method for linearized supersonic flow  
[AIAA PAPER 78-15]  
A78-52628
- PARABOLIC ANTENNAS**  
Portable earth station antenna study system  
[AD-A054791]  
N78-32321
- PARACHUTE DESCENT**  
Compressibility effects on parachute transient pressures  
A78-51950
- From space on a parachute  
[NASA-TM-75577]  
N78-33140
- PARACHUTE FABRICS**  
The theory of fabric porosity as applied to parachutes in incompressible flow  
A78-51466
- PARTICLE BEAMS**  
Key beam weapons tests slated --- for aircraft carrier particle beam defense against cruise missiles  
A78-53238
- PARTICLE COLLISIONS**  
Aerodynamic effects on erosion in turbomachinery  
A78-50635
- PARTICLE DIFFUSION**  
Reaction diffusion in the NiCrAl and CoCrAl systems  
A78-53063
- PARTICLE EMISSION**  
Results and status of the NASA aircraft engine emission reduction technology programs  
[NASA-TM-79009]  
N78-33102
- Non-extractive electro-optical measurement of jet-engine emissions  
[AD-A056783]  
N78-33105

- PARTICLE MOTION**  
Mathematical analysis of impact erosion --- of supersonic flight vehicles  
A78-51711
- PARTICLE SIZE DISTRIBUTION**  
A distribution model for the aerial application of granular agricultural particles  
[NASA-CR-157745] N78-33048
- PARTICULATE SAMPLING**  
Turbine engine particulate emission characterization, phase 2  
[AD-A057370] N78-33106
- PASSENGER AIRCRAFT**  
European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/  
A78-51520
- Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport  
A78-51598
- Fire resistivity and toxicity studies of candidate aircraft passenger seat materials  
A78-51838
- Boeing launches the 767  
A78-52244
- The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation  
[NASA-TM-75535] N78-32043
- PASSENGERS**  
Improved passenger flow through simulation  
A78-50437
- PAYLOADS**  
Prospects for a civil/military transport aircraft  
[NASA-TM-78724] N78-33060
- Preliminary design characteristics of a subsonic business jet concept employing laminar flow control  
[NASA-CR-158958] N78-33087
- PERFORMANCE PREDICTION**  
Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath  
A78-50574
- Broadband noise in axial-fan blade cascade  
A78-50650
- Avionics performance analysis: A historical review and a current assessment of flight instrumentation and control systems in civil aviation  
[NASA-CR-145378] N78-32094
- A validation of mathematical models for turbojet test cells  
[AD-A055991] N78-32101
- Mechanization of blended A sub N mode for CCV YF-16  
[AD-A056553] N78-33089
- PERFORMANCE TESTS**  
Design and verification of a turbofan Swirl augmentor  
A78-50564
- Recent status on research and development of FJR 710 turbofan engine --- for subsonic civil transport aircraft  
A78-50577
- High temperature elastomers in gas turbine engine fuel sealing  
A78-52686
- Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85  
[NASA-CR-3047] N78-32066
- Aircraft defogging and defrosting (transparent area)  
[AD-A056976] N78-33094
- PERTURBATION THEORY**  
An alternative treatment of lifting-line theory as a perturbation problem  
A78-50904
- PHENOLS**  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371
- PHOSPHORUS**  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371
- PHOTOCHEMICAL REACTIONS**  
Feasibility of an orbital simulator of stratospheric photochemistry  
A78-51816
- PHYSICAL PROPERTIES**  
Properties and evaporation of jet-engine fuels at pressurized conditions  
A78-50594
- Physical characteristics: Aviation materiel --- Army test facilities and equipment  
[AD-A055803] N78-32093
- PIEZOELECTRIC TRANSDUCERS**  
Piezoelectric polymer transducers for detection of structural defects in aircraft  
[AD-A055729] N78-32903
- PILOT PERFORMANCE**  
A theory for longitudinal short-period pilot induced oscillations  
[AD-A056982] N78-33120
- PILOT TRAINING**  
Visual flight simulator for the investigation of the learning process during aircraft landing  
A78-50302
- PIPE FLOW**  
Axisymmetric unsteady flow past obstacles in a cylindrical tube  
A78-51441
- PISTON ENGINES**  
Analysis of a high speed ring valve system for a single cylinder reciprocating compressor  
N78-33442
- PITCH (INCLINATION)**  
Effect of nozzle inclination on the efficiency of a single-nozzle microturbine  
A78-51400
- A theory for longitudinal short-period pilot induced oscillations  
[AD-A056982] N78-33120
- PLASMA DIAGNOSTICS**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators  
A78-51449
- PLENUM CHAMBERS**  
Duct effects on the heave stability of plenum air cushions  
A78-52616
- PLUMES**  
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing  
[NASA-CR-150826] N78-33134
- PODS (EXTERNAL STORES)**  
Boeing-747 aircraft with external cargo pod  
[NASA-CR-158932] N78-32047
- POLLUTION CONTROL**  
Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels  
A78-50598
- Development of the experimental gas turbine bus  
A78-50601
- Current state of the law in aircraft noise pollution control  
A78-51130
- Aircraft gas turbine low-power emissions reduction technology program  
[NASA-CR-135434] N78-32097
- Helicopter external noise requirements: FAA perspective  
N78-32817
- Helicopter noise regulations: An industry perspective  
N78-32818
- Noise requirements from a military point of view  
N78-32819
- The impact of urban operations on helicopter noise requirements  
N78-32820
- Theoretical models of helicopter rotor noise  
N78-32822
- Pollution Reduction Technology Program for small jet aircraft engines, phase 2  
[NASA-CR-159415] N78-33104
- POLLUTION MONITORING**  
Concorde emissions at Dulles International Airport - Results of measurements  
A78-53050

POROSITY

SUBJECT INDEX

POROSITY

The theory of fabric porosity as applied to parachutes in incompressible flow  
A78-51466

POROUS MATERIALS

Heat transfer augmentation in flows over and normal to high-porosity perforated surfaces  
N78-32371

POROUS PLATES

Three dimensional free convection flow and heat transfer along a porous vertical plate  
A78-50288

PORTABLE EQUIPMENT

Portable earth station antenna study system [AD-A054791]  
N78-32321

POSITION (LOCATION)

The Navstar Global Positioning System /GPS/  
Satellites for position determination  
A78-52952  
A78-53911

POSITION ERRORS

Precision approach monitoring and guidance using interferometer techniques  
A78-51551

POTENTIAL FLOW

Calculation of cascade flow by means of spline fit singularity  
A78-50606  
Irrotational flow around a spherical segment --- aerodynamic brakes application  
A78-51688

Computation of two-dimensional potential flow using elementary vortex distributions  
A78-51948  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows [AIAA PAPER 78-229]  
A78-52630

POTENTIOMETERS

Angle detector [NASA-CASE-ARC-11036-1]  
N78-32395

POWDER METALLURGY

Evaluation of cyclic behavior of aircraft turbine disk alloys [NASA-CR-159433]  
N78-33478

PREDICTION ANALYSIS TECHNIQUES

Prediction and reduction of rotor broadband noise  
N78-32821  
Theoretical models of helicopter rotor noise  
N78-32822

Helicopter external noise prediction and correlation with flight test  
N78-32829  
Improved methods for calculating the thickness noise  
N78-32832

PREDICTIONS

Technical evaluation report on the Fluid Dynamics Panel Symposium on Prediction of Aerodynamic Loading [AGARD-AR-125]  
N78-32074

PREMIXED FLAMES

A study on a premixed combustor for a vehicular gas turbine  
A78-50592

PRESSURE DISTRIBUTION

Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613  
Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application  
A78-50673

Some comments on sonic boom focusing  
A78-51172

Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures  
A78-51968

Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers  
N78-32063

Technical evaluation report on the Fluid Dynamics Panel Symposium on Prediction of Aerodynamic Loading [AGARD-AR-125]  
N78-32074

Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor [NASA-TP-1337]  
N78-33108

PRESSURE DRAG

Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3  
N78-32064

PRESSURE EFFECTS

Properties and evaporation of jet-engine fuels at pressurized conditions  
A78-50594

PRESSURE GRADIENTS

On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities  
A78-52043

PRESSURE MEASUREMENTS

Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel  
A78-50303  
Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3  
N78-32064

Static pressure orifice system testing and apparatus [NASA-CASE-LAR-12269-1]  
N78-33123

PRESSURE OSCILLATIONS

Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures  
A78-50780

PRESSURE RECOVERY

Changes in conical diffuser performance by swirl addition  
A78-51463

PRESSURE SENSORS

Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions [NASA-TP-1331]  
N78-33053

PRODUCT DEVELOPMENT

Engineering and development program plan: Discrete Address Beacon System (DABS) [AD-A057122]  
N78-33073  
Engineering and development program plan: Advanced Integrated Flight Systems (AIFS) [AD-A056770]  
N78-33119

PRODUCTION ENGINEERING

New production methods gain --- in engine manufacturing for U.S. aerospace industry  
A78-53239

PRODUCTION PLANNING

Helicopter manufacturing technology. III - Future manufacturing technologies  
A78-53174

PROJECT MANAGEMENT

Overview of the NASA YF-12 program  
N78-32056

PELLANT ADDITIVES

Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371

PROPELLER BLADES

Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85 [NASA-CR-3047]  
N78-32066  
The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833

PROPELLERS

Nonlinear mathematical modeling of unsteady flow past a lifting propeller  
A78-51379

Minimum on-axis noise for a propeller or helicopter rotor  
A78-51949

A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow  
A78-52648

PROPULSION SYSTEM PERFORMANCE

Future large civil turbofans and powerplants /Seventeenth Short Bros. Commemorative Lecture/  
A78-51519  
Large-scale static tests of a tilt-nacelle V/STOL-propulsion/attitude control system [NASA-CR-152181]  
N78-32098

**PROPULSIVE EFFICIENCY**  
Effect of nozzle inclination on the efficiency of a single-nozzle microturbine  
A78-51400

**PROTECTIVE COATINGS**  
Reaction diffusion in the NiCrAl and CoCrAl systems  
A78-53063

**PSYCHOLOGICAL SETS**  
The missed approach --- psychological factors in aircraft instrument landing decisions  
A78-51517

**PURSUIT TRACKING**  
Optimization and differential games  
A78-52401

**Q**

**QUADRUPOLES**  
The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833

**QUANTITATIVE ANALYSIS**  
Quantitative mapping by remote sensing of an ocean acid-waste dump  
[NASA-TP-1275]  
N78-33617

**R**

**RADAR APPROACH CONTROL**  
Precision approach monitoring and guidance using interferometer techniques  
A78-51551

**RADAR BEACONS**  
Airport traffic surveillance  
A78-52957  
System definition and investigation of the on site processing of en route sensor signals.  
Addendum: Investigation into possible en route on site beacon ring around discriminants  
[AD-A056941]  
N78-33070

**RADAR DATA**  
Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control  
A78-52954  
The APTS III Umbrella - Concepts and applications --- for collecting and distributing aircraft positional data within ATC radar coverage areas  
A78-52958

**RADAR DETECTION**  
Moving target detector /MTD/ radar system  
A78-52963

**RADAR NAVIGATION**  
Airline contributions to better air traffic control  
A78-51518

**RADAR RECEIVERS**  
Optimization of MLS receivers for multipath environments  
[NASA-CR-157736]  
N78-32080

**RADAR SIGNATURES**  
System definition and investigation of the on site processing of en route sensor signals.  
Addendum: Investigation into possible en route on site beacon ring around discriminants  
[AD-A056941]  
N78-33070

**RADIAL FLOW**  
Operation of an axial-flow compressor in the case of radially nonuniform inlet flow  
A78-50793

**RADIO ANTENNAS**  
Portable earth station antenna study system  
[AD-A054791]  
N78-32321

**RADIO COMMUNICATION**  
Applications for airborne digital communications  
A78-51896

**RADIO NAVIGATION**  
The optimum shape of the aperture of an antenna array --- for radio navigation of aircraft  
A78-53257

**RADIO RELAY SYSTEMS**  
Earth-to-orbital station radio bridge  
N78-33019

**RADIO SIGNALS**  
Suboptimal adaptive filtering of radio signals  
A78-53903

**RADIO TRACKING**  
Methodology questions involved in systems engineering for devising an optimum radio-engineering system for trajectory measurements --- of space vehicles  
A78-53253

**RADIO TRANSMITTERS**  
Portable earth station antenna study system  
[AD-A054791]  
N78-32321

**RADIOMETERS**  
An aircraft radiometer front end, addendum  
[NASA-CR-157777]  
N78-33405

**RADOMES**  
Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book  
A78-53426

**RAIL TRANSPORTATION**  
Numerical calculation of magnetic levitation systems  
A78-53805

**RAMJET ENGINES**  
Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine  
A78-52926  
Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1]  
N78-32168

**RAREFIED GAS DYNAMICS**  
An algorithm for complex study of the aerodynamic characteristics of spacecraft  
A78-53506

**REAL GASES**  
Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel  
A78-50304

**REAL TIME OPERATION**  
Research and development of digital jet-engine controls  
A78-50626  
Area navigation - Fast-time/real-time simulations in a high-altitude center environment  
A78-52977  
Vortex advisory system simulation of Chicago O'Hare Airport  
[AD-A057112]  
N78-33069

**REATTACHED FLOW**  
On moderate injection into a separated supersonic boundary layer, with reattachment  
A78-50896  
The attachment of a ventilated plane jet to an inclined plane wall  
A78-53764  
Inverse boundary-layer theory and comparison with experiment  
[NASA-TP-1208]  
N78-32385

**RECIRCULATIVE FLUID FLOW**  
A research on centrifugal compressor for small gas turbine - The effect of recirculating flow --- automobile engines  
A78-50612

**RECORDING INSTRUMENTS**  
Two lightning-flash counter systems  
[AD-A057369]  
N78-33655

**RECTANGULAR WINGS**  
Development of a nonlinear switching function and its application to static lift characteristics of straight wings  
[NASA-TR-78737]  
N78-32051

**REDUCED GRAVITY**  
Assess II - A simulated mission of Spacelab  
A78-50276

**REDUNDANT COMPONENTS**  
Strapdown system redundancy management flight demonstration --- vertical takeoff and landing aircraft  
[NASA-CR-1453561]  
N78-32079  
Redundant disc  
[NASA-CASE-LEW-12496-1]  
N78-33101

**REENTRY GUIDANCE**  
Simple numerical model for calculation of entry vehicle trim response  
A78-51284

**REENTRY VEHICLES**  
Simple numerical model for calculation of entry vehicle trim response  
A78-51284  
Hardened reentry vehicle development program. Erosion-resistant nosetip technology  
[AD-A056390]  
N78-33128

## REFRACTORY MATERIALS

## SUBJECT INDEX

<b>REFRACTORY MATERIALS</b>			
High temperature elastomers in gas turbine engine fuel sealing			
	A78-52686		
<b>REGENERATORS</b>			
The development of a regenerator seal for vehicular use --- for automatic gas turbine engines	A78-50587		
Aluminous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines	A78-50588		
<b>REGULATIONS</b>			
And now 'the deregulators' - When will they learn	A78-51127		
British Airways v. Port Authority - Its impact on aircraft noise regulation	A78-51128		
Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases	A78-51129		
Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978	A78-52447		
The changing environment of international air commerce	A78-52448		
<b>RELIABILITY ENGINEERING</b>			
Improved safety in air transportation through the extension and automation of flight safety systems	A78-50264		
<b>REMOTE SENSORS</b>			
Infrared passbands for clear-air-turbulence detection	A78-51971		
Quantitative mapping by remote sensing of an ocean acid-waste dump [NASA-TP-1275]	N78-33617		
<b>REMOTELY PILOTTED VEHICLES</b>			
A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis	A78-52498		
<b>RESEARCH AIRCRAFT</b>			
YF-12 experiments symposium, volume 1 [NASA-CP-2054]	N78-32055		
Overview of the NASA YF-12 program	N78-32056		
<b>RESEARCH AND DEVELOPMENT</b>			
The potential of advanced technology for aircraft structures /10th J. D. North Memorial Lecture/	A78-50400		
Recent status on research and development of FJR 710 turbofan engine --- for subsonic civil transport aircraft	A78-50577		
Research and development of digital jet-engine controls	A78-50626		
Naval structural materials - Requirements, issues, and opportunities	A78-51149		
Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711]	N78-32911		
Translations on USSR science and technology: Physical science and technology, no. 42 [JPRS-71612]	N78-33015		
Translations on USSR science and technology: Physical science and technology, no. 44 [JPRS-71659]	N78-33024		
<b>RESIDENTIAL AREAS</b>			
Commercial airport operations and community noise criteria [AD-A057451]	N78-33615		
<b>RESONANT FREQUENCIES</b>			
Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure	A78-50717		
The response of a Poole's-joint gyroscope to linear vibration	A78-52647		
<b>RETROFITTING</b>			
The shape of airliners to come	A78-51817		
<b>REYNOLDS NUMBER</b>			
Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers	A78-51437		
M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests [AD-A055952]	N78-32072		
<b>REYNOLDS STRESS</b>			
M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests [AD-A055952]	N78-32072		
<b>RIGID ROTORS</b>			
Natural vibrations of a rigid rotor mounted on elastic ball bearings	A78-51015		
<b>RINGS</b>			
Analysis of a high speed ring valve system for a single cylinder reciprocating compressor	N78-33442		
<b>ROCKET ENGINES</b>			
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface	A78-50791		
<b>ROCKET EXHAUST</b>			
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing [NASA-CR-150826]	N78-33134		
<b>ROCKET VEHICLES</b>			
Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit	A78-52578		
Rocket structures	N78-32123		
<b>ROLLER BEARINGS</b>			
Investigation of the heat regime of gas turbine engine bearings --- Russian book	A78-53431		
<b>ROLLING MOMENTS</b>			
Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations [NASA-TM-78699]	N78-32046		
Aerodynamic roll characteristics of a 0.00548 scale 146-inch solid rocket booster reentry configuration (MSFC Model Number 486) over a portion of the reentry flight regime in the NASA MSF 14-inch trisonic wind tunnel [NASA-TM-78195]	N78-32173		
<b>ROTARY WINGS</b>			
Minimum on-axis noise for a propeller or helicopter rotor	A78-51949		
Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation [AD-A055921]	N78-32070		
Rotor wake effects on hub/pylon flow. Volume 2: Program SHAPES user's manual [AD-A055767]	N78-32071		
Prediction and reduction of rotor broadband noise	N78-32821		
Theoretical models of helicopter rotor noise	N78-32822		
Noise due to rotor-turbulence interaction	N78-32823		
Theory on acoustic sources	N78-32824		
Potential acoustic benefits of circulation control rotors	N78-32825		
Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- Langley anechoic noise facility	N78-32827		
Wind tunnel investigations of model rotor noise at low tip speeds	N78-32828		
Helicopter external noise prediction and correlation with flight test	N78-32829		
Full-scale testing of an Ogee tip rotor. --- in the Langley whirl tower	N78-32830		

## SUBJECT INDEX

## SEPARATED FLOW

- Hovering impulsive noise: Some measured and calculated results  
N78-32831
- Improved methods for calculating the thickness noise  
N78-32832
- The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833
- Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction  
N78-32834
- A study of the noise radiation from four helicopter rotor blades --- tests in Ames 40 by 20 foot wind tunnel  
N78-32835
- Theoretical study of multicyclic control of a controllable twist rotor  
[NASA-CR-151959]  
N78-33085
- ROTATING DISKS**  
Redundant disc  
[NASA-CASE-LEW-12496-1]  
N78-33101
- ROTATING GENERATORS**  
A study of the effect of the rotor coil couplings of a synchronous machine on its predicted transient response  
N78-33330
- ROTOR AERODYNAMICS**  
Radial equilibrium of flows in shock-in-rotor type rotors  
A78-50611
- Search-method optimization of the balancing of flexible rotors of gas turbine engines  
A78-50795
- Nonlinear mathematical modeling of unsteady flow past a lifting propeller  
A78-51379
- Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation  
A78-53095
- ROTOR BLADES**  
Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619
- Rotor wake effects on hub/pylon flow. Volume 2: Program SHAPES user's manual  
[AD-A055767]  
N78-32071
- ROTOR BLADES (TURBOMACHINERY)**  
Investigation of flow in centrifugal impeller with tandem inducer  
A78-50614
- Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation  
A78-50617
- A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade  
A78-50618
- ROTORS**  
Rotary combustion engine hydrocarbon source studies  
A78-50561
- The response of a Hooke's-joint gyroscope to linear vibration  
A78-52647
- Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology  
[AD-A055276]  
N78-32100
- Dynamic analysis of flexible rotor-bearing systems using a model approach  
N78-32424
- Transient dynamics of a flexible rotor with squeeze film dampers  
[NASA-CR-3050]  
N78-32433
- ROUTES**  
Stochastic properties of conflict frequency at multiple connected air route intersections  
A78-51945
- RUNWAY CONDITIONS**  
Sounding the runway  
A78-50822
- RUNWAYS**  
Dynamic response of aircraft to unloaded and loaded pavement profiles  
[AD-A055703]  
N78-32090
- Chevron cutting: Experiment with new runway mixtures  
[NASA-TM-75448]  
N78-32427
- Parameters of future ATC systems relating to airport capacity/delay  
[AD-A057059]  
N78-33068
- S**
- SAINT VENANT PRINCIPLE**  
Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel  
A78-50304
- SALT SPRAY TESTS**  
Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite  
[AD-A055714]  
N78-33197
- SANDWICH STRUCTURES**  
Diffusion brazing titanium sandwich structures  
A78-51524
- Impact tests on fibrous composite sandwich structures  
[NASA-TM-78719]  
N78-33152
- SATELLITE NAVIGATION SYSTEMS**  
Accuracy of ship-position determination by means of NNSS Transit  
A78-51889
- SATELLITE SOLAR POWER STATIONS**  
Solar power satellite construction and maintenance - The first large-scale use of man-in-space  
[AIAA PAPER 78-1637]  
A78-51977
- SATELLITE-BORNE INSTRUMENTS**  
Satellites for position determination  
A78-53911
- SCALE EFFECT**  
Experimental investigation on the scale effects of gas turbine combustion chambers  
A78-50591
- SCALE MODELS**  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage --- conducted in the Langley V/STOL wind tunnel  
[NASA-TM-74033]  
N78-32049
- SCIENCE**  
Engineering and Scientific Data Management  
[NASA-CP-2055]  
N78-33776
- SEALING**  
Compressor seal rub energetics study  
[NASA-CR-159424]  
N78-32096
- SEALS (STOPPERS)**  
The development of a regenerator seal for vehicular use --- for automatic gas turbine engines  
A78-50587
- Technical evaluation report on the 51st(B) PEP Specialists' Meeting of the Propulsion and Energetics Panel on Seal Technology in Gas Turbine engines  
[AGARD-AR-123]  
N78-32104
- SEATS**  
Fire resistivity and toxicity studies of candidate aircraft passenger seat materials  
A78-51838
- SECURITY**  
The legal basis for security measures in air traffic  
A78-51823
- SELF FOCUSING**  
Self-focusing of a Gaussian beam in a supersonic gas flow  
A78-51387
- SELF OSCILLATION**  
Model calculations of the generation of self-excited oscillations in a supersonic duct with stepwise widening of cross section  
A78-51165
- A theory for longitudinal short-period pilot induced oscillations  
[AD-A056982]  
N78-33120
- SEPARATED FLOW**  
Investigation of flow in centrifugal impeller with tandem inducer  
A78-50614
- Noise from separated flow of flat plate  
A78-50622
- Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation  
[AD-A055921]  
N78-32070
- Inverse boundary-layer theory and comparison with experiment  
[NASA-TP-1208]  
N78-32385

## SHEAR FLOW

## SUBJECT INDEX

**SHEAR FLOW**  
The force on a small sphere in slow viscous flow  
A78-52175

Propagation of sound through a sheared flow  
[NASA-CR-152196] N78-33876

**SHEAR STRESS**  
Three-dimensional and relaminarization effects in  
turbine blade cascades - An experimental study  
A78-50608

Shear buckling of corrugated plates with  
quasi-sinusoidal corrugations  
N78-32458

**SHELL STABILITY**  
Natural frequencies of a soft heavy cylindrical  
shell under the effect of internal pressure  
A78-50717

**SHELL THEORY**  
Three-dimensional boundary layer theory using  
shell geometrical concepts  
A78-51176

**SHIPS**  
Naval structural materials - Requirements, issues,  
and opportunities  
A78-51149

**SHOCK ABSORBERS**  
Comparison of linear and nonlinear dampers for  
landing gears  
A78-51947

**SHOCK LAYERS**  
Shock obliquity effect on transonic shock-boundary  
layer interaction  
A78-51185

Three dimensional fully viscous shock-layer flows  
over sphere-cones at high altitudes and angles  
of attack  
N78-32040

**SHOCK WAVE CONTROL**  
Radial equilibrium of flows in shock-in-rotor type  
rotors  
A78-50611

**SHOCK WAVE INTERACTION**  
Approximate transonic profile flow at incidence  
with shock  
A78-51096

Shock obliquity effect on transonic shock-boundary  
layer interaction  
A78-51195

**SHOCK WAVE LUMINESCENCE**  
Calculation of viscous radiant gas flows ---  
hypersonic reentry  
A78-53556

**SHOCK WAVE PROPAGATION**  
Some comments on sonic boom focusing  
A78-51172

**SHOCK WAVES**  
The flow field calculation in supersonic  
mixed-compression aircraft inlets at angle of  
attack using the three-dimensional method of  
characteristics with discrete shock wave fitting  
N78-32041

**SHORT HAUL AIRCRAFT**  
The short-haul jet designed with ATC in mind  
A78-51516

**SHORT TAKEOFF AIRCRAFT**  
The attachment of a ventilated plane jet to an  
inclined plane wall  
A78-53764

**SHROUDS**  
Pressure at shroud and flow in a supersonic  
centrifugal impeller  
A78-50613

**SIDE-LOOKING RADAR**  
A modular side looking airborne radar to fulfill a  
multitude of surveillance missions  
A78-51543

**SIGNAL PROCESSING**  
Suboptimal adaptive filtering of radio signals  
A78-53903

System definition and investigation of the on site  
processing of en route sensor signals.  
Addendum: Investigation into possible en route  
on site beacon ring around discriminants  
[AD-A056941] N78-33070

**SILICON CARBIDES**  
New materials in the Si-C-Al-O-N and related systems  
--- for gas turbine and high temperature  
applications  
A78-53864

High-temperature ceramics for automobile gas  
turbines  
[NASA-TN-75457] N78-32264

**SILICON NITRIDES**  
Silicon nitride ceramics for gas turbine engines  
A78-50630

High-temperature ceramics for automobile gas  
turbines  
[NASA-TN-75457] N78-32264

**SIMILARITY THEOREM**  
Similarity considerations for nonequilibrium  
nozzle flows  
A78-51163

Streamline coordinates and similarity  
transformation for the 3-D boundary layer  
A78-51181

**SINGULARITY (MATHEMATICS)**  
Calculation of cascade flow by means of spline fit  
singularity  
A78-50606

**SKIN FRICTION**  
Influence of surface roughness on skin friction  
and heat transfer for compressible turbulent  
boundary layers  
[AIAA PAPER 77-1781] A78-52629

Boundary layer, skin friction, and boattail  
pressure measurements from the YF-12 airplane at  
Mach numbers up to 3  
N78-32064

**SLABS**  
Interaction of a surface wave with a dielectric  
slab discontinuity  
[AD-A055956] N78-32327

**SLENDER CONES**  
Linear theory of supersonic flows past ruled  
bodies of three-dimensional configuration  
A78-51443

**SMOKE**  
Smoke and nitric oxide control for gas turbine  
engines burning light/heavy fuels  
A78-50598

Fire detector response in aircraft applications  
A78-53674

**SOCIAL FACTORS**  
Aviation futures to the year 2000  
A78-52966

**SOLAR GENERATORS**  
Solar power satellite construction and maintenance  
- The first large-scale use of man-in-space  
[AIAA PAPER 78-1637] A78-51977

**SOLID SOLUTIONS**  
New materials in the Si-C-Al-O-N and related systems  
--- for gas turbine and high temperature  
applications  
A78-53864

**SONIC BOOMS**  
Some comments on sonic boom focusing  
A78-51172

**SOUND PROPAGATION**  
Propagation of sound through a sheared flow  
[NASA-CR-152196] N78-33876

**SOUND WAVES**  
Experimental investigation of  
laminar-to-turbulent-flow transition under the  
effect of acoustic oscillations  
A78-52763

**SOUNDING**  
Sounding the runway  
A78-50822

**SOYUZ SPACECRAFT**  
From space on a parachute  
[NASA-TN-75577] N78-33140

**SPACE ENVIRONMENT SIMULATION**  
Assess II - A simulated mission of Spacelab  
A78-50276

**SPACE MAINTENANCE**  
Solar power satellite construction and maintenance  
- The first large-scale use of man-in-space  
[AIAA PAPER 78-1637] A78-51977

**SPACE MISSIONS**  
Assess II - A simulated mission of Spacelab  
A78-50276

**SPACE PERCEPTION**  
Optical simulator with a holographic component ---  
infinity display system  
[AIAA 78-1581] A78-50671

- SPACE SHUTTLE BOOSTERS**  
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing  
[NASA-CR-150826] N78-33134
- SPACE SHUTTLE ORBITERS**  
Space shuttle separation mechanisms  
[NASA-TM-58210] N78-32177
- SPACE TRANSPORTATION**  
Spacelab hardware update  
[AAS PAPER 78-005] A78-53614
- SPACECRAFT ANTENNAS**  
Antenna fairings for flight vehicles /2nd revised and enlarged edition/ --- Russian book  
A78-53426
- SPACECRAFT CONFIGURATIONS**  
An algorithm for complex study of the aerodynamic characteristics of spacecraft  
A78-53506
- SPACECRAFT CONTROL**  
Spacecraft flight control systems --- Russian book  
A78-53434
- SPACECRAFT DESIGN**  
Spacelab hardware update  
[AAS PAPER 78-005] A78-53614
- SPACECRAFT LANDING**  
From space on a parachute  
[NASA-TM-75577] N78-33140
- SPACELAB**  
Assess II - A simulated mission of Spacelab  
A78-50276
- Spacelab hardware update  
[AAS PAPER 78-005] A78-53614
- SPANLOADER AIRCRAFT**  
Wind tunnel tests on a tail-less swept wing span-distributed cargo aircraft configuration  
[NASA-TM-78767] N78-32048
- SPECIFIC HEAT**  
Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies  
A78-50455
- SPECIFIC IMPULSE**  
Influence of the compression process in air intakes on the specific impulse characteristics of a hypersonic ramjet engine  
A78-52926
- SPHERES**  
Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers  
A78-51437
- Irrotational flow around a spherical segment --- aerodynamic brakes application  
A78-51688
- The force on a small sphere in slow viscous flow  
A78-52175
- SPHERICAL SHELLS**  
Three dimensional fully viscous shock-layer flows over sphere-cones at high altitudes and angles of attack  
N78-32040
- SPIN DYNAMICS**  
Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests  
A78-50457
- Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit  
A78-52578
- SPLINE FUNCTIONS**  
Calculation of cascade flow by means of spline fit singularity  
A78-50606
- STABILITY DERIVATIVES**  
Aerodynamic derivatives for an oblique wing aircraft estimated from flight data by using a maximum likelihood technique  
[NASA-TP-1336] N78-33054
- Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling  
[SAND-77-1309C] N78-33121
- STABILITY TESTS**  
Aerodynamic stability testing with magnetically suspended models  
N78-32108
- STABILIZED PLATFORMS**  
Influence of constrained arrestors on the operation of gyroscopic stabilizers  
A78-51355
- STABILIZERS (FLUID DYNAMICS)**  
Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins  
N78-32058
- STAGE SEPARATION**  
Space shuttle separation mechanisms  
[NASA-TM-58210] N78-32177
- STAGNATION POINT**  
Unsteady three-dimensional compressible stagnation-point boundary layers  
A78-50456
- Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point  
A78-50503
- Asymmetric supercritical flow past a double wedge with embedded shocks  
N78-32042
- STANDARDS**  
Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine  
N78-32673
- STATIC LOADS**  
Influences of sway braces and mounting gaps on the static aerodynamic loading of external stores  
[AD-A054963] N78-32068
- STATIC PRESSURE**  
Static pressure orifice system testing and apparatus  
[NASA-CASE-LAR-12269-1] N78-33123
- STATIC STABILITY**  
Development of a nonlinear switching function and its application to static lift characteristics of straight wings  
[NASA-TM-78737] N78-32051
- STATISTICAL ANALYSIS**  
A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF  
A78-51497
- New organization of air traffic over the North Atlantic region  
A78-51599
- STATISTICAL DISTRIBUTIONS**  
Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles --- of ground-to-aircraft wideband data links  
A78-52360
- STATISTICAL MECHANICS**  
Thirty years of fluid dynamics  
A78-51280
- STATOR BLADES**  
Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation  
A78-50617
- STATORS**  
Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology  
[AD-A055276] N78-32100
- STOCHASTIC PROCESSES**  
Stochastic properties of conflict frequency at multiple connected air route intersections  
A78-51945
- STRAIN GAGES**  
Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing  
N78-32057
- Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions  
[NASA-TP-1331] N78-33053
- STRAIN RATE**  
High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components  
[NASA-TM-75302] N78-32265
- STRAPDOWN INERTIAL GUIDANCE**  
Strapdown system redundancy management flight demonstration --- vertical takeoff and landing aircraft  
[NASA-CR-145356] N78-32079
- STRATIFIED FLOW**  
Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer  
A78-51687



## STRATOSPHERE

## SUBJECT INDEX

- STRATOSPHERE**  
Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 A78-51338
- Feasibility of an orbital simulator of stratospheric photochemistry A78-51816
- STREAM FUNCTIONS (FLUIDS)**  
Irrotational flow around a spherical segment --- aerodynamic brakes application A78-51688
- STREAMLINING**  
Streamline coordinates and similarity transformation for the 3-D boundary layer A78-51181  
An investigation of drag reduction for tractor trailer vehicles [NASA-CR-144877] N78-33444
- STRESS ANALYSIS**  
Silicon nitride ceramics for gas turbine engines A78-50630  
Stress analysis of ceramic gas turbine blades by the finite element method, part 2 [AD-A055538] N78-32102  
Stress analysis of ceramic turbine blades by finite element method, part 1 [AD-A056310] N78-33111
- STRESS CONCENTRATION**  
Fatigue crack growth of titanium fan blades A78-51744
- STRESS RELAXATION**  
High temperature elastomers in gas turbine engine fuel sealing A78-52686
- STRESS-STRAIN RELATIONSHIPS**  
Some effects of temperature on the erosion of metals A78-51594
- STRUCTURAL ANALYSIS**  
Rocket structures N78-32123
- STRUCTURAL DESIGN**  
Compressibility effects on parachute transient pressures A78-51950  
Modifications and improvements in a structural optimization scheme based on an optimality criterion [AD-A055941] N78-32088  
Rocket structures N78-32123
- STRUCTURAL DESIGN CRITERIA**  
Assessment of the structural-mechanical design of commercial aircraft gas turbine engines A78-50625
- STRUCTURAL ENGINEERING**  
Primary Adhesively Bonded Structure Technology (PABST). Phase 1: Detail design [AD-A056857] N78-33095
- STRUCTURAL STABILITY**  
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads A78-50941
- STRUCTURAL VIBRATION**  
Mathematical model of vortex-excited oscillations of thin, weakly damped structures A78-51153  
Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements A78-51470  
Theoretical study of multicyclic control of a controllable twist rotor [NASA-CR-151959] N78-33085  
Noise-induced building vibrations caused by Concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769] N78-33874
- STRUCTURAL WEIGHT**  
Influence of the bypass ratio on jet-engine weight A78-50787
- SUBSONIC AIRCRAFT**  
The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft [AIAA PAPER 78-96] A78-52626  
Aircraft configurations for high-speed ships [AD-A055540] N78-32092
- SUBSONIC FLOW**  
On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance A78-50582  
Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation A78-50617  
Some mixed boundary value problems for subsonic flow past oscillating profiles A78-51198  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows [AIAA PAPER 78-229] A78-52630  
Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades A78-53783
- SUBSONIC SPEED**  
Subsonic dynamic stability characteristics of two close-coupled canard-wing configurations [NASA-TP-1291] N78-33050  
An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109] N78-33113  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110] N78-33114  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152111] N78-33115  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112] N78-33116  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152113] N78-33117  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152114] N78-33118
- SUBSONIC WIND TUNNELS**  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel A78-50303  
Heat transfer augmentation in flows over and normal to high-porosity perforated surfaces N78-32371
- SUCTION**  
Three dimensional free convection flow and heat transfer along a porous vertical plate A78-50288
- SUPERCOOLING**  
Initial development of a tactical system for dispersing supercooled stratus [AD-A056570] N78-33677
- SUPERCRITICAL FLOW**  
Approximate transonic profile flow at incidence with shock A78-51096  
Asymmetric supercritical flow past a double wedge with embedded shocks N78-32042
- SUPERCRITICAL PRESSURES**  
Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures A78-50780
- SUPERSONIC AIRCRAFT**  
Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft [AIAA PAPER 78-1458] A78-52042

## SUBJECT INDEX

## SUPERSONIC TURBINES

- High angle of incidence implications upon air intake design and location for supersonic cruise aircraft and highly maneuverable transonic aircraft  
[NASA-TM-78530] N78-32044
- Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests  
[NASA-TM-78706] N78-32050
- SUPERSONIC AIRFOILS**  
Calculation of local three-dimensional supersonic fields A78-51184
- SUPERSONIC BOUNDARY LAYERS**  
On moderate injection into a separated supersonic boundary layer, with reattachment A78-50896
- Investigations of the intensity of oscillations of the boundary of a turbulent wake A78-51402
- Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers N78-32063
- M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests  
[AD-A055952] N78-32072
- SUPERSONIC COMBUSTION**  
Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1] N78-32168
- SUPERSONIC COMMERCIAL AIR TRANSPORT**  
Reference aircraft for ICAO Working Group E  
[NASA-CP-158929] N78-32087
- SUPERSONIC COMPRESSORS**  
Radial equilibrium of flows in shock-in-rotor type rotors A78-50611
- SUPERSONIC CRUISE AIRCRAFT RESEARCH**  
High angle of incidence implications upon air intake design and location for supersonic cruise aircraft and highly maneuverable transonic aircraft  
[NASA-TM-78530] N78-32044
- YP-12 experiments symposium, volume 1  
[NASA-CP-2054] N78-32055
- Overview of the NASA YP-12 program N78-32056
- Recent load calibrations experience with the YP-12 airplane --- thermal stresses on Delta wing N78-32057
- Flight experience with altitudes hold and Mach hold autopilots on the YP-12 aircraft at Mach 3 N78-32059
- The YP-12 gust velocity measuring system N78-32061
- The common case study: Lockheed design of a supersonic cruise vehicle  
[NASA-CR-158935] N78-33086
- SUPERSONIC DRAG**  
Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers N78-32063
- In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction N78-32065
- SUPERSONIC FLIGHT**  
Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight A78-50790
- Mathematical analysis of impact erosion --- of supersonic flight vehicles A78-51711
- Flight experience with altitudes hold and Mach hold autopilots on the YP-12 aircraft at Mach 3 N78-32059
- SUPERSONIC FLOW**  
Pressure at shroud and flow in a supersonic centrifugal impeller A78-50613
- Model calculations of the generation of self-excited oscillations in a supersonic duct with stepwise widening of cross section A78-51165
- Self-focusing of a Gaussian beam in a supersonic gas flow A78-51387
- Linear theory of supersonic flows past ruled bodies of three-dimensional configuration A78-51443
- An improved higher order panel method for linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628
- Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers  
[AIAA PAPER 77-178] A78-52629
- Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow A78-53087
- Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow A78-53767
- The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting N78-32041
- Unsteady blade rows in high-speed flow  
[AD-A055620] N78-32391
- SUPERSONIC HEAT TRANSFER**  
Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows A78-50935
- In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction N78-32065
- SUPERSONIC INLETS**  
Wind tunnel evaluation of YP-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests N78-32062
- Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1] N78-32168
- SUPERSONIC JET FLOW**  
Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space A78-51448
- SUPERSONIC NOZZLES**  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element A78-50792
- SUPERSONIC SPEEDS**  
Wind-tunnel investigation at supersonic speeds of a canard-controlled missile with fixed and free-rolling tail fins  
[NASA-TP-1316] N78-32067
- Estimation of leading-edge thrust for supersonic wings of arbitrary planform  
[NASA-TP-1270] N78-33051
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152113] N78-33117
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152114] N78-33118
- SUPERSONIC TRANSPORTS**  
The aerodynamic performance of a freely hinged door between two flows --- for supersonic transport propulsion nozzles A78-51464
- Supersonic transport --- using canard surfaces  
[NASA-CASE-LAR-11932-1] N78-32086
- SUPERSONIC TURBINES**  
Performance of a transonic fan stage designed for a low meridional velocity ratio  
[NASA-TP-1298] N78-33107

**SUPERSONIC WAKES**

**SUBJECT INDEX**

**SUPERSONIC WAKES**

Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers  
A78-51437

**SUPERSONIC WIND TUNNELS**

M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests  
[AD-A055952] N78-32072

**SUPPORTS**

Natural vibrations of a rigid rotor mounted on elastic ball bearings  
A78-51015

**SURFACE GEOMETRY**

Circles, texture, etc. - Alternate approaches to CIG scene detail --- computer image generation for flight simulators  
[AIAA 78-1578] A78-50659

**SURFACE NAVIGATION**

Accuracy of ship-position determination by means of NNSS Transit  
A78-51889

The use of Doppler-shift position lines in satellite navigation systems  
A78-51890

**SURFACE PROPERTIES**

Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces  
A78-53309

Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone  
A78-53508

**SURFACE REACTIONS**

Aerodynamic effects on erosion in turbomachinery  
A78-50635

**SURFACE ROUGHNESS**

Ellipsometric determination of properties of films on rough surfaces such as aluminum alloy aircraft skin  
[AD-A056782] N78-33413

**SURFACE ROUGHNESS EFFECTS**

Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers  
[AIAA PAPER 77-178] A78-52629

**SURFACE TEMPERATURE**

Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies  
A78-50455

Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades  
A78-50581

**SURFACE VEHICLES**

The development of a regenerator seal for vehicular use --- for automatic gas turbine engines  
A78-50587

**SURFACE WAVES**

Interaction of a surface wave with a dielectric slab discontinuity  
[AD-A055956] N78-32327

**SURFACES**

Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins  
N78-32058

**SURGES**

Surge responsibility and range characteristics of centrifugal compressors  
A78-50616

**SURVEILLANCE RADAR**

Airport traffic surveillance  
A78-52957

Moving target detector /MTD/ radar system  
A78-52963

**SURVEYS**

Baseline data requirements for assessing environmental impact  
[PB-281148/7] N78-32620

**SUSPENSION SYSTEMS (VEHICLES)**

Duct effects on the heave stability of plenum air cushions  
A78-52616

**SWEEP EFFECT**

Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction  
N78-32834

**SWEPT WINGS**

Wind tunnel tests on a tail-less swept wing span-distributed cargo aircraft configuration  
[NASA-TM-78767] N78-32048

**SWIRLING**

Unsteady fluid flow in a swirl injector  
A78-50781

Changes in conical diffuser performance by swirl addition  
A78-51463

**SWITCHING THEORY**

Development of a nonlinear switching function and its application to static lift characteristics of straight wings  
[NASA-TM-78737] N78-32051

**SYMBOLS**

Development of a symbology exerciser for display generation and analysis on the visually-coupled airborne systems simulator (VCASS)  
[AD-A055464] N78-33124

**SYNCHRONOUS MOTORS**

Linear machine power requirements and system comparisons --- for German magnetic levitation revenue vehicles  
A78-51271

**SYNTHETIC FIBERS**

Design and development of helicopter external cargo sling legs made with Kevlar  
[AD-A056951] N78-33093

**SYSTEMS ANALYSIS**

Strategic or tactical air traffic control  
A78-50447

A system concept of metering and spacing --- for aircraft landing approach  
A78-52968

System measurement improves computer responses to the controller --- for air traffic control  
A78-52974

**SYSTEMS ENGINEERING**

A more fully Automated En Route ATC system  
A78-52959

Overview of potential ATC developments  
A78-52970

Concept and future plans for automation of air traffic control in the Federal Republic of Germany  
A78-52972

Numerical calculation of magnetic levitation systems  
A78-53805

The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation  
[NASA-TM-75535] N78-32043

Strapdown system redundancy management flight demonstration --- vertical takeoff and landing aircraft  
[NASA-CR-145356] N78-32079

Engineering and Scientific Data Management  
[NASA-CP-2055] N78-33776

**SYSTEMS MANAGEMENT**

Management of software development for advance ATC systems  
A78-52961

**T**

**TAIL ASSEMBLIES**

Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941

**TAIL ROTORS**

Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- Langley anechoic noise facility  
N78-32827

**TAKEOFF RUNS**

Estimating the average taxi speed of departing aircraft  
A78-50450

VTOL aircraft dynamics --- Russian book  
A78-53428

**TARGET ACQUISITION**

Moving target detector /MTD/ radar system  
A78-52963

SUBJECT INDEX

THICKNESS

<b>TARGET SIMULATORS</b>		
Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580]	A78-50661	
<b>TAXIING</b>		
Estimating the average taxi speed of departing aircraft	A78-50450	
<b>TECHNOLOGICAL FORECASTING</b>		
Airports in the year 2000 - Suggestions for improving capacity	A78-50435	
Technical-economic analysis of the direct operating costs of air transport companies --- German thesis	A78-51752	
The shape of airliners to come	A78-51817	
Design concepts for future air freighters	A78-52450	
Aviation futures to the year 2000	A78-52966	
ATC in the year 2000	A78-52978	
Helicopter manufacturing technology. III - Future manufacturing technologies	A78-53174	
Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1: Executive summary [NASA-CR-145381-1]	N78-32187	
Study on utilization of advanced composites in commercial aircraft wing structures, volume 2 [NASA-CR-145381-2]	N78-32188	
Air Force Flight Dynamics Laboratory fiscal year 1979. Technical objective document [AD-A055711]	N78-32911	
<b>TECHNOLOGY ASSESSMENT</b>		
Current and future navigation and landing systems	A78-50265	
The Navy's approach /Air traffic control/	A78-52969	
Advancements in ATC information displays and controller-computer interaction	A78-52975	
The technology assessment of LTA aircraft systems --- hybrid airships for passenger and cargo transportation [NASA-TM-75535]	N78-32043	
V/STOL aerodynamic technology assessment [AD-A054797]	N78-32069	
Translations on USSR science and technology: Physical science and technology, no. 42 [JPRS-71612]	N78-33015	
Translations on USSR science and technology: Physical science and technology, no. 44 [JPRS-71659]	N78-33024	
<b>TECHNOLOGY UTILIZATION</b>		
The potential of advanced technology for aircraft structures /10th J. D. North Memorial Lecture/ and opportunities	A78-50400	
Naval structural materials - Requirements, issues, and opportunities	A78-51149	
<b>TELECOMMUNICATION</b>		
Earth-to-orbital station radio bridge	N78-33019	
Description of a model for evaluating operational performance of communications system [AD-A057199]	N78-33313	
<b>TELEVISION RECEPTION</b>		
A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis	A78-52498	
<b>TEMPERATURE DISTRIBUTION</b>		
A computer-aided method of calculating temperature fields in turbine disks	A78-50796	
<b>TEMPERATURE EFFECTS</b>		
Some effects of temperature on the erosion of metals	A78-51594	
<b>TEMPERATURE PROFILES</b>		
Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades	A78-50581	
<b>TERCOM</b>		
Terrain Contour Matching (TERCOM): Sensitivity to heading and ground-speed errors [AD-A056127]	N78-32084	
<b>TERMINAL FACILITIES</b>		
Airports in the year 2000 - Suggestions for improving capacity	A78-50435	
Toulouse combines elegance with economy --- French airport design	A78-50436	
Improved passenger flow through simulation	A78-50437	
ATC in the year 2000	A78-52978	
<b>TERNARY ALLOYS</b>		
Reaction diffusion in the NiCrAl and CoCrAl systems	A78-53063	
<b>TERRAIN FOLLOWING AIRCRAFT</b>		
Acquisition of operational data during NOE missions [AD-A055922]	N78-32089	
<b>TEST CHAMBERS</b>		
Feasibility of an orbital simulator of stratospheric photochemistry	A78-51816	
<b>TEST EQUIPMENT</b>		
Physical characteristics: Aviation materiel --- Army test facilities and equipment [AD-A055803]	N78-32093	
A validation of mathematical models for turbojet test cells [AD-A055991]	N78-32101	
<b>TEST FACILITIES</b>		
Aerodynamic effects on erosion in turbomachinery	A78-50635	
Test instrumentation system for flight simulator handling characteristics [AIAA 78-1595]	A78-50669	
Physical characteristics: Aviation materiel --- Army test facilities and equipment [AD-A055803]	N78-32093	
<b>TEST STANDS</b>		
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads	A78-50941	
<b>THERMAL STABILITY</b>		
Aluminous keatite - A durable ceramic material for rotary regenerator cores --- for automotive gas turbine engines	A78-50588	
<b>THERMAL STRESSES</b>		
The development of a regenerator seal for vehicular use --- for automatic gas turbine engines	A78-50587	
Investigation of the heat regime of gas turbine engine bearings --- Russian book	A78-53431	
Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing	N78-32057	
<b>THERMODYNAMIC EFFICIENCY</b>		
Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines	A78-50579	
Thermodynamical performances of closed-cycle gas-turbine	A78-50605	
<b>THERMODYNAMIC PROPERTIES</b>		
Properties and evaporation of jet-engine fuels at pressurized conditions	A78-50594	
Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines	A78-53511	
<b>THERMO MECHANICAL TREATMENT</b>		
Influence of technological factors on the resistance to fracture of refractory materials in high-speed air flows	A78-50935	
<b>THICKNESS</b>		
Improved methods for calculating the thickness noise	N78-32832	
Ellipsometric determination of properties of films on rough surfaces such as aluminum alloy aircraft skin [AD-A056782]	N78-33413	

## THICKNESS RATIO

## SUBJECT INDEX

## THICKNESS RATIO

Design of a transonically profiled wing  
[NASA-TM-75440] N78-32052  
Rounds on thickness and loading noise of rotating  
blades and the favorable effect of blade sweep  
on noise reduction N78-32834

## THIN AIRFOILS

Approximate transonic profile flow at incidence  
with shock A78-51096

## THIN BODIES

Mathematical model of vortex-excited oscillations  
of thin, weakly damped structures A78-51153  
Linear theory of supersonic flows past ruled  
bodies of three-dimensional configuration A78-51443

## THIN FILMS

Transient dynamics of a flexible rotor with  
squeeze film dampers  
[NASA-CR-3050] N78-32433  
Ellipsometric determination of properties of films  
on rough surfaces such as aluminum alloy  
aircraft skin N78-33413  
[AD-A056782]

## THREE AXIS STABILIZATION

Influence of constrained arrestors on the  
operation of gyroscopic stabilizers A78-51355

## THREE DIMENSIONAL BOUNDARY LAYER

Unsteady three-dimensional compressible  
stagnation-point boundary layers A78-50456  
Three-dimensional and relaminarization effects in  
turbine blade cascades - An experimental study A78-50608  
Three-dimensional boundary layer theory using  
shell geometrical concepts A78-51176  
Streamline coordinates and similarity  
transformation for the 3-D boundary layer A78-51181

## THREE DIMENSIONAL FLOW

Three dimensional free convection flow and heat  
transfer along a porous vertical plate A78-50288  
Unsteady laminar compressible boundary-layer flow  
at a three-dimensional stagnation point A78-50503  
Contribution to the theory of three-dimensional  
hypersonic viscous gas flow past blunted bodies  
in the presence of injection A78-50757  
Linear theory of supersonic flows past ruled  
bodies of three-dimensional configuration A78-51443  
Advanced panel-type influence coefficient methods  
applied to unsteady three dimensional potential  
flows [AIAA PAPER 78-229] A78-52630  
A surface vorticity theory for propeller ducts and  
turbofan engine cowls in non-axisymmetric  
incompressible flow A78-52648  
Three dimensional fully viscous shock-layer flows  
over sphere-cones at high altitudes and angles  
of attack N78-32040  
The flow field calculation in supersonic  
mixed-compression aircraft inlets at angle of  
attack using the three-dimensional method of  
characteristics with discrete shock wave fitting N78-32041

## THROATS

Dual throat thruster cold flow analysis  
[NASA-CR-150822] N78-33142

## THROTTLING

Convective heat transfer from a gas suspension to  
the flow area of a throttle with a blade-shaped  
throttling element A78-50792  
Turboexpanders for energy conservation A78-51621

## THRUST AUGMENTATION

Design and verification of a turbofan swirl  
augmenter A78-50564

## THRUST-WEIGHT RATIO

Influence of the bypass ratio on jet-engine weight  
A78-50787

## THUNDERSTORMS

Investigations of simulated aircraft flight  
through thunderstorm outflows  
[NASA-CR-3052] N78-32037  
Two lightning-flash counter systems  
[AD-A057369] N78-33655

## TIME LAG

Parameters of future ATC systems relating to  
airport capacity/delay  
[AD-A057059] N78-33068

## TIME SERIES ANALYSIS

A method for validating missile system simulation  
models  
[AD-A055689] N78-32169

## TIP SPEED

Wind tunnel investigations of model rotor noise at  
low tip speeds N78-32828

Design and performance of a  
427-meter-per-second-tip-speed two-stage fan  
having a 2.40 pressure ratio  
[NASA-TP-1314] N78-33109

## TITANIUM

Diffusion brazing titanium sandwich structures  
Compressor seal rub energetics study  
[NASA-CR-159424] N78-32096

## TITANIUM ALLOYS

Fatigue crack growth of titanium fan blades  
A78-51744  
Opportunities for cost-affordable titanium  
aerospace structures A78-51839  
Investigation of the weldability of heat-resistant  
titanium alloys A78-53324  
Titanium alloy ignition and combustion  
[AD-A055443] N78-32235

## TOKAMAK DEVICES

Ballooning stability boundaries for the  
large-aspect-ratio tokamak A78-53664

## TORQUE

Eddy current torques, air torques, and the spin  
decay of cylindrical rocket bodies in orbit A78-52578

## TOXICITY AND SAFETY HAZARD

Fire resistivity and toxicity studies of candidate  
aircraft passenger seat materials A78-51838

## TRAILERS

An investigation of drag reduction for tractor  
trailer vehicles  
[NASA-CR-144877] N78-33444

## TRAILING EDGES

Vortex dynamics A78-51051

## TRAINING DEVICES

Correlated data bases for the present and future  
--- aircrew training simulator acquisitions  
flexibility  
[AIAA 78-1583] A78-50662

## TRAINING SIMULATORS

COMPUTROL - A new technique in image generation  
--- advanced computerized visual environment  
simulator  
[AIAA 78-1579] A78-50660  
Optical simulator with a holographic component ---  
infinity display system  
[AIAA 78-1581] A78-50671

## TRAJECTORY MEASUREMENT

Methodology questions involved in systems  
engineering for devising an optimum  
radio-engineering system for trajectory  
measurements --- of space vehicles A78-53253

## TRANSIENT PRESSURES

Compressibility effects on parachute transient  
pressures A78-51950

## TRANSIENT RESPONSE

Transient dynamics of a flexible rotor with  
squeeze film dampers  
[NASA-CR-3050] N78-32433

- A study of the effect of the rotor coil couplings of a synchronous machine on its predicted transient response  
N78-33330
- TRANSIT SATELLITES**  
Accuracy of ship-position determination by means of NNSS Transit  
A78-51889
- TRANSLATIONAL MOTION**  
The force on a small sphere in slow viscous flow  
A78-52175
- TRANSONIC FLIGHT**  
Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers  
N78-32063
- TRANSONIC FLOW**  
Integral equation formulation for transonic flow past lifting wings  
A78-50459  
Numerical analysis of flow through turbine cascade by the Modified FLIC Method  
A78-50607  
Approximate transonic profile flow at incidence with shock  
A78-51096  
Calculation of local three-dimensional supersonic fields  
A78-51184  
Shock obliquity effect on transonic shock-boundary layer interaction  
A78-51185  
On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities  
A78-52043  
Design of a transonically profiled wing [NASA-TM-75440]  
N78-32052  
A comparative study of two computational methods for calculating unsteady transonic flows about oscillating airfoils [AD-A056946]  
N78-33058
- TRANSONIC SPEED**  
Aerodynamic load distributions at transonic speeds for a close-coupled wing-canard configuration: Tabulated pressure data [NASA-TM-78780]  
N78-33045  
An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: P-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109]  
N78-33113  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: P-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110]  
N78-33114  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: P-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152111]  
N78-33115  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2 F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112]  
N78-33116
- TRANSONIC WIND TUNNELS**  
Aerodynamic roll characteristics of a 0.00548 scale 146-inch solid rocket booster reentry configuration (MSPC Model Number 486) over a portion of the reentry flight regime in the NASA MSP 14-inch trisonic wind tunnel [NASA-TM-78195]  
N78-32173
- TRANSPONDERS**  
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary [AD-A056930]  
N78-33072
- TRANSPORT AIRCRAFT**  
Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent --- German thesis  
A78-51749  
The development and evaluation of advanced technology laminar-flow-control subsonic transport aircraft [AIAA PAPER 78-96]  
A78-52626
- Prospects for a civil/military transport aircraft [NASA-TM-78724]  
N78-33060  
Wing planform geometry effects on large subsonic military transport airplanes [AD-A056124]  
N78-33088
- TRANSPORTATION ENERGY**  
Fuel consumption: Transportation, volume 1. A bibliography with abstracts [NTIS/PS-78/0707/6]  
N78-33599  
Fuel consumption: Transportation, volume 2. A bibliography with abstracts [NTIS/PS-78/0708/4]  
N78-33600
- TRANSVERSE OSCILLATION**  
Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams  
A78-50451
- TRAVELING WAVE TUBES**  
Aerodynamic roll characteristics of a 0.00548 scale 146-inch solid rocket booster reentry configuration (MSPC Model Number 486) over a portion of the reentry flight regime in the NASA MSP 14-inch trisonic wind tunnel [NASA-TM-78195]  
N78-32173
- TRIBOLOGY**  
Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II  
A78-51600
- TURBINE BLADES**  
Film cooling of a gas turbine blade  
A78-50580  
Temperature profiles of rotating cooled blade --- via infrared photography of air-cooled turbine blades  
A78-50581  
Experimental verification of a blade cooling system and comparison with design calculation --- in high temperature test turbine  
A78-50583  
Aerodynamic and cooling performances of a film cooled turbine  
A78-50599  
Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades  
A78-50600  
Numerical analysis of flow through turbine cascade by the Modified FLIC Method  
A78-50607  
Three-dimensional and relaminarization effects in turbine blade cascades - An experimental study  
A78-50608  
An experiment of deposit formation on surface of an air-cooled gas-turbine blade  
A78-50634  
A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior  
A78-50777  
Fatigue crack growth of titanium fan blades  
A78-51744  
Stress analysis of ceramic gas turbine blades by the finite element method, part 2 [AD-A055538]  
N78-32102  
Stress analysis of ceramic turbine blades by finite element method, part 1 [AD-A056310]  
N78-33111
- TURBINE ENGINES**  
Operation of oil ring seals for aircraft turbine engines under cavitation conditions. II  
A78-51600  
Evaluation of cyclic behavior of aircraft turbine disk alloys [NASA-CR-159433]  
N78-33478
- TURBINE EXHAUST NOZZLES**  
Effect of nozzle inclination on the efficiency of a single-nozzle microturbine  
A78-51400
- TURBINE WHEELS**  
A computer-aided method of calculating temperature fields in turbine disks  
A78-50796  
Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation  
A78-53095
- TURBOCOMPRESSORS**  
An experimental study of the annular diffusers in axial-flow compressors and turbines  
A78-50610

## TURBOPAN ENGINES

## SUBJECT INDEX

- Radial equilibrium of flows in shock-in-rotor type rotors  
A78-50611
- Operation of an axial-flow compressor in the case of radially nonuniform inlet flow  
A78-50793
- Blade-surface boundary layer and wake computational models for estimation of axial-flow compressor and fan blade-row turning angles and losses  
N78-32038
- TURBOPAN ENGINES**
- Design and verification of a turbofan swirl augmentor  
A78-50564
- Recent status on research and development of FJR 710 turbofan engine --- for subsonic civil transport aircraft  
A78-50577
- Development of velocity profile through a stage of axial flow turbomachinery  
A78-50609
- A study of fan-rotating noise reduction  
A78-50670
- Influence of changes in bypass ratio on the aerodynamic behavior of a fan  
A78-50794
- Future large civil turbofans and powerplants /Seventeenth Short Bros. Commemorative Lecture/  
A78-51519
- A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow  
A78-52648
- Pollution Reduction Technology Program for small jet aircraft engines, phase 2  
[NASA-CR-159415]  
N78-33104
- DYGABCD: A program for calculating linear A, B, C, and D matrices from a nonlinear dynamic engine simulation  
[NASA-TP-1295]  
N78-33110
- TURBOPANS**
- Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619
- Broadband noise in axial-fan blade cascade  
A78-50650
- Performance of a transonic fan stage designed for a low meridional velocity ratio  
[NASA-TP-1298]  
N78-33107
- TURBOJET ENGINES**
- Influence of the bypass ratio on jet-engine weight  
A78-50787
- Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight  
A78-50790
- A validation of mathematical models for turbojet test cells  
[AD-A055991]  
N78-32101
- Turbine engine particulate emission characterization, phase 2  
[AD-A057370]  
N78-33106
- DYGABCD: A program for calculating linear A, B, C, and D matrices from a nonlinear dynamic engine simulation  
[NASA-TP-1295]  
N78-33110
- TURBOMACHINE BLADES**
- Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades  
A78-53783
- TURBOMACHINERY**
- Aerodynamic effects on erosion in turbomachinery  
A78-50635
- Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation  
A78-53095
- Design and performance of a 427-meter-per-second-tip-speed two-stage fan having a 2.40 pressure ratio  
[NASA-TP-1314]  
N78-33109
- A study of the effect of the rotor coil couplings of a synchronous machine on its predicted transient response  
N78-33330
- TURBOPROP AIRCRAFT**
- Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85  
[NASA-CR-3047]  
N78-32066
- TURBOSHAPTS**
- Advantages of 3-shaft KTT gas turbine configurations for automotive applications  
A78-50602
- TURBULENCE**
- Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations  
[NASA-TN-78699]  
N78-32046
- Noise due to rotor-turbulence interaction  
N78-32823
- TURBULENCE METERS**
- Infrared passbands for clear-air-turbulence detection  
A78-51971
- TURBULENT BOUNDARY LAYER**
- On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance  
A78-50582
- Turbulent boundary layer separation on a curved wall with normal compression shock  
A78-51155
- Interaction of turbulent boundary layers in a right-angle corner  
A78-51697
- Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers  
[AIAA PAPER 77-178]  
A78-52629
- In-flight compressible turbulent boundary layer measurements on a hollow cylinder at a Mach number of 3.0 --- supersonic heat transfer and skin friction  
N78-32065
- M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests  
[AD-A055952]  
N78-32072
- TURBULENT FLOW**
- Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment  
A78-50778
- Thirty years of fluid dynamics  
A78-51280
- Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow  
A78-53767
- The YF-12 gust velocity measuring system  
N78-32061
- TURBULENT JETS**
- Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations  
A78-52763
- TURBULENT WAKES**
- Investigations of the intensity of oscillations of the boundary of a turbulent wake  
A78-51402
- Development and evaluation of a wake vortex advisory system  
A78-52965
- A preliminary study of the benefits of flying by ground speed during final approach  
[NASA-TN-78777]  
N78-32076
- TWO DIMENSIONAL FLOW**
- Vortex dynamics  
A78-51051
- Calculation of viscous flow in straight weakly divergent diffusers  
A78-51158
- Computation of two-dimensional potential flow using elementary vortex distributions  
A78-51948
- Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow  
A78-53767

**TWO DIMENSIONAL JETS**

- Distortion of a flat jet in a bounded cross-stream in the presence of a wake space A78-50779
- The attachment of a ventilated plane jet to an inclined plane wall A78-53764

**TWO PHASE FLOW**

- Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface A78-50791
- Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element A78-50792
- Axisymmetric unsteady flow past obstacles in a cylindrical tube A78-51441
- Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space A78-51448

**U****U.S.S.R.**

- Translations on USSR science and technology: Physical science and technology, no. 42 [JPRS-71612] N78-33015
- Translations on USSR science and technology: Physical science and technology, no. 44 [JPRS-71659] N78-33024

**U.S.S.R. SPACE PROGRAM**

- From space on a parachute [NASA-TM-75577] N78-33140

**UH-1 HELICOPTER**

- Acquisition of operational data during NOE missions [AD-A055922] N78-32089
- Bell UH-1H RAM/LOG report [AD-A057231] N78-33091

**ULTRAVIOLET RADIATION**

- The application of ultraviolet cure resins for repair of composites [AD-A055731] N78-32273

**UNITED STATES OF AMERICA**

- Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978 A78-52447
- Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis [AD-A056741] N78-33075

**UNSTEADY FLOW**

- Unsteady three-dimensional compressible stagnation-point boundary layers A78-50456
- Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point A78-50503
- Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application A78-50673
- Unsteady fluid flow in a swirl injector A78-50781
- Nonlinear mathematical modeling of unsteady flow past a lifting propeller A78-51379
- Axisymmetric unsteady flow past obstacles in a cylindrical tube A78-51441
- Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space A78-51448
- On the nonstationary boundary layer with self-induced pressure at transonic external stream velocities A78-52043
- Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows [AIAA PAPER 78-229] A78-52630
- A comparative study of two computational methods for calculating unsteady transonic flows about oscillating airfoils [AD-A056946] N78-33058

**URBAN PLANNING**

- Urban noise pollution. A bibliography with abstracts [NTIS/PS-78/0686/2] N78-33634

**URBAN TRANSPORTATION**

- The impact of urban operations on helicopter noise requirements N78-32820

**USER MANUALS (COMPUTER PROGRAMS)**

- Rotor wake effects on hub/pylon flow. Volume 2: Program SHAPES user's manual [AD-A055767] N78-32071

**V****V/STOL AIRCRAFT**

- V/STOL aerodynamic technology assessment [AD-A054797] N78-32069
- Helicopter noise research at the Langley V/STOL tunnel N78-32826
- A study of alternatives for VSTOL computer systems [AD-A056105] N78-33098

**VELOCITY DISTRIBUTION**

- Development of velocity profile through a stage of axial flow turbomachinery A78-50609
- Experiments on the laminar flow in a rectangular streamwise corner A78-53765

**VELOCITY MEASUREMENT**

- The YF-12 gust velocity measuring system N78-32061

**VENTILATION**

- The attachment of a ventilated plane jet to an inclined plane wall A78-53764

**VERTICAL TAKEOFF AIRCRAFT**

- VTOL aircraft dynamics --- Russian book A78-53428
- Strapdown system redundancy management flight demonstration --- vertical takeoff and landing aircraft [NASA-CR-145356] N78-32079

**VIBRATION DAMPING**

- Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams A78-50451

**VIBRATION MEASUREMENT**

- An automatic processing system for vibration data analysis of gas turbine engines A78-50623
- Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements A78-51470

**VIBRATION MODE**

- Nonlinear vibrations of an asymmetric flight vehicle A78-53504

**VIBRATION TESTS**

- Captive carriage vibration of air-to-air missiles on fighter aircraft --- F-15 flight measurements A78-51470

**VIBRATIONAL SPECTRA**

- Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure A78-50717

**VIBRATORY LOADS**

- Transient dynamics of a flexible rotor with squeeze film dampers [NASA-CR-3050] N78-32433

**VISCOELASTIC DAMPING**

- Transient dynamics of a flexible rotor with squeeze film dampers [NASA-CR-3050] N78-32433

**VISCOELASTICITY**

- Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams A78-50451

**VISCOUS FLOW**

- Contribution to the theory of three-dimensional hypersonic viscous gas flow past blunted bodies in the presence of injection A78-50757
- Calculation of viscous flow in straight weakly divergent diffusers A78-51158



VISCOUS FLUIDS

SUBJECT INDEX

Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers A78-51437

viscous carbon dioxide flow past a blunted cone A78-51444

The force on a small sphere in slow viscous flow A78-52175

Calculation of viscous radiant gas flows --- hypersonic reentry A78-53556

Three dimensional fully viscous shock-layer flows over sphere-cones at high altitudes and angles of attack N78-32040

Dynamic stall: An example of strong interaction between viscous and inviscid flows [NASA-TM-75447] N78-32384

**VISCOUS FLUIDS**  
Basic model concepts of fluid mechanics in wing theory A78-50752

**VISIBILITY**  
Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a stopograph was in operation A78-50474

Feasibility of landing at an alternate airport due to visibility conditions A78-51341

**VISUAL AIDS**  
Circles, texture, etc. - Alternate approaches to CIG scene detail --- computer image generation for flight simulators [AIAA 78-1578] A78-50659

Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 --- visual display training simulator devices [AIAA 78-1580] A78-50661

Correlated data bases for the present and future --- aircrew training simulator acquisitions flexibility [AIAA 78-1583] A78-50662

**VISUAL FIELDS**  
COMPUTROL - A new technique in image generation --- advanced computerized visual environment simulator [AIAA 78-1579] A78-50660

**VISUAL FLIGHT**  
Visual flight simulator for the investigation of the learning process during aircraft landing A78-50302

Some principles for studying reduced visibility conditions in regions around airports [NASA-TM-75152] N78-32642

**VISUAL FLIGHT RULES**  
Airborne equipment for all weather operations A78-50448

**VISUAL OBSERVATION**  
A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles --- German thesis A78-52498

**VORTEX SHEETS**  
Vortex dynamics A78-51051

**VORTICES**  
Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath A78-50574

Vortex dynamics A78-51051

Mathematical model of vortex-excited oscillations of thin, weakly damped structures A78-51153

Changes in conical diffuser performance by swirl addition A78-51463

Computation of two-dimensional potential flow using elementary vortex distributions A78-51948

The force on a small sphere in slow viscous flow A78-52175

Development and evaluation of a wake vortex advisory system A78-52965

Laser-velocimeter surveys of merging vortices in a wind tunnel: Complete data and analysis [NASA-TM-78449] N78-33043

Vortex advisory system simulation of Chicago O'Hare Airport [AD-A057112] N78-33069

**VORTICITY**  
A surface vorticity theory for propeller ducts and turbofan engine cowls in non-axisymmetric incompressible flow A78-52648

**W**

**WAKES**  
Distortion of a flat jet in a bounded cross-stream in the presence of a wake space A78-50779

Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- langley anechoic noise facility N78-32827

**WALL FLOW**  
Three dimensional free convection flow and heat transfer along a porous vertical plate A78-50288

Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow A78-50797

Turbulent boundary layer separation on a curved wall with normal compression shock A78-51155

Three-dimensional boundary layer theory using shell geometrical concepts A78-51176

**WALL JETS**  
The attachment of a ventilated plane jet to an inclined plane wall A78-53764

**WALL TEMPERATURE**  
Measurements of film cooling effectiveness distributions for exhausting through a double row of holes --- for high temperature gas turbine blades A78-50578

Near-hole region heat transfer in full-coverage film cooling --- for high temperature gas turbines A78-50579

Impingement cooling and its application to combustor design A78-50584

**WANKEL ENGINES**  
Rotary combustion engine hydrocarbon source studies A78-50561

**WARNING SYSTEMS**  
Preventing helicopter mid-air collisions with the proximity warning device A78-51223

Development and evaluation of a wake vortex advisory system A78-52965

NASA aviation safety reporting system [NASA-TM-78511] N78-32075

**WASTE ENERGY UTILIZATION**  
Turboexpanders for energy conservation A78-51621

**WATER POLLUTION**  
Quantitative mapping by remote sensing of an ocean acid-waste dump [NASA-TP-1275] N78-33617

**WATER WAVES**  
Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures A78-51968

**WAVE RESISTANCE**  
Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures A78-51968

**WEAPON SYSTEMS**  
Key beam weapons tests slated --- for aircraft carrier particle beam defense against cruise missiles A78-53238

Ignition of a liquid fuel under high intensity radiation --- laser weapon systems [AD-A054974] N78-32199

## SUBJECT INDEX

WING SPAN

**WEAR**  
Chevron cutting: Experiment with new runway mixtures [NASA-TM-754481] N78-32427

**WEDGES**  
Asymmetric supercritical flow past a double wedge with embedded shocks N78-32042

**WEIGHT REDUCTION**  
Influence of the bypass ratio on jet-engine weight A78-50787  
A data management system for weight control and design-to-cost N78-33780

**WELD TESTS**  
Investigation of the weldability of heat-resistant titanium alloys A78-53324

**WELDABILITY**  
Investigation of the weldability of heat-resistant titanium alloys A78-53324

**WIND SHEAR**  
Investigations of simulated aircraft flight through thunderstorm outflows [NASA-CR-3052] N78-32037  
Computed responses of several aircraft to atmospheric turbulence and discrete wind shears [NASA-CR-152185] N78-32106  
The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear [AD-A056780] N78-33063

**WIND TUNNEL MODELS**  
Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests [NASA-TM-78706] N78-32050  
An investigation of drag reduction for tractor trailer vehicles [NASA-CR-144877] N78-33444

**WIND TUNNEL STABILITY TESTS**  
Investigation of a side force due to ablation --- reentry vehicle spin dynamic stability tests A78-50457  
Nonlinear rolling motion analysis of a Canard-controlled missile configuration at angles of attack from 0 to 30 degrees in incompressible flow [AD-A056695] N78-33132

**WIND TUNNEL TESTS**  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel A78-50303  
Three-dimensional and relaminarization effects in turbine blade cascades - An experimental study A78-50608  
Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794  
Interaction of turbulent boundary layers in a right-angle corner A78-51697  
Wind tunnel tests on a tail-less swept wing span-distributed cargo aircraft configuration [NASA-TM-78767] N78-32048  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage --- conducted in the Langley V/STOL wind tunnel [NASA-TM-74033] N78-32049  
Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95 --- Langley Unitary Plan wind tunnel tests [NASA-TM-78706] N78-32050  
Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests N78-32062  
Wind-tunnel investigation at supersonic speeds of a canard-controlled missile with fixed and free-rolling tail fins [NASA-TP-1316] N78-32067

M=3 turbulent boundary layer measurements at very high Reynolds numbers --- supersonic wind tunnel tests [AD-A055952] N78-32072  
Aerodynamic roll characteristics of a 0.00548 scale 146-inch solid rocket booster reentry configuration (MSFC Model Number 486) over a portion of the reentry flight regime in the NASA MSF 14-inch trisonic wind tunnel [NASA-TM-78195] N78-32173  
Helicopter noise research at the Langley V/STOL tunnel N78-32826  
Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise --- Langley anechoic noise facility N78-32827  
Wind tunnel investigations of model rotor noise at low tip speeds N78-32828  
A study of the noise radiation from four helicopter rotor blades --- tests in Ames 40 by 20 foot wind tunnel N78-32835  
Laser-velocimeter surveys of merging vortices in a wind tunnel: Complete data and analysis [NASA-TM-78449] N78-33043

**WIND TUNNELS**  
Static pressure orifice system testing and apparatus [NASA-CASE-LAR-12269-1] N78-33123

**WINDPOWERED GENERATORS**  
Inviscid flow through wide-angle diffuser with actuator disk --- for wind turbine augmentation A78-53095

**WINDSHIELDS**  
Aircraft defogging and defrosting (transparent area) [AD-A056976] N78-33094

**WING CAMBER**  
Analysis of advanced variable camber concepts for combat aircraft A78-52592

**WING LOADING**  
Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing N78-32057  
Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction N78-32834

**WING OSCILLATIONS**  
Some mixed boundary value problems for subsonic flow past oscillating profiles A78-51198  
Oscillating airfoils. I - Wedges of arbitrary thickness in supersonic and hypersonic flow A78-53087

**WING PANELS**  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows [AIAA PAPER 78-229] A78-52630

**WING PLANFORMS**  
Aerodynamic load distributions at transonic speeds for a close-coupled wing-canard configuration: Tabulated pressure data [NASA-TM-78780] N78-33045  
Wing planform geometry effects on large subsonic military transport airplanes [AD-A056124] N78-33088

**WING PROFILES**  
An alternative treatment of lifting-line theory as a perturbation problem A78-50904  
Calculation of local three-dimensional supersonic fields A78-51184  
Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft [AIAA PAPER 78-1458] A78-52042  
Design of a transonically profiled wing [NASA-TM-75440] N78-32052

**WING SPAN**  
Comparison of wing-span averaging effects on lift, rolling moment, and bending moment for two span load distributions and for two turbulence representations [NASA-TM-78699] N78-32046

## WING TIPS

## SUBJECT INDEX

## WING TIPS

Full-scale testing of an Ogee tip rotor --- in the Langley whirl tower

N78-32830

## WINGS

Integral equation formulation for transonic flow past lifting wings

A78-50459

Basic model concepts of fluid mechanics in wing theory

A78-50752

Advanced composites wing study program. Volume 1:

Executive summary

[NASA-CR-145382-1]

N78-32185

Advanced composites wing study program, volume 2

[NASA-CR-145382-2]

N78-32186

Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1:

Executive summary

[NASA-CR-145381-1]

N78-32187

Study on utilization of advanced composites in commercial aircraft wing structures, volume 2

[NASA-CR-145381-2]

N78-32188

Assessment of load alleviation devices installed on a power-augmented-ram wing over irregular waves

[AD-A045425]

N78-33049

Aerodynamic derivatives for an oblique wing aircraft estimated from flight data by using a maximum likelihood technique

[NASA-TP-1336]

N78-33054

An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions

[NASA-CR-152109]

N78-33113

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra

[NASA-CR-152110]

N78-33114

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra

[NASA-CR-152111]

N78-33115

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2 F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions

[NASA-CR-152112]

N78-33116

## WINTER

Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation

A78-50474

Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977

A78-51338

## WIRING

Fabrication and assembly of cable strands for aircraft engines --- Russian book

A78-53432

## WURTZITE

New materials in the Si-C-Al-O-N and related systems --- for gas turbine and high temperature applications

A78-53864

## Y

## YF-12 AIRCRAFT

YF-12 experiments symposium, volume 1

[NASA-CP-2054]

N78-32055

Overview of the NASA YF-12 program

N78-32056

Recent load calibrations experience with the YF-12 airplane --- thermal stresses on Delta wing

N78-32057

Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface --- YF-12A ventral fins

N78-32058

Flight experience with altitudes hold and Mach hold autopilots on the YF-12 aircraft at Mach 3

N78-32059

The YF-12 gust velocity measuring system

N78-32061

Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control --- Lewis 10 by 10 ft supersonic wind tunnel tests

N78-32062

Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3

N78-32064

## YF-16 AIRCRAFT

Mechanization of blended A sub N mode for CCV YF-16 [AD-A056553]


N78-33089

# PERSONAL AUTHOR INDEX

AERONAUTICAL ENGINEERING / *A Continuing Bibliography (Suppl 104)*

JANUARY 1979

## Typical Personal Author Index Listing

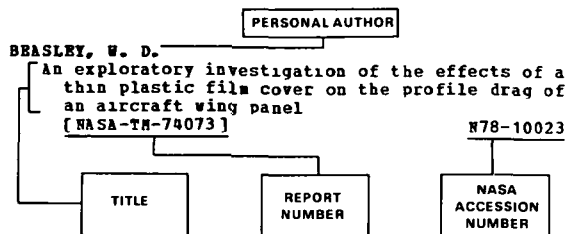

Listings in this index are arranged alphabetically by personal author. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document cited (e.g. NASA report, translation, NASA contractor report). The accession number is located beneath and to the right of the title, e.g. N78-10023. Under any one author's name the accession numbers are arranged in sequence with the IAA accession numbers appearing first.

## A

- ABEL, E.**  
Linear machine power requirements and system comparisons  
A78-51271
- ADACHI, T.**  
Numerical analysis of flow through turbine cascade by the Modified PLIC Method  
A78-50607
- AFONINA, N. E.**  
Viscous carbon dioxide flow past a blunted cone  
A78-51444
- AGACHEV, R. S.**  
A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior  
A78-50777
- AIBA, T.**  
Properties and evaporation of jet-engine fuels at pressurized conditions  
A78-50594
- AIZAWA, K.**  
Experimental verification of a blade cooling system and comparison with design calculation  
A78-50583
- ALBERY, W. B.**  
Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 [AIAA 78-1580]  
A78-50661
- ALTSHULER, E. E.**  
Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles  
A78-52360
- ANATO, R. A.**  
Advancements in ATC information displays and controller-computer interaction  
A78-52975
- ANIET, R. K.**  
Noise due to rotor-turbulence interaction  
N78-32823
- ANDERSON, V. G.**  
Titanium alloy ignition and combustion [AD-A055443]  
N78-32235
- ANIUTIN, A. E.**  
Operation of an axial-flow compressor in the case of radially nonuniform inlet flow  
A78-50793
- ANTONOV, A. N.**  
Influence of rarefaction and compression waves on base pressure  
A78-53781

- ANTONOVA, A. M.**  
Some problems of heat transfer in a boundary layer on continuously moving axisymmetric surfaces  
A78-53309
- AONO, H.**  
An automatic processing system for vibration data analysis of gas turbine engines  
A78-50623
- ARAVANUDAN, K. S.**  
Prediction and reduction of rotor broadband noise  
N78-32821  
Wind tunnel investigations of model rotor noise at low tip speeds  
N78-32828
- ARCONI, S. A.**  
Interaction of a surface wave with a dielectric slab discontinuity [AD-A055956]  
N78-32327
- ARUTIUNIAN, A. A.**  
Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers  
A78-51437
- ASLANOV, S. K.**  
Theory on the two-frequency ranges for the unsteady fluctuations of the turbulent combustion process in a jet-engine combustion chamber. II - Analysis of the characteristic equation, comparison with the experiment  
A78-50778
- ASTON, M. W.**  
High temperature elastomers in gas turbine engine fuel sealing  
A78-52686
- AWANO, S.**  
Thermodynamical performances of closed-cycle gas-turbine  
A78-50605
- AZUMA, A.**  
Improved methods for calculating the thickness noise  
N78-32832

## B

- BABENKO, Z. Y.**  
Some principles for studying reduced visibility conditions in regions around airports [NASA-TN-75152]  
N78-32642
- BAGWELL, J. W.**  
An airborne meteorological data collection system using satellite relay (ASDAR) [NASA-TN-78992]  
N78-33283
- BAHR, D. W.**  
Aircraft gas turbine low-power emissions reduction technology program [NASA-CR-135434]  
N78-32097
- BAKER, R. R.**  
Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration [AD-A055252]  
N78-32099  
Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology [AD-A055276]  
N78-32100
- BARACK, W. H.**  
Redundant disc [NASA-CASE-LEW-12496-1]  
N78-33101
- BARCLAY, W. H.**  
Experiments on the laminar flow in a rectangular streamwise corner  
A78-53765

- BARDOWICKS, H.  
Mathematical model of vortex-excited oscillations  
of thin, weakly damped structures  
A78-51153
- BARRON, R. M.  
Oscillating airfoils. I - Wedges of arbitrary  
thickness in supersonic and hypersonic flow  
A78-53087
- BASS, V. P.  
An algorithm for complex study of the aerodynamic  
characteristics of spacecraft  
A78-53506
- BASSFORD, R. S.  
Moving target detector /MTD/ radar system  
A78-52963
- BATKOV, IU. P.  
Effect of nozzle inclination on the efficiency of  
a single-nozzle microturbine  
A78-51400
- BAULIN, N. N.  
Measurement of the flow behind a hypersonic sphere  
in air, using open microwave resonators  
A78-51449
- BAUM, H. R.  
Ignition of a liquid fuel under high intensity  
radiation  
[AD-A054974] N78-32199
- BAXTER, T.  
Dynamical model of gust front  
[PP-283425/7] N78-33692
- BAYER, R. J.  
Rotary combustion engine hydrocarbon source studies  
A78-50561
- BEBENIN, G. G.  
Spacecraft flight control systems  
A78-53434
- BEEKMAN, S. W.  
Redundant disc  
[NASA-CASE-LEW-12496-1] N78-33101
- BELIK, L.  
Three-dimensional and relaminarization effects in  
turbine blade cascades - An experimental study  
A78-50608
- BELOTSEKOVSKII, S. M.  
Nonlinear mathematical modeling of unsteady flow  
past a lifting propeller  
A78-51379
- BELOVA, M. M.  
Some problems of heat transfer in a boundary layer  
on continuously moving axisymmetric surfaces  
A78-53309
- BENEPE, D. B.  
An investigation of wing buffeting response at  
subsonic and transonic speeds: Phase 1: F-111A  
flight data analysis. Volume 1: Summary of  
technical approach, results and conclusions  
[NASA-CR-152109] N78-33113  
An investigation of wing buffeting response at  
subsonic and transonic speeds. Phase 1: F-111A  
flight data analysis. Volume 2: Plotted power  
spectra  
[NASA-CR-152110] N78-33114  
An investigation of wing buffeting response at  
subsonic and transonic speeds. Phase 1: F-111A  
flight data analysis. Volume 3: Tabulated  
power spectra  
[NASA-CR-152111] N78-33115  
An investigation of wing buffeting response at  
subsonic and transonic speeds. Phase 2 P-3A  
flight data analysis. Volume 1: Summary of  
technical approach, results and conclusions  
[NASA-CR-152112] N78-33116  
An investigation of wing buffeting response at  
subsonic and transonic speeds. Phase 2: F-111A  
flight data analysis. Volume 2: Plotted power  
spectra  
[NASA-CR-152113] N78-33117  
An investigation of wing buffeting response at  
subsonic and transonic speeds. Phase 2: F-111A  
flight data analysis. Volume 3: Tabulated  
power spectra  
[NASA-CR-152114] N78-33118
- BERGE, K.  
Spacelab hardware update  
[AAS PAPER 78-005] A78-53614
- BERGER, R. B.  
B-1 EMUX automated logic diagrammer demonstration  
program  
[AD-A056964] N78-33092
- BERNARD, M.  
The Turboclar process  
A78-50449
- BHARATHAN, D.  
Aerodynamic stability testing with magnetically  
suspended models  
N78-32108
- BINGHAM, P. J.  
Maintenance of gas turbine accessory equipment  
A78-53175
- BISHOP, G.  
Application of self-cleaning air cleaners to  
aircraft and vehicular gas turbines  
A78-50633
- BIZOW, S. A.  
The aerodynamic performance of a freely hinged  
door between two flows  
A78-51464
- BLACK, D. H.  
Aerodynamic design and performance testing of an  
advanced 30 deg swept, eight bladed propeller at  
Mach numbers from 0.2 to 0.85  
[NASA-CR-3047] N78-32066
- BLAIR, A. B., JR.  
Wind-tunnel investigation at supersonic speeds of  
a canard-controlled missile with fixed and  
free-rolling tail fins  
[NASA-TP-1316] N78-32067
- BLOOMFIELD, P. E.  
Piezoelectric polymer transducers for detection of  
structural defects in aircraft  
[AD-A055729] N78-32903
- BOEHM, M.  
Current and future navigation and landing systems  
A78-50265
- BOGDANOV, A. S.  
Influence of the bypass ratio on jet-engine weight  
A78-50787
- BOGOMOLOV, E. N.  
Distortion of a flat jet in a bounded cross-stream  
in the presence of a wake space  
A78-50779
- BOHNING, R.  
Turbulent boundary layer separation on a curved  
wall with normal compression shock  
A78-51155
- BONDAR, V. A.  
Intensification of fuel evaporation in aircraft  
gas-turbine engines as a result of electric forces  
A78-50798
- BOROVSKII, V. R.  
Some problems of heat transfer in a boundary layer  
on continuously moving axisymmetric surfaces  
A78-53309
- BOWERS, A. W.  
A more fully Automated En Route ATC system  
A78-52959
- BOXWELL, D. A.  
Hovering impulsive noise: Some measured and  
calculated results  
N78-32831
- BOYCE, M. P.  
Investigation of flow in centrifugal impeller with  
tandem inducer  
A78-50614
- BOYD, T. H.  
Aircraft configurations for high-speed ships  
[AD-A055540] N78-32092
- BOYDEN, R. P.  
Subsonic dynamic stability characteristics of two  
close-coupled canard-wing configurations  
[NASA-TP-1291] N78-33050
- BOYER, J. R., JR.  
Reflections on the economic implications of  
current noise abatement financing proposals  
A78-51132
- BRANDT, U.  
Calculation of viscous flow in straight weakly  
divergent diffusors  
A78-51158
- BREKHOV, A. P.  
Operation of an axial-flow compressor in the case  
of radially nonuniform inlet flow  
A78-50793
- BRIEHL, D.  
Ozone concentration in the cabin of a Gates  
Learjet measured simultaneously with atmospheric  
ozone concentrations  
[NASA-TP-1340] N78-33618

- BROCK, J. S.**  
Ellipsometric determination of properties of films on rough surfaces such as aluminum alloy aircraft skin  
[AD-A056782] N78-33413
- BROOKBANK, E. B., III**  
Forced vibration of thin elastic shells with application to fractional horsepower hermetic refrigeration compressor shells N78-32457
- BROWN, C. M., JR.**  
Missile aerodynamic parameter and structure identification from flight test data  
[AD-A056343] N78-33055
- BROWN, S. R.**  
Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite  
[AD-A055714] N78-33197
- BROWN, T. J.**  
Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction N78-32834
- BRUCE, T. W.**  
Pollution Reduction Technology Program for small jet aircraft engines, phase 2  
[NASA-CR-159415] N78-33104
- BRUSSAT, T. R.**  
Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions  
[AD-A055483] N78-32504  
Flaw growth in complex structure. Volume 1: Technical discussion  
[AD-A056372] N78-33483
- BRYANT, J. C.**  
A data management system for weight control and design-to-cost N78-33780
- BUCH, A.**  
Effect of aircraft loading program modifications on the fatigue life and damage cumulation. Part 1: Effect of load peaks in case of central hole sheet specimens  
[TAE-334-PT-1] N78-32462
- BUNKER, W. H.**  
Circles, texture, etc. - Alternate approaches to CIG scene detail  
[AIAA 78-1578] A78-50659
- BUONO, D. F.**  
Transient dynamics of a flexible rotor with squeeze film dampers  
[NASA-CR-3050] N78-32433
- BURDESS, J. S.**  
The response of a Hooke's-joint gyroscope to linear vibration A78-52647
- BURGIN, R. E.**  
The missed approach A78-51517
- BURNSIDE, W. D.**  
Near field pattern computations for airborne antennas  
[AD-A057244] N78-33311
- BURROWS, L.**  
CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments  
[AD-A055804] N78-32077
- BURTE, H. H.**  
Opportunities for cost-affordable titanium aerospace structures A78-51839
- BURTON, T. D.**  
Simple numerical model for calculation of entry vehicle trim response A78-51284
- BUTTINGER, J. D.**  
A study of alternatives for VSTOL computer systems  
[AD-A056105] N78-33098
- C**
- CAMPBELL, R. L.**  
Full-scale testing of an Ogee tip rotor N78-32830
- CANNON, H. W., JR.**  
Terrain Contour Matching (TERCOM) Sensitivity to heading and ground-speed errors  
[AD-A056127] N78-32084
- CAPODANNO, P.**  
Two extensions of a theorem of Levi-Civita to gyroscopic systems and some applications A78-50311
- CARBONE, E. R.**  
Investigation of the technical and operational feasibility of using a VHP data link for transmission of Intermittent Positive Control (IPC) volume 1  
[AD-A055444] N78-32330
- CARDINALE, S. V.**  
Study on utilization of advanced composites in commercial aircraft wing structures. Volume 1: Executive summary  
[NASA-CR-145381-1] N78-32187
- CARLSON, H. W.**  
Estimation of leading-edge thrust for supersonic wings of arbitrary planform  
[NASA-TP-1270] N78-33051
- CARTER, J. E.**  
Inverse boundary-layer theory and comparison with experiment  
[NASA-TP-1208] N78-32385
- CAVAGNARO, D. M.**  
Air pollution emission factors: A bibliography with abstracts  
[NTIS/PS-78/0548/4] N78-32604
- CARLEY, J.**  
Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control A78-52954
- CAWTHORN, J. M.**  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports  
[NASA-TN-78769] N78-33874
- CHAKHOIAN, A. A.**  
Natural frequencies of a soft heavy cylindrical shell under the effect of internal pressure A78-50717
- CHAKRABARTY, S. K.**  
Integral equation formulation for transonic flow past lifting wings A78-50459
- CHANG, K. S.**  
Asymmetric supercritical flow past a double wedge with embedded shocks N78-32042
- CHEESEMAN, I. C.**  
Potential acoustic benefits of circulation control rotors N78-32825
- CHEBNIYAVSKII, S. IU.**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators A78-51449
- CHIU, S. T.**  
Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions  
[AD-A055483] N78-32504  
Flaw growth in complex structure. Volume 1: Technical discussion  
[AD-A056372] N78-33483
- CHMYR, G. I.**  
Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer A78-51687  
Application of the method of integral equations to the calculation of subsonic gas flows through turbine blade cascades A78-53783
- CHOY, K. C.**  
Dynamic analysis of flexible rotor-bearing systems using a model approach N78-32424
- CHU, S.**  
Prediction of pressure field induced by lifting surfaces with unsteady airloads and its application A78-50673
- CLAUSS, J. S., JR.**  
The common case study: Lockheed design of a supersonic cruise vehicle  
[NASA-CR-158935] N78-33086
- COE, P. L., JR.**  
Supersonic transport  
[NASA-CASE-LAR-11932-1] N78-32086

Effects of wing leading-edge deflection on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration [NASA-TM-78787] N78-33047

COLE, G. L.  
Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control N78-32062

COLEMAN, D. R.  
Improved passenger flow through simulation A78-50437

COMFORT, D. L.  
RIM: A prototype for a relational information management system N78-33785

CONTE, M.  
Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977 A78-51338

CORK, T. R.  
System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses [AD-A056348] N78-33097

CORSIGLIA, V. R.  
Laser-velocimeter surveys of merging vortices in a wind tunnel: Complete data and analysis [NASA-TM-78449] N78-33043

COUCH, R. P.  
Detecting abnormal turbine engine deterioration using electrostatic methods A78-51946

COX, T. L.  
Acquisition of operational data during NOE missions [AD-A055922] N78-32089

CRAWFORD, C. C., JR.  
Noise requirements from a military point of view N78-32819

CREAGER, M.  
Flaw growth in complex structure. Volume 3: Summary, assessments, conclusions [AD-A055483] N78-32504  
Flaw growth in complex structure. Volume 1: Technical discussion [AD-A056372] N78-33483

CROSBY, B.  
Investigations of simulated aircraft flight through thunderstorm outflows [NASA-CR-3052] N78-32037

CULLEN, W. H.  
Fatigue crack growth of titanium fan blades A78-51744

CULOTTA, R. F.  
Static pressure orifice system testing and apparatus [NASA-CASE-LAR-12269-1] N78-33123

CUNNAN, W. S.  
Design and performance of a 427-meter-per-second-tip-speed two-stage fan having a 2.40 pressure ratio [NASA-TP-1314] N78-33109

CUNNINGHAM, A. M., JR.  
An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: P-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152109] N78-33113  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: P-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152110] N78-33114  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112] N78-33116  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 2: Plotted power spectra [NASA-CR-152113] N78-33117

An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 3: Tabulated power spectra [NASA-CR-152114] N78-33118

CURRY, W. H.  
Hybrid computer study of the sensitivity of aircraft dynamics to aerodynamic cross-coupling [SAND-77-1309C] N78-33121

CURTICE, W. L.  
Test instrumentation system for flight simulator handling characteristics [AIAA 78-1595] A78-50669

CUSUMANO, S. J.  
An extended Kalman filter fire control system against air-to-air missiles, volume 2 [AD-A055637] N78-32091

CUTLER, I. B.  
New materials in the Si-C-Al-O-N and related systems A78-53864

D

DAEUBLER, H.-G.  
Streamline coordinates and similarity transformation for the 3-D boundary layer A78-51181

DAIUTOLO, H.  
Development and evaluation of a wake vortex advisory system A78-52965

DAVIS, E.  
Solar power satellite construction and maintenance - The first large-scale use of man-in-space [AIAA PAPER 78-1637] A78-51977

DAVIS, F. G.  
Pollution Reduction Technology Program for small jet aircraft engines, phase 2 [NASA-CR-159415] N78-33104

DE HUIZON, H.  
Assess II - A simulated mission of Spacelab A78-50276

DEANGELIS, V. M.  
Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface N78-32058

DEAVIES, E. G.  
The Navstar Global Positioning System /GPS/ A78-52952

DEL BALZO, J. M.  
ATC in the year 2000 A78-52978

DELANEY, A. J.  
Interaction of a surface wave with a dielectric slab discontinuity [AD-A055956] N78-32327

DELOACH, R.  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769] N78-33874

DELUCCIA, J. J.  
Galvanic corrosion fatigue testing of 7075-T6 aluminum bonded with graphite-epoxy composite [AD-A055714] N78-33197

DEMIDOVICH, V. M.  
Investigation of the heat regime of gas turbine engine bearings A78-53431

DENEGEL, S. P.  
Rotary combustion engine hydrocarbon source studies A78-50561

DEPONTE, M., JR.  
An extended Kalman filter fire control system against air-to-air missiles, volume 2 [AD-A055637] N78-32091

DICKISON, G. J.  
Advanced Tactical Air Combat Simulation /ATACS/ - An overview of Project 2363 [AIAA 78-1580] A78-50661

DIEHL, L. A.  
Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TM-79009] N78-33102

DILKS, K. R.  
Management of software development for advance ATC systems A78-52961

- DIVER, C.**  
On moderate injection into a separated supersonic boundary layer, with reattachment  
A78-50896
- DIX, R. E.**  
Influences of sway braces and mounting gaps on the static aerodynamic loading of external stores  
[AD-A054963] N78-32068
- DIMITRIEV, A. K.**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators  
A78-51449
- DODDS, W. J.**  
Aircraft gas turbine low-power emissions reduction technology program  
[NASA-CR-135434] N78-32097
- DOMAS, P. A.**  
Redundant disc  
[NASA-CASE-LEW-12496-1] N78-33101
- DONIH, R. B.**  
British Airways v. Port Authority - Its impact on aircraft noise regulation  
A78-51128
- DORFMAN, J. R.**  
Thirty years of fluid dynamics  
A78-51280
- DOUGLAS, B. E.**  
Transverse compressional damping in the vibratory response of elastic-viscoelastic-elastic beams  
A78-50451
- DRAUDIN, R.**  
COMPUTROL - A new technique in image generation  
[AIAA 78-1579] A78-50660
- DREW, D. A.**  
The force on a small sphere in slow viscous flow  
A78-52175
- DROBIAZKO, B. S.**  
Unsteady fluid flow in a swirl injector  
A78-50781
- DRUZHININ, L. W.**  
Optimal control of aircraft powerplant  
A78-53119
- DUBOIS, L. G.**  
The ARTS III Umbrella - Concepts and applications  
A78-52958
- DUBROVSKAYA, L. I.**  
Axisymmetric unsteady flow past obstacles in a cylindrical tube  
A78-51441
- DUGANOV, V. V.**  
Calculations of flows in flat asymmetric nozzles for overexpanded conditions  
A78-50782
- DUNHYER, W. D.**  
An investigation of wing buffeting response at subsonic and transonic speeds: Phase 1: F-111A flight data analysis. Volume 1: Summary of technical approach, results and conclusions  
[NASA-CR-152109] N78-33113  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152110] N78-33114  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 1: F-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152111] N78-33115  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2 F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions  
[NASA-CR-152112] N78-33116  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152113] N78-33117  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: F-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152114] N78-33118
- DUNN, P. K.**  
Theoretical study of multicyclic control of a controllable twist rotor  
[NASA-CR-151959] N78-33035
- DURVASULA, S.**  
Rocket structures  
N78-32123
- DUSTIN, M. O.**  
Wind tunnel evaluation of YF-12 inlet response to internal airflow disturbances with and without control  
N78-32062
- DUSTO, A. R.**  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows  
[AIAA PAPER 78-229] A78-52630
- E**
- EASTERLING, L. R.**  
Stress analysis of ceramic turbine blades by finite element method, part 1  
[AD-A056310] N78-33111
- ECKER, E. R. G.**  
Film cooling of a gas turbine blade  
A78-50580
- EDGE, A. G.**  
Improved passenger flow through simulation  
A78-50437
- EGAN, D. E.**  
Human factors engineering for head-up displays: A review of military specifications and recommendations for research  
[AD-A056944] N78-33099
- EGAN, W. J.**  
Design and verification of a turbofan swirl augmentor  
A78-50564
- EHRNBERRGER, J.**  
The YF-12 gust velocity measuring system  
N78-32061
- EHLERS, P. E.**  
An improved higher order panel method for linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628
- EICHELBERGER, J. L.**  
The application of ultraviolet cure resins for repair of composites  
[AD-A055731] N78-32273
- EINBINDER, L. W.**  
Two lightning-flash counter systems  
[AD-A057369] N78-33655
- EL-GANAL, H. A.**  
Experiments on the laminar flow in a rectangular streamwise corner  
A78-53765
- ELBAUM, J. K.**  
Opportunities for cost-affordable titanium aerospace structures  
A78-51839
- ELEZOVA, T. S.**  
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941
- EMRICH, R. J.**  
Thirty years of fluid dynamics  
A78-51280
- ENDO, H.**  
Research and development of digital jet-engine controls  
A78-50626
- ENZAKI, Y.**  
Properties and evaporation of jet-engine fuels at pressurized conditions  
A78-50594
- EPTON, H. A.**  
An improved higher order panel method for linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628  
Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows  
[AIAA PAPER 78-229] A78-52630
- ERIKSON, W. J.**  
RIM: A prototype for a relational information management system  
N78-33785



- ERNANI, P.  
Some preliminary considerations on stratospheric and mesospheric circulation with regard to the analysis of the stratospheric warming of December 1976-January 1977  
A78-51338
- ERSHOV, V. N.  
Operation of an axial-flow compressor in the case of radially nonuniform inlet flow  
A78-50793  
Influence of changes in bypass ratio on the aerodynamic behavior of a fan  
A78-50794
- ESCOFFIER, H.  
Sounding the runway  
A78-50822
- F**
- FABER, B.  
Optimization of quasi-stationary long distance flights in the case of different directions for conducting the flight according to a model which has been idealized to a large extent  
A78-51749
- FANTUZI, A.  
Feasibility of landing at an alternate airport due to visibility conditions  
A78-51341
- FARASSAT, F.  
Bounds on thickness and loading noise of rotating blades and the favorable effect of blade sweep on noise reduction  
N78-32934
- FEDCHUN, L. V.  
Numerical calculation of magnetic levitation systems  
A78-53805
- FENTON, D. L.  
Turbine engine particulate emission characterization, phase 2  
[AD-A057370]  
N78-33106
- FERNANDES, S. T.  
A distribution model for the aerial application of granular agricultural particles  
[NASA-CR-157745]  
N78-33048
- FEWELL, L. L.  
Fire resistivity and toxicity studies of candidate aircraft passenger seat materials  
A78-51838
- FIEBIG, M.  
Similarity considerations for nonequilibrium nozzle flows  
A78-51163
- FIEDLER, H.  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel  
A78-50303
- FILIN, V. A.  
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface  
A78-50791  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element  
A78-50792
- FILZ, J.  
Digital flight control system - Advanced technology of flight control  
A78-50266
- FINK, H. R.  
Minimum on-axis noise for a propeller or helicopter rotor  
A78-51949  
The importance of quadrupole sources in prediction of transonic tip speed propeller noise  
N78-32833
- FINLEY, T. D.  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports  
[NASA-TM-78769]  
N78-33874
- FIORÉ, A. W.  
M=3 turbulent boundary layer measurements at very high Reynolds numbers  
[AD-A055952]  
N78-32072
- FISHER, B. D.  
Comparison of the characteristics of bypass turbojet engine employing a small-size gas-turbine in the outer duct with those of a turbojet engine in supersonic cruising flight  
A78-50790
- FISHER, D. F.  
Boundary layer, skin friction, and boattail pressure measurements from the YF-12 airplane at Mach numbers up to 3  
N78-32064
- FOERSTER, S.  
Development of ceramic components for an automotive gas turbine  
A78-50632
- FOLAYAN, C. O.  
Impingement cooling and its application to combustor design  
A78-50584
- POLLE, M. I.  
Linear theory of supersonic flows past ruled bodies of three-dimensional configuration  
A78-51443
- POSTER, C. E.  
Helicopter external noise requirements: FAA perspective  
N78-32817
- FOX, C. H. J.  
The response of a Hooke's-joint gyroscope to linear vibration  
A78-52647
- FREEDMAN, J. E.  
Description of a model for evaluating operational performance of communications system  
[AD-A057199]  
N78-33313
- FREEMAN, C. E.  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage  
[NASA-TM-74033]  
N78-32049
- FRENKIEL, F. N.  
Thirty years of fluid dynamics  
A78-51280
- FROST, W.  
Investigations of simulated aircraft flight through thunderstorm outflows  
[NASA-CR-3052]  
N78-32037
- FROST, W. G.  
Captive carriage vibration of air-to-air missiles on fighter aircraft  
A78-51470
- FRUM, C. A.  
The Central Flow Control /CFC/ system  
A78-52960
- FUJII, S.  
Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619
- FULLER, D. E.  
Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95  
[NASA-TM-78706]  
N78-32050
- G**
- GALLOP, M. A., JR.  
Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles  
A78-52360
- GAT, W.  
Some effects of temperature on the erosion of metals  
A78-51594
- GEDDES, J. F.  
Boeing launches the 767  
A78-52244  
The L-1011-500 long-range TriStar  
A78-52245
- GERASIMENKO, V. P.  
Influence of changes in bypass ratio on the aerodynamic behavior of a fan  
A78-50794
- GERLIGA, V. A.  
Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures  
A78-50780
- HERSCH, J. A.  
The ARTS III Umbrella - Concepts and applications  
A78-52958

- GERSHBEIN, E. A.  
Contribution to the theory of three-dimensional  
hypersonic viscous gas flow past blunted bodies  
in the presence of injection  
A78-50757
- GEYSER, L. C.  
DYGABCD- A program for calculating linear A, B,  
C, and D matrices from a nonlinear dynamic  
engine simulation  
[NASA-TP-1295] N78-33110
- GISSLER, P. J.  
Acquisition of operational data during NOE missions  
[AD-A055922] N78-32089
- GILBERT, G. A.  
The helicopter operators' viewpoint  
A78-52955
- GILL, A. T.  
Optical simulator with a holographic component  
[AIAA 78-1581] A78-50671
- GILLMAN, H. D.  
The application of ultraviolet cure resins for  
repair of composites  
[AD-A055731] N78-32273
- GILYARD, G. B.  
Flight experience with altitudes hold and Mach  
hold autopilots on the YF-12 aircraft at Mach 3  
N78-32059
- GLEASON, C. C.  
Aircraft gas turbine low-power emissions reduction  
technology program  
[NASA-CR-135434] N78-32097
- GLEIZER, A. I.  
Search-method optimization of the balancing of  
flexible rotors of gas turbine engines  
A78-50795
- GLOSS, B. B.  
Aerodynamic load distributions at transonic speeds  
for a close-coupled wing-canard configuration:  
Tabulated pressure data  
[NASA-TM-78780] N78-33045
- GLOTZ, G.  
Streamline coordinates and similarity  
transformation for the 3-D boundary layer  
A78-51181
- GOLDSTEIN, B. J.  
Film cooling of a gas turbine blade  
A78-50580
- On the nature of jets entering a turbulent flow. A  
- Jet-mainstream interaction. B - Film cooling  
performance  
A78-50582
- GOLOVACHEV, IU. P.  
Calculation of viscous radiant gas flows  
A78-53556
- GOLOVANEV, IU. M.  
Experimental study of the endurance of the  
vertical-fin sections of an aircraft subjected  
to acoustic loads  
A78-50941
- GONG, L.  
In-flight compressible turbulent boundary layer  
measurements on a hollow cylinder at a Mach  
number of 3.0  
N78-32065
- GOODRICH, W. C.  
Sanders AM/FYK-14 - Bridging the gap between  
mission control and air traffic control  
A78-52954
- GOODSON, J. E.  
Human factors engineering for head-up displays: A  
review of military specifications and  
recommendations for research  
[AD-A056944] N78-33099
- GOODWIN, R.  
COMPUTROL - A new technique in image generation  
[AIAA 78-1579] A78-50660
- GORTYSNOV, IU. F.  
Heat transfer from two-phase flow to the nozzle  
walls in the presence of a condensate film on  
the nozzle surface  
A78-50791
- GRABBERR, E.  
The legal basis for security measures in air traffic  
A78-51823
- GRABITZ, G.  
Model calculations of the generation of  
self-excited oscillations in a supersonic duct  
with stepwise widening of cross section  
A78-51165
- GRAY, R. B.  
Computation of two-dimensional potential flow  
using elementary vortex distributions  
A78-51948
- GREEN, G. C.  
Helicopter noise research at the Langley V/STOL  
tunnel  
N78-32826
- GREENWOOD, R. C.  
Two lightning-flash counter systems  
[AD-A057369] N78-33655
- GRIFFITH, D. A.  
Initial development of a tactical system for  
dispersing supercooled stratus  
[AD-A056570] N78-33677
- GRIFFITH, W. C.  
Thirty years of fluid dynamics  
A78-51280
- GRIGORIAN, S. S.  
Some problems of continuum mechanics  
A78-50751
- GRISMEB, D. W.  
Study of the turbine engine industry  
[AD-A055895] N78-32103
- GROBMAN, J.  
Results and status of the NASA aircraft engine  
emission reduction technology programs  
[NASA-TM-79009] N78-33102
- GROBOV, V. G.  
Viscous carbon dioxide flow past a blunted cone  
A78-51444
- GROSSMAN, D. G.  
Aluminous Keatite - A durable ceramic material for  
rotary regenerator cores  
A78-50588
- GRUENING, J.  
Streamline coordinates and similarity  
transformation for the 3-D boundary layer  
A78-51181
- GUPTA, B. P.  
Helicopter external noise prediction and  
correlation with flight test  
N78-32829
- GUSTINCIC, J. J.  
An aircraft radiometer front end, addendum  
[NASA-CR-157777] N78-33405
- GUZANOV, B. N.  
Influence of technological factors on the  
resistance to fracture of refractory materials  
in high-speed air flows  
A78-50935

## H

- HABERCOM, G. E., JR.  
Lighter than air vehicles. Citations from the  
engineering index data base  
[NTIS/PS-78/0410/7] N78-32073
- Air traffic congestion and capacity. A  
bibliography with abstracts  
[NTIS/PS-78/0598/9] N78-32085
- Bird strikes and aviation safety. A bibliography  
with abstracts  
[NTIS/PS-78/0694/6] N78-33066
- Closed loop control systems. Part 1: Aircraft. A  
bibliography with abstracts  
[NTIS/PS-78/0809/0] N78-33122
- Closed loop control systems. Part 2:  
Miscellaneous applications. A bibliography with  
abstracts  
[NTIS/PS-78/0810/8] N78-33278
- Airport noise. A bibliography with abstracts  
[NTIS/PS-78/0807/4] N78-33639
- HAINES, A. L.  
Parameters of future ATC systems relating to  
airport capacity/delay  
[AD-A057059] N78-33068
- HALL, E. G., III  
Transient dynamics of a flexible rotor with  
squeeze film dampers  
[NASA-CR-3050] N78-32433
- HAMED, A.  
Aerodynamic effects on erosion in turbomachinery  
A78-50635
- HARR, W. D.  
Rotor wake effects on hub/pylon flow. Volume 1:  
Theoretical formulation  
[AD-A055921] N78-32070

- Rotor wake effects on hub/pylon flow. Volume 2:  
Program SHAPES user's manual  
[AD-A055767] N78-32071
- HAMMING, R. W.**  
A study of alternatives for VSTOL computer systems  
[AD-A056105] N78-33098
- HANABUSA, H.**  
An experimental study of the annular diffusers in  
axial-flow compressors and turbines  
A78-50610
- HANAMURA, Y.**  
A modification of flutter characteristics by  
changing elastic nature of neighbouring blades  
in cascade  
A78-50618
- HANSEN, E. C.**  
Blade-surface boundary layer and wake  
computational models for estimation of  
axial-flow compressor and fan blade-row turning  
angles and losses  
N78-32038
- HANSON, D. B.**  
The importance of quadrupole sources in prediction  
of transonic tip speed propeller noise  
N78-32833
- HARA, K.**  
Pressure at shroud and flow in a supersonic  
centrifugal impeller  
A78-50613
- HARDY, S. R.**  
Nonlinear rolling motion analysis of a  
Canard-controlled missile configuration at  
angles of attack from 0 to 30 degrees in  
incompressible flow  
[AD-A056695] N78-33132
- HARRIS, W. L.**  
Wind tunnel investigations of model rotor noise at  
low tip speeds  
N78-32828
- HARTMAN, W. F.**  
Analysis of the engine fragment threat and the  
crush environment for small packages carried on  
US commercial jet aircraft  
[SAND-78-0244C] N78-32078
- HARVEY, S. T.**  
Advanced composites wing study program. Volume 1:  
Executive summary  
[NASA-CR-145382-1] N78-32185  
Advanced composites wing study program, volume 2  
[NASA-CR-145382-2] N78-32186
- HASHIMOTO, H.**  
Silicon nitride ceramics for gas turbine engines  
A78-50630
- HASHIMOTO, T.**  
Radial equilibrium of flows in shock-in-rotor type  
rotors  
A78-50611
- HASTBACKA, A.**  
Sanders AM/PYK-14 - Bridging the gap between  
mission control and air traffic control  
A78-52954
- HASTINGS, E. C., JR.**  
A preliminary study of the benefits of flying by  
ground speed during final approach  
[NASA-TM-78777] N78-32076
- HAUSSLING, H. J.**  
Waves and wave resistance for air-cushion vehicles  
with time-dependent cushion pressures  
A78-51968
- HAWKINGS, D. L.**  
Theoretical models of helicopter rotor noise  
N78-32822
- HAYAMI, H.**  
Pressure at shroud and flow in a supersonic  
centrifugal impeller  
A78-50613
- HAYDEN, R. E.**  
Prediction and reduction of rotor broadband noise  
N78-32821
- HAYS, A. P.**  
The common case study: Lockheed design of a  
supersonic cruise vehicle  
[NASA-CR-158935] N78-33086
- HEFFLEY, E. K.**  
Computed responses of several aircraft to  
atmospheric turbulence and discrete wind shears  
[NASA-CR-152185] N78-32106
- HEIWE, W.**  
Loran-C, Omega, and Differential Omega applied to  
the civil air navigation requirement of CONUS,  
Alaska, and offshore. Volume 2: Analysis  
[AD-A056741] N78-33075
- HENDERSON, C.**  
V/STOL aerodynamic technology assessment  
[AD-A054797] N78-32069
- HERGET, W. F.**  
Non-extractive electro-optical measurement of  
jet-engine emissions  
[AD-A056783] N78-33105
- HERMANN, B.**  
Assess II - A simulated mission of Spacelab  
A78-50276
- HETT, W. D.**  
What's new in controller displays - Electronic  
flight strips and a color plan view display  
A78-52979
- HETTICHE, L. R.**  
Naval structural materials - Requirements, issues,  
and opportunities  
A78-51149
- HEUMANN, W.**  
Visual flight simulator for the investigation of  
the learning process during aircraft landing  
A78-50302
- HEWES, D. E.**  
Development of a nonlinear switching function and  
its application to static lift characteristics  
of straight wings  
[NASA-TM-78737] N78-32051
- HEWISH, M.**  
The shape of airliners to come  
A78-51817
- HIBNER, D. H.**  
Transient dynamics of a flexible rotor with  
squeeze film dampers  
[NASA-CR-3050] N78-32433
- HICKEY, J. V.**  
Automatic Inspection, Diagnostic and Prognostic  
AIDAPS: Test cell data collection and technical  
support  
[AD-A055385] N78-32109
- HIGASHI, K.**  
A study of fan-rotating noise reduction  
A78-50620
- HIGHFILL, J. H., III**  
Optimization of MLS receivers for multipath  
environments  
[NASA-CR-157736] N78-32080
- HIGHTER, W. E.**  
Dynamic response of aircraft to unloaded and  
loaded pavement profiles  
[AD-A055703] N78-32090
- HIGUCHI, S.**  
A research on centrifugal compressor for small gas  
turbine - The effect of recirculating flow  
A78-50612
- HILL, V. P.**  
A surface vorticity theory for propeller ducts and  
turbofan engine cowls in non-axisymmetric  
incompressible flow  
A78-52648
- HINCHEY, M. J.**  
Duct effects on the heave stability of plenum air  
cushions  
A78-52616
- HIRAOKA, K.**  
Experiment on aerodynamic and heat transfer  
characteristics of a cooled turbine cascade  
losing a few blades  
A78-50600
- HIRATA, H.**  
Near-hole region heat transfer in full-coverage  
film cooling  
A78-50579
- HIRATA, N.**  
Measurements of film cooling effectiveness  
distributions for exhausting through a double  
row of holes  
A78-50578
- HITCHON, C. K.**  
Operational Software Concept OSC executive  
evaluation/refinement  
[AD-A055902] N78-32754

- HOAD, D. R.**  
Helicopter noise research at the Langley V/STOL tunnel  
N78-32826
- HODGE, K. E.**  
Aircraft developments that hold promise for increased compatibility with an advanced ATC system  
A78-52967
- HOFFERT, M. I.**  
Feasibility of an orbital simulator of stratospheric photochemistry  
A78-51816
- HOLLIDAY, B. G.**  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769]  
N78-33874
- HOLM, J.**  
Turboexpanders for energy conservation  
A78-51621
- HOLMES, B. K.**  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports [NASA-TM-78769]  
N78-33874
- HOOG, T. W.**  
Correlated data bases for the present and future [AIAA 78-1583]  
A78-50662
- HORANOFF, E. V.**  
Investigation of a side force due to ablation  
A78-50457
- HOROWITZ, S. M.**  
Airline delay trends, 1972-1977 [AD-A056867]  
N78-33062
- HORTON, R. P.**  
Adhesive bonded aerospace structures standardized repair handbook [AD-A055684]  
N78-32270
- HUFFMAN, J. K.**  
Wind tunnel tests on a tail-less swept wing span-distributed cargo aircraft configuration [NASA-TM-78767]  
N78-32048
- HUGHES, I.**  
AIDS - Aircraft-integrated-data-system  
A78-53675
- HUHTANEN, P. H.**  
Maintenance of gas turbine accessory equipment  
A78-53175
- HUNDEBANN, A. S.**  
Fuel consumption: Transportation, volume 1. A bibliography with abstracts [NTIS/PS-78/0707/6]  
N78-33599  
Fuel consumption: Transportation, volume 2. A bibliography with abstracts [NTIS/PS-78/0708/4]  
N78-33600
- HUNT, B. L.**  
The aerodynamic performance of a freely hinged door between two flows  
A78-51464
- HUNT, J. L.**  
Hypersonic airbreathing missile [NASA-CASE-LAR-12264-1]  
N78-32168
- HUSSAIN, H. I.**  
Shear buckling of corrugated plates with quasi-sinusoidal corrugations  
N78-32458
- I**
- IAKSHIN, A. A.**  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element  
A78-50792
- IDIALTULLIN, M. S.**  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element  
A78-50792
- IKOI, T.**  
Development of velocity profile through a stage of axial flow turbomachinery  
A78-50609
- INGALLS, M. L.**  
Circles, texture, etc. - Alternate approaches to CIG scene detail [AIAA 78-1578]  
A78-50659
- INGEB, G. R.**  
Shock obliquity effect on transonic shock-boundary layer interaction  
A78-51185
- INOUE, H.**  
Calculation of cascade flow by means of spline fit singularity  
A78-50606  
Development of velocity profile through a stage of axial flow turbomachinery  
A78-50609
- INOUE, S.**  
Aerodynamic and cooling performances of a film cooled turbine  
A78-50599
- ISHIUCHI, T.**  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613
- ISHIZAWA, K.**  
A study of fan-rotating noise reduction  
A78-50620
- ISUPOV, G. P.**  
Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations  
A78-52763
- ITO, S.**  
Film cooling of a gas turbine blade  
A78-50580
- ITOH, T.**  
Development of the experimental gas turbine bus  
A78-50601
- IUGOV, O. K.**  
Optimal control of aircraft powerplant  
A78-53119
- IVANCHINOV-MARINSKII, N. N.**  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators  
A78-51449
- IVANOV, V. G.**  
Investigations of the intensity of oscillations of the boundary of a turbulent wake  
A78-51402
- IVERSEN, J. D.**  
Laser-velocimeter surveys of merging vortices in a wind tunnel: Complete data and analysis [NASA-TM-78049]  
N78-33043
- IZADPAHAH, G.**  
Modernization program for the Iranian National Airspace System  
A78-52971
- J**
- JACK, R. H.**  
New materials in the Si-C-Al-O-N and related systems  
A78-53864
- JACKSON, L. E.**  
Aviation futures to the year 2000  
A78-52966
- JANOSKY, M.**  
Sanders AN/PYK-14 - Bridging the gap between mission control and air traffic control  
A78-52954
- JANUS, B. P.**  
Applications for airborne digital communications  
A78-51896
- JENKINS, J. M.**  
Recent load calibrations experience with the YF-12 airplane  
N78-32057
- JEWELL, W. P.**  
Computed responses of several aircraft to atmospheric turbulence and discrete wind shears [NASA-CR-152185]  
N78-32106
- JINBOH, K.**  
An automatic processing system for vibration data analysis of gas turbine engines  
A78-50623
- JOBE, C. E.**  
Prospects for a civil/military transport aircraft [NASA-TM-78724]  
N78-33060
- JOHNSON, D. M.**  
Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog  
A78-51933

- JOHNSON, F. T.  
An improved higher order panel method for linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628
- Advanced panel-type influence coefficient methods applied to unsteady three dimensional potential flows  
[AIAA PAPER 78-229] A78-52630
- JOHNSON, T. G.  
CAD/CAM data management needs, requirements and options  
N78-33778
- JONES, C. R.  
A study of alternatives for VSTOL computer systems  
[AD-A056105] N78-33098
- JONES, R. E.  
Results and status of the NASA aircraft engine emission reduction technology programs  
[NASA-TM-79009] N78-33102

## K

- KADOTANI, K.  
On the nature of jets entering a turbulent flow. A - Jet-mainstream interaction. B - Film cooling performance  
A78-50582
- KAHN, A. E.  
The changing environment of international air commerce  
A78-52448
- KAIN, J. E.  
Missile aerodynamic parameter and structure identification from flight test data  
[AD-A056343] N78-33055
- KAJITA, S.  
Development of the can-type gas turbine combustors  
A78-50590
- KAKIMOTO, Y.  
A review of human factors investigation studies in aircraft accidents during the period 1957-1977 in Aeromedical Laboratory, JASDF  
A78-51497
- KAN, S.  
Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades  
A78-50600
- An experiment of deposit formation on surface of an air-cooled gas-turbine blade  
A78-50634
- KANDLER, W. D.  
System measurement improves computer responses to the controller  
A78-52974
- KARAMCHETI, K.  
Propagation of sound through a sheared flow  
[NASA-CR-152196] N78-33876
- KARKALIK, F. G.  
Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis  
[AD-A056741] N78-33075
- KARPENKO, B. K.  
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941
- KASHCHUK, I. A.  
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941
- KASHIWAGI, T.  
Ignition of a liquid fuel under high intensity radiation  
[AD-A054974] N78-32199
- KATAOKA, H.  
Broadband noise in axial-fan blade cascade  
A78-50650
- KATSUMATA, I.  
Near-hole region heat transfer in full-coverage film cooling  
A78-50579
- KAWAGUCHI, O.  
Experimental investigation on the scale effects of gas turbine combustion chambers  
A78-50591
- KAWAGUTI, K.  
Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels  
A78-50598
- KAWASHIMA, T.  
An experimental study of the annular diffusers in axial-flow compressors and turbines  
A78-50610
- An automatic processing system for vibration data analysis of gas turbine engines  
A78-50623
- KEEFPE, B. E.  
Vortex advisory system simulation of Chicago O'Hare Airport  
[AD-A057112] N78-33069
- KEEL, A. G., JR.  
Influence of surface roughness on skin friction and heat transfer for compressible turbulent boundary layers  
[AIAA PAPER 77-178] A78-52629
- KENTON, E.  
Urban noise pollution. A bibliography with abstracts  
[NTIS/PS-78/0686/2] N78-33634
- KHARITONOV, A. M.  
Interaction of turbulent boundary layers in a right-angle corner  
A78-51697
- KIDA, T.  
An alternative treatment of lifting-line theory as a perturbation problem  
A78-50904
- KIEKEBUSCH, B.  
Design of a transonically profiled wing  
[NASA-TM-75440] N78-32052
- KIEZELIS, A.  
Optimization of the structure of the LOT Polish Airlines fleet for the requirements of international passenger transport  
A78-51598
- KIM, K. H.  
Study of the turbine engine industry  
[AD-A055895] N78-32103
- KIMOSHITA, Y.  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613
- KITAJIMA, J.  
Development of the can-type gas turbine combustors  
A78-50590
- KITANO, H.  
The development of a regenerator seal for vehicular use  
A78-50587
- KLEINMAN, L.  
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary  
[AD-A056930] N78-33072
- KLINAS, P. C.  
Compressibility effects on parachute transient pressures  
A78-51950
- KLUFAN, R. M.  
Wing planform geometry effects on large subsonic military transport airplanes  
[AD-A056124] N78-33088
- KOBAYASHI, H.  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613
- Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619
- KOBAYASHI, T.  
Unsteady dynamic responses of subsonic cascades to sinusoidal gust. III - Stator and rotor blade cascades in oscillation  
A78-50617
- ROCK, B. M.  
Overview of the NASA YP-12 program  
N78-32056
- KODRES, U. R.  
A study of alternatives for VSTOL computer systems  
[AD-A056105] N78-33098
- KOEHLER, M.  
High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components  
[NASA-TM-75302] N78-32265

- KOENKE, E. J.  
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary [AD-A056930] N78-33072
- KOGAN, M. H.  
Self-focusing of a Gaussian beam in a supersonic gas flow A78-51387
- KOKIN, A. S.  
Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798
- KOKUNKO, V. S.  
Antenna fairings for flight vehicles /2nd revised and enlarged edition/ A78-53426
- KOLCUM, E. H.  
New production methods gain A78-53239
- KOLEYNI, G.  
Optimization of MLS receivers for multipath environments [NASA-CR-157736] N78-32080
- KOMAROVSKII, L. V.  
Axisymmetric unsteady flow past obstacles in a cylindrical tube A78-51441
- KONEVA, K.  
Silicon nitride ceramics for gas turbine engines A78-50630
- KONDO, Y.  
The development of a regenerator seal for vehicular use A78-50587
- KORNEEV, V. M.  
Density of motions in the flutter of infinite plates A78-52932
- KORNILOV, V. I.  
Interaction of turbulent boundary layers in a right-angle corner A78-51697
- KOSHINUMA, T.  
Research and development of digital jet-engine controls A78-50626
- KOTAKE, S.  
Noise from separated flow of flat plate A78-50622
- KOVAL, V. A.  
Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794
- KOVALENKO, M. D.  
Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines A78-53511
- KOVALHOGOV, H. H.  
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface A78-50791
- KOWALSKI, S. H.  
Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330
- KOZLOWSKI, H.  
Flight effects on the aerodynamic and acoustic characteristics of inverted profile conannular nozzles [NASA-CR-3018] N78-32836
- KRIKUNOV, V. V.  
Theoretical and experimental investigation of the wake structure behind a sphere in supersonic gas flow at small Reynolds numbers A78-51437
- KRONENBERGER, L., JR.  
Aeroelastic characteristics of a cascade of blades [AD-A055619] N78-32392
- KRONOGARD, S. O.  
Advantages of 3-shaft KTT gas turbine configurations for automotive applications A78-50602
- KRUPINSKI, E. C.  
Safety and communication requirements in air traffic control today A78-52956
- KRYLOV, I. P.  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel A78-53371
- KRYLOV, Y. V.  
Some pressing problems of setting physiological-hygienic standards for noise in aerospace medicine N78-32673
- KUBO, T.  
Silicon nitride ceramics for gas turbine engines A78-50630
- KUCHEROV, A. M.  
Self-focusing of a Gaussian beam in a supersonic gas flow A78-51387
- KUHL, A. E.  
Recent load calibrations experience with the YP-12 airplane N78-32057
- KUHN, P. H.  
Infrared passbands for clear-air-turbulence detection A78-51971
- KUHN, T. E.  
Pollution Reduction Technology Program for small jet aircraft engines, phase 2 [NASA-CR-159415] N78-33104
- KULPAN, H. H.  
Application of hypersonic favorable aerodynamic interference concepts to supersonic aircraft [AIAA PAPER 78-1458] A78-52042
- KUMARI, M.  
Unsteady three-dimensional compressible stagnation-point boundary layers A78-50456
- KUMARI, M.  
Unsteady laminar compressible boundary-layer flow at a three-dimensional stagnation point A78-50503
- KUMIROV, B. A.  
A theoretical and experimental analysis of the influence of coolant discharge from perforated turbine blades on their aerodynamic behavior A78-50777
- KURAEVA, V. P.  
Investigation of the weldability of heat-resistant titanium alloys A78-53324
- KUROSAKA, M.  
Unsteady blade rows in high-speed flow [AD-A055620] N78-32391
- KUROHARU, M.  
Calculation of cascade flow by means of spline fit singularity A78-50606
- Development of velocity profile through a stage of axial flow turbomachinery A78-50609
- KUZENKO, A. M.  
Investigation of the convergence of a method of computing the flow around cascades in a variable thickness layer A78-51687
- L
- LAMBELL, A. J.  
Precision approach monitoring and guidance using interferometer techniques A78-51551
- LANEKIN, H. S.  
Influence of the bypass ratio on jet-engine weight A78-50787
- LANE, E.  
CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments [AD-A055804] N78-32077
- LANNING, J. G.  
Aluminous keatite - A durable ceramic material for rotary regenerator cores A78-50588
- LARUSSA, J. A.  
Optical simulator with a holographic component [AIAA 78-1581] A78-50671
- LAVERY, W. P.  
Compressor seal rub energetics study [NASA-CR-159424] N78-32096

- LAWING, P. L.  
Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1] N78-32168
- LEBEDEV, N. A.  
Natural vibrations of a rigid rotor mounted on  
elastic ball bearings A78-51015
- LEBEDEV, V. P.  
Calculation of combustion efficiency in  
gas-turbine-engine combustion chambers A78-51670
- LEE, A.  
Wind tunnel investigations of model rotor noise at  
low tip speeds N78-32828
- A study of the noise radiation from four  
helicopter rotor blades N78-32835
- LEE, C. P.  
Heat transfer augmentation in flows over and  
normal to high-porosity perforated surfaces N78-32371
- LEE, J. G.  
Missile aerodynamic parameter and structure  
identification from flight test data  
[AD-A056343] N78-33055
- LEMNOS, A. Z.  
Theoretical study of multicyclic control of a  
controllable twist rotor  
[NASA-CR-151959] N78-33085
- LENA, P.  
Assess II - A simulated mission of Spacelab  
A78-50276
- LEVINE, S. R.  
Reaction diffusion in the NiCrAl and CoCrAl systems  
A78-53063
- LEWIS, G. W., JR.  
Performance of a transonic fan stage designed for  
a low meridional velocity ratio  
[NASA-TP-1298] N78-33107
- LEWIS, R. B.  
Noise-induced building vibrations caused by  
concorde and conventional aircraft operations at  
Dulles and Kennedy International Airports  
[NASA-TM-78769] N78-33874
- LIAUGHINAS, R.  
Technical evaluation report on the Fluid Dynamics  
Panel Symposium on Prediction of Aerodynamic  
Loading  
[AGARD-AR-125] N78-32074
- LICHTENSTEIN, J. H.  
Comparison of wing-span averaging effects on lift,  
rolling moment, and bending moment for two span  
load distributions and for two turbulence  
representations  
[NASA-TM-78699] N78-32046
- LIMANSKII, A. V.  
Mutual effect of thermochemical destruction of the  
surface and viscous interaction for hypersonic  
flow past a sharp cone A78-53508
- LINDOW, B. G.  
An airborne meteorological data collection system  
using satellite relay (ASDAR)  
[NASA-TM-78992] N78-33283
- LIPNITSKII, I. M.  
Theoretical and experimental investigation of the  
wake structure behind a sphere in supersonic gas  
flow at small Reynolds numbers A78-51437
- LOBANOV, N.  
From space on a parachute  
[NASA-TM-75577] N78-33140
- LOEPLER, A. L., JR.  
Inviscid flow through wide-angle diffuser with  
actuator disk A78-53095
- LOKAI, V. I.  
A computer-aided method of calculating temperature  
fields in turbine disks A78-50796
- LOKTEV, B. E.  
Nonlinear mathematical modeling of unsteady flow  
past a lifting propeller A78-51379
- LOPATIN, V. E.  
Measurement of the flow behind a hypersonic sphere  
in air, using open microwave resonators A78-51449
- LOPATKA, R. S.  
CAD/CAM data management needs, requirements and  
options N78-33778
- LORTZ, D.  
Ballooning stability boundaries for the  
large-aspect-ratio tokamak A78-53664
- LOVELL, W. A.  
Preliminary design characteristics of a subsonic  
business jet concept employing laminar flow  
control  
[NASA-CR-158958] N78-33087
- LUCIER, E.  
The FAA concept for a Beacon Collision Avoidance  
System (BCAS). Volume 1: Executive summary  
[AD-A056930] N78-33072
- LUNDGREEN, R. B.  
Dual throat thruster cold flow analysis  
[NASA-CR-150822] N78-33142
- LUTHER, P. H.  
The High Altitude Pollution Program  
[UCRL-50042-77] N78-32601
- LYKOV, O. P.  
Influence of compositions of NG 22-46 additive  
with phosphorus-containing compounds on the  
antioxidative stability of T-7 fuel A78-53371
- LYNCH, J. W.  
Noise-induced building vibrations caused by  
concorde and conventional aircraft operations at  
Dulles and Kennedy International Airports  
[NASA-TM-78769] N78-33874

## M

- MABRY, J. E.  
Commercial airport operations and community noise  
criteria  
[AD-A057451] N78-33615
- MACK, E. A.  
Development of a breadboard system for recording  
ATC displays A78-52964
- Digitized radar data compressor  
[AD-A057442] N78-33290
- MACK, R. J.  
Estimation of leading-edge thrust for supersonic  
wings of arbitrary planform  
[NASA-TP-1270] N78-33051
- MAGNUS, A. E.  
An improved higher order panel method for  
linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628
- MAHTANI, J. L.  
Linear machine power requirements and system  
comparisons A78-51271
- MAINE, R. E.  
Aerodynamic derivatives for an oblique wing  
aircraft estimated from flight data by using a  
maximum likelihood technique  
[NASA-TP-1336] N78-33054
- MALIA, J. P.  
Standard modular power supplies for avionics  
[AD-A057159] N78-33100
- MALITS, P. IA.  
Irrational flow around a spherical segment  
A78-51688
- MALBOTH, N. D.  
Generalized area rules and integral theorems for  
hypersonic wing-bodies A78-50461
- MAMEN, E.  
Satellites for position determination A78-53911
- MARISON, W. A.  
Advancements in ATC information displays and  
controller-computer interaction A78-52975
- MANTAY, W. R.  
Full-scale testing of an Ogee tip rotor  
N78-32830
- MANTY, B. A.  
Titanium alloy ignition and combustion  
[AD-A055443] N78-32235

## PERSONAL AUTHOR INDEX

MIRONOV, A. I.

MAO, Y. T.  
Preparing today, to meet the ATC challenges of tomorrow  
A78-52973

MARCHAND, H. A.  
Pitch rate flight control for the F-16 aircraft to improve air-to-air combat  
[AD-A055417] N78-32107

MARCUM, D. C., JR.  
Hypersonic airbreathing missile  
[NASA-CASE-LAR-12264-1] N78-32168

MARSTERS, G. P.  
The attachment of a ventilated plane jet to an inclined plane wall  
A78-53764

MARUTA, Y.  
Noise from separated flow of flat plate  
A78-50622

MATLOFF, G. L.  
Feasibility of an orbital simulator of stratospheric photochemistry  
A78-51816

MATOKHENIUK, L. E.  
Experimental study of the endurance of the vertical-fin sections of an aircraft subjected to acoustic loads  
A78-50941

MATSUDA, Y.  
Research and development of digital jet-engine controls  
A78-50626

MATSUKI, M.  
Recent status on research and development of FJR 710 turbofan engine  
A78-50577

MAUNDER, L.  
The response of a Hooke's-joint gyroscope to linear vibration  
A78-52647

HAYES, W. H.  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports  
[NASA-TM-78769] N78-33874

MCALPINE, G. A.  
Optimization of MLS receivers for multipath environments  
[NASA-CR-157736] N78-32080

MCCABE, E. P., JR.  
Assessment of load alleviation devices installed on a power-augmented-ram wing over irregular waves  
[AD-A045425] N78-33049

MCCARTY, J. E.  
Adhesive bonded aerospace structures standardized repair handbook  
[AD-A055684] N78-32270

MCCAWLEY, T. Q.  
Mathematical analysis of impact erosion  
A78-51711

MCCLURE, J. D.  
Analysis of the engine fragment threat and the crush environment for small packages carried on US commercial jet aircraft  
[SAND-78-0244C] N78-32078

MCCOMAS, A. D.  
Airport traffic surveillance  
A78-52957

MCCONKEY, E. D.  
Loran-C, Omega, and Differential Omega applied to the civil air navigation requirement of CONUS, Alaska, and offshore. Volume 2: Analysis  
[AD-A056741] N78-33075

MCCONNELL, J. J.  
Applications for airborne digital communications  
A78-51896

MCCURDY, D. A.  
Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes  
[NASA-TM-78736] N78-33873

MCLENNEN, J.  
CH-47 crash test (T-40) structural, cargo restraint, and air crew inflatable restraint experiments  
[AD-A055804] N78-32077

MCGREGOR, K.  
Baseline data requirements for assessing environmental impact  
[PB-281148/7] N78-32620

MCINTOSH, S. C., JR.  
Modifications and improvements in a structural optimization scheme based on an optimality criterion  
[AD-A055941] N78-32088

MCKEE, R. G.  
Fire detector response in aircraft applications  
A78-53674

MCLEAN, A. P.  
Brittle materials design, high temperature gas turbine. Volume 1: Ceramic component fabrication and demonstration  
[AD-A055252] N78-32099

Brittle materials design, high temperature gas turbine. Volume 2: Ceramic turbine rotor technology  
[AD-A055276] N78-32100

MCHIBILL, W. P.  
Nickel brazing honeycomb for aircraft gas turbine engines  
A78-53751

MEADOWS, A. J.  
Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit  
A78-52578

MEISTER, E.  
Some mixed boundary value problems for subsonic flow past oscillating profiles  
A78-51198

MELLOR, A. M.  
Alternative fuel effects upon combustion efficiency in continuous combustors  
A78-50571

MENTHE, R. W.  
Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85  
[NASA-CR-3047] N78-32066

MERTZEL, G.  
Technical-economic analysis of the direct operating costs of air transport companies  
A78-51752

MERCADO, W.  
Two lightning-flash counter systems  
[AD-A057369] N78-33655

MERCKER, E.  
Blockage correction for aerodynamic measurements in a closed subsonic wind tunnel  
A78-50303

MEYER, R. R., JR.  
Flight-measured aerodynamic loads on a 0.92 aspect ratio lifting surface  
N78-32058

MICHAELSON, G. L.  
Advanced composites wing study program. Volume 1: Executive summary  
[NASA-CR-145382-1] N78-32185

Advanced composites wing study program, volume 2  
[NASA-CR-145382-2] N78-32186

MICHEL, K. W.  
Assess II - A simulated mission of Spacelab  
A78-50276

MILLER, K. H.  
Solar power satellite construction and maintenance - The first large-scale use of man-in-space  
[AIAA PAPER 78-1637] A78-51977

MILLER, P. D.  
New materials in the Si-C-Al-O-N and related systems  
A78-53864

MILLER, R. L.  
Physical characteristics: Aviation materiel  
[AD-A055803] N78-32093

MILLS, J. S.  
Mathematical analysis of impact erosion  
A78-51711

MIMURA, F.  
Aerodynamic and cooling performances of a film cooled turbine  
A78-50599

MINECK, R. E.  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage  
[NASA-TM-74033] N78-32049

MIRONOV, A. I.  
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface  
A78-50791



- MISRA, U. N.  
Three dimensional free convection flow and heat transfer along a porous vertical plate  
A78-50288
- MITRA, N. K.  
Similarity considerations for nonequilibrium nozzle flows  
A78-51163
- MIYAI, Y.  
An alternative treatment of lifting-line theory as a perturbation problem  
A78-50904
- MIZUMACHI, N.  
A development of advanced radial gas turbine for automobile  
A78-50603
- MOKROWIECKI, A.  
New organization of air traffic over the North Atlantic region  
A78-51599
- HOLYNEUX, W. G.  
The potential of advanced technology for aircraft structures /10th J. D. North Memorial Lecture/  
A78-50400
- MONGIA, H. C.  
Pollution Reduction Technology Program for small jet aircraft engines, phase 2  
[NASA-CR-159415] N78-33104
- MOORE, D. W.  
Vortex dynamics  
A78-51051
- MOORE, R. D.  
Performance of a transonic fan stage designed for a low meridional velocity ratio  
[NASA-TP-12981] N78-33107  
Design and overall performance of four highly loaded, high speed inlet stages for an advanced high-pressure-ratio core compressor  
[NASA-TP-1337] N78-33108
- MORI, K.  
Development of the can-type gas turbine combustors  
A78-50590
- MORIGAMI, Y.  
Temperature profiles of rotating cooled blade  
A78-50581
- MORIMATSU, T.  
Near-hole region heat transfer in full-coverage film cooling  
A78-50579
- MORIN, S.  
Airline delay trends, 1972-1977  
[AD-A056867] N78-33062
- MORINO, I.  
Rotor wake effects on hub/pylon flow. Volume 1: Theoretical formulation  
[AD-A055921] N78-32070  
Rotor wake effects on hub/pylon flow. Volume 2: Program SHAPES user's manual  
[AD-A055767] N78-32071  
Geometry requirements for unsteady aerodynamics in aeroelastic analysis and design  
[NASA-TM-78781] N78-33046
- MORISHITA, T.  
A study on a premixed combustor for a vehicular gas turbine  
A78-50592  
Experiment on aerodynamic and heat transfer characteristics of a cooled turbine cascade losing a few blades  
A78-50600  
An experiment of deposit formation on surface of an air-cooled gas-turbine blade  
A78-50634
- MOROZ, A. P.  
Nonlinear vibrations of an asymmetric flight vehicle  
A78-53504
- MORRIS, G. V.  
A modular side looking airborne radar to fulfill a multitude of surveillance missions  
A78-51543
- MORRIS, O. A.  
Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95  
[NASA-TM-78706] N78-32050
- MOSES, C. A.  
Combustor performance of high availability fuels  
A78-50568
- MOSHER, M.  
A study of the noise radiation from four helicopter rotor blades  
N78-32835
- MOSS, A. E.  
Digitized radar data compressor  
[AD-A057442] N78-33290
- MUEWZBERG, H. G.  
Energy economy with high temperature gasturbine  
A78-50604
- MUIRHEAD, V. U.  
An investigation of drag reduction for tractor trailer vehicles  
[NASA-CR-144877] N78-33444
- MUKHERJEE, D. K.  
Experimental verification of a blade cooling system and comparison with design calculation  
A78-50583
- MULCAHY, J. P.  
System Avionics Value Estimation (SAVE): An aid for avionics logistics-and-support-cost analyses  
[AD-A056348] N78-33097
- MURRAY, A. L.  
Three dimensional fully viscous shock-layer flows over sphere-cones at high altitudes and angles of attack  
N78-32040
- MUSS, J. A.  
Aircraft noise - Federal pre-emption of local control, Concorde and other recent cases  
A78-51129
- MUTO, P. T.  
Estimating the average taxi speed of departing aircraft  
A78-50450

## N

- NACHMIAS, S.  
A learning control system with application to flight systems  
N78-33112
- NADYROV, N. A.  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element  
A78-50792
- NARGELI, D. W.  
Combustor performance of high availability fuels  
A78-50568
- NAGAI, N.  
Experimental investigation on the scale effects of gas turbine combustion chambers  
A78-50591
- NAGAOKA, S.  
Estimating the average taxi speed of departing aircraft  
A78-50450
- NAGASHIMA, Y.  
Temperature profiles of rotating cooled blade  
A78-50581
- NAGAYAMA, T.  
Numerical analysis of flow through turbine cascade by the Modified FLIC Method  
A78-50607
- NAKAMURA, K.  
A study on a premixed combustor for a vehicular gas turbine  
A78-50592  
A research on centrifugal compressor for small gas turbine - The effect of recirculating flow  
A78-50612
- NAKAMURA, Y.  
Improved methods for calculating the thickness noise  
N78-32832
- NAKANO, S.  
A new air blast type combustor - Design, performance and emission  
A78-50593
- NAKAYAMA, N.  
Experimental investigation on the scale effects of gas turbine combustion chambers  
A78-50591
- NATH, G.  
Unsteady three-dimensional compressible stagnation-point boundary layers  
A78-50456

- Unsteady laminar compressible boundary-layer flow  
at a three-dimensional stagnation point  
A78-50503
- BEHRER, H. H.  
A study of the effect of the rotor coil couplings  
of a synchronous machine on its predicted  
transient response  
N78-33330
- BEINER, G. H.  
Wind tunnel evaluation of YF-12 inlet response to  
internal airflow disturbances with and without  
control  
N78-32062
- BETZER, D. W.  
A validation of mathematical models for turbojet  
test cells  
[AD-A055991]  
N78-32101
- BEVE, R. S.  
Changes in conical diffuser performance by swirl  
addition  
A78-51463
- NICHOLLS, J. A.  
Calculation of CO concentration for liquid fueled  
gas turbine combustor  
A78-50560
- HICKERSON, G. R.  
Dual throat thruster cold flow analysis  
[NASA-CR-150822]  
N78-33142
- NISHIDA, A.  
Investigation of flow in centrifugal impeller with  
tandem inducer  
A78-50614
- NISHIMURA, H.  
Broadband noise in axial-fan blade cascade  
A78-50650
- NISHIO, K.  
Research and development of digital jet-engine  
controls  
A78-50626
- NISHIWAKI, H.  
Some considerations on pure tone noise generation  
in an axial-flow fan  
A78-50619
- NISHIYAMA, T.  
Unsteady dynamic responses of subsonic cascades to  
sinusoidal gust. III - Stator and rotor blade  
cascades in oscillation  
A78-50617
- NIYOGI, P.  
Approximate transonic profile flow at incidence  
with shock  
A78-51096
- NOGGLE, L. W.  
Prospects for a civil/military transport aircraft  
[NASA-TM-78724]  
N78-33060
- NOLL, R. B.  
Rotor wake effects on hub/pylon flow. Volume 1:  
Theoretical formulation  
[AD-A055921]  
N78-32070  
Rotor wake effects on hub/pylon flow. Volume 2:  
Program SHAPES user's manual  
[AD-A055767]  
N78-32071
- NOLT, I. G.  
Infrared passbands for clear-air-turbulence  
detection  
A78-51971
- NOHURA, H.  
An experiment of deposit formation on surface of  
an air-cooled gas-turbine blade  
A78-50634
- NORDENBERG, H. H.  
The Navy's approach /Air traffic control/  
A78-52969
- NORRD, L. S.  
Applications for airborne digital communications  
A78-51896
- NORTH, H. K.  
Current state of the law in aircraft noise  
pollution control  
A78-51130
- HOUSE, H.  
Aerodynamic and cooling performances of a film  
cooled turbine  
A78-50599
- NOEHRENBERG, J.  
Ballooning stability boundaries for the  
large-aspect-ratio tokamak  
A78-53664
- WYSTROM, P. A.  
Bounds on thickness and loading noise of rotating  
blades and the favorable effect of blade sweep  
on noise reduction  
N78-32834
- O**
- OBERMEIER, F.  
Some comments on sonic boom focusing  
A78-51172
- O'BRIEN, C. J.  
Dual throat thruster cold flow analysis  
[NASA-CR-150822]  
N78-33142
- OCHIAI, T.  
Silicon nitride ceramics for gas turbine engines  
A78-50630
- OELHORST, C. W.  
Quantitative mapping by remote sensing of an ocean  
acid-waste dump  
[NASA-TP-1275]  
N78-33617
- OKANO, H.  
The development of a regenerator seal for  
vehicular use  
A78-50587
- OLTHOF, H.  
Assess II - A simulated mission of Spacelab  
A78-50276
- OHELCHUK, N. D.  
Some problems of heat transfer in a boundary layer  
on continuously moving axisymmetric surfaces  
A78-53309
- OPDYKE, G., JR.  
Variability of emissions measurements on a small  
gas turbine engine  
A78-50569
- OBLIK-RUECKENHANN, K. J.  
Hybrid computer study of the sensitivity of  
aircraft dynamics to aerodynamic cross-coupling  
[SAND-77-1309C]  
N78-33121
- ORLOFF, K. L.  
Laser-velocimeter surveys of merging vortices in a  
wind tunnel: Complete data and analysis  
[NASA-TM-79449]  
N78-33043
- ORLOV, V. V.  
Theoretical study of the thermal regime of  
noncooled combustion chambers of flight vehicle  
engines  
A78-53511
- ORMSBEE, A. I.  
A distribution model for the aerial application of  
granular agricultural particles  
[NASA-CR-157745]  
N78-33048
- OSBORN, W. H.  
Performance of a transonic fan stage designed for  
a low meridional velocity ratio  
[NASA-TP-1298]  
N78-33107
- OSMUN, W. G.  
Airline contributions to better air traffic control  
A78-51518
- OSTOPKOWICZ, H.  
Operation of oil ring seals for aircraft turbine  
engines under cavitation conditions. II  
A78-51600
- OSTROM, B. B.  
Study on utilization of advanced composites in  
commercial aircraft wing structures. Volume 1:  
Executive summary  
[NASA-CR-145381-1]  
N78-32187  
Study on utilization of advanced composites in  
commercial aircraft wing structures, volume 2  
[NASA-CR-145381-2]  
N78-32188
- OTANI, T.  
The development of a regenerator seal for  
vehicular use  
A78-50587
- OTSUKA, S.  
Radial equilibrium of flows in shock-in-rotor type  
rotors  
A78-50611
- P**
- PACKMAN, A. B.  
Flight effects on the aerodynamic and acoustic  
characteristics of inverted profile coannular  
nozzles  
[NASA-CR-3018]  
N78-32836

PAHNICHAPUTT, W.  
Analysis of a high speed ring valve system for a single cylinder reciprocating compressor N78-33442

PALMER, K. P.  
High temperature elastomers in gas turbine engine fuel sealing A78-52686  
Double row radial hydraulic piston pumps for aircraft hydraulic systems A78-53249

PARK, H. K.  
New materials in the Si-C-Al-O-N and related systems A78-53864

PARRA, G. T.  
Angle detector [NASA-CASE-ARC-11036-1] N78-32395

PATEL, H. P.  
Dynamic analysis using superelements for a large helicopter model N78-32486

PATIL, P. B.  
Calculation of CO concentration for liquid fueled gas turbine combustor A78-50560  
Combustion and emission characteristics of a gas turbine combustor N78-32095

PAVLENKO, G. V.  
Influence of changes in bypass ratio on the aerodynamic behavior of a fan A78-50794

PAVLOVSKII, V. P.  
Unsteady fluid flow in a swirl injector A78-50781

PAYNE, P. R.  
The theory of fabric porosity as applied to parachutes in incompressible flow A78-51466

PCHELKIN, IV. M.  
Calculation of combustion efficiency in gas-turbine-engine combustion chambers A78-51670

PEDDIESON, J., JR.  
Mathematical analysis of impact erosion A78-51711

PEGG, R. J.  
Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise N78-32827

PELTON, E. L.  
Near field pattern computations for airborne antennas [AD-A057244] N78-33311

PENIA, B. N.  
Nonlinear vibrations of an asymmetric flight vehicle A78-53504

PENNY, H. H.  
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing [NASA-CR-150826] N78-33134

PEREVERZEV, V. G.  
Theoretical study of the thermal regime of noncooled combustion chambers of flight vehicle engines A78-53511

PERKINS, P. J.  
Ozone concentration in the cabin of a Gates Learjet measured simultaneously with atmospheric ozone concentrations [NASA-TP-1340] N78-33618

PETER, K. F.  
Investigation of the technical and operational feasibility of using a VHF data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330

PETRASH, D. A.  
Results and status of the NASA aircraft engine emission reduction technology programs [NASA-TM-79009] N78-33102

PHILIPS, A. E., III  
Aerodynamic characteristics of a 1/4 scale powered helicopter model with a V-type empennage [NASA-TM-74033] N78-32049

PHILIPPE, J. J.  
Dynamic stall: An example of strong interaction between viscous and inviscid flows [NASA-TM-75447] N78-32384

PHILLIPS, P. H.  
Applications for airborne digital communications A78-51896

PILIUGIN, H. H.  
Measurement of the flow behind a hypersonic sphere in air, using open microwave resonators A78-51449

PLANK, V. G.  
Values of diffusion coefficients deduced from the closing times of helicopter-produced clearings in fog A78-51933

PLATZ, K.  
Improved safety in air transportation through the extension and automation of flight safety systems A78-50264  
Concept and future plans for automation of air traffic control in the Federal Republic of Germany A78-52972

POKROVSKIY, B.  
Earth-to-orbital station radio bridge N78-33019

POLIAKOV, V. V.  
Calculations of flows in flat asymmetric nozzles for overexpanded conditions A78-50782

POSTRIAGIN, L. S.  
Optimization and differential games A78-52401

POP, B. G.  
Evaluation of cyclic behavior of aircraft turbine disk alloys [NASA-CR-159433] N78-33478

POPOV, B. G.  
Intensification of fuel evaporation in aircraft gas-turbine engines as a result of electric forces A78-50798

POPOV, P. D.  
Calculation of viscous radiant gas flows A78-53556

POSEY, D. L.  
Static pressure orifice system testing and apparatus [NASA-CASE-LAR-12269-1] N78-33123

POWELL, C. A.  
Laboratory and community studies of aircraft noise effects [NASA-TM-78776] N78-32815  
Comparison of low-frequency noise levels of the Concorde supersonic transport with other commercial service airplanes [NASA-TM-78736] N78-33873

POWELL, C. A., JR.  
Annoyance due to the interaction of community noise sources N78-33613

POWERS, S. G.  
Flight-measured pressure characteristics of aft-facing steps in thick boundary layer flow for transonic and supersonic Mach numbers N78-32063

PRASAD, A.  
Effect of temperature-dependent heat capacity on aerodynamic ablation of melting bodies A78-50455

PREISEL, J. H., JR.  
Stress analysis of ceramic gas turbine blades by the finite element method, part 2 [AD-A055538] N78-32102

PRESLEY, L. S.  
High angle of incidence implications upon air intake design and location for supersonic cruise aircraft and highly maneuverable transonic aircraft [NASA-TM-78530] N78-32044

PRICE, J. E.  
Boeing-747 aircraft with external cargo pod [NASA-CR-158932] N78-32047  
Preliminary design characteristics of a subsonic business jet concept employing laminar flow control [NASA-CR-158958] N78-33087

PRIGODA, B. A.  
Antenna fairings for flight vehicles /2nd revised and enlarged edition/ A78-53426

PROKOPOVICH, V. G.  
Operation of an axial-flow compressor in the case  
of radially nonuniform inlet flow  
A78-50793

## Q

QUARTERO, C. B.  
Boeing-747 aircraft with external cargo pod  
[NASA-CR-158932] N78-32047  
Preliminary design characteristics of a subsonic  
business jet concept employing laminar flow  
control  
[NASA-CR-158958] N78-33087  
QUINN, R. D.  
In-flight compressible turbulent boundary layer  
measurements on a hollow cylinder at a Mach  
number of 3.0  
N78-32065

## R

RACE, K. R.  
Mechanization of blended A sub N mode for CCV YF-16  
[AD-A056553] N78-33089  
RADOSTITZ, J. V.  
Infrared passbands for clear-air-turbulence  
detection  
A78-51971  
RAPANIELLO, W.  
New materials in the Si-C-Al-O-N and related systems  
A78-53864  
RAGSDALE, W. C.  
Investigation of a side force due to ablation  
A78-50457  
RAJ, P.  
Computation of two-dimensional potential flow  
using elementary vortex distributions  
A78-51948  
RAMSEY, P. E.  
Aerodynamic roll characteristics of a 0.00548  
scale 146-inch solid rocket booster reentry  
configuration (MSPC Model Number 486) over a  
portion of the reentry flight regime in the NASA  
MSP 14-inch trisonic wind tunnel  
[NASA-TM-78195] N78-32173  
RAO, B. H.  
Aeroelastic characteristics of a cascade of blades  
[AD-A055619] N78-32392  
RAO, C. V. V. S.  
Visibility observations at Bombay Airport during  
the winters of 1974-75 and 1975-76 when a  
skopograph was in operation  
A78-50474  
RAO, D. H.  
Wind tunnel tests on a tail-less swept wing  
span-distributed cargo aircraft configuration  
[NASA-TM-78767] N78-32048  
RATCLIFFE, S.  
Strategic or tactical air traffic control  
A78-50447  
REDDY, N. H.  
Hypersonic flows  
N78-32124  
REICHERT, J. D.  
Ellipsometric determination of properties of films  
on rough surfaces such as aluminum alloy  
aircraft skin  
[AD-A056782] N78-33413  
REID, L.  
Design and overall performance of four highly  
loaded, high speed inlet stages for an advanced  
high-pressure-ratio core compressor  
[NASA-TP-1337] N78-33108  
REINBOLD, K. A.  
Baseline data requirements for assessing  
environmental impact  
[PB-281148/7] N78-32620  
RHODES, H. D.  
Impact tests on fibrous composite sandwich  
structures  
[NASA-TM-78719] N78-33152  
RHODES, R. G.  
Linear machine power requirements and system  
comparisons  
A78-51271

RIEKE, K. L.  
Ceramics technology readiness development program.  
Phase 1: Conceptual designs and material  
screening  
[FE-2786-12] N78-33243  
RIZZETTA, D. P.  
A comparative study of two computational methods  
for calculating unsteady transonic flows about  
oscillating airfoils  
[AD-A056946] N78-33058  
RIZZI, A.  
Numerical implementation of solid-body boundary  
conditions for the Euler equations  
A78-51175  
ROBERT, K.  
Three-dimensional boundary layer theory using  
shell geometrical concepts  
A78-51176  
ROBINSON, C. A., JR.  
Key beam weapons tests slated  
A78-53238  
RODIN, K. G.  
Effect of nozzle inclination on the efficiency of  
a single-nozzle microturbine  
A78-51400  
ROGERS, W. P.  
Space shuttle separation mechanisms  
[NASA-TM-58210] N78-32177  
ROMANOV, G. S.  
Numerical simulation of the unsteady two-stage  
axisymmetric efflux of a gas into an immersed  
space  
A78-51448  
ROMANOV, N. N.  
Some principles for studying reduced visibility  
conditions in regions around airports  
[NASA-TM-75152] N78-32642  
ROMANOVICH, S. S.  
Numerical calculation of magnetic levitation systems  
A78-53805  
ROSPJORD, T. J.  
Aircraft afterburner catalytic flame stabilization  
A78-50570  
ROTTENKOLBER, P.  
High temperature ceramics for automobile gas  
turbines. Part 2: Development of ceramic  
components  
[NASA-TM-75302] N78-32265  
ROUAN, D.  
Assess II - A simulated mission of Spacelab  
A78-50276  
ROUBERT, P. E.  
An improved higher order panel method for  
linearized supersonic flow  
[AIAA PAPER 78-15] A78-52628  
RUCKER, R. A.  
A more fully Automated En Route ATC system  
A78-52959  
RYZHOV, O. S.  
On the nonstationary boundary layer with  
self-induced pressure at transonic external  
stream velocities  
A78-52043

## S

SAIMA, A.  
Experimental investigation on the scale effects of  
gas turbine combustion chambers  
A78-50591  
SAKATA, I. P.  
Study on utilization of advanced composites in  
commercial aircraft wing structures. Volume 1:  
Executive summary  
[NASA-CR-145381-1] N78-32187  
Study on utilization of advanced composites in  
commercial aircraft wing structures, volume 2  
[NASA-CR-145381-2] N78-32188  
SAKATA, K.  
Aerodynamic and cooling performances of a film  
cooled turbine  
A78-50599  
SAROKHIN, V. G.  
Experimental study of the endurance of the  
vertical-fin sections of an aircraft subjected  
to acoustic loads  
A78-50941

- SASAKI, R.  
A study of fan-rotating noise reduction  
A78-50620
- SASAKI, S.  
A development of advanced radial gas turbine for automobile  
A78-50603
- SASAKI, Y. K.  
Dynamical model of gust front  
[PB-283425/7] N78-33692
- SATO, G. T.  
Experimental investigation on the scale effects of gas turbine combustion chambers  
A78-50591
- SATO, N.  
Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels  
A78-50598
- SCALA, E.  
Design and development of helicopter external cargo sling legs made with Kevlar  
[AD-A056951] N78-33093
- SCHLITZER, L. D.  
Transient dynamics of a flexible rotor with squeeze film dampers  
[NASA-CR-3050] N78-32433
- SCHMIDT, D. A.  
Alternative fuel effects upon combustion efficiency in continuous combustors  
A78-50571
- SCHMIDT, D. K.  
Stochastic properties of conflict frequency at multiple connected air route intersections  
A78-51945
- SCHMITZ, F. H.  
Hovering impulsive noise: Some measured and calculated results  
N78-32831
- SCHOENAUER, W.  
Streamline coordinates and similarity transformation for the 3-D boundary layer  
A78-51181
- SCHOENBERGER, O.  
Preventing helicopter mid-air collisions with the proximity warning device  
A78-51223
- SCHONER, D.  
International jurisdiction related to the Warsaw Convention during the years from 1974 to 1976. II  
A78-51822
- SCHUCHMAN, L.  
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary  
[AD-A056930] N78-33072
- SCHULZ-HELBACH, K. D.  
A visual simulation procedure for the processing of television images with reduced frame rates in the case of representations of outside views from remotely piloted vehicles  
A78-52498
- SCHUPPISSEK, K.  
Assessment of the structural-mechanical design of commercial aircraft gas turbine engines  
A78-50625
- SCHWARTZ, M. H.  
Diffusion brazing titanium sandwich structures  
A78-51524
- SCHWERDT, K. R.  
The direct access radar channel - A distributed minicomputer system  
A78-52976
- SEFIC, W. J.  
Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions  
[NASA-TP-1331] N78-33053
- SEGAL, H.  
Concorde emissions at Dulles International Airport - Results of measurements  
A78-53050
- SELIVANOV, O. D.  
Optimal control of aircraft powerplant  
A78-53119
- SEMYENICHEV, A. V.  
Suboptimal adaptive filtering of radio signals  
A78-53903
- SEN, R.  
Approximate transonic profile flow at incidence with shock  
A78-51096
- SENOO, Y.  
Pressure at shroud and flow in a supersonic centrifugal impeller  
A78-50613
- SERGEVA, O. V.  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371
- SEWARDS, A.  
Satellites for position determination  
A78-53911
- SHADOWEN, J. H.  
Design and verification of a turbofan swirl augmentor  
A78-50564
- SHAH, L. C.  
Dynamic analysis using superelements for a large helicopter model  
N78-32486
- SHAHANI, V.  
Evaluation of cyclic behavior of aircraft turbine disk alloys  
[NASA-CR-159433] N78-33478
- SHAIKIN, A. P.  
Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer  
A78-50788
- SHARMA, V. P.  
Three dimensional free convection flow and heat transfer along a porous vertical plate  
A78-50288
- SHCHUKIN, V. K.  
Heat transfer from two-phase flow to the nozzle walls in the presence of a condensate film on the nozzle surface  
A78-50791
- SHEPTEL, D. J.  
Overview of potential A7C developments  
A78-52970
- SHELDON, R. G.  
Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions  
[NASA-TP-1331] N78-33053
- SHELPIAKOV, A. N.  
Experimental investigation of laminar-to-turbulent-flow transition under the effect of acoustic oscillations  
A78-52763
- SHERMAN, H. H.  
Hardened reentry vehicle development program. Erosion-resistant nosetip technology  
[AD-A056390] N78-33128
- SHIDLER, P. A.  
Exploratory wind-tunnel investigation of the effect of the main rotor wake on tail rotor noise  
N78-32827
- SHIOTA, Y.  
Full-scale testing of an Ogee tip rotor  
N78-32830
- SHIOTA, Y.  
Temperature profiles of rotating cooled blade  
A78-50581
- SHIRAKURA, T.  
Thermodynamical performances of closed-cycle gas-turbine  
A78-50605
- SHEAGER, J. J.  
The analysis of National Transportation Safety Board small multiengine fixed-wing aircraft accident/incident reports for the potential presence of low-level wind shear  
[AD-A056780] N78-33063
- SHUKIN, V. K.  
Convective heat transfer from a gas suspension to the flow area of a throttle with a blade-shaped throttling element  
A78-50792
- SHUMSKII, V. V.  
Influence of the compression process in air -- intakes on the specific impulse characteristics of a hypersonic ramjet engine  
A78-52926

## PERSONAL AUTHOR INDEX

SULLIVAN, P. A.

SICHEL, H.  
Calculation of CO concentration for liquid fueled  
gas turbine combustor  
A78-50560

SIEWERT, R. F.  
Analysis of advanced variable camber concepts for  
combat aircraft  
A78-52592

SINGH, P.  
Three dimensional free convection flow and heat  
transfer along a porous vertical plate  
A78-50288

SKREBUSHEVSKII, B. S.  
Spacecraft flight control systems  
A78-53434

SMITH, C. A.  
Propagation of sound through a sheared flow  
[NASA-CR-152196] N78-33876

SMITH, C. D.  
Standard modular power supplies for avionics  
[AD-A057159] N78-33100

SMITH, J. W.  
Flight experience with altitudes hold and Mach  
hold autopilots on the YF-12 aircraft at Mach 3  
N78-32059

SMITH, M. P.  
Fiber optics, volume 2. Citations from the NTIS  
data base  
[NTIS/PS-78/0713/4] N78-33918

SMITH, R. H.  
A theory for longitudinal short-period pilot  
induced oscillations  
[AD-A056982] N78-33120

SMITH, R. V.  
A theoretical and experimental study of  
circulation control with reference to fixed wing  
applications  
[RP-582] N78-33052

SNYDER, H. R.  
Dynamic response of aircraft to unloaded and  
loaded pavement profiles  
[AD-A055703] N78-32090

SOBIECZKY, H.  
Calculation of local three-dimensional supersonic  
fields  
A78-51184

Shock obliquity effect on transonic shock-boundary  
layer interaction  
A78-51185

SOKKAPPA, B. G.  
A system concept of metering and spacing  
A78-52968

SOKOLOV, G. A.  
Spacecraft flight control systems  
A78-53434

SONE, N.  
Development of the can-type gas turbine combustors  
A78-50590

SOOHOO, P.  
Rotor wake effects on hub/pylon flow. Volume 1:  
Theoretical formulation  
[AD-A055921] N78-32070

Rotor wake effects on hub/pylon flow. Volume 2:  
Program SHAPES user's manual  
[AD-A055767] N78-32071

SOROKIN, V. G.  
Influence of technological factors on the  
resistance to fracture of refractory materials  
in high-speed air flows  
A78-50935

SPAETH, J. L.  
Baseline data requirements for assessing  
environmental impact  
[PB-281148/7] N78-32620

SPANGENBERG, R. L.  
Helicopter manufacturing technology. III - Future  
manufacturing technologies  
A78-53174

SPATOLA, A. A.  
Values of diffusion coefficients deduced from the  
closing times of helicopter-produced clearings  
in fog  
A78-51933

SPECTOR, S. B.  
The impact of urban operations on helicopter noise  
requirements  
N78-32820

SPIETH, B. B.  
Fire resistivity and toxicity studies of candidate  
aircraft passenger seat materials  
A78-51938

SPIRIDONOV, I. A.  
Effect of wall thickness /height of the injection  
pipe/ on the mixing process in a system of  
chordal jets in a flow  
A78-50797

STAPLEFORD, R. L.  
Computed responses of several aircraft to  
atmospheric turbulence and discrete wind shears  
[NASA-CR-152185] N78-32106

STARVES, H. G.  
Maintenance of gas turbine accessory equipment  
A78-53175

STASHKOV, V. P.  
Effect of nozzle inclination on the efficiency of  
a single-nozzle microturbine  
A78-51400

STEARNS, L. P.  
Infrared passbands for clear-air-turbulence  
detection  
A78-51971

STEENKEN, W. G.  
Blade row dynamic digital compression program.  
Volume 2: J85 circumferential distortion  
redistribution model, effect of Stator  
characteristics, and stage characteristics  
sensitivity study  
[NASA-CR-134953] N78-33103

STEINER, J. C.  
Rotary combustion engine hydrocarbon source studies  
A78-50561

STEPANOV, G. I. U.  
Basic model concepts of fluid mechanics in wing  
theory  
A78-50752

STEPHENS, D. G.  
Laboratory and community studies of aircraft noise  
effects  
[NASA-TM-78776] N78-32815

Noise-induced building vibrations caused by  
concorde and conventional aircraft operations at  
Dulles and Kennedy International Airports  
[NASA-TM-78769] N78-33874

STEVANS, W.  
Design and performance of a  
427-meter-per-second-tip-speed two-stage fan  
having a 2.40 pressure ratio  
[NASA-TP-1314] N78-33109

STEWARTSON, K.  
On moderate injection into a separated supersonic  
boundary layer, with reattachment  
A78-50896

STONESIFER, P. R.  
Fatigue crack growth of titanium fan blades  
A78-51744

STOUT, G. E.  
Baseline data requirements for assessing  
environmental impact  
[PB-281148/7] N78-32620

STRIUKOV, B. A.  
Methodology questions involved in systems  
engineering for devising an optimum  
radio-engineering system for trajectory  
measurements  
A78-53253

STURGEON, R. P.  
The development and evaluation of advanced  
technology laminar-flow-control subsonic  
transport aircraft  
[AIAA PAPER 78-96] A78-52626

SUGIYAMA, N.  
Research and development of digital jet-engine  
controls  
A78-50626

SULLIVAN, B. M. S.  
Commercial airport operations and community noise  
criteria  
[AD-A057451] N78-33615

SULLIVAN, P. A.  
Duct effects on the heave stability of plenum air  
cushions  
A78-52616

- SULYNA, P. R.  
Development of base pressure similarity parameters for application to space shuttle launch vehicle power-on aerodynamic testing  
[NASA-CR-150826] N78-33134
- SUZUKI, A.  
Experimental verification of a blade cooling system and comparison with design calculation A78-50583
- SUZUKI, K.  
Experimental investigation on the scale effects of gas turbine combustion chambers A78-50591  
A new air blast type combustor - Design, performance and emission A78-50593
- SWALLOW, R.  
COMPUTROL - A new technique in image generation [AIAA 78-1579] A78-50660
- SWANN, D. A.  
Investigation of the technical and operational feasibility of using a VHP data link for transmission of Intermittent Positive Control (IPC) volume 1 [AD-A055444] N78-32330
- SWEARINGEN, J. S.  
Turboexpanders for energy conservation A78-51621
- T**
- TABAKOFF, W.  
Aerodynamic effects on erosion in turbomachinery A78-50635  
Some effects of temperature on the erosion of metals A78-51594
- TAKAHARA, K.  
Aerodynamic and cooling performances of a film cooled turbine A78-50599
- TAKEDA, K.  
Noise from separated flow of flat plate A78-50622
- TAKEHIRA, A.  
An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610
- TAKIZAWA, K.  
A development of advanced radial gas turbine for automobile A78-50603
- TALANTOV, A. V.  
Effect of wall thickness /height of the injection pipe/ on the mixing process in a system of chordal jets in a flow A78-50797
- TAMABU, T.  
A new air blast type combustor - Design, performance and emission A78-50593
- TANAKA, H.  
A modification of flutter characteristics by changing elastic nature of neighbouring blades in cascade A78-50618
- TANAKA, H.  
An experimental study of the annular diffusers in axial-flow compressors and turbines A78-50610
- TANASAWA, Y.  
A study on a premixed combustor for a vehicular gas turbine A78-50592
- TANG, M. H.  
Comparison of concurrent strain gage- and pressure transducer-measured flight loads on a lifting reentry vehicle and correlation with wind tunnel predictions [NASA-TP-1331] N78-33053
- TANNER, M.  
Two different theoretical approaches to the base pressure problem in two-dimensional supersonic flow A78-53767
- TARASHENKO, V. T.  
V70L aircraft dynamics A78-53428
- TAYLOR, S. A.  
The aerodynamic performance of a freely hinged door between two flows A78-51464
- TEDSTONE, D.  
Technical evaluation report on the 51st (A) Specialists' Meeting of the Propulsion and Energetics Panel on Icing Testing for Aircraft Engines [AGARD-AR-124] N78-32105
- TELFORD, L. E.  
Atmospheric attenuation statistics at 15 and 35 GHz for very low elevation angles A78-52360
- TESCH, W. A.  
Blade row dynamic digital compression program. Volume 2: J85 circumferential distortion redistribution model, effect of Stator characteristics, and stage characteristics sensitivity study [NASA-CR-134953] N78-33103
- TRAYER, P. C.  
And now 'the deregulators' - When will they learn A78-51127
- THEDFORD, W.  
The FAA concept for a Beacon Collision Avoidance System (BCAS). Volume 1: Executive summary [AD-A056930] N78-33072
- THIRUVENGADATHAN, A.  
Visibility observations at Bombay Airport during the winters of 1974-75 and 1975-76 when a skopograph was in operation A78-50474
- THOMAS, F.  
Aircraft guidance and flight safety - Current and future problems for research and industry A78-50263
- THOMAS, J. W.  
System definition and investigation of the on site processing of en route sensor signals. Addendum: Investigation into possible en route on site beacon ring around discriminants [AD-A056941] N78-33070
- THOMPSON, D. P.  
New materials in the Si-C-Al-O-N and related systems A78-53864
- THOMPSON, J. R.  
Initial development of a tactical system for dispersing supercooled stratus [AD-A056570] N78-33677
- THOMPSON, P. A.  
Real-gas version of the gasdynamic formulas of Saint-Venant and Wantzel A78-50304
- TIMOSHENKO, V. I.  
Mutual effect of thermochemical destruction of the surface and viscous interaction for hypersonic flow past a sharp cone A78-53508
- TISHCHENKO, V. N.  
Irrotational flow around a spherical segment A78-51688
- TKHOEVSKAIA, ZH. D.  
Investigation of the weldability of heat-resistant titanium alloys A78-53324
- TOKAR, E. W.  
Influence of constrained arrestors on the operation of gyroscopic stabilizers A78-51355
- TOKAREV, V. V.  
Mechanism of pulsating combustion of the liquid fuel fed to the airflow through the circulation zone behind the flame stabilizer A78-50788
- TONINAGA, T.  
Broadband noise in axial-fan blade cascade A78-50650
- TRABOLD, E. L.  
Fire resistivity and toxicity studies of candidate aircraft passenger seat materials A78-51838
- TRAYLOR, S., JR.  
An investigation of wing buffeting response at subsonic and transonic speeds. Phase-2-F-3A flight data analysis. Volume 1: Summary of technical approach, results and conclusions [NASA-CR-152112] N78-33116

- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 2: Plotted power spectra  
[NASA-CR-152113] N78-33117
- An investigation of wing buffeting response at subsonic and transonic speeds. Phase 2: P-111A flight data analysis. Volume 3: Tabulated power spectra  
[NASA-CR-152114] N78-33118
- TSIBIZOV, N. I.  
Fabrication and assembly of cable strands for aircraft engines  
A78-53432
- TSUBOI, T.  
Temperature profiles of rotating cooled blade  
A78-50581
- TSUCHIYA, F. Y.  
Noise control analysis for gas turbine installations  
A78-50621
- TSUGE, A.  
Silicon nitride ceramics for gas turbine engines  
A78-50630
- TUCKER, P. B.  
Captive carriage vibration of air-to-air missiles on fighter aircraft  
A78-51470
- TUNAR, N. V.  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371
- TUPPER, W. G.  
Opportunities for cost-affordable titanium aerospace structures  
A78-51839
- TURRIZIANI, R. V.  
Preliminary design characteristics of a subsonic business jet concept employing laminar flow control  
[NASA-CR-158958] N78-33087
- TURUTO, C.  
Smoke and nitric oxide control for gas turbine engines burning light/heavy fuels  
A78-50598
- TYRAN, K.  
Chevron cutting: Experiment with new runway mixtures  
[NASA-TN-75448] N78-32427
- TYTULA, T. P.  
A method for validating missile system simulation models  
[AD-A055689] N78-32169
- TZENG, C. P. J.  
Optimization of MLS receivers for multipath environments  
[NASA-CR-157736] N78-32080
- U**
- UCHAEV, I. U. F.  
The optimum shape of the aperture of an antenna array  
A78-53257
- URASEK, D. C.  
Design and performance of a 427-meter-per-second-tip-speed two-stage fan having a 2.40 pressure ratio  
[NASA-TP-1314] N78-33109
- URBAN, V. V.  
Numerical simulation of the unsteady two-stage axisymmetric efflux of a gas into an immersed space  
A78-51448
- USUI, H.  
Aerodynamic and cooling performances of a film cooled turbine  
A78-50599
- UYAMA, M.  
A study of fan-rotating noise reduction  
A78-50620
- V**
- VACHAL, J. D.  
Wing planform geometry effects on large subsonic military transport airplanes  
[AD-A056124] N78-33088
- VADYAK, J.  
The flow field calculation in supersonic mixed-compression aircraft inlets at angle of attack using the three-dimensional method of characteristics with discrete shock wave fitting  
N78-32041
- VAN ESELTINE, R. T.  
Waves and wave resistance for air-cushion vehicles with time-dependent cushion pressures  
A78-51968
- VANDERBILT, D.  
Inviscid flow through wide-angle diffuser with actuator disk  
A78-53095
- VASIN, V. A.  
Nonlinear mathematical modeling of unsteady flow past a lifting propeller  
A78-51379
- VENKATESAN, C.  
Comparison of linear and nonlinear dampers for landing gears  
A78-51947
- VERDOON, A. J.  
Performance of the Vortex-Controlled Diffuser /VCD/ in an annular combustor flowpath  
A78-50574
- VERONIS, G.  
Thirty years of fluid dynamics  
A78-51280
- VETROV, V. I.  
Experimental investigation of the thermoacoustic fluctuations in heated channels at supercritical pressures  
A78-50780
- VICKERS, T. K.  
The short-haul jet designed with ATC in mind  
A78-51516
- VINCENT, R. P.  
Precision approach monitoring and guidance using interferometer techniques  
A78-51551
- VISENIAKOVA, T. P.  
Influence of compositions of NG 22-46 additive with phosphorus-containing compounds on the antioxidative stability of T-7 fuel  
A78-53371
- VOLLMEERS, R.  
A modular side looking airborne radar to fulfill a multitude of surveillance missions  
A78-51543
- VONRIESEMAN, W. A.  
Analysis of the engine fragment threat and the crush environment for small packages carried on US commercial jet aircraft  
[SAND-78-0244C] N78-32078
- VOROBEV, V. M.  
Numerical calculation of magnetic levitation systems  
A78-53805
- W**
- WAGNER, R. A.  
Helicopter noise regulations: An industry perspective  
N78-32818
- WAINAUSKI, H. S.  
Aerodynamic design and performance testing of an advanced 30 deg swept, eight bladed propeller at Mach numbers from 0.2 to 0.85  
[NASA-CR-3047] N78-32066
- WALMSLEY, P.  
Airports in the year 2000 - Suggestions for improving capacity  
A78-50435
- WALSH, B.  
The multirole cruise missile  
A78-53716
- WALTERS, J. J.  
A validation of mathematical models for turbojet test cells  
[AD-A055991] N78-32101
- WALTERS, H.  
V/STOL aerodynamic technology assessment  
[AD-A054797] N78-32069
- WALZER, P.  
Development of ceramic components for an automotive gas turbine  
A78-50632



High-temperature ceramics for automobile gas turbines  
[NASA-TM-75457] N78-32264

High temperature ceramics for automobile gas turbines. Part 2: Development of ceramic components  
[NASA-TM-75302] N78-32265

**WANG, N.**  
Near field pattern computations for airborne antennas  
[AD-A057244] N78-33311

**WARD, D. W.**  
Noise-induced building vibrations caused by concorde and conventional aircraft operations at Dulles and Kennedy International Airports  
[NASA-TM-78769] N78-33874

**WARNER, H. H.**  
Development of a symbology exerciser for display generation and analysis on the visually-coupled airborne systems simulator (VCASS)  
[AD-A055464] N78-33124

**WARREN, D. V.**  
Airborne equipment for all weather operations  
A78-50448

**WASHBURN, G. P.**  
Boeing-747 aircraft with external cargo pod  
[NASA-CR-158932] N78-32047

Preliminary design characteristics of a subsonic business jet concept employing laminar flow control  
[NASA-CR-158958] N78-33087

**WASHBURN, K. E.**  
Aerodynamic load distributions at transonic speeds for a close-coupled wing-canard configuration: tabulated pressure data  
[NASA-TM-78780] N78-33045

**WASSENERBERGH, H. A.**  
Innovation in international air transportation regulation - The US-Netherlands agreement of 10 March 1978  
A78-52447

**WATANABE, H.**  
Some considerations on pure tone noise generation in an axial-flow fan  
A78-50619

**WATSON, C. B.**  
Aerodynamic characteristics of a fixed arrow-wing supersonic cruise aircraft at Mach numbers of 2.30, 2.70, and 2.95  
[NASA-TM-78706] N78-32050

**WATTS, R.**  
European air transport up to the year 2000 /Lord Douglas of Kirtleside Lecture/  
A78-51520

**WAYMON, G. R.**  
Captive carriage vibration of air-to-air missiles on fighter aircraft  
A78-51470

**WEGLER, D.**  
Glass airports  
A78-50434

**WEGMANN, H. W.**  
Assess II - A simulated mission of Spacelab  
A78-50276

**WELTE, D.**  
Profile design for an advanced-technology airfoil for general aviation aircraft  
[NASA-TM-75323] N78-32054

**WERESZCZYNSKI, J.**  
Accuracy of ship-position determination by means of NNSS Transit  
A78-51889

The use of Doppler-shift position lines in satellite navigation systems  
A78-51890

**WERNER, CH.**  
Assess II - A simulated mission of Spacelab  
A78-50276

**WESTON, R. P.**  
Effects of wing leading-edge deflection on the low-speed aerodynamic characteristics of a low-aspect-ratio highly swept arrow-wing configuration  
[NASA-TM-78787] N78-33047

**WHEELER, G. L.**  
Baseline data requirements for assessing environmental impact  
[PB-281148/7] N78-32620

**WHITCOMB, W. P.**  
Impact of federal noise abatement policy on aircraft financing  
A78-51131

**WHITEHEAD, A. H., JR.**  
Prospects for a civil/military transport aircraft  
[NASA-TM-78724] N78-33060

Characteristics of future air cargo demand and impact on aircraft development: A report on the Cargo/Logistic Airlift Systems Study (CLASS) project  
[NASA-TM-78774] N78-33061

**WHITEHEAD, R. E.**  
Analysis of advanced variable camber concepts for combat aircraft  
A78-52592

**WHITELAW, J. H.**  
Impingement cooling and its application to combustor design  
A78-50584

**WIBLEBSKI, K.**  
Accuracy of ship-position determination by means of NNSS Transit  
A78-51889

**WIERSMA, S. J.**  
Fire detector response in aircraft applications  
A78-53674

**WIJNBERGEN, J.**  
Assess II - A simulated mission of Spacelab  
A78-50276

**WILDE, G. L.**  
Future large civil turbofans and powerplants /Seventeenth Short Bros. Commemorative Lecture/  
A78-51510

**WILLETT, P. M., JR.**  
Area navigation - Fast-time/real-time simulations in a high-altitude center environment  
A78-52977

**WILLIAMS, R. M.**  
Potential acoustic benefits of circulation control rotors  
N78-32825

**WILLIAMS, V.**  
Eddy current torques, air torques, and the spin decay of cylindrical rocket bodies in orbit  
A78-52578

**WILLOUGHBY, H. G.**  
Operational Software Concept OSC executive evaluation/refinement  
[AD-A055902] N78-32754

**WILSON, D. A.**  
The aerodynamic performance of a freely hinged door between two flows  
A78-51464

**WILSON, J. R.**  
The common case study: Lockheed design of a supersonic cruise vehicle  
[NASA-CR-158935] N78-33086

**WINGETT, C. M.**  
Assess II - A simulated mission of Spacelab  
A78-50276

**WINTER, A. E.**  
Satellites for position determination  
A78-53911

**WIRASINGHE, M. E. A.**  
Changes in conical diffuser performance by swirl addition  
A78-51463

**WISNER, C.**  
Initial development of a tactical system for dispersing supercooled stratus  
[AD-A056570] N78-33677

**WITHINGTON, H. W.**  
Design concepts for future air freighters  
A78-52450

**WOOLLEY, J. P.**  
Propagation of sound through a sheared flow  
[NASA-CR-152196] N78-33876

**WRIGHT, S. E.**  
Theory on acoustic sources  
N78-32824

**WRIGLEY, B.**  
Technical evaluation report on the 51st(B) PEP Specialists' Meeting of the Propulsion and Energetics Panel on Seal Technology in Gas Turbine engines  
[AGARD-AR-123] N78-32104

## Y

- YAHADA, H.  
A new air blast type combustor - Design,  
performance and emission  
A78-50593
- YAHADA, H.  
Numerical study on the stability dependence of  
geostrophic drag and cross-isobar angle  
A78-50691
- YAHAGUCHI, H.  
Broadband noise in axial-fan blade cascade  
A78-50650
- YAHAMOTO, A.  
Aerodynamic and cooling performances of a film  
cooled turbine  
A78-50599
- YAHAZAKI, S.  
Development of the experimental gas turbine bus  
A78-50601
- YANG, J. C. S.  
Transverse compressional damping in the vibratory  
response of elastic-viscoelastic-elastic beams  
A78-50451
- YAROSLAVTSEVA, H. N.  
Some principles for studying reduced visibility  
conditions in regions around airports  
[NASA-TM-75152] N78-32642
- YATES, E. C., JR.  
Geometry requirements for unsteady aerodynamics in  
aeroelastic analysis and design  
[NASA-TM-78781] N78-33046
- YOSHIDA, Y.  
Aerodynamic and cooling performances of a film  
cooled turbine  
A78-50599
- YOSHINAKA, T.  
Surge responsibility and range characteristics of  
centrifugal compressors  
A78-50616
- YOSHIOKA, E.  
Estimating the average taxi speed of departing  
aircraft  
A78-50450
- YOUNG, R. H.  
Independent power generator  
[NASA-CASE-LAR-11208-1] N78-32539
- YU, Y. H.  
Hovering impulsive noise: Some measured and  
calculated results  
N78-32831

## Z



- ZAIKIN, V. H.  
Theoretical and experimental investigation of the  
wake structure behind a sphere in supersonic gas  
flow at small Reynolds numbers  
A78-51437
- ZATOLOKA, V. V.  
Influence of the compression process in air  
intakes on the specific impulse characteristics  
of a hypersonic ramjet engine  
A78-52926
- ZHUKOV, V. V.  
A computer-aided method of calculating temperature  
fields in turbine disks  
A78-50796
- ZHURAVSKII, V. A.  
Effect of wall thickness /height of the injection  
pipe/ on the mixing process in a system of  
chordal jets in a flow  
A78-50797
- ZIEREP, J.  
Turbulent boundary layer separation on a curved  
wall with normal compression shock  
A78-51155
- ZVEGINTSEV, V. I.  
Influence of the compression process in air  
intakes on the specific impulse characteristics  
of a hypersonic ramjet engine  
A78-52926

# CONTRACT NUMBER INDEX

AERONAUTICAL ENGINEERING / A Continuing Bibliography (Suppl 104)

JANUARY 1979

## Typical Contract Number Index Listing



Listings in this index are arranged alphanumerically by contract number. Under each contract number the accession numbers denoting documents that have been produced as a result of research done under that contract are arranged in ascending order with the IAA accession numbers appearing first. The accession number denotes the number by which the citation is identified in either the IAA or STAR section.

AP PROJ. 486J N78-33095  
 AP PROJ. 2068 N78-33055  
 AP PROJ. 2307 N78-32392  
 N78-33058  
 AP PROJ. 2308 N78-37199  
 AP PROJ. 7233 N78-32084  
 AP-AFOSR-2451-73G N78-33413  
 AP-AFOSR-2700-74 N78-32392  
 AP-AFOSR-3278-77 N78-33413  
 AFOSR-ISSA-77-0016 N78-32199  
 ARPA ORDER 1849 N78-32099  
 N78-32100  
 DA PROJ. 1F2-62209-AH76-06 N78-33093  
 DA PROJ. 1T1-61101-A-91A N78-32169  
 DA PROJ. 4A1-61102-AT-24 N78-32327  
 DA-ARO (D) -124-G154 A78-51594  
 DAAG29-76-C-0027 N78-32828  
 DAAG29-76-G-0229 A78-50635  
 DAAG46-71-C-0162 N78-32099  
 N78-32100  
 DAAJ01-71-A-0335 N78-32109  
 DAAJ02-75-C-0041 N78-32070  
 N78-32071  
 DAAJ02-76-C-0025 N78-33093  
 DAAJ02-76-C-0065 N78-32089  
 DFG-SPB-61 A78-51158  
 DNA001-75-C-0054 N78-33128  
 DOT-FA70WA-2448 A78-52959  
 DOT-FA75WA-3553 N78-33070  
 DOT-FA75WA-3662 N78-33075  
 DOT-FA75WA-3686 N78-33313  
 DOT-FA75WA-3722 N78-33106  
 DOT-FA76WA-3788 N78-32330  
 DOT-FA76WAI-622 N78-33692  
 DOT-FA77WAI-723 N78-33615

DOT-FA77WAI-744 N78-33105  
 DOT-FA78WA-4075 N78-33068  
 E(49-18)-2465 A78-50635  
 EF-77-C-01-2786 N78-33243  
 EY-76-C-04-0789 N78-32078  
 N78-33121  
 FAA PPOJ. 154-451-110 N78-33063  
 F08635-77-C-0062 N78-33055  
 F08635-77-C-0181 N78-32090  
 F19628-76-C-0306 N78-33677  
 F33615-73-C-5171 N78-32270  
 F33615-75-C-3016 N78-33095  
 F33615-75-C-3093 N78-32504  
 N78-33483  
 F33615-76-C-0038 A78-50659  
 F33615-76-C-1192 N78-32754  
 F33615-76-C-1240 N78-33100  
 F33615-76-C-1299 N78-33097  
 N78-33088  
 F33615-76-C-3146 N78-33058  
 F33615-77-C-3011 N78-33120  
 F44620-71-C-0021 A78-50461  
 F44620-74-C-0040 N78-32391  
 F44620-76-C-0020 A78-51466  
 F49620-77-C-0055 N78-32088  
 JPL-954492 N78-33405  
 MDA903-76-C-0220 N78-32103  
 NASW-2790 N78-32642  
 NASW-3198 N78-32052  
 N78-32264  
 N78-32384  
 NASW-3199 N78-32043  
 N78-32054  
 N78-32427  
 N78-33140  
 NAS1-13500 N78-32047  
 N78-33087  
 NAS1-13694 A78-52626  
 NAS1-14624 N78-32087  
 NAS1-14625 N78-33086  
 NAS1-15003 N78-32185  
 N78-32186

NAS1-15005 N78-32188  
 NAS1-15145 N78-32094  
 NAS1-15155 N78-32079  
 NAS1-28611 N78-32187  
 NAS2-7091 N78-33113  
 N78-33114  
 N78-33115  
 N78-33116  
 N78-33117  
 N78-33118  
 NAS2-7729 A78-52628  
 A78-52630  
 NAS2-7738 N78-33085  
 NAS2-8583 A78-53674  
 NAS2-8889 N78-32106  
 NAS2-9357 N78-33876  
 NAS3-17866 N78-32836  
 NAS3-18523 N78-32433  
 NAS3-18526 N78-33103  
 NAS3-20044 N78-33104  
 NAS3-20219 N78-32066  
 NAS3-20368 N78-33478  
 NAS3-20580 N78-32097  
 NAS3-20613 N78-32096  
 NAS7-100 N78-33405  
 NAS8-32217 N78-32037  
 NAS8-32658 N78-33134  
 NAS8-32666 N78-33142  
 NOAA-04-6-022-44031  
 N78-33692  
 NRC A-3378 A78-52616  
 NRC A-4310 A78-53764  
 NSC-66E-0401-02 (01)  
 A78-50673  
 NSG-1128 N78-32080  
 NSG-1298 A78-51816  
 NSG-1400 N78-33048  
 NSG-1474 N78-32834  
 NSG-3148 A78-50560  
 NSG-4009 N78-33444  
 N00014-76-C-0246  
 A78-50580  
 N00019-77-C-0299  
 N78-33311  
 N62269-76-C-0429  
 N78-32235  
 N62269-77-N-3186  
 N78-32903  
 N62269-77-N-7197  
 N78-32273  
 PROJ. 989156 N78-32903  
 W-7405-ENG-48  
 N78-32601  
 WP41400000 N78-32069  
 ZP54590001 N78-33197  
 141-95-01 N78-33444  
 176-30-34-05 N78-33617  
 505-02-13-42 N78-33152  
 505-03-13-15 N78-32816  
 505-03-32 N78-33104  
 505-04 N78-33107  
 N78-33108  
 N78-33109  
 505-05 N78-33110  
 505-05-22 N78-33103  
 505-06-33-08 N78-32385  
 505-08 N78-33618  
 505-09-13-11 N78-32815  
 N78-33873  
 N78-33874  
 505-10-13-03 N78-32046  
 505-10-13-04 N78-32051  
 505-10-21 N78-33085  
 505-10-23-05 N78-32049  
 505-10-31 N78-32044  
 505-11-13-01 N78-32050  
 N78-33051  
 505-11-13-03 N78-32048  
 505-11-23-03 N78-32067  
 505-11-23-13 N78-33050  
 505-11-54 N78-33054  
 510-54-03-01 N78-33776  
 515-51-11-01 N78-32075  
 515-52-10 N78-33043  
 515-52-13-52 N78-32076

516-50-23-01 N78-33087  
 516-51-04 N78-32055  
 521-71-01 N78-33053  
 743-04-13-02 N78-33047  
 791-40-13-01 N78-32047  
 N78-33061  
 953-36-00-00-72  
 N78-32177

1 Report No NASA SP-7037 (104)	2 Government Accession No	3 Recipient's Catalog No	
4 Title and Subtitle AERONAUTICAL ENGINEERING A Continuing Bibliography (Supplement 104)		5 Report Date January 1979	6 Performing Organization Code
		8 Performing Organization Report No	
7 Author(s)		10 Work Unit No	
9 Performing Organization Name and Address  National Aeronautics and Space Administration Washington, D. C. 20546		11 Contract or Grant No	
		13 Type of Report and Period Covered	
12 Sponsoring Agency Name and Address		14 Sponsoring Agency Code	
		15 Supplementary Notes	
16 Abstract  This bibliography lists 532 reports, articles, and other documents introduced into the NASA scientific and technical information system in December 1978.			
17 Key Words (Suggested by Author(s))  Aerodynamics Aeronautical Engineering Aeronautics Bibliography		18 Distribution Statement  Unclassified - Unlimited	
19 Security Classif (of this report) -- Unclassified --	20 Security Classif (of this page) -- Unclassified --	21 No of Pages 158	22 Price* E02 \$4.75 HC

# PUBLIC COLLECTIONS OF NASA DOCUMENTS

## DOMESTIC

NASA distributes its technical documents and bibliographic tools to eleven special libraries located in the organizations listed below. Each library is prepared to furnish the public such services as reference assistance, interlibrary loans, photocopy service, and assistance in obtaining copies of NASA documents for retention.

### CALIFORNIA

University of California, Berkeley

### COLORADO

University of Colorado, Boulder

### DISTRICT OF COLUMBIA

Library of Congress

### GEORGIA

Georgia Institute of Technology, Atlanta

### ILLINOIS

The John Crerar Library, Chicago

### MASSACHUSETTS

Massachusetts Institute of Technology, Cambridge

### MISSOURI

Linda Hall Library, Kansas City

### NEW YORK

Columbia University, New York

### OKLAHOMA

University of Oklahoma, Bizzell Library

### PENNSYLVANIA

Carnegie Library of Pittsburgh

### WASHINGTON

University of Washington, Seattle

NASA publications (those indicated by an "\*" following the accession number) are also received by the following public and free libraries:

### CALIFORNIA

Los Angeles Public Library

San Diego Public Library

### COLORADO

Denver Public Library

### CONNECTICUT

Hartford Public Library

### MARYLAND

Enoch Pratt Free Library, Baltimore

### MASSACHUSETTS

Boston Public Library

### MICHIGAN

Detroit Public Library

### MINNESOTA

Minneapolis Public Library

### MISSOURI

Kansas City Public Library

St. Louis Public Library

### NEW JERSEY

Trenton Public Library

### NEW YORK

Brooklyn Public Library

Buffalo and Erie County Public Library

Rochester Public Library

New York Public Library

### OHIO

Akron Public Library

Cincinnati Public Library

Cleveland Public Library

Dayton Public Library

Toledo Public Library

### TENNESSEE

Memphis Public Library

### TEXAS

Dallas Public Library

Fort Worth Public Library

### WASHINGTON

Seattle Public Library

### WISCONSIN

Milwaukee Public Library

An extensive collection of NASA and NASA-sponsored documents and aerospace publications available to the public for reference purposes is maintained by the American Institute of Aeronautics and Astronautics, Technical Information Service, 750 Third Avenue, New York, New York 10017.

## EUROPEAN

An extensive collection of NASA and NASA-sponsored publications is maintained by the British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. By virtue of arrangements other than with NASA, the British Library Lending Division also has available many of the non-NASA publications cited in STAR. European requesters may purchase facsimile copy of microfiche of NASA and NASA-sponsored documents, those identified by both the symbols "\*" and "#", from ESA - Information Retrieval Service, European Space Agency, 8-10 rue Mario-Nikis, 75738 Paris CEDEX 15, France.

National Aeronautics and  
Space Administration

Washington, D.C.  
20546

Official Business  
Penalty for Private Use, \$300

THIRD-CLASS BULK RATE

Postage and Fees Paid  
National Aeronautics and  
Space Administration  
NASA-451



POSTMASTER: If Undeliverable (Section 158  
Postal Manual) Do Not Return

## NASA CONTINUING BIBLIOGRAPHY SERIES

NUMBER	TITLE	FREQUENCY
NASA SP-7011	AEROSPACE MEDICINE AND BIOLOGY Aviation medicine, space medicine, and space biology	Monthly
NASA SP-7037	AERONAUTICAL ENGINEERING Engineering, design, and operation of aircraft and aircraft components	Monthly
NASA SP-7039	NASA PATENT ABSTRACTS BIBLIOGRAPHY NASA patents and applications for patent	Semiannually
NASA SP-7041	EARTH RESOURCES Remote sensing of earth resources by aircraft and spacecraft	Quarterly
NASA SP-7043	ENERGY Energy sources, solar energy, energy conversion, transport, and storage	Quarterly
NASA SP-7500	MANAGEMENT Program, contract, and personnel management, and management techniques	Annually

*Details on the availability of these publications may be obtained from:*

**SCIENTIFIC AND TECHNICAL INFORMATION OFFICE  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
Washington, D.C. 20546**