

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

Laboratory for Information and Decision Systems
Massachusetts Institute of Technology
Cambridge, Massachusetts 02139

(NASA-CR-158474) SIMULATION EVALUATION OF
COMBINED 4D RNAV AND AIRBORNE TRAFFIC
SITUATION DISPLAYS AND PROCEDURES APPLIED TO
TERMINAL AERIAL MANEUVERS Semi-annual
Progress Report, 1 Sep. 1978 (Massachusetts G3/04

N79-21033

Unclassified
14735

Semi-Annual Progress Report

Simulation Evaluation of Combined 4D RNAV and Airborne
Traffic Situation Displays and Procedures Applied
to Terminal Area Maneuvers

Principal Investigators: Michael Athans
Mark E. Connally

Period: September 1, 1978 to March 1, 1979

Grant NSG-2180
NASA-Ames Research Center
Moffett Field, CA 94035



Massachusetts Institute of Technology
Laboratory for Information and Decision Systems
Cambridge, Massachusetts 02139

Semi-Annual Status Report
(NASA Ames Grant NSG-2180)

April 1979

Introduction

The principal objective of this research is to prepare and evaluate a set of simulation scenarios in which subject pilots must carry out the following critical approach functions simultaneously:

1. Follow a 3D terminal airspace structure and arrive at fixed waypoints within the structure precisely at pre-scheduled times in the presence of a full range of wind conditions aloft.
2. Monitor nearby traffic on an Airborne Traffic Situation Display, especially during merging and spacing operations, and detect blunders and resolve conflicts in a safe manner.

These functions represent two key tasks in the application of distributed management to the problem of providing adequate ATC capacity, safety, and efficiency at busy terminals.

Open-loop simulator tests of the single-stage 4D RNAV algorithm developed by the project indicate that a descending pilot can comply quite closely with an assigned time of arrival at a 3D waypoint simply by tracking a pre-calculated speed profile. In these tests, the pilot cuts back to idle thrust at a given DME distance from the waypoint and keeps the aircraft descending at constant Mach and/or constant EAS almost solely with stabilizer trim adjustments. Our initial experiments show that the aircraft arrives at the 3D waypoint within a few seconds of the anticipated time. The presence of headwinds or tailwinds

does not affect the arrival time error as long as the wind is accurately modeled in the descent algorithm. The accuracy achieved in the open-loop, single-stage descents was much better than expected. These results all but guarantee that a 5 second standard deviation in arrival time error can be realized in closed-loop descents at very moderate pilot workload levels. The term "closed-loop" means that the descent profile required to get the aircraft to the 3D waypoint at the scheduled time is periodically recomputed throughout the descent and the pilot receives a continuous indication of the correct air-speed. The principal advantage of the closed-loop approach is that errors in wind estimation and pilot errors can be compensated for as long as the aircraft stays within its normal speed-altitude envelope. The disadvantage of the closed-loop technique is that an on-board computer, properly interfaced with other aircraft systems, is required, whereas the open-loop technique can be implemented in the immediate future employing existing hand-calculators such as the TI59. For all practical purposes, it appears that the main limitation on the performance of an open-loop descent is the degree to which winds aloft can be accurately estimated.

Research Activity

A. Open-Loop Descent Algorithm Development

The following working programs have been written by the project based on the descent algorithm analyzed in the last semi-annual progress report:

1. Complete Algorithm for the TI59 Hand Calculator (predicts horizontal distance and elapsed time for an idle thrust descent from 36,000' to 10,000' given the desired Mach during the first phase of the descent and the desired equivalent airspeed during the second phase). Running Time is 5 minutes, 13 seconds.

2. Simplified Algorithm for the TI59 applicable to a descent between any two integer altitudes in the range 40,000' to sea level with constant headwinds/tailwinds. Running time has been reduced to 2 minutes, 40 seconds by using only one iteration at each altitude level and simplifying the computation in the transition zone between constant EAS and constant Mach.

3. Complete Algorithm in FORTRAN for running baseline solutions on the Adage AGT-30 computer. The values obtained from this program have been used to check the results of open-loop descents in the 707 simulator from 36,000' to 10,000' and to check the TI59 results.

4. Real-time, closed-loop algorithm in Adage AGT-30 assembly language (ADEPT) continuously computes and displays the Mach or EAS value required to arrive at a 3D waypoint at the assigned time.

The basic building block for all of these programs is a computation sequence which estimates the horizontal distance and elapsed time corresponding to a given Mach-EAS descent profile. The algorithm is based on two equations which sum the longitudinal wind axis force components (zero thrust assumed):

$$-D - mg \sin \gamma = m(\dot{TAS} + \dot{w} \cos \gamma)$$

$$-L + mg \cos \gamma = m(w \sin \gamma - \dot{\gamma} TAS)$$

These equations are solved at discrete altitude levels between the aircraft's cruise altitude and the desired altitude at the destination waypoint. At present, even numbered altitudes between sea level and 40,000 ft. are employed as computation points. Using a piecewise-linear approximation to the trajectory, the time and horizontal distance required to traverse each 2,000 ft. altitude increment are then found. These values are summed to obtain the overall elapsed time and the horizontal distance covered during the descent.

As with most finite difference algorithms of this type, some of the values required during the calculations are not available until the calculation is

is completed. As a consequence, the computation must be repeated (iterated) one or more times to obtain more accurate approximations for the missing values. In the M.I.T. descent algorithm, no more than two passes through the routine at each altitude level are employed. Additional iterations, it was found, have very little effect on the results.



The same basic algorithm is implemented quite differently in FORTRAN, in the TI59, and in the Adage assembly language ADEPT because of the unique constraints imposed in each case. The FORTRAN program, for example, makes one complete pass through all the altitude levels, storing the interim results in ten tables for use in the second pass. This extravagant use of storage tables was impossible in the TI59, which is memory limited. In the latter program, consequently, two iterations are executed at each altitude in sequence in the full version and one iteration per altitude in the short version. Minimizing the running time was the main consideration in organizing the real-time ADEPT program. Since it operates repetitively at a one solution per second rate during the descent, values generated in the prior frame are used to approximate the missing variables in the current frame, hence only one pass through the algorithm is required per frame.



A flow chart for the FCRTRAN version of the algorithm is given in Figure 1 and a flow chart of the short TI59 program is presented in Figure 2. A listing of the FORTRAN program is given in Appendix A as well as a set of outputs for three descent profiles (standard, medium speed, slow speed). A listing of the short TI59 program is given in Appendix B. The real-time Adage descent program is still being tested and refined, hence it will be documented at a later date.

The results from the FORTRAN and TI59 program agree quite well. For example, on a standard .83 Mach - 320 knot EAS descent from 36,000' to 10,000' the FORTRAN program predicts an elapsed time of 591 seconds and the TI59 program predicts 591.6 seconds. Horizontal distance according to the FORTRAN program will be

ORIGINAL PAGE IS
OF POOR QUALITY


FIGURE 1
FORTRAN 4DRNAV (1)

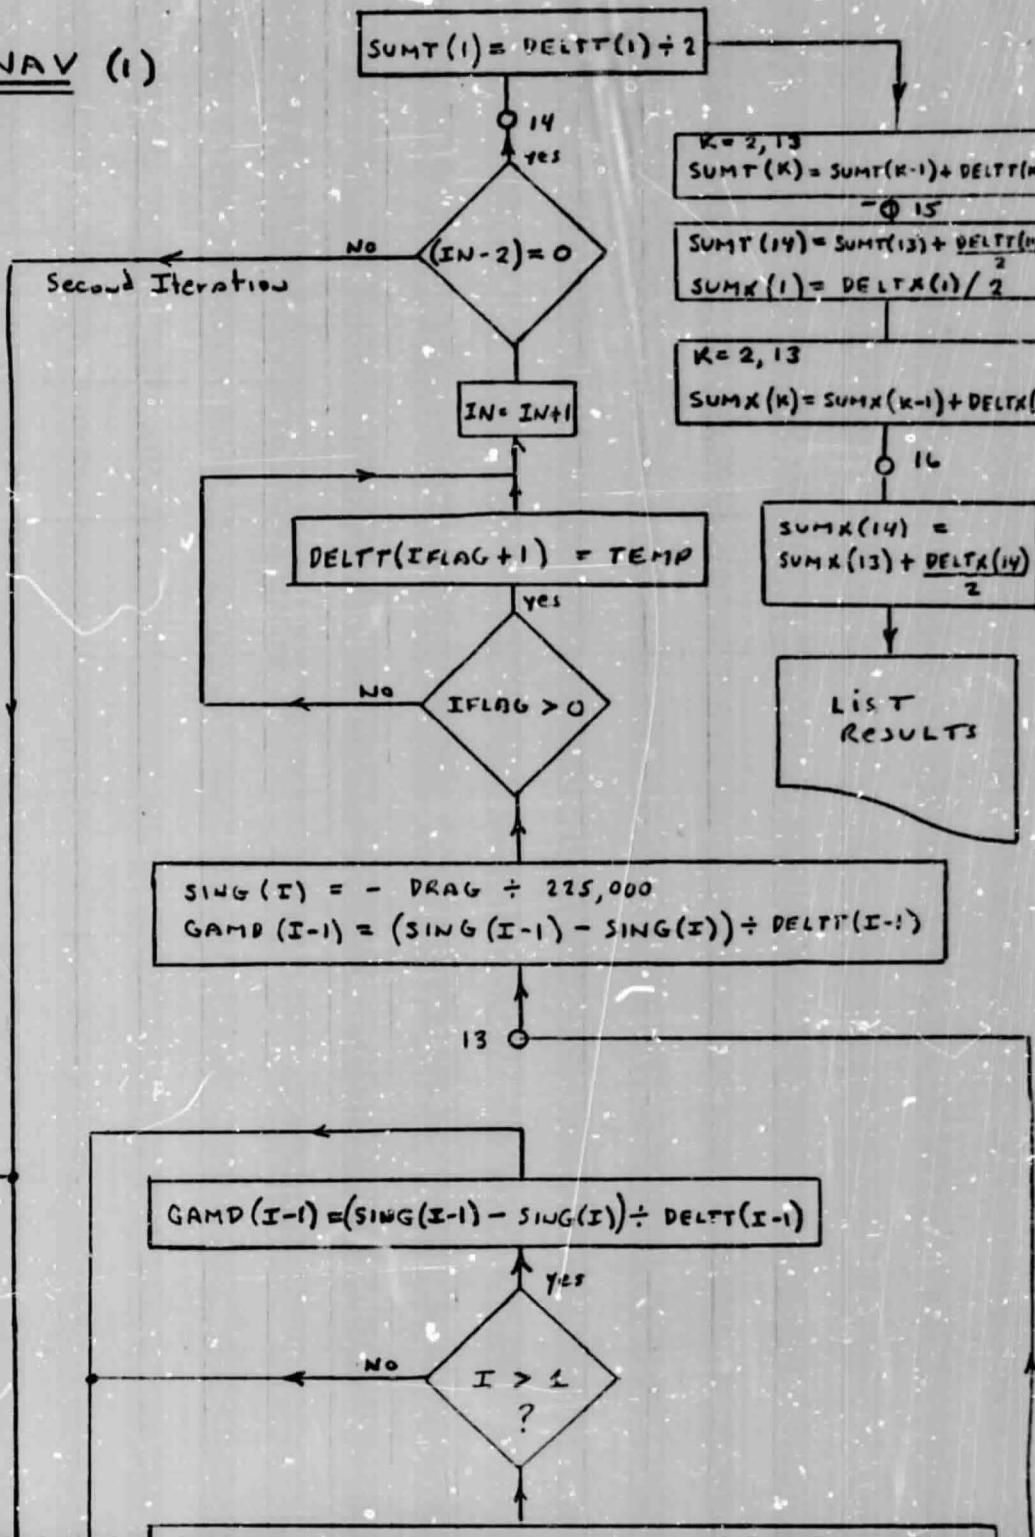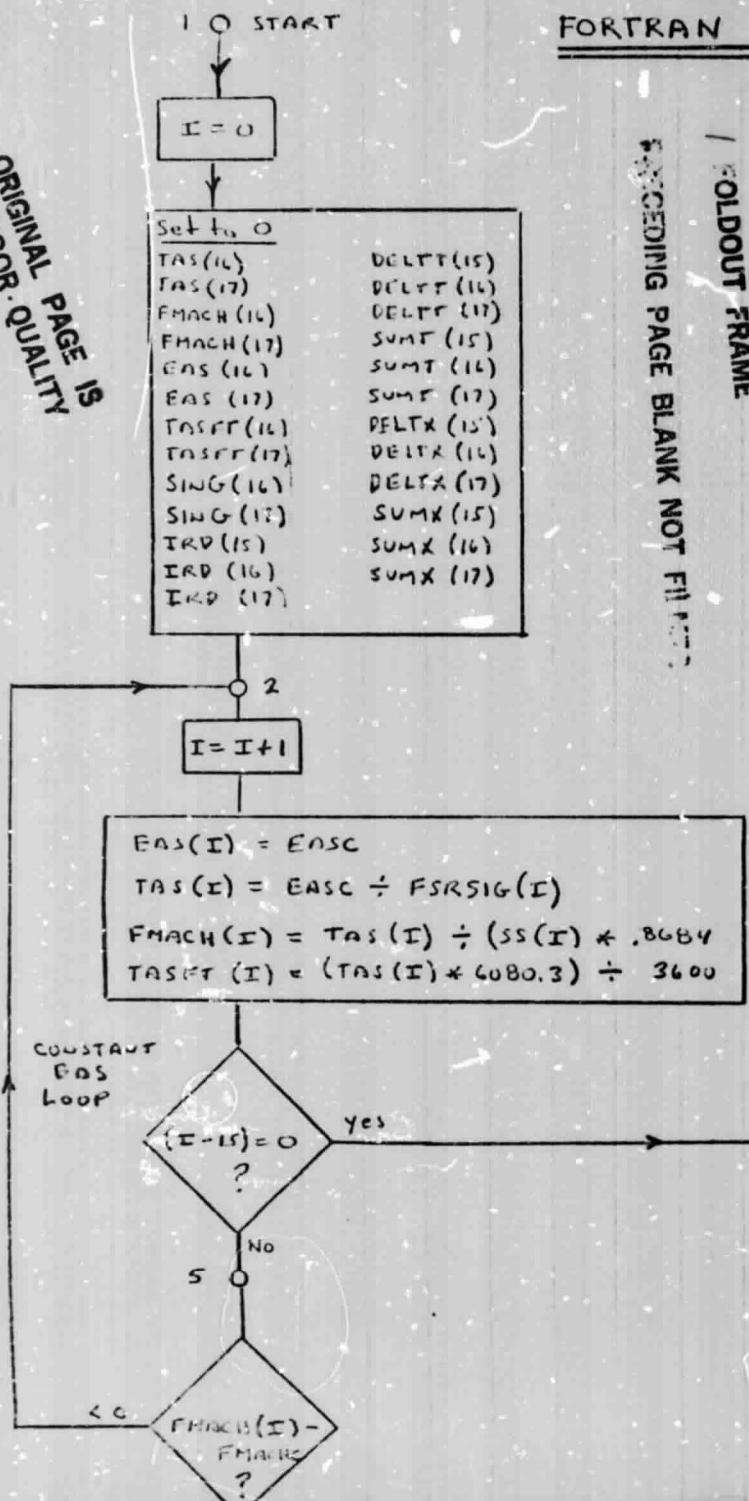

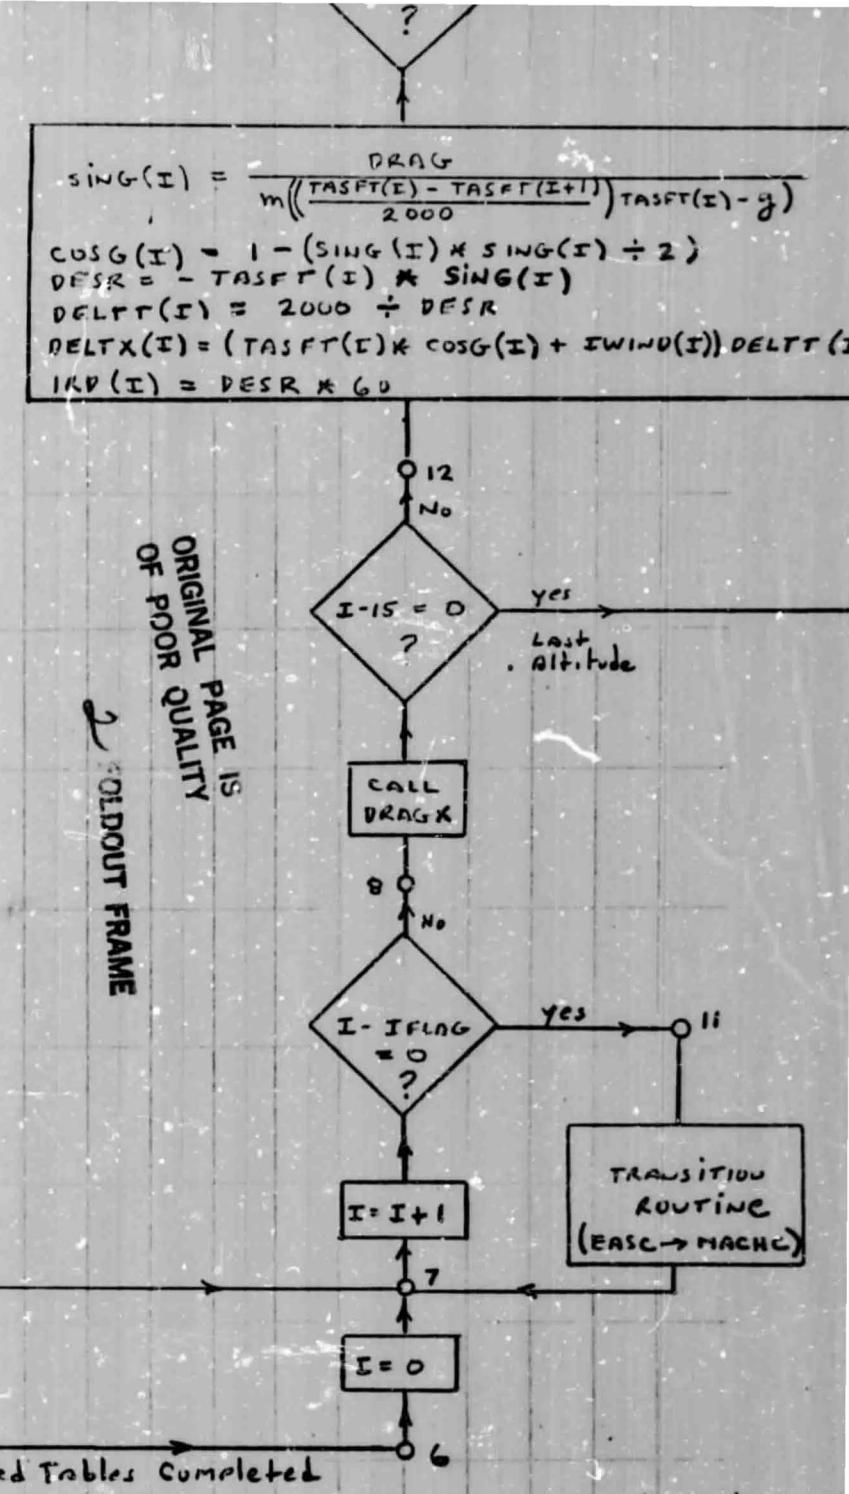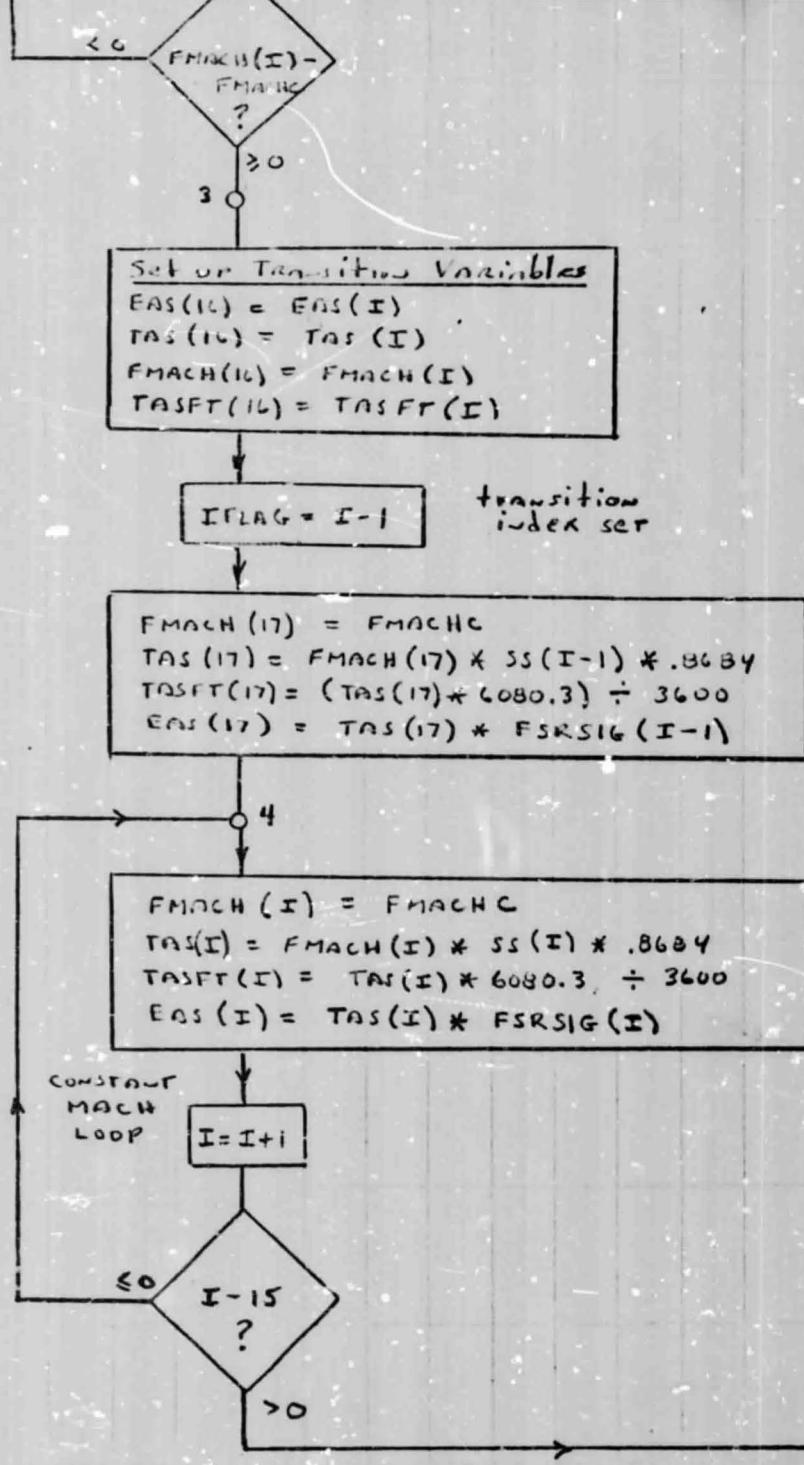

FORTRAN 4DRNAV (2)

| FOLDOUT FRAME

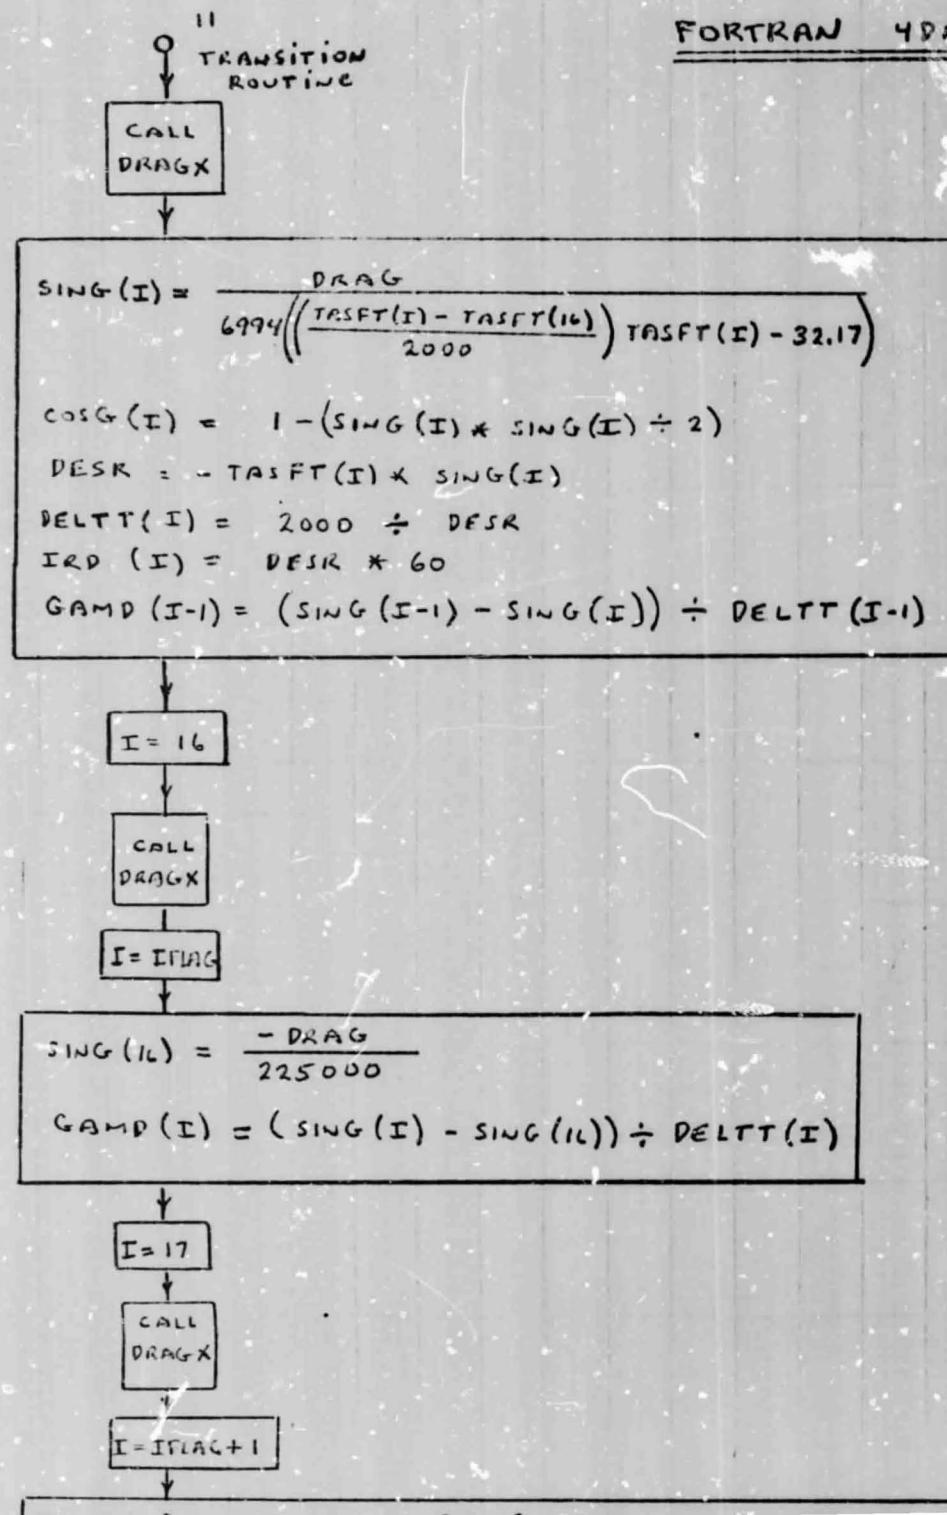

ORIGINAL PAGE IS
OF POOR QUALITY

I=IFLAG+1

$$\text{SING}(17) = \frac{\text{DRAG}}{6994 \left(\left(\frac{\text{TASFT}(17) - \text{TASFT}(I)}{2000} \right) \text{TASFT}(17) - 32.17 \right)}$$

$$\text{DESR} = -\text{TASFT}(17) * \text{SING}(17)$$

$$\text{DELTTR}(17) = 2000 \div \text{DESR}$$

CALL
DRAGX

$$\text{SING}(I) = \frac{\text{DRAG}}{6994 \left(\left(\frac{\text{TASFT}(I) - \text{TASFT}(I+1)}{2000} \right) \text{TASFT}(I) - 32.17 \right)}$$

$$\text{COSG}(I) = 1 - (\text{SING}(I) * \text{SING}(I) \div 2)$$

$$\text{DESR} = -\text{TASFT}(I) * \text{SING}(I)$$

$$\text{DELTTR}(I) = 2000 \div \text{DESR}$$

$$\text{IRD}(I) = \text{DESR} * 60$$

$$\text{GAMD}(17) = (\text{SING}(17) - \text{SING}(I)) \div \text{DELTTR}(17)$$

$$\text{HTMHK} = \frac{2000 * (\text{TAS}(17) - \text{TAS}(I-1))}{\text{TAS}(16) - \text{TAS}(I-1) + \text{TAS}(17) - \text{TAS}(I)}$$

$$\text{DELTTR}(I-1) = \frac{-(\text{HTMHK} + 1000)}{\text{TASFT}(I-1) * \text{SING}(I-1)}$$


$$\text{DELTX}(I-1) = (\text{TASFT}(I-1) * \text{COSG}(I-1) + \text{IWIND}(I-1)) * \text{DELTTR}(I-1)$$

$$\text{TEMP} = \frac{-(3000 - \text{HTMHK})}{\text{TASFT}(I) * \text{SING}(I)}$$

$$\text{DELTX}(I) = (\text{TASFT}(I) * \text{COSG}(I) + \text{IWIND}(I)) * \text{TEMP}$$

GOTO
7


FORTRAN 4DRNAV (3)

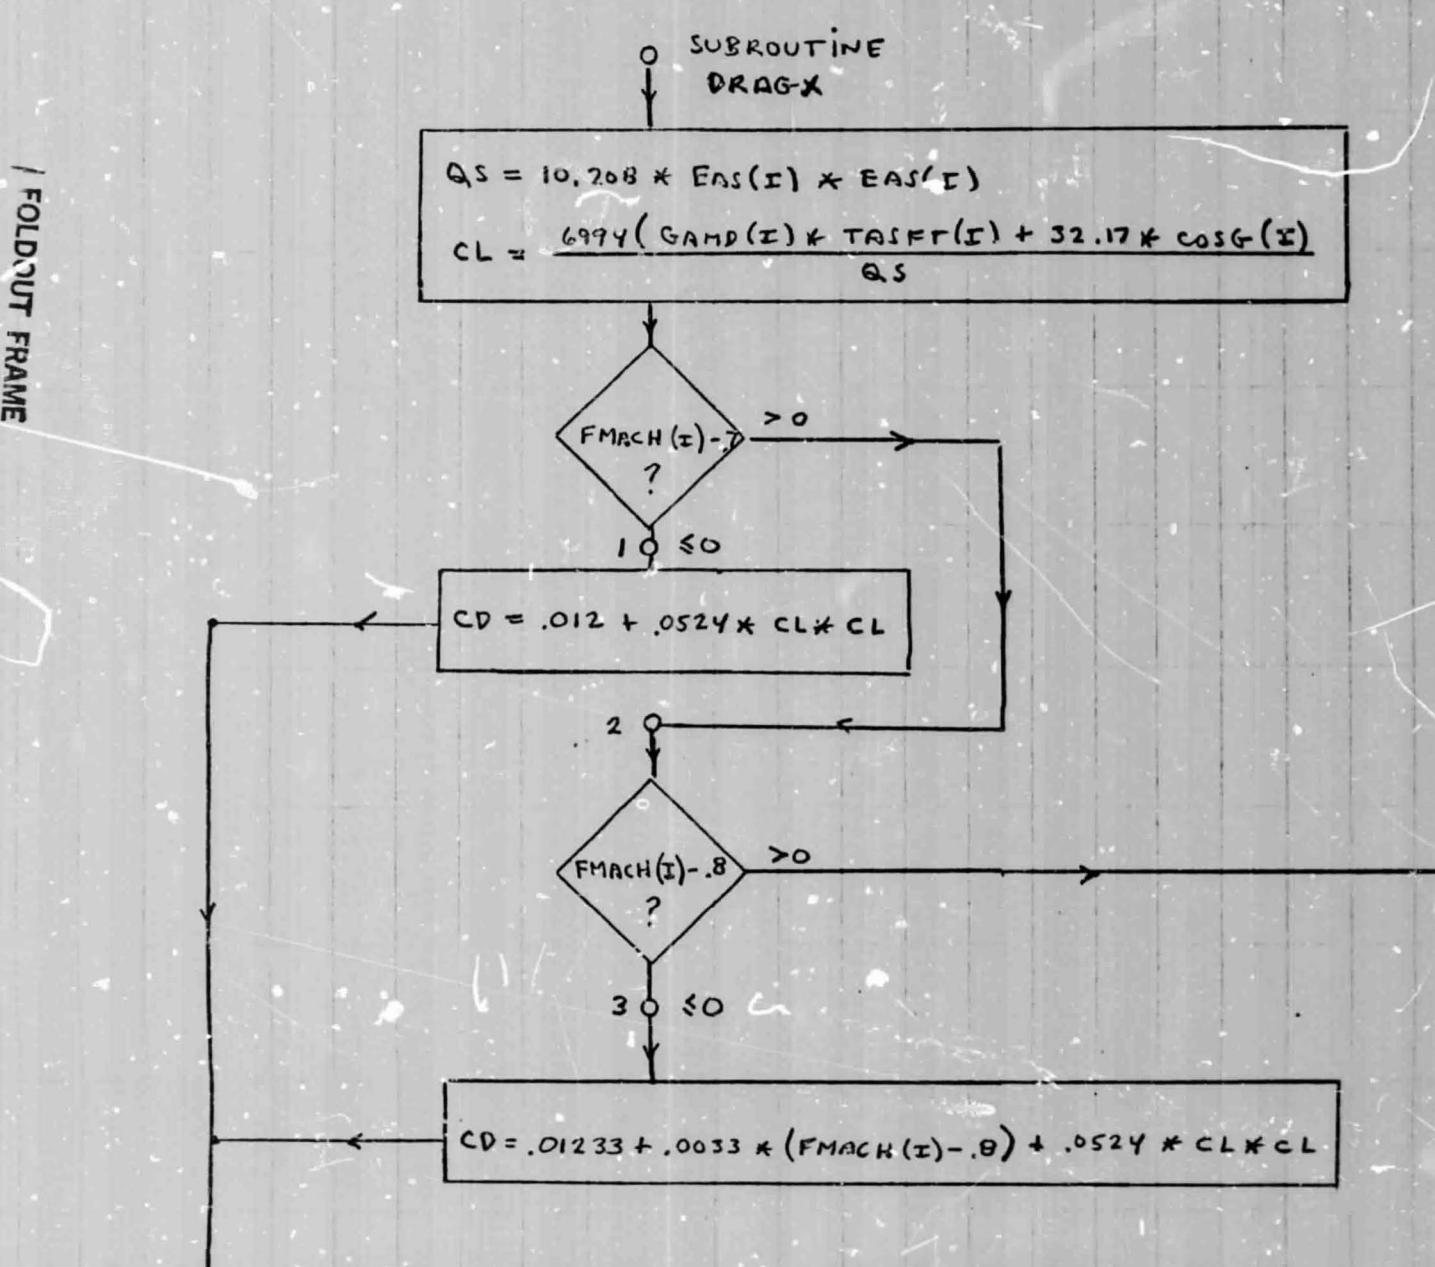

ORIGINAL PAGE IS
OF POOR QUALITY

/ FOLDOUT FRAME

$CD = .01233 + .00333 * (FMACH(\bar{x}) - .8) + .0524 * CL * CL$

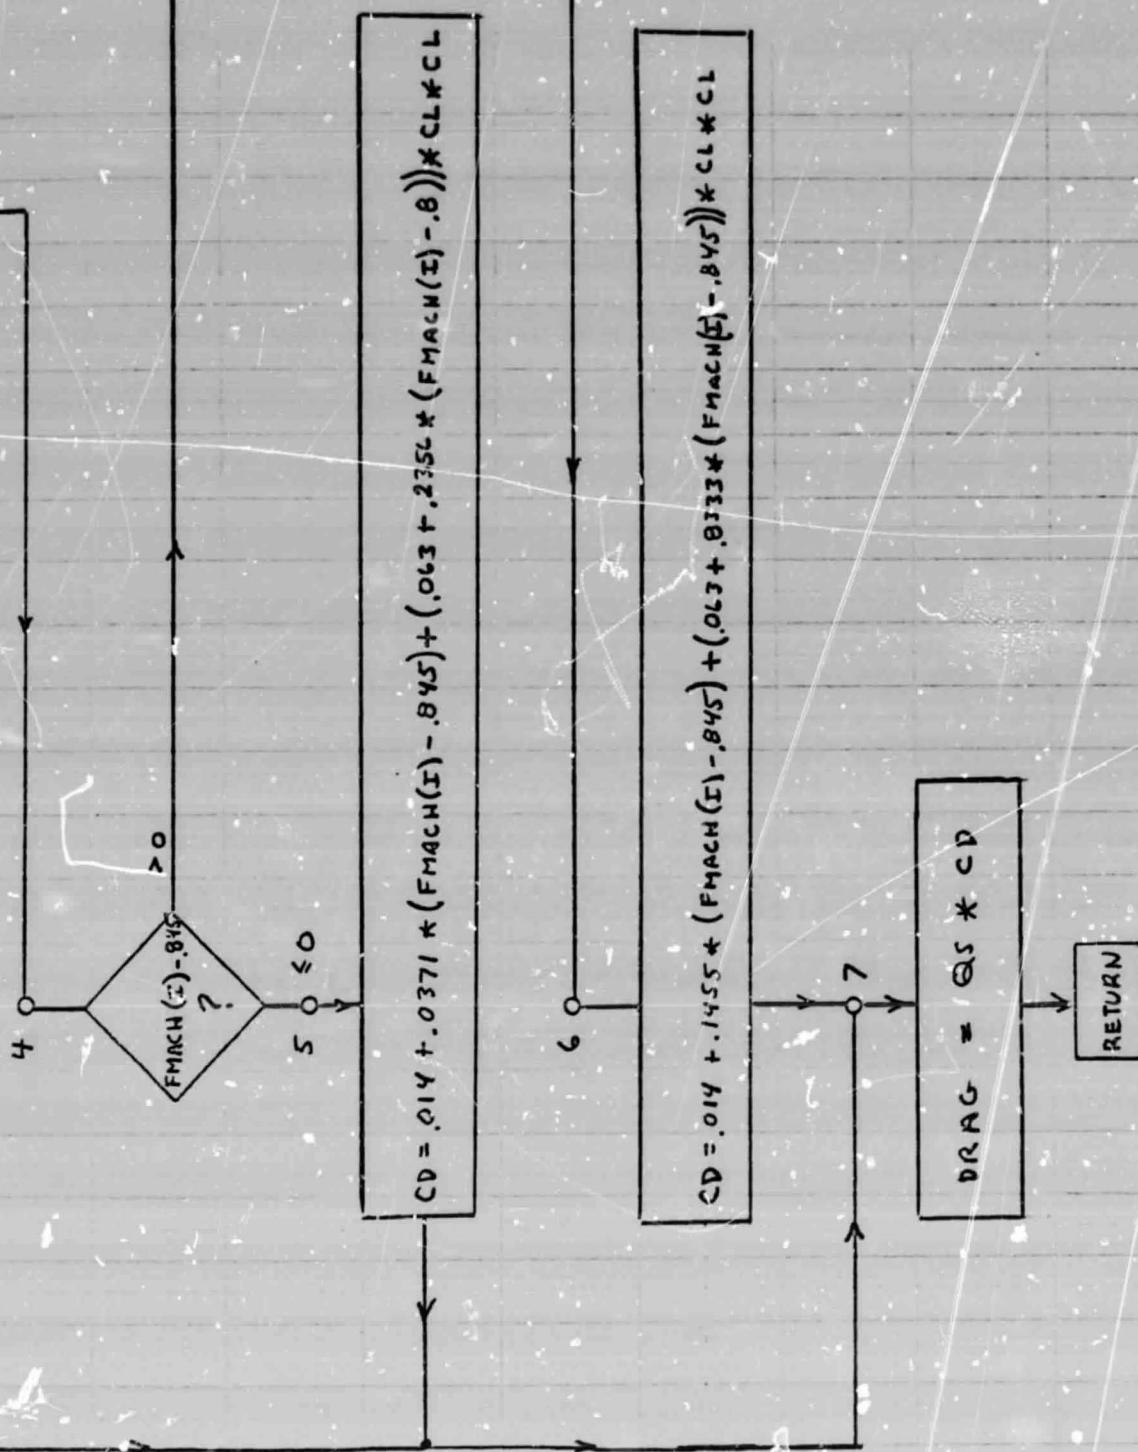


2 FOLDOUT FRAME


ORIGINAL PAGE IS
OF POOR QUALITY



ORIGINAL PAGE IS
OF POOR QUALITY

FIGURE 2
T157 NEW SHORT ALGORITHM (1)

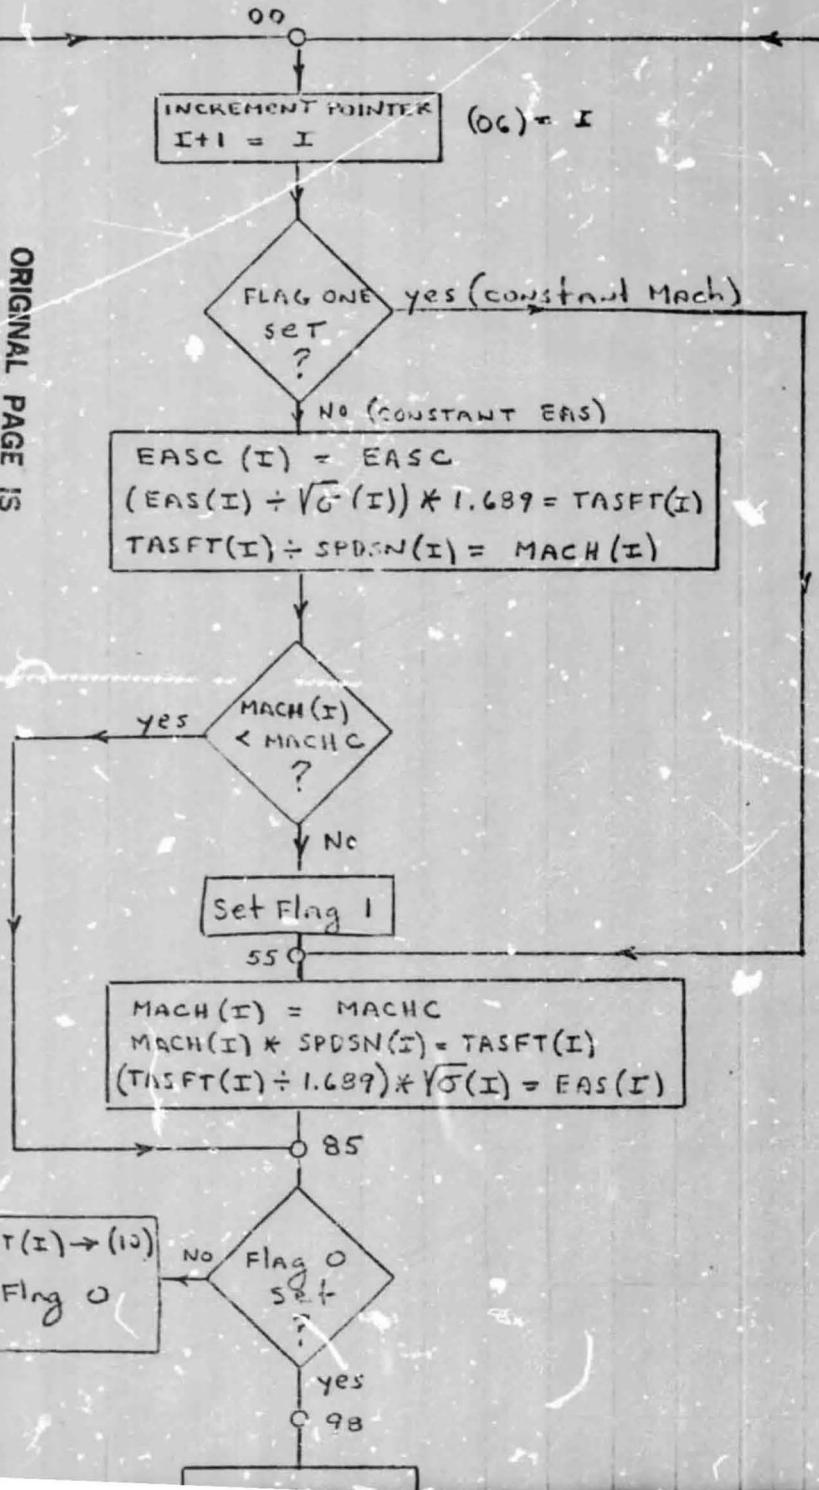

(PUSH RST BEFORE RUN TO LOWER FLAGS)

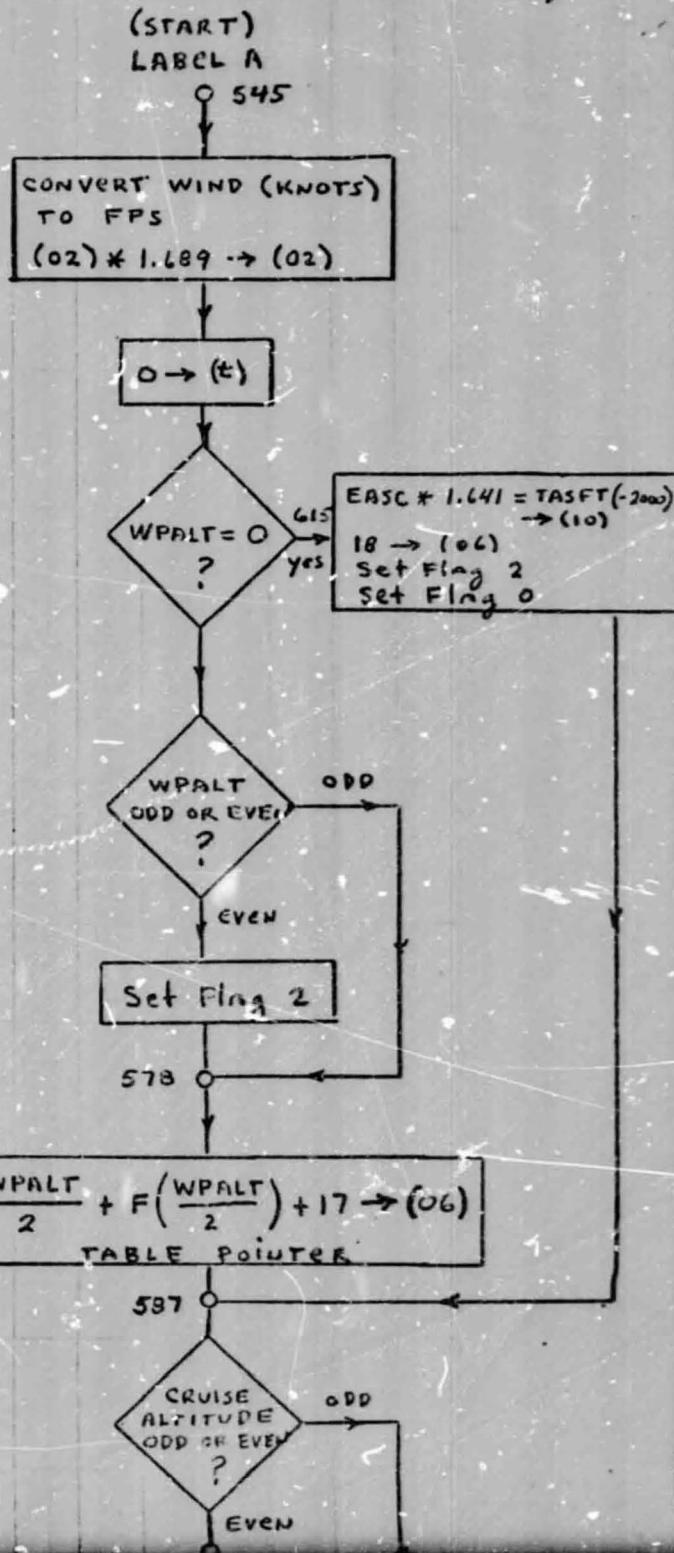

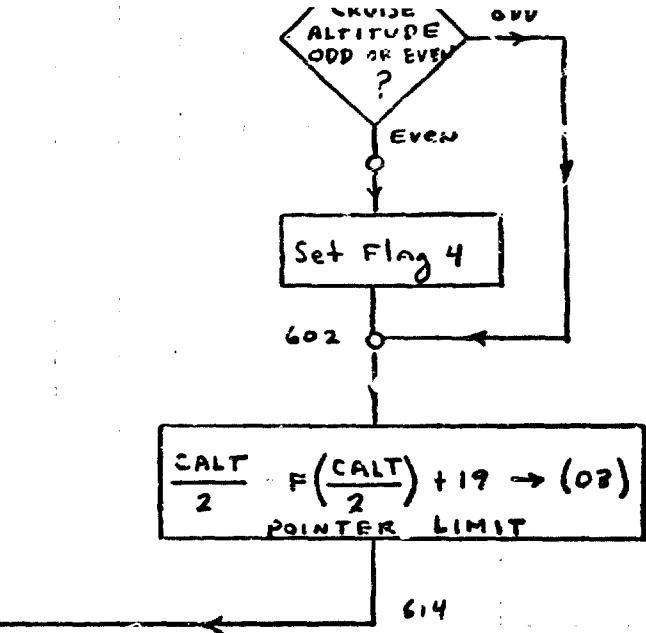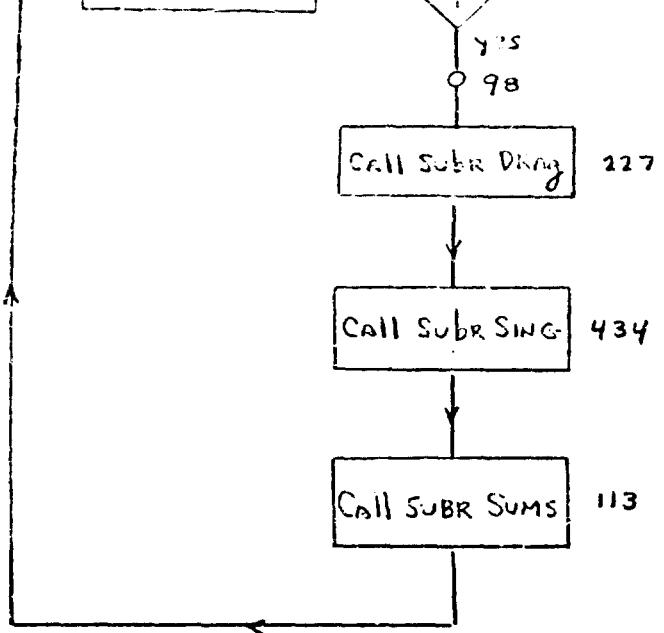

FLAG ASSIGNMENTS

- 0 FIRST PASS COMPLETED
- 1 CONSTANT MACH ZONE
- 2 WAYPOINT ALTITUDE EVEN
- 4 CRUISE ALTITUDE EVEN
- 5 LAST ALTITUDE

ORIGINAL PAGE IS
OF POOR QUALITY

MEMORY ASSIGNMENTS

- 00 MACHC
- 01 EASC KNOTS
- 02 HW/TW KNOTS → FPS
- 03 CRUISE ALTITUDE (1000's) → PTR LIMIT
- 04 WAYPOINT ALTITUDE (1000's) → DRAG(I)
- 05 TEMPORARY STORE
- 06 SPD\$W - √10 TABLE POINTER
- 07 CL²
- 08 SING(I)
- 10 TASFT(I-1)
- 11
- 12 MACH(:I)
- 13 TASFT(I)
- 14 EAS(I)
- 15 QS(I) → OT(I)
- 16 SUM T
- 17 SUM X
- 18 COSG(I)
- 19-39 SPDSW (ft/sec * 10) integer part
√10 FRACTION PART
SEA LEVEL TO 40,000'

SBR SING
O 434

TI 59 SHORT ALGORITHM (2)

$$\text{DRAG}(I) \div \left(\frac{(\text{TASFT}(I-1) - \text{TASFT}(I))}{2000} \times \text{TASFT}(I) - 32.17 \right) \times 699.4 = \text{SING}(I) \rightarrow (09)$$

$$1 - \text{SING}(I)^2 \div 2 = \text{COSG}(I) \rightarrow (18)$$

Return 478


SBR SUMS
O 113

$$\frac{-2000}{\text{TASFT}(I) \times \text{SING}(I)} = \text{DELTFT}(I) \rightarrow (15)$$

Assumes :


- (13) = TASFT(I)
- (09) = SING(I)
- (18) = COSG(I)
- (02) = WIND

ORIGINAL PAGE IS
OF POOR QUALITY

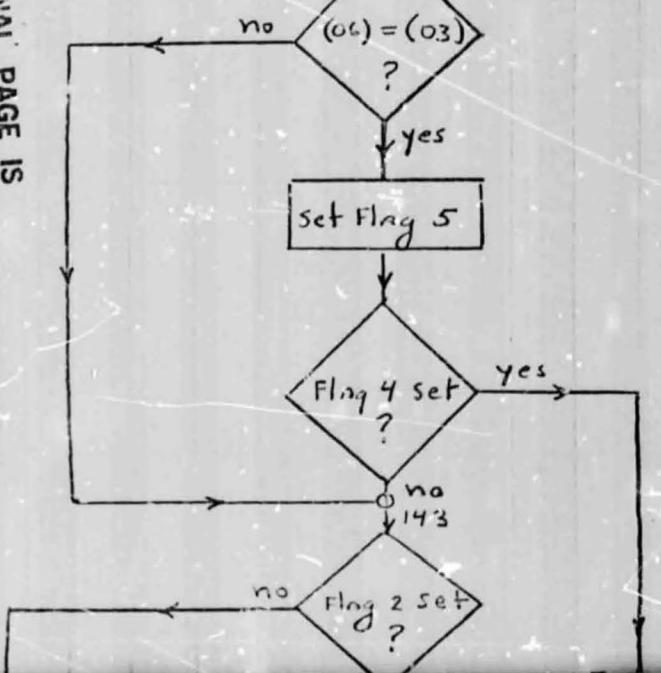


Assumes :

- (04) = DRAG(I)
- (10) = TASFT(I-1)
- (13) = TASFT(I)
- (09) = SING(I)

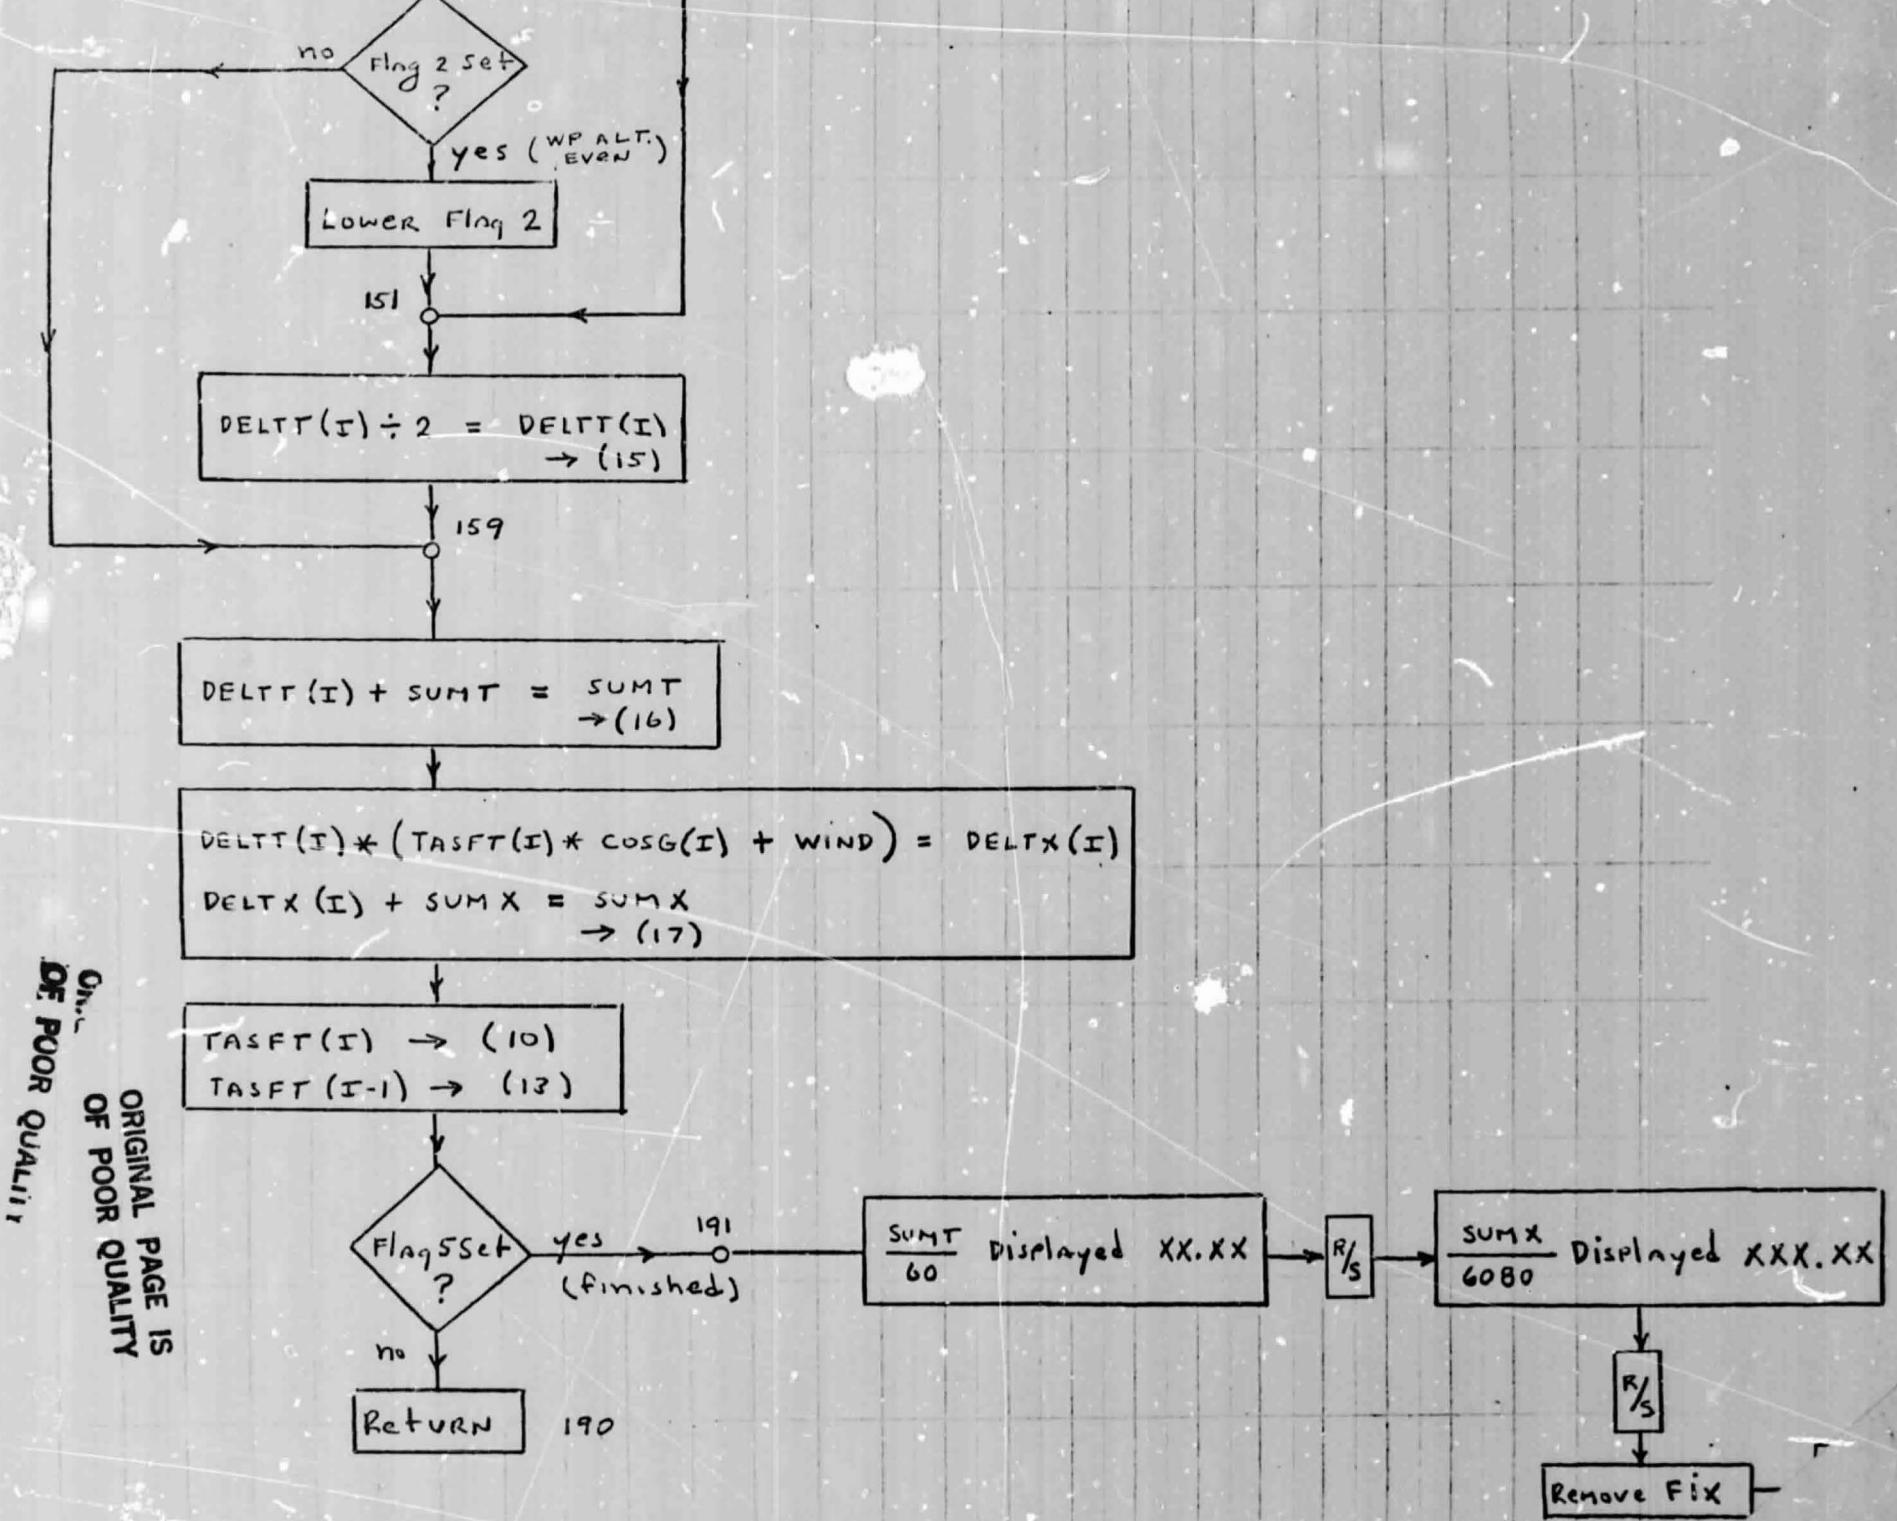


TI57 SHORT ALGORITHM (3)

FOLDOUT FRAME

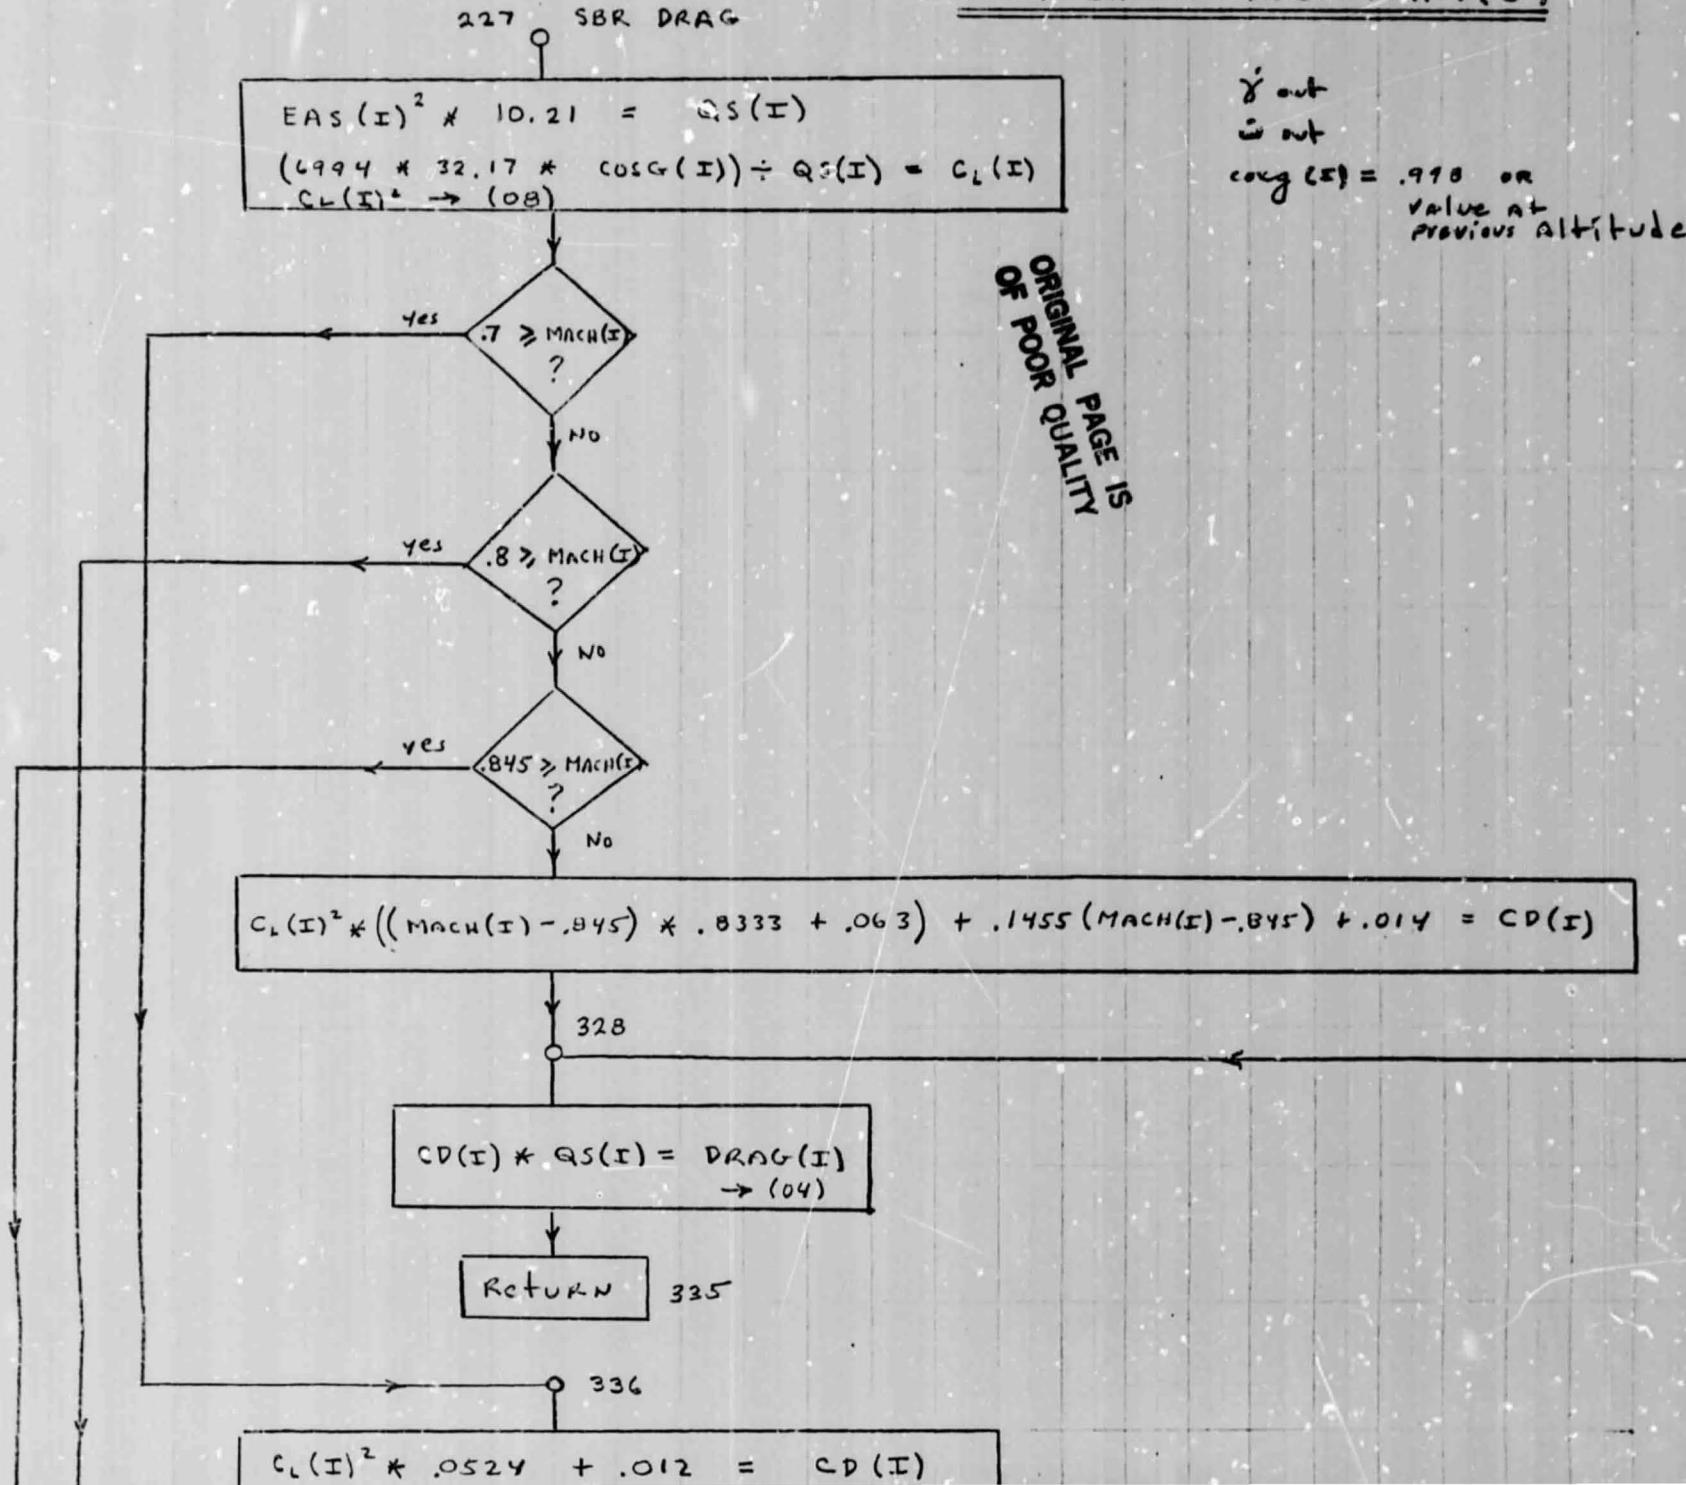

1 FOLDOUT FRAME

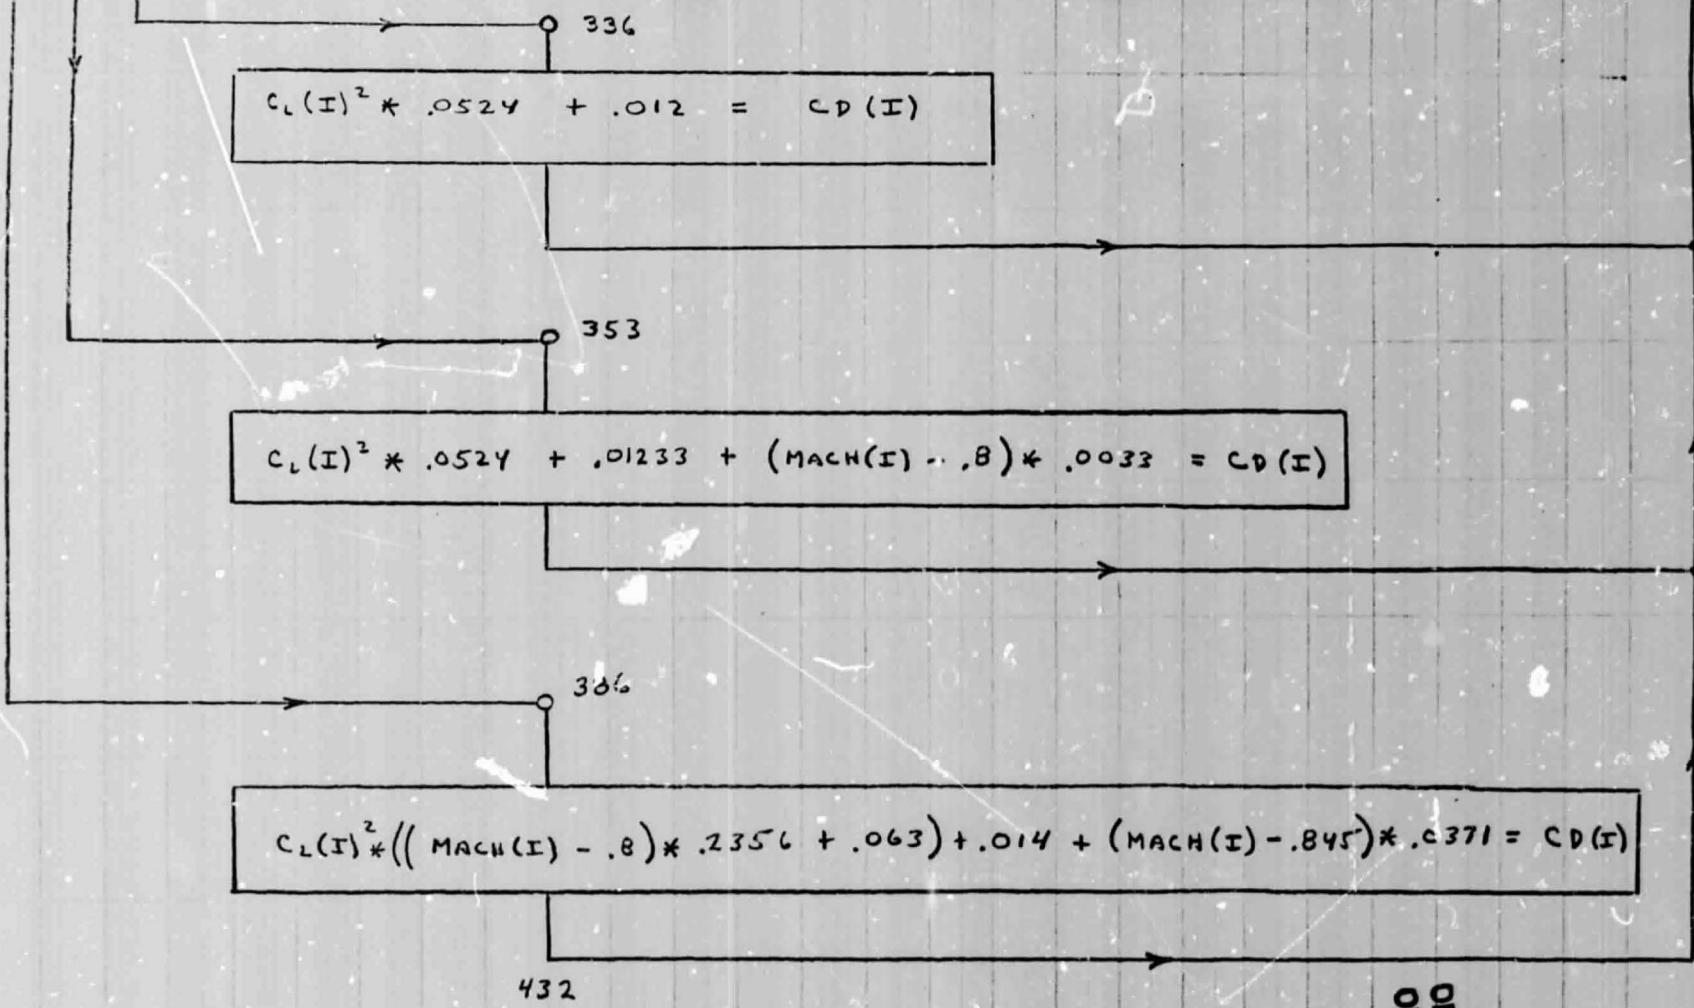

439,996 feet, whereas the TI59 estimates 441, 165 feet.

Two visiting students from the Centre d'Etudes et de Recherches de Toulouse M. Roger Dubois and M. Jean-Michel Loussant, will be working full time from April through June on the evaluation and refinement of the TI59 algorithm.

B. 707 Simulation Program Refinements


The decision to include open-loop descent tests in the research program was based on the need for an interim 4D RNAV technique that could be implemented in the near future. Open-loop testing, however, places much more severe requirements on the fidelity of the simulation model. Modeling errors that would be washed out in a closed-loop system, cause cumulative performance errors in an open-loop system that would completely mask the human factor effects we are attempting to measure. For this reason, a very significant effort has been made to correct errors and to improve the accuracy of the M.I.T. 707 simulation program. The original 707 program written by Captain Charles Corley (reference 1) has been thoroughly checked and over a hundred major modifications made to enhance its fidelity. A separate report on the current aircraft model and simulation program is now in preparation, so we will not go into great detail here. A structural flow chart for the new 707 program is given in Fig. 3.

The following list identifies the most important changes:

1. The roll moment equation was modified to include the interaction between inboard and outboard ailerons as a function of flap setting and the effects of spoiler blowdown.
2. The airspeed dial now reads equivalent airspeed (EAS) instead of indicated airspeed (IAS) since the profile descents utilize constant EAS, which is a true indicator of dynamic pressure.
3. The alignment of the MACH dial and the EAS dial is now correct at the current airspeed needle position. The MACH dial range

FIGURE 3

707 STRUCTURAL FLOW CHART

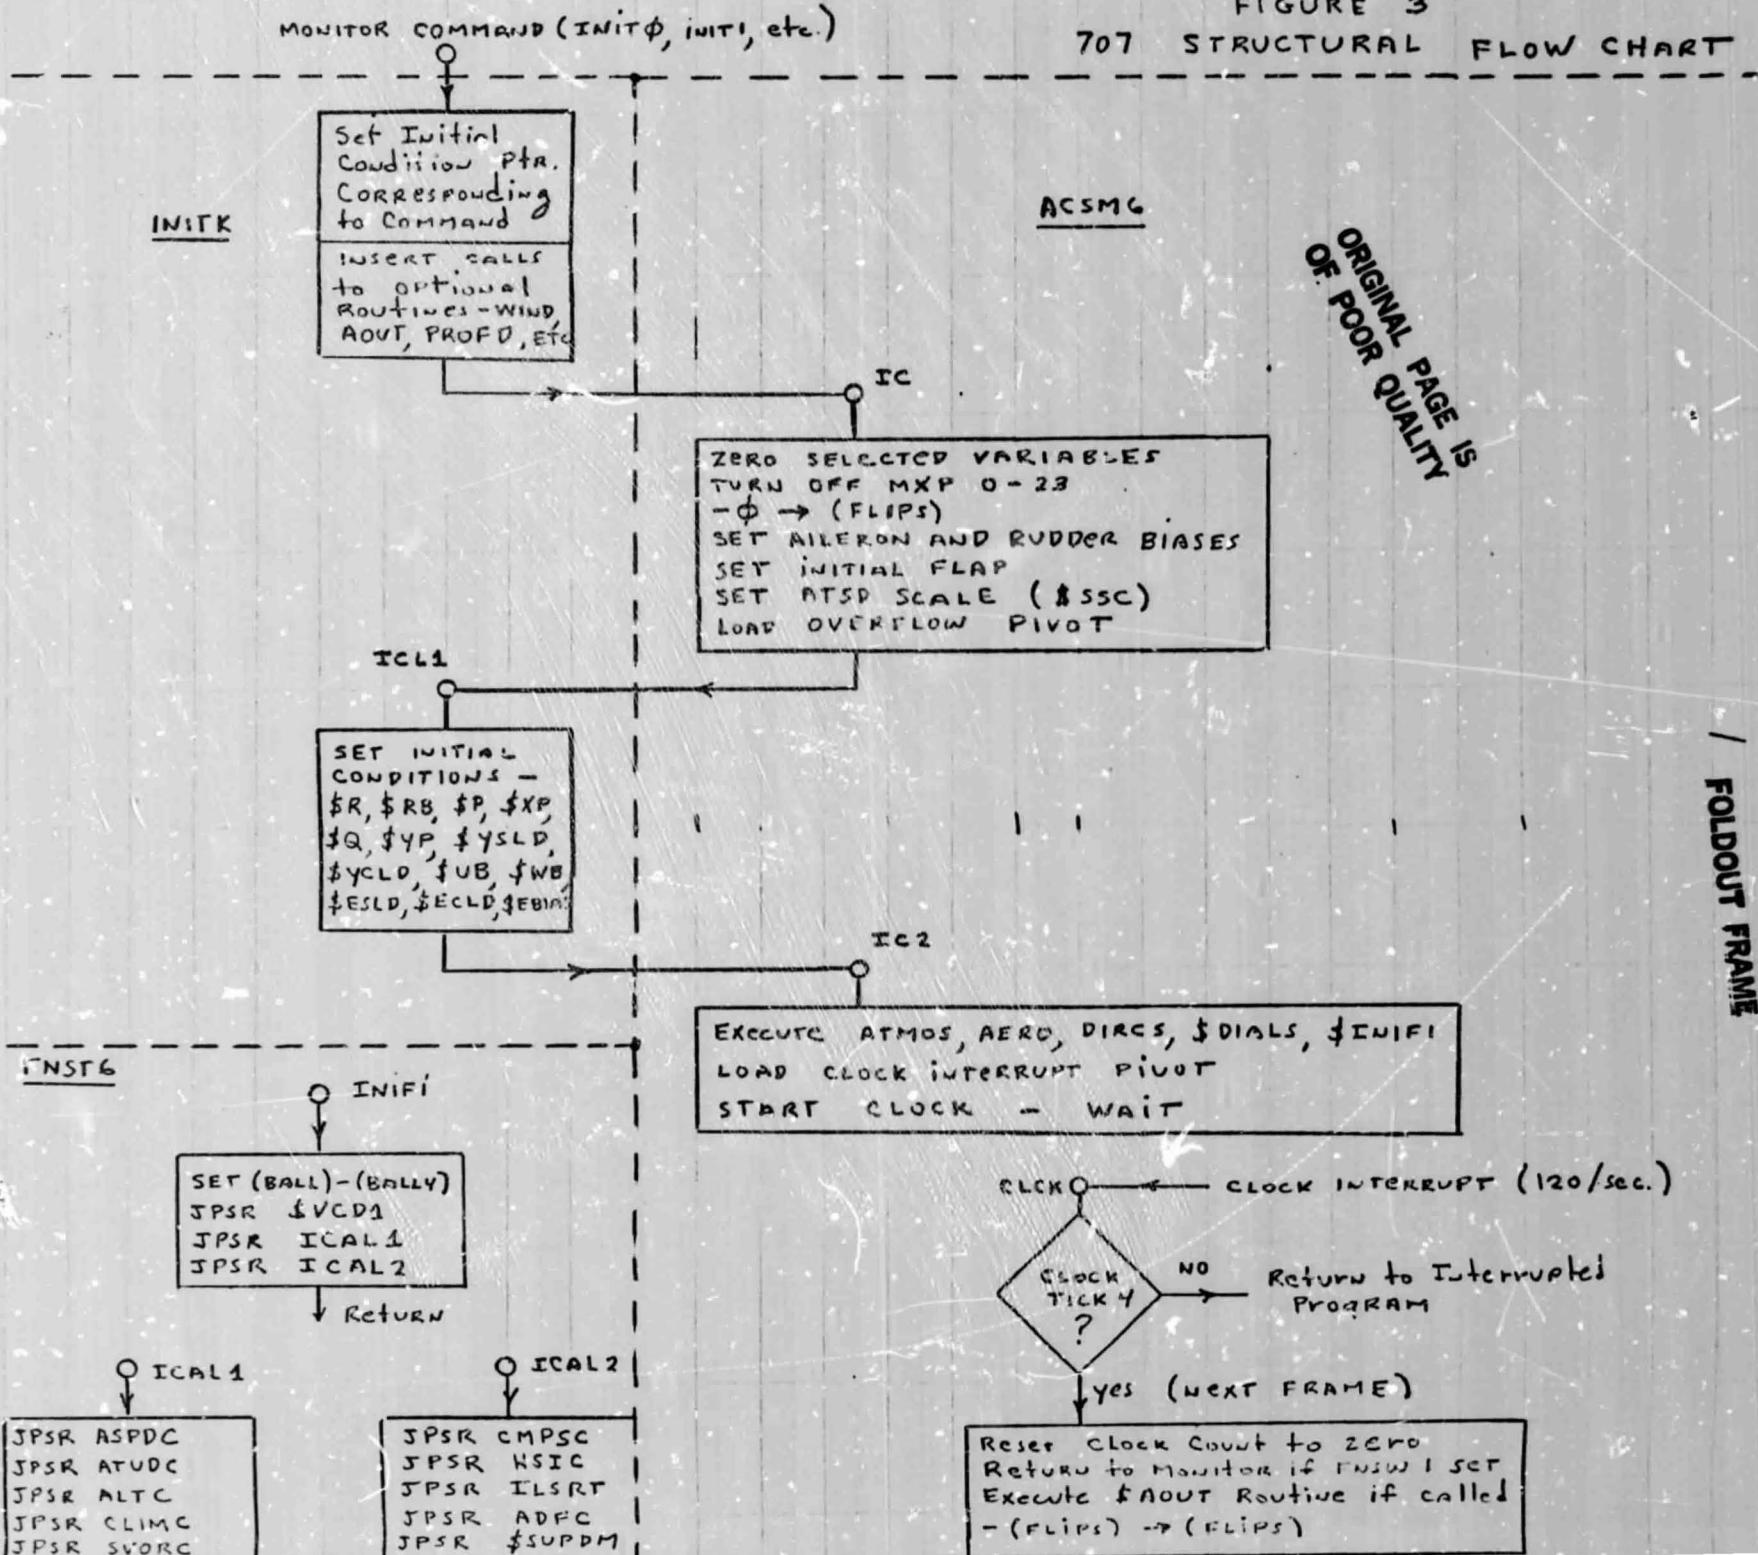

JPSK RIGUC
 JPSR ALTC
 JPSR CLIMC
 JPSR SVORC
 JPSR DESHC
 JPSR CRDTC

↓ Return

JPSK RSIC
 JPSR ILSRT
 JPSR ADFC
 JPSR \$SUPDM

↓ Return

O ASPD1 (STARTS DISPLAY sequence)

Load Hybrid ARRAY
 Set Display Mode
 INITIALIZE the DRAW LIST POINTER
 LOAD EOL PIVOT
 LOAD EOF PIVOT
 START DRAWING OF ASPDN LIST

↓ Return

O MKLTS

BLINK OUTER,
MIDDLE, AND
INNER MARKER
LIGHTS

↓ Return

The Draw Setup Routines are called in the following order:

SETUP

ASPD1
 MACHI
 ATUD1
 CIRCL
 ALT1
 CLIM1
 HSI
 CMPAS
 DESH
 CIRCL
 CMPS2
 CIRCL
 RHI
 ADF
 CORPT
 ATUD2

DRAW Lists


ASPDN
 LOMAC
 LIST2
 \$LIST0
 ALTN
 CLIMN
 HSIN
 \$LIST5
 DHBUG
 \$LIST0
 \$LIST5
 \$LIST0
 RMH
 ADFN
 LIST6
 \$LIST7

CLPD - CLPPL
 CLPO - CLPPL

PAKLR
 ACTDR
 MILDR
 WITDR
 LOGDR
 OMKDI
 GARDR
 ALBDR
 PRODR
 HHRDR
 RING1, 2, 3
 FIVEVAL

MSEL

Return to Monitor if FNSW 1 set
 Execute \$ROUT Routine if called
 -(FLIPS) → (FLIPS)




SIM1

JPSR \$ASPD1
JPSR FNSW

O STATS

FREEZE



JPSR VCD1
 JPSR \$WIND(OPTION)
 JPSR ATMUS
 JPSR NEKO
 JPSR TRNSL
 JPSR WTOB
 JPSR FORCE
 JPSR DIRCS
 JPSR INTGV
 JPSR \$ICAL1
 JPSR \$MKLTS
 JPSR CONT1


O CONT1

index (TIME1)
 UNTIL interrupted
 by clock tick 4

SIM2

JPSR \$ASHD1
JPSR \$SSFLS
JPSR VCD2
JPSR RDISC

O EOFRD

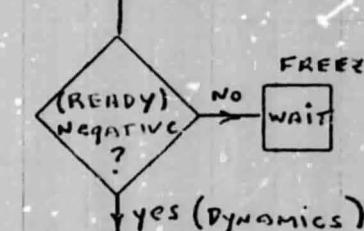

JPSR ROTAT
 JPSR EQMM
 JPSR EULER
 JPSR SICOS
 JPSR \$ICAL2
 JPSR \$PROFD
 (OPTION)
 JPSK CONT2

O CONT2

index (TIME2)
 UNTIL INTERRUPTED
 by clock tick 4

ORIGINAL PAGE IS
OF POOR QUALITY

2 FOLDOUT FRAME

was reduced to .6 through .9.

4. The rotating drum on the altimeter (100's of feet) was replaced by an discretely updated digit.

5. The atmospheric variables and the instrument calculations are now updated every 1/15 seconds.

6. All the analog control inputs have been rescaled as well as the corresponding aerodynamic coefficients.

7. Errors in drag, the Euler angle routine SICOS, thrust, elevator limits, and several logic errors have been corrected.

8. The old piecewise-linear traffic generator has been removed to make way for the new traffic routine which will be based on stored trajectories.

9. Three new function switch modes have been created:

- (a) Fly with position frozen (useful in establishing the steady-state flight conditions required by the initial condition routine INITK).
- (b) Return to monitor leaving the real-time program in a clean condition so that it can be restarted at the point where the interruption occurred.
- (c) Execution of a single frame (used for debugging).

10. The steady-state elevator bias can now be set as an initial condition, thus avoiding a severe pitch transient when the program is started.

11. A more accurate square root routine has been written and the duplication of square root software in FNST and ACSM eliminated.

12. The trapezoidal integration of acceleration components has been rescaled to reduce the risk of overflow.

13. The initial condition routine, the wind model, analog outputs, and profile descent algorithm are now separate programs, no longer imbedded in the ACSM program. This was done to minimize the number of versions of the rather large program ACSM that must be stored on disk.

14. Several aerodynamic coefficients were changed and idle thrust was set to zero.

15. An interval clock count was added to provide the real-time program with an absolute time base for matching 4D RNAV schedules. As a consequence of the revisions listed above, the current 707 simulation performs and handles much like the actual aircraft and meaningful open-loop testing can be carried out.

C. Advanced Integrated Display

John-Thones Amenyo continued his work during the report period on the design and programming of a single integrated display that would place ATSD information in the center of the pilot's scan field. This display is scheduled to be completed at the end of the spring term.

D. Presentations

(a) NASA-Langley Research Center - October 11, 1978

At the invitation of NASA Headquarters, a review of M.I.T.'s 4D RNAV-ATSD work was presented to a group of about 30 FAA and NASA staff members by Mark Connelly. Professor John Kreifeldt also made a presentation of his research on distributed management.

(b) FAA Engineering and Development Initiatives Process - August 17, 1978

A talk on the relationship between ATC capacity and ATSD-4D RNAV techniques was presented to the Airport Capacity Topic Group in Washington, D.C. by

Mark Connelly. Later in the year, at the request of the Chairman, Joseph Blatt, a report summarizing this talk was submitted for inclusion in the final report of the Initiatives Study.

(c) GENAVAC Meeting - February 27, 1979 - Washington, D.C.

A presentation was made to a group representing the major general aviation organizations by Mark Connelly. A review of the M.I.T. ATSD work was followed by a discussion period which focused on the need for greater ATC capacity to accomodate the growth of both the airlines and general aviation without restricting the efficiency or utility of either. Representatives of AOPA, NPA, NBAA, GAMA and HAA were present at the meeting.

(d) Channel 2 - Boston - April 20, 1979

The M.I.T. cockpit and ATSD display were included in an evening news special report on mid-air collisions.

ORIGINAL PAGE IS
OF POOR QUALITY

ORI

OF POOR QUALITY

References

1. Charles Corley, A Simulation Study of Time-Controlled Aircraft Navigation, M.S. Thesis, M.I.T. Department of Electrical Engineering, December 1974.

Appendix A

```

1.1 PROGRAM PROFILE
1.2 IMPLICIT FRACTION(F)
1.3 DIMENSION TAS(17),FMACH(17),EAS(17),TASFT(17),SING(17)
1.4 DIMENSION DELTT(17),SUMT(17),DELTX(17),SUMX(17),GAMD(17)
1.5 DIMENSION IWIND(15),WDOT(17),FSRSIG(15),SS(15),EASC(1)
1.6 DIMENSION IFLAG(1),IN(1),IRD(17),COSG(17),IALT(17)
1.7     DIMENSION FMACHC(1),DRAG(1),I(1)
1.8     COMMON/X/EAS,GAMD,TASFT,COSG,FMACH,DRAG,I
1.9     DATA IFLAG/0/,IN/0/,WDOT/17*0.0/
1.10    DATA COSG/17*1.0/,GAMD/17*0.0/
1.11    DATA IWIND/15*0.0/,FSRSIG/-8593F,.8325F,.8061F,-7802F,
1.12      -1.7548F,-7298F,-7053F,-6811F,-6575F,-6343F,-6115F,
1.13      -2.5891F,-5672F,-5442F,-5138F/
1.14    DATA IALT/10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,0,0/
1.15    DATA SS/734.2,726.8,723.3,717.8,712.2,706.6,700.9,695.2,
1.16      -1689.5,683.7,677.8,671.9,666.0,662.0,662.0/
1.17    DATA EASC/320./,FMACHC/-83F/
1.18    GLOBAL EASC,FMACHC
1.19    1
1.20    I=0
1.21    DO 60 K=16,17
1.22    TAS(K)=0
1.23    FMACH(K)=0.0F
1.24    EAS(K)=0.
1.25    TASFT(K)=0.
1.26    SING(K)=0.
1.27    CONTINUE
1.28    50
1.29    DO 70 K=15,17
1.30    IRD(K)=0
1.31    DELTT(K)=0.
1.32    SUMT(K)=0.
1.33    DELTX(K)=0.
1.34    SUMX(K)=0.
1.35    CONTINUE
1.36    70
1.37    I=I+1
1.38    2
1.39    EAS(I)=EASC
1.40    TAS(I)=EASC/FSRSIG(I)
1.41    FMACH(I)=TAS(I)/(SS(I)*.8684F)
1.42    TASFT(I)=(TAS(I)*6080.3)/3600.
1.43    IF (I-15) 5,6
1.44    IF (FMACHC(I)-FMACHC) 2,3,3
1.45
1.46
1.47
1.48
1.49
1.50

```

ORIGINAL PAGE
OF POOR QUALITY

```
2.1      3      EAS(16)=EAS(I)
2.2      TRS(16)=TRS(I)
2.3      FMACH(16)=FMACH(I)
2.4      TASFT(16)=TASFT(I)
2.5      IFLAG=I-1
2.6      FMACH(17)=FMACHC
2.7      TAS(17)=FMACH(17)*SS(I-1)*.8684F
2.10     TASFT(17)=(TAS(17)*6080.3)/3600.
2.11     EAS(17)=TAS(17)*FSR3IG(I-1)
2.12     FMACH(1)=FMACHC
2.13     TAS(I)=FMACH(I)*SS(I)*.8684F
2.14     TASFT(I)=(TAS(I)*6080.3)/3600.
2.15     EAS(I)=TAS(I)*FSRSIG(I)
2.16     I=L+1
2.17     IF (I-15) 4,4,6
2.20     I=0
2.21     I=I+1
2.22     IF (I-IFLAG) 8,11
2.23     CALL DRAGX
2.24     IF (I-15) 12,13
2.25     12      SING(I)=DRAG/((6994.)*( ((TASFT(I)-TASFT(L+1))/2000.)*
2.26     ITASFT(I)-32.17))
2.27     COSG(I)=1-SING(I)*SING(I)/2.
2.30     DESR=-TASFT(I)*SING(I)
2.31     DELTT(I)=2000./DESR
2.32     DELTX(I)=(TASFT(I)*COSG(I)+IWIND(I))*DELT(I)
2.33     IRD(I)=DESR*60.
2.34     IF(I.GT.1) GAMD(I-1)=(SING(I-1)-SING(I))/DELT(I-1)
2.35     GO TO 7
```

ORIGINAL PAGE IS
IN POOR QUALITY

```

3.1      11    CALL DRAGX
3.2      SING(I)=DRAG/((6994.)*(((TASFT(I)-TASFT(16))/2000.)*
3.3      1TASFT(I)-32.17))
3.4      COSG(I)=1-SING(I)*SING(I)/2
3.5      DESR=-TASFT(I)*SING(I)
3.6      DELTT(I)=2000./DESR
3.7      IRD(I)=DESR*60.
3.8      GAMD(I-1)=(SING(I-1)-SING(I))/DELT(I-1)
3.9      I=16
3.10     CALL DRAGX
3.11     I=IFLAG
3.12     SING(16)=-DRAG/225000.
3.13     GAMD(I)=(SING(I)-SING(16))/DELT(I)          ORIGINAL PAGE IS
3.14     I=17                                     OF POOR QUALITY
3.15     CALL DRAGX
3.16     I=IFLAG+1
3.17     SING(17)=DRAG/((6994.)*(((TASFT(17)-TASFT(I))/2000.)*
3.18     1TASFT(17)-32.17))
3.19     DESR=-TASFT(17)*SING(17)
3.20     DELTT(17)=2000./DESR
3.21     CALL DRAGX
3.22     SING(I)=DRAG/((6994.)*(((TASFT(I)-TASFT(I+1))/2000.)*
3.23     1TASFT(I)-32.17))
3.24     COSG(I)=1-SING(I)*SING(I)/2.
3.25     DESR=-TASFT(I)*SING(I)
3.26     DELTT(I)=2000./DESR
3.27     IRD(I)=DESR*60.
3.28     GAMD(I)=(SING(I)-SING(I))/DELT(I)
3.29     HTMHK=2000.*(TAS(17)-TAS(I-1))/(TAS(16)-TAS(I-1)+TAS(17)-
3.30     1TAS(I)).
3.31     DELTT(I-1)=-(HTMHK+1000.)/(TASFT(I-1)*SING(I-1))
3.32     DELTX(I-1)=(TASFT(I-1)*COSG(I-1)+IWIND(I-1))*DELT(I-1)
3.33     TEMP=-(3000.-HTMHK)/(TASFT(I)*SING(I))
3.34     DELTX(I)=(TASFT(I)*COSG(I)+IWIND(I))*TEMP
3.35     GO TO 7
3.36     13    SING(I)=-DRAG/225000.
3.37     GAMD(I-1)=(SING(I-1)-SING(I))/DELT(I-1)
3.38     IF (IFLAG.GT.0) DELTT(IFLAG+1)=TEMP
3.39     IN=IN+1
3.40     IF (IN-2).GT.14
3.41     SUMT(I)=DELT(I)/2
3.42     DO 15 K=2,13
3.43     SUMT(K)=SUMT(K-1)+DELT(K)
3.44     CONTINUE
3.45     SUMT(14)=SUMT(13)+DELT(14)/2
3.46     SUMX(I)=DELT(I)/2
3.47     DO 16 K=2,13
3.48     SUMX(K)=SUMX(K-1)+DELT(X(K))
3.49     CONTINUE
3.50     SUMX(14)=SUMX(13)+DELT(X(14))/2

```

4.1 WRITE (10,20)
4.2
4.3 21 WRITE (10,30) IALT(K), FMACH(K), EAS(K), TAS(K), TASFT(K),
4.4 1SING(K), COSG(K), IRD(K), GAMD(K)
4.5 IF (K.EQ.17) GO TO 23
4.6 K=K+1
4.7 GO TO 21
4.10 23 WRITE (10,40)
4.11 K=1
4.12 24 WRITE(10,50) IALT(K), DELTT(K), SUMT(K), DELTX(K), SUMX(K)
4.13 IF (K.EQ.17) GO TO 26
4.14 K=K+1
4.15 GO TO 24
4.16 30 FORMAT(I3,F8.4,3F8.1,2F9.4,17,E12.3)
4.17 50 FORMAT(I3,2X,F7.2,F9.1,I8,I10)
4.20 20 FORMAT(1X,3HALT,2X,5HFMACH,4X,3HEAS,5X,3HTAS,4X,5HTASFT,
4.21 14X,4HSING,5X,4HCOSG,4X,3HR/D,6X,4HGAMD)
4.22 40 FORMAT(////1X,3HALT,3X,5HDELT,5X,4HSUMT,3X,5HDELT,5X,
4.23 14HSUMX)
4.24 26 EXIT
4.25 END /

ORIGINAL PAGE IS
OF POOR QUALITY

```
5.1      SUBROUTINE DRAGX
5.2      IMPLICIT FRACTION(F)
5.3      COMMON/X/EAS(17),GAMD(17),TASF(17),COSG(17),
5.4      1FMACH(17),DRAG(1),I(1)
5.5      QS=10.208*EAS(I)*EAS(I)
5.6      CL=(GAMD(I)*TASF(I)+32.17*COSG(I))*0.994./QS
5.7      IF (FMACH(I)-.7) 1,1,2
5.10     1      CD=.012+.0524*CL*CL
5.11     GO TO 7
5.12     2      IF (FMACH(I)-.8) 3,3,4
5.13     3      CD=.01233+.0033*(FMACH(I)-.8)+.0524*CL*CL
5.14     GO TO 7
5.15     4      IF (FMACH(I)-.845) 5,5,6
5.16     5      CD=.014+.0371*(FMACH(I)-.845)+(.063+.2356*(FMACH(I)-.8))*1CL*CL
5.17
5.20     GO TO 7
5.21     6      CD=.014+.1455*(FMACH(I)-.845)+(.063+.8333*(FMACH(I)-1.845))*CL*CL
5.22
5.23     7      DRAG=GS*CD
5.24
5.25     RETURN
      END
```

ORIGINAL PAGE IS
OF POOR QUALITY

PROFILWLISTV(0,1)

RESET(6,001)

PROFILE

STANDARD Descent (.83 Mach/320 EAS)

ALT	FMACH	EAS	TAS	TASFT	SING	COSG	R/D	GAMD
10	0.5641	320.0	372.4	629.0	-0.0559	0.9984	2110	-0.133E-04
12	0.6074	320.0	384.4	649.2	-0.0552	0.9985	2148	-0.144E-04
14	0.6320	320.0	397.0	670.5	-0.0544	0.9985	2186	-0.148E-04
16	0.6580	320.0	410.2	692.3	-0.0536	0.9985	2225	-0.169E-04
18	0.6855	320.0	424.0	716.1	-0.0526	0.9985	2261	-0.151E-04
20	0.7146	320.0	438.5	740.6	-0.0518	0.9987	2303	-0.137E-04
22	0.7455	320.0	453.7	766.3	-0.0511	0.9987	2350	-0.127E-04
24	0.7783	320.0	469.8	793.5	-0.0505	0.9987	2403	0.619E-04
26	0.8129	320.0	486.7	822.0	-0.0536	0.9985	2642	0.540E-03
28	0.8300	312.5	492.7	832.2	-0.0828	0.9965	4136	-0.141E-03
30	0.8300	298.7	488.5	825.0	-0.0786	0.9969	3898	-0.116E-03
32	0.8300	285.2	484.2	817.9	-0.0752	0.9972	3690	-0.159E-03
34	0.8300	272.2	480.0	810.7	-0.0700	0.9975	3406	-0.175E-03
36	0.8300	259.6	477.1	805.8	-0.0639	0.9980	3088	-0.338E-04
38	0.8300	247.5	477.1	805.8	-0.0626	1.0000	0	0.000E+00
0	0.8497	320.0	504.5	852.1	-0.0826	1.0000	0	0.000E+00
0	0.8300	326.7	496.9	839.3	-0.0875	1.0000	0	-0.171E-03

ALT	DELT	SUMT	DELT	SUMX
10	56.86	28.4	35709	17854
12	55.84	84.3	36199	54053
14	54.87	139.1	36737	90791
16	53.91	193.1	37294	128085
18	53.06	246.1	37941	166027
20	52.09	298.2	38527	204554
22	51.04	349.3	39066	243620
24	49.93	399.2	39568	283189
26	43.79	443.0	35945	319134
28	30.05	473.0	24918	344053
30	30.78	503.8	25315	359358
32	32.52	536.3	26520	395888
34	35.22	571.5	28485	424373
36	38.65	591.0	31244	439996
38	0.00	0.0	0	0
0	0.00	0.0	0	0
0	27.24	0.0	0	0

**ORIGINAL PAGE IS
OF POOR QUALITY**

LISTA(1)
 LISTV(0,1)
 REMOVE(0,1,((11,13)))
 COPY((1,11,112,001))
 SHORT((1,11,001))

START(12,001(001,007))
 OPEN(EASC,"0")
 2114040000S
 PROFILE

Intermediate Descent (260 KEAS)

ALT	FNACH	EAS	TAS	TASFT	SING	COSG	R/D	GAMD
10	0.4745	260.0	302.6	511.1	-0.0476	0.9989	1460	-0.549E-05
12	0.4935	260.0	312.3	527.5	-0.0472	0.9989	1493	-0.604E-05
14	0.5135	260.0	322.5	544.8	-0.0467	0.9989	1526	-0.527E-05
16	0.5347	260.0	333.3	562.9	-0.0462	0.9989	1560	-0.728E-05
18	0.5570	260.0	344.5	581.8	-0.0456	0.9990	1593	-0.801E-05
20	0.5805	260.0	355.3	601.7	-0.0450	0.9990	1625	-0.907E-05
22	0.6057	260.0	368.7	622.7	-0.0444	0.9990	1657	-0.909E-05
24	0.6323	260.0	381.7	644.7	-0.0437	0.9990	1690	-0.105E-04
26	0.6605	260.0	395.5	667.9	-0.0430	0.9991	1721	-0.118E-04
28	0.6904	260.0	409.9	692.3	-0.0421	0.9991	1750	-0.100E-04
30	0.7224	260.0	425.2	718.2	-0.0414	0.9991	1785	-0.919E-05
32	0.7555	260.0	441.4	745.5	-0.0408	0.9992	1826	-0.195E-04
34	0.7925	260.0	458.4	774.2	-0.0395	0.9992	1836	0.379E-03
36	0.8300	259.6	477.1	805.8	-0.0639	0.9980	3088	-0.338E-04
38	0.8300	247.5	477.1	805.8	-0.0626	1.0000	0	0.000E+00
0	0.8311	260.0	477.8	806.9	-0.0643	1.0000	0	0.000E+00
0	0.8300	272.2	480.0	810.7	-0.0701	1.0000	0	-0.178E-03

ALT	DETT	SUMT	DELTX	SUMX
10	82.17	41.1	41947	20973
12	80.37	121.5	42349	63323
14	78.63	200.1	42790	106114
16	76.92	277.0	43248	149362
18	75.33	352.3	43779	193142
20	73.81	426.1	44367	237509
22	72.40	498.5	45038	282548
24	70.98	569.5	45718	328266
26	69.71	639.2	46514	374781
28	66.55	707.8	47426	422207
30	67.19	775.0	48215	470423
32	65.71	840.7	48945	519368
34	96.01	936.7	74277	593646
36	20.51	947.0	16573	601933
38	0.00	0.0	0	0
0	0.00	0.0	0	0
0	35.17	0.0	0	0

ORIGINAL PAGE IS
OF POOR QUALITY

START(26001,00700)
OPEN(EASO,00700)
21062000003
PROFILE

SLOW DESCENT (200 KIAS)

ALT	FACON	EAS	TAS	TASFT	SING	COSG	R/D	CAND
10	0.3551	200.0	232.8	393.1	-0.0470	0.9989	1107	-0.255E-05
12	0.3795	200.0	240.3	405.8	-0.0467	0.9989	1135	-0.285E-05
14	0.3950	200.0	248.1	419.1	-0.0464	0.9989	1166	-0.298E-05
16	0.4113	200.0	256.4	433.0	-0.0461	0.9989	1196	-0.351E-05
18	0.4285	200.0	265.0	447.6	-0.0457	0.9990	1227	-0.292E-05
20	0.4465	200.0	274.0	462.9	-0.0453	0.9990	1259	-0.451E-05
22	0.4659	200.0	283.6	479.0	-0.0449	0.9990	1290	-0.459E-05
24	0.4864	200.0	293.6	496.0	-0.0445	0.9990	1323	-0.540E-05
26	0.5081	200.0	304.2	513.8	-0.0440	0.9990	1356	-0.621E-05
28	0.5311	200.0	315.3	532.6	-0.0434	0.9991	1388	-0.572E-05
30	0.5557	200.0	327.1	552.4	-0.0429	0.9991	1420	-0.707E-05
32	0.5819	200.0	339.5	573.5	-0.0423	0.9991	1454	-0.151E-04
34	0.6097	200.0	352.6	595.5	-0.0410	0.9992	1465	-0.215E-04
36	0.6393	200.0	367.5	620.7	-0.0393	0.9992	1462	0.139E-03
38	0.6706	200.0	385.5	651.1	-0.0307	1.0000	0	0.000E+00
0	0.0000	0.0	0.0	0.0	0.0000	1.0000	0	0.000E+00
0	0.0000	0.0	0.0	0.0	0.0000	1.0000	0	0.000E+00

ALT	DELT T	SUM T	DELT X	SUM X
10	103.35	54.2	42546	21273
12	105.59	159.8	42799	64072
14	102.91	262.7	43077	107150
16	100.25	362.9	43364	150515
18	97.74	450.7	43699	194214
20	95.31	556.0	44069	238264
22	92.99	649.0	44491	282775
24	90.66	739.6	44919	327695
26	88.49	828.1	45420	373116
28	86.45	914.6	45995	419112
30	84.47	999.0	46620	465732
32	82.52	1081.6	47200	513013
34	81.67	1153.4	48719	561732
36	82.00	1204.5	50907	587186
38	0.00	0.0	0	0
0	0.00	0.0	0	0
0	0.00	0.0	0	0

ORIGINAL PAGE IS
OF POOR QUALITY

Appendix B

TI 59 Descent Program
New Short Form w/o Printout

000	69	uP
001	26	26
002	87	IFF
003	01	01
004	00	00
005	55	55
006	73	RC*
007	06	06
008	22	INV
009	59	INT
010	35	1/X
011	65	x
012	43	RCL
013	01	01
014	42	STD
015	14	14
016	65	x
017	01	1
018	93	.
019	06	6
020	08	8
021	09	9
022	95	=
023	42	STD
024	13	13
025	55	÷
026	53	(
027	73	RC*
028	06	06
029	59	INT
030	55	÷
031	01	1
032	00	0
033	54)
034	95	=
035	42	STD
036	12	12
037	32	XIT
038	43	RCL
039	00	00
040	32	XIT
041	22	INV
042	77	GE
043	00	00
044	85	85
045	86	STF
046	01	01
047	61	GTO
048	00	00
049	55	55
050	68	HOP

ORIGINAL PAGE IS
OF POOR QUALITY

051 68 NOP
052 61 GTO
053 00 00
054 85 85
055 73 RC*
056 06 06
057 59 INT
058 55 ÷
059 01 1
060 00 0
061 65 X
062 43 RCL
063 00 00
064 42 STO
065 12 12
066 95 =
067 42 STO
068 13 13
069 55 ÷
070 01 1
071 93 .
072 06 6
073 08 8
074 09 9
075 65 X
076 53 <
077 73 RC*
078 06 06
079 22 INV
080 59 INT
081 54)
082 95 =
083 42 STO
084 14 14
085 87 IFF
086 00 00
087 00 00
088 98 99
089 43 RCL
090 13 13
091 42 STO
092 10 10
093 86 STF
094 00 00
095 61 GTO
096 00 00
097 00 00
098 71 SBR
099 02 02
100 27 27

N

ORIGINAL PAGE IS
OF POOR QUALITY

101 71 SBR
102 04 04
103 34 34
104 71 SBR
105 01 01
106 13 13
107 61 GTO
108 00 00
109 00 00
110 00 0
111 00 0
112 00 0
113 43 RCL
114 13 13
115 65 ×
116 43 RCL
117 09 09
118 55 ÷
119 02 2
120 00 0
121 00 0
122 00 0
123 95 =
124 35 1/X
125 94 +/-
126 42 STO
127 15 15
128 43 RCL
129 03 03
130 32 XIT
131 43 RCL
132 06 06
133 22 INV
134 67 EQ
135 01 01
136 43 43
137 86 STF
138 05 05
139 87 IFF
140 04 04
141 01 01
142 51 51
143 22 INV
144 87 IFF
145 02 02
146 01 01
147 59 59
148 22 INV
149 86 STF
150 02 02

151 43 RCL
152 15 15
153 65 X
154 93 +
155 05 5
156 95 =
157 42 STD
158 15 15
159 43 RCL
160 15 15
161 44 SUM
162 16 16
163 60 NOP
164 65 X
165 53 <
166 43 RCL
167 18 18
168 55 X
169 43 RCL
170 13 13
171 85 +
172 43 RCL
173 02 02
174 54)
175 95 =
176 44 SUM
177 17 17
178 68 NOP
179 43 RCL
180 13 13
181 48 EXC
182 10 10
183 42 STD
184 13 13
185 87 IFF
186 05 05
187 01 01
188 91 91
189 68 NOP
190 92 RTN
→ 191 43 RCL
192 16 16
193 55 +
194 06 6
195 00 0
196 95 =
197 58 FIX
198 02 02
199 91 R/S
200 43 RCL

ORIGINAL PAGE IS
OF POOR QUALITY

201	17	17
202	55	÷
203	06	6
204	00	0
205	08	8
206	00	0
207	95	=
208	91	R/S
209	22	INV
210	58	FIX
211	91	R/S
212	00	0
213	00	0
214	00	0
215	00	0
216	00	0
217	00	0
218	00	0
219	00	0
220	00	0
221	00	0
222	00	0
223	00	0
224	00	0
225	00	0
226	00	0
227	43	RCL
228	14	14
229	68	NOP
230	33	X ²
231	65	×
232	01	1
233	00	0
234	93	.
235	02	2
236	01	1
237	95	=
238	42	STD
239	15	15
240	35	1/X
241	65	×
242	06	6
243	09	9
244	09	9
245	04	4
246	65	×
247	68	NOP
248	68	NOP
249	03	3
250	02	2

ORIGINAL PAGE IS
OF POOR QUALITY

251 93 .
252 01 1
253 07 ?
254 65 X
255 43 RCL
256 18 18
257 68 NDP
258 95 =
259 33 X2
260 42 STD
261 08 08
262 43 RCL
263 13 13
264 68 NDP
265 43 RCL
266 12 12
267 68 NDP
268 32 XIT
269 93 .
270 07 7
271 77 GE
272 03 03
273 36 36
274 93 .
275 08 8
276 77 GE
277 03 03
278 53 53
279 93 .
280 08 8
281 04 4
282 05 5
283 77 GE
284 03 03
285 86 86
286 32 XIT
287 75 -
288 93 .
289 08 8
290 04 4
291 05 5
292 95 =
293 42 STD
294 04 04
295 65 X
296 93 .
297 08 8
298 03 3
299 03 3
300 03 3

ORIGINAL PAGE IS
OF POOR QUALITY

301 85 +
302 93 .
303 00 0
304 06 6
305 03 3
306 95 =
307 65 x
308 43 RCL
309 08 08
310 98 ADV \approx
311 48 EXC
312 04 04
313 65 x
314 93 .
315 01 1
316 04 4
317 05 5
318 05 5
319 85 +
320 93 .
321 00 0
322 01 1
323 04 4
324 85 +
325 43 RCL
326 04 04
327 95 =
328 65 x
329 43 RCL
330 15 15
331 35 =
332 42 GTO
333 04 04
334 68 NDP
335 92 RTN
336 43 RCL
337 08 08
338 65 x
339 93 .
340 00 0
341 05 5
342 02 2
343 04 4
344 85 +
345 93 .
346 00 0
347 01 1
348 02 2
349 95 =
350 61 GTO

ORIGINAL PAGE IS
OF POOR QUALITY

351	03	03
352	28	23
353	43	RCL
354	08	08
355	65	x
356	93	.
357	00	0
358	05	5
359	02	2
360	04	4
361	85	+
362	93	.
363	00	0
364	01	1
365	02	2
366	03	3
367	03	3
368	85	+
369	53	<
370	32	XIT
371	75	-
372	93	.
373	08	8
374	54)
375	65	x
376	93	.
377	00	0
378	00	0
379	03	3
380	03	3
381	68	NOP
382	95	=
383	51	GTO
384	03	03
385	28	28
386	43	RCL
387	08	08
388	65	x
389	53	<
390	53	<
391	32	XIT
392	75	-
393	93	.
394	08	8
395	54)
396	65	x
397	93	.
398	02	2
399	03	3
400	05	5

ORIGINAL PAGE IS
OF POOR QUALITY

401	06	6
402	85	+
403	93	.
404	00	0
405	06	6
406	03	3
407	54)
408	85	+
409	93	.
410	00	0
411	01	1
412	04	4
413	85	+
414	53	(
415	43	RCL
416	12	12
417	75	-
418	93	.
419	08	8
420	04	4
421	05	5
422	54)
423	65	x
424	93	.
425	00	0
426	03	3
427	07	7
428	01	1
429	95	=
430	61	GTO
431	03	03
432	28	28
433	00	0
434	43	RCL
435	10	10
436	75	-
437	43	RCL
438	13	13
439	95	=
440	55	÷
441	02	2
442	00	0
443	00	0
444	00	0
445	65	x
446	43	RCL
447	13	13
448	75	-
449	03	3
450	02	2

ORIGINAL PAGE IS
OF POOR QUALITY

451	93	.
452	01	1
453	07	7
454	95	=
455	65	x
456	06	6
457	09	9
458	09	9
459	04	4
460	95	=
461	35	1/X
462	65	x
463	43	RCL
464	04	04
465	95	=
466	42	STO
467	09	09
468	68	NOP
469	33	X ²
470	55	÷
471	02	2
472	75	-
473	01	1
474	95	=
475	94	+/-
476	42	STO
477	18	18
478	92	RTN
479	00	0
480	00	0
481	00	0
482	00	0
483	00	0
484	00	0
485	00	0
486	00	0
487	68	NOP
488	68	NOP
489	68	NOP
490	68	NOP
491	68	NOP
492	68	NOP
493	68	NOP
494	68	NOP
495	68	NOP
496	68	NOP
497	68	NOP
498	68	NOP
499	68	NOP
500	00	0

ORIGINAL PAGE IS
OF POOR QUALITY

545 76 LBL
546 11 A
547 43 RCL
548 02 02
549 65 X
550 01 1
551 93 .
552 06 6
553 08 8
554 09 9
555 95 =
556 42 STO
557 02 02
558 00 0
559 32 X¹T
560 43 RCL
561 04 04
562 67 EQ
563 06 05
564 15 15
565 55 ÷
566 02 2
567 95 =
568 42 STO
569 06 06
570 22 INV
571 59 INT
572 22 INV
573 67 EQ
574 05 05
575 78 78
576 86 STF
577 02 02
578 85 +
579 43 RCL
580 06 06
581 85 +
582 01 1
583 07 7
584 95 =
585 42 STO
586 06 06
587 43 RCL
588 03 03
589 55 ÷
590 02 2
591 95 =
592 42 STO
593 03 03
594 22 INV
595 59 INT
596 22 INV
597 67 EQ
598 06 06
599 02 02
600 86 STF

601	04	04
602	75	-
603	43	RCL
604	03	03
605	75	-
606	01	1
607	09	9
608	95	=
609	94	+/-
610	42	STD
611	03	03
612	61	GTO
613	00	00
614	00	00
615	43	RCL
616	01	01
617	65	x
618	01	1
619	93	.
620	06	6
621	04	4
622	01	1
623	95	=
624	42	STD
625	10	10
626	01	1
627	08	8
628	42	STD
629	06	06
630	86	STF
631	02	02
632	86	STF
633	00	00
634	61	GTO
635	00	00 05
636	00	00 07
637	00	0
638	00	0
639	00	0

ORIGINAL PAGE
OF POOR QUALITY

0.83	00
320.	01
0.	02
36.	03
10.	04
0.	05
0.	06
0.	07
0.	08
0.	09
0.	10
0.	11
0.	12
0.	13
0.	14
0.	15
0.	16
0.	17
0.998	18
11160.9999	19
11082.9709	20
11004.9424	21
10927.9142	22
10848.8865	23
10769.8593	24
10690.8325	25
10609.8061	26
10528.7802	27
10446.7548	28
10364.7298	29
10281.7053	30
10196.6811	31
10114.6575	32
10028.6343	33
9941.6115	34
9855.5891	35
9769.5672	36
9710.5442	37
9709.5188	38
9709.4946	39

ORIGINAL PAGE
OF POOR QUALITY