

## General Disclaimer

### One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

NASA TECHNICAL  
MEMORANDUM

NASA TM X- 73,212

NASA TM X- 73,212

MEASURES OF PILOT PERFORMANCE DURING V/TOL AIRCRAFT  
LANDINGS ON SHIPS AT SEA

James C. Howard

Ames Research Center  
Moffett Field, California 94035

(NASA-TM-X-73212) MEASURES OF PILOT  
PERFORMANCE DURING V/TOL AIRCRAFT LANDINGS  
ON SHIPS AT SEA (NASA) 23 p HC A02/MF A01  
CSCL 05E

N77-21020

G3/01    Unclas  
22918

February 1977



1. Report No. NASA TM X-73,212	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle MEASURES OF PILOT PERFORMANCE DURING V/TOL AIRCRAFT LANDINGS ON SHIPS AT SEA		5. Report Date	
		6. Performing Organization Code	
7. Author(s) James C. Howard		8. Performing Organization Report No. A-6942	
		10. Work Unit No. 505-09-42	
9. Performing Organization Name and Address Ames Research Center Moffett Field, California 94035		11. Contract or Grant No.	
		13. Type of Report and Period Covered Technical Memorandum	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546		14. Sponsoring Agency Code	
		15. Supplementary Notes	
16. Abstract  Simulation experiments to determine the feasibility of landing V/TOL aircraft on ships at sea, require that the motion and attitude of the aircraft relative to the landing platform be known at the instant of touchdown. The success of these experiments depends on the ability of the experimenter to measure the pilot's performance during the landing maneuver. To facilitate these measurements, the equations describing the motion of the aircraft and its attitude relative to the landing platform are presented in a form which is suitable for simulation purposes. It is assumed that the pilot has achieved a successful landing when the relative motion at each landing wheel, at the instant of touchdown, does not exceed design values for the landing gear. By using this criterion, the equations presented can be used to determine the success or failure of each landing maneuver and hence establish the feasibility of such maneuvers.			
17. Key Words (Suggested by Author(s))  Pilot performance V/TOL aircraft Ship landings		18. Distribution Statement  Unlimited  STAR Category - 01	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 23	22. Price* \$3.25

## NOMENCLATURE

[A]	a column vector of velocity components relative to aircraft axes
[D]	a direction cosine matrix
$d_{ij}$	an element in the $i$ th row, and the $j$ th column of the direction cosine matrix
[E]	a column vector of velocity components in a fixed reference system
$\hat{I}, \hat{J}, \hat{K}$	unit vectors defining a ship axes system
[I]	a unit matrix
$\hat{i}, \hat{j}, \hat{k}$	unit vectors defining an aircraft axes system
P	the rolling component of the ship's angular velocity vector
p	the rolling component of the aircraft's angular velocity vector
Q	the pitching component of the ship's angular velocity vector
q	the pitching component of the aircraft's angular velocity vector
R	the yawing component of the ship's angular velocity vector
$\bar{R}_P$	the position vector of the landing platform, relative to the origin of the ship coordinate system
r	the yawing component of the aircraft's angular velocity vector
$\bar{r}$	the position vector of an aircraft landing wheel, relative to the center of gravity of the aircraft
[S]	a column vector of velocity components relative to ship axes
[T]	a transformation matrix
U, V, W	ship linear velocity components
u, v, w	aircraft linear velocity components
X, Y, Z	coordinates relative to ship axes
x, y, z	coordinates relative to aircraft axes
$Z_{cg}$	the perpendicular height of the aircraft center of gravity above the landing platform

$\theta_1 \theta_2 \theta_3$  Euler angles corresponding to direction cosines  
 $\Phi, \Theta, \Psi$  ship Euler angles  
 $\phi, \theta, \psi$  aircraft Euler angles  
 $\bar{\omega}$  ship angular velocity vector  
 $\ddot{\omega}$  aircraft angular velocity vector

Superscript:

T denotes transposition

Subscripts:

c.g. center of gravity  
 EA a transformation from fixed axes to aircraft body axes  
 ES a transformation from fixed axes to ship axes  
 I signifies inertial components  
 ij the ith row and the jth column of the direction cosine matrix  
 N nose wheel  
 P landing platform  
 Pi the point on the landing platform at which the ith landing wheel makes contact  
 Pcg the point on the landing platform beneath the aircraft center of gravity  
 Ps the point on the landing platform at which the starboard landing wheel makes contact  
 p port landing wheel  
 R aircraft motion relative to the landing platform  
 S ship motion  
 SA a transformation from ship axes to aircraft axes  
 s starboard landing wheel

# MEASURES OF PILOT PERFORMANCE DURING V/TOL AIRCRAFT

## LANDINGS ON SHIPS AT SEA

James C. Howard

Ames Research Center

### SUMMARY

Simulation experiments to determine the feasibility of landing V/TOL aircraft on ships at sea, require that the motion and attitude of the aircraft relative to the landing platform be known at the instant of touchdown. The success of these experiments depends on the ability of the experimenter to measure the pilot's performance during the landing maneuver. To facilitate these measurements, the equations describing the motion of the aircraft and its attitude relative to the landing platform are presented in a form which is suitable for simulation purposes. It is assumed that the pilot has achieved a successful landing when the relative motion at each landing wheel, at the instant of touchdown, does not exceed design values for the landing gear. By using this criterion, the equations presented can be used to determine the success or failure of each landing maneuver and hence establish the feasibility of such maneuvers.

### INTRODUCTION

Landing V/TOL aircraft on ships at sea is complicated by the motion of the landing platform which moves in response to the motions of the sea. In order to achieve a successful landing, the pilot has to induce in his aircraft a state which is compatible with the state of the ship, at the instant of touchdown. In the present context, the state refers specifically to the components of linear and angular motion and the corresponding spatial orientation. The relative states must be such that the rate at which the aircraft approaches the landing platform does not exceed design limits for the landing gear. Moreover, in the event that the aircraft attitude is not compatible with the attitude of the ship, the total landing energy is initially being absorbed by fewer than the total number of shock absorbers available.

In order to determine if the relative motions and attitudes during the landing maneuver are within prescribed limits, it is necessary to know the motion of the aircraft relative to the landing platform. The equations describing the relative motions during touchdown require the formulation of a matrix that defines the attitude of the aircraft. A similar matrix defining the attitude of the ship is also required. The elements of these matrices are functions of the conventional Euler angles for the aircraft and

the ship. The elements of the aircraft attitude matrix are computed in the process of solving the mathematical model of the aircraft. In order to determine the elements of the attitude matrix for the ship, the components of the ship's angular velocity vector are measured and inserted into Euler's geometrical equations, which are then solved to obtain the Euler angles for the ship. Subsequent to formulation, the ship's attitude matrix is transposed and premultiplied by the aircraft attitude matrix to obtain the required matrix defining the transformation from ship axes to aircraft body axes. The result is then used to transform the motion components of the landing platform from ship axes to aircraft body axes.

The elements of the matrix defining the transformation from ship axes to aircraft body axes are direction cosines. Although the direction cosines are useful for transformation purposes, they are not convenient measures of attitude. To facilitate the determination of relative attitudes, the equations describing a conversion from direction cosines to the Euler angles representing the attitude of the aircraft relative to the landing platform are formulated.

The feasibility of landing a V/TOL aircraft on a moving ship is determined by using the relative motion and attitude equations to measure pilot performance during the landing maneuver. The performance measured will be the pilot's ability to keep the relative motions and attitudes within prescribed limits. A pilot will be deemed to have achieved a successful landing if the relative motions at all landing wheels do not exceed design values for the landing gear.

#### VELOCITY OF AIRCRAFT RELATIVE TO THE SHIP

For simulation experiments of this kind, it is necessary to know the velocity of each landing wheel relative to the landing platform at the instant of touchdown. The point at which a given landing wheel makes contact with the landing platform is assumed to have a position vector  $\bar{R}_{P_i}$  relative to the origin of the ship's coordinate system. This system originates at a point on the water line, vertically above the center of gravity of the ship. The XZ plane of the ship's coordinate system corresponds to the plane of symmetry of the vessel and the Y axis is normal to it. It is naval practice to have the Y axis emanating from the port side of the ship and the Z axis pointing upward. However, in order to simplify the determination of relative velocities, ship motion will be referred to a coordinate system that originates on the water line but otherwise conforms to the aircraft axes convention.

Relative to this system of coordinates the position vector  $\bar{R}_{P_i}$  assumes the form

$$\bar{R}_{P_i} = (x_{P_i} \hat{i} + y_{P_i} \hat{j} + z_{P_i} \hat{k}) \quad (1)$$

where  $\hat{I}, \hat{J}, \hat{K}$  are a triad of mutually orthogonal unit vectors in the directions of the ship's axes, and  $X_{P_i}, Y_{P_i}, Z_{P_i}$  are the coordinates of the point at which the  $i$ th landing wheel makes contact with the landing platform. The subscript "i" is used to indicate which landing wheel is being considered.

Due to the ship's motion, the velocity of the landing platform at the point at which the  $i$ th landing wheel makes contact, is given by the equation (ref. 1)

$$\frac{d\bar{R}_{P_i}}{dt} = (\bar{V}_S + \bar{\Omega} \times \bar{R}_{P_i}) \quad (2)$$

where

$$\bar{V}_S = (U\hat{I} + V\hat{J} + W\hat{K}) \quad (3)$$

and

$$\bar{\Omega} = (P\hat{I} + Q\hat{J} + R\hat{K}) \quad (4)$$

The components  $U, V, W$  are the surging, swaying, and heaving velocities of the ship. These are nautical terms which denote forward, lateral, and vertical components of the ship's motion.  $P, Q,$  and  $R$  are the rolling, pitching, and yawing components of the ship's angular velocity vector  $\bar{\Omega}$ .

Equation (2) gives the components of the ship's inertial velocity at the point at which the  $i$ th landing wheel makes contact with the landing platform. These are

$$\left. \begin{aligned} U_I &= (U + QZ_{P_i} - RY_{P_i}) \\ V_I &= (V + RX_{P_i} - PZ_{P_i}) \\ W_I &= (W + PY_{P_i} - QX_{P_i}) \end{aligned} \right\} \quad (5)$$

where the subscript  $I$  denotes inertial components.

It is next necessary to determine the velocity of each landing wheel in the fully extended position. Let  $\bar{r}_S$  be the position vector of the starboard landing wheel. The components of  $\bar{r}_S$  relative to a set of aircraft body axes with origin at the center of gravity of the aircraft are

$$\bar{r}_S = (x_S\hat{i} + y_S\hat{j} + z_S\hat{k})$$

where  $\hat{i}, \hat{j}, \hat{k}$  are a triad of mutually orthogonal unit vectors in the directions of the aircraft axes.



The velocity of the starboard landing wheel is

$$\frac{d\bar{r}_S}{ds} = (\bar{V}_A + \bar{\omega} \times \bar{r}_S) \quad (6)$$

where  $\bar{V}_A$  is the linear velocity of the aircraft and  $\bar{\omega}$  is its angular velocity.

In component form

$$\left. \begin{aligned} \bar{V}_A &= (u\hat{i} + v\hat{j} + w\hat{k}) \\ \bar{\omega} &= (p\hat{i} + q\hat{j} + r\hat{k}) \end{aligned} \right\} \quad (7)$$

$u, v, w$  are the components of the aircraft's linear velocity vector, and  $p, q, r$  are the angular velocity components.

Equation (6) may be used to obtain the aircraft's velocity components at the location of the starboard landing wheel. Relative to the aircraft's body axes, these are

$$\left. \begin{aligned} u_I &= (u + qz_S - ry_S) \\ v_I &= (v + rx_S - pz_S) \\ w_I &= (w + py_S - qx_S) \end{aligned} \right\} \quad (8)$$

where the subscript I again denotes inertial components.

The velocity  $\bar{V}_R$  of the starboard landing wheel relative to the landing platform is given by the equation

$$\bar{V}_R = [(\bar{V}_A + \bar{\omega} \times \bar{r}_S) - (\bar{V}_S + \bar{\Omega} \times \bar{R}_{PS})] \quad (9)$$

The components of this vector are

$$\left. \begin{aligned} \bar{V}_{R1} &= (u + qz_S - ry_S)\hat{i} - (U + QZ_{PS} - RY_{PS})\hat{I} \\ \bar{V}_{R2} &= (v + rx_S - pz_S)\hat{j} - (V + RX_{PS} - PZ_{PS})\hat{J} \\ \bar{V}_{R3} &= (w + py_S - qx_S)\hat{k} - (W + PY_{PS} - QX_{PS})\hat{K} \end{aligned} \right\} \quad (10)$$

Since the aircraft axes  $\hat{i}, \hat{j}, \hat{k}$  are not, in general, aligned with the ship's reference axes  $\hat{I}, \hat{J}, \hat{K}$  at the instant of touchdown, it is necessary

to transform the velocity components of the landing platform from ship axes to aircraft body axes.

#### Transformation of Motion Vector Components

A set of vector components in a coordinate system that is rotationally fixed is related to the components in the aircraft body axes by a transformation equation of the form

$$[A] = [T]_{EA}[E] \quad (11)$$

where

[A] denotes a column vector of motion components in the aircraft reference system

$[T]_{EA}$  is a matrix which effects a transformation from fixed axes to aircraft body axes

[E] is a column vector of motion components in the fixed reference system

Likewise, the components of a vector in the fixed reference system are related to the components in the moving ship reference system, by a transformation of the same form. That is,

$$[S] = [T]_{ES}[E] \quad (12)$$

where

[S] denotes a column vector of motion vector components relative to ship axes

$[T]_{ES}$  is a matrix that effects a transformation from fixed axes to the moving ship axes

Similarly, a triad of ship axes components can be transformed to aircraft body axes by the transformation equation

$$[A] = [T]_{SA}[S] \quad (13)$$

where

$[T]_{SA}$  is a matrix which effects a transformation from ship axes to aircraft body axes

Substitution from equation (12) in equation (13) gives a transformation from fixed axes to ship axes, followed by a transformation from ship axes to aircraft axes:

$$[A] = [T]_{SA} [T]_{ES} [E] \quad (14)$$

Finally, substitution from equation (11) in equation (14) yields the following matrix equation:

$$[A] = [T]_{SA} [T]_{ES} [T]_{EA}^{-1} [A]$$

Therefore,  $[T]_{SA} [T]_{ES} [T]_{EA}^{-1} = [I]$ , where  $[I]$  is the unit matrix.

Solving this matrix equation for  $[T]_{SA}$  yields

$$[T]_{SA} = [T]_{EA} [T]_{ES}^{-1} \quad (15)$$

Since only orthogonal transformations are being considered, the inverse of a transformation matrix equals the transpose of the matrix, and equation (15) simplifies accordingly. That is

$$[T]_{ES}^{-1} = [T]_{ES}^T \quad (16)$$

where the superscript T denotes transposition.

Substitution from equation (16) in equation (15) yields the required transformation from ship axes to aircraft body axes. That is

$$[T]_{SA} = [T]_{EA} [T]_{ES}^T \quad (17)$$

In terms of the Euler angles  $\psi$ ,  $\theta$ ,  $\phi$  and using the conventional aeronautical rotation sequence, the required transformation matrices are (ref. 2)

$$[T]_{EA} = \begin{pmatrix} 1 & 0 & 0 \\ 0 & \cos \phi & \sin \phi \\ 0 & -\sin \phi & \cos \phi \end{pmatrix} \begin{pmatrix} \cos \theta & 0 & -\sin \theta \\ 0 & 1 & 0 \\ \sin \theta & 0 & \cos \theta \end{pmatrix} \begin{pmatrix} \cos \psi & \sin \psi & 0 \\ -\sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

$$[T]_{EA} = \begin{bmatrix} \cos \theta \cos \psi & \cos \theta \sin \psi & -\sin \theta \\ \sin \phi \sin \theta \cos \psi & \sin \psi \sin \theta \sin \phi & \sin \phi \cos \theta \\ -\sin \psi \cos \phi & +\cos \psi \cos \phi & \\ \cos \psi \cos \phi \sin \theta & \sin \psi \cos \phi \sin \theta & \cos \phi \cos \theta \\ +\sin \psi \sin \phi & -\cos \psi \sin \phi & \end{bmatrix} \quad (18)$$

For the transformation from fixed axes to ship axes, the Euler angles will be denoted by the capital Greek letters  $\Psi$ ,  $\Theta$ , and  $\Phi$ . In terms of this notation, the transformation matrix  $[T]_{ES}$  assumes a form identical to equation (18).

$$[T]_{ES} = \begin{bmatrix} \cos \Theta \cos \Psi & \cos \Theta \sin \Psi & -\sin \Theta \\ \sin \Phi \sin \Theta \cos \Psi & \sin \Psi \sin \Theta \sin \Phi & \sin \Phi \cos \Theta \\ -\sin \Psi \cos \Phi & +\cos \Psi \cos \Phi & \\ \cos \Psi \cos \Phi \sin \Theta & \sin \Psi \cos \Phi \sin \Theta & \cos \Phi \cos \Theta \\ +\sin \Psi \sin \Phi & -\cos \Psi \sin \Phi & \end{bmatrix} \quad (19)$$

The following equation gives the transposed form of this matrix:

$$[T]_{ES}^T = \begin{bmatrix} \cos \Theta \cos \Psi & \sin \Phi \sin \Theta \cos \Psi & \cos \Psi \cos \Phi \sin \Theta \\ & -\sin \Psi \cos \Phi & +\sin \Psi \sin \Phi \\ \cos \Theta \sin \Psi & \sin \Psi \sin \Theta \sin \Phi & \sin \Psi \cos \Phi \sin \Theta \\ & +\cos \Psi \cos \Phi & -\cos \Psi \sin \Phi \\ -\sin \Theta & \sin \Phi \cos \Theta & \cos \Phi \cos \Theta \end{bmatrix} \quad (20)$$

The computer program, which solves the equations of the mathematical model of the aircraft, evaluates the angles  $\Psi$ ,  $\Theta$ , and  $\Phi$  and hence determines the attitude of the aircraft as a function of time. The Euler angles are then used to compute the elements of the transformation matrix  $[T]_{EA}$ .

In order to determine the attitude of the ship, the components of the ship's angular velocity vector are measured and used to formulate the equations (ref. 3)

$$\left. \begin{aligned} P &= \dot{\Phi} - \dot{\Psi} \sin \Theta \\ Q &= \dot{\Theta} \cos \Phi + \dot{\Psi} \cos \Theta \sin \Phi \\ R &= \dot{\Psi} \cos \Theta \cos \Phi - \dot{\Theta} \sin \Phi \end{aligned} \right\} \quad (21)$$

Solving these equations for  $\dot{\Phi}$ ,  $\dot{\Theta}$ , and  $\dot{\Psi}$ , we obtain

$$\left. \begin{aligned} \dot{\Phi} &= P + (Q \sin \Phi + R \cos \Phi) \tan \Theta \\ \dot{\Theta} &= Q \cos \Phi - R \sin \Phi \\ \dot{\Psi} &= (Q \sin \Phi + R \cos \Phi) \sec \Theta \end{aligned} \right\} \quad (22)$$

The solution of these equations yields the required Euler angles  $\Phi$ ,  $\Theta$ , and  $\Psi$ , which are then used to determine the elements of the transformation matrix  $[T]_{ES}$ . Subsequent to the formulation and transposition of this matrix, the product of  $[T]_{EA}$  and  $[T]_{ES}^T$  is formed.

This product matrix yields the required ship-to-aircraft transformation in accordance with equation (17). The result may be used to obtain the velocity of the starboard landing wheel relative to the landing platform. The relative velocities are

$$\begin{pmatrix} V_{Rx} \\ V_{Ry} \\ V_{Rz} \end{pmatrix}_s = \begin{pmatrix} u + qz_s - ry_s \\ v + rx_s - pz_s \\ w + py_s - qx_s \end{pmatrix} - [T]_{SA} \begin{pmatrix} U + QZ_{Ps} - RY_{Ps} \\ V + RX_{Ps} - PZ_{Ps} \\ W + PY_{Ps} - QX_{Ps} \end{pmatrix} \quad (23)$$

For experiments of this type, the most important components of ship motion are: heaving, pitching, and rolling. Hence, by assuming that

$$U = V = R = 0$$

the amount of computation is reduced, and equation (23) assumes the simpler form

$$\begin{pmatrix} V_{Rx} \\ V_{Ry} \\ V_{Rz} \end{pmatrix}_s = \begin{pmatrix} u + qz_s - ry_s \\ v + rx_s - pz_s \\ w + py_s - qx_s \end{pmatrix} - [T]_{SA} \begin{pmatrix} QZ_{Ps} \\ -PZ_{Ps} \\ W + PY_{Ps} - QX_{Ps} \end{pmatrix} \quad (24)$$

where

$$\begin{pmatrix} V_{Rx} \\ V_{Ry} \\ V_{Rz} \end{pmatrix}_s$$

are the velocity components of the starboard landing wheel relative to the landing platform, and  $[T]_{SA}$  is defined in equation (17).

Similarly, the relative velocity components of the port landing wheel are

$$\begin{pmatrix} V_{Rx} \\ V_{Ry} \\ V_{Rz} \end{pmatrix}_p = \begin{pmatrix} u + qz_p - ry_p \\ v + rx_p - pz_p \\ w + py_p - qx_p \end{pmatrix} - [T]_{SA} \begin{pmatrix} QZ_{Pp} \\ -PZ_{Pp} \\ W + PY_{Pp} - QX_{Pp} \end{pmatrix} \quad (25)$$

In this case, the subscript  $p$  denotes the port landing wheel. This is not to be confused with the subscript,  $P$ , which refers to the landing platform.

Finally, the relative velocity components of the nosewheel are

$$\begin{pmatrix} V_{Rx} \\ V_{Ry} \\ V_{Rz} \end{pmatrix}_N = \begin{pmatrix} u + qz_N - ry_N \\ v + rx_N - pz_N \\ w + py_N - qx_N \end{pmatrix} - [T]_{SA} \begin{pmatrix} QZ_{PN} \\ -PZ_{PN} \\ W + PY_{PN} - QX_{PN} \end{pmatrix} \quad (26)$$

where the subscript  $N$  denotes nosewheel.

#### Attitude of Aircraft Relative to the Ship

The transformation of vector components from ship axes to aircraft body axes is given by equation (17)

$$[T]_{SA} = [T]_{EA} [T]_{ES}^T$$

In terms of the direction cosines  $d_{ij}$ , relating aircraft body axes to ship axes, this matrix equation assumes the form

$$[T]_{SA} = \begin{bmatrix} d_{11} & d_{12} & d_{13} \\ d_{21} & d_{22} & d_{23} \\ d_{31} & d_{32} & d_{33} \end{bmatrix} = [D]$$

The direction cosines  $d_{ij}$  have the following values:

$$\begin{aligned}
d_{11} &= (\cos \theta \cos \psi \cos \Theta \cos \Psi + \cos \theta \sin \psi \cos \Theta \sin \Psi + \sin \theta \sin \Theta) \\
d_{12} &= [\cos \theta \cos \psi (\sin \Phi \sin \Theta \cos \Psi - \sin \Psi \cos \Phi) \\
&\quad + \cos \theta \sin \psi (\sin \Psi \sin \Theta \sin \Phi + \cos \Psi \cos \Phi) - \sin \theta \sin \Phi \cos \Theta] \\
d_{13} &= [\cos \theta \cos \psi (\cos \Psi \cos \Phi \sin \Theta + \sin \Psi \sin \Theta) \\
&\quad + \cos \theta \sin \psi (\sin \Psi \cos \Phi \sin \Theta - \cos \Psi \sin \Phi) - \sin \theta \cos \Phi \cos \Theta] \\
d_{21} &= [(\sin \phi \sin \theta \cos \psi - \sin \psi \cos \phi) \cos \Theta \cos \Psi \\
&\quad + (\sin \psi \sin \theta \sin \phi + \cos \psi \cos \phi) \cos \Theta \sin \Psi - \sin \phi \cos \theta \sin \Theta] \\
d_{22} &= [(\sin \phi \sin \theta \cos \psi - \sin \psi \cos \phi) (\sin \Phi \sin \Theta \cos \Psi - \sin \Psi \cos \Phi) \\
&\quad + (\sin \psi \sin \theta \sin \phi + \cos \psi \cos \phi) (\sin \Psi \sin \Theta \sin \Phi + \cos \Psi \cos \Phi) \\
&\quad + \sin \phi \cos \theta \sin \Phi \cos \Theta] \\
d_{23} &= [(\sin \phi \sin \theta \cos \psi - \sin \psi \cos \phi) (\cos \Psi \cos \Phi \sin \Theta + \sin \Psi \sin \Phi) \\
&\quad + (\sin \psi \sin \theta \sin \phi + \cos \psi \cos \phi) (\sin \Psi \cos \Phi \sin \Theta - \cos \Psi \sin \Phi) \\
&\quad + \sin \phi \cos \theta \cos \Phi \cos \Theta] \\
d_{31} &= [(\cos \psi \cos \phi \sin \theta + \sin \psi \sin \phi) (\cos \Theta \cos \Psi) \\
&\quad + (\sin \psi \cos \phi \sin \theta - \cos \psi \sin \phi) \cos \Theta \sin \Psi - \cos \phi \cos \theta \sin \Theta] \\
d_{32} &= [(\cos \psi \cos \phi \sin \theta + \sin \psi \sin \phi) (\sin \Phi \sin \Theta \cos \Psi - \sin \Psi \cos \Phi) \\
&\quad + (\sin \psi \cos \phi \sin \theta - \cos \psi \sin \phi) (\sin \Psi \sin \Theta \sin \Phi + \cos \Psi \cos \Phi) \\
&\quad + \cos \phi \cos \theta \sin \Phi \cos \Theta] \\
d_{33} &= [(\cos \psi \cos \phi \sin \theta + \sin \psi \sin \phi) (\cos \Psi \cos \Phi \sin \Theta + \sin \Psi \sin \Phi) \\
&\quad + (\sin \psi \cos \phi \sin \theta - \cos \psi \sin \phi) (\sin \Psi \cos \Phi \sin \Theta - \cos \Psi \sin \Phi) \\
&\quad + \cos \phi \cos \theta \cos \Phi \cos \Theta]
\end{aligned}$$

Although the direction cosines are useful for transformation purposes, they are not convenient measures of aircraft attitude. A conversion from direction cosines to a set of Euler angles that represents the attitude of the



aircraft relative to the ship can be effected by the method described in reference 4.

For the conventional aeronautical rotation sequence, a direction cosine matrix can be generated as the product of three rotation matrices as follows:

$$[D] = [T_1(\theta_1)][T_2(\theta_2)][T_3(\theta_3)] \quad (27)$$

where

$$[T_1(\theta_1)] = \begin{pmatrix} 1 & 0 & 0 \\ 0 & \cos \theta_1 & \sin \theta_1 \\ 0 & -\sin \theta_1 & \cos \theta_1 \end{pmatrix}$$

$$[T_2(\theta_2)] = \begin{pmatrix} \cos \theta_2 & 0 & -\sin \theta_2 \\ 0 & 1 & 0 \\ \sin \theta_2 & 0 & \cos \theta_2 \end{pmatrix}$$

$$[T_3(\theta_3)] = \begin{pmatrix} \cos \theta_3 & \sin \theta_3 & 0 \\ -\sin \theta_3 & \cos \theta_3 & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

The product matrix, equation (27) yields the following direction cosines:

$$d_{11} = \cos \theta_2 \cos \theta_3$$

$$d_{12} = \cos \theta_2 \sin \theta_3$$

$$d_{13} = -\sin \theta_2$$

$$d_{21} = \sin \theta_1 \sin \theta_2 \cos \theta_3 - \sin \theta_3 \cos \theta_1$$

$$d_{22} = \sin \theta_3 \sin \theta_2 \sin \theta_1 + \cos \theta_3 \cos \theta_1$$

$$d_{23} = \sin \theta_1 \cos \theta_2$$

$$d_{31} = \cos \theta_3 \cos \theta_1 \sin \theta_2 + \sin \theta_3 \sin \theta_1$$

$$d_{32} = \sin \theta_3 \cos \theta_1 \sin \theta_2 - \cos \theta_3 \sin \theta_1$$

$$d_{33} = \cos \theta_1 \cos \theta_2$$



The following combinations of these equations are required to convert the direction cosines  $d_{ij}$  to the Euler angles  $\theta_1, \theta_2, \theta_3$ .

$$d_{11} \sin \theta_3 - d_{12} \cos \theta_3 = 0 \quad (28)$$

$$d_{31} \sin \theta_3 - d_{32} \cos \theta_3 = \sin \theta_1 \quad (29)$$

$$d_{21} \sin \theta_3 - d_{22} \cos \theta_3 = -\cos \theta_1 \quad (30)$$

$$d_{13} = -\sin \theta_2 \quad (31)$$

$$d_{23} \sin \theta_1 + d_{33} \cos \theta_1 = \cos \theta_2 \quad (32)$$

From equation (28):

$$\tan \theta_3 = \frac{d_{12}}{d_{11}} \quad (33)$$

Equations (29) and (30) give:

$$\tan \theta_1 = \left[ \frac{d_{31} \sin \theta_3 - d_{32} \cos \theta_3}{d_{22} \cos \theta_3 - d_{21} \sin \theta_3} \right] \quad (34)$$

or

$$\tan \theta_1 = \left[ \frac{d_{31} \tan \theta_3 - d_{32}}{d_{22} - d_{21} \tan \theta_3} \right] \quad (35)$$

From equations (31) and (32):

$$\tan \theta_2 = - \left[ \frac{d_{13}}{d_{23} \sin \theta_1 + d_{33} \cos \theta_1} \right] \quad (36)$$

Given the nine direction cosines and the rotational sequence, the three Euler angles  $\theta_1, \theta_2$ , and  $\theta_3$  can be computed. For the present application,  $\theta_3$  corresponds to the aircraft yaw angle relative to the landing platform. The angles  $\theta_2$  and  $\theta_1$  are pitch and roll angles, respectively, relative to the landing platform. It should be noted that the computed values of  $\theta_i$  are not unique, since  $\tan \theta$  is a many valued function. That is,

$$\tan \theta = \tan(n\pi + \theta)$$

where  $n$  is a positive or negative integer. However, for the case being considered, and the angles anticipated, only those solutions corresponding to  $n = 0$  will be required.

### Performance Measures at Touchdown

In terms of a known c.g., height above the landing platform, and the direction cosines relating aircraft axes to ship axes, the relative velocities required for performance measures are those prevailing when

$$Z_{cg} = (d_{13}x_{pw} + d_{23}y_{pw} + d_{33}z_{pw}) \quad (37)$$


at the port landing wheel;

$$Z_{cg} = (d_{13}x_{sw} + d_{23}y_{sw} + d_{33}z_{sw}) \quad (38)$$

at the starboard landing wheel; and

$$Z_{cg} = (d_{13}x_{nw} + d_{23}y_{nw} + d_{33}z_{nw}) \quad (39)$$

at the nosewheel. (See diagram.)

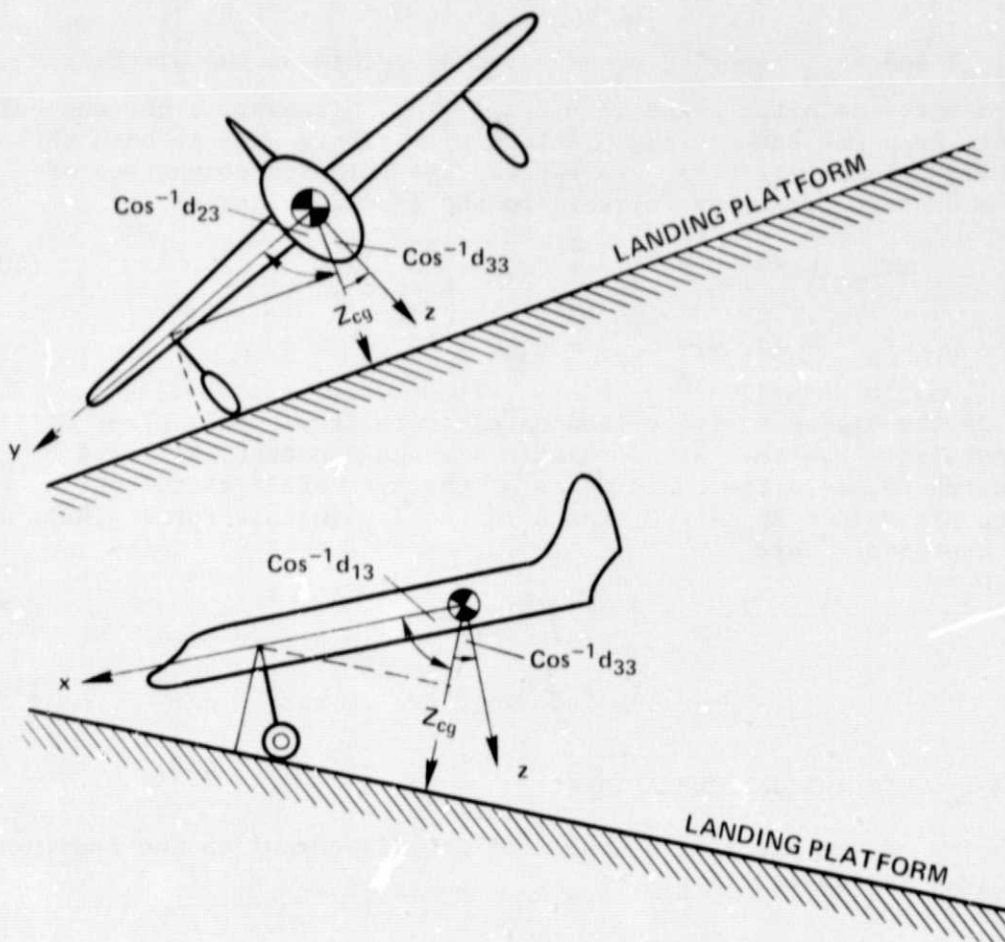

Equations (24) through (26) give the components of aircraft velocity relative to the landing platform. These are referred to aircraft body axes. In order to determine the corresponding components in ship axes, the aircraft velocity components must be transformed to ship axes. Subsequent to transformation, equation (24) assumes the form

$$[T]_{SA}^T \begin{pmatrix} V_{Px} \\ V_{Py} \\ V_{Pz} \end{pmatrix} = [T]_{SA}^T \begin{pmatrix} u \\ v \\ w \end{pmatrix} - \begin{pmatrix} QZ_{Pcg} \\ -PZ_{Pcg} \\ W + PY_{Pcg} - QX_{Pcg} \end{pmatrix}$$

where

$$[T]_{SA}^T = \begin{pmatrix} d_{11} & d_{21} & d_{31} \\ d_{12} & d_{22} & d_{32} \\ d_{13} & d_{23} & d_{33} \end{pmatrix}$$

and  $X_{Pcg}$ ,  $Y_{Pcg}$ , and  $Z_{Pcg}$  are the coordinates of points on the aircraft trajectory projected onto the plane  $(Z + Z_{Pcg}) = 0$ . Moreover, a perpendicular from the point  $Z_{Pcg}$  on the landing platform will always pass through the center of gravity of the aircraft. Therefore, the velocity components of the aircraft's center of gravity relative to the landing platform are

$$\dot{X}_{Pcg} = (d_{11}u + d_{21}v + d_{31}w - QZ_{Pcg}) \quad (40)$$

$$\dot{Y}_{Pcg} = (d_{12}u + d_{22}v + d_{32}w + PZ_{Pcg}) \quad (41)$$

where  $Z_{Pcg}$  is the distance of the landing platform from the XY plane of the ship's coordinate system. Since this is a known constant,  $\dot{X}_{Pcg}$  and  $\dot{Y}_{Pcg}$  can be integrated to yield the coordinates of the aircraft's center of gravity in the plane  $(Z + Z_{Pcg}) = 0$ , which is the landing platform. Therefore, the required coordinates are

$$X_{Pcg} = X_o + \int \dot{X}_{Pcg} dt \quad (42)$$

$$Y_{Pcg} = Y_o + \int \dot{Y}_{Pcg} dt \quad (43)$$

where  $X_o$  and  $Y_o$  are initial conditions.

The velocity of the aircraft's center of gravity normal to the landing platform is given by the equation

$$\dot{Z}_{cg} = [(d_{13}u + d_{23}v + d_{33}w) - (W + PY_{Pcg} - QX_{Pcg})] \quad (44)$$

Because  $X_{Pcg}$  and  $Y_{Pcg}$  are known from equations (42) and (43), equation (44) can be integrated to yield

$$Z_{cg} = Z_o - Z_{Pcg} + \int \dot{Z}_{cg} dt \quad (45)$$

where  $Z_o$  is the initial distance from the XY plane of the ship's coordinate system.

The initial values  $X_o$ ,  $Y_o$ , and  $Z_o$  are ship axes components. When the initial conditions are given in earth-fixed axes, a transformation from these axes to ship axes is required.

Given that  $\bar{X}_o$ ,  $\bar{Y}_o$ , and  $\bar{Z}_o$  are initial components in earth-fixed axes, the corresponding ship axes components are

$$\begin{pmatrix} X_o \\ Y_o \\ Z_o \end{pmatrix} = [T]_{ES} \begin{pmatrix} \bar{X}_o \\ \bar{Y}_o \\ \bar{Z}_o \end{pmatrix}$$


When equations (42) through (45) are modified in accordance with this transformation, we obtain

$$\begin{pmatrix} X_{Pcg} \\ Y_{Pcg} \\ Z_{Pcg} + Z_{cg} \end{pmatrix} = [T]_{ES} \begin{pmatrix} \bar{X}_o \\ \bar{Y}_o \\ \bar{Z}_o \end{pmatrix} + \int \begin{pmatrix} \dot{X}_{Pcg} \\ \dot{Y}_{Pcg} \\ \dot{Z}_{cg} \end{pmatrix} dt$$

The landing platform is assumed to be rectangular and bounded by the lines

$$\left. \begin{aligned} (\ell X - mY - n_1) &= 0 \\ (\ell X - mY - n_2) &= 0 \\ (mX + \ell Y - n_3) &= 0 \\ (mX + \ell Y - n_4) &= 0 \end{aligned} \right\} \quad (46)$$

where  $\ell$ ,  $m$ , and  $n_i$  are constants:  $i = 1, 2, 3, 4$ . (See diagram.)

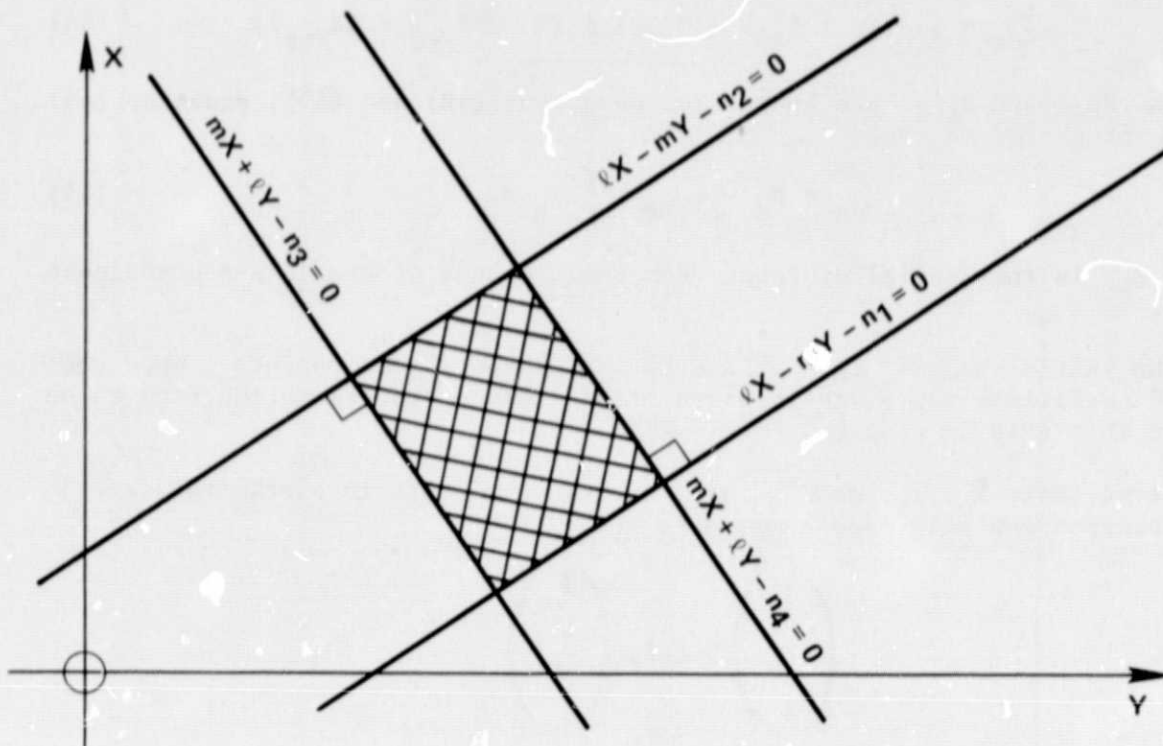

For this and all other geometrical shapes,  $Z_{cg}$  should be computed continuously from the initiation of each run, but the information generated is only required when appropriate geometrical conditions are met. For the configuration assumed, these are

$$\begin{aligned}
 (lX_{Pcg} - mY_{Pcg}) &\geq n_1 \\
 (lX_{Pcg} - mY_{Pcg}) &\leq n_2 \\
 (mX_{Pcg} + lY_{Pcg}) &\geq n_3 \\
 (mX_{Pcg} + lY_{Pcg}) &\leq n_4
 \end{aligned}
 \tag{47}$$

When these conditions are satisfied, the aircraft is over the landing platform.

For a rectangular platform, with sides parallel to the ship's XY coordinate axes, the coefficient  $m$  vanishes and equations (46) assume the simpler form:




$$\left. \begin{aligned}
 (\ell X - n_1) &= 0 \\
 (\ell Y - n_2) &= 0 \\
 (\ell Y - n_3) &= 0 \\
 (\ell Y - n_4) &= 0
 \end{aligned} \right\} \quad (48)$$

Given that the platform has length  $L$  and breadth  $B$ , these equations can be interpreted as follows:

$$\left. \begin{aligned}
 (X - X_p) &= 0 \\
 (Y - Y_p) &= 0 \\
 (X - X_p - L) &= 0 \\
 (Y - Y_p - B) &= 0
 \end{aligned} \right\} \quad (49)$$

where  $X_p$  and  $Y_p$  are platform boundary lines, and

$$\begin{aligned}
 X_p &= n_1 / \ell \\
 Y_p &= n_3 / \ell \\
 X_p + L &= n_2 / \ell \\
 Y_p + B &= n_4 / \ell
 \end{aligned}$$

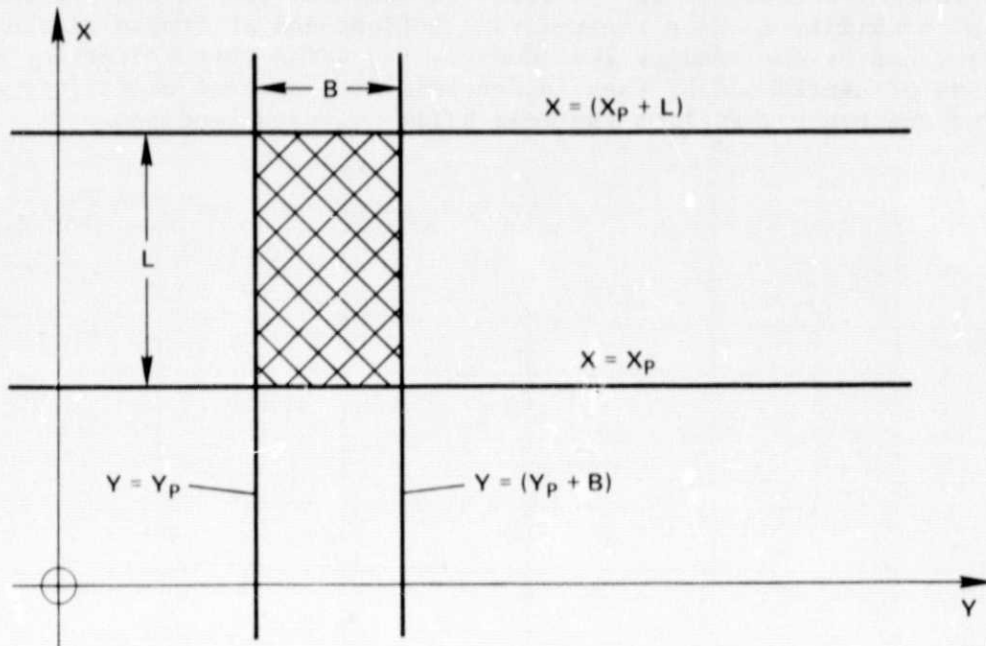

In this case, the aircraft will be over the landing platform when the following geometrical conditions are met:

$$\left. \begin{aligned} X_p &\leq X_{pcg} \leq (X_p + L) \\ Y_p &\leq Y_{pcg} \leq (Y_p + B) \end{aligned} \right\} \quad (50)$$

When either these conditions or the conditions in (47), as appropriate, are satisfied, the computed value of  $Z_{cg}$  is used to determine when equations (37) through (39) are satisfied. At this juncture,  $X_{pi}$  and  $Y_{pi}$  are evaluated from the equations

$$\begin{aligned} X_{pi} &= X_{pcg} + (d_{11}x_i + d_{21}y_i + d_{31}z_i) \\ Y_{pi} &= Y_{pcg} + (d_{12}x_i + d_{22}y_i + d_{32}z_i) \end{aligned}$$

where  $x_i$ ,  $y_i$ , and  $z_i$  are the coordinates of the  $i$ th landing wheel referred to aircraft body axes. The relative velocities required for performance measures are then obtained from equations (24) through (26), as appropriate.

#### CONCLUSIONS

Simulation experiments to determine the feasibility of landing V/TOL aircraft on ships at sea, require that the motion and the attitude of the aircraft relative to the landing platform be known. The equations describing the relative motions and attitudes have been derived in a form that is suitable for simulation purposes and the measurement of pilot performance during the landing maneuver. The performance measures can be used to determine a pilot's ability to keep the relative motions and attitudes within limits prescribed by the landing gear design. By using this criterion, the equations presented can be used to determine the success or failure of each landing and hence establish the feasibility of such landings.

## REFERENCES

1. Ramsey, A. S.: Dynamics, Part II. Cambridge University Press, 1947.
2. McRuer, Duane, et al.: Aircraft Dynamics and Automatic Control. Princeton University Press, 1973.
3. Etkin, Bernard: Dynamics of Atmospheric Flight. John Wiley & Sons, Inc., 1972.
4. Meyer, George, et al.: A Method for Expanding a Direct Cosine Matrix into an Euler Sequence of Rotations. NASA TM X-1384, 1967.