

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

**NASA TECHNICAL
MEMORANDUM**

NASA TM X-73400

NASA TM X-73400

(NASA-TM-X-73400) FLOW VISUALIZATION IN
LONG NECK HELMHOLTZ RESONATORS WITH GRAZING
FLOW (NASA) 9 p HC \$3.50 CSCI 20D

N76-27518

G3/34 Unclass
42384

**FLOW VISUALIZATION IN LONG NECK HELMHOLTZ
RESONATORS WITH GRAZING FLOW**

by Kenneth J. Baumeister and Edward J. Rice
Lewis Research Center
Cleveland, Ohio 44135

TECHNICAL PAPER to be presented at
the Third Aero-Acoustics Conference
sponsored by the American Institute of Aeronautics
and Astronautics
Palo Alto, California, July 20-23, 1976



FLOW VISUALIZATION IN LONG NECK HELMHOLTZ RESONATORS WITH GRAZING FLOW

Kenneth J. Bauncister and Edward J. Rice
National Aeronautics and Space Administration
Lewis Research Center
Cleveland, Ohio 44135

Abstract

Both oscillating and steady flows were applied to a single plexiglass resonator cavity with colored dyes injected in both the orifice and grazing flow field to record the motion of the fluid. For oscillatory flow, the instantaneous dye streamlines were similar for both the short and long-neck orifices. The orifice flow blockade appears to be independent of orifice length for a fixed amplitude of flow oscillation and magnitude of the grazing flow. The steady flow dye studies showed that the acoustic and steady flow resistances do not necessarily correspond for long neck orifices.

Introduction

Despite considerable research during the last decade, there is still much unknown concerning the mechanism of acoustic energy dissipation by a resonator in the presence of grazing flow. More detailed information is needed regarding the physical flow interaction process occurring near the mouth of a Helmholtz resonator in the presence of grazing flow. To ascertain the nature of the flow process for long neck resonators, a visual study of the effect of grazing flow on the oscillatory flow in a long neck orifice has been performed in a plexiglass flow channel with a single side branch Helmholtz resonator using water as the fluid media and colored dyes to trace the fluid motion.

In this investigation, both oscillatory and steady flow were applied to the back cavity of the long-neck resonator. The motion of the dyes and thus the fluid are recorded by a high-speed camera. Individual motion-picture frames are presented in this report to illustrate the flow regimes. The motion picture from which the still photographs in this report were taken may be obtained by contacting the authors.

Apparatus and Procedure

Figure 1 is a schematic diagram of the test apparatus. The apparatus is essentially a once-through water flow system. The main channel is 90 cm long with a rectangular cross section 2.54 cm by 5 cm. Details of the short neck resonator cavity are shown in Fig. 2, while details of the long neck resonator cavity are shown in Fig. 3. For both cases, the orifice hole is a square 1.27 by 1.27 cm. The square geometry rather than a circular one was chosen for ease in photographing the flow. The short neck resonator has a length to diameter (hydraulic) ratio of 0.5 while the L/D of the long neck resonator is 4.

Three different color dyes can be injected into the flow field (see Fig. 1). The dye flows under the action of gravity to the dye injection locations marked in Figs. 2 and 3. The needle valves shown in Fig. 1 were adjusted to prevent jetting of the dye so as to minimize any disturbance to the flow field. Water soluble dyes were used.

Either oscillating or steady flow can be applied to the resonator through the valving shown in Fig. 1. The oscillatory flow was intended to simulate acoustic oscillations while the steady flow was intended to simulate a common method of measuring the resistive portion of the resonator impedance. The flow oscillations to the resonator cavity are driven by a servo-controlled hydraulically operated piston, as shown in Fig. 1. The piston could be oscillated from 0.1 to 50 hertz. For the purpose of these experiments, the frequency was set at 2 hertz. At higher frequencies (greater than 10 Hz), the equipment had a tendency to vibrate. At frequencies lower than 2 hertz, the resulting pulse was not sinusoidal. This latter effect was thought to occur because of resonance in the fluid lines.

For convenience, the oscillatory flow was applied to the resonator cavity rather than the main stream. In this manner, the magnitude of the flow oscillation in the orifice could be precisely controlled by varying the stroke of the piston. It was found experimentally in ref. 1, that the same type of flow profiles in the orifice occurred whether the flow oscillation was introduced in the back cavity or in the main stream. Using this procedure allows the resonator cavity to be full of water with no need for an air bubble to provide compliance.

The grazing flow was measured with a turbine flowmeter and the frequency of the piston was also measured. The high-speed motion-picture camera was positioned adjacent to the resonator cavity. The velocity field in the orifice and in the main flow channel can be determined from the high-speed motion pictures by following the movement of the dye.

In the entrance region of the main flow channel, a system of screens and baffles was added to produce an initially uniform velocity profile in the flow channel. From velocity profile measurements reported in ref. 1, the "boundary layer" extends approximately 0.3 cm from the wall. This gives a ratio of boundary thickness to orifice diameter (hydraulic) of around 0.25, which is small compared to the corresponding ratio in actual flow ducts. Although this may change the magnitude of the resistance, it should not change the general characteristics of the flow regimes.

During a run, the grazing flow velocity in the main channel was first set. Next, the frequency (2 Hz) and amplitudes of the resonator flow perturbation were set. Finally, the valves to the dye reservoirs were opened. When desired, a high-speed motion-picture camera recorded the flow patterns. Generally, the camera was run at 500 frames per second.

Scaling Considerations

The intent of this study was to provide a visualization and hence a better understanding of the air flow process in a resonator orifice in the

REPRODUCIBILITY OF THE
ORIGINAL PAGE IS POOR

presence of a grazing steady flow. It is important to consider whether the water system simulates an air system.

Based on the work of Thurston and Hargrove⁽²⁾ and Ingard and Ising⁽³⁾, Marsh and Rogers⁽⁴⁾ provide convincing evidence that air-water similitude exists for the resistance and reactance for flow in the orifice. Reference 1 also discusses this topic as well as presenting some numerical examples.

Outside the hole, similarity of the air-water system with grazing flow may be inferred because grazing flow Reynolds numbers based on the diameters of the orifices are similar. Finally, the orifice to grazing stream momentum ratios are similar thus implying dynamic force similarity.

Orifice Flow Visualization

The following several figures summarize the oscillatory flow and steady flow regimes for a simulated resonator orifice. The figures contain single frames taken from a motion picture study. All the photographic sequences are for flow in the orifice in the presence of a grazing flow. Photographs of oscillating orifice flow in the absence of grazing flow can be found in ref. 1.

Photographs for oscillatory flow for a short and then a long neck orifice will be presented and compared. Next, photographs for steady flow into both the short and long neck orifice will be presented and related to the oscillatory flow. The steady flow is of interest since measurements on a steady flow system are a practical way of estimating the orifice resistance to an oscillating flow⁽⁵⁾.

Oscillatory Flow Regimes

The oscillatory flow regimes are illustrated in Figs. 4 and 5 which shows one cycle with both inflow and outflow to a short and long neck orifice. As documented in refs. 1 and 4, the resistance due to grazing flow may be viewed qualitatively as an orifice blockage effect which is evident in the sequences in Figs. 4 and 5.

For the short neck orifice as shown in Fig. 4, during the inflow portion of the cycle ($t = 0$ to 0.257 sec) the axial momentum (vertical) of the grazing flow makes it difficult for the fluid to negotiate the turn into the orifice. This results in a large separation or dead flow region at the lower side of the orifice which effectively reduces the area of inflow. The inflow region is seen to be limited to the small channel at the top of the orifice. For a long neck orifice, similar results are shown in Fig. 5 during the inflow portion of the cycle ($t = 0$ to 0.228 sec).

In the short neck orifice, the kinetic energy of the entering jet of fluid is dissipated in the back cavity. At the beginning of flow reversal in Fig. 4 ($t = 0.236$ sec), new flow from the resonator cavity is pushed outward through the lower or dead-water portion of the orifice area while the inertia of the fluid which had just entered the orifice near the upper surface continues to carry that fluid back into the resonator cavity. Therefore, for short neck orifices, the resonator cavity acts as the source of fluid for the outflow portion of the flow oscillation cycle.

In contrast, in the long neck orifice (Fig. 5) the entering fluid at the top of the orifice is directed downward by the action of a small eddy formed at the lower lip of the orifice. Partial dissipation occurs during the turning process; however, some of the kinetic energy will be directed back into the main stream of the grazing flow during the outflow cycle. Recall, in the short neck orifice all the kinetic energy was dissipated in the back cavity. Therefore, the acoustic resistance may be a function of the length to diameter ratio of the orifice.

On the outflow portion of the cycle, the orifice flow is seen to encounter the large axial momentum of the grazing flow which must be displaced before the orifice flow can emerge. In both the short and long neck resonator, the outflow streamlines look similar. The streamlines leaving the orifice turn downstream in parallel with the grazing flow.

One striking difference between the oscillating flow in the short and long neck orifice is the presence of an oscillating slug in the neck of the long orifice. In the motion-picture study of this oscillating slug, a red dye was used to mark the position of the slug as a function of time. To make this slug visible in a black and white photograph, a large concentration of the red dye was added in the rear of the orifice, as shown in Fig. 5. The inertia of the slug accounts for the increase in reactance that theory predicts for the long neck orifice.

Steady Flow Regimes

Zorumski and Parrott⁽⁵⁾ found for short neck orifices that the instantaneous resistance is independent of frequency and is, therefore, equivalent to the flow resistance of the orifice. The flow resistance is defined as the ratio of the steady pressure drop across a material to the steady velocity through the material. Feder and Dean⁽⁶⁾ also show a close correspondence between the acoustic and steady flow resistances in the presence of a grazing flow.

Short Neck

Using Fig. 4 as a basis for modeling the flow fields of a short neck resonator, Fig. 6 presents schematics of the three flow regimes associated with one oscillation cycle. The flow fields of the steady inflow and outflow from the resonator closely approximate the instantaneous flow fields of the resonator due to an oscillatory flow field, as seen in Fig. 4. Figure 7(a) shows a photograph of the flow field for a typical inflow setting. In Fig. 7(a) the back cavity was filled with dye and the inflow is shown by the clear region near the top of the orifice. The streamline represented by the outer edge of the dye closely approximates the dye streamlines seen in Fig. 4 at $t = 0.122$ and 0.178 seconds. Therefore, the steady flow visualization confirms the earlier observations made by Zorumski and Parrott⁽⁵⁾ for inflow to the orifice. Similar results occur for outflow.

Unfortunately, the streamlines associated with oscillatory flow near transition from inflow to outflow can not be duplicated with a steady flow experiment. The advantage of oscillating flow visualization over that of steady flow can be seen by

the sequency $t = 0.178$ to 0.312 seconds in Fig. 4. At $t = 0.178$ seconds, high velocity inflow enters at the top of the orifice while a dead region occurs at the bottom. As time progresses, the pressure drop across the orifice changes to a higher pressure on the left of the orifice than on the right (favors outflow). The high velocity jet regions cannot be immediately stopped and reversed. The dead region can, however, be more quickly accelerated to form an outflow. Thus there is an instant in the cycle where inflow exists on the top of the orifice and outflow exists on the bottom such that the net flow through the orifice is zero. Around this zero flow condition, a resistance-time (or net flow) history should be produced which is continuous. In effect, the two-dimensional quality of the dynamic flows will remove the discontinuity of resistance at zero through flow which was observed by Budoff and Zorumski⁽⁷⁾ and Rogers and Hersh⁽⁸⁾.

Long Neck

The steady streamlines in a long neck orifice do not match, in general, the instantaneous dye trace patterns in the same orifice under the conditions of an oscillatory flow, as seen by comparing the dye traces in Figs. 7(b), (c), and (d) to the dye lines in Fig. 5. For relatively low inflow, as shown in Fig. 7(b), the flow reattaches to the lower orifice wall. Consequently, the steady flow resistance measurement cannot be assumed equal to the instantaneous oscillatory flow resistance.

For the larger inflow rates (Fig. 7(c) and (d), separation occurs in the long neck and the resonator back pressure is felt at the vorteam entrance at the orifice. Under these conditions, the steady flow resistance might approximate the instantaneous inflow resistance.

Summary of Results

By means of colored dye traces, photographic sequences illustrate the detailed structure of an oscillating orifice flow with and without the presence of a grazing flow field. Specifically, the following major results were found:

1. For flow into the resonator with grazing flow, the orifice flow area blockage appears to be independent of orifice length for a fixed amplitude of flow oscillation and magnitude of the grazing flow. For short neck resonators, all the entering kinetic energy is dissipated in the resonator cavity; however, long neck resonators return some of the entering kinetic energy back to the grazing flow field. Therefore, the acoustic resistance may be a function of the length to diameter ratio of the orifice.
2. As shown in the photographic sequences, at the crossover from inward to outward flow, flow exists simultaneously inward and outward in different parts of the orifice. Thus, no discontinuity in resistance will exist in an oscillating system when the average jet velocity approaches zero from either the inflow or outflow directions.
3. For long neck resonators, the instantaneous fluid streamlines for oscillatory flow do not, in general, match the steady streamlines in the same orifice. Therefore, the acoustic and steady flow resistance do not necessarily correspond.

References

1. Baumeister, K. J. and Rice, J.: "Visual Study of the Effect of Grazing Flow on the Oscillatory Flow in a Resonator Orifice," TM X-3288, Sept. 1976, NASA.
2. Thurston, G. B., Hargrove, Jr., L. E., and Cook, W. D., "Nonlinear Properties of Circular Orifices," Jet Acoustics Society of America, Vol. 29, 1967, pp. 982-1001.
3. Ingard, U. and Ising, H., "Acoustic Nonlinearity of an Orifice," Jet Acoustics Society of America, Vol. 42, 1967, pp. C-17.
4. Hersh, A. S. and Rogers, T., "Fluid Mechanical Model of the Acoustic Impedance of Small Orifices," AIAA Paper 75-495, Hampton, Va., 1975.
5. Zorumski, W. E. and Parrott, T. L., "Nonlinear Acoustic Theory for Rigid Porous Materials," TN D-6196, June 1971, NASA.
6. Fezer, E., and Dean, L. W., "Analytical and Experimental Studies For Predicting Noise Attenuation in Acoustically Treated Ducts for Turbofan Engines," CR-1573, Sept. 1969, NASA.
7. Budoff, M., and Zorumski, W. E., "Flow Resistance of Perforated Plates in Tangential Flow," TM X-2361, Oct. 1971, NASA.
8. Rogers, T., and Hersh, A. S., "The Effect of Grazing Flow on the Steady State Resistance of Square-Edged Orifices," AIAA Paper 75-493, Hampton, Va., 1975.

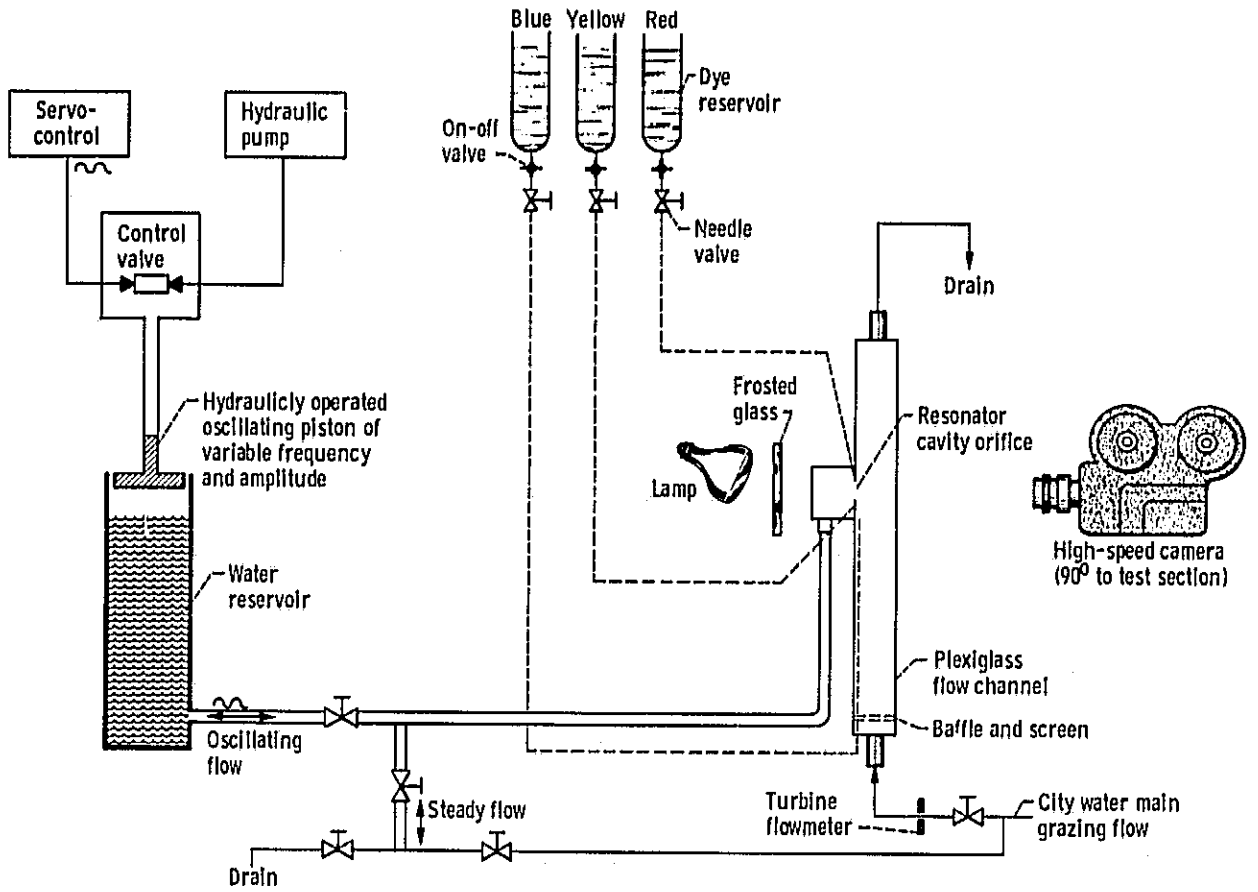


Figure 1. - Apparatus schematic for visualizing oscillatory flow in resonator orifice in presence of grazing flow.

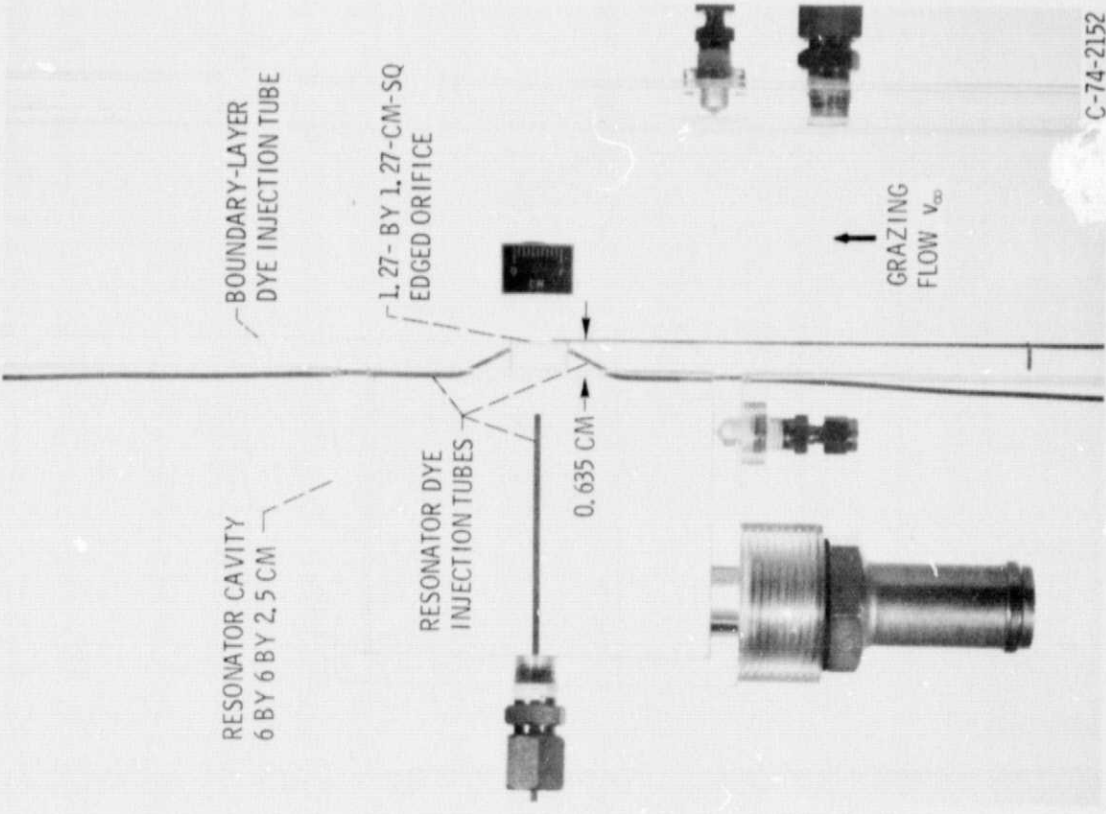


Figure 2. - Resonator cavity (short neck).

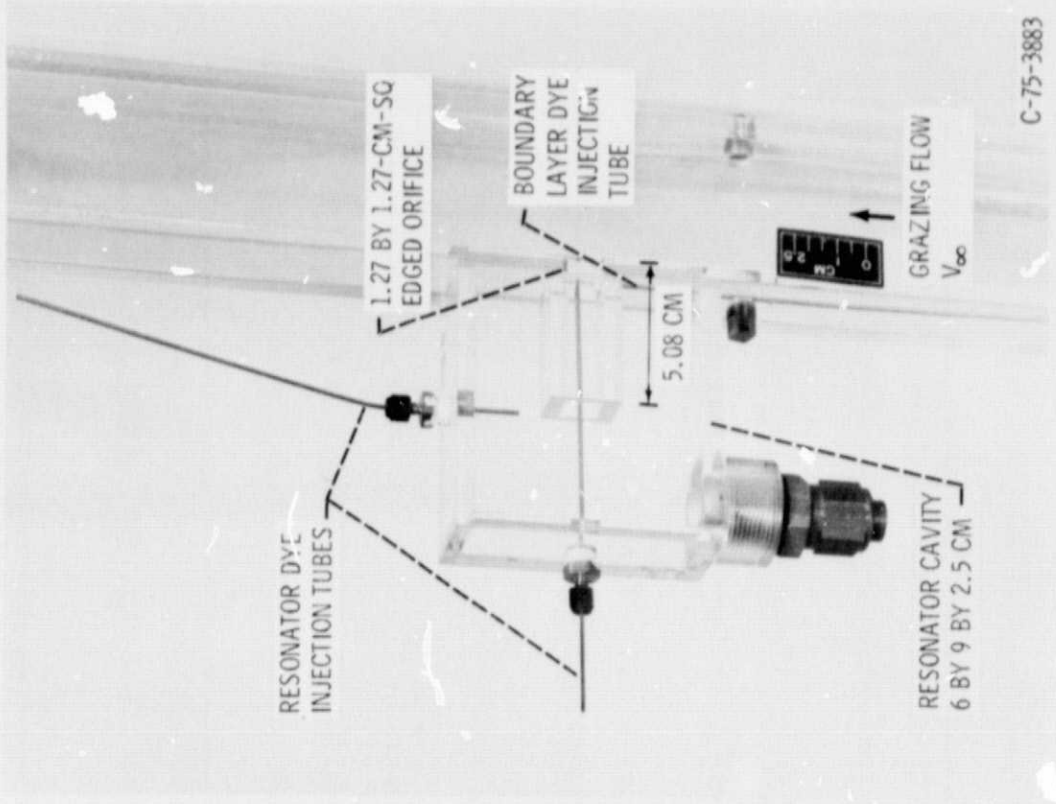


Figure 3. - Resonator cavity (long neck).


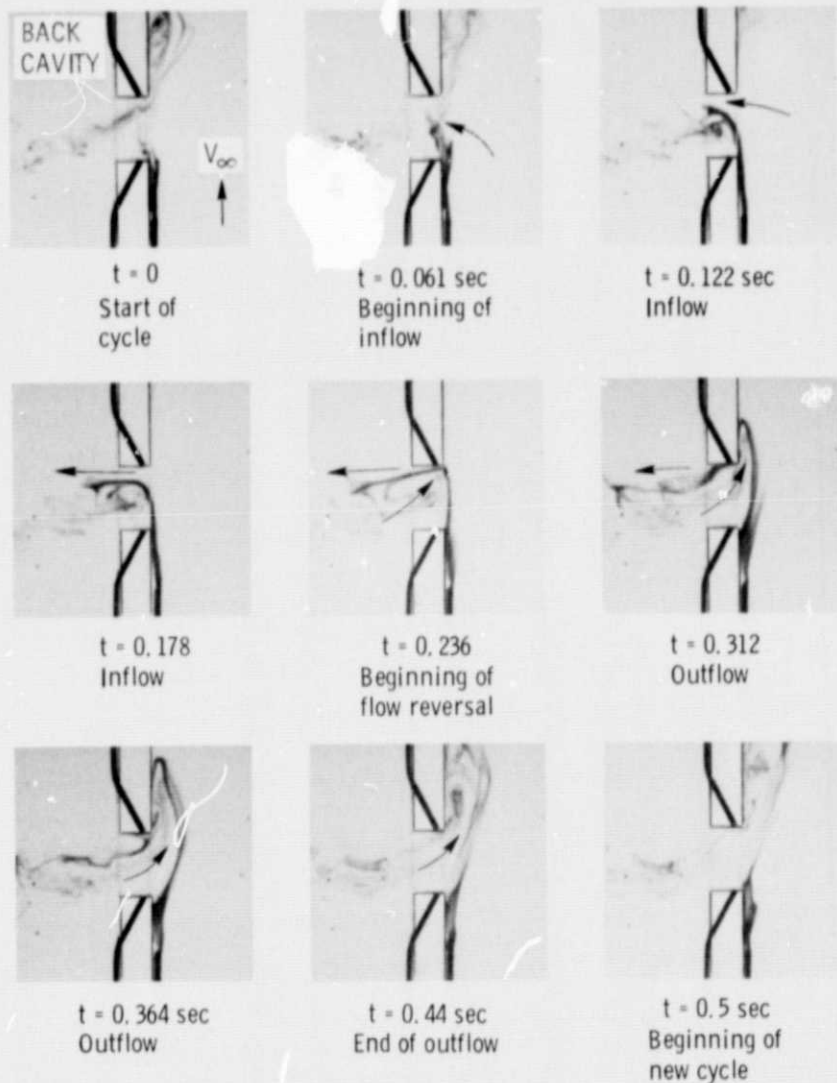



Figure 4. - Flow regimes with 0.3-meter-per-second grazing flow and intermediate amplitude oscillating orifice flow at 2 hertz.



t = 0 SEC; START OF CYCLE




t = 0.110 SEC; BEGINNING OF INFLOW




t = 0.164 SEC; INFLOW




t = 0.228 SEC; INFLOW




t = 0.278 SEC; FLOW REVERSAL




t = 0.348 SEC; OUTFLOW



t = 0.390 SEC; OUTFLOW



t = 0.442 SEC; OUTFLOW



t = 0.5 SEC; BEGINNING OF NEW CYCLE

Figure 5. Flow regimes with 0.3 meter-per-second grazing flow and moderately high amplitude oscillating flow at 2 hertz.



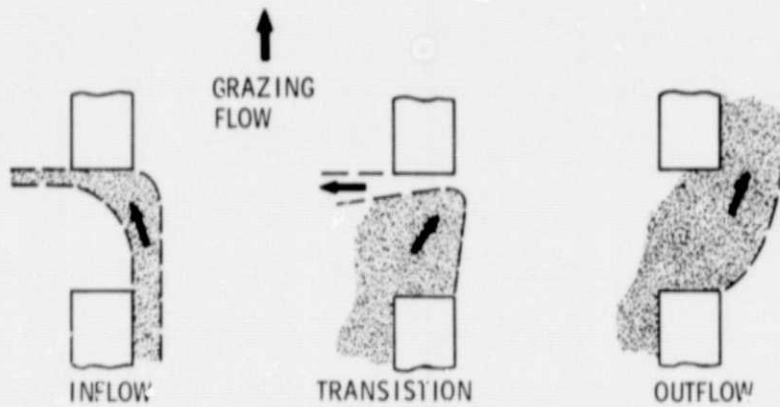



Figure 6. - Oscillatory orifice flow regimes with grazing flow.



(a) SHORT NECK.

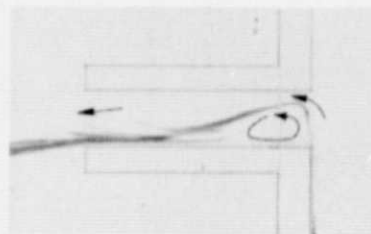

(b) LONG NECK - LOW INFLOW.

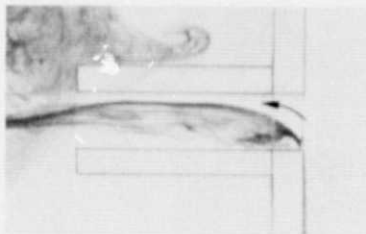

(c) LONG NECK - MODERATE INFLOW.



(d) LONG NECK - LARGE INFLOW.

Figure 7. - Steady flow into short and long neck resonator cavities.