

PRINT FIG. No DrawingsNOTICE

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.2).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourages nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will consider the granting of a limited exclusive license, pursuant to the NASA Patent Licensing Regulations, when such a license will provide the necessary incentive to the licensee to achieve early practical application of the invention.

Address inquiries and all applications for license for this invention to NASA Patent Counsel, Langley Research Center, Mail Code 456, Langley Station, Hampton, Virginia, 23365. Approved NASA forms for application for nonexclusive or exclusive license are available from the above address.

NASA Case No. LAR 11397-1

AWARDS ABSTRACT  
POLYIMIDE ADHESIVES

This invention relates to a process of preparing aromatic polyamide-acids for use as adhesives.

Aromatic polyimide are known to have good thermal stability but heretofore have not shown good adhesive properties unless modified to such an extent that their long term thermal stability characteristic is diminished.

The present invention involves the addition of an equimolar quantity of a suitable aromatic dianhydride to a stirred solution of an appropriate aromatic diamine in a water or alcohol-miscible ether solvent. In certain instances a highly viscous polyamic-acid intermediate polymer precipitates from the ether solvents but the addition of very small amounts of water or alcohol generally leads to redissolution of the polyamic-acid to give a viscous polymer solution. In certain other instances, depending upon the choice of monomers, the polyamic-acid intermediate polymer does not become insoluble but directly forms a smooth viscous polymer solution. These polyamic-acid polymers are applied as adhesives and converted, by heating in the range of 200-300°C and with pressure, to form polyimides with excellent adhesive properties.

Solvents useful in the present invention are of the aliphatic acyclic and cyclic ether types and include tetrahydrofuran, m-and p-dioxane, monoglyme, diglyme, triglyme and tetraglyme.

The novelty of this invention appears to reside in the discover that water or alcohol-miscible ether solvents may be employed in making polyamic-acids that improve the adhesive properties of these compounds when converted by heat into the polyimides.

**Inventors:**

Donald J. Progar  
Vernon L. Bell  
Terry L. St. Clair

**Employer:** NASA-LRC

**Original Evaluator:** George F. Pezdirtz

**Serial No. :** 532,784

**Filing Date:** December 16, 1974

ABSTRACT OF THE DISCLOSURE

A process of preparing aromatic polyamide-acids for use as adhesives by reacting an aromatic dianhydride in an approximately equimolar amount of an aromatic diamine in a water or lower alkanol miscible ether solvent and wherein the polyamide-acids are converted to polyimides by heating to the temperature range of 200° - 300°C.

ORIGIN OF THE INVENTION

This invention was made by employees of the National Aeronautics and Space Administration and may be manufactured and used by or for the Government of the United States without the payment of any royalties thereon or therefor.

BACKGROUND OF THE INVENTION

This invention relates generally to the preparation of useful adhesives and more particularly to the preparation of aromatic polyimide adhesives which have excellent bonding characteristics and excellent retention of properties at elevated temperatures.

Adhesive bonding is a well known method for joining similar and dissimilar materials. However, the advent of materials, both metallic and nonmetallic, which are capable of withstanding high temperatures, has generated a subsequent need for adhesives for bonding the advanced materials. The increased use of titanium and thermally resistant composites in particular for applications such as in aircraft structural components has led to the investigation of polyimides as base ingredients for adhesive formulations. The aromatic polyimides have the best thermal stability, but do not give satisfactory adhesion of the joints. Some modifications have been made to the polyimides which result in improved adhesive strengths, but those modifications are generally made so that a sacrifice in the long-term thermal stability of the adhesive

resin results.


Accordingly, it is an object of this invention to provide a process for preparing and using aromatic polyimides as adhesives for bonding metals, and fiber-reinforced organic resin composites such that high bonding strengths result with no significant loss in thermooxidative stability of the adhesive resin.

A further object of this invention is to provide a process for preparing polyimide adhesives which will retain a high proportion of their adhesive strength when formulated with various additives and when tested at elevated temperatures.

#### BRIEF DESCRIPTION OF THE INVENTION



The process for producing the polymers for use as adhesives according to the present invention broadly involves the addition of an equimolar quantity of a suitable aromatic dianhydride to a stirred solution of an appropriate aromatic diamine (or equivalent mixtures of two or more appropriate diamines) in certain water- or alcohol-miscible ether solvents. In certain instances, a highly viscous polyamic-acid intermediate polymer precipitates from the ether solvents. The addition of very small amounts of water or alcohol generally leads to redissolution of the polyamic-acid to give a viscous polymer solution. In certain other instances, depending upon the choice of monomers, the polyamic-acid intermediate polymer does not become insoluble, but instead a smooth, viscous polymer solution is formed directly.

These polyamic-acid polymers are characterized by a recurring unit with the following structural formula:

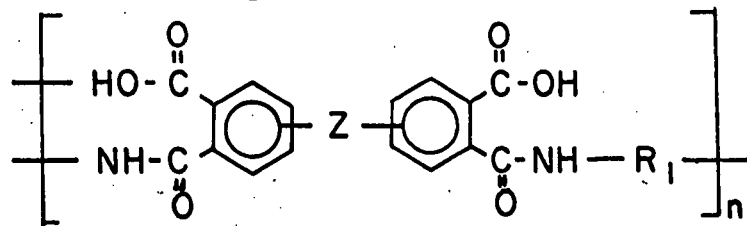


where,

Z is selected from the group consisting of:

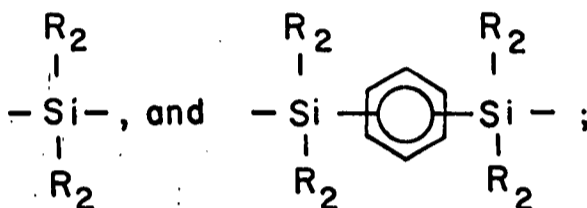

R<sub>2</sub> being selected from the alkyl and aryl groups;



15  
Z' being selected from  $-\overset{\text{O}}{\parallel}{\text{C}}-, -S-$  and  $-\text{SO}_2-$ .

20  
25  
The choice of diamines and dianhydrides inappropriate for this process is signaled by failure of one or both monomers to dissolve in the ether solvents. Further failure is caused by a mismatch between the rate of polymerization of the reactants and the rate of precipitation of the polymer, such that the incompletely reacted insoluble monomer can be coated by precipitating polymer and thus inactivated before the completion of the polymerization. A third failure results when the solubility of the polyamic-acid intermediate polymer is such that it precipitates from solution, usually as a powder, before a suitable degree of polymerization has been reached.


30  
The solvents useful for this process are of the aliphatic acyclic and cyclic ether types, such as tetrahydrofuran, m- and p-dioxane, monoglyme, diglyme, triglyme and tetraglyme. Such

solvents have a high affinity for the polar chemical groups of the aromatic polyamic-acid intermediates, in contrast to the aromatic water-immiscible solvents such as anisole and diphenyl ether.

5       The polyamic-acid solutions so obtained can then be applied to suitably prepared substrate surfaces, either as neat adhesive resins or in various formulations with fillers, thickeners, etc., and with or without supports such as glass fabric. When the substrates are allowed to stand to allow some or all of the solvent  
10 to evaporate, the treated surfaces to be bonded are assembled together by means of clamps or in a press. Heat is applied, which completes the evaporation of solvent and leads to the conversion of the intermediate polyamic-acid to the more thermally resistant cyclic polyimide, during the course of which the  
15 excellent bonding of the substrates occurs. Although the bonding cycle can be varied over a wide range of time, temperatures, and pressure, a typical bonding operation would initially involve the drying of the primed surfaces in air at room temperature. This would be followed by bonding of the joint at pressures from 30  
20 to 200 psi with thermal treatment of the joint, under bonding pressure, up to temperatures of 200 to 300°C. Times of 1 hour or more, at temperature and pressure, suffice to post-cure the bonded joint. Thus, minor adjustments of the process make it suited for autoclaving or vacuum-bag operations, in addition to  
25 clamp or press bonding.

The polyamic-acid solutions are converted by the heating described to yield polyimide adhesive resins which are characterized by a recurring unit with the following structural formula:


30

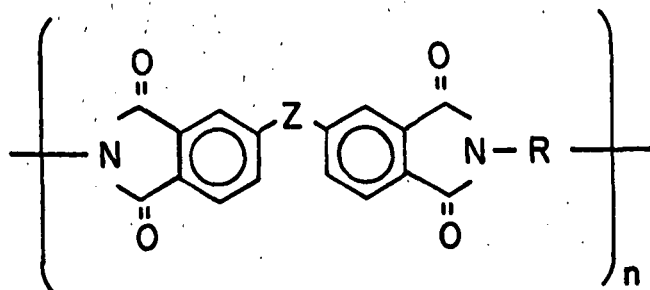


5

where,

Z is selected from the group consisting of:




10

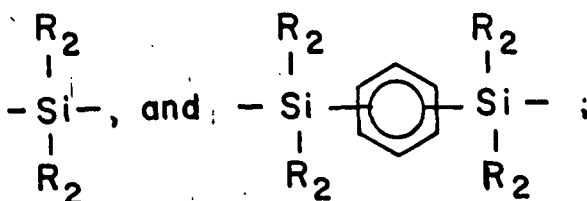

R<sub>2</sub> being selected from CH<sub>3</sub>, C<sub>2</sub>H<sub>5</sub> and C<sub>6</sub>H<sub>5</sub>;

15



Z' being selected from  $-\overset{\text{O}}{\parallel}{\text{C}}-, -\text{S}-$  and  $-\text{SO}_2-$ .

20

Representative diamines which are suitable for the present invention are:

25

- 3,3'-diaminobenzophenone
- 3,4'-diaminobenzophenone
- 4,4'-diaminobenzophenone
- 3,5 -diaminobenzophenone
- 3,3'-diaminodiphenyl sulfide
- 3,4'-diaminodiphenyl sulfide
- 4,4'-diaminodiphenyl sulfide
- 3,3'-diaminodiphenyl sulfone
- 3,4'-diaminodiphenyl sulfone
- 4,4'-diaminodiphenyl sulfone.

Typical dianhydrides which are suitable for use in this invention are:

30

3,3',4,4'-benzophenone tetracarboxylic acid dianhydride  
bis(3,4-dicarboxyphenyl)ether dianhydride  
bis(3,4-dicarboxyphenyl)sulfone dianhydride  
bis-4-(3',4'-dicarboxyphenoxy) sulfone dianhydride  
bis(3,4-dicarboxyphenyl) dimethylsilane dianhydride  
1,4-bis-(3',4'-dicarboxyphenyl dimethylsilyl) benzene dianhydride.

5           The above-described process for preparing the polyimide adhesives is significantly different from the usual procedure for polyimide preparation. The primary difference is the necessity of using ether solvents, in contrast to the usual solvents of the N,N-dialkylcarboxylamide class, e.g., N,N-dimethylform-  
10           amide, N,N-dimethylacetamide, and N-methyl-2-pyrrolidone. The use of the proper ether solvents not only leads to molecular weights of the polyamic-acid prepolymers which result in superior bonding properties, but the ether solvents are more readily volatilized from the polymer at the optimum states of cyclization  
15           of the polyamic-acids to the polyimides. In contrast, the solvents of the N,N-dialkylcarboxylamide class complex tenaciously with the polyamic-acid intermediates and are usually not volatilized from the polymer until an excessive degree of conversion of the polymer to the cyclic polyimide form has occurred. This diminishes the  
20           extent to which those chemical groups in the polyamic-acid intermediates responsible for bonding can do so with the substrates. Another advantage in the use of ether solvents is their lower degree of toxicity to humans, in contrast to the well known cumulative toxic effects of N,N-dialkylcarboxylamides.

25           Measurements of the contact angles of the polymer solutions on the metallic substrates have disclosed that those polyamic-acid solutions in ether solvents give smaller contact angles than do the corresponding polyamic-acids dissolved in N,N-dialkylcarboxylamides solvents. The smaller contact angles thus infer  
30           that the ether solvents have superior wetting power, and



consequently, result in improved bonding to the metal.

The invention and its advantages will be illustrated more completely by the following specific examples. Lap shear tensile strength measurements were conducted according to ASTM D-1002 (CTM No. 26). Titanium lap shear specimens were fabricated from four-finger panels. Each finger test joint specimen was 1 inch wide, and the bonded overlap was 1/2 inch. The titanium finger panels were fabricated from 6 aluminum 4 vanadium titanium alloy, nominally 0.050 inch thick. The metal panels were cleaned using a standard Pasa-Jel cleaning procedure. The individual lap shear specimens were separated from the four-finger panel after bonding.

#### SPECIFIC EXAMPLES

##### Example I

A solution of 84.8 grams (0.40 mole) of p,p'-diaminobenzophenone (p,p'-DABP) in 900 milliliters of tetrahydrofuran (THF) was prepared in a 2-l Erlenmeyer flask. The solution was stirred with a magnetic stirring bar and 128.8 grams (0.40 mole) of 3,3',4,4'-benzophenone tetracarboxylic acid dianhydride (BTDA), was added as a granular solid. After the dianhydride had dissolved and reacted, a solution of 40 ml of water and 60 ml of THF was added. The resulting viscous polymer solution contained 20% by weight of the BTDA-p,p'-DABP polyamic-acid. A-1100 glass fabric (112 finish) was dipped into the polymer solution and the solvent was allowed to evaporate in air. The fabric was heated in an air oven for 1/2 hour at 65°C., then at 100°C. for 10 minutes.

A pair of precleaned panels, containing four 1" x 5" lap shear specimens and made from 50 mil 6-4 titanium alloy (6 parts aluminum and 4 parts vanadium per 100 parts titanium alloy) were painted with the neat polymer solution so as to give one-half inch overlaps. After the solvent was allowed to evaporate, a

one-half inch wide strip of the glass-adhesive tape was placed between the overlapped panels and the specimens were assembled in a bonding jig in such a manner as to hold the specimens securely while being bonded. The assembly was placed in a hydraulic press and 150 psi pressure was applied. The temperature, which was monitored by a thermocouple spotwelded next to the bondline of one of the specimens, was increased up to 275°C. over a period of 45 minutes. The temperature of the press was held at 275°C. for 1 hour, while the pressure was maintained at 150 psi. The heat was turned off and the press was allowed to cool, under pressure, to less than 100°C. At that time, the bonded panel was removed from the press and the bonding jig, the individual lap shear specimens were separated with a metal shearer, and the lap shear strengths were determined according to the procedure for ASTM D-1002. The four specimens tested gave an average of 2790 pounds per square inch lap shear strength. Breaks were predominantly cohesive in nature.

A 25% solution of the same BTDA-p,p'-DABP polyamic-acid was prepared in N,N-dimethyl formamide, one of the highly polar, aprotic solvents more customarily employed for the polymerization of such polyimide precursors. Use of this solution for bonding titanium lap shear specimens using a bonding cycle similar to that described above for THF gave an average lap shear strength of 640 psi, and the prevalence of large areas of adhesive failure in the broken specimens was noted.

A similar bonding test with a 15% solution of BTDA-p,p'-DABP polyamic-acid in N,N-dimethylacetamide (DMAC) gave an average of 1990 psi lap shear strength, with a mixture of adhesive and cohesive bonding failure.

## EXAMPLE II

An 18% solution of a polyimide precursor from BTDA and a diamine, m,m'-diaminobenzophenone (m,m'-DABP), isomeric to p,p'-DABP, was prepared in bis(2-methoxyethyl) ether. This solvent, also known as diglyme, is similar to THF in its solvent properties, but is considerably higher boiling (162°C.) than tetrahydrofuran (64°C.). The polymerization was performed as follows:

A mixture of 7.07g (0.033mole) of m,m'-diaminobenzophenone (m,m'-DABP) and 10.74g (0.033 mole) of 3,3',4,4'-benzophenone tetracarboxylic acid dianhydride were mixed in a household blender. To the mixture was added 80 ml. of diglyme and the mixture was stirred. After 15 minutes, a very viscous mass had precipitated from solution. A total of 5 ml. of ethanol was added in 1/2 ml. portions to redissolve the polymer. The resulting viscous polymer solution, containing 18% of the polyamic-acid by weight, was used for bonding titanium lap shear specimens, using the following bonding cycle. A pair of precleaned four-finger vanadium alloy panels were painted with the above polymer solution so as to give one-half inch overlaps. After the solvent was allowed to evaporate, the specimens were assembled in a bonding jig in such a manner as to hold the specimens securely while being bonded. The assembly was placed in a hydraulic press and 40 psi pressure was applied. The temperature, which was monitored by a thermocouple spotwelded next to the bondline of one of the specimens, was increased at a rate of 4-5°C/min. up to 300°C. The temperature of the press was held at 300°C. for 50 minutes, while the pressure was maintained at 40 psi. The heat was turned off and the press was allowed to cool, still holding 40 psi pressure, to less than 100°C. At that time, the bonded panel was removed from the press and the bonding jig, the individual lap shear specimens were separated with a

metal cutter, and the lap shear strengths were determined.

When a similar polymerization was performed at 10% solids concentration in dioxane, the insoluble polymer did not redissolve when about 2% ethanol was added. Therefore, the supernatant dioxane was decanted off, and 12 ml. of DMAc was added to redissolve the polymer. A clear polymer solution was obtained, and this was used for bonding.

Test specimens were also prepared using BTDA-m,m'-DABP polyamic-acid solutions prepared in two of the aprotic, highly polar amide solvents, DMF and N-methyl-2-pyrrolidone (NMP).

The following table compares the results of the lap shear tests.

TABLE I

Ti-Ti Lap Shear Strengths with BTDA-m,m'-DABP

Polymerization Solvent	inh. (0.5%, 35°C)	Lap Shear Strength (psi)
DMF	.20	410
DMAc	.60	2582
NMP	.52	1220
Dioxane + DMAc	.33 (DMAc)	2900
Diglyme	.36	4350

The results above indicate not only the superior bonding strengths obtained using the ether solvent process, but also shows that the preparation of the polymer in an ether solvent, followed by redissolution in a customary amide solvent (DMAc), improves the adhesion in comparison to the bonding achieved using an amide polymerization solvent.

EXAMPLE III

This example illustrates the compatibility of adhesive resins prepared by the ether process with the customary agents, such as fillers and supports, used for formulating adhesives.

The polymer solutions of BTDA-m,m'-DABP in diglyme prepared

as described in Example II was coated onto A-1100 glass fabric sufficient to give a tape with good coverage of polymer resin after drying at room temperature. The solution was also mixed with 325 mesh (Alcan MD 105) aluminum powder in a quantity sufficient to give a formulation containing 70% by weight of aluminum (based on dry weight of the resin) which was coated in a similar fashion onto glass fabric.

Bonding of titanium with the neat polymer solution, the polymer on the glass fabric support, and the glass fabric-supported aluminum-polymer formulation gave the results in Table II.

TABLE II

Lap Shear Strengths for Titanium Bonded with BTDA-m,m'-DABP Formulations

<u>Formulation</u>	<u>Lap Shear Strength (psi)</u>
Neat resin	4350
Neat resin-A-1100 glass fabric	4550
70% aluminum -30% resin on A-1100 glass-fabric	4110

EXAMPLE IV

The potential utility of the adhesives of this process for bonding materials for use at elevated temperatures was demonstrated by this experiment.

Lap shear strengths of titanium bonded with the diglyme solution of BTDA-m,m'-DABP prepared in Example II, were determined at several temperatures. The results were as follows:

<u>Test Temperatures</u>	<u>Lap Shear Strength (psi)</u>
25°C.	4350
210°C.	2500
250°C.	950

EXAMPLE V

An assessment of the versatility of this process for improving the bonding properties of other polymeric adhesive compositions was made by preparing polyamic-acid solutions from

BTDA and p,p'-diaminodiphenylsulfide in diglyme by a procedure similar to that in Example II and in DMAc. The results of bonding tests with titanium alloy were as follows:

	<u>Solvent</u>	<u>Lap Shear Strength (psi)</u>
5	Diglyme	4330
	DMAc	2030

These specific examples are exemplary and are not to be considered as exhaustive, but merely to illustrate applicants' invention without serving as limitations thereon.

10 Obviously there are many variations and modifications of the present invention in the light of the above teachings. It is therefore to be understood that within the scope of the appended claims the invention may be practiced otherwise than as specifically described.

15 What is claimed as new and desired to be secured by Letters Patent of the United States is:

This is the end of the patent specification. There are no claims attached.

20

25

30