

NASA TECHNICAL NOTE



NASA TN D-7543

NASA TN D-7543

(NASA-TN-D-7543) NBODY - A MULTIPURPOSE  
TRAJECTORY OPTIMIZATION COMPUTER PROGRAM  
(NASA) 123 p HC \$3.00 CSCL 09B

N74-19835

Unclas  
H1/08 33770

# NBODY - A MULTIPURPOSE TRAJECTORY OPTIMIZATION COMPUTER PROGRAM

*by William C. Strack*  
*Lewis Research Center*  
*Cleveland, Ohio 44135*

1. Report No. NASA TN D-7543	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle NBODY - A MULTIPURPOSE TRAJECTORY OPTIMIZATION COMPUTER PROGRAM		5. Report Date February 1974	6. Performing Organization Code
		8. Performing Organization Report No. E-6998	10. Work Unit No. 502-04
7. Author(s) William C. Strack		11. Contract or Grant No.	
9. Performing Organization Name and Address Lewis Research Center National Aeronautics and Space Administration Cleveland, Ohio 44135		13. Type of Report and Period Covered Technical Note	
		14. Sponsoring Agency Code	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D. C. 20546		15. Supplementary Notes	
16. Abstract Documentation of the NBODY trajectory optimization program is presented in the form of a mathematical development plus a user's manual. Optimal multistage-launch-vehicle ascent trajectories may be determined by variational thrust steering during the upper phase. Optimal low-thrust interplanetary spacecraft trajectories may also be calculated with solar power or constant power, all-propulsion or embedded coast arcs, fixed or optimal thrust angles, and a variety of terminal end conditions. A hybrid iteration scheme solves the boundary-value problem, while either transversality conditions or a univariate search scheme optimize vehicle or trajectory parameters.			
17. Key Words (Suggested by Author(s)) Computer program Trajectory simulation Trajectory optimization		18. Distribution Statement Unclassified - unlimited  Cat. o8	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 122	22. Price* \$8.00

\* For sale by the National Technical Information Service, Springfield, Virginia 22151

# CONTENTS

	Page
<u>SUMMARY</u> . . . . .	1
<u>INTRODUCTION</u> . . . . .	1
<u>SOLAR SYSTEM MODEL</u> . . . . .	4
EPHEMERIDES . . . . .	4
PHYSICAL DATA . . . . .	4
<u>VEHICLE MODELS</u> . . . . .	4
ELECTRICALLY PROPELLED VEHICLES . . . . .	5
LAUNCH VEHICLES AND HIGH-THRUST OR BALLISTIC SPACECRAFT . . . . .	10
<u>PROGRAM LOGICAL STRUCTURE</u> . . . . .	11
LEVEL 1 - TRAJECTORIES AND VARIATIONAL NECESSARY CONDITIONS . . . . .	12
Trajectory Equations . . . . .	12
Primary gravitational body attraction . . . . .	13
Perturbing body gravitational attraction . . . . .	14
Aerodynamic forces . . . . .	14
Thrust acceleration . . . . .	16
Optimal Thrust Control . . . . .	18
Optimum continuously variable thrust angle . . . . .	20
Optimum choice of fixed thrust angles . . . . .	21
Boundary Conditions . . . . .	22
Flight time . . . . .	22
Initial conditions . . . . .	23
Arrival end conditions . . . . .	24
Transversality conditions for optimum spacecraft parameters . . . . .	26
The Two-Point Boundary-Value Problem . . . . .	27
NOPT=0 . . . . .	28
NOPT=1 . . . . .	28
NOPT=2 . . . . .	28
NOPT=3 . . . . .	29
NOPT=4 . . . . .	29
NOPT=5 . . . . .	29
NOPT=6 . . . . .	29
NOPT=7 . . . . .	29
Additional features of the NOPT options . . . . .	30
Partial Derivatives . . . . .	31
Finite difference method . . . . .	31

Page intentionally left blank

	Page
Analytical method . . . . .	32
Iterator for Boundary-Value Problems . . . . .	38
Convergence criterion . . . . .	38
Linear correction scheme (Newton-Raphson) . . . . .	39
Univariate search scheme . . . . .	40
Integration Method . . . . .	41
Runge-Kutta scheme . . . . .	41
Trajectory interrupt . . . . .	44
Choice of coordinate systems . . . . .	46
Origin shift . . . . .	46
Orbit element integration . . . . .	46
Coordinate transformations . . . . .	48
Earth-fixed coordinate frame . . . . .	50
<b>LEVEL 2 - DIRECT OPTIMIZATION OF VEHICLE AND MISSION</b>	
<b>PARAMETERS . . . . .</b>	<b>53</b>
<b>SWEEP SCHEMES FOR RUNNING SIMILAR CASES . . . . .</b>	<b>55</b>
Manual Sweeps . . . . .	56
Automatic Sweeps . . . . .	57
Multidimensional Sweeps . . . . .	57
<b><u>PROGRAM DESCRIPTION</u> . . . . .</b>	<b>58</b>
<b>PROGRAM STRUCTURE . . . . .</b>	<b>58</b>
<b>INPUT . . . . .</b>	<b>60</b>
Vehicle Model . . . . .	61
Analytic Spiral Escape Maneuver at Departure . . . . .	63
Analytic High-Thrust Departure of Electric Vehicle . . . . .	63
Analytic High-Thrust Capture Retromaneuver of Electric Vehicle . . . . .	64
Departure Time . . . . .	64
Initial Position and Velocity . . . . .	64
Thrust Program Options . . . . .	65
Trajectory Integration Controls . . . . .	66
Output Controls . . . . .	67
Trajectory Interrupt Controls . . . . .	68
Level 1 Boundary-Value Problem . . . . .	68
Level 2 Optimization . . . . .	70
Parameter Sweeps . . . . .	70
<b>PROGRAM OUTPUT . . . . .</b>	<b>71</b>
Full Output Mode . . . . .	71
One-Line Summary . . . . .	73

	Page
<u>EXAMPLE PROBLEMS</u> . . . . .	73
EXAMPLE 1 - JUPITER RENDEZVOUS USING THE MULTIDIMENSIONAL SWEEP FEATURE . . . . .	73
EXAMPLE 2 - 0.1-AU SOLAR PROBE WITH A SWEEP ON SPECIFIC IMPULSE . . . . .	77
EXAMPLE 3 - JUPITER CAPTURE MISSION WITH HIGH-THRUST DEPARTURE AND CAPTURE AND OPTIMUM VEHICLE PARAMETERS . . . . .	82
SINGLE-STAGE LAUNCH VEHICLE WITH CHEMICAL AND NUCLEAR PROPULSION . . . . .	88
 APPENDIXES	
A - SYMBOLS . . . . .	96
B - SUBPROGRAM GLOSSARY . . . . .	102
 <u>REFERENCES</u> . . . . .	 104

# NBODY - A MULTIPURPOSE TRAJECTORY OPTIMIZATION COMPUTER PROGRAM

by William C. Strack

Lewis Research Center

## SUMMARY

This report documents the NBODY computer program. NBODY calculates the performance and trajectories for a variety of space vehicles such as low-thrust electric spacecraft and multistage launch vehicles (three degrees of freedom). Thrust, n-body, and aerodynamic forces may be simulated through flexible vehicle and solar system models. The thrust steering program, for example, may be specified or optimized for maximum performance by using variational techniques. If coast arcs are permitted, the engine on-off times may be optimized also. The low-thrust spacecraft options include solar or nuclear power, two-body or n-body simulation, fixed or optimum thrust angles, analytic spiral escape or high-thrust departure and/or capture, and fixed or optimized vehicle parameters such as specific impulse (constant), initial acceleration, and launch speed. Parameter optimization is done with transversality conditions or a search procedure, depending on the particular set of parameters.

The trajectory integration is carried out with a variable-step-size, fourth-order Runge-Kutta technique with double-precision accumulation but single-precision derivative evaluation. Boundary-value problems are solved with a general-purpose iterator using a hybrid univariate search and linear correction scheme (modified multivariable Newton-Raphson scheme). The program is written FORTRAN IV and occupies about 20 K of IBM 7094 core storage exclusive of standard library routines. Both the mathematical description of the program and detailed operating instructions with examples are included in this report.

## INTRODUCTION

The computer program NBODY is used to generate trajectories for low-thrust interplanetary spacecraft and high-thrust launch vehicles. It was originally developed as a general-purpose program for a wide variety of space mechanics problems (ref. 1). During the mid-1960's its evolution was directed toward the optimum low-thrust problem

as the potential of electric rockets came to be more widely recognized. Today NBODY is used mainly to calculate trajectories for electrically propelled spacecraft although it still retains its earlier multipurpose capability, such as the calculation of multistage-launch-vehicle trajectories. Extending NBODY's capability to cover optimal low-thrust trajectories required a considerable increase in the size and complexity of the program and, although the revised program has been extensively exercised, no formal documentation was made available. This report provides such documentation in the form of a user's manual. It describes the assumed vehicle and solar system models, summarizes the basic equations and program logic, and provides operating instructions.

The solar system model may be specified during input. It could be a simple two-dimensional model with only a single point-mass gravitational body. Or it could be a more accurate but more complicated model involving three dimensions, n bodies, and a realistic Earth (atmosphere, rotation, and oblateness). The planetary positions are determined by analytical time-dependent orbital elements.

The vehicle model is also specified during input and is generally either a low-thrust electric spacecraft or a multistage launch vehicle, although any thrust level and as many as 10 stages are permitted in either case. All vehicles are assumed to be point masses and to operate at constant specific impulse. Either a constant or solar-electric power profile may be chosen. The thrust direction program may be defined by the user or optimized by the program to yield maximum net mass. The thrust attitude may be optimized over an infinite set of angles ( a continuous thrust program) or over a finite set of specified angles. In either case, the engine operation mode may be selected as continuously on or on-off with optimal switch times.

The NBODY program numerically integrates trajectories by using a fourth-order Runge-Kutta scheme with automatic step-size control. The only exceptions occur when the user wishes to calculate the planetary phases of an interplanetary trajectory for an electric spacecraft with approximate closed-form solutions. This is common practice when either a high-thrust or low-thrust Earth departure maneuver is part of a problem since significant simplification results with only a relatively small sacrifice in accuracy (refs. 2 to 4). For example, an electric spacecraft may be assumed to be boosted to at least escape velocity by a launch vehicle of known performance. The numerical trajectory integration begins in heliocentric space just outside the Earth's sphere of influence. Alternatively, a closed-form low-thrust spiral may be assumed for the Earth-escape maneuver, with numerical integration again commencing just outside the Earth's sphere of influence.

Either flyby or orbiter trajectory modes may be selected for interplanetary problems. For orbiters, some or all of the arrival hyperbolic excess speed may be removed with a closed-form, high-thrust retromaneuver.

For launch vehicle studies, the trajectory simulation consists of a zero angle-of-attack phase followed by an optimally steered upper phase. This simulation is in accord



with the usual practice of limiting the angle of attack during atmospheric flight to reduce structural and heating loads.

Many trajectory problems require finding a set of initial conditions that permit a terminal set of conditions to be satisfied. This troublesome nonlinear two-point boundary-value problem is normally solved with an iterative linear correction scheme. Past experience here at the Lewis Research Center has shown that it is often helpful to program several iteration schemes to improve the chances of obtaining a solution. NBODY uses a univariate search scheme when the terminal set of conditions are far from being satisfied and a Newton-Raphson scheme when the solution is not far away. If either scheme fails to converge rapidly, an automatic shift to the other scheme takes place. The partial derivatives needed by the Newton-Raphson scheme may always be generated in NBODY by finite differencing. However, it is faster and more accurate to generate these partial derivatives by numerical integration. This option is available in NBODY for many typical problems but not all, since this method cannot be programmed to accommodate arbitrary end conditions as can the finite differencing method. Therefore, if the user selects a set of end conditions different from those for which the numerically integrated partials have already been programmed, he must either reprogram several sections of NBODY or resort to the finite difference method.

The problem of optimizing the thrust program to maximize gross payload is solved by using variational calculus. This method requires guessing a set of initial values for the adjoint variables (equivalent to guessing the initial thrust direction and its first derivative) that yield a trajectory not too far from the solution trajectory that satisfies certain end conditions. The user may also choose to optimize the central travel angle, the magnitude and direction of any hyperbolic excess speeds due to high-thrust launch or retrobraking of an electric spacecraft, the spacecraft specific impulse (assumed to be constant), and the initial mass flow rate. These options are also handled by variational calculus through transversality conditions. Or, if the user wishes, he may choose to optimize these or any other arbitrary variables with a simple search scheme. Transversality conditions are preferred whenever possible because their use has marked convergence speed and accuracy advantages.

It is often desirable to generate many solutions over a range of some arbitrary parameter, and provision has been made in NBODY to automatically "sweep" from one solution to others. Since problems often arise for which good starting guesses of the adjoint variables are lacking, a feature has been provided that sweeps a known solution of a related problem to the solution of the sought problem by a continuous transformation.

The NBODY program is written in many different subprograms in an effort to retain as much flexibility as possible. It is therefore possible to modify the program (the solar system model, vehicle model, etc.) with a minimum amount of difficulty. Its primary advantages compared to other trajectory programs are its relatively small size and broad capability. It is not specifically tailored to two-body, low-thrust interplanetary

trajectories as are HILTOP (ref. 5) and CHEBYTOP II (ref. 6) or to launch vehicle trajectories such as the program reported in reference 7. Still, even as a general-purpose tool, it has proven itself capable of handling most of the problems for which such special-purpose programs are designed. It is sized for running on a computer having 32 000 words of core storage.

## SOLAR SYSTEM MODEL

### EPHEMERIDES

Ephemeris data are needed in two-body problems if the user instructs the program to calculate initial and final end conditions to be identical with those of specified gravitational bodies. Ephemeris data are also needed in n-body problems where the perturbing bodies' positions need to be known at each point along the spacecraft's trajectory. Elliptic orbits are used to approximate the true paths. To increase the accuracy of this approximation, the orbital elements are computed as a function of the departure Julian date in accordance with the relations presented in reference 8. Prestored elliptic data for the solar system planets are referenced to the mean equinox and ecliptic of date. Data for bodies in addition to the planets (e. g., the Moon) may be added by amending subroutines WORDER and WORBEL. Also, for interplanetary problems involving an Earth departure specified in equatorial coordinates, the prestored elliptic ephemerides would have to be converted to a consistent equatorial framework by amending subroutine WORBEL.

### PHYSICAL DATA

The assumed values of several astronomical constants and the planetary masses and sphere-of-influence radii are given in table I. These values are consistent with the Jet Propulsion Laboratory values given in reference 8. The 1962 U.S. Standard Atmosphere model (ref. 9) is programmed for the Earth in subroutine WICAO. Other atmosphere models may be simulated by altering this subroutine.

## VEHICLE MODELS

The discussion of vehicle models is separated into two major parts: (1) electrically propelled low-thrust spacecraft and (2) non-electric-type vehicles including launch vehicles, high-thrust spacecraft, and ballistic spacecraft. Actually, while it is con-

venient and logical to separate the discussion in this way, it should be noted that the program makes no internal distinction between these two types of vehicles. The inputs for mass, specific impulse, and so forth, are loaded into the same storage locations; and the integrated equations are identical. Thus, the user never inputs a single indicator that "tells" the program which vehicle model to use; instead, he supplies only the type of input data applicable to a particular vehicle model. For example, one normally does not think in terms of a multistage low-thrust electric vehicle; however, if one inputs three stage times, specific impulses, and so forth (as one might do in the case of a launch vehicle), the program will calculate a three-phase low-thrust trajectory. In general, then, all the features discussed in this section apply to either vehicle model. It is clearer, however, to discuss them in two, logically distinct sections.

### ELECTRICALLY PROPELLED VEHICLES

The electric spacecraft is assumed to be composed of the following components:

- (1) Electric propulsion system,  $m_{ps}$
- (2) Propellant mass,  $m_p$
- (3) Tankage mass,  $m_t$
- (4) Structure mass,  $m_s$
- (5) Retropropulsion mass,  $m_r$
- (6) Net spacecraft mass (gross payload),  $m_n$

The net spacecraft mass refers to everything aboard the spacecraft not specified in this list. It includes the scientific instruments, communications equipment, control system, and so forth. The spacecraft mass at departure  $m_0$  is just the sum of all these components,

$$m_0 = m_{ps} + m_p + m_t + m_s + m_r + m_n \quad (1)$$

which can also be written in a form that facilitates scaling,

$$\frac{m_n}{m_0} = 1 - \frac{m_{ps}}{m_0} - \frac{m_p}{m_0} - \frac{m_t}{m_0} - \frac{m_s}{m_0} - \frac{m_r}{m_0} \quad (2)$$

(All symbols are defined in appendix A.) This is the form actually programmed since the net mass ratio is usually the criterion to be maximized. The propulsion system mass ratio is computed from the electrical power available at 1 AU from the Sun  $P_r$  and the specific powerplant mass  $\alpha_{ps}$ :

$$\frac{\dot{m}_{ps}}{\dot{m}_0} \equiv \frac{\alpha_{ps} P_r}{m_0} = - \frac{\dot{m}_0 c^2}{2\eta \frac{P_0}{P_r}} \frac{\alpha_{ps}}{m_0} \quad (3)$$

Here  $P_0/P_r$  is the ratio of initial power to the 1-AU power;  $\dot{m}_0$  is the initial flow rate;  $c$  is the input jet exhaust speed; and  $\eta$  is the overall propulsion system conversion efficiency, assumed to be a function of the jet exhaust speed,

$$\eta = \frac{bc^2}{c^2 + d^2} \quad (4)$$

where  $b$  and  $d$  are input constants that reflect the assumed technology level. If the efficiency is constant, for example,  $b = \eta$  and  $d = 0$ .

The propellant mass is determined by integrating the mass flow rate  $\dot{m}$  over the entire trajectory

$$m_p = - \int_{t_0}^{t_a} \dot{m} dt = - \int_{t_0}^{t_a} \epsilon \left( \frac{P}{P_r} \right) \dot{m}_0 dt \quad (5)$$

where  $\epsilon$  is a step function equal to unity if the engines are on and equal to zero if they are off. The initial flow rate  $\dot{m}_0$  may be inputted directly or, if the user prefers, computed from an input value of the initial thrust-weight ratio  $f/m_0g$

$$\dot{m}_0 = -a_0 \frac{m_0}{c} = - \left( \frac{f}{m_0g} \right) \frac{m_0g}{c} \quad (6)$$

or from an input value of the initial power  $P_0$

$$\dot{m}_0 = -2\eta P_r \frac{\left( \frac{P}{P_r} \right)_0}{c^2} \quad (7)$$

The power ratio  $P/P_r$  may be chosen at input to simulate nuclear electric propulsion, in which case  $P/P_r = 1$ ; or it may be chosen to simulate solar electric propulsion, in which case it is a function of the distance  $r$  from the Sun

$$\frac{P}{P_r} = \begin{cases} 0 & r < 0.13 \\ 1.33 & 0.13 \leq r \leq 0.652 \\ \frac{2.825}{r^2} - \frac{1.825}{r^{2.5}} & 0.652 < r \end{cases} \quad (8)$$

This relation is derived in reference 10; however, any other preferred model may be substituted by altering subroutine WPOWER.

The tankage mass is assumed to be proportional to the propellant mass

$$\frac{m_t}{m_0} = k_t \left( \frac{m_p}{m_0} \right) \quad (9)$$

and the structure mass is assumed to be proportional to the initial mass

$$\frac{m_s}{m_0} = k_s \quad (10)$$

Both  $k_t$  and  $k_s$  are input constants.

The retropropulsion mass component is really two components, one representing the retropropellant  $m_{rp}$  and the other representing tankage, engine, and other retropropulsion structure  $m_{rt}$  (assumed proportional to  $m_{rp}$ ). Hence,

$$\frac{m_{rp}}{m_0} = \left[ 1 - \frac{m_p}{m_0} - j \left( \frac{m_{ps}}{m_0} + \frac{m_t}{m_0} \right) \right] \left( 1 - e^{-\Delta v_r / c_r} \right) \quad (11)$$

$$\frac{m_{rt}}{m_0} = k_{rt} \frac{m_{rp}}{m_0} \quad (12)$$

$$\frac{m_r}{m_0} = \frac{m_{rp}}{m_0} + \frac{m_{rt}}{m_0} \quad (13)$$

where  $j$  is a jettison indicator equal to unity if the electric propulsion system and tankage mass components are to be jettisoned prior to the retromaneuver and equal to zero if they are not,  $c_r$  is the retropropulsion jet exhaust speed (input), and  $\Delta v_r$  is the

magnitude of the retropropulsion velocity increment. The latter is assumed to be an impulsive velocity change,

$$\Delta v_r = v_r - v_{c,r} \sqrt{1 + e_r} \quad (14)$$

where  $v_r$  is the planetocentric velocity at periapsis before the retrofire (input),  $v_{c,r}$  is the planetocentric circular orbit velocity at periapsis (input), and  $e_r$  is the eccentricity of the planetocentric elliptic orbit (input). Note that  $v_{c,r}$  and  $e_r$  specify the desired planetary orbit, while  $v_r$  controls the amount of high-thrust braking and is usually free for optimization.

It often happens that a user wishes to include the Earth escape phase as part of the overall optimization of the net spacecraft mass  $m_n$ . However, it is exceedingly difficult to obtain solutions to such problems because of the extreme sensitivity of the associated two-point boundary-value problem. To avoid this difficulty, two options are available in NBODY that involve departure-phase approximations that are generally regarded as sufficiently accurate for preliminary analysis. The first option is a high-thrust launch to at least escape energy, and the second option is a low-thrust escape spiral. If the high-thrust option is chosen, the net spacecraft mass ratio is redefined in terms of the launch vehicle's payload capability in a low Earth circular parking orbit  $m_{ref}$

$$\frac{m_n}{m_{ref}} = \frac{m_0}{m_{ref}} \frac{m_n}{m_0} \quad (15)$$

The launch vehicle's mass ratio is assumed to obey the following relation:

$$\frac{m_0}{m_{ref}} = (1 + k_l) e^{-(v_l - v_{c,l})/c_l} - k_l \quad (16)$$


where  $v_l$  is the launch velocity relative to the Earth,  $v_{c,l}$  is the circular orbit velocity of the low Earth parking orbit (e.g., at 185-km altitude), and  $c_l$  and  $k_l$  are input constants characterizing the launch vehicle performance. This equation is a curve fit to published launch vehicle performance curves, assuming impulsive velocity addition beyond the initial low Earth orbit. While  $c_l$  and  $k_l$  appear to be the launch vehicle's exhaust speed and propellant-sensitive hardware fraction, they are in fact, merely curve-fit parameters that only coincidentally may be close to the actual values for these parameters. To obtain their values from a specified performance curve, select two  $v_l$

values, note the corresponding  $m_0/m_{ref}$  values, and solve equation (16) for  $c_l$  and  $k_l$ . A particularly simple solution exists if the velocity increments  $\Delta v = v_l - v_{c,l}$  are chosen such that  $\Delta v_2 = 2 \Delta v_1$ , as illustrated in sketch (a), then

$$k_l = \frac{\left(\frac{m_0}{m_{ref}}\right)_1^2 - \left(\frac{m_0}{m_{ref}}\right)_2}{1 + \left(\frac{m_0}{m_{ref}}\right)_2 - 2\left(\frac{m_0}{m_{ref}}\right)_1} \quad (17)$$

and

$$c_l = \frac{\Delta v_1}{\ln \left[ \frac{1 + k_l}{\left(\frac{m_0}{m_{ref}}\right)_1 + k_l} \right]} \quad (18)$$

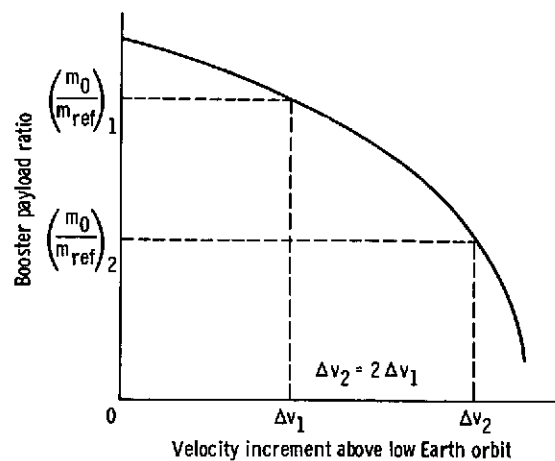

(a)

Using this simple scheme ordinarily results in an adequate representation of launch vehicle performance for preliminary design analyses. The launch velocity  $v_l$  is an input variable subject to internal change if it is selected as an optimization variable, as is usually the case. In effect, choosing  $v_l$  is equivalent to choosing the initial spacecraft mass  $m_0$ . Note that  $m_{\text{ref}}$  does not need to be specified before trajectories are integrated if the initial acceleration  $a_0$  is input directly or if  $\dot{m}_0$  and  $m_0$  are input together. In such cases the net mass ratios are evaluated and the absolute net mass calculated afterwards, if so desired, by multiplying by any  $m_{\text{ref}}$ . On the other hand, if the initial power  $P_0$  is input, it is also necessary to input  $m_{\text{ref}}$  to determine  $\dot{m}_0$  and  $m_0$  (eqs. (7) and (16)). Solutions obtained with this option may be scaled by keeping  $P_0/m_{\text{ref}}$  constant.

If the closed-form tangential, low-thrust spiral escape option is chosen, equation (15) is still used but with a different form for  $m_0/m_{\text{ref}}$ :

$$\frac{m_0}{m_{\text{ref}}} = 1 - \xi \left( 1 - e^{-v_{c,l}/c} \right) \quad (19)$$

where  $\xi$  is an empirical correction factor dependent on the thrust-weight ratio  $a_0/g$ , curve fitted from reference 11:

$$\xi = 0.28988 - 0.14084 \left( \frac{a_0}{g} \right) - 0.010483 \left( \frac{a_0}{g} \right)^2 - 0.00028355 \left( \frac{a_0}{g} \right)^3 \quad (20)$$

The low-thrust spiral escape option is permitted when inputting either the initial flow rate  $\dot{m}_0$  or the initial thrust-weight ratio  $a_0/g$ , but not when inputting the initial power  $P_0$ .

## LAUNCH VEHICLES AND HIGH-THRUST OR BALLISTIC SPACECRAFT

This section discusses features normally associated with non-electric-type vehicles such as launch vehicles and ballistic or high-thrust spacecraft. As many as 10 trajectory phases are permitted, each specified by its flight time  $t_f$ , initial mass  $m_0$ , vacuum specific impulse  $I$ , and mass flow rate  $\dot{m}_0$ . These phases may be defined by actual vehicle staging or by a change in thrust vector control. Atmospheric flight may be simulated by also including the aerodynamic reference area  $S_{\text{ref}}$ , the engine exit area  $A_e$ , and lift and drag coefficient tabular data.

Between phases the vehicle mass may remain unchanged, be set to a new value, or decremented a fixed amount. The payload ratio is the same as that defined as net space-



craft mass for electric vehicles (eq. (2)) with the absence of the electric powerplant and planetary retropropulsion terms.

The thrust magnitude of each phase is assumed to be

$$f = -\dot{m}_0 I_g - p A_e \quad (21)$$

where  $p$  is the atmospheric pressure and  $A_e$  is the input engine exit area. Instead of inputting the mass flow rate  $\dot{m}_0$ , the user may input the initial vacuum thrust-weight ratio  $f/m_0g$ , in which case  $\dot{m}_0$  is calculated internally from

$$\dot{m}_0 = - \frac{\left(\frac{f}{m_0g}\right)m_0g + pA_e}{I_g} \quad (22)$$

The vehicle drag coefficient is composed of a parasitic component  $C_{D0}$  and an induced component  $C_{DI}$ . These coefficients are assumed to be quadratic functions of Mach number  $M$ ,

$$C_D = C_{D0} + C_{DI} \quad (23)$$

$$C_{D0} = a_1 + a_2M + a_3M^2 \quad (24)$$

$$C_{DI} = (a_4 + a_5M + a_6M^2)C_L^2 \quad (25)$$

where the  $a_i$  coefficients are input in sets that apply to specific intervals of  $M$ . The lift coefficient  $C_L$  is determined in a similar manner

$$C_L = (a_7 + a_8M + a_9M^2)\sin \alpha \quad (26)$$

Here  $\alpha$  is the vehicle angle of attack, which is identical to the angle between the thrust and relative velocity vectors because of the implied assumption that the engine thrust is always aligned along the vehicle longitudinal axis.

### PROGRAM LOGICAL STRUCTURE

The program NBODY is structured logically in what may be called three levels of operation. By analogy, these levels may be thought of as a set of three nested DO

loops in FORTRAN programming. In the first level (analogous to an innermost DO loop), trajectories are integrated and an iteration scheme is available to solve two-point boundary-value problems. Thus, trajectories are found that satisfy specified terminal constraints such as fixed position and velocity. Every trajectory is integrated, including those for purely ballistic spacecraft. In addition to finding trajectory solutions, four vehicle-related parameters - specific impulse, initial mass flow rate, launch hyperbolic excess speed (equivalent to initial spacecraft mass), and high-thrust retropropulsion velocity increment (equivalent to retropropellant) - may be optimized in level 1 by incorporating the required transversality conditions into the two-point boundary-value problem.

Level 2 (analogous to a middle DO loop) permits direct optimization of either trajectory- or vehicle-related variables. The user selects the optimization criterion and the set of independent variables from among all variables computed by the program. If the user alters the net mass equation already programmed without also altering the vehicle-related transversality conditions, he must use level 2 to optimize specific impulse, acceleration, and so forth. Each time a level 2 independent variable is changed, the level 1 trajectory calculations are repeated, including the two-point boundary-value iteration.

Level 3 (analogous to an outermost DO loop) involves running several cases in succession with parameter sweep capability. Level 1 and level 2 calculations are repeated each time a level 3 variable is altered. Thus, variables that are optimized in level 2 may be reoptimized during a sweep on, for example, mission time.

## LEVEL 1 - TRAJECTORIES AND VARIATIONAL NECESSARY CONDITIONS


### Trajectory Equations

The forces included in the trajectory simulation are gravitational forces of the Sun and the planets, thrust forces, and aerodynamic forces. These forces are vectorially summed as a resultant total force on the assumed point-mass vehicle relative to a primary center of attraction. The vector equation of motion is

$$\ddot{\mathbf{R}} = -\nabla u - \sum_{i=2}^n \mu_i \left( \frac{\mathbf{R} - \mathbf{R}_i}{|\mathbf{R} - \mathbf{R}_i|^3} + \frac{\mathbf{R}_i}{r_i^3} \right) + \frac{\mathbf{D}}{m} + \frac{\mathbf{L}}{m} + a\mathbf{T} \quad (27)$$

$$(\text{Total}) = (\text{Primary body}) + (\text{Perturbing bodies}) + (\text{Drag}) + (\text{Lift}) + (\text{Thrust})$$

The convention of using capital letters to denote vectors and lower case letters to denote scalars is adopted in this report except where it interferes with well-known symbols. Here  $R$  is the vehicle's position vector (and  $r$  is the magnitude of  $R$ ) relative to the origin of the coordinate system - located at the center of the primary body as shown in sketch (b);  $R_i$  is the position vector of the  $i^{\text{th}}$  perturbing body;  $\mu_i$  is the body's gravitational constant;  $m$  is the vehicle mass; and  $T$  is a unit vector in the thrust direction.

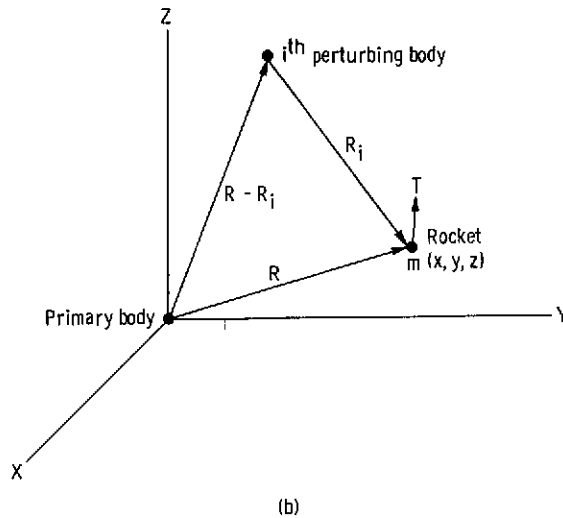

Primary gravitational body attraction. - The first term  $\nabla u$  in the acceleration equation denotes the gradient of the gravitational potential function  $u = u(x, y, z)$  of the primary body. A point-mass body may be selected, in which case  $u = -\mu/r$  and

$$\nabla u \equiv \left[ \frac{\partial u}{\partial x} \quad \frac{\partial u}{\partial y} \quad \frac{\partial u}{\partial z} \right] = \frac{\mu}{r^3} R \quad (28)$$

Or, in the case of the Earth, an oblate potential function may be selected (from ref. 8)

$$u = \frac{-\mu}{r} \left[ 1 - \frac{J_2}{2} \left( \frac{a_e}{r} \right)^2 (3 \sin^2 \varphi - 1) - \frac{J_3}{2} \left( \frac{a_e}{r} \right)^3 (5 \sin^3 \varphi - 3 \sin \varphi) - \frac{J_4}{8} \left( \frac{a_e}{r} \right)^4 (35 \sin^4 \varphi - 30 \sin^2 \varphi + 3) \right] \quad (29)$$

where  $a_e$  is the equatorial radius of the Earth;  $\varphi$  is the vehicle's geocentric latitude relative to the Earth's equatorial plane; and  $J_2$ ,  $J_3$ , and  $J_4$  are zonal harmonic coefficients whose values are given in table I (from ref. 8). In this case,

$$\frac{\partial u}{\partial x} = \frac{\mu}{r^2} \left[ 1 - \frac{3}{2} J_2 \left( \frac{a_e}{r} \right)^2 (5 \sin^2 \varphi - 1) - \frac{5}{2} J_3 \left( \frac{a_e}{r} \right)^3 (7 \sin^2 \varphi - 3) \sin \varphi - \frac{35}{8} J_4 \left( \frac{a_e}{r} \right)^4 \left( 9 \sin^4 \varphi - 6 \sin^2 \varphi + \frac{3}{7} \right) \right] \frac{x}{r} \quad x \rightarrow y \quad (30)$$

$$\frac{\partial u}{\partial z} = \frac{\mu}{r^2} \left[ 1 - \frac{3}{2} J_2 \left( \frac{a_e}{r} \right)^2 (5 \sin^2 \varphi - 3) - \frac{5}{2} J_3 \left( \frac{a_e}{r} \right)^3 \left( 6 - 7 \sin^2 \varphi - \frac{3}{5} \frac{1}{\sin^2 \varphi} \right) \sin \varphi - \frac{35}{8} J_4 \left( \frac{a_e}{r} \right)^4 \left( 9 \sin^4 \varphi - 10 \sin^2 \varphi + \frac{15}{7} \right) \right] \frac{z}{r} \quad (31)$$

Note that the oblateness forces are referenced to the Earth's equatorial plane. Thus, if oblateness terms are to be considered, the integrating inertial coordinate frame must be chosen as an equatorial frame or the user must program a coordinate transformation.


Perturbing body gravitational attraction. - The second term in equation (27) represents the acceleration caused by  $n - 1$  perturbing bodies. The bodies are all assumed to be point masses, and their positions are determined by ephemerides as explained previously in the section SOLAR SYSTEM MODEL.

Aerodynamic forces. - Aerodynamic forces are split into drag and lift components with the usual definitions. Drag is opposite the relative wind vector and lift is perpendicular to the relative wind as shown in sketch (c). Since drag is opposite the relative wind velocity  $V_r$

$$D = -(C_D q S_{ref}) \frac{V_r}{v_r} \quad (32)$$

where  $v_r$  is the magnitude of  $V_r$  and the dynamic pressure  $q$  is a function of atmospheric density  $\rho$ :

$$q = \frac{1}{2} \rho v_r^2 \quad (33)$$

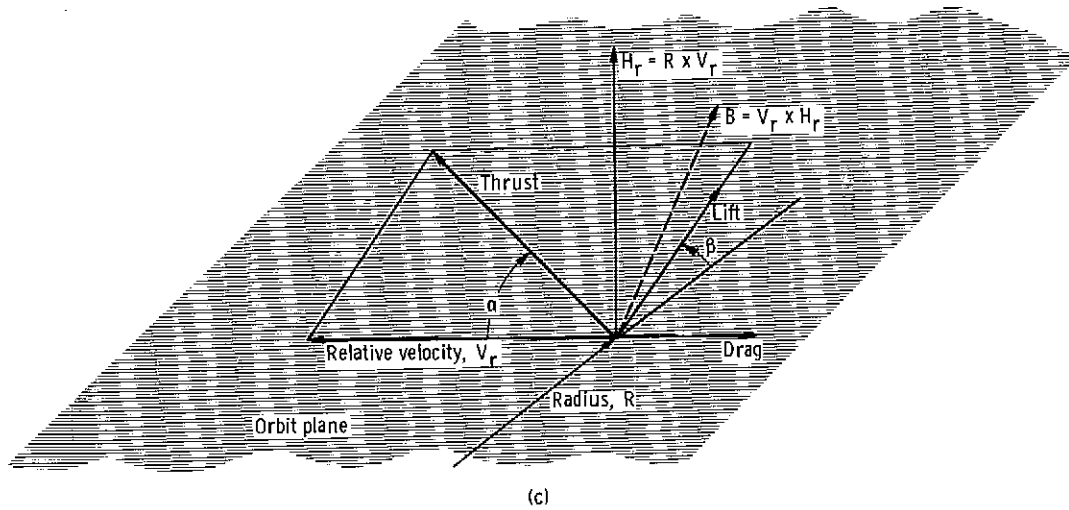

The relative velocity  $V_r$  is referenced to the primary body, which is assumed to rotate counterclockwise about the  $z$ -axis. Hence,

$$v_{r,x} = v_x + \omega_r y \quad (34a)$$

$$v_{r,y} = v_y - \omega_r x \quad (34b)$$

$$v_{r,z} = v_z \quad (34c)$$

where the subscripts refer to the  $x, y, z$  components and  $\omega_r$  is the rotation rate of the primary body and its atmosphere.

To compute the lift vector in the  $x, y, z$  inertial frame, it is convenient to first define the relative angular momentum vector per unit mass  $H_r$

$$H_r = R \times V_r \quad (35)$$

and then define another vector  $B$  such that

$$B = V_r \times H_r \quad (36)$$

Note that  $H_r$  is normal to the  $R \times V_r$  plane;  $B$  is within the  $R \times V_r$  plane; and  $V_r$ ,  $H_r$ , and  $B$  form an orthogonal set as shown in sketch (c). The lift vector  $L$  can be resolved along  $V_r$ ,  $H_r$ , and  $B$  as follows:

$$L \cdot V_r = 0 \quad (37a)$$

$$L \cdot H_r = (l \sin \beta)H_r \quad (37b)$$

$$L \cdot B = (l \cos \beta)B \quad (37c)$$

where  $\beta$  is the out-of-orbit (relative orbit) thrust angle (sketch (c)) and the lift magnitude  $l$  is

$$l = C_L q S_{ref} \quad (38)$$

Solving these equations for  $L$  yields

$$L = l \sin \beta \frac{H_r}{|H_r|} + l \cos \beta \frac{B}{|B|} \quad (39)$$

The lift and drag coefficients ( $C_D$  and  $C_L$ ) are tabular input data as explained in the section VEHICLE MODELS.

Thrust acceleration. - The fourth term in equation (27) is the thrust acceleration  $a_T$ . The thrust acceleration magnitude is, in general,

$$a = -\epsilon \left( \frac{c \dot{m}_0}{m} \right) \left( \frac{P}{P_r} \right) - \frac{p A_e}{m} \quad (40)$$

where the second term is absent for exoatmospheric flight and the power ratio  $P/P_r$  is unity except for solar electric propulsion, as explained earlier in the section VEHICLE MODELS. The engine on-off switch parameter  $\epsilon$  is unity for engine-on operation and zero for engine-off operation. It is needed in this equation only if the user selects the optimum thrust-coast profile option, in which case  $\epsilon$  is calculated internally by the program.

The unit thrust vector  $T$  determines the thrust direction, and the user selects either an optimum  $T$  program or a specified  $T$  program. For a specified  $T$  program, the angle between the thrust force and the relative velocity (sketch (c)) is assumed to be a quadratic function of time

$$\alpha(t) = a_{10} + a_{11}t + a_{12}t^2 \quad (41)$$

where the  $a_i$  coefficients are input in sets that apply to specific time intervals. The out-of-plane thrust component is determined by the angle  $\beta$ , previously defined in the discussion of the lift force as an input constant (sketch (c)). The unit thrust vector can be resolved along the  $V_r$ ,  $H_r$ , and B axes similar to the resolution of the lift force along these axes

$$\mathbf{T} \cdot \mathbf{V}_r = V_r \cos \alpha \quad (42a)$$

$$\mathbf{T} \cdot \mathbf{H}_r = H_r \sin \alpha \sin \beta \quad (42b)$$


$$\mathbf{T} \cdot \mathbf{B} = B \sin \alpha \cos \beta \quad (42c)$$

Thus,

$$\mathbf{T} = \cos \alpha \frac{\mathbf{V}_r}{|V_r|} + \sin \alpha \sin \beta \frac{\mathbf{H}_r}{|H_r|} + \sin \alpha \cos \beta \frac{\mathbf{B}}{|B|} \quad (43)$$

Instead of referencing the thrust angle to the relative velocity vector, the user may alternatively select to reference it to the circumferential direction as shown in sketch (d). In this case he specifies  $\alpha_c$  - the angle from the forward circumferential direction to the thrust vector - as a function of time as in equation (41). The program then subtracts the path angle  $\gamma$  from  $\alpha_c$  to determine  $\alpha$ :

$$\alpha = \alpha_c - \gamma \quad (44)$$

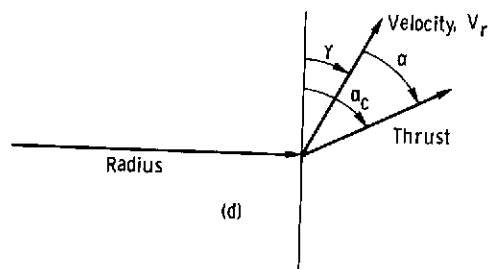

and resolves the thrust, as before, using equation (43). This option is most useful for interplanetary missions where  $\omega_r = 0$  (hence,  $V$  replaces  $V_r$  in sketch (d)) and the thrust orientation is often conveniently given in terms of the circumferential direction. A brief summary of frequently encountered thrust programs is given in the following table:

Thrust program	Required angles, deg
Tangential thrust (forward)	$\alpha = 0, \beta = 0$
Tangential thrust (rearward)	$\alpha = 180, \beta = 0$
Circumferential thrust (forward)	$\alpha_c = 0, \beta = 0$
Radial thrust (outward)	$\alpha_c = 90, \beta = 0$
Radial thrust (inward)	$\alpha_c = -90, \beta = 0$
Normal thrust (upward)	$\alpha_c = 0, \beta = 90$
Normal thrust (downward)	$\alpha_c = 0, \beta = -90$

If the user selects an optimum  $T$  program, variational calculus is employed to determine  $T(t)$ . This is rather involved and is the subject of the following section. The user could, of course, closely approximate the optimum  $T(t)$  without variational calculus by using the built-in generalized search procedure to optimize  $\beta$  and the  $a_i$  coefficients in the  $\alpha(t)$  equation. Since  $\beta$  is programmed as a constant, this could only be done for two-dimensional cases. Moreover, such a direct optimization procedure is generally inadequate unless the independent function (e. g.,  $\alpha(t)$ ) is subdivided many times, which in turn greatly increases the number of independent variables and slows down the search procedure significantly. Nevertheless, it may be applicable whenever the optimum thrust angle is fairly constant or when the thrust angle is constrained.

### Optimal Thrust Control

Since the application of optimal control theory is especially complicated if oblateness and aerodynamic forces are present, these effects are not included in the optimal control formulation. This is quite acceptable for interplanetary transfers, of course, and usually so for preliminary launch vehicle studies. If the user should request optimal thrust control with oblateness or aerodynamic forces present, the equations of motion will account for such forces but the optimal control law will not. Hence, the trajectory will not be truly optimal.

With these restrictions the optimal control law formation is based on a simplified version of the equations of motion, namely



$$\dot{V} = -\frac{\mu}{r^3} R - \sum_{i=2}^n \mu_i \left( \frac{R - R_i}{|R - R_i|^3} + \frac{R_i}{r_i^3} \right) - \frac{c}{m} \dot{m} T \quad (45a)$$

$$\dot{R} = V \quad (45b)$$

where  $V$  is the vehicle's absolute velocity. The mass equation is

$$\dot{m} = \epsilon \dot{m}_0 \zeta \quad (45c)$$

where  $\zeta$  is the power ratio  $P/P_r$ . These three equations define seven state variables - the three components of position and velocity, and the vehicle mass. The four parameters  $\dot{m}_0$ ,  $c$ ,  $v_L$ , and  $v_r$  may also be treated as state variables in order to optimize them with the variational method. To do this, four more state equations are appended to the preceding set.

$$(\dot{m}_0) \equiv \frac{d}{dt} (\dot{m}_0) = 0 \quad (45d)$$

$$\dot{c} = 0 \quad (45e)$$

$$\dot{v}_L = 0 \quad (45f)$$

$$\dot{v}_r = 0 \quad (45g)$$

The necessary conditions for maximizing the net spacecraft mass are determined by variational principles (ref. 12). These conditions determine the optimum thrust orientation; engine on-off switch times; and values of  $\dot{m}_0$ ,  $c$ ,  $v_L$ , and  $v_r$ . Part of these conditions are differential equations known as Euler-Lagrange or adjoint equations which are

$$\dot{\Lambda} = -\Lambda_r \quad (46a)$$

$$\dot{\Lambda}_r = \sum_{i=1}^n \frac{\mu_i}{r_i^3} \left[ \Lambda - \frac{3}{r_i^2} (\Lambda \cdot R_i) R_i \right] + \left( \frac{\epsilon \dot{m}_0 \zeta'_{rk}}{r} \right) R \quad (R_1 = R) \quad (46b)$$

$$\dot{\lambda}_m = - \frac{\dot{m}c\lambda}{m^2} \quad (46c)$$

$$\dot{\lambda}_{\dot{m}_0} = \frac{\dot{m}\kappa}{\dot{m}_0} \quad (46d)$$

$$\dot{\lambda}_c = \frac{\dot{m}\lambda}{m} \quad (46e)$$

$$\dot{\lambda}_{v_L} = 0 \quad (46f)$$

$$\dot{\lambda}_{v_R} = 0 \quad (46g)$$

where

$$\kappa \equiv \frac{c\lambda}{m} - \lambda_m \quad (47)$$

The subscripts here denote which state variable the adjoint variables  $\lambda_i$  are associated with. The term  $\Lambda_r$  is a vector with components  $\lambda_x$ ,  $\lambda_y$ , and  $\lambda_z$ . Likewise,  $\Lambda$  is a three-component vector associated with velocity (it is not subscripted in keeping with its usual notation) and is customarily referred to as the primer vector.

Optimum continuously variable thrust angle. - Variational theory shows that the optimum value of  $T$  is determined by the primer vector:

$$T = \frac{\Lambda}{\lambda} \quad (48)$$

where  $\lambda$  is the magnitude of  $\Lambda$ . The engine on-off indicator  $\epsilon$  is determined as follows:

$$\epsilon = 0 \quad \text{if } \kappa < 0 \quad (49a)$$

$$\epsilon = 1 \quad \text{if } \kappa > 0 \quad (49b)$$

The theoretical possibility of  $\kappa = 0$  over a finite time interval very seldom occurs in practice, and this case presents no problems. If  $\kappa = 0$  at the initial time,  $\dot{\kappa}$  is inter-

rogated to determine the proper initial value of  $\epsilon$ . The adjoint equations must be integrated along with the equations of motion to determine the optimum values of  $T$  and  $\epsilon$ . So far, we have not discussed how the optimization of  $\dot{m}_0$ ,  $c$ ,  $v_L$ , and  $v_R$  is accomplished, nor how the initial values of the adjoint variables  $\lambda_i$  are determined. Values for these variables are determined by the transversality conditions, which are dependent on the form of the net mass equation and the desired end conditions. Hence, a separate discussion of these conditions is presented later. It is sufficient for the moment to note that the adjoint equations are independent of these conditions. If any of the variables  $\dot{m}_0$ ,  $c$ ,  $v_L$ , or  $v_R$  are fixed instead of free for optimization, its corresponding state equation (eq. (45)) and adjoint equation (eq. (46)) are deleted. Conversely, the adjoint equations for any free variables are retained as they are needed in the evaluation of the transversality conditions.

Optimum choice of fixed thrust angles. - For two-dimensional problems, the user may choose to restrict the thrust angle to a finite set of fixed input values  $\alpha_i$  - referenced either to the velocity vector or to the circumferential direction, as explained earlier. To determine which of the input angles should be used at any instant of time, the variational equations just presented are employed, with the exceptions that  $T \cdot \Lambda$  is substituted at every occurrence of the scalar  $\lambda$  (eqs. (46c), (47), and several subsequent equations) and that equation (48) is replaced with

$$T \cdot \Lambda = \max_i (T_i \cdot \Lambda) \quad (50)$$


When this criterion is used, the program automatically switches the thrust angle whenever the difference between the two largest values of  $T_i \cdot \Lambda$  reaches zero. The value of  $T_i$  depends on  $\alpha_i$ ; and since this option is programmed only for the two-dimensional case of trajectories in the x-y plane,

$$\Lambda \cdot T_i = \lambda_x \cos \psi_i + \lambda_y \sin \psi_i \quad (51)$$

where

$$\psi_i = \frac{\pi}{2} + \theta - (\alpha_i + \gamma) \quad (52)$$

Here  $\psi_i$  is the thrust angle referenced to the x-axis and  $\theta$  is the travel angle as shown in sketch (e). If the thrust angle is referenced to the forward circumferential direction ( $\alpha_c$  in sketch (d)), then  $(\alpha_c)_i$  replaces  $\alpha_i + \gamma$  in equation (52).

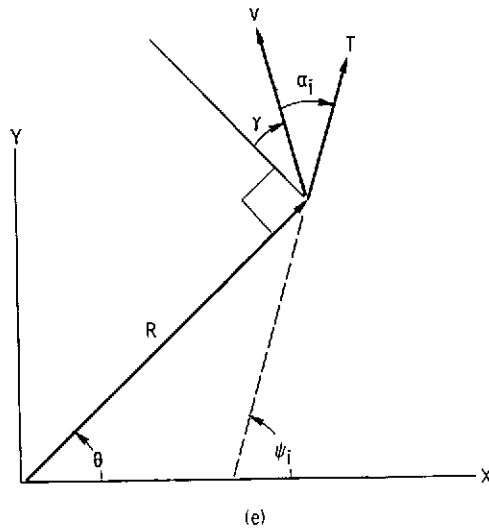

### Boundary Conditions

Every problem involves certain boundary conditions that must be satisfied to obtain the desired solution. In some cases these are fixed, such as the initial position and velocity vectors. But in other cases, some of the boundary conditions are in the form of transversality conditions. These conditions arise whenever an end condition is not fixed but left open for optimization. The transversality equations are derived from variational theory (ref. 12) and are presented herein without proof.

Flight time. - The time at departure  $t_0$  is an input constant  $\bar{t}_0$

$$t_0 = \bar{t}_0 \quad (\text{Departure time}) \quad (53)$$

The departure time is usually zero except for interplanetary problems involving actual planetary positions as a function of date. The arrival (or final) time is also a constant

$$t_a = t_0 + t_f \quad (\text{Arrival time}) \quad (54)$$

where  $t_f$  is an input mission time. It should be noted at this point that although the boundary conditions are often stated herein in terms of input constants, such as  $t_f$ , the user always has the power to override this choice and declare such boundary conditions to be variable. For example, in typical launch vehicle problems the flight time  $t_f$  is not a fixed constant but an independent variable used in an iteration scheme to obtain certain orbit insertion conditions. How this is done is explained in the section on The Two-Point Boundary Value Problem.

The flight time for low-thrust interplanetary missions must be defined in detail if

any of the closed-form planetocentric simulations are involved. The planetocentric flight times are ignored for both high-thrust closed-form simulations; that is, the launch vehicle boost phase and the planetary capture phase (if any). In these cases,  $t_0$  and  $t_a$  refer to the heliocentric portion of the flight, only. In the case of the closed-form low-thrust tangential escape spiral,  $t_0$  and  $t_a$  again refer only to the heliocentric portion of the mission. But the program also calculates the spiral time required for the vehicle to reach escape velocity

$$t_s = \xi \left( \frac{c}{a_0} \right) \left( 1 - e^{-v_{c, l}/c} \right) \quad (55)$$

where  $\xi$  is an empirical function of  $a_0$  previously defined in equation (20). This time is added to the user-supplied heliocentric flight time  $t_f$  and printed out as total mission time. This method of handling the low-thrust spiral is acceptable since the known optimum trajectory for low-thrust escape from a circular orbit approximates a tangential thrust spiral (ref. 2). The main drawback in this method is that the total mission time ( $t_f + t_s$ ) is a dependent rather than an independent variable. (The user selects  $t_f$ , but the program calculates  $t_s$ .) This is because  $t_s$  depends on  $c$  and  $a_0$  and these two variables are frequently changing during the course of an optimization iteration. In a typical case,  $t_s$  will be between 50 and 350 days.

Initial conditions. - At departure the vehicle position and velocity may be assumed fixed

$$R_0 = \bar{R}_0 \quad (\text{Initial position}) \quad (56)$$

$$V_0 = \bar{V}_0 \quad (\text{Initial velocity}) \quad (57)$$

where  $\bar{R}_0$  and  $\bar{V}_0$  are constants that are inputted directly or calculated by the program using an ephemeris. In the latter option,  $\bar{R}_0$  and  $\bar{V}_0$  are identical with a specified planet's position and velocity at time  $t_0$ .

For interplanetary low-thrust problems that begin in heliocentric space with the closed-form launch vehicle simulation, the velocity equation is modified to read

$$V_0 = \bar{V}_0 + v_{s, d} \left( \frac{\Delta}{\lambda} \right)_0 \quad (\text{Optimum launch orientation}) \quad (58)$$

where

$$v_{s,d}^2 = v_l^2 - 2v_{c,l}^2 \left(1 - \frac{r_l}{r_{s,d}}\right) \quad (59)$$

Here  $v_{s,d}$  is the spacecraft speed relative to the departure planet as it passes through a sphere of influence of radius  $r_{s,d}$ . If  $r_{s,d} = \infty$ ,  $v_{s,d}$  is identical to the often used hyperbolic excess speed. The launch vehicle burnout velocity  $v_l$  is assumed to occur at radius  $r_l$ , where the circular orbit speed is  $v_{c,l}$ . Both  $v_{c,l}$  and the ratio  $r_l/r_{s,d}$  are input constants. The launch vehicle burnout velocity  $v_l$  may be fixed or, as is often the case, optimized to yield maximum net spacecraft mass. If  $v_l$  is optimized, a transversality condition can be used for this purpose; and one is given later (eq. (72)) in the section Transversality conditions for optimum spacecraft parameters. The spacecraft velocity at the sphere of influence  $v_{s,d}$  is added to the planet's velocity  $\bar{V}_0$  in the primer direction  $\Lambda/\lambda$  in order to minimize propellant expenditure (ref. 13).

Arrival end conditions. - There are several sets of programmed arrival end conditions. The simplest of these is requiring the vehicle position and velocity to match those of a given target

$$R_a = \bar{R}_a \quad (\text{Arrival position}) \quad (60)$$

$$V_a = \bar{V}_a \quad (\text{Arrival velocity}) \quad (61)$$

Here  $\bar{R}_a$  and  $\bar{V}_a$  are the target position and velocity vectors. They are inputted directly or calculated by the program using an ephemeris for a specified target body.

For problems involving the analytic high-thrust capture maneuver, the arrival velocity equation must be modified to account for the braking maneuver,

$$\tilde{V}_a \equiv V_a + v_{s,a} \left(\frac{\Lambda}{\lambda}\right)_a = \bar{V}_a \quad (\text{Optimum retromaneuver orientation}) \quad (62)$$

where

$$v_{s,a}^2 = v_r^2 - 2v_{c,r}^2 \left(1 - \frac{r_r}{r_{s,a}}\right) \quad (63)$$

Here  $v_{s,a}$  is the vehicle speed relative to the target planet as the vehicle passes through the sphere of influence of radius  $r_{s,a}$ . Orienting the planetocentric path so that  $v_{s,a}$  is directed in the primer direction at arrival  $(\Lambda/\lambda)_a$  is a transversality result (ref. 13). The retrofire is assumed to take place at radius  $r_r$ , where the circular

orbit speed is  $v_{c,r}$ . Both  $v_{c,r}$  and the ratio  $r_r/r_{s,a}$  are input constants. The velocity just prior to retrofire  $v_r$  is either fixed or open for optimization. Optimizing  $v_r$  effectively optimizes the amount of high-thrust braking into the specified capture orbit. The transversality condition for optimum  $v_r$  is given in the next section.

For two-dimensional trajectories in the x-y plane, the user may elect to specify the polar coordinates of a target point,

$$r_a = \bar{r}_a \quad (\text{Arrival radius}) \quad (64)$$

$$\tilde{v}_a = \bar{v}_a \quad (\text{Arrival velocity}) \quad (65)$$

$$\tilde{\gamma}_a = \bar{\gamma}_a \quad (\text{Arrival path angle}) \quad (66)$$

$$\theta_a = \bar{\theta}_a \quad (\text{Central travel angle}) \quad (67)$$

where  $\bar{r}_a$ ,  $\bar{v}_a$ ,  $\bar{\gamma}_a$ , and  $\bar{\theta}_a$  are input constants. The tilde on the arrival velocity  $\tilde{v}_a$  and path angle  $\tilde{\gamma}_a$  indicates that these variables are not necessarily the arrival values. They are the arrival values if an analytic braking maneuver is not used. But if it is used,  $\tilde{v}_a$  and  $\tilde{\gamma}_a$  refer to values evaluated after the  $v_{s,a}$  term is added to  $v_a$  in equation (62).

A frequently used variation of the polar set for launch vehicle and parametric interplanetary problems is leaving the travel angle  $\theta$  open for optimization since  $\theta$  is seldom constrained in these cases. In this case the  $\theta$  equation (eq. (67)) is replaced with the transversality equation

$$\left( \lambda_1 v_y - \lambda_2 v_x + \lambda_4 y - \lambda_5 x \right)_a = 0 \quad (\text{Optimum travel angle}) \quad (68a)$$

where  $\lambda_1$  and  $\lambda_2$  are the components of  $\Lambda$ , and  $\lambda_4$  and  $\lambda_5$  are the components of  $\Lambda_r$ . Fortunately, this expression is also a constant of the motion (for two-body problems only, strictly speaking). It therefore can be invoked at the departure point to solve for  $\lambda_5$  (or any other  $\lambda_i$ ) directly instead of solving equation (68a) at the arrival point by iteration. Also, this transversality condition may be generalized to three-dimensional problems to optimize the arrival latitude and longitude,

$$\left( \Lambda \times V + \Lambda_r \times R \right)_a = 0 \quad (68b)$$

In this case it is used to determine the initial values of  $\lambda_3$ ,  $\lambda_5$ , and  $\lambda_6$ .

In some problems, such as interplanetary flybys, the arrival velocity vector is left open for optimization, which leads to the transversality condition

$$\left(\frac{\Lambda}{\lambda_m}\right)_a = 0 \quad (\text{Optimum arrival velocity}) \quad (69)$$

This equation replaces the  $V_a$  equation if the arrival end conditions are specified in rectangular coordinates (eqs. (60) to (62)) or the  $\tilde{v}_a$  and  $\tilde{\gamma}_a$  equations if polar coordinates are specified (eqs. (64) to (67)).

Transversality conditions for optimum spacecraft parameters. - There are four variables associated with low-thrust spacecraft that may be open for optimization: The initial mass flow rate  $\dot{m}_0$ ; the exhaust speed  $c$ ; the launch vehicle burnout speed  $v_l$ ; and for capture missions, the spacecraft speed just prior to the braking retrofire  $v_r$  (equivalent to the amount of retrofire propellant). The transversality conditions for these variables are

$$T_{\dot{m}_0} \equiv \frac{(\lambda_m)_a}{(\lambda_m)_0} \left( \frac{A_2}{A_1} \frac{m_{ps}}{m_0} - \frac{m_a}{m_0} \right) + 1 = 0 \quad (\text{Optimum } \dot{m}_0) \quad (70a)$$

$$T_c \equiv \left( \frac{\lambda_m}{\lambda_c} \right)_a m_{ps} \frac{A_2}{A_1} \left( \frac{2}{c} - \frac{1}{\eta} \frac{d\eta}{dc} \right) + 1 = 0 \quad (\text{Optimum } c) \quad (70b)$$

$$T_{v_l} \equiv \frac{m_n}{A_1} \left( \frac{v_{s,d}}{v_l} \right) \frac{(\lambda_m)_a}{\lambda_0} \frac{\left( 1 + k_l \frac{m_{ref}}{m_0} \right)}{c_l} - 1 = 0 \quad (\text{Optimum } v_l) \quad (70c)$$

$$T_{v_r} = \left( \frac{\lambda_m}{\lambda} \right)_a \left( \frac{v_{s,a}}{v_r} \right) \frac{1}{A_1 c_r} \left\{ (1 + k_{rt}) [m_a - j(m_{ps} + m_t)] - m_r \right\} - 1 = 0 \quad (\text{Optimum } v_r) \quad (70d)$$

where

$$A_1 = 1 + k_t - \frac{m_r(1 + jk_t)}{m_a - j(m_{ps} + m_t)} \quad (71)$$

$$A_2 = 1 - \frac{j m_r}{m_a - j(m_{ps} + m_t)} \quad (72)$$



and  $m_a$  is the arrival mass at the target before any retrofire (i. e.,  $m_a = m_0 - m_p$ ). It has been assumed in these equations that

$$\left(\lambda_c\right)_0 = \left(\lambda_{\dot{m}_0}\right)_a = \lambda_{v_L} = \lambda_{v_R} = 0 \quad (73)$$

since they are arbitrary and choosing the value zero yields the simplest expressions. Unlike the trajectory transversality conditions, these four spacecraft transversality conditions are dependent on the particular definition of net spacecraft mass. Hence, the user is cautioned that any modification he makes to the net mass equations (eqs. (2), (3), and (9) to (16)) invalidates these four transversality equations.

### The Two-Point Boundary-Value Problem

In some nonvariational and in nearly all variational trajectory problems, a two-point boundary-value problem arises that must be solved with iterative methods. In variational problems, for example, it is necessary to guess values for the initial adjoint variables  $\lambda_i$  and then use an iterative scheme that adjusts the  $\lambda_i$  until a given set of end conditions are satisfied. The NBODY user has the power to create any boundary-value problem he chooses. He does this at input time by specifying a particular set of independent variables  $x_i$  and a particular set of dependent variables  $y_i$ , where  $i = 1, 2, \dots, n$  ( $n \leq 10$ ). He must be careful, of course, to create a well-defined boundary-value problem by selecting  $y_i$  that really do depend on  $x_i$ . He must also input guesses for the  $x_i$  and specify his desired values  $\bar{y}_i$  for  $y_i$ . The program then adjusts the  $x_i$  until  $y_i = \bar{y}_i$  by using techniques discussed in the section Iterator for Boundary-Value Problems.

Users of NBODY specify  $x_i$ ,  $y_i$ , and  $\bar{y}_i$  by loading values into the program arrays IA, IB, and DESIRE. The array DESIRE is simply  $\bar{y}_i$ . The array IA is a list of program locations relative to the beginning of COMMON where the  $x_i$  are stored. The array IB is a similar list for the dependent variables  $y_i$ . Table II is intended to assist users in this task by giving the COMMON locations of the anticipated candidates for  $x_i$  and  $y_i$ . If the user does not find his selections for  $x_i$  or  $y_i$  in table II, he must consult the complete COMMON map given in table III. To save the user the trouble of looking up the IA and IB indexes for frequently encountered problems, the program will fill these arrays automatically if the user selects special values for the program control variable NOPT. Since the description of how to use NOPT is too lengthy to include as a part of the input instructions given later, its use is detailed here and summarized in table IV.

NOPT=0. - NOPT=0 is the option for nonoptimal control - only the equations of motion are integrated, not the adjoint equations. The user must fill the IA, IB, and DESIRE arrays himself through input. If the program finds IA empty, it assumes that a boundary-value problem does not exist and calculates only a single trajectory.

NOPT=1. - All nonzero values for NOPT specify a variational problem involving the adjoint equations. The NOPT=1 option is useful for rendezvous problems where the vehicle is required to match a target's velocity  $\bar{V}_a$  and position  $\bar{R}_a$ . The IA array is automatically filled by the program with the COMMON locations of the initial values for the adjoint variables  $\lambda_i$  ( $i = 1, 2, \dots, 6$ ), where  $\lambda_1, \lambda_2,$  and  $\lambda_3$  are the components of the primer vector  $\Lambda$  and  $\lambda_4, \lambda_5,$  and  $\lambda_6$  are the components of the position adjoint vector  $\Lambda_r$ . The IB array is automatically filled with the locations of the components of the modified arrival velocity  $\tilde{V}_a$  and position  $R_a$ . The modified arrival velocity (eq. (62)) is used here so that cases involving the analytic high-thrust braking maneuver may be included as a generalization. If this braking maneuver is not used,  $\tilde{V}_a = V_a$ . The user must fill the DESIRE list with the components of the target velocity and position ( $\bar{V}_a$  and  $\bar{R}_a$ ) unless he selects the ephemeris option. In this case, DESIRE is filled by the program using the selected target body's ephemeris. For two-dimensional problems in the x-y plane, only the x and y components of  $\Lambda, \Lambda_r, \tilde{V}_a, R_a, \bar{V}_a,$  and  $\bar{R}_a$  are used.

The preceding discussion assumes that the engines may be shut down and restarted whenever a zero is attained by the on-off switching function  $\kappa$ . Thus, coast arcs will occur in the optimum trajectory. The user is cautioned here that he must select a value of initial mass flow rate  $\dot{m}_0$  (or initial thrust-weight ratio  $a_0/g$ ) large enough to permit a solution. If he selects too small a value of  $\dot{m}_0$ , not enough propulsive effort can be expended within the allotted mission time to accomplish the mission. In this case, the program will eliminate all coast arcs and fail to converge to a solution. Simultaneously, the adjoint variables will tend toward infinity - a sure signal to the user that  $\dot{m}_0$  is too small.

If the user selects the all-propulsion constraint (COAST=F), the initial mass flow rate  $\dot{m}_0$  (or  $a_0/g$  if inputted) is treated as an independent variable and replaces  $\lambda_1$  in the IA list. Thus, in this case, the input value of  $\dot{m}_0$  is merely a first guess and will be changed by the program in the process of iterating to a solution trajectory. The converged value of  $\dot{m}_0$  will be the smallest possible value that may be used to reach the target at the specified mission time. The use of a larger value of  $\dot{m}_0$  (or  $a_0/g$ ) would result in a lower payload all-propulsion trajectory.

NOPT=2. - Valid only for two-dimensional trajectories in the x-y plane, NOPT=2 is a polar coordinate option that utilizes the end conditions defined by equations (64) to (67). The user must fill the DESIRE list with values for the target's radius  $\bar{r}_a$ , speed  $\bar{v}_a$ , path angle  $\bar{\gamma}_a$ , and the central travel angle  $\bar{\theta}_a$ . The IA list is automatically filled

with the locations of  $\lambda_1$ ,  $\lambda_2$ ,  $\lambda_4$ , and  $\lambda_5$  (the initial values of the adjoint variables). The IB list is automatically filled with the locations of the modified arrival conditions  $r_a$ ,  $\tilde{v}_a$ ,  $\tilde{\gamma}_a$ , and  $\theta_a$ . Again,  $\tilde{v}_a$  and  $\tilde{\gamma}_a$  differ from  $v_a$  and  $\gamma_a$  only in cases involving the analytic high-thrust braking maneuver. And as explained in the NOPT=1 option, the initial mass flow rate or initial thrust-weight ratio is substituted for  $\lambda_1$  in the IA list for all-propulsion missions.

NOPT=3. - The NOPT=3 option is identical to the NOPT=2 option with the exception that the optimum-travel-angle transversality condition (eq. (68a)) replaces the fixed-travel-angle condition (eq. (67)). Actually, as explained earlier, equation (68a) also applies at the departure point and may be used to solve for  $\lambda_5$ . Hence, only three end conditions require iteration (eqs. (64) to (66)). The user must load only the target values  $\bar{r}_a$ ,  $\bar{v}_a$ , and  $\bar{\gamma}_a$  into the DESIRE list and also guess values for  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_4$ . For all-propulsion missions, the initial propellant flow rate (or the initial thrust-weight ratio) replaces  $\lambda_1$  in the IA list as previously explained.

NOPT=4. - The NOPT=4 option is useful for two-dimensional flybys and involves end conditions, equations (64), (67), and (69). The user must fill the DESIRE list with a target radius  $\bar{r}_a$ , two consecutive zeros for the two components of  $(\bar{\Lambda}/\bar{\lambda}_m)_a$ , and the central travel angle  $\bar{\theta}_a$ . The two zeros do not have to be loaded since the program default values are set to zero, but the loading order must be maintained (i. e.,  $\bar{\theta}_a$  must be loaded as the fourth element of DESIRE). The IA list is automatically filled with the  $\lambda_1$ ,  $\lambda_2$ ,  $\lambda_4$ , and  $\lambda_5$  locations, while the IB list is filled with the location of  $r_a$ ,  $(\lambda_1/\lambda_m)_a$ ,  $(\lambda_2/\lambda_m)_a$ , and  $\theta_a$ . The optimum arrival velocity end condition  $\Lambda_a = 0$  is modified here by scaling with the arrival value of the mass adjoint variable  $\lambda_m$ . One of the transversality conditions requires  $(\lambda_m)_a = 1$  and, because of the homogeneity of the adjoint equations, we are free to scale all the  $\lambda_i$  without changing the trajectory. In effect then, the user need only supply a target radius  $\bar{r}_a$ ; the desired travel angle  $\bar{\theta}_a$ ; and guesses for  $\lambda_1$ ,  $\lambda_2$ ,  $\lambda_4$ , and  $\lambda_5$ . For all-propulsion trajectories, the comments under the NOPT=1 option apply here also.

NOPT=5. - NOPT=5 is the optimum-travel-angle flyby option and is similar to the NOPT=4 option except that the optimum-travel-angle end condition is invoked to calculate  $\lambda_5$  in the manner described for the NOPT=3 option. The user is required only to load a target radius  $\bar{r}_a$  and guess the initial values of  $\lambda_1$ ,  $\lambda_2$ , and  $\lambda_4$ . The all-propulsion mission comments of the NOPT=1 option also apply here.

NOPT=6. - In the NOPT=6 option the user must fill the IA and IB lists himself. The only difference between this option and the NOPT=0 option is that with this option the thrust control is optimal. Thus, the adjoint equations are integrated, and the user must load initial values for the adjoint variables  $\lambda_i$ .

NOPT=7. - The NOPT=7 option is identical to the NOPT=6 option with the addition

of the appropriate optimum angle condition (eq. (68a) or (68b)). Thus, the user must fill the IA, IB, and initial adjoint variable lists. However, he need not furnish a value for  $\lambda_5$  for two-dimensional problems (or  $\lambda_3, \lambda_5,$  and  $\lambda_6$  for three-dimensional problems) since equation (68) is used at the departure point to determine them.

Additional features of the NOPT options. - Since choosing reasonable initial values for the adjoint variables  $\lambda_1$  is often a difficult task, a somewhat simpler scheme is provided for the common two-dimensional case. The user may elect instead to input variables that have more physical significance; namely, the departure thrust angle  $\psi_0$ , its derivative  $\dot{\psi}_0$ , the engine on-off switch function at departure  $\kappa_0$ , its derivative  $\dot{\kappa}_0$ , and the magnitude of the primer vector at departure  $\lambda_0$ . Sketch (e) defines  $\psi$ , and equation (47) defines  $\kappa$ . Under this option, the initial values of the adjoint variables are calculated with the following equations:

$$(\lambda_1)_0 = (\lambda \cos \psi)_0 \quad (74)$$

$$(\lambda_2)_0 = (\lambda \sin \psi)_0 \quad (75)$$

$$(\lambda_4)_0 = \left( \lambda_2 \dot{\psi} - \frac{\lambda_1 m \dot{\kappa}}{c \lambda} \right)_0 \quad (76)$$

$$(\lambda_5)_0 = \left( -\lambda_1 \dot{\psi} - \frac{\lambda_2 m \dot{\kappa}}{c \lambda} \right)_0 \quad (77)$$

$$(\lambda_7)_0 = \left( \frac{c \lambda}{m} - \kappa \right)_0 \quad (78)$$

Here  $(\lambda_7)_0$  is the initial value of the mass adjoint variable  $\lambda_m$ . It is usually convenient to let the program set  $\lambda_0 = 1$  by default since it represents a scale factor here and since all values of  $\lambda_0$  result in identical trajectories. It is useful to set  $\lambda_0 \neq 1$  when attempting to reproduce a previously computed trajectory for which the initial value of  $\lambda$  is not unity. (It avoids scaling by the user in such a situation.) If one of the optimum-travel-angle options is selected (NOPT=3, 5, or 7), it is unnecessary for the user to load  $\dot{\kappa}_0$  since the program will compute its value using a variation of the transversality condition,

$$\dot{\kappa}_0 = \left[ \begin{array}{c} \lambda_2(v_x - y\dot{\psi}) - \lambda_1(v_y + x\dot{\psi}) \\ \frac{m}{c\lambda} (\lambda_2x - \lambda_1y) \end{array} \right]_0 \quad (79)$$

In most NOPT options, inputting the alternative set  $\psi_0$ ,  $\dot{\psi}_0$ ,  $\kappa_0$ ,  $\dot{\kappa}_0$ , and  $\lambda_0$  instead of  $\lambda_1$ ,  $\lambda_2$ ,  $\lambda_4$ ,  $\lambda_5$ , and  $\lambda_7$  will result in its use for only the first trajectory of the boundary-value-problem iteration sequence. The remaining trajectories are begun by the program using the adjoint variables directly. However, the NOPT=6 and 7 options permit using the alternative set through the iteration sequence, if preferred, simply by filling the IA list with the locations of whichever members of this set are chosen.

### Partial Derivatives

The boundary-value problem consists of driving a set of  $n$  dependent variables  $y_i$  to desired values  $\bar{y}_i$  by adjusting a set of  $n$  independent variables  $x_i$ . The iterator that does this needs a partial derivative matrix  $G$  whose elements are  $\partial y_i / \partial x_j$  evaluated for the current approximate solution set of  $x_i$ . There are two methods used in NBODY to generate  $G$ :

- (1) A finite difference method
- (2) An analytical method

Finite difference method. - This method consists of computing  $n$  perturbation trajectories about a reference trajectory - one for each  $x_i$ . Then the elements of  $G$  are formed in an approximate way by differencing the results of the perturbation trajectories with the reference trajectory.

$$\frac{\partial y_i}{\partial x_j} \cong \frac{\Delta y_i}{\Delta x_j} = \frac{y_i - y_i^0}{x_j - x_j^0} \quad (80)$$

The superscript zero denotes the reference trajectory values. This method has the advantage of being quite general and straightforward. It does suffer, however, from two standpoints: (1) it is relatively slow in comparison with the analytical method, and (2) it is often not easy to select appropriate perturbation sizes  $\Delta x_j$ . The latter difficulty manifests itself in highly nonlinear, sensitive problems, where a large  $\Delta x_j$  results in an excessively large error in  $\Delta y_i$  and where a small  $\Delta x_j$  results in too much numerical noise in  $\Delta y_i$ . To help alleviate this difficulty, NBODY is programmed to monitor  $\Delta y_i$  and to adjust  $\Delta x_j$  accordingly. If  $\Delta y_i$  is judged to be too small or too large, the

perturbation trajectory is repeated; therefore, more than  $n$  perturbation trajectories are frequently necessary.

Analytical method. - The analytical method of generating the partial derivatives is faster and more accurate than the finite difference method. The partial derivatives are generated by integrating an additional set of differential equations along with the state and adjoint equations. Thus, the problem of choosing perturbation sizes is avoided. However, the method has the serious disadvantage of not being general - that is, a change in the definition of the end conditions or payoff criterion generally requires deriving and programming new partial derivative equations. In the NBODY program these equations are currently programmed for a limited set of options; namely, variational problems not involving any of the transversality equations for optimum  $\dot{m}_0$ ,  $c$ ,  $v_l$ , or  $v_r$ . Thus, the user must resort to the finite difference method if his problem is nonvariational or if any of these four variables are to be optimized by using transversality conditions. (They may also be optimized by using an ordinary search scheme, as discussed later.) In particular, the program will use the analytical scheme only if  $1 \leq \text{NOPT} \leq 5$ . (The NOPT operations are discussed in detail in the preceding section and are summarized in table IV.) If the user wishes to include analytical partial derivatives for  $\dot{m}_0$ ,  $c$ ,  $v_l$ , or  $v_r$  (or any others), he may do so by amending subroutines WDERIV, WALTER, WLOOK, WBEGIN, and WOUT.

The differential equations used to generate the partials are derived by differentiating the state and adjoint equations (eqs. (45) and (46)) with respect to an arbitrary variable. When  $\delta$  is used to denote a partial with respect to the arbitrary variable, the resulting equations are

$$\frac{d}{dt} (\delta V) = - \sum_{j=1}^{n-1} \frac{\mu_j}{r_j^3} \left[ \delta R - \frac{3}{r_j^2} (\mathbf{R}_j \cdot \delta \mathbf{R}_j) \mathbf{R}_j \right] - \frac{c \dot{m}_0}{m \lambda} \zeta \epsilon \left\{ \delta \Lambda + \left[ \frac{\delta c}{c} + \frac{\delta \dot{m}_0}{\dot{m}_0} - \frac{\delta m}{m} + \frac{\zeta' (\mathbf{R} \cdot \delta \mathbf{R})}{\zeta r} - \frac{\Lambda \cdot \delta \Lambda}{\lambda^2} \right] \Lambda \right\} \quad (81a)$$

$$\frac{d}{dt} (\delta \mathbf{R}) = \delta \mathbf{V} \quad (81b)$$

$$\frac{d}{dt} (\delta m) = \epsilon \zeta \delta \dot{m}_0 + \epsilon \dot{m}_0 \zeta' \frac{\mathbf{R} \cdot \delta \mathbf{R}}{r} \quad (81c)$$

$$\frac{d}{dt} (\delta \Lambda) = -\delta \Lambda_{\mathbf{r}} \quad (81d)$$

$$\begin{aligned} \frac{d}{dt} (\delta \Lambda_{\mathbf{r}}) = \sum_{j=1}^{n-1} \frac{\mu_j}{r_j^3} \left( \delta \Lambda - \frac{3}{r_j^2} \left\{ (\mathbf{R}_j \cdot \delta \mathbf{R}) \Lambda + (\Lambda \cdot \mathbf{R}_j) \delta \mathbf{R} + \left[ (\mathbf{R}_j \cdot \delta \Lambda) + (\Lambda \cdot \delta \mathbf{R}) - \frac{5}{r_j^2} (\Lambda \cdot \mathbf{R}_j)(\mathbf{R}_j \cdot \delta \mathbf{R}) \right] \mathbf{R}_j \right\} \right) \\ + \frac{\dot{m}_0 \zeta'}{r} \left\{ \left[ \frac{\delta \dot{m}_0}{\dot{m}_0} + \frac{\mathbf{R} \cdot \delta \mathbf{R}}{r} \left( \frac{\zeta''}{\zeta'} - \frac{1}{r} \right) \right] \kappa \mathbf{R} + \left[ \frac{\lambda}{m} \delta c + \frac{c(\Lambda \cdot \delta \Lambda)}{m \lambda} - \frac{c \lambda}{m^2} \delta m - \delta \lambda_m \right] \mathbf{R} + \delta \mathbf{R} \right\} \end{aligned} \quad (81e)$$

$$\frac{d}{dt} (\delta \lambda_m) = - \frac{\epsilon \dot{m}_0 \zeta c \lambda}{m^2} \left[ \frac{\delta \dot{m}_0}{\dot{m}_0} + \frac{\delta c}{c} + \frac{\zeta'}{\zeta} \left( \frac{\mathbf{R} \cdot \delta \mathbf{R}}{r} \right) + \frac{\Lambda \cdot \delta \Lambda}{\lambda} - 2 \frac{\delta m}{m} \right] \quad (81f)$$

$$\frac{d}{dt} (\delta \dot{m}_0) = \frac{d}{dt} (\delta \dot{a}_0) = 0 \quad (81g)$$

$$\frac{d}{dt} (\delta c) = 0 \quad (81h)$$

$$\frac{d}{dt} (\delta \lambda_c) = \frac{\epsilon \dot{m}_0 \zeta \lambda}{m} \left( \frac{\delta \dot{m}_0}{\dot{m}_0} - \frac{\delta m}{m} + \frac{\Lambda \cdot \delta \Lambda}{\lambda} + \frac{\mathbf{R} \cdot \delta \mathbf{R}}{r} \frac{\zeta'}{\zeta} \right) \quad (81i)$$

$$\left[ \delta \lambda_{\dot{m}_0} \right]_0^a = - \frac{1}{\dot{m}_0} \left[ \lambda_m \delta m + m \delta \lambda_m + \lambda \dot{m}_0 \delta \dot{m}_0 \right]_0^a \quad (81j)$$

Each time the engine is switched on or off ( $\kappa = 0$ ), discontinuities appear in several of these partials due to the presence of the factor  $\epsilon$  in the state and adjoint equations. In general, the jumps are given by

$$\Delta \delta \mathbf{y} \equiv (\delta \mathbf{y})^+ - (\delta \mathbf{y})^- = \frac{(\dot{\mathbf{y}})_{\text{engines off}} - (\dot{\mathbf{y}})_{\text{engines on}}}{\dot{\kappa}} \delta \kappa \quad (82)$$

where

$$\delta\kappa = \frac{c}{m\lambda} (\Lambda \cdot \delta\Lambda) - \delta\lambda_m - \frac{c\lambda}{m^2} \delta m + \frac{\lambda}{m} \delta c \quad (83)$$

$$\dot{\kappa} = - \frac{c(\Lambda \cdot \Lambda_r)}{m\lambda} \quad (84)$$

Specifically, the nonzero jumps are

$$\Delta\delta V = - \left( \frac{\dot{m}_0 \xi \delta\kappa}{\Lambda \cdot \Lambda_r} \right) \Lambda \quad (85a)$$

$$\Delta\delta m = \frac{\dot{m}_0 \xi m \lambda \delta\kappa}{c(\Lambda \cdot \Lambda_r)} \quad (85b)$$

$$\Delta\delta\lambda_m = - \frac{\dot{m}_0 \xi \lambda^2 \delta\kappa}{m(\Lambda \cdot \Lambda_r)} \quad (85c)$$

$$\Delta\delta\lambda_c = \frac{\dot{m}_0 \xi \lambda^2 \delta\kappa}{c(\Lambda \cdot \Lambda_r)} \quad (85d)$$

A jump discontinuity also occurs in  $\delta V$  at the arrival point if the analytic high-thrust braking maneuver option is selected,

$$\Delta\delta V = \frac{v_{s,a}}{\lambda_a} \left( \delta\Lambda - \frac{\Lambda \cdot \delta\Lambda}{\lambda^2} \Lambda \right)_a \quad (86)$$

Recall that  $\delta$  denotes a partial derivative with respect to any variable  $x$ . The  $x_i$  of main interest, of course, are those variables that are defined as independent variables in the two-point boundary-value problem - namely, the initial values of the adjoint variables (plus  $\dot{m}_0$  for all-propulsion cases). Actually, there are nine  $x_i$  programmed in NBODY:

$$x_1 = (\lambda_1)_0 \quad (\text{Initial value of x-component of } \Lambda) \quad (87a)$$



$$x_2 = (\lambda_2)_0 \quad (\text{Initial value of y-component of } \Lambda) \quad (87b)$$

$$x_3 = (\lambda_3)_0 \quad (\text{Initial value of x-component of } \Lambda) \quad (87c)$$

$$x_4 = (\lambda_4)_0 \quad (\text{Initial value of x-component of } \Lambda_r) \quad (87d)$$

$$x_5 = (\lambda_5)_0 \quad (\text{Initial value of y-component of } \Lambda_r) \quad (87e)$$

$$x_6 = (\lambda_6)_0 \quad (\text{Initial value of x-component of } \Lambda_r) \quad (87f)$$

$$x_7 = (\lambda_m)_0 \quad (\text{Initial value of } \lambda_m) \quad (87g)$$

$$x_8 = c \quad (\text{Specific impulse}) \quad (87h)$$

$$x_9 = \dot{m}_0 \quad (\text{Initial mass flow rate}) \quad (87i)$$

The initial value of  $\lambda_m$  is included in this list since it is needed for the evaluation of  $\delta (\Lambda/\lambda_m)$  used in the flyby end condition  $(\Lambda/\lambda_m)_a = 0$ . The specific impulse  $c$  is also included but is not required in the present version of NBODY. If the user prefers other  $x_i$  (such as  $\psi_0, \dot{\psi}_0, \kappa_0, \dot{\kappa}_0$ ), he must alter subroutines WDERIV, WBEGIN, WOUT, WLOOK, and WINTEG.

Having defined the list of  $x_i$ , it is now possible to calculate the initial values of the partials - that is, the partial derivatives have values at the departure point according to the conditions imposed at departure. For example, the value of  $\delta V$  at departure depends on the magnitude of the boost velocity supplied by the launch vehicle (if any) and the boost velocity orientation. Thus, by differentiating equation (58), the first four of the following set of initial-value equations may be derived. The others are derived similarly. The subscripts on the partials denote which  $x_i$  in the preceding list is the independent variable (e. g.,  $\delta V_1 \equiv$  partial derivative of  $V$  with respect to  $(\lambda_1)_0$ ). Also,  $\hat{i}, \hat{j}, \hat{k}$  are unit vectors along the  $x, y, z$  axes, respectively. The following, then, are the initial values of the partial derivatives:

$$\delta V_1 = \left[ \frac{v_{s,d}}{\lambda} \left( \hat{i} - \frac{\lambda x}{\lambda^2} \Lambda \right) \right]_0 \quad (88a)$$

$$\delta V_2 = \left[ \frac{v_{s,d}}{\lambda} \left( \hat{j} - \frac{\lambda y}{\lambda^2} \Lambda \right) \right]_0 \quad (88b)$$

$$\delta V_3 = \left[ \frac{v_{s,d}}{\lambda} \left( \hat{k} - \frac{\lambda z}{\lambda^2} \Lambda \right) \right]_0 \quad (88c)$$

$$\delta V_i = 0 \quad i = 4, \dots, 9 \quad (88d)$$

$$\delta R_i = 0 \quad i = 1, \dots, 9 \quad (88e)$$

$$\delta m_i = 0 \quad i = 1, \dots, 9 \quad (88f)$$

$$\delta \Lambda_1 = \hat{i} \quad (88g)$$

$$\delta \Lambda_2 = \hat{j} \quad (88h)$$

$$\delta \Lambda_3 = \hat{k} \quad (88i)$$

$$\delta \Lambda_i = 0 \quad i = 4, \dots, 9 \quad (88j)$$

$$\delta(\Lambda_r)_1 = \begin{cases} 0 & \text{for fixed travel angle} \\ \left( \frac{v_y + \lambda_1 \delta v_{y1} - \lambda_2 \delta v_{x1}}{x} \right) \hat{j} & \text{for optimum travel angle (two dimensions only)} \end{cases} \quad (88k)$$

$$\delta(\Lambda_r)_2 = \begin{cases} 0 & \text{for fixed travel angle} \\ \left( \frac{-v_x + \lambda_1 \delta v_{y2} - \lambda_2 \delta v_{x2}}{x} \right)_0 \hat{j} & \text{for optimum travel angle (two dimensions only)} \end{cases} \quad (88l)$$

$$\delta(\Lambda_r)_3 = 0 \quad (88m)$$

$$\delta(\Lambda_r)_4 = \begin{cases} \hat{i} & \text{for fixed travel angle} \\ \hat{i} + \left( \frac{y}{x} \right)_0 \hat{j} & \text{for optimum travel angle (two dimensions only)} \end{cases} \quad (88n)$$

$$\delta(\Lambda_r)_5 = \hat{j} \quad (88o)$$

$$\delta(\Lambda_r)_6 = \hat{k} \quad (88p)$$

$$\delta(\Lambda_r)_i = 0 \quad i = 7, 8, 9 \quad (88q)$$

$$\delta(\lambda_m)_i = 0 \quad i = 1, \dots, 9 \quad (88r)$$

$$\delta(c)_8 = 1 \quad (88s)$$

$$\delta(c)_i = 0 \quad i = 1, \dots, 7, 9 \quad (88t)$$

$$\delta(\dot{m}_0)_9 = 1 \quad (88u)$$

$$\delta(\dot{m}_0)_i = 0 \quad i = 1, \dots, 8 \quad (88v)$$

$$\delta(\lambda_c)_i = 0 \quad i = 1, \dots, 9 \quad (88w)$$

$$\delta(\lambda_{\dot{m}_0})_i = 0 \quad i = 1, \dots, 9 \quad (88x)$$

After the partial derivative equations are integrated, it is necessary to transform them into another set if the end conditions are in terms of polar coordinates (two dimensions only):

$$\delta r = \frac{\mathbf{R} \cdot \delta \mathbf{R}}{r} \quad (\text{Radius magnitude}) \quad (89a)$$

$$\delta v = \frac{\mathbf{V} \cdot \delta \mathbf{V}}{v} \quad (\text{Velocity magnitude}) \quad (89b)$$

$$\delta \theta = \frac{x\delta y - y\delta x}{r^2} \quad (\text{Polar travel angle}) \quad (89c)$$

$$\delta \gamma = \delta \theta - \frac{v_x \delta v_y - v_y \delta v_x}{v^2} \quad (\text{Path angle}) \quad (89d)$$

Also, for the flyby end condition  $(\Lambda/\lambda_m)_a = 0$  we need the following transformation equation:

$$\delta \left( \frac{\Lambda}{\lambda_m} \right) = \left( \frac{1}{\lambda_m} \right) \delta \Lambda - \left( \frac{\delta \lambda_m}{\lambda_m^2} \right) \Lambda \quad (90)$$

#### Iterator for Boundary-Value Problems

Convergence criterion. - Before each trajectory integration, an N-vector of independent variables  $\mathbf{X}$  is selected that yields, after the integration, a particular N-vector of dependent variables  $\mathbf{Y}$ . That is, the end condition vector  $\mathbf{Y}$  is a function of  $\mathbf{X}$ ,

$$\mathbf{Y} = f(\mathbf{X}) \quad (91)$$

The boundary-value problem is to determine the solution to this equation if the  $Y$  vector is known - that is, given  $\bar{Y}$  find the  $\bar{X}$  that satisfies

$$\bar{Y} = f(\bar{X}) \quad (92)$$

A solution is judged to be found if the square root of the sum of the squares of the weighted residuals  $\Delta Y = \bar{Y} - Y$  is less than a tolerance criterion  $\bar{\tau}$ :

$$\tau \equiv \sqrt{\Delta Y^T W^2 \Delta Y} < \bar{\tau} \quad (93)$$

The weighting matrix  $W$  is diagonal and positive definite. The diagonal elements of  $W$  consist of the weighting factors  $1/w_i$  either selected by the user, or by default, calculated by the program as follows:

$$w_i = \begin{cases} \bar{y}_i & \text{if } \bar{y}_i \neq 0 \\ 1 & \text{if } \bar{y}_i = 0 \\ 360 & \text{if } \bar{y}_i = 0 \text{ and } y_i \text{ is path angle} \end{cases} \quad (94)$$

In the majority of cases the default weighting factors will result in approximately equal emphasis on all residuals, and the error  $\tau$  will be of the order

$$\tau \approx \max_i \left| 1 - \frac{y_i}{\bar{y}_i} \right| \quad (95)$$

The convergence criterion  $\bar{\tau}$  may be selected by the user or defaulted to  $10^{-4}$ .

Linear correction scheme (Newton-Raphson). - Starting with a guess  $X_i$  that yields an error  $\tau_i$ , the problem is to choose a new value  $X_{i+1}$  such that  $\tau_{i+1} < \tau_i$ . In general, the end condition vectors are related by

$$Y_{i+1} = Y_i + G \Delta X + (\text{Higher order terms}) \quad (96)$$

where  $\Delta X = X_{i+1} - X_i$  and  $G$  is the partial derivative matrix  $\partial Y / \partial X$ . By ignoring the higher order nonlinear terms, we may estimate  $\Delta X$  by setting  $Y_{i+1} = \bar{Y}$  as follows:

$$\Delta X = G^{-1}(\bar{Y} - Y_i) \quad (97)$$

If  $X_i$  is close to the solution value  $\bar{X}$ , this estimate will usually result in  $\tau_{i+1} < \tau_i$  and the process is repeated until convergence is obtained ( $\tau < \bar{\tau}$ ). However,  $\Delta X$  may be too large if  $X_i$  is not close to  $\bar{X}$ , and the new error value may exceed the old value. When this occurs, the trajectory is repeated using a smaller value of  $\Delta X$ . In particular,

$$\Delta X = \chi G^{-1}(\bar{Y} - Y_i) \quad (98)$$

where  $\chi$  is an inhibitor whose value lies between zero and unity ( $0 < \chi \leq 1$ ). Several cutbacks in the size of  $\chi$  may be necessary before  $\tau_{i+1} < \tau_i$ . The program reduces  $\chi$  by a factor of 2 for each cutback and restores its value to unity upon satisfying  $\tau_{i+1} < \tau_i$ . Thus, each iteration cycle is initially attempted with  $\chi = 1$ . This method of controlling  $\chi$  has proven to be just as effective as more elaborate inhibitor controllers in terms of reducing overall computation time.

The partial derivative matrix  $G$  is generated either by finite differencing or by numerical integration, as explained in the section Partial Derivatives, and is updated each time  $X_i$  is improved.

This convergence scheme is generally quite satisfactory providing the initial estimate of  $X$  is reasonably close to  $\bar{X}$ . If  $X$  is not close to  $\bar{X}$ , however, the inhibitor  $\chi$  may be forced to very small values in order to improve  $X$ . This situation is undesirable since  $X$  is improved very slowly. To alleviate this difficulty, another error-reducing scheme is programmed to handle cases of large errors.

Univariate search scheme. - This scheme is called upon when the initial guess  $X$  is poor. In particular, it is used if  $\tau > \tau^*$ , where the value of  $\tau^*$  is selected by the user or defaulted to unity (experience is the best guide for selecting  $\tau^*$ ). It is also called upon if the linear correction scheme bogs down because of inaccurate partial derivatives or highly nonlinear behavior. Each member of  $X$  is varied - one at a time - to reduce  $\tau$ . The individual searches are conducted by increasing the step increments until a minimum in  $\tau$  is detected. Rather than attempting to pinpoint the minimum, the search proceeds to vary the next variable as soon as  $\tau$  begins to increase after having been in a downward trend. After the search cycles through all the variables, it begins over again with reduced initial step increments.

Although this technique has the capability to reduce large errors quickly, it is unacceptably slow in the neighborhood of the solution. Thus, whenever  $\tau < \tau^*$ , the univariate scheme is abandoned in favor of the linear correction scheme. This switch also occurs if the univariate scheme fails to halve the error  $\tau$  within 15N trajectory simulations. Actually, control may be passed between these two schemes several times in difficult problems. If it is determined that neither scheme is working well, the linear correction scheme is activated without inhibitor control ( $\chi = 1$ ) in a final effort to sal-

vage the iteration. With reasonable first guesses, however, this hybrid technique is a powerful iterator that combines the advantages of both schemes.

### Integration Method

Runge-Kutta scheme. - All the state equations, adjoint equations, and partial derivative equations (if used) are numerically integrated simultaneously by using a fourth-order Runge-Kutta method. This method for a single equation of the form  $\dot{y} = f(t, y)$  may be described as follows:

$$y_{n+1} = y_n + \frac{1}{6} (k_1 + 2k_2 + 2k_3 + k_4) \quad (99)$$

where

$$k_1 = hf(t_n, y_n) \quad (100a)$$

$$k_2 = hf\left(t_n + \frac{h}{2}, y_n + \frac{k_1}{2}\right) \quad (100b)$$

$$k_3 = hf\left(t_n + \frac{h}{2}, y_n + \frac{k_2}{2}\right) \quad (100c)$$

$$k_4 = hf(t_n + h, y_n + k_3) \quad (100d)$$


Four function evaluations are required for each integration step of size  $h$ . One of the disadvantages of this method is the absence of a simple yet accurate method to estimate the truncation error propagated along the trajectory. The truncation error is the difference between the true value of  $y$  and the value obtained with the integration formulas. If an accurate estimate of the truncation error were available, one could use it to control the step size in a manner that would maintain a specified accuracy level. In the absence of a rigorous and efficient step-size controller, an approximate but very efficient step-size controller is programmed that experience has shown to be stable and well-behaved in difficult situations. In particular, it reduces the step size in regions where the time derivative of the  $f$  function is changing rapidly.

The basis of the technique is the assumption that the truncation error  $\delta$  is proportional to the fifth power of  $h$ ,

$$\delta(t, h) = \Psi(t)h^5 \quad (101)$$

In general  $\Psi$  varies with time  $t$  in some unknown fashion. We further assume that, over the time span of two steps, the logarithm of  $\Psi$  varies linearly with  $t$ . This assumption allows us to predict a value of  $h$  that will result in a desired error  $\bar{\delta}$  if we know the values of  $\ln \Psi$  at the two previous time points (sketch f),

$$\ln h_n = \frac{1}{5} (\ln \bar{\delta} - \ln \Psi_n) \quad (102)$$

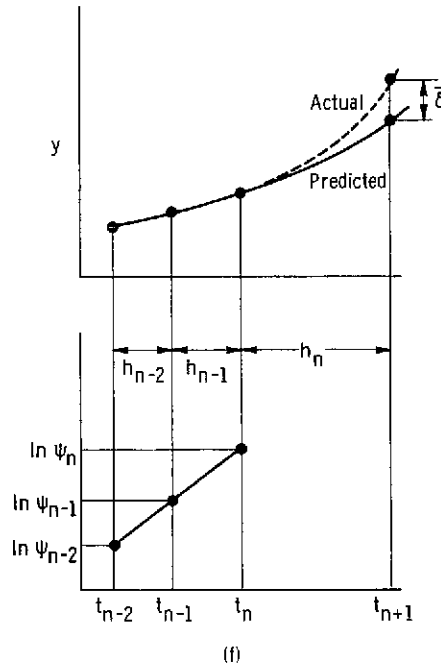

where

$$\ln \Psi_n = \ln \Psi_{n-1} + (\ln \Psi_{n-1} - \ln \Psi_{n-2}) \frac{h_{n-1}}{h_{n-2}} \quad (103)$$

The values of  $\ln \Psi_{n-1}$  and  $\ln \Psi_{n-2}$  are computed with the same basic formula except that the computed error  $\delta$  is used in place of the desired error  $\bar{\delta}$ ,

$$\ln \Psi = \ln \delta - 5 \ln h \quad (104)$$



Evaluating this equation at times  $t_{n-1}$  and  $t_{n-2}$  requires determining the error  $\delta$ . Instead of attempting to calculate  $\delta$  precisely, a very simple estimate is generated with the following Lagrangian interpolation formula:

$$\dot{y} = \dot{y}_{n-2} \frac{(t - t_{n-1})(t - t_n)}{h_{n-2}(h_{n-2} + h_{n-1})} - \dot{y}_{n-1} \frac{(t - t_{n-2})(t - t_n)}{h_{n-2}h_{n-1}} + \dot{y}_n \frac{(t - t_{n-2})(t - t_{n-1})}{h_{n-1}(h_{n-2} + h_{n-1})} \quad (105)$$

Integrating this equation between  $t_{n-1}$  and  $t_n$  yields

$$\begin{aligned} \Delta y &\equiv y_n - y_{n-1} \\ &= \frac{1}{6} \left[ -\frac{h_{n-1}^3 \dot{y}_{n-2}}{h_{n-2}(h_{n-2} + h_{n-1})} + \frac{h_{n-1}(h_{n-1} + 3h_{n-2}) \dot{y}_{n-1}}{h_{n-2}} + \left( 2h_{n-1} + \frac{h_{n-2}h_{n-1}}{h_{n-2} + h_{n-1}} \right) \dot{y}_n \right] \end{aligned} \quad (106)$$

This low-order integration formula may be evaluated quite efficiently since all the required data (the derivatives in particular) are already available from the Runge-Kutta integration. Thus, at each integration step the error  $\delta$  may be estimated by differencing the value of  $\Delta y$  obtained by the Runge-Kutta formulas with the value obtained with this low-order method.

$$\delta_r = \left| \frac{(\Delta y)_{\text{Runge-Kutta}} - (\Delta y)_{\text{Low-order scheme}}}{y_n} \right| \quad (107)$$

This definition of error  $\delta_r$  is not the same as the previous definition of  $\delta$ : (1) because  $\delta_r$  represents the difference in answers between two integration schemes instead of the true error  $\delta$  and (2) because  $\delta_r$  is a relative error since the  $\Delta y$  increments are divided by a normalization factor  $y_n$ .

Since many independent variables are integrated simultaneously, there are many values of  $\delta_r$  calculated at each step (one for each state and adjoint variable). Only the maximum value of  $\delta_r$  is used to calculate the next step size. Obviously, inaccurate predictions of step size can occur - particularly when the maximum value of  $\delta_r$  shifts from one variable to another or when any sudden change occurs. Whenever the error is excessive ( $\delta_r > \delta_{\text{limit}}$ ), the step is recomputed with a smaller value of  $h$ , which is calculated by updating the  $\ln \Psi$  data (using the excessive error in eq. (104)). Two consecutive failures at satisfying  $\delta_r > \delta_{\text{limit}}$  result in a restart of the integration procedure at the time of failure. The start (and restart) procedure is to take two identical sized

steps before checking the relative error  $\bar{\delta}_r$ . This is necessary because no values of  $\ln \Psi$  are yet available. In this procedure the value of  $\ln \Psi_{n-2}$  is set equal to  $\ln \Psi_{n-1}$  and the low-order integration formula (eq. (106)) is replaced by a simplified form (Simpson's Rule) because  $h_{n-2}$  equals  $h_{n-1}$ ,

$$\Delta y = \frac{h_{n-1}}{3} (\dot{y}_{n-2} + 4\dot{y}_{n-1} + \dot{y}_n) \quad (108)$$

The program user selects the level of accuracy and initial step size as follows:

Parameter	FORTTRAN name	Default value
Reference relative error, $\bar{\delta}_r$	EREF	$10^{-4}$
Limit relative error, $\delta_{\text{limit}}$	ERLIMT	$3 \times 10^{-4}$
Initial step size, $h_1$	STEP	$t_f/100$

The default initial step size is  $1/100^{\text{th}}$  of the mission time  $t_f$ . If the estimate of  $h_1$  is too large, the program automatically reduces it until the limit error criterion is satisfied. If  $h_1$  is grossly underestimated ( $\bar{\delta}_r \ll \delta_{\text{limit}}$ ), the step is accepted and the next step size is increased substantially, but as a precaution no step is permitted to be greater than three times the size of the previous step.

Comparisons with exact solutions have shown that  $\bar{\delta}_r = 10^{-4}$  is sufficiently accurate for most parametric studies requiring only three or four figures of accuracy. With a 36-bit word length computer, roundoff error will ordinarily exceed truncation error if  $\bar{\delta}_r < 10^{-7}$ . Furthermore, very little accuracy difference exists between  $\bar{\delta}_r = 10^{-6}$  and  $\bar{\delta}_r = 10^{-7}$ . Hence, as a general guideline, setting  $\bar{\delta}_r < 10^{-6}$  is not recommended since little improvement in accuracy can be gained at the expense of much greater computer execution time. Decreasing  $\bar{\delta}_r$  by an order of magnitude will result roughly in doubling the number of integration steps and execution time.

Most of the integration process is computed in single precision on 36-bit word length computers ( $8 \frac{1}{3}$  significant figures), although the variables being integrated are accumulated in double precision. That is, the derivatives  $\dot{y}$  are evaluated in single precision, but the integration variables  $y$  are accumulated in double precision. This is nearly as fast and compact as complete single-precision integration and approaches the accuracy afforded by complete double-precision integration since usually  $\Delta y \ll y$ .

Trajectory interrupt. - It is often necessary to interrupt the integration process before the trajectory terminates to allow some specific action to be taken. Interrupts

for printouts at selected time or step intervals are an obvious example. Figure 1 illustrates several other interrupt situations. For problems involving more than one phase (fig. 1(a)), the phase-defining data are changed at each phasing point. When phases are identical to physical vehicle stages, this amounts to reinitializing the mass, specific impulse, propellant flow rate, and so forth. These data are read in during a single input at the beginning of a case and stored in arrays. Interrupts also occur whenever a trajectory passes through a sphere of influence in order to translate the coordinate system origin to the center of another body (fig. 1(b)). A third type of interrupt occurs under the optimal thrust option and involves switching the engines either on or off when  $\kappa = 0$  (fig. 1(c)). Several of the partial derivatives (if integrated) are discontinuous whenever the engines shut down or start up. Yet a fourth type of interrupt occurs under the optimum-fixed-thrust-angle option (fig. 1(d)). In this case the thrust angle changes discontinuously whenever the difference between the two largest values of  $\Lambda \cdot T_i$  vanishes. The unit thrust vector  $T_i$  is dependent on the thrust angle  $\alpha_i$  according to equations (50) to (52).

The last type of interrupt provides the user with a means to force phase points or printouts to occur whenever a user-selected variable attains a user-selected target value (fig. 1(e)). This flexibility circumvents many awkward situations such as trying to guess the firing time of a launch vehicle's first stage so that the first-stage burnout occurs at some desired altitude. In this example the user can specify directly that the first stage should cease when the vehicle's altitude reaches some input value. The user commands the program to search for an interrupt by loading the COMMON location of the specified variable into LOOKX and the target values into XLOOK. Table III is a map of COMMON which the user refers to in order to determine LOOKX. If desired, the search for an interrupt may be delayed until some side condition is met; namely,  $C(\text{LOOKSW}) > \text{SWLOOK}$ , where C refers to COMMON, and LOOKSW and SWLOOK are both input parameters. Whenever an interrupt does occur (i. e., when  $C(\text{LOOKX}) = \text{XLOOK}$ ), a printout is issued and the program interrogates the input parameter ENDX to determine whether to continue the current phase ( $\text{ENDX} = 0$ ), terminate the current phase and begin the next ( $\text{ENDX} = 1$ ), or terminate the entire trajectory ( $\text{ENDX} = -1$ ). After the first interrupt, the search will continue for more interrupts of the same kind unless a minus sign was attached to the LOOKX entry as a trigger to cease searching.

The LOOKX interrupt search feature is programmed to accommodate five simultaneous searches. Thus, LOOKX, XLOOK, ENDX, LOOKSW, and SWLOOK are actually five-element arrays whose values may be set either by the user or the program as follows:

LOOKX (1)      always available to the user

- LOOKX (2) always available to the user
- LOOKX (3) available to the user unless the option of finding the best thrust angle from a set of fixed angles is selected
- LOOKX (4) available to the user unless perturbing bodies are involved (n-body problems)
- LOOKX (5) available to the user unless the optimal engine on-off timing option is selected

Elements 3, 4, and 5 of these arrays may be filled by the program if certain options are selected so that the user must be careful to avoid interfering with preprogrammed searches when he sets up his input. Ordinarily, no more than two user-selected searches are required, and it is always permissible to use the first two elements of these arrays. The interrupts for normal printout and time-specified phase points do not require the use of the LOOKX search scheme.

Choice of coordinate systems. - The basic coordinate system is a Cartesian inertial system with its origin at the center of the primary gravitational body. It has no specific reference axis or reference plane. This system is useful for problems that do not refer to NBODY's built-in ephemeris data. For example, if the user wishes to input the departure and arrival points directly without reference to NBODY's built-in ephemeris, this coordinate system is ideal. However, if the user calls on NBODY to supply ephemeris data, the coordinate system is defined by the mean equinox and ecliptic of date - the x-y plane lies in the ecliptic plane of date and the x-axis points toward the mean equinox of date. By modifying subroutine WORBEL, however, the user may redefine the coordinate system. If, for example, he wishes to use the 1950 mean equatorial system, he would simply supply elliptic ephemeris data in that system instead of the system just defined.

Origin shift. - To minimize integration error in n-body problems, it is necessary to shift the origin of the coordinate system occasionally. These shifts take place whenever the vehicle penetrates a body's sphere of influence. Values of the programmed sphere-of-influence radii are given in table I. These shifts translate the origin to the center of the dominant gravitating body while keeping the coordinate axes aligned. (There is no rotation of axes.) A printout message is issued each time the origin is shifted, and the integration procedure is restarted.

Orbit element integration. - In many problems where the perturbation forces are relatively small it is advantageous to integrate a set of six orbit elements instead of the rectangular coordinates because fewer integration steps are required for the same accuracy. The NBODY user may select orbit element integration as an option only for non-variational problems (problems not involving the adjoint equations for optimal thrust control). Instead of integrating the  $\dot{R}$  and  $\dot{V}$  equations the following set of equations is integrated (ref. 14):

$$\dot{e} = \sqrt{\frac{p}{\mu}} \left[ (\sin \nu) \mathcal{R} + \frac{1}{e} \left( \frac{p}{r} - \frac{1 - e^2}{p} \right) \mathcal{C} \right] \quad (\text{Eccentricity}) \quad (109a)$$

$$\dot{\omega} = \sqrt{\frac{p}{\mu}} \left[ \frac{\sin \nu}{e} \left( 1 + \frac{r}{p} \right) \mathcal{C} - \left( \frac{\cos \nu}{e} \right) \mathcal{R} - \left( \frac{r}{p} \sin u \cot i \right) \mathcal{N} \right] \quad (\text{Argument of pericenter}) \quad (109b)$$

$$\dot{\Omega} = \left( \frac{r}{\sqrt{p\mu}} \frac{\sin u}{\sin i} \right) \mathcal{N} \quad (\text{Longitude of ascending node}) \quad (109c)$$

$$\dot{i} = \left( \frac{r}{\sqrt{p\mu}} \cos u \right) \mathcal{N} \quad (\text{Inclination}) \quad (109d)$$

$$\dot{M} = n + \sqrt{\frac{p}{\mu} |1 - e^2|} \left[ \left( \frac{\cos \nu}{e} - 2 \frac{r}{p} \right) \mathcal{R} - \frac{\sin \nu}{e} \left( 1 + \frac{r}{p} \right) \mathcal{C} \right] \quad (\text{Mean anomaly}) \quad (109e)$$

$$\dot{p} = \left( 2r \sqrt{\frac{p}{\mu}} \right) \mathcal{C} \quad (\text{Semilatus rectum}) \quad (109f)$$

where

$$u = \omega + \nu \quad (\text{Argument of latitude}) \quad (110)$$

$$n = \pm \sqrt{\frac{\mu}{p^3} |1 - e^2|^3} \quad + \text{ if } e < 1, - \text{ if } e > 1 \quad (111)$$

Here  $\nu$  is the true anomaly;  $n$  is the mean angular motion; and  $\mathcal{R}$ ,  $\mathcal{C}$ , and  $\mathcal{N}$  are the radial, circumferential, and normal perturbative acceleration components, respectively:

$$\begin{aligned} \mathcal{R} = a_x (\cos u \cos \Omega - \sin u \sin \Omega \cos i) + a_y (\cos u \sin \Omega + \sin u \cos \Omega \cos i) \\ + a_z (\sin u \sin i) \end{aligned} \quad (112a)$$

$$\begin{aligned} \mathcal{C} = a_x (-\sin u \cos \Omega - \cos u \sin \Omega \cos i) + a_y (-\sin u \sin \Omega + \cos u \cos \Omega \cos i) \\ + a_z (\cos u \sin i) \end{aligned} \quad (112b)$$

$$\mathcal{N} = a_x \sin \Omega \sin i - a_y \cos \Omega \sin i + a_z \cos i \quad (112c)$$

Here  $a_x$ ,  $a_y$ , and  $a_z$  are the components of the perturbative acceleration along the x, y, and z axes (i. e., the sum of the four rightmost terms of eq. (27)). The true anomaly  $\nu$  requires solving Kepler's equation iteratively for the eccentric anomaly E (or F)

$$M = E - e \sin E \quad (e < 1) \quad (113a)$$

$$M = -F + e \sinh F \quad (e > 1) \quad (113b)$$


before substituting E (or F) into

$$\cos \nu = \frac{\cos E - e}{1 - e \cos E} \quad (e < 1) \quad (114a)$$

$$\cos \nu = \frac{\cosh F - e}{1 - e \cosh F} \quad (e > 1) \quad (114b)$$

This set of orbit element equations experiences numerical difficulties under any of the following conditions: (1)  $e \sim 1$ ; (2)  $e \sim 0$ ,  $\mathcal{R} \neq 0$ ,  $\mathcal{C} \neq 0$ ; (3)  $i \sim 0$  and  $\mathcal{N} \neq 0$ ; and (4) whenever a vehicle approaches an asymptote while on a hyperbolic orbit. In these situations the program will temporarily shift from orbit element integration to rectangular coordinate integration until the difficulty subsides. A printout message is issued whenever such an integration shift takes place.

Coordinate transformations. - A transformation from orbit element to rectangular coordinates is sometimes required for numerical reasons and also because the user may wish to input orbit elements but to integrate rectangular coordinates. The transformation equations are given following sketch (g), which illustrates the geometry.

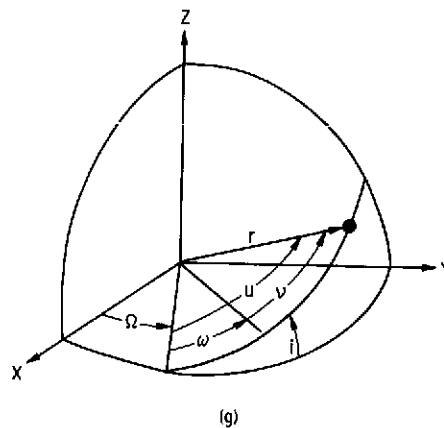

$$x = r(\cos \Omega \cos u - \sin \Omega \sin u \cos i) \quad (115a)$$

$$y = r(\sin \Omega \cos u + \cos \Omega \sin u \cos i) \quad (115b)$$

$$z = r(\sin u \sin i) \quad (115c)$$

$$\dot{x} = -\sqrt{\frac{\mu}{p}} (N \cos i \sin \Omega + Q \cos \Omega) \quad (115d)$$

$$\dot{y} = \sqrt{\frac{\mu}{p}} (N \cos i \cos \Omega - Q \sin \Omega) \quad (115e)$$

$$\dot{z} = \sqrt{\frac{\mu}{p}} (N \sin i) \quad (115f)$$

where

$$r = \frac{p}{1 + e \cos \nu} \quad (116)$$

$$N \equiv e \cos \omega + \cos u \quad (117)$$

$$Q \equiv e \sin \omega + \sin u \quad (118)$$

The inverse transformation equations are

$$p = \frac{h^2}{\mu} \quad (119a)$$

$$i = \tan^{-1} \left( \frac{\sqrt{h_x^2 + h_y^2}}{h_z} \right) \quad (119b)$$

$$\Omega = \tan^{-1} \left( \frac{h_x}{-h_y} \right) \quad (119c)$$

$$\omega = \tan^{-1} \left[ \frac{z \sin i + (y \cos \Omega - x \sin \Omega) \cos i}{x \cos \Omega + y \sin \Omega} \right] - \nu \quad (119d)$$

$$e = \sqrt{1 + p \left( \frac{V^2}{\mu} - \frac{2}{r} \right)} \quad (119e)$$

$$M = \tan^{-1} \left( \frac{\sin E}{\cos E} \right) - e \sin E \quad (e < 1) \quad (119f)$$

$$M = -\ln \left( -\sin E + \sqrt{\sin^2 E + 1} \right) - e \sin E \quad (e > 1) \quad (119g)$$

where

$$h_x = y\dot{z} - z\dot{y} \quad (120a)$$

$$h_y = z\dot{x} - x\dot{z} \quad (120b)$$

$$h_z = x\dot{y} - y\dot{x} \quad (120c)$$

$$h^2 = h_x^2 + h_y^2 + h_z^2 \quad (\text{Unit angular momentum}) \quad (121)$$

$$\sin E = \frac{\sqrt{1 - e^2} \sin \nu}{1 + e \cos \nu} \quad (122)$$


$$\cos E = \frac{e + \cos \nu}{1 + e \cos \nu} \quad (123)$$

$$\nu = \tan^{-1} \left[ \frac{hR \cdot V}{\mu(p - r)} \right] \quad (124)$$

$$r^2 = x^2 + y^2 + z^2 \quad (125)$$

Earth-fixed coordinate frame. - For many launch vehicle problems it is convenient to specify the departure conditions in terms of an Earth-fixed frame of reference. The Earth-fixed equatorial frame is related to a space-fixed frame as shown in sketch (h). The Earth-fixed position vector is specified by the radius  $r$ , north latitude  $\phi$ , and east longitude  $\theta$ .



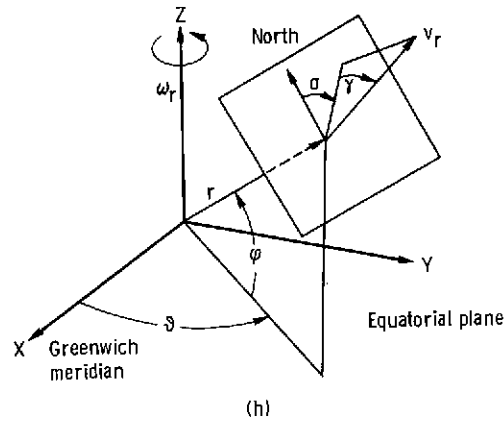

It is convenient to translate the Earth-fixed velocity vector  $V_r$  to the end of the position vector and project it on the local horizontal. Then it is specified by its magnitude  $v_r$ , path angle or elevation angle above the local horizontal  $\gamma$ , and the north azimuth  $\sigma$  as shown in the sketch. The transformation between the Earth-fixed spherical coordinates and the space-fixed Cartesian coordinates is

$$x = r \cos \varphi \cos \vartheta \quad (126a)$$

$$y = r \cos \varphi \sin \vartheta \quad (126b)$$

$$z = r \sin \varphi \quad (126c)$$

$$\dot{x} = v_r (\Phi \cos \vartheta - \cos \gamma \sin \sigma \sin \vartheta) - y \omega_r \quad (126d)$$

$$\dot{y} = v_r (\Phi \sin \vartheta + \cos \gamma \sin \sigma \cos \vartheta) + x \omega_r \quad (126e)$$

$$\dot{z} = v_r (\sin \varphi \sin \gamma + \cos \varphi \cos \sigma \cos \gamma) \quad (126f)$$

where  $\omega_r$  is the Earth's rotation rate and

$$\Phi \equiv \cos \varphi \sin \gamma - \sin \varphi \cos \gamma \cos \sigma \quad (127)$$

Since this transformation is not the mean-ecliptic and equinox-of-date system, the inclusion of n-body effects is not permitted for launch vehicle problems which use the Earth-centered coordinates for input unless the user alters subroutine WORBEL to redefine the coordinate system, as explained in the previous section Choice of coordinate systems.

Two problems emerge if one attempts to use these Earth-fixed coordinates for a launch vehicle starting from rest and aimed straight vertically. First, if  $v_r = 0$ , defining the thrust direction relative to the velocity vector results in an undefined thrust direction at lift-off. And, secondly, the lift-off thrust should be aligned with the sensible gravity direction, which is not identical to the radial direction ( $\gamma = 90^\circ$ ) in the case of an oblate or rotating Earth. To avoid the first difficulty, the launch vehicle is assumed to rise vertically for a short time  $t_v$  and atmospheric forces are ignored, which leads to a closed-form solution for the changes in relative velocity  $\Delta v_r$  and radius  $\Delta r$ ,

$$\Delta v_r = c_0 \ln\left(\frac{m_0}{m}\right) - gt_v \quad (128)$$

$$\Delta r = v_0 t_v + c_0 \frac{m_0}{\dot{m}_0} \left[ 1 - \frac{m}{m_0} \left( 1 + \ln \frac{m_0}{m} \right) \right] - \frac{1}{2} gt_v^2 \quad (129)$$


where

$$m = m_0 + \dot{m}_0 t_v \quad (130)$$

$$c_0 = c + \frac{pA_e}{\dot{m}_0} \quad (131)$$

The subscript 0 refers to values at lift-off. The numerical integration is begun just after this short vertical rise with an instantaneous tilt of the velocity vector to the desired path angle  $\gamma$  (generally between  $85^\circ$  and  $89.5^\circ$ ) and azimuth  $\sigma$ .

To avoid the second difficulty (vertical direction not identical to sensible gravity direction), small corrections are made to the latitude  $\phi$  used in the preceding transformation equations so that the rocket will be aligned with the sensible gravity direction when  $\gamma = 90^\circ$ . In effect, this helps avoid the problem of having a low-acceleration ( $1 \leq a_0/g \leq 1.2$ ) launch vehicle turn quickly and crash into the ground just because the vehicle's velocity and thrust vectors are not properly aligned to the net external force field. The correction for an oblate Earth model is to replace the geocentric latitude  $\phi$  with a simple approximation to the geodetic latitude  $\phi^*$  as illustrated in sketch (i).



(i)

$$\varphi^* \cong \tan^{-1} \left\{ \frac{\left[ \frac{15}{2} J_2 \left( \frac{a_e}{r} \right)^2 (\sin^2 \varphi - 0.6) - 1 \right]}{\left[ \frac{15}{2} J_2 \left( \frac{a_e}{r} \right)^2 (\sin^2 \varphi - 0.2) - 1 \right]} \tan \varphi \right\} \quad (132)$$


This equation is derived by comparison of the oblate potential function written in the geocentric framework (eq. (29)) with a similar function written in the geodetic system, ignoring terms higher than  $J_2$ . Here  $J_2$  is the second zonal harmonic coefficient and  $a_e$  is the Earth's mean equatorial radius. The correction for centrifugal force is

$$\Delta \varphi \cong \frac{\omega^2 r \cos \varphi \sin \varphi}{g} \quad (133)$$

If both effects are present,  $\varphi$  is replaced by  $\varphi^* + \Delta \varphi$  when applying the transformation equations.

## LEVEL 2 - DIRECT OPTIMIZATION OF VEHICLE AND MISSION PARAMETERS

After the solution to the boundary-value problem (assuming there is one) is obtained ( $Y = \bar{Y}$ ), the program control passes to the level 2 optimizer if there are any additional vehicle or mission parameters to be optimized. The level 2 optimizer is a general-purpose iterator that extremizes a user-specified payoff criterion  $\Gamma$  over a field of user-specified variables  $Z$ . It operates on one variable at a time in the same fashion as the univariate search scheme (in fact, the same subroutine is utilized for both schemes). Each time it changes one of the  $Z$  variables, the boundary-value problem of level 1 must be resolved, as illustrated in sketch (j).

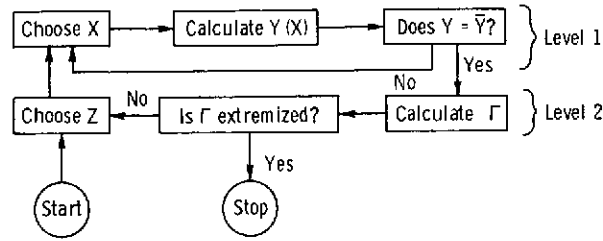

(j)

The level 2 search cycles over each  $Z$  variable in sequence, records the extremum of  $\Gamma$  for the first complete iteration, and then repeats the complete iteration a second time. The  $\Gamma$  value at the end of the second complete iteration is compared with the value obtained from the first iteration and the entire process repeated until

$$\left| \frac{\Gamma_{i+1} - \Gamma_i}{\Gamma_{i+1}} \right| < 0.001 \quad (134)$$

where  $i$  refers to values obtained after a complete iteration cycle on all variables.

Each time  $Z$  is changed in level 2, the level 1 independent variable vector  $\bar{X}$  is also estimated with the functional form  $\bar{X} = \bar{X}(Z)$  by using a linear extrapolation. In this regard, it is desirable to avoid such large changes in  $Z$  that the resulting  $\bar{X}$  estimate is so poor that it hinders convergence of the level 1 boundary-value problem. Thus,  $\Delta Z$  is constrained in the sense that if  $\Delta Z$  produces an initial level 1 error  $\tau$  greater than 0.3,  $Z$  is reduced until this constraint is satisfied.

The user specifies the payoff criterion  $\Gamma$  by loading its COMMON location into IBB. The most frequently used criterion are given in the following table:

Typical level 2 payoff criterion, $\Gamma$	COMMON loca- tion (for IBB)
Final mass, $m_f$	2159
Net spacecraft mass, $m_n/m_{ref}$	437
Payload ratio for launch vehicle problems, $m_n/m_0$	437

The latter two criterion have the same IBB location since they are both calculated with equations (2) and (15), although  $m_0/m_{ref} = 1$  for launch vehicles.

The user selects the level 2 independent variable list  $Z$  by loading the COMMON locations of his chosen set into the IAA array during input. Thus, if  $C$  denotes COMMON storage,  $Z = C(IAA)$ . A list of likely candidates for  $Z$  is given in the following table, along with their COMMON locations:

Typical level 2 independent variable, $Z$	COMMON loca- tion (for IAA)	
Electric vehicles:		
Specific impulse, $I$	418	
Initial mass flow rate, $\dot{m}_0$	} Only one of these may be selected	
Initial thrust-weight ratio, $a_0/g$		383
Initial electric power level, $P_0$		408
Launch vehicle burnout velocity, $v_l$		397
Vehicle velocity just prior to capture retro- fire, $v_r$	429	
Departure date, $t_0$	430	
Mission time, $t_f$	11	
Launch vehicles:		
Stage firing times, $(t_f)_i$	1, 2, . . . , 10	
Elevation angle at launch, $\gamma$	48	
Either vehicle: Desired final conditions in level 1, $\bar{Y}$	866, . . . , 875	

Any or all of the set  $I, \dot{m}_0, v_l, v_r$  may be optimized either in level 2 or in level 1 if the payoff criterion is net spacecraft mass ratio. Level 1 is recommended in this case because it is faster and more accurate. Choosing any other independent variables or payoff criterion requires the use of the level 2 optimizer.

### SWEEP SCHEMES FOR RUNNING SIMILAR CASES

Studies frequently require a set of answers over a range of some parameter  $s$ . The basic problem that arises in generating such a set of answers is to make reasonable estimates of the independent variables ( $X$  and  $Z$ ) as  $s$  is "swept" from  $s_1$  to  $s_n$ . If  $s$  is varied too quickly, the successive boundary-value solutions  $\bar{X}$  cannot be estimated with sufficient accuracy to avoid nonconvergence or unacceptably slow convergence. And if  $s$  is varied too slowly, much computer time will be wasted solving intermediate problems. Thus, the successive values of  $s$  must be chosen carefully to avoid both com-

putational difficulties. Two sweeping schemes are programmed which have the following descriptions:

Manual sweeping scheme	Automatic sweeping scheme
User must guess each new $s$ . Sweep is terminated if $\Delta s$ is oversized. Output occurs for every value of $s$ . Scope includes levels 1 and 2. Program estimates $\bar{X}$ and $\bar{Z}$ .	Program guesses each new $s$ . Sweep recovers from oversized $\Delta s$ . Output occurs on selected values of $s$ . Scope includes level 1 only. Program estimates $\bar{X}$ .

The main advantage of the manual scheme is that it covers both level 1 and level 2, instead of just level 1 as is the case with the automatic scheme. However, the automatic scheme is much more convenient to use and is recommended in all cases except those involving level 2 optimization.

### Manual Sweeps

In this method a group of cases are executed sequentially and the user selects each new value of the sweeping parameter  $s$ . This is implemented by submitting a separate data set for each case, as illustrated in figure 2. The first case consists of all the usual data plus a value for NSWEEP which is the COMMON location of the sweep parameter  $s$ . The only data entered for the subsequent cases are new values of  $s$ . The program will execute the first case and then the second case starting with the converged solution ( $\bar{X}_1$  and  $\bar{Z}_1$ ) of the first case. Since the manual sweep cannot recover if any of the cases fails to converge, the best policy is to select a small increment in  $s$  for the second case (e.g.,  $s_2 = 1.01 s_1$ ). The third and remaining cases are started with a linear extrapolation of the two previous solutions for  $\bar{X}$  and  $\bar{Z}$ . The user increases  $\Delta s$  to whatever value he believes is satisfactory and may expect several trial-and-error attempts in sensitive problems if he chooses large steps in  $s$ . It is often more productive to pick small increments in  $s$  and accept the extra output and computer execution time.

If the entire sweep is executed to completion, a second sweep may be initiated where the first sweep terminated by resetting the value of NSWEEP in the first data set of the second sweep. Additional sweeps may be appended to the second sweep in a similar fashion.

## Automatic Sweeps

The automatic sweep scheme eliminates the guesswork in selecting the  $\Delta s$  increments. The user only needs to specify which variable is to be "swept" and the particular values of  $s$  for which he desires a full trajectory printout. Only a single data set is required for this scheme, as shown in figure 3. The program will execute the first problem and then proceed to sweep  $s$  toward the first printout value  $s_1$ . All intermediate  $s$ -values will be noted in the output, but only  $s_1$  (and subsequently  $s_2, s_3, \dots, s_n$ ) will trigger a full trajectory printout. The program attempts to select  $\Delta s$  increments that will result in an initial boundary-value problem error of 0.1 each time  $s$  is changed. If the error is greater than 0.3 or the boundary-value problem iteration falters, the iteration is terminated and a smaller  $\Delta s$  is selected before reiteration. Thus, this scheme recovers from poor estimates of  $\Delta s$ . As with the manual scheme, the  $\bar{X}$  estimates are produced with a linear extrapolation of the previous two solutions. As an additional option, the user may override the linear extrapolation with an  $n^{\text{th}}$ -order least-squares curve-fit extrapolation of the previous  $m$  solutions by also inputting

MORDER order of the curve fit,  $n$

MAXPTS number of points used in the curve fit,  $m$

Experience has shown that the linear extrapolation (and sometimes a quadratic) usually is more productive overall than high-order extrapolations. Finally, the automatic sweep scheme cannot be used in cases of level 2 optimization - only the manual scheme can.

## Multidimensional Sweeps

The sweeping method is also very useful in obtaining the solution of a boundary-value problem when one does not have a reasonable estimate of the solution vector  $\bar{X}$ , but does have the solution to a related problem. In such a case, the related problem can often be transformed into the sought problem by a continuous transformation of the set of independent variables  $S$  that differ between the two problems.

The manual sweeping scheme can handle this situation, albeit rather awkwardly, simply by performing multiple sweeps in tandem. Alternatively, the user may vary the entire set of parameters  $S$  in parallel by changing each element of  $S$  in each data set of a single sweep. The extrapolation of  $\bar{X}$  and  $\bar{Z}$  will be based on only one element (specified by NSWEEP), however, so this method is prone to failure unless the user is very careful in choosing successive values of  $S$ .

The automatic sweeping scheme is better equipped to handle a multidimensional sweep. The user loads the COMMON locations of all elements of S into the IAA vector and the corresponding sought values of S into the SVALUE vector. This is a simple extension of the definitions given in figure 3 for a single-dimensional sweep except that SVALUE represents a set of single values for n parameters instead of n values of a single parameter. The program automatically sweeps all elements of S simultaneously to the target values loaded in SVALUE. It does this by the linear transformation

$$S = S_1 + l_s(S_2 - S_1) \quad 0 \leq l_s \leq 1 \quad (135)$$

where  $S_1$  is the initial value of S loaded as normal input,  $S_2$  is the sought value of S loaded in SVALUE, and  $l_s$  is a scalar. The program solves the initial problem for  $S_1$  and then sweeps  $l_s$  from 0 to 1, which completes the multidimensional parallel sweep since  $S = S_2$  when  $l_s = 1$ . Other transformations may be better than this linear one in situations where a constraint (such as maintaining a circular orbit) preserves the similarity of the problems, but this one is general and works reasonably well in most cases.

## PROGRAM DESCRIPTION

### PROGRAM STRUCTURE

The entire NBODY program is written in the FORTRAN IV (7090 compiler, version 5) language and occupies about 22 000 core storage locations on an IBM 7094. Peripheral equipment is assigned as follows:

(1) Logical unit 5: All input is taken from this unit from a single READ command in the main program.

(2) Logical unit 6: All output is written on this unit from many of the subroutines.

Most of the variables that are transferred between NBODY's 35 subroutines are located in "labeled COMMON blocks" as follows:

COMMON block name	Description of variables in block
TIME	time-related variables such as departure time, mission time, and integration step size
FIXED	fixed physical constants such as $\pi$ and g
ENTER	input variables assigned either true or false values
LAT	input variables for the Earth-fixed spherical coordinate system option



COMMON block name	Description of variables in block
LOOK	variables related to the interrupt search scheme
CASES	bookkeeping variables for running successive cases
OUTPUT	output option variables
LOCATE	indexes that give locations of variables relative to the beginning of COMMON
IGRATE	integration scheme controls and the increments $\Delta y$
COFV	variables associated with the optimal thrust control formulation
ROCKET	variables that describe the vehicle
TRAJEC	variables that describe the trajectory
ITERAT	iteration scheme control variables
BODIES	variables that describe the gravitational bodies
AERODY	variables associated with aerodynamics
SAVE	bookkeeping variables that must be saved each time a trajectory is re- peated
HD	values of the integration variables at the current time (at time $t_n$ in eq. (99)) in double precision
H	values of the integration variables at the current time plus any Runge-Kutta subinterval increment (at time $t_n$ , $t_n + (h/2)$ , or $t_n + h$ in eq. (100))
HDOT	derivatives of the integration variables

The program's built-in flexibility regarding free choices of optimization variables, criterion of merit, interrupt parameters, sweep parameters, and so forth, is implemented by specifying the COMMON locations of these variables. Hence, it is important that these labeled COMMON blocks be loaded in the same sequence as just given. This loading will be handled automatically by many computer software packages, but in others it is necessary to always load the main program (or block data subprogram) first just to ensure the proper loading sequence. The user is also cautioned against changing these COMMON blocks without also changing the prestored indexes in LOCATE. It is generally recommended that any user-supplied additional COMMON be appended after the last block (HDOT) or defined as "unlabeled COMMON." Appendix B is a glossary of the variables appearing in COMMON, along with their relative locations.

An overall flow diagram of the program is given in figure 4. The user's input data set is read by a NAMELIST-type read command in the main program. Control is then passed to subroutine WSTAGE, which initiates phase 1 (same as vehicle stage 1 in many cases) by supplying the appropriate phase data such as initial mass, specific impulse, and so forth, to the integrator. After more initializing in subroutines WORDER and WBEGIN, the trajectory integration is carried out by subroutine WINTEG. The derivatives of the integration variables are computed in WDERIV, the time step sizes are calculated in WSTEP, and the relative integration error is evaluated in WERROR. After the phase 1 trajectory arc is computed, control is returned to WSTAGE for the initialization of phase 2 and it, and any remaining trajectory phases, are computed in a similar manner. After the last trajectory phase is computed, control is passed to subroutine WOPT, which controls the iteration of the boundary-value problem, the level 2 optimization schemes, and the automatic sweep scheme. The program control is passed back to WSTAGE each time a new trajectory must be computed during these processes. When level 1, level 2, and any automatic sweep are all completed, control is finally sent back to the main program for the next case's input data set (if any). The main program also performs the extrapolation on the level 1 ( $\bar{X}$ ) and level 2 ( $\bar{Z}$ ) independent variables if the manual parameter sweep option is selected.

There are many other subprograms that perform specific tasks, and appendix B provides a definition of every subprogram's function. The small TIMLFT routine is of particular concern since it would probably be deleted or rewritten at other installations. It is a convenience routine for batch sequence operation that warns the program when its allotted execution time is almost over. Thus, some useful information can be extracted before an imminent termination by triggering a final trajectory printout. A complete subprogram call sequence diagram is given in figure 5.

## INPUT

The input data sets are read by a single NAMELIST read command in the main program, and successive cases may be stacked in tandem indefinitely. All variables are input in SI units using floating-point, single-precision format unless otherwise noted. In the list of operating instructions that follows, the input variable names are written entirely in capital letters. The default value of all variables is zero (or F, false, for logical variables) unless otherwise noted. The dimensionality of the coordinate system is specified as follows:

NDEM=2 two-dimensional model (default value)  
=3 three-dimensional model

The set of gravitational bodies is specified by a list of indexes:

NUMBOD=index of the origin body, index of the first perturbing body, . . . , index of  $n^{\text{th}}$  perturbing body ( $0 \leq n \leq 6$ ); default value: 1, 6\*0

The first index refers to the origin body at the departure date, and the remaining indexes are all of perturbing bodies in random order. The vehicles initial coordinates are referenced to the origin body. The permissible indexes and corresponding body names are

1	Sun	7	Saturn
2	Mercury	8	Uranus
3	Venus	9	Neptune
4	Earth-Moon	10	Pluto
5	Mars	11	Earth
6	Jupiter		

The physical model for the Earth may be selected as follows:

OBLATE=T    oblate Earth model  
          =F    spherical Earth model (default value)  
ROTATE=T    rotating Earth  
          =F    nonrotating Earth (default value)

The atmospheric Earth model is automatically programmed for the 1962 U. S. Standard Atmosphere. Altering this model or adding another planet's atmosphere requires re-programming subroutine WICAO.

#### Vehicle Model

The program provides the capability to simulate an n-stage vehicle ( $1 \leq n \leq 10$ ). The term "stage" really refers to "trajectory phase" since a "stage" change does not necessarily mean that a vehicle stage is discarded. It may only mean that the thrust steering control is switched from a tangential program to an optimal program, for example. The vehicle related inputs are as follows ( $1 \leq i \leq 10$ ):

VMASS(i)>0                    initial mass of stage i,  $m_0$ , kg (default value: 1, 9\*0)

VMASS(i) =0	vehicle mass is continuous between stage i - 1 and stage i							
<0	vehicle mass decreases between stage i - 1 and stage i by the amount specified for stage i, $m_0$ , kg							
ISP(i)	vacuum specific impulse, I, sec							
TB(i)>0	stage flight time, $t_f$ , sec							
<0	total flight time of i stages, $\sum_{j=1}^i (t_f)_j$ , sec							
NOPT(i)	preprogrammed optimal-thrust-control end condition options (see table IV for a summary or preceding text for complete discussion)							
Choose only one	<table border="0"> <tr> <td rowspan="3" style="font-size: 3em; vertical-align: middle;">{</td> <td>PFLOW(i)</td> <td>propellant flow rate at 1 AU, <math>-\dot{m}_0</math>, kg/sec</td> </tr> <tr> <td>TW(i)</td> <td>initial thrust-weight ratio (at 1 AU), <math>a_0/g</math></td> </tr> <tr> <td>POWER(i)<sup>1</sup></td> <td>initial electric power, <math>P_0</math>, kW</td> </tr> </table>	{	PFLOW(i)	propellant flow rate at 1 AU, $-\dot{m}_0$ , kg/sec	TW(i)	initial thrust-weight ratio (at 1 AU), $a_0/g$	POWER(i) <sup>1</sup>	initial electric power, $P_0$ , kW
{	PFLOW(i)		propellant flow rate at 1 AU, $-\dot{m}_0$ , kg/sec					
	TW(i)		initial thrust-weight ratio (at 1 AU), $a_0/g$					
	POWER(i) <sup>1</sup>	initial electric power, $P_0$ , kW						
SOLAR=T	propulsion power depends on solar distance (eq. (8))							
=F	propulsion power is constant (default value)							
KE	propellant tankage factor, $k_t$							
STRUCT	structural mass factor, $k_s$							
ALFPOW	specific mass of electric propulsion system, $\alpha_{ps}$ , kg/kW							
BE, DE	overall powerplant efficiency $\eta$ factors, b and d (default value: BE=0.75, DE=14 350.)							
DISPO=T	electric propulsion system and tankage mass are jettisoned just prior to high-thrust retromaneuver (j = 1)							
=F	electric propulsion system and tankage mass are not jettisoned prior to high-thrust retromaneuver (j = 0) (default value)							

The last six entries are normally used only for single-stage electric vehicles. For n-stage vehicles, they are applicable to the entire flight as a whole (e. g., the tankage factor  $k_t$  is applied to all stages taken together). The number of stages is taken to be the number of nonzero flight times that are inputted.

---

<sup>1</sup>This option is valid only when using the analytical launch vehicle simulation and requires that NOPT be equal to 0, 6, or 7. Also instead of inputting VMASS, the reference mass  $m_{ref}$  must be loaded into BOOSTM.

The following group of inputs is required only if aerodynamic forces are to be included in the simulation:

- REFA(i) aerodynamic reference area of  $i^{\text{th}}$  stage,  $S_{\text{ref}}$ ,  $\text{m}^2$
- AEXIT(i) engine exit area,  $A_e$ ,  $\text{m}^2$
- CD0C set of parasite drag coefficient data (eq. (24));  $M_1, (a_1, a_2, a_3)_1, M_2, (a_1, a_2, a_3)_2, M_3, \dots, M_n$ ; the coefficients  $(a_1, a_2, a_3)_i$  apply to the Mach number interval  $(M_i, M_{i+1})$
- CDIC set of induced drag coefficient data (eq. (25));  $M_1, (a_4, a_5, a_6)_1, M_2, (a_4, a_5, a_6)_2, M_3, \dots, M_n$
- CLC set of lift coefficient data (eq. (26));  $M_1, (a_7, a_8, a_9)_1, M_2, (a_7, a_8, a_9)_2, M_3, \dots, M_n$

The user may install his own method of handling the aerodynamic data by modifying subroutine WAERO.

#### Analytic Spiral Escape Maneuver at Departure

A tangential-thrust spiral escape from a departure planet circular orbit will be simulated for electrically propelled vehicles (eqs. (19) and (55)) if the following are input:

- SPIR=T
- VC1 speed in initial circular orbit,  $v_{c,l}$ ,  $\text{m/sec}$

#### Analytic High-Thrust Departure of Electric Vehicle

The launch vehicle is assumed to impart a speed  $v_l$  to the electric vehicle at a distance  $r_l$  from the departure planet's center. The inputs are

- VB1 launch vehicle's burnout speed,  $v_l$ ,  $\text{m/sec}$
- RRAT1 departure planet's sphere-of-influence radius ratio,  $r_l/r_{s,d}$
- VC1 circular orbit speed at  $r_l$ ,  $v_{c,l}$ ,  $\text{m/sec}$
- VJET1, K1 curve-fit parameters defining launch vehicle's performance (eq. (16)),  $c_l$ ,  $\text{m/sec}$ , and  $k_l$

## Analytic High-Thrust Capture Retromaneuver of Electric Vehicle

If an electric vehicle is to be braked into a planetary capture orbit at the arrival planet with a high-thrust retrorocket, input the following:

- VB2 planetocentric vehicle speed just before retrofire at periapsis radius  $r_r$ ,  $v_r$ ,  
m/sec
- RRAT2 arrival planet's sphere-of-influence radius ratio,  $r_r/r_{s,a}$
- VC2 circular orbit speed at  $r_r$ ,  $v_{c,r}$ , m/sec
- VJET2 retrojet exhaust speed,  $c_r$ , m/sec
- K2 retropropulsion tankage factor,  $k_{rt}$
- ECC2 eccentricity of capture ellipse,  $e_r$

### Departure Time

The departure time  $t_d$  need only be specified in problems involving ephemerides. It is input as a Julian date in Greenwich time as follows:

- DTOFFJ whole Julian day number (default value: 2 440 000.)
- TOFFT fraction of Julian day

### Initial Position and Velocity

The vehicle coordinates at departure may be specified in any of these sets:

(1) Rectangular coordinates (double-precision variables):

- R x, y, z components of position vector  $R_0$ , m
- V x, y, z components of velocity vector  $V_0$ , m/sec

(2) Orbit elements (double-precision variables, sketch (g):

- E eccentricity, e
- OMEGA argument of pericenter,  $\omega$ , rad
- NODE longitude of ascending node,  $\Omega$ , rad
- INCL orbit inclination to reference plane, i, rad
- MA mean anomaly, M, rad

RECTUM semilatus rectum,  $p$ , m

(3) Earth-fixed spherical coordinates (sketch (h)):

LAT northern latitude,  $\varphi$ , deg

LONG eastern longitude from Greenwich,  $\vartheta$ , deg

ALTO altitude above sea level,  $r_0 - r_e$ , m

VEL0 relative velocity,  $v_r$ , m/sec

ELEV elevation angle,  $\gamma$ , deg

AZI azimuth, eastward from north,  $\sigma$ , deg

TKICK duration of short, vertical, nondrag ascent to facilitate starting (eq. (129)),  
 $t_v$ , sec

Alternatively, the user may instruct the program to use ephemerides to compute the departure (and desired arrival) coordinates. This option is intended for Sun-centered two-body problems only where the departure coordinates are taken to be identical to the specified departure planet coordinates (and likewise for the arrival conditions). The option is invoked by setting

EPHEM=T

NUMBOD=1, index of departure planet, index of arrival planet

The program will not consider this an n-body problem even though the two planets would normally be considered perturbing bodies by the previous definition of NUMBOD. The program will compute rectangular coordinates for both end points (i. e., values of  $R$  and  $V$  for departure option 1 and similar values for DESIRE as defined later).

### Thrust Program Options

The previously defined array NOPT determines whether a variational thrust program (NOPT(i)≠0) or a nonvariational thrust program (NOPT(i)=0) applies to the  $i^{\text{th}}$  stage. The inputs depend on which of these two types is selected:

(1) Nonvariational thrust program (NOPT(i)=0):

ALFCOE a set of thrust angle coefficient data (eq. (42));  $t_1, (a_{10}, a_{11}, a_{12})_1, t_2, (a_{10}, a_{11}, a_{12})_2, \dots, t_n$ ; the coefficients  $(a_{10}, a_{11}, a_{12})_i$  apply to the time interval  $(t_i, t_{i+1})$ ; if  $a_{11} = a_{12} = 0$ , the thrust angle  $\alpha$  equals  $a_{10}$ .

ALPHAC=T thrust angle  $\alpha$  is referenced to local horizontal  
 =F thrust angle  $\alpha$  is referenced to velocity vector  
 BETA out-of-orbit-plane thrust angle (sketch (c)),  $\beta$ , deg

If the user prefers another method of specifying the thrust program, he may do so simply by modifying subroutine WVREL.

(2) Variational thrust program (NOPT(i)≠0):

COAST=T coast arcs permitted (default)  
 =F coast arcs not permitted  
 KBODYS number of gravitating bodies included in variational equations (It may be desirable to limit this number to 1 even though n bodies affect the equations of motion; default value: 1.)  
 LAMDA seven element array of initial values of the adjoint variables (Lagrange multipliers): the three components of  $\Lambda$  ((kg)(sec)/m), the three components of  $\Lambda_r$  (kg/m), and  $\lambda_m$

As an alternative to inputting LAMDA, the following set of variables may be input for two-dimensional problems only (sketch (d) and eqs. (74) to (79)):

PS initial thrust direction relative to x-axis,  $\psi_0$ , deg  
 DPS time derivative of thrust angle,  $\dot{\psi}_0$ , deg/sec  
 KAPPA thrust on-off switching function,  $\kappa_0$   
 DKAPPA time derivative of on-off switching function,  $\dot{\kappa}_0$ ,  $\text{sec}^{-1}$   
 LAM scale factor,  $\lambda_0$ , (kg)(sec)/m (default value: 1.)

The program will always use the latter set if PS≠0. If the thrust angle at any given moment is to be picked from a specified set of angles  $\alpha_i$  instead of varying continuously, input

ALF set of angles  $\alpha_i$  ( $i \leq 5$ ) referenced according to the value of ALPHAC, deg

### Trajectory Integration Controls

The input initial coordinates for any problem may be (1) rectangular coordinates, (2) orbit elements, or (3) Earth-fixed spherical coordinates as previously explained. Regardless of which set of input coordinates is selected, the user may also choose be-



tween rectangular coordinate integration or orbit element integration for nonvariational problems. Only rectangular coordinates may be integrated for variational problems. The input coordinates - integration coordinates option is defined by MODEI as follows:

Trajectory integration coordinates	Input coordinates		
	Rectangular	Orbit elements	Earth fixed
Rectangular	MODEI=2 (default)	MODEI=-1	MODEI=4
Orbit elements (non-variational only)	MODEI=-2	MODEI=1	MODEI=-4

The following controls affect the accuracy and efficiency of the trajectory integration:

- EREF      reference relative error,  $\bar{\delta}_r$  (default value:  $10^{-4}$ )
- ERLIMT    limit relative error,  $\delta_{\text{limit}}$  (default value:  $3 \times 10^{-4}$ )
- STEP(i)    initial step size for  $i^{\text{th}}$  stage,  $(h_1)_i$ , sec (default value:  $t_f/100$ )

### Output Controls

For problems that involve neither a level 1 boundary-value problem iteration nor a level 2 optimization search, the user selects the frequency of trajectory printout as follows:

- Select only one
- STEPS      number of trajectory integration steps between printouts
  - DELMAX    time interval between printouts, sec (default value: DELMAX = 50 days)

By default, the first and last trajectories of level 1 and level 2 iteration sequences will be printed out in full, and a one-line summary will be printed out for each intermediate trajectory. After inspecting a computer run, it is occasionally desirable to repeat the run with a request for more trajectories to be printed out in full (to examine odd behavior, for example). This request will be fulfilled if the following is input:

NOUT =  $n_1, n_2, \dots, n_l$  ( $l \leq 5$ ), where each  $n_l$  is the sequence number of the specific trajectory for which printout is desired. These sequence numbers appear as the leftmost entry in the one-line summary printouts (default value: NOUT = 1, 4\*0).

## Trajectory Interrupt Controls

As explained in the section Trajectory interrupt (p. 44), the trajectory may be interrupted occasionally in order to take some specific action. The program may do this automatically in some cases (such as when the engine is turned on or off), but the user may also cause this to happen by inputting the following:

- LOOKX(i) location relative to COMMON of interrupt parameter  $i$  entered in fixed point format; table III contains a map of these locations; a minus sign on LOOKX(i) will cause the interrupt search to terminate after the first interrupt, otherwise interrupts will continue to occur each time  $XLOOK(i)=C(LOOKX(i))$ , where  $C=COMMON$  (default value: consult text)
- XLOOK(i) value that interrupt parameter  $i$  must attain to trigger an interrupt
- ENDX(i)=-1 flight is terminated at interrupt  
=0 flight continues after interrupt (default value)  
=1 stage is terminated, but flight continues

If the interrupt search is to be delayed until an arbitrary criterion  $y > \bar{y}$  is satisfied, input

- LOOKSW(i) location relative to COMMON of the delay parameter  $y$  entered in fixed-point format (default value: location of time,  $t$ )
- SWLOOK(i) value that the delay parameter must exceed before interrupt may occur,  $\bar{y}$

All these interrupt inputs are five-element arrays. The first two elements are always available to the user, but the latter three may not be, as explained in the Trajectory interrupt section.

## Level 1 Boundary-Value Problem

The program will recognize that a two-point boundary-value problem exists if the following are input:

- IA(i) COMMON location of the  $i^{\text{th}}$  independent variable  $x_i$  in fixed-point format ( $0 \leq i \leq 10$ )
- IB(i) COMMON location of the  $i^{\text{th}}$  dependent variable  $y_i$  in fixed-point format ( $0 \leq i \leq 10$ )

DESIRE(i)	desired value of the $i^{\text{th}}$ dependent variable $\bar{y}_i$ ( $0 \leq i \leq 10$ )
WEIGHT(i)	weighting factor of the $i^{\text{th}}$ residual, $w_i$ ( $0 \leq i \leq 10$ ); (default value: $\bar{y}_i$ if $\bar{y}_i \neq 0$ , 1.0 if $\bar{y}_i = 0$ , 360 if $\bar{y}_i = 0$ and $y_i$ is path angle)
TOLER	convergence criterion, $\bar{\tau}$ (default value: $10^{-4}$ )
ERSTAR	relative error value above which the univariate search scheme is used and below which the linear corrective scheme is used, $\tau^*$ (default value: 1.0)
NBVP	trajectory phase number where boundary-value problem begins in fixed-point format (default value: j, where j is the number of the first stage having NOPT(j)≠0)
MAXNUM	maximum number of trajectories allowed before execution is terminated (default value: 500.)

The IA and IB vectors are filled automatically by the program if  $1 \leq |\text{NOPT}| \leq 5$ , as indicated in table IV. For other cases, the COMMON locations may be selected from table II or table III. Also, DESIRE is calculated by the program as the arrival planet's velocity and position if EPHEM=T, as explained in the section Initial Position and Velocity.

Occasionally, the situation arises that successive iterations fluctuate between n coast phases and m coast phases. Convergence difficulty is often experienced in the region of such a boundary, especially when finite difference partials are used. This type of difficulty is avoided if solutions are sought away from such a boundary and an extrapolation is accepted in the boundary's immediate vicinity. An alternative method that sometimes works is to ignore phase shifts near the boundary by setting TSKIP equal to  $t_1, t_2$  (phase shifts are ignored in the time interval  $(t_1, t_2)$ , sec) until convergence is obtained and then releasing this constraint (TSKIP=0, 0) to determine whether n or m phases are optimal.

If any of the vehicle-related variables  $\dot{m}_0$ , c,  $v_l$ , or  $v_r$  are to be optimized in level 1, the appropriate COMMON locations are automatically loaded into IA and IB vectors simply by inputting

OPTA=T	for optimum $\dot{m}_0$ (or its equivalent, $f/m_0g$ )
OPTC=T	for optimum c
OPTVB1=T	for optimum $v_l$
OPTVB2=T	for optimum $v_r$

## Level 2 Optimization

User-specified variables  $z_i$  will be optimized in level 2 if the following are input:

- IAA(i) COMMON location of the  $i^{\text{th}}$  optimization variable  $z_i$  ( $0 \leq i \leq 10$ )
- IBB COMMON location of the external criterion  $\Gamma$  (default value: location of payload)
- TOL2 relative tolerance on  $\Gamma$  to be satisfied for convergence: positive for a maximization problem, negative for a minimization problem (default value: 0.001)
- MAXNUM maximum number of iteration trajectories allowed before execution is terminated (total of level 2 and level 1, if any; default value: 500)
- PERT2(i) initial perturbation size for  $z_i$  ( $0 \leq i \leq 10$ ), expressed as a fraction of  $z_i$  (default value: 0.001)

## Parameter Sweeps

For manual sweeps the user simply inputs successive data sets in tandem, as shown in figure 2, and identifies the sweep parameter  $s$  in the first data set:

- NSWEEP COMMON location of the sweep parameter  $s$  (see table IV for likely candidates)

For automatic sweeps on a single parameter  $s$ , the user inputs

- IAA COMMON location of the sweep parameter  $s$
- SVALUE(i) sequential set of values of  $s$  for which a full trajectory printout is desired ( $1 \leq i \leq 10$ )
- MAXPTS=2

For multidimensional automatic sweeps on  $n$  sweep parameters, input the following:

- IAA(i) COMMON locations of the sweep parameters  $s_i$  ( $1 \leq i \leq 10$ )
- SVALUE(i) desired set of  $s_i$  values; each SVALUE(i) corresponds to IAA(i)
- MAXPTS=2

The automatic sweep schemes may be applied only to level 1 (not level 2). The estimation procedure of the level 1 independent variable array  $X$  is defaulted to a linear

extrapolation of the previous two solutions. The order and number of data points used in this procedure may be changed as explained in the section Automatic Sweeps.

## PROGRAM OUTPUT

The frequency of output is controlled by the input variables NOUT, STEPS, and DELMAX, as explained in the input instructions. Each trajectory is noted on the print-out in either (1) a full output mode or (2) a one-line summary mode.

### Full Output Mode

The full output mode produces information blocks at specified intervals of flight time (DELMAX) or integration step number (STEPS) with the following format:

STEP= +	ECCENTRICITY=	OMEGA=	V=	R=	REFER=
TIME=	SEMILATUS R. =	TRU A=	VX=	X=	RMASS=
DAYS=	MEAN ANOMALY=	NODE=	VY=	Y=	REVS. =
ALFA=	PATH ANGLE=	INCL=	VZ=	Z=	DELT=

STEP	current integration step number to the left of the plus sign and a count of the step-size cutbacks on the right
TIME	current flight time, t, sec
DAYS	flight time, t, days
ALFA	angle between thrust and velocity vectors, $\alpha$ , deg
ECCENTRICITY	orbit eccentricity, e
SEMILATUS R.	semilatus rectum of orbit, p, m
MEAN ANOMALY	mean anomaly, M, rad
PATH ANGLE	path angle, $\gamma$ , deg
OMEGA	argument of pericenter, $\omega$ , rad
TRU A	true anomaly, $\nu$ , rad
NODE	longitude of ascending node, $\Omega$ , rad
INCL	orbit inclination, i, rad
V, VX, VY, VZ	velocity and its components, V, m/sec

R, X, Y, Z            radius and its components, R, m  
 REFER                name of reference body followed by integration mode  
 RMASS                vehicle mass, kg  
 REVS.                revolutions past x-axis  
 DELT                 current integration step size, h, sec

In the case of atmospheric flight the following two lines are appended to the preceding:

BETA=     R PATH ANGLE=     DRAG=     VR=     G=     PUSH=  
 ALT. =     MACH NUMBER=     LIFT=     CD=     Q=     HEAT=

BETA                out-of-plane thrust angle,  $\beta$ , deg  
 ALT.                altitude, m  
 R PATH ANGLE     path angle relative to Earth (may be rotating), deg  
 MACH NUMBER     Mach number, M  
 DRAG, LIFT        drag and lift acceleration magnitudes,  $|D|/m$ ,  $l/m$ ;  $m/sec^2$   
 VR                 velocity relative to rotating Earth,  $V_r$ , m/sec  
 CD                 drag coefficient  
 G                 net force acting along longitudinal axis of vehicle, Earth g's  
 Q                 dynamic pressure,  $q$ ,  $N/m^2$   
 PUSH               thrust acceleration magnitude,  $a$ ,  $m/sec^2$   
 HEAT               heating rate per unit mass,  $W/m^2/sec$

In the case of an n-body problem, additional lines of printout give the vehicle-to-perturbing-body position vectors in terms of their magnitudes in meters, followed by the three x, y, z direction cosines (e.g., EARTH R=9.25E8 0.580 0.743 0.335). In the case of variational thrust steering programs, the following two lines are added to the basic output block:

PSI=     DPSI=     THETA=     DK=     K=     L7=  
 L1=     L2=     L3=     L4=     L5=     L6=

PSI, DPSI           thrust angle relative to x-axis,  $\psi$ , deg; and its derivative,  $\dot{\psi}$ , deg/sec  
 K, DK               engine on-off switch function,  $\kappa$ , and its derivative,  $\dot{\kappa}$ ,  $sec^{-1}$   
 THETA               central travel angle,  $\theta$ , deg

L1, . . . , L7 Lagrange multipliers (adjoint variables): the components of  $\Lambda$  and  $\Lambda_T$ ,  
and also  $\lambda_m$

The full trajectory output occurs for the first trajectory and the converged solution trajectory. During automatic sweeps, full output will occur for each converged solution that corresponds to the SVALUE list.

### One-Line Summary

Each trajectory generated during the level 1 boundary-value iteration is noted in a one-line summary table. The table heading is

**RUN N ERROR TIME INDEPENDENT VARIABLES -- DEPENDENT VARIABLES**

The trajectory number is listed under RUN, the number of engine on-off switch points under N, the level 1 boundary-value error  $\tau$  under ERROR, and flight time in seconds under TIME. The remaining columns list the values of the independent variable vector X and the dependent variable vector Y. During sweeps or level 2 optimizations, this table is interrupted each time a solution is attained with a one-line notation of the current IAA and IBB values. Finally, the following letters may appear between the RUN and N columns:

- E indicates the beginning of a univariate search sequence
- N indicates that a new partial derivative matrix G is being generated for the linear correction scheme
- P indicates that both search schemes have bogged down and that control will now pass to the linear correction scheme without inhibitor ( $\chi = 1.0$ ) in a last-ditch effort to achieve convergence

There are other printout messages that are intended to be self-explanatory.

### EXAMPLE PROBLEMS

#### EXAMPLE 1 - JUPITER RENDEZVOUS USING THE MULTIDIMENSIONAL SWEEP FEATURE

This example illustrates how the multidimensional sweep method can be used to assist in finding the solution of a problem. The mission is a 500-day Jupiter rendezvous

commencing in a circular orbit at 1 AU. The heliocentric travel angle is fixed at  $133^\circ$ . The spacecraft's initial thrust-weight ratio is  $2 \times 10^{-4}$ , the specific impulse is 5000 seconds, coasting is permitted, and the thrust is constant. The final conditions being sought are

- (1) Radius,  $7.778 \times 10^{11}$  meters (Jupiter's distance from Sun)
- (2) Velocity, 13 062.5 meters per second (Jupiter's circular orbit speed)
- (3) Path angle,  $0^\circ$  (rendezvous condition)
- (4) Travel angle,  $133^\circ$  (assumed)

Suppose we already know the optimum-thrust-angle solution to a similar problem; namely, one that has the same vehicle parameters but different target conditions:

- (1) Radius,  $7.0528 \times 10^{11}$  meters
- (2) Velocity, 16 570 meters per second
- (3) Path angle,  $30^\circ$
- (4) Travel angle,  $138^\circ$

Since these conditions (especially the path angle) are significantly different than the sought conditions, we may expect trouble if we straightforwardly attempt to begin our search with the same set of adjoint variables. Therefore, we use the multidimensional sweep scheme to gradually transform the known solution to the sought solution. The input is as follows:

TB=4.32E7	mission time, sec
R=1.49597893E11, 0, 0	initial position vector on x-axis, m
V=0, 29784.7, 0	initial position vector in y-direction
VMASS=1000	initial vehicle mass, kg
TW=2.E-4	initial thrust-weight ratio
ISP=5000	specific impulse, sec
COAST=T	coast arcs permitted
STEPS=100	output every 100th integration step
NOPT=2	fixed-travel-angle rendezvous option
SVALUE=7.778E11, 13062.5, 0, 133	sought values of final conditions
DESIRE=7.0528E11, 16570, 30, 138	current values of final conditions
WEIGHT(3)=365	better weighting factor for $\gamma$ than the default value of 30



LAMDA=3.3431, 4.40876, 0, correct solution values of the adjoint variables for  
 1.072E-6, 3.70E-7, 0, DESIRE  
 63.3065

IAA=866, 867, 868, 869 COMMON locations of the sweep variables (the  
 DESIRE array)

MAXPTS=2 number of points used to extrapolate  $\bar{X}$

For simplicity, this input list contains no vehicle model variables other than those necessary to generate a trajectory. High-thrust chemical propulsion options have also been ignored - for the same reason.

The output is shown below. Since a whole sequence of problems are actually solved in the process of transforming the given solution into the sought solution, the first trajectory printout is followed by the one-line trajectory summaries and, finally, the complete trajectory printout of the sought solution. The one-line trajectory summaries are interrupted each time an intermediate solution is found to present the value of the first sweep variable (final radius in this case) and several other parameters. The computer execution time on the IBM 7094II is 1.1 minutes.

EXAMPLE 1 - JUPITER RENDEZVOUS

SAVED INITIAL DATA FOR STAGE 1 OF CASE 1.  
 REFERENCE BODY IS SUN

```

2 DIMENSIONS 150 DIFF.EQNS.  T/W= 2.000000E-04  ISP= 5000.0000  PFLDN= 4.000000E-05  REFA= 0  AEXIT= 0

STEP= 0. + 0.  ECCENTRICITY= 1.7263349E-04  OMEGA= 0  V= 25784.700  R= 1.4959785E+11  REFER=SUN  RECT 2
TIME= 0  SEMILATUS R.= 1.4559793E+11  TRU A= 0  VX= 0  X= 1.4959785E+11  RMAS= 1000.0000
DAYS= 0.  MEAN ANOMALY= 0  NODE= 0  YY= 29784.700  Y= 0  REVS.= 0
ALFA= 37.17225  PATH ANGLE= 0  INCL= 0  VZ= 0  Z= 0  DELT= 432000.00
PSI= 52.827415  DPSI= 6.5304213E-06  THETA= 0  OK= -4.6215996E-05  K= 207.99178  L7= 63.306500
L1= 3.3431000  L2= 4.4087600  L3= 0  L4= -1.0426600E-06  L5= 3.7000000E-07  L6= 0

STEP= 23. + 3.  ECCENTRICITY= 0.7846867  OMEGA=-0.2690612  V= 31937.052  R= 2.1119842E+11  REFER=SUN  RECT 2
TIME= 6955146.4  SEMILATUS R.= 2.1537830E+11  TRU A= 1.5455718  VX=-18578.035  X= 6.1259438E+10  RMAS= 721.79414
DAYS= 80.4554  MEAN ANOMALY= 0.1762923  NODE= 0  VY= 25977.576  Y= 2.0211891E+11  REVS.= 0.2031630
ALFA= 62.369410  PATH ANGLE= 37.567967  INCL= 0  VZ= 0  Z= 0  DELT= 14.753720
PSI= 63.201293  DPSI=-2.0086438E-06  THETA= 73.138671  DK=-1.3444954E-05  K= 0  L7= 119.70815
L1= 0.7544848  L2= 1.5729008  L3= 0  L4= 3.4050458E-08  L5= 2.0451261E-07  L6= 0
TRAJECTORY INTERRUPT -- C(LOOKX(5)) = 0

STEP= 23. + 3.  ECCENTRICITY= 0.7846867  OMEGA=-0.2690612  V= 31937.052  R= 2.1119842E+11  REFER=SUN  RECT 2
TIME= 6955146.4  SEMILATUS R.= 2.1537830E+11  TRU A= 1.5455718  VX=-18578.035  X= 6.1259438E+10  RMAS= 721.79414
DAYS= 80.4554  MEAN ANOMALY= 0.1762923  NODE= 0  VY= 25977.576  Y= 2.0211891E+11  REVS.= 0.2031630
ALFA= 62.369410  PATH ANGLE= 37.567967  INCL= 0  VZ= 0  Z= 0  DELT= 172861.56
PSI= 63.201293  DPSI=-2.0086438E-06  THETA= 73.138671  DK=-1.3444954E-05  K= 0  L7= 119.70815
L1= 0.7944848  L2= 1.5729008  L3= 0  L4= 3.4090458E-08  L5= 2.0451261E-07  L6= 0

STEP= 51. + 6.  ECCENTRICITY= 0.7846864  OMEGA=-0.2690611  V= 16347.572  R= 5.2593102E+11  REFER=SUN  RECT 2
TIME= 2.6390800E+07  SEMILATUS R.= 2.1537830E+11  TRU A= 2.4226565  VX=-15547.528  X= 2.8945300E+11  RMAS= 721.79414
DAYS= 305.4491  MEAN ANOMALY= 0.7098759  NODE= 0  VY= 5115.8064  Y= 4.2911315E+11  REVS.= 0.3427553
ALFA= 288.84640  PATH ANGLE= 51.85344  INCL= 0  VZ= 0  Z= 0  DELT= 2285934.5
PSI= 127.0552  DPSI= 1.3714007E-07  THETA= 123.39192  DK= 6.7890353E-06  K= -95.775606  L7= 119.70815
L1=-0.2123126  L2= 0.2811371  L3= 0  L4= 6.0900455E-08  L5= 7.9243080E-08  L6= 0

STEP= 60. + 7.  ECCENTRICITY= 0.7846862  OMEGA=-0.2690613  V= 12242.311  R= 6.8646743E+11  REFER=SUN  RECT 2
TIME= 4.0946728E+07  SEMILATUS R.= 2.1537829E+11  TRU A= 2.6353138  VX=-12197.260  X= 4.9026337E+11  RMAS= 721.79414
DAYS= 473.9205  MEAN ANOMALY= 1.1094937  NODE= 0  VY= 1045.2904  Y= 4.8049908E+11  REVS.= 0.3766008
ALFA= 301.23528  PATH ANGLE= 50.493146  INCL= 0  VZ= 0  Z= 0  DELT= 1739147.6
PSI= 126.15615  DPSI= 1.0022469E-07  THETA= 135.57628  DK= 6.2970745E-06  K= 0  L7= 119.70815
L1=-1.0396555  L2=-1.4227928  L3= 0  L4= 5.2200761E-08  L5= 7.6662588E-08  L6= 0
TRAJECTORY INTERRUPT -- C(LOOKX(5)) = 0

STEP= 60. + 7.  ECCENTRICITY= 0.7846862  OMEGA=-0.2690613  V= 12242.311  R= 6.8646743E+11  REFER=SUN  RECT 2
TIME= 4.0946728E+07  SEMILATUS R.= 2.1537829E+11  TRU A= 2.6353138  VX=-12197.260  X= 4.9026337E+11  RMAS= 721.79414
DAYS= 473.9205  MEAN ANOMALY= 1.1094937  NODE= 0  VY= 1045.2904  Y= 4.8049908E+11  REVS.= 0.3766008
ALFA= 301.23528  PATH ANGLE= 50.493146  INCL= 0  VZ= 0  Z= 0  DELT= 1739147.6
PSI= 126.15615  DPSI= 1.0022469E-07  THETA= 135.57628  DK= 6.2970745E-06  K= 0  L7= 119.70815
L1=-1.0396555  L2=-1.4227928  L3= 0  L4= 5.2200761E-08  L5= 7.6662588E-08  L6= 0

STEP= 62. + 7.  ECCENTRICITY= 0.6232751  OMEGA= 0.8915956  V= 16280.684  R= 7.0643525E+11  REFER=SUN  RECT 2
TIME= 4.3199955E+07  SEMILATUS R.= 7.3336940E+11  TRU A= 1.5095863  VX= 15598.487  X= 5.2148454E+11  RMAS= 631.66329
DAYS= 500.0000  MEAN ANOMALY= 0.3822734  NODE= 0  VY=-4663.4608  Y= 4.7655497E+11  REVS.= 0.3821600
ALFA= 322.57723  PATH ANGLE= 30.932568  INCL= 0  VZ= 0  Z= 0  DELT= 514123.65
PSI= 125.93251  DPSI= 5.7792500E-08  THETA= 137.57759  DK= 7.0150244E-06  K= 15.027596  L7= 137.84041
L1=-1.1556472  L2=-1.5945583  L3= 0  L4= 5.0763977E-08  L5= 7.5771679E-08  L6= 0

PHASE 1 COMPLETED.  DELV= 22526.  MASS RATIO= 0.63166  ***  TOTAL DELV= 22526.  TOTAL MASS RATIO= 0.63166  PAYLOAD RATIO= 0.63166

```

NOPT= 2; CCAST=T, EPHEM=F, NBVP=1, NBODYS=1, ERSTAR= 1.0000, NSWEEP= 0, IBR= 437

Table with 7 columns: IAA, IA, IB, DESIRE, WEIGHT, PERTEM, PERTNR. Rows 866-869 showing numerical values for each parameter.

RUN N ERROR TIME 4 INDEPENDENT VARIABLES -- 4 DEPENDENT VARIABLES

Main data table with 13 columns: RUN N, ERROR, TIME, 4 INDEPENDENT VARIABLES, 4 DEPENDENT VARIABLES. Rows 1N2-25 2 showing various numerical data points.

REFERENCE BODY IS SUN

2 DIMENSIONS 15C DIFF.EQNS. T/W= 2.000000E-04 1SP= 5000.0000 PFLW= 4.000000E-05 REFA= 0 AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= 1.7263349E-04 OMEGA= 0 V= 29784.700 R= 1.4959789E+11 REFER=SUN RECT 2
TIME= 0 SEMILATUS R.= 1.4959793E+11 TRU A= 0 VX= 0 Y= 1.4959789E+11 RMASS= 1000.0000
DAYS= 0 MEAN ANOMALY= 0 NODE= 0 WY= 29784.700 Y= 0 RMAS= 0
ALFA= 33.368304 PATH ANGLE= 0 INCL= 0 VZ= 0 Z= 0 DELT= 432000.00
PSI= 56.431654 DPSI= 6.7365258E-06 THETA= 0 DK=-4.2566814E-05 K= 213.30899 L7= 63.306500
L1= 3.1028886 L2= 4.7114164 L3= 0 L4= 1.0313585E-06 L5= 3.6009298E-07 L6= 0

STEP= 25. + 2. ECCENTRICITY= 0.8819417 OMEGA=-0.2376959 V= 32301.512 R= 2.2522151E+11 REFER=SUN RECT 2
TIME= 7617575.6 SEMILATUS R.= 2.1822231E+11 TRU A= 1.6060406 VX=-19035.910 X= 4.5285619E+10 RMASS= 695.29681
DAYS= 88.1664 MEAN ANOMALY= 7.8929201E-02 NODE= 0 WY= 26096.395 Y= 2.2062172E+11 REVS.= 0.2177788
ALFA= 63.61723 PATH ANGLE= 42.291648 INCL= 0 VZ= 0 Z= 0 DELT= 10.383288
PSI= 62.49807 DPSI=-3.4471007E-06 THETA= 78.400377 DK=-1.1113466E-05 K= 0 L7= 127.81130
L1= 0.8369190 L2= 1.6075700 L3= 0 L4=-2.3944742E-08 L5= 1.9013343E-07 L6= 0

TRAJECTORY INTERRUPT --- C(L00KX(5)) = 0

STEP= 25. + 2. ECCENTRICITY= 0.8819417 OMEGA=-0.2376959 V= 32301.512 R= 2.2522151E+11 REFER=SUN RECT 2
TIME= 7617575.6 SEMILATUS R.= 2.1822231E+11 TRU A= 1.6060406 VX=-19035.910 X= 4.5285619E+10 RMASS= 695.29681
DAYS= 88.1664 MEAN ANOMALY= 7.8929201E-02 NODE= 0 WY= 26096.395 Y= 2.2062172E+11 REVS.= 0.2177788
ALFA= 63.61723 PATH ANGLE= 42.291648 INCL= 0 VZ= 0 Z= 0 DELT= 181419.05
PSI= 62.49807 DPSI=-3.4471007E-06 THETA= 78.400377 DK=-1.1113466E-05 K= 0 L7= 127.81130
L1= 0.8369190 L2= 1.6075700 L3= 0 L4=-2.3944742E-08 L5= 1.9013343E-07 L6= 0

STEP= 58. + 2. ECCENTRICITY= 0.8819413 OMEGA=-0.2376959 V= 14805.135 R= 7.4912962E+11 REFER=SUN RECT 2
TIME= 3.8884524E+07 SEMILATUS R.= 2.1822231E+11 TRU A= 2.5040603 VX= 13810.624 X= 4.8005846E+11 RMASS= 695.29681
DAYS= 450.0524 MEAN ANOMALY= 0.4489699 NODE= 0 WY= 5334.6675 Y= 5.7509918E+11 REVS.= 0.3607031
ALFA= 231.31045 PATH ANGLE= 60.973300 INCL= 0 VZ= 0 Z= 0 DELT=-0.1302527
PSI=-72.430640 DPSI=-1.3682199E-06 THETA= 129.85311 DK= 7.3217223E-06 K= 0 L7= 127.81130
L1= 0.5470847 L2=-1.7278348 L3= 0 L4= 9.9206284E-09 L5= 1.1204407E-07 L6= 0

TRAJECTORY INTERRUPT --- C(L00KX(5)) = 0

STEP= 58. + 2. ECCENTRICITY= 0.8819413 OMEGA=-0.2376959 V= 14805.135 R= 7.4912962E+11 REFER=SUN RECT 2
TIME= 3.8884524E+07 SEMILATUS R.= 2.1822231E+11 TRU A= 2.5040603 VX= 13810.624 X= 4.8005846E+11 RMASS= 695.29681
DAYS= 450.0524 MEAN ANOMALY= 0.4489699 NODE= 0 WY= 5334.6675 Y= 5.7509918E+11 REVS.= 0.3607031
ALFA= 231.31045 PATH ANGLE= 60.973300 INCL= 0 VZ= 0 Z= 0 DELT= 1390852.4
PSI=-72.430640 DPSI=-1.3682199E-06 THETA= 129.85311 DK= 7.3217223E-06 K= 0 L7= 127.81130
L1= 0.5470847 L2=-1.7278348 L3= 0 L4= 9.9206284E-09 L5= 1.1204407E-07 L6= 0

STEP= 63. + 3. ECCENTRICITY= 2.4414063E-04 OMEGA= 2.1172107 V= 13083.328 R= 7.7779753E+11 REFER=SUN RECT 2
TIME= 4.3199554E+07 SEMILATUS R.= 7.7790927E+11 TRU A= 0.2040819 VX=-9554.1361 X= 5.3045932E+11 RMASS= 522.67779
DAYS= 500.0000 MEAN ANOMALY= 0.2039829 NODE= 0 WY=-8908.9252 Y= 5.6884261E+11 REVS.= 0.3694452
ALFA= 299.98503 PATH ANGLE= 1.7033000E-03 INCL= 0 VZ= 0 Z= 0 DELT= 933913.67
PSI=-76.586474 DPSI=-7.9824046E-07 THETA= 133.00027 DK= 1.0362181E-05 K= 37.619324 L7= 175.87607
L1= 0.5124645 L2=-2.2173392 L3= 0 L4= 6.0189015E-09 L5= 1.1476000E-07 L6= 0

PHASE 1 COMPLETED. DELV= 31812. MASS RATIO= 0.52268 \*\*\* TOTAL DELV= 31812. TOTAL MASS RATIO= 0.52268 PAYLOAD RATIO= 0.52268

C (866) = 7.7779999E+11 YIELDS C (437) = 0.5226778 DELV= 31812.297 PAY= 0.5226778

## EXAMPLE 2 - 0.1-AU SOLAR PROBE WITH A SWEEP ON SPECIFIC IMPULSE

This example considers a mission to 0.1 AU using a Titan IID/Centaur to launch a 10-kilowatt solar-electric spacecraft. A sequence of solutions are sought for specific-impulse values from 2600 to 4000 seconds. From previous experience (ref. 10), it is known that permitting coast flight adds very little to the performance but much to the convergence difficulty for these missions. Hence, we assume optimum thrust steering with the no-coast constraint for simplicity. The Earth-escape phase is simulated analytically, and the electric spacecraft betins its heliocentric flight on the x-axis. The level 1 boundary-value problem is set up such that  $\psi_0$ ,  $\dot{\psi}_0$ , and  $v_l$  will be iterated to satisfy the optimum flyby conditions at 0.1 AU:  $r_a = 0.1$  AU and  $(\Lambda/\lambda_m)_a = 0$ . The launch velocity  $v_l$  is used here instead of  $\kappa_0$  because the power level is fixed at 10 kilowatts. Technically, this leaves  $\kappa_0$  open for optimization; however, we shall ignore this optimization since the payoff criterion  $m_n/m_{ref}$  is quite insensitive to  $\kappa_0$ . The input required for this example is as follows:

ISP=2600	spacecraft specific impulse, I, sec
TB=4.32E7	mission time, $t_f$ , sec; equal to 500 days
NOPT=7	manual specification of level 1 boundary-value problem with optimum-travel-angle option
POWER=10	initial spacecraft electric power, $P_0$ , kW
SOLAR=T	solar power option
KE=0.03	low-thrust tankage factor, $k_t$
STRUCT=0	low-thrust structure factor, $k_s$
ALFPOW=30	specific powerplant mass, $\alpha_{ps}$ , kg/kW
BE=0.8	overall powerplant efficiency factors, b and d
DE=15700	
BOOSTM=15500	reference mass of launch vehicle, $m_{ref}$ , kg
VB1=13375	launch velocity, $v_l$ , m/sec
RRAT1=150	sphere-of-influence radius ratio, $r_{s,a}/r_l$
VC1=7810	circular orbit speed at 160-n mi launch altitude, $v_c$ , m/sec
VJET1=3811	launch vehicle performance parameter, $c_l$ , m/sec
K1=0.129	launch vehicle performance parameter, $k_l$

R=1.49597893D11, 0, 0	initial heliocentric position vector, $R_0$ , m
V=0, 29765.2, 0	heliocentric velocity of Earth, $V_0$ , m/sec
COAST=F	coast arcs not permitted
PS=-88.27	initial thrust angle, $\psi_0$ , deg
DPS=5.58E-6	initial thrust angle rate, $\dot{\psi}_0$ , deg/sec
KAPPA=28.3	initial engine on-off switch function, $\kappa_0$
LAM=4.19145	initial magnitude of primer, $\lambda_0$ , (kg)(sec)/m
EREF=1.E-3	integration scheme relative error control, $\bar{\delta}_r$
ERLIMT=3.E-3	limit relative integration error, $\delta_{\text{limit}}$
DELMAX=8640000	output frequency, sec; every 100 days
IA=343, 344, 429	COMMON locations of $\psi_0, \dot{\psi}_0, v_l$
IB=480, 363, 364	COMMON locations of $r, \lambda_1/\lambda_m, \lambda_2/\lambda_m$
DESIRE=1.49597893E10, 0, 0	desired values of arrival conditions, $\bar{y}$
WEIGHT=1.496E11	weighting factor $w_1$ for radius
TOLER=0.001	convergence tolerance, $\bar{\tau}$
IAA=418	COMMON location of sweep variable, specific impulse
SVALUE=3000, 3500, 4000	values of specific impulse for which full trajectory printout is desired
MAXPTS=2	number of points used in extrapolation of $\bar{X}$

The output of this example follows. Note that the  $2\frac{1}{2}$ -revolution solution was found. (There are also solutions for  $1/2, 1\frac{1}{2}, 3\frac{1}{2}$ , etc., revolutions.) Full printouts occur for the first trajectory and for the solutions with I of 3000, 3500, and 4000 seconds. The computer execution time on the IBM 7094II is 0.9 minute.

EXAMPLE 2 - SOLAR PROBE

SAVEC INITIAL DATA FOR STAGE 1 OF CASE 1.

REFERENCE BODY IS SUN

2 DIMENSIONS 14 DIFF.EQNS. T/W= 2.2484632E-05 ISP= 2600.0000 PFLCW= 1.7845157E-05 REFA= 0 AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= 0.4458999 OMEGA=-3.1287374 V= 22173.026 R= 1.4959789E+11 REFER=SUN RECT 2  
 TIME= 0 SEMILATUS R.= 8.2857723E+10 TRU A= 3.1287374 VX= 229.345C7 X= 1.4959789E+11 RMASS= 2063.5164  
 DAYS= 0 MEAN ANOMALY= 3.1115682 NODE= 0 VY= 22171.84C Y= 0 REV5.= 0  
 ALFA= 177.67735 PATH ANGLE= 0.5626453 INCL= 0 VZ= 0 Z= 0 DELT= 432000.00  
 PSI=-88.270C0C DPSI= 5.5799999E-06 THETA= 0 DK= 4.6257672E-07 K= 28.299998 L7= 23.490534  
 L1= 0.1265382 L2=-4.1855394 L3= 0 L4=-4.0914925E-C7 L5= 2.5177062E-08 L6= 0 L8= 0

STEP= 32. + 2. ECCENTRICITY= 0.5281270 OMEGA=-3.2329176 V= 64545.622 R= 4.8502337E+10 REFER=SUN RECT 2  
 TIME= 8639995.6 SEMILATUS R.= 7.3287868E+10 TRU A=-0.2552384 VX=-4894.3926 X= 4.7852224E+10 RMASS= 1881.0954  
 DAYS= 100.0000 MEAN ANOMALY=-6.7433164E-02 NODE= 0 VY=-64363.759 Y= 7.9146290E+09 REV5.= 0.4739124  
 ALFA= 356.12258 PATH ANGLE=-5.0429915 INCL= 0 VZ= 0 Z= 0 DELT= 77067.925  
 PSI=-90.471545 DPSI= 2.7892346E-05 THETA= 170.60845 DK= 4.7716681E-C6 K= 1.6793537 L7= 26.809296  
 L1=-1.7297547E-02 L2=-2.1017157 L3= 0 L4=-1.0202455E-C6 L5= 3.6044472E-07 L6= 0 L8= 0

STEP= 68. + 2. ECCENTRICITY= 0.6113584 OMEGA=-3.1243871 V= 17928.566 R= 1.6352188E+11 REFER=SUN RECT 2  
 TIME= 1.7279598E+07 SEMILATUS R.= 6.3845129E+10 TRU A= 3.0649180 VX= 3189.2918 X= 1.6323281E+11 RMASS= 1702.8326  
 DAYS= 200.0C00 MEAN ANOMALY= 2.8907908 NODE= 0 VY= 17642.616 Y= 9.7187752E+09 REV5.= 0.9905352  
 ALFA= 170.556716 PATH ANGLE= 6.8394836 INCL= 0 VZ= 0 Z= 0 DELT= 594779.63  
 PSI=-90.8036C7 DPSI= 4.4576789E-06 THETA= 356.59266 DK= 1.3671515E-06 K= 32.797728 L7= 30.657357  
 L1=-5.9436254E-02 L2=-4.2374214 L3= 0 L4=-3.2835580E-C7 L5= 5.5920259E-C8 L6= 0 L8= 0

STEP= 93. + 2. ECCENTRICITY= 0.6888826 OMEGA=-3.2426031 V= 6955C.428 R= 4.2758698E+10 REFER=SUN RECT 2  
 TIME= 2.5919958E+07 SEMILATUS R.= 5.0890502E+10 TRU A=-1.2910949 VX=-43862.914 X=-1.5888340E+10 RMASS= 1534.2834  
 DAYS= 300.0C0C MEAN ANOMALY=-0.2220886 NODE= 0 VY=-53975.057 Y= 3.5697190E+10 REV5.= 1.3105922  
 ALFA= 324.72C15 PATH ANGLE=-29.087727 INCL= 0 VZ= 0 Z= 0 DELT= 77962.497  
 PSI=-93.815648 DPSI= 4.2896791E-05 THETA= 471.81318 DK= 1.0212851E-05 K= 18.902946 L7= 35.610293  
 L1=-6.6576246E-02 L2= 1.0C31207 L3= 0 L4= 7.9166759E-07 L5= 5.6304457E-07 L6= 0 L8= 0

STEP= 145. + 2. ECCENTRICITY= 0.7689342 OMEGA=-3.1231938 V= 13475.256 R= 1.7279529E+11 REFER=SUN RECT 2  
 TIME= 3.4559956E+07 SEMILATUS R.= 4.0048448E+10 TRU A= 3.0988463 VX= 2215.8046 X= 1.7274408E+11 RMASS= 1361.0252  
 DAYS= 400.0C00 MEAN ANOMALY= 2.9327975 NODE= 0 VY= 13291.870 Y=-4.2067218E+09 REV5.= 1.9961250  
 ALFA= 170.12782 PATH ANGLE= 8.0653787 INCL= 0 VZ= 0 Z= 0 DELT= 532501.57  
 PSI=-89.592216 DPSI= 3.7053917E-06 THETA= 718.60499 DK= 1.2242662E-C6 K= 38.184099 L7= 41.249037  
 L1= 3.0177056E-02 L2=-4.2399709 L3= 0 L4=-2.7466947E-07 L5= 6.3397122E-08 L6= 0 L8= 0

STEP= 181. + 2. ECCENTRICITY= 0.8339287 OMEGA=-3.0331403 V= 127540.65 R= 1.4962139E+10 REFER=SUN RECT 2  
 TIME= 4.319956E+07 SEMILATUS R.= 2.7437360E+10 TRU A= 1.8506017E-02 VX= 15083.700 X=-1.4841718E+10 RMASS= 1200.7586  
 DAYS= 500.0C00 MEAN ANOMALY= 9.2488130E-04 NODE= 0 VY=-126645.60 Y=-1.8944690E+09 REV5.= 2.5202060  
 ALFA= 158.94537 PATH ANGLE= 0.4821485 INCL= 0 VZ= 0 Z= 0 DELT= 11453.155  
 PSI= 117.84644 DPSI= 5.0644076E-03 THETA= 907.27417 DK= 1.2101470E-C5 K= 48.425145 L7= 48.753842  
 L1=-7.2996536E-03 L2= 1.3817826E-02 L3= 0 L4= 1.4874144E-C6 L5= 1.4161210E-07 L6= 0 L8= 0

STEP= 182. + 2. ECCENTRICITY= 0.8339287 OMEGA=-3.0331404 V= 127540.67 R= 1.4962143E+10 REFER=SUN RECT 2  
 TIME= 4.32000C0E+07 SEMILATUS R.= 2.7437360E+10 TRU A= 1.8534423E-02 VX= 15085.659 X=-1.4841668E+10 RMASS= 1200.7586  
 DAYS= 500.0C00 MEAN ANOMALY= 9.2630111E-04 NODE= 0 VY=-126645.35 Y=-1.8948911E+09 REV5.= 2.5202105  
 ALFA= 158.92527 PATH ANGLE= 0.4828886 INCL= 0 VZ= 0 Z= 0 DELT= 3.3325195  
 PSI= 117.86351 DPSI= 5.0631846E-03 THETA= 907.27579 DK= 1.2110086E-C5 K= 48.425105 L7= 48.753842  
 L1=-7.3046505E-03 L2= 1.3817354E-02 L3= 0 L4= 1.4874156E-C6 L5= 1.4161420E-07 L6= 0 L8= 0

PHASE 1 COMPLETED. DELV= 13806. MASS RATIO= 0.58190 \*\*\* TOTAL DELV= 13806. TOTAL MASS RATIO= 0.58190 PAYLOAD RATIO= 0.05644

KE=-030 STRUCT=- ALFPDW= 30.000 PJ/MO= 3.7423699E-04 PJ/M1= 2.8110625E-03 MPP/M1= 0.145 ETAPDW= 0.580 ML/M1= 0.42397  
 KI=-129 VJET1= 3811.0 VBI= 7810.0 VBI= 13375.000 VSPH1= 7596.8221 VBI/MO= 0.133 TSP1R= 0. TMISSION= 500.000

NOPT= 7, COAST=F, EPHEM=F, NBVP=1, KBODYS=1, FRSTAR= 1.00000, NSWEEP= 0, IRR= 437

IAA	IA	IB	DESIRE	WEIGHT	PERTEM	PERTNR
418	343	480	1.4959789E+10	1.496E+11	-1.000E-C2	-1.000E-04
0	344	363	0	1.000	-1.000E-02	-1.000E-04
0	429	344	0	1.000	-1.000E-02	-1.000E-04

RUN N ERROR TIME 3 INDEPENDENT VARIABLES -- 3 DEPENDENT VARIABLES

1ND	0.000321	4.3200E+07 - 88.2700	5.58000E-06 13375.0	1.49621E+10 -1.49827E-04 2.83411E-04
	CI (418)	= 2600.0000 YIELDS	CI (437) = 5.6443601E-02	DELV= 13805.712 PAY= 5.6443601E-02
2ND	0.000357	4.3200E+07 - 88.2700	5.58000E-06 13375.0	1.49869E+10 -1.60803E-04 2.62608E-04
	CI (418)	= 2602.0000 YIELDS	CI (437) = 5.6523452E-02	CELV= 13753.950 PAY= 5.6523452E-C2
3ND	0.000590	4.3200E+07 - 88.2700	5.58000E-06 13375.0	1.50366E+10 -1.84803E-04 2.24355E-04
	CI (418)	= 2607.8000 YIELDS	CI (437) = 5.6682658E-02	DELV= 13770.625 PAY= 5.6682658E-C2
4ND	0.001541	4.3200E+07 - 88.2700	5.58000E-06 13375.0	1.51868E+10 -2.44422E-04 1.08948E-04
	CI (418)	= 2623.3999 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
5 0	0.002257	4.3200E+07 - 88.2612	5.58000E-06 13375.0	1.52803E+10 -7.27573E-04 3.58885E-C4
	CI (418)	= 2630.0000 YIELDS	CI (437) = 5.6882658E-02	DELV= 13770.625 PAY= 5.6882658E-C2
6 0	0.001466	4.3200E+07 - 88.2700	5.57944E-06 13375.0	1.51801E+10 -1.71973E-04 9.83249E-05
	CI (418)	= 2610.0000 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
7 0	0.001444	4.3200E+07 - 88.2700	5.58000E-06 13373.7	1.52055E+10 2.95332E-05 4.48317E-C5
	CI (418)	= 2623.3999 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
8ND	0.000700	4.3200E+07 - 88.2765	5.57267E-06 13380.1	1.50641E+10 -5.72901E-05 3.83709E-05
	CI (418)	= 2623.3999 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
9ND	0.001404	4.3200E+07 - 88.2959	5.55070E-06 13395.3	1.51827E+10 2.65535E-04 -5.20816E-04
	CI (418)	= 2610.0000 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
10 0	0.001375	4.3200E+07 - 88.2870	5.55070E-06 13395.3	1.51620E+10 -1.06104E-C4 -2.27933E-04
	CI (418)	= 2610.0000 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
11 0	0.001655	4.3200E+07 - 88.2959	5.55014E-06 13395.3	1.51950E+10 3.47372E-04 -5.29973E-04
	CI (418)	= 2610.0000 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
12 0	0.002244	4.3200E+07 - 88.2959	5.55070E-06 13393.9	1.52772E+10 5.27663E-04 -5.88961E-04
	CI (418)	= 2623.3999 YIELDS	CI (437) = 5.6790720E-02	DELV= 13754.237 PAY= 5.6790720E-02
13ND	0.000310	4.3200E+07 - 88.2842	5.55370E-06 13402.2	1.50061E+10 -5.55725E-06 -1.30302E-06
	CI (418)	= 2670.1999 YIELDS	CI (437) = 5.6760501E-02	DELV= 13723.155 PAY= 5.6760501E-02
14ND	0.000910	4.3200E+07 - 88.3074	5.43119E-06 13468.8	1.48295E+10 2.17174E-04 -1.48938E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
15ND	0.002020	4.3200E+07 - 88.3387	5.28804E-06 13558.5	1.46748E+10 5.77067E-04 -3.39895E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
16 0	0.002657	4.3200E+07 - 88.3258	5.28804E-06 13558.5	1.45349E+10 2.89141E-04 -1.08321E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
17 0	0.001849	4.3200E+07 - 88.3387	5.28751E-06 13558.5	1.47045E+10 6.20853E-04 -3.45994E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
18 0	0.001172	4.3200E+07 - 88.3387	5.28804E-06 13557.1	1.48399E+10 7.56641E-04 -4.00448E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
19 0	0.001548	4.3200E+07 - 88.3387	5.28804E-06 13558.2	1.47042E+10 6.12374E-04 -3.51068E-04
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02
20 0	0.000681	4.3200E+07 - 88.3030	5.31594E-06 13536.3	1.49644E+10 6.79796E-05 3.07944E-05
	CI (418)	= 2810.5959 YIELDS	CI (437) = 5.6417645E-02	DELV= 13647.547 PAY= 5.6417645E-02

REFERENCE BODY IS SUN

2 DIMENSIONS 14 DIFF.EQNS. T/W= 2.2776023E-05 [ISP= 3000.0000] PFLOW= 1.4388166E-05 REFA= 0 AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= C.4598296 OMEGA=-3.1290736 V= 21892.619 R= 1.4959789E+11 REFER=SUN RECT 2  
TIME= 0 SEMILATUS R.= 8.0813749E+10 TRU A= 3.1290736 VX= 233.27533 X= 1.4959789E+11 RMASS= 1895.1753  
DAYS= 0. MEAN ANOMALY= 3.1115499 NODE= 0 VY= 21891.376 Y= 0 REVS.= 0  
ALFA= 177.69249 PATH ANGLE= C.6105229 INCL= 0 VZ= 0 Z= 0 DELT= 432000.00  
PSI=-88.303012 DPST= 5.3159420E-06 THETA= 0 OK= 5.6240465E-07 K= 28.299999 L7= 36.766409  
L1= 0.1241243 L2=-4.1896117 L3= 0 L4=-3.8578755E-07 L5= 2.4696773E-08 L6= 0

STEP= 34. + 2. ECCENTRICITY= 0.5429763 OMEGA= 3.2239206 V= 66389.050 R= 4.6441442E+10 REFER=SUN RECT 2  
TIME= 8639995.6 SEMILATUS R.= 7.1562116E+10 TRU A=-8.7253034E-02 VX= 1710.7850 X= 4.6440875E+10 RMASS= 1747.8114  
DAYS= 300.0000 MEAN ANOMALY=-2.1721855E-02 NODE= 0 VY=-66367.004 Y= 2.2872727E+08 REVS.= 0.4992161  
ALFA= 358.90166 PATH ANGLE=-1.7588099 INCL= 0 VZ= 0 Z= 0 DELT= 75514.208  
PSI=-87.425444 DPST= 3.3440147E-05 THETA= 179.71781 L3= 0 DK= 2.2557642E-06 K= 0.5580359 L7= 40.438375  
L1= 0.1064419 L2=-2.3668611 L4=-1.3874171E-06 L5= 7.1753713E-08 L6= 0

STEP= 69. + 2. ECCENTRICITY= 0.6243988 OMEGA=-3.1259579 V= 17501.177 R= 1.6477836E+11 REFER=SUN RECT 2  
TIME= 1.7279595E+07 SEMILATUS R.= 6.2070258E+10 TRU A= 3.0825195 VX= 2456.3305 X= 1.6462293E+11 RMASS= 1605.4229  
DAYS= 200.0000 MEAN ANOMALY= 2.9424206 NODE= 0 VY= 17327.518 Y= 1.654568E+09 REVS.= 0.9930866  
ALFA= 172.04311 PATH ANGLE= 5.5893162 INCL= 0 VZ= 0 Z= 0 DELT= 662280.34  
PSI=-90.121272 DPST= 4.2591450E-06 THETA= 357.51116 L3= 0 DK= 1.3544552E-06 K= 33.782144 L7= 44.609245  
L1=-9.0543172E-03 L2=-4.2777451 L4=-3.1782985E-07 L5= 7.6767408E-08 L6= 0

STEP= 98. + 2. ECCENTRICITY= C.6956600 OMEGA= 3.2348388 V= 75622.246 R= 3.7492514E+10 REFER=SUN RECT 2  
TIME= 2.5519958E+07 SEMILATUS R.= 4.9846592E+10 TRU A=-1.0804471 VX=-39696.930 X= 2.0659639E+10 RMASS= 1469.1925  
DAYS= 300.0000 MEAN ANOMALY=-0.1622246 NODE= 0 VY=-64376.943 Y= 3.1287346E+10 REVS.= 1.3428821  
ALFA= 338.72279 PATH ANGLE=-2.903105 INCL= 0 VZ= 0 Z= 0 DELT= 32116.280  
PSI=-100.38214 DPST= -8.5869136E-06 THETA= 483.43755 L3= 0 CK= 2.1812458E-05 K= 25.471545 L7= 49.679219  
L1= 0.2178588 L2=-1.1891060 L4= 3.7451408E-07 L5= 1.6388001E-06 L6= 0

STEP= 148. + 2. ECCENTRICITY= 0.7753833 OMEGA=-3.1244797 V= 13178.018 R= 1.7455829E+11 REFER=SUN RECT 2  
TIME= 3.4559557E+07 SEMILATUS R.= 3.9292828E+10 TRU A= 3.1063362 VX= 1825.4927 X= 1.7452556E+11 RMASS= 1331.1315  
DAYS= 400.0000 MEAN ANOMALY= 2.9658669 NODE= 0 VY= 13000.967 Y= 3.1649253E+05 REVS.= 1.9971124  
ALFA= 171.34517 PATH ANGLE= 6.9229913 INCL= 0 VZ= 0 Z= 0 DELT= 521642.52  
PSI=-89.211723 DPST= 3.5844693E-06 THETA= 718.96045 L3= 0 DK= 1.2559032E-06 K= 39.414749 L7= 55.365194  
L1= 5.1514076E-02 L2=-4.2880924 L4=-2.6894885E-07 L5= 5.3583431E-08 L6= 0

STEP= 184. + 2. ECCENTRICITY= 0.8358092 OMEGA=-3.0395966 V= 127554.67 R= 1.4964411E+10 REFER=SUN RECT 2  
TIME= 4.3199556E+07 SEMILATUS R.= 2.7461456E+10 TRU A=-4.0679919E-02 VX= 10175.907 X= 1.4952629E+10 RMASS= 1201.8968  
DAYS= 500.0000 MEAN ANOMALY=-1.9980140E-03 NODE= 0 VY=-127188.25 Y= 9.1698376E+08 REVS.= 2.5097587  
ALFA= 250.22177 PATH ANGLE=-1.0611493 INCL= 0 VZ= 0 Z= 0 DELT= 10770.641  
PSI= 24.252512 DPST= 5.8410155E-03 THETA= 903.51315 L3= 0 DK=-3.3207338E-05 K= 62.423087 L7= 62.536300  
L1= 4.2559378E-03 L2= 1.9261463E-03 L4= 1.4320416E-06 L5= 1.2546459E-07 L6= 0

STEP= 185. + 2. ECCENTRICITY= 0.8358093 OMEGA=-3.0395967 V= 127594.71 R= 1.4964404E+10 REFER=SUN RECT 2  
TIME= 4.3200000E+07 SEMILATUS R.= 2.7461456E+10 TRU A=-4.0654063E-02 VX= 10177.701 X= 1.4936259E+10 RMASS= 1201.8968  
DAYS= 500.0000 MEAN ANOMALY=-1.9967428E-03 NODE= 0 VY=-127188.14 Y= 9.1736951E+08 REVS.= 2.5097629  
ALFA= 250.20485 PATH ANGLE=-1.0604748 INCL= 0 VZ= 0 Z= 0 DELT= 2.5097629  
PSI= 24.270243 DPST= 5.8513098E-03 THETA= 903.51463 L3= 0 DK=-3.3203707E-05 K= 62.423187 L7= 62.536300  
L1= 4.2511545E-03 L2= 1.9257658E-03 L4= 1.4320405E-06 L5= 1.2546473E-07 L6= 0

PHASE 1 COMPLETED. DELV= 13398. MASS RATIO= 0.63419 \*\*\* TOTAL DELV= 13358. TOTAL MASS RATIO= 0.63419 PAYLOAD RATIO= 0.05685

KE=.030 STRUCT=. ALFPOW= 30.000 P/JMO= 4.0172437E-04 P/JM1= 3.2855684E-03 MPP/M1= 0.150 ETAPOW= 0.623 ML/M1= 0.46492  
K1= 129 VJET1= 3811.0 VC1= 7810.0 V81= 13536.264 VSPH1= 7877.2786 M1/MO= 0.122 TSP1R= 0. TMSSSION= 500.000  
C1 41E1 = 3000.0000 YIELDS C1 437 = 5.6845060E-02 DELV= 13398.150 PAY= 5.6845060E-02  
22 C 0.00C404 4.32C0E+07 -88.2915 5.01170E-06 13714.5 1.50197E+10 4.08761E-05 3.60450E-05

REFERENCE BODY IS SUN

2 DIMENSIONS 14 DIFF.EQNS. T/W= 2.2891123E-05 **ISP= 3500.0000** PFLGW= 1.1231402E-05 REFA= C AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= 0.4746445 OMEGA=-3.1290883 V= 21590.508 R= 1.4959789E+11 REFER=SUN RECT 2  
TIME= 0 SEMILATUS R.= 7.8557628E+10 TRU A= 3.1290883 VX= 243.87569 X= 1.4959789E+11 RMASS= 1717.2555  
DAYS= 0. MEAN ANOMALY= 3.1107007 NODE= 0 VY= 21589.131 Y= 0 REVS.= 0  
ALFA= 177.64429 PATH ANGLE= 0.6471985 INCL= 0 VZ= 0 Z= 0 DELT= 432000.00  
PSI=-88.291489 DPST= 5.0117046E-06 THETA= 0 OK= 7.1577063E-07 K= 28.299999 L7= 55.475706  
L1= 0.1245669 L2=-4.1895866 L3= 0 L4=-3.6753358E-07 L5= 2.4864427E-08 L6= 0

STEP= 36. + 2. ECCENTRICITY= 0.5578642 OMEGA=-3.0679704 V= 87861.237 R= 4.4871897E+10 REFER=SUN RECT 2  
TIME= 8639995.6 SEMILATUS R.= 6.9777862E+10 TRU A= 0.1005587 VX= 9347.4139 X= 4.4192932E+10 RMASS= 1602.0116  
DAYS= 300.0000 MEAN ANOMALY= 2.3714441E-02 NODE= 0 VY=-67214.384 Y= 7.7763686E+09 REVS.= 0.5272218  
ALFA= 1.2463453 PATH ANGLE= 2.0625656 INCL= 0 VZ= 0 Z= 0 DELT= 75015.062  
PSI=-83.329068 DPST= 3.7315241E-05 THETA= 189.97983 L3= 0 DK= 4.0116755E-06 K= 2.7671399 L7= 59.586010  
L1= 0.3080707 L2=-2.6340212 L4=-1.6537178E-06 L5= 3.8661270E-07 L6= 0

STEP= 70. + 2. ECCENTRICITY= 0.6368262 OMEGA=-3.1270948 V= 17105.012 R= 1.6587940E+11 REFER=SUN RECT 2  
TIME= 1.7279595E+07 SEMILATUS R.= 6.0336249E+10 TRU A= 3.0995842 VX= 1723.0544 X= 1.6581663E+11 RMASS= 1491.9086  
DAYS= 200.0000 MEAN ANOMALY= 2.9957663 NODE= 0 VY= 17018.006 Y= 4.5628679E+09 REVS.= 0.9956215  
ALFA= 173.63239 PATH ANGLE= 4.2051909 INCL= 0 VZ= 0 Z= 0 DELT= 701021.13  
PSI=-89.413830 DPST= 4.0552393E-06 THETA= 358.42375 L3= 0 DK= 1.4061767E-06 K= 35.442089 L7= 64.148172  
L1= 4.4285768E-02 L2=-4.3286018 L4=-3.0729415E-07 L5= 5.7980697E-08 L6= 0

STEP= 102. + 2. ECCENTRICITY= 0.7097314 OMEGA= 3.2271324 V= 82615.622 R= 3.2479534E+10 REFER=SUN RECT 2  
TIME= 2.5915958E+07 SEMILATUS R.= 4.8909410E+10 TRU A=-0.7774381 VX=-30075.257 X= 2.5010726E+10 RMASS= 1385.2128  
DAYS= 300.0000 MEAN ANOMALY=C.1016100 NODE= 0 VY=-76948.865 Y= 2.0722202E+10 REVS.= 1.3989809  
ALFA= 349.23223 PATH ANGLE=-18.294441 INCL= 0 VZ= 0 Z= 0 DELT= 44941.064  
PSI=-100.58066 DPST= 3.2164838E-05 THETA= 500.35714 L3= 0 DK= 3.2119139E-05 K= 31.877349 L7= 69.415372  
L1= 0.2781751 L2=-1.4891948 L4=-5.9798917E-07 L5= 1.4303814E-06 L6= 0

STEP= 149. + 2. ECCENTRICITY= 0.7808711 OMEGA=-3.1254842 V= 12918.150 R= 1.7620714E+11 REFER=SUN RECT 2  
TIME= 3.4559557E+07 SEMILATUS R.= 3.8665098E+10 TRU A= 3.1138327 VX= 1419.5102 X= 1.7619518E+11 RMASS= 1278.7433  
DAYS= 400.0000 MEAN ANOMALY= 3.0007866 NODE= 0 VY= 12839.921 Y= 2.0520482E+09 REVS.= 1.9981456  
ALFA= 172.65571 PATH ANGLE= 5.6410958 INCL= 0 VZ= 0 Z= 0 DELT= 606791.25  
PSI=-88.961410 DPST= 3.4758360E-06 THETA= 719.33241 L3= 0 CK= 1.3073705E-06 K= 41.771118 L7= 75.245789  
L1= 7.8564222E-02 L2=-4.3588583 L4=-2.6530695E-07 L5= 4.3933229E-08 L6= 0

STFP= 185. + 2. ECCENTRICITY= C.8369020 OMEGA=-3.0454146 V= 127398.25 P= 1.5019665E+10 REFER=SUN RECT 2  
 TIME= 4.315555E+07 SEMILATUS R.= 2.7582031E+10 TRU A=-3.4824706E-02 VX= 9821.6571 Y= 1.4951405E+10 RMASS= 1178.2644  
 DAYS= 500.CCCC MEAN ANOMALY=-1.6927677E-03 NODE= 0 VY=-127018.61 Y= 9.2092884E+08 REVS.= 2.5097647  
 ALFA= 233.05231 PATH ANGLE=-C.9050640 INCL= 0 VZ= 0 Z= C DELT= 10952.285  
 PSI= 41.372021 DPSI= 1.1069430E-02 THETA= 903.51528 DK=-3.3932340E-05 K=-82.123343 L7= 82.252939  
 L1= 3.366665E-03 L2= 2.9651766E-03 L3= 0 L4= 1.4466656E-06 L5= 1.1935029E-07 L6= 0

STEP= 186. + 2. ECCENTRICITY= 0.8369020 OMEGA=-3.0454145 V= 127398.27 R= 1.5019659E+10 REFER=SUN RECT 2  
 TIME= 4.3200000E+07 SEMILATUS R.= 2.7582031E+10 TRU A=-3.4798535E-02 VX= 9825.6687 X= 1.4991375E+10 RMASS= 1178.2644  
 DAYS= 500.CCCC MEAN ANOMALY=-1.6914955E-03 NODE= 0 VY=-127018.50 Y= 9.2132075E+08 REVS.= 2.5097688  
 ALFA= 233.01655 PATH ANGLE=-C.9083909 INCL= 0 VZ= 0 Z= 0 DELT= 3.0854492  
 PSI= 41.406202 DPSI= 1.1087171E-02 THETA= 903.51678 DK=-3.3917255E-05 K=-82.123446 L7= 82.252939  
 L1= 3.3621812E-03 L2= 2.9648084E-03 L3= 0 L4= 1.4468688E-06 L5= 1.1935057E-07 L6= 0

PHASE 1 COMPLETED. DELV= 12929. MASS RATIO= 0.68613 \*\*\* TOTAL DELV= 12929. TOTAL MASS RATIO= 0.68613 PAYLOAD RATIO= 0.05562

KE=.030 STRUCT=. ALFPDW= 3C.000 PJ/MO= 4.2682486E-04 PJ/MI= 3.8525341E-03 MPP/MI= 0.175 ETAPDW=C.662 ML/MI= 0.50202  
 K1=.129 VJETI= 3811.0 VCI= 7810.0 VBI= 13714.463 VSPHI= 8179.7054 MI/MO= 0.111 TSPIR= 0. TMISSION= 500.000  
 C( 418 ) = 350C.0000 YIELDS C( 437 ) = 5.5619008E-02 DELV= 12929.059 PAY= 5.56150C8E-02  
 24N0 0.002166 4.3200E+07 -88.2800 4.70747E-06 13892.7 1.46362E+10 8.01512E-05 -6.85868E-05  
 25 0 0.002167 4.3200E+07 -88.2800 4.70747E-06 13892.7 1.46316E+10 -8.83281E-05 7.86366E-05  
 26 0 0.002128 4.3200E+07 -88.2800 4.70700E-06 13892.7 1.46419E+10 1.00881E-04 -7.26786E-05  
 27 0 0.002155 4.3200E+07 -88.2800 4.70747E-06 13892.4 1.46469E+10 5.82538E-05 -7.49556E-05  
 28 0 0.000231 4.3200E+07 -88.2653 4.72301E-06 13879.1 1.49128E+10 6.53366E-05 -8.29893E-05

REFERENCE BODY IS SUN

2 DIMENSIONS 14 DIFF.EQNS. T/W= 2.2979227E-05 ISP= 4000.0000 PFLOW= 8.5625001E-06 REFA= 0 AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= 0.4878450 OMEGA=-3.1289892 V= 21317.762 R= 1.4959789E+11 REFER=SUN RECT 2  
 TIME= 0 SEMILATUS R.= 7.6623113E+10 TRU A= 3.1289892 VX= 255.88020 X= 1.4959789E+11 RMASS= 1560.1047  
 DAYS= 0. MEAN ANOMALY= 3.1096328 NODE= 0 VY= 21316.227 Y= 0 REVS.= 0  
 ALFA= 177.57756 PATH ANGLE= 0.6877461 INCL= 0 VZ= 0 Z= 0 DELT= 432000.00  
 PSI=-88.265306 DPSI= 4.7230087E-06 THETA= 0 DK= 8.9814856E-07 K= 28.299997 L7= 77.088012  
 L1= 0.1268814 L2= 4.1895291 L3= 0 L4=-3.4643280E-07 L5= 2.5245343E-06 L6= 0

STEP= 38. + 2. ECCENTRICITY= 0.5709333 OMEGA=-3.0747913 V= 68696.152 R= 4.4607767E+10 REFER=SUN RECT 2  
 TIME= 8639955.6 SEMILATUS R.= 6.8172519E+10 TRU A= 0.2774313 VX= 16571.422 X= 4.1426037E+10 RMASS= 1468.0002  
 DAYS= 100.0000 MEAN ANOMALY= 6.2795700E-02 NODE= 0 VY=-66667.494 Y= 1.4851499E+10 REVS.= 0.5547863  
 ALFA= 3.0411243 PATH ANGLE= 5.7640718 INCL= 0 VZ= 0 Z= 0 DELT= 66513.282  
 PSI=-79.082122 DPSI= 3.8912090E-05 THETA= 199.72308 DK=-1.4614214E-05 K= 4.3699532 L7= 81.692156  
 L1= 0.5480672 L2= 2.8412979 L3= 0 L4=-1.8260637E-06 L5= 9.0923359E-07 L6= 0

STEP= 72. + 2. ECCENTRICITY= 0.6478109 OMEGA=-3.1279183 V= 16768.765 R= 1.6677164E+11 REFER=SUN RECT 2  
 TIME= 17279555E+07 SEMILATUS R.= 5.8776782E+10 TRU A= 3.1138332 VX= 1090.1753 X= 1.6675510E+11 RMASS= 1380.8755  
 DAYS= 20C.0000 MEAN ANOMALY= 3.0426967 NODE= 0 VY= 16733.250 Y= 2.3489121E+09 REVS.= 0.9577583  
 ALFA= 175.05080 PATH ANGLE= 2.9205559 INCL= 0 VZ= 0 Z= 0 DELT= 562978.62  
 PSI=-88.818385 DPSI= 3.8755323E-06 THETA= 359.19298 DK= 1.3627841E-06 K= 37.660158 L7= 86.699344  
 L1= 9.0276585E-02 L2=-4.3768380 L3= 0 L4=-2.9704212E-07 L5= 4.1856863E-08 L6= 0

STEP= 108. + 2. ECCENTRICITY= 0.7191506 OMEGA=-3.2209582 V= 88525.743 R= 2.8939045E+10 REFER=SUN RECT 2  
 TIME= 2.5515555E+07 SEMILATUS R.= 4.7955389E+10 TRU A=-0.4136425 VX=-14254.044 X= 2.7337205E+10 RMASS= 1295.4601  
 DAYS= 300.0000 MEAN ANOMALY=-4.8101936E-02 NODE= 0 VY=-87370.645 Y= 5.4945017E+09 REVS.= 1.4467982  
 ALFA= 355.700179 PATH ANGLE=-9.8867954 INCL= 0 VZ= 0 Z= 0 DELT= 29935.598  
 PSI=-94.961666 DPSI= 6.4856442E-05 THETA= 520.84734 DK= 2.9004976E-05 K= 36.770218 L7= 92.272442  
 L1=-0.1587228 L2= 1.8260781 L3= 0 L4=-1.9840975E-06 L5= 1.1339600E-06 L6= 0

STEP= 152. + 2. ECCENTRICITY= 0.7866527 OMEGA=-3.1264217 V= 12664.981 R= 1.7777790E+11 REFER=SUN RECT 2  
 TIME= 3.4559557E+07 SEMILATUS R.= 3.7960789E+10 TRU A= 3.1200851 VX= 1080.2763 X= 1.7777434E+11 RMASS= 1211.4817  
 DAYS= 400.0000 MEAN ANOMALY= 3.0304552 NODE= 0 VY= 12618.825 Y= 1.1265010E+09 REVS.= 1.9989915  
 ALFA= 173.74490 PATH ANGLE= 4.5300036 INCL= 0 VZ= 0 Z= 0 DELT= 648749.16  
 PSI=-88.657576 DPSI= 3.3628694E-06 THETA= 719.63693 DK= 1.3623856E-06 K= 45.206621 L7= 98.386829  
 L1= 0.1038848 L2=-4.4335508 L3= 0 L4=-2.6120445E-07 L5= 3.9568601E-08 L6= 0

STEP= 188. + 2. ECCENTRICITY= C.8395701 OMEGA=-3.0498740 V= 127944.87 R= 1.4912852E+10 REFER=SUN RECT 2  
 TIME= 4.3199997E+07 SEMILATUS R.= 2.7417549E+10 TRU A=-5.0064442E-02 VX= 8247.0884 X= 1.4899917E+10 RMASS= 1131.5998  
 DAYS= 50C.CCCC MEAN ANOMALY=-2.3728205E-03 NODE= 0 VY=-127678.80 Y= 6.2100276E+08 REVS.= 2.5066294  
 ALFA= 325.46619 PATH ANGLE=-1.3051338 INCL= 0 VZ= 0 Z= 0 DELT= 10662.935  
 PSI=-51.770464 DPSI=-6.0710085E-03 THETA= 902.38660 DK=-2.7253494E-05 K= 105.10148 L7= 105.48676  
 L1= 6.8960222E-03 L2=-8.7539663E-03 L3= 0 L4= 1.4140135E-06 L5= 1.1318018E-07 L6= 0

STEP= 189. + 2. ECCENTRICITY= C.8395701 OMEGA=-3.0498740 V= 127944.51 R= 1.4912844E+10 REFER=SUN RECT 2  
 TIME= 4.3200000E+07 SEMILATUS R.= 2.7417548E+10 TRU A=-5.0041054E-02 VX= 8248.7141 X= 1.4899894E+10 RMASS= 1131.5998  
 DAYS= 500.CCCC MEAN ANOMALY=-2.3717119E-03 NODE= 0 VY=-127678.73 Y= 6.2135091E+08 REVS.= 2.5066332  
 ALFA= 325.46246 PATH ANGLE=-1.3085222 INCL= 0 VZ= 0 Z= 0 DELT= 10662.935  
 PSI=-51.787022 DPSI=-6.0733350E-03 THETA= 902.38793 DK=-2.7241661E-05 K= 105.10156 L7= 105.48676  
 L1= 6.8921445E-03 L2=-8.7542750E-03 L3= 0 L4= 1.4140121E-06 L5= 1.1317913E-07 L6= 0

PHASE 1 COMPLETED. DELV= 12596. MASS RATIO= 0.72534 \*\*\* TOTAL DELV= 12596. TOTAL MASS RATIO= 0.72534 PAYLOAD RATIO= 0.05232

KE=.030 STRUCT=. ALFPDW= 3C.000 PJ/MO= 4.4486557E-04 PJ/MI= 4.4198422E-03 MPP/MI= 0.192 ETAPDW=C.65C ML/MI= 0.52480  
 K1=.129 VJETI= 3811.0 VCI= 7810.0 VBI= 13879.104 VSPHI= 8452.8469 MI/MO= 0.101 TSPIR= 0. TMISSION= 500.000  
 C( 418 ) = 400C.0000 YIELDS C( 437 ) = 5.2822234E-02 DELV= 12596.468 PAY= 5.2822234E-02

**EXAMPLE 3 - JUPITER CAPTURE MISSION WITH HIGH-THRUST DEPARTURE  
AND CAPTURE AND OPTIMUM VEHICLE PARAMETERS**

This example illustrates (1) the analytic high-thrust approximations for the departure and capture phases; (2) the use of transversality conditions to optimize the initial mass flow rate, specific impulse, high-thrust launch velocity, and high-thrust retro-braking; and (3) the alternate method of specifying the initial values of the adjoint variables. We will specify a two-dimensional solar system model with only the Sun's gravitational force acting on the spacecraft. The spacecraft will start its heliocentric path on the x-axis at 1 AU with a velocity equal to Earth's circular velocity plus an incremental velocity from the high-thrust launch vehicle. The launch vehicle is assumed to inject the electric spacecraft at 185-kilometer altitude, after which it coasts to a sphere of influence of radius 150 times the launch radius. Hence,

$$R_0 = (1.49597893 \times 10^{11}, 0, 0) \text{ m}$$

$$V_0 = (0, 29765.2, 0) \text{ m/sec}$$

$$v_{c,l} = 7795 \quad \text{m/sec (circular speed at 185 km)}$$

$$r_{s,d}/r_l = 150$$

The launch vehicle performance simulates the Atlas/Centaur/SLV-3C:

$$k_l = 0.369$$

$$c_l = 4001 \text{ m/sec}$$

Instead of specifying the reference mass of the launch vehicle in low Earth orbit, a nondimensional approach will be used to permit simple scaling to any reference mass. This is done by specifying that the initial heliocentric mass of the electric vehicle is some convenient number - 1000 kilograms - and letting the program print out the appropriate mass ratios. The electric vehicle assumptions are

- (1) Specific powerplant mass,  $\alpha_{ps}$ , 34 kg/kW
- (2) Structure mass factor,  $k_s$ , 0.1
- (3) Tankage mass factor,  $k_t$ , 0.1
- (4) Specific impulse,  $I$ , 3650 sec
- (5) Initial thrust-weight ratio,  $f/m_0g$ ,  $3.73 \times 10^{-5}$
- (6) Powerplant efficiency, the default efficiency curve



(7) Type of power source, solar panels using built-in power profile

(8) Thrust program, optimum angle with coast arcs permitted

Since the specific impulse and initial thrust-weight ratio are to be optimized, the values for  $I$  and  $f/m_0g$  quoted simply serve as first estimates. Likewise, the launch velocity  $v_l$  and the spacecraft velocity just prior to retrofire must also be estimated, although both will be optimized:

(1) Launch velocity,  $v_l$ , 11540 m/sec

(2) Velocity just before retrofire,  $v_r$ , 43200 m/sec

After 1200 days of flight time, the high-thrust retropropulsion unit is assumed to brake the entire spacecraft into a parabolic orbit about Jupiter with a periapsis of 2 Jupiter radii. The Jovian sphere of influence for this maneuver is assumed to be 345 times the periapse radius. Hence,

$$t_0 = 0$$

$$t_f = 1.368 \times 10^8 \text{ sec (1200 days)}$$

$$e_r = 1$$

$$v_{c,r} = 30500 \text{ m/sec (circular speed at 2 Jupiter radii)}$$

$$r_{s,a}/r_r = 345$$

The retropropulsion unit parameters are

$$c_r = 2940$$

$$k_{rt} = 0.2$$

Instead of guessing initial values of the adjoint variables  $\Lambda$ ,  $\Lambda_r$ , and  $\lambda_m$ , we will use the alternate set of thrust program variables; namely, the thrust angle  $\psi_0$ , its derivative  $\dot{\psi}_0$ , and the engine on-off switch function  $\kappa_0$ :

$$\psi_0 = 103^\circ$$

$$\dot{\psi}_0 = 8.97 \times 10^{-6} \text{ deg/sec}$$

$$\kappa_0 = 29$$

A value of  $\dot{\kappa}_0$  is not required because the central travel angle  $\theta_a$  is left open for optimization. The other desired target conditions are assumed to be

- (1) Jupiter's heliocentric radius,  $\bar{r}_a$ ,  $7.778 \times 10^{11}$  m
- (2) Jupiter's orbit speed,  $\bar{v}_a$ , 13050 m/sec
- (3) Jupiter's path angle,  $\bar{\gamma}_a$ ,  $0^\circ$

These three conditions plus the four transversality conditions for optimum  $c$ ,  $f/m_0g$ ,  $v_l$ , and  $v_r$  comprise a seven-variable level 1 boundary-value problem. The presence of the vehicle-related transversality conditions requires generating the partial derivative matrix  $G$  with the finite difference method. Hence, the NOPT=7 option must be used. In this option the COMMON locations of  $r_a$ ,  $\tilde{v}_a$ ,  $\tilde{\gamma}_a$  must be loaded into the IB vector and the locations of  $\psi_0$ ,  $\dot{\psi}_0$ , and  $\kappa_0$  into the IA vector. (The locations of the four vehicle-related variables and their transversality conditions are set by the program by inputting OPTA=T, etc.)

The nondefault input values are given here in the same order as presented in the input instructions:

```

VMASS=1000, ISP=3650, TB=1.0368E8, NOPT=7,
TW=3.73E-5, SOLAR=T, KE=0.1, STRUCT=0.1,
ALFPOW=34, VB1=11540, RRAT1=150, VC1=7795
VJET1=4001, K1=0.369, VB2=43200, RRAT2=345
VC2=30500, VJET2=2940, K2=0.2, ECC2=1,
R=1.49597893D11, 0, 0, V=0, 29765.2, 0,
PS=103, DPS=8.97E-6, KAPPA=29, EREF=1.E-3,
ERLIMT=3.E-3, DELMAX=3.456E7, IA=343, 344, 345,
IB=480, 493, 479, DESIRE=7.778E11, 13050, 5*0,
OPTA=T, OPTC=T, OPTVB1=T, OPTVB2=T

```

The output for this example is reproduced on the following pages.

EXAMPLE 3 - JUPITER ORBITER

SAVEC INITIAL DATA FOR STAGE 1 OF CASE 1.

REFERENCE BODY IS SUN

2 DIMENSIONS 15 DIFF.EQNS. T/W= 3.7259999E-05 ISP= 3650.0000 PFLCW= 1.0219178E-05 REFA= 0 AEXIT= 0

STEP= 0. + 0. ECCENTRICITY= 0.2446139 OMEGA= 0.1217890 V= 33213.777 R= 1.4959789E+11 REFER=SUN RECT 2  
 TIME= 0 SEMILATUS R.= 1.8592056E+11 TRU A=-0.1217890 VX=-793.47552 X= 1.4959789E+11 RMASS= 1000.0000  
 DAYS= 0 MEAN ANOMALY=-7.1740789E-02 NODE= 0 VY= 33204.286 Y= 0 REVS.= 0  
 ALFA=-11.630213 PATH ANGLE= 1.3697864 INCL= 0 VZ= 0 Z= 0 DELT= 1036800.0  
 PSI= 103.00000 DPSI= 8.9699966E-06 THETA= 0 CK= 2.9379649E-06 K= 29.000000 L7= 6.7942726  
 L1=-0.2245510 L2= 0.9743701 L3= 0 L4= 1.7100721E-07 L5=-4.4758067E-08 L6= 0

STEP= 29. + 2. ECCENTRICITY= 0.5250132 OMEGA=-5.1901622 V= 16429.142 R= 4.6346922E+11 REFER=SUN RECT 2  
 TIME= 3.4554557E+07 SEMILATUS R.= 3.1750373E+11 TRU A= 2.2141383 VX=-6162.2346 X= 4.5713118E+11 RMASS= 825.80685  
 DAYS= 40.0000 MEAN ANOMALY= 1.1584204 NODE= 0 VY=-15226.737 Y= 7.6385905E+10 REVS.= 0.5263511  
 ALFA= 4.2471085 PATH ANGLE= 31.515560 INCL= 0 VZ= 0 Z= 0 DELT= 2162021.2  
 PSI=-116.27469 DPSI= 1.5164135E-06 THETA= 189.48639 CK=-6.5042652E-07 K= 14.303463 L7= 14.867560  
 L1=-0.2975262 L2=-0.6036609 L3= 0 L4=-2.2614573E-06 L5=-5.5700164E-09 L6= 0

STEP= 40. + 2. ECCENTRICITY= 0.4799415 OMEGA=-4.8343219 V= 11989.573 R= 6.7336884E+11 REFER=SUN RECT 2  
 TIME= 6.6285345E+07 SEMILATUS R.= 4.0787876E+11 TRU A= 2.5348311 VX= 4864.2631 X= 4.4839376E+11 RMASS= 783.51517  
 DAYS= 767.1515 MEAN ANOMALY= 1.7735078 NODE= 0 VY=-10958.504 Y= 5.0236305E+11 REVS.= 0.6340247  
 ALFA= 7.6532649 PATH ANGLE= 24.313395 INCL= 0 VZ= 0 Z= 0 DELT= 29.034986  
 PSI=-73.717766 DPSI= 1.4344809E-06 THETA= 228.24888 CK=-2.9561101E-07 K= 0 L7= 16.049241  
 L1= 9.8495858E-02 L2=-0.3372181 L3= 0 L4=-6.6285374E-09 L5= 8.6772047E-09 L6= 0

TRAJECTORY INTERRUPT -- C(LOOKX(5)) = 0

STEP= 40. + 2. ECCENTRICITY= 0.4799415 OMEGA=-4.8343219 V= 11989.573 R= 6.7336884E+11 REFER=SUN RECT 2  
 TIME= 6.6285345E+07 SEMILATUS R.= 4.0787876E+11 TRU A= 2.5348311 VX= 4864.2631 X= 4.4839376E+11 RMASS= 783.51517  
 DAYS= 767.1515 MEAN ANOMALY= 1.7735078 NODE= 0 VY=-10958.504 Y= 5.0236305E+11 REVS.= 0.6340247  
 ALFA= 7.6532649 PATH ANGLE= 24.313395 INCL= 0 VZ= 0 Z= 0 DELT= 2326153.7  
 PSI=-73.717766 DPSI= 1.4344809E-06 THETA= 228.24888 CK=-2.9561101E-07 K= 0 L7= 16.049241  
 L1= 9.8495858E-02 L2=-0.3372181 L3= 0 L4=-6.6285374E-09 L5= 8.6772047E-09 L6= 0

STEP= 42. + 2. ECCENTRICITY= 0.4799415 OMEGA=-4.8343219 V= 11661.268 R= 6.8689979E+11 REFER=SUN RECT 2  
 TIME= 6.9119954E+07 SEMILATUS R.= 4.0787876E+11 TRU A= 2.5799103 VX= 5391.8772 X= 4.3384592E+11 RMASS= 783.51517  
 DAYS= 800.0000 MEAN ANOMALY= 1.8581534 NODE= 0 VY=-10339.866 Y= 5.3254557E+11 REVS.= 0.6411992  
 ALFA= 7.1104088 PATH ANGLE= 23.251273 INCL= 0 VZ= 0 Z= 0 DELT= 508496.94  
 PSI=-69.565558 DPSI= 1.4534311E-06 THETA= 230.83173 CK=-2.7022387E-07 K=-0.8020886 L7= 16.049241  
 L1= 0.1165033 L2=-0.3127578 L3= 0 L4=-6.0866344E-05 L5= 8.5816424E-09 L6= 0

STEP= 48. + 2. ECCENTRICITY= 0.4799396 OMEGA=-4.8343267 V= 9465.3547 R= 7.8061685E+11 REFER=SUN RECT 2  
 TIME= 1.0368000E+08 SEMILATUS R.= 4.0787816E+11 TRU A= 3.0405672 VX= 8998.6744 X= 1.7261039E+11 RMASS= 783.51517  
 DAYS= 1200.0000 MEAN ANOMALY= 2.8901662 NODE= 0 VY=-2935.5672 Y= 7.6129389E+11 REVS.= 0.7145143  
 ALFA= 347.46635 PATH ANGLE= 5.2526217 INCL= 0 VZ= 0 Z= 0 DELT= 4820869.6  
 PSI=-5.5278316 DPSI= 1.5336885E-06 THETA= 257.22514 CK= 8.1699706E-08 K=-4.2870117 L7= 16.049241  
 L1= 0.2562708 L2=-2.4601715E-02 L3= 0 L4=-2.4617079E-05 L5=-8.4766711E-09 L6= 0

PHASE 1 COMPLETED. DELV= 8733. MASS RATIO= 0.78352 \*\*\* TOTAL DELV= 8733. TOTAL MASS RATIO= 0.78352 PAYLOAD RATIO= 0.04976

KE=100 STRUCT=100 ALFPDW= 34.000 PJ/MO= 1.0991951E-03 PJ/M1= 6.5465583E-03 MPP/M1= 0.244 ETAPDW=0.646 ML/M1= 0.29637  
 K1=369 VJET1= 4001.0 VC1= 7795.0 VB1= 11540.000 VSPH1= 3529.5483 M1/MO= 0.168 TSP1R= 0. TMS1SD1=1200.000  
 K2=200 VJET2= 2940.0 VC2=30500.0 VB2= 43200.000 VSPH2= 3336.5803 ECC2=1.000 CAPSML/MO= 0.05141

NOPT= 7, CGAST=T, EPHEM=F, NBVP=1, NBDYS=1, ERSTAR= 1.00000, NSWEEP= 0, IER= 42T

IAA	IA	IB	DESIRE	WEIGHT	PERTEN	PERTNR
0	343	480	7.7779999E+11	7.778E+11	-1.000E-02	-1.000E-04
0	344	493	13050.000	1.305E+04	-1.000E-02	-1.000E-04
0	345	479	0	360.0	-1.000E-02	-1.000E-04
0	418	359	0	1.000	-1.000E-02	-1.000E-04
0	408	360	0	1.000	-1.000E-02	-1.000E-04
0	429	361	0	1.000	-1.000E-02	-1.000E-04
0	430	362	0	1.000	-1.000E-02	-1.000E-04

RUN N	ERROR	TIME	7 INDEPENDENT VARIABLES --			7 DEPENDENT VARIABLES					
1	1.0	0.427300	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	3.73000E-05	11540.0	43200.0	7.80617E+11
N			12743.0	12743.0	2.03368	-6.59810E-02	-9.25637E-02	8.34189E-02	0.40262		
2	1.0	0.410784	1.0368E+08	102.590	8.97000E-06	29.0000	3650.00	3.73000E-05	11540.0	43200.0	7.80653E+11
			12744.3	12744.3	1.96880	-6.61078E-02	-9.22259E-02	8.29550E-02	0.38522		
3	1.0	0.42395E	1.0368E+08	102.998	8.97000E-06	29.0000	3650.00	3.73000E-05	11540.0	43200.0	7.80624E+11
			12743.2	12743.2	2.02047	-6.60065E-02	-9.24963E-02	8.33273E-02	0.39911		
4	1.0	0.426611	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	3.73000E-05	11540.0	43200.0	7.80618E+11
			12743.0	12743.0	2.03103	-6.59881E-02	-9.25502E-02	8.34000E-02	0.40192		
5	1.0	0.428223	1.0368E+08	103.000	8.96910E-06	29.0000	3650.00	3.73000E-05	11540.0	43200.0	7.80529E+11
			12740.8	12740.8	1.99499	-6.61314E-02	-9.24502E-02	8.34000E-02	0.40360		
6	1.0	0.429579	1.0368E+08	103.000	8.97000E-06	28.9971	3650.00	3.73000E-05	11540.0	43200.0	7.80582E+11
			12742.4	12742.4	2.03351	-6.62041E-02	-9.23026E-02	8.36665E-02	0.40501		
7	1.0	0.427759	1.0368E+08	103.000	8.97000E-06	28.9994	3650.00	3.73000E-05	11540.0	43200.0	7.80610E+11
			12742.9	12742.9	2.03366	-6.60257E-02	-9.25115E-02	8.34685E-02	0.40311		
8	1.0	0.424539	1.0368E+08	103.000	8.97000E-06	29.0000	3649.63	3.73000E-05	11540.0	43200.0	7.80664E+11
			12743.4	12743.4	2.03521	-6.56097E-02	-9.29087E-02	8.31514E-02	0.40016		
9	1.0	0.426629	1.0368E+08	103.000	8.97000E-06	29.0000	3649.93	3.73000E-05	11540.0	43200.0	7.80626E+11
			12743.1	12743.1	2.03400	-6.59067E-02	-9.26327E-02	8.33654E-02	0.40213		
10	1.0	0.429435	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	3.72963E-05	11540.0	43200.0	7.80439E+11
			12743.4	12743.4	2.01464	-6.59499E-02	-9.26060E-02	8.35823E-02	0.40486		
11	1.0	0.427726	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	3.72953E-05	11540.0	43200.0	7.80581E+11
			12743.1	12743.1	2.02987	-6.59748E-02	-9.25722E-02	8.34516E-02	0.40307		
12	1.0	0.407168	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	3.73000E-05	11538.8	43200.0	7.80102E+11
			12747.7	12747.7	1.87888	-6.58740E-02	-9.25024E-02	8.14292E-02	0.38169		

13	1	0.422230	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	2.73000E-05	11539.8	43200.0	7.80514E+11
				12743.9		-6.59598E-02	-9.25516E-02	8.20231E-02	0.39840		
14	1	0.426488	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	2.73000E-05	11540.0	43200.0	7.80596E+11
				12743.2		-6.59768E-02	-9.25613E-02	8.23357E-02	0.40178		
15	1	0.405552	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	2.73000E-05	11540.0	43195.7	7.80617E+11
				12687.3		-6.42701E-02	-9.37807E-02	8.66136E-02	0.27886		
16	1	0.423028	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	2.73000E-05	11540.0	43195.1	7.80617E+11
				12731.9		-6.56385E-02	-9.28073E-02	8.40584E-02	0.35790		
17	1	0.426445	1.0368E+08	103.000	8.97000E-06	29.0000	3650.00	2.73000E-05	11540.0	43195.8	7.80617E+11
				12740.8		-6.59125E-02	-9.26125E-02	8.35468E-02	0.40168		
18	1	0.241353	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74965E+11
				12906.4		-0.19497	1.50560E-02	-5.07052E-03	-3.16844E-02	0.23829	
19	1	0.240561	1.0368E+08	103.373	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74967E+11
				12906.4		-0.19543	1.50500E-02	-5.05899E-03	-3.31824E-02	0.23785	
20	1	0.240534	1.0368E+08	103.373	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74968E+11
				12906.4		-0.19787	1.50439E-02	-5.04748E-03	-3.21964E-02	0.23742	
21	1	0.239665	1.0368E+08	103.372	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74971E+11
				12906.3		-0.20075	1.50317E-02	-5.02452E-03	-3.22241E-02	0.23656	
22	1	0.241610	1.0368E+08	103.374	9.10142E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74818E+11
				12905.3		-0.23376	1.49110E-02	-4.98987E-03	-3.21217E-02	0.23872	
23	1	0.241668	1.0368E+08	103.374	9.10233E-06	21.5486	3040.10	3.64458E-05	11410.8	43226.2	7.74955E+11
				12906.4		-0.19586	1.50280E-02	-5.04318E-03	-3.21260E-02	0.23858	
24	1	0.241548	1.0368E+08	103.374	9.10233E-06	21.5481	3040.10	3.64458E-05	11410.8	43226.2	7.74945E+11
				12906.4		-0.19673	1.50000E-02	-5.01590E-03	-3.31036E-02	0.23807	
25	1	0.242501	1.0368E+08	103.374	9.10233E-06	21.5473	3040.10	3.64458E-05	11410.8	43226.2	7.74924E+11
				12506.4		-0.19850	1.49439E-02	-4.96129E-03	-3.30387E-02	0.23944	
26	1	0.241102	1.0368E+08	103.374	9.10233E-06	21.5490	3040.04	3.64458E-05	11410.8	43226.2	7.74978E+11
				12906.4		-0.19376	1.51117E-02	-5.10959E-03	-3.22106E-02	0.23799	
27	1	0.240805	1.0368E+08	103.374	9.10233E-06	21.5490	3039.98	3.64458E-05	11410.8	43226.2	7.74992E+11
				12906.4		-0.19255	1.51674E-02	-5.14862E-03	-3.32527E-02	0.23768	
28	1	0.240228	1.0368E+08	103.374	9.10233E-06	21.5490	3039.86	3.64458E-05	11410.8	43226.2	7.75018E+11
				12906.3		-0.19014	1.52787E-02	-5.22677E-03	-3.23369E-02	0.23707	
29	1	0.241641	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74923E+11
				12906.6		-0.19974	1.50618E-02	-5.08047E-03	-3.31342E-02	0.23855	
30	1	0.241653	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64444E-05	11410.8	43226.2	7.74881E+11
				12906.9		-0.20450	1.50675E-02	-5.09041E-03	-3.31000E-02	0.23801	
31	1	0.242357	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64447E-05	11410.8	43226.2	7.74797E+11
				12907.3		-0.21403	1.50790E-02	-5.11032E-03	-3.20315E-02	0.23933	
32	1	0.240725	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.2	7.74946E+11
				12906.5		-0.19981	1.50605E-02	-5.06815E-03	-3.22495E-02	0.23760	
33	1	0.240042	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.7	43226.2	7.74928E+11
				12906.6		-0.20465	1.50650E-02	-5.06580E-03	-3.33306E-02	0.23692	
34	1	0.240703	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43226.1	7.74965E+11
				12904.4		-0.19316	1.51196E-02	-5.11355E-03	-3.20516E-02	0.23760	
35	1	0.240016	1.0368E+08	103.374	9.10233E-06	21.5490	3040.10	3.64458E-05	11410.8	43225.9	7.74965E+11
				12902.4		-0.19136	1.51829E-02	-5.15645E-03	-3.29339E-02	0.23691	
36	1	0.018825	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.9	7.79475E+11
				13086.9		0.40537	1.58752E-03	7.31613E-04	-4.60831E-03	1.79265E-02	
37	1	0.017654	1.0368E+08	102.729	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.9	7.79496E+11
				13087.2		0.40494	1.57436E-03	7.84735E-04	-4.09436E-03	1.67060E-02	
38	1	0.018558	1.0368E+08	102.730	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.9	7.79479E+11
				13087.0		0.40528	1.58485E-03	7.42250E-04	-4.62550E-03	1.76821E-02	
39	1	0.018589	1.0368E+08	102.731	9.13335E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.9	7.79324E+11
				13084.8		0.36543	1.41719E-03	8.01760E-04	-3.92595E-03	1.81800E-02	
40	1	0.019543	1.0368E+08	102.731	9.13426E-06	22.1675	3093.34	3.60806E-05	11440.9	43231.9	7.79427E+11
				13086.5		0.39870	1.46030E-03	8.36909E-04	-3.84573E-03	1.87320E-02	
41	1	0.020262	1.0368E+08	102.731	9.13426E-06	22.1657	3093.34	3.60806E-05	11440.9	43231.9	7.79381E+11
				13086.1		0.39209	1.33319E-03	9.42169E-04	-3.68239E-03	1.95282E-02	
42	1	0.018083	1.0368E+08	102.731	9.13426E-06	22.1692	3093.09	3.60806E-05	11440.9	43231.9	7.79535E+11
				13087.2		0.41315	1.82697E-03	5.78800E-04	-4.20860E-03	1.70648E-02	
43	1	0.017367	1.0368E+08	102.731	9.13426E-06	22.1692	3092.84	3.60806E-05	11440.9	43231.9	7.79595E+11
				13087.4		0.42090	2.06628E-03	4.25989E-04	-4.40405E-03	1.62110E-02	
44	1	0.019411	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60776E-05	11440.9	43231.9	7.79304E+11
				13087.4		0.38476	1.60069E-03	6.84898E-04	-3.84274E-03	1.85990E-02	
45	1	0.020016	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60745E-05	11440.9	43231.9	7.79132E+11
				13087.8		0.36415	1.61394E-03	6.38271E-04	-3.67751E-03	1.92801E-02	
46	1	0.018036	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.8	43231.9	7.79445E+11
				13087.3		0.39985	1.60141E-03	7.41071E-04	-4.18438E-03	1.70523E-02	
47	1	0.017263	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.7	43231.9	7.79416E+11
				13087.7		0.39434	1.61520E-03	7.50492E-04	-4.36266E-03	1.61846E-02	
48	1	0.017652	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.9	7.79475E+11
				13083.0		0.40950	1.71618E-03	6.46042E-04	-3.76645E-03	1.68261E-02	
49	1	0.018556	1.0368E+08	102.731	9.13426E-06	22.1692	3093.34	3.60806E-05	11440.9	43231.8	7.79475E+11
				13086.1		0.40620	1.61329E-03	7.14473E-04	-3.55877E-03	1.77065E-02	
50	1	0.000119	1.0368E+08	102.699	9.12338E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77825E+11
				13049.7		1.64015E-03	-5.10127E-06	-1.80237E-06	-2.22572E-05	-1.08915E-04	
51	1	0.000355	1.0368E+08	102.699	9.12338E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77829E+11
				13049.7		1.60595E-03	-7.81297E-06	8.82265E-06	-3.93663E-05	-3.49909E-04	
52	1	0.000554	1.0368E+08	102.699	9.12338E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77833E+11
				13049.8		1.57506E-03	-1.05088E-05	1.93695E-05	-5.63744E-05	-5.88881E-04	
53	1	0.001074	1.0368E+08	102.698	9.12338E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77842E+11
				13049.9		1.52437E-03	-1.58530E-05	4.05027E-05	-9.04926E-05	-1.06808E-03	
54	1	0.002032	1.0368E+08	102.657	9.12338E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77859E+11
				13050.1		1.40641E-03	-2.66938E-05	8.28153E-05	-1.58832E-04	-2.02213E-03	
55	1	0.000360	1.0368E+08	102.699	9.12247E-06	22.2629	3100.27	3.60487E-05	11443.1	43225.5	7.77670E+11
				13047.7		-3.86772E-02	-1.76644E-04	6.80621E-05	5.67778E-05	1.37918E-04	
56	1	0.001546	1.0368E+08	102.699	9.12338E-06	22.2594	3100.27	3.60487E-05	11443.1	43225.5	7.77728E+11
				13048.9		-1.21853E-02	-2.61956E-04	2.10391E-04	3.04464E-04	1.47251E-03	
57	1	0.000228	1.0368E+08	102.699	9.12338E-06	22.2622	3100.27	3.60487E-05	11443.1	43225.5	7.77806E+11
				13045.5		-1.13903E-03	-5.65576E-05	4.06223E-05	4.32502E-05	2.09734E-04	
58	1	0.001527	1.0368E+08	102.699	9.12338E-06	22.2629	3099.78	3.60487E-05	11443.1	43225.5	7.77945E+11
				13050.2		1.76393E-02	4.76756E-04	-3.09359E-04	-4.24249E-04		

61	1	0.000173	1.0368E+08	102.499	9.12338E-06	22.2629	3100.27	3.80477E-05	11443.1	43229.5	7.77756E+11
62	1	0.0001E54	1.0368E+08	102.499	-6.66687E-03	1.34564E-07	-2.03334E-05	4.23817E-05	1.53336E-04	43229.5	7.77766E+11
63	1	0.0004E1	1.0368E+08	102.499	9.12338E-06	22.2629	3100.27	3.80487E-05	11442.9	43229.5	7.777813E+11
64	1	0.000343	1.0368E+08	102.499	-4.74839E-04	4.05643E-07	1.89779E-06	-9.25768E-05	-4.50524E-04	43229.5	7.77825E+11
65	1	0.000576	1.0368E+08	102.499	9.12338E-06	22.2629	3100.27	3.80487E-05	11443.1	43229.4	7.77825E+11
66	1	0.001043	1.0368E+08	102.499	9.12338E-06	22.2629	3100.27	3.80487E-05	11443.1	43229.2	7.77825E+11
67	1	0.0015E2	1.0368E+08	102.499	9.12338E-06	22.2629	3100.27	3.80487E-05	11443.1	43228.9	7.77825E+11
68	1	0.0000C2	1.0368E+08	102.499	9.12346E-06	22.2625	3100.26	3.80481E-05	11443.1	43229.5	7.77800E+11
		N		13050.0	-1.79936E-06	1.47359E-07	-1.01805E-07	3.10153E-07	-1.83255E-06		

REFERENCE BODY IS SUN

2 DIMENSIONS 15 DIFF.EQNS. T/W= 3.8048110E-05 ISP= 3100.2576 PFLW= 1.2272564E-C5 REFA= 0 AEXIT= 0

STEP= 0. + 0.	ECCENTRICITY= 0.226041	OMEGA= 0.1184343	V= 32893.094	R= 1.4959789E+11	REFER=SUN RECT 2
TIME= 0	SEMILATUS R.= 1.8236860E+11	TRU A=-0.1184343	VX=-703.1E3C1	X= 1.4959789E+11	RMASS= 1000.0000
DAYS= 0.	MEAN ANOMALY=-7.3823441E-02	NODE= 0	VY= 32885.578	Y= 0	REVS.= 0
ALFA=-11.474305	PATH ANGLE=-1.2249179	INCL= 0	VZ= 0	Z= 0	DELTA= 1036800.0
PSI= 102.65922	DPSI= 9.1234558E-06	THETA= 0	DK= 2.4541203E-06	K= 22.262549	L7= 8.1405917
L1=-0.2198330	L2= 0.9755375	L3= 0	L4= 1.7208391E-C7	L5=-4.2373975E-08	L6= 0

STEP= 29. + 2.	ECCENTRICITY= 0.5154938	OMEGA=-5.0881774	V= 16726.532	R= 4.5646380E+11	REFER=SUN RECT 2
TIME= 3.4559457E+07	SEMILATUS R.= 3.2258634E+11	TRU A= 2.1739649	VX=-5150.4483	X=-4.4471458E+11	RMASS= 786.96352
DAYS= 400.0000	MEAN ANOMALY= 1.1299006	NODE= 0	VY=-15913.758	Y= 1.0289871E+11	REVS.= 0.5361887
ALFA= 1.5062675	PATH ANGLE= 30.962614	INCL= 0	VZ= 0	Z= 0	DELTA= 198497.1
PSI=-109.44057	DPSI= 1.7669130E-06	THETA= 193.02791	DK=-5.5033957E-C7	K= 9.5635965	L7= 16.940683
L1=-0.2283295	L2=-0.6469254	L3= 0	L4=-2.4691550E-C8	L5=-6.3913075E-09	L6= 0

STEP= 38. + 2.	ECCENTRICITY= 0.4781054	OMEGA=-4.7409714	V= 12938.977	R= 6.3439650E+11	REFER=SUN RECT 2
TIME= 5.9690872E+07	SEMILATUS R.= 4.0791872E+11	TRU A= 2.4138703	VX= 4499.6794	X=-4.3534718E+11	RMASS= 743.53381
DAYS= 690.8666	MEAN ANOMALY= 1.5673169	NODE= 0	VY=-12131.364	Y=-4.6144529E+11	REVS.= 0.6296304
ALFA= 358.63235	PATH ANGLE= 26.316463	INCL= 0	VZ= 0	Z= 0	DELTA= 4688.1303
PSI=-68.2828E7	DPSI= 1.6633173E-06	THETA= 226.66693	DK=-2.3602332E-C7	K= 4.7683716E-07	L7= 18.198613
L1= 0.1646828	L2=-0.4134725	L3= 0	L4=-9.8674233E-C9	L5=-1.0143279E-08	L6= 0

TRAJECTORY INTERRUPT -- C(LOOKX15) = 4.7683716E-07

STEP= 38. + 2.	ECCENTRICITY= 0.4781054	OMEGA=-4.7409714	V= 12938.977	R= 6.3439650E+11	REFER=SUN RECT 2
TIME= 5.9690872E+07	SEMILATUS R.= 4.0791872E+11	TRU A= 2.4138703	VX= 4499.6794	X=-4.3534718E+11	RMASS= 743.53381
DAYS= 690.8666	MEAN ANOMALY= 1.5673169	NODE= 0	VY=-12131.364	Y=-4.6144529E+11	REVS.= 0.6296304
ALFA= 358.63235	PATH ANGLE= 26.316463	INCL= 0	VZ= 0	Z= 0	DELTA= 1805142.8
PSI=-68.2828E7	DPSI= 1.6633173E-06	THETA= 226.66693	DK=-2.3602332E-C7	K= 4.7683716E-07	L7= 18.198613
L1= 0.1646828	L2=-0.4134725	L3= 0	L4=-9.8674233E-09	L5=-1.0143279E-08	L6= 0

STEP= 42. + 2.	ECCENTRICITY= 0.4781054	OMEGA=-4.7409714	V= 11725.115	R= 6.8329038E+11	REFER=SUN RECT 2
TIME= 6.9119556E+07	SEMILATUS R.= 4.0791872E+11	TRU A= 2.5734996	VX= 6200.3589	X=-3.8353809E+11	RMASS= 743.53381
DAYS= 800.0000	MEAN ANOMALY= 1.8458045	NODE= 0	VY=-9888.5656	Y=-5.6522376E+11	REVS.= 0.6550361
ALFA= 354.68752	PATH ANGLE= 23.310349	INCL= 0	VZ= 0	Z= 0	DELTA= 1505995.1
PSI=-52.184811	DPSI= 1.7454427E-06	THETA= 235.81301	DK=-1.3589002E-D7	K= 1.7490680	L7= 18.198613
L1= 0.2466486	L2=-0.3178041	L3= 0	L4=-7.6691120E-C5	L5=-1.0152575E-08	L6= 0

STEP= 46. + 3.	ECCENTRICITY= 0.4781029	OMEGA=-4.7409784	V= 9501.4211	R= 7.7779966E+11	REFER=SUN RECT 2
TIME= 1.0368000E+08	SEMILATUS R.= 4.0791782E+11	TRU A= 3.0381891	VX= 9260.2002	X= 1.0226639E+11	RMASS= 743.53381
DAYS= 1200.0000	MEAN ANOMALY= 2.8852111	NODE= 0	VY=-2127.3683	Y= 7.7103434E+11	REVS.= 0.7289926
ALFA= 340.70032	PATH ANGLE= 5.3755587	INCL= 0	VZ= 0	Z= 0	DELTA= 1.0060053E+07
PSI= 6.3614607	DPSI= 1.4589399E-06	THETA= 262.43735	DK= 1.8461425E-07	K= 0.5779645	L7= 18.198613
L1= 0.4282741	L2= 4.7746962E-02	L3= 0	L4=-3.2704645E-C5	L5=-1.1413001E-08	L6= 0

PHASE 1 COMPLETED. DELV= 9010. MASS RATIO= 0.74353 \*\*\* TOTAL DELV= 9010. TOTAL MASS RATIO= 0.74353 PAYLOAD RATIC= 0.04976

KE=-100 STRCT=-100 ALFPW= 34.000 P/J/M1= 1.0270034E-03 P/J/M1= 5.6720784E-03 MPP/M1= 0.314 ETAPW=0.613 #L/M1= 0.27481  
 K1=-369 VJET1= 40C1.0 VC1= 7795.0 VBI= 11443.124 VSPH1= 3198.6239 M1/M0= 0.181 TSP1R= 0. TMISSION=1200.000  
 K2=-200 VJET2= 2940.0 VC2=30500.C VB2= 43229.507 VSPM2= 3699.0572 ECC 2=1.000 CAPSML/M0= 0.05213

The optimization of  $f/m_0g$ ,  $c$ ,  $v_l$ , and  $v_r$  could also have been accomplished with the level 2 optimization scheme instead of with transversality conditions. In this case, the OPTA, OPTC, OPTVB1, and OPTVB2=T statements would be deleted from the input list and, instead, the following would be needed:

$$IAA = 408, 418, 429, 430$$

These numbers are the COMMON locations of the four vehicle-related variables to be optimized. By default, the optimization criterion is payload ratio  $m_n/m_{ref}$  (IBB=437). Also, it would be more economical in this case to change NOPT=7 to NOPT=3 so that the partial derivative matrix  $G$  would be integrated rather than computed by finite differencing. The computer execution time on the IBM 7094II is 0.9 minute.

### SINGLE-STAGE LAUNCH VEHICLE WITH CHEMICAL AND NUCLEAR PROPULSION

The performance of an advanced, hypothetical single-stage Earth shuttle is sought. The shuttle uses conventional chemical propulsion during lift-off and ascent through the atmosphere but switches to nuclear propulsion for the upper trajectory phase. This upper phase terminates with injection into a 444 165-meter (240-n mi) circular parking orbit. A zero angle-of-attack thrust program is assumed for the chemical boost phase and an optimal steering program for the nuclear upper phase. To be specific, assume that the shuttle has the following description:

#### Vehicle:

- (1) Gross lift-off mass,  $2 \times 10^6$  kg
- (2) Maximum cross-sectional area,  $100 \text{ m}^2$
- (3) Drag coefficient,  $C_D$ ,  $0.4 + 0.6 M^2$  ( $0 \leq M \leq 1$ );  
 $1.15306 - 0.16326 M + 0.010204 M^2$  ( $1 < M \leq 8$ );  $0.5$  ( $M > 8$ )

#### Chemical engine:

- (1) Vacuum specific impulse, 425 sec
- (2) Ratio of thrust to lift-off weight, 1.25
- (3) Exit area,  $40 \text{ m}^2$
- (4) Specific weight, 0.02

#### Nuclear engine:

- (1) Vacuum specific impulse, 1200 sec
- (2) Propellant flow rate, 140 kg/sec
- (3) Specific weight,  $1/3$

The payoff criterion is payload delivered into orbit, and for this calculation it will be assumed that the tankage factor  $k_t$  is 0.1 and the structure factor  $k_s$  is 0.053. This particular value of structure factor is simply the total engine mass divided by the gross lift-off mass:

$$\begin{aligned} \frac{(\text{Chemical engine mass}) + (\text{Nuclear engine mass})}{\text{Gross lift-off mass}} &= \frac{0.02 m_0 \left( \frac{f_0}{m_0 g} \right) + \frac{1}{3} (\dot{m} I)_{\text{nuclear}}}{m_0} \\ &= \frac{0.02(2 \times 10^6)(1.25) + \frac{1}{3}(140)(1200)}{2 \times 10^6} \\ &= 0.053 \end{aligned}$$

Of course, in any real shuttle there would be many additional items (such as radiation shielding, reentry structure, landing engines, and fuel) that should also be subtracted from the injected weight to calculate net payload, but these items are simply lumped together with net payload and called gross payload in this illustration.

A rotating, spherical Earth model is assumed and, for convenience, a due-eastward launch from an equatorial site is assumed so that the calculations need be done in only two dimensions. The launch site is also assumed to be at the Greenwich meridian (zero longitude) and 10 meters above mean sea level. The short vertical rise segment  $t_v$  is assumed to be 20 seconds. After 20 seconds, the vehicle is instantaneously tilted to  $90^\circ$  azimuth (eastward launch) and to an elevation angle initially assumed to be  $89.4^\circ$  but later optimized for maximum gross payload. The elevation angle  $\gamma$  strongly affects the amount of trajectory lofting and must be carefully chosen to avoid paths that go straight up ( $\gamma$  too close to  $90^\circ$ ) and paths that fall back to Earth ( $\gamma$  too far from  $90^\circ$ ). Lift-off acceleration and vertical rise duration strongly affect the proper choice of  $\gamma$ , and experience dictated the choice of  $t_v = 20$  seconds and  $\gamma = 89.4^\circ$ .

The level 1 boundary-value problem is set up as follows:

Independent variables	Dependent variables (at burnout)
Thrust angle at start of optimal steering, $\psi_0$ Thrust angle rate at start of optimal steering, $\dot{\psi}_0$ Nuclear engine firing time, $(t_f)_2$	Altitude, $r_a - r_0$ , 444 165 m Velocity, $v_a$ , 7643.8 m/sec Path angle, $\gamma_a$ , 0

With this set of conditions plus the usual optimal-travel-angle assumption, the NOPT(2)=7 option is needed for the second stage. (Option NOPT(1)=0 is required for the first stage.)

A level 2 optimization scheme is set up so that the initial elevation angle  $\gamma$  and the amount of chemical propulsion  $(t_f)_1$  are optimized to yield maximum gross payload. The initial guesses for the level 1 and level 2 independent variables are

Level 1:

$$\psi_0 = 54^\circ$$

$$\dot{\psi}_0 = 0.053 \text{ deg/sec}$$

$$(t_f)_2 = 1100 \text{ sec}$$

Level 2:

$$\gamma = 89.4^\circ$$

$$(t_f)_1 = 220 \text{ sec}$$

Finally, the use of the trajectory interrupt feature is illustrated by requiring a trajectory step printout to occur if the path angle attains zero before orbit injection. This occurs whenever the acceleration level is low enough to produce lob-type trajectories:

The input for this case is given here:

NUMBOD=11, ROTATE=T, VMASS=2.E6, ISP=425, 1200,

TB=220, 1100, NOPT=0, 7, TW=1.25, PFLOW(2)=140,

KE=0.1, STRUCT=0.053, REFA=100, AEXIT=40,

CD0C=0, 0.4, 0, 0.6, 1, 1.15306, -0.16326, 0.010204, 8, 0.5, 0, 0, 100,

LAT=0, LONG=0, ALTO=10, ELEV=89.4, AZI=90, TKICK=20,



COAST=F, PS=54, DPS=0.053, MODEI=4, DELMAX=100,  
 LOOKX=-479, IA=343, 344, 2, IB=1263, 493, 479,  
 DESIRE=444165, 7643.8, 0, IAA=48, 1, PERT2=0.0003

The small perturbation size (0.0003) for the elevation angle is necessary to prevent non-convergence difficulties during the level 2 search procedure. The output for this case is presented below. Note that two trajectory phases are indeed listed: the zero angle-of-attack, chemical propulsion, atmospheric phase; and the optimum steering, nuclear propulsion vacuum phase. The level 1 boundary-value problem concerns only phase 2, while the level 2 optimization is over both phases. The IBM 7094II computer execution time is 4.5 minutes.

EXAMPLE 4 - NUCLEAR BOOSTER

SAVEC INITIAL DATA FOR STAGE 1 OF CASE 1.

REFERENCE BODY IS EART

```

STEP= 0. + 0.   LAT.= 0   LONG.= 0   AZI.= 90.0000000   ELEV.= 89.3999996   ALT.= 10.0000000
TIME= 0         VEL.= 0   RMASS= 2000000.00   X= 6378170.00   Y= 0   Z= 0

2 DIMENSIONS  7 DIFF.EQNS.  T/W= 1.2500000   TSP= 425.00000   PFLCW= 6854.8022   REFA= 100.00000   AEXIT= 40.000000

STEP= 0. + 0.   ECCENTRICITY= 0.9965287   OMEGA=-3.1397000   V= 469.35613   R= 6378720.4   REFER=EART RECT 2
TIME= 20.000000   SEMILATUS R.= 22143.050   TRU A= 3.1411584   VX= 57.377169   X= 6378713.7   RMASS= 1862904.0
DAYS= 0.000000   MEAN ANOMALY= 3.1208004   NODE= 0   VY= 465.83565   Y= 9302.8701   REVS.= 2.3211524E-04
ALFA= 0   PATH ANGLE= 7.1033368   INCL= 0   VZ= 0   Z= 0   DELT= 2.2000000
BETA= 0   R PATH ANGLE= 89.3999998   DRAG= 4.3850195E-02   VR= 58.059677   G= 1.3518681   PUSH= 13.301148
ALT.= 560.43750   MACH NUMBER= 0.1715502   LIFT= 0   CD= 0.4116577   Q= 1955.8770   HEAT= 0.1219146

STEP= 13. + 2.   ECCENTRICITY= 0.9897790   OMEGA=-3.1265241   V= 948.46774   R= 6399349.9   REFER=EART RECT 2
TIME= 99.599557   SEMILATUS R.= 65546.738   TRU A= 3.1349661   VX= 504.70255   X= 6399121.9   RMASS= 1314519.8
DAYS= 0.000000   MEAN ANOMALY= 2.9578824   NODE= 0   VY= 803.02574   Y= 54022.475   REVS.= 1.3435812E-03
ALFA= 0   PATH ANGLE= 32.632774   INCL= 0   VZ= 0   Z= 0   DELT= 12.443851
BETA= 0   R PATH ANGLE= 57.0039933   DRAG= 0.8935276   VR= 609.82334   G= 2.1108796   PUSH= 21.594186
ALT.= 21189.475   MACH NUMBER= 2.0555339   LIFT= 0   CD= 0.8601026   Q= 13656.043   HEAT= 12.670442

STEP= 13. + 4.   ECCENTRICITY= 0.9897790   OMEGA=-3.1265241   V= 948.46774   R= 6399349.9   REFER=EART RECT 2
TIME= 99.599557   SEMILATUS R.= 65546.738   TRU A= 3.1349661   VX= 504.70255   X= 6399121.9   RMASS= 1314519.8
DAYS= 0.000000   MEAN ANOMALY= 2.9578824   NODE= 0   VY= 803.02574   Y= 54022.475   REVS.= 1.3435812E-03
ALFA= 0   PATH ANGLE= 32.632774   INCL= 0   VZ= 0   Z= 0   DELT= 12.443851
BETA= 0   R PATH ANGLE= 57.0039933   DRAG= 0.8935276   VR= 609.82334   G= 2.1108796   PUSH= 21.594186
ALT.= 21189.475   MACH NUMBER= 2.0555339   LIFT= 0   CD= 0.8601026   Q= 13656.043   HEAT= 12.670442

STEP= 24. + 4.   ECCENTRICITY= 0.8416291   OMEGA=-3.0159442   V= 3478.6038   R= 6494296.7   REFER=EART RECT 2
TIME= 199.99559   SEMILATUS R.= 105062.5   TRU A= 3.0515858   VX= 1360.2888   X= 6450172.2   RMASS= 629039.59
DAYS= 0.000000   MEAN ANOMALY= 2.5842967   NODE= 0   VY= 3201.6088   Y= 231418.35   REVS.= 5.6725424E-03
ALFA= 0   PATH ANGLE= 25.061620   INCL= 0   VZ= 0   Z= 0   DELT= 8.6473604
BETA= 0   R PATH ANGLE= 28.825070   DRAG= 1.4705086E-05   VR= 3056.2083   G= 4.6313300   PUSH= 45.417847
ALT.= 116136.65   MACH NUMBER= 8.4880325   LIFT= 0   CD= 0.5000000   Q= 0.1850016   HEAT= 1.7976722E-03

STEP= 27. + 4.   ECCENTRICITY= 0.7423421   OMEGA=-2.9337468   V= 4423.5327   R= 6526866.4   REFER=EART RECT 2
TIME= 220.000000   SEMILATUS R.= 1744528.5   TRU A= 2.9803745   VX= 1610.9387   X= 6519772.6   RMASS= 491943.52
DAYS= 0.000000   MEAN ANOMALY= 2.4287575   NODE= 0   VY= 4119.7716   Y= 304222.80   REVS.= 7.4210361E-03
ALFA= 0   PATH ANGLE= 24.028374   INCL= 0   VZ= 0   Z= 0   DELT= 4.0277823
BETA= 0   R PATH ANGLE= 26.809944   DRAG= 1.6706407E-06   VR= 3993.5349   G= 5.9220025   PUSH= 58.075008
ALT.= 148706.44   MACH NUMBER= 6.5097824   LIFT= 0   CD= 0.5226966   Q= 1.5723660E-02   HEAT= 2.5528534E-04

PHASE 1 COMPLETED.  DELV= 5846.  MASS RATIO= 0.24597

2 DIMENSIONS  14 DIFF.EQNS.  T/W= 0.3415026   ISP= 1200.0000   PFLOW= 140.00000   REFA= 0   AEXIT= 0

STEP= 27. + 4.   ECCENTRICITY= 0.7423421   OMEGA=-2.9337468   V= 4423.5327   R= 6526866.4   REFER=EART RECT 2
TIME= 220.000000   SEMILATUS R.= 1744528.5   TRU A= 2.9803745   VX= 1610.9387   X= 6519772.6   RMASS= 491943.52
DAYS= 0.000000   MEAN ANOMALY= 2.4287575   NODE= 0   VY= 4119.7716   Y= 304222.80   REVS.= 7.4210361E-03
ALFA= 14.662159   PATH ANGLE= 24.028374   INCL= 0   VZ= 0   Z= 0   DELT= 11.000000
BETA= 0   R PATH ANGLE= 26.809944   DRAG= 0   VR= 3993.5349   G= 0.3415026   PUSH= 3.3489966
ALT.= 148706.44   MACH NUMBER= 6.5057824   THETA= 2.6715730   K= 0   L= 1.5723660E-02   HEAT= 2.5528534E-04
PSI= 54.000000   DPS1= 5.2959988E-02   L1= 0.8090170   L2= 0   L3= 0   L4= 1.3125049E-03   L5= 2.3276243E-04   L6= 0
L1= 0.5877853

STEP= 30. + 4.   ECCENTRICITY= 0.7162203   OMEGA=-2.9046912   V= 4414.4061   R= 6656227.8   REFER=EART RECT 2
TIME= 299.99559   SEMILATUS R.= 1935863.0   TRU A= 3.0011162   VX= 1030.5033   X= 6625307.8   RMASS= 480743.52
DAYS= 0.000000   MEAN ANOMALY= 2.5583230   NODE= 0   VY= 4292.4404   Y= 640832.31   REVS.= 1.5346507E-02
ALFA= 18.314229   PATH ANGLE= 19.024485   INCL= 0   VZ= 0   Z= 0   DELT= 45.999996
BETA= 0   R PATH ANGLE= 21.315077   DRAG= 0   VR= 3958.7011   G= 0.3494587   PUSH= 3.4270190
ALT.= 278067.81   MACH NUMBER= 4.7250207   LIFT= 0   CD= 0.6094123   Q= 4.2293290E-04   HEAT= 7.1300054E-06
PSI= 58.186029   DPS1= 5.1714303E-02   THETA= 5.5247426   K= 0   L= 1.774238E-03   L7= 2.4457774E-02
L1= 0.4888128   DPS2= 0.7873005   L2= 0   L3= 0   L4= 1.1749210E-03   L5= 3.0762257E-04   L6= 0
  
```

```

STEP= 32. + 4. ECCENTRICITY= 0.56789350 OMEGA=-2.8679470 V= 4495.1187 R= 6779503.8 REFER=EART RECT 2
TIME= 399.99599 SEMILATUS R.= 2206345.5 TRU A= 3.0279098 VX= 325.23558 X= 6692951.4 RMASS= 466743.52
DAYS= 0.0C646 MEAN ANOMALY= 2.7090487 NODE= 0 VY= 4483.3373 Y= 1079849.2 REVS.= 2.6458864E-02
ALFA= 22.552283 PATH ANGLE= 13.314341 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 14.538983 DRAG= 0 VR= 4015.6516 C= 0.3599407 PUSH= 3.5298127
ALT.= 401343.81 MACH NUMBER= 4.3020591 LIFT= 0 CC= 0.6355585 Q= 5.1335688E-C5 HEAT= 8.833839E-07
PSI= 63.298546 DPST= 5.0622794E-02 THETA= 9.1651911 L3= 0 DK= 2.0216956E-C5 K= 3.8649293E-03 L7= 2.5106420E-02
L1= 0.3785626 L2= 0.7526411 L4= 1.0257764E-03 L5= 3.8251008E-04 L6= 0

STEP= 34. + 4. ECCENTRICITY= 0.6361366 OMEGA=-2.8306689 V= 4661.0650 R= 6864933.8 REFER=EART RECT 2
TIME= 499.99599 SEMILATUS R.= 2513732.2 TRU A= 3.0564113 VX= 367.84452 X= 6690758.1 RMASS= 452743.52
DAYS= 0.0C649 MEAN ANOMALY= 2.8473027 NODE= 0 VY= 4646.5275 Y= 1536578.3 REVS.= 3.5928024E-02
ALFA= 26.194275 PATH ANGLE= 8.4076816 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 9.4142852 DRAG= 0 VR= 4166.4891 C= 0.3710710 PUSH= 3.6389636
ALT.= 486773.81 MACH NUMBER= 4.2509385 LIFT= 0 CC= 0.6434566 Q= 1.6314481E-05 HEAT= 3.0027643E-07
PSI= 68.332027 DPST= 5.0136012E-02 THETA= 12.934089 L3= 0 DK= 1.9254909E-05 K= 5.8371550E-03 L7= 2.5732515E-02
L1= 0.2824155 L2= 0.7113386 L4= 8.9596645E-C4 L5= 4.4114044E-04 L6= 0

STEP= 36. + 4. ECCENTRICITY= 0.5673783 OMEGA=-2.7927703 V= 4895.6850 R= 6917415.6 REFER=EART RECT 2
TIME= 599.99599 SEMILATUS R.= 2860259.0 TRU A= 3.0873177 VX= 1057.0914 X= 661950.7 RMASS= 438743.52
DAYS= 0.0C649 MEAN ANOMALY= 2.9728449 NODE= 0 VY= 4780.2018 Y= 2008172.4 REVS.= 4.6878669E-02
ALFA= 29.122110 PATH ANGLE= 4.4066427 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 4.9121516 DRAG= 0 VR= 4292.5252 C= 0.3829116 PUSH= 3.7550804
ALT.= 539255.63 MACH NUMBER= 4.3858102 LIFT= 0 CD= 0.6390151 Q= 5.2793775E-06 HEAT= 1.8581977E-07
PSI= 73.344577 DPST= 5.0264911E-02 THETA= 16.876321 L3= 0 DK= 1.8511265E-C5 K= 7.7238322E-03 L7= 2.6337064E-02
L1= 0.1988746 L2= 0.6648465 L4= 7.8104716E-C4 L5= 4.4873408E-04 L6= 0

STEP= 38. + 4. ECCENTRICITY= 0.5321913 OMEGA=-2.7541569 V= 5184.8259 R= 6941797.9 REFER=EART RECT 2
TIME= 699.99599 SEMILATUS R.= 3248196.8 TRU A= 3.1212638 VX= 1748.5706 X= 6479263.2 RMASS= 424743.52
DAYS= 0.0C611 MEAN ANOMALY= 3.0823215 NODE= 0 VY= 4881.0820 Y= 2491526.7 REVS.= 5.8426882E-02
ALFA= 31.300477 PATH ANGLE= 1.3244159 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 1.4676941 DRAG= 0 VR= 4678.7758 C= 0.3955328 PUSH= 3.8788519
ALT.= 563637.88 MACH NUMBER= 4.6349823 LIFT= 0 CD= 0.6154287 Q= 7.8145064E-06 HEAT= 1.7216188E-07
PSI= 78.408774 DPST= 5.1108908E-02 THETA= 21.033677 L3= 0 DK= 1.7927276E-05 K= 9.5447153E-03 L7= 2.6920407E-02
L1= 0.1260106 L2= 0.6143536 L4= 6.7802569E-04 L5= 5.2145217E-04 L6= 0

STEP= 43. + 4. ECCENTRICITY= 0.4986825 OMEGA=-3.5507417 V= 5263.9944 R= 6945040.5 REFER=EART RECT 2
TIME= 755.36598 SEMILATUS R.= 3481670.6 TRU A= 3.1415926 VX= 2133.9515 X= 6371794.6 RMASS= 416992.34
DAYS= 0.0C657 MEAN ANOMALY= 3.1415926 NODE= 0 VY= 4921.2487 Y= 2762937.1 REVS.= 6.5118099E-02
ALFA= 32.182456 PATH ANGLE= 1.9686544E-07 INCL= 0 VZ= 0 Z= 0 DELT= 25.000000
BETA= 0 R PATH ANGLE= 2.1739030E-07 DRAG= 0 VR= 4857.5541 C= 0.4028851 PUSH= 3.9509532
ALT.= 566880.50 MACH NUMBER= 4.8089253 LIFT= 0 CD= 0.6039301 Q= 8.1001096E-06 HEAT= 1.8871675E-07
PSI= 81.260059 DPST= 5.1936421E-02 THETA= 23.442516 L3= 0 DK= 1.7648346E-C5 K= 1.0529439E-02 L7= 2.7234215E-02
L1= 8.9942542E-02 L2= 0.5890519 L4= 6.2525042E-04 L5= 5.3656873E-04 L6= 0

TRAJECTORY INTERRUPT -- C(LOOKX(1)) = -1.5686544E-07

STEP= 43. + 4. ECCENTRICITY= 0.4986825 OMEGA= 3.5507417 V= 5263.9944 R= 6945040.5 REFER=EART RECT 2
TIME= 755.36598 SEMILATUS R.= 3481670.6 TRU A= 3.1415926 VX= 2133.9515 X= 6371794.6 RMASS= 416992.34
DAYS= 0.0C657 MEAN ANOMALY= 3.1415926 NODE= 0 VY= 4921.2487 Y= 2762937.1 REVS.= 6.5118099E-02
ALFA= 32.182456 PATH ANGLE= 1.9686544E-07 INCL= 0 VZ= 0 Z= 0 DELT= 25.000000
BETA= 0 R PATH ANGLE= 2.1739030E-07 DRAG= 0 VR= 4857.5541 C= 0.4028851 PUSH= 3.9509532
ALT.= 566880.50 MACH NUMBER= 4.8089253 LIFT= 0 CD= 0.6039301 Q= 8.1001096E-06 HEAT= 1.8871675E-07
PSI= 81.260059 DPST= 5.1936421E-02 THETA= 23.442516 L3= 0 DK= 1.7648346E-C5 K= 1.0529439E-02 L7= 2.7234215E-02
L1= 8.9942542E-02 L2= 0.5890519 L4= 6.2525042E-04 L5= 5.3656873E-04 L6= 0

STEP= 45. + 4. ECCENTRICITY= 0.47C0513 OMEGA= 3.5684226 V= 5516.8204 R= 6943112.8 REFER=EART RECT 2
TIME= 799.99599 SEMILATUS R.= 3679981.2 TRU A= 3.1243110 VX= 2446.3936 X= 6269580.3 RMASS= 410743.52
DAYS= 0.0C693 MEAN ANOMALY= 3.0992840 NODE= 0 VY= 4944.7413 Y= 2923149.0 REVS.= 7.0682559E-02
ALFA= 32.726565 PATH ANGLE= 0.8780223 INCL= 0 VZ= 0 Z= 0 DELT= 19.634412
BETA= 0 R PATH ANGLE= 0.9667393 DRAG= 0 VR= 5010.5861 C= 0.4090144 PUSH= 4.0110607
ALT.= 564952.81 MACH NUMBER= 4.9436384 LIFT= 0 CD= 0.5540957 Q= 8.8210748E-06 HEAT= 2.1521340E-07
PSI= 83.597178 DPST= 5.2820664E-02 THETA= 25.445721 L3= 0 DK= 1.7437476E-05 K= 1.1312421E-C2 L7= 2.7482384E-02
L1= 6.2939244E-02 L2= 0.5608677 L4= 5.6493385E-C4 L5= 5.4680927E-C4 L6= 0

STEP= 47. + 4. ECCENTRICITY= 0.4003594 OMEGA= 3.6085352 V= 5882.2321 R= 6926779.5 REFER=EART RECT 2
TIME= 899.99599 SEMILATUS R.= 4158448.3 TRU A= 3.0823225 VX= 3152.8925 X= 5989693.6 RMASS= 396743.52
DAYS= 0.0104 MEAN ANOMALY= 3.0148534 NODE= 0 VY= 4955.8753 Y= 3479058.1 REVS.= 8.3749348E-02
ALFA= 33.402229 PATH ANGLE= 2.2621894 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 2.4746155 DRAG= 0 VR= 5377.5528 C= 0.4234474 PUSH= 4.1526001
ALT.= 548615.50 MACH NUMBER= 5.3566276 LIFT= 0 CD= 0.5713250 Q= 1.2391962E-05 HEAT= 3.3592705E-07
PSI= 89.005711 DPST= 5.5640616E-02 THETA= 30.149765 L3= 0 DK= 1.6981771E-05 K= 1.3033350E-02 L7= 2.8022481E-02
L1= 8.733770E-03 L2= 0.5052653 L4= 5.005644E-04 L5= 5.6399332E-04 L6= 0

STEP= 49. + 4. ECCENTRICITY= 0.3224082 OMEGA= 3.6488572 V= 6273.4941 R= 6898777.1 REFER=EART RECT 2
TIME= 999.99599 SEMILATUS R.= 4687228.0 TRU A= 3.0348504 VX= 3868.7448 X= 5638688.3 RMASS= 382743.52
DAYS= 0.0116 MEAN ANOMALY= 2.9447514 NODE= 0 VY= 4938.5765 Y= 3974710.0 REVS.= 9.7722222E-02
ALFA= 33.300000 PATH ANGLE= 2.8941652 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 3.1463464 DRAG= 0 VR= 5771.1248 C= 0.4389362 PUSH= 4.3044940
ALT.= 520617.13 MACH NUMBER= 5.8041189 LIFT= 0 CC= 0.5492258 Q= 2.0206100E-05 HEAT= 6.0934761E-07
PSI= 94.774168 DPST= 5.9532123E-02 THETA= 35.180000 L3= 0 DK= 1.6497772E-C5 K= 1.4707844E-02 L7= 2.8539982E-02
L1= 3.7442742E-02 L2= 0.4483176 L4= 4.2428758E-C4 L5= 5.7387993E-04 L6= 0

STEP= 51. + 4. ECCENTRICITY= 0.2353214 OMEGA= 3.6871902 V= 6604.5807 R= 6855776.3 REFER=EART RECT 2
TIME= 1100.0000 SEMILATUS R.= 5271373.0 TRU A= 2.9791847 VX= 4593.1411 X= 5215658.6 RMASS= 368743.52
DAYS= 0.0127 MEAN ANOMALY= 2.8872805 NODE= 0 VY= 4856.6116 Y= 4464951.4 REVS.= 0.1126826
ALFA= 32.340276 PATH ANGLE= 2.8372087 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 3.0667960 DRAG= 0 VR= 6184.5837 C= 0.4556012 PUSH= 4.4679217
ALT.= 487616.31 MACH NUMBER= 6.3668948 LIFT= 0 CD= 0.5292801 Q= 3.5541523E-05 HEAT= 1.1922082E-06
PSI= 101.00256 DPST= 6.6223032E-02 THETA= 40.565729 L3= 0 DK= 1.5911775E-C5 K= 1.6329531E-02 L7= 2.9034173E-02
L1= 7.6386449E-02 L2= 0.3966961 L4= 3.5550115E-C4 L5= 5.7761092E-04 L6= 0

STEP= 53. + 4. ECCENTRICITY= 0.1380313 OMEGA= 3.7122355 V= 7110.8765 R= 6835202.9 REFER=EART RECT 2
TIME= 1200.0000 SEMILATUS R.= 5918314.5 TRU A= 2.9036459 VX= 5324.1437 X= 4719839.4 RMASS= 354743.52
DAYS= 0.0129 MEAN ANOMALY= 2.8313757 NODE= 0 VY= 4713.6066 Y= 4943997.9 REVS.= 0.1286910
ALFA= 30.371521 PATH ANGLE= 2.1519044 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000
BETA= 0 R PATH ANGLE= 2.3140628 DRAG= 0 VR= 6612.8254 C= 0.4735816 PUSH= 4.6442488
ALT.= 457042.44 MACH NUMBER= 6.8587048 LIFT= 0 CC= 0.5132227 Q= 6.1805803E-05 HEAT= 2.3042618E-06
PSI= 108.10515 DPST= 7.5230240E-02 THETA= 46.328771 L3= 0 DK= 1.5125513E-C5 K= 1.7883572E-02 L7= 2.950641E-02
L1= 0.1086878 L2= 0.3329625 L4= 2.9546051E-04 L5= 5.7634178E-04 L6= 0

```

STEP= 55. + 4. ECCENTRICITY= 3.0035251E-02 OMEGA= 3.5215729 V= 7549.2360 R= 6815188.5 REFER=EART RECT 2  
 TIME= 1300.0000 SEMILATUS R= 6639197.1 TRU A=-2.6056207 VX=-6059.2623 X= 4150693.0 RMAS5= 340743.52  
 DAYS= 27.0150 MEAN ANOMALY= 2.5743408 NCDE= 0 VY= 4502.9218 Y= 5405417.9 REVS.= 0.1457783  
 ALFA= 27.151118 PATH ANGLE= 0.9020390 INCL= 0 VZ= 0 Z= 0 DELT= 50.00000  
 BETA= 0 R PATH ANGLE= 0.9656022 DRAG= 0 VR= 7052.3304 C= 0.4930394 PUSM= 4.8350653  
 ALT.= 437028.50 MACH NUMBER= 7.3583961 LIFT= 0 CD= 0.5037267 Q= 9.3413645E-05 HEAT= 3.8668261E-06  
 PSI= 116.22711 DPSI= 8.7786118E-02 THETA= 52.480190 DK=-1.3946665E-05 K=-1.9343287E-02 L7= 2.9951738E-02  
 L1=0.1357474 L2= 0.2754559 L3= 0 L4= 2.4307687E-04 L5= 5.7153681E-04 L6= 0

STEP= 56. + 4. ECCENTRICITY= 1.0677141E-02 OMEGA= 2.7822057 V= 7638.1855 R= 6813204.7 REFER=EART RECT 2  
 TIME= 1320.0000 SEMILATUS R= 6793582.2 TRU A=-1.8439675 VX=-6206.5614 X= 4028034.8 RMAS5= 337943.52  
 DAYS= 0.0152 MEAN ANOMALY= 1.8233609 NCDE= 0 VY= 4452.0191 Y= 5454972.4 REVS.= 0.1493253  
 ALFA= 26.235252 PATH ANGLE= 0.9907141 INCL= 0 VZ= 0 Z= 0 DELT= 20.00000  
 BETA= 0 R PATH ANGLE= 0.6318097 DRAG= 0 VR= 7141.2868 C= 0.4971245 PUSM= 4.8751259  
 ALT.= 435046.75 MACH NUMBER= 7.5003893 LIFT= 0 CD= 0.5025810 Q= 9.8568712E-05 HEAT= 4.1658872E-06  
 PSI= 118.01255 DPSI= 9.0786190E-02 THETA= 53.757091 DK=-1.3712645E-05 K=-1.9620418E-02 L7= 3.0038482E-02  
 L1=0.1405133 L2= 0.2641275 L3= 0 L4= 2.3356582E-04 L5= 5.7030036E-04 L6= 0

PHASE 2 COMPLETED. DELV= 4419. MASS RATIO= 0.68696 \*\*\* TOTAL DELV= 10264. TOTAL MASS RATIO= 0.16897 PAYLOAD RATIO= 0.03287  
 KE=.100 STRCT=.053 ALFPQW= 0. PJ/M0= 25.545258 PJ/M1= 25.545258 MPP/M1= 0. ETAPDN=0.058 ML/M1= 0.03287

JAA	IA	IB	DESIRE	WEIGHT	PRTEN	PRTNR
48	343	1263	444165.00	4.442E+05	-1.000E-02	-1.000E-04
E	344	493	7643.8000	7.644E+03	-1.000E-02	-1.000E-04
0	2	479	0	360.0	-1.000E-02	-1.000E-04

RUN N	ERROR	TIME	3 INDEPENDENT VARIABLES --			3 DEPENDENT VARIABLES			
1N0	0.0204CE	1320.0	54.0000	5.30000E-02	1100.00	4.35047E+05	7638.19	-0.59071	
2	0.020551	1320.0	53.9946	5.30000E-02	1100.00	4.35054E+05	7638.32	-0.59327	
3	0.020755	1320.0	53.9892	5.30000E-02	1100.00	4.35061E+05	7638.47	-0.59591	
4	0.020542	1320.0	53.9784	5.30000E-02	1100.00	4.35076E+05	7638.75	-0.60047	
5	0.020291	1320.0	54.0000	5.29947E-02	1100.00	4.35189E+05	7637.62	-0.58694	
6	0.020591	1319.9	54.0000	5.30000E-02	1099.89	4.35055E+05	7637.69	-0.59264	
7	0.020754	1319.8	54.0000	5.30000E-02	1099.78	4.35064E+05	7637.20	-0.59424	
8	0.020542	1319.6	54.0000	5.30000E-02	1099.56	4.35082E+05	7636.22	-0.59793	
9N0	0.001067	1332.0	54.2568	5.26112E-02	1112.04	4.44613E+05	7641.12	2.64017E-03	
10	0.001140	1332.0	54.2351	5.26112E-02	1112.04	4.44657E+05	7641.70	-6.71439E-03	
11	0.001397	1332.0	54.2568	5.26040E-02	1112.04	4.44755E+05	7640.52	6.39795E-03	
12	0.001172	1331.6	54.2568	5.26112E-02	1111.60	4.44612E+05	7639.22	-5.49723E-03	
13	0.001319	1331.2	54.2568	5.26112E-02	1111.15	4.44613E+05	7637.22	-1.32944E-02	
14	0.001467	1330.3	54.2568	5.26112E-02	1110.27	4.44615E+05	7633.51	-2.93550E-02	
15	0.002545	1329.5	54.2568	5.26112E-02	1108.49	4.44627E+05	7625.52	-6.08630E-02	
16N0	0.000002	1332.3	54.2659	5.26270E-02	1112.31	4.44164E+05	7643.80	-2.20233E-04	
	C( 48) =	89.400000	YIELDS	C( 437) =	3.1921132E-02	DELV=	10324.401	PAY=	3.1921132E-02
17N0	0.194801	1332.3	54.2659	5.26270E-02	1112.31	5.30048E+05	7462.57	0.17808	
18	0.195012	1332.3	54.2442	5.26270E-02	1112.31	5.30143E+05	7462.00	0.17056	
19	0.195119	1332.3	54.2659	5.26218E-02	1112.31	5.30183E+05	7461.99	0.18173	
20	0.194892	1328.7	54.2659	5.26270E-02	1108.75	5.29978E+05	7447.96	0.11437	
21	0.194813	1331.6	54.2659	5.26270E-02	1111.60	5.30029E+05	7459.65	0.16528	
22N0	0.041744	1331.0	58.8181	5.51239E-02	1111.02	4.25935E+05	7701.18	-0.47112	
23	0.041046	1331.0	58.7946	5.51239E-02	1111.02	4.26247E+05	7700.85	-0.47333	
24	0.040341	1331.0	58.7711	5.51239E-02	1111.02	4.26562E+05	7700.52	-0.47547	
25	0.041444	1331.0	58.8181	5.51184E-02	1111.02	4.26065E+05	7700.68	-0.46802	
26	0.041576	1330.3	58.8181	5.51239E-02	1110.31	4.25981E+05	7698.23	-0.48599	
27N0	0.000113	1333.8	58.7599	5.43771E-02	1113.76	4.44468E+05	7642.20	5.99904E-03	
28	0.002160	1333.8	58.7128	5.43771E-02	1113.76	4.45115E+05	7641.50	2.44192E-03	
29	0.001004	1332.8	58.7505	5.43771E-02	1113.76	4.44599E+05	7642.06	5.34132E-03	
30	0.001016	1333.8	58.7599	5.43717E-02	1113.76	4.44599E+05	7641.68	9.10829E-03	
31	0.000853	1333.0	58.7599	5.43771E-02	1113.04	4.44468E+05	7639.40	-9.64560E-03	
32	0.001171	1332.3	58.7599	5.43771E-02	1112.33	4.44472E+05	7636.60	-2.52009E-02	
33	0.001824	1330.9	58.7599	5.43771E-02	1110.90	4.44477E+05	7630.55	-5.63734E-02	
34N0	0.000020	1333.8	58.7575	5.43907E-02	1113.84	4.44174E+05	7643.80	1.52669E-04	
	C( 4E) =	89.426819	YIELDS	C( 437) =	3.1802968E-02	DELV=	10331.923	PAY=	3.1802968E-02
35N0	0.027586	1331.8	52.9183	5.20979E-02	1111.85	4.31951E+05	7682.81	-0.36494	
36	0.028047	1331.8	52.9098	5.20979E-02	1111.85	4.31928E+05	7683.16	-0.36996	
37	0.028108	1331.8	52.9013	5.20979E-02	1111.85	4.31904E+05	7683.52	-0.37485	
38	0.027637	1331.8	52.9183	5.20927E-02	1111.85	4.32102E+05	7682.20	-0.36094	
39	0.027404	1329.0	52.9183	5.20979E-02	1109.00	4.32099E+05	7689.93	-0.46882	
40	0.027665	1331.3	52.9183	5.20979E-02	1111.28	4.31979E+05	7680.23	-0.37382	
41N0	0.000124	1334.3	52.9171	5.16720E-02	1114.31	4.44152E+05	7642.85	6.46827E-03	
42	0.000113	1334.3	52.9002	5.16720E-02	1114.31	4.44116E+05	7643.62	5.888E-03	
43	0.000366	1334.3	52.9171	5.16668E-02	1114.31	4.44270E+05	7642.26	7.588E-03	
	C( 47) =	222.44879	YIELDS	C( 437) =	3.3343980E-02	DELV=	9948.2817	PAY=	3.3343980E-02
358N0	0.000045	1196.9	60.6056	5.63810E-02	974.494	4.54451E+05	7642.16	0.13569	
	C( 1) =	222.43759	YIELDS	C( 437) =	3.3342853E-02	DELV=	9971.6410	PAY=	3.3342853E-02
359N0	0.000625	1186.6	61.7729	5.67395E-02	963.988	4.41517E+05	7650.84	-5.78132E-02	
360	0.005756	1186.6	61.7644	5.67395E-02	963.988	4.41640E+05	7650.43	-5.73813E-02	
361	0.005485	1186.6	61.7560	5.67395E-02	963.988	4.41760E+05	7650.34	-5.70860E-02	
362	0.005720	1186.6	61.7729	5.67304E-02	963.988	4.41654E+05	7644.47	-5.40042E-02	
363	0.005526	1185.2	61.7729	5.67395E-02	962.531	4.41531E+05	7644.47	-8.12563E-02	
364	0.005542	1183.7	61.7729	5.67395E-02	961.075	4.41520E+05	7638.10	-0.10450	
365N0	0.000043	1184.8	61.7219	5.66126E-02	964.138	4.44146E+05	7643.74	-8.08373E-04	
	C( 1) =	222.64879	YIELDS	C( 437) =	3.3343980E-02	DELV=	9948.2817	PAY=	3.3343980E-02
366N0	0.010531	1166.5	63.9634	5.70757E-02	943.427	4.39343E+05	7653.23	-0.12577	
367	0.010275	1166.5	63.9458	5.70757E-02	943.427	4.39633E+05	7652.68	-0.12359	
368	0.010650	1166.5	63.9634	5.70666E-02	943.427	4.39466E+05	7652.83	-0.12238	
369	0.010743	1163.6	63.9634	5.70757E-02	940.576	4.39401E+05	7640.71	-0.17187	
370	0.010677	1165.9	63.9634	5.70757E-02	942.857	4.39353E+05	7650.73	-0.13505	
371N0	0.000020	1167.6	63.8881	5.68081E-02	944.490	4.44178E+05	7643.68	2.21924E-04	
	C( 1) =	223.07119	YIELDS	C( 437) =	3.3264410E-02	DELV=	9906.8184	PAY=	3.3264410E-02

REFERENCE BODY IS EART

STEP= 0. + 0. LAT.= 0 LONG.= 0 AZI.= 90.000000 ELEV.= 89.3642712 ALT.= 10.000000  
 TIME= D VEL.= 0 RMAS= 2000000.00 X= 6378170.0C Y= C Z= 0  
 2 DIMENSIONS 14 DIFF.EQNS. T/W= 1.2500000 ISP= 425.00000 PFLOW= 6854.8022 REFA= 100.00000 AEXIT= 40.000000

STEP= 0. + 0. ECCENTRICITY= 0.9965282 OMEGA=-3.1396999 V= 469.39201 R= 6378720.4 REFER=EART RECT 2  
 TIME= 20.000000 SEMILATUS R.= 22146.453 TRU A= 3.1411584 VX= 57.276726 X= 6378713.7 RMAS= 1862904.0  
 DAYS= 0.0002 MEAN ANOMALY= 3.1208006 NODE= 0 VY= 465.87206 Y= 9302.8701 REVS.= 2.32115246E-04  
 ALFA= 0 PATH ANGLE= 7.1047428 INCL= 0 VZ= 0 Z= 0 DELT= 2.2264879  
 BETA= 0 R PATH ANGLE= 89.364269 DRAG= 4.3850194E-02 VR= 58.059676 G= 1.3518681 PUSM= 13.301148  
 ALT.= 560.43750 MACH NUMBER= 0.1715502 LIFT= 0 CR= 0.4176577 C= 1955.8770 Q= 0.1219146 HEAT= 0.1219146

STEP= 8. + 3. ECCENTRICITY= 0.9952450 OMEGA=-3.1342482 V= 610.74861 R= 6385855.6 REFER=EART RECT 2  
 TIME= 65.247620 SEMILATUS R.= 30383.557 TRU A= 3.1391738 VX= 273.04018 X= 6385778.2 RMAS= 1552740.5  
 DAYS= 0.0008 MEAN ANOMALY= 3.0427730 NODE= 0 VY= 546.31761 Y= 31454.266 REVS.= 7.8393911E-04  
 ALFA= 0 PATH ANGLE= 26.837315 INCL= 0 VZ= 0 Z= 0 DELT= 2.8410634  
 BETA= 0 R PATH ANGLE= 73.954230 DRAG= 1.3212091 VR= 286.90530 C= 1.6436605 PUSM= 17.440013  
 ALT.= 7695.6250 MACH NUMBER= 0.9264910 LIFT= 0 CD= 0.9150313 Q= 22419.941 HEAT= 8.2852222

STEP= 17. + 4. ECCENTRICITY= 0.9892652 OMEGA=-3.1264041 V= 960.44389 R= 6399202.9 REFER=EART RECT 2  
 TIME= 99.999956 SEMILATUS R.= 68835.183 TRU A= 3.1349186 VX= 495.42451 X= 6399722.0 RMAS= 1314519.8  
 DAYS= 0.0012 MEAN ANOMALY= 2.9611097 NODE= 0 VY= 822.80437 Y= 54485.336 REVS.= 1.3551240E-03  
 ALFA= 0 PATH ANGLE= 31.540766 INCL= 0 VZ= 0 Z= 0 DELT= 5.9494073  
 BETA= 0 R PATH ANGLE= 54.590351 DRAG= 0.9238064 VR= 613.40442 C= 2.1074443 PUSM= 21.590971  
 ALT.= 21043.427 MACH NUMBER= 2.0723181 LIFT= 0 CD= 0.8885545 Q= 14146.261 HEAT= 13.200490

STEP= 28. + 4. ECCENTRICITY= 0.8307139 OMEGA=-3.0185903 V= 3524.1483 R= 6488878.6 REFER=EART RECT 2  
 TIME= 199.999999 SEMILATUS R.= 1118575.5 TRU A= 3.0552106 VX= 1232.8708 X= 6484528.1 RMAS= 629039.59  
 DAYS= 0.0023 MEAN ANOMALY= 2.6277867 NODE= 0 VY= 3201.4619 Y= 237571.60C REVS.= 5.8283024E-03  
 ALFA= 0 PATH ANGLE= 22.575419 INCL= 0 VZ= 0 Z= 0 DELT= 8.3550345  
 BETA= 0 R PATH ANGLE= 25.642812 DRAG= 3.3237581E-05 VR= 3092.5686 C= 4.6313280 PUSM= 45.417847  
 ALT.= 110718.56 MACH NUMBER= 9.4177803 LIFT= 0 CD= 0.5000000 Q= 0.4181551 HEAT= 4.1115797E-03

STEP= 32. + 4. ECCENTRICITY= 0.7063571 OMEGA=-2.9232258 V= 4624.4761 R= 6523008.2 REFER=EART RECT 2  
 TIME= 222.6475 SEMILATUS R.= 1980825.8 TRU A= 2.9729171 VX= 1466.0930 X= 6514956.5 RMAS= 473786.58  
 DAYS= 0.0026 MEAN ANOMALY= 2.4631072 NODE= 0 VY= 4385.5265 Y= 324003.53 REVS.= 7.9086195E-03  
 ALFA= 0 PATH ANGLE= 21.330449 INCL= 0 VZ= 0 Z= 0 DELT= 1.3015041  
 BETA= 0 R PATH ANGLE= 23.699933 DRAG= 2.322290E-06 VR= 4184.9720 C= 6.1489516 PUSM= 60.300619  
 ALT.= 144848.19 MACH NUMBER= 7.1221350 LIFT= 0 CD= 0.5078962 Q= 2.1662714E-02 HEAT= 3.8269498E-04

PHASE 1 COMPLETED. DELV= 6002. MASS RATIO= 0.23689

2 DIMENSIONS 14 DIFF.EQNS. T/W= 0.3545900 ISP= 1200.0000 PFLOW= 140.00000 REFA= 0 AEXIT= 0

STEP= 32. + 4. ECCENTRICITY= 0.7063571 OMEGA=-2.9232258 V= 4624.4761 R= 6523008.2 REFER=EART RECT 2  
 TIME= 222.6475 SEMILATUS R.= 1980825.8 TRU A= 2.9729171 VX= 1466.0930 X= 6514956.5 RMAS= 473786.58  
 DAYS= 0.0026 MEAN ANOMALY= 2.4631072 NODE= 0 VY= 4385.5265 Y= 324003.53 REVS.= 7.9086195E-03  
 ALFA= 9.7947056 PATH ANGLE= 21.330449 INCL= 0 VZ= 0 Z= 0 DELT= 9.6413822  
 BETA= 0 R PATH ANGLE= 23.699933 DRAG= 0 VR= 4184.9730 C= 0.3545900 PUSM= 3.4773603  
 ALT.= 144848.19 MACH NUMBER= 7.1221350 LIFT= 0 CD= 0.5078962 Q= 2.1662714E-02 HEAT= 3.8269498E-04  
 PSI= 61.721548 DPST= 5.6612598E-02 THETA= 2.8471030 K= 0 K= 3.1065333E-03 L7= 2.4838145E-02  
 L1= 0.4737505 L3= 0 L4= 1.2195612E-03 L5= 1.8140578E-04 L6= 0

STEP= 35. + 4. ECCENTRICITY= 0.6752868 OMEGA=-2.8929056 V= 4655.5218 R= 6639447.0 REFER=EART RECT 2  
 TIME= 299.999999 SEMILATUS R.= 2204591.0 TRU A= 2.9941062 VX= 876.45645 X= 6605476.9 RMAS= 462957.41  
 DAYS= 0.0025 MEAN ANOMALY= 2.5886544 NODE= 0 VY= 4576.7544 Y= 670769.59 REVS.= 1.6106573E-02  
 ALFA= 13.129520 PATH ANGLE= 16.639328 INCL= 0 VZ= 0 Z= 0 DELT= 45.139881  
 BETA= 0 R PATH ANGLE= 18.531679 DRAG= 0 VR= 4198.3287 C= 0.3628843 PUSM= 3.5586798  
 ALT.= 261287.00 MACH NUMBER= 5.1112722 LIFT= 0 CD= 0.5851743 Q= 6.8963647E-04 HEAT= 1.2507935E-05  
 PSI= 66.029118 DPST= 5.4818091E-02 THETA= 5.7983661 K= 1.3856406E-03 L7= 2.5402820E-02  
 L1= 0.3888649 L2= 0.8633552 L3= 0 L4= 1.1065986E-03 L5= 2.6378669E-04 L6= 0

STEP= 37. + 4. ECCENTRICITY= 0.6256273 OMEGA=-2.8534567 V= 4795.6022 R= 6752440.9 REFER=EART RECT 2  
 TIME= 399.999999 SEMILATUS R.= 2530765.1 TRU A= 3.0230342 VX= 127.41247 X= 6655585.1 RMAS= 448957.41  
 DAYS= 0.0046 MEAN ANOMALY= 2.7395133 NODE= 0 VY= 4793.9054 Y= 1139582.0 REVS.= 2.6989097E-02  
 ALFA= 17.060435 PATH ANGLE= 11.238523 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000  
 BETA= 0 R PATH ANGLE= 12.513257 DRAG= 0 VR= 4313.7159 C= 0.3742003 PUSM= 3.6696514  
 ALT.= 374280.94 MACH NUMBER= 4.7187242 LIFT= 0 CD= 0.6098870 Q= 0.9093831E-05 HEAT= 1.7475245E-06  
 PSI= 71.417117 DPST= 5.3039169E-02 THETA= 9.7160749 K= 3.1065333E-03 L7= 2.6124760E-02  
 L1= 0.2798456 L2= 0.8323787 L3= 0 L4= 9.7624658E-04 L5= 3.5279097E-04 L6= 0

STEP= 39. + 4. ECCENTRICITY= 0.5773667 OMEGA=-2.8136790 V= 5014.5921 R= 6828166.9 REFER=EART RECT 2  
 TIME= 499.999999 SEMILATUS R.= 2900758.3 TRU A= 3.0544832 VX= 615.75675 X= 6631150.5 RMAS= 434957.41  
 DAYS= 0.0058 MEAN ANOMALY= 2.8770553 NODE= 0 VY= 4976.6393 Y= 1628406.1 REVS.= 3.8325168E-02  
 ALFA= 20.398170 PATH ANGLE= 6.7432796 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000  
 BETA= 0 R PATH ANGLE= 7.4843367 DRAG= 0 VR= 4520.4978 C= 0.3882447 PUSM= 3.7877667  
 ALT.= 450006.88 MACH NUMBER= 4.7072646 LIFT= 0 CD= 0.6106557 Q= 3.1889310E-05 HEAT= 6.6285320E-07  
 PSI= 76.655610 DPST= 5.1820889E-02 THETA= 13.797060 K= 6.4278618E-03 L7= 2.6838638E-02  
 L1= 0.1888638 L2= 0.7532277 L3= 0 L4= 8.550326E-04 L5= 4.2582259E-04 L6= 0

STEP= 41. + 4. ECCENTRICITY= 0.5180467 OMEGA=-2.7734945 V= 5299.4982 R= 6872015.1 REFER=EART RECT 2  
 TIME= 599.999999 SEMILATUS R.= 3316875.7 TRU A= 3.0891989 VX= 1360.1168 X= 6532385.7 RMAS= 420957.41  
 DAYS= 0.0069 MEAN ANOMALY= 3.0005734 NODE= 0 VY= 5121.9882 Y= 2133665.3 REVS.= 5.0245912E-02  
 ALFA= 23.072453 PATH ANGLE= 3.2171446 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000  
 BETA= 0 R PATH ANGLE= 3.5528888 DRAG= 0 VR= 4795.2545 C= 0.3950902 PUSM= 3.9137384  
 ALT.= 493855.06 MACH NUMBER= 4.8776339 LIFT= 0 CD= 0.5995041 Q= 1.9688891E-05 HEAT= 4.4893856E-07  
 PSI= 81.798520 DPST= 5.1132514E-02 THETA= 18.088528 K= 6.4278618E-03 L7= 2.7544825E-02  
 L1= 0.1077536 L2= 0.7476590 L3= 0 L4= 7.5106058E-04 L5= 4.8547750E-04 L6= 0

STEP= 43. + 4. ECCENTRICITY= 0.4511888 OMEGA=-2.7327958 V= 5635.4598 R= 6889570.2 REFER=EART RECT 2  
 TIME= 699.999999 SEMILATUS R.= 3781367.6 TRU A= 3.1278353 VX= 2105.8189 X= 6358954.0 RMAS= 406957.41  
 DAYS= 0.0081 MEAN ANOMALY= 3.1061298 NODE= 0 VY= 5225.6169 Y= 2651414.1 REVS.= 6.2872484E-02  
 ALFA= 25.086633 PATH ANGLE= 0.6479276 INCL= 0 VZ= 0 Z= 0 DELT= 50.000000  
 BETA= 0 R PATH ANGLE= 0.7113410 DRAG= 0 VR= 5133.0957 C= 0.4128196 PUSM= 4.0483774  
 ALT.= 511410.19 MACH NUMBER= 5.1789770 LIFT= 0 CD= 0.17958143E-05 HEAT= 4.5302498E-07  
 PSI= 86.899513 DPST= 5.0967103E-02 THETA= 22.634094 K= 0.0692221E-03 L7= 2.8243048E-02  
 L1= 3.7733822E-02 L2= 0.6566251 L3= 0 L4= 6.4503847E-04 L5= 5.3332322E-04 L6= 0

STEP= 47. + 4.	ECCENTRICITY= 0.4273031	OMEGA= 3.5640023	V= 5755.7643	R= 6890605.7	REFER=EART RECT 2
TIME= 733.11370	SEMILATUS R.= 3946228.8	TRU A=-3.1415926	VX=-2355.6303	X= 6284947.2	RMASS= 402321.50
DAYS= 0.0085	MEAN ANOMALY=-3.1415926	NODE= 0	VY= 5249.8540	Y= 2824869.4	REVS.= 6.7228587E-02
ALFA= 25.614188	PATH ANGLE=-1.8491502E-07	INCL= 0	VZ= 0	Z= 0	DELTA= 5.2192765E-03
BETA= 0	R PATH ANGLE=-2.0260192E-07	DRAG= 0	VR= 5253.2933	G= 0.4175765	PUSH= 4.0950265
ALT.= 512445.75	MACH NUMBER= 5.2983338	LIFT= 0	CD= 0.5745042	Q= 1.8543431E-05	HEAT= 4.8478217E-07
PSI= 88.588102	DPSI= 5.103205E-02	THETA= 24.202291	DK=-1.6432814E-05	K=-8.6130872E-03	L7= 2.8472376E-02
L1=1.6729061E-02	L2= 0.6787395	L3= 0	L4= 6.1835871E-04	L5= 5.4673174E-04	L6= 0
TRAJECTORY INTERRUPT -- C(LOOKX(1)) = -1.8491502E-07					
STEP= 47. + 4.	ECCENTRICITY= 0.4273031	OMEGA= 3.5640023	V= 5755.7643	R= 6890605.7	REFER=EART RECT 2
TIME= 733.11370	SEMILATUS R.= 3946228.8	TRU A=-3.1415926	VX=-2355.6303	X= 6284947.2	RMASS= 402321.50
DAYS= 0.0085	MEAN ANOMALY=-3.1415926	NODE= 0	VY= 5249.8540	Y= 2824869.4	REVS.= 6.7228587E-02
ALFA= 25.614188	PATH ANGLE=-1.8491502E-07	INCL= 0	VZ= 0	Z= 0	DELTA= 25.000000
BETA= 0	R PATH ANGLE=-2.0260192E-07	DRAG= 0	VR= 5253.2933	G= 0.4175765	PUSH= 4.0950265
ALT.= 512445.75	MACH NUMBER= 5.2983338	LIFT= 0	CD= 0.5745042	Q= 1.8543431E-05	HEAT= 4.8478217E-07
PSI= 88.588102	DPSI= 5.103205E-02	THETA= 24.202291	DK=-1.6432814E-05	K=-8.6130872E-03	L7= 2.8472376E-02
L1=1.6729061E-02	L2= 0.6787395	L3= 0	L4= 6.1835871E-04	L5= 5.4673174E-04	L6= 0
STEP= 49. + 4.	ECCENTRICITY= 0.3762899	OMEGA= 3.5917404	V= 6005.9944	R= 6886876.4	REFER=EART RECT 2
TIME= 799.99558	SEMILATUS R.= 4296531.7	TRU A=-3.1122303	VX=-2866.6483	X= 6110181.6	RMASS= 392957.41
DAYS= 0.0053	MEAN ANOMALY=-3.0815736	NODE= 0	VY= 5282.2885	Y= 3177223.2	REVS.= 7.6316404E-02
ALFA= 26.477525	PATH ANGLE=-1.0144530	INCL= 0	VZ= 0	Z= 0	DELTA= 41.886284
BETA= 0	R PATH ANGLE=-1.1069444	DRAG= 0	VR= 5507.8813	G= 0.4275272	PUSH= 4.1926100
ALT.= 508716.28	MACH NUMBER= 5.5623304	LIFT= 0	CD= 0.5606608	Q= 2.1296568E-05	HEAT= 5.9980929E-07
PSI= 92.010432	DPSI= 5.1345364E-02	THETA= 27.473905	DK=-1.6483582E-05	K=-9.7138059E-03	L7= 2.9325106E-02
L1=2.2513627E-02	L2= 0.6413576	L3= 0	L4= 5.9544027E-04	L5= 5.7025790E-04	L6= 0
STEP= 50. + 4.	ECCENTRICITY= 0.2528106	OMEGA= 3.6339166	V= 6412.5180	R= 6870673.1	REFER=EART RECT 2
TIME= 899.99558	SEMILATUS R.= 4864892.7	TRU A=-3.0641798	VX=-3629.8087	X= 5785401.5	RMASS= 378957.41
DAYS= 0.0104	MEAN ANOMALY=-3.0063889	NODE= 0	VY= 5266.2914	Y= 3706113.0	REVS.= 9.0676432E-02
ALFA= 27.286717	PATH ANGLE=-1.8317517	INCL= 0	VZ= 0	Z= 0	DELTA= 100.000000
BETA= 0	R PATH ANGLE=-1.9849646	DRAG= 0	VR= 5911.7783	G= 0.4433216	PUSH= 4.3474995
ALT.= 492512.13	MACH NUMBER= 6.0126899	LIFT= 0	CD= 0.5403278	Q= 3.0414418E-05	HEAT= 9.4893667E-07
PSI= 97.188550	DPSI= 5.2324383E-02	THETA= 32.643516	DK=-1.6577251E-05	K=-1.1266827E-02	L7= 2.9612010E-02
L1=7.3521163E-02	L2= 0.5829208	L3= 0	L4= 4.6554190E-04	L5= 5.9677397E-04	L6= 0
STEP= 51. + 4.	ECCENTRICITY= 0.2001526	OMEGA= 3.6771355	V= 6823.8344	R= 6848591.6	REFER=EART RECT 2
TIME= 999.99558	SEMILATUS R.= 5489515.1	TRU A=-3.0109175	VX=-4295.9126	X= 5384120.2	RMASS= 364957.41
DAYS= 0.0116	MEAN ANOMALY=-2.9497580	NODE= 0	VY= 5232.3325	Y= 4232547.2	REVS.= 0.1060319
ALFA= 27.536231	PATH ANGLE=-1.8636071	INCL= 0	VZ= 0	Z= 0	DELTA= 100.000000
BETA= 0	R PATH ANGLE=-2.0105018	DRAG= 0	VR= 6334.7171	G= 0.4603277	PUSH= 4.5142725
ALT.= 470431.56	MACH NUMBER= 6.5212815	LIFT= 0	CD= 0.5223422	Q= 4.7098085E-05	HEAT= 1.6350019E-06
PSI= 102.45886	DPSI= 5.4012510E-02	THETA= 38.171482	DK=-1.6647250E-05	K=-1.3028460E-02	L7= 3.0280059E-02
L1=0.1157850	L2= 0.5223397	L3= 0	L4= 3.8067465E-04	L5= 6.1319476E-04	L6= 0
STEP= 53. + 4.	ECCENTRICITY= 9.7623438E-02	OMEGA= 3.7216460	V= 7265.8054	R= 6829292.1	REFER=EART RECT 2
TIME= 1100.00000	SEMILATUS R.= 6174492.6	TRU A=-2.9523812	VX=-5155.0928	X= 4906315.2	RMASS= 350957.41
DAYS= 0.0127	MEAN ANOMALY=-2.9128355	NODE= 0	VY= 5116.2183	Y= 4750505.3	REVS.= 0.1226323
ALFA= 27.218441	PATH ANGLE=-1.1834399	INCL= 0	VZ= 0	Z= 0	DELTA= 50.000000
BETA= 0	R PATH ANGLE=-1.2490431	DRAG= 0	VR= 6767.9157	G= 0.4786505	PUSH= 4.6943507
ALT.= 451132.06	MACH NUMBER= 7.0430357	LIFT= 0	CD= 0.5093767	Q= 7.0352104E-05	HEAT= 2.7133611E-06
PSI= 108.02063	DPSI= 5.6591278E-02	THETA= 44.075629	DK=-1.6643555E-05	K=-1.4693712E-02	L7= 3.0935024E-02
L1=0.1496721	L2= 0.4606033	L3= 0	L4= 3.0141662E-04	L5= 6.1992415E-04	L6= 0
STEP= 55. + 4.	ECCENTRICITY= 1.9361011E-04	OMEGA= 1.7499298	V= 7642.7448	R= 6822306.0	REFER=EART RECT 2
TIME= 1186.7870	SEMILATUS R.= 6822384.6	TRU A=-0.8858732	VX=-5812.0078	X= 4430118.1	RMASS= 338807.23
DAYS= 0.0137	MEAN ANOMALY=-0.8855743	NODE= 0	VY= 4963.4428	Y= 5188247.6	REVS.= 0.1375189
ALFA= 26.445008	PATH ANGLE=-8.0E37334E-04	INCL= 0	VZ= 0	Z= 0	DELTA= 36.787025
BETA= 0	R PATH ANGLE=-8.6464872E-04	DRAG= 0	VR= 7146.2543	G= 0.4958572	PUSH= 4.8626978
ALT.= 444146.00	MACH NUMBER= 7.4663814	LIFT= 0	CD= 0.5029354	Q= 8.6614951E-05	HEAT= 3.6538326E-06
PSI= 113.06255	DPSI= 5.9766716E-02	THETA= 49.506793	DK=-1.6526171E-05	K=-1.6133830E-02	L7= 3.1491612E-02
L1=0.1732101	L2= 0.4068213	L3= 0	L4= 2.3797822E-04	L5= 6.1845142E-04	L6= 0
PHASE 2 COMPLETE. DELV= 3946. MASS RATIO= 0.71511 *** TOTAL DELV= 9948. TOTAL MASS RATIO= 0.16940 PAYLOAD RATIO= 0.03334					
KE=100 STRUCT=0.03 ALFPDW= 0. P/MO= 25.545258 P/M1= 25.545258 MPP/M1= 0. ETAPDW=0.058 PL/M1= 0.03334					

Lewis Research Center,  
National Aeronautics and Space Administration,  
Cleveland, Ohio, September 11, 1973,  
502-04.

## APPENDIX A

### SYMBOLS

$A_e$	engine exit area, $m^2$
$a$	thrust acceleration magnitude, $m/sec^2$
$a_e$	Earth's equatorial radius, $m$
$a_x, a_y, a_z$	components of total perturbing acceleration, $m/sec^2$
$a_1, \dots, a_{12}$	curve-fit coefficients
$B$	$V_r \times H_r$
$b$	electric thruster efficiency parameter
$C$	vector constant of motion, $kg$
$\mathcal{C}$	perturbative acceleration in circumferential direction, $m/sec^2$
$C_D$	total drag coefficient
$C_{DI}$	induced drag coefficient
$C_{D0}$	parasite drag coefficient
$C_L$	lift coefficient
$c$	jet exhaust speed of vehicle, $m/sec$
$c_l$	launch vehicle performance parameter, $m/sec$
$c_r$	jet exhaust speed of high-thrust retroengine, $m/sec$
$D$	vehicle drag force vector, $N$
$d$	electric thruster efficiency parameter, $m/sec$
$E$	eccentric anomaly, $rad$
$e$	orbit eccentricity
$e_r$	eccentricity of planetary capture orbit
$F$	eccentric anomaly equivalent for hyperbolic orbits, $rad$
$f$	thrust force magnitude, $N$
$G$	partial derivative matrix for two-point boundary-value problem
$g$	universal gravitational constant, $m/sec^2$
$H_r$	relative angular momentum per unit mass vector, $m^2/sec$

$h$	absolute angular momentum magnitude, $m^2/\text{sec}$ ; and integration step size, sec
$I$	specific impulse, sec
$i$	orbit inclination, rad
$\hat{i}, \hat{j}, \hat{k}$	unit vectors along $x, y, z$ axes
$J_2, J_3, J_4$	zonal harmonic oblateness coefficients
$j$	retrorocket jettison indicator
$k_L$	launch vehicle performance parameter
$k_{rt}$	retrosystem tankage factor
$k_s$	structure factor
$k_t$	tankage factor
$k_1, k_2, k_3, k_4$	Runge-Kutta subinterval increments
$L$	lift force vector, N
$l$	lift force magnitude, N
$l_s$	transformation factor used in multidimensional sweeps
$M$	Mach number; and mean anomaly, rad
$m$	vehicle mass, kg
$m_n$	net spacecraft mass, kg
$m_p$	propellant mass, kg
$m_{ps}$	propulsion system mass, kg
$m_r$	retrosystem mass, kg
$m_{rp}$	retropropellant mass, kg
$m_{rt}$	retrosystem tankage mass, kg
$m_{ref}$	reference mass in planetary orbit, kg
$m_s$	structure mass, kg
$m_t$	tankage mass, kg
$N$	$e \cos \omega + \cos u$
$\mathcal{N}$	perturbative acceleration normal to orbit plane, $m/\text{sec}^2$
$n$	mean motion
$P$	instantaneous electric power available from power source, W

$P_r$	electric power available from power source at 1-AU distance from Sun, W
$p$	atmospheric pressure, $N/m^2$ ; and semilatus rectum, m
$Q$	$e \sin \omega + \sin u$
$q$	dynamic pressure, $N/m^2$
$R$	position vector of vehicle, m
$\mathcal{A}$	perturbative acceleration in outward radial direction, $m/sec^2$
$r$	distance from origin to vehicle, m
$r_l$	radius of launch vehicle at injection, m
$r_r$	radius of retrofire maneuver at arrival planet, m
$r_{s,a}$	sphere-of-influence radius of arrival planet, m
$r_{s,d}$	sphere-of-influence radius of departure planet, m
$S$	vector of sweep parameters
$S_{ref}$	aerodynamic reference area, $m^2$
$s$	sweep parameter
$T$	unit vector in thrust direction
$T_{\dot{m}_0}, T_c, T_{v_l}, T_{v_r}$	transversality conditions for $\dot{m}_0$ , $c$ , $v_l$ , and $v_r$
$t$	time, sec
$t_f$	flight duration of a stage, sec
$t_s$	duration of low-thrust escape spiral maneuver, sec
$t_v$	time of short vertical rise for launch vehicles, ignoring atmosphere
$u$	gravitational potential function, $m^2/sec^2$ ; and argument of latitude, rad
$V$	absolute vehicle velocity vector, m/sec
$V_r$	vehicle speed relative to a planet, m/sec
$v$	vehicle speed, m/sec
$v_{c,l}$	circular orbit speed about departure planet at radius $r_l$ , m/sec
$v_{c,r}$	circular orbit speed about arrival planet at radius $r_r$ , m/sec
$v_l$	launch speed of spacecraft when analytic launch vehicle simulation is invoked, m/sec



$v_r$	spacecraft speed just prior to an analytic high-thrust retrofire maneuver, m/sec; and relative spacecraft speed, m/sec
$\Delta v_r$	retrofire speed increment, m/sec
$v_{s, a}, v_{s, d}$	vehicle speed as it passes through arrival (departure) planet's sphere of influence, m/sec
$W$	weighting matrix for end condition residuals
$w_i$	diagonal elements of $W$
$X$	vector of level 1 independent variables
$X, Y, Z$	inertial Cartesian coordinate axes
$x, y, z$	components of vehicle position, m
$x_i$	$i^{\text{th}}$ element of $X$
$Y$	vector of level 1 dependent variables
$y_i$	$i^{\text{th}}$ element of $Y$
$y_n$	value of integration variable at $n^{\text{th}}$ step
$Z$	vector of level 2 optimization variables
$z_i$	$i^{\text{th}}$ element of $Z$
$\alpha$	angle between thrust vector and velocity vector (numerically identical with angle of attack), deg
$\alpha_c$	angle between thrust vector and circumferential direction, deg
$\alpha_{ps}$	specific weight of propulsion system, kg/kW
$\beta$	out-of-orbit thrust angle, deg
$\Gamma$	level 2 optimization criterion
$\gamma$	vehicle path angle, rad
$\delta$	integration scheme truncation error
$\delta_{\text{limit}}$	acceptable limit value of $\delta_r$
$\delta_r$	relative truncation error (between fourth-order Runge-Kutta scheme and lower order scheme)
$\delta( )$	partial derivative with respect to arbitrary variable
$\epsilon$	engine on-off indicator
$\xi$	ratio $P/P_r$
$\eta$	thruster efficiency

$\theta$	central travel angle, rad
$\vartheta$	east longitude relative to Greenwich, rad
$\kappa$	engine on-off switching function
$\Lambda$	vector of velocity-related adjoint variables (primer vector), (kg)(sec)/m
$\Lambda_{\mathbf{r}}$	vector of position-related adjoint variables, kg/m
$\lambda$	magnitude of primer vector $\Lambda$ , (kg)(sec)/m
$\lambda_c$	adjoint variable for engine exhaust speed $c$ , (kg)(sec)/m
$\lambda_m$	adjoint variable for mass
$\lambda_{\dot{m}_0}$	adjoint variable for initial mass flow rate $\dot{m}_0$ , sec
$\lambda_{v_L}$	adjoint variable for analytic launch vehicle speed $v_L$ , (kg)(sec)/m
$\lambda_{v_R}$	adjoint variable for analytic retrofire speed $v_R$ , (kg)(sec)/m
$\lambda_1, \dots, \lambda_7$	components of $\Lambda$ , components of $\Lambda_{\mathbf{r}}$ , and $\lambda_m$ in that order
$\mu$	gravitational constant, $\text{m}^3/\text{sec}^2$
$\nu$	true anomaly, rad
$\xi$	empirical factor used in spiral escape equations
$\rho$	atmospheric density, $\text{kg}/\text{m}^3$
$\sigma$	azimuth measured eastward from north, rad
$\tau$	boundary-value-problem error criterion
$\tau^*$	value of $\tau$ separating univariate scheme domain from linear correction scheme domain
$\Phi$	$\cos \varphi \sin \gamma - \sin \varphi \cos \gamma \cos \sigma$
$\varphi$	geocentric latitude, rad
$\varphi^*$	geodetic latitude, rad
$\chi$	inhibitor for linear correction scheme
$\Psi$	time-dependent term of Runge-Kutta truncation error
$\psi$	angle between thrust vector and x-axis, rad
$\Omega$	longitude of ascending node, rad
$\omega$	argument of periapsis, rad
$\omega_{\mathbf{r}}$	rotation rate of Earth, rad/sec

**Subscripts:**

**a** arrival value

**x, y, z** x, y, z components of vector

**0** departure value

**Superscripts:**

**0** reference trajectory value

**'** derivative with respect to time  $t$

**'** derivative with respect to radius  $r$

**-** desired value

**~** modified arrival planet value

## APPENDIX B

### SUBPROGRAM GLOSSARY

WAERO	computes lift and drag acceleration
WALSO	provides auxiliary computation after each integration step, such as a check for zero vehicle mass and determining the optimum fixed-thrust-angle switch function
WALTER	alters the independent variables $X$ of level 1
WBEGIN	initializes variables and controls for the boundary-value problem involved with optimal thrust steering
WCREEP	univariate search scheme
WCURVE	least squares $n$ -order curve fit to $m$ points
WDERIV	evaluates derivatives of integration variables
WELIPS	computes position and velocity of a body in elliptic orbit
WEPHEM	computes $n$ -body accelerations, and position and velocity of bodies
WELEM	transforms rectangular coordinates to orbit elements
WENDST	auxiliary computations between trajectory phases
WERROR	computes relative integration errors between fourth-order Runge-Kutta scheme and low-order scheme
WGAUSS	Gauss-Jordan elimination solution to a set of linear equations
WICAO	U. S. Standard Atmosphere 1962 model
WINTEG	Runge-Kutta (fourth order) integrator, also low-order integrator
WLOOK	computes jump discontinuities or takes other appropriate action at trajectory interrupt points
WMARCH	automatic parameter sweep scheme
WNR	finite difference method (generalized Newton-Raphson) of generating partial derivatives for boundary-value problem
WOBLAT	computes oblateness acceleration
WOPT	master controller of level 1 boundary-value-problem iteration, level 2 variable optimization, and the automatic parameter sweep scheme
WORBEL	computes analytic time-series approximate ephemerides

WORDER sorts gravitational body list so that a body's position from the reference is dependent upon positions already computed for other bodies

WOUT basic trajectory output routine

WPENAL computes boundary-value-problem error function

WPOWER computes the solar power ratio  $P/P_r$  and its derivatives with respect to distance

WPUSH computes thrust acceleration for nonoptimal steering

WQUAD curve-fit model based on  $n$  quadratic functions pieced together

WRXV computes unit angular momentum

WSTAGE prepares data for use in integrator by updating key variables (mass, specific impulse, etc.) with current trajectory phase data

WSTEP computes integration step size and searches for trajectory interrupts

WTUDES transforms Earth-fixed spherical coordinates to space-fixed inertial rectangular coordinates

WVREL computes velocity relative to a rotating planet and the nonoptimal thrust angle

WXFER tests for and translates the coordinate system origin when a sphere of influence is penetrated

TIMLFT calculates the amount of computer execution time remaining (in 1/60-sec units) before execution is terminated by the system monitor. This is a Lewis Research Center non-FORTRAN routine that uses the \$IBFTC card time estimate for batch sequencing operation. A dummy FORTRAN version is substituted for other users unless otherwise requested. The function of this routine is to provide a warning that the job is about to be prematurely terminated, thus giving the program an opportunity to print out the best unconverged trajectory instead of being "thrown-off" without gaining any useful information.

## REFERENCES

1. Strack, William C.; and Huff, Vearl N.: The N-Body Code - A General FORTRAN Code for the Numerical Solution of Space Mechanics Problems on an IBM 7090 Computer. NASA TN D-1730, 1963.
2. Lededev, V. N.: Variational Problem of Escape from Circular Orbit. Rep. FTD-TT-64-1200/1+2+4, Foreign Technology Div., Air Force Systems Command (AD-610208), Dec. 5, 1964.
3. MacKay, John S.; and Masey, Alfred C.: Some Three-Body Numerical Solutions to Outer Planet Orbiter Missions Using Nuclear-Electric Propulsion. Paper 70-1040, AIAA, Aug. 1970.
4. Strack, William C.: Some Numerical Comparisons of Three-Body Trajectories with Patched Two-Body Trajectories for Low Thrust Rockets. NASA TN D-4559, 1968.
5. Flanagan, Paul F.; and Horsewood, Jerry L.: HILTOP, Heliocentric Interplanetary Low-Thrust Trajectory Optimization Program. Rep. 70-46, Analytical Mechanics Associates, Inc., NASA contract NAS5-20126, Dec. 1970.
6. Hahn, D. W.; and Johnson, F. T.: Chebychev Trajectory Optimization Program (CHEBYTOP II). Rep. D180-12916-1, Boeing Co. (NASA CR-114354), June 1971.
7. Spurlock, Omer F.; and Teren, Fred: A Trajectory Code for Maximizing the Payload of Multistage Launch Vehicles. NASA TN D-4729, 1968.
8. Melbourne, William G.; Mulholland, J. Derral; Sjogren, William L.; and Sturms, Francis M., Jr.: Astrodynamical Calculations, 1968. Rep. TR-32-1306, Jet Propulsion Lab. (NASA CR-97666), July 15, 1968.
9. Anon.: U.S. Standard Atmosphere, 1962. Prepared under sponsorship of NASA, USAF, and USWB, Dec. 1962.
10. Strack, William C.: Solar-Electric Propulsion System Performance for a Close Solar Probe Mission. J. Spacecraft Rockets, vol. 4, no. 4, Apr. 1967, pp. 469-475.
11. Melbourne, William G.: Interplanetary Trajectories and Payload Capabilities of Advanced Propulsion Vehicles. TR 32-68, Jet Prop. Lab., California Inst. Tech., Mar. 1961.
12. Leitmann, George, ed.: Optimization Techniques with Applications to Aerospace Systems. Academic Press, 1962.

13. Horsewood, Jerry L.: Interplanetary Trajectory Analysis for Combined High- and Low-Thrust Propulsion Systems. American Astronautical Society Space Flight Mechanics Specialists Symposium. Vol. 11 of the AAS Science and Technology Series. M. L. Anthony, ed., American Astronautical Society, 1967, pp. 457-476.
14. Dobson, Wilbur F.; Huff, Vearl N.; and Zimmerman, Arthur V.: Elements and Parameters of the Osculating Orbit and Their Derivatives. NASA TN D-1106, 1962.

TABLE I. - ASSUMED PHYSICAL DATA

Constant	Assumed value
Astronomical unit, m	$1.495978730 \times 10^{11}$
Gravitational constant of the Sun, $\text{AU}^3/\text{day}^2$	$2.959122083 \times 10^{-4}$
Earth's rotation rate, $\omega_r$ , rad/sec	$7.29211515 \times 10^{-5}$
Equatorial Earth radius, $a_e$ , m	6 378 160
$J_2$ zonal harmonic coefficient for Earth	$1082.7 \times 10^{-6}$
$J_3$ zonal harmonic coefficient for Earth	$-2.56 \times 10^{-6}$
$J_4$ zonal harmonic coefficient for Earth	$-1.58 \times 10^{-6}$

Body	Reciprocal mass	Sphere-of-influence radius, m
Sun	1	$1.0 \times 10^{20}$
Mercury	5 983 000	$1.0 \times 10^8$
Venus	408 522	$6.14 \times 10^8$
Earth-Moon	328 900.1	$9.25 \times 10^8$
Mars	3 098 700	$5.78 \times 10^8$
Jupiter	1 047.3908	$4.81 \times 10^{10}$
Saturn	3 499.2	$5.46 \times 10^{10}$
Uranus	22 930	$5.17 \times 10^{10}$
Neptune	19 260	$8.61 \times 10^{10}$
Pluto	1 812 000	$3.81 \times 10^{10}$
Earth	332 945.6	$9.25 \times 10^8$
Moon	<sup>a</sup> 81.3010	$1.60 \times 10^8$

<sup>a</sup>Earth reference.



TABLE II. - COMMON LOCATIONS OF ANTICIPATED CANDIDATES FOR

BOUNDARY-VALUE VARIABLES

(a) Independent variables, X, for IA vector

Variable	FORTTRAN name	COMMON location
Stage flight times, $(t_f)_i$ , sec	TB	1, 2, . . . , 10
Elevation angle for launch vehicles, $\gamma$ , deg	ELEV	48
Initial thrust angle relative to x-axis, $\psi_0$ , deg	PS	343
Initial thrust-angle rate, $\dot{\psi}_0$ , deg/sec	DPS	344
Initial value of engine on-off switch function, $\kappa_0$	KAPPA	345
Time derivative of $\kappa_0$ , $\dot{\kappa}_0$ , sec <sup>-1</sup>	DKAPPA	346
Initial values of adjoint variables, $\Lambda$ , $\Lambda_r$ , $\lambda_m$	LAMDA	347 to 353
Stage initial propellant flow rates, $(-m_0)_i$ , kg/sec	PFLOW	383 to 392
Initial power level, $P_0$ , kW	POWER	397
Stage initial thrust-weight ratios, $f/m_0g$	TW	408 to 417
Launch speed of electric spacecraft, $v_l$ , m/sec	VB1	429
Spacecraft speed just prior to high-thrust retromaneuver, $v_r$ , m/sec	VB2	430
Nonvariational thrust program coefficients, $a_{10}$ , $a_{11}$ , $a_{12}$	ALFCOE	1458 to 1507
x, y, z components of initial velocity, $V_0$ , m/sec	V	2161, 2163, 2165
x, y, z components of initial position, $R_0$ , m	R	2167, 2169, 2171

(b) Dependent variables, Y, for IB vector

Orbit elements, $e$ , $\omega$ , $\Omega$ , $i$ , $M$ , $p$	ORBELS	447 to 452
Energy per unit mass, J/kg	ENERGY	462
Path angle, $\gamma$ , deg	PATH	479
Radius, $r$ , m	RADIUS	480
Central travel angle, $\theta$ , deg	THETA	485
True anomaly, $\nu$ , deg	TRU	486
x, y, z components of position, $R$ , m	X, Y, Z	487 to 489
x, y, z components of velocity, $V$ , m/sec	VX, VY, VZ	490 to 492
Velocity magnitude, $v$ , m/sec	VEL	493

TABLE III. - GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition
TIME	TB	1	1	Array of phase flight times, $t_f$ , sec
	DTOFFJ	11	11	Julian departure date
	TOFFT	12	12	Fraction of day at departure
	TABL	13	13	Time since takeoff, days
	TMAX	14	14	Total flight time, sec
	TTEST	15	15	Control used when switching from orbit element integration to rectangular coordinates, sec
	TTOL	16	16	Time tolerance used to terminate a trajectory, sec
	DELT	17	17	Integration step size, h, sec
	T0	18	18	Time at departure, $t_0$ , sec
	STEP	19	19	Ten-element array of phase initial step size, sec
FIXED	AU	1	29	Astronomical unit, m
	SPD	2	30	Seconds per day
	G	3	31	Gravitational constant at Earth's surface, $g$ , m/sec <sup>2</sup>
	RE	4	32	Earth's equatorial radius, $a_e$ , m
	RESQRD	5	33	RE squared, m <sup>2</sup>
	SQRDK1	6	34	Gravitational constant of the Sun, AU <sup>3</sup> /day <sup>2</sup>
	DEGREE	7	35	Degrees per radian
	PI	8	36	$\pi$
	TWOPI	9	37	$2\pi$
	DUMMY1	10	38	Dummy variable causing an even number of locations in COMMON block (required for double-precision usage in some computers)
ENTER	END	1	39	Alphanumeric value 'END'
	T	2	40	Logical value .TRUE.
	F	3	41	Logical value .FALSE.
	EPHEM	4	42	Control causing ephemerides determination of departure and arrival conditions if .TRUE.
	OBLATE	5	43	Control causing oblateness effects to be considered if .TRUE.
	ROTATE	6	44	Control causing planetary rotation to be included if .TRUE.
LAT	LAT	1	45	Launch site latitude, $\phi$ , deg
	LONG	2	46	Launch site longitude, $\theta$ , deg
	AZI	3	47	Launch site azimuth, $\sigma$ , deg
	ELEV	4	48	Launch elevation angle, $\gamma$ , deg
	VEL0	5	49	Initial velocity at launch, $v_0$ , m/sec
	ALT0	6	50	Initial altitude above mean sea level, m
	TKICK	7	51	Duration of short vertical rise for launch vehicles (ignoring atmosphere), $t_v$ , sec
	DUMMY2	8	52	See DUMMY1 above
LOOK	XLOOK	1	53	Five-element array of trajectory interrupt values corresponding to LOOKX array
	LOOKSW	6	58	Five-element array of COMMON indices for interrupt delay
	SWLOOK	11	63	Five-element array of trajectory interrupt delay values corresponding to LOOKSW
	ENDX	16	68	Five-element array of control variables that determine post-interrupt action
	LOOKY	21	73	Has the value .TRUE. if trajectory interrupt feature is operative
CASES	DUMMY3	22	74	See DUMMY 1 above
	NSWEEP	1	75	COMMON location of the sweep variable S
	NSAVE	2	76	Stage number of saved set of initial conditions
	RECALL	3	77	Causes saved data to be recalled for succeeding cases if input .TRUE.
	KCASE	4	78	Counter on the case number used only for manual sweeps
	NCASE	5	79	Current case number
OUTPUT	NCASES	6	80	Case number of the saved initial data
	STEPS	1	81	Number of steps between printouts
	DELMAX	2	82	Trajectory time interval between printouts, sec
	ADDOUT	3	83	Internal control variable that indicates whether subroutine WOUT is to be called after every step
	NOUT	4	84	Five-element array specifying the trajectories to be printed out in full
	NBUG	9	89	Five-element array specifying the trajectories to be debugged
	STEP1	14	94	Integration step number where debug output is to begin
	STEP2	15	95	Integration step number where debug output is to cease
	DEBUG	16	96	Triggers debug output when .TRUE.
	OUTPOT	17	97	Triggers full trajectory printout when .TRUE.
OUTEND	18	98	Triggers final (converged) trajectory printout when .TRUE.	

TABLE III. - Continued. GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition	
LOCATE	LCAPPA	1	99	COMMON location of thrust on-off switching function $\kappa$	
	LLAMDA	2	100	COMMON location of primer vector $\Lambda$	
	LV	3	101	COMMON location of vehicle velocity $V$	
	LVEL	4	102	COMMON location of vehicle speed $v$	
	LPATH	5	103	COMMON location of vehicle path angle $\gamma$	
	LSIMP	6	104	COMMON location of specific impulse $I$	
	LFLOW	7	105	COMMON location of propellant flow rate $\dot{m}_p$	
	LVB1	8	106	COMMON location of launch speed of spacecraft (using analytic launch vehicle simulation) $v_l$	
	LVB2	9	107	COMMON location of spacecraft speed just prior to analytic retrofire maneuver $v_r$	
	LTC	10	108	COMMON location of transversality condition for optimum exhaust speed $T_c$	
	LTA	11	109	COMMON location of transversality condition for optimum initial propellant flow rate $T_{m0}$	
	LTVB1	12	110	COMMON location of transversality condition for optimum launch vehicle speed $T_{v_l}$	
	LTVB2	13	111	COMMON location of transversality condition for optimum speed prior to retromaneuver $T_{v_r}$	
	LALFSW	14	112	COMMON location of fixed-thrust-angle switching function $\Delta(\Lambda \cdot T_l)$	
	LPSI	15	113	COMMON location of initial angle between thrust vector and X-axis $\psi_0$	
	LRMAG	16	114	COMMON location of vehicle's position vector magnitude $r$	
	LLAMF	17	115	COMMON location of final primer vector value $\Lambda_a$	
	LTHETA	18	116	COMMON location of central travel angle $\theta$	
	JSLOPE	19	117	COMMON location of time derivatives of $C(\text{LOOKX})$	
	LTW	24	122	COMMON location of initial thrust-weight ratio $(I/mg)_0$	
	IGRATE	NDEM	1	123	Number of coordinate system dimensions
		A1	2	124	Factor used in determining integration step size
		A2	3	125	Factor used in determining integration step size
		ADJOIN	4	126	Triggers integration of partial deviative matrix $G$
ADJOINT		5	127	Temporary value of ADJOIN	
DONE		6	128	Indicator for trajectory termination	
ERROR		7	129	Relative truncation error of integration scheme, $\delta_r$	
EMONE		8	130	Eccentricity minus 1	
ERLOG		9	131	$\ln \bar{\delta}_r$	
H2		10	132	Step size for previous step	
ESTART		11	133	Control variable for starting procedure of integration scheme	
ETOL		12	134	If $e$ is in region $1 \pm \text{ETOL}$ , integration is always done in rectangular coordinates	
EXMODE		13	135	Eccentricity $e$ , only calculated when in temporary rectangular coordinates	
KERROR		14	136	Index of integration variable producing maximum truncation error	
KSUB		15	137	Index of Runge-Kutta subinterval	
NSTAGE		16	138	Stage index	
LSTAGE		17	139	Number of stages	
MODEI		18	140	Input control indicating choice of set of integration variables	
EREF		19	141	Relative truncation error, $\delta_r$	
ERLMT		20	142	Maximum value of truncation error permitted, $\delta_{limit}$	
STEPMX		21	143	Limit on number of trajectory integration steps	
NEQ		22	144	Number of differential equations being integrated	
NSTART		23	145	Control variable used in starting Runge-Kutta scheme	
RATIO		24	146	Ratio $h_n/h_{n-1}$	
XWHOLE	25	147	A saved set of integration variables used when translating the coordinate system origin		
COFV	HINC	31	153	Array of integration variable increments, $\Delta y_n$	
	ABS0	1	303	Initial magnitude of the primer vector, $\lambda_0$	
	ABSLAM	2	304	Current magnitude of the primer vector, $\lambda$	
	CAPPA	3	305	Engine on-off switching function, $\kappa$	
	CV	4	306	Indicates a calculus-of-variations problem if .TRUE.	
	DCAPPA	5	307	Derivative of engine on-off switching function, $\dot{\kappa}$	
	FCV	6	308	Indicates optimal fixed-angle-thrust steering option if .TRUE.	
	HAM	7	309	Five-element array of $\Lambda \cdot T_l$	
	HAMMAX	12	314	$\max_l(\Lambda \cdot T_l)$	
	ALF	13	315	Five-element array of thrust angles, either $\alpha$ or $\alpha_c$	
NALF	18	320	Length of ALF array ( $\text{NALF} \leq 5$ )		

TABLE III. - Continued. GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition	
COFV	NCAPPA	19	321	Number of times engine is turned on or off during a single trajectory ( $k = 0$ condition)	
	NLAMDA	20	322	Element of NOPT corresponding to the current stage number NSTAGE	
	NOPT	21	323	Ten-element array indicating boundary-value-problem end condition definition for each stage	
	PLDOTL	31	333	$\delta\Lambda \cdot \Lambda$ array	
	PSI	40	342	Angle between thrust vector and x-axis, $\psi$ , deg	
	PS	41	343	Initial value of angle between thrust vector and x-axis, $\psi_0$ , deg	
	DPS	42	344	$\dot{\psi}_0$ , deg/sec	
	KAPPA	43	345	Initial value of engine on-off switching function, $\kappa_0$	
	DKAPPA	44	346	$\dot{\kappa}_0$ , $\text{sec}^{-1}$	
	LAMDA	45	347	Initial value of adjoint variables (7 total), $\Lambda$ , $\Lambda_r$ , and $\lambda_m$	
	IMAX	52	354	Index of maximum ( $\Lambda \cdot T_i$ ) value	
	COAST	53	355	Input option that indicates coast arcs are permitted if .TRUE.	
	IUSE	54	356	Index of which ALF value is current for optimal fixed-thrust-angle option	
	LAM	55	357	Scale factor for adjoint variables used for alternate set of inputs involving $\psi_0$ , $\dot{\psi}_0$ , etc.	
	ALFSWT	56	358	Fixed-thrust-angle switching function, $\Delta(\Lambda \cdot T_i)$	
	TRAC	57	359	Transversality condition residual for optimum exhaust speed, $T_c$	
	TRAA	58	360	Transversality condition residual for optimum initial propellant flow rate, $T_{m_0}$	
	TRAVB1	59	361	Transversality condition residual for optimum launch vehicle speed, $T_{v_i}$	
	TRAVB2	60	362	Transversality condition residual for optimum retromaneuver vehicle speed, $T_{v_r}$	
	LAMDAP	61	363	Arrival values of $\Lambda$ and $\Lambda_r$ vectors	
	GETDOT	67	369	Six-element array indicating the need for certain partial derivatives $G_i$	
	OPTA	73	375	Input option specifying optimum initial propellant flow rate $\dot{m}_0$ if .TRUE.	
	OPTC	74	376	Input option specifying optimum jet exhaust speed $c$ if .TRUE.	
	OPTVB1	75	377	Input option specifying optimum launch vehicle speed $v_l$ if .TRUE.	
	OPTVB2	76	378	Input option specifying optimum retromaneuver vehicle speed $v_r$ if .TRUE.	
	ROCKET	ALFPOW	1	379	Specific weight of propulsion system $\sigma_{ps}$ , kg/kW
		BE	2	380	Electric thruster efficiency parameter, $b$
		DE	3	381	Electric thruster efficiency parameter, $d$
BOOSTM		4	382	Reference vehicle mass in planetary orbit, $m_{ref}$ , kg	
PFLOW		5	383	Ten-element array of stage initial propellant flow rates, $\dot{m}_0$ , kg/sec	
FW		15	393	Initial stage thrust-weight ratio	
K1		16	394	Launch vehicle performance factor, $k_l$	
K2		17	395	Retrosystem tankage factor, $k_{rt}$	
KE		18	396	Vehicle tankage factor, $k_v$	
POWER		19	397	Electric power available from power source at 1 AU, $P_r$ , W	
VMAS		20	398	Ten-element array of stage initial mass, $m_0$ , kg	
TW		30	408	Ten-element array of stage initial thrust-weight ratio, $f/m_0g$	
ISP		40	418	Ten-element array of stage specific impulses, $I$ , sec	
SOLAR		50	428	Input option specifying solar-electric propulsion if .TRUE.	
VB1		51	429	Launch speed of spacecraft when analytic launch vehicle simulation is used, $v_l$ , m/sec	
VB2		52	430	Spacecraft speed just prior to retrofire maneuver, $v_r$ , m/sec	
VJET1		53	431	Launch vehicle performance parameter, $c_l$ , m/sec	
VJET2		54	432	Jet exhaust speed of high-thrust retroengine, $c_r$ , m/sec	
A0		55	433	Initial thrust acceleration magnitude, $a_0$ , $\text{m}/\text{sec}^2$	
CPAR		56	434	The quantity $c/m$	
ETAPOW		57	435	Thruster efficiency, $\eta$	
FLOW		58	436	Current propellant flow rate, $\dot{m}_p$ , kg/sec	
PAY		59	437	Net spacecraft mass ratio, $m_n/m_{ref}$	
PUSH		60	438	Engine thrust, $f$ , N	
PUSH0		61	439	Engine thrust in vacuum, N	
RMAS0		62	440	Initial spacecraft mass, $m_0$ , kg	
SIMP		63	441	Current specific impulse, $I$ , sec	
TMAG		64	442	Thrust acceleration, $a$ , $\text{m}/\text{sec}^2$	
VJET	65	443	Jet exhaust speed, $c$ , m/sec		
FLOWX	66	444	Stage initial propellant flow rate at 1 AU, kg/sec		
DISPO	67	445	Electric propulsion system jettison indicator		
STRUCT	68	446	Structure factor, $k_s$		

TABLE III. - Continued. GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition	
TRAJEC	ORBELS	1	447	Six-element array of orbit elements $e, \omega, \Omega, i, M, p$ (in radians and meters)	
	U	7	453	Eccentric anomaly, $E$ , rad	
	RAMC	8	454	Three components of relative angular momentum, $H_r$ , $m^2/sec$	
	RAM	11	457	Relative angular momentum magnitude, $ H_r $ , $m^2/sec$	
	RAMSRD	12	458	Square of $ H_r $ , $m^4/sec^2$	
	ALPHAC	13	459	Input option indicating circumferential thrust angle reference (using ALF or ALFCOE) if .TRUE.	
	BETA	14	460	Out-of-orbit plane thrust angle, $\beta$ , deg	
	ECC2	15	461	Eccentricity of planetary capture orbit, $e_r$	
	ENERGY	16	462	Vehicle energy per unit mass, $m^2/sec^2$	
	SPIR	17	463	Input option indicating an analytic Earth escape spiral if .TRUE.	
	VC1	18	464	Circular orbit speed about departure planet (at radius $r_d$ ), $v_{c,d}$ , $m/sec$	
	VC2	19	465	Circular orbit speed about arrival planet (at radius $r_r$ ), $v_{c,r}$ , $m/sec$	
	RRAT1	20	466	Radius ratio $r_s, d/r_d$ at departure planet	
	RRAT2	21	467	Radius ratio $r_s, a/r_r$ at arrival planet	
	ALPHA	22	468	Angle between thrust and velocity vectors, $\alpha$ , deg	
	AMC	23	469	Angular momentum components, $m^2/sec$	
	AM	26	472	Magnitude of angular momentum, $h$ , $m^2/sec$	
	AMSQRD	27	473	Square of $h$ , $m^4/sec^2$	
	COSALF	28	474	cosine $\alpha$	
	COSBET	29	475	cosine $\beta$	
	COSTRU	30	476	cosine $\nu$	
	DELV	31	477	Change in vehicle velocity, $\Delta v$ , $m/sec$	
	DPSI	32	478	Derivative of thrust angle, $\dot{\psi}$ , $rad/sec$	
	PATH	33	479	Path angle of vehicle, $\gamma$ , deg	
	RADIUS	34	480	Vehicle's position vector magnitude, $r$ , $m$	
	RSQRD	35	481	Square of $r$ , $m^2$	
	SINALF	36	482	sine $\alpha$	
	SINBET	37	483	sine $\beta$	
	SINTRU	38	484	sine $\nu$	
	THETA	39	485	Central travel angle, $\theta$ , deg	
	TRU	40	486	True anomaly, $\nu$ , rad	
	X	41	487	x-component of position vector $R$ , $m$	
	Y	42	488	y-component of position vector $R$ , $m$	
	Z	43	489	z-component of position vector $R$ , $m$	
	VX	44	490	x-component of velocity vector $V$ , $m/sec$	
	VY	45	491	y-component of velocity vector $V$ , $m/sec$	
	VZ	46	492	z-component of velocity vector $V$ , $m/sec$	
	VEL	47	493	Vehicle speed, $v$ , $m/sec$	
	VSQRD	48	494	Speed squared, $v^2$ , $m^2/sec^2$	
	ITERAT	IA	1	495	Ten-element array of COMMON locations of the level 1 independent variables $X$
		IAA	11	505	Ten-element array of COMMON locations of the level 2 optimization variables $Z$
		IB	21	515	Ten-element array of COMMON locations of the level 1 dependent variables $Y$
		IBB	31	525	COMMON location of the level 2 criterion of merit $\Gamma$
		MAXNUM	32	526	Maximum number of trajectories allowed for a particular case
		WEIGHT	33	527	Ten-element array of level 1 weighting factors for boundary-value problems $w_i$
		NUM	43	537	Length of IA array (dimensionality of level 1 boundary-value problem)
		NUM2	44	548	Length of IAA array (dimensionality of level optimization problem)
		JNUM	45	539	IA+IAA
DAMP		46	540	Inhibitor for level 1 linear correction scheme, $\chi$	
CHANGE		47	541	Array increments in the level 1 independent variable vector $\Delta X$	
XIA		67	561	Reference value of the level 1 independent variation vector $X$	
XIB		87	581	Reference value of the level 2 optimization variable vector $Z$	
NRUNB		107	601	Run number of best trajectory yet calculated	
TOLER		108	602	Level 1 iteration convergence tolerance, $\bar{\tau}$	
ELEMEN	109	603	$10 \times 11$ Element (double precision) partial derivative matrix $G$		
PERTEW	329	823	Ten-element array of perturbation factors for univariate search scheme		

TABLE III. - Continued. GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition	
ITERAT	PERTNR	339	833	Ten-element array of perturbation factors for linear correction scheme	
	PERT2	349	843	Ten-element array of perturbation factors for level 2 search scheme	
	SVALUE	359	853	Set of desired sweep variable values, $s_i$	
	MAXPTS	369	863	Maximum number of points to be used in the sweep extrapolation of X	
	MORDER	370	864	Order of curve fit to be used in the sweep extrapolation of X	
	KOUNT	371	865	Iteration counter for level 1 boundary-value problems	
	DESIRE	372	866	Ten-element array of desired values of the dependent vector $\bar{Y}$	
	TSKIP	382	876	Two-element array specifying a time interval in which trajectory interrupts are inhibited, sec	
	ERRBAR	384	878	Preferred value of initial level 1 error for each step of an automatic sweep	
	ERSTAR	385	879	Value of level 1 boundary-value error separating univariate and linear correction schemes, $\tau^*$	
	NBVP	386	880	Stage number defining beginning of level 1 boundary-value problem	
	NRUN	387	881	Trajectory counter	
	RETURN	388	882	Internal control used to indicate boundary-value-problem termination	
	ATOE	389	883	Internal control indicating which stage data are saved for boundary-value problems	
	XMISSL	390	884	Current lowest error $\delta_x$ obtained during the level 1 iteration process	
	TOL2	391	885	Tolerance criterion used between level 2 loops to indicate convergence	
	DUMMY4	392	886	See DUMMY1 above	
	BOD	PNAME	1	887	Alphameric list of gravitational body names defining permissible body choices
		REFER	31	917	Alphameric list of reference body names corresponding to PNAME list
		AMASS	61	947	List of body masses corresponding to PNAME list, Sun mass units
BODIES	RCRIT	91	977	List of body sphere-of-influence radii corresponding to PNAME list, m	
	NUMBOD	121	1007	Input list of selected body numbers, corresponds to PNAME list	
	BODIES	1	1017	Alphameric list of body names corresponding to NUMBOD list of indexes	
	BNAME	11	1027	Same list as BODIES but reordered for computational purposes	
	BMASS	19	1035	List of body masses corresponding to BNAME list, Sun mass units	
	EFMRS	27	1043	Alphameric list of ephemerides needed for a particular case	
	GK2M	34	1050	Gravitational constant of the origin body, $\mu$ , $m^3/sec^2$	
	GKM	35	1051	Square root of GK2M	
	IBODY	36	1052	Index list corresponding to BNAME that indicates position of reference body (also in BNAME)	
	MBODYS	44	1060	Number of perturbing bodies selected	
	NBODYS	45	1061	Total number of bodies selected	
	KBODYS	46	1062	Number of bodies selected for inclusion in the variational equations	
	XMASS	47	1063	Mass scaling factor (usually from 0 to 1) that may be varied to smoothly include n-body effects	
	NCHAMP	48	1064	BNAME index of the dominant gravitational body	
	NEFMRS	49	1065	Index list indicating location of EFMRS bodies in PNAME list	
	TRSPER	57	1073	Control whose value is .TRUE. when an origin shift is required	
	LBODY	58	1074	An unconditional origin shift to LBODY will take place at trajectory termination if LBODY is loaded (al- phameric)	
	RBCRIT	59	1075	List of body sphere of influences corresponding to BNAME list, m	
	VEFM	66	1082	$3 \times 8$ Array of velocity components of vehicle relative to all bodies, m/sec	
	SQRDK	90	1106	Gravitational constant of the Sun, $m^3/sec^2$	
XFER	91	1107	Control indicating an origin transfer is in progress		
TDAT	92	1108	$14 \times 7$ Array of ephemerides data		
XP	190	1206	$3 \times 8$ Array of perturbing body position components relative to the origin, m		
OBLA	214	1230	Control whose value is .TRUE. if oblateness effects are being included		
RB	215	1231	$3 \times 8$ Array of position components of the vehicle to all bodies, m		
RMAG	239	1255	List of distances of the vehicle to all bodies, m		
AERODY	ALT	1	1263	Vehicle altitude above ground, m	
	AREA	2	1264	Vehicle's aerodynamic reference area for current stage $S_{ref2}$ , $m^2$	
	REFA	3	1265	Ten-element array of stage aerodynamic reference areas, $m^2$	
	CD	13	1275	Total vehicle drag coefficient, $C_D$	
	CL	14	1276	Vehicle lift coefficient, $C_L$	
	DENSITY	15	1277	Atmospheric density, $\rho$ , $kg/m^3$	
	PRESS	16	1278	Atmospheric pressure, $p$ , $N/m^2$	
	TM	17	1279	Atmospheric molecular scale temperature, K	
	EXITA	18	1280	Engine exit area, $A_e$ , $m^2$	
	Q	19	1281	Dynamic pressure, $q$ , $N/m^2$	

TABLE III. - Concluded. GLOSSARY OF COMMON VARIABLES

Block name	Variable name	Relative location	Absolute location	Definition
AERODY	AEXIT	20	1282	Ten-element array of stage engine exit areas, $m^2$
	REVOLV	30	1292	Earth's rotation rate, $\omega_r$ , rad/sec
	HEATR	31	1293	Vehicle heating rate, $W/m^2/kg$
	P	32	1294	The vector $B = V_r \times H_r$
	PMAGN	35	1297	Magnitude of the vector B
	RATMOS	36	1298	Radius of the outer limit of the sensible atmosphere, m
	TDRAG	37	1299	Magnitude of vehicle drag acceleration, $ D/m $ , N/kg
	TLIFT	38	1300	Magnitude of vehicle lift acceleration, $ L/m $ , N/kg
	VATM	39	1301	Components of vehicle velocity relative to planet, $V_r$ , m/sec
	VQ	42	1304	Vehicle relative speed, $ V_r $ , m/sec
	VQSQRD	43	1305	Square of VQ, $m^2/sec^2$
	VMACH	44	1306	Vehicle Mach number, M
	ICD0	45	1307	Index that points at current position in CD0C array
	CD0C	46	1308	Array of parasite drag coefficient data, $C_{D0}$ vs. M
	ICDI	95	1357	Index that points at current position in CDIC array
	CDIC	96	1358	Array of induced drag coefficient data, $C_{DI}/C_L^2$ vs. M
	ICL	145	1407	Index that points at current position in CLC array
	CLC	146	1408	Array of lift coefficient data, $C_L/\sin \alpha$ vs. M
	IALF	195	1457	Index that points at current position in ALFCOE array
	ALFCOE	196	1458	Array of angle of attack (thrust angle $\alpha$ ) data, $\alpha$ vs. t, deg and sec
SAVE	TIME	1	1507	Time (double precision), t, sec
	STEPGO	3	1509	Number of successful integration steps
	STEPNO	4	1510	Number of unsuccessful integration steps
	REVS	5	1511	Number of complete revolutions around x-axis
	DEL	6	1512	Time increment to next output point, sec
	IMODE	7	1513	Current indicator of the integration mode (see MODEI)
	ASYMPT	8	1514	Control set to . TRUE. when path lies too close to an asymptote to use orbit element integration
	LOOKX	9	1515	Five-element array defining COMMON locations of trajectory interrupt variables
	NLOOK	14	1520	Five-element array of counters for each trajectory interrupt, corresponds to LOOKX
	SAVE1	19	1525	Seventeen-element array of initial-value variables saved during level 2 optimization
	SAVE2	36	1542	Seventeen-element array of initial-value variables saved during level 1 iterations
	HDS1	53	1559	One-hundred-fifty-array element of initial integration values saved during level 2 optimization (double precision)
		HDS2	353	1859
HD	RMASS	1	2159	Vehicle mass (double precision), m, kg
	V	3	2161	Vehicle velocity (double precision), V, m/sec
	R	9	2167	Vehicle position (double precision), R, m
	L	15	2173	Adjoint variables (double precision), $\Lambda$ , $\Lambda_r$ , $\Lambda_m$
	PV	31	2189	Velocity partial derivatives (double precision), $\delta V$
	PR	85	2243	Position partial derivatives (double precision), $\delta R$
	PL	139	2297	Adjoint partial derivatives (double precision), $\delta \Lambda$
	PJ	193	2351	Adjoint partial derivatives (double precision), $\delta \Lambda_r$
	PM	247	2405	Adjoint partial derivatives (double precision), $\delta \Lambda_m$
	P7	265	2423	Adjoint partial derivatives (double precision), $\delta c$
P8	283	2441	Adjoint partial derivatives (double precision), $\delta \dot{m}_0$	
H	H	1	2459	Array of current values of the integration variables $y_n$
HDOT	HDOT	1	2609	Array of current values of the derivatives of the integration variables $\dot{y}_n$


TABLE IV. - SUMMARY OF NOPT OPTIONS<sup>a, b</sup>

Value of NOPT	Dependent variables (at arrival)	Independent variables (at departure)	Dimensionality of coordinate system	Typical usage
0	Input	Input	2 or 3	Nonvariational problems
1	$v_x, v_y, v_z, x, y, z$	$\lambda_1, \dots, \lambda_6$	2 or 3	Cartesian rendezvous
2	$r, v, \gamma, \theta$	$\lambda_1, \lambda_2, \lambda_4, \lambda_5$	2	Polar rendezvous
3	$r, v, \gamma$	$\lambda_1, \lambda_2, \lambda_4$	↓	Optimum-angle rendezvous
4	$r, \theta, \Lambda/\lambda_m$	$\lambda_1, \lambda_2, \lambda_4, \lambda_5$		Flybys
5	$r, \Lambda/\lambda_m$	$\lambda_1, \lambda_2, \lambda_4$		Optimum-angle flybys
6	Input	Input	2 or 3	Any variational case not specified above
7	Input	Input	2 or 3	Same as option 6 but with optimum travel angle


<sup>a</sup>By default, the program will generate the partial derivatives by numerical integration if  $1 \leq \text{NOPT} \leq 5$  and by finite differencing otherwise. If the user prefers the finite difference scheme even if  $1 \leq \text{NOPT} \leq 5$ , he should attach a minus sign to his NOPT entry.

<sup>b</sup>For all propulsion cases,  $\lambda_1$  in this table is replaced by  $\dot{m}_0$  (or by  $a_0/g$  if initial thrust-weight ratio was input).




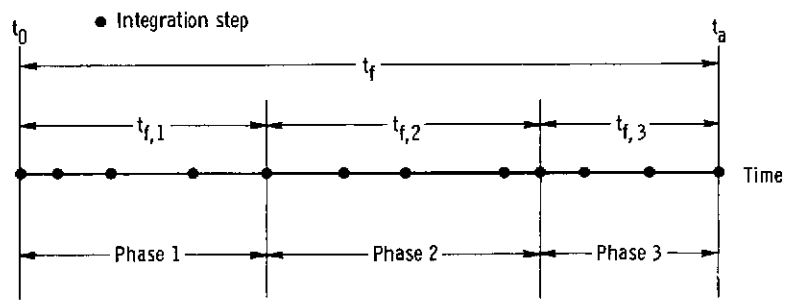

(a) Phases or staging.

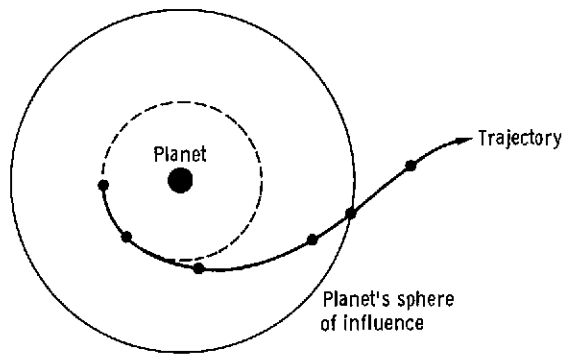


(b) Trajectory penetrates a sphere of influence.

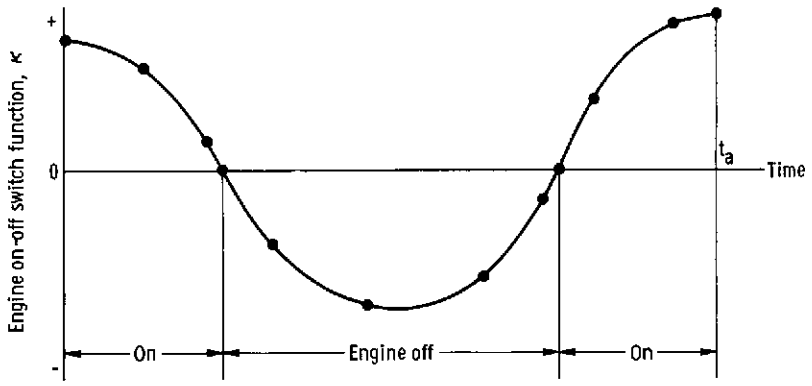


(c) Optimal engine on-off times.

Figure 1. - Trajectory interrupt situations.

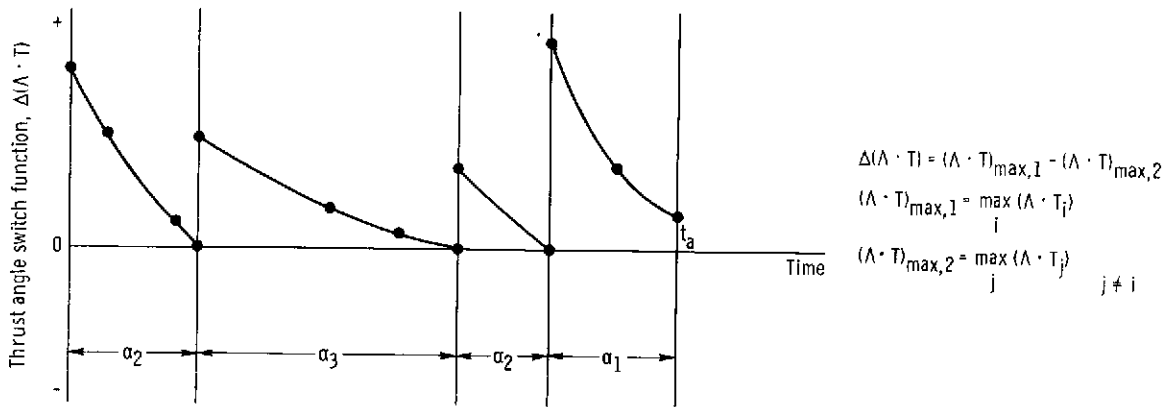

(d) Optimum fixed-thrust-angle selection from a set of angles  $\alpha_i$ .

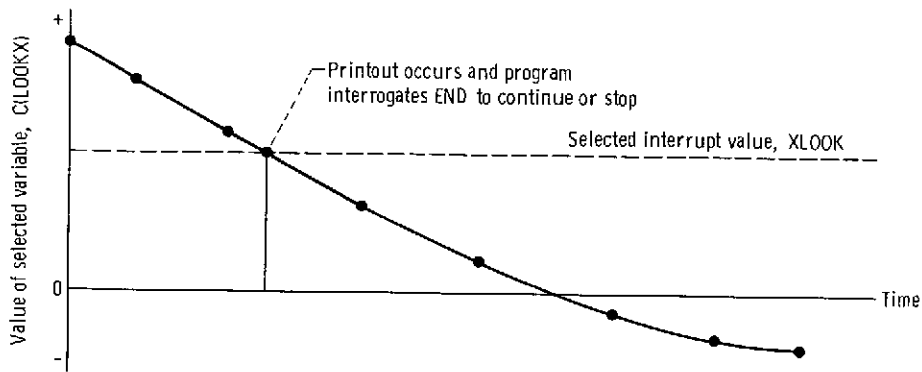

(e) User-selected interrupt on arbitrary variable.

Figure 1. - Concluded.

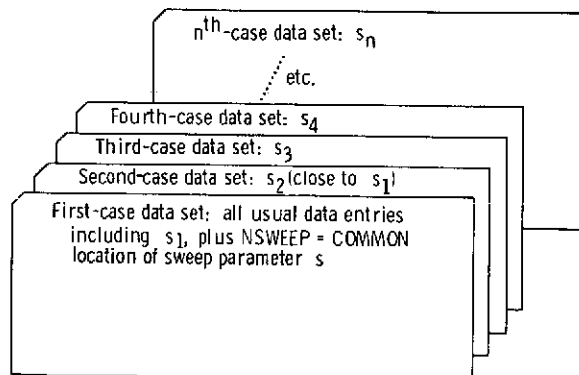


Figure 2. - Data deck setup for manual sweep.

All usual data entries, plus IAA = COMMON  
 location of sweep parameter s  
 SVALUE =  $s_1, s_2, \dots, s_n$ ;  $n \leq 10$  (the values  
 of s where a full trajectory printout will occur)  
 MAXPTS = 2

Figure 3. - Data deck setup for automatic sweep.

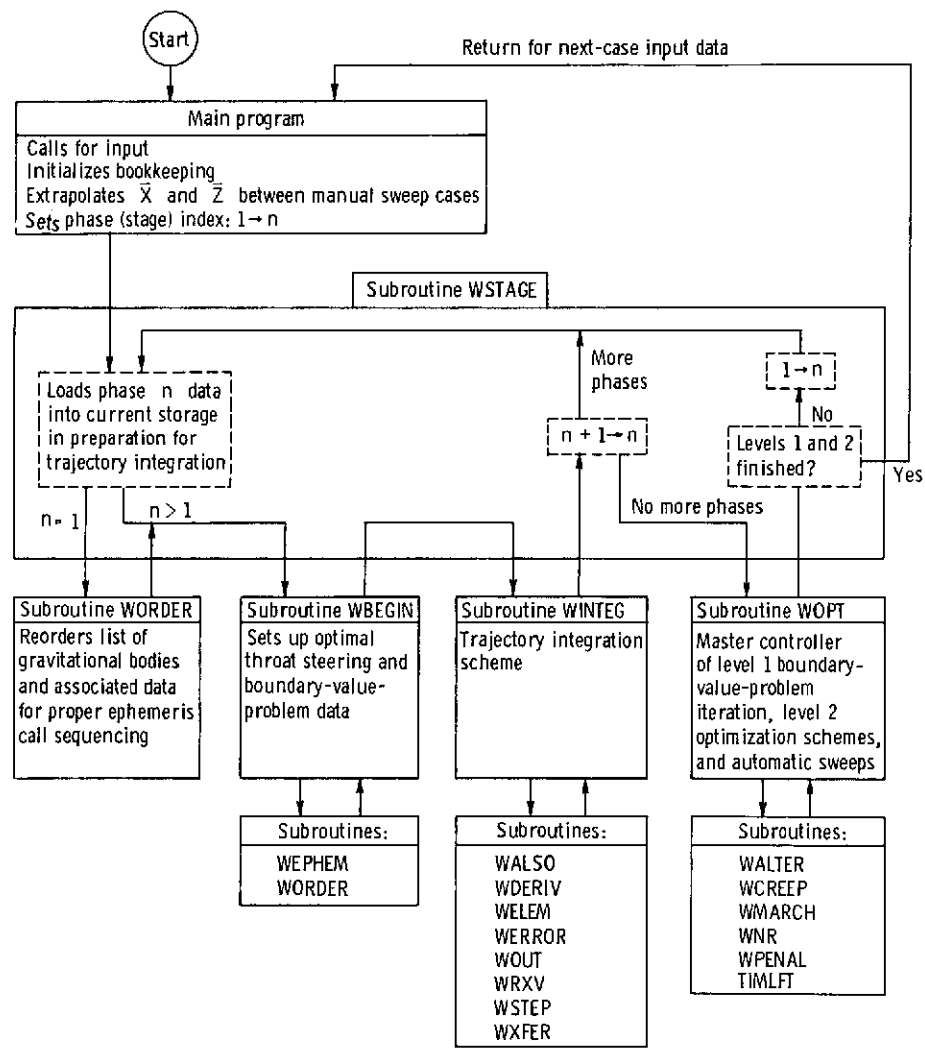


Figure 4. - NBODY flow diagram.

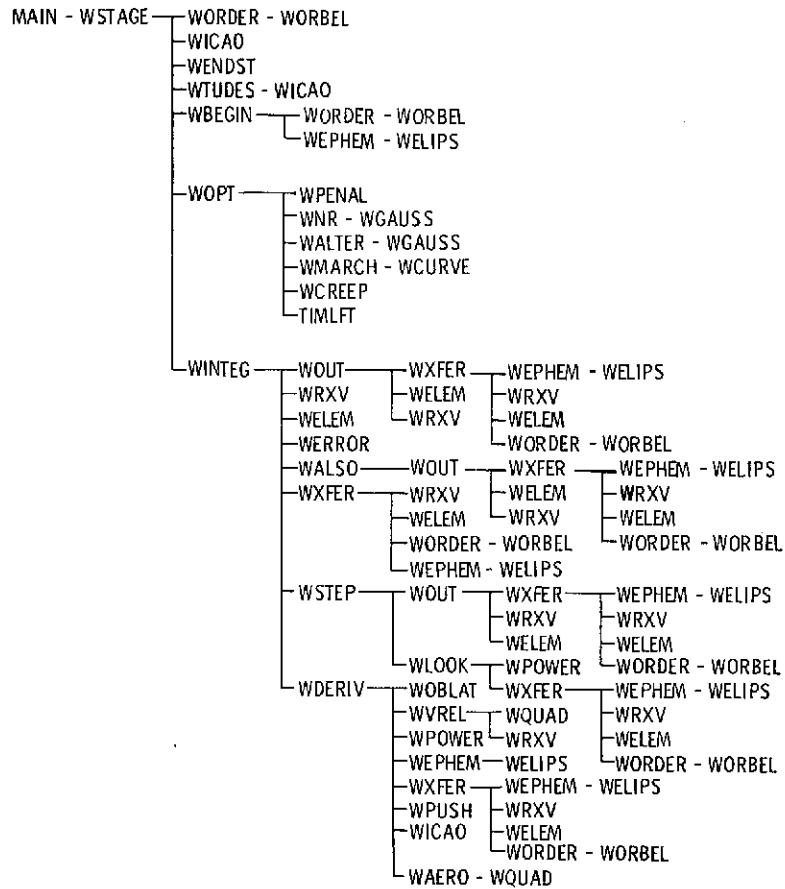


Figure 5. - Subprogram call sequence.