

**NASA CONTRACTOR
REPORT**



NASA CR-2335

NASA CR-2335

**INVESTIGATION OF NONLINEAR INVISCID
AND VISCOUS FLOW EFFECTS
IN THE ANALYSIS OF DYNAMIC STALL**

by Peter Crimi

Prepared by

AVCO SYSTEMS DIVISION

Wilmington, Mass.

for Langley Research Center

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • FEBRUARY 1974

1. Report No. NASA CR-2335	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle INVESTIGATION OF NONLINEAR INVISCID AND VISCOUS FLOW EFFECTS IN THE ANALYSIS OF DYNAMIC STALL		5. Report Date February 1974	6. Performing Organization Code
		8. Performing Organization Report No.	
7. Author(s) Peter Crimi	10. Work Unit No.		
9. Performing Organization Name and Address AVCO Systems Division Wilmington, MA		11. Contract or Grant No. NAS 1-11245	
		13. Type of Report and Period Covered Contractor Report	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546		14. Sponsoring Agency Code	
		15. Supplementary Notes Final Report	
16. Abstract A recently developed method for analyzing unsteady airfoil stall was refined by including nonlinear effects in the representation of the inviscid flow. Certain other aspects of the potential-flow model were reexamined and the effects of varying Reynolds number on stall characteristics were investigated. Refinement of the formulation improved the representation of the flow and chordwise pressure distribution below stall, but substantial quantitative differences between computed and measured results are still evident for sinusoidal pitching through stall. Agreement is substantially improved by assuming the growth rate of the dead-air region at the onset of leading-edge stall is of the order of the component of the free stream normal to the airfoil chordline. The method predicts the expected increase in the resistance to stalling with increasing Reynolds number. Results indicate that a given airfoil can undergo both trailing-edge and leading-edge stall under unsteady conditions.			
17. Key Words (Suggested by Author(s)) Dynamic stall analysis, oscillating airfoil, Reynolds number, leading-edge stall		18. Distribution Statement Unlimited - Unclassified	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 112	22. Price* \$4.25

INVESTIGATION OF NONLINEAR INVISCID
AND VISCOUS FLOW EFFECTS IN THE
ANALYSIS OF DYNAMIC STALL

by Peter Crimi
Avco Systems Division

SUMMARY

A recently developed method for analyzing unsteady airfoil stall was refined by including nonlinear effects in the representation of the inviscid flow. Certain other aspects of the potential-flow model were reexamined and the effects of varying Reynolds number on stall characteristics were investigated. Refinement of the formulation improved the representation of the flow and chordwise pressure distribution below stall, but substantial quantitative differences between computed and measured results are still evident for sinusoidal pitching through stall. Agreement is substantially improved by assuming the growth rate of the dead-air region at the onset of leading-edge stall is of the order of the component of the free stream normal to the airfoil chordline. The method predicts the expected increase in the resistance to stalling with increasing Reynolds number. Results indicate that a given airfoil can undergo both trailing-edge and leading-edge stall under unsteady conditions.

INTRODUCTION

Unsteady airfoil stall is a problem of particular concern in the design and operation of helicopter rotors. Periodic stall and unstall of the blades at high advance ratio cause severe oscillatory control loads, increased vibration levels and, under some circumstances, a torsional aeroelastic instability, effectively limiting aircraft performance (Ref. 1). As a result, the problem has been the subject of considerable research (Refs. 2-5, for example).

A method was recently developed for analyzing dynamic stall of a helicopter rotor blade. The method, which is described in Ref. 6, employs a model for each of the basic flow elements involved in the unsteady stall of a two-dimensional airfoil in incompressible flow. The interactions of these elements are analyzed by forward integration in time, with the aid of a digital computer. Results are in good qualitative agreement with measured loads, both dynamic lift overshoot and unstable moment variation being in clear evidence in the computed loading. A number of approximations were employed in the formulations which caused substantial quantitative differences, however.

One of the approximations most open to question was the use of a linearized representation of the potential flow. This study was directed, first, to refining the model of the potential flow by introducing second-order terms. Certain other aspects of the model for a stalled airfoil were also considered. The method was then used to investigate the effects of varying Reynolds number and to determine the relative importance of leading-edge and trailing-edge stall under unsteady conditions.

SYMBOLS

b	airfoil semichord, m
C_m	moment coefficient, $C_m = m / (2 \rho U^2 b^2)$
C_n	normal-force coefficient, $C_n = n / (\rho U^2 b)$
C_p	pressure coefficient, $C_p = 2 (p - p_\infty) / (\rho U^2)$
c	airfoil chord, m
k	reduced frequency, $k = \omega b / U$
l	lift per unit span, N/m
ℓ	length of dead-air region, m
m	moment per unit span about quarter-chord, N
n	force normal to chord line per unit span, N/m
p	static pressure, N/m^2
p_∞	free-stream static pressure, N/m^2
q	fluid speed at airfoil surface, m/s
Re ()	Reynolds number based on length indicated by subscript
r_o	leading-edge radius, m
T	airfoil section thickness distribution, m
t	time, s
U	free-stream speed, m/s
u_e	fluid speed external to boundary layer
(x, y)	foil-fixed coordinates, with origin at midchord
α	angle of attack, deg or rad
γ	vortex strength, m/s
δ^*	boundary layer displacement thickness, m

θ_p pitch angle, deg or rad
 ρ fluid density, kg/m³
 σ source strength, m/s
 τ_w wall shear, N/m²
 ϕ perturbation velocity potential m²/s
 ω frequency of pitch oscillation, rad/s

DESCRIPTION OF BASIC METHOD

The previously developed method for analyzing dynamic stall is outlined briefly below. Details can be found in Ref. 6.

When the flow is attached (Figure 1a), the flow elements represented are: (1) a laminar boundary layer extending from the stagnation point over the leading edge; (2) a leading-edge separation bubble (if separation occurs prior to transition); (3) a turbulent boundary layer from the re-attachment point of the leading-edge bubble (or the transition point) to the trailing edge; and (4) a potential flow over the airfoil, including the effects of a vortical wake generated by the variation in time of the circulation about the airfoil. If the airfoil undergoes leading-edge stall (Figure 1b), the flow elements modelled are: (1) a laminar boundary layer to the point of separation; (2) a laminar constant-pressure shear layer to the point of transition; (3) a turbulent constant-pressure shear layer; (4) a turbulent pressure-recovery region; and (5) a potential flow over the airfoil and external to the viscous mixing region, again including a vortical wake. If trailing-edge stall occurs (Figure 1c), the flow elements represented are: (1) the laminar boundary layer; (2) the leading-edge bubble (if laminar separation occurs prior to transition); (3) the turbulent boundary layer; (4) a turbulent constant-pressure shear layer; (5) a turbulent pressure-recovery region; and (6) a potential flow with vortical wake. These elements were formulated as follows.

Potential Flow

Given the airfoil section characteristics and motions, together with the distribution of pressure in the dead-air region if the airfoil is stalled, the flow and pressure over the airfoil must be determined to compute the integrated load and analyze the boundary layer. The problem was formulated by imposing linearized boundary conditions of flow tangency and pressure, using a perturbation velocity potential derived from source and vortex distributions. The resulting coupled set of singular integral equations is solved by casting the singularity distributions in series form and solving for the unknown coefficients by imposing boundary conditions at prescribed points.

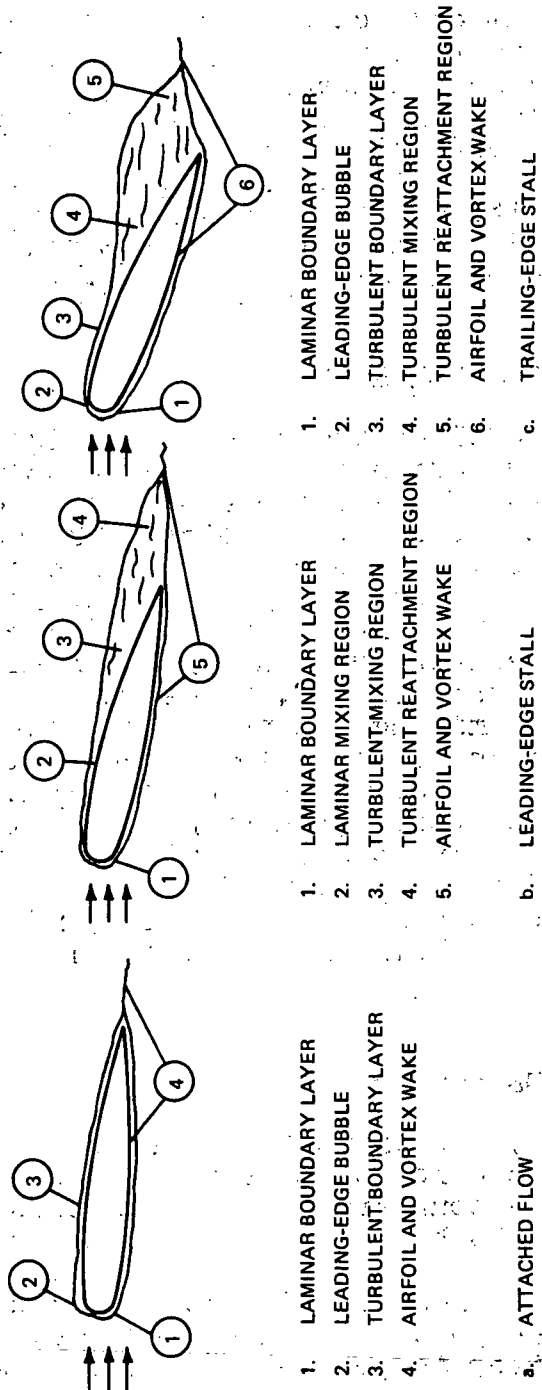


Figure 1 FLOW ELEMENTS

Boundary Layer

Because the relative importance of the individual elements of the boundary layer flow as they affect dynamic stall could not be established in advance, the representation in Ref. 6 was made as general as possible. The method of finite differences for unsteady flow, with variable step size in both streamwise and normal directions, was employed with the error in each finite-difference approximation of second order. The Cebeci-Smith eddy-viscosity model (Ref. 7) is used to compute turbulent shear.

Dead-Air Region

The function of the model of the dead-air region is to define the streamwise distribution of pressure in that region, given the locations of the separation and recovery points and the pressure at the recovery point. The dead-air region is assumed to consist, in the most general case, of a laminar constant-pressure free shear layer from separation to transition, a turbulent constant-pressure mixing region, and a turbulent pressure-recovery region. The laminar shear layer is analyzed by the method of Ref. 8, assuming quasi-steady flow. The turbulent mixing and pressure-recovery regions are analyzed using the steady-flow momentum integral and first moment equations. Profile parameters in those regions are assumed to be universal functions of a dimensionless streamwise coordinate, with those functions derived from an exact viscous-inviscid interaction calculation. Matching of approximate solutions for the mixing and pressure-recovery regions at their interface completes the analysis.

Leading-Edge Bubble

The leading-edge bubble on an unstalled airfoil is analyzed using the same basic relations employed for the dead-air region. Given the boundary-layer parameters at separation, the length of the bubble and the amount of pressure rise possible, for that length, in the pressure recovery region, are computed. That pressure rise is compared with the rise in pressure in the potential flow over the length of the bubble. If the latter is greater than the former, the bubble is assumed to have burst, and the stall process is initiated.

Loading Calculation Procedure

Calculations proceed by forward integration in time, given the blade motions as a function of time. If, at a given instant, the airfoil is not stalled, the potential flow is computed, and the boundary layer and leading-edge bubble are analyzed to check for bubble bursting. If the airfoil is stalled, the pressure distribution in the dead-air region is computed, the potential flow evaluated, and the boundary layer is analyzed to locate the separation point. The last two steps are repeated iteratively until assumed and computed separation points agree. Rate of growth of the dead-air region is determined from an estimate of the rate of fluid entrainment derived from the potential-flow solution. In the case of leading-edge stall, unSTALL is determined by first postulating its occurrence and analyzing the leading-edge bubble which would then form to ascertain whether that event did in fact occur. During unSTALL, the dead-air region is washed off the airfoil. The rate of wash-off is normally taken to be the free-stream speed. There is some indication, though, that the rate should be considerably less than that value, as is discussed subsequently.

FORMULATION OF POTENTIAL FLOW TO SECOND ORDER

The following specifically concerns the derivation of the perturbation velocity potential to second order for unsteady, attached flow. The formulations derived are also used to compute flow and loading when the airfoil is stalled. However, in the latter case, while the solution is uniformly valid to first order, strictly consistent accounting of second-order terms was not attempted. A complete development to second order could not be justified without a corresponding refinement of the analysis of the dead-air region, which would be outside the scope of the present study.

The problem of an airfoil in unsteady flow, including nonlinear effects, has been treated by several investigators. Representative of these studies is the work of Giesing (Ref. 9), who used a finite-element approach to obtain numerical solutions for arbitrary transient motions, and Chen and Wirtz (Ref. 10), who employed an expansion of the acceleration potential to obtain integrated loading to second order for oscillatory pitching and plunging.

The approach taken here was dictated primarily by the requirement for compatibility with the formulation of the linearized problem in Ref. 6. The velocity potential and boundary conditions were systematically expanded, following the general procedure used in Ref. 11 for the steady problem, as follows.

The perturbation velocity potential can be written in the form

$$\begin{aligned} \phi(x, y, t) = & \frac{1}{2\pi} \int_{-b}^b \sigma(\xi, t) \tan^{-1} \left(\frac{y}{x - \xi} \right) d\xi \\ & - \frac{1}{2\pi} \int_{-b}^{x_0} \gamma(\xi, t) \ln \left(\sqrt{(x - \xi)^2 + y^2} \right) d\xi \end{aligned} \quad (1)$$

where coordinates (x, y) are fixed to the airfoil, with origin at midchord. The surface of the airfoil, of chord $2b$, is located at $y = \pm T(x)$, $-b < x < b$ (consideration has been limited to symmetric airfoils). Coordinate x_0 in Eq. (1) locates the end of the shed vortex wake.

Wake displacement effects have been omitted. Their contribution to the boundary conditions is of third order. While there is a second-order effect from wake displacement on the pressure at the airfoil surface, the contribution is symmetric and so does not affect integrated load. In any case, that term has reduced frequency as a factor, so for all practical purposes it can be regarded as third order.

The potential is required to satisfy

$$\frac{V_{\infty} + \partial \phi / \partial y}{U_{\infty} + \partial \phi / \partial x} = \pm T'(x), \quad \left\{ \begin{array}{l} y = \pm T(x) \\ -b \leq x \leq b \end{array} \right. \quad (2)$$

where U_{∞} and V_{∞} are apparent free-stream components, including effects of foil motions.

The source and vortex distribution strengths are taken to be sums of terms of ascending order in angle of attack or a similar small parameter, i.e.,

$$\sigma = \sigma_1 + \sigma_2 + \dots$$

$$\gamma = \gamma_1 + \gamma_2 + \dots$$

If the derivatives of ϕ in Eq. (2) are expanded in Taylor series about $y = 0$, terms of like order are assembled, and symmetric and antisymmetric contributions separated, in the usual manner, it results that

$$\left. \begin{array}{l} \sigma_1 = 2 U T'(x) \\ \frac{1}{2\pi} \int_{-b}^{x_0} \frac{\gamma_1(\xi, t) d\xi}{x - \xi} = w(x, t) \end{array} \right\} \quad (3)$$

$$\left. \begin{aligned}
 \alpha_2 &= \frac{2U}{\pi} \frac{\partial}{\partial x} \int_{-b}^b \frac{T'(\xi) d\xi}{x - \xi} \\
 \frac{1}{2\pi} \int_{-b}^{x_0} \frac{\gamma_2(\xi, t) d\xi}{x - \xi} &= - \frac{\partial}{\partial x} (T \gamma_1)
 \end{aligned} \right\} \quad (4)$$

where U is free-stream speed and w is the downwash imposed by foil incidence and motions.

The second of Eqs. (3) is, of course, the one solved in Ref. 6, using a Glauert-type trigonometric expansion of γ_1 . Comparing Eqs. (3) and (4), it is seen that γ_2 can be computed using the same procedure as for γ_1 , with $-(T \gamma_1)'$ substituted for w .

Some difficulty was encountered in implementing Eqs. (4), because T was originally formulated as a rather slowly converging trigonometric series. As a result, the derivative of $T \gamma_1$, in series form, did not converge satisfactorily. The difficulty was resolved by replacing the original series for T with the following more rapidly converging one:

$$T = b \sin \theta \left[\frac{1}{2} (1 - \cos \theta) \frac{r_0}{b} + \sin \theta \sum_{n=1}^{\infty} t_n \sin n \theta \right]$$

where r_0 is leading-edge radius, and $x = b \cos \theta$.

The same basic procedure as the one developed by Lighthill for steady flow (Ref. 11) was followed in deriving the formula for the flow at the surface, q . The x -component of q , denoted q_x , is of the order of free-stream speed U , while the y -component, q_y , is of first order in whatever expansion parameter one chooses to use. Thus,

$$\begin{aligned}
 q &= q_x \sqrt{1 + (q_y/q_x)^2} \\
 &= q_x + \frac{1}{2} \frac{q_y^2}{q_x} + \dots \\
 &= q_x + \frac{1}{2} \frac{q_y^2}{U} + \text{higher order terms.}
 \end{aligned} \quad (5)$$

while

$$q_x = U \cos \theta_p \pm \frac{1}{2} (\gamma_1 + \gamma_2) + u_s$$

$$+ \frac{1}{2\pi} \int_{-b}^b \frac{(\sigma_1 + \sigma_2) d\xi}{x - \xi} + UTT'' + \text{third-order terms.}$$

$$q_y = U \sin \theta_p - \frac{1}{2\pi} \int_{-b}^{x_0} \frac{\gamma_1 d\xi}{x - \xi} \pm v_s \pm UT'$$

+ second-order terms.

where θ_p is pitch angle and u_s and v_s are contributions from the source distribution representing the dead-air region when the airfoil is stalled (see Ref. 6). If these expressions for q_x and q_y are substituted in Eq. (5), a term which is singular at the leading edge due to a factor $(b+x)^{-1/2}$ is obtained, just as in the linear approximation. However, there is also a second-order term which is singular due to a factor $(b+x)^{-1}$, namely $U [TT'' + \frac{1}{2} (T')^2]$, which is approximately equal to $-.25 U r_0 / (b+x)$ near the leading edge. A uniformly valid approximation for q is obtained, using Lighthill's procedure, by subtracting off the singular part of the offending term and multiplying by the factor

$$\left(\frac{b+x}{b+x+r_0/2} \right)^{1/2}$$

which restores the complete expression to its original form, to second order, some distance from the leading edge, and makes the result finite at the leading edge. The complete expression for q , uniformly valid to second order, with attached flow, is then

$$q = \left(\frac{b+x}{b+x+r_0/2} \right)^{\frac{1}{2}} \left\{ U \cos \theta_p \pm \frac{1}{2} (\gamma_1 + \gamma_2) + u_s + U T T'' \right.$$

$$+ \frac{1}{2\pi} \int_{-b}^b \frac{(\sigma_1 + \sigma_2) d\xi}{x - \xi}$$

$$+ \frac{1}{2U} \left[U \sin \theta_p - \int_{-b}^{x_0} \frac{\gamma_1 d\xi}{x - \xi} \pm v_s \pm U T' \right]^2$$

$$+ \frac{U r_0}{4(b+x)} \left. \right\}$$

The pressure coefficient on the airfoil is computed from

$$C_p(x, \pm T(x), t) = 1 - \left(\frac{q}{U} \right)^2 - \frac{1}{U^2} \frac{\partial}{\partial t} \phi(x, 0^\pm, t) \quad (6)$$

The derivative of ϕ in Eq. (6) is computed by the same formulas as in Ref. 6, except that the second-order corrections are added to the source and vortex strengths. A term of second order which derives from the Taylor expansion of ϕ about $y = 0$ has been omitted from Eq. (6) for the same reasons wake displacement effects were neglected.

RESULTS OF COMPUTATIONS


All calculations were performed for a modified NACA 0012 airfoil section. The section and a list of offsets are shown in Fig. 2. Unless otherwise noted, chordal Reynolds number was 2 million.

Preliminary Calculations

Computations were performed for transient pitching at a dimensionless rate $\dot{\theta}b/U$ of .025 and a chordal Reynolds number of 3 million, in order to determine whether quasi-steady flow could be assumed in the analysis of the laminar and turbulent boundary layers, and so effect a substantial savings in computer storage requirements and running time. Results for the laminar boundary layer are shown in Fig. 3, in which are plotted the external flow magnitude u_e , displacement thickness δ^* and wall shear τ_w as a function of distance along the airfoil surface from the stagnation point. Results obtained by omitting time derivatives are seen to be virtually identical to those using the complete boundary-layer equations.

It should be noted here that the point of vanishing wall shear is not generally coincident with the separation point in unsteady laminar flow. It was shown in Ref. 12, though, that a sufficient condition for identifying the separation point is that the boundary layer equations become invalid downstream of the true separation point. In the method of analyzing the boundary layer used here, there is a good indication of when that event occurs, since the solution is obtained by iteration on the wall shear. When that iteration diverges, then presumably there is no solution to the boundary layer equations and unsteady separation has occurred. It was found that, for the results of Fig. 3, the points of vanishing wall shear and separation are nonetheless coincident, for all practical purposes, since the iteration on wall shear diverged at the first streamwise station downstream of the point where the wall shear went to zero.

A slight difference between the quasi-steady and unsteady result was discernable near separation of the turbulent boundary layer downstream of reattachment of the leading-edge bubble, as shown in Fig. 4. However, the difference in separation points, 3.5 percent of chord, is less than the acceptable error of 5% used in the overall

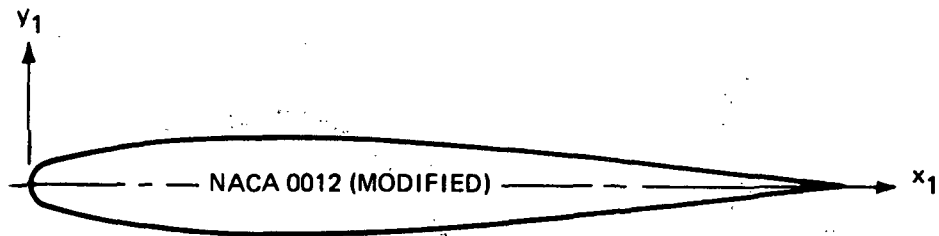

x_1/c	Y_u/c
0	0
.0110	.0170
.0220	.0230
.0330	.0270
.0540	.0340
.0760	.0390
.1087	.0445
.1521	.0493
.2065	.0527
.2500	.0542
.3043	.0547
.3478	.0541
.4130	.0520

x_1/c	Y_u/c
0	0
.4564	.0499
.5000	.0472
.5434	.0439
.6086	.0383
.6521	.0343
.6955	.0300
.7607	.0230
.8042	.0181
.8477	.0127
.8911	.0070
.9346	.0011
1.000	.0011

$ro/c = .0143$

Figure 2 AIRFOIL SECTION

iteration for trailing-edge stall. The assumption of quasi-steady flow appears to be justified, then, at least for those flow conditions and airfoil motions normally experienced by a helicopter rotor blade. That assumption was therefore employed for all subsequent calculations.

Effect of Second-Order Terms

In order to assess the importance of the added terms in the potential flow model, a number of calculations were performed for direct comparison with results obtained using

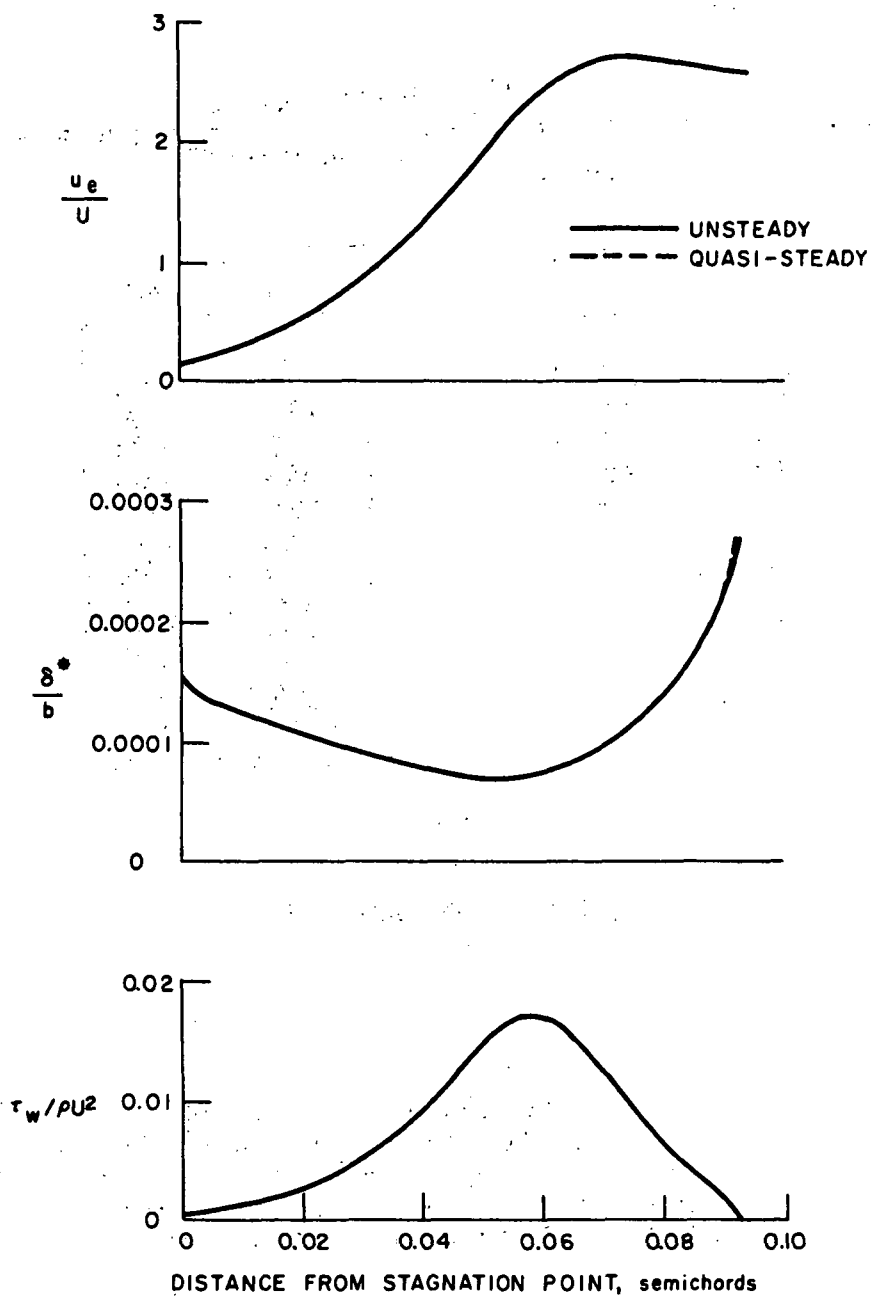


Figure 3 COMPARISON OF RESULTS OF LAMINAR BOUNDARY LAYER ANALYSES

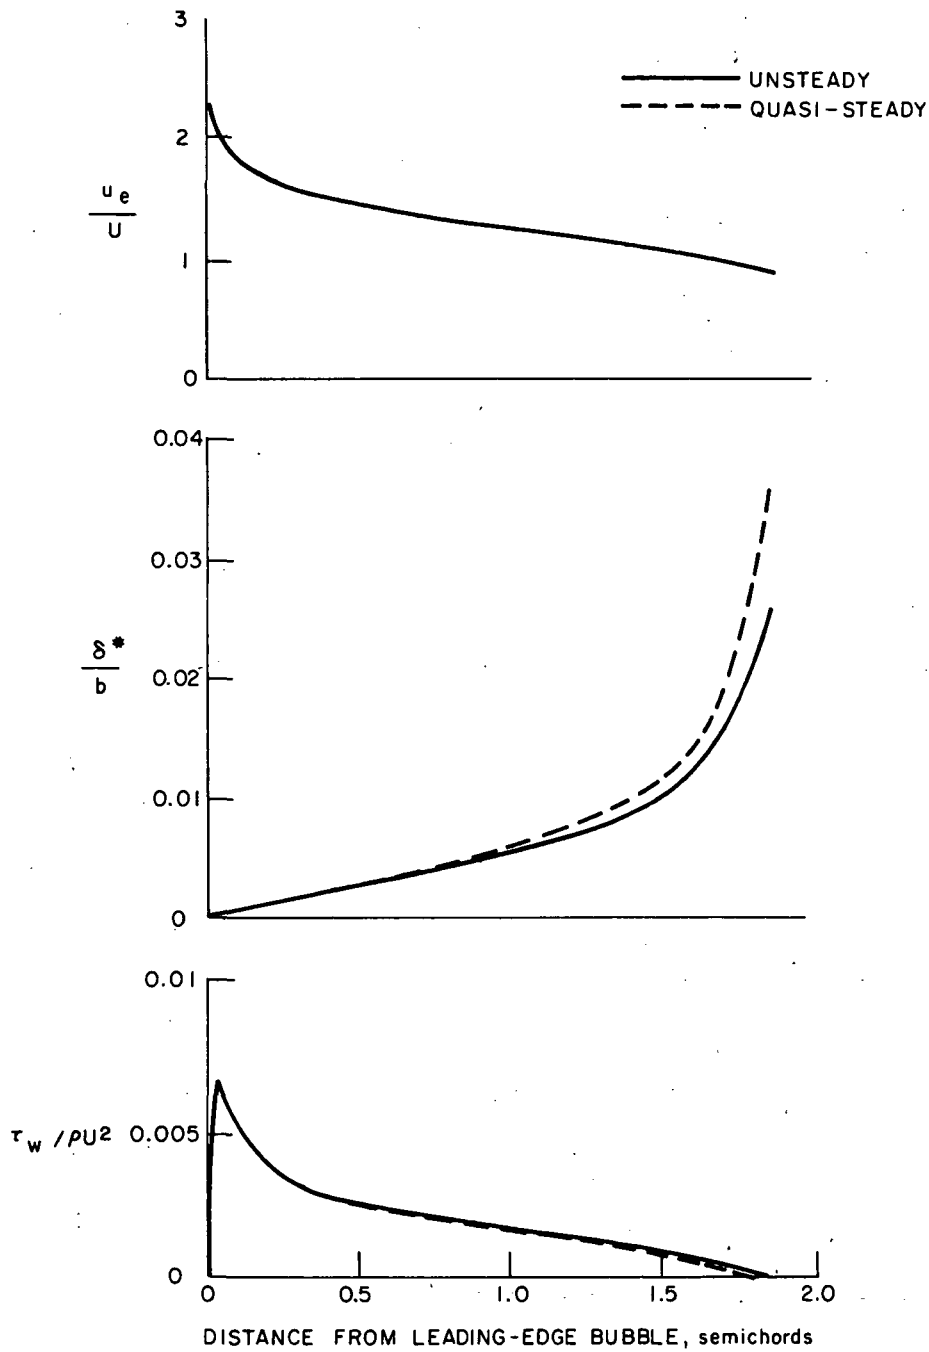


Figure 4 COMPARISON OF RESULTS OF TURBULENT BOUNDARY LAYER ANALYSES

a linearized potential-flow formulation. Cases of both transient and sinusoidal pitching motions were considered.

Time histories of normal force and moment coefficient and length of the dead-air region for a linearly varying pitch angle are shown in Fig. 5. The refined solution is seen to produce somewhat less dynamic overshoot of normal force than the linear formulation. However, the relative overshoot is about the same, the maximum static C_n for the linearized case being somewhat larger than when second-order terms are included.

A comparison of the variation of static normal-force and moment coefficients with angle of attack, generated by series of transient pitch calculations, is shown in Fig. 6. Including second-order terms is seen to reduce both the maximum C_n and the stall angle of attack, and increase the slope of the C_n curve below stall. The increase in $dC_n/d\alpha$ is due to nonlinear thickness effects. The theoretical value of the slope for the airfoil analyzed is 6.82 per radian, while the computed value is 6.76; the slight difference is believed to be due to numerical inaccuracies.

Including second-order terms significantly improved the representation of the pressure distribution. The predicted moment coefficient below stall using the nonlinear potential model is essentially zero, as it should be. The linear solution makes the center of pressure somewhat aft of the quarter-chord, the shift being due to the Lighthill correction which was used to remove the leading-edge singularity.

Results for sinusoidal pitching at a reduced frequency of .13 are compared in Fig. 7, where C_n and $C_m c/4$ are plotted against instantaneous pitch angle. The dashed curves are the static variations of the coefficients. The corresponding measured loading variation, from Ref. 2, is shown in Fig. 8. Including second-order terms is seen to cause some dynamic overshoot, while none had been obtained with the linear model. The overshoot is still considerably less than what was measured, however. The nonlinear terms are seen to cause unstall to be initiated at a pitch angle somewhat above the static stall angle, while the linear solution has unstall starting slightly below that angle.

Results for pitching at a reduced frequency of .26 are shown in Fig. 9. The comparable measured loading is shown in Fig. 10. The same effects of the second-order terms are evident at the higher frequency, but the relative differences are somewhat less.

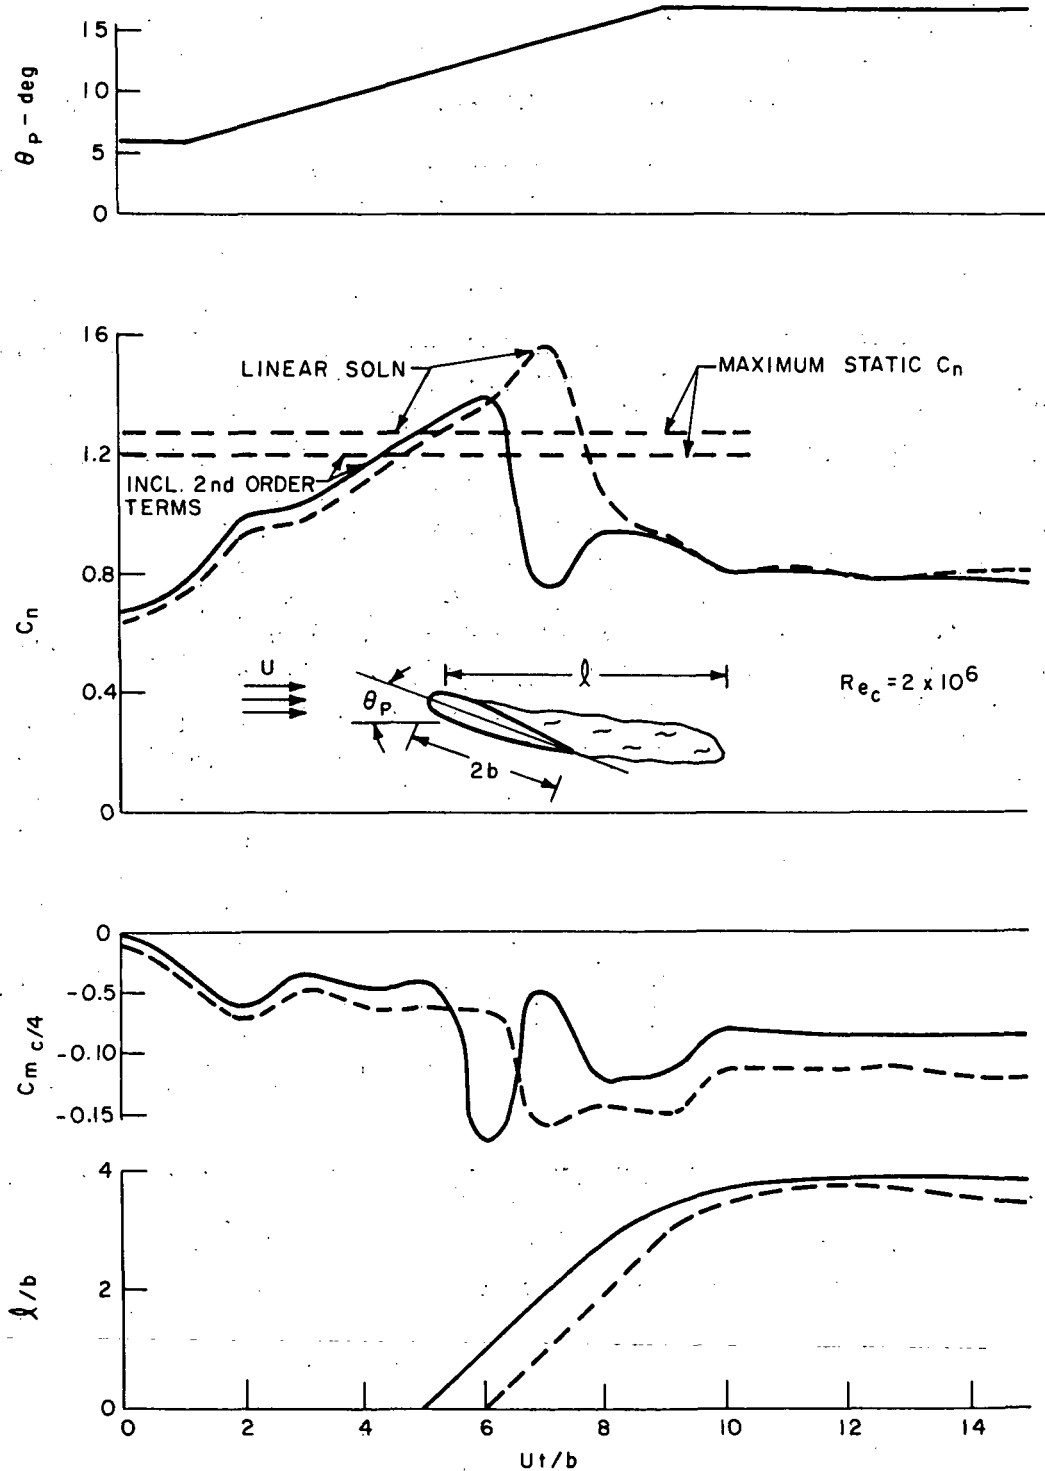


Figure 5 COMPARISON OF COMPUTED LOADING TIME HISTORIES DURING TRANSIENT PITCHING

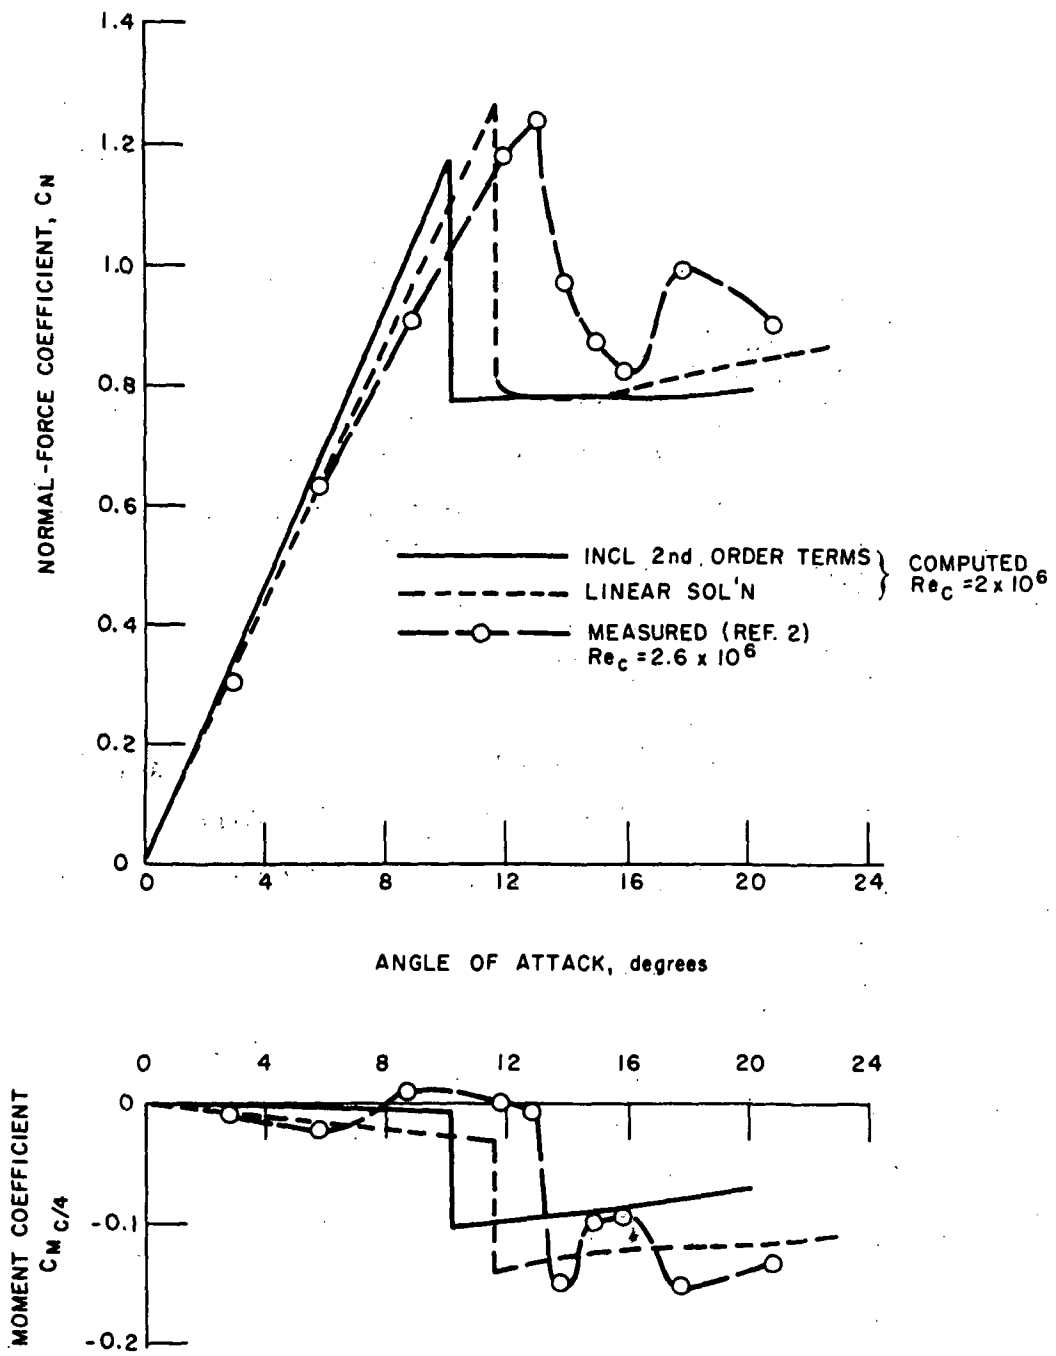


Figure 6 STATIC NORMAL-FORCE AND MOMENT COEFFICIENTS

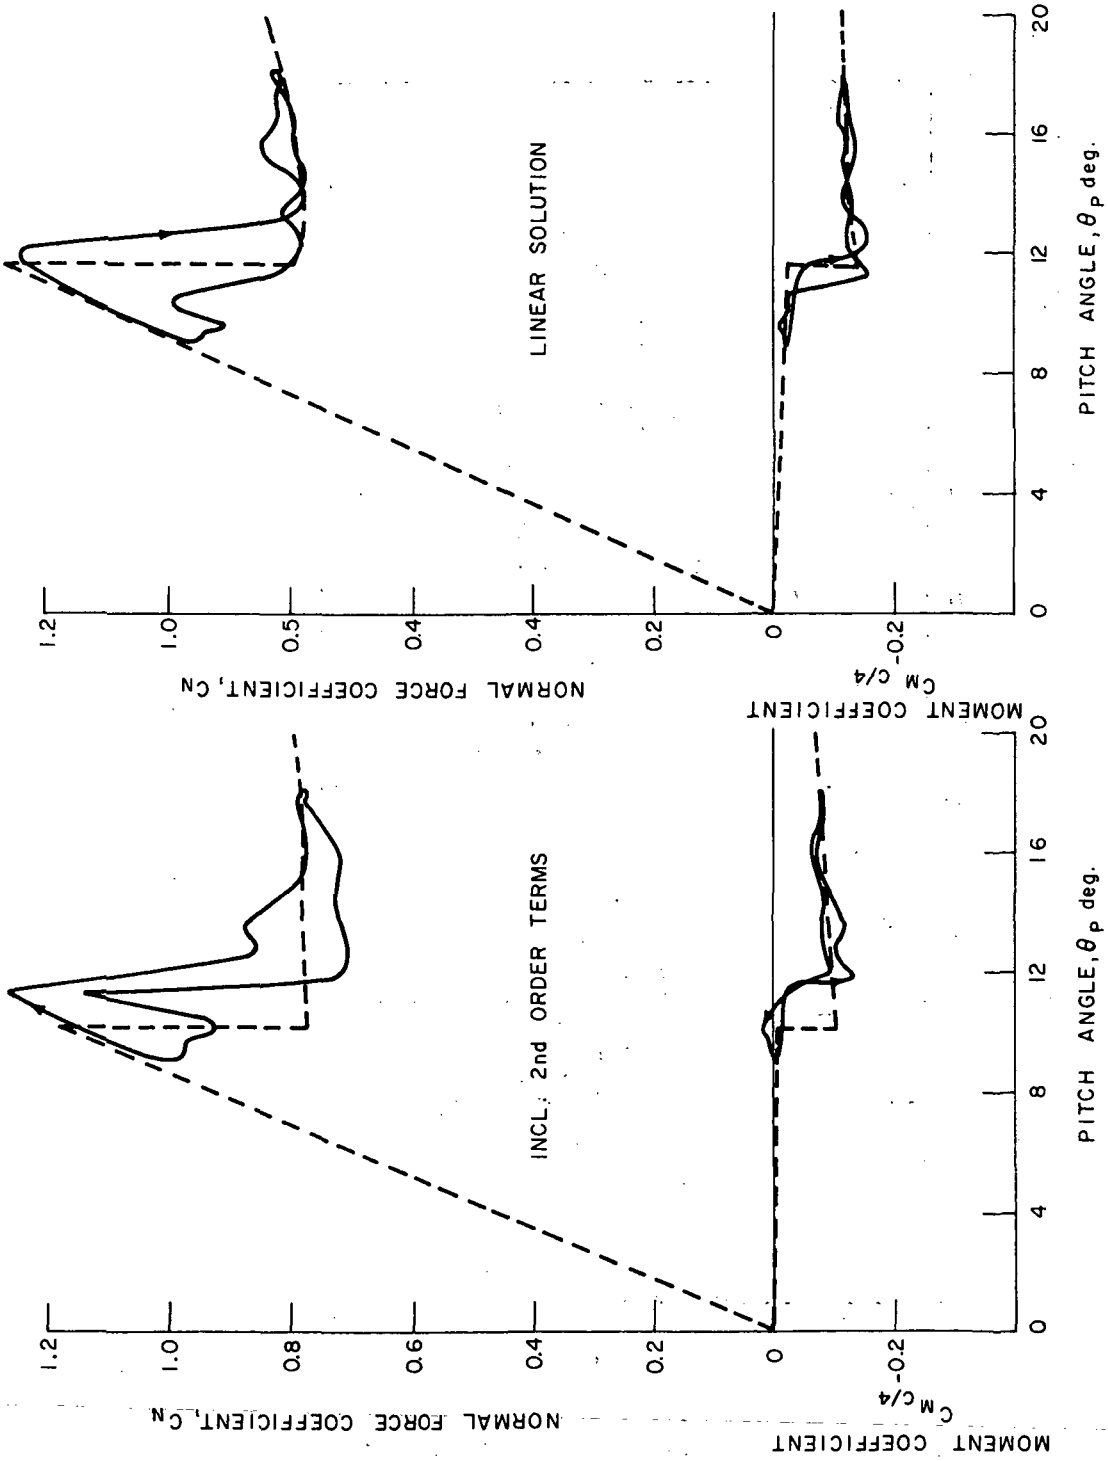


Figure 7 COMPARISON OF COMPUTED LOADINGS DURING SINUSOIDAL PITCHING, $k = .13$

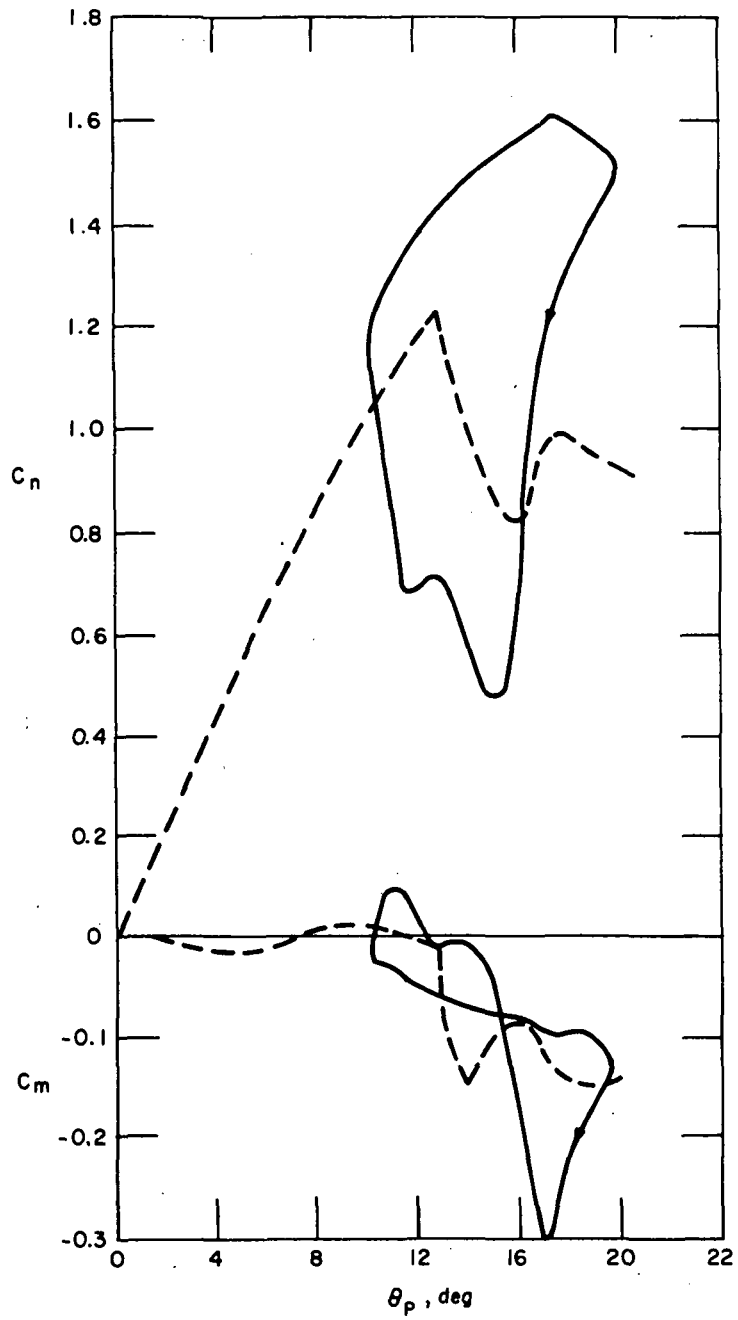


Figure 8 MEASURED LOADING WITH $k = .126$ (from Ref. 2)

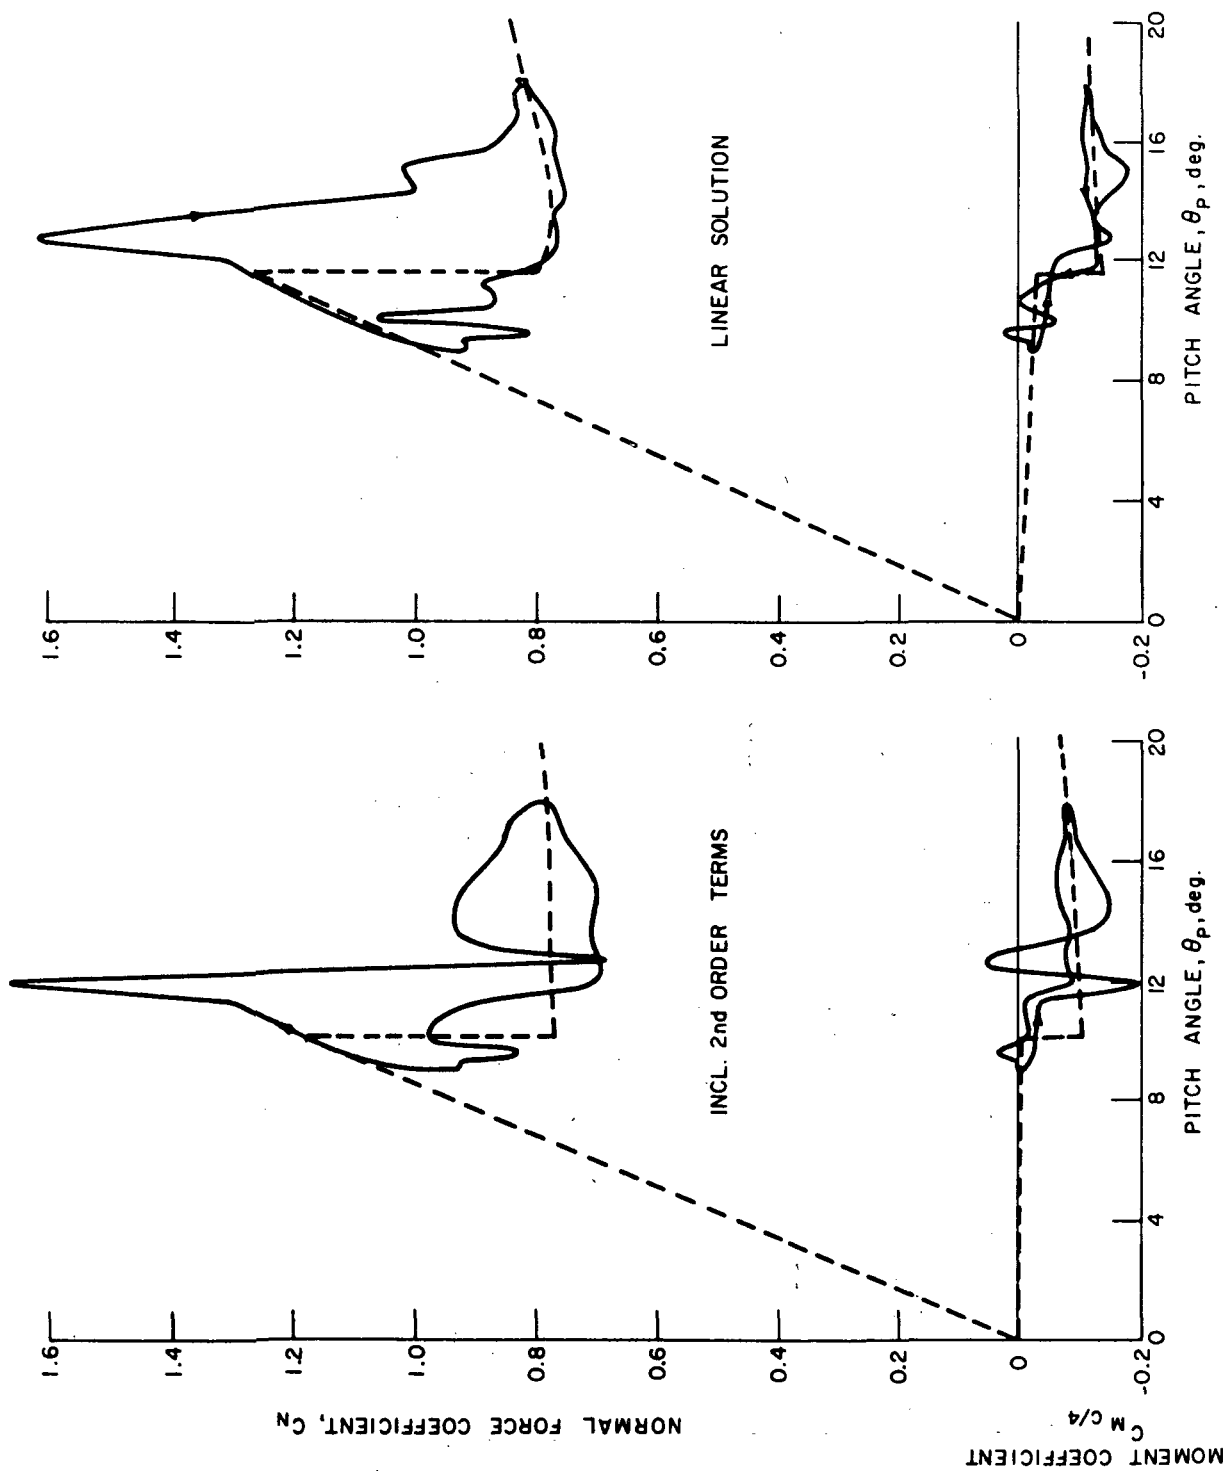


Figure 9 COMPARISON OF COMPUTED LOADINGS DURING SINUSOIDAL PITCHING, $k = .26$

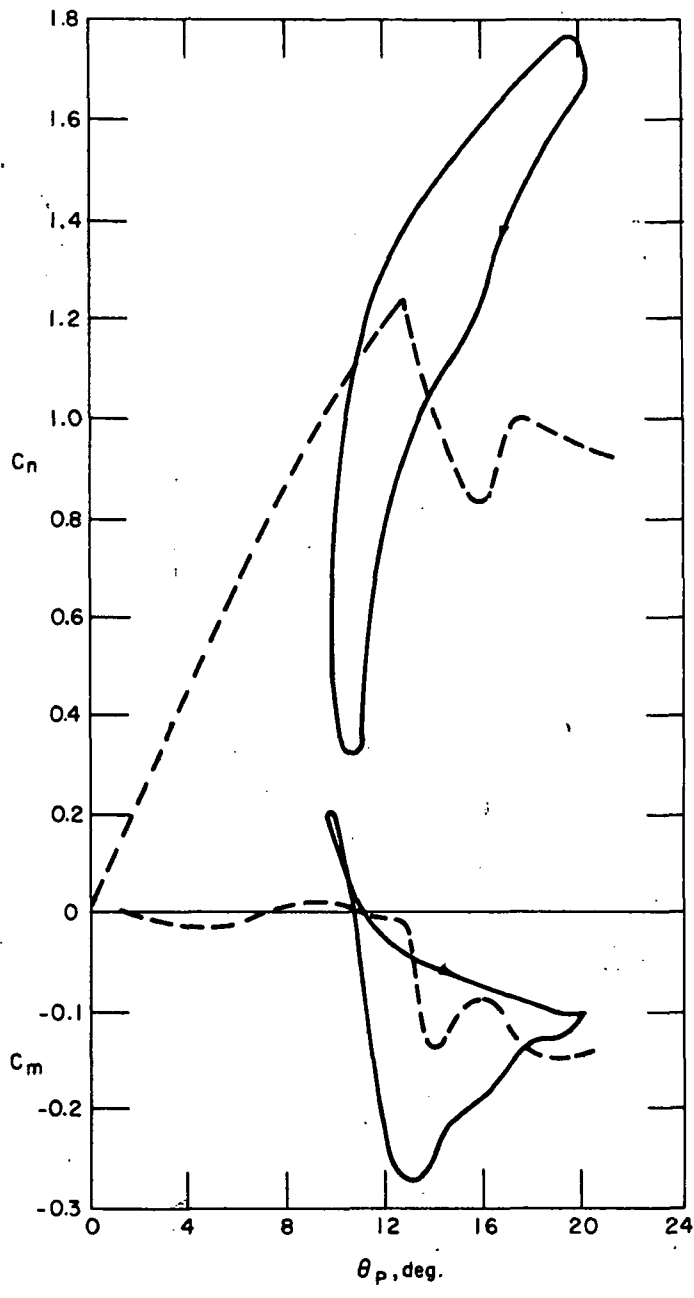


Figure 10 MEASURED LOADING WITH $k = .252$ (from Ref. 2)

While a nonlinear potential-flow model improves the predicted loading somewhat, substantial quantitative differences between computed and measured results are still evident. The analysis does serve to demonstrate that the errors in the original potential-flow model were not contributing to any great extent to those differences. Attention can now be directed to other factors in improving the method, as discussed in the next section.

Effect of Dead-Air Region Growth Rate

As was noted in the previous description of the basic method, rate of growth of the dead-air region is computed from an estimate of rate of entrainment obtained from the potential-flow solution. That estimate, which is proportional to the net source strength in the dead-air region, can only be reasonably justified when the length of the dead-air region is near its steady state value. However, a value for the growth rate is needed at the onset of leading-edge stall, when the region does not yet extend beyond the trailing edge, and is much less than its steady-state length of between two and three chords. It was beyond the scope of the original study to attempt a definitive analysis of this complex unsteady interaction of viscous and inviscid flows, so the growth rate was arbitrarily made equal to the free stream speed at the onset of leading-edge stall.

Subsequent calculations revealed, though, that one of the factors contributing to lift overshoot is an increment in lift induced on the aft portion of the airfoil when the dead-air region still terminates upstream of the trailing edge. This effect is discussed in more detail in Ref. 6. It would appear, then, that if the initial growth rate of the dead-air region were reduced, more overshoot would result.

A series of transient pitch calculations were carried out, parametrically varying initial growth rate ℓ_0 , to verify that this is the case. The loading time histories obtained are shown in Fig. 11. As expected, the overshoot in C_n is increased substantially by reducing ℓ_0 . The time to reach steady state is, of course, increased as well.

The greatest differences between computed and measured loading during oscillatory pitch are the amount of lift overshoot and the amounts of lift and moment hysteresis. It would appear, then, that considerable improvement in the agreement would result if ℓ_0 were reduced. The following arguments are put forth as justification for doing that.


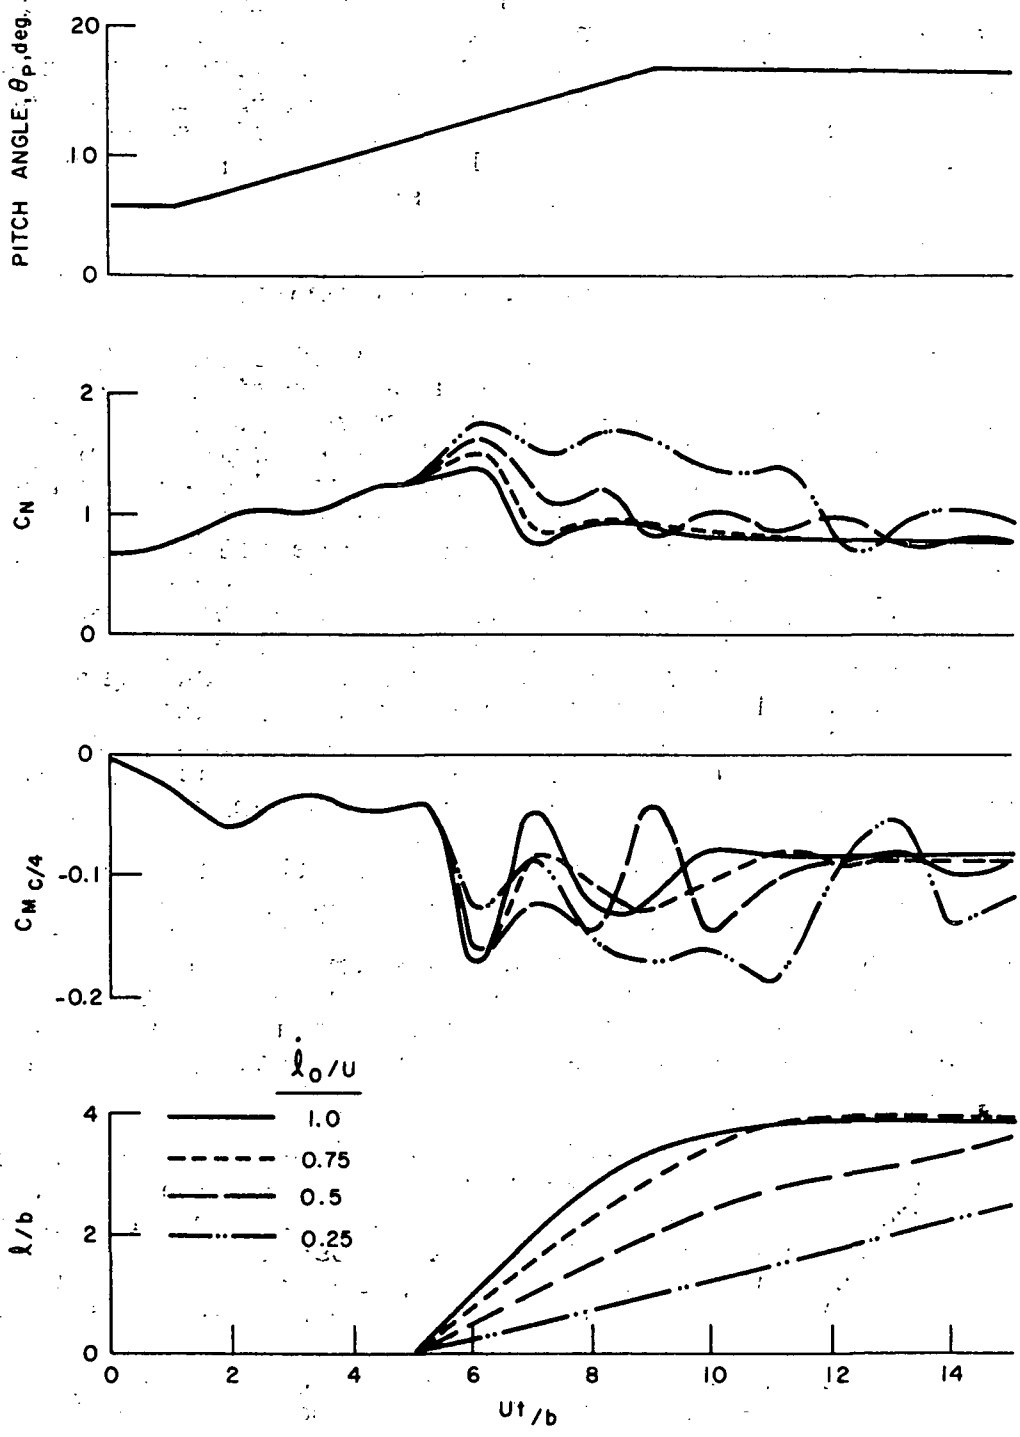


Figure 11 EFFECT OF \dot{l}_0 ON LOADING DURING TRANSIENT PITCHING

The dead-air region consists of fluid garnered from the free stream by the combined action of viscous shear (mostly turbulent, probably) and pressure gradients. Let it be assumed that this assimilation of fluid mass takes place primarily at the downstream end of the dead-air region, and that the fluid is trapped in the funnel-shaped region subtending an angle β , as sketched below (lengths and velocities shown are approximate, assuming angle of attack a is small).

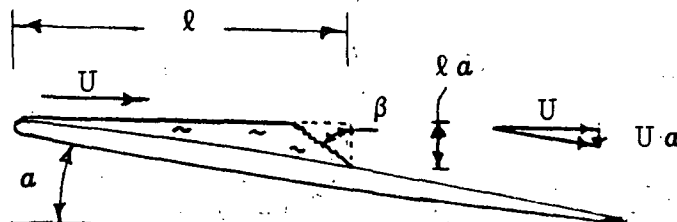

Let f be the fraction of fluid entering the funnel which ultimately becomes part of the dead-air region. Then the rate of increase of the mass of trapped air is given, approximately, by

$$\dot{m} = f \left[\rho (la \tan \beta) (Ua) \right]$$

But \dot{m} is proportional to the rate of increase of area; $\dot{m} \approx \rho l \dot{a}$. Equating the two rates, it follows that

$$\dot{a} \approx (f \tan \beta) Ua$$

Thus, if $f \tan \beta$ is a number of order one, or less, \dot{a}_0 is of the order of Ua , rather than U .

Convincing evidence that \dot{a}_0 must be substantially less than U was obtained by recomputing the loading for oscillatory pitching with $k = .13$, using a value of $.25U$ for \dot{a}_0 . Presumably the process of unstall, in which the free stream recaptures the fluid in the dead-air region, is similar to that of stall onset, so the rate of wash-off of the dead-air region during unstall was also reduced from U to $.25U$. The resulting curves of C_n and C_m vs. pitch angle are shown in Fig. 12. The computed variation of C_n

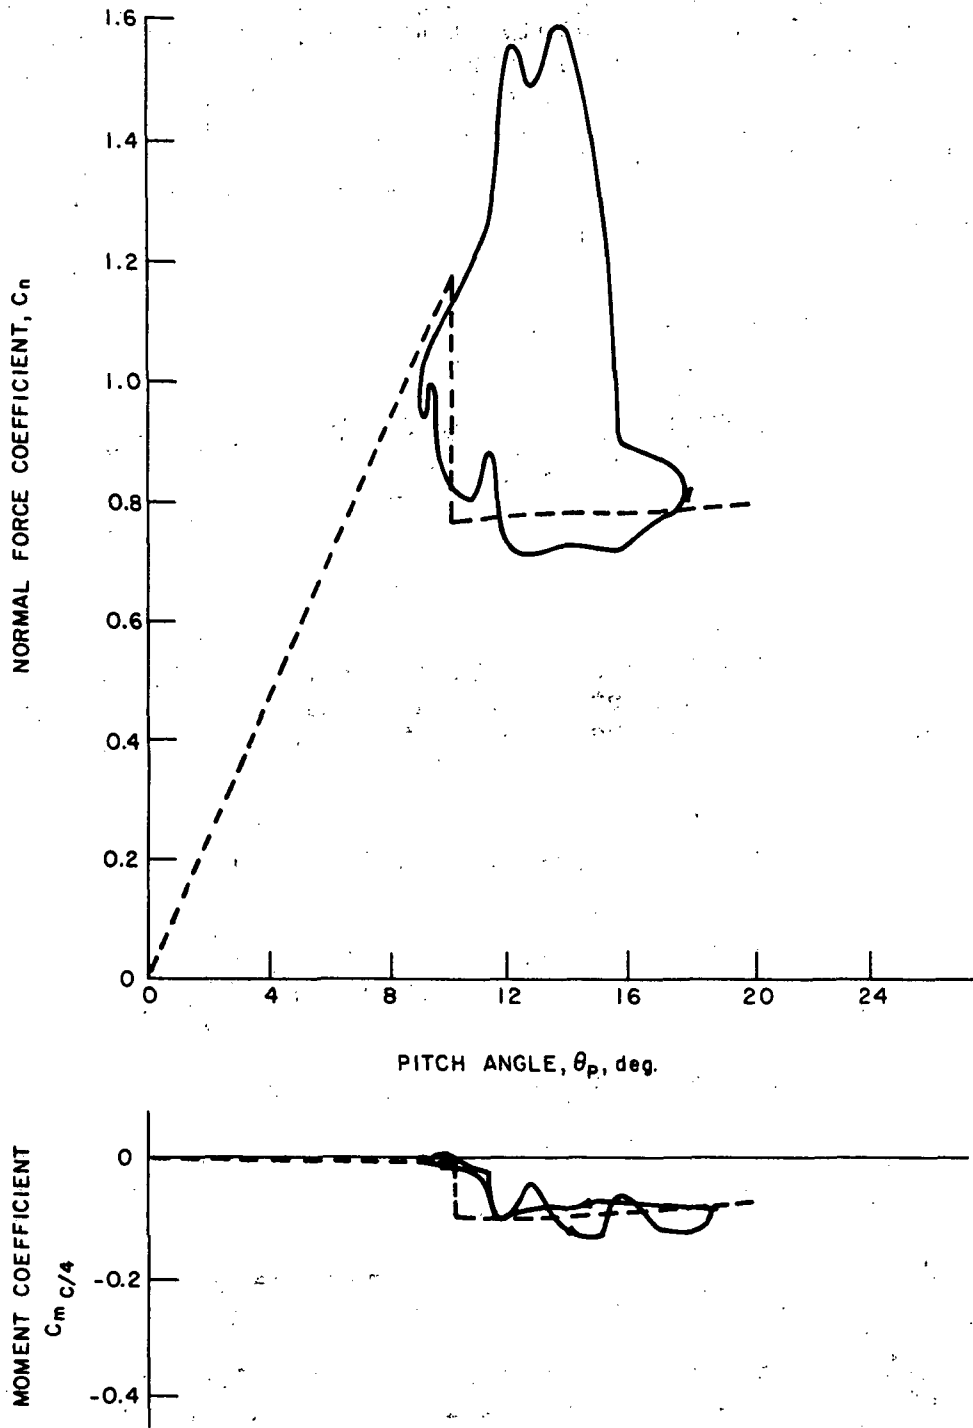


Figure 12 COMPUTED LOADING DURING SINUSOIDAL PITCHING
WITH $\ell_0 = .25 U$ AND $k = .13$

is now seen to be in quite good agreement with the measured loading, Fig. 8. Maximum normal force is predicted almost exactly, and the areas within the loops are roughly the same. The moment variations still differ appreciably, the main discrepancy being between when the airfoil starts pitching down and where unstall begins. There is apparently considerably more suction over the aft portion of the airfoil in the dead-air region than what is predicted. The assumption of quasi-steady flow in the dead-air region is the most likely cause for this difference.

The load during oscillatory pitching with ℓ_0 and wash-off rate of $.25U$ was also computed for $k = .26$, with the results shown in Fig. 13. Again, the agreement with the measured loading, Fig. 10, is much improved, the peak C_n computed being 1.88 while the measured maximum is 1.77. The inadequacy in the model of the dead-air region with θ_p decreasing is also evident at the higher frequency.

It might be conjectured that the wash-off rate should be less than the initial growth rate of the dead-air region, since reentrainment presumably is dominated by viscous shear, rather than pressure gradients. Therefore, the effect of changing the ratio of ℓ_0 to wash-off rate was investigated by repeating the oscillatory pitching calculations using a wash-off rate of $.1U$, with ℓ_0 again being $.25U$. The results for k of $.13$ and $.26$ are shown in Figs. 14 and 15, respectively. The loading variation is seen to be quite insensitive to wash-off rate, regardless of the reduced frequency or the value of ℓ_0 , so making it equal to ℓ_0 would appear to be a reasonable approximation.

Effect of Reynolds Number on Stall Characteristics

Stall characteristics of a given airfoil are necessarily a function of Reynolds number, because of the role played by the boundary layer in the stall process. Specifically, one would expect that an airfoil which is subject to leading-edge stall at a certain Reynolds number would undergo trailing-edge stall at a much higher Reynolds number, since transition would then preclude formation of a leading-edge bubble. At intermediate Reynolds numbers, presumably either type of stall could occur. Calculations were performed to investigate the effect of varying Reynolds number on dynamic and static stall characteristics in this intermediate range of Reynolds numbers.

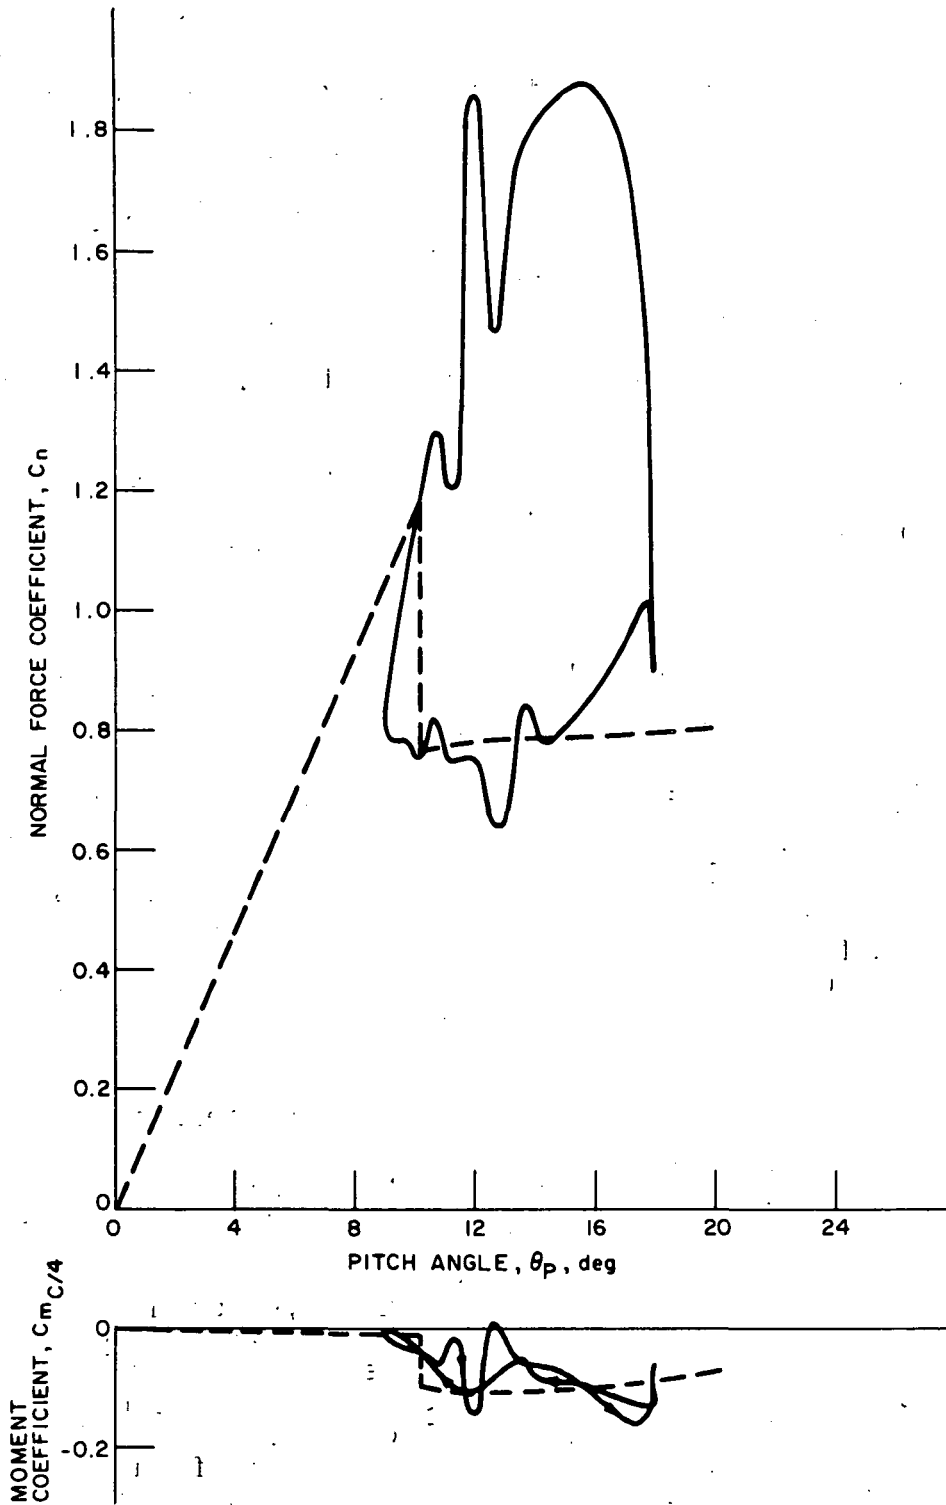


Figure 13 COMPUTED LOADING DURING SINUSOIDAL PITCHING WITH $\dot{\alpha}_0 = 0.25U$ AND $k = 0.26$

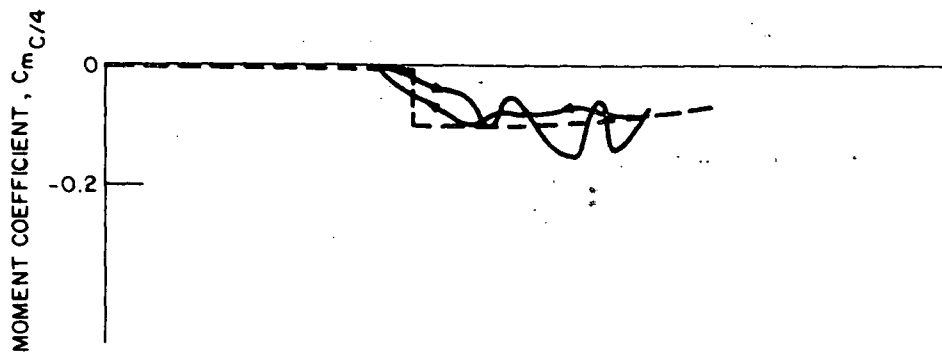
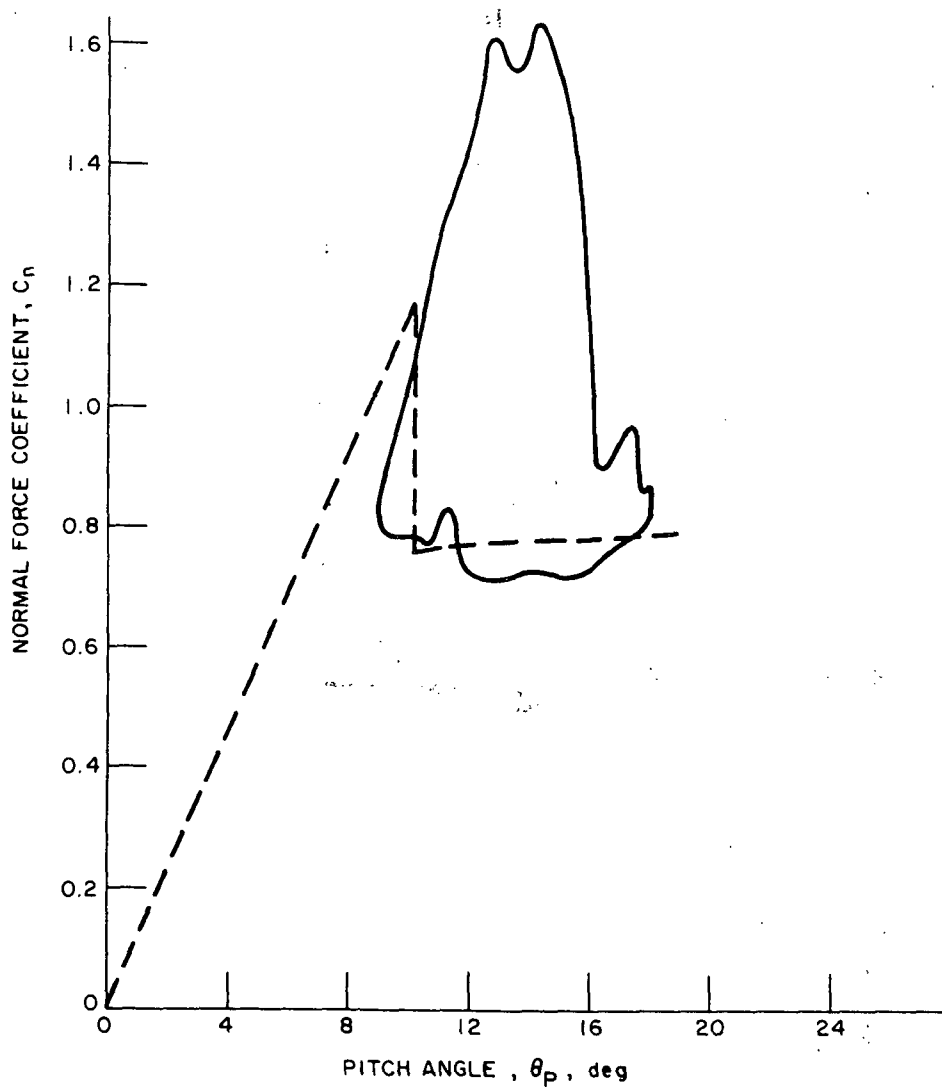


Figure 14 COMPUTED LOADING DURING SINUSOIDAL PITCHING WITH WASH-OFF RATE OF 0.1U, $l_0 = 0.25U$, $k = 0.13$

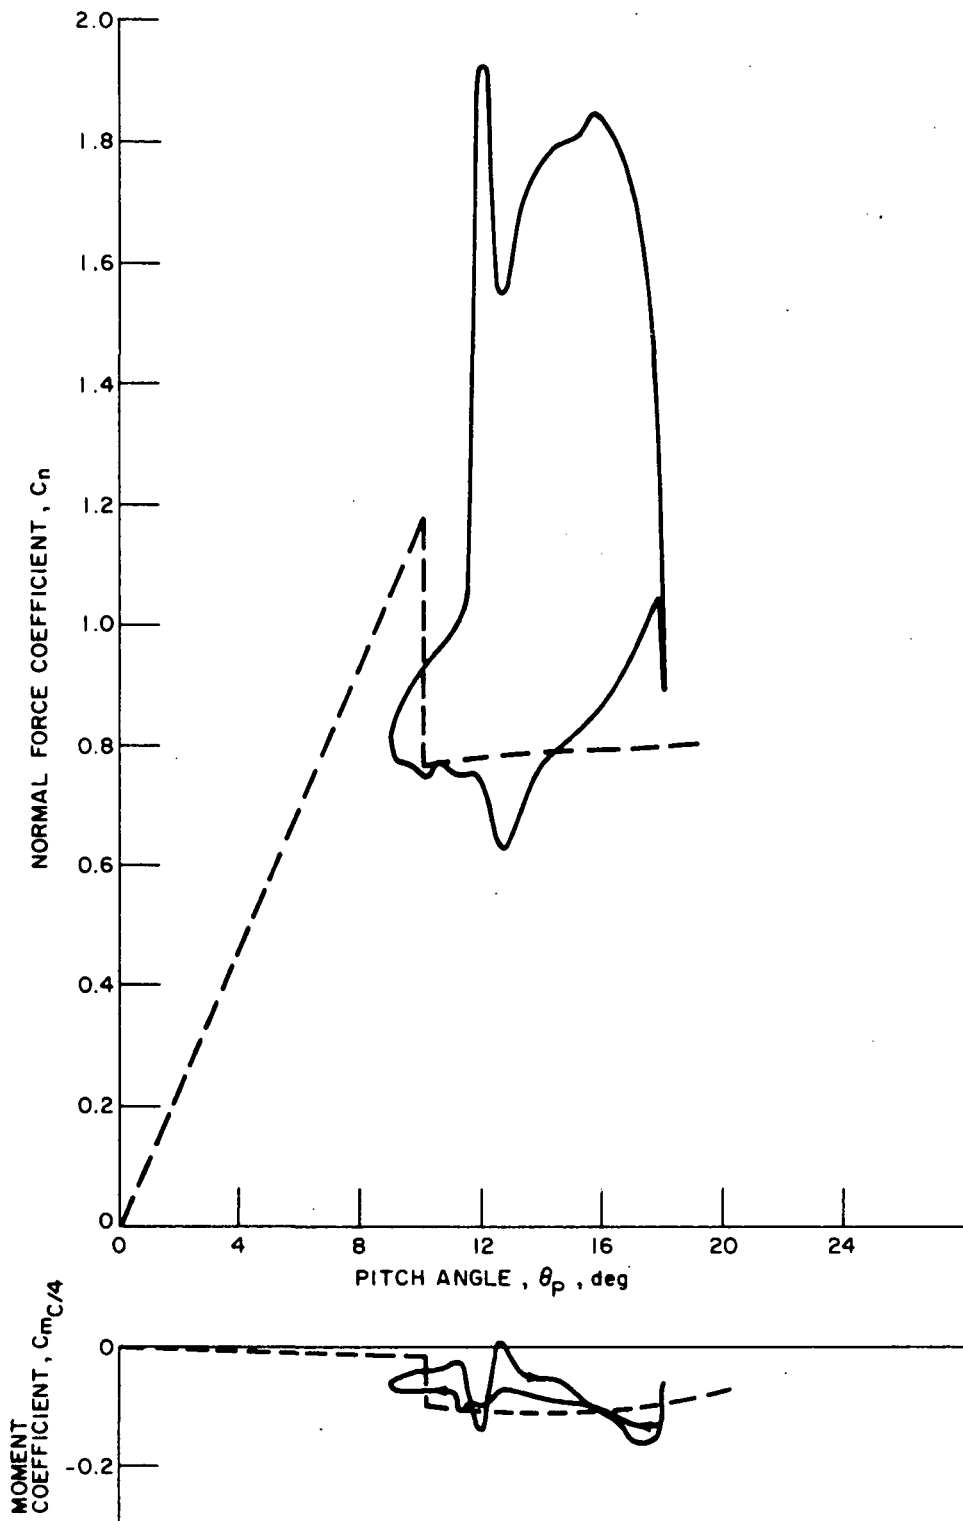


Figure 15 COMPUTED LOADING DURING SINUSOIDAL PITCHING WITH WASH-OFF RATE OF $0.1U$, $\ell_o = 0.25U$, $k = 0.26$

The loading resulting from transient pitching through stall was analyzed for chordal Reynolds numbers of 3 and 6 million, for comparison with the previous results obtained at a Reynolds number of 2 million. Pitch angle was again varied linearly with time up to a prescribed value and then held constant.

Increasing Reynolds number to 3 million caused a marked increase in the resistance to bursting of the leading-edge bubble. The airfoil does not undergo leading-edge stall for pitch angles as high as about 16 degrees, but does experience trailing-edge stall between about 12 and 16 degrees. At a steady-state pitch angle of 15.8 degrees, separation of the turbulent boundary layer has progressed upstream to near the quarter-chord point.

An interesting phenomenon is encountered during pitching through higher angles. As the separation point of the turbulent boundary layer moves up the chord, the resistance of the leading-edge bubble to bursting continuously decreases, even though the circulation and loading on the airfoil are decreasing as well. The reason for this is that the separated region has relatively little effect on the flow in the immediate vicinity of the leading edge, even though it reduces the loading over the rest of the airfoil. At a sufficiently high incidence, the bubble bursts and leading-edge stall ensues. Results for a case in which both trailing-edge and leading-edge stall occur are shown in Fig. 16, where the loading and the separation point location x_s are plotted against time for pitching up to 18 degrees. Note that very little C_n overshoot is predicted in this case.

As expected, a further increase in Reynolds number to 6×10^6 increases the resistance to both leading-edge and trailing-edge stall. When the steady-state pitch angle is 15.8 degrees, the separation point is only about $.1c$ from the trailing edge. At a slightly larger pitch angle, that point moves rapidly up the chord. Figure 17 shows the loading and x_s variations with time for pitching up to 16.3 degrees. The steady-state separation point is seen to be about $.35c$ from the leading edge in this case. No C_n overshoot at all is predicted for this case.

Leading-edge stall ultimately occurs at high pitch angles for $Re_c = 6 \times 10^6$, as well, but the separation point of the turbulent boundary layer very nearly encroaches on the leading-edge bubble before the bubble bursts. The distance separating them is only about $.01c$.

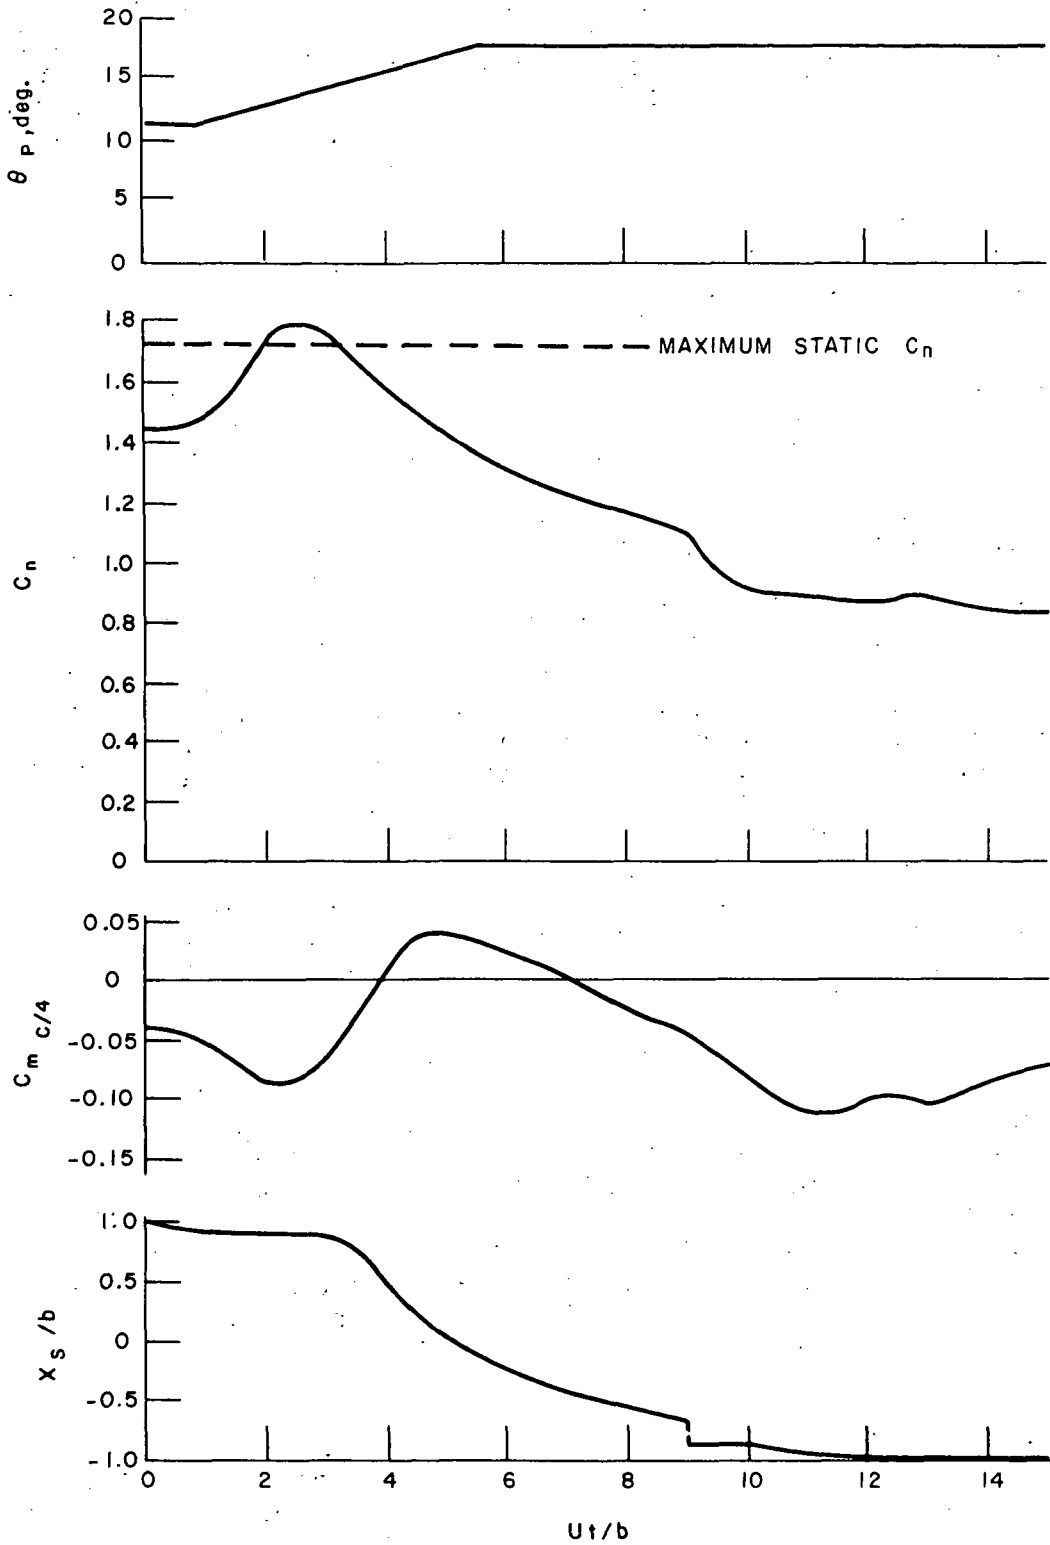


Figure 16 LOADING AND X_s VARIATION DURING TRANSIENT PITCH, $Re_c = 3 \times 10^6$

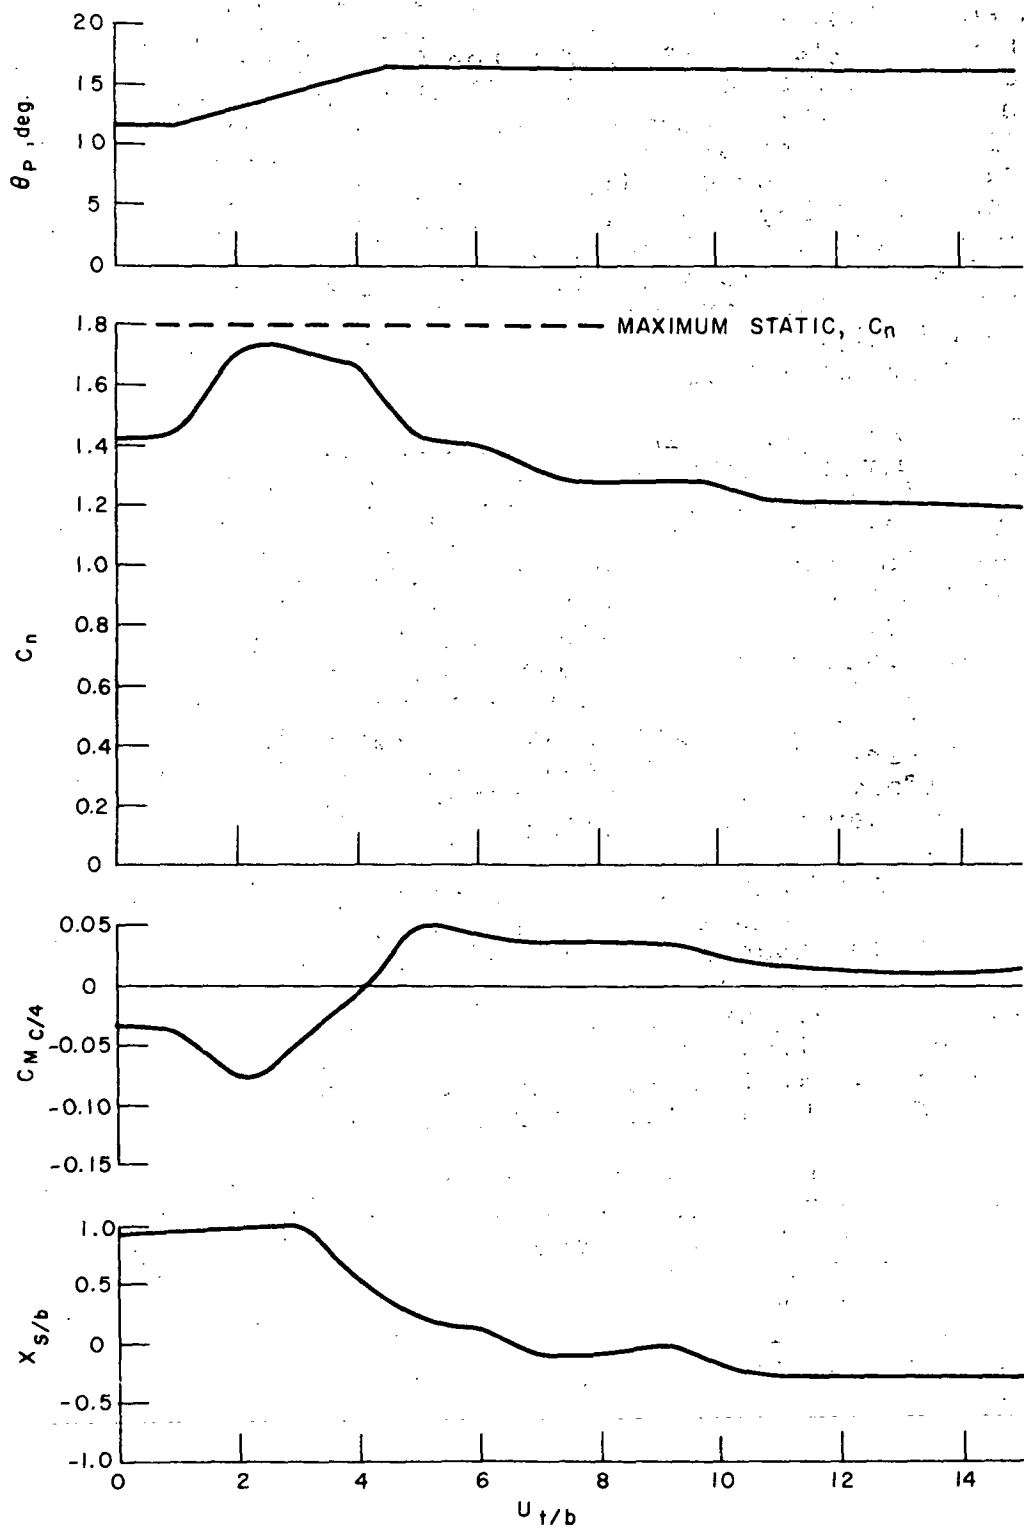


Figure 17 LOADING AND X_S VARIATION DURING TRANSIENT PITCH, $Re_c = 6 \times 10^6$

Results are summarized in Fig. 18, which shows the computed variation of static normal-force and moment coefficients with angle of attack for the three Reynolds numbers considered. A flagged symbol indicates that the airfoil was undergoing trailing-edge stall. Results of measurements for different Reynolds numbers for the section analyzed are not available. However, data in Ref. 13 show that a regular 0012 section at Reynolds numbers between 3 and 6 million has a maximum lift coefficient of about 1.6, generated at an angle of attack of 16 degrees, which agrees fairly well with the computed values of maximum C_n of 1.7 at $Re_c = 3 \times 10^6$ and 1.8 with $Re_c = 6 \times 10^6$, also occurring at about 16 degrees angle of attack.

The rapid falloff in normal force with angle of attack at higher Reynolds numbers is quite different from the behavior of thicker airfoils undergoing trailing-edge stall, the falloff in the latter case being more gradual (see Ref. 14). The reason for the sharp drop-off is apparently that the pressure rise is quite steep near the leading-edge, but relatively flat aft of midchord. Thus, the separation point moves rapidly forward, once incipient separation occurs, until it encounters the region of steep gradients near midchord (note the variation of x_s in Figs. 16 and 17). On thicker airfoils, the pressure increase along the chord is more uniform, allowing the separation point to stabilize at points closer to the trailing edge.

One case of sinusoidal pitching through stall was analyzed with $Re_c = 6 \times 10^6$ and $k = .13$. The C_n and C_m c/4 variations with pitch angle are shown in Fig. 19. Only trailing edge stall occurred during the cycle. As can be seen from Fig. 19, the normal force did not exceed the maximum static value. The moment variation exhibits a fairly large unstable (i.e., clockwise) loop, and the moment undergoes rather large positive excursions.

Since no direct determination of the type of stall has been made in the tests carried out to date, it is not clear whether the lack of lift overshoot in the calculations is symptomatic of trailing-edge stall or is an indication of an inadequacy in the analytic model. If the latter is the case, the most likely source of the problem would seem to be, again, the assumption of quasi-steady flow in the dead-air region.

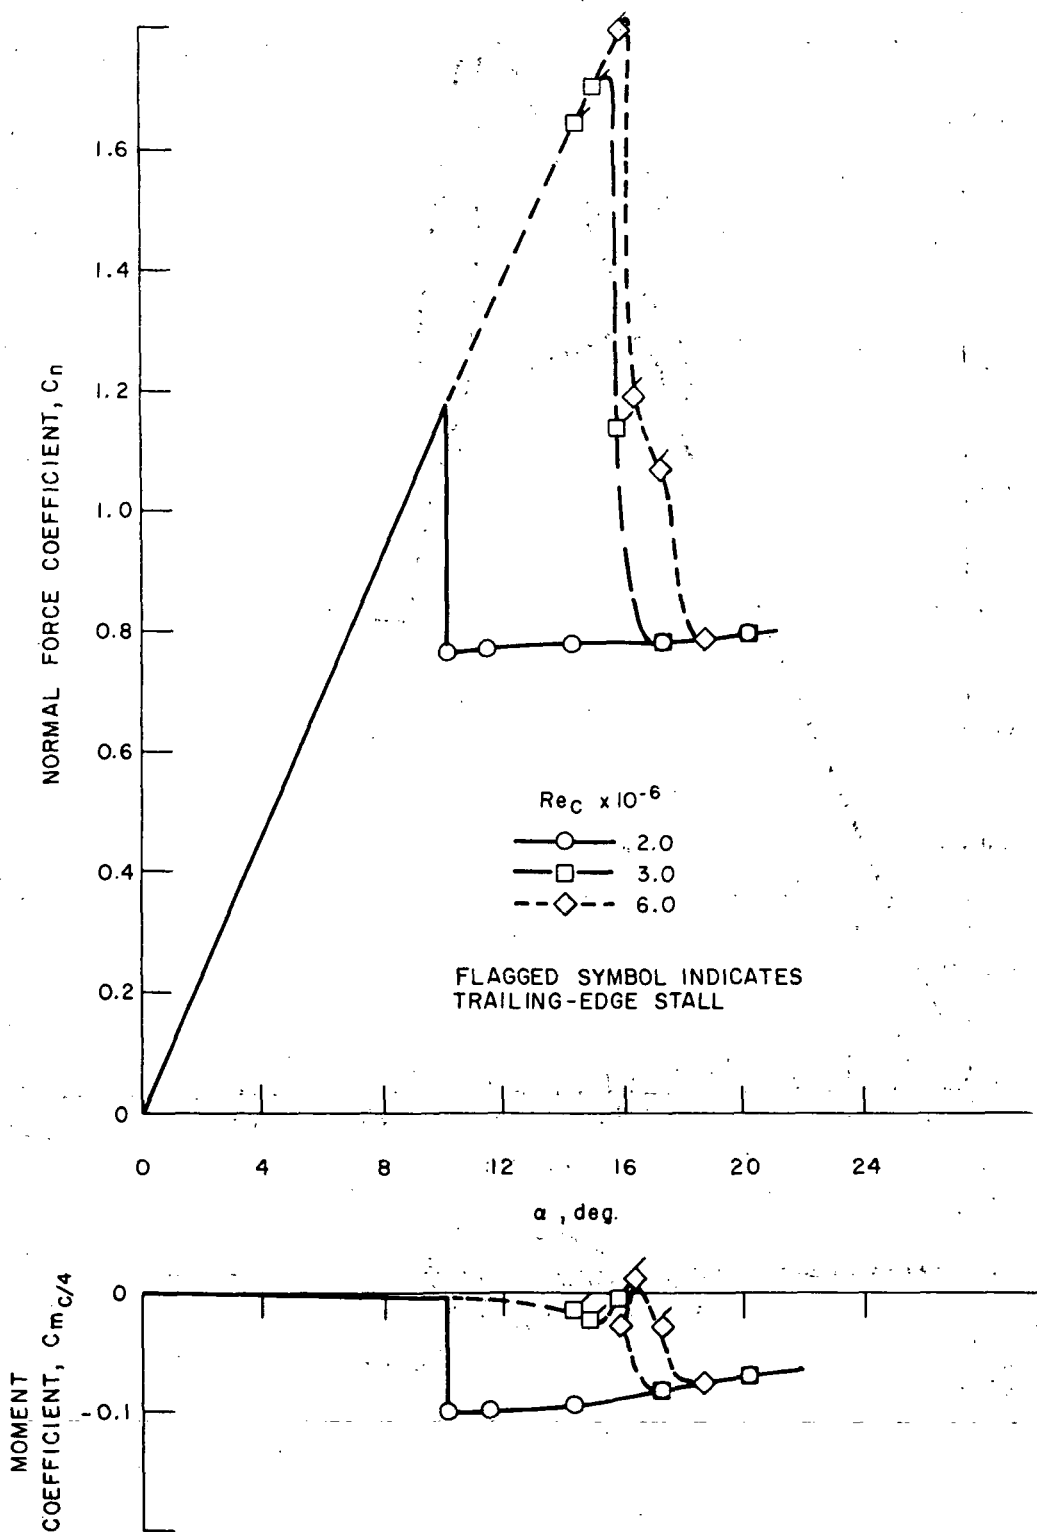


Figure 18 COMPUTED STATIC-NORMAL-FORCE AND MOMENT COEFFICIENTS

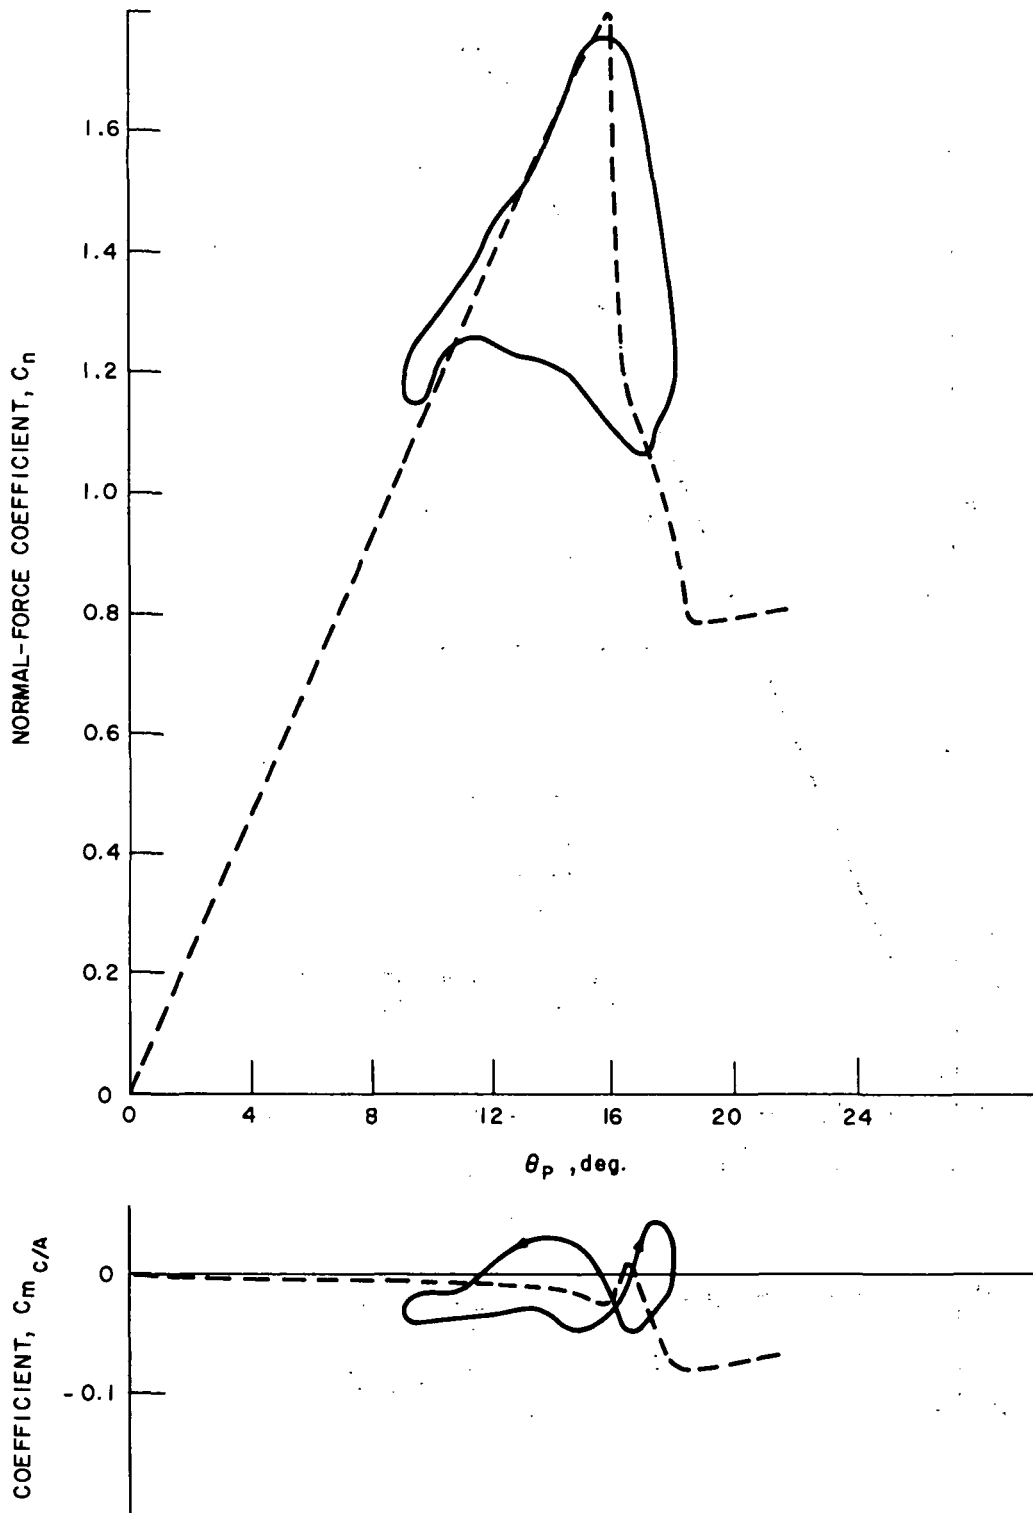


Figure 19- COMPUTED LOADING DURING SINUSOIDAL PITCHING,
 $k = .13, Re_c = 6 \times 10^6$

CONCLUDING REMARKS

The representation of the potential flow in a previously developed method for analyzing dynamic stall has been refined by including second-order terms. The effects of growth rate of the dead-air region during leading-edge stall and the effect of Reynolds number on stall characteristics were also investigated. Results can be summarized as follows.

Including second-order terms improves the representation of the flow and chordwise pressure distribution on the airfoil below stall, but does not appreciably reduce the large quantitative differences between computed and measured results for sinusoidal pitching through stall.

The amount of lift overshoot during dynamic stall is a strong function of the rate of growth of the dead-air region at the onset of leading-edge stall. Much improved agreement between theory and test with a smaller growth rate indicates that the growth rate is of the order of the component of the free stream normal to the airfoil chord, but further analytical and experimental study of the stall onset process is needed. In contrast to the strong dependence on growth rate, the loading is quite insensitive to the rate at which the dead-air region is washed off during un stall.

The method predicts an increase in the resistance to both leading-edge and trailing-edge stall with increasing Reynolds number, as expected. Computations indicate that a given airfoil can undergo both trailing-edge and leading-edge stall under unsteady conditions at high Reynolds numbers, and that dynamic lift overshoot is much less when trailing-edge stall occurs. The latter effect may be due to the assumption of quasi-steady flow in the dead-air region.

APPENDIX

PROGRAM LISTING

APPENDIX

PROGRAM LISTING

A listing of the FORTRAN coding of the computer program follows. The program was written in FORTRAN IV for use on an IBM 360/75 computer.

```

C
C PROGRAM TO ANALYZE UNSTEADY AIRFOIL STALL
C
DIMENSION USAV( 1,70),U( 1,70,2),CMAT(50,50)
DIMENSION RMAT(130), SCALE(300,2), V(100,2), UC(100,3), Y(100)
X, SCALS(300)
DIMENSION ALAM(30),VZIP(30),FPRES(100),CAMBR(24),X(300)
DOUBLE PRECISION CMAT, RMAT
DIMENSION XGAM(30),XC(300),SBL(300),XBSIG(100)
DIMENSION ASZ(30),AS(30,30),BS(30,30),ASHZ(30),ASH(30,30),BSH(30,3
10),AR(30),ARH(30),UE(300,3)
DIMENSION BLAM(30),FLAM(10),XFLAM(10)
DIMENSION XU(30),YU(30),XL(30),YL(30), VZ2(30),AR2(30)
COMMON /LOADS/ CR,CRHAT,THICK(24),THAT(24),NF,ACAP(30,3),ACAP2(30,
13),NGAM,GAMAW(1000),GAMAW2(1000),XIW(1000),NWAKE,XSEP,XATT,BCAP(10
10,3),NSIG,RDBB,AA,BB,AKK,SS,SSLAM,ZS,UT,UN,UINF,XSIG(100),XSIGA(10
10),XSIGB(100),NSIGA,NSIGB,DXI
EQUIVALENCE (ASH(1),SCALS(1))
DATA IN,MOUT,MD, NTIME, ISEPT,IWASH/5,6,250, 0, 0,2/
DATA PI,TIME, RENEL,USTOP/3.14159,0., 6.20E4,3.0/
DATA FPAST,FUP,VBUB /.1,.4,1./
DATA VOFF /1.7
DATA FLAM /1.75,1.75,1.724,1.527,1.354,1.,.663,.452,.25
14,.21/
DATA XFLAM /-100.,-11.26,-7.01,-3.48,-1.766,0.,1.888,4.
103,6.77,7.19/
DATA NSBL,NZ,NY, NCORD,LOWER,MSTOP,MOTR,NOTBL,INDV/
1 150,100,70, 20,1,6,1,1,0/
DATA ELSIG,FRZ,ARR,AMPLU,FREQU,ALPH1,ALPH2,HEAVE,AROT,FREQF,PHIH,
1 RY1,DRY,Y(2),TEST,UPRIM, ISEP/ .1,.06,3.5,0.,
1 0.00,.1,0.,0.,-.5,0.,0.,1.001,.008,.01,.001,.0001, 0/
NAMELIST /CASE/ NSBL,NZ,NY,MAXT,NGAM,NSIG,NOFF,NCORD,LOWER,MSTOP,
1MOTR,NOTBL,INDV,ELSIG,DXI,REB,RDBB,FRZ,ARR,AMPLU,FREQU,ALPH1,ALPH2
1,HEAVE,AROT,FREQF,PHIH, RY1,DRY, Y,TEST,UPRIM,XU,XL,YU,YL,NF,
1INVOR,SVOR,HVOR,BARG,X1VOR,EMI,TORF,SSPA,CMPA,CMPAS,USTOP,RENEL,
1 FPAST,FUP,VBUB,MD,VOFF
NGAM=24
NSIG=24
NF=20
UINF=1.
NWAKE=999
DXI=1.E10
READ(IN,CASE)
MX=NSBL+NZ-1
NDIMC=50
INDV=INDV+1
RY=RY1
C
C NOTE - OFFSETS ARE PUT IN AS LISTED IN THEORY OF WING SECTIONS, I.E
C AS A FRACTION OF TOTAL CHORD, X1 BEING MEASURED FROM THE
C LEADING EDGE. BE SURE NF IS AN EVEN NUMBER.
C
WRITE(MOUT,6)
WRITE(MOUT,CASE)
GO TO (343,342), INDV

```

342	WRITE(MOUT,25) NVOR,SVOR,HVOR,BARG,X1VOR,EMI,TORF,SSPA	0056
	HVOR=HVOR**2	0057
	BARG=BARG/6.2832	0058
343	RDBC = RDBB / 2.	0059
	CALL SECT(XU,YU,XL,YL,NOFF,NF,RDBC, THICK,CAMBR)	0060
	RDBB = RDBC * 2.	0061
	DO 7875 N = 1, NF	0062
	CAMBR(N) = 2 * CAMBR(N)	0063
7875	THICK(N) = 2. * THICK(N)	0064
	CR=SQRT(RDBB)/2.	0065
	CALL THCALC(CR,THICK,GRHAT,THAT,NF)	0066
	WRITE(MOUT,4)	0067
	WRITE(MOUT,7) AMPLU,FREQU,ALPH1,ALPH2,HEAVE,AROT,FREQF,RDBB,REB	0068
	WRITE(MOUT,8)	0069
	WRITE(MOUT,9) (N,CAMBR(N),THICK(N),THAT(N),N=1,NF)	0070
	WRITE(MOUT,10) CR,CRHAT	0071
	CALL SCAL(SBL,NSBL,FRZ,ARR,RDBB)	0072
	CALL CORDX(NSBL,NZ,RDBB,SBL,X,XC)	0073
	UTU=CR	0074
	DO 350 N=1,NF	0075
350	UTU=UTU+THICK(N)	0076
	UTU=2.*UTU	0077
	DO 2420 M=1,MX	0078
	IF(XC(M)-1.) 2420,2419,2419	0079
2419	MEND=M-1	0080
	GO TO 2421	0081
2420	CONTINJE	0082
2421	MX=MEND	0083
	XATT = -100.	0084
	MXM1=MX-1	0085
	UE(MX+1,1)=1.	0086
	EPSLE=2.*(X(NZ)-X(NZ-1))	0087
	EPSTE=X(MX)-X(MX-1)	0088
	ALTC=11.50E4/SQRT(REB)	0089
	IF(MD.EQ.1) GO TO 2423	0090
	DO 2422 M=1,MX	0091
	SCALE(M,1)=0.	0092
	SCALE(M,2)=0.	0093
	DO 2422 N=1,NY	0094
	U(M,N,1)=0.	0095
2422	U(M,N,2)=0.	0096
2423	NSIGA=NSIG	0097
	NSIGB=NSIG	0098
	NSIGI=NSTG+I	0099
	MOTR=MOTR+1	0100
	PITCH = ALPH1	0101
	IF(INDV + MOTR .LE. 2) PITCH = PITCH - ALPH2	0102
	UN=SIN(PITCH)	0103
	UT=COS(PITCH)	0104
	NOTBL=NOTBL+I	0105
	XMAX=1.-ELSIG	0106
	CONA=.375*PI/DXI	0107
	ANGS=PI/FLOAT(NSIG)	0108
	CALL SETSX(NSIGI,1.1,2.,XSIG,ANGS)	0109
	XSEP=1.1	0110

	DO 2430 N=1, NSIG1	0111
	XSIGB(V)=XSIG(N)	0112
2430	XSIGA(V)=XSIG(N)	0113
	DO 2431 N=1, NSIG	0114
	DO 2431 NU=1, 3	0115
2431	BCAP(N, NU)=0.	0116
	PINT=2./FLOAT(NCORD)	0117
	NCP1=NCORD+1	0118
	THXI=1.5/DXI	0119
	NGP1=NGAM+1	0120
	NWMI=NWAKE-1	0121
	COUNT=0.	0122
	DO 8456 N=1, NWAKE	0123
	GAMAW(V)=0.	0124
	GAMAW2(N) = 0.	0125
	XIW(N)=1.+COUNT	0126
8456	COUNT=COUNT+DXI	0127
	ANGLE=PI/FLOAT(NGAM)	0128
	COUNT=0.	0129
	DO 1002 M=1, NGP1	0130
	PHIM=CJUNT*ANGLE	0131
	XGAM(M)=COS(PHIM)	0132
	DOUNT=2.	0133
	DO 1001 N=2, NGAM	0134
	AS(M, N)=COS(DOUNT*PHIM)	0135
1001	DOUNT=DOUNT+1.	0136
1002	COUNT=COUNT+1.	0137
	CALL WASH(XGAM, NGAM, TIME, ALPH1, ALPH2, HEAVE, AROT, FREQ, PHIH, UINF, CA	0138
	IMBR, NF, VZIP, 1, 1)	0139
	IF(INDV.EQ.2) CALL VWASH(BARG, HVOR, SVOR, NVOR, X1VOR, UINF, VZIP, XGAM,	0140
	INGP1, DXI)	0141
	DO 8458 M=1, NGP1	0142
	CMAT(M, 1)=1.	0143
	RMAT(M)=2.*VZIP(M)	0144
	CMAT(M, 2)=XGAM(M)	0145
	DO 8457 N=3, NGP1	0146
8457	CMAT(M, N)=AS(M, N-1)	0147
8458	CONTINUE	0148
	CALL ALSOL(NGP1, CMAT, RMAT, NDIMC)	0149
	DO 8459 N=1, NGP1	0150
	ACAP(N, 1)=RMAT(N)	0151
8459	ACAP(N, 2)=ACAP(N, 1)	0152
	CALL WASH2(VZ2, XGAM, NGAM, CR, THICK, NF, ACAP, 0., 0., 2.)	0153
	DO 8470 M = 1, NGP1	0154
	RMAT(M)= VZ2(M)	0155
	CMAT(M, 1) = 1.	0156
	CMAT(M, 2) = XGAM(M)	0157
	DO 8470 N = 3, NGP1	0158
8470	CMAT(M, N) = AS(M, N - 1)	0159
	CALL ALSOL(NGP1, CMAT, RMAT, NDIMC)	0160
	DO 8471 M = 1, NGP1	0161
	ACAP2(M, 1)=RMAT(M)	0162
8471	ACAP2(M, 2) = ACAP2(M, 1)	0163
	DO 2784 M=1, MX	0164
	SIGN=1.	0165

IF(M-NZ)	2774,2775,2775	0166
2774	SIGN=-SIGN	0167
2775	CALL DECAL(UE(M,1),XC(M),SIGN,0)	0168
2784	JE(M,2)=UE(M,1)	0169
	DO 1004 M=2,NGAM	0170
1004	BLAM(M)=(1.125*XGAM(M)+.1875*(1.+XGAM(M))*(1.-3.*XGAM(M))*ALGG((1.	0171
	1+XGAM(M))/(1.-XGAM(M)))/DXI	0172
	BLAM(NGP1)=-1.125/DXI	0173
C		0174
C	INDEXING IN TIME IS CARRIED OUT AT THIS POINT.	0175
C		0176
9999	CONTINJE	0177
	GO TO (196,195),MOTR	0178
195	READ(IV,2) ALPH1,ALPH2,HEAVE	0179
C		0180
C	NOTE - FOR READ-IN OF FOIL MOTIONS, MAKE ALPH1 = ALPHA,	0181
C	ALPH2 = ALPHA-DOT, AND HEAVE = H-DOT.	0182
C		0183
196	GO TO (198,197), INDV	0184
197	CALL ELPIT(ALPH1,ALPH2,EMI,TORF,SSPA,UINF,DXI,CMPA,CMPAS)	0185
	XIVOR=XIVOR+DXI*UINF	0186
198	NITS=1	0187
	TIME=TIME+DXI	0188
	PITCH = ALPH1	0189
	IF(INDV + MOTR .LE. 2) PITCH = PITCH - ALPH2*COS(FREQ*TIME)	0190
	NTIME=VTIME+1	0191
	NWAKE=NTIME+2	0192
	IF(NWAKE=998) 202, 201, 201	0193
201	NWAKE=998	0194
202	IF(MAXT-NTIME) 8989, 8800, 8800	0195
8800	SAVEU=JINF	0196
	UINF=1.+AMPLU*SIN(FREQ*TIME)	0197
	UBUB=UINF*VBUB	0198
	UN=UINF*SIN(PITCH)	0199
	UT=UINF*COS(PITCH)	0200
	UDOT=FREQ*AMPLU*COS(FREQ*TIME)	0201
	STEPX=.5*DXI*(UINF+SAVEU)	0202
	DO 1003 J=2,NWAKE	0203
	JC=NWAKE-J+2	0204
	GAMAW(JC)=GAMAW(JC-1)	0205
	GAMAW2(JC) = GAMAW2(JC-1)	0206
1003	XIW(JC)=XIW(JC-1)+STEPX	0207
	IF(ISEP) 2009,2009,2007	0208
2007	DO 2008 N=1,NSIG	0209
	BCAP(N,3)=BCAP(N,2)	0210
2008	BCAP(N,2)=BCAP(N,1)	0211
	DO 4433 N=1,NSIG1	0212
	XSIGB(N)=XSIGA(N)	0213
4433	XSIGA(N)=XSIG(N)	0214
	PRECS=PREC	0215
	GO TO 2010	0216
2009	DEADL=0.	0217
	ELDOT=UBUB	0218
2010	DO 1014 M=1,MX	0219
	UE(M,3)=UE(M,2)	0220

```

1014 UE(M,2)=UE(M,1)                                0221
      DEAD1=DEADL                                     0222
      ELD1=ELDOT                                     0223
      ALAM(1)=(1.125+.75*ALOG(STEPX*.5))/DXI        0224
      DO 1005 M=2,NGP1                                0225
1005 ALAM(M)=BLAM(M)+.75*(1.+(1.-XGAM(M))/STEPX)*ALOG((1.+STEPX-XGAM(M)
      1)/(1.-XGAM(M)))/DXI                            0227
      DO 2006 M=1,NGP1                                0228
      ACAP2(M,3) = ACAP2(M,2)                         0229
      ACAP2(M,2) = ACAP2(M,1)                         0230
      ACAP(M,3)=ACAP(M,2)                             0231
2006 ACAP(M,2)=ACAP(M,1)                             0232
      AFACT=8.*(ACAP(1,2)+.5*ACAP(2,2))-2.*(ACAP(1,3)+.5*ACAP(2,3)) 0233
      AFAC2 =8.*(ACAP2(1,2)+.5*ACAP2(2,2))-2.*(ACAP2(1,3)+.5*ACAP2(2,3)) 0234
      ALPHS=VZIP(1)                                    0235
      CALL WASH(XGAM,NGAM,TIME,ALPH1,ALPH2,HEAVE,AROT,FREQF,PHIH,UINF,CA
      IMBR,NF,VZIP,MOTR,INDV)                          0236
      IF(INDV.EQ.2) CALL VWASH(BARG,HVOR,SVOR,NVOR,X1VOR,UINF,VZIP,XGAM,
      INGPI,DXI)                                       0238
      DO 1006 M=1,NGP1                                0239
      ASZ(M)=1.+2.*ALAM(M)                             0240
      AS(M,1)=XGAM(M)*ALAM(M)                         0242
      SUM=0.                                            0243
      SUM2=0.                                           0244
      NWM1=NMAKE-1                                     0245
      DO 4343 J=2,NWM1                                 0246
      JP=J+1                                           0247
      DLX=XIW(J)-XGAM(M)                               0248
      COX=DLX/(XIW(JP)-XIW(J))                       0249
      ALX=ALOG((XIW(JP)-XGAM(M))/DLX)                 0250
      SUM=SJM+(GAMAW(J)+(GAMAW(J)-GAMAW(JP))*COX)*ALX 0251
4343 SUM2=SJM2+(GAMAW2(J)+(GAMAW2(J)-GAMAW2(JP))*COX)*ALX 0252
      ELX=1.-XGAM(M)                                  0253
      IF(M.EQ.1) ELX=1.                                0254
      ALX=(1.-XGAM(M))*ALOG(1.+STEPX/ELX)/STEPX      0255
      AR2(M)=ALAM(M)*AFAC2/3.+(SUM2-GAMAW2(2)*ALX)/PI 0256
1006 AR(M)=2.*VZIP(M)+ALAM(M)*AFACT/3.+(SUM-GAMAW(2)*ALX)/PI 0257
C                                                                 0258
C THE FOLLOWING CALCULATIONS, THROUGH STATEMENT 4444, ARE PERFORMED 0259
C ONLY IF THE AIRFOIL IS STALLED. THE AIRFOIL IS DESIGNATED TO BE 0260
C STALLED IF INTEGER ISEP IS NONZERO.                 0261
C                                                                 0262
      IF(ISEP) 3247,4444,3247                          0263
3247 GO TO (3344,3345),IWASH                          0264
3344 XSEP=XSEP+DXI*VOFF                                0265
      IF(XSEP-XMAX) 3248,3347,3347                    0266
3347 IWASH=2                                           0267
      ISEP=0                                           0268
      XSEP=1.1                                         0269
      DO 3015 K=1,3                                     0270
      DO 3015 N=1,NSIG                                 0271
3015 BCAP(N,K)=0.                                     0272
      GO TO 4444                                       0273
3345 IF(INDT) 3348,3348,3248                          0274
3348 IF(NITS-1) 3248,3349,3248                       0275

```


3349	IF(INDV.EQ.2) GO TO 6349	0276
	IF(VZIP(1)-ALPHS) 6349,6348,6348	0277
6348	NITS=2	0278
	GO TO 3248	0279
6349	CALL UNPOP(NGP1,AR,ALAM,AFAC2,AR2,CMAT,RMAT,XGAM,AS,MX,NZ,XC,UE,NDIMC,	0280
	1 AFAC2,AR2)	0281
	GO TO 2785	0282
3248	XATT=XSEP+DEAD1+.5*(ELD1+ELDOT)*DXI	0283
	IF(INDT.EQ.1.AND.XATT.LT.1.2) XATT=1.2	0284
	DEADL=XATT-XSEP	0285
	DIFF=1.-XATT	0286
	CALL SETSX(NSIG1,XSEP,XATT,XSIG,ANGS)	0287
	DO 4434 N=1,NSIG	0288
4434	XBSIG(N)=.5*(XSIG(N)+XSIG(N+1))	0289
	DO 3086 M=1,NGP1	0290
	DO 3086 N=1,NSIG	0291
3086	BS(M,N)=0.	0292
	IF(DIFF-1.E-6) 5005,5006,5006	0293
5005	PREC=0.	0294
	GO TO 5007	0295
5006	CALL ATTPR(PREC,ASZ,AS,AR,CMAT,RMAT,NGP1,AR2,NDIMC,XGAM,UTU,PRECS)	0296
5007	CALL MIXER(FPRES,PREC,UINF,UDOT,THICK,NF,XBSIG,NSIG,INDT,DELL,THET	0297
	11,REB,USEP,X4,CPI,RDBB)	0298
	DO 3487 M=1,NGP1	0299
	IF(XGAM(M)-XSEP) 3088,3088,3089	0300
3089	IF(XATT-XGAM(M)) 3187,3087,3091	0301
3091	CONTINUE	0302
	ACDSX=ACOS((2.*XGAM(M)-XSEP-XATT)/DEADL)	0303
	DO 30 N=2,NSIG	0304
30	BS(M,N)=SIN(FLOAT(N-1)*ACDSX)	0305
	BS(M,1)=SQRT((XGAM(M)-XSEP)/(XATT-XGAM(M)))	0306
3088	IF(DIFF-1.E-6) 3087,3098,3098	0307
3098	BS(M,1)=BS(M,1)+DIFF**(-1.5)*SQRT(DEADL)*(2.*DIFF+(SQRT((1.-XGAM(M)	0308
	1))/(XATT-XGAM(M))-1.)*[4.*XGAM(M)-1.-3.*XATT])	0309
	GO TO 3087	0310
3187	BS(M,1)=DIFF**(-1.5)*SQRT(DEADL)*(3.+ XATT-4.*XGAM(M))	0311
3087	CONTINUE	0312
3487	CONTINUE	0313
C		0314
C	SET-UP OF THE SECOND SET OF EQUATIONS STARTS HERE.	0315
C		0316
	DO 4350 K=1,NSIG	0317
	IF(XBSIG(K)-1.) 4348,4349,4349	0318
4348	COSK=XBSIG(K)	0319
	SINK=SQRT(1.-COSK*COSK)	0320
	THETK=ARCT(COSK)	0321
	TANT= SIN(.5*THETK)/COS(.5*THETK)	0322
	ASHZ(K)=TANT+CONA*(1.+COSK)*(1.-3.*COSK)/UINF+THXI*(PI-THETK+SINK+	0323
	1 CONA*(1.+COSK)*SINK**2)/UINF	0324
	ASH(K,1)=.5*(ASHZ(K)-TANT)+SINK	0325
	COUNT=1.	0326
	DO 4355 N=2,NGAM	0327
	COUNT=COUNT+1.	0328
4355	ASH(K,N)=SIN(COUNT*THETK)+.75*(SIN((COUNT+1.)*THETK)/(COUNT+1.)-SIN	0329
	IN((COUNT-1.)*THETK)/(COUNT-1.))/(DXI*UINF)	0330

	GO TO 4350	0331
4349	ASHZ(K)=0.	0332
	DO 4359 N=1,NGAM	0333
4359	ASH(K,N)=0.	0334
4350	CONTINJE	0335
	CPOT=CP1	0336
	DO 4800 K=1,NSIG	0337
	CORD=XBSIG(K)	0338
	BSH(K,1)=-1.	0339
	ACOSX=ARCOS((2.*CORD - XSEP-XATT)/DEADL)	0340
	DO 4808 N= 2, NSIG	0341
4808	BSH(K,N)= COS (FLOAT(N-1) * ACOSX)	0342
	ARH(K)= FPRES(K)	0343
	IF(CORD-1.) 5008,4799,4799	0344
5008	CALL EGAMI(2,NGAM,ACAP,BCAP(1,2),XSIGA(1),XSIGA(NSIGA+1),GAMAW(2),	0345
	ICORD,VAL1)	0346
	CALL EGAMI(3,NGAM,ACAP,BCAP(1,3),XSIGB(1),XSIGB(NSIGB+1),GAMAW(3),	0347
	ICORD,VAL2)	0348
	ARH(K)=ARH(K)+(2.*VAL1-.5*VAL2)/(DXI*UINF)+.0625*AFACT*PI*(1.+CORD	0349
	1)*(1.-3.*CORD+THXI*(1.-CORD*CORD))/(DXI*UINF)	0350
4799	CONTINJE	0351
4800	CONTINJE	0352
4444	CONTINJE	0353
C		0354
C	CALCULATIONS FROM THIS POINT ON COMBINE THE	0355
C	CASES OF STALLED AND UNSTALLED AIRFOILS.	0356
C		0357
	DO 6500 M=1,NGPI	0358
	RMAT(M)=AR(M)	0359
	CMAT(M,1)=ASZ(M)	0360
	DO 6485 N=1,NGAM	0361
6485	CMAT(M,N+1)=AS(M,N)	0362
	IF(ISEP) 6486,6500,6486	0363
6486	DO 6499 N=1,NSIG	0364
	NGG=N+NGPI	0365
6499	CMAT(M,NGG)=BS(M,N)	0366
6500	CONTINJE	0367
	IF(ISEP) 6502,6501,6502	0368
6501	NTOT=NGPI	0369
	GO TO 6751	0370
6502	DO 6750 K=1,NSIG	0371
	KK=K+NGPI	0372
	RMAT(KK)=ARH(K)	0373
	CMAT(KK,1)=ASHZ(K)	0374
	DO 6748 N=1,NGAM	0375
6748	CMAT(KK,N+1)=ASH(K,N)	0376
	DO 6750 N=1,NSIG	0377
	NGG=N+NGPI	0378
6750	CMAT(KK,NGG)=BSH(K,N)	0379
	NTOT=NSIG+NGPI	0380
6751	CALL ALSOL(NTOT, CMAT, RMAT, NDIMC)	0381
	DO 6800 N=1,NGPI	0382
6800	ACAP(N,1)=RMAT(N)	0383
	IF(ISEP) 6805,6820,6805	0384
6805	DO 6810 N=1,NSIG	0385

	NGG=N+NGP1	0386
6810	BCAP(N,1)=RMAT(NGG)	0387
6820	CONTINJE	0388
	GAMAW(1)=GAM1(ACAP,DXI,PI)	0389
	DDEL=UTU*GAMAW(1)	0390
	DELPI=DDEL/PI	0391
	DO 6910 M = 1, NGP1	0392
	CMAT(M,1) = ASZ(M)	0393
	DO 6910 N = 2, NGP1	0394
6910	CMAT(M, N) = AS(M, N-1)	0395
	CALL WASH2(VZ2,XGAM,NGAM,CR,THICK,NF,ACAP,GAMAW(1),ISEP,DELPI,	0396
	1 X IW(2))	0397
	DO 339 M=1,NGP1	0398
339	RMAT(M)= VZ2(M)+AR2(M)	0399
	CALL ALSOL(NGP1,CMAT,RMAT,NDIMC)	0400
	DO 340 M=1,NGP1	0401
	ACAP2(M,1)=RMAT(M)	0402
340	CONTINJE	0403
	GAMAW2(1) = GAM1(ACAP2, DXI, PI) +DDEL	0404
	DO 1785 M=1,MX	0405
	SIGN=1.	0406
	IF(M=NZ) 1780,1785,1785	0407
1780	SIGN=-SIGN	0408
1785	CALL QECAL(UE(M,1),XC(M),SIGN,ISEP)	0409
2785	DO 8886 I=1,2	0410
	US2=UE(I,1)	0411
	DO 8886 M=1,MXM1	0412
	US1=UE(M,I)	0413
	JE(M,1)=(US1+US2+UE(M+1,1))/3.	0414
8886	US2=US1	0415
	IF(ISEPT.EQ.1) CALL TAYLOR(XSEP,UE,XC,X,NZ,MX)	0416
	GO TO (8351,8353),IWASH	0417
8351	DO 8352 M=1,MX	0418
8352	SCALS(M)=0.	0419
	GO TO 1786	0420
8353	CALL YSET(RY1,Y(2),NY,Y)	0421
	RY=RY1	0422
	DO 8354 M=1,MX	0423
8354	SCALS(M)=0.	0424
	IF(INDV.EQ.2.AND.NTIME.LT.10) GO TO 1786	0425
	IF(INDV.EQ.2) GO TO 8370	0426
	IF(ISEP.EQ.0.AND.VZ1P(1).LT.ALPHS) GO TO 1786	0427
8370	CALL STAG(MX,NY,MSTOP,MST,DXI,RY,DRY,X,Y,UE,UC,V,USAV,SCALS,ISEP,	0428
	1 MD)	0429
	LAMQ=1	0430
	XSEPS=XSEP	0431
	DXX=DXI	0432
	IF(ISEP.EQ.1.AND.ISEPT.EQ.0.AND.NITS.EQ.1) DXX=1.E30	0433
8367	CALL BLC(X,Y,MST,MEND,NY,RY,DRY,DXX,REB,UPRIM,FLAM,XFLAM,TEST,U,SC	0434
	IALE,UE,UC,V,XSEP,USEP,DISP,THETA,LOWER,LAMQ,MSEP,XC,USAV,SCALS,NIT	0435
	IS,NTIME, MD)	0436
	IF(XSEP=XMAX) 7736,7735,7735	0437
7735	IF(ISEP) 1786,1786,7736	0438
7736	DEL1=DISP	0439
	THET1=THETA	0440

INDT=1-LAMQ	0441
IF(.NOT.(INDT.EQ.1.AND.NOTBL.EQ.2)) GO TO 378	0442
XSEP=XSEPS	0443
INDT=0	0444
GO TO 1786	0445
378 WRITE(MOUT,23) XSIG(1),CPDT,XSEP	0446
IF(INDT) 8462,8462,8463	0447
8462 IF(ISEP) 8562,8562,8563	0448
8563 IF(NITS-1) 8562,8562,8662	0449
8662 IF(ISEPT) 7742,7742,8562	0450
8562 CALL BJB8(DEL1,THET1,REB,XSEP,USEP,XC5,DCP,DEL5,X,XC,MX,NZ,X5,U5,U	0451
1E,ALTC,RENEL,USTOP)	0452
IF(USEP.GT.USTOP) USEP=USEP+.075114*(USEP-USTOP)	0453
PDIFF=(USEP-U5)*(USEP+U5)	0454
WRITE(MOUT,22) PDIFF,DCP	0455
IF(DCP-PDIFF) 8263,8366,8366	0456
8263 ISEPT=0	0457
GO TO 8463	0458
8366 IF(ISEP) 8368,8368,8369	0459
8369 IF(ISEPT) 8467,8467,8368	0460
8467 IWASH=1	0461
NITS=2	0462
GO TO 3344	0463
8368 GO TO (8168,1786),NOTBL	0464
8168 CALL REATT(UC,V,X,Y,MX,NY,RY,DRY,UE,X5,DEL5,MST,REB)	0465
LAMQ=0	0466
GO TO 8367	0467
8463 IF(ISEP) 7741,7741,7742	0468
7741 ISEP=1	0469
NITS=NITS+1	0470
IF(INDT) 7743,7743,7643	0471
7643 ISEPT=1	0472
CALL CPC(CP1,XSEP,1.,0)	0473
GO TO 3248	0474
7742 CALL ELDER(BCAP,XSIG,NSIG,UBUB,ELDOT,SIGSUM,YMX)	0475
IF(ISEP.EQ.1.AND.ISEPT.EQ.0.AND.NITS.EQ.1) GO TO 9210	0476
IF(XSEP+.5) 7841,7842,7842	0477
7841 EPS=EPSLE	0478
GO TO 7843	0479
9307 IF(XSEP-XMAX) 9212,9212,7835	0480
9212 CALL CPC(CP1,XSEP,1.,ISEP)	0481
GO TO 3248	0482
7743 IF(NITS-1) 7737,7737,3248	0483
7737 NITS=NITS+1	0484
ELDOT=ELD1	0485
7842 EPS=EPSTE	0486
7843 DXSEP=ABS(XSEP-XSEPS)	0487
IF(DXSEP-EPS) 7834,7834,9210	0488
7834 IF(XSEP-XMAX) 1786,1786,7835	0489
7835 ISEP=0	0490
ISEPT=0	0491
DO 7836 K=1,3	0492
DO 7836 N=1,NSIG	0493
7836 BCAP(N,K)=0.	0494
GO TO 1786	0495

9210	NITS=NITS+1	0496
	IF(NITS.EQ.2.AND.INDT.EQ.0) XSEPS=XSEP	0497
	IF(NITS-4) 9211,9211,1786	0498
9211	IF(XSEP-XSEPS) 9305,9305,9306	0499
9305	XSEP=(1.-FUP)*XSEPS+FUP*XSEP	0500
	GO TO 9307	0501
9306	XSMAX=XSEPS+FPAST*(1.-XSEPS)	0502
	IF(XSEP.GT.XSMAX) XSEP=XSMAX	0503
	GO TO 3248	0504
1786	WRITE(MOUT,20) NTIME	0505
	XSEP=XSIG(1)	0506
	WRITE(MOUT,26) X1VDR	0507
	PITC = PITCH * 180. / PI	0508
209	WRITE(MOUT,10) TIME,UINF,XSEP,XATT,PITC	0509
	WRITE(MOUT,11)	0510
	WRITE(MOUT,12) (N,XGAM(N),VZIP(N),AR(N),ACAP(N,1),XIW(N),GAMAW(N),	0511
	IN=1,NGP1)	0512
	WRITE(6,9005)	0513
	DO 63 M = 1, NGP1	0514
63	WRITE(MOUT,9006) M, XGAM(M),VZ2(M),AR2(M), ACAP2(M,1), XIW(M),	0515
6	A GAMAW2(M)	0516
	IF(ISEP) 7432,7433,7432	0517
7432	WRITE(MOUT,13)	0518
	WRITE(MOUT,17) (N,XBSIG(N),FPRES(N),ARH(N),BCAP(N,1),N=1,NSIG)	0519
	WRITE(MOUT,14) ELDJT	0520
	WRITE(MOUT,18) XSIG(1),CPOT,X4,CPOT,XATT,PREC	0521
7433	WRITE(MOUT,15)	0522
	XPC=-1.	0523
	DO 7102 N=1,NCPI	0524
	CALL QECAL(QEL,XPC,-1.,ISEP)	0525
	CALL QECAL(QEU,XPC, 1.,ISEP)	0526
	CALL CPC(CPL,XPC,-1.,ISEP)	0527
	CALL CPC(CPU,XPC, 1.,ISEP)	0528
	IF(N-1) 7546,7545,7546	0529
7545	CPL=CPJ	0530
7546	DLIFT=CPL-CPU	0531
	WRITE(MOUT,16) XPC,QEL,CPL,QEU,CPU,DLIFT	0532
7102	XPC=XPC+PINT	0533
	CMPAS=CMPA	0534
	CALL CLCMT(PITCH,AROT,ISEP,CMPA,CAMBR)	0535
	IF(MD.EQ.1) GO TO 9999	0536
	DO 7950 M=1,MX	0537
	SCALE(M,2)=SCALE(M,1)	0538
	SCALE(M,1)=SCALS(M)	0539
	DO 7950 N=1,NY	0540
	U(M,N,2)=U(M,N,1)	0541
7950	U(M,N,1)=USAV(M,N)	0542
	GO TO 9999	0543
8989	CONTINUE	0544
	STOP	0545
2	FORMAT(3F10.4)	0546
4	FORMAT(1HI7//)	0547
5	FORMAT(6F10.4)	0548
6	FORMAT(1HI,50X,34H ANALYSIS OF UNSTEADY AIRFOIL STALL///)	0549
7	FORMAT(8X,6HUBAR =E13.5/7X,7HUFREQ =E13.5/3X,11HALPHA ONE =E13.5/	0550

	13X, 11HALPHA TWO =E13.5/8X, 6HHBAR =E13.5/11X, 3HA =E13.5/8X, 6HFREQ =	0551
	1E13.5//8X, 6HRO/B =E13.5//9X, 5HREB =E13.5//)	0552
8	FORMAT(19X, 1HN, 25X, 4HC(N), 26X, 4HT(N), 25X, 5HTH(N)/)	0553
9	FORMAT(120, 3E30.5)	0554
10	FORMAT(5X, 3HT =E13.5/5X, 3HU =E13.5/4X, 4HXS =E13.5/4X, 4HXO =E13.5/4	0555
	1X, 4HPA =E13.5//)	0556
11	FORMAT(///4X, 1HN, 11X, 1HX, 14X, 5HVZ(X), 12X, 5HRN(X), 12X, 4HA(N), 21X, 3H	0557
	1X 1W, 14X, 5HGAMMA/)	0558
12	FORMAT(15, 4E17.5, 8X, 2E17.5)	0559
13	FORMAT(1H1, 8X, 1HN, 20X, 1HX, 21X, 5HFP(X), 22X, 5HRH(N), 21X, 4HB(N)/)	0560
14	FORMAT(//54X, 9H L-DOT =E13.5//51X, 27HPRESURES IN SEPARATED FLW	0561
	1//55X, 1HX, 19X, 2HCP/)	0562
15	FORMAT(1H1, 11X, 1HX, 16X, 3HQEL, 15X, 3HCPL, 15X, 3HQEU, 15X, 3HCPU, 13X, 9HC	0563
	IPL - CPU/)	0564
16	FORMAT(6E18.5)	0565
17	FORMAT(110, 4E25.5)	0566
18	FORMAT(3(40X, 2E20.5/))	0567
20	FORMAT(1H1, 50X, 12HTIME STEP NOI3//)	0568
22	FORMAT(///40X, 26HINCREASE IN CP REQUIRED ISE13.5//40X, 26HINCREASE	0569
	IN CP POSSIBLE ISE13.5)	0570
23	FORMAT(///45X, 23HPOTENTIAL FLOW XS =E12.4/60X, 8HCP(XS) =E12.4/	0571
	1/45X, 23HBOUNDARY LAYER XS =E12.4)	0572
25	FORMAT(12X, 4HNV =I2, 3X, 3HS =E12.4, 3X, 3HH =E12.4, 3X, 3HG =E12.4, 3X, 4	0573
	1HX1 =E12.4//12X, 4HMI =E12.4, 3X, 4HWT =E12.4, 3X, 4HPA =E12.4//)	0574
26	FORMAT(4X, 4HX1 =E13.5)	0575
101	FORMAT(///10X, 4HCR =E13.5/7X, 7HCRHAT =E13.5)	0576
9005	FORMAT(1H1//T50, 'SECOND ORDER SOLUTION'//	0577
90051	4X, 1HN, 11X, 1HX, 14X, 5HVZ(X), 12X, 5HRN(X), 12X, 4HA(N), 13X, 3H	0578
	90052X 1W, 14X, 5HGAMMA/)	0579
9006	FORMAT(15, 6E17.5)	0580
	END	0581

```

SUBROUTINE BLC(X,Y,MST,MEND,NY,RY,DRY,DXI,REB,UPRIM,FLAM,XFLAM,TES 0582
IT,U,SCALE,UE,UC,V,XSEP,USEP,DISS,THETS,LOWER,LAMQ,MSEP,XC,USAV,SCA 0583
ALS,NITS,NTIME,MX) 0584
C 0585
C PROGRAM FOR ANALYZING LAMINAR AND TURBULENT BOUNDARY LAYERS 0586
C BY THE METHOD OF FINITE DIFFERENCES. IF THE INTEGER LAMQ 0587
C IS GREATER THAN ZERO, THE BOUNDARY LAYER IS LAMINAR. 0588
C 0589
DIMENSION U(MX,NY,Z),USAV(MX,NY) 0590
DIMENSION SCALS(300),X(300),Y(300),UC(100,3),V(100,2), 0591
X UE(300,3),XC(300) 0592
DIMENSION SD(100),SE(100),SF(100),VISC(100,2),GRAD(100) 0593
DIMENSION A(100),B(100),C(100),D(100),F(100) 0594
DIMENSION ALPHA(100),BETA(100),GAMMA(100),DELTA(100) 0595
DIMENSION SCALE(300,2),VARI(100),VAR2(100) 0596
DIMENSION FLAM(10),XFLAM(10),YB1(100),YB2(100) 0597
DIMENSION CAPG(100),CAPH(100),CAPJ(100),CAPK(100) 0598
DOUBLE PRECISION AP(100),BP(100),CP(100),DP(100),FP(100),UP(100) 0599
10 FORMAT(1H1,4IX,36H ANALYSIS OF LAMINAR BOUNDARY LAYER//51X,12HTI 0600
1ME STEP NOI3//51X,12HITERATION NOI3///3X,1HM,8X,1HX,13X,2HXC,12X,2 0601
1HUE,10X,6H-DP/DX,9X,5HDELTA,9X,5HDI SPL,9X,5H THETA,9X,5HSHEAR,4X, 0602
1 1HI/) 0603
11 FORMAT(1H1,4IX,36H ANALYSIS OF TURBULENT BOUNDARY LAYER//51X,12HTI 0604
1ME STEP NOI3//51X,12HITERATION NOI3///3X,1HM,8X,1HX,13X,2HXC,12X,2 0605
1HUE,10X,6H-DP/DX,9X,5HDELTA,9X,5HDI SPL,9X,5H THETA,9X,5HSHEAR,4X, 0606
1 1HI/) 0607
12 FORMAT(14,8E14.4,I3) 0608
20 FORMAT(1H1,2X,3HM =14//2X,3HX =E14.5//2X,4HUE =E14.5,10X,17H-(1/R 0609
1HO)(DP/DX) =E14.5,10X,5HREB =E14.5,10X,4HU' =E14.5//) 0610
24 FORMAT(2X,25H PHYSICAL DELTA =E14.5,8X,12H DELTA STAR =E14. 0611
15,8X,7H THETA =E14.5//2X,25H TRANSFORMED DELTA =E14.5,8X,12H DE 0612
1LTA STAR =E14.5,8X,7H THETA =E14.5//) 0613
21 FORMAT(25X,1HV,19X,1HU,19X,1HV,16X,5H DU/DY,14X,6HNUE/NU/) 0614
22 FORMAT(10X,5E20.5) 0615
23 FORMAT(///30X,17H SEPARATION AT X =E13.5,6H, XC =E13.5) 0616
25 FORMAT(///40X,12H WALL SHEAR =E14.5//) 0617
30 FORMAT(///50X,17H TRANSITION AT X =E14.5) 0618
35 FORMAT(/20X,35H SCALE CHANGE - Y-MAX INCREASED FROM E12.4,3H TO E12.4 0619
1/) 0620
810 FORMAT(10X,7H AT STEP I3,22H, THE WALL GRADIENT ISE12.4) 0621
DATA MOUT 76/ 0622
BCON = 1.5/DXI 0623
FCON = 1./(2.*DXI) 0624
IF(MX.GT.1) GO TO 990 0625
BCON=0. 0626
FCON=0. 0627
DXI=1.E30 0628
900 CONTINUE 0629
MAXIT=0 0630
MTRAN=-1 0631
YSUB2=Y(Z) 0632
MST2 = MST - 2 0633
MST1=MST-1 0634
GO TO (543,550),LOWER 0635

```

543	IF(LAMQ) 544,544,545	0636
544	WRITE(MOUT,11) NTIME,NITS	0637
	GO TO 550	0638
545	WRITE(MOUT,10) NTIME,NITS	0639
550	CONTINJE	0640
	YTR = SQRT(REB)	0641
	UC(1,1) = 0.	0642
	V(1,1) = 0.	0643
	NV = NY - 2	0644
	NVM1 = NV - 1	0645
	NVP1 = NV + 1	0646
	CALL YDIFF(NY, ALPHA, BETA, GAMMA, DELTA, SD, SE, SF, C2, C3, C4, Y)	0647
	DO 41 N=1, NVP1	0648
	VISC(N,1) = 1.	0649
41	VISC(N,2) = 1.	0650
	DO 42 M=MST2, MST1	0651
	L = MST1-M+2	0652
	DO 50 N=1, NV	0653
50	GRAD(N+1) = SD(N+1)*UC(N+2,L)+SE(N+1)*UC(N+1,L)-SF(N+1)*UC(N,L)	0654
	GRAD(1) = C2*UC(2,L)+C3*UC(3,L)+C4*UC(4,L)	0655
	MM=M-1	0656
	CALL PGRAD(MM,X,UE,DXI,PRESS,SA,SB,SC,SR,SS)	0657
	DO 456 N=1, NY	0658
456	UC(N,1)=UC(N,L)	0659
	CALL SETUP(LAMQ,M,NV,REB,X,Y,UC,PRESS,GRAD,DELT,DISP,THETA,VISC,MT	0660
	IRAN)	0661
42	CONTINJE	0662
	MEND1 = MEND - 1	0663
	GRADS=GRAD(1)	0664
	GRADSS=GRAD(1)	0665
C		0666
C	THE MAIN CALCULATION STARTS HERE.	0667
C		0668
	DO 99 M=MST1, MEND1	0669
	ITER=0	0670
	WALLG=0.	0671
	MP1=M+1	0672
	DELTP = DELT/YTR	0673
	DISPT = DISP*YTR	0674
	THETT = THETA*YTR	0675
	SHEAR = GRAD(1)/YTR	0676
	IF(MAXIT.EQ.10.AND.(EPWS.LE.EPW)) MAXIT=95	0677
	GO TO (561,562), LOWER	0678
561	WRITE(MOUT,12) M,X(M),XC(M),UE(M,1),PRESS,DELTP,DISP,THETA,SHEAR,	0679
	1 MAXIT	0680
	GO TO 225	0681
562	WRITE(MOUT,20) M,X(M),UE(M,1),PRESS,REB,UPRIM	0682
	WRITE(MOUT,24) DELTP,DISP,THETA,DELT,DISPT,THETT	0683
	WRITE(MOUT,21)	0684
	WRITE(MOUT,22) (Y(N),UC(N,2),V(N,1),GRAD(N),VISC(N,1),N=1,NVP1)	0685
	WRITE(MOUT,25) SHEAR	0686
225	IF(GRADSS-GRADS=1.E=6) 229,229,408	0687
408	XSX=X(M-2)+(X(M-1)-X(M-2))*GRADSS/(GRADSS-GRADS)	0688
	IF(XSX-X(M)) 409,409,229	0689
409	WFS=(XSX-X(M-1))/(X(M)-X(M-1))	0690

	GO TO 224	0691
229	IF(GRAD(1)) 227, 227, 2000	0692
2000	IF(MAX(IT.LT.10) GO TO 223	0693
	IF(EPWS.GT.EPW) GO TO 223	0694
	WFS=0.	0695
	GO TO 224	0696
227	WFS=GRADS/(GRADS-GRAD(1))	0697
224	WFS1=1.-WFS	0698
	XSEP=WFS1*XC(M-1)+WFS*XC(M)	0699
	XBL=WFS1*X(M-1)+WFS*X(M)	0700
	USEP=WFS1*UE(M-1,1)+WFS*UE(M,1)	0701
	WFP=(XBL-X(M-2))/(X(M-1)-X(M-2))	0702
	WFP1=1.-WFP	0703
	DISS=DISSS*WFP1+DISS*WFP	0704
	THETS=THETSS*WFP1+THETS*WFP	0705
	IF(THETS.LT.0.) THETS=-THETS	0706
	IF(M.LT.MST1+3) GO TO 223	0707
	WRITE(MOUT,23) XBL,XSEP	0708
	IF(LAMQ.EQ.0.AND.M.LT.MTRAN+5) LAMQ=1	0709
	GO TO 222	0710
223	CONTINJE	0711
	IF(LAMQ) 801,801,802	0712
802	CALL TRANS(UPRIM,PRESS,THETA,REB,UC,NY,FLAM,XFLAM,LAMQ)	0713
	IF(LAMQ) 805,805,801	0714
805	WRITE(MOUT,30) X(M)	0715
	MTRAN = M+1	0716
801	CONTINJE	0717
	IF(Y(NV)-DELTT) 620,641,641	0718
620	RY=RY+DRY	0719
		0720
C		0721
C	RESCALING CALCULATION STARTS HERE.	0722
		0723
	DO 632 N=1,NY	0724
	YB1(N) = Y(N)	0725
	VAR1(N) = UC(N,2)	0726
632	VAR2(N) = UC(N,3)	0727
	CALL YSET(RY,YSUB2,NY,Y)	0728
	WRITE(MOUT,35) YB1(NY),Y(NY)	0729
	DO 633 N=2,NVPI	0730
	YIN = Y(N)	0731
	CALL TERP(YIN,YB1,VAR1,NY,UPAS1)	0732
	UC(N,2) = UPAS1	0733
	CALL TERP(YIN,YB1,VAR2,NY,UPAS2)	0734
633	UC(N,3) = UPAS2	0735
	CALL YDIFF(NY,ALPHA,BETA,GAMMA,DELTA.SD,SE,SF,C2,C3,C4,Y)	0736
	IF(LAMQ) 700,700,701	0737
700	DO 635 N=2,NVPI	0738
	VAR1(N) = VISC(N,1)	0739
635	VAR2(N) = VISC(N,2)	0740
	DO 636 N=2,NVPI	0741
	YIN = Y(N)	0742
	CALL TERP(YIN,YB1,VAR1,NVPI,UPAS1)	0743
	VISC(N,1) = UPAS1	0744
	CALL TERP(YIN,YB1,VAR2,NVPI,UPAS2)	0745
636	VISC(N,2) = UPAS2	

701	DO 637 N=2,NVP1	0746
	VAR1(N) = V(N,1)	0747
637	VAR2(N) = V(N,2)	0748
	DO 638 N=2,NVP1	0749
	YIN = Y(N)	0750
	CALL TERP(YIN,YB1,VAR1,NVP1,UPAS1)	0751
	V(N,1) = UPAS1	0752
	CALL TERP(YIN,YB1,VAR2,NVP1,UPAS2)	0753
638	V(N,2) = UPAS2	0754
641	CONTINJE	0755
C		0756
C	RESCALING CALCULATION ENDS HERE.	0757
C		0758
	CALL PGRAD(M,X,UE,DXI,PRESS,SA,SB,SC,SR,SS)	0759
C		0760
C	RECURSION RELATIONS ARE SET UP HERE.	0761
C		0762
	IF(MX.EQ.1) GO TO 820	0763
	IF(SCALE(M+1,1)-1.) 522,522,521	0764
521	IF(SCALE(M+1,2)-1.) 522,522,523	0765
522	LACKJ=1	0766
	FACU1=JE(M+1,2)/UE(M+1,1)	0767
	FACU2=JE(M+1,3)/UE(M+1,1)	0768
	GO TO 820	0769
523	LACKU=2	0770
	DO 610 NN=1,NY	0771
	VAR1(NN) = U(M+1,NN,1)	0772
610	VAR2(NN) = U(M+1,NN,2)	0773
	CALL YSET(SCALE(M+1,1),YSUB2,NY,YB1)	0774
	CALL YSET(SCALE(M+1,2),YSUB2,NY,YB2)	0775
820	DO 88 N=2,NV	0776
	CALL CAPS(ITER,N,CAPG,CAPH,CAPJ,CAPK,SR,SS,SD,SE,SF,VISC,V,UC)	0777
	A(N)=-SF(N)*CAPG(N)-DELTA(N)*CAPH(N)+SF(N)*CAPJ(N)	0778
	B(N)=BCON+SA*CAPK(N)+SETN)*CAPG(N)-GAMMA(N)*CAPH(N)-SE(N)*CAPJ(N)	0779
	C(N)=SD(N)*CAPG(N)-BETA(N)*CAPH(N)-SD(N)*CAPJ(N)	0780
	D(N) = -ALPHA(N)*CAPH(N)	0781
	IF(MX.EQ.1) GO TO 576	0782
	GO TO (574,575),LACKU	0783
574	UPAS1=FACU1*UC(N,1)	0784
	UPAS2=FACU2*UC(N,1)	0785
	GO TO 576	0786
575	YIN = Y(N)	0787
	CALL TERP(YIN,YB1,VAR1,NY,UPAS1)	0788
	CALL TERP(YIN,YB2,VAR2,NY,UPAS2)	0789
576	F(N) = PRESS+FCON*(4.*UPAS1-UPAS2)+CAPK(N)*{(SR*UC(N,2)-SC*UC(N,3))	0790
88	CONTINJE	0791
C		0792
C	SOLUTION FOR VELOCITY PROFILE STARTS HERE.	0793
C		0794
	DO 89 N=2,NV	0795
	AP(N) = A(N)	0796
	BP(N) = B(N)	0797
	CP(N) = C(N)	0798
	DP(N) = D(N)	0799
89	FP(N) = F(N)	0800

	DO 77 N=2,NVM1	0801
	CP(N) = CP(N)/BP(N)	0802
	DP(N) = DP(N)/BP(N)	0803
	FP(N) = FP(N)/BP(N)	0804
	BP(N+1) = BP(N+1) - CP(N)*AP(N+1)	0805
	CP(N+1) = CP(N+1) - DP(N)*AP(N+1)	0806
77	FP(N+1) = FP(N+1) - FP(N)*AP(N+1)	0807
	UP(NY) = UE(M+1,1)	0808
	UP(NVP1) = UP(NY)	0809
	UP(NV) = (FP(NV)-UP(NY)*(DP(NV) + CP(NV)))/BP(NV)	0810
	DO 66 N=3,NV	0811
	NN=NV+2-N	0812
66	UP(NN) = FP(NN) - DP(NN)*UP(NN+2) - CP(NN)*UP(NN+1)	0813
	DO 65 N=2,NY	0814
65	UC(N,1) = UP(N)	0815
	IF(ITER) 843,841,843	0816
841	DO 842 N=2,NVP1	0817
	V(N,2) = V(N,1)	0818
842	VISC(N,2)=VISC(N,1)	0819
	DISS=DISS	0820
	DISS=DISP	0821
	THETSS=THEYS	0822
	THETS=THETA	0823
	GRADSS=GRADS	0824
	GRADS=GRAD(1)	0825
843	DO 55 N=2,NVP1	0826
55	V(N,1) = V(N-1,1) - .5*(Y(N)-Y(N-1))*(SA*(UC(N,1)+UC(N-1,1))-SB*(UC(N,2)+JC(N-1,2))+SC*(UC(N,3)+UC(N-1,3)))	0827
	DO 56 N=1,NV	0828
56	GRAD(N+1) = SD(N+1)*UC(N+2,1)+SE(N+1)*UC(N+1,1)-SF(N+1)*UC(N,1)	0830
	GRAD(1) = C2*UC(2,1)+C3*UC(3,1)+C4*UC(4,1)	0831
	CALL SETUP(LAMQ,NP1,NV,REB,X,Y,UC,PRESS,GRAD,DELT,DISP,THETA,VISC,	0832
	IMTRAN)	0833
	ITER=ITER+1	0834
	GO TO (830,809),LOWER	0835
809	WRITE(MOUT,810) ITER,GRAD(1)	0836
830	IF(ITER-9) 811,811,812	0837
811	EPWS=EPW	0838
	EPW=ABS(GRAD(1)-WALLG)	0839
	IF(WALLG-I.) I20,I20,I19	0840
119	EPW=EPW/WALLG	0841
120	IF(EPW-TEST) 812,814,814	0842
814	WALLG=GRAD(1)	0843
	GO TO 820	0844
812	DO 44 N=1,NY	0845
	UC(N,3) = UC(N,2)	0846
44	JC(N,2) = UC(N,1)	0847
	MAXIT=ITER	0848
	IF(MX.EQ.1) GO TO 99	0849
	SCALS(M+1)=RY	0850
	DO 48 N=1,NY	0851
48	USAV(M+I,N)=UC(N,I)	0852
99	CONTINUE	0853
	XSEP=1.1	0854
	USEP=UE(MX,1)	0855

222 CONT INJE
RETURN
END

0856
0857
0858

```

SUBROUTINE STAG(MX,NY,MSTOP,MST,DXI,RY,DRY,X,Y,UE,UC,V,USAV,SCALS, 0859
IISEP,MD) 0860
C PROGRAM FOR CALCULATING THE BOUNDARY LAYER PROFILE NEAR 0861
C THE STAGNATION POINT 0862
C 0863
DIMENSION USAV(MD, NY), SCALS(1) 0864
DIMENSION PHIZ(24),PHIP(24),ETAP(24) 0865
DIMENSION X(300),Y(100),UE(300,3),UC(100,3),V(100,2) 0866
DIMENSION EF(100),EFP(100) 0867
DATA ETAP /0.,.2,.4,.6,.8,1.,1.2,1.4,1.6,1.8,2.,2.2,2.4,2.6,2.8,3. 0868
1,3.2,3.4,3.6,3.8,4.,4.2,4.4,4.6/ 0869
DATA PHIZ /0.,.0233,.0881,.1867,.3124,.4592,.622,.7967,.9798,1.168 0870
19,1.362,1.5578,1.7553,1.9538,2.153,2.3526,2.5523,2.7522,2.9521,3.1 0871
1521,3.3521,3.5521,3.7521,3.9521/ 0872
DATA PHIP /0.,.2266,.4145,.5663,.6859,.7779,.8467,.8968,.9323,.956 0873
18,.9732,.9839,.9905,.9946,.997,.9984,.9992,.9996,.9998,.9999,1.,1. 0874
1,1.,1./ 0875
BAG=.08 0876
IF(ISEP) 10,10,5 0877
5 BAG=.35 0878
10 EF(1) = 0. 0879
EFP(1) = 0. 0880
DO 20 M=1,MX 0881
IF(UE(M,1)) 20,20,19 0882
19 MSP = M 0883
GO TO 21 0884
20 CONTINJE 0885
21 ASTAG = (UE(MSP+2,1)-UE(MSP+1,1))/(X(MSP+2)-X(MSP+1)) 0886
IF(ASTAG) 22,22,23 0887
22 ASTAG=(UE(MSP,1)-UE(MSP-1,1))/(X(MSP)-X(MSP-1)) 0888
23 SQAS = SQRT(ASTAG) 0889
DELT = 2.6/SQAS 0890
309 IF(DELT-Y(NY-3)) 311,310,310 0891
310 RY=RY+DRY 0892
CALL YSET(RY,Y(2),NY,Y) 0893
GO TO 309 0894
311 CONTINJE 0895
DO 80 N=2,NY 0896
YET = Y(N)*SQAS 0897
DO 33 NN=1,24 0898
IF(YET-ETAP(NN)) 408,408,33 0899
408 MARK = NN 0900
GO TO 410 0901
33 CONTINJE 0902
EF(N) = YET-.6479 0903
EFP(N) = 1. 0904
GO TO 80 0905
410 FRACT = (YET-ETAP(MARK-1))/(ETAP(MARK)-ETAP(MARK-1)) 0906
FRAC1 = 1.-FRACT 0907
EF(N) = PHIZ(MARK-1)*FRAC1+PHIZ(MARK)*FRACT 0908
EFP(N) = PHIP(MARK-1)*FRAC1+PHIP(MARK)*FRACT 0909
80 CONTINJE 0910
M1 = MSP-MSTOP 0911
M2 = MSP+MSTOP 0912

```

M=M1-1	0913
50 M=M+1	0914
MST=M+1	0915
DO 71 N=1,NY	0916
UC(N,3) = UC(N,2)	0917
JC(N,2) = UE(M,1)*EFP(N)	0918
V(N,2) = V(N,1)	0919
V(N,1) = -SQAS*EF(N)	0920
71 CONTINJE	0921
IF(MD.EQ.1) GO TO 73	0922
SCALS(M)=RY	0923
DO 72 N=1,NY	0924
72 USAV(M,N)=UC(N,2)	0925
73 IF(M-M2) 50,55,55	0926
55 IF(UE(M,1)-BAG) 50,50,81	0927
81 CONTINJE	0928
RETURN	0929
END	0930

	SUBROUTINE THCALC(CR,THICK,CRHAT,THAT,NF)	0931
	DIMENSION THICK(24),THAT(24),ARG(61)	0932
	DATA NSIMP,PI /60,3.14159/	0933
	SIGN=1.	0934
	SUM=0.	0935
	DO 5 N=1,NF	0936
	THAT(N)=0.	0937
	SIGN=-SIGN	0938
5	SUM=SUM+SIGN*THICK(N)	0939
	CRHAT=CR*(3.*CR+2.*SUM)	0940
	DT=PI/FLOAT(NSIMP)	0941
	ARG(1)=0.	0942
	ARG(NSIMP+1)=0.	0943
	ANGLE=0.	0944
	DO 10 N=2,NSIMP	0945
	ANGLE=ANGLE+DT	0946
	SINT=SIN(ANGLE)	0947
	COST=COS(ANGLE)	0948
	ST=0.	0949
	STPR=0.	0950
	COUNT=0.	0951
	DO 6 I=1,NF	0952
	COUNT=COUNT+1.	0953
	TTI=COUNT*ANGLE	0954
	SINIT=SIN(TTI)	0955
	ST=ST+THICK(I)*SINIT	0956
6	STPR=STPR+THICK(I)*TCOUNT*SINT*SINIT-2.*COST*COS(TTI)	0957
	ARG(N)=(CR*(1.-COST)+SINT*ST)*(CR*(1.-2.*COST)+STPR)	0958
10	ARG(N)=(ARG(N)-CRHAT*(1.-COST))/SINT	0959
	DT2=DT+DT	0960
	ANGLE=0.	0961
	DO 15 N=2,NSIMP,2	0962
	NPI=N+1	0963
	ANGLE=ANGLE+DT2	0964
	ANGA=ANGLE-DT	0965
	COUNT=0.	0966
	DO 12 I=1,NF	0967
	COUNT=COUNT+1.	0968
12	THAT(I)=THAT(I)+4.*ARG(N)*SIN(COUNT*ANGA)+2.*ARG(NPI)*SIN(COUNT*AN	0969
	IGLE)	0970
15	CONTINJE	0971
	FACT=DT2/(3.*PI)	0972
	DO 20 N=1,NF	0973
20	THAT(N)=FACT*THAT(N)	0974
	RETURN	0975
	END	0976

```

*
SUBROUTINE CLCM(PITCH,AROT,ISEP,CMPA,CAMBR) 0977
COMMON /LOADS/ CR,CRHAT,THICK(24),THAT(24),NF,ACAP(30,3),ACAP2(30, 0978
13),NGAM,GAMAW(1000),GAMAW2(1000),XIW(1000),NWAKE,XSEP,XATT,BCAP(10 0979
10,3),NSIG,RDBB,AA,BB,AKK,SS,S,SLAM,ZS,UT,UN,UINF,XSIG(100),XSIGA(10 0980
10),XSIGB(100),NSIGA,NSIGB,DXI
DIMENSION CAMBR(24),X(2),T(2),CPL(2),CPU(2),CP(2),TP(2),A(2), 0982
1 B(2),C(2) 0983
DATA NSIMP,PI /80,3.14159/ 0984
CN=0. 0985
CT=0. 0986
CMZ=0. 0987
T1=0. 0988
TE=PI 0989
IF(ISEP.EQ.1 .AND. XATT.LT.1.) TE=ARCOS(XATT) 0990
99 DT=(TE-T1)/FLOAT(NSIMP) 0991
X(1)=CJS(T1) 0992
CALL CPC(CPL(1),X(1),-1.,ISEP) 0993
CALL CPC(CPU(1),X(1), 1.,ISEP) 0994
CALL PRIMES(CP(1),TP(1),T1,CR,THICK,CAMBR,NF) 0995
SUMN=(CPL(1)-CPU(1))*SIN(T1) 0996
SUMT=(CP(1)-TP(1))*CPL(1)-(CP(1)+TP(1))*CPU(1) 0997
SUMM=SJMN*X(1) 0998
T(2)=T1 0999
DO 10 N=2,NSIMP,2 1000
T(1)=T(2)+DT 1001
T(2)=T(1)+DT 1002
DO 5 I=1,2 1003
X(I)=CJS(T(I)) 1004
CALL CPC(CPL(I),X(I),-1.,ISEP) 1005
CALL CPC(CPU(I),X(I), 1.,ISEP) 1006
CALL PRIMES(CP(I),TP(I),T(I),CR,THICK,CAMBR,NF) 1007
A(I)=(CPL(I)-CPU(I))*SIN(T(I)) 1008
B(I)=(CP(I)-TP(I))*CPL(I)-(CP(I)+TP(I))*CPU(I) 1009
5 C(I)=A(I)*X(I) 1010
SUMN=SUMN+4.*A(1)+2.*A(2) 1011
SUMT=SUMT+4.*B(1)+2.*B(2) 1012
10 SUMM=SJMM+4.*C(1)+2.*C(2) 1013
CN=CN+DT*(SUMN-A(2))/6. 1014
CT=CT+DT*(SUMT-B(2))/6. 1015
CMZ=CMZ-DT*(SUMM-C(2))/12. 1016
IF(TE.EQ.PI) GO TO 20 1017
T1=TE 1018
TE=PI 1019
GO TO 99 1020
20 COSP=COS(PITCH) 1021
SINP=SIN(PITCH) 1022
CL=CN*COSP-CT*SINP 1023
CD=CT*COSP+CN*SINP 1024
CMPA=CMZ+.5*AROT*CN 1025
WRITE(6,2) CL,CD,CN,CT,CMZ,CMPA,AROT 1026
2 FORMAT(///40X,4HCL =E13.5/40X,4HCD =E13.5//40X,4HCN =E13.5/40X, 1027
1 4HCT =E13.5//39X,5HCMZ =E13.5/38X,6HCMPA =E13.5,5X,4H(A =E13.5,1H 1028
1)) 1029
RETURN 1030
END

```


	SUBROUTINE CPC(CP, XC, SIGN, ISEP)	1032
	COMMON /LOADS/ CR, CRHAT, THICK(24), THAT(24), NF, ACAP(30,3), ACAP2(30,	1033
	13), NGAM, GAMAW(1000), GAMAW2(1000), XIW(1000), NWAKE, XSEP, XATT, BCAP(10	1034
	10, 3), NSIG, RDBB, AA, BB, AKK, SS, SSLAM, ZS, UT, UN, UINF, XSIG(100), XSIGA(10	1035
	10), XSIGB(100), NSIGA, NSIGB, DXI	1036
	DIMENSION GAMS(3), ASUM(30,3)	1037
	NGP1 = NGAM + 1	1038
	DO 6 I = 1, 3	1039
	GAMS(I) = GAMAW(I) + GAMAWZ(I)	1040
	DO 6 J = 1, NGP1	1041
6	ASUM(J, I) = ACAP(J, I) + ACAP2(J, I)	1042
	RECIP=1./(UINF*UINF)	1043
	CALL QECAL(U, XC, SIGN, ISEP)	1044
	CP = (U/UINF)**2 - 1.	1045
	CALL EGAMI(1, NGAM, ASUM, BCAP(1,1), XSIG(1), XSIG(NSIG+1), GAMS(1), XC,	1046
	IVAL1)	1047
	CALL EGAMI(2, NGAM, ASUM, BCAP(1,2), XSIGA(1), XSIGA(NSIGA+1), GAMS(2),	1048
	IXC, VAL2)	1049
	CALL EGAMI(3, NGAM, ASUM, BCAP(1,3), XSIGB(1), XSIGB(NSIGB+1), GAMS(3),	1050
	IXC, VAL3)	1051
	CP=CP+SIGN*RECIP*(1.5*VAL1-2.*VAL2+.5*VAL3)/DXI	1052
20	CP=-CP	1053
	RETURN	1054
	END	1055

```

SUBROUTINE QECAL(Q,X,SIGN,ISEP)
COMMON /LOADS/ CR,CRHAT,THICK(24),THAT(24),NF,ACAP(30,3),ACAP2(30,
13),NGAM,GAMAW(1000),GAMAWZ(1000),XTW(1000),NWAKE,XSEP,XATT,BCAP(10
10,3),NSIG,RDBB,AA,BB,AKK,SS,SSLAM,ZS,UT,UN,UINF,XSIG(100),XSIGA(10
10),XSIGB(100),NSIGA,NSIGB,DXI
DIMENSION SN(30),CS(30)
RDT=RDBB/2.
USIG=0.
XP=1.+X
XM=1.-X
COST=X
THETA=ARCOS(X)
NSUM=NGAM
IF(NF.GT.NGAM) NSUM=NF
ANGLE=0.
DO 5 N=1,NSUM
ANGLE=ANGLE+THETA
SN(N)=SIN(ANGLE)
CS(N)=COS(ANGLE)
SINT=SN(1)
SAS=0.
SAC=ACAP(1,1)
DO 6 N=1,NGAM
NP=N+1
SAS=SAS+(ACAP(NP,1)+ACAP2(NP,2))*SN(N)
SAC=SAC+ACAP(NP,1)*CS(N)
COST2=COST+COST
ST=0.
ST1=0.
ST2=0.
ST3=0.
EN=0.
ENS=0.
DO 7 N=1,NF
EN=EN+1.
ENS=ENS+SINT
STICK=SN(N)*THICK(N)
ST3=ST3+STICK*EN*EN
ST=ST+STICK
ST1=ST1+(THICK(N)+THAT(N))*(ENS*SN(N)-COST2*CS(N))
ST2=ST2+EN*THICK(N)*CS(N)
ST3=3.*COST*ST2-SINT*(2.*ST1+ST3)
ST2=SINT*ST2+COST2*ST
ALTP=SAS+.25*XP*(3.*X-1.)*(GAMAW(1)+GAMAWZ(1))
ALTM=ACAP(1,1)+ACAP2(1,1)
IF(ISEP.EQ.0) GO TO 10
DEADL=XATT-XSEP
CALL SIGF(X,USIG,XSEP,XATT,BCAP,NSIG,DEADL,RDT)
IF(XATT.GE.1.) GO TO 10
IF(X.LT.XATT) GO TO 10
ALTP=ALTP+((1.+3.*XATT-3.*RDT-4.*X)*SQRT(DEADL*XM/(X-XATT+RDT)))/(
11.-XATT)**1.5)*BCAP(1,1)
ALTP=.5*SIGN*ALTP*USIG*UINF*(CR+CRHAT)*(XH-X)+ST1+(1.-X+X*X)*CR**
12+(CR*XM+SINT*ST)*(3.*X*CR+ST3)

```

ALTM=.5*SIGN*ALTM-UINF*CR*(1.+X+X*X)*ST	1110
DEN=XP+RD88/2.	1111
COP=SQRT(XP/DEN)	1112
COM=SQRT(XH/DEN)	1113
QT=COP*(UT+ALTP)+COM*ALTM	1114
QN=UN-.5*SAC+ GAMSUM(X,GAMAW,XIW,NWAKE)-UINF*SIGN*(CR*SINT+ST2	1115
1)	1116
QNS=COP*(QN**2-(UINF*CR)**2*(2.-X-X*X*X))-2.*UINF*SIGN*X*CR*COM*QN	1117
Q=SIGN*(QT+.5*QNS/UINF)	1118
RETURN	1119
END	1120

```

SUBROUTINE SIG(X,USIG,XSEP,XATT,BCAP,NSIG,DEADL,ROD)
DIMENSION BCAP(100,3)
IF(X.LE.XSEP .OR. X.GE.XATT) GO TO 40
COSB=(2.*X-XATT-XSEP)/DEADL
BETA=ARCOS(COSB)
ANGLE=0.
SUMC=0.
DO 10 N=2,NSIG
  ANGLE=ANGLE+BETA
10  SUMC=SUMC+BCAP(N,1)*COS(ANGLE)
  JSIG= .5*(SUMC-BCAP(1,1))
  RETURN
40  XBAR=(2.*X-XATT-XSEP)/DEADL
  SUMAND=XBAR-XBAR*SQRT(ABS(1.-XBAR**(-2)))
  FACTOR=SUMAND
  SUM=BCAP(2,1)*SUMAND
  DO 45 N=3,NSIG
  SUMAND=SUMAND*FACTOR
45  SUM=SUM+BCAP(N,1)*SUMAND
  USIG= SUM+.5*BCAP(1,1)*(SQRT((X-XSEP)/(X-XATT+ROD))-1.)
  RETURN
END

```

```

*
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142

```

```

*
FUNCTION GAMSUM(X,GAMAW,XIW,NWAKE) 1143
DIMENSION GAMAW(1000),XIW(1000) 1144
DATA PI /3.14159/ 1145
SUM=0. 1146
NWM=NWAKE-1 1147
DO 5 J=2,NWM 1148
JP=J+1 1149
DL=XIW(J)-X 1150
5 SUM=SUM+(GAMAW(J)+(GAMAW(J)-GAMAW(JP))*DL/(XIW(JP)-XIW(J)))*ALOG( 1151
1 (XIW(JP)-X)/DL) 1152
ARG=1.-X 1153
XM=ARG 1154
IF(ARG.LE.0.) ARG=1. 1155
XP=1.+X 1156
AP=XP 1157
IF(AP.LE.0.) AP=1. 1158
D2=XIW(2)-X 1159
GAMSUM=SUM+XM*(GAMAW(1)-GAMAW(2))*ALOG(D2/ARG)/(XIW(2)-1.) 1160
1 +.25*GAMAW(1)*4.*ALOG(D2)+XP*(1.-3.*X)*ALOG(AP)+6.*X 1161
1 -XM*(5.+3.*X)*ALOG(ARG) 1162
GAMSUM=.5*GAMSUM/PI 1163
RETURN 1164
END 1165

```

```

SUBROUTINE WASH2(VZ,XGAM,NGAM,CR,THICK,NF,ACAP,GAM1,ISEP,DELPI, 1166
1 X12) 1167
DIMENSION VZ(30),XGAM(30),THICK(24),ACAP(30,3),SN(30),CS(30) 1168
DATA NTOT /3/ 1169
NTOP=NGAM 1170
IF( ISEP.EQ.1) NTOP=NTOT 1171
VZ(1)=DELPI*(.806853+ALOG(X12-1.)) 1172
NGP1=NGAM+1 1173
SIGN=1. 1174
SUM=0. 1175
DO 5 N=1,NF 1176
SIGN=-SIGN 1177
SUM=SUM+SIGN*N*THICK(N) 1178
FACT=2.*(CR+2.*SUM) 1179
SUM=0. 1180
SIGN=1. 1181
DO 6 N=1,NTOP 1182
SIGN=-SIGN 1183
SUM=SUM+SIGN*N*ACAP(N+1,1) 1184
VZ(NGP1)=2.*CR*(SUM+ACAP(1,1))+DELPI*((X12+1.)*ALOG((X12+1.)*.5)/ 1185
1(X12-1.)-1.5) 1186
VZ(NGP1)=VZ(NGP1)+FACT*ACAP(1,1) 1187
10 NSUM=NGAM 1188
IF(NF.GT.NGAM) NSUM=NF 1189
DO 50 V=2,NGAM 1190
COST=XGAM(V) 1191
THETA=ARCOS(COST) 1192
DO 15 V=1,NSUM 1193
ANGLE=N*THETA 1194
SN(N)=SIN(ANGLE) 1195
CS(N)=COS(ANGLE) 1196
15 SINT=SN(1) 1197
COTT=COST/SINT 1198
ST=0. 1199
STPR=0. 1200
SA=0. 1201
SAPR=0. 1202
DO 16 N=1,NF 1203
ST=ST+THICK(N)*SN(V) 1204
16 STPR=STPR+THICK(N)*(COTT*SN(N)+N*CS(N)) 1205
DO 17 N=1,NTOP 1206
NP1=N+1 1207
SA=SA+ACAP(NP1,1)*SN(N) 1208
17 SAPR=SAPR+N*ACAP(NP1,1)*CS(N) 1209
H=.25*GAM1*(1.+COST)*(3.*COST-1.) 1210
HPR=-GAM1*SINT*(1.+1.5*COST) 1211
FACT1=CR+STPR 1212
FACT2=CR*(1.-COST)+SINT*ST 1213
TERM1=ACAP(1,1)*(1.-COST)+SINT*(H+SA) 1214
40 TERM2=ACAP(1,1)+COTT*(H+SA)+HPR+SAPR 1215
XP=1.+COST 1216
XM=1.-COST 1217
50 VZ(N)=FACT1*TERM1+FACT2*TERM2+DELPI*(1.+COST+.25*(1.-3.*COST)*XP* 1218
1ALOG(XP/XM)+(X12-COST)*ALOG((X12-COST)/XM)/(X12-1.) 1219
RETURN
END

```

```

SUBROUTINE UNPOP(NGP1, AR, ALAM, AFACT, RMAT, CMAT, XGAM, AS, MX, NZ, XC,
1 UE, NDIMC, AFAC2, AR2)
COMMON /LOADS/ CR, CRHAT, THICK(24), THAT(24), NF, ACAP(30,3), ACAP2(30,
13), NGAM, GAMAW(1000), GAMAW2(1000), XIW(1000), NWAKE, XSEP, XATT, BCAP(10
10,3), NSIG, ROBB, AA, BB, AKK, SS, SSLAM, ZS, UT, UN, UINF, XSIG(100), XSIGA(10
10), XSIGB(100), NSIGA, NSIGB, DXI
DIMENSION VZ(30), AR2(30)
DIMENSION AR(30), ALAM(30), XGAM(30), AS(30,30), XC(300), UE(300,3)
DOUBLE PRECISION RMAT(130), CMAT(NDIMC, NDIMC)
DO 5 M=1, NGP1
SUB=AR(M)-ALAM(M)*AFACT/3.
RMAT(M)=SUB
CMAT(M,1)=1.
CMAT(M,2)=XGAM(M)
DO 5 N=2, NGAM
5 CMAT(M,N+1)=AS(M,N)
CALL ALSOL(NGP1, CMAT, RMAT, NDIMC)
DO 10 N=1, NGP1
10 ACAP(N,1)=RMAT(N)
CALL WASH2(VZ, XGAM, NGAM, CR, THICK, NF, ACAP, 0., 0., 0., 2.)
DO 16 M=1, NGP1
CMAT(M,1)=1.
CMAT(M,2)=XGAM(M)
RMAT(M)=VZ(M)-ALAM(M)*AFAC2/3.+AR2(M)
DO 16 N=3, NGP1
16 CMAT(M,N)=AS(M,N-1)
CALL ALSOL(NGP1, CMAT, RMAT, NDIMC)
DO 17 M=1, NGP1
17 ACAP2(M,1)=RMAT(M)
GAMAW(1)=0.
GAMAW2(1)=0.
DO 15 M=1, MX
SIGN=1.
IF(M-NZ) 12, 14, 14
12 SIGN=-SIGN
14 CALL QECAL(UE(M,1), XC(M), SIGN, 0)
15 CONTINUE
RETURN
END

```

	SUBROUTINE PRIMES(CP, TP, THETA, CR, THICK, CAMBR, NF)	*
	DIMENSION THICK(24), CAMBR(24)	1261
	SST=0.	1262
	SCT=0.	1263
	SSR=0.	1264
	SCR=0.	1265
	ANGLE=0.	1266
	COUNT=0.	1267
	DO 5 N=1, NF	1268
	ANGLE=ANGLE+THETA	1269
	COUNT=COUNT+1.	1270
	CN=COUNT*COS(ANGLE)	1271
	SN=SIN(ANGLE)	1272
	SST=SST+THICK(N)*SN	1273
	SCT=SCT+THICK(N)*CN	1274
	SSR=SSR+CAMBR(N)*SN	1275
5	SCR=SCR+CAMBR(N)*CN	1276
	COST=COS(THETA)	1277
	SINT=SIN(THETA)	1278
	TP=CR*(COST-COST**2+SINT**2)+SINT*(2.*COST*SST+SINT*SCT)	1279
	CP=COST*SSR+SINT*SCR	1280
	RETURN	1281
	END	1282
		1283


```

SUBROUTINE ATTPR(PREC, ASZ, AS, AR, CMAT, RMAT, NGP1, AR2, NDIMC, XGAM, UTU,      *
1 PRECS) 1284
COMMON /LOADS/ CR, CRHAT, THICK(24), THAT(24), NF, ACAP(30,3), ACAP2(30, 1285
13), NGAM, GAMAW(1000), GAMAW2(1000), XIW(1000), NWAKE, XSEP, XATT, BCAP(10 1286
10,3), NSIG, RDBB, AA, BB, AKK, SS, SSLAM, ZS, UT, UN, UINF, XSIG(100), XSIGA(10 1287
10), XSIGB(100), NSIGA, NSIGB, DXI 1288
DIMENSION XGAM(30), ASZ(30), AS(30,30), AR(30), VZ(30), AR2(30) 1289
DOUBLE PRECISION RMAT(130), CMAT(NDIMC, NDIMC) 1290
DATA PI /3.14159/ 1291
SAVE=XSIG(NSIG+1) 1292
XATS=XSIGA(NSIGA+1) 1293
IF(SAVE.LT.XATS) GO TO 20 1294
PREC=PRECS*(1.-SAVE)/(1.-XATS) 1295
RETURN 1296
20 DO 50 M=1, NGP1 1297
CMAT(M, 1)=ASZ(M) 1298
RMAT(M)=AR(M) 1299
DO 25 N=1, NGAM 1300
CMAT(M, N+1)=AS(M, N) 1301
50 CONTINUE 1302
CALL ALSOL(NGP1, CMAT, RMAT, NDIMC) 1303
DO 75 M=1, NGP1 1304
ACAP(M, 1)=RMAT(M) 1305
GAMAW(1)=GAM1(ACAP, DXI, PI) 1306
DDEL=UTU*GAMAW(1) 1307
DELPI=DDEL/PI 1308
XSIG(NSIG+1)=2. 1309
CALL WASH2(VZ, XGAM, NGAM, CR, THICK, NF, ACAP, GAMAW(1), 0, DELPI, XIW(2)) 1310
DO 60 M = 1, NGP1 1311
CMAT(M, 1) = ASZ(M) 1312
RMAT(M) = VZ(M)+AR2(M) 1313
DO 60 N = 2, NGP1 1314
CMAT(M, N) = AS(M, N-1) 1315
60 CALL ALSOL(NGP1, CMAT, RMAT, NDIMC) 1316
DO 65 M=1, NGP1 1317
ACAP2(M, 1)=RMAT(M) 1318
GAMAW2(1) = GAM1(ACAP2, DXI, PI)+DDEL 1319
CALL CPC(PREC, SAVE, 1., 0) 1320
XSIG(NSIG+1)=SAVE 1321
RETURN 1322
END 1323
1324

```

```

SUBROUTINE TAYLOR(XSEP,UE,XC,X,NZ,MX)
DIMENSION UE(300,3),XC(300),X(300)
DO 3 M=NZ,MX
IF(XSEP.LT.XC(M)) GO TO 4
3 CONTINJE
4 MS=M-1
QSEP=UE(M,1)
XSTOP=X(MS)
XBSEP=XSTOP+(XSEP-XC(MS))*(X(M)-XSTOP)/(XC(M)-XC(MS))
QMAX=0.
DO 5 M=NZ,MS
IF(UE(M,1).LT.QMAX) GO TO 5
QMAX=UE(M,1)
MQMAX=M
5 CONTINUE
SMAX=0.
DO 6 M=MQMAX,MS
MP=M+1
SLOPE=(UE(M,1)-UE(MP,1))/(X(MP)-X(M))
IF(SLOPE.LT.SMAX) GO TO 6
SMAX=SLOPE
MSMAX=M
6 CONTINJE
IF(MSMAX.LT.MS) GO TO 61
WRITE(6,85) XC(MS)
85 FORMAT(/ /10X,'POSITION OF MAX SLOPE DOWNSTREAM OF X =',E13.5,' SO
IND SMOOTHING NEEDED')
RETURN
61 MSM=MS-1
DO 7 M=MSMAX,MSM
SLOPS=SLOPE
MP=M+1
SLOPE=(UE(M,1)-UE(MP,1))/(X(MP)-X(M))
TLAM=(JE(M,1)-QSEP)/(XSTOP-X(M))
IF(TLAM.GT.SLOPE) GO TO 8
7 CONTINJE
WRITE(6,88)
88 FORMAT(/ /10X,'SLOPE MONOTONIC - NO SMOOTHING NEEDED')
RETURN
8 SLOPE=SLOPS
K=M-1
KP=M
XKP=X(KP)
XIS=XBSEP-XKP
QKP=UE(KP,1)
QDIFF=QKP-QSEP
B=2.*QDIFF/XIS-SLOPE
KPP=KP+1
DO 9 M=KPP,MS
XI=X(M)-XKP
9 UE(M,1)=QSEP+(QDIFF*B*XI)*(1.-XI/XIS)**2
WRITE(6,99) XC(KP),XC(MS)
99 FORMAT(/ /10X,'FLOW SMOOTHED BETWEEN X =',E13.5,' AND',E13.5/)
RETURN
END

```

*

		*	
	SUBROUTINE ELDER(BCAP, XSIG, NSIG, UINF, ELD, Y, YMAX, AZ)		1380
	DIMENSION BCAP(100, 3), XSIG(100)		1381
	DATA PI/ 3.1415926/		1382
	BCAP(NSIG+1, 1)=0.		1383
	XS=XSIG(1)		1384
	XZ=XSIG(NSIG+1)		1385
	IF(XZ-1.) 16, 16, 1		1386
1	DEADL=XZ-XS		1387
	NSIG= NSIG-1		1388
	DEADL2= DEADL / 2.		1389
	YMAX=1.E-10		1390
	Y= PI * DEADL2 *(BCAP(1, 1)+ BCAP(2, 1) /2.)		1391
	DO 30 J= 2, 1001		1392
	T= PI/1000. * (J-1)		1393
	YX= BCAP(1, 1) *(PI-T - SIN(T))		1394
	1 + .5 * BCAP(2, 1) *(PI -T +.5* SIN(T*2.))		1395
	SUM=0.		1396
	DO 31 I= 2, NSIG		1397
31	SUM = SUM + BCAP(I+1, 1) * (SIN((I-1)* T)/(I-1)		1398
	1 - SIN((I+1) *T)/(I+1))		1399
	YX= DEADL2 * (YX-.5*SUM)		1400
	IF(YX .GT. YMAX) YMAX=YX		1401
30	CJNT INUE		1402
	ELD=Y/YMAX		1403
	IF(ABS(ELD)=UINF) 20, 20, 12		1404
12	IF(ELD) 14, 16, 16		1405
14	ELD=-UINF		1406
	GO TO 20		1407
16	ELD=UINF		1408
20	CONTINUE		1409
	WRITE(6, 80) ELD		1410
80	FORMAT(/10X, 7HELDOT =E13.5/)		1411
	RETURN		1412
	END		1413

```

SUBROUTINE REATT(UC,V,X,Y,MX,NY,RY,DRY,UE,X5,DEL5,MST,REB) 1414
DIMENSION UC(100,3),V(100,2),Y(100) 1415
DIMENSION X(300),UE(300,3) 1416
DIMENSION TAB1(24),TAB2(24),TAB3(24),TAB4(24),XITAB(24) 1417
DATA TAB1 /24.98,23.29,21.04,19.33,17.61,15.29,13.46,11.54,10.36,9 1418
1.38,8.35,7.32,6.29,5.31,4.4,3.57,2.22,1.26,.66,.31,.14,.01,0.,0./ 1419
DATA TAB2 /20.05,18.85,17.25,16.04,14.8,13.12,11.77,10.3,9.36,8.65 1420
1,7.95,7.2,6.43,5.66,4.9,4.18,2.89,1.86,1.11,.62,.32,.04,0.,0./ 1421
DATA TAB3 /16.65,15.8,14.67,13.8,12.91,11.66,10.65,9.48,8.71,8.11, 1422
17.59,7.01,6.41,5.77,5.13,4.5,3.31,2.28,1.48,.9,.51,.09,.01,0./ 1423
DATA TAB4 /10.12,10.05,9.93,9.78,9.58,9.17,8.72,8.08,7.6,7.2,6.85, 1424
16.53,6.18,5.79,5.36,4.91,3.98,3.05,2.21,1.5,.95,.22,.03,0./ 1425
DATA XITAB /.0001,.0002,.0005,.001,.002,.005,.01,.02,.03,.04,.05, 1426
106,.07,.08,.09,.1,.12,.14,.16,.18,.2,.25,.3,.35/ 1427
3 FORMAT(///40X,23HATT REATTACHMENT, BETA =E13.5) 1428
MOUT=6 1429
RTR=SQRT(REB) 1430
UC(1,2)=0. 1431
UC(1,3)=0. 1432
V(1,1)=0. 1433
V(1,2)=0. 1434
DO 5 M=1,MX 1435
IF(X5-X(M)) 4,4,5 1436
4 MST=M+2 1437
GO TO 6 1438
5 CONTINUE 1439
6 XA=X(MST-2) 1440
XB=X(MST-1) 1441
UA=UE(MST-2,1) 1442
UB=UE(MST-1,1) 1443
ZA=ALOG(UA*DEL5*REB) 1444
PGRAD=2.*(UA-UB)/((UA+UB)*(XB-XA)) 1445
BETM2=(.0974-SQRT(DEL5*PGRAD))/(.0249+.004565*ZA) 1446
IF(BETM2-1.) 8,7,7 1447
7 BETM2=1. 1448
GO TO 10 1449
8 IF(BETM2-.3) 9,9,10 1450
9 BETM2=.3 1451
10 BETA=1./(BETM2*BETM2) 1452
WRITE(MOUT,3) BETA 1453
AGAM=.0974*BETM2-.0249/BETA 1454
BGAM=.004565/BETA 1455
AH=1.-(5.3+3.9*BETM2)*(.0974-.0249*BETM2) 1456
BH=BETM2*(5.3+3.9*BETM2)*.004565 1457
GAMA=AGAM-BGAM*ZA 1458
DERIV=JA*REB*EXP(-ZA)*GAMA*GAMA*(1.+BETA*(1.+AH+BH*ZA))/(AH+BH+BH* 1459
1ZA) 1460
ZB=ZA+DERIV*(XB-XA) 1461
DEL B=EXP(ZB)/(UB*REB) 1462
GAMB=AGAM-BGAM*ZB 1463
DELL=.35*DEL B*RTR*BETM2/GAMB 1464
11 IF(DELL-Y(NY-3)) 14,12,12 1465
12 RY=RY+DRY 1466
CALL YSET(RY,Y(2),NY,Y) 1467

```

	GO TO 11	1468
14	IF(BETA-4.) 102,101,101	1469
101	TERPB=1.-4./BETA	1470
	INDEX=3	1471
	GO TO 110	1472
102	IF(BETA-2.) 104,103,103	1473
103	TERPB=.5*BETA-1.	1474
	INDEX=2	1475
	GO TO 110	1476
104	TERPB=BETA-1.	1477
	INDEX=1	1478
110	K=0	1479
	TERP1=1.-TERPB	1480
50	K=K+1	1481
	GO TO (16,17,99),K	1482
16	G=GAMA	1483
	DELTA=DEL 5	1484
	UEDGE=JA	1485
	L=3	1486
	GO TO 18	1487
17	G=GAMB	1488
	DELTA=DEL B	1489
	UEDGE=JB	1490
	L=2	1491
18	XICO=G/(DELTA*RTR*BETH2)	1492
	UCOM=RTR*(UEDGE*G)**2	1493
	EFCO=G/BETH2	1494
	NLAM=NY	1495
	DO 75 N=2,NY	1496
	XI=Y(N)*XICO	1497
	IF(XI-.35) 20,19,19	1498
19	UC(N,L)=UEDGE	1499
	GO TO 75	1500
20	CALL TERPF(XI,INDEX,TAB1,TAB2,TAB3,TAB4,XITAB,FP1)	1501
	INDP1=INDEX+1	1502
	CALL TERPF(XI,INDP1,TAB1,TAB2,TAB3,TAB4,XITAB,FP2)	1503
	FP=TERP1*FP1+TERPB*FP2	1504
	UC(N,L)=UEDGE*(1.-EFCO*FP)	1505
	IF(N-NLAM) 21,75,75	1506
21	ALTER=UCOM*YIN	1507
	IF(ALTER-UC(N,L)) 33,33,32	1508
32	UC(N,L)=ALTER.	1509
	GO TO 75	1510
33	NLAM=N	1511
75	CONTINJE	1512
	GO TO 50	1513
99	DO 60 K=2,3	1514
	SAVE2=0.	1515
	DO 60 N=3,NY	1516
	SAVE1=JG(N-1,K)	1517
	UC(N-1,K)=(SAVE2+SAVE1+UC(N,K))/3	1518
60	SAVE2=SAVE1	1519
	DUDX=0.	1520
	COD=.5/(XB-XA)	1521
	DO 65 N=2,NY	1522

```
DUDXP=CDD*(UC(N,2)-UC(N,3)) 1523
V(N,1)=V(N-1,1)-(Y(N)-Y(N-1))*(DUDXP+DUDX) 1524
V(N,2)=V(N,1) 1525
65 DUDX=DJDXP 1526
RETURN 1527
END 1528
```

SUBROUTINE ELPIT(ALPH1,ALPH2,EM1,TORF,THETZ,UINF,DXI,CMPA,CMPAS)	1529
SAVET=ALPH1		1530
STEP=TORF*DXI		1531
SINS=SIN(STEP)		1532
COSS=COS(STEP)		1533
CONST=2.*EM1*(UINF/TORF)**2		1534
ALPH1=THETZ+(ALPH1-THETZ)*COSS+ALPH2*SINS/TORF+CONST*(2.*CMPA-CMPAS)*(1.-COSS)+CONST*(CMPAS-CMPA)*(SINS-STEP*COSS)/(TORF*DXI)		1535
ALPH2=ALPH2*COSS-TORF*SINS*(SAVET-THETZ)+CONST*(CMPA-CMPAS)*(1.-COSS)/DXI+CONST*CMPA*TORF*SINS		1536
RETURN		1537
END		1538
		1539
		1540

	SUBROUTINE VWASH(BARG, H, S, NVDR, X1, UINF, VZIP, XGAM, NGP1, DXI)	*
	DIMENSION VZIP(30), XGAM(30)	1541
	DO 10 N=1, NGP1	1542
	DIFF=XGAM(N)-X1	1543
	SUM=0.	1544
	DO 5 K=1, NVDR	1545
	SUM=SUM+DIFF/(DIFF*DIFF+H)	1546
5	DIFF=DIFF-S	1547
10	VZIP(N)=VZIP(N)+SUM*BARG	1548
	RETURN	1549
	END	1550
		1551


```

SUBROUTINE WASH(XGAM,NGAM,TIME,ALPH1,ALPH2,HEAVE,ARCT,FREQ,PHIH,U      *
1INF,CAMBR,NF,VZIP,MOTR,INDV) 1552
DIMENSION XGAM(30),VZIP(30),CAMBR(24) 1553
NGP1 = NGAM+1 1554
ANGLE = FREQ*TIME 1555
GO TO (108,120), INDV 1556
108 GO TO (110,120),MOTR 1557
110 CONST = -ALPH2*COS(ANGLE)*UINF+HEAVE*COS(ANGLE+PHIH)+ALPH1*UINF 1558
FACT = -ALPH2*FREQ*SIN(ANGLE)*UINF 1559
GO TO 130 1560
120 CONST=JINF*ALPH1+HEAVE 1561
FACT=-JINF*ALPH2 1562
130 DO 10 M=1,NGP1 1563
X=XGAM(M) 1564
THETA = ARCT(X) 1565
SUM=0. 1566
COUNT=0. 1567
DO 20 N=1,NF 1568
COUNT=COUNT+1. 1569
20 SUM=SUM+COUNT*CAMBR(N)*COS(COUNT*THETA) 1570
IF(M-1) 2,4,2 1571
2 IF(NGP1-M) 3,4,3 1572
4 SUM = SUM + SUM 1573
GO TO 50 1574
3 COUNT = 0. 1575
COTT = X/SIN(THETA) 1576
DO 30 N=1,NF 1577
COUNT = COUNT+THETA 1578
30 SUM=SUM+COTT*CAMBR(N)*SIN(COUNT) 1579
50 VZIP(M) = UINF*SUM+CONST+FACT*(AROT-X) 1580
10 CONTINUE 1581
RETURN 1582
END 1583

```

```

SUBROUTINE MIXER(FPRES,PREC,UINF,UDOT,THICK,NF,XBSIG,NSIG,INDT,DEL 1585
11,THET1,REB,USEP,X4,CP4,RDBB) 1586
DIMENSION FPRES(100),THICK(24),XBSIG(100) 1587
FCAP(X)=-19.556*X+107.535*X*X-336.33*X**3+508.1*X**4-295.96*X**5 1588
UI1(X)=-.46532*X+.68425*X*X-.45293*X**3+.6592*X**4 1589
UI2(X)=-.045929*X-1.91615*X*X+2.91843*X**3-5.42125*X**4 1590
CR=SQRT(RDBB)/4. 1591
DIST=.5*(XBSIG(2)-XBSIG(1)) 1592
XSEP=XBSIG(1)-DIST 1593
XATT=XBSIG(NSIG)+DIST 1594
C 1595
C IF INDT IS NONZERO, THE BOUNDARY LAYER IS TURBULENT 1596
C AT SEPARATION. 1597
C 1598
CALL H4X4(INDT,XSEP,DEL1,THET1,XATT,REB,USEP,X3,H3,X4,H4) 1599
IF(XSEP-1.) 24,25,25 1600
25 CP4=0. 1601
GO TO 27 1602
24 URAT=EXP(-.08712-UI1(H4)-.24723*(.3255+UI2(H4))) 1603
CP4=1.-(1.-PREC)/URAT**2 1604
DEADL=XATT-XSEP 1605
IF(DEADL-2.) 5,6,6 1606
5 G=(.5*DEADL)**2 1607
GO TO 7 1608
6 G=1. 1609
7 CP4=PREC+(CP4-PREC)*(1.-G*XSEP) 1610
27 CONTINJE 1611
CP4LIN=2.* (1.-SQRT(1.-CP4)) 1612
PRLIN=2.*(1.-SQRT(1.-PREC)) 1613
COEF= (PRLIN-CP4LIN)/(XATT-X4) 1614
CZ=2.*JDOT/UINF 1615
C2 = -2.*UINF 1616
DO 20 M=1,NSIG 1617
SUM=0. 1618
X=XBSIG(M) 1619
IF(X-1.) 2,2,3 1620
2 THETA = ARCT(X) 1621
COST=COS(THETA) 1622
SINT=SIN(THETA) 1623
COUNT=0. 1624
DO 10 N=1,NF 1625
COUNT=COUNT+1. 1626
ANGLE=COUNT*THETA 1627
10 SUM=SUM+THICK(N)*(COUNT*SINT*SIN(ANGLE)-2.*COST*COS(ANGLE)) 1628
SUM=-4.*UINF*(SUM+CR*(1.-2.*COST)) 1629
GO TO 35 1630
3 SQSS=SQRT(X*X-1.) 1631
XRAD=1./(X+SQSS) 1632
COUNT=1. 1633
FACT=XRAD 1634
DO 30 N=2,NF 1635
COUNT=COUNT+1. 1636
FACT=FACT*XRAD 1637
30 SUM=SUM+THICK(N)*FACT*(2.*X-COUNT*SQSS) 1638

```

	SUM=SUM*2.+2.*CR*(X+X-1.-SQSS*(1.+X+X)/(1.+X))+3.*THICK(1)*XRAD**2	1639
	SUM=SUM*UINF	1640
35	CP=CP4LIN	1641
	IF(X-X4) 55, 50, 50	1642
50	CP=CP+(X-X4)*COEF	1643
55	CONTINUE	1644
	FPRES(M)=-UINF*CP+SUM	1645
20	CONTINUE	1646
	RETURN	1647
	END	1648

```

*
SUBROUTINE SECT(XU,YU,XL,YL,NOFF,NF,RDBC,ST,SC) 1649
C PROGRAM TO COMPUTE COEFFICIENTS TN AND CN OF THE FOURIER SERIES 1650
C REPRESENTATION OF SECTION THICKNESS AND CAMBER DISTRIBUTIONS. 1651
  DIMENSION XU(30),YU(30),XL(30),YL(30),YUC(30),YLC(30),ST(24),SC(24 1652
  1),DUM(50),TBAR(50),CBAR(50) 1653
11  FORMAT(1H1,4X,6HRDBC =E13.5/4X,7HRCDBC =E13.5) 1654
12  FORMAT(////47X,26HINPUT AND COMPUTED OFFSETS/) 1655
13  FORMAT(19X,4HX1/C,12X,4HYU/C,11X,5HYUC/C,20X,4HX1/C,12X,4HYL/C,11X 1656
  1,5HYLC/C/) 1657
14  FORMAT(8X,3F16.5,8X,3F16.5) 1658
    NA=6 1659
    RNA=6. 1660
    RNF=FLJAT(NF) 1661
    MOUT=6 1662
    PI=3.14159 1663
    DELT=PI/(2.*RNF) 1664
    NTC=2*NF-1 1665
    NINT=NTC+2 1666
    NSIMP=NTC+1 1667
    THETA=0. 1668
    DO 89 K=1,NTC 1669
      THETA=THETA+DELT 1670
      X1=.5*(1.+COS(THETA)) 1671
      DO 90 LAM=2,NOFF 1672
        IF(X1-XU(LAM)) 110,90,90 1673
110  YUINT=YU(LAM-1)+(X1-XU(LAM-1))*(YU(LAM)-YU(LAM-1))/(XU(LAM)-XU(LAM 1674
  1-1)) 1675
      GO TO 111 1676
90  CONTINUE 1677
111  DO 80 LAM=2,NOFF 1678
      IF(X1-XL(LAM)) 210,80,80 1679
210  YLINT=YL(LAM-1)+(X1-XL(LAM-1))*(YL(LAM)-YL(LAM-1))/(XL(LAM)-XL(LAM 1680
  1-1)) 1681
      GO TO 112 1682
80  CONTINUE 1683
112  TBAR(K+1)=.5*(YUINT-YLINT) 1684
89  CBAR(K+1)=.5*(YUINT+YLINT) 1685
      TBAR(1)=0. 1686
      CBAR(1)=0. 1687
      TBAR(NINT)=0. 1688
      CBAR(NINT)=0. 1689
      SAVT2=0. 1690
      SAVC2=0. 1691
      DO 39 I=2,NSIMP 1692
        SAVT1=SAVT2 1693
        SAVC1=SAVC2 1694
        SAVT2=TBAR(I) 1695
        SAVC2=CBAR(I) 1696
        TBAR(I)=(SAVT1+SAVT2+TBAR(I+1))/3. 1697
39  CBAR(I)=(SAVC1+SAVC2+CBAR(I+1))/3. 1698
      TTA=TBAR(NA) 1699
      TTB=TBAR(NA+1) 1700
      TTC=TBAR(NA+2) 1701
      TAA=DELT*(RNA-1.) 1702

```

```

TBB=TAA+DELT 1703
TCC=TBB+DELT 1704
XA=.5*COS(TAA) 1705
XB=.5*COS(TBB) 1706
XC=.5*COS(TCC) 1707
SLOPE=((TTC-TTB)*(XB-XA)/(XC-XB)+(TTB-TTA)*(XC-XB)/(XB-XA))/(XC-XA 1708
1) 1709
THETA=0. 1710
COSB=COS(TBB) 1711
DO 456 I=2,NA 1712
THETA=THETA+DELT 1713
COST=COS(THETA) 1714
TBAR(I)=(SQRT(1.-COST))/(1.-COSB)**1.5*(TTB*(1.+COST-2.*COSB)/(1.- 1715
1COSB)+.5*SLOPE*(COST-COSB)) 1716
456 TBAR(I)=TBAR(I)*(1.-COST) 1717
NLE=2*NF+I-NA 1718
TTA=TBAR(NLE+1) 1719
TTB=TBAR(NLE) 1720
TTC=TBAR(NLE-1) 1721
TAA=PI-DELT*(RNA-1.) 1722
TBB=TAA-DELT 1723
TCC=TBB-DELT 1724
XA=.5*(1.+COS(TAA)) 1725
XB=.5*(1.+COS(TBB)) 1726
XC=.5*(1.+COS(TCC)) 1727
SLOPE=((TTC-TTB)*(XB-XA)/(XC-XB)+(TTB-TTA)*(XC-XB)/(XB-XA))/(XC-XA 1728
1) 1729
CAPA=SLOPE*SQRT(2.*XB/RDBC) 1730
CAPB=TTB/SQRT(2.*XB/RDBC) 1731
AS=(2.5*CAPB-.5*CAPA-2.)/XB 1732
BS=(.5*CAPA-1.5*CAPB+1.)/XB**2 1733
THETA=PI 1734
COEF=SQRT(2.*RDBC) 1735
DO 457 I=2,NK 1736
IND=2*NF+2-I 1737
THETA=THETA-DELT 1738
X=.5*(1.+COS(THETA)) 1739
457 TBAR(IND)=COEF*SQRT(X)*(1.+AS*X+BS*X*X) 1740
COEF=COEF/4. 1741
THETA=0. 1742
DO 458 I=2,NSIMP 1743
THETA=THETA+DELT 1744
SINT=SIN(THETA) 1745
458 TBAR(I)=(TBAR(I)-COEF*SINT*(1.-COS(THETA)))/SINT**2 1746
THETA=0. 1747
DO 459 I=2,NSIMP 1748
THETA=THETA+DELT 1749
459 CBAR(I)=CBAR(I)/SIN(THETA) 1750
RKK=0. 1751
DO 59 K=1,NF 1752
RKK=RKK+1. 1753
THETA=0. 1754
DO 777 I=1,NINT 1755
DUM(I)=TBAR(I)*SIN(THETA*RKK) 1756
777 THETA=THETA+DELT 1757

```

	CALL SIMP(NSIMP, DELT, DUM, VARY)	1758
	ST(K)=2.*VARY/PI	1759
	THETA=0.	1760
	DO 888 I=1, NINT	1761
	DUM(I)=CBAR(I)*SIN(THETA*RKK)	1762
888	THETA=THETA+DELT	1763
	CALL SIMP(NSIMP, DELT, DUM, VARY)	1764
59	SC(K)=2.*VARY/PI	1765
	DO 969 I=1, NOFF	1766
	X=XU(I)	1767
	CALL EVAL(NF, X, SC, ST, CB, TB, COEF)	1768
969	YUC(I)=CB+TB	1769
	DO 869 I=1, NOFF	1770
	X=XL(I)	1771
	CALL EVAL(NF, X, SC, ST, CB, TB, COEF)	1772
869	YLC(I)=CB-TB	1773
	RSAV=RDBC	1774
	WRITE(MOUT, 11) RSAV, RDBC	1775
	WRITE(MOUT, 12)	1776
	WRITE(MOUT, 13)	1777
	WRITE(MOUT, 14) (XU(I), YU(I), YUC(I), XL(I), YL(I), YLC(I), I=1, NOFF)	1778
	RETURN	1779
	END	1780

	SUBROUTINE EVAL(NNF, XX, SSC, SST, CCB, TTB, COEF)	1781
	DIMENSION SSC(50), SST(50)	1782
	COST=2.*XX-1.	1783
	COSTS=COST**2	1784
	IF(COSTS-1.E-8) 303, 304, 304	1785
304	TANT=SQRT(1./COSTS-1.)	1786
	THE=ATAN(TANT)	1787
	GO TO 305	1788
303	THE=1.5708	1789
305	IF(COST) 403, 404, 404	1790
403	THE=3.14159-THE	1791
404	ARG=0.	1792
	SUM1=0.	1793
	SUM2=0.	1794
	DO 551 N=1, NNF	1795
	ARG=ARG+THE	1796
	SUM1=SUM1+SSC(N)*SIN(ARG)	1797
551	SUM2=SUM2+SST(N)*SIN(ARG)	1798
	SINT=SIN(THE)	1799
	CCB=SUM1*SINT	1800
	TTB=SINT*(COEF*(1.-COST)*SINT*SUM2)	1801
	RETURN	1802
	END	1803

```

SUBROUTINE ALSOL(NT, C, R, NDIMC)
DOUBLE PRECISION C (NDIMC,NDIMC), R(130)
DOUBLE PRECISION CMAX,SAVE,SUM
NT1 = NT-1
DO 99 J=1,NT1
CMAX = C(NT,J)
L=NT
DO 10 I=J,NT1
IF (DABS(CMAX)-DABS(C(I,J))) 5,10,10
5 CMAX = C(I,J)
L=I
10 CONTINUE
DO 15 JJ=J,NT
SAVE = C(L,JJ)
C(L,JJ) = C(J,JJ)
15 C(J,JJ) = SAVE/CMAX
SAVE = R(L)
R(L) = R(J)
R(J) = SAVE/CMAX
JP1 = J+1
DO 25 I=JP1,NT
DO 20 JJ=JP1,NT
20 C(I,JJ) = C(I,JJ) - C(I,J)*C(J,JJ)
25 R(I) = R(I) - R(J)*C(I,J)
99 CONTINUE
R(NT) = R(NT)/C(NT,NT)
DO 150 K=I,NT1
I=NT-K
IP1 = I+1
SUM = 0.
DO 125 J=IP1,NT
125 SUM = SUM + R(J)*C(I,J)
150 R(I) = R(I) - SUM
RETURN
END

```

```

*
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838

```



```
FUNCTION GAM1(ACAP,DXI,PI)          *
DIMENSION ACAP(30,3)                1839
GAM1=PI*(-1.5*ACAP(1,1)+.75*ACAP(2,1)+2.*ACAP(1,2)+ACAP(2,2)-.5*AC  1840
IAP(1,3)-.25*ACAP(2,3))/DXI        1841
RETURN                               1842
END                                  1843
                                   1844
```

	SUBROUTINE EGAMI(NU,NG,A,B,XSEP,XATT,GAMMA,Y,GI)	1845
	DIMENSION A(30,3)	1846
	SINT=SQRT(1.-Y*Y)	1847
	THETA=ARCT(Y)	1848
	SUM=0.	1849
	COUNT=1.	1850
	DO 6 N=2,NG	1851
	COUNT=COUNT+1.	1852
6	SUM=SUM+A(N+1,NU)*(SIN((COUNT+1.)*THETA)/(COUNT+1.)-SIN((COUNT-1.)*THETA)/(COUNT-1.))	1853
	GI=(3.14159-THETA+SINT)*(A(1,NU)+.5*A(2,NU))+.5*SUM-.25*GAMMA*(1.+Y)*SINT*SINT	1854
	IF(Y-XATT) 8,8,7	1855
7	DIFF=1.-XATT	1856
	IF(DIFF-1.E-6) 8,8,9	1857
9	GI=GI+2.*8*DIFF**(-1.5)*SQRT((XATT-XSEP)*(1.-Y)*(Y-XATT))	1858
8	CONTINUE	1859
	RETURN	1860
	END	1861
		1862
		1863

```

SUBROUTINE BUBB(DEL1, THET1, REB, XC1, U1, XC5, DCP, DEL5, X, XC, MX, NZ, X5, U
15, UE, ALTC, RENEL, USTOP)
DIMENSION X(300), XC(300), UE(300,3)
FCAP(X)=-19.556*X+107.535*X*X-336.33*X**3+508.1*X**4-295.96*X**5
UI1(X)=-.46532*X+.68425*X*X-.45293*X**3+.6592*X**4
UI2(X)=-.045929*X-1.91615*X*X+2.91843*X**3-5.42125*X**4
FDEL1(X)=EXP(2.5773-.34252*X-.4379*X*X-.076511*X**3-.0039707*X**4)
FAICH(X)=EXP(-3.7481+.038772*X+.41967*X*X+.071046*X**3+.0032162*X*
1*4)
DELI(X)=-.045929*ALOG(X)-3.9242*X+.54535*X*X-1.39147*X**3-10.8425*
IX**4
25 FORMAT(1H1,44X,31HANALYSIS OF LEADING-EDGE BUBBLE////34X,1HX,19X,1
1HU,19X,1HH,18X,4HDISP/)
30 FORMAT(20X,4E20.5)
MOUT=6
H1=.25
H5=.429
DO 5 M=NZ, MX
IF(XC1-XC(M)) 4,4,5
4 M1=M
GO TO 6
5 CONTINUE
6 X1=X(M1-1)+(X(M1)-X(M1-1))*(XC1-XC(M1-1))/(XC(M1)-XC(M1-1))
X4=X1+RENE1/(U1*REB)
ARG=ALOG((X4-X1)/(REB*DELI*DELI*U1))
H4=.25*FAICH(ARG)
DELI4=.58*FDEL1(ARG)*DELI
X5=X4+10.5*DELI4*(1.-(H4/.429)**2)
IF(U1-USTOP) 41,41,40
40 ALTL=ALTC*DELI
IF(X5-X1.LT.ALTL) X5=X1+ALTL
41 URAT=EXP(-.08712-UI1(H4)-.24723*(.3255+UI2(H4)))
DCP=U1*U1*(1.-URAT**2)
DRAT=EXP(-2.24374-FCAP(H4)+.24723*(2.0214+DELI(H4)))
DEL5=DRAT*DELI4
DO 7 M=NZ, MX
IF(X5-X(M)) 16,16,7
16 M5=M
GO TO 8
7 CONTINUE
8 FACT=(X5-X(M5-1))/(X(M5)-X(M5-1))
FACT1=1.-FACT
XC5=XC(M5-1)*FACT1+XC(M5)*FACT
U5=UE(45-1,1)*FACT1+UE(M5,1)*FACT
WRITE(MOUT,25)
WRITE(MOUT,30) X1,U1,H1,DELI
WRITE(MOUT,30) X4,U1,H4,DELI4
WRITE(MOUT,30) X5,U5,H5,DEL5
RETURN
END

```

```
SUBROUTINE YSET(R,A,NY,Y)
DIMENSION Y(100)
RP1=1.+R
Y(1)=0.
Y(2)=A
DO 10 N=3,NY
10 Y(N)=RP1*Y(N-1)-R*Y(N-2)
RETURN
END
```

*
1914
1915
1916
1917
1918
1919
1920
1921
1922

```

SUBROUTINE H4X4(INDT,X1,DEL1,THET1,X5,REB,U1,X3,H3,X4,H4)
CURLF(H)=26.703/H+305.03*ALOG(H)-2111.3*H+3327.8*H*H-2403.9*H**3
FDELT(X)=EXP(2.5773-.34252*X-.4379*X*X-.076511*X**3-.0039707*X**4)
FAICH(X)=EXP(-3.7481+.038772*X+.41967*X*X+.071046*X**3+.0032162*X*
1*4)
10 FORMAT(/ /20X,54HA SOLUTION FOR X4 COULD NOT BE OBTAINED IN 1000 TR
IALS)
MOUT=6
C
C IF INDT IS NONZERO, THE BOUNDARY LAYER IS TURBULENT
C AT SEPARATION.
C
IF(INDT) 2,5,2
2 H3=THET1/DEL1
X3=X1
DEL3=DEL1
GO TO 20
5 X3=X1+.5.E4/(U1*REB)
ARG=ALOG((X3-X1)/(REB*DEL1*DEL1))
H3=THET1*FAICH(ARG)/DEL1
DEL3=.58*FDELT(ARG)*DEL1
IF(X3-X5) 20,15,15
15 H4=.429
X4=X5
GO TO 50
20 CONTINUE
IGO=0
DIST=X5-X1
UNDER=0.
H4=H3+H3
COEF1=DEL3*H3
COEF2=10.5*DEL3*H3
SUB=X3-COEF1*CURLF(H3)
95 OVER=H4
H4=.5*(H4+UNDER)
X4=CURLF(H4)*COEF1+SUB
ALTER=X5-COEF2*(1.-(H4/.429)**2)/H4
IGO=IGO+1
IF(X4-ALTER) 41,50,42
41 IF(IGO-1000) 95,61,61
42 IF(ABS(X4-ALTER)/DIST-.001) 50,50,43
43 UNDER=H4
H4=.5*(OVER+H4)
X4=CURLF(H4)*COEF1+SUB
ALTER=X5-COEF2*(1.-(H4/.429)**2)/H4
IGO=IGO+1
IF(X4-ALTER) 52,50,51
51 IF(IGO-1000) 43,61,61
52 IF(ABS(X4-ALTER)/DIST-.001) 50,50,95
61 H4=.429
X4=X5
WRITE(MOUT,10)
50 CONTINUE
RETURN
END

```

*

```

SUBROUTINE SETSX(NSP1, XSEP, XATT, XSIG, ANGLE)      1978
DIMENSION XSIG(100)                                1979
A=.5*(XSEP+XATT)                                    1980
B=.5*(XATT-XSEP)                                    1981
ARG=0.                                               1982
DO 5 N=1, NSP1                                      1983
XSIG(N)=A-B*COS(ARG)                                1984
5 ARG=ARG+ANGLE                                     1985
RETURN                                              1986
END                                                  1987
```

	FUNCTION ARCT(X)	*
	PI=3.14159	1988
	IF(ABS(X)-1.E-6) 1,2,2	1989
1	ARCT=.5*PI	1990
	GO TO 6	1991
2	IF(X+.99999) 3,4,4	1992
3	ARCT=PI	1993
	GO TO 6	1994
4	ARCT=ATAN(SQRT(1.-X*X)/X)	1995
	IF(ARCT) 5,6,6	1996
5	ARCT=ARCT+PI	1997
6	CONTINUE	1998
	RETURN	1999
	END	2000
		2001

		*
	SUBROUTINE SCAL(SBL,NSBL,FRZ,ARR,RDBB)	2002
	DIMENSION SBL(300)	2003
	DELZ=FRZ*RDBB	2004
	EN=ARR/FRZ	2005
	DO 5 N=1,300	2006
	IF(EN-V) 4,4,5	2007
4	NE=N	2008
	GO TO 6	2009
5	CONTINUE	2010
6	NG=NSBL-NE	2011
	EN=FLOAT(NG)	2012
	NGM1=NG-1	2013
	SBL(1)=0.	2014
	DO 7 N=2,NE	2015
7	SBL(N)=SBL(N-1)+DELZ	2016
	FRACT=2.2/DELZ	2017
	FRACT=FRACT-1.	2018
	R=FRACT**(1./FLOAT(NGM1))	2019
8	SAVE=R	2020
	R=R-(R**NG-FRACT*R+FRACT)/(EN*R**NGM1-FRACT)	2021
	IF(ABS(SAVE-R)-1.E-6) 9,9,8	2022
9	RPI=R+1.	2023
	DO 10 N=NE,NSBL	2024
10	SBL(N+1)=RPI*SBL(N)-R*SBL(N-1)	2025
	RETURN	2026
	END	2027

		*
	SUBROUTINE TERPF(XI,J,TAB1,TAB2,TAB3,TAB4,XITAB,FP)	2028
	DIMENSION TAB1(24),TAB2(24),TAB3(24),TAB4(24),XITAB(24)	2029
	IF(XI-.0001) 2,2,10	2030
2	GO TO (3,4,5,6),J	2031
3	FP=2.53-2.439*ALOG(XI)	2032
	GO TO 99	2033
4	FP=3.54-1.725*ALOG(.7071*XI)	2034
	GO TO 99	2035
5	FP=4.58-1.2195*ALOG(.5*XI)	2036
	GO TO 99	2037
6	FP=10.12	2038
	GO TO 99	2039
10	DO 12 N=1,24	2040
	IF(XI-XITAB(N)) 11,11,12	2041
11	NX=N	2042
	GO TO 13	2043
12	CONTINUE	2044
13	TX=(XI-XITAB(NX-1))/(XITAB(NX)-XITAB(NX-1))	2045
	TX1=1.-TX	2046
	GO TO (14,15,16,17),J	2047
14	FP=TX1*TAB1(NX-1)+TX*TAB1(NX)	2048
	GO TO 99	2049
15	FP=TX1*TAB2(NX-1)+TX*TAB2(NX)	2050
	GO TO 99	2051
16	FP=TX1*TAB3(NX-1)+TX*TAB3(NX)	2052
	GO TO 99	2053
17	FP=TX1*TAB4(NX-1)+TX*TAB4(NX)	2054
99	CONTINUE	2055
	RETURN	2056
	END	2057

```

SUBROUTINE SIMP(NS,DX,ORD,FIND)                                2058 *
DIMENSION ORD(50)                                           2059
C      INTEGRATION OF NS + 1 EQUALLY SPACED ORDINATE VALUES 2060
C      BY SIMPSON'S RULE. NS MUST BE EVEN                    2061
SUM = 0.                                                       2062
DO 88 I=2,NS,2                                               2063
88 SUM = SUM + 2.*ORD(I-1) + 4.*ORD(I)                       2064
FIND = DX*(SUM - ORD(1) + ORD(NS+1))/3.                      2065
RETURN                                                         2066
END                                                            2067

```

```

SUBROUTINE CORDX(NSBL,NZ,RDBB,SBL,X,XC)
C
C BOUNDARY LAYER COORDINATES AND CORRESPONDING CHORDAL
C COORDINATES ARE COMPUTED HERE.
C
DIMENSION SBL(300),X(300),XC(300)
336 FORMAT(//10X,31HITERATION TO COMPUTE XC FOR M=15,32H DID NOT CONV
1ERGE IV 1000 STEPS.)
337 FORMAT(1H1,25X,1HM,20X,1HS,25X,1HX,24X,2HXC//)
338 FORMAT(22X,15,3E25.5)
MOUT=6
MX = NSBL + NZ - 1
RZERO = RDBB/2.
XC(NZ) = -1.
DO 255 M=1,NZ
MM = NZ + 1 - M
255 X(M) = SBL(NZ) - SBL(MM)
DO 256 M=NZ,MX
MM = M + 1 - NZ
256 X(M) = SBL(NZ) + SBL(MM)
DO 257 M=1,MX
IF(NZ-M) 333,257,335
333 K = M + 1 - NZ
GO TO 334
335 K = NZ - M + 1
334 XC(M) = -1. + SBL(K)
IF(SBL(K)-RZERO) 341,341,342
341 XC(M) = -1. + SBL(K)**2/(4.*RZERO)
342 CONTINJE
DO 258 L=1,1000
SAVE = XC(M)
CALC1 = SQRT((1.+XC(M))/RZERO)
CALC2 = SQRT((1.+XC(M))/RZERO)
XC(M)=XC(M)+CALC1*(SBL(K) - RZERO*(CALC1*CALC2+ALOG(CALC1+CALC2))
1)/CALC2
IF(ABS(SAVE-XC(M))-1.E-6) 257,257,258
258 CONTINJE
WRITE(MOUT,336) M
257 CONTINJE
WRITE(MOUT,337)
DO 264 M=1,MX
IF(NZ-M) 261,261,262
262 K=NZ-M+1
GO TO 263
261 K=M+1-VZ
263 WRITE(MOUT,338) M,SBL(K),X(M),XC(M)
264 CONTINJE
RETURN
END

```

*

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

```

SUBROUTINE PGRAD(M,X,UE,DXI,PRESS,SA,SB,SC,SR,SS)
C
C SUBROUTINE FOR CALCULATION OF PRESSURE GRADIENT AND
C DERIVATIVE COEFFICIENTS.
C
DIMENSION X(300),UE(300,3)
DIZ=X(M+1)-X(M)
D2Z=X(M+2)-X(M)
D21=X(M+2)-X(M+1)
DIM1=X(M+1)-X(M-1)
DZM1=X(M)-X(M-1)
XIM=DIZ/(D2Z*D21)
ETAM=1./DIZ-1./D21
ZETAM=D21/(DIZ*D2Z)
PRESS = (3.*UE(M+1,1)-4.*UE(M+1,2)+UE(M+1,3))/(2.*DXI)+UE(M+1,1)*
IXIM*UE(M+2,1)+ETAM*UE(M+1,1)-ZETAM*UE(M,1)
SA=1./DIZ+1./DIM1
SB=DIM1/(DIZ*DZM1)
SC=DIZ/(DIM1*DZM1)
SR=DIM1/DZM1
SS=DIZ/DZM1
RETURN
END

```

```

*
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139

```

```

*
SUBROUTINE TRANS(UPRIM,PRESS,THETA,REB,UC,NY,FLAM,XFLAM,LAMQ) 2140
C 2141
C SUBROUTINE TO TEST FOR TRANSITION IN A LAMINAR BOUNDARY LAYER. 2142
C 2143
DIMENSION UC(100,3),FLAM(10),XFLAM(10) 2144
F(X) = .11746 - 1.0582E-3*X - 1.1022E-4*X*X 2145
TKAY = PRESS*REB*THETA**2/UC(NY,2) 2146
IF(TKAY-.077) 2,2,99 2147
2 IF(ABS(TKAY)-.0001) 3,3,4 2148
3 ARG = TKAY*72.48 2149
GO TO 5 2150
4 ARG = 0. 2151
DO 6 N=1,1000 2152
SAVE = ARG 2153
ARG = ARG - (ARG*F(ARG)**2-TKAY)/(F(ARG)*(.11746-ARG*3.1746E-3 -ARG
1 ARG*ARG*5.5115E-4)) 2154
IF(ABS(1.-SAVE/ARG)-1.E-6) 7,7,6 2155
6 CONTINUE 2156
7 IF(ARG+11.) 8,8,5 2158
8 EF = 1.75 2159
GO TO 10 2160
5 DO 15 V=1,10 2161
IF(ARG-XFLAM(N)) 24,24,15 2162
24 NBAR = N 2163
GO TO 16 2164
15 CONTINUE 2165
16 EF = FLAM(NBAR-1)*(ARG-XFLAM(NBAR-1))*(FLAM(NBAR)-FLAM(NBAR-1))/X
1 FLAM(NBAR)-XFLAM(NBAR-1)) 2166
10 B = .5*EF 2168
A = 3.36*(UPRIM/UC(NY,2))**2 2169
RTH = F(ARG)*(SQRT(B*B+9860.*A)-B)/A 2170
IF(REB*THETA-RTH) 99,50,50 2171
50 LAMQ = 0 2172
99 CONTINUE 2173
RETURN 2174
END 2175

```

```

SUBROUTINE CAPS(ITER,N,CAPG,CAPH,CAPJ,CAPK,SR,SS,SD,SE,SF,VISC,V,U      *
1C)                                                                    2176
DIMENSION CAPG(100),CAPH(100),CAPJ(100),CAPK(100)                    2177
DIMENSION VISC(100,2),V(100,2),UC(100,3),SD(100),SE(100),SF(100)    2178
IF(ITER) 4,2,4                                                         2179
2 CAPG(N)= SR*V(N,1) - SS*V(N,2)                                       2180
CAPH(N)=SR*VISC(N,1)-SS*VISC(N,2)                                     2181
CAPJ(N)=SR*(SD(N)*VISC(N+1,1)+SE(N)*VISC(N,1)-SF(N)*VISC(N-1,1))-S  2182
1S*(SD(N)*VISC(N+1,2)+SE(N)*VISC(N,2)-SF(N)*VISC(N-1,2))          2183
CAPK(N)= SR*UC(N,2)-SS*UC(N,3)                                       2184
GO TO 6                                                                2185
4 CAPG(N)=.5*(CAPG(N)+V(N,1))                                         2186
CAPH(N)=.5*(CAPH(N)+VISC(N,1))                                       2187
CAPJ(N)=.5*(CAPJ(N)+SD(N)*VISC(N+1,1)+SE(N)*VISC(N,1)-SF(N)*VISC(N  2188
1-1,1))                                                                2189
CAPK(N)=.5*(CAPK(N)+UC(N,1))                                         2190
6 CONTINUE                                                             2191
RETURN                                                                  2192
END                                                                      2194

```

		*
	SUBROUTINE TERP(YIN,YBASE,VARY,NY,VALUE)	2195
C		2196
C	SUBROUTINE FOR DETERMINING INTERPOLATED VALUE OF THE	2197
C	FUNCTION VARY AT Y = YIN.	2198
C		2199
	DIMENSION YBASE(100),VARY(100)	2200
	IF(YIN-YBASE(NY-1)) 2,3,3	2201
3	VALUE = VARY(NY)	2202
	GO TO 10	2203
2	DO 15 N=1,NY	2204
	IF(YIN-YBASE(N)) 24,24,15	2205
24	NBAR=N	2206
	GO TO 16	2207
15	CONTINUE	2208
16	D21=YBASE(NBAR)-YBASE(NBAR-1)	2209
	D31=YBASE(NBAR+1)-YBASE(NBAR-1)	2210
	D32=D31-D21	2211
	D3A=YBASE(NBAR+1)-YIN	2212
	D2A=YBASE(NBAR)-YIN	2213
	DA1=YIN-YBASE(NBAR-1)	2214
	VALUE=D3A*D2A*VARY(NBAR-1)/(D21*D31)+D3A*DA1*VARY(NBAR)/(D21*D32)-	2215
	D2A*DA1*VARY(NBAR+1)/(D31*D32)	2216
10	CONTINUE	2217
	RETURN	2218
	END	2219

```

SUBROUTINE YDIFF(NY,ALPHA,BETA,GAMMA,DELTA,SD,SE,SF,C2,C3,C4,Y)      2220
DIMENSION ALPHA(100),BETA(100),GAMMA(100),DELTA(100)            2221
DIMENSION SD(100),SE(100),SF(100),Y(100)                        2222
NV=NY-2                                                            2223
NVP1=NV+1                                                         2224
DO 40 N=2,NV                                                      2225
  ALPHA(N) = 2.*(2.*Y(N)-Y(N-1)-Y(N+1))/((Y(N+2)-Y(N-1))*(Y(N+2)-Y(N  2226
  1+1))*(Y(N+2)-Y(N)))                                           2227
  DELTA(N) = 2.*(Y(N+2)+Y(N+1)-2.*Y(N))/((Y(N+2)-Y(N-1))*(Y(N+1)-Y(N  2228
  1-1))*(Y(N)-Y(N-1)))                                           2229
  BETA(N) = (DELTA(N)*(Y(N)-Y(N-1))**3-ALPHA(N)*(Y(N+2)-Y(N))**3)/(Y  2230
  1(N+1)-Y(N))**3                                               2231
  GAMMA(N) = -ALPHA(N)-BETA(N)-DELTA(N)                          2232
40 CONTINUE                                                       2233
DO 39 N=2,NVP1                                                   2234
  SD(N) = (Y(N)-Y(N-1))/((Y(N+1)-Y(N-1))*(Y(N+1)-Y(N)))        2235
  SE(N) = 1./(Y(N)-Y(N-1))-1./(Y(N+1)-Y(N))                    2236
  SF(N) = (Y(N+1)-Y(N))/((Y(N)-Y(N-1))*(Y(N+1)-Y(N-1)))       2237
39 CONTINUE                                                       2238
C2 = Y(3)*Y(4)/(Y(2)*(Y(3)-Y(2))*(Y(4)-Y(2)))                 2239
C3 = -Y(2)*Y(4)/(Y(3)*(Y(4)-Y(3))*(Y(3)-Y(2)))                2240
C4 = Y(2)*Y(3)/(Y(4)*(Y(4)-Y(3))*(Y(4)-Y(2)))                 2241
RETURN                                                            2242
END                                                                2243

```



```

SUBROUTINE SETUP(LGO,M,NV,REB,X,Y,UC,PRESS,GRAD,DELTA,DISP,THETA,VISC,MTRAN) 2244
C 2245
C 2246
C SUBROUTINE FOR CALCULATION OF BOUNDARY LAYER THICKNESS, 2247
C DISPLACEMENT THICKNESS, MOMENTUM THICKNESS AND EDDY VISCOSITY. 2248
C 2249
C DIMENSION X(300),Y(100),UC(100,3),VISC(100,2),GRAD(100) 2250
RTR=SQRT(REB) 2251
NY = NV + 2 2252
UEDGE = .995*UC(NY,1) 2253
DO 10 N=1,NV 2254
IF(UEDGE-UC(N+1,1)) 41,41,10 2255
41 NOELT = N 2256
GO TO 20 2257
10 CONTINJE 2258
20 DELT = Y(NELT)+(UEDGE-UC(NELT,1))*(Y(NELT+1)-Y(NELT))/(UC(NELT 2259
IT+1,1)-UC(NELT,1)) 2260
SUM = 0. 2261
DO 50 N=2,NY 2262
50 SUM = SUM+(Y(N)-Y(N-1))*(UC(N,1)+UC(N-1,1)) 2263
DISP = (Y(NY)-.5*SUM/UC(NY,1))/RTR 2264
SUM = 0. 2265
UEDGE = UC(NY,1) 2266
DO 60 N=2,NY 2267
60 SUM = SUM+(Y(N)-Y(N-1))*((UEDGE-UC(N,1))*UC(N,1)+(UEDGE-UC(N-1,1)) 2268
1*UC(N-1,1)) 2269
THETA = .5*SUM/(RTR*UEDGE**2) 2270
IF(LGO) 53,53,56 2271
53 NVPI=NV+1 2272
EASE = 1. 2273
IF(M-MTRAN) 31,32,32 2274
32 IF(MTRAN+5-M) 31,31,33 2275
33 EASE = (X(M)-X(MTRAN))/(X(MTRAN+5)-X(MTRAN)) 2276
31 CONTINJE 2277
INNER=0 2278
FAC1 = .16*RTR*EASE 2279
FAC2 = .0168*UEDGE*DISP*REB*EASE 2280
EFAC1 = -RTR/26. 2281
EFAC2 = PRESS/RTR 2282
TAUW = GRAD(1)/RTR 2283
DO 160 N=2,NVPI 2284
ALTER = 1.+FAC2/(1.+5.5*(Y(N)/DELTA)**6) 2285
IF(INNER) 402,401,402 2286
402 VISC(N,1)=ALTER 2287
GO TO 160 2288
401 CONTINJE 2289
TAUWY=TAUW-Y(N)*EFAC2 2290
IF(TAUWY) 701,701,702 2291
701 VISC(N,1)=1 2292
GO TO 703 2293
702 EX=Y(N)*EFAC1*SQRT(TAUWY) 2294
VISC(N,1) = 1.+FAC1*Y(N)*Y(N)*ABS(GRAD(N))*(1.-EXP(EX))**2 2295
703 IF(VISC(N,1)-ALTER) 160,160,521 2296
521 VISC(N,1)=ALTER 2297

```

	INNER=1	2298
160	CONTINUE	2299
	SAVE=1.	2300
	DO 162 N=2,NV	2301
	RAVE=VISC(N,1)	2302
	VISC(N,1)=(VISC(N+1,1)+RAVE+SAVE)/3.	2303
162	SAVE=RAVE	2304
56	CONTINUE	2305
	RETURN	2306
	END	2307

REFERENCES

1. Ham, N. D.; and Young, M. I.: Torsional Oscillation of Helicopter Blades Due to Stall. *J. Aircraft*, vol. 3, no. 3, May-June 1966, pp. 218-224.
2. Liiva, J.; et al.: Two-Dimensional Tests of Airfoils Oscillating Near Stall. USAAVLABS Tech. Rept. no. 68-13A, April 1968.
3. Ericsson, L.; and Reding, J.: Dynamic Stall of Helicopter Blades. *J. Am. Helicopter Soc.*, vol. 17, no. 1, January 1972, pp. 11-19.
4. Johnson, W.; and Ham, N. D.: On the Mechanism of Dynamic Stall. *J. Am. Helicopter Soc.*, vol. 17, no. 4, October 1972, pp. 36-45.
5. Tarzanin, F.: Prediction of Control Loads Due to Blade Stall. *J. Am. Helicopter Soc.*, vol. 17, no. 2, April 1972, pp. 33-46.
6. Crimi, P.; and Reeves, B. L.: A Method for Analyzing Dynamic Stall of Helicopter Rotor Blades. NASA CR 2009, May 1972.
7. Smith, A. M. O.; and Cebeci, T.: Numerical Solution of the Turbulent-Boundary-Layer Equations. McDonnell Douglas Rept. No. DAC 33735, May 1967.
8. Reeves, B. L.; and Lees, L.: Theory of Laminar Near Wake of Blunt Bodies in Hypersonic Flow. *AIAA J.*, vol. 3, no. 11, November 1965, pp. 2061-2074.
9. Giesing, J. P.: Nonlinear Two-Dimensional Unsteady Potential Flow with Lift. *J. Aircraft*, vol. 5, no. 2, March-April 1968, pp. 135-143.
10. Chen, C. F.; and Wirtz, R. A.: Second-Order Theory for Flow Past Oscillating Foils. *AIAA J.*, vol. 6, no. 8, August 1968, pp. 1556-1562.
11. Lighthill, M. J.: A New Approach to Thin Airfoil Theory. *Aeron. Quart.*, vol. 3, November 1951, pp. 193-210.
12. Sears, W. R.; and Telionis, D. P.: Unsteady Boundary Layer Separation. Preprint for IUTAM Symposium on Unsteady Boundary Layers, Quebec, May 1971.

13. Abbott, I. H.; and Doenhoff, A. E.: Theory of Wing Sections. Dover Publications, New York, 1959.
14. McCullough, G. B.; and Gault, D. E.: Examples of Three Representative Types of Airfoil-Section Stall at Low Speed. NACA TN 2502, September 1951.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
WASHINGTON, D.C. 20546

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

SPECIAL FOURTH-CLASS RATE
BOOK

POSTAGE AND FEES PAID
NATIONAL AERONAUTICS AND
SPACE ADMINISTRATION
451



POSTMASTER: If Undeliverable (Section 158
Postal Manual) Do Not Return

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons. Also includes conference proceedings with either limited or unlimited distribution.

CONTRACTOR REPORTS: Scientific and technical information generated under a NASA contract or grant and considered an important contribution to existing knowledge.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities. Publications include final reports of major projects, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

TECHNOLOGY UTILIZATION PUBLICATIONS: Information on technology used by NASA that may be of particular interest in commercial and other non-aerospace applications. Publications include Tech Briefs, Technology Utilization Reports and Technology Surveys.

Details on the availability of these publications may be obtained from:

**SCIENTIFIC AND TECHNICAL INFORMATION OFFICE
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Washington, D.C. 20546**