


NASA CONTRACTOR  
REPORT

NASA CR-2358

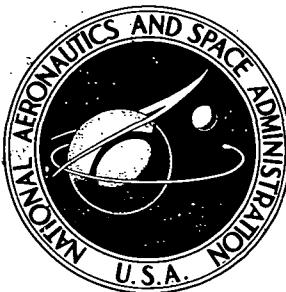

NASA CR-2358

CALCULATION OF THE LONGITUDINAL  
AERODYNAMIC CHARACTERISTICS  
OF STOL AIRCRAFT WITH  
EXTERNALLY-BLOWN JET-AUGMENTED FLAPS

*by Marnix F. E. Dillenius, Michael R. Mendenhall,  
and S. B. Spangler*

*Prepared by*

NIELSEN ENGINEERING & RESEARCH, INC.  
Mountain View, Calif. 94043  
*for Ames Research Center*

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • FEBRUARY 1974

1. Report No. NASA CR-2358	2. Government Accession No.	3: Recipient's Catalog No.	
4. Title and Subtitle "Calculation of the Longitudinal Aerodynamic Characteristics of STOL Aircraft with Externally-Blown Jet-Augmented Flaps"		5. Report Date February 1974	
7. Author(s) Marnix F.E. Dillenius, Michael R. Mendenhall, and S.B. Spangler		6. Performing Organization Code	
9. Performing Organization Name and Address Nielsen Engineering and Research, Inc. 510 Clyde Avenue Mountain View, California 94043		8. Performing Organization Report No.	
12. Sponsoring Agency Name and Address National Aeronautics & Space Administration Washington, D.C. 20546		10. Work Unit No.	
15. Supplementary Notes		11. Contract or Grant No. NAS 2-5247	
		13. Type of Report and Period Covered Contractor Report/Final Rept.	
		14. Sponsoring Agency Code	
16. Abstract  A theoretical investigation was made to develop methods for predicting the longitudinal aerodynamic characteristics of externally-blown, jet-augmented wing-flap combinations. A potential flow analysis was used to develop two models: a wing-flap lifting surface model and a high-bypass-ratio turbofan engine wake model. The wing-flap model uses a vortex-lattice approach to represent a wing of arbitrary planform, camber, and twist, and a multiply-slotted flap which can be large and highly deflected. The engine wake model consists of a series of closely spaced vortex rings normal to a wake centerline which is permitted to have vertical and lateral curvature to accommodate the local perturbed flow under the wing. Use of these two models in sequence provides for calculation of the wing-flap load distribution including the influence of the engine wake. The method can accommodate multiple engines per wing panel and part-span flaps but is limited to the case where the flow and geometry of the configuration are symmetric about a vertical plane containing the wing root chord.  Comparisons of predicted and measured lift and pitching moment on unswept and swept wings with one and two engines per panel and with various flap deflection angles indicate satisfactory prediction of lift and moment for flap deflections up to 30 to 40 degrees. At higher flap angles with and without power, the method begins to overpredict lift, due probably to the appearance of flow separation on the flaps.			
17. Key Words (Suggested by Author(s)) Externally Blown Flaps STOL		18. Distribution Statement  UNCLASSIFIED-UNLIMITED	
19. Security Classif. (of this report) UNCLASSIFIED	20. Security Classif. (of this page) UNCLASSIFIED	21. No. of Pages 195	22. Price* Domestic, \$5.25 Foreign, \$7.75

## TABLE OF CONTENTS

	<u>Page No.</u>
SUMMARY	1
INTRODUCTION	2
LIST OF SYMBOLS	3
THEORETICAL ANALYSIS	7
Wing-Flap Model	7
Configuration characteristics	7
Description of the method	8
Jet Wake Model	18
Model description	19
Velocities induced by jet wake model	21
Interference Calculation	23
COMPARISON OF THEORY WITH EXPERIMENT	25
Wing-Flap	26
Jet-Wing-Flap	28
Discussion of Results	32
WING-FLAP VORTEX-LATTICE PROGRAM	33
Program Description	34
Calculation procedure	34
Program operation	36
Program limitations and precautions	36
Description of Input	37
Description of Output	50
Program Listing	51
JET-WAKE PROGRAM	76
Program Description	76
Calculation procedure	76
Program operation	77
Description of Input	77
Card content	77
Calculation of input wake characteristics	82

	<u>Page No.</u>
Description of Output	86
Program Listing	87
SAMPLE CASE	95
CONCLUDING REMARKS	99
APPENDIX A - ARRANGEMENT OF VORTICES ON THE WING-FLAP	102
REFERENCES	136
FIGURES 1 - 26	138

CALCULATION OF THE LONGITUDINAL AERODYNAMIC  
CHARACTERISTICS OF STOL AIRCRAFT WITH  
EXTERNALLY-BLOWN JET-AUGMENTED FLAPS

By Marnix F. E. Dillenius, Michael R.  
Mendenhall, and S. B. Spangler  
Nielsen Engineering & Research, Inc.

SUMMARY

A theoretical investigation was made to develop methods for predicting the lift and pitching moment characteristics of externally-blown, jet-augmented wing-flap combinations. A potential flow analysis was used to develop two models: a wing-flap lifting surface model and a high-bypass-ratio turbofan engine wake model. The wing-flap model uses a vortex-lattice approach to represent a wing of arbitrary planform, camber, and twist, and a multiply-slotted flap which can be large and highly deflected. In order to handle the large angles that appear in the flow-tangency condition applied to the surfaces, trigonometric functions are used instead of the usual linearizations. The horseshoe vortices on the flap are laid out on a surface inclined to the wing at the average flap angle, with the trailing vortex legs lying on an extension of this flap surface. The engine wake model consists of a series of closely spaced vortex rings normal to a wake centerline which is permitted to have vertical and lateral curvature to accommodate the local perturbed flow under the wing. The ring diameters and strengths are determined from the engine thrust such that the resulting potential flow "wake" has essentially the same mass, momentum and spreading rate as the appropriate turbulent, coflowing wake. Use of these two models in sequence provides for calculation of the wing-flap load distribution including the influence of the engine wake. The method can accommodate multiple engines per wing panel and part-span flaps but is limited to the case where the flow and geometry of the configuration are symmetric about a vertical plane containing the wing root chord.

Comparisons of predicted and measured lift and pitching moment on unswept and swept wings with one and two engines per panel and with flaps having a combined chord as large as the basic wing chord indicate

satisfactory prediction of lift and moment for flap deflections up to 30 to 40 degrees. At higher flap angles with and without power, the method begins to overpredict lift, due probably to the appearance of flow separation on the flaps. The agreement on moments is least satisfactory for swept wings, probably as a result of the particular vortex-lattice layout used in the calculations.

#### INTRODUCTION

The development of high-bypass-ratio turbofan engines with their relatively cool exhaust has generated great interest in the use of external-flow jet-augmented flaps as a means of achieving high lift coefficients for STOL operation. In this concept, the jet efflux from pod-mounted engines is made to impinge on a large, highly deflected, multiply slotted flap system which induces a large amount of additional lift through engine wake deflection. A number of experimental investigations have confirmed the capability of the externally-blown jet-augmented flap to produce high lift coefficients (refs. 1-4).

Most of the work that has been published on externally-blown jet-augmented flaps has been experimental in nature. In addition to the work on complete configurations such as that of references 1-4, experimental work has also been done on a semispan wing-flap-engine model (ref. 5). A wide range of configuration variables have been tested, including swept and unswept wings, partial and full span flaps, various numbers of flap segments, and variations in engine position and incidence relative to the wing. The results of this work are available in the form of overall lift and pitching moment over a range of flap angles and thrust coefficients.

Early analysis of the behavior of a wing with externally-blown jet-augmented flaps considered the lift to be made up of the lift of the wing-flap alone, the lift due to the vertical component of jet momentum, and a circulation lift induced by the jet-flap interaction (ref. 1). While theoretical values of the first two could be obtained, no method was developed to estimate the last. Recently, jet flap theory developed for the jet flap and augmentor wings was applied to a jet-augmented flap (ref. 6). Although good agreement was indicated, empirically determined momentum coefficients, jet turning angles, and jet spreading factors were

used. Thus, no rational, analytical method existed for predicting the performance of an arbitrary jet-augmented flap and wing combination.

The objective of the present work is to develop an engineering method for predicting the characteristics of such a configuration. A potential flow approach was adopted involving the combination of two flow models: a wing-flap lifting surface model and a jet wake model. Because of the size and large deflection angles of flaps required for STOL performance, a nonplanar, nonlinear lifting surface method is required for the wing-flap model. A vortex-lattice approach was selected. The jet wake model required a potential flow approximation to a turbulent, coflowing jet. The jet characteristics used were those of Abrámovich (ref. 7). The potential flow approximation was derived from the basic ring vortex model of reference 8. These models must be combined in such a fashion that all the boundary conditions are satisfied. An iterative approach was selected. The development of the models, comparisons of predicted results with data, and a user's description of the resulting computer programs are presented in this report. The computer source programs are available from COSMIC.

#### SYMBOLS

$A_f$	fan exit flow area
$A_j$	jet-wake cross sectional area at beginning of the wake
$b$	wing span
$c$	chord of area element on the wing; or basic wing root chord
$c_{ave}$	average wing chord, $S_{REF}/b$ , used as reference length by wing-flap program
$c_l$	section lift coefficient, based on local chord
$c_{\lambda_i}$	design section lift coefficient
$C_D$	induced drag coefficient, $-F_s/qS_{REF}$
$C_L$	lift coefficient, $L/qS_{REF}$
$C_\mu$	thrust coefficient, $T/qS_{REF}$
$C_m$	pitching moment coefficient, $M/qS_{REF}C_{ave}$

E	complete elliptic integral of second kind
$F_u, F_v, F_w$	backwash, sidewash, and downwash influence coefficient for a horseshoe vortex on the wing
$F_{f,u}, F_{f,v}, F_{f,w}$	backwash, sidewash, and downwash influence coefficient for horseshoe vortex on the flap
$F_s$	streamwise force
k	argument of elliptic integral
K	complete elliptic integral of first kind
L	lift force
$\ell_c$	length of initial region in jet-wake
M	pitching moment; or momentum in jet; or number of vortices or control points on wing
MF	number of vortices or control points on flap
m	mass flow in jet
q	free stream dynamic pressure, $\frac{1}{2} \rho_\infty V^2$
R	radius of jet-wake
$R_o$	radius of jet-wake at beginning of jet wake
r	radial distance given by $\sqrt{\eta^2 + \zeta^2}$ for the jet
s	horseshoe vortex semi-width measured in chordal plane; or distance along jet wake centerline
S <sub>REF</sub>	wing planform area used as reference area by wing-flap program
T	engine thrust
$u, v, w$	perturbation velocities in x, y and z directions, respectively, induced by horseshoe vortices on the wing
$u_f, v_f, w_f$	perturbation velocities in $x_f, y_f$ and $z_f$ directions, respectively, induced by horseshoe vortices on the flap
$u_i, v_i, w_i$	perturbation velocities in x, y and z directions, respectively, induced on wing-flap by other airframe components
$u_p$	axial velocity induced by a single vortex ring

$v_r$	radial velocity induced by a single vortex ring
$v_j$	jet velocity directed along the geometric engine centerline at beginning of wake (includes free stream velocity)
$\bar{v}_j$	average jet velocity at a station along the jet (includes free stream velocity)
$v_f$	fan exit velocity
$v_1$	perturbation velocity along $y^+$ direction at the bound leg midpoint of a horseshoe vortex on the wing
$v_2$	perturbation velocity along $y^+$ direction at the 3/4 chord of the left side of an area element on the wing
$v$	free stream velocity
$x, y, z$	coordinates with origin located at the midspan of a horseshoe vortex on the wing and with same directions as $X, Y, Z$ coordinate system; figure 2; or jet wake coordinate system fixed at beginning of jet, figure 9(a)
$x_f, y_f, z_f$	coordinates with origin located at the midspan of a horseshoe vortex on the flap, $y_f$ direction same as $y$ and $Y$ directions. Directions of $x_f$ and $z_f$ rotated from $x$ and $z$ through angle $\delta_{xz}$ (positive down), figure 2
$X, Y, Z$	coordinates with origin located at the wing root chord nose, figure 2. $X$ axis coincident with wing root chord, $Z$ axis positive in downward direction
$\alpha$	angle of attack of wing root chord with respect to free stream, degrees
$\alpha_l$	angle between tangent to mean camber surface of the wing and $X$ direction, degrees
$\Gamma$	vortex strength of a horseshoe vortex
$\Gamma_j$	vortex strength of vortex rings used to model expanding jet wake
$\gamma$	vortex strength of vortex cylinder used to model straight jet wake
$\delta_f$	flap deflection angle measured perpendicular to the hingeline, positive downward, degrees
$\delta_{xz}$	streamwise flap deflection angle measured in a plane parallel to the $X-Z$ plane, positive downwards, degrees

$\delta_l$	angle between tangent to mean camber surface of the flap and the $x_f$ direction, degrees
$\epsilon_y$	angle whose tangent equals the slope of the jet-wake centerline in the X-Y plane, degrees
$\epsilon_z$	angle whose tangent equals the slope of the jet-wake centerline in the X-Z plane, degrees
$\eta$	non-dimensional spanwise coordinate, $Y/(b/2)$
$\theta$	angle of inclination of jet wake centerline, relative to X-direction, degrees
$\xi, \eta, \zeta$	vortex ring rectangular coordinate system with origin located at the center of the vortex ring, figure 9(b)
$\rho_\infty$	free stream density
$\phi$	dihedral of wing, degrees
$\phi_f$	dihedral of flap calculated by wing flap program, degrees
$\psi$	sweep angle of the bound leg of a wing horseshoe vortex (positive for swept back vortices), degrees
$\psi_f$	sweep angle of the bound leg of a horseshoe vortex on the deflected flap calculated by wing flap program from undeflected flap sweep, degrees
$\psi_p$	sweep angles measured in the plane of the wing planform, degrees

#### Subscripts

f	flap
l	left; or local
o	initial
p	field point
Q	center of engine inlet
r	right
s	center of vortex ring
w	wing
LE	leading edge
TE	trailing edge

## THEORETICAL ANALYSIS

### Wing-Flap Model

In order to appraise aerodynamic interaction effects between a jet-wake and a wing-flap configuration, a method is required to determine aerodynamic loadings on the wing flap surfaces. Furthermore, the method must be able to predict wing-flap induced perturbation velocities at field points in the vicinity of the configuration. For these purposes, a three-dimensional horseshoe vortex lattice is used as the distribution of singularities representing the lifting surfaces. The flow tangency boundary condition, including all wing-flap interference effects, is applied at a finite number of control points on the wing-flap surfaces, which results in a set of simultaneous equations from which the vortex strengths are determined. Wing angle of attack and flap deflection angles are accounted for in terms of trigonometric functions instead of linear terms because the magnitudes of the angles can be large. The jet-wake is considered an external source of perturbation velocities which are included in the wing-flap flow tangency condition as part of the jet wing-flap aerodynamic interference calculation.

The method is developed for flow in the pitch plane; yaw effects are not included. Since large flap deflections are used only at low speeds, compressibility effects are not included. Finally, since potential flow theory is used, the methods cannot account for flow separation or other viscous effects.

Configuration characteristics.- The configuration of interest is a wing with large, deflected flaps attached to the trailing edges of the wing panel. The various configuration parameters included in the method are listed below.

#### Wing Panels:

Mean camber surface: May have both twist and camber

Leading-edge shape: Straight line which may be swept

Trailing-edge shape: Same as for leading edge

Taper: Linear

Tips: Parallel to wing root chord

Dihedral: Arbitrary but constant over the semispan

Thickness: Assumed small (thickness effects neglected)

Flaps:

Type: Single surface. Multiple flaps are idealized as a single flap with camber to account for the effects of individual flap components.

Location: At or near wing trailing edge with the flap leading edge situated in or off the plane of the wing. (In actuality, the flap can be located anywhere provided certain precautions are followed in the layout of the wing vortex-lattice and the flap control points.)

Mean camber surface: May have camber. Also see remarks regarding flap type.

Span: Full or partial span.

Leading-edge shape: Straight line which may be swept.

Trailing-edge shape: Same as for leading edge.

Taper: Linear

Thickness: Assumed small (thickness effects neglected).

Description of the method.- The three-dimensional horseshoe vortex lattice that is used to represent the wing-flap lifting surfaces is an extension of the vortex-lattice methods and programs developed in references 8, 9, and 10. Specifically, the approach described in reference 8 has been extensively modified to treat a wing-flap system with mutual interference between the wing and flap.

The vortex-lattice arrangement and the coordinate system for a swept wing with trailing edge flaps deflected are shown in figures 1 and 2. The wing panel and flap are divided into trapezoidal area elements. A horseshoe vortex is placed in each area element such that the spanwise bound leg lies along the element quarter chord and its trailing legs along the chordwise sides of the element. The trailing legs are assumed to lie in the plane of the area element. The wing vortex trailing legs consequently extend back to infinity in the plane of the wing. The flap vortex trailing legs extend downwards to infinity in the plane of the flap. Both wing and flap vortex trailing legs lie in planes parallel to the X-Z plane. The angle subtended by the two trailing leg directions equals the streamwise flap angle,  $\delta_{xz}$ , whereas the actual flap  $\delta_f$  is understood to be measured perpendicular to the hingeline.

On the wing, the area elements have a uniform chordwise length at any spanwise station; in the spanwise direction the area element widths need not be equal to allow for closer spacing where large spanwise loading gradients

exist. The flap area elements are arranged likewise although the chordwise and spanwise dimensions need not be the same as those used for the wing area elements.

The flow tangency boundary condition is applied at a finite set of control points given by the midpoint of the 3/4 chord of each area element located in the chordal planes of the wing and the flap. The wing chordal plane is the plane containing the wing root chord and making angle  $\phi$  with the  $Z = 0$  plane, see figure 2. The flap chordal plane is the plane containing the flap leading- and trailing-edges and the flap root and tip chords. The boundary condition states that there is no flow through the wing and flap surfaces at each control point. The condition is illustrated in figure 3 for the wing. The velocities normal to the wing consist of a component of the free stream, perturbation velocities  $u$ ,  $v$  and  $w$  induced by the wing-flap horseshoe system, and externally induced perturbation velocities  $u_i$ ,  $v_i$  and  $w_i$ . The latter velocities may be generated by a turbofan wake as described in a later section. The velocities normal to the flap are categorized in the same manner.

With  $M$  control points on the wing and  $MF$  on the flap, the boundary condition for the left wing panel is formulated as follows.

$$\begin{aligned}
 & \sum_{n=1}^M \frac{\Gamma_n}{4\pi V} \left( F_{w,v,n} \cos \phi_v - F_{v,v,n} \sin \phi_v \right) + \sum_{n=M+1}^{M+MF} \frac{\Gamma_n}{4\pi V} \left( F_{f,w,v,n} \cos \phi_v \cos \delta_{XZ} \right. \\
 & \quad \left. - F_{f,u,v,n} \cos \phi_v \sin \delta_{XZ} - F_{f,v,v,n} \sin \phi_v \right) \\
 & = \sin \left( \alpha + \alpha_{\ell,v} \right) \cos \phi_v + \frac{v_{i,v}}{V} \sin \phi_v - \left( \frac{u_{i,v}}{V} \alpha_{\ell,v} + \frac{w_{i,v}}{V} \right) \cos \phi_v \\
 & \quad v = 1, \dots, M \quad (1)
 \end{aligned}$$

With the flap deflected downwards, the flap boundary condition is written for  $MF$  points as

$$\begin{aligned}
& \sum_{n=1}^M \frac{\Gamma_n}{4\pi V} \left[ F_{w_{v,n}} \cos \phi_{f,v} \cos (\delta_{xz} + \delta_{\ell_v}) + F_{u_{v,n}} \cos \phi_{f,v} \sin (\delta_{xz} + \delta_{\ell_v}) \right. \\
& \quad \left. - F_{v_{v,n}} \sin \phi_{f,v} \cos (\delta_{xz} + \delta_{\ell_v}) \right] \\
& + \sum_{n=M+1}^{M+MF} \frac{\Gamma_n}{4\pi V} \left[ F_{f,w_{v,n}} \cos \phi_{f,v} \cos \delta_{\ell_v} - F_{f,v_{v,n}} \sin \phi_{f,v} \cos \delta_{\ell_v} \right] \\
& = \sin \left( \alpha + \delta_{xz} + \delta_{\ell_v} \right) \cos \phi_{f,v} + \frac{v_{i,v}}{V} \sin \phi_{f,v} \cos \left( \delta_{xz} + \delta_{\ell_v} \right) \\
& \quad - \left[ \frac{u_{i,v}}{V} \sin \left( \delta_{xz} + \delta_{\ell_v} \right) + \frac{w_{i,v}}{V} \cos \left( \delta_{xz} + \delta_{\ell_v} \right) \right] \cos \phi_{f,v}
\end{aligned}$$

v = M + 1, ..., M + MF      (2)

The wing angle of attack  $\alpha$ , the streamwise flap angle  $\delta_{xz}$  (positive downwards) and the local flap angle  $\delta_{\ell}$  due to flap camber are accounted for in a nonlinear manner; for example,  $\sin \alpha$  instead of  $\alpha$ . This allows the method to be used with large magnitudes for these angles. The validity of the wing-flap loading results at high angles will, however, be limited by viscous effects such as flow separation on the flap not accounted for in the present theory. Local wing angles  $\alpha_{\ell}$  due to wing camber and twist are assumed to have small magnitudes.

The right-hand sides of equations (1) and (2) represent the free-stream component and the externally induced perturbation velocities normal to the wing and flap chordal planes. The first summation on the left-hand sides of the equations represents the perturbation velocities induced by the left and right wing surfaces. The second summation represents the perturbation velocities induced by the left and right flap surfaces. The functions inside the summations will be discussed next.

The functions  $F_u, F_v, F_w$  and  $F_{f,u}, F_{f,v}, F_{f,w}$  are influence functions relating the perturbation velocity components induced at some point by a wing and flap horseshoe vortex, respectively, to the circulation strength and the coordinates of the point relative to the origin of the vortex coordinate system  $(x, y, z)$ . This relationship is obtained

from the Biot-Savart law, (ref. 11). The origin of the vortex coordinate system is located at the bound leg midpoint and its directions are aligned with the wing root chord coordinate system (X,Y,Z), (fig. 2). The effect of vortices laid out on the left and the right wing and flap panels must be included in the influence functions shown in equations (1) and (2). The functions  $F_u$ ,  $F_v$  and  $F_w$  for the left wing panel are described completely in Appendix A of reference 8 and are repeated below together with other necessary relations. The same functions are used in connection with the flap vortices as described later. The bound leg sweep angle  $\psi$  measured in the wing chordal plane is related to the sweep angle  $\psi_p$  in the wing planform by the dihedral angle  $\phi$ :

$$\tan \psi = \tan \psi_p \cos \phi \quad (3)$$

The backwash influence coefficient is

$$F_u(x, y, z, s, \psi, \phi) = \frac{(z \cos \phi - y \sin \phi) \cos \psi}{[x \cos \psi - (y \cos \phi + z \sin \phi) \sin \psi]^2 + (z \cos \phi - y \sin \phi)^2} \\ \cdot \left\{ \frac{(x + s \tan \psi) \sin \psi + (y + s \cos \phi) \cos \psi \cos \phi + (z + s \sin \phi) \cos \psi \sin \phi}{[(x + s \tan \psi)^2 + (y + s \cos \phi)^2 + (z + s \sin \phi)^2]^{1/2}} \right. \\ \left. - \frac{(x - s \tan \psi) \sin \psi + (y - s \cos \phi) \cos \psi \cos \phi + (z - s \sin \phi) \cos \psi \sin \phi}{[(x - s \tan \psi)^2 + (y - s \cos \phi)^2 + (z - s \sin \phi)^2]^{1/2}} \right\} \quad (4)$$

The sidewash influence coefficient is

$$F_v(x, y, z, s, \psi, \phi)$$

$$\begin{aligned}
&= \frac{-z \sin \psi + x \cos \psi \sin \phi}{[x \cos \psi - (y \cos \phi + z \sin \phi) \sin \psi]^2 + (z \cos \phi - y \sin \phi)^2} \\
&\bullet \left\{ \frac{(x + s \tan \psi) \sin \psi + (y + s \cos \phi) \cos \psi \cos \phi + (z + s \sin \phi) \cos \psi \sin \phi}{[(x + s \tan \psi)^2 + (y + s \cos \phi)^2 + (z + s \sin \phi)^2]^{1/2}} \right. \\
&- \left. \frac{(x - s \tan \psi) \sin \psi + (y - s \cos \phi) \cos \psi \cos \phi + (z - s \sin \phi) \cos \psi \sin \phi}{[(x - s \tan \psi)^2 + (y - s \cos \phi)^2 + (z - s \sin \phi)^2]^{1/2}} \right\} \\
&+ \frac{(z - s \sin \phi)}{(y - s \cos \phi)^2 + (z - s \sin \phi)^2} \\
&\bullet \left\{ 1 - \frac{(x - s \tan \psi)}{[(x - s \tan \psi)^2 + (y - s \cos \phi)^2 + (z - s \sin \phi)^2]^{1/2}} \right\} \\
&- \frac{(z + s \sin \phi)}{(y + s \cos \phi)^2 + (z + s \sin \phi)^2} \\
&\bullet \left\{ 1 - \frac{(x + s \tan \psi)}{[(x + s \tan \psi)^2 + (y + s \cos \phi)^2 + (z + s \sin \phi)^2]^{1/2}} \right\}
\end{aligned} \tag{5}$$

The downwash influence coefficient is

$$F_w(x, y, z, s, \psi, \phi)$$

$$\begin{aligned}
&= \frac{-x \cos \psi \cos \phi + y \sin \psi}{[x \cos \psi - (y \cos \phi + z \sin \phi) \sin \psi]^2 + (z \cos \phi - y \sin \phi)^2} \\
&\bullet \left\{ \frac{(x + s \tan \psi) \sin \psi + (y + s \cos \phi) \cos \psi \cos \phi + (z + s \sin \phi) \cos \psi \sin \phi}{[(x + s \tan \psi)^2 + (y + s \cos \phi)^2 + (z + s \sin \phi)^2]^{1/2}} \right. \\
&- \left. \frac{(x - s \tan \psi) \sin \psi + (y - s \cos \phi) \cos \psi \cos \phi + (z - s \sin \phi) \cos \psi \sin \phi}{[(x - s \tan \psi)^2 + (y - s \cos \phi)^2 + (z - s \sin \phi)^2]^{1/2}} \right\}
\end{aligned}$$

(Continued on next page)

$$\begin{aligned}
 & - \frac{(y - s \cos \phi)}{(y - s \cos \phi)^2 + (z - s \sin \phi)^2} \\
 & \cdot \left\{ 1 - \frac{(x - s \tan \psi)}{[(x - s \tan \psi)^2 + (y - s \cos \phi)^2 + (z - s \sin \phi)^2]^{1/2}} \right\} \\
 & + \frac{(y + s \cos \phi)}{(y + s \cos \phi)^2 + (z + s \sin \phi)^2} \\
 & \cdot \left\{ 1 - \frac{(x + s \tan \psi)}{[(x + s \tan \psi)^2 + (y + s \cos \phi)^2 + (z + s \sin \phi)^2]^{1/2}} \right\}
 \end{aligned} \tag{6}$$

The contribution from a vortex situated in the right panel is obtained by changing the signs on the vortex bound leg sweep angle  $\psi$  and the dihedral  $\phi$ . In addition, the term  $y_r$  stands for the coordinate in the  $y$  direction of the point relative to a vortex on the right wing panel. Summing up the contributions from left and right wing panels results in:

$$F_u = F_u(x, y_l, z, s, \psi, \phi) + F_u(x, y_r, z, s, -\psi, -\phi) \tag{7}$$

The same expressions hold for  $F_v$  and  $F_w$ . These functions are substituted in the wing induced effects indicated by the first summations on the left-hand side of equations (1) and (2).

Flap induced effects are obtained in the following manner. First, the wing vortex coordinate system  $(x, y, z)$  is rotated about the  $y$ -axis through angle  $\delta_{xz}$  which is the streamwise flap angle (positive downwards). This transformation relocates the vortex coordinate system such that the transformed  $x$ -axis lies in the plane of the flap. The transformed  $y$ -axis is parallel to the wing vortex  $y$ -axis and the transformed  $z$ -axis is perpendicular to the transformed  $x$  and  $y$  axis. Thus the flap vortices bear the same relationship to the transformed or flap vortex coordinate system  $(x_f, y_f, z_f)$  as the wing vortices to the wing vortex coordinates  $(x, y, z)$ . Flap vortex bound leg sweeps,  $\psi_f$ , are calculated by the program in the chordal plane of the deflected flap. The dihedral angle,  $\phi_f$ , associated with the deflected flap is the angle the flap chordal plane makes with the transformed or flap  $x_f, y_f$  plane and is

also computed by the program. It is to be observed that the flap vortex  $y_f$ -axis is parallel to the wing vortex  $y$ -axis as well as the  $Y$ -axis of the wing root chord coordinate system.

The coordinates of a point relative to a horseshoe vortex on the flap are specified in the same way as the coordinates  $(x, y, z)$  of a point relative to a wing horseshoe vortex. Then, to compute perturbation velocities induced by the flap horseshoe vortex, the following transformations are performed.

$$\left. \begin{array}{l} x_f = x \cos \delta_{xz} - z \sin \delta_{xz} \\ y_{f_l} = y_l \\ y_{f_r} = y_r \\ z_f = x \sin \delta_{xz} + z \cos \delta_{xz} \end{array} \right\} \quad (8)$$

Substituting  $x_f, y_f, z_f$  and angles  $\psi_f$  and  $\phi_f$  in equations (4) through (7) allows for the determination of influence functions  $F_{f,u}, F_{f,v}, F_{f,w}$ . The flap-vortex-induced perturbation velocity components associated with these functions are consequently aligned with the flap vortex coordinate system  $(x_f, y_f, z_f)$ . These velocities must therefore be transformed back in the wing coordinate system for inclusion in the boundary conditions expressed by equations (1) and (2). The result is a set of  $M + MF$  simultaneous equations in which the unknowns are the  $M + MF$  values of circulation strengths,  $\Gamma$ . The values can therefore be obtained from a matrix solution for a given wing angle of attack,  $\alpha$ , flap angle  $\delta_f$  and a specified set of perturbation velocities  $u_i, v_i, w_i$  induced by an external source such as the turbofan wake.

Once the circulation values have been calculated, the load distribution on the wing and flap can be obtained by means of the Kutta-Joukowski law for aerodynamic force on a vortex filament. The force per unit length on the vortex filament is obtained as the product of density, velocity and circulation strength. The line of action is perpendicular to the velocity vector and the vortex line. For a given area element on the left wing panel, the lift and streamwise force components are calculated

as the sum of two contributions: lift and streamwise force acting on the bound leg plus lift and streamwise force acting on that part of the trailing legs within the area element. The forces on the bound leg are obtained by first computing the perturbation velocity and free-stream components in the wing coordinate system (X,Y,Z) at the bound-leg midpoint and applying the Kutta-Joukowski law to each velocity component. The force components are then resolved into the lift direction, and the streamwise direction. The forces on the vortex trailing legs are computed at the 3/4 chord of the left side of an area element. According to the Kutta-Joukowski law, the product of the net circulation  $\Delta\Gamma$  of the coincident legs along the chordwise sides of the area elements, the sidewash at the element 3/4 chord and the density equals the aerodynamic force per unit length on the vortex trailing legs. The line of action of this force is perpendicular to the plane formed by the sidewash vector (parallel to Y-axis) and the vortex trailing legs (parallel to X-axis). This force is then resolved into the lift and streamwise directions. The expression for lift, made non-dimensional by the dynamic head and reference area, acting on an area element of the left wing panel is specified as

$$\begin{aligned} \frac{L}{qS_{REF}} = & \frac{2\Gamma}{S_{REF}V} 2s \left[ \left( 1 - \frac{u}{V} \cos \alpha \right) \cos \phi \right. \\ & + \frac{v_1}{V} (\tan \psi \cos \alpha + \sin \phi \sin \alpha) - \frac{w}{V} \cos \phi \sin \alpha \left. \right] \\ & + \frac{2\Delta\Gamma v_2}{S_{REF}V^2} c \cos \alpha \end{aligned} \quad (9)$$

The non-dimensional streamwise force acting on a left wing area element is given by

$$\begin{aligned} \frac{F_s}{qS_{REF}} = & \frac{2\Gamma}{S_{REF}V} 2s \left[ \frac{u}{V} \cos \phi \sin \alpha \right. \\ & - \frac{v_1}{V} (\tan \psi \sin \alpha - \sin \phi \cos \alpha) - \frac{w}{V} \cos \phi \cos \alpha \left. \right] \\ & - \frac{2\Delta\Gamma v_2}{S_{REF}V^2} c \sin \alpha \quad (\text{positive forwards}) \end{aligned} \quad (10)$$

Backwash  $u$ , sidewash  $v_1$  and downwash  $w$  are calculated at the mid-point of the vortex bound leg swept at angle  $\psi$ . Sidewash  $v_2$  is computed at the 3/4 point of the left side of the element with chord,  $c$ . The perturbation velocities  $u, v_1, v_2, w$  include flap and wing vorticity effects. Engine jet-wake induced perturbation velocities are also included when determining wake-wing-flap interference.

Aerodynamic forces on the flap are determined in a manner similar to the procedure described above. However, forces due to sidewash have not been included in accordance with the following considerations. The trailing legs of the wing vortices aft of the hinge line should lie in or close to the flap plane rather than the wing plane. Were they to lie in the flap plane, they would induce no sidewash in the flap plane. As an approximation to this condition, the sidewash induced forces have not been included. With this assumption, the expression for lift made nondimensional by the dynamic head and reference area and acting on an area element of the left flap is written as:

$$\frac{L}{qS_{REF}} = \frac{2\Gamma}{S_{REF}V} 2s \left\{ \left[ 1 - \frac{u_f}{V} \cos(\alpha + \delta_{XZ}) \right] \cos \phi_f - \frac{w_f}{V} \cos \phi_f \sin(\alpha + \delta_{XZ}) \right\} \quad (11)$$

The specification of the non-dimensional streamwise force acting on a left flap area element is

$$\frac{F_s}{qS_{REF}} = \frac{2\Gamma}{S_{REF}V} 2s \left[ \frac{u_f}{V} \cos \phi_f \sin(\alpha + \delta_{XZ}) - \frac{w_f}{V} \cos \phi_f \cos(\alpha + \delta_{XZ}) \right] \quad (positive forwards) \quad (12)$$

The perturbation velocities  $u_f, w_f$  are computed in the flap or  $(x_f, y_f, z_f)$  coordinate system and include contributions from the wing vorticity as well as the flap vorticity. If a jet wake-wing-flap interference calculation is performed, wake induced velocities are also included.

For purposes of computing span loadings on the wing and flap, equations (9) and (11) are summed over the chordwise rows on the wing and flap vortices respectively. The vortex trailing leg contribution, represented by the second term in equation (9) is averaged over the left and right sides of the wing area element. The total lift is then calculated by summing over the semispan and the result is multiplied by two to include the right wing and flap panels.

The pitching moment is calculated by summing the products of the appropriate moment arms with the lift and streamwise forces acting on the area elements on the wing and flap.

Perturbation velocities at points in the vicinity of the wing-flap surfaces are determined by adding the effects of all horseshoe vortices distributed on the wing and the flap as follows. The coordinates  $(x, y, z)$  of the point relative to the bound leg midpoint of each horseshoe vortex are first computed. Then the appropriate influence functions are calculated according to equations (4) through (7). The influence functions are then combined with the circulation strengths to calculate the perturbation velocities. For example, the wash velocities at a point  $(x, y, z)$  induced by a horseshoe vortex on the left wing panel are

$$\left. \begin{aligned} u(x, y, z) &= \frac{\Gamma}{4\pi} F_u(x, y, z, s, \psi, \phi) \\ v(x, y, z) &= \frac{\Gamma}{4\pi} F_v(x, y, z, s, \psi, \phi) \\ w(x, y, z) &= \frac{\Gamma}{4\pi} F_w(x, y, z, s, \psi, \phi) \end{aligned} \right\} \quad (13)$$

Transformations indicated by equation (8) are necessary to compute the effects of a horseshoe vortex on the flap. The location of the point relative to the midpoint of the bound leg in the flap vortex coordinate system  $(x_f, y_f, z_f)$  is determined first. The perturbation wash velocities induced by a horseshoe vortex on the left flap are then given by

$$\left. \begin{aligned}
 u(x, y, z) &= \frac{\Gamma}{4\pi} F_u(x_f, y_f, z_f, s_f, \psi_f, \phi_f) \cos \delta_{xz} \\
 &\quad + F_w(x_f, y_f, z_f, s_f, \psi_f, \phi_f) \sin \delta_{xz} \\
 v(x, y, z) &= \frac{\Gamma}{4\pi} F_v(x_f, y_f, z_f, \psi_f, \phi_f) \\
 w(x, y, z) &= \frac{\Gamma}{4\pi} F_w(x_f, y_f, z_f, s_f, \psi_f, \phi_f) \cos \delta_{xz} \\
 &\quad - F_u(x_f, y_f, z_f, s_f, \psi_f, \phi_f) \sin \delta_{xz}
 \end{aligned} \right\} \quad (14)$$

The transformations indicated in equation (14) align the directions of the perturbation velocities with the wing vortex coordinate system  $(x, y, z)$ . The influence functions in equations (13) and (14) are constructed such that they also include the effects of the right wing panel and flap horseshoe vortex as per equation (7). Finally, the process is repeated for all horseshoe vortices distributed on the left wing panel and flap.

#### Jet Wake Model

A potential flow model of a high-bypass-ratio turbofan engine and its wake is needed which will yield the velocity field both inside and outside the jet wake. The jet shape should behave according to known spreading rates for jets in a coflowing stream and the model should simulate the entrainment effect exhibited by jet wakes. Attention was directed toward the region of the wake within 10 or 12 radii downstream of the engine since this is the region of greatest interaction between the wake and the wing-flap. For the same reason, no attempt was made to model the fan and engine ducts, since their contributions to the engine wake induced flow field are very small compared to those of the wake.

A wake model developed for a turbofan engine in a cruise condition is described in reference 8. In this model, the wake is represented by a constant diameter, constant strength, semi-infinite vortex cylinder. The wake velocity profile inherent with a vortex cylinder is a uniform axial velocity across the wake whose magnitude becomes essentially invariant with axial distance along the wake three radii or so downstream of the origin of the wake. This model has constant momentum inside the jet, but it also has constant mass flow in the jet which indicates that

entrainment of the free stream is not included in the model. The approach used for the cruise fan wake is retained, but the analytical model is modified according to some empirical observations to better approximate the actual turbulent jet in a coflowing stream.

Model description.- The description of an axisymmetric turbulent jet in a coflowing stream as given in reference 7 is used as basis for the needed potential flow model. In this reference, experimental data is used to develop an analytical representation of a coflowing jet. The jet is divided into two separate regions for analysis: the initial region in which the jet velocity does not decay within the confines of a central core, and the main region in which the velocity decays with distance along the jet centerline (fig. 4). With assumptions on the form of the velocity profile and constant momentum within the wake, the spreading rate of an incompressible turbulent jet can be defined. Spreading rates are shown in figure 4 for various jet velocity ratios. The characteristics of the initial region as a function of jet velocity ratio are shown in figure 5.

The development of the potential flow model proceeds in the following manner. Instead of maintaining a constant radius along the jet as in reference 8, a vorticity distribution is placed on the specified expanding jet boundary. This is carried out by replacing the continuous vorticity distribution of the cylinder with a series of vortex rings coaxial with the jet centerline. Each ring represents a finite increment of length of the jet wake boundary and the vortex strength of each ring is equal to the net vorticity on the incremental length of the boundary. This model is shown schematically in figure 6 for a particular jet velocity ratio. The semi-infinite length of the jet wake is replaced with a finite length model of vortex rings. The length is specified such that the difference between induced velocities calculated with a finite length cylinder and those calculated with the semi-infinite cylinder is acceptably small (less than 1 percent) in the near wake.

The strength of the vortex ring at any point along the jet is

$$\frac{\Gamma_j}{V} = \gamma \left( \frac{R_o}{R} \right) \Delta s \quad (15)$$

where  $\gamma/V$  is the strength of the constant radius vortex cylinder corresponding to the specified engine thrust coefficient. This vortex cylinder strength is

$$\frac{\gamma}{V} = \frac{V_j}{V} - 1 \quad (16)$$

where  $V_j$  is a uniform velocity across the initial jet area,  $A_j$ , and can be calculated in terms of the thrust coefficient  $C_\mu$  as follows. Assuming an incompressible jet, the velocity ratio at the fan exit based on momentum considerations is approximately

$$\frac{V_f}{V} = \frac{1}{2} \left[ 1 + \sqrt{1 + 2 \left( \frac{S_{REF} C_\mu}{A_f} \right)} \right] \quad (17)$$

which when expanded over the entire wake area results in the needed jet velocity ratio:

$$\frac{V_j}{V} = \frac{V_f}{V} \left( \frac{A_f}{A_j} \right) \quad (18)$$

Equations (17) and (18) have been applied to a cold-gas turbine-driven model of a high-bypass-ratio turbofan engine on which the thrust coefficient and the fan exit velocity are known from measurements. This simple method predicted the fan exit velocity within 5 percent of the experimental average value.

From equation (15), the strength of the initial vortex ring is  $\Gamma_{j_0} = \gamma \Delta s$ . As the radius of the successive rings increases, their circulation strength is decreased proportionally such that the product of  $\Gamma_j$  and the ring circumference remains constant. The induced velocity at any point in the field is calculated by summing the effects of all the vortex rings making up the jet model. The induced velocity equations are described in the next section.

Predicted jet velocity profiles at several stations along a jet centerline are shown in figure 6 for a jet velocity ratio  $V_j/V = 6$ . The average velocity inside the wake boundary decreases with axial distance along the centerline in almost inverse proportion with the jet radius. The vortex ring model theoretically should give a constant velocity profile across the jet radius; however, the finite-step summation procedure results in a rounded profile near the wake boundary.

The expanding vortex ring model in the absence of a free-stream velocity satisfies the requirement of constant momentum inside the jet which is in agreement with the Abramovich model. When an external flow is superimposed on the vortex ring model, the momentum is no longer constant in the jet. The change in momentum in the initial region of a jet is shown in figure 7 for a range of typical jet velocity ratios. The vortex ring model of the jet shows a small increase in momentum in the initial region of the jet in contrast with the Abramovich model. An estimate of the effect of this momentum change on the externally induced flow field can be made by comparing the mass flows of the two models. This is done in figure 8, where it is shown that the vortex ring model has a larger increase in mass in the initial region of the jet than does the Abramovich model. The implication of this result is that the vortex ring model will predict more inflow to the jet and thus show a larger entrainment effect than the Abramovich model. In the region of interest within 10 radii of the engine exit, the differences are small and should not lead to any appreciable error in the interference calculation.

It is desirable in subsequent interference calculations to permit the jet wake to deflect under the influence of the wing-induced sidewash and downwash and the cross flow component of the free stream. Accordingly, provision has been made in developing the equation for the velocity induced by the wake to place the vortex rings normal to the local wake centerline. A limitation is thereby placed on the centerline curvature, in that numerical problems may arise if two adjacent rings intersect.

Velocities induced by jet wake model.— The wake model is made up of a series of vortex rings lying along the prescribed centerline of the jet as shown in figure 9(a). The details of a single ring and its relative position with respect to an arbitrary field point, P, are shown in figure 9(b). The velocity induced at point P by a single vortex ring is calculated as follows.

The coordinates of point P in the wing coordinate system are transformed to the jet coordinate system according to

$$\left. \begin{array}{l} x_p = -x_p + x_Q \\ y_p = y_p - y_Q \\ z_p = -z_p + z_Q \end{array} \right\} \quad (19)$$

where point Q denotes the center of the origin of the jet (fig. 9(a)). Coordinates of P transformed to a ring-centered coordinate system become

$$\left. \begin{array}{l} \xi_p = (x_p - x_s) \cos \theta + (z_p - z_s) \sin \theta \\ \eta_p = -(y_p - y_s) \\ \zeta_p = (x_p - x_s) \sin \theta - (z_p - z_s) \cos \theta \end{array} \right\} \quad (20)$$

where the point S denotes the location of the center of the vortex ring. From reference 12, the induced axial velocity is

$$\frac{u_r}{V} = \left( \frac{1}{2\pi} \right) \frac{\Gamma/V}{\left[ \left( \frac{\xi_p}{R_o} \right)^2 + \left( \frac{r_p}{R_o} + \frac{R}{R_o} \right)^2 \right]^{1/2}} \left\{ K(k) - \left[ 1 + \frac{2 \left( \frac{R}{R_o} \right) \left( \frac{r_p}{R_o} - \frac{R}{R_o} \right)}{\left( \frac{\xi_p}{R_o} \right)^2 + \left( \frac{r_p}{R_o} - \frac{R}{R_o} \right)^2} \right] E(k) \right\} \quad (21)$$

where the radial distance to point P is

$$r_p = \sqrt{(\eta_p)^2 + (\zeta_p)^2} \quad (22)$$

and the argument of the elliptic integrals is

$$k^2 = \frac{r_p \left( \frac{r_p}{R_o} \right) \left( \frac{R}{R_o} \right)}{\left( \frac{\xi_p}{R_o} \right)^2 + \left( \frac{r_p}{R_o} + \frac{R}{R_o} \right)^2} \quad (23)$$

The induced radial velocity is

$$\frac{v'_r}{V} = \frac{-\Gamma/V}{2} \frac{\xi_p}{R_o} \left\{ K(k) - \left[ 1 + \frac{2(\frac{r_p}{R_o})(\frac{R}{R_o})}{\left(\frac{\xi_p}{R_o}\right)^2 + \left(\frac{r_p}{R_o} - \frac{R}{R_o}\right)^2} \right] E(k) \right\}$$

$$\left( \frac{r_p}{R_o} \left[ \left( \frac{\xi_p}{R_o} \right)^2 + \left( \frac{r_p}{R_o} + \frac{R}{R_o} \right)^2 \right] \right)^{1/2}$$
(24)

These velocity components, when resolved into components in the wing coordinate system, become

$$\left. \begin{aligned} \frac{u_i}{V} &= -\frac{u'_r}{V} \cos \theta - \frac{v'_r}{V} \left( \frac{\xi_p}{r_p} \right) \sin \theta \\ \frac{v_i}{V} &= -\frac{v'_r}{V} \left( \frac{\xi_p}{r_p} \right) \\ \frac{w_i}{V} &= -\frac{u'_r}{V} \sin \theta + \frac{v'_r}{V} \left( \frac{\xi_p}{r_p} \right) \cos \theta \end{aligned} \right\}$$
(25)

The total velocity induced at the point  $P$  by the entire jet wake model is obtained by summing the velocities induced by all the rings forming the wake.

#### Interference Calculation

In order to calculate the aerodynamic loading of a wing-flap configuration under the influence of the jet wake of a turbofan engine, it is necessary to combine the two potential flow models just described. The wing-flap loading is not considered to affect the engine thrust or the basic velocity distribution in the engine wake. However, the component of the free stream velocity normal to the engine centerline (if any) and the velocity field induced by the wing-flap are considered to deflect the engine wake ahead of the point where it impinges on the wing and flap. Because of this interaction, either a simultaneous solution using both flow models or an iterative solution is required. The latter choice was selected. The general approach evolved is as follows.

The aerodynamic loading on the wing-flap at an angle of attack in a uniform flow (without engine wake) is calculated first. As a part of this solution, the flow field beneath the wing in the region where the engine and its wake would be introduced is calculated. The specific region selected is the engine centerline and its extension aft to a point approximately one chord length aft of the wing. Sufficient points are selected along this line to obtain the induced downwash and sidewash distribution. At this point, the  $w$  and  $v$  velocities are combined vectorily with  $V$  (neglecting the  $u$ ) to obtain the flow directions along the engine centerline extension. Finally, the streamline passing through the center of the exhaust of the as yet unintroduced engine is defined approximately by laying off a series of straight line segments aft from the engine exhaust, where each segment has the local flow direction as calculated above.<sup>1</sup>

An iteration procedure appropriate to the information noted above would consist of laying the jet wake centerline along the approximate streamline, computing the velocity components induced through the wing-flap at the control points by the wake, recomputing the wing-flap vorticity, and recomputing the streamline by now combining the new wash velocities with  $V$  and  $V_j$ . Since the coordinates of this streamline would be somewhat different from those of the initial streamline, further iterations would be performed until the streamline coordinates no longer changed by more than some acceptable amount. It should be noted that in the first iteration, the initial streamline would not intersect the wing or flap surfaces, but when the jet model is laid on the streamline, the jet wake generally will pass through portions of the wing and flap surfaces. At the end of the first iteration, however, sufficient additional bound and trailing vorticity has been placed on the wing and flap to cause the combined free stream and jet wake flow (including the effects of induced  $v$  and  $w$ ,  $V$  and  $V_j$ ) to be tangent to the wing and flap surfaces at all control points. The additional vorticity is a measure of the wake-induced interference.

The actual procedure adopted was somewhat different than that just described in order to increase the convergence rate of the iteration

---

<sup>1</sup> The streamline is approximate in that as the streamline departs from the engine centerline extension, the wash velocities induced at points along this streamline are slightly different from those computed on the extension.

procedure. The down- and sidewash velocities are generally small compared to  $V$ , but  $v_j$  is perhaps three to six times the value of  $V$ . If one examines the changes in the flow field between the wing-flap alone at the beginning of the first iteration and the wing-flap-jet at the end of the first iteration, the largest effect on flow angles is caused by the inclusion of  $v_j$  rather than the changes in induced  $v$  and  $w$  velocities due to wake interaction with the wing-flap. Therefore, the addition of  $v_j$  to the flow field underneath the wing-flap alone in order to get the initial wake centerline will decrease the differences between the initial wake centerline and the "engine wake" streamline computed at the end of the first iteration, which should cause more rapid convergence. The procedure is as follows. The induced down- and sidewash velocities due to the wing-flap in a uniform flow are computed as before, to start the first iteration. These are then combined with  $V$  and  $v_j$  to construct the straight line segments leaving the engine exhaust. This line at this point is no longer a streamline, but will be closer to the streamline calculated at the end of the first iteration than was the case previously. Note again that the total flow at the end of the first iteration will be tangent to the wing and flap surfaces at all control points.

The results presented in this report were obtained after the first iteration. It is felt that with the modified procedure just described, there should be little change in wing-flap loadings between the first and second iterations. Although downwash and sidewash velocity results are shown in the results for the beginning and end of the first iteration, no second iteration calculations were carried out to verify this point. As an additional comment on the convergence issue, it should be noted that the degree of convergence will be dependent on the lattice arrangement used. If a coarse lattice is used, small changes in wake displacement, principally vertically, will affect relatively large areas on the flap and wing, and the solution will oscillate with perhaps undesirably large amplitudes. Thus, the above comments on the improvement in convergence would apply to relatively fine lattice arrangements.

#### COMPARISON OF THEORY WITH EXPERIMENT

In order to evaluate the methods previously described, calculations were made for a number of configurations for which data exist. For

comparison purposes, the number of investigations providing useful data are quite limited for several reasons. The models in many cases are complete configurations which have tail and fuselage effects in addition to the flap and engine effects. In most cases, the engine thrust is not measured directly and, in particular, the engine wake velocities are not measured. Finally, in many cases it is difficult to obtain sufficient detail on the configuration to accurately model the wing camber and twist and the flap size and location.

Five sets of data were identified and used for comparison purposes. The data consist of overall lift and pitching moment and in two cases chordwise pressure distributions on the wing and flap. The discussion is divided into wing-flap comparisons and jet-wing-flap comparisons and finally discussion of the theoretical methods in light of the comparisons.

#### Wing-Flap

Lift and pitching moment and chordwise pressure distributions are available on an aspect ratio 6 rectangular wing with a slotted, Fowler-type flap having a chord 24 percent of the wing-flap chord with flaps up (ref. 13). The wing was supported by a small cylindrical "fuselage" which should have a negligible influence on the wing lift. The comparison of predicted and measured lift and moment is shown in figure 10(a) for flaps off and flaps deflected  $40^\circ$ . The vortex-lattice arrangement used was 6 chordwise by 20 spanwise on the wing semispan and 2 by 20 on the flap.

For flaps off, the lift and moment agree very well with the data. With flaps deflected, the lift curve slope is well predicted but the lift magnitude is high by about 5 percent. The moment is also overpredicted (i.e., too negative). Since both the predicted lift and moment are high, the indication is that the flap lift is being overpredicted. This is verified in the results for chordwise variation of pressure difference, shown in figure 10(b). The predicted values were obtained by calculating the circulation on each chordwise area element, computing the pressure difference associated with the circulation strength, and considering that pressure difference to exist at the panel quarter chord. The results indicate that the loading on the flap is overpredicted for both angles of attack shown,

whereas the loading on the wing is reasonably well predicted. The chordwise distribution of area elements for this calculation was chosen so that the elements on both the wing and flap have about the same chordwise length. According to the results of Appendix A, this arrangement for this size flap should give good results. It is possible that a larger chordwise number on the flap (greater than 2) would change the predicted loadings, although this was not investigated.

The second set of results was obtained on a semispan model of a rectangular cambered wing of aspect ratio 5.3 with a double slotted flap system (ref. 14). The flap chord length (sum of both segments) is about 39 percent of the chord of the wing-flap combination with flaps up. The comparison is shown in figure 11 for three flap angles. The predicted results were obtained using a 6 by 20 lattice on the wing semispan and a 3 by 20 lattice on the flaps. The agreement on lift and pitching moment is good for the zero and 20/40 degrees deflection angles. With the 30/60 deflection angle, the lift curve slope agreement is still good but the magnitude is overpredicted by approximately 10 percent. The predicted pitching moment is too negative for this angle. It is probable that some separation existed on the flap at the largest deflection angle, which could cause the measured lift and pitching moment to be lower than the predicted results.

The third set of results consists of chordwise pressure distributions on a swept wing with a partial span flap. The configuration, illustrated in the sketch in figure 12, has a 35° leading-edge sweep angle and a flap occupying approximately half of the semispan. Loading calculations were made at zero angle of attack with a 10° flap deflection at a Mach number of 0.6. A Prandtl-Glauert correction was used to account for compressibility effects, as described in reference 8. The lattice arrangement was 8 chordwise by 15 spanwise (so that there are 2 chordwise on the flap). The results shown in figure 12 are the chordwise variation of pressure difference near the midspan of the flap. The pressure difference was computed in the same manner as was described above in connection with figure 10.

The agreement of  $\Delta C_p$  is quite good over the entire chord. In this model there was essentially no gap between the flap and wing, unlike figure 10, and there is a loading peak at the wing-flap junction, which is also well predicted.

### Jet-Wing-Flap

Data are available in reference 4 on a STOL model with a rectangular, cambered wing with a leading-edge slat, double-slotted flaps, and two engines on the semispan. The model engines are cold-gas-turbine-driven fans which model quite well the wake of a high-bypass-ratio turbofan engine. The engines were mounted at  $3^\circ$  incidence to the wing in order to direct their exhaust upwards towards the flap. Their static thrust was measured over a range of engine speeds and these data were used to obtain thrust coefficients at the flight condition of interest. The model had no tail surfaces and the influence of the fuselage was neglected, which is felt to be a reasonable assumption because of its small size with respect to the wing. The slat has a chord equal to 19 percent of the wing flap and the two flaps have a combined chord equal to 33 percent of the wing-flap with flaps up. The slat was treated as a highly cambered leading edge.

The wing and flap system were modeled with a 10 chordwise by 15 spanwise lattice on the wing and a 2 by 24 lattice on the flaps. The area element layout for the left wing panel and flap is illustrated in figure 13. Several features are noteworthy. First, the area elements locally are symmetric with respect to each engine centerline. Since the wing has no sweep, the sidewash under the wing is small and the engine wakes tend to move straight aft. Maintaining local symmetry provides that panels both inboard and outboard of the wake are affected equally as the wake spreads. The shaded areas represent the area elements within the undeflected jet wake boundary. Secondly, the area elements have smaller spanwise dimensions in the region of the jet wake. By using smaller elements in this region, the area of the wing and flap impinged upon by the jet wake changes more smoothly as the wake spreading changes or as the wake moves vertically due to the effects of the flow field under the wing-flap surfaces. By the same reasoning, it is desirable to have small chordwise spacings on the area elements of the wing in the region of the wake.

Results for lift and moment on this wing are given in figure 14. The lower two curves represent an engine-off condition for zero flap deflection and  $17.5/35$  degrees flap deflection. The zero deflection data and theory agree very well whereas the  $17.5/35$  degree results do not.

In view of the agreement obtained at moderate flap angles in figure 10 and the irregularity of the data points, the lack of agreement is not considered significant. The upper three curves represent two different power settings with flaps deflected 17.5/35 degrees. For the full power case ( $C_{\mu} = 5.5$ ), calculations were made assuming the wake remained coaxial with the engine (dashed curve) and assuming the engine wake was deflected in accordance with the downwash field under the wing (solid curve). In the latter case, at small  $\alpha$ , the induced downwash deflects the wake downward and thus reduces the effect of the wake on the wing and flap loading over the undeflected wake case. At high  $\alpha$ , the  $\alpha$ -induced upwash drives the wake into the wing and flap and increases the wake-induced effects. The net result is to improve the agreement for the case where downwash-induced wake deflection is included. For the intermediate power case ( $C_{\mu} = 2.75$ ), the slope (which includes downwash effects) is good but the predicted magnitude is low. The reason for the discrepancy is not known but may be due to the use of an incorrect engine wake velocity, since the slope agrees well. The moments are in reasonable agreement in all cases.

The final set of results are for a semispan model with one engine per panel (ref. 5). The tests were quite systematic in that the same wing-engine combination was tested unswept and swept 30° with three different flap configurations. The wing is an untapered, cambered wing with aspect ratio of about 3.5 in the unswept configuration and 3 in the swept configuration, based on the span and the wing without flap. The engine is a 1.02 pressure-ratio ducted fan mounted on a long, large centerbody, as illustrated in the sketch on figure 15(a). Fan wake measurements were made to determine the engine wake velocity profile (the only such measurements made in all the data examined). Since the theoretical turbofan engine model does not allow for a centerbody aft of the engine, the assumption was made that the fan exit flow expands to fill the entire area within the duct trailing edge. The wing-flap was modeled with a 4 by 20 lattice on the wing and the flap lattice arrangement was dependent on the flap size. The spanwise lattice spacing was uniform on both wing and flap.

Figure 15(a) shows results for an unswept wing with a thrust coefficient of 2.3 and a double-slotted flap with 10/30 degrees flap deflection. The flap chord (both flaps) is 47 percent of the wing-flap

chord with flaps up. The lattice arrangement used on the flaps was a 4 chordwise by 20 spanwise layout. The agreement on lift and moment is excellent in this case. The engine wake was assumed to remain coaxial with the fan in this calculation, since it was felt that the centerbody would tend to "guide" the wake flow under the wing. In addition, the predicted downwash distribution for the wing-flap in uniform flow, shown in figure 15(b), was relatively small in the region where it could influence the wake vertical deflection (the  $V \sin \alpha$  component, which is negative, tends to offset the  $w$  to get the net angle of the jet flow).

Figures 16(a) and (b) show similar comparisons for the same configuration and thrust coefficient but a considerably larger flap deflection angle. Two theoretical curves are shown. The dashed one is for the case of the engine wake coaxial with the engine centerbody. The solid curve is based on vertical deflection of the wake in accordance with the wing-flap-induced downwash distribution of figure 16(b). Both curves are higher than the data by 25 and 10 percent, respectively.

The comparison of the undeflected wake curve given by the dashed line in figure 16(a), with the upper curve of figure 15(a) indicates the predicted lift to vary approximately linearly with flap deflection angle for the same thrust coefficient. However, the wing loading increases due to increasing flap deflection and therefore the induced downwash below the wing increases, as shown by comparing figures 15(b) and 16(b). The result is a slightly higher upwash below the leading edge and a higher downwash below the aft part of the wing and the flap. The effect of deflecting the wake according to this downwash (ignoring any "guiding" effect the centerbody might have), is to lower the lift coefficient considerably near zero  $\alpha$  because of the flap-induced downwash and lower it less at high  $\alpha$  because the  $V_\infty \sin \alpha$  component tends to drive the wake up into the flap and wing. The net effect is to increase the lift-curve slope so it agrees with the data and to reduce the magnitude of the lift coefficient towards that of the experimental values. The 30/60 degrees experimental data do not show the linear range indicated by the 10/30 degrees data. Some powered static test results for this wing-flap configuration presented in reference 5 indicate little loss in flap effectiveness at 10/30 degrees but a considerable loss at

30/60 degrees. Consequently, it is probable that some separation is occurring for the 30/60 degrees case, which would account for the over-prediction.

The moment predictions in figure 16(a) are consistent with the lift results. The moment is overpredicted (i.e., more negative) without inclusion of the downwash, and its inclusion improves the agreement on magnitude and provides a moment curve slope that agrees with the data for low angles of attack.

Figure 17(a) shows lift and moment results for the 30° swept wing with a triple slotted flap. The combined flap chord is about 58 percent of the chord of the wing-flap combination with the flap undeflected. A 5 chordwise by 20 spanwise vortex element arrangement was used to represent the flap system. The lift and moment curves for the engine-off, flaps-up case agree reasonably well with the data. The lift curve slope for 10/20/30 degrees flap deflection with engine off agrees well and the over-prediction on lift is mostly due to the camber problem. The moment, however, is considerably underpredicted. The data indicate a slight shift forward in center of pressure with angle of attack whereas the theory predicts a large forward shift. The calculation of moments on a swept wing is much more sensitive to the spanwise and chordwise load distribution than is the case on an unswept wing. It is possible that a different vortex layout would more adequately represent the loading distribution on the wing and flap, but such calculations were not made.

Two sets of curves are shown for the case of 10/20/30 degrees flap and wing loading with power. The dashed one represents the predicted results with an engine wake coaxial with the centerbody and considerably overpredicts the measured lift although the slope is reasonably good. In order to assess the influence of wake deflection on the calculated results, the downwash and sidewash velocities induced by the wing and flap in uniform flow were computed along the (absent) engine centerline and are shown in figure 17(b). In addition to the downwash distribution, there is some sidewash due to wing sweep which tends to move the wake outboard. Using these results, a calculation was made with a wake deflected both vertically and laterally and the upper solid

curve was obtained. The magnitude of the lift is considerably improved, although it is still about 12 percent high. The predicted moment results are not affected greatly by the wake deflection and still show too low a nose down moment.

#### Discussion of Results

Insofar as the results described above are concerned, there are three aspects of the method that should be discussed. These are the subjects of iteration, lattice layout, and jet wake deflection.

The description of the interference calculation indicated that an iterative scheme involving sequential use of the wing-flap and jet wake models was employed. Since the only "interference" of the wing-flap on the jet wake is the deflection of the wake centerline, the iteration is on the centerline location. All of the data comparisons just described are based on results obtained at the end of the first iteration. At this point, the wake position has been based on a line determined by the free-stream velocity, the induced flow from the wing-flap in uniform flow, and the jet velocity. Also at this point, a streamline leaving the engine exit can be calculated using the free stream, the induced flow from the wing-flap as interfered upon by the jet wake, and the jet velocity. The changes to be expected between iterations are determined by the differences between these two line locations.

Although no complete second iteration has been calculated, wing-induced downwash comparisons have been made before and after jet-induced loadings have been included in the wing circulation distribution. As an example, figure 18 illustrates these two downwash and sidewash distributions for the swept wing-flap configuration described in connection with figure 17 at zero angle of attack. The curves are very similar from the engine exit aft to approximately the midchord of the three segment flap. Thereafter, the velocities calculated with jet-wake interference differ from the wing-flap alone values, particularly for downwash. Thus wake centerlines with and without jet-wake interference placed on a streamline under the wing would not differ significantly until the wake has reached the midchord of the flap, and the wake would strike the same area elements on the wing and the forward half of the flap. On the basis of these results, it is anticipated that the second iteration would not produce a significant change in the lift and moment on the wing.

It is known that the number of area elements used on the wing and flap affects the calculated lift and moment for a vortex-lattice method (ref. 10). The general guides of reference 10 with respect to the ratio of spanwise to chordwise area elements and the spanwise number of elements were used initially to minimize the errors from this source. However, with jet impingement on a portion of the wing and flap, an additional difficulty arises with regard to the element arrangement. Initially, a uniform spanwise spacing was used in calculating wake-induced loadings. It was found that the results were sensitive to those factors determining the wing-flap area on which the jet impinged, such as wake spreading angle, wake deflection, and engine incidence. Finer lattice arrangements improved this situation. The scope of the contract was subsequently increased to permit the systematic lattice investigation described in Appendix A. On the basis of these results, it is felt that many of the calculated results presented here are essentially converged in terms of changes with increasingly fine lattice arrangements. However, it is desirable that some additional work on lattice arrangement be done with wake augmentation, particularly in conjunction with consideration of wake deflection.

Finally, it should be noted that very little data are available for use as a guide in estimating the accuracy with which the wake centerline is modeled. A relatively simple streamline model consisting of 3 or 4 points axially to define the slope and deflection of the wake center streamline was used in the comparisons presented herein. On the basis of results obtained with this model, the general approach of fitting a wake profile to a centerline which is permitted to change with the wing-flap-induced flow field appears to yield the proper behavior for the wake-flap interaction. It was felt however that a more detailed calculation of the streamline was not justified until additional flow field data were available for comparison with predictions.

#### WING-FLAP VORTEX-LATTICE PROGRAM

The purpose of this section is to describe the vortex-lattice computer program in sufficient detail to permit understanding and use of the program. This program computes span loadings, overall lift and pitching moment coefficients for a wing-flap configuration. Perturbation velocities induced by the wing-flap lifting surfaces at prescribed field points can also be computed. The wing is considered the main surface and the flap

is an optional item. The influence of an engine jet-wake or other source of externally induced perturbation velocities can be included in the loading calculation.

Configuration parameters taken into consideration by the program are listed in the section concerned with the theoretical analysis of the vortex-lattice lifting-surface model.

Fundamentally, the program is based on representing the wing and flap surfaces by horseshoe vortices. The circulation strengths are determined from a set of simultaneous equations provided by the flow tangency boundary condition applied at a finite set of control points distributed over the wing and flap surfaces. The boundary conditions, expressed by equations (1) and (2), feature the optional inclusion of interference velocities induced by an external component such as the jet-wake of a turbofan engine.

Sample cases described at the end of this section illustrate how the program handles a wing-flap combination with and without engine jet-wake interference.

#### Program Description

Calculation procedure.- The computer program proceeds through various stages as follows. After run identification and input of certain control variables, the wing-flap geometry is read in. This includes information such as wing leading- and trailing-edge sweep angles measured in the wing planform plane, root chord, semispan, and dihedral. The same parameters are specified for the undeflected flap except dihedral but with the addition of the flap root chord leading-edge location in the wing root chord coordinate system.

The vortex lattice to be laid out on the wing and flap is specified next in terms of the chordwise and spanwise numbers of vortices on the left wing panel and flap. Associated with the spanwise specifications are the spanwise coordinates of the left trailing legs of the horseshoe vortices. The distances along the semispan from the plane of symmetry ( $X-Z$  plane) to the left legs are predetermined by the user and read in separately for the wing and the flap.

After reading in the local wing and flap angles due to wing camber and twist and flap camber, respectively, the program proceeds to calculate the tangents of the wing and undeflected flap leading- and trailing-edge sweep angles in the wing chordal plane. The next optional input consists of coordinates of field points at which wing-flap vortex-lattice induced perturbation velocities are to be calculated. This is followed by the specification of wing angle of attack, flap deflection angle measured perpendicular to the hingeline, and some more control variables.

The program then computes angles necessary for the layout of vortices on the deflected flap. The set of externally induced perturbation velocities is optionally read in as the last item of input.

After displaying most of the geometry and vortex-lattice specifications in output, the program proceeds to lay out the wing and deflected flap with one horseshoe vortex assigned to an area element. The wing vortex trailing legs extend downstream to infinity while the flap vortex trailing legs extend downward at the streamwise flap angle,  $\delta_{xz}$ , relative to the wing vortex trailing legs. This section of the program also calculates the coordinates of the control points at which the flow tangency boundary conditions are to be satisfied.

Upon completion of the wing and flap vortex layout computations, Subroutine INFWW determines the influence functions required by the main program and given by equations (4) through (7) for the construction of the influence coefficient matrix defined by the left-hand side of equations (1) and (2). The next step is to build up the array defined by the right-hand side of the equations. Subroutine INVERS then solves the set of simultaneous equations by a Gaussian elimination method to obtain the unknown circulation strengths,  $\Gamma/V$ .

After the circulation strengths are known, wing-flap vorticity-induced perturbation velocities at field points specified by the user are computed as an option. Next, the program calls on Subroutine LOAD1 to calculate overall lift and pitching moments as well as spanwise loadings on the wing and the flap. This calculation is based on equations (9) through (12) for the aerodynamic forces acting on wing and flap area elements. These loadings are due to vorticity on the wing and flap with or without the interference effects of externally induced velocities,

such as produced by an engine jet wake. If an engine is present, the direct contribution to lift and pitching moment must be separately determined by the user and added to the program calculated lift and pitching moment which include the effects of jet wake-wing-flap interference.

The remainder of the program arranges for the output of control point coordinates, vortex-lattice arrangement and circulation strengths. Overall lift and pitching moment and spanwise loadings are printed. Lastly, the optionally determined wing-flap induced velocities at user prescribed field points are listed.

For a given wing-flap configuration, the computer program can treat a maximum of 10 flow condition cases. The flow conditions are given by the wing angle of attack and the set of externally induced velocities (if applicable) both of which appear on the right hand side of equations (1) and (2). In addition, the program is arranged to read in consecutively as many sets of wing-flap configuration data as the user desires.

Program operation.- The wing-flap vortex-lattice computer program is written in Fortran IV language and has been run on the IBM 360/67 TSS batch system at the Ames Research Laboratory. With this machine 220 control points can be used, although this number is not necessarily a maximum. This program also makes use of the ability of the TSS system to generate, store, and read from data sets. This feature is used as an option and the items treated this way are the control point coordinates and the externally induced velocities. As an alternative, the latter are read in via cards. If the program is to be run on a different computer with smaller storage, dimension statements need to be changed to permit operation on that machine.

No tapes are required other than the standard input and output. For a configuration employing 160 control points, the running time on<sup>5</sup> the TSS batch system to calculate loadings and wing-flap induced perturbation velocities at about 10 field points requires approximately 4 minutes for one angle of attack.

Program limitations and precautions.- There are problems that could arise in the use of the program. The first has to do with the layout of the vortices. The velocity induced at a point by a vortex filament becomes singular as the point approaches the filament. For each influence function,

Subroutine INFWW avoids the singularity by examining a function which contains the distance between the point and the filament. If the value of this function is less than  $225 \times 10^{-10}$  times the square of the wing semispan (also used in ref. 10), that influence coefficient is set equal to zero.

Some care must be taken in selecting the spanwise widths of adjacent area elements and selecting field point locations for calculating wing-flap induced velocities. As a general rule, the spanwise widths of two adjacent area elements should not differ by more than half of the smaller width. Use of the program has indicated that wing-flap induced velocities can be computed at locations as close to the wing and/or flap as one-half of the width of the nearest horseshoe vortex. At smaller distances, the influence of the nearest bound vortex filament is unduly large and causes unrealistic velocities. The same reasons preclude the positioning of a flap such that the wing trailing vortex legs cut through the flap surfaces close to the flap control points. The input specification of the chordwise number of flap vortices fixes the number of area elements on the flap in the chordwise direction. In a cross section of the wing with the flap deflected, the user should compute the 3/4 chord of the area elements on the flap. He should then make sure that the wing trailing vortices are at least one-half of the wing vortex-width removed from the nearest flap control points.

#### Description of Input

This section describes the input for the wing-flap computer program. In the following discussion, the content of all input cards is described and, where appropriate, instructions on generating the input quantities are given. All input variables are listed at the end of this section in the order of appearance in the input deck, except that the first four variables listed do not appear in the input deck but are needed for program input preparation. The input format for all cards is shown in figure 19, and the item numbers refer to figure 19.

Item 1

The first card serves as identification and may contain any alphanumeric information desired. This information is printed on the first page of the output.

Item 2

The second card contains several control variables which govern certain geometric parameter input options as indicated in the table at the end of this section. The option concerning the specification of the flap root chord is discussed in connection with Item 4 below.

Item 3

The third card contains wing geometry data specified in the wing planform plane. The necessary parameters are the leading- and trailing-edge sweep angles, root chord, semispan and dihedral. The sign conventions for the sweep and dihedral angles are shown in figure 2 and follow the usual convention where positive sweep is aft, positive dihedral corresponds to wing tips above the wing root chord. The wing root chord, semispan, and all other lengths shown in figure 2, are dimensional and should have consistent units of length.

Item 4

The fourth card contains the following geometry data for the flap: leading- and trailing-edge sweep angles, flap root chord, semispan, and the coordinates of the flap root chord leading edge. The flap root chord is defined for the undeflected or deflected flap as follows. The leading and trailing edges of the flap are extended inboard until they intersect the symmetry plane. The line connecting the two intersection points lies in the plane of symmetry and is defined as the flap root chord measured in that plane.

The flap geometry parameters are specified for the undeflected flap except for the flap root chord which may be specified for either the deflected or undeflected flap in accordance with the value of the control variable MFSPEC in Item 2. This choice depends on the manner in which the flap details are specified to the user: cross section with the flap deflected or undeflected. This distinction is not applicable to unswept wing-flap combinations. The undeflected flap lies in or is parallel to the wing chordal plane and has its planform and dimensions determined

by rotating the deflected flap into the wing chordal plane or a plane parallel to it. In this way, flap sweep angles are specified in the wing planform plane as are the wing sweep angles.

At this point it should be noted that the vortex-lattice program performs certain geometrical transformations while in the process of laying out the vortex lattice in the chordal plane of the deflected flap. In doing so, the innermost and the outermost horseshoe vortex trailing legs on the flap, which lie in planes parallel to the X-Z plane, are made to originate from the leading edge of the deflected flap inboard and outboard chords. The effective span of the deflected flap is therefore determined by the innermost and outermost locations of the flap vortex trailing legs. This in effect changes the aerodynamically loaded area of the flap by a small amount which should be of little consequence in the lift and pitching moment calculation.

Multiple slotted flaps are idealized as a single flap with its chordal plane defined by the leading edge of the most forward flap component and the trailing edge of the aft flap component. The camber of the idealized flap is determined from the individual flap component angles.

If no flap is present, a blank card is inserted for this item.

#### Item 5

The fifth card specifies the number of chordwise and spanwise vortices on the left wing panel and flap. The accuracy of the predicted lift and moment depends on the number of layout of vortices used.

A number of calculations were made to investigate the sensitivity of the predicted loading distribution to the vortex-lattice layout. These calculations are described in Appendix A. From these calculations, recommendations have been determined for the optimum vortex-lattice layout for a variety of wing-flap configurations. The user should consult the appendix for guidance on the layout.

While the vortex layout associated with this computer program is very flexible, it is limited by the maximum allowable number of vortices (or control points) specified in the DIMENSION statements. The sum of the products of chordwise and spanwise vortices on the wing and flap should not exceed 220.

#### Item 6

The sixth and following cards comprising Item 6 list the spanwise location  $Y(I)$  of the outboard trailing legs of each chord row of vortices on the wing. The input quantities are dimensional spanwise distances which should have the same units as the wing and flap semispan and chord input values. All distances are input as positive quantities. The input starts at the root chord and proceeds outward towards the tip, according to the index  $I$ . An index value  $I = 1$  is assigned to the trailing legs on the root chord with spanwise location  $Y(I = 1) = 0.0$ . This is the first quantity on the first card for this item. The second quantity is the distance from the root chord to the outboard trailing legs of the innermost chordwise row of horseshoe vortices.

Since there are MSW vortices, spanwise, on the wing, the maximum value of  $I$  (which is IMAX) is MSW + 1. IMAX is limited to 50 in the program, so the maximum number of vortices, spanwise, on the wing is limited to 49. The last value of  $Y$  to be entered,  $Y(IMAX)$ , must be equal to the value of the semispan; that is,  $Y(IMAX) = SSPAN$ .

#### Item 7

This is the first optional set of input necessary only if a flap is presented (MFLAP = 1). The quantities required are the distances from the plane of symmetry to the outboard trailing legs of each chordwise row of vortices on the flap. The trailing legs lie in planes parallel to the plane of symmetry (X-Z plane). These positive input quantities are dimensional spanwise distances which should have the same units as the wing and flap semispan and chord input values. All distances are input as positive quantities. The input starts at the plane of symmetry for a flap with its inboard chord lying in that plane. For a partial span flap with its inboard chord not in the plane of symmetry, the input starts with the spanwise distance from the symmetry plane to the inboard chord of the flap. An index value of IF = 1 is assigned to the

flap vortex trailing legs either in the plane of symmetry with spanwise location  $YF(IF = 1) = 0.0$  or in a plane parallel to that plane with spanwise location  $YF(IF = 1) \neq 0.0$ . One of these is the first quantity on the first card for this item. The second quantity is the distance from the symmetry plane to the outboard trailing legs of the innermost row of horseshoe vortices on the flap.

Since there are MSF vortices, spanwise, on the flap, the maximum value of IF (which is IFMAX) is MSF + 1. IFMAX is limited to 50 in the program, so the maximum number of vortices, spanwise, on the flap is limited to 49. The last value of YF to be entered,  $YF(IFMAX)$ , must equal the value of the flap semispan; that is,  $YF(IFMAX) = FSSPAN$ .

If no flap is present ( $MFLAP = 0$ ), no cards are required for Item 7.

Item 8

The card of this input contains the coordinates of the center of moments. These are dimensional quantities, whose units should be consistent with those of the wing-flap dimensions and whose signs must be consistent with the wing coordinate system. The Y coordinate, YM, must be input as zero.

Item 9

This optional set of input is necessary only if the wing has camber and twist ( $ALPHLC = 1.0$ ). The specification of the vortex-lattice through Item 5 fixes the layout of the area elements on both wing and flap in their respective chordal planes. In particular, the chordwise specification allows the *a priori* determination of the chordwise location of control points since they are given by the midpoint of the 3/4 chord of each area element. This is done in a wing-flap cross section (parallel to the X-Z plane). The quantities specified in this set of cards are the tangents of the local angles of attack, ALPHAL, of the cambered and twisted wing mean surface measured in the streamwise direction at each control point relative to the wing coordinate system. The first card in this item contains these values for the chordwise row of elemental panels nearest the root chord, starting with the element nearest the leading edge. In the event that there are more than eight chordwise elements on the wing, the second card would have the values for the ninth;

tenth, etc., elements in that first row. Otherwise, the second card has the values for the chordwise row next outboard of the first row, and so on. The ALPHAL value for the leading edge wing area element in each chordwise row must start on a new card. Thus, there are MSW (or possibly 2 MSW) cards in this item.

The values of ALPHAL are obtained as follows. Consider the sketch in figure 20(a) which shows the cambered and twisted section of the lifting surface at some spanwise station  $n$ , for a wing angle of attack. At a point  $P$ , corresponding to a control point in the wing chordal plane, a tangent to the wing mean surface is constructed, which makes an angle  $\alpha_\ell$  with the wing root chord (the X-axis). The positive sense of  $\alpha_\ell$  is shown. The input value required is  $\text{ALPHAL} = \tan \alpha_\ell$ .

#### Item 10

This optional set of input is required only if a flap is present, MFLAP = 1, and has camber, DELLC = 1.0, Item 2. The quantities specified in this set of cards are the local angles in radians, DELL, of the cambered flap at the control points measured in the streamwise direction. The first card in this item contains these values for the chordwise row of area elements on the flap nearest the plane of symmetry, starting with the area element nearest the flap leading edge. If there are more than eight chordwise elements on the flap, the second card has the values for the ninth, tenth, etc., elements in the first row. Otherwise the second card has the values for the chordwise row next outboard of the first row, and so on. The DELL value for the leading edge flap area element in each chordwise row must start on a new card. Therefore, there are MSF (or possibly 2 MSF) cards in this item.

The values of DELL are obtained as follows. First the case of a single flap with camber will be discussed; then the case of multiple flaps idealized as a single flap with camber will be treated. The top half of figure 20(b) shows the former and the bottom half the latter. Both are in combination with an unswept, untwisted, untapered wing with dihedral which has its trailing edge cut off to accommodate the trailing edge flaps. The dashed lines represent the thickness envelopes of the wing and flap. Consider the single flap case. At a point  $P$ , corresponding to a control point in the flap chordal plane, a tangent to the flap mean surface is constructed, which makes a positive angle  $\delta_\ell$  with

the flap root chord as shown. The input value required is  $\text{DELL} = \delta_l$ , radians. Consider the multiple flap case next. Connect the leading edge of the flap component nearest the wing trailing edge to the trailing edge of the aft flap component. This line is the local chord of the idealized flap representing the multiple flaps system. This local chord also lies in the chordal plane of the idealized flap. The chordal plane also contains the root chord of the idealized flap. At a point P, corresponding to a control point in the idealized flap chordal plane, a tangent to the mean surface of the flap component is drawn, which makes positive angle  $\delta_l$  with the flap root chord as shown. The input value required is  $\text{DELL} = \delta_l$ , radians.

If no flap is presented ( $\text{MFLAP} = 0$ ) or the flap does not have camber ( $\text{DELLC} = 0.0$ ), no cards are required for Item 10.

#### Item 11

This optional set of data is required only if induced velocities are to be computed at field points adjacent to the wing-flap ( $\text{MMM} \neq 0$ , in Item 2). The number of cards in this item is  $\text{MMM}$ . Each card has X, Y, and Z coordinates of a point where the induced velocities are desired. The points need not be in any particular order, although an order might be dictated by the subsequent use of the output in, for instance, an engine-wing-flap interference calculation. If no induced velocities are to be computed ( $\text{MMM} = 0$ , Item 2), no cards are required for Item 11.

#### Item 12

The single card of this item contains several quantities. The first is the flap deflection angle,  $\text{DELD}$ , which must be measured perpendicular to the flap hinge line. If only the streamwise flap angle  $\text{DLXD}$  is known, angle  $\text{DELD}$  may be estimated through the average sweep angle of the flap:

$$\tan \text{DELD} = (\tan \text{DLXD}) / \cos_{\text{ave}} \psi_f \quad (26)$$

Control integer variables  $\text{KEI}$  and  $\text{KCP}$  govern options regarding the method of input of the externally induced velocities and the output of control points associated with the vortex lattice, respectively. Control variable  $\text{NRHS}$  equals the number of cases to be run successively for a given wing.

flap combination without recalculating the influence coefficient matrix. For each case, an angle of attack and a set of induced velocities (if applicable) will be specified in Items 13 and 14. A maximum of 10 cases can be treated in this manner.

Item 13

This item specifies the wing angle of attack, ALPHAD, for each of the NRHS cases specified in Item 12 above.

Item 14

The input quantities in this optional item are externally induced perturbation velocities at the control points on the left wing panel and flap. Cards with this input are required only if KEI of Item 12 is different from zero. For each of the cases specified in Item 12, these velocities are read in via cards if KEI = 5; if KEI = 8 a data set generated by the jet-wake program is called and velocities are read in from it. The signs of the perturbation velocity components must be consistent with the wing root chord coordinate system.

The externally induced perturbation velocities must be input in the same order as the control point layout: the first is nearest the wing leading edge and root chord, the succeeding points proceed aft chordwise to the wing trailing edge, then from the leading edge of the next outboard chordwise row aft towards the trailing edge of this row and so forth. The last point on the wing is the control point nearest the tip and wing trailing edge. There are M cards for the wing, where  $M = MSW \times NCW$ . On the flap, if present, the first point is nearest the flap leading edge and inboard chord, the succeeding points proceed aft chordwise to the flap trailing edge and then from the leading edge of the next outboard chordwise row aft towards the flap trailing edge and so on. As on the wing, the last point is the control point nearest the flap outboard chord and flap trailing edge.

Again, if no external velocities are considered (KEI = 0) no cards are required for this item.

This completes the description of the input and its preparation. The program variables with algebraic symbol and comments are listed below in the order in which they appear in the input deck.

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comment</u>
M	M	number of control points on wing $M = NCW \times MSW$
MF	MF	number of control points on flap $MF = NCF \times MSF$
J		running index of control points on wing: $1 < J < M$ , also used as overall running index $1 < J < M + MF$ in Item 13 of the input and also in the output
JF		running index of control points on flap $1 < JF < MF$
N		running index of successive cases $1 \leq N \leq NRHS$
<u>Item 1</u>		any alphanumeric information may be put on this card for identification of the calculation
<u>Item 2</u>		
ALPHLC		$\left\{ \begin{array}{l} ALPHLC = 0.0: \text{wing without camber and twist} \\ ALPHLC = 1.0: \text{wing with camber and twist} \end{array} \right.$
DELLC		$\left\{ \begin{array}{l} DELLC = 0.0: \text{flap without camber} \\ DELLC = 1.0: \text{flap with camber} \end{array} \right.$
MMM		number of locations in vicinity of wing-flap at which wing-flap induced velocities are determined ( $MMM \leq 50$ ). If $MMM = 0$ , induced velocities are not calculated
MFLAP		$\left\{ \begin{array}{l} MFLAP = 0: \text{flap not present, i.e., wing only} \\ MFLAP = 1: \text{flap included} \end{array} \right.$
MFSPEC		$\left\{ \begin{array}{l} MFSPEC = 0: \text{flap root chord CRF specified for undeflected flap in Item 4} \\ MFSPEC = 1: \text{flap root chord CRF specified for deflected flap in Item 4. This differentiation is applicable to swept wing-flap combinations only} \end{array} \right.$
<u>Item 3</u>		
PSIWLE	$\psi_{WLE}$	wing leading-edge sweep angle measured in the wing planform, positive for sweep back, deg.

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comment</u>
PSIWTE	$\psi_w_{TE}$	wing trailing-edge sweep angle measured in the wing planform, positive for sweep back, degrees
CRW	c	wing root chord, dimensional
SSPAN	b/c	wing semispan, dimensional
PHID	$\phi$	wing dihedral, positive for wing tips above root chord, degrees
<b>Item 4</b>		
PSIFLE	$\psi_f_{LE}$	flap leading-edge sweep angle measured in the wing planform for the undeflected flap, positive for sweep back, degrees (this angle normally equals $\psi_w_{TE}$ )
PSIFTE	$\psi_f_{TE}$	flap trailing-edge sweep angle measured in the wing planform for the undeflected flap, positive for sweep back, degrees
CRF	$c_f$	flap root chord measured in the plane of symmetry, dimensional. According to Item 2: if MFSPEC = 0, CRF specified for undeflected flap, if MFSPEC = 1, CRF specified for deflected flap. See the earlier discussion under Item 4
FSSPAN		flap semispan defined as the distance from the plane of symmetry to the flap outboard span, dimensional
XF		X-coordinate in wing coordinate system of the leading edge of the flap root chord, dimensional
ZF		Z-coordinate in wing coordinate system of the leading edge of the flap root chord, dimensional
<b>Item 5</b>		
NCW		number of chordwise vortices on wing, $1 \leq NCW \leq 10$
MSW		number of spanwise vortices on left wing panel, $1 \leq MSW \leq 49$

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comment</u>
NCF		number of chordwise vortices on flap, $1 \leq NCF \leq 10$
MSF		number of spanwise vortices on left flap $1 \leq MSF \leq 49$
<u>Item 6</u>		
Y(I)	Y(1), Y(2), ..., Y(IMAX)	distance parallel to Y-axis from plane of symmetry to outboard trailing leg of I'th wing horseshoe vortex, dimensional ( $1 \leq I \leq IMAX$ , IMAX = MSW + 1)
<u>Item 7</u>		
YF(IF)	YF(1), YF(2), ..., YF(IFMAX)	distance parallel to Y-axis from plane of symmetry to outboard trailing leg of IF'th flap horseshoe vortex, dimensional ( $1 \leq IF \leq IFMAX$ , IFMAX = MSF + 1). If $MFLAP = 0$ , no input cards necessary
<u>Item 8</u>		
XM YM ZM	}	coordinates of pitching-moment center in wing coordinate system, dimensional
<u>Item 9</u>		
ALPHAL(J)	$\tan \alpha_l(1)$ , $\tan \alpha_l(2)$ , ..., $\tan \alpha_l(M)$	tangent of local angle of wing mean surface at J'th control point due to wing twist and camber. See figure 20 for sign convention. $1 \leq J \leq M$ , $M \leq 150$ . (If ALPHLC = 0.0, no input cards are necessary)
<u>Item 10</u>		
DELL(JF)	$\delta_l(1)$ , $\delta_l(2)$ , ..., $\delta_l(MF)$	local angle in radians of flap mean surface at JF'th control point due to flap camber. See figure 20 for sign convention. $1 \leq JF \leq MF$ , $MF \leq 100$ . (If DELLC = 0.0, no input cards necessary)
<u>Item 11</u>		
PMX(MM) PMY(MM) PMZ(MM)	}	coordinates of locations at which wing- flap induced velocities are computed. $1 \leq MM \leq MMM$ , $MMM \leq 50$ . If $MMM = 0$ , no input cards are required.

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comment</u>
<u>Item 12</u>		
DELD	$\delta_f$	flap deflection angle measured perpendicular to hingeline, positive downwards, degrees, see figure 1
KEI		$\left\{ \begin{array}{l} KEI = 0: \text{no externally induced velocities} \\ KEI = 5: \text{externally induced velocities read in via cards} \\ KEI > 6: \text{externally induced velocities read in from a data set.} \\ (7 \leq KEI \leq 98) \end{array} \right.$
KCP		$\left\{ \begin{array}{l} KCP = 0: \text{control point coordinates in program output} \\ KCP > 6: \text{control point coordinates in program output and data set.} \\ (7 < KCP < 98) \\ \text{NOTE: } KEI \neq KCP \end{array} \right.$
NRHS		number of successive cases to be treated for the same wing flap configuration. $1 \leq NRHS \leq 10$
<u>Item 13</u>		wing root chord angle of attack relative to free stream, degrees, see figure 1. $(1 \leq N \leq NRHS)$
ALPHAD(N)	$\alpha(1), \alpha(2), \dots, \alpha(NRHS)$	
<u>Item 14</u>		$\left\{ \begin{array}{l} \text{UEI}(J,N), \frac{u_i}{V}(1,N), \frac{v_i}{V}(1,N), \\ \text{VEI}(J,N) \\ \text{WEI}(J,N) \\ \frac{w_i}{V}(1,N), \dots \\ \frac{u_i}{V}(M,N), \frac{v_i}{V}(M,N), \\ \frac{w_i}{V}(M,N) \end{array} \right\}$ <p>this input is read in only if <math>KEI \neq 0</math>. The first card contains any alphanumeric information for identification of these data. These are externally induced velocity components at wing control points <math>J</math>, <math>1 \leq J \leq M</math>, <math>M \leq 150</math>.</p>

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comment</u>
	$\frac{u_i}{V}(M+1, N),$	
	$\frac{v_i}{V}(M+1, N),$	
	$\frac{w_i}{V}(M+1, N),$	
Desired wing velocity	$\frac{w_i}{V}(M+1, N), \dots$	
Desired flow velocity	$\frac{v_i}{V}(M+MF, N),$	
	$\frac{u_i}{V}(M+MF, N),$	
	$\frac{v_i}{V}(M+MF, N),$	
	$\frac{w_i}{V}(M+MF, N)$	
		this input required only if MFLAP = 1 and KEI $\neq$ 0. These are externally induced velocity components at flap control points J. M+1 $\leq$ J $\leq$ M+MF (NOTE: M $<$ 150, MF $\leq$ 150, but M+MF $\leq$ 220.) For these data, if KEI = 5, input via cards; if KEI = 8, input via data set. There will be N sets of these data for the N successive cases. 1 $\leq$ N $\leq$ NRHS.

Samples of two input decks are shown in figure 21 illustrating the options concerning externally induced perturbation velocities and flow-field determination. The first input deck shown is for a swept wing with full span, triple slotted flaps and without externally induced velocities. The configuration is shown in figure 22. The vortex lattice on the wing is made up of 20 spanwise rows with 4 vortices on the chord. On the flap there are 20 spanwise rows with 5 vortices on the chord. The 30° swept-back wing is untapered and has zero dihedral. The full span, triple slotted flap system is idealized to a single flap with camber, as shown in figure 22(c). One of the desired results of the calculation is the perturbation flow field determined at eight specified field points for 0° angle of attack. The points lie along a line colinear with a typical centerline location of a turbofan engine that could be hung under the wing.

The second input deck shown in figure 21 concerns the same configuration, but includes perturbation velocities induced by a high-bypass-ratio turbofan engine. The determination of these velocities is described in the jet wake section.

### Description of Output

This section describes the output from the wing-flap program. In the following, all items of output are enumerated and the contents briefly described. Two sample outputs are shown in figure 23.

The first page identifies the run and prints the wing-flap geometry data, vortex-lattice layout and the pitching moment center as specified in the input. The flap deflection angle,  $DELD$ , is the specified angle perpendicular to the hingeline whereas the streamwise flap deflection angle,  $DLXD$ , is calculated by the program. All length dimensions in the output are the same as in input.

The second page shows the wing angle of attack and the identification of the set of externally induced velocities (when applicable) for the flow condition case under consideration. Both are specified in the input. In the first sample case, figure 23(a), the flow conditions only include the wing angle of attack. In the second case, the wing angle of attack and identification of a set of induced velocities are printed under the flow condition heading.

On the next pages of the output, program-computed control point coordinates are listed for the wing and the flap together with mean surface streamwise slopes specified in input as tangents at the control points. The coordinate system associated with the control point locations is the wing coordinate system shown in figure 2. This part of the output also prints the externally induced perturbation velocities. In the first sample case, figure 23(a), these velocities appear as zeros. In the second case, figure 23(b), non-zero values were read in. The order of the output in this item and the next is as follows.  $J = 1$  corresponds to the area element on the left wing panel closest to the wing root chord and nearest the wing leading edge. This starts the first chordwise row. The sequence proceeds towards the wing trailing edge ( $J = NCW$ ) and then back up to the wing leading edge ( $J = NCW + 1$ ) for the next chordwise row. This process continues along the semispan for each chordwise row of area elements on the wing until the wing tip is reached. There, the aft element of the last chordwise row on the wing is located closest to the wing tip and nearest the wing trailing edge. On the flap, the sequence starts in a manner analogous to the wing with the first element ( $J = M + 1$ ) closest to the inboard span of the flap and nearest the flap leading edge.

The process then continues towards the outboard tip of the flap. The aft area element ( $J = M + MF$ ) of the last chordwise row on the flap is located closest to the flap outboard span and nearest the flap trailing edge.

The next item starts on a new page and provides information concerning the computed horseshoe vortex characteristics. This output includes bound leg midpoint coordinates, bound leg sweep angles and horseshoe vortex half-widths, together with the calculated vortex strengths. Wing angle of attack, ALPHAD, and flap deflection angle, DELD, are again listed in the heading of this output. The output sequence is described above and the coordinates are expressed in the wing root chord coordinate system of figure 2.

The following new page contains aerodynamic performance parameters computed by the program. The wing and flap lift coefficients, and the sum of the two,  $C_L$ , are referenced with respect to the wing planform area, SREF. The pitching moment coefficient,  $C_m$ , is referenced with respect to SREF and the wing average chord, CAVE. Both reference quantities are listed in this output also. The spanload coefficient,  $c_s c/c_L C_{ave}$ , is referenced with respect to the wing lift coefficient and CAVE for spanloads on the wing. Spanloads on the flap are referenced with respect to the flap lift coefficient and CAVE. These values of spanloads are listed for each chordwise row of area elements on the wing and flap starting nearest the wing root chord and flap inboard span respectively. The last line provides a breakdown of the pitching moment and induced drag in terms of the wing and flap contributions. The total induced drag,  $C_D$ , is also listed by itself and in combination with the total lift,  $C_L$ . Both parameters are calculated on the basis of equations (9) and (10).

The last and optional output item is called for by  $MMM \neq 0$  in Item 2 of the input and starts on a new page. This output includes coordinates of the locations at which the components of wing-flap induced velocities are computed and the induced velocity components. The sequence of this output is dictated by the sequence of the specified field point coordinates in Item 11 of the input.

#### Program Listing

The wing-flap vortex-lattice program is written in Fortran IV language for the IBM 360/67 computer. The computer consists of the main program and three subroutines.

<u>Program</u>	<u>Identification</u>	<u>Page No.</u>
MAINPL	WF01	53
LOAD1	WF02	65
INFWW	WF03	73
INVERS	WF04	75



```

22 FORMAT (4X,23HCHORD AT WING ROOT      ,F8.4,7X,F8.4)           WF01 065
23 FORMAT (3X,I3,7X,F8.4,6X,F8.4,10X,F8.4,15X,F8.4)           WF01 066
24 FORMAT ( 3X,4HWING/)           WF01 067
25 FORMAT (4X,23HSEMSISPAN           ,F8.4,7X,F8.4/)           WF01 068
28 FORMAT (/24X,20HREFERENCE QUANTITIES//5X,11HWING SPAN,B,4X,23HWINGWF01 069
   1 PLANFORM AREA,SREF,4X,19HWING AVE.CHORD,CAVE)           WF01 070
29 FORMAT (7X,F8.4,8X,F12.4,14X,F8.4)           WF01 071
30 FORMAT (4X,23HLE SWEEP,DEG.           ,F8.4,7X,F8.4)           WF01 072
31 FORMAT (/4X,29HUNDEFLECTED FLAP INBOARD SPAN,8X,F8.4)           WF01 073
32 FORMAT (2F5.1 ,3I5)           WF01 074
33 FORMAT (3F10.3)           WF01 075
34 FORMAT (1H1,4X,36HCONTROL POINT COORDINATES AND SLOPES,11X,
   129HEXTERNALLY INDUCED VELOCITIES)           WF01 077
35 FORMAT (14,1X,F9.4,2X,F9.4,2X,F8.4,2X,F8.4,6X,F9.5,1X,F9.5,1X,F9.5WF01 078
   1,1X,F9.4,2X,F9.4,2X,F8.4)           WF01 079
36 FORMAT (1H1,9X,66HVELOCITIES INDUCED AT SPECIFIED POINTS IN THE VIFWF01 080
   1CINITY OF THE WING//3X,1HN,6X,1HX,9X,1HY,9X,1HZ,13X,3HU/V,7X,3HV/VWF01 081
   2,7X,3HW/V)           WF01 082
37 FORMAT (4X,30HUNDEFLECTED FLAP OUTBOARD SPAN,7X,F8.4//)           WF01 083
38 FORMAT (4X,30HPITCHING MOMENT CENTER           ,2X,F8.4,2X,F8.4,2X,F8WF01 084
   1,4)           WF01 085
39 FORMAT (2X,I2,3X,F8.4,2X,F8.4,2X,F8.4,7X,F8.5,2X,F8.5,2X,F8.5)           WF01 086
43 FORMAT (3E13.6)           WF01 087
47 FORMAT (/2X,19HWING CONTROL POINTS/)           WF01 088
51 FORMAT (34X,12HMEAN SURFACE/3X,1HJ,5X,1HX,9X,1HY,9X,1HZ,7X,5HSLOPEWF01 089
   1,10X,3HU/V,7X,3HV/V,7X,3HW/V)           WF01 090
58 FORMAT (4X,23HCHORDWISE VORTICES           ,2X,I3,12X,I3)           WF01 091
59 FORMAT (/34X,13HGEOOMETRY DATA//28X,4HWING,11X,4HFLAP/)           WF01 092
60 FORMAT (4X,23HSPANWISE VORTICES           ,2X,I3,12X,I3)           WF01 093
64 FORMAT (/3X,4HFLAP)           WF01 094
65 FORMAT (/24X,26HSPANWISE LOAD DISTRIBUTION//2X,7HSTATION,5X,7HY/(B/WF01 095
   12),5X,13HLOCAL CHORD,C,6X,12HCL*C/CL*CAVE,14X,10HCL*C/(2*B)//)           WF01 096
66 FORMAT (4X,27HANGLE OF ATTACK,ALPHA ,DEG.,,15X,F8.4//)           WF01 097
67 FORMAT (/4X,27HFLAP ANGLE,DELD,DEG.           ,15X,F8.4)           WF01 098
68 FORMAT (4X,37HCALC. STREAMWISE FLAP ANGLE,DLXD,DEG.,,5X,F8.4)           WF01 099
72 FORMAT (1H1,15X,39HAERODYNAMIC LOADING RESULTS FOR ALPHA =,F10.5,
   11X,4HDEG.           //9X,21HWING LIFT CWF01 101
   10EFFICIENT,20X,21HFLAP LIFT COEFFICIENT/)           WF01 102
73 FORMAT (//39X,21HX           Y           Z)           WF01 103
74 FORMAT (/2X,19HFLAP CONTROL POINTS)           WF01 104
76 FORMAT (/2X,13HFLAP VORTICES/)           WF01 105
78 FORMAT (1H1,20X,26HFLOW CONDITIONS FOR CASE I3//)           WF01 106
79 FORMAT (/4X,63HCOORDS. OF ROOTCHORD NOSE OF FLAP EXTENDED TO PLANEWF01 107
   1. OF SYMMETRY/39X,           WF01 108
   2           21HX           Z/36X,F8.4,12X,F8.4)           WF01 109
81 FORMAT (1F10.5,3I10)           WF01 110
83 FORMAT (///2X,7HCM,WING,8X,7HCM,FLAP,8X,7HCD,WING,8X,7HCD,FLAP,9X,WF01 111
   12HCD,11X,8HCD/CL*CL/)           WF01 112
84 FORMAT (F10.5,5X,F10.5,5X,F10.5,5X,F10.5,5X,F10.5,5X,F10.5)           WF01 113
85 FORMAT (///20A4//)           WF01 114
C           WF01 115
C   INITIALIZE           WF01 116
C           WF01 117
C   DO 3008 J=1,150           WF01 118
3008 ALPHAL(J)=0.0           WF01 119
   DO 3080 JF=1,100           WF01 120
3080 DELL(JF)=0.0           WF01 121
C           WF01 122
1010 READ (5+15) TALK           WF01 123
C           WF01 124
C   CONTROL VARIABLES READ IN           WF01 125
C           WF01 126
   READ (5+32) ALPHLC,DELLC,MMM,MFLAP,MFSPEC           WF01 127
C   WING GEOMETRY SPECIFIED IN WING PLATFORM PLANE           WF01 128
C           WF01 129
C           WF01 130

```

```

READ (5,7) PSIWLE,PSIWTE,CRW,SSPAN,PHID           WF01 131
BOT= SSPAN                                         WF01 132
C
C   FLAP GEOMETRY SPECIFIED IN UNDEFLECTED FLAP PLANFORM PLANE    WF01 133
C   UNDEFLECTED FLAP PLANFORM PLANE IS THE WING PLANFORM PLANE    WF01 134
C
C   READ (5,7) PSIFILE,PSIFTE,CRF,FSSPAN,XF,ZF          WF01 135
C
C   SPECIFY VORTEX LATTICE ON WING AND FLAP               WF01 136
C
C   READ (5,6) NCW,MSW,NCF,MSF                         WF01 137
C
C   IMAX=MSW+1                                         WF01 138
C   IFMAX=MSF+1                                         WF01 139
C   M=MSW*NCW                                         WF01 140
C   MF=MSF*NCF                                         WF01 141
C   MP1=M+1*PF                                         WF01 142
C   MPMF=M+MF                                         WF01 143
C
C   LAY OUT WING VORTEX TAILS ALONG WING SEMISPAN       WF01 144
C   POSITIVE VALUES FOR LEFT PANEL                     WF01 145
C
C   READ (5,7) (Y(I),I=1,IMAX)                         WF01 146
C
C   LAY OUT FLAP VORTEX TAILS ALONG UNDEFLECTED FLAP SEMI SPAN   WF01 147
C   POSITIVE VALUES FOR LEFT PANEL                     WF01 148
C
C   IF(MFLAP.EQ.0) GO TO 9912                         WF01 149
C   READ (5,7) (YF(IF),IF=1*IFMAX)                   WF01 150
9912 CONTINUE                                         WF01 151
C
C   SPECIFY MOMENT CENTER                           WF01 152
C
C   READ (5,7) XM,YM,ZM                            WF01 153
C
C   INPUT LOCAL WING ANGLES DUE TO WING CAMBER AND TWIST   WF01 154
C
C   IF (ALPHLC.EQ.0.0) GO TO 1001                   WF01 155
C   MN=0                                              WF01 156
C   DO 9910 JNW=1,M,NCW                            WF01 157
C   MN=MN+NCW                                         WF01 158
9910 READ (5,7) (ALPHAL(J),J=JNW,MN)             WF01 159
1001 CONTINUE                                         WF01 160
C
C   INPUT LOCAL FLAP ANGLES DUE TO FLAP CAMBER        WF01 161
C
C   IF(MFLAP.EQ.0) GO TO 1002                         WF01 162
C   IF (DELLC.EQ.0.0) GO TO 1002                     WF01 163
C   MFN=0                                             WF01 164
C   DO 9911 JNF=1,MF,NCF                           WF01 165
C   MFN=MFN+NCF                                         WF01 166
9911 READ (5,7) (DELL(JF),JF=JNF,MFN)            WF01 167
1002 CONTINUE                                         WF01 168
C
C   DTR=P1/180                                         WF01 169
C   DTR=0.01745329                                    WF01 170
C
C   SPAN=2.0*SSPAN                                     WF01 171
C   PHI= PHID*DTR                                      WF01 172
C   SPHI=SIN(PHI)                                       WF01 173
C   CSPHI=COS (PHI)                                     WF01 174
C   TANPHI=TAN(PHI)                                     WF01 175
C   SWPWLE=TAN (PSIWLE*DTR)                          WF01 176
C   SWPWTE=TAN (PSIWTE*DTR)                          WF01 177
C
C   SPAN=2.0*SSPAN                                     WF01 178
C   PHI= PHID*DTR                                      WF01 179
C   SPHI=SIN(PHI)                                       WF01 180
C   CSPHI=COS (PHI)                                     WF01 181
C   TANPHI=TAN(PHI)                                     WF01 182
C   SWPWLE=TAN (PSIWLE*DTR)                          WF01 183
C   SWPWTE=TAN (PSIWTE*DTR)                          WF01 184
C
C   DTR=P1/180                                         WF01 185
C   DTR=0.01745329                                    WF01 186
C
C   SPAN=2.0*SSPAN                                     WF01 187
C   PHI= PHID*DTR                                      WF01 188
C   SPHI=SIN(PHI)                                       WF01 189
C   CSPHI=COS (PHI)                                     WF01 190
C   TANPHI=TAN(PHI)                                     WF01 191
C   SWPWLE=TAN (PSIWLE*DTR)                          WF01 192
C   SWPWTE=TAN (PSIWTE*DTR)                          WF01 193
C
C   SPAN=2.0*SSPAN                                     WF01 194
C   PHI= PHID*DTR                                      WF01 195

```

```

C   FLAP SWEEPS ARE SPECIFIED FOR THE UNDEFLECTED FLAP AND MEASURED    WF01 196
C   IN THE WING PLANFORM PLANE                                WF01 197
C   SWPFLE=TAN (PSIFLE*DTR)                                WF01 198
C   SWPFTE=TAN (PSIFTE*DTR)                                WF01 199
C   COMPUTE WING L.E. AND WING T.E. SWEEPS IN THE WING CHORDAL PLANE    WF01 200
C   SWPWLV=SWPWLE*CSPHI                                WF01 201
C   SWPWTV=SWPWTE*CSPHI                                WF01 202
C   WTV=ATAN(SWPWTV)                                WF01 203
C   SINWTV=SIN(WTV)                                WF01 204
C   COSWTV=COS(WTV)                                WF01 205
C   COMPUTE UNDEFLECTED FLAP T.E. SWEEP IN WING CHORDAL PLANE    WF01 206
C   SWPFTV=SWPFTE*CSPHI                                WF01 207
C   FTE=ATAN(SWPFTV)                                WF01 208
C   READ IN COORDINATES OF POINTS AT WHICH PERTURBATION VELOCITIES    WF01 209
C   INDUCED BY WING FLAP ARE CALCULATED    WF01 210
C   IF(MMM,EQ.0) GO TO 4000                                WF01 211
C   READ (5,33) (PMX(MM),PMY(MM),PMZ(MM),MM=1,MMM)    WF01 212
4000 CONTINUE                                WF01 213
C   READ IN CERTAIN FIXED QUANTITIES    WF01 214
C   DELD= FLAP ANGLE MEASURED PERPENDICULAR TO HINGE LINE, POSITIVE    WF01 215
C   DOWN,DEG.                                WF01 216
C   IF KEI=0 NO EXTERNALLY INDUCED VELOCITIES    WF01 217
C   IF KEI=5 INPUT EXTERNALLY INDUCED VELOCITIES VIA CARDS    WF01 218
C   IF KEI GT.6 INPUT EXTERNALLY INDUCED VELOCITIES VIA DATASET    WF01 219
C   IF KCP=0 CONTROL POINT COORDINATES IN OUTPUT    WF01 220
C   IF KCP GT.6 CONTROL POINT COORDINATES IN OUTPUT AND IN DATASET    WF01 221
C   NRHS= NUMBER OF SUCCESSIVE CASES TO BE TREATED    WF01 222
C   READ (5,81) DELD,KEI,KCP,NRHS    WF01 223
C   IF (KEI,LT,0) KEI=0                                WF01 224
C   IF (KCP,LT,7) KCP=0                                WF01 225
C   DO 3081 JC=1,220                                WF01 226
C   DO 3081 JV=1,230                                WF01 227
3081 FVN(JC,JV)= 0.0                                WF01 228
C   DO 3082 N=1,NRHS                                WF01 229
C   DO 3082 JC=1,220                                WF01 230
3082 CIR(JC,N)=0.0                                WF01 231
C   DEL= DELD*DTR                                WF01 232
C   SINDEL=SIN(DEL)                                WF01 233
C   COSDEL=COS(DEL)                                WF01 234
C   TANDEL=TAN(DEL)                                WF01 235
C   CALCULATE ANGLES THETAP NECESSARY FOR THE FLAP DEFLECTION MEASURED    WF01 236
C   IN THE X-Z PLANE DLX, FLAP DIHEDRAL PHIF, AND FLAP VORTEX LAYOUT    WF01 237
C   WF01 238
C   WF01 239
C   WF01 240
C   WF01 241
C   WF01 242
C   WF01 243
C   WF01 244
C   WF01 245
C   WF01 246
C   WF01 247
C   WF01 248
C   WF01 249
C   WF01 250
C   WF01 251
C   WF01 252
C   WF01 253
C   WF01 254
C   WF01 255
C   WF01 256
C   WF01 257
C   WF01 258
C   WF01 259

```

```

A1=COSDEL*COSWTV WF01 260
C1=-(COSDEL*SINWTV*SPHI+SINDEL*CSPHI) WF01 261
A3=-(SINDEL*COSWTV) WF01 262
B3=SINDEL*SINWTV*CSPHI+COSDEL*SPHI WF01 263
C3=SINDEL*SINWTV*SPHI-COSDEL*CSPHI WF01 264
WF01 265
C THETAP=ARCOS((A3*C1-A1*C3)/((C3*C3+A3*A3)**0.5)) WF01 266
SINTHP= SIN(THETAP) WF01 267
COSTHP= COS(THETAP) WF01 268
C PI02=PI/2 WF01 269
C PI02= 1.57079633 WF01 270
C WF01 271
C PI02=PI02-THETA2 WF01 272
C PI02-THETA7=THETA2- PI02+WTV-FTE WF01 273
C PI02-THETA8= PI02-THETA2 WF01 274
C PI02-THETA9=THETA2-( PI02-WTV) WF01 275
C PI02-THETA10= PI02-THETA9 WF01 276
C WF01 277
C PI02+THETAP WF01 278
C SINTH=SIN(THETA) WF01 279
C COSTH=COS(THETA) WF01 280
C NOTE, COSTHP=SINTH AND -SINTHP=COSTH WF01 281
C WF01 282
C DLX= 0.0 WF01 283
C IF (DEL.NE.0.0) DLX= ARCOS(COSTHP*COSDEL*COSWTV+SINTHP*SINWTV) WF01 284
C SINDLX=SIN(DLX) WF01 285
C COSDLX=COS(DLX) WF01 286
C DLXD= DLX*1.0/DTR WF01 287
C PHIF=ARCOS((A3*A3+C3*C3)/((A3*B3)**2+(A3*A3+C3*C3)**2+(C3*B3)**2)) WF01 288
C 1**0.5) WF01 289
C SPHIF=SIN(PHIF) WF01 290
C CSPHIF=COS(PHIF) WF01 291
C WF01 292
C WF01 293
C WF01 294
C WF01 295
C WF01 296
C WF01 297
C GEOFTRY AND VORTEX NUMBERS LAY-OUT OUTPUT WF01 298
C WF01 299
C WRITE (6,14) TALK WF01 300
C WRITE (6,59) WF01 301
C WRITE (6,30) PSIWLE,PSIYLE WF01 302
C WRITE (6,8) PSIWTE,PSIFTE WF01 303
C WRITE (6,21) PHID WF01 304
C WRITE (6,22) CRW,CRF WF01 305
C WRITE (6,25) SSPAN,FSSPAN WF01 306
C WRITE (6,58) NCW,NCF WF01 307
C WRITE (6,60) MSW,MSF WF01 308
C IF (MFLAP.EQ.0) GO TO 9971 WF01 309
C WRITE (6,79) XF,ZF WF01 310
C WRITE (6,31) YF(1) WF01 311
C WRITE (6,37) YF(IFMAX) WF01 312
9971 CONTINUE WF01 313
C WRITE (6,73) WF01 314
C WRITE (6,38) XM,YM,ZM WF01 315
C WRITE (6,67) DELD WF01 316
C WRITE (6,68) DLXD WF01 317
C WF01 318
C LAY-OUT VORTEX BOUND LEG MIDPOINTS AND CONTROL POINTS ON THE WING WF01 319
C D=NCW DO 701 I=2,IMAX WF01 320
DO 701 I=2,IMAX WF01 321
SUMY(I)=(Y(I)+Y(I-1))/2.0 WF01 322
YLOC(I)=SUMY(I)/SSPAN WF01 323
YLOC(I)=SUMY(I)/SSPAN WF01 324

```

```

DO 720 JCW=1,NCW          WF01 325
A=JCW                      WF01 326
SWPC(JCW)=SWPWLE-((A-0.25)/D)*(SWPWLE-SWPWTE) + WF01 327
J=(I-2)*NCW+JCW            WF01 328
SWPV(J)= SWPWLE-((A-0.75)/D)*(SWPWLE-SWPWTE)   WF01 329
C DISTINCTION BETWEEN SWEEP IN CHORDAL(SWPVVP) AND PLANFORM(SWPV) WF01 330
C PLANES                   WF01 331
C SWPVVP(J)=SWPV(J)*CSPHI WF01 332
C SWPVVP(J)= ATAN (SWPVVP(J)) WF01 333
C WING VORTEX HALFWIDTH=SW WF01 334
C SW(J)=(Y(I)-Y(I-1))/(2.0*CSPHI) WF01 335
C PVX(J)=-((A-0.75)*(CRW/D))-(SUMY(I)*SWPV(J)) WF01 336
C PVY(J)=-SUMY(I)           WF01 337
C PVZ(J)=-SUMY(I)*TANPHI   WF01 338
C PCX(J)=-((A-0.25)*(CRW/D))-(SUMY(I)*SWPC(JCW)) WF01 339
C COORDINATES OF 3/4 CHORD ELEMENTAL PANEL LEFT SIDE POINT,PTL WF01 340
C PTLX(J)=-((A-0.25)*(CRW/D))-(Y(I)*SWPC(JCW)) WF01 341
C PTLY(J)=-Y(I)             WF01 342
C PTLZ(J)=-Y(I)*TANPHI    WF01 343
720 CONTINUE               WF01 344
701 CONTINUE               WF01 345
C IF(MFLAP.EQ.0) GO TO 9913 WF01 346
C LAY-OUT VORTEX BOUNDLEG MID POINTS AND CONTROL POINTS ON THE FLAP WF01 347
C TANTH7=TAN(THETA7)        WF01 348
C COSTH8=COS(THETA8)        WF01 349
C TANTH8=TAN(THETA8)        WF01 350
C COSTH9=COS(THETA9)        WF01 351
C COST10=COS(THET10)        WF01 352
C AE IS INTERSECTION OF DEFLECTED FLAP PLANE AND XZ PLANE WF01 353
C IF (MFSPEC.EQ.1) GO TO 6970 WF01 354
C AE=CRF*(COSTH9+COST10*TANTH7) WF01 355
C GO TO 6971               WF01 356
6970 AE=CRF               WF01 357
6971 CONTINUE               WF01 358
C YFC....DISTANCE FROM FLAP X-Z PLANE TO LEFT TRAILING LEG OF WF01 359
C HORSE SHOE VORTEX ON DEFLECTED FLAP WF01 360
C E=NCF                    WF01 361
C YFC(1)=(YF(1)*COSTH8)/(CSPHI*COSWTV) WF01 362
DO 702 IF=2,IFMAX          WF01 363
C YFC(IF)=(YF(IF)*COSTH8)/(CSPHI*COSWTV) WF01 364
C SUMYF(IF)=(YFC(IF)+YFC(IF-1))/2.0 WF01 365
C YLOCF(IF)=SUMYF(IF)/SSPAN WF01 366
DO 721 JCF=1,NCF          WF01 367
B=JCF                      WF01 368
JF=(IF-2)*NCF+JCF         WF01 369
SWPVVF(JF)= TANTH8-((B-0.75)/E)*(TANTH8+TANTH7) WF01 370
SWPCF(JCF)= TANTH8-((B-0.25)/E)*(TANTH8+TANTH7) WF01 371
C SF IS FLAP VORTEX HALFWIDTH WF01 372
C SF(JF)=(YFC(IF)-YFC(IF-1))/2.0 WF01 373
C WF01 374
WF01 375
WF01 376
WF01 377
WF01 378
WF01 379
WF01 380
WF01 381
WF01 382
WF01 383
WF01 384
WF01 385
WF01 386
WF01 387
WF01 388
WF01 389

```

```

C PVFX(JF)=XF
C   1 - (SUMYF(IF)*SINWTV/COSTH8)-(((B=0.75)/E)*AE+SUMYF(IF)*
C 1 SWPVVF(JF)-SUMYF(IF)*TANTH8)*COSDLX
C PVFY(JF)=-SUMYF(IF)*(COSWTV*CSPHI/COSTH8)
C PVEZ(JF)=ZF
C   1 -SUMYF(IF)*(COSWTV*CSPHI/COSTH8)+(((B=0.75)/E)*AE+SUMYF(IF)
C 1)*SWPVVF(JF)-SUMYF(IF)*TANTH8)*SINDLX
C PCFX(JF)=XF
C   1 - (SUMYF(IF)*SINWTV/COSTH8)-(((B=0.25)/E)*AE+SUMYF(IF)*
C 1 SWPCF(JCF)-SUMYF(IF)*TANTH8)*COSDLX
C PCFZ(JF)=ZF
C   1 -SUMYF(IF)*(COSWTV*CSPHI/COSTH8)+(((B=0.25)/E)*AE+SUMYF(IF)
C 1)*SWPCF(JCF)-SUMYF(IF)*TANTH8)*SINDLX
C COORDINATES OF FLAP ELEMENTAL PANEL 3/4 CHORD POINT ON THE LEFT
C SIDE
C PTLFX(JF)= XF
C   1 ((YFC(IF)*SINWTV/COSTH8)-(((B=0.25)/E)*AE+YFC(IF)*
C 1 SWPCF(JCF)-YFC(IF)*TANTH8)*COSDLX
C PTLFY(JF)=-YFC(IF)*(COSWTV*CSPHI/COSTH8)
C PTLFZ(JF)=ZF
C   1 -YFC(IF)*(COSWTV*CSPHI/COSTH8)+(((B=0.25)/E)*AE+YFC(IF)*
C 1 WPCF(JCF)-YFC(IF)*TANTH8)*SINDLX

C SWPVVF(JF)= ATAN(SWPVVF(JF))
721 CONTINUE
702 CONTINUE
9913 CONTINUE

C GENERATE DATA SET FOR CONTROL POINT COORDINATES
C
C IF I KCP.EQ.0) GO TO 875
DO 876 J=1,M
 876 WRITE(KCP,7) PCX(J),PVY(J),PVZ(J)
IF (MFLAP.EQ.0) GO TO 875
DO 877 J=MP1,MPMF
  JF=J-M
  877 WRITE(KCP,7) PCFX(JF),PVFY(JF),PCFZ(JF)
  875 CONTINUE

C BUILD UP L.H.S. OF BOUNDARY CONDITION, THE COEFFICIENT MATRIX
C
C CONTROL POINTS ON WING, VORTICES ON WING
C
DO 212 JC=1,M
DO 212 JV=1,M
XWW=PCX(JC)-PVX(JV)
YWW(1)=PVY(JC)-PVY(JV)
YWW(2)=PVY(JC)+PVY(JV)
ZWW=PVZ(JC)-PVZ(JV)
DO 261 I=1,2
CALL INFWW(SWPVVP(JV),PHI,XWW,YWW(I),ZWW,SW(JV),FUW(I),FVW(I),
1 FWW(I))
SWPVVP(JV)=-SWPVVP(JV)
PHI=-PHI
261 CONTINUE
FVN(JC,JV)=(FWW(1)+FWW(2))*CSPHI-(FVW(1)+FVW(2))*SPHI
212 CONTINUE

C CONTROL POINTS ON WING, VORTICES ON FLAP

```

```

IF (MFLAP.EQ.0) GO TO 9914
DO 312 JC=1,M
DO 312 JV=MP1,MPMF
JVF=JV-M
XWF=PCX(JC)-PVFX(JVF)
YWF(1)=PVY(JC)-PVFY(JVF)
YWF(2)=PVY(JC)+PVFY(JVF)
ZWF=PVZ(JC)-PVFZ(JVF)
C
C TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES
C
XWFP=XWF*COSDLX-ZWF*SINDLX
YWFP(1)=YWF(1)
YWFP(2)=YWF(2)
ZWFP=XWF*SINDLX+ZWF*COSDLX
C
DO 262 I=1,2
CALL INFWW(SWPVVF(JVF),PHIF,XWFP,YWFP(I),ZWFP,SF(JVF),FUF(I),FVF(I),WF01 455
1),FWF(I))
SWPVVF(JVF)=-SWPVVF(JVF)
PHIF=-PHIF
262 CONTINUE
FVN(JC,JV)=(FWF(1)+FWF(2))*CSPHI*COSDLX-(FUF(1)+FUF(2))*CSPHI*SINDLX-1,WF01 456
1*LX-(FVF(1)+FVF(2))*SPHI
312 CONTINUE
C
C CONTROL POINTS ON FLAP, VORTICES ON WING
C
DO 412 JC=MP1,MPMF
JCF=JC-M
DO 412 JV=1,M
XFW=PCFX(JCF)-PVX(JV)
YFW(1)=PVFY(JCF)-PVY(JV)
YFW(2)=PVFY(JCF)+PVY(JV)
ZFW=PCFZ(JCF)-PVZ(JV)
DO 263 I=1,2
CALL INFWW(SWPVVP(JV),PHI,XFW,YFW(I),ZFW,SW(JV),FUW(I),FVW(I),WF01 457
1FWW(I))
SWPVVP(JV)=-SWPVVP(JV)
PHI=-PHI
263 CONTINUE
FVN(JC,JV)=(FWW(1)+FWW(2))*COS(DLX+DELL(JCF))*CSPHIF+(FUW(1)+FUW
1(2))*SIN(DLX+DELL(JCF))*CSPHIF-(FVW(1)+FVW(2))*SPHIF*2COS(DLX+DELL(JCF))
412 CONTINUE
C
C CONTROL POINTS'ON FLAP, VORTICES ON FLAP
C
DO 512 JC=MP1,MPMF
JCF=JC-M
DO 512 JV=MP1,MPMF
JVF=JV-M
XFF=PCFX(JCF)-PVFX(JVF)
YFF(1)=PVFY(JCF)-PVFY(JVF)
YFF(2)=PVFY(JCF)+PVFY(JVF)
ZFF=PCFZ(JCF)-PVFZ(JVF)
C
C TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES
C
XFFP=XFF*COSDLX-ZFF*SINDLX
YFFP(1)=YFF(1)
YFFP(2)=YFF(2)
ZFFP=XFF*SINDLX+ZFF*COSDLX

```

```

DO 264 I=1,2
    CALL INFWW(SWPVVF(JVF),PHIF,XFFP,YFFP(I),ZFFP,SF(JVF),FUF(I),FVF(I)WF01 519
    1),FWF(I))
    SWPVVF(JVF)=-SWPVVF(JVF)
    PHIF=-PHIF
264 CONTINUE
    FVN(JC,JV)=(FWF(1)+FWF(2))*CSPHIF*COS(DELL(JCF))-(FVF(1)+FVF(2))*WF01 520
    1)*CSPHIF*COS(DELL(JCF))
512 CONTINUE
9914 CONTINUE
C
C READ IN ANGLE OF ATTACK, DEG., FOR SUCCESSIVE CASES WF01 521
C
C DO 1006 N=1,NRHS WF01 522
    READ (5,7) ALPHAD(N)
1006 ALPHA(N)=ALPHAD(N)*DTR WF01 523
C
C READ IN ENGINE INDUCED PERTURBATION VELOCITIES FOR SUCCESSIVE WF01 524
C CASES FROM MULTIPLE DATASETS WF01 525
C
C IF (KEI).LE.1004,1004,1005 WF01 526
1005 DO 7011 N=1,NRHS WF01 527
    READ (KEI,15) (TITLE(N,JI),JI=1,20)
    DO 7001 J=1,MPMF WF01 528
7001 READ (KEI,43) UEI(J,N),VEI(J,N),WEI(J,N) WF01 529
    IF (KEI.EQ.5) GO TO 7011 WF01 530
    READ (KEI,43,END=7011)
7011 CONTINUE WF01 531
C
C GO TO 1003 WF01 532
1004 DO 7003 N=1,NRHS WF01 533
    DO 7003 J=1,MPMF WF01 534
        UEI(J,N)=0.0 WF01 535
        VEI(J,N)=0.0 WF01 536
        WEI(J,N)=0.0 WF01 537
1003 CONTINUE WF01 538
C
C CONTROL POINTS ON THE WING WF01 539
C
C DO 2612 N=1,NRHS WF01 540
    MPMFPN=M+MF+N WF01 541
    DO 2612 JC=1,M WF01 542
2612 FVN(JC,MPMFPN)=12.566371*(SIN(ALPHA(N)+ALPHAL(JC))*CSPHI+WF01 543
    1*VEI(JC,N)*SPHI-(UEI(JC,N)*ALPHAL(JC)+WEI(JC,N))*CSPHI) WF01 544
C
C CONTROL POINTS ON THE FLAP WF01 545
C
C IF (MFLAP.EQ.0) GO TO 9915 WF01 546
    DO 2613 N=1,NRHS WF01 547
        MPMFPN=M+MF+N WF01 548
        DO 2613 JC=MP1,MPMF WF01 549
            JCF=JC-M WF01 550
2613 FVN(JC,MPMFPN)=12.566371*(SIN(ALPHA(N)+DLX+DELL(JCF))*CSPHIF+WF01 551
    1*VEI(JC,N)*SPHIF*COS(DLX+DELL(JCF))-(UEI(JC,N)*SIN(DLX+DELL(JCF))+WF01 552
    2*WEI(JC,N)*COS(DLX+DELL(JCF)))*CSPHIF) WF01 553
9915 CONTINUE WF01 554
C
C SOLVE FOR UNKNOWN VORTEX STRENGTHS WF01 555
C
C CALL INVERS(FVN,NRHS,MPMF,220,230) WF01 556
C

```

```

DO 9812 N=1,NRHS                               WF01 585
  MPMFPN=M+MF+N                               WF01 586
  DO 9812 JC=1,MPMF                           WF01 587
    9812 CIR(JC,N)=FVN(JC,MPMFPN)             WF01 588
C   CALL OF THE FOLLOWING OPERATIONS PERFORMED FOR EACH SUCCESSIVE CASEWF01 589
C   CIR
C   DO 1000 N=1,NRHS                           WF01 590
C   WRITE (6,78) N                             WF01 591
C   WRITE (6,66) ALPHAD(N)                     WF01 592
C   IF (KEI.GT.6) WRITE (6,85) (TITLE(N,J),J=1,20) WF01 593
C   IF (MMM.EQ.0) GO TO 4001                   WF01 594
C   COMPUTE INDUCED VELOCITIES AT POINTS (PMX,PMY,PMZ) DUE TO WINGUGWF01 595
C   VORTICES                                     WF01 596
C   IF (MMM.EQ.0) GO TO 4001                   WF01 597
C   IF (MMM.EQ.0) GO TO 4001                   WF01 598
C   COMPUTE INDUCED VELOCITIES AT POINTS (PMX,PMY,PMZ) DUE TO WINGUGWF01 599
C   VORTICES                                     WF01 600
C   IF (MMM.EQ.0) GO TO 4001                   WF01 601
C   DO 5000 JC=1,MMM                           (IE+6) BTIRWF01 602
C   UI(JC)=0.0                                 (TA+6) BTIRWF01 603
C   VI(JC)=0.0                                 WF01 604
C   WI(JC)=0.0                                 WF01 605
C   DO 5000 JV=1,MJ,1                         (IE+6) BTIRWF01 606
C   XWM=PMX(JC)-PVX(JV)                      WF01 607
C   YWM(1)=PMY(JC)-PVY(JV)                   WF01 608
C   YWM(2)=PMY(JC)+PVY(JV)                   WF01 609
C   ZWM=PMZ(JC)-PVZ(JV)                      WF01 610
C   DO 1261 I=1,2                           (IE+6) BTIRWF01 611
C   CALL INFVW (SWPVVP(JV),PHI,XWM,YWM(I),ZWM,SW(JV),FUW(I),FVW(I),FWWWF01 612
C   PHI(I))                                     WF01 613
C   SWPVVP(JV)=-SWPVVP(JV)                   WF01 614
C   PHI=-PHI                                    WF01 615
1261 CONTINUE                                  WF01 616
  UI(JC)=UI(JC)+((FUW(1)+FUW(2))*CIR(JV,N))/12.566371 WF01 617
  VI(JC)=VI(JC)+((FVW(1)+FVW(2))*CIR(JV,N))/12.566371 WF01 618
  WI(JC)=WI(JC)+((FWW(1)+FWW(2))*CIR(JV,N))/12.566371 WF01 619
5000 CONTINUE                                  WF01 620
C   COMPUTE INDUCED VELOCITIES AT POINTS (PMX,PMY,PMZ) DUE TO FLAPWF01 621
C   VORTICES                                     WF01 622
C   IF (MFLAP.EQ.0) GO TO 9916                 WF01 623
C   DO 5010 JC=1,MMM                           WF01 624
C   DO 5010 JV=MP1,MPMF                         WF01 625
C   JVF=JV-M                                    WF01 626
C   XFM=PMX(JC)-PVFX(JVF)                     WF01 627
C   YFM(1)=PMY(JC)-PVFY(JVF)                  WF01 628
C   YFM(2)=PMY(JC)+PVFY(JVF)                  WF01 629
C   ZFM=PMZ(JC)-PVFZ(JVF)                     WF01 630
C   TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREESWF01 631
C   XFM=XFM*COSDLX-ZFM*SINDLX                WF01 632
C   YFM(1)=YFM(1)                            WF01 633
C   YFM(2)=YFM(2)                            WF01 634
C   ZFM=XFM*SINDLX+ZFM*COSDLX                WF01 635
C   DO 1271 I=1,2                           (IE+6) BTIRWF01 636
C   CALL INFVW (SWPVVF(JVF),PHIF,XFMP,YFMP(I),ZFMP,SF(JVF),FUF(I),WF01 637
C   1,FVF(I),FWF(I))                          WF01 638
C   SWPVVF(JVF)=-SWPVVF(JVF)                 WF01 639
C   PHIF=-PHIF                                WF01 640
1271 CONTINUE                                  WF01 641
  UI(JC)=UI(JC)+(((FUF(1)+FUF(2))*COSDLX+(FWF(1)+FWF(2))*SINDLX)*CIRWF01 642
  (JV,N))/12.566371                         WF01 643
  VI(JC)=VI(JC)+((FVF(1)+FVF(2))*CIR(JV,N))/12.566371 WF01 644
  WF01 645
  WF01 646
  WF01 647
  WF01 648

```

```

WI(JC)=WI(JC)+(((FWF(1)+FWF(2))*COSDLX-(FUF(1)+FUF(2))*SINDLX)*CIRWF01 649
1(JV,N))/12.566371 WF01 650
5010 CONTINUE WF01 651
9916 CONTINUE WF01 652
4001 CONTINUE WF01 653
C WF01 654
C LOADING CALCULATIONS FOLLOW WF01 655
C WF01 656
C CALL LOAD1(N) WF01 657
C WF01 658
C CONTROL POINTS COORDINATES, MEAN SURFACE SLOPES AND EXTERNALLY WF01 659
C INDUCED VELOCITIES OUTPUT WF01 660
C WRITE (6,34) WF01 661
C WRITE (6,51) WF01 662
C WRITE (6,47) WF01 663
C DO 6001 J=1,M WF01 664
6001 WRITE (6,35) J,PCX(J),PVY(J),PVZ(J),ALPHAL(J),UEI(J,N),VEI(J,N), WF01 665
1WEI(J,N) WF01 666
C IF(MFLAP.EQ.0) GO TO 9917 WF01 667
C WRITE (6,74) WF01 668
C DO 6002 J=MP1,MPMF WF01 669
JF=J-M WF01 670
6002 WRITE (6,35) J,PCFX(JF),PVFY(JF),PCFZ(JF),DELL(JF),UEI(J,N), WF01 671
1VEI(J,N),WEI(J,N) WF01 672
9917 CONTINUE WF01 673
C HORSESHOE VORTEX CHARACTERISTICS OUTPUT WF01 674
C WRITE (6,1) ALPHAD(N),DELD WF01 675
DO 550 J=1,M WF01 676
SWPVVD= SWPVVP(J) *57.29578 WF01 677
550 WRITE (6,13) J,PVX(J),PVY(J),PVZ(J),SWPVVD ,SW(J),CIR(J,N) WF01 678
C IF(MFLAP.EQ.0) GO TO 9918 WF01 679
C WRITE (6,76) WF01 680
C DO 551 J=MP1,MPMF WF01 681
JF=J-M WF01 682
SWPVVD= SWPVVF(JF) *57.29578 WF01 683
551 WRITE (6,13) J,PVFX(JF),PVFY(JF),PVFZ(JF),SWPVVD ,SF(JF), WF01 684
1CIR(J,N) WF01 685
C 9918 CONTINUE WF01 686
C OVFRALL LIFT AND MOMENT COEFFICIENT, REFERENCE QUANTITIES, SPAN- WF01 687
WISE LOADINGS OUTPUT WF01 688
C WRITE (6,72) ALPHAD(N) WF01 689
C WRITE (6,19) SUMLIF,FUMLIF WF01 690
C WRITE (6,18) WF01 691
C WRITE (6,19) CLTOT,TOTMOM WF01 692
C WRITE (6,28) WF01 693
C WRITE (6,29) SPAN,SREF,CAVE WF01 694
C WF01 695
C WF01 696
C WF01 697
C WF01 698
C WF01 699
C WF01 700
C WF01 701
C WF01 702
C WF01 703
C WF01 704
C WF01 705
C WF01 706
C WF01 707
C WF01 708
C WF01 709
C WF01 710
C WF01 711
C WF01 712

```

```

      WRITE (6,65) WF01 713
      WRITE (6,24) WF01 714
      DO 3000 I=2,IMAX WF01 715
      IM1=I-1 WF01 716
      CHLOCB(I)=CRW-SUMY(I)*(SWPWLE-SWPWTE) WF01 717
 3000 WRITE (6,23) IM1,YLOC(I),CHLOCB(I),SLDCO(I),SECLIF(I) WF01 718
C IF(MFLAP.EQ.01 GO TO 9919 WF01 719
      WRITE (6,64) WF01 720
      DO 3100 IF=2,IFMAX WF01 721
      IFM1=IF-1 WF01 722
      FCHLOB(IF)= AE-SUMYF(IF)*(TANTH8+TANTH7) WF01 723
 3100 WRITE (6,23) IFM1,YLOCF(IF),FCHLOB(IF),FSLDCO(IF),FECLIF(IF) WF01 725
 9919 CONTINUE WF01 726
C WRITE (6,83) WF01 727
C WRITE (6,84) WMOM,FMOM,SUMDRG,FUMDRG,DRGTOT,CDOCLS WF01 728
C IF(MMM.EQ.0) GO TO 9100 WF01 729
      WRITE (6,36) WF01 730
      DO 4002 J=1,MMM WF01 731
 4002 WRITE (6,39) J,PMX(J),PMY(J),PMZ(J),UI(J),VI(J),WI(J) WF01 732
 9100 CONTINUE WF01 733
C 1000 CONTINUE WF01 734
C GO TO 1010 WF01 735
C END WF01 736
C WF01 737
C WF01 738
C WF01 739
C WF01 740

```

```

SUBROUTINE LOAD1(N) WF02 001
C WF02 002
C WF02 003
C DIMENSION SLDCO(50),SECLIF(50),FSLDCO(50),FECLIF(50),CHLIWF02 004
C 1FT(50),TLLIFT(150),BLLIFT(150),SLDC01(50),FCHLIF(50),TFLIFT(150), WF02 005
C 2BFLIFT(150),SLDCF1(50),BFLIF1(150),BFLIF2(150),BFLIF3(150), WF02 006
C 3BFLIF4(150),BFLIF5(150),BLLIF1(150),BLLIF2(150),BLLIF3(150), WF02 007
C 4RLLIF4(150),BFDRG2(150),BFDRG3(150),BFDRG4(150),BFDRG5(150), WF02 008
C 5TFDRAG(150),FCDRAG(50),BFDRAG(150),BLDRG2(150),BLDRG3(150),BLDRG4 WF02 009
C 6(150),BLDRG5(150),BLDRAG(150),TLDRAG(150),CHDRAG(50),BLLIF5(150), WF02 010
C 10C101WF02 011
C 10E,DIMNSION V(150),U(150),VA(150),VF(150),UF(150),VB(150),FUW(2),FWF02 012
C 10C10VW(2),FWW(2),FUF(2),FVF(2),FWF(2),WF(150),WB(150) WF02 013
C 10C103WF02 014
C 10D10DIMENSION UEI(220,10),VEI(220,10),WEI(220,10),ALPHA(10), WF02 015
C 10C101CIR(220,10) WF02 016
C 10C1010C10WF02 017
C 10D10DIMENSION PTLX(150),PTLY(150),PTLZ(150),PVX(150),PVY(150),PVZ(150)WF02 018
C 10D10, PVFX(150),PVFY(150),PVFZ(150),PTLFX(150),PTLFY(150),PTLFZ(150) WF02 019
C 10C1010C10WF02 020
C 10D10DIMENSION SWPVVP(150),SWPVVF(150),SF(150),SW(150),Y(50),YF(50),CHLWF02 021
C 10C1010C1010C(50),FCHLOC(50),YFC(50) WF02 022
C 10C1010C1010C10WF02 023
C 10D10DIMENSION YTW(2),YTWP(2),YBWP(2),YTFW(2),YTFP(2),YTFF(2),YBFW(2),YWFW02 024
C 10D10, YBFF(2),YBFP(2),YBW(2),T(150),TF(150),ELPANL(150),FLPANL(150) WF02 025
C 10C1010C1010C10WF02 026
C 10C1010C1010C10WF02 027
C COMMON CIR,SMLIF,FMLIF,CLTOT,TOTMOM,SLDCO,SECLIF,FSLDCO,FECLIF WF02 028
C COMMON WMOM,FMOM,SUMDRG,FUMDRG,DRGTOT,CDOCLS WF02 029
C COMMON PTLX,PTLY,PTLZ,PVX,PVY,PVZ,PVFX,PVFY,PVFZ,PTLFX,PTLFY,PTLFZWF02 030
C COMMON SWPWLE,SWPWTE,SWPFLE,SWPFTE,SWPVVP,SWPVVF,SF,SW,Y,YF WF02 031
C COMMON CRW,SSPAN,CRF,FSSPAN,PHI,PHIF,CSPHIF,CSPHI,ALPHA,DLX,COSDLXWF02 032
C 1;SINDLX,SREF,CAVE,XM,ZM,SPHIF,SPHI WF02 033
C COMMON NCW,M,MP1,MPMF,IFMAX,IMAX,NCF,MFLAP WF02 034
C COMMON AE,YFC,TANTH8,TANTH7 WF02 035
C COMMON UEI,VEI,WEI WF02 036
C COMMON INF/BOT WF02 037
C COMMON SMLIF,CLTOT,TOTMOM,SLDCO,SECLIF,FSLDCO,FECLIF WF02 038
C COMPUTE REFERENCE WING AREA = PLANFORM AREA = SREF, WING AVERAGE WF02 039
C CHORD = CAVE WF02 040
C SINALP= SIN(ALPHA(N)) WF02 041
C COSALP= COS(ALPHA(N)) WF02 042
C D=NCW WF02 043
C CTW=CRW-SSPAN*(SWPWLE-SWPWTE) WF02 044
C SREF=(CRW+CTW)*SSPAN WF02 045
C CAVE=SREF/(2.0*SSPAN) WF02 046
C I=1 WF02 047
C SUMLIF=0.0 WF02 048
C SUMDRG=0.0 WF02 049
C 702 I=I+1 WF02 050
C CHLIFT(I)=0.0 WF02 051
C CHDRAG(I)=0.0 WF02 052

```

```

C COMPUTE VELOCITIES NEEDED FOR LOADING CALCULATIONS WF02 064
C SIDEWASH V INDUCED BY WING VORTICES AT THE 3/4 CHORD OF THE LEFTWF02 067
C TRAILING WING VORTEX LEGS WF02 068
C DO 823 NV=1,NCW WF02 069
C JT=(I-2)*NCW+NV WF02 070
C ADD EXTERNALLY INDUCED VELOCITY VEI WF02 071
C WF02 072
C V(JT)=VEI(JT,N) WF02 073
C DO 823 NN=1,M WF02 074
C XTW=PTLX(JT)-PVX(NN) WF02 075
C YTW(1)=PTLY(JT)-PVY(NN) WF02 076
C YTW(2)=PTLY(JT)+PVY(NN) WF02 077
C ZTW=PTLZ(JT)-PVZ(NN) WF02 078
C DO 271 L=1,2 WF02 079
C CALL INFWW(SWPVVP(NN),PHI,XTW,YTW(L),ZTW,SW(NN),FUW(L),FVW(L),WF02 080
C FFW(L)) WF02 081
C SWPVVP(NN)=-SWPVVP(NN) WF02 082
C PHI=-PHI WF02 083
C 271 CONTINUE WF02 084
C V(JT)=V(JT)+((FVW(1)+FVW(2))*CIR(NN,N))/12.566371 WF02 085
C 823 CONTINUE WF02 086
C SIDEWASH V INDUCED BY FLAP VORTICES AT THE 3/4 CHORD OF THE LEFTWF02 090
C TRAILING WING VORTEX LEGS WF02 091
C IF(MFLAP.EQ.0) GO TO 8901 WF02 092
C DO 824 NV=1,NCW WF02 093
C JT=(I-2)*NCW+NV WF02 094
C DO 824 NN=MP1,MPMF WF02 095
C NNF=NN-M WF02 096
C XTW=PTLX(JT)-PVFX(NNF) WF02 097
C YTW(1)=PTLY(JT)-PVFY(NNF) WF02 098
C YTW(2)=PTLY(JT)+PVFY(NNF) WF02 099
C ZTW=PTLZ(JT)-PVFZ(NNF) WF02 100
C TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES WF02 101
C WF02 102
C XTWP=XTW*COSDLX-ZTW*SINDLX WF02 103
C YTWP(1)=YTW(1) WF02 104
C YTWP(2)=YTW(2) WF02 105
C ZTWP=XTW*SINDLX+ZTW*COSDLX WF02 106
C DO 272 L=1,2 WF02 107
C CALL INFWW(SWPVVF(NNF),PHIF,XTWP,YTWP(L),ZTWP,SF(NNF),FUF(L),FVF(L),WF02 108
C FWF(L)) WF02 109
C SWPVVF(NNF)=-SWPVVF(NNF) WF02 110
C PHIF=-PHIF WF02 111
C 272 CONTINUE WF02 112
C V(JT)=V(JT)+((FVF(1)+FVF(2))*CIR(NN,N))/12.566371 WF02 113
C 824 CONTINUE WF02 114
C 8901 CONTINUE WF02 115
C VELOCITIES U AND V INDUCED AT WING VORTEX BOUND LEG MIDPOINT WF02 116
C INDUCED BY WING VORTICES WF02 117
C DO 826 NV=1,NCW WF02 118
C JB=(I-2)*NCW+NV WF02 119
C ADD EXTERNALLY INDUCED VELOCITIES UEI,VEI WF02 120
C WF02 121
C WF02 122
C WF02 123
C WF02 124
C WF02 125
C WF02 126
C WF02 127

```

```

U(JR)=UEI(JB,N) WFO2 128
VB(JB)=VEI(JB,N) WFO2 129
WB(JB)=WEI(JB,N) WFO2 130
DO 826 NN=1,M WFO2 131
XBW=PVX(JB)-PVX(NN) WFO2 132
YBW(1)=PVY(JB)-PVY(NN) WFO2 133
YBW(2)=PVY(JB)+PVY(NN) WFO2 134
ZBW=PVZ(JB)-PVZ(NN) WFO2 135
DO 268 L=1,2 WFO2 136
CALL INFOW(SWPVVP(NN),PHI,XBW,YBW(L),ZBW,SW(NN),FUW(L),FVW(L), WFO2 137
1FWW(L))
SWPVVP(NN)=-SWPVVP(NN) WFO2 138
PHI=-PHI WFO2 139
268 CONTINUE WFO2 140
U(JR)=U(JB)+((FUW(1)+FUW(2))*CIR(NN,N))/12.566371 WFO2 141
VB(JB)=VB(JB)+((FVW(1)+FVW(2))*CIR(NN,N))/12.566371 WFO2 142
WB(JB)=WB(JB)+((FWW(1)+FWW(2))*CIR(NN,N))/12.566371 WFO2 143
826 CONTINUE WFO2 144
C WFO2 145
C VELOCITIES U AND V INDUCED AT WING VORTEX BOUND LEG MIDPOINT WFO2 146
C INDUCED BY FLAP VORTICES WFO2 147
C WFO2 148
C IF(MFLAP.EQ.0) GO TO 8902 WFO2 149
DO 827 NV=1,NCW WFO2 150
JR=(I-2)*NCW+NV WFO2 151
DO 827 NN=MP1,MPMF WFO2 152
NNF=NN-M WFO2 153
NNF=NN-M WFO2 154
XBW=PVX(JB)-PVFX(NNF) WFO2 155
YBW(1)=PVY(JB)-PVFY(NNF) WFO2 156
YBW(2)=PVY(JB)+PVFY(NNF) WFO2 157
ZBW=PVZ(JB)-PVFZ(NNF) WFO2 158
C WFO2 159
C TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES WFO2 160
C WFO2 161
XBWP=XBW*COSDLX-ZBW*SINDLX WFO2 162
YBWP(1)=YBW(1) WFO2 163
YBWP(2)=YBW(2) WFO2 164
ZRWP=XBW*SINDLX+ZBW*COSDLX WFO2 165
C WFO2 166
DO 269 L=1,2 WFO2 167
CALL INFOW(SWPVVF(NNF),PHIF,XBWP,YBWP(L),ZBWP,SF(NNF),FUF(L),FVW(L), WFO2 168
1L),FWF(L))
SWPVVF(NNF)=-SWPVVF(NNF) WFO2 169
PHIF=-PHIF WFO2 170
269 CONTINUE WFO2 171
U(JR)=U(JB)+(((FUF(1)+FUF(2))*COSDLX+(FWF(1)+FWF(2))*SINDLX)*CIR(NN, N))/12.566371 WFO2 172
VB(JB)=VB(JB)+((FVW(1)+FVW(2))*CIR(NN,N))/12.566371 WFO2 173
WB(JB)=WB(JB)+((-FUF(1)+FUF(2))*SINDLX+(FWF(1)+FWF(2))*COSDLX)* CIR(NN,N))/12.566371 WFO2 174
827 CONTINUE WFO2 175
8902 CONTINUE WFO2 176
C WFO2 177
C CALCULATE LIFT ON CHORDWISE ROW OF ELEMENTAL PANELS ON THE WING WFO2 178
C WFO2 179
CHLOC(I)=CRW-Y(I)*(SWPWLE-SWPWTE) WFO2 180
CIRNET=0.0 WFO2 181
DO 829 KCW=1,NCW WFO2 182
JT=(I-2)*NCW+KCW WFO2 183
JS=(I-1)*NCW+KCW WFO2 184
T(JT)=SSPAW(SW(JT)*CSPHI) WFO2 185
IF (I.EQ.IMAX) GO TO 2010 WFO2 186
CIRNET=CIRNET+CIR(JT,N)-CIR(JS,N) WFO2 187
GO TO 2011 WFO2 188

```

```

2010 CIRNET=CIRNET+CIR(JT,N) WF02 192
2021 FAC=1.0 WF02 193
    IF (KCW.EQ.NCW) FAC=0.75 WF02 194
    ELPANL(JT)=CHLOC(I)/D WF02 195
C WF02 196
C TLLIFT=LIFT ACTING ON LEFT LEG OF WING VORTEX TAIL AT THE 3/4 WF02 197
C ELEMENTAL PANEL CHORD WF02 198
C TLDrag=FORCE ACTING ON LEFT LEG OF WING VORTEX TAIL AT THE 3/4 WF02 199
C ELEMENTAL PANEL CHORD, IT ACTS ALONG VINF LINE AND POINTS FORWARD WF02 200
C WF02 201
C TLLIFT(JT)=ELPANL(JT)*FAC*V(JT)*(2.0/SREF)*CIRNET*COSALP WF02 202
C TLDrag(JT)=ELPANL(JT)*FAC*V(JT)*(-2.0/SREF)*CIRNET*SINALP WF02 203
C WF02 204
C BLLIFT = LIFT ACTING ON BOUND LEG OF THE WING VORTEX AT THE WF02 205
C MIDPOINT WF02 206
C BLDrag= -DRAG FORCE ACTING AT SAME POINT WF02 207
C WF02 208
C SWPVVT= TAN(SWPVVP(JT)) WF02 209
C FACLDW= (2.0/SREF)*2.0*SW(JT)*CIR(JT,N) WF02 210
C BLLIF1(JT)= FACLDW*CSPHI WF02 211
C BLLIF2(JT)= FACLDW*(-U(JT)*COSALP)*CSPHI WF02 212
C BLLIF3(JT)= FACLDW*VB(JT)*SWPVVT *COSALP WF02 213
C BLLIF4(JT)= FACLDW*VB(JT)*SPHI*SINALP WF02 214
C BLLIF5(JT)= FACLDW*(-WB(JT))*CSPHI*SINALP WF02 215
C BLLIFT(JT)=BLLIF1(JT)+BLLIF2(JT)+BLLIF3(JT)+BLLIF4(JT)+BLLIF5(JT) WF02 216
C WF02 217
C BLDRG2(JT)= FACLDW*U(JT)*SINALP*CSPHI WF02 218
C BLDRG3(JT)= FACLDW*(-VB(JT))*SWPVVT *SINALP WF02 219
C BLDRG4(JT)= FACLDW*VB(JT)*SPHI*COSALP WF02 220
C BLDRG5(JT)= FACLDW*(-WB(JT))*CSPHI*COSALP WF02 221
C BLDrag(JT)= BLDRG2(JT)+BLDRG3(JT)+BLDRG4(JT)+BLDRG5(JT) WF02 222
C WF02 223
C IF (I.GT.2) GO TO 2007 WF02 224
C CHLIFT(I)=CHLIFT(I)+(TLLIFT(JT) )+BLLIFT(JT) WF02 225
C CHDRAG(I)= CHDRAG(I)+(TLDrag(JT) )+BLdrag(JT) WF02 226
C GO TO 1832 WF02 227
2007 JU=(I-3)*NCW+KCW WF02 228
    CHLIFT(I)=CHLIFT(I)+(TLLIFT(JT) )+BLLIFT(JT) WF02 229
    CHDRAG(I)= CHDRAG(I)+(TLDrag(JT) )+BLdrag(JT) WF02 230
1832 SLDC01(I)=T(JT)*CHLIFT(I) WF02 231
C SECLIF=(WING SECTION LIFT*WING LOCAL CHORD)/2*SPAN WF02 232
C WF02 233
C SECLIF(I)=CHLIFT(I)*(SREF/(2.0*SW(JT)*CSPHI*4.0*SSPAN)) WF02 234
C 829 CONTINUE WF02 235
C WF02 236
C SPANWISE SUMMING UP OF LIFTS ACTING ON CHORDWISE ROW OF ELEMENTAL WF02 237
C PANELS, SUMLIF=CL WF02 238
C WF02 239
C SUMLIF=SUMLIF+2.0*CHLIFT(I) WF02 240
C SUMDRG= SUMDRG-2.0*CHDRAG(I) WF02 241
C IF(I.LT.IMAX) GO TO 702 WF02 242
C WF02 243
C SLDC0=SPANLOAD COEFFICIENT CLC/CLCAVE FOR THE WING WF02 244
C WF02 245
C WF02 246
C WF02 247
C DO 3010 I=2,IMAX WF02 248
C IF(ABS(SUMLIF).LT.1.0E-07) GO TO 3811 WF02 249
C SLDC0(I)=SLDC01(I)/SUMLIF WF02 250
C GO TO 3010 WF02 251
3811 SLDC0(I)=0.0 WF02 252
3010 CONTINUE WF02 253

```

```

C IF(MFLAP.EQ.0) GO TO 8903           WF02 254
C SINAPD=SIN(ALPHA(N)+DLX)           WF02 255
C COSAPD=COS(ALPHA(N)+DLX)           WF02 256
C
C COMPUTE FLAP LOADINGS             WF02 257
C
C E=NCF                               WF02 258
C IF=1                                WF02 259
C FUMLIF=0.0                           WF02 260
C FUMDRG=0.0                           WF02 261
7020 IF=IF+1                           WF02 262
C FCHLIF(IF)=0.0                      WF02 263
C FCDRAG(IF)=0.0                      WF02 264
C
C COMPUTE VELOCITIES NEEDED FOR FLAP LOADING CALCULATIONS WF02 265
C
C SIDEWASH V AT 3/4 CHORD OF LEFT TRAILING VORTEX LEGS ON FLAP WF02 266
C INDUCED BY WING VORTICES          WF02 267
C
C DO 8230 NV=1,NCF                   WF02 268
C JFT=(IF-2)*NCF+NV                 WF02 269
C
C ADD EXTERNALLY INDUCED VELOCITY VEI WF02 270
C
C JF=JFT+M                           WF02 271
C VFT(JFT)=VEI(JF,N)                WF02 272
C DO 8230 NN=1,M                     WF02 273
C XTFW=PTLFX(JFT)-PVX(NN)          WF02 274
C YTFW(1)=PTLFY(JFT)-PVY(NN)        WF02 275
C YTFW(2)=PTLFY(JFT)+PVY(NN)        WF02 276
C ZTFW=PTLFZ(JFT)-PVZ(NN)          WF02 277
C DO 2715 L=1,2                     WF02 278
C CALL INFWW(SWPVVP(NN),PHI,XTFW,YTFW(L),ZTFW,SW(NN),FUW(L),FVW(L),WF02 279
1FWW(L))
C SWPVVP(NN)=-SWPVVP(NN)           WF02 280
C PHI=-PHI                          WF02 281
2715 CONTINUE                      WF02 282
C VFT(JFT)=VFT(JFT)+((FVW(1)+FVW(2))*CIR(NN,N))/12.566371 WF02 283
8230 CONTINUE                      WF02 284
C
C CALCULATE SIDEWASH V AT 3/4 CHORD OF LEFT TRAILING VORTEX LEGS WF02 285
C ON FLAP INDUCED BY FLAP VORTICES WF02 286
C
C DO 8240 NV=1,NCF                   WF02 287
C JFT=(IF-2)*NCF+NV                 WF02 288
C DO 8240 NN=MP1,MPMF               WF02 289
C NNF=NN-M                          WF02 290
C XTFF=PTLFX(JFT)-PVFX(NNF)        WF02 291
C YTFF(1)=PTLFY(JFT)-PVFY(NNF)      WF02 292
C YTFF(2)=PTLFY(JFT)+PVFY(NNF)      WF02 293
C ZTFF=PTLFZ(JFT)-PVFZ(NNF)        WF02 294
C
C TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES WF02 295
C
C XTFP=XTFF*COSDLX-ZTFF*SINDLX   WF02 296
C YTFP(1)=YTFF(1)                  WF02 297
C YTFP(2)=YTFF(2)                  WF02 298
C ZTFP=XTFF*SINDLX+ZTFF*COSDLX   WF02 299
C
C DO 2660 L=1,2                   WF02 300
C CALL INFWW(SWPVVF(NNF),PHIF,XTFP,YTFP(L),ZTFP,SF(NNF),FUF(L),FVF(L),WF02 301
1L),FWF(L)).                         WF02 302
C SWPVVF(NNF)=-SWPVVF(NNF)          WF02 303

```

```

    PHIF=-PHIF                                WF02 318
2660 CONTINUE                                WF02 319
    VFT(JFT)=VFT(JFT)+((FVF(1)+FVF(2))*CIR(NN,N))/12.566371   WF02 320
8240 CONTINUE                                WF02 321
C                                              WF02 322
C      VELOCITIES U,V,W INDUCED AT FLAP VORTEX BOUNDLEG MIDPOINT INDUCED WF02 323
C      BY WING VORTICES                      WF02 324
C                                              WF02 325
DO 8260 NV=1,NCF                            WF02 326
JFB=(IF-2)*NCF+NV                           WF02 327
C                                              WF02 328
C      ADD EXTERNALLY INDUCED VELOCITIES UEI,VEI,WEI   WF02 329
C                                              WF02 330
JF=JFB+M                                    WF02 331
UF(JFB)=UEI(JF,N)*COSDLX-WEI(JF,N)*SINDLX   WF02 332
VBF(JFB)=VEI(JF,N)                          WF02 333
WF(JFB)=UEI(JF,N)*SINDLX+WEI(JF,N)*COSDLX   WF02 334
DO 8260 NN=1,M                               WF02 335
XBFW=PVFX(JFB)-PVX(NN)                     WF02 336
YBFW(1)=PVFY(JFB)-PVY(NN)                   WF02 337
YBFW(2)=PVFY(JFB)+PVY(NN)                   WF02 338
ZBFW=PVFZ(JFB)-PVZ(NN)                     WF02 339
DO 2680 L=1,2                               WF02 340
CALL INFWW(SWPVVP(NN),PHI,XBFW,YBFW(L),ZBFW,SW(NN),FUW(L),FVW(L),WF02 341
1FWW(L))
SWPVVP(NN)=-SWPVVP(NN)                      WF02 342
PHI=-PHI                                     WF02 343
WF02 344
2680 CONTINUE                                WF02 345
UF(JFR)=UF(JFR)+((F UW(1)+F UW(2))*COSDLX-(F WW(1)+F WW(2))*SINDLX)*WF02 346
1CIR(NN,N))/12.566371                      WF02 347
VRF(JFB)=VBF(JFB)+((F VW(1)+F VW(2))*CIR(NN,N))/12.566371   WF02 348
WF(JFB)=WF(JFB)+((F UW(1)+F UW(2))*SINDLX+(F WW(1)+F WW(2))*COSDLX)*WF02 349
1CIR(NN,N))/12.566371                      WF02 350
8260 CONTINUE                                WF02 351
C                                              WF02 352
C      VELOCITIES U AND V INDUCED AT FLAP VORTEX BOUND LEG MIDPOINT WF02 353
C      INDUCED BY FLAP VORTICES                  WF02 354
C                                              WF02 355
DO 8270 NV=1,NCF                            WF02 356
JFB=(IF-2)*NCF+NV                           WF02 357
DO 8270 NN=MP1,MPMF                         WF02 358
NNF=NN-M                                     WF02 359
XBFF=PVFX(JFB)-PVFX(NNF)                   WF02 360
YBFF(1)=PVFY(JFB)-PVFY(NNF)                 WF02 361
YBFF(2)=PVFY(JFB)+PVFY(NNF)                 WF02 362
ZBFF=PVFZ(JFB)-PVFZ(NNF)                   WF02 363
C                                              WF02 364
C      TRANSFORM COORDINATES, ROTATION THROUGH -DLX DEGREES   WF02 365
C                                              WF02 366
XBFP=XBFF*COSDLX-ZBFF*SINDLX               WF02 367
YBFP(1)=YBFF(1)                           WF02 368
YBFP(2)=YBFF(2)                           WF02 369
ZBFP=XBFF*SINDLX+ZBFF*COSDLX              WF02 370
C                                              WF02 371
DO 2690 L=1,2                               WF02 372
CALL INFWW(SWPVVF(NNF),PHIF,XBFP,YBFP(L),ZBFP,SF(NNF),FUF(L),FVF(WF02 373
1L),FWF(L))
SWPVVF(NNF)=-SWPVVF(NNF)                   WF02 374
PHIF=-PHIF                                     WF02 375
WF02 376
2690 CONTINUE                                WF02 377
UF(JFB)=UF(JFB)+((F UF(1)+F UF(2))*CIR(NN,N))/12.566371   WF02 378
VBF(JFB)=VBF(JFR)+((F VF(1)+F VF(2))*CIR(NN,N))/12.566371   WF02 379
WF(JFB)=WF(JFB)+((F FW(1)+F FW(2))*CIR(NN,N))/12.566371   WF02 380

```

```

8270 CONTINUE WF02 381
C   C CALCULATE LIFT ON CHORDWISE ROW OF ELEMENTAL PANELS ON THE FLAP WF02 382
C   C
C   C FCHLOC(IF)=AE-YFC(IF)*(TANTH8+TANTH7) WF02 383
C   C
C   C CIRNET=0.0 WF02 384
C   DO 8290 KCF=1,NCF WF02 385
C   JFT=(IF-2)*NCF+KCF+M WF02 386
C   JF=JFT-M WF02 387
C   JFS=(IF-1)*NCF+KCF+M WF02 388
C   TF(JF)=FSSPAN/(SF(JF)*CSPHIF) WF02 389
C   IF(IF.EQ.IFMAX) GO TO 2110 WF02 390
C   CIRNET=CIRNET+CIR(JFT,N)-CIR(JFS,N) WF02 391
C   GO TO 2111 WF02 392
2110 CIRNET=CIRNET+CIR(JFT,N) WF02 393
2111 FAC=1.0 WF02 394
C   IF(KCF.EQ.NCF) FAC=0.75 WF02 395
C   FLPANL(JF)=FCHLOC(IF)/E WF02 396
C
C   TELIFT = LIFT ACTING ON LEFT LEG OF FLAP VORTEX TAIL AT THE 3/4 ELEMENTAL PANEL CHORD WF02 401
C   TFDrag= FORCE ACTING ON LEFT LEG OF FLAP VORTEX TAIL AT THE 3/4 ELEMENTAL PANEL CHORD IT ACTS ALONG VINF LINE AND POINTS FORWARD WF02 402
C   TFLIFT = LIFT ACTING ON BOUND LEG OF THE FLAP VORTEX AT THE MIDPOINT WF02 403
C   BFDrag= DRAG FORCE ACTING AT SAME PLACE WF02 404
C
C   FACLOD= (2.0/SREF)*2.0*SF(JF)*CIR(JFT,N) WF02 405
C   RFLIF1(JF)= FACLOD*CSPHIF WF02 406
C   RFLIF2(JF)= FACLOD*(-UF(JF)*COSAPD)*CSPHIF WF02 407
C   RFLIF3(JF)= 0.0 WF02 408
C   RFLIF4(JF)= FACLOD*(-WF(JF)*CSPHIF)*SINAPD WF02 409
C   RFLIF5(JF)= 0.0 WF02 410
C   BFLIFT(JF)= RFLIF1(JF)+RFLIF2(JF)+RFLIF3(JF)+RFLIF4(JF)+RFLIF5(JF) WF02 411
C   BFDrag2(JF)= FACLOD*UF(JF)*SINAPD*CSPHIF WF02 412
C   BFDrag3(JF)= 0.0 WF02 413
C   BFDrag4(JF)= FACLOD*(-WF(JF)*CSPHIF*COSAPD) WF02 414
C   BFDrag5(JF)= 0.0 WF02 415
C   BFDrag(JF)= BFDrag2(JF)+BFDrag3(JF)+BFDrag4(JF)+BFDrag5(JF) WF02 416
C   IF(IF.GT.2) GO TO 2107 WF02 417
C   Fchlif(IF)=Fchlif(IF)+(TFLIFT(JF)) +BFLIFT(JF) WF02 418
C   Fcdrag(IF)=Fcdrag(IF)+(TFDRAG(JF)) +BFDRAG(JF) WF02 419
C   GO TO 8320 WF02 420
2107 JFU=(IF-3)*NCF+KCF WF02 421
C   Fchlif(IF)=Fchlif(IF)+(TFLIFT(JF)) +BFLIFT(JF) WF02 422
C   Fcdrag(IF)=Fcdrag(IF)+(TFDRAG(JF)) +BFDRAG(JF) WF02 423
C   GO TO 8320 WF02 424
8320 SLDCF1(IF)=TF(JF)*Fchlif(IF) WF02 425
C   FECLIF = (FLAP SECTION LIFT*FLAP LOCAL CHORD)/2*WING SPAN WF02 426
C
C   FECLIF(IF)=Fchlif(IF)*(SREF/(2.0*SF(JF)*CSPHIF*4.0*SSPAN)) WF02 427
8290 CONTINUE WF02 428
C   SPANWISE SUMMING UP OF LIFTS ACTING ON CHORDWISE ROW OF FLAP ELEMENTAL PANELS. FUMLIF=CL FOR FLAP, FUMDRG= CD FOR FLAP WF02 429
C   WF02 430
C   WF02 431
C   WF02 432
C   WF02 433
C   WF02 434
C   WF02 435
C   WF02 436
C   WF02 437
C   WF02 438
C   WF02 439
C   WF02 440
C   WF02 441
C   WF02 442

```

```

FUMLIF=FUMLIF+2.0*FCHLIF(IF) WF02 443
FUMDRG= FUMDRG-2.0*FCDRAG(IF) WF02 444
IF(IF.LT.IFMAX) GO TO 7020 WF02 445
C WF02 446
C FSLDCO = SPANLOAD COEFFICIENT CLC/CLCAVE FOR THE FLAP WF02 447
C WF02 448
C DO 3110 IF=2,IFMAX WF02 449
C IF(ABS(FUMLIF).LT.1.0E-07) GO TO 3821 WF02 450
C FSLDCO(IF)=SLDCFI(IF)/FUMLIF WF02 451
C GO TO 3110 WF02 452
3821 FSLDCO(IF)=0.0. WF02 453
3110 CONTINUE WF02 454
GO TO 8906 WF02 455
8903 FUMLIF=0.0 WF02 456
FUMDRG=0.0 WF02 457
8906 CONTINUE WF02 458
CLTOT=SUMLIF+FUMLIF WF02 459
DRGTOT=SUMDRG+FUMDRG WF02 460
CDCLS=DRGTOT/(CLTOT*CLTOT) WF02 461
C WF02 462
C PITCHING MOMENT CALCULATION, MOMENTS TAKEN ABOUT POINT XM, YM, ZM WF02 463
C AND DIVIDED BY Q*SREF*CAVE WF02 464
C WF02 465
WMOM=0.0 WF02 466
FMOM=0.0 WF02 467
DO 9109 JT=1,M WF02 468
9109 WMOM=WMOM+(2.0*((BLLIFT(JT)*SINALP+BLDrag(JT)*COSALP)*(PVZ(JT)-ZM))WF02 469
1*(BLDRAG(JT)*SINALP-BLLIFT(JT)*COSALP)*(XM-PVX(JT))+ (TLLIFT(JT)* WF02 470
2*SINALP+TLDRAG(JT)*COSALP)*(PTLZ(JT)-ZM)+(TLDRAG(JT)*SINALP WF02 471
3-TLLIFT(JT)*COSALP)*(XM-PTLX(JT))/CAVE) WF02 472
IF(MFLAP.EQ.0) GO TO 8904 WF02 473
DO 9110 JFT=1,MF WF02 474
9110 FMOM=FMOM+(2.0*((BFLIFT(JFT)*SINALP+BFDRAG(JFT)*COSALP)*(PVFZ(JFT))WF02 475
1-ZM)+(BFDRAG(JFT)*SINALP-BFLIFT(JFT)*COSALP)*(XM-PVFX(JFT))+ WF02 476
2*(TFLIFT(JFT)*SINALP+TFDRAG(JFT)*COSALP)*(PTLFZ(JFT)-ZM)+ WF02 477
3*(TFDRAG(JFT)*SINALP-TFLIFT(JFT)*COSALP)*(XM-PTLFX(JFT))/CAVE) WF02 478
GO TO 8905 WF02 479
8904 FMOM=0.0 WF02 480
8905 TOTMOM=WMOM+FMOM WF02 481
RETURN WF02 482
END WF02 483

```

```

SUBROUTINE INFWW (PSII,APHIID,XXX,YYY,ZZZ,SNN,FUI,FVI,FWI) WF03 001
C SO W. WF03 002
C COMMON/INF/BOT WF03 003
C TOLRNC=(BOT*15.0E-05)**2 WF03 004
C DATA PSIID,APHIID/0., 0./ , FS,FC,FPS,FPC/0.,1.,0.,1./ WF03 005
C IF (PSII .EQ. PSIID) GO TO 10 WF03 006
C   FS = SIN(PSII) WF03 007
C   FC = COS(PSII) WF03 008
C   FT = FS/FC WF03 009
C   PSIID=PSII WF03 010
C 10 CONTINUE WF03 011
C   IF (APHII.EQ.APHIID) GO TO 20 WF03 012
C   FPS=SIN(APHII) WF03 013
C   FPC=COS(APHII) WF03 014
C   APHIID=APHII WF03 015
C 20 CONTINUE WF03 016
C   DUMMY=SNN*FT WF03 017
C   F1=XXX+DUMMY WF03 018
C   F4=XXX-DUMMY WF03 019
C   DUMMY=SNN*FPC WF03 020
C   F2=YYY+DUMMY WF03 021
C   F5=YYY-DUMMY WF03 022
C   DUMMY=SNN*FPS WF03 023
C   F3=ZZZ+DUMMY WF03 024
C   F6=ZZZ-DUMMY WF03 025
C   DUMMY2=YYY*FPS-ZZZ*FPC WF03 026
C   FFA=(XXX*FC-(YYY*FPC+ZZZ*FPS)*FS)**2+DUMMY2*DUMMY2 WF03 027
C   FFE=F2*F2+F3*F3 WF03 028
C   FFB=SQRT(F1*F1+FFE) WF03 029
C   FFD=F5*F5+F6*F6 WF03 030
C   FFC=SQRT(F4*F4+FFD) WF03 031
C   DUMMY3=FC*FPC WF03 032
C   DUMMY4=FC*FPS WF03 033
C   FFF=(F1*FS+F2*DUMMY3+F3*DUMMY4)/FFB-(F4*FS+F5*DUMMY3+F6*DUMMY4)/FFC WF03 034
C
C   IF (ABS(FFA).LT.TOLRNC) GO TO 262 WF03 035
C   DUMMY=FFF/FFA WF03 036
C   FUONE=(ZZZ*FPC-YYY*FPS)*FC*DUMMY WF03 037
C   FVONE=(XXX*DUMMY4-ZZZ*FS)*DUMMY WF03 038
C   FWONE=(YYY*FS-XXX*DUMMY3)*DUMMY WF03 039
C   GO TO 265 WF03 040
C 262 FUONE=0. WF03 041
C   FVONE=0. WF03 042
C   FWONE=0. WF03 043
C 265 IF(ABS(FFD).LT.TOLRNC) GO TO 263 WF03 044
C
C   DUMMY=(1.-F4/FFC)/FFD WF03 045
C   FVTWO=F6*DUMMY WF03 046
C   FWTWO=-F5*DUMMY WF03 047
C   GO TO 266 WF03 048
C 263 FVTWO=0. WF03 049
C   FWTWO=0. WF03 050
C 266 IF(ABS(FFE).LT.TOLRNC) GO TO 264 WF03 051
C
C   DUMMY=(1.-F1/FFB)/FFE WF03 052
C   FVTRE=-F3*DUMMY WF03 053
C   FWTHRE=F2*DUMMY WF03 054
C

```

GO TO 267

264 FVTHRE=0.  
FWTHRE=0.

267 FUI=FUONE  
FVI=FVONE+FVTWO+FVTHRE  
FWI=FWONE+FWTWO+FWTHRE  
RETURN  
END

WF03 062  
WF03 063  
WF03 064  
WF03 065  
WF03 066  
WF03 067  
WF03 068  
WF03 069

```

      SUBROUTINE INVERS(A,NSYS,N,NMAX,MMAX)
      SUBROUTINE TO SOLVE SIMULTANEOUS EQUATIONS
      DIMENSION A(NMAX,MMAX),X(300)
      5  SIGN=1,0
      NPI=N+1
      NM1=N-1
      NPLSY=N+NSYS
      9  DO 14 I=1,NM1
          IPI=I+1
          MAX=I
          AMAX=ABS(A(I,I))
          DO 10 K=IPI,N
              AKMAX=ABS(A(K,I))
              IF(AKMAX.LE.AMAX) GO TO 10
              MAX=K
              AMAX=AKMAX
10    CONTINUE
          IF(AMAX.LT.1.0E-12) GO TO 16
          IF(MAX.EQ.I) GO TO 12
          DO 11 L=I,NPLSY
              TEMP=A(I,L)
              A(I,L)=A(MAX,L)
11    A(MAX,L)=TEMP
              SIGN=-SIGN
12    DO 14 J=IPI,N
          IF(A(J,I)) 30,14,30
30    CONST=A(J,I)/A(I,I)
          DO 13 L=I,NPLSY
13    A(J,L)=A(J,L)+A(I,L)*CONST
14    CONTINUE
          DO 15 I=1,N
              IF(A(I,I)) 15,16,15
15    CONTINUE
          GO TO 18
16    WRITE(6,100)
100   FORMAT(5X,1BH MATRIX IS SINGULAR)
          STOP
18    DO 21 I=NPI,NPLSY
          DO 20 KK=1,N
              K=NPI-KK
              X(K)=A(K,I)
              IF(K.EQ.N) GO TO 20
              J=K
19    J=J+1
              X(K)=X(K)-A(K,J)*X(J)
              IF(J.NE.N) GO TO 19
20    X(K)=X(K)/A(K,K)
          DO 21 J=1,N
21    A(J,I)=X(J)
          RETURN
        END
      WF04 001
      WF04 002
      WF04 003
      WF04 004
      WF04 005
      WF04 006
      WF04 007
      WF04 008
      WF04 009
      WF04 010
      WF04 011
      WF04 012
      WF04 013
      WF04 014
      WF04 015
      WF04 016
      WF04 017
      WF04 018
      WF04 019
      WF04 020
      WF04 021
      WF04 022
      WF04 023
      WF04 024
      WF04 025
      WF04 026
      WF04 027
      WF04 028
      WF04 029
      WF04 030
      WF04 031
      WF04 032
      WF04 033
      WF04 034
      WF04 035
      WF04 036
      WF04 037
      WF04 038
      WF04 039
      WF04 040
      WF04 041
      WF04 042
      WF04 043
      WF04 044
      WF04 045
      WF04 046
      WF04 047
      WF04 048
      WF04 049
      WF04 050
      WF04 051

```

## JET WAKE PROGRAM

The purpose of this section is to describe the jet wake computer program in sufficient detail to permit understanding and use of the program. The program calculates the velocity field induced by the jet wake of a turbofan engine, both inside and outside the boundary of the jet. Since the purpose for which the program was developed is the calculation of interference between the jet wake and the wing-flap, the computer program is oriented principally toward use with the wing-flap program described previously.

The program represents the wake by a series of closely spaced ring vortices on the boundary of the jet. The strength of the vortices is determined from the initial jet velocity in accordance with equations (15) and (16). The ring vortices and jet boundary are centered on a wake centerline that is permitted to have curvature in accordance with the flow field induced in the region of the wake by the wing-flap and the free stream velocity. Once the ring vortex system is defined, induced velocities are computed at points in the vicinity of the jet wake corresponding to the control points on the wing.

Sample cases described in this section illustrate the preparation of the input and the details of the output.

### Program Description

Calculation procedure.- The purpose of this program is to calculate the jet-wake induced velocity components at field points corresponding to the control points on the wing and flap. Upon input, the program transforms the coordinates of the field points from the wing coordinate system to the coordinate system of the jet wake. All calculations are carried out in a jet coordinate system and the results transformed back to the wing coordinate system for output.

The program first determines the location of the vortex rings using the specified centerline coordinates and wake boundary shape. Then the position of each field point relative to the nearest vortex ring is examined. If the radial distance from the field point to the ring is  $\Delta s$  or less, where  $\Delta s$  is the axial spacing of the rings, then the field point is moved axially upstream or downstream until it lies in a

plane midway between two adjacent rings. This adjustment was found necessary because if the field point is very close to a ring, unrealistically high velocities are induced at that field point. By moving the field point to the midplane, the induced velocities computed at the point agree with those computed on the basis of a continuous vorticity distribution. In subsequent wing calculations, the induced velocities are considered to act at the original control point location in the wing coordinate system.

The velocities induced by the jet at all the control points are computed. If more than one jet is present, the above procedure is repeated for each jet in turn, and the final result is a sum of all the induced velocities at each control point. These velocities are output and the program returns to the beginning for a new case.

Program operation.- The program is written in Fortran IV for the IBM 360/67 computer at the Ames Research Center, NASA. The input is either by cards only or by a combination of cards and internally stored data sets containing the field point coordinates. The output is printed and the option is available to store the induced velocities in a data set. Typical execution time is approximately 6 minutes for a case with 200 field points and one jet with a maximum length of  $150 R_o$  and a ring spacing of  $0.1 R_o$ . The running time is doubled when a second jet is added. A complete description of the input and output is presented in the following sections.

#### Description of Input

This section describes the input for the jet-wake program. In the following discussion, the content of all input cards is described and, where appropriate, instructions on generating input quantities are given. The following section then presents a more detailed discussion of how the jet wake parameters are computed. The relationship between the jet wake and the wing-flap is shown in figures 9 and 22(a) for purposes of illustrating the geometry of the configuration.

Card content.- The input quantities on each card are described. All input variables are listed at the end of this section in order of appearance in the input deck. The input form is presented in figure 24.

Item 1

The first card contains identification information which is printed at the top of the first page of output. Any alphanumeric information can be used on this card. If a data set is created for the induced velocities, the information on this card is also printed at the beginning of the data set for identification purposes.

Item 2

The second card contains six indices and the vortex ring spacing DS. The indices and their use are defined in the table at the end of this section. The limit on the number of field points NP is the same as the limit on the number of wing-flap control points. The jet centerline table entries NCYL are discussed further in the following section describing the input for the wake centerline. The print index NPRNT is used to obtain additional printed output if desired. The normal output (NPRNT = 0) contains details of the jet wake boundary specification and the jet wake induced velocities in the wing coordinate system. As optional output (NPRNT = 1), the wake-induced velocities for each jet in its own coordinate system can be printed.

The values of KIN and KOUT define the manner in which the field points are input and the velocities output. This option is presented in order to make use of data blocks in the Ames Research Center TSS system. A value of KIN = 5 corresponds to input of field points by cards. A value of KIN of seven or more (up through 98) indicates input of field points by a data set which, for instance, has been generated by the wing-flap program. The value of KIN must correspond to the number on the appropriate control card which defines the data set containing the field point coordinates. A value of KOUT = 6 indicates printed output only. Values of KOUT of seven or higher (up through 98) indicate both printed output and induced velocities stored in a data set. With the data set, the value of KOUT must correspond to the number on the appropriate control card which defines the data set in which the induced velocities are to be stored. KOUT and KIN should never be equal to each other. More information on the appropriate values of KIN and KOUT is presented at the end of this section.

Finally, DS is the dimensional axial spacing between vortex rings. It is recommended that DS be chosen such that  $\Delta s/R_o \approx 0.1$ . As the

spacing increases from this value, the accuracy in calculating velocities begins to decrease. Smaller spacings do not provide any appreciable increases in accuracy but increase the running time.

Item 3

This item consists of one or more groups of cards: one group for each jet wake in the calculation (NJET). For each group, the following information is required. The first card contains the initial vortex strength from equation (16), the initial radius of the jet, and the coordinates in the wing coordinate system of the origin of the wake centerline. The radius and origin coordinates are dimensional and all dimensions should be consistent. Note that since the wing-flap calculation is carried out on the left wing panel, the Y-coordinate of the jet origin is negative. The following cards, of which there are NCYL in number, specify the location of the jet centerline and the growth of the jet boundary. On each card, the variables are the three coordinates of the jet centerline in the jet coordinate system,  $(x_{CL}/R_o, y_{CL}/R_o, z_{CL}/R_o)$ , the ratio of the local jet boundary radius to the initial radius ( $R/R_o$ ), and the inclination of the centerline in degrees ( $\theta$ ). These variables are described further in a subsequent section concerning input for the wake centerline. The last of these cards defines the downstream end of the wake. This group of cards is repeated for each jet wake. Thus there are NJET groups of cards.

Item 4

This item consists of the field point coordinates, in the wing coordinate system, at which the induced velocities are to be computed. These coordinates are input according to the value of KIN. If KIN = 5, this item is made up of NP cards, on each of which are the coordinates of one field point. If KIN > 6, no cards are required. Since all wing-flap calculations are carried out on the left wing panel, the field point coordinates will generally have negative Y coordinates.

This completes the input for one case. The program input variables are defined as follows:

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comments</u>
<u>Item 1</u>		any alphanumeric information may be put on this card for identification
<u>Item 2</u>		
NJET		number of jet wakes under the left wing panel to be included in the induced velocity calculation $1 \leq NJET \leq 4$
NP		number of yield points at which induced velocities are to be calculated $1 \leq NP \leq 200$
NCYL		number of entries in table specifying jet centerline $2 \leq NCYL \leq 100$
NPRNT		index controlling optional output NPRNT = 0 for normal output NPRNT = 1 for expanded output
KIN		index controlling input of field points KIN = 5 input via cards KIN > 6 input via data set ( $7 \leq KIN \leq 98$ )
KOUT		index controlling output of induced velocities KOUT = 6 output printed only KOUT > 6 induced velocities stored in data set ( $7 \leq KOUT \leq 98$ ) Note: $KOUT \neq KIN$
DS	$\Delta s$	spacing between vortex rings in appropriate units
<u>Item 3</u>		
GAMVJ(J)	$\gamma/v$	vortex cylinder strength of J'th jet
RJET(J)	$R_o$	initial radius of J'th jet
XQ(J), YQ(J), ZQ(J)	$x_Q, y_Q, z_Q$	coordinates of center of origin of J'th jet wake in wing coordinate system
XCLR(J,N), YCLR(J,N), ZCLR(J,N)	$\frac{x_{CL}}{R_o}, \frac{y_{CL}}{R_o}, \frac{z_{CL}}{R_o}$	N'th set of coordinates specifying centerline of J'th jet in jet coordinate system. N = 1, 2, ..., NCYL $1 \leq J \leq 4$

<u>Program Variable</u>	<u>Algebraic Symbol (if applicable)</u>	<u>Comments</u>
RGR(J,N)	$R/R_o$	ratio of local radius of jet wake boundary to initial jet radius at N'th point specified by XCLR(J,N)
THETA(J,N)	$\theta$	inclination in the jet coordinate system of the J'th jet centerline at N'th point, positive upwards, degrees. See figure 9(a)
<u>Item 4</u>	XW(N), YW(N), ZW(N)	coordinates of field points in wing coordinate system $1 \leq N \leq 200$

The last card in the data deck should be a %END card preceding the LOGOFF command to terminate execution.

Samples of input decks are shown in figure 25 illustrating all of the options discussed previously. In figure 25(a), two complete sets of input are shown for a configuration with one jet per semispan and for two angles of attack. The field point coordinates for both cases are input via the same data set (KIN = 7) and the final induced velocity results are stored in one data set (KOUT = 8 for  $\alpha = 0^\circ$  and  $10^\circ$ ). The control cards for a run of this type are listed as follows:

Col.	5	10	15	20	25
L O G O N					
D D E F	F T 0 7	F 0 0 1 , V S , C P X Y Z			
D D E F	F T 0 8	F 0 0 1 , V S , J E T V 1			
D D E F	F T 0 8	F 0 0 2 , V S , J E T V 2			
C A L L	J E T 1 \$ \$				

Notice that the unit number in columns 8 and 9 of the first DDEF card corresponds to the value of KIN on the second card of both input decks. The data set containing the table of field point coordinates is stored under the name CPXYZ and is defined by this DDEF control card. Similarly, the output, which is a table of u/V, v/V, and w/V induced velocity components at the specified field points, is stored under the name JETV1 for  $\alpha = 0^\circ$  and JETV2 for  $\alpha = 10^\circ$  in the data set defined by FT08 (KOUT = 8). Note that the sequence numbers in columns 11, 12, and 13 of the DDEF card

defining the data set in which the velocities are stored must be different, as must the names of each data group (e.g., JETV1 and JETV2). This data set is now available for use as input to the vortex-lattice program. Separate data sets can be generated by changing the DDEF numbers in columns 8 and 9 for each case. The value of KOUT in each case should agree with the appropriate number of the data set.

A second set of input shown in figure 25(b) illustrates a typical case of a wing with two engines on the semispan. The input deck is complete as shown ( $KIN = 5$ ) and the output is to be printed ( $KOUT = 6$ ). For purposes of illustration, the control points shown correspond to one inboard chordwise row on the wing and the five outboard rows on the flap. Since no data sets are required, no DDEF control cards are needed.

Calculation of input wake characteristics. - The results obtained from interference calculations on an externally-blown jet-augmented flap have shown that the predicted load distribution is sensitive to the position of the wake relative to the wing-flap. In the method, both the vertical and lateral displacements and the slope of the centerline must be specified. Of these, the most important effect is the vertical displacement, in that by moving the jet vertically, the wake boundary is caused to intersect more or less area element control points on the wing-flap. The objective in defining the jet centerline was to develop a simple rational approach that could be applied equally well to any wing-flap-engine configuration. The approach described below appears to fulfill this objective, although more experience with the method, comparisons with more lift and moment data, or particularly comparisons with wake survey data that may become available may indicate areas of improvement.

The coordinates specifying the jet centerline ( $x_{CL}/R_o$ ,  $y_{CL}/R_o$ ,  $z_{CL}/R_o$ ) are input in the jet coordinate system, figure 9. The  $x_{CL}$  values are always positive. The axes of this coordinate system are always taken to be parallel to their respective wing axes, whether or not the engine has incidence relative to the wing root chord. The local inclination of the centerline,  $\theta$ , is input in degrees, positive when the jet is angled up toward the wing. Experience has shown that the best jet model is obtained when the jet origin is placed at the engine inlet. In the region of the engine nacelle, the jet is not allowed to deflect or expand. At the

fan nacelle exit, the wake then is considered to begin expansion. The reason for this practice is that in a vortex ring (or continuous vortex cylinder) model, the calculated axial jet velocity at the origin is  $1/2 V_j$  and within two diameters or so increases to nearly  $V_j$ . Thus, by permitting this adjustment to occur over the nacelle length, the jet has essentially become fully developed at the fan exit station.

After the initial jet velocity ratio,  $V_j/V$ , is calculated according to equation (18), the jet boundary is chosen from figure 4. The initial region is fixed by the velocity ratio, and when the total length of the main region is chosen, the variation of radius along the entire length of the jet is specified. Again on the basis of calculations comparing the ring vortex model with a semi-infinite vortex cylinder, it has been found that the rings must be used over a total length of about  $150 R_o$  to have sufficient wake to accurately model the velocities within the first 15 radii of length.

The change in the average jet velocity  $\bar{V}_j$  along the jet can be determined approximately from the relation

$$\frac{\bar{V}_j}{V} \approx \frac{R_o}{R} \left( \frac{V_j}{V} - 1 \right) + 1 \quad (27)$$

This value is needed in calculating the displacement of the jet centerline due to induced downwash and sidewash. The distribution of wing-flap induced downwash and sidewash (with no power effects) along a line colinear with the engine centerline is shown in figure 17(b) for a typical configuration with zero engine incidence. Although a streamline leaving the center of the engine exhaust would deviate from this line, the deviations are small and should not change the computed downwash significantly except near the flap trailing edge, where the resultant changes in wake position would have little effect on the wing-flap area within the wake boundary. Consequently, all the results presented in this report were based on down- and sidewash velocities computed along the jet x-axis. For zero engine incidence, this line is colinear with the engine centerline.

A distribution of points along the wake centerline must be selected in order to define the wake centerline coordinates, the slope of this centerline, and the radius of the wake for Item 3 of the input. The number of points chosen is arbitrary. In accordance with the above discussion, the first point should be the engine inlet and the second the engine exit. The slopes of the wake in the jet coordinate system are given by the engine incidence angles for these first two points, and the wake radius is  $R_o$ . The last point should be approximately  $150 R_o$  downstream of the engine. Linear interpolation is used between points defining the wake. The computation procedure is the same for any number of points and will be illustrated for the  $N^{\text{th}}$  point along the wake centerline.

At the  $N^{\text{th}}$  point, the direction of the flow is first computed relative to the engine coordinate system. An estimate of the average jet velocity  $\bar{V}_j$  is obtained from equation (27). If the engine has an incidence  $\epsilon_{ez}$  in the vertical plane measured with respect to the  $x$ -axis (positive if the wake is directed upward toward the wing), and a toe-in angle  $\epsilon_{ey}$  in the horizontal plane measured with respect to the  $x$ -axis (positive if the wake is directed outboard under the right wing panel), then the angles made by the velocity vector with respect to the  $x$ -axis in the vertical and horizontal planes are, respectively

$$\left. \begin{aligned} \epsilon_z &\equiv \tan^{-1} \left( \frac{\sin \alpha - \frac{w}{V} + \frac{\bar{V}_j}{V} \sin \epsilon_{ez}}{\bar{V}_j/V} \right) \\ \epsilon_y &\equiv \tan^{-1} \left( \frac{\frac{\bar{V}_j}{V} \sin \epsilon_{ey} + \frac{v}{V}}{\bar{V}_j/V} \right) \end{aligned} \right\} \quad (28)$$

In the above equations, positive values indicate the velocity vector to be directed upward toward the wing in the positive  $z$  direction and outboard under the right wing in the positive  $y$  direction, and the cosines of the engine incidence angles are assumed equal to 1. Note that under the left wing panel, which is where the calculations are made,  $\epsilon_{ey}$  will have a negative value if the engine is toed-in so that its wake is directed outboard.

The vertical and lateral displacements are then computed separately to get the  $z_{CL}/R_o$  and  $y_{CL}/R_o$  coordinates at the  $N$ 'th  $x_{CL}/R_o$ , as follows. With all the slopes at the NCYL points known, the displacement in each plane (vertical and horizontal) can be determined by assuming the wake centerline to be divided into straight line segments between each  $x_{CL}/R_o$ . The slope of an individual segment is considered the average between the slopes at the two ends of the segment. The line segments are laid out starting at the engine exhaust station and working aft. The wake characteristics aft of the flap trailing edge have a decreasing effect on the induced velocities on the wing and flap with increasing distances; thus the wake centerline can be made a straight line for most of the  $150 R_o$  of length.

The slope of the wake centerline at each point is required in order to tilt the plane of the vortex rings to make them normal locally to the wake centerline. The tilting of the rings has only a very small effect on the induced velocities, and for all practical purposes, the rings could be oriented normal to the  $x$ -axis. Provision is made in the program for vertical tilting by specifying values of  $\theta(N)$ , where  $\theta$  is equal to  $\epsilon_z$  at each point, as given by equation (28). One caution should be indicated in calculating  $\theta$  values. If  $\theta$  changes sufficiently between adjacent vortex rings, the two rings can intersect and cause numerical problems. Since the slopes are small in practical cases and the program linearly interpolates between input values, it is unlikely that this condition will occur.

The wake radius is obtained at each  $x_{CL}/R_o$  from the appropriate curve in figure 4.

For most configurations of interest, the major interference of the wake on the wing-flap occurs in the initial region of the wake, thus it is necessary to describe the initial region more precisely than the main region. Because of the desire to retain simplicity and ease of application of the method and the fact that no appropriate wake survey data exists to use as a guide, the calculations presented in this report were made using only a few points. The main region of the jet was defined by two points: the end of the initial region, which is usually aft of the flap trailing edge, and the  $150 R_o$  point. The initial region was specified by the first two points on the engine, the end of the initial

region, and possibly one or two intermediate points. The procedures are illustrated in the sample cases in a later section.

#### Description of Output

A sample set of output, shown in figure 26, was generated from the input deck illustrated in figure 25. The entire set of optional output has been obtained for this case.

The identification information from the first card of the input deck is printed at the top of the first page. This is followed immediately by the jet vortex ring spacing and the input and output indices KIN, KOUT. The next block of output describes the geometry of the jet wake(s). Under the major heading JET PARAMETERS are given the nondimensional vortex ring spacing,  $\Delta s/R_o$ ; the initial jet radius,  $R_o$ ; the coordinates of the origin of the jet in the wing coordinate system,  $X_Q$ ,  $Y_Q$ ,  $Z_Q$ ; the initial vortex strength,  $\text{GAMMA}/V$ ; and a table defining the jet centerline. The centerline coordinates in the jet coordinate system  $x_{CL}/R_o$ ,  $y_{CL}/R_o$ ,  $z_{CL}/R_o$ ; vertical inclination,  $\theta$ , and jet radius,  $R/R_o$  are all input quantities. The distance along the centerline,  $s/R_o$ , is calculated in the program. If more than one jet is present, the same block of information for the other jets follows.

The next items of output are optional (NPRNT = 1). The induced velocity components at the specified field points are output in the jet coordinate system. The field point coordinates,  $x_p/R_o$ ,  $y_p/R_o$ ,  $z_p/R_o$  are expressed also in the jet coordinate system. The induced axial velocity,  $u/V$ , is positive aft, and the other components  $v/V$  and  $w/V$  are positive in the direction of increasing jet coordinates  $y_p$  and  $z_p$  respectively. Note that these velocities are jet wake induced and do not have any free-stream velocity components included. If more than one jet is considered, the same output is given for the second and succeeding jets.

The last block of output is the induced velocity field due to the entire system of jets. The field points in the wing coordinate system  $X_W, Y_W, Z_W$  are printed as are the total jet induced velocity components  $u/V$ ,  $v/V$ , and  $w/V$ . The velocities are positive in the positive wing coordinate direction as shown in figure 2. If the data set option (KOUT > 6) is requested, this last set of velocity components is also

stored in the specified data set for use as input to the vortex-lattice program.

#### Program Listing

The jet flow model program is written in Fortran IV for the NASA, Ames Research Center IBM 360/67 computer. The program consists of the main program and three subroutines. The table below will act as a table of contents for the program listing given on the following pages.

<u>Program</u>	<u>Identification</u>	<u>Page No.</u>
MAIN	JET1	88
CORECT	JET2	91
VRING	JET3	92
ELLIPS	JET4	93

```

C COMPUTE VELOCITY INDUCED BY A SERIES OF CONSTANT STRENGTH JET1 001
C VORTEX RINGS WITH VARIABLE RADII LYING ALONG A PRESCRIBED PATH JET1 002
C JET1 003
C ALL FIELD POINT COORDINATES ARE INPUT IN THE WING SYSTEM AND JET1 004
C TRANSFORMED TO THE ENGINE SYSTEM FOR CALCULATIONS JET1 005
C JET CENTERLINE COORDINATES ARE INPUT IN ENGINE SYSTEM JET1 006
C ALL OUTPUT IS IN THE WING SYSTEM OPTIONAL OUTPUT IN ENGINE SYSTEM JET1 007
C JET1 008
C OPTIONS ... INPUT OF FIELD POINTS MAY BE VIA CARDS OR DATA SET JET1 009
C ... INDUCED VELOCITY OUTPUT IS BOTH PRINTED AND JET1 010
C STORED IN A DATA SET JET1 011
C JET1 012
C JET1 013
C
C DIMENSION XCLR(4,100),ZCLR(4,100),RGR(4,100),SCLR(4,100) JET1 014
1 THETA(4,100),YCLR(4,100),GAMVJ(4),RJET(4),XQ(4),YQ(4),ZQ(4),DS JET1 015
C DIMENSION TITLE(20),XPR(220),YPR(220),ZPR(220),U(220),V(220),W(220) JET1 016
1 W(220),XP(220),YP(220),ZP(220),UP(220),VP(220),WP(220) JET1 017
C COMMON MZZZ JET1 018
700 FORMAT (8F10.5) JET1 019
701 FORMAT (6I5,5F10.4) JET1 020
702 FORMAT (20A4) JET1 021
710 FORMAT (1H1/10X,20A4) JET1 022
711 FORMAT (/2H (I1,16H) JET PARAMETERS 5X8HD(S/R) =,F7.4/ JET1 023
110X3HX/R7X3HY/R7X3HZ/R7X3HS/R JET1 024
2 5X5HTHETA,4X6HRGAM/R, 5X1HR,8X2HXQ,6X2HYQ,6X2HZQ,4X7HGAMMA/V) JET1 025
712 FORMAT (3X6F10.2, F10.4,4F8.3) JET1 026
713 FORMAT (/5X4HD(S),4X3HKIN,2X4HKOUT) JET1 027
714 FORMAT (F10.4,I5,I6) JET1 028
715 FORMAT (4X1HN,5X2HXR,8X2HYW,8X2HZW8X3HU/V,9X3HV/V,9X3HW/V) JET1 029
716 FORMAT (I5,3F10.3,3(1PE12.4)) JET1 030
717 FORMAT (/2X,22HWING COORDINATE SYSTEM) JET1 031
718 FORMAT (/2X,25VELOCITIES INDUCED BY JET,I2,24H - JET COORDINATE SYSTEM) JET1 032
1YSTEM/4X1HN,6X4HXD/R,6X4HYP/R,6X4HZP/R,7X3HU/V9X3HV/V9X3HW/V) JET1 033
719 FORMAT (3E13.6) JET1 034
C MZZZ=1 JET1 035
RAD=180./3.1415926 JET1 036
C INPUT NOTE .. IF KIN=5 , INPUT FIELD POINTS VIA CARDS JET1 038
C IF KIN.GT.6, INPUT FIELD POINTS VIA DATA SET JET1 039
C JET1 040
C IF KOUT=6 , PRINTED OUTPUT ONLY JET1 041
C IF KOUT.GT.6, VELOCITIES OUTPUT IN DATA SET JET1 042
C KIN MUST NOT EQUAL KOUT JET1 043
C JET1 044
C JET1 045
10 READ (5,702) TITLE JET1 046
READ(5,701) NJET,NP,NCYL,NPRNT,KIN,KOUT,DS JET1 047
IF (KIN .LT. 5) KIN=5 JET1 048
IF (KOUT .LT. 6) KOUT=6 JET1 049
C INPUT INDIVIDUAL JET PARAMETERS JET1 050
C JET1 051
DO 16 J=1,NJET JET1 052
READ (5,700) GAMVJ(J),RJET(J),XQ(J),YQ(J),ZQ(J) JET1 053
DO 11 N=1,NCYL JET1 054
DO 11 N=1,NCYL JET1 055
11 READ (5,700) XCLR(J,N),YCLR(J,N),ZCLR(J,N),RGR(J,N),THETA(J,N) JET1 056
16 CONTINUE JET1 057
C INPUT FIELD POINT COORDINATES JET1 058
C JET1 059
DO 12 N=1,NP JET1 060
12 READ (5,700) XP(N),YP(N),ZP(N) JET1 061
C SET UP TABLE OF JET CENTERLINE PARAMETERS JET1 062
C JET1 063
C JET1 064
C JET1 065

```

```

DO 14 J=1,NJET          JET1 066
SCLR(J,1)=0.0           JET1 067
DO 13 N=2,NCYL          JET1 068
SR = (XCLR(J,N)-XCLR(J,N-1))**2 + (YCLR(J,N)-YCLR(J,N-1))**2 +
     (ZCLR(J,N)-ZCLR(J,N-1))**2           JET1 069
13 SCLR(J,N)=SQRT(SR) + SCLR(J,N-1)      JET1 070
14 CONTINUE              JET1 071
C
C       PRELIMINARY OUTPUT             JET1 072
C
C       WRITE (6,710) TITLE            JET1 073
C       WRITE (6,713)                 JET1 074
C       WRITE (6,714) DS,KIN,KOUT      JET1 075
C       IF (KIN .EQ. KOUT) GO TO 10    JET1 076
C       DO 15 N=1,NJET                JET1 077
C       DSR=DS/RJET(N)               JET1 078
C       WRITE (6,711) N,DSR          JET1 079
C       DO 15 U=1,NCYL              JET1 080
C       IF (U-1) 150,150,151        JET1 081
150  WRITE (6,712) XCLR(N,J),YCLR(N,J),ZCLR(N,J),SCLR(N,J),THETA(N,J),
     1 RGR(N,J),RJET(N),XQ(N),YQ(N),ZQ(N),GAMVJ(N)   JET1 082
     1 GO TO 15                  JET1 083
151  WRITE (6,712) XCLR(N,J),YCLR(N,J),ZCLR(N,J),SCLR(N,J),THETA(N,J),
     1 RGR(N,J)                  JET1 084
15  CONTINUE                JET1 085
DO 192 J=1,NP              JET1 086
UP(J)=0.0                  JET1 087
VP(J)=0.0                  JET1 088
192 WP(J)=0.0              JET1 089
DO 40 M=1,NJET              JET1 090
IF (NPRNT .NE. 0) WRITE (6,718) M   JET1 091
DO 19 J=1,NP                JET1 092
U(J)=0.0                   JET1 093
V(J)=0.0                   JET1 094
19 W(J)=0.0                 JET1 095
SREND=SCLR(M,NCYL)         JET1 096
DSR=DS/RJET(M)             JET1 097
C
C       TRANSFORM FIELD POINT COORDINATES TO ENGINE SYSTEM   JET1 098
C
C       190 DO 191 J=1,NP             JET1 099
C       XPR(J)=(-XP(J)+XQ(M))/RJET(M)   JET1 100
C       YPR(J)=(YP(J)-YQ(M))/RJET(M)   JET1 101
191  ZPR(J)=(-ZP(J)+ZQ(M))/RJET(M)   JET1 102
C       CALL CORECT (NP,XPR,YPR,ZPR,DSR,M,NCYL,XCLR,YCLR,ZCLR,SCLR,RGR,
     1 THETA)                         JET1 103
     1 SR=-DSR/2.0                     JET1 104
     1 JSR=1                          JET1 105
20  SR=SR+DSR                  JET1 106
C
C       LOCATE INDIVIDUAL VORTEX RINGS             JET1 107
C
21  IF (SR-SCLR(M,JSR)) 23,25,22      JET1 108
22  JSR=JSR+1                      JET1 109
IF (JSR.GT.NCYL) GO TO 51          JET1 110
GO TO 21                          JET1 111
25  XG=XCLR(M,JSR)                JET1 112
YG=YCLR(M,JSR)                  JET1 113
ZG=ZCLR(M,JSR)                  JET1 114
RG=RGR(M,JSR)                  JET1 115
THG=THETA(M,JSR)/RAD           JET1 116
GO TO 30                          JET1 117
23  DELTA=(SR-SCLR(M,JSR-1))/(SCLR(M,JSR)-SCLR(M,JSR-1))   JET1 118
XG=XCLR(M,JSR-1)+(XCLR(M,JSR)-XCLR(M,JSR-1))*DELTA   JET1 119
YG=YCLR(M,JSR-1)+(YCLR(M,JSR)-YCLR(M,JSR-1))*DELTA   JET1 120
ZG=ZCLR(M,JSR-1)+(ZCLR(M,JSR)-ZCLR(M,JSR-1))*DELTA   JET1 121

```

```

RG = RGR(M,JSR-1)+(RGR(M,JSR)-RGR(M,JSR-1))*DELTA JET1 132
THG=THETA(M,JSR-1)+(THETA(M,JSR)-THETA(M,JSR-1))*DELTA JET1 133
THG=THG/RAD. JET1 134
30 CONTINUE JET1 135
SNTH=SIN(THG) JET1 136
CSTH=COS(THG) JET1 137
RGAMR=RG JET1 138
DO 38 N=1,NP JET1 139
XIPR=(XPR(N)-XG)*CSTH + (ZPR(N)-ZG)*SNTH JET1 140
ETAR=-(YPR(N)-YG) JET1 141
ZETAR= (XPR(N)-XG)*SNTH - (ZPR(N)-ZG)*CSTH JET1 142
RPR=SQRT(ETAR**2 + ZETAR**2) JET1 143
CALL VRING(RGAMR,XIPR,RPR,UGAM,VGAM) JET1 144
IF (RPR .LT. 1.0E-05) 33,33,34 JET1 145
33 DUMU=UGAM*CSTH JET1 146
DUMV=0. JET1 147
DUMW=UGAM*SNTH JET1 148
GO TO 35 JET1 149
34 DUMU=UGAM*CSTH + VGAM*ZETAR/RPR*SNTH JET1 150
DUMV=-VGAM*ETAR/RPR JET1 151
DUMW=UGAM*SNTH - VGAM*ZETAR/RPR*CSTH JET1 152
35 UGAM=DUMU JET1 153
VGAM=DUMV JET1 154
WGAM=DUMW JET1 155
C JET1 156
C CORRECT VORTEX RING STRENGTH FOR RADIUS EFFECT JET1 157
C JET1 158
U(N)=U(N)+UGAM*GAMVJ(M)*DSR/RGAMR JET1 159
W(N)=W(N)+VGAM*GAMVJ(M)*DSR/RGAMR JET1 160
38 V(N)=V(N)+VGAM*GAMVJ(M)*DSR/RGAMR JET1 161
C JET1 162
C NOTE.. U(N),V(N),W(N) ARE VELOCITIES INDUCED IN ENGINE SYSTEM JET1 163
C JET1 164
IF (SR.LT.SREN) GO TO 20 JET1 165
51 CONTINUE JET1 166
DO 52 N=1,NP JET1 167
UP(N)=UP(N)+U(N) JET1 168
VP(N)=VP(N)+V(N) JET1 169
52 WP(N)=WP(N)+W(N) JET1 170
IF (NPRNT.EQ.0) GO TO 40 JET1 171
C JET1 172
C OPTIONAL OUTPUT JET1 173
C JET1 174
DO 50 N=1,NP JET1 175
50 WRITE (6,716) N,XPR(N),YPR(N),ZPR(N),U(N),V(N),W(N) JET1 176
40 CONTINUE JET1 177
' WRITE (6,717) JET1 178
WRITE (6,715) JET1 179
C JET1 180
C OUTPUT INDUCED VELOCITIES IN WING SYSTEM JET1 181
C JET1 182
DO 41 N=1,NP JET1 183
UP(N)=-UP(N) JET1 184
WP(N)=-WP(N) JET1 185
41 WRITE (6,716)N,XP(N),YP(N),ZP(N),UP(N),VP(N),WP(N) JET1 186
IF (KOUT .LE. 6) GO TO 60 JET1 187
C JET1 188
C GENERATE INDUCED VELOCITIES DATA SET JET1 189
C JET1 190
WRITE (KOUT,702) TITLE JET1 191
DO 42 N=1,NP JET1 192
42 WRITE (KOUT,719) UP(N),VP(N),WP(N) JET1 193
END FILE KOUT JET1 194
60 IF (KIN .LE. 6) GO TO 10 JET1 195
REWIND KIN. JET1 196
GO TO 10 JET1 197
END JET1 198

```



```

C SUBROUTINE VRING (RGAMR,XIPR,RPR,UGAM,VGAM) JET3 001
C C SUBROUTINE TO COMPUTE VELOCITY INDUCED BY A SINGLE VORTEX RING JET3 002
C C RGAMR = RING RADIUS/REFERENCE RADIUS JET3 003
C XIPR = AXIAL DISTANCE TO FIELD POINT/REFERENCE RADIUS JET3 004
C RPR = RADIAL DISTANCE TO FIELD POINT/REFERENCE RADIUS JET3 005
C UGAM = AXIAL VELOCITY/GAMMA JET3 006
C VGAM = RADIAL VELOCITY/GAMMA JET3 007
C C PI=3.1415926 JET3 008
C DENM=XIPR**2 + (RPR-RGAMR)**2 JET3 009
C DENP=XIPR**2 + (RPR+RGAMR)**2 JET3 010
C AK2=4.0*RPR*RGAMR/DENP JET3 011
C CALL ELLIPS (AK2,ZK,ZE) JET3 012
C UGAM=(ZK-(1.0+2.0*RGAMR*(RPR-RGAMR)/DENM)*ZE) /SQRT(DENP)/(2.0*PI) JET3 013
C VGAM=0.0 JET3 014
C IF (RPR .LE. 1.0E-05) RETURN JET3 015
C VGAM=-XIPR/RPR/(2.0*PI*SQRT(DENP))*(ZK-(1.+2.*RPR*RGAMR/DENM)*ZE) JET3 016
C RETURN JET3 017
C END JET3 018

```

```

      SUBROUTINE ELLIPS (AKSQ,TK,TE) JET4 001
      -- TABLE LOOK-UP OF ELLIPTIC INTEGRALS --
      DIMENSION CKK(100),CK(100),CE(100) JET4 002
      COMMON MZZZ JET4 003
      CKK = ARGUMENT OF ELLIPTIC INTEGRALS JET4 004
      DATA CKK/0.00,.01,.02,.03,.04,.05,.06,.07,.08,.09,.10,.11,.12,.13,JET4 005
      .14,.15,.16,.17,.18,.19,.20,.21,.22,.23,.24,.25,.26,.27,JET4 006
      .28,.29,.30,.31,.32,.33,.34,.35,.36,.37,.38,.39,.40,.41,JET4 007
      .42,.43,.44,.45,.46,.47,.48,.49,.50,.51,.52,.53,.54,.55,JET4 008
      .56,.57,.58,.59,.60,.61,.62,.63,.64,.65,.66,.67,.68,.69,JET4 009
      .70,.71,.72,.73,.74,.75,.76,.77,.78,.79,.80,.81,.82,.83,JET4 010
      .84,.85,.86,.87,.88,.89,.90,.91,.92,.93,.94,.95,.96,.97,JET4 011
      .98,.99/JET4 012
      CK = COMPLETE ELLIPTIC INTEGRALS OF FIRST KIND. JET4 013
      DATA CK/1.570796,1.574746,1.578740,1.582780,1.586868,1.591003, JET4 014
      1.595188,1.599423,1.603710,1.608049,1.612441,1.616889, JET4 015
      1.621393,1.625955,1.630576,1.635257,1.640000,1.644806, JET4 016
      1.649678,1.654617,1.659624,1.664701,1.669850,1.675073, JET4 017
      1.680373,1.685750,1.691208,1.696749,1.702374,1.708087, JET4 018
      1.713889,1.719785,1.725776,1.731865,1.738055,1.744351, JET4 019
      1.750754,1.757269,1.763898,1.770647,1.777519,1.784519, JET4 020
      1.791650,1.798918,1.806328,1.813884,1.821593,1.829460, JET4 021
      1.837491,1.845694,1.854075,1.862641,1.871400,1.880361, JET4 022
      1.889533,1.898925,1.908547,1.918410,1.928526,1.938908, JET4 023
      1.949568,1.960521,1.971783,1.983371,1.995303,2.007598, JET4 024
      2.020279,2.033369,2.046894,2.060882,2.075363,2.090373, JET4 025
      2.105948,2.122132,2.138970,2.156516,2.174827,2.193971, JET4 026
      2.214022,2.235068,2.257205,2.280549,2.305232,2.331409, JET4 027
      2.359264,2.389016,2.420933,2.455338,2.492635,2.533335, JET4 028
      2.578092,2.627773,2.683551,2.747073,2.820752,2.908337, JET4 029
      3.016112,3.155875,3.354141,3.695637/JET4 030
      CF = COMPLETE ELLIPTIC INTEGRALS OF SECOND KIND. JET4 031
      DATA CE/1.570796,1.566862,1.562913,1.558948,1.554969,1.550973, JET4 032
      1.546963,1.542936,1.538893,1.534833,1.530758,1.526665, JET4 033
      1.522555,1.518428,1.514284,1.510122,1.505942,1.501743, JET4 034
      1.497526,1.493290,1.489035,1.484761,1.480466,1.476152, JET4 035
      1.471818,1.467462,1.463086,1.458688,1.454269,1.449827, JET4 036
      1.445363,1.440876,1.436366,1.431832,1.427274,1.422691, JET4 037
      1.418083,1.413450,1.408791,1.404105,1.399392,1.394652, JET4 038
      1.389883,1.385086,1.380259,1.375402,1.370515,1.365596, JET4 039
      1.360645,1.355661,1.350644,1.345592,1.340505,1.335382, JET4 040
      1.330223,1.325024,1.319788,1.314511,1.309192,1.303832, JET4 041
      1.298428,1.292979,1.287484,1.281942,1.276350,1.270707, JET4 042
      1.265013,1.259263,1.253458,1.247595,1.241671,1.235684, JET4 043
      1.229632,1.223512,1.217321,1.211056,1.204714,1.198290, JET4 044
      1.191781,1.185183,1.178490,1.171697,1.164798,1.157787, JET4 045
      1.150656,1.143396,1.135998,1.128451,1.120742,1.112856, JET4 046
      1.104775,1.096478,1.087938,1.079121,1.069986,1.060474, JET4 047
      1.050502,1.039947,1.028595,1.015994/JET4 048

```

```

IF (MZZZ) 73,30,3 JET4 060
3 IF(AKSQ-.99)20,20,21 JET4 061
21 PARA=0.25*(1.0-AKSQ) JET4 062
700 TEST = 1.00E-07 JET4 063
    IF(PARA-TEST)701,702,702 JET4 064
701 PARA=TEST JET4 065
702 ZLP=ALOG(4./PARA) JET4 066
    TK=ZLP*0.5*(1.+PARA)-PARA JET4 067
    TE=1.0+(ZLP*PARA)-PARA JET4 068
    GO TO 30 JET4 069
20 JA=100.0*AKSQ JET4 070
    JA=1+JA JET4 071
    IF(CKK(JA)-AKSQ)22,23,22 JET4 072
23 TK=CK(JA) JET4 073
    TE=CE(JA) JET4 074
    GO TO 30 JET4 075
22 CON=(AKSQ-CKK(JA))/(CKK(JA+1)-CKK(JA)) JET4 076
    TK=CK(JA)+CON*(CK(JA+1)-CK(JA)) JET4 077
    TE=CE(JA)+CON*(CE(JA+1)-CE(JA)) JET4 078
    GO TO 30 JET4 079
73 IF(AKSQ-.01)721,721,720 JET4 080
721 PARA=.25*AKSQ JET4 081
    GO TO 700 JET4 082
720 AKSQ=1.-AKSQ JET4 083
    GO TO 20 JET4 084
30 CONTINUE JET4 085
    RETURN JET4 086
END JET4 087

```

## SAMPLE CASE

In this section a sample case is described to illustrate the use of the computer programs presented in this report. The case involves an engine wake-wing-flap interference determination. The configuration comprises a swept-wing with flap and one engine mounted underneath the wing panel. Both the wing-flap and jet wake flow model programs are used in accordance with the interference determination procedure described in a previous section.

For the illustrative sample case, the chosen airframe configuration is the semispan swept wing-flap wind tunnel model of reference 5. A 1.02 pressure ratio ducted fan was pylon mounted under the semiwing at mid-span. The wing was cambered with zero dihedral and had no taper. Figure 22(a) shows the configuration in planform and elevation. Figure 22(b) is a section normal to the leading and trailing edges of the wing and flaps. Figure 22(c) shows how the deflected triple slotted flaps, denoted type I with  $\delta = 30^\circ$  in reference 5, are idealized to a single flap with camber. The flap component deflection angles in the plane normal to the hingeline are  $10^\circ$ ,  $20^\circ$ , and  $30^\circ$  for the leading, middle, and aft flap components, respectively. The idealized flap deflection angle required in the input to the wing-flap program must also be specified normal to the hingeline and measures  $21.5^\circ$  in figure 22(c). The wing and idealized flap root chords and other streamwise lengths are related to the lengths perpendicular to the wing and flap leading and trailing edges through the cosine of the sweep angle. The basic wing chord is the chord of the original wing before the trailing edge flaps were attached. In the normal direction, this chord is 5.5 feet, so the (streamwise) basic wing chord for this sample case with a wing sweep angle of  $30^\circ$  is 6.35 feet.

The parameters required by the wing-flap program will now be described. On the wing, a 4 chordwise by 20 spanwise vortex lattice is laid out with equal spanwise spacings. Since the idealized flap chord is longer than the wing chord, 5 chordwise vortices are specified for the flap and the spanwise layout is taken the same as on the wing. Consequently, mean surface angles due to camber and twist are required at four chordwise stations on the wing and 5 chordwise stations over the flap semispan. On the wing, the angles are input as tangents; on the idealized flap the angles are input in radians. These quantities are determined as follows.


The chordwise locations of the control points are given by the midpoint of the 3/4 chord of the area elements in the chordal planes of the wing and idealized flap. The wing airfoil section was specified as NACA 63<sub>2</sub>-416 (modified) normal to the wing leading and trailing edge. The mean surface slopes in the streamwise direction are therefore obtained from the slopes associated with the  $a = 1.0$  mean line by a scaling procedure:

$$\text{wing mean surface slope} = \tan \alpha_l = \frac{d \left( \frac{y_c}{c} \right)}{d \left( \frac{x}{c} \right)} \Bigg|_{\begin{array}{l} c_{\ell_i} \cos \psi \\ c_{\ell_i} = 1.0 \end{array}} \quad (29)$$

For this case,  $c_{\ell_i} = 0.4$  and the cosine factor accounts for the sweep. The chord  $c$  is the basic wing chord. Slopes  $d(y_c/c)/d(x/c)|_{c_{\ell_i}} = 1.0$  for the  $a = 1.0$  line are obtained from reference 15, at control point stations  $x/c$  based on the basic wing chord ( $c = 6.35$  feet). On the flap, the segment characteristics were not specified precisely. Consequently, it is assumed that each segment has no camber. The surface slopes are then given by the difference in slope between the segment mean line and the idealized flap chord line in planes normal to the hinge-line. To obtain the slopes in the streamwise direction, the normal slopes are multiplied by  $\cos \psi$ . To complete the input specifications, the coordinates of a series of points on the geometric engine centerline are required. The necessary information is available in figure 22. A sufficient number of points on the extension to the engine centerline were chosen to generate a good theoretical representation of the flow field from the engine inlet to a point one wing chord length aft of the trailing edge.

The user is now prepared to run the wing-flap program for zero angle of attack without externally induced perturbation velocities. The input deck for this reference (power-off) calculation is shown in figure 21. A data set containing the coordinates of the wing and flap control points is generated ( $KCP = 7$ ) for use by the jet wake program ( $KIN = 7$ ). Downwash and sidewash perturbation velocities induced by wing flap vorticity at the specified points along the engine centerline are included in the output shown in figure 23(a). Curves of these induced velocities are shown in figure 17(b).

Details of the jet wake to be included in the sample calculation will now be set up and the induced velocity field determined. Based on the reference area ( $S_{REF} = 136.8 \text{ ft}^2$ ) used in reference 5, the fan thrust coefficient under consideration is  $C_u = 0.91$ . From equation (17) the corresponding fan exit velocity ratio based on the fan exit flow area is 4.7. For this configuration which has a large centerbody, the flow was assumed to fill the entire area within the duct exit outer diameter. With this correction, the velocity ratio becomes 3.46. From figure 5, the length of the initial region,  $\ell_c$ , is  $13.6 R_o$  and the radius,  $R$ , of the wake boundary at the end of the initial region is  $1.97 R_o$ . If we assume the total length of the jet to be  $150 R_o$ , the final radius of the boundary is approximately  $9.5 R_o$  as obtained from figure 4. The engine has no incidence with respect to the wing root chord. Thus, assuming no downwash or sidewash effect, the shape of the jet is shown in the following sketch.

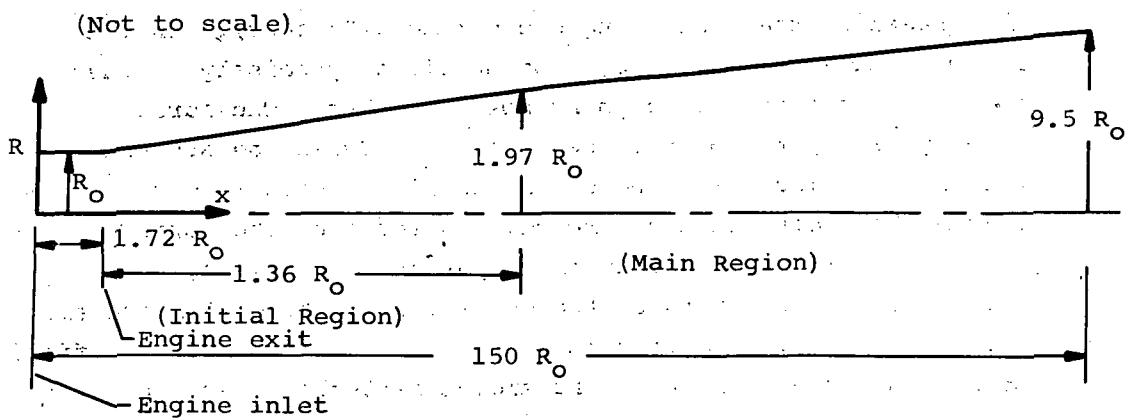

Deflection of the engine wake due to wing-flap induced downwash and sidewash is calculated in the following manner. The wash velocities computed by the wing-flap program with no power effects are shown in figure 17(b). The results of figure 17(b) were obtained from the computer output of figure 23(a). The points along the wake selected for computing the wake deflection are the fan inlet ( $x/R_o = 0$ ), the fan exit ( $1.72$ ), a point below the center of the second flap segment (8.5), the end of the initial region (15.3), and a point  $150 R_o$  downstream of the fan exit. Note that the initial region extends considerably downstream of the flap trailing edge.

At the first two points, the wake is of constant radius equal to  $R_o$  and is undeflected. At the third point, from figure 17(b), the induced downwash is about  $+0.2V$  and the sidewash is about  $-0.15V$  (outboard under this left wing panel). At this point, from equation (27),  $\bar{V}_j/V$  is 2.64 and, from figure 5,  $R$  is about  $1.5 R_o$ . When the wash velocities are combined with  $\bar{V}_j$  in accordance with equation (28) (with  $\alpha = 0$ ), the wake deflection angles are  $\epsilon_z = -4.5^\circ$  and  $\epsilon_y = -3.3^\circ$ . The coordinates of the wake at this point are obtained by laying out a straight line from the engine exit ( $x/R_o = 1.72$ ) to the third point with slopes in the vertical and horizontal planes equal to the average of the slopes at the second and third points (or  $-2.25^\circ$  and  $-1.65^\circ$ , respectively).

The fourth point ( $x/R_o = 15.3$ ) is downstream of the region in which wash velocities were calculated. Since the important part of the wake between  $x/R_o = 8.5$  and 15.3 is that part near the aft flap segment, the slopes of the wake at  $x/R_o = 15.3$  are taken as the values at  $x/R_o = 8.5$ , which values also occur just downstream of the aft flap segment. Thus, the average values of slopes for the wake centerline segment between 8.5 and 15.3 are the values at either end.

At the last point, the wake is assumed to reach the free stream direction, so its slopes are zero. The resulting wake characteristics are shown in the following table.

<u><math>x_{CL}/R_o</math></u>	<u><math>y_{CL}/R_o</math></u>	<u><math>z_{CL}/R_o</math></u>	<u><math>R/R_o</math></u>	<u><math>\theta</math> (deg.)</u>
0	0	0	1.0	0
1.72	0	0	1.0	0
8.5	-0.2	-0.3	1.5	-4.5
15.3	-0.6	-0.8	1.97	-4.5
150.0	-3.0	-5.0	9.5	0

Note that the coordinates are all relative to a system fixed in the jet inlet (fig. 9(a)).

The input deck for this wake calculation is shown in figure 25(a). The wing and flap control points are input via a data set generated by the wing-flap program and the induced velocity field is output in another data set ( $KOUT = 8$ ) for subsequent use by the wing-flap program ( $KEI = 8$ ).

The wing-flap program is now rerun to obtain the wing-flap loading including the effect of the wake-induced velocities. The input is shown in figure 21(b). The aerodynamic parameters in the output, figure 23(b), reflect the effects of the jet wake interfering on the wing-flap system. The total lift and moment coefficients in the output must be incremented by the appropriate contribution due to engine thrust

$$\left. \begin{aligned} C_L &= C_{L \text{ Wing-flap}} + C_\mu \sin \alpha \\ C_m &= C_{m \text{ Wing-flap}} + C_\mu \frac{z \text{ engine } C_L}{C_{ave}} \end{aligned} \right\} \quad (30)$$

where  $Z_{\text{engine}}$  is the vertical coordinate of the engine centerline. For this case, the angle of attack is zero. There is no increment in lift but the pitching moment is increased ( $Z_{\text{engine}} = 2.07$  ft from figure 22(b)).

## CONCLUDING REMARKS

Analytical methods have been developed to predict the loading distribution on an externally-blown jet-augmented wing-flap configuration with a high-bypass-ratio turbofan engine. Two potential flow models were developed. The first is a nonplanar lifting surface method capable of representing a wing of arbitrary sweep, taper, dihedral, camber, and twist with a large, multiply-slotted, partial or full span flap which can have large deflection angles. The second is a model of the jet wake of a turbofan engine which represents the mass flow, momentum, and spreading rate of a turbulent, coflowing jet and which has the capability to follow a curved centerline. These models are used in sequence to first define the flow field beneath the wing-flap in the absence of an engine to locate the jet wake centerline, then predict the flow field induced by the jet on the wing-flap, and finally calculate the loading on the wing-flap in the presence of the jet wake. The methods yield lift and pitching moment coefficients for the case of symmetry about the vertical plane through the root chord. More than one engine

per semispan can be treated, with the provision that if the engine wakes overlap, their mutual interference is neglected and their effects are considered additive.

Some data are available on lift and pitching moment on wing-flap combinations with externally blown flaps. With few exceptions, these data do not include any direct measurements of the flow at the engine exit or the nature of the engine wake spreading. Such data would be useful in checking computed values of engine exit velocities and in understanding the spreading and deflection of the wake under the wing. Comparisons between predicted and measured lift and pitching moment indicate that the method is satisfactory for predicting lift on externally blown jet-augmented unswept and swept wings with flap deflection angles up to 30 to 40 degrees. In this range, the pitching moment is well predicted for unswept wings but underpredicted somewhat (not sufficiently negative) for swept wings. For flap deflections in excess of 40 degrees, with or without power, the method begins to overpredict lift, due primarily to the onset of flow separation on the flap segments, with overpredictions of 10 to 15 percent at a flap angle of 60 degrees. The pitching moments are considerably underpredicted at large flap angles.

The lift that is obtained through wake-wing-flap interaction is sensitive to the position of the wake relative to the wing chord. Calculations made with and without wake deflection due to the wing-induced downwash and  $V \sin \alpha$  upwash indicate significant improvements in the accuracy of prediction with inclusion of the wash effects. Since the jet augmentation can be modified by changing the location and incidence of the engine relative to the local wing chord, the prediction method offers a means of systematically investigating the influence of these two variables on jet augmentation.

The single most important factor in increasing the reliability and utility of the prediction method is the wake position determination. A systematic investigation could be done using existing overall force and moment data to evaluate the degree of detail required in the wake description, to examine the final velocity field beneath and aft of the wing, and to determine the sensitivity of the predicted load distributions to wake position. Such an investigation would provide considerable insight into the adequacy of the wake flow model. This work would benefit greatly,

however, by direct flow field measurements made with an EBF model, where care is taken to measure engine thrust and exit velocity profiles and possibly load distributions on the flaps as well as the flow field.

Nielsen Engineering & Research, Inc.  
Mountain View, California  
February 1972

APPENDIX A  
ARRANGEMENT OF VORTICES ON THE WING-FLAP

Calculations were made for a variety of wing-flap configurations to provide guidance to the user of the program on the arrangement of the vortices on the wing-flap. The spanwise and chordwise number of vortices and the vortex spacing on the wing and flap were varied to determine their effect on the predicted aerodynamic forces and moments. As a brief summary of the results to be presented, the following conditions were investigated:

Nominal aspect ratio 3, 5, and 7 untapered wings with zero and 30-degree sweep and a flap chord approximately half the total wing-flap chord.

Aspect ratio 3.2 untapered wing with 30-degree sweep and a flap chord approximately one quarter that of the wing-flap chord.

Aspect ratio 3.2 untapered wing with 30-degree sweep and a part span flap (64 percent) with a chord approximately half the total wing-flap chord.

Aspect ratio 3.2 untapered wing with 30-degree sweep and a flap chord approximately half the total wing-flap chord and engine wake interaction.

At the end of this appendix some guidelines are given for the vortex layout, based on the calculations made.

Configurations

The major part of the work was conducted using the 30-degree swept wing with triple slotted flap (Flap I) of reference 5. This wing is not tapered and has a combined flap chord of about 58 percent of the combined wing-flap with flap undeflected. The aspect ratio is 3.2. The higher aspect ratio cases were obtained by extending the span an appropriate amount. The unswept configurations have the same flap and camber arrangements. The part span flap configuration was obtained from the 3.2 aspect ratio swept wing-flap by reducing the flap length to the inner 64 percent of the wing span. The smaller flap chord configuration was obtained from the 3.2 aspect ratio swept wing-flap by extending the wing chord and shortening the flap chord so that the flap reduced to a single flap segment.

## APPENDIX A

having a chord one-fourth of the total root chord. This flap is uncambered. All moments are taken about a center located at an x station corresponding to the 62 percent root chord.

### Wings with Large Flaps

The first set of results, listed in the table below, are those of the basic, aspect ratio 3.2, swept wing with flap deflection angles of 10/20/30 degrees at an angle of attack of 10 degrees.

VORTEX LATTICE,		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	3.915	-1.056	0.0400	-0.269
4 x 8	8 x 8	4.037	-1.018	0.0402	-0.252
4 x 8	10 x 8	4.053	-1.004	0.0402	-0.248
7 x 8	8 x 8	4.038	-1.028	0.0402	-0.255
7 x 8	10 x 8	4.054	1.014	0.0402	-0.250
4 x 14	5 x 14	3.857	-1.022	0.0410	-0.265
4 x 14	8 x 14	3.977	-0.984	0.0410	-0.248
4 x 14	10 x 14	3.993	-0.970	0.0414	-0.243
7 x 14	8 x 14	3.979	-0.994	0.0414	-0.250
4 x 20	5 x 20	3.831	-1.004	0.0416	-0.262
4 x 10	5 x 12	3.903	-1.049	0.0403	-0.268

Loading Results for an aspect ratio 3.2 swept wing-flap at  $\alpha = 10^\circ$ .

The chordwise numbers of vortices (wing/flap) of 4/5 and 7/8 represent approximately equal chordwise lengths of the area elements over both wing and flap. The 4/8 and 4/10 arrangements represent attempts to get a higher density of elements on the flap. The spanwise numbers considered are 8, 14 and 20 elements, all of equal spanwise width. For 20 spanwise elements, the larger number of chordwise elements cannot be run because of size limitations in the program. The final case is one in which an 8-spanwise element arrangement is modified by dividing each of the two elements around the wing mid-semispan into halves and each of the four elements around the flap mid-semispan into halves. The objective is to determine the effect of locally increasing the spanwise density of elements in the region on which an engine wake would impinge.

## APPENDIX A

The results for  $C_L$ ,  $C_m$ , and the span load distribution are shown in figure A-1 for  $\alpha = 10^\circ$ . The spanwise variations indicate that the calculation has essentially converged with 14 elements. The chordwise variations indicate that 4 elements are sufficient on the wing, but that 7 or 8 elements are required on the flap. Figure A-1(b) shows that the flap span load distribution has converged with 5 chordwise flap elements, but the wing load distribution has not. Thus the additional chordwise elements are required on the flap to cause the proper interference to be felt on the wing.

Similar results are obtained for the same parameters at  $\alpha = 0$ . There are considerably larger changes as a result of increasing the flap chordwise elements from 5 to 8, because the flap is the primary source of lift in this case, both directly and by its interference on the wing. The calculated values are shown in the table below.

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	2.699	-1.227	0.0389	-0.4544
4 x 8	10 x 8	2.852	-1.170	0.0390	-0.4103
7 x 8	8 x 8	2.836	-1.195	0.0390	-0.4212
4 x 14	5 x 14	2.657	-1.197	0.0400	-0.4504
4 x 14	10 x 14	2.809	-1.140	0.0402	0.4060
7 x 14	8 x 14	2.793	-1.165	0.0401	-0.4171
4 x 20	5 x 20	2.639	-1.182	0.0404	-0.4478
4 x 10	5 x 12	2.690	-1.220	0.0392	-0.4530

Loading results for an aspect ratio 3.2' swept wing-flap at  $\alpha = 0^\circ$ .

Finally, it can be seen with these results (comparing 4 x 8, 5 x 8 with 4 x 10, 5 x 12) that if one starts with a uniform spanwise arrangement and divides certain elements to obtain a locally denser arrangement spanwise, the predicted loading is essentially unchanged from that of the original uniform arrangement. Thus, to improve convergence by increasing the spanwise number of vortices, one must distribute the increase over the entire span. Conversely, one may judge the convergence of a spanwise arrangement which is locally more dense from the closest uniform spanwise arrangement.

## APPENDIX A

If the aspect ratio of the basic wing just discussed is increased, retaining the sweep, taper, and flap characteristics, a very similar pattern occurs. Results for aspect ratios of 5 and 7 at wing angles of attack of  $10^\circ$  are presented in the tables below and in figures A-3 and A-4. These results indicate that spanwise convergence is obtained with

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	4.556	-3.973	0.0259	-0.872
7 x 8	8 x 8	4.700	-4.037	0.0260	-0.857
4 x 14	5 x 14	4.499	-3.899	0.0268	-0.866
7 x 14	8 x 14	4.642	-3.962	0.0269	-0.854
4 x 20	5 x 20	4.473	-3.861	0.0272	-0.862

Loading results for an aspect ratio 5 swept wing-flap at  $\alpha = 10^\circ$ .

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	4.963	-7.698	0.0188	-1.55
4 x 8	8 x 8	5.121	-7.882	0.0188	-1.54
7 x 8	8 x 8				
4 x 14	5 x 14	4.906	-7.577	0.0196	-1.55
4 x 14	8 x 14				
7 x 14	8 x 14	5.062	-7.758	0.0197	-1.54
4 x 20	5 x 20	4.881	-7.520	0.0199	-1.54

Loading results for an aspect ratio 7 swept wing-flap at  $\alpha = 10^\circ$ .

14 elements and that the chordwise density must be higher on the (large) flap than on the wing to obtain the proper flap-wing interference effects.

The effect of increasing the flap deflection to 20/40/60 degrees with the basic aspect ratio 3.2 swept wing is shown in the table below and in figure A-5. The calculations were

APPENDIX A

ANGLE OF ATTACK (deg.)	VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
	NCW MSW	NCF MSF				
0	4 x 14	5 x 14	4.702	-1.639	0.039	-0.348
0	4 x 14	10 x 14	4.856	-1.590	0.039	-0.327
0	7 x 14	8 x 14	4.849	-1.617	0.039	-0.334
10	4 x 14	5 x 14	5.601	-1.336	0.041	-0.238
10	4 x 14	10 x 14	5.730	-1.293	0.041	-0.226
10	7 x 14	8 x 14	5.726	-1.319	0.041	-0.230

Loading results for an aspect ratio 3.2 swept wing-flap with large flap deflection.

made with 14 spanwise elements and various combinations of chordwise elements, since the previous calculations indicated convergence with 14 elements. As was the case for the smaller flap deflection, four spanwise elements on the wing are sufficient, but a denser arrangement must be used on the flap.

The characteristics of wings of zero sweep angle which are otherwise identical to the 3.2 aspect ratio swept wing-flap configuration are shown in figures A-6, A-7, and A-8 and the tables below for both 0° and 10° angle of attack.

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	3.050	1.841	0.043	0.603
4 x 8	8 x 8	3.184	2.028	0.043	0.636
7 x 8	8 x 8	3.188	2.021	0.043	0.633
4 x 14	5 x 14	3.000	1.810	0.044	0.603
4 x 14	8 x 14	3.133	1.994	0.044	0.636
7 x 14	8 x 14	3.137	1.987	0.044	0.633
4 x 20	5 x 20	2.981	1.797	0.044	0.602

Loading results for an aspect ratio 2.8 unswept wing-flap at  $\alpha = 0^\circ$ .

APPENDIX A

5.2730232

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	3.640	2.343	0.028	0.657
4 x 14	5 x 14	3.592	2.358	0.029	0.656
4 x 20	5 x 20	3.571	2.344	0.029	0.657

Loading results for an aspect ratio 4.4 unswept wing-flap at  $\alpha = 0^\circ$ .

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	4.032	2.777	0.020	0.688
4 x 14	5 x 14	3.988	2.742	0.021	0.687
4 x 20	5 x 20	3.968	2.727	0.021	0.687

Loading results for an aspect ratio 6.1 unswept wing-flap at  $\alpha = 0^\circ$ .

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	4.238	3.374	0.045	0.795
4 x 8	8 x 8	4.357	3.547	0.045	0.815
7 x 8	8 x 8	4.361	3.541	0.045	0.812
4 x 14	5 x 14	4.175	3.324	0.046	0.796
4 x 14	8 x 14	4.290	3.494	0.046	0.814
7 x 14	8 x 14	4.295	3.489	0.046	0.813
4 x 20	5 x 20	4.147	3.303	0.046	0.797

Loading results for an aspect ratio 2.8 unswept wing-flap at  $\alpha = 10^\circ$ .

APPENDIX A

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	5.080	4.198	0.029	0.825
4 x 14	5 x 14	5.018	4.145	0.029	0.825
4 x 20	5 x 20	4.990	4.122	0.029	0.825

Loading results for an aspect ratio 4.4 unswept wing-flap at  $\alpha = 10^\circ$ .

VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
4 x 8	5 x 8	5.650	4.766	0.021	0.843
4 x 14	5 x 14	5.593	4.712	0.021	0.843
4 x 20	5 x 20	5.566	4.689	0.021	0.842

Loading results for an aspect ratio 6.1 unswept wing-flap at  $\alpha = 10^\circ$ .

The results for zero sweep are similar to those for 30-degree sweep in terms of convergence. The gross force and moment parameters essentially converge to within 1 percent with 14 spanwise elements. The (large) flap requires a denser chordwise spacing than the wing to effect convergence, as is indicated by the span load distributions.

#### Wings with Small Flaps

A series of calculations was made with an aspect ratio 3.2, 30 degrees swept, untapered wing having a smaller flap system than the one considered in the previous section. The flap considered here is a single, full span flap segment having a chord equal to 25 percent of the combined wing-flap chord with flaps up. The flap deflection is  $21.5^\circ$ , which is the mean deflection angle for the 10/20/30 degrees flap considered previously. Calculations were made for angles of attack of 0 and 10 degrees. All cases were run with 14 spanwise vortices. The results are shown in the table below and in figure A-9.

## APPENDIX A

ANGLE OF ATTACK (deg.)	VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L$	$C_m/C_L$
	NCW MSW	NCF MSF				
0	7 x 14	2 x 14	0.838	-0.309	0.073	-0.369
0	4 x 14	5 x 14	0.839	-0.305	0.073	-0.364
0	4 x 14	8 x 14	0.840	-0.305	0.073	-0.363
10	7 x 14	2 x 14	1.544	-0.237	0.073	-0.153
10	4 x 14	5 x 14	1.545	-0.233	0.073	-0.151
10	4 x 14	8 x 14	1.546	-0.233	0.073	-0.151

Loading results for an aspect ratio 3.2 swept wing with small flap.


The tabular results and those presented in figure A-9 indicate no essential differences in computed loads between the three cases for each angle of attack. The case with 7 chordwise elements on the wing and 2 on the flap represents essentially the same element chordwise length on both flap and wing, whereas the other two represent denser spacings on the flap. For this size flap, the uniform spacing along the entire wing-flap chord is sufficient to obtain the proper wing-flap interference.

It should be noted that as the flap chord decreases relative to the wing chord, the case of a wing alone is approached. In this case, one can use the more extensive calculation presented in reference 10 as a guide to the selection of the vortex-lattice arrangement.

#### Wings with Part Span Flaps

The method is capable of treating a partial span flap which protrudes from the wing trailing edge. In order to investigate the effect on the load distribution of the positions of the trailing legs of the horseshoe vortices relative to the flap tip, some calculations were run for the basic 30 degree swept, aspect ratio 3.2 wing with the 58 percent chord triple slotted flap. The flap however was considered to extend only from the root chord to the 64 percent semispan station. The spanwise area element arrangements of the two vortex configurations are the following:

APPENDIX A

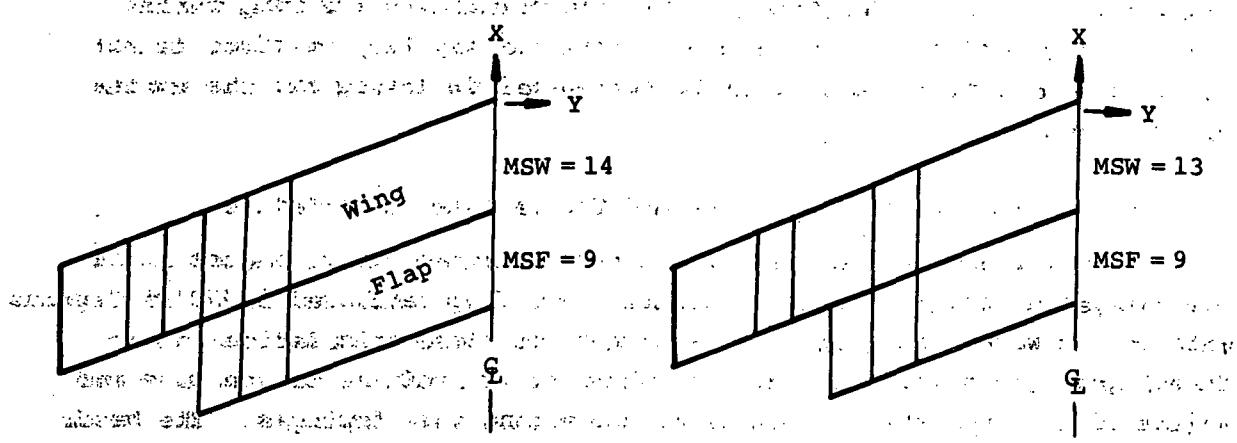

The layout on the wing is basically a  $5 \times 14$  arrangement. The flap has 8 chordwise elements and the same spanwise element size as the wing. Since the flap span is only 64 percent of the wing span, the flap has 9 spanwise elements. In the case on the left above, the  $Y = \text{constant}$  plane at the flap tip contains trailing legs of both wing and flap vortices. The wing vortex trailing legs lie in the  $Z = 0$  plane, while the flap vortex trailing legs lie in the plane of the flap. In the case on the right, the two spanwise elements on the wing near the 64 percent semispan station have been combined into one element so that no wing vortex legs lie in the same  $Y$  plane as the flap tip chord. Thus, the wing element arrangement is a  $5 \times 13$  and the flap arrangement, as before, is an  $8 \times 9$ .

The computed results for the span load distribution at  $\alpha = 0$  are shown in figure A-10. There is a slight difference in wing loading just outboard of the flap. The influence on the overall loading of this difference is small, however, as shown in the following table.


VORTEX LATTICE		$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW MSW	NCF MSF				
5 x 14	8 x 9	1.757	-0.159	0.061	-0.0904
5 x 13	8 x 9	1.771	-0.162	0.059	-0.0913

Loading results for a low aspect ratio swept wing-flap with part span flap at  $\alpha = 0^\circ$ .


Thus, the coincidence between any Y-plane containing the wing vortex trailing legs and the Y-plane containing the tip flap vortices is not important and should not have to be considered in laying out the vortex arrangement.

#### Wings with Large Flaps and Engine Wake Augmentation

Calculations were made for the basic 30 degree swept, aspect ratio 3.2 untapered wing with the 58 percent chord flap deflected 10/20/30 degrees with engine wake impingement. The purpose of these calculations is to investigate the sensitivity of the wake-induced loadings to the size and layout of the area elements on which the engine wake impinges. The basic case is a lattice layout employing 8 spanwise elements on the wing and flap, 4 chordwise elements on the wing and 5 chordwise elements on the flap. This arrangement was perturbed by dividing sets of elements spanwise into halves near the mid-semispan location, under which the engine wake centerline is assumed to lie, in accordance with the following sketches. The first case is the uniform spanwise arrangement, the second has 2 additional elements on the wing and 4 on the flap, and the third case has 5 additional on the flap. The engine thrust coefficient (for one engine) was taken to

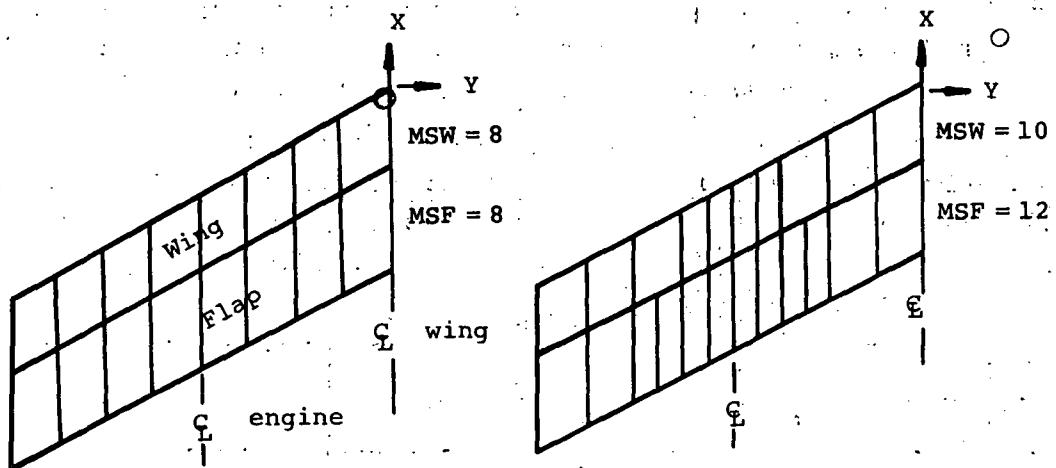

APPENDIX A

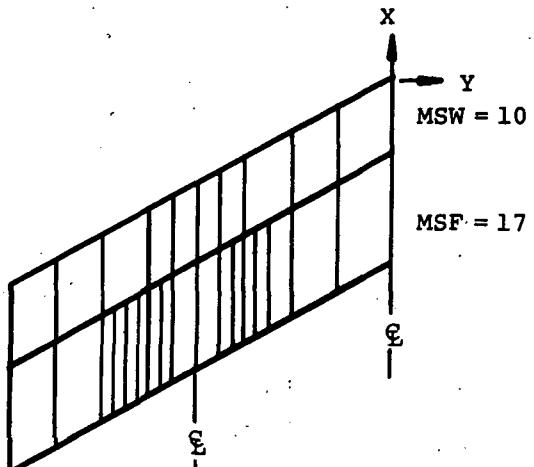

be 0.9, a relatively high thrust level. The force and moment results for  $\alpha = 10^\circ$  are given in the following table.

LATTICE ARRANGEMENT		$C_\mu$	$C_L$	$C_m$	$C_{D_i}/C_L^2$	$C_m/C_L$
NCW	MSW					
4 x 8	5 x 8	0	3.915	-1.056	0.040	-0.269
4 x 10	5 x 12	0	3.903	-1.049	0.040	-0.268
4 x 10	8 x 12	0	4.025	-1.011	0.041	-0.251
4 x 10	8 x 17	0	4.021	-1.007	0.041	-0.250
4 x 8	5 x 8	0.9	5.853	-2.869	0.037	-0.490
4 x 10	5 x 12	0.9	5.567	-2.744	0.029	-0.493
4 x 10	8 x 12	0.9	5.675	-2.640	0.040	-0.465
4 x 10	8 x 17	0.9	5.726	-2.718	0.040	-0.473

Loading results for an aspect ratio 3.2 swept wing-flap at  $\alpha = 10^\circ$  with engine wake impingement.

The forces and moments for  $C_\mu = 0.9$  do not include the direct contribution of engine thrust. The tabulated results indicate a considerably larger effect in going from 5 to 8 chordwise elements on the flap than in increasing the spanwise number on the flap from 12 to 17 without wake augmentation, as was the case in previous calculations. With wake augmentation, increases in both spanwise and chordwise number on the flap cause comparable changes

in lift and moment. With wake augmentation, it would not appear necessary to employ any greater a number of elements chordwise and spanwise than is necessary to achieve convergence without wake augmentation, insofar as lift is concerned. The moment is more sensitive to spanwise number, at least for swept wings, and might require a locally denser arrangement on the flap.

The span loading distributions for these cases are shown in figure A-11. Figure A-11(a) shows a comparison of the four lattice arrangements for  $C_{\mu} = 0$ . As was indicated previously, the lattice variation has essentially no influence on the flap loading, but the larger chordwise number shows slightly higher induced loadings on the wing. For the case of engine thrust, figure A-11(b), the span loading results are again very similar on the flap. The major effect on the wing is caused by increased chordwise number of vortices, with little effect due to adding spanwise vortices. The effect of engine wake augmentation for the largest number of vortices is shown in figure A-11(c). The flap loading is greatly increased in the region of direct impingement and slightly increased both inboard and outboard of the impingement region. The wing loading is increased over the entire span, with the greatest increments occurring somewhat outboard of the 50 percent semispan station due to wing sweep.

#### Recommended Procedure for Vortex Arrangement

The following comments are offered with respect to selecting a vortex arrangement for a wing-flap configuration based on the results of the calculations described above and the results of reference 10.

Spanwise number.- Convergence on the four gross aerodynamic properties examined ( $C_L$ ,  $C_m$ ,  $C_{D_1}/C_L^2$ ,  $C_m/C_L$ ) to within about one percent was obtained using 14 equally spaced elements on the semispan for nominal aspect ratios from 3 to 7 and sweep angles of 0 and 30 degrees and untapered planforms. The results of reference 10 indicate faster convergence as the taper ratio decreases. Thus, it is suggested that the spanwise number not exceed 14 equally spaced elements. It is noted that if an unequal spanwise spacing is employed to create a locally denser spacing, the degree of convergence should be assessed by the nearest equally spaced arrangement.

Chordwise number.- The choice of chordwise arrangement depends principally on the flap size. For a flap whose chord is one-quarter or less than that of the combined wing-flap, the wing-flap mutual interference and

## APPENDIX A


the gross loading characteristics are adequately predicted by an equal spacing on the wing and flap. The convergence then depends on the total number of elements on the wing-flap. The results of reference 10 for a wing alone indicate very small differences between 4 and 6 elements. There should, of course, always be at least one row on the flap. If more chordwise definition of the flap loading is desired, additional elements can be placed on the flap without affecting the gross loading.

For a flap whose chord is greater than one-quarter that of the combined wing-flap, it is necessary to have more chordwise elements on the flap than on the wing to properly model the wing-flap mutual interference. It is suggested that twice as many elements be used on the flaps as on the wing.

The wing-flap aspect ratio, sweep, taper, and flap deflection angle appear to have little influence on convergence and generally need not be considered.

Other considerations.- One consideration that deserves comment is the effect on calculated loadings of the element arrangement in the region(s) of engine wake impingement. Small vertical and/or lateral changes in the engine wake centerline can cause the wake to "cover" or "uncover" area elements which can produce unrealistic discrete changes in wake-induced loading. Calculated results indicate, however, that if a sufficient number of uniformly spaced elements both chordwise and spanwise are used to achieve convergence on engine-off characteristics, the element sizes will be sufficiently small that the results will not be unduly influenced by changes in wake centerline location, at least for wings of low sweep. At larger sweep angles, the pitching moment appears sensitive to the spanwise number on the flap, and it may be desirable to have a locally denser spanwise arrangement in the region of wake impingement on the flap.


Finally, the end effects due to part-span flaps do not appear to be sensitive to the precise arrangement of area elements in the spanwise region of the flap tip.

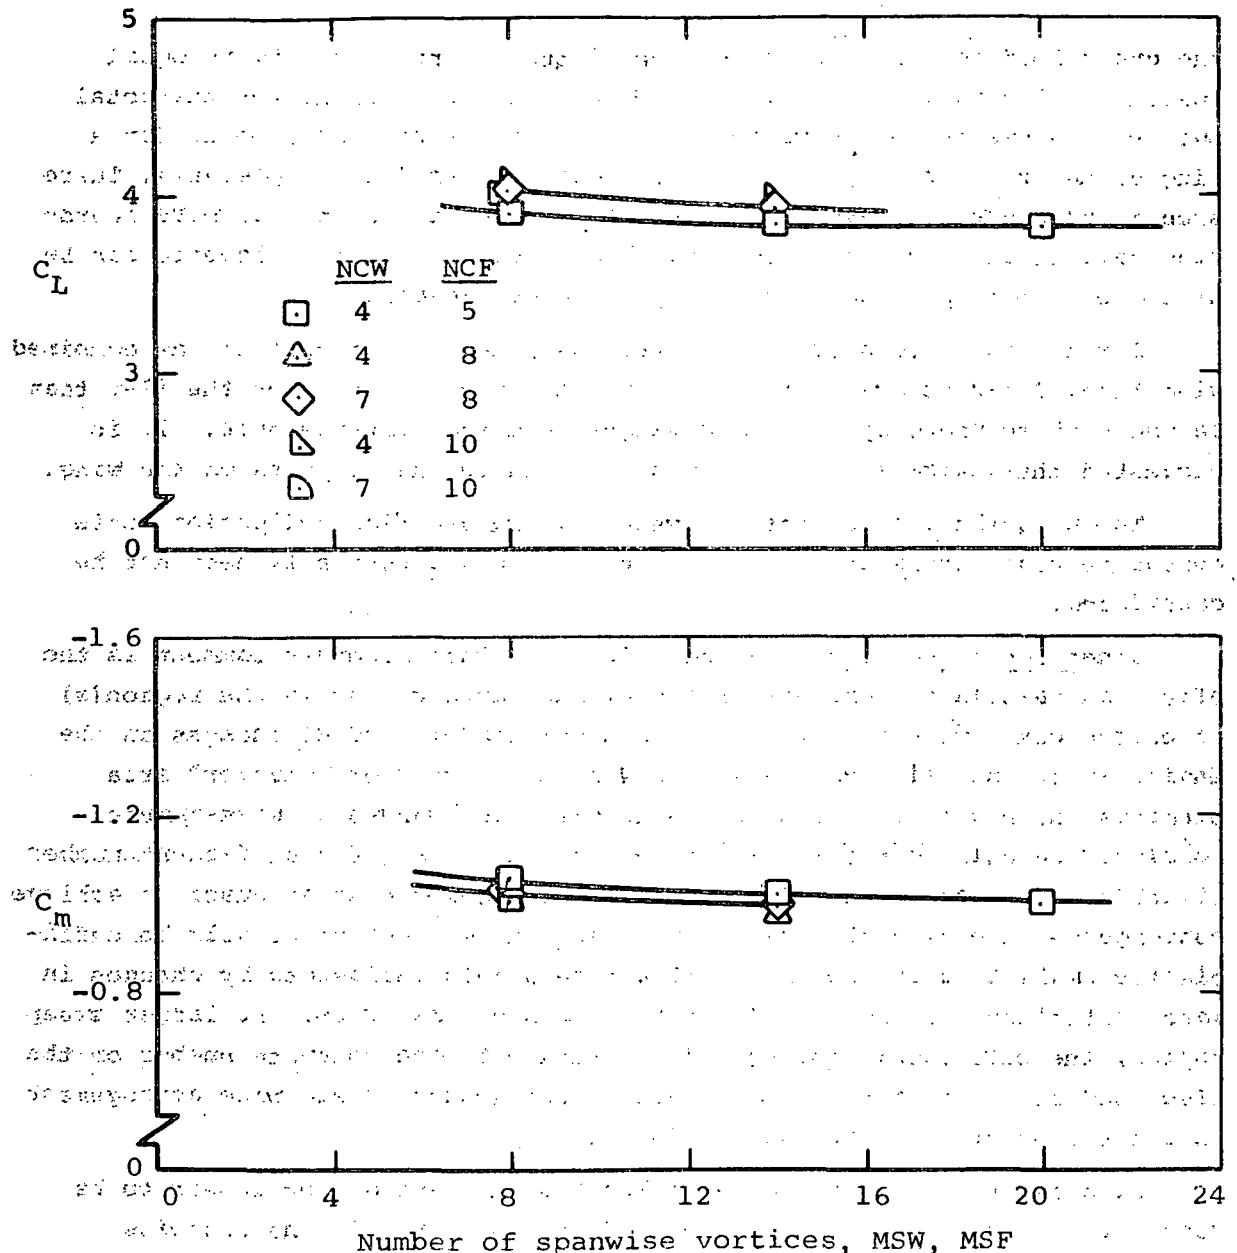

(a) Variation of lift and pitching-moment coefficients with vortex arrangement


Figure A-1.- Predicted load characteristics of a  $30^\circ$  swept, aspect ratio 3.2 untapered wing with a large, triple slotted flap at  $\alpha = 10^\circ$ .

APPENDIX A

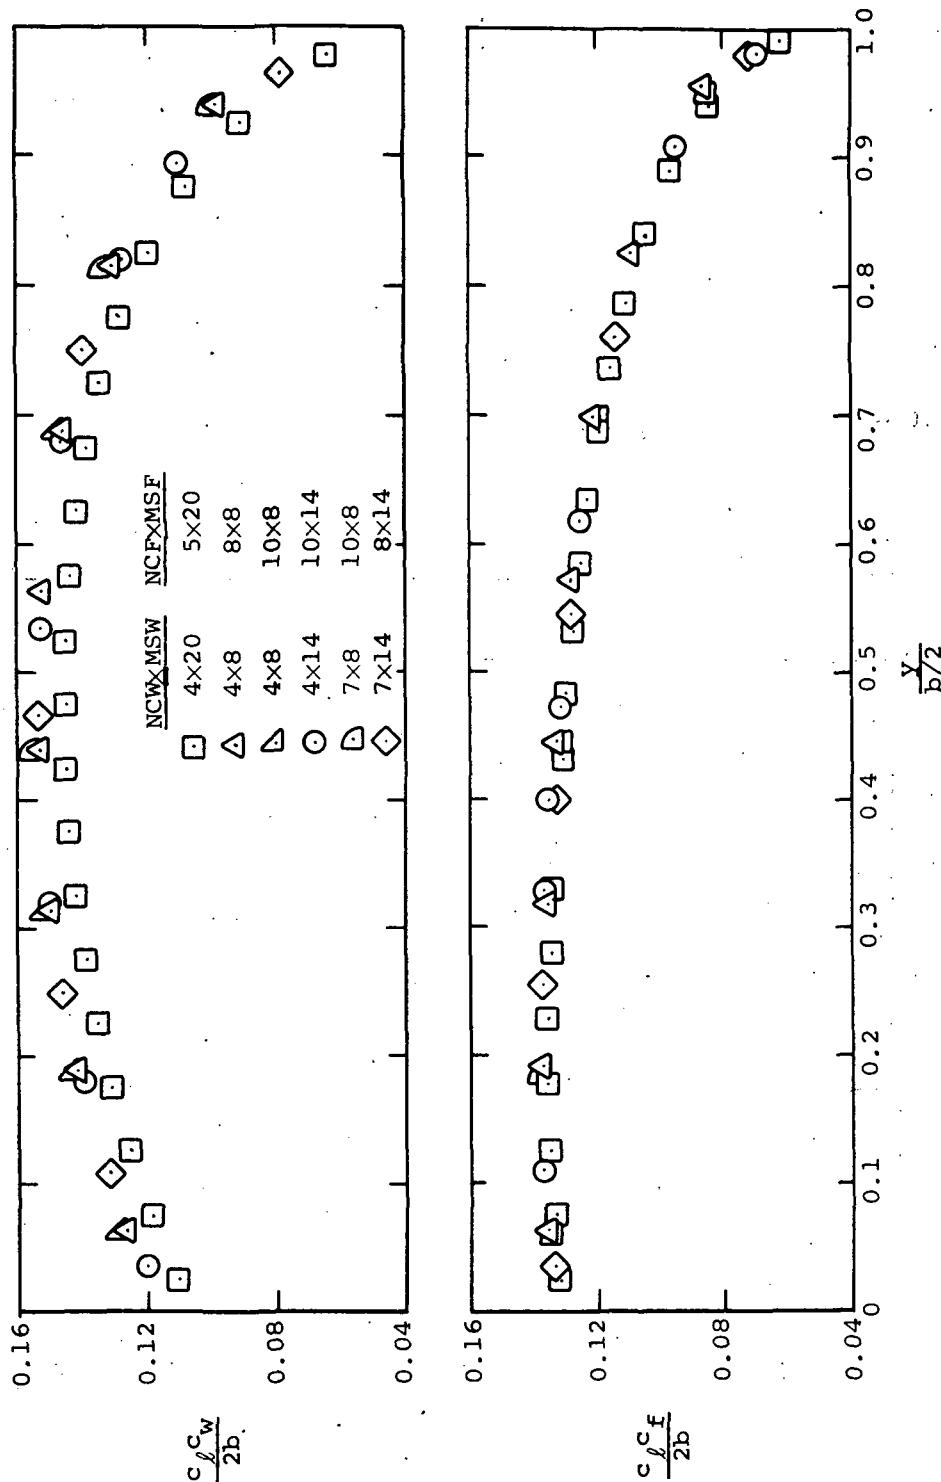

(b) Variation of span load distribution with vortex arrangement.


Figure A-1.— Concluded.

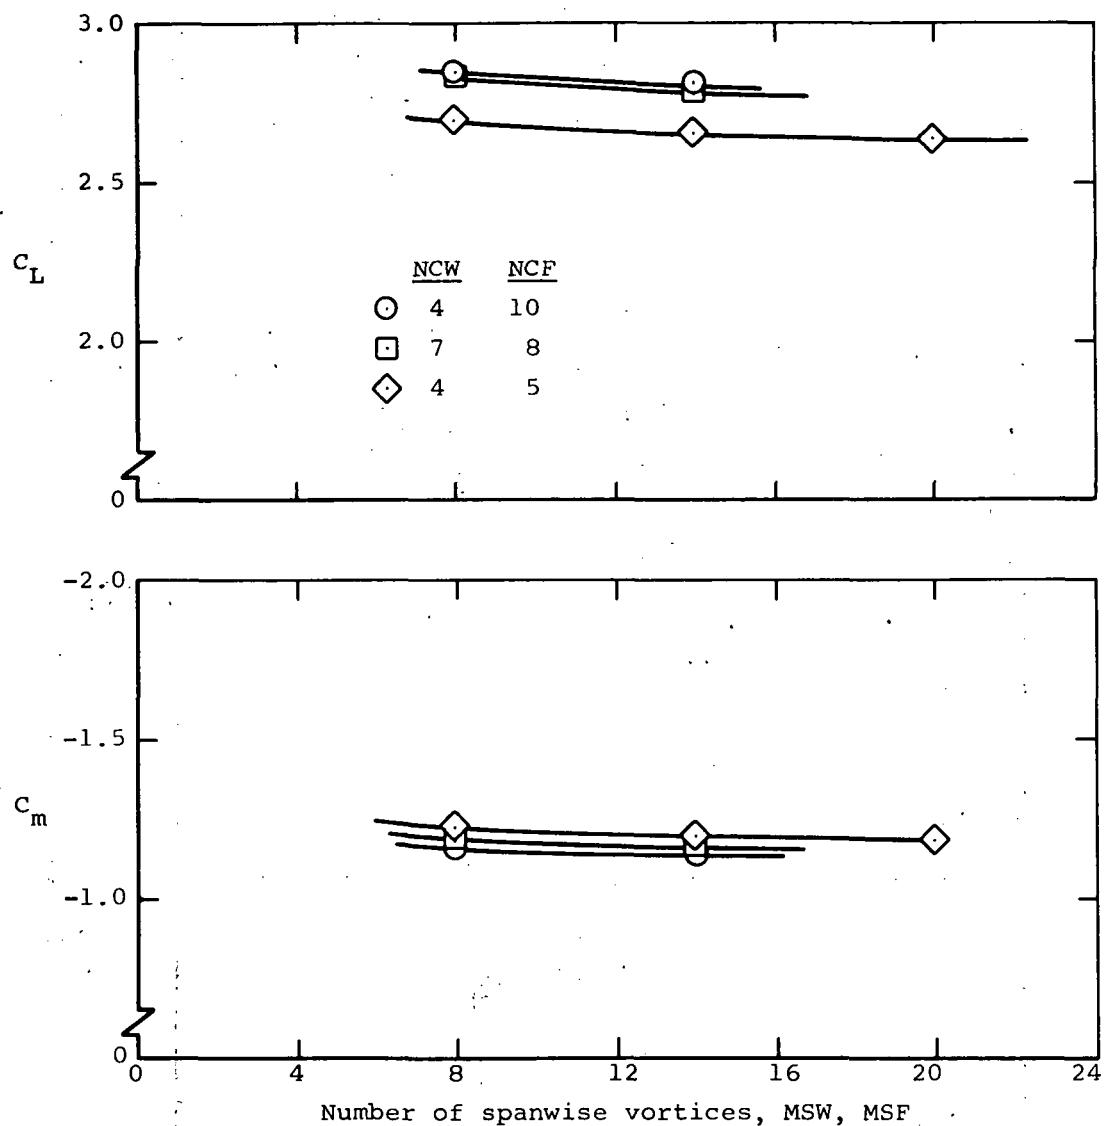

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.

Figure A-2.- Predicted load characteristics of a  $30^\circ$  swept, aspect ratio 3.2 untapered wing with a large, triple slotted flap at  $\alpha = 0^\circ$ .


**APPENDIX A**

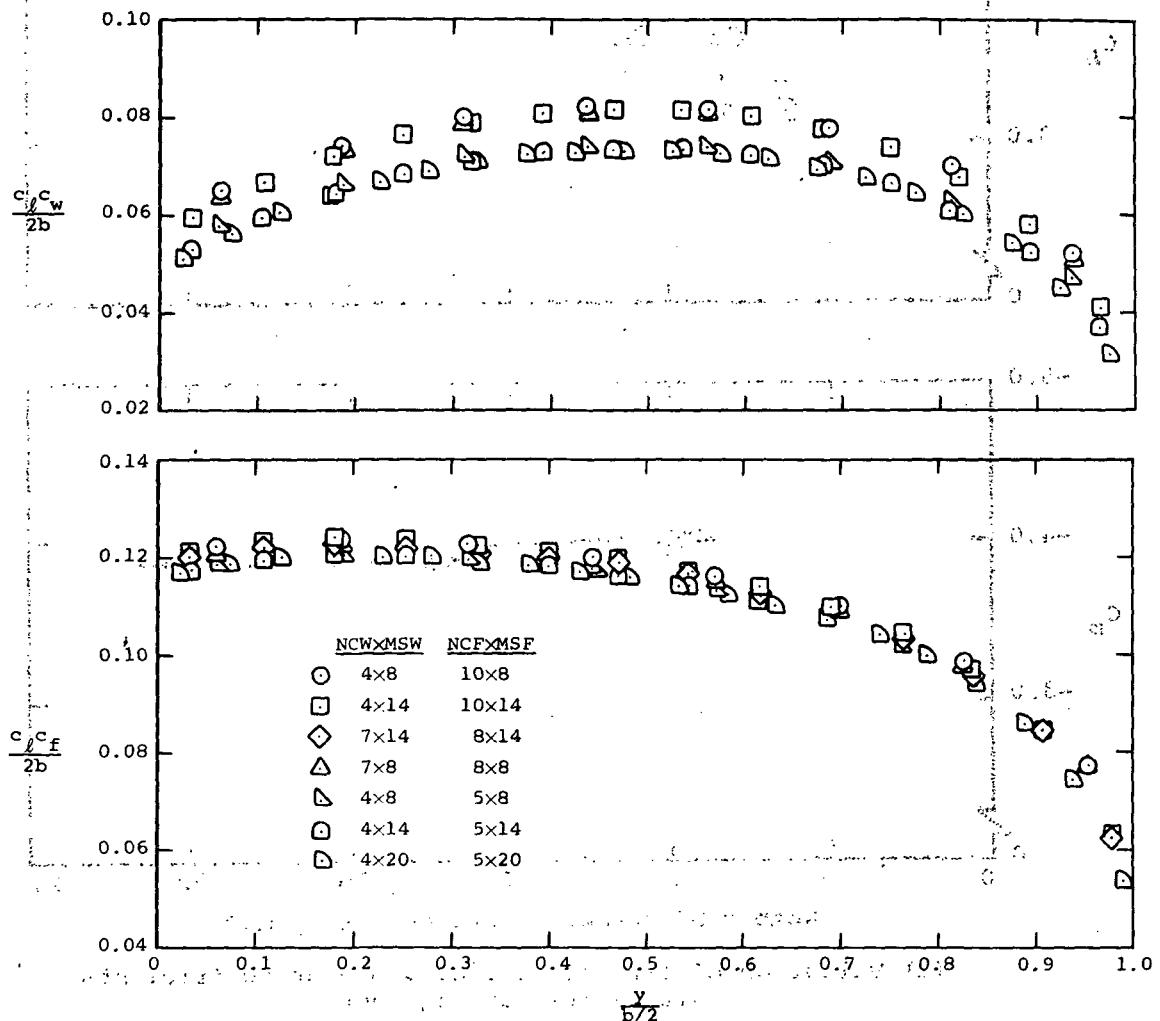

(b) Variation of span load distribution with vortex arrangement.

Figure A-2.- Concluded.



APPENDIX A

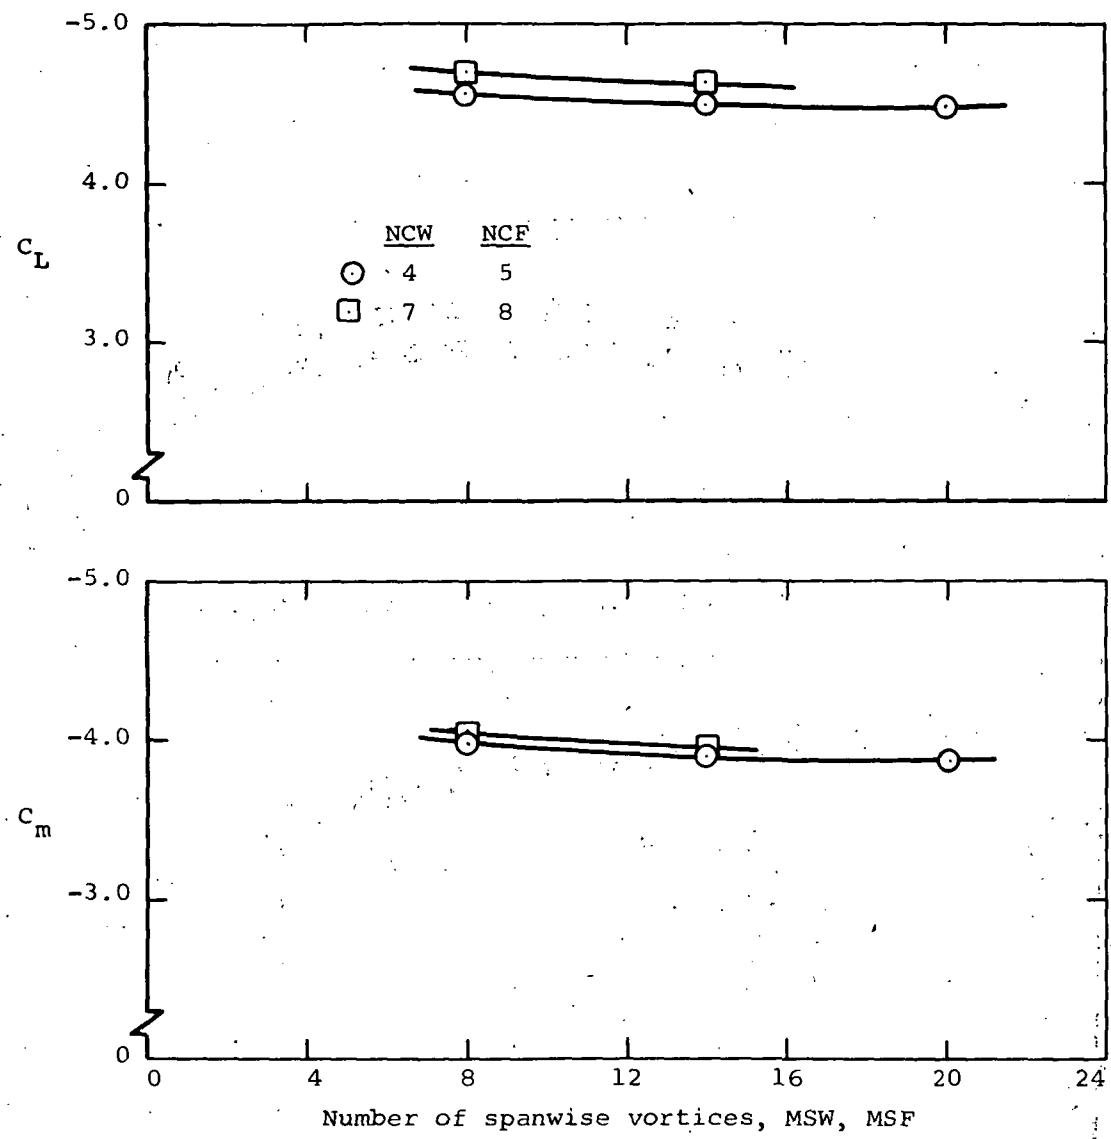

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.


Figure A-3.- Predicted load characteristics of a  $30^\circ$  swept, aspect ratio 5 untapered wing with a large triple slotted flap at  $\alpha = 10^\circ$ .

APPENDIX A

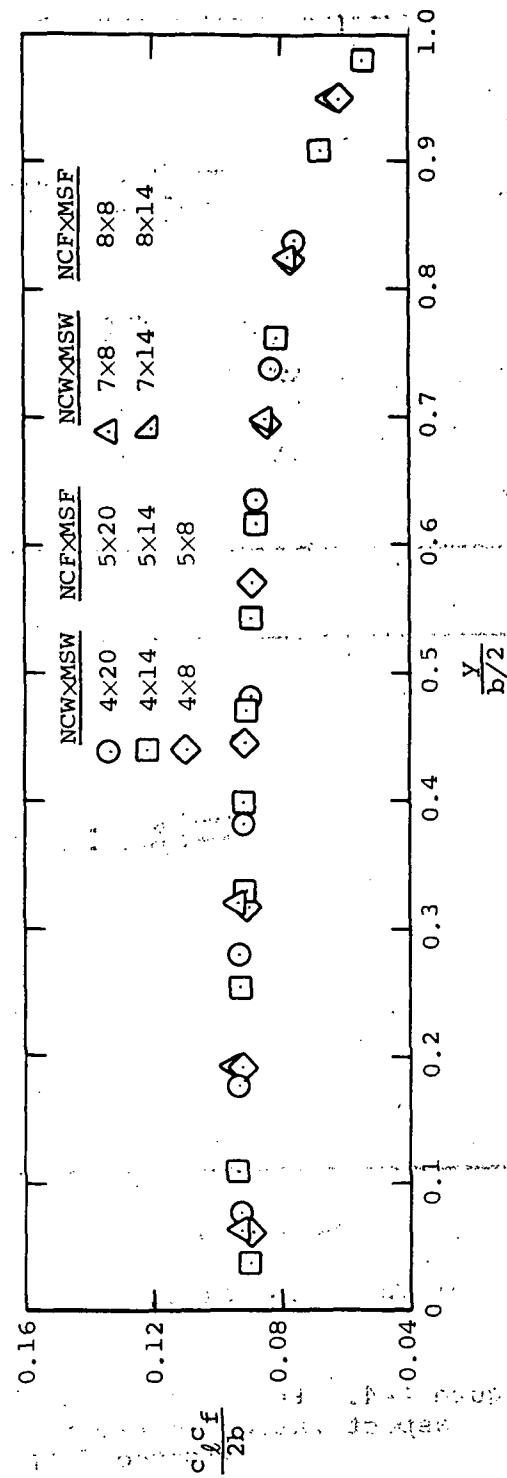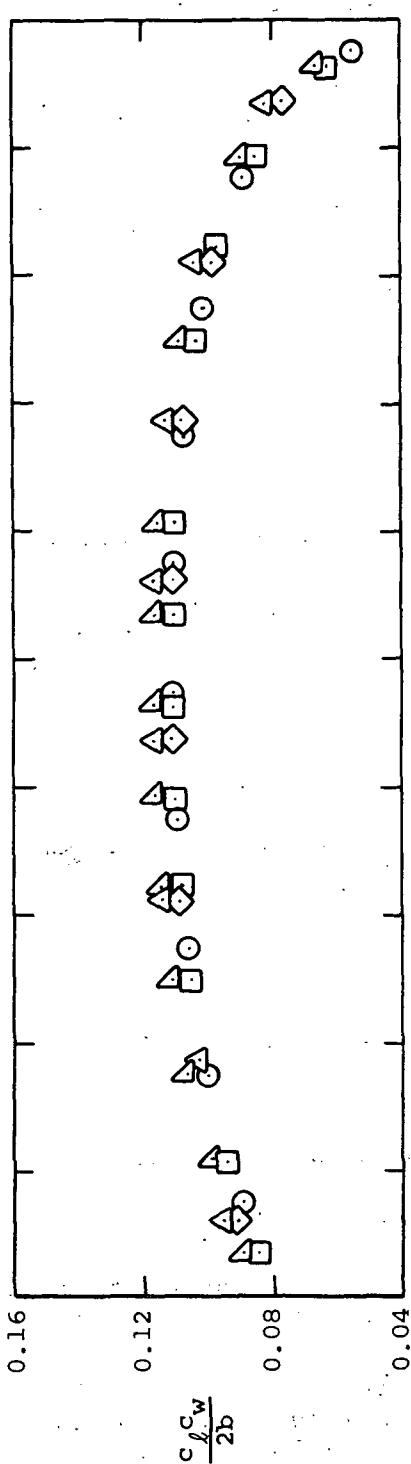

(b) Variation of span load distribution with vortex arrangement.


Figure A-3.— Concluded.

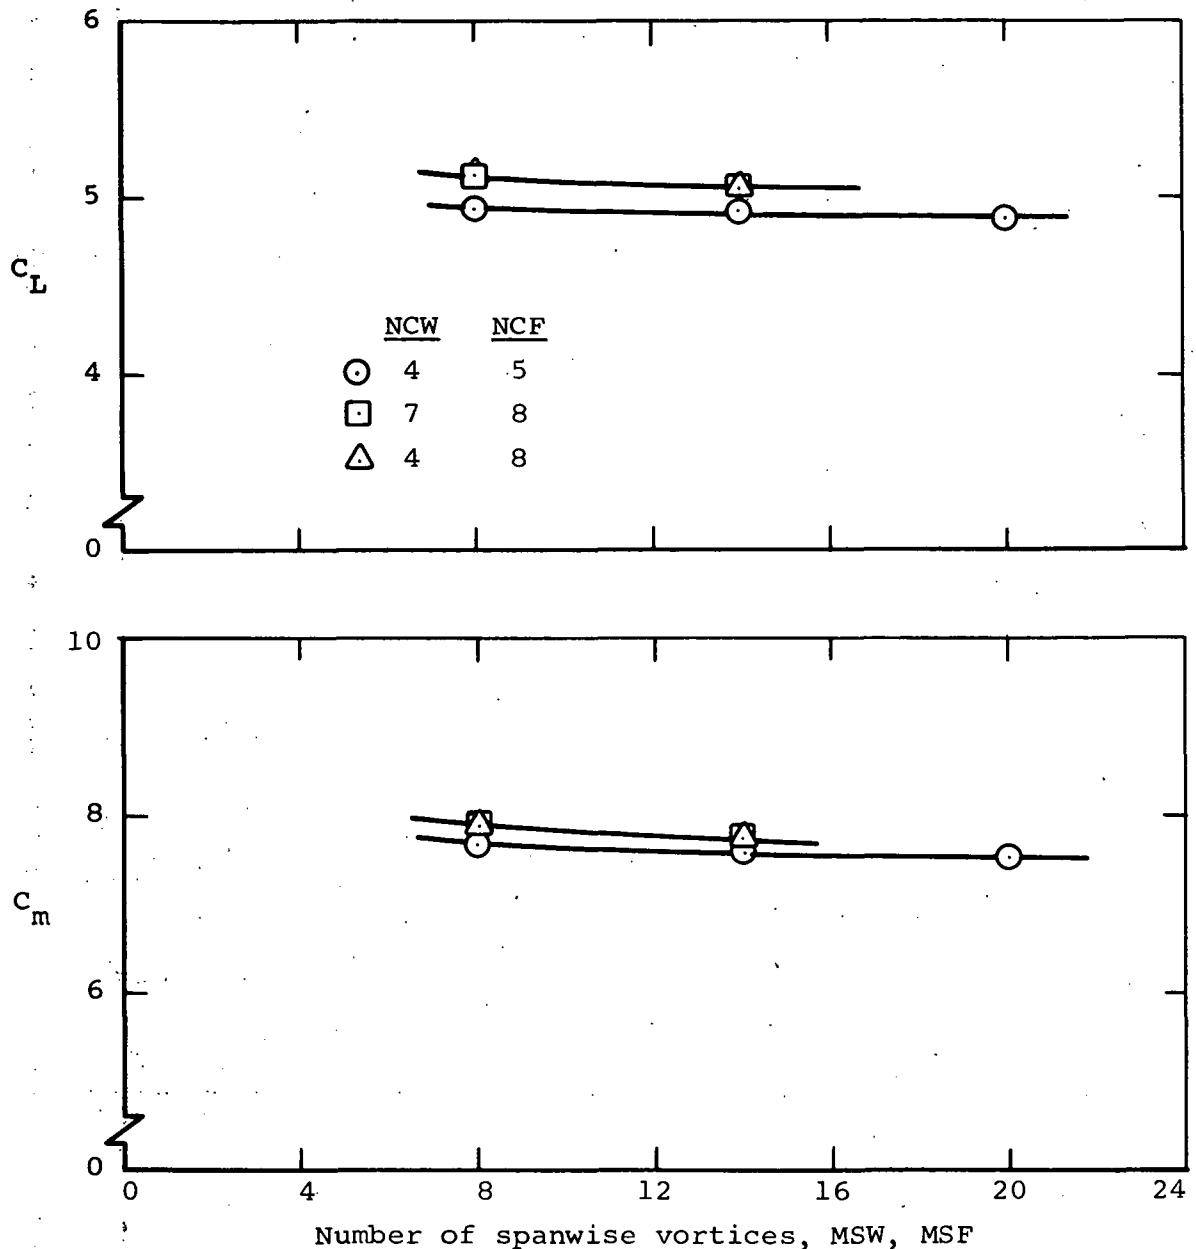

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.

Figure A-4.- Predicted load characteristics of a  $30^\circ$  swept, aspect ratio 7 untapered wing with a large triple slotted flap at  $\alpha = 10^\circ$ .

**APPENDIX A**

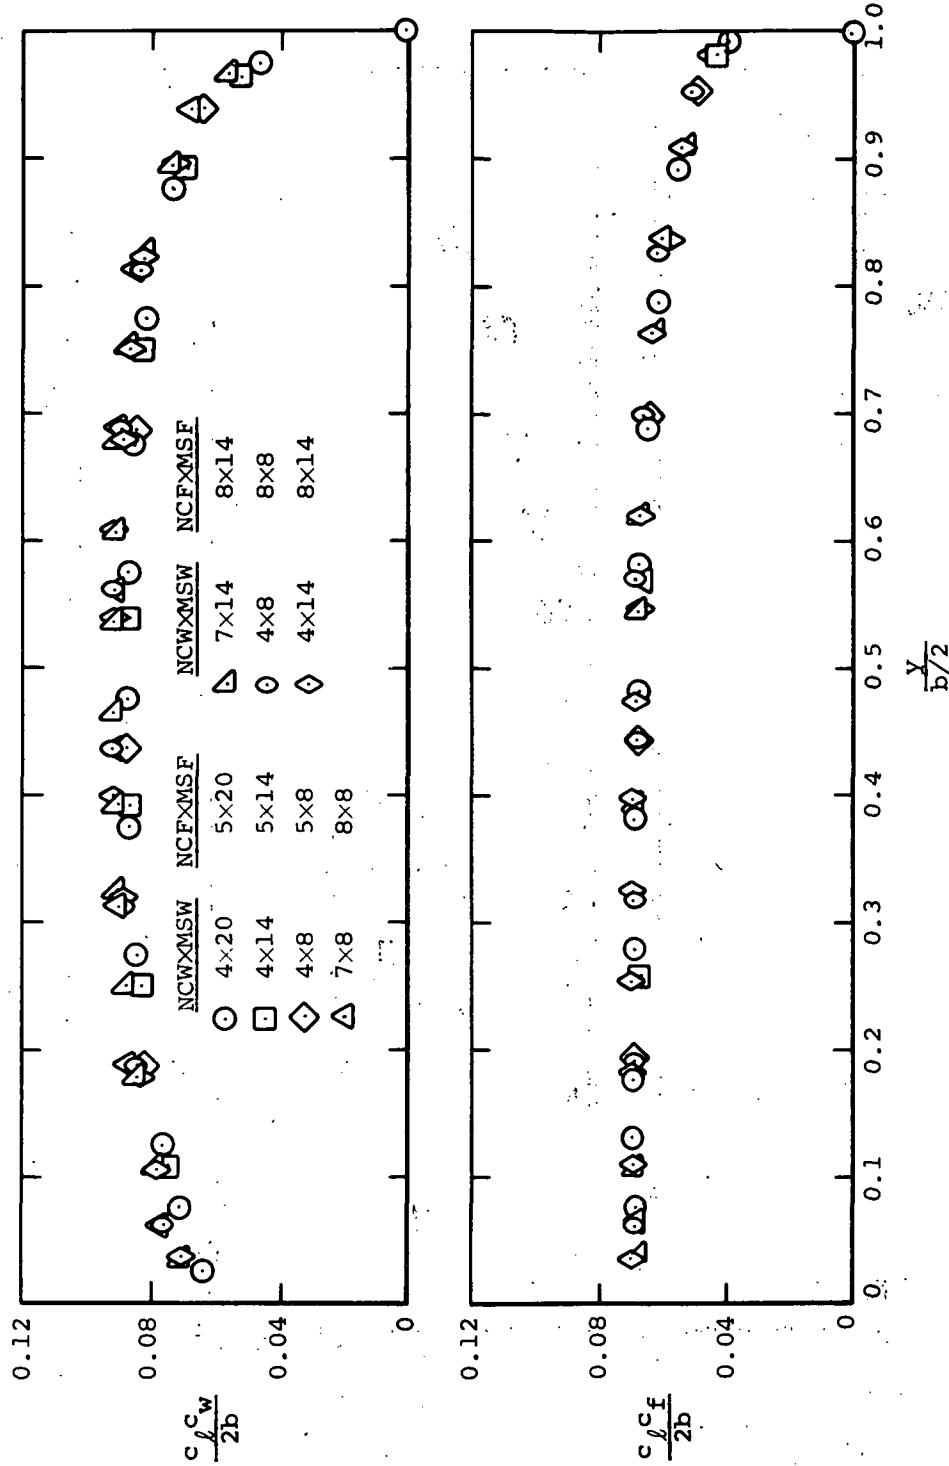

(b) Variation of span load distribution with vortex arrangement.

Figure A-4.— Concluded.

APPENDIX A


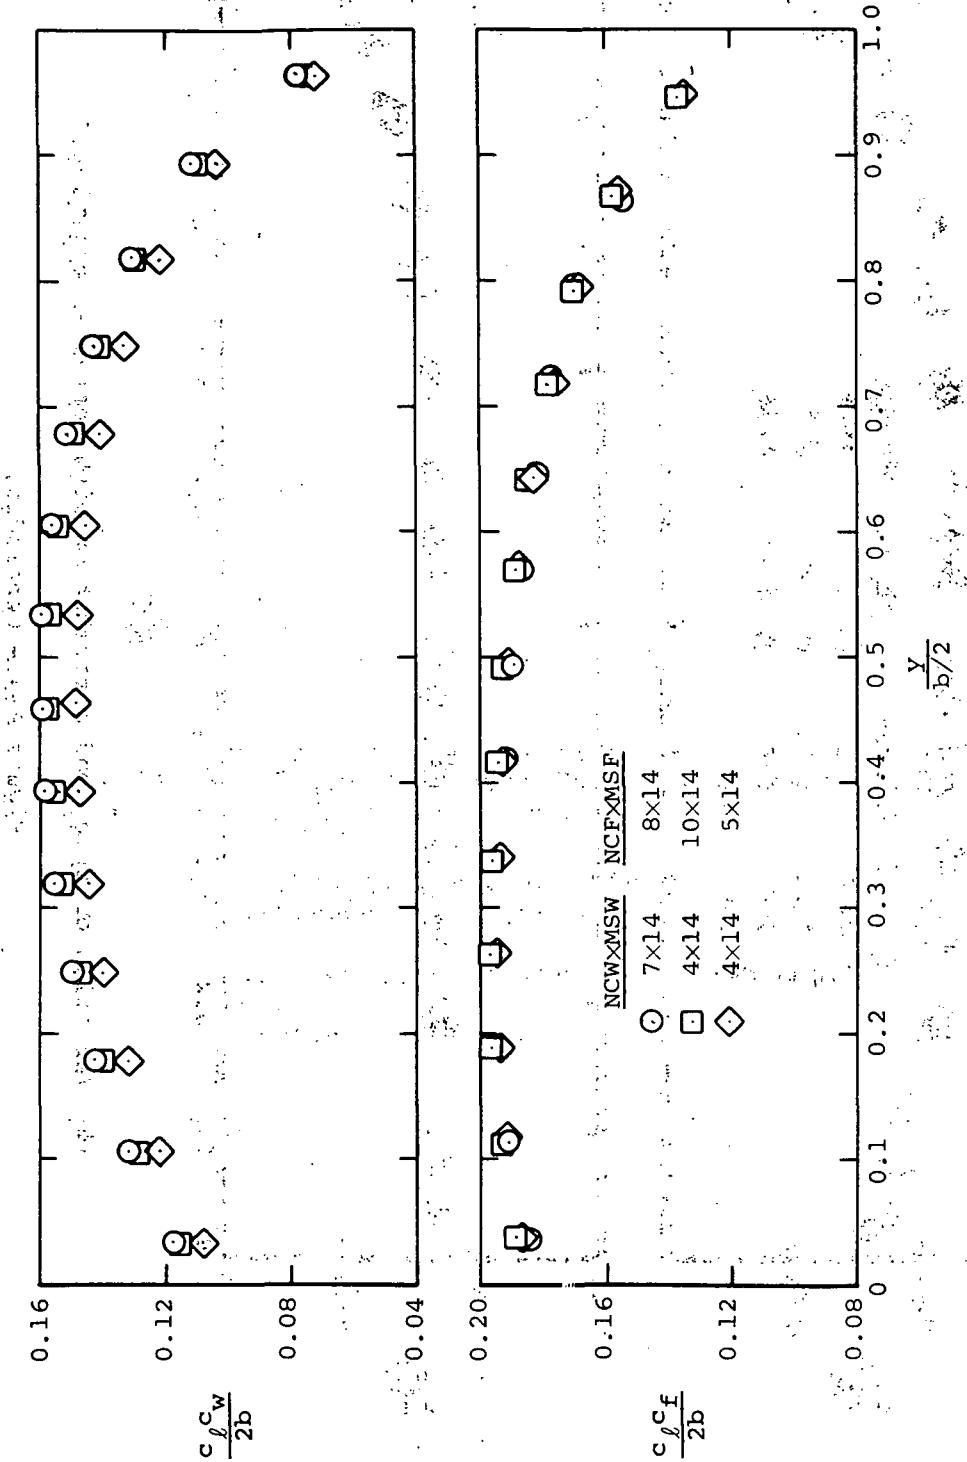



Figure A-5.— Predicted variation of span load distribution with chordwise vortex arrangement for a 300° swept, aspect ratio 3.2 untapered wing with highly deflected triple slotted flap at  $\alpha = 0$ .

APPENDIX A

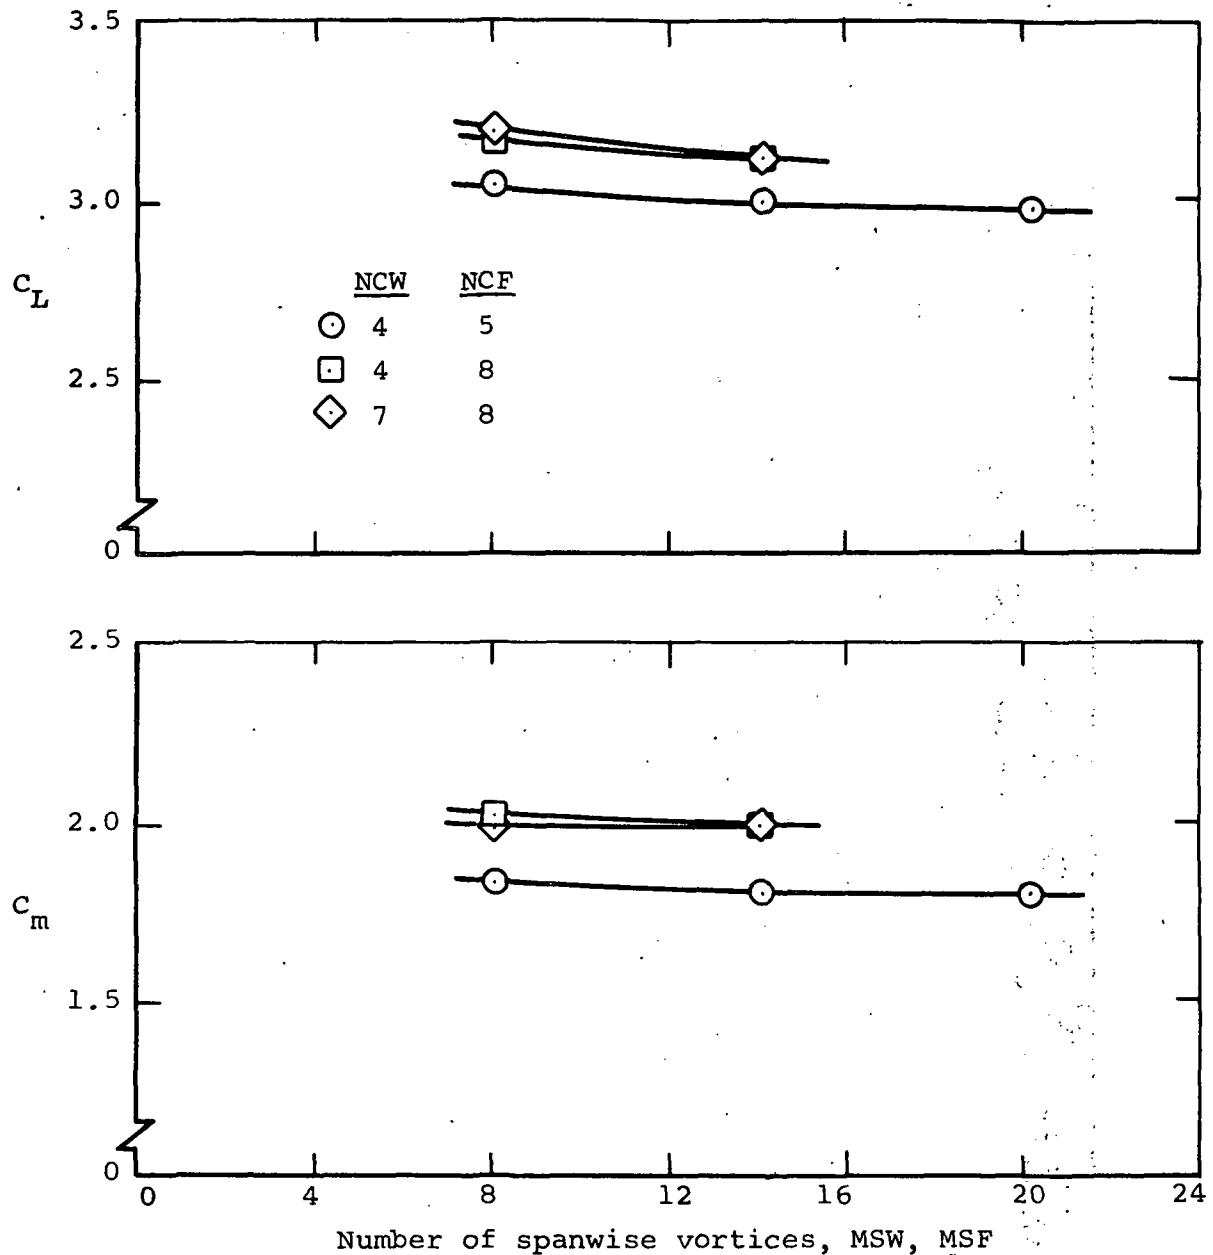

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.


Figure A-6.- Predicted load characteristics of an unswept, aspect ratio 2.8 untapered wing with a large, triple slotted flap at  $\alpha = 0^\circ$ .

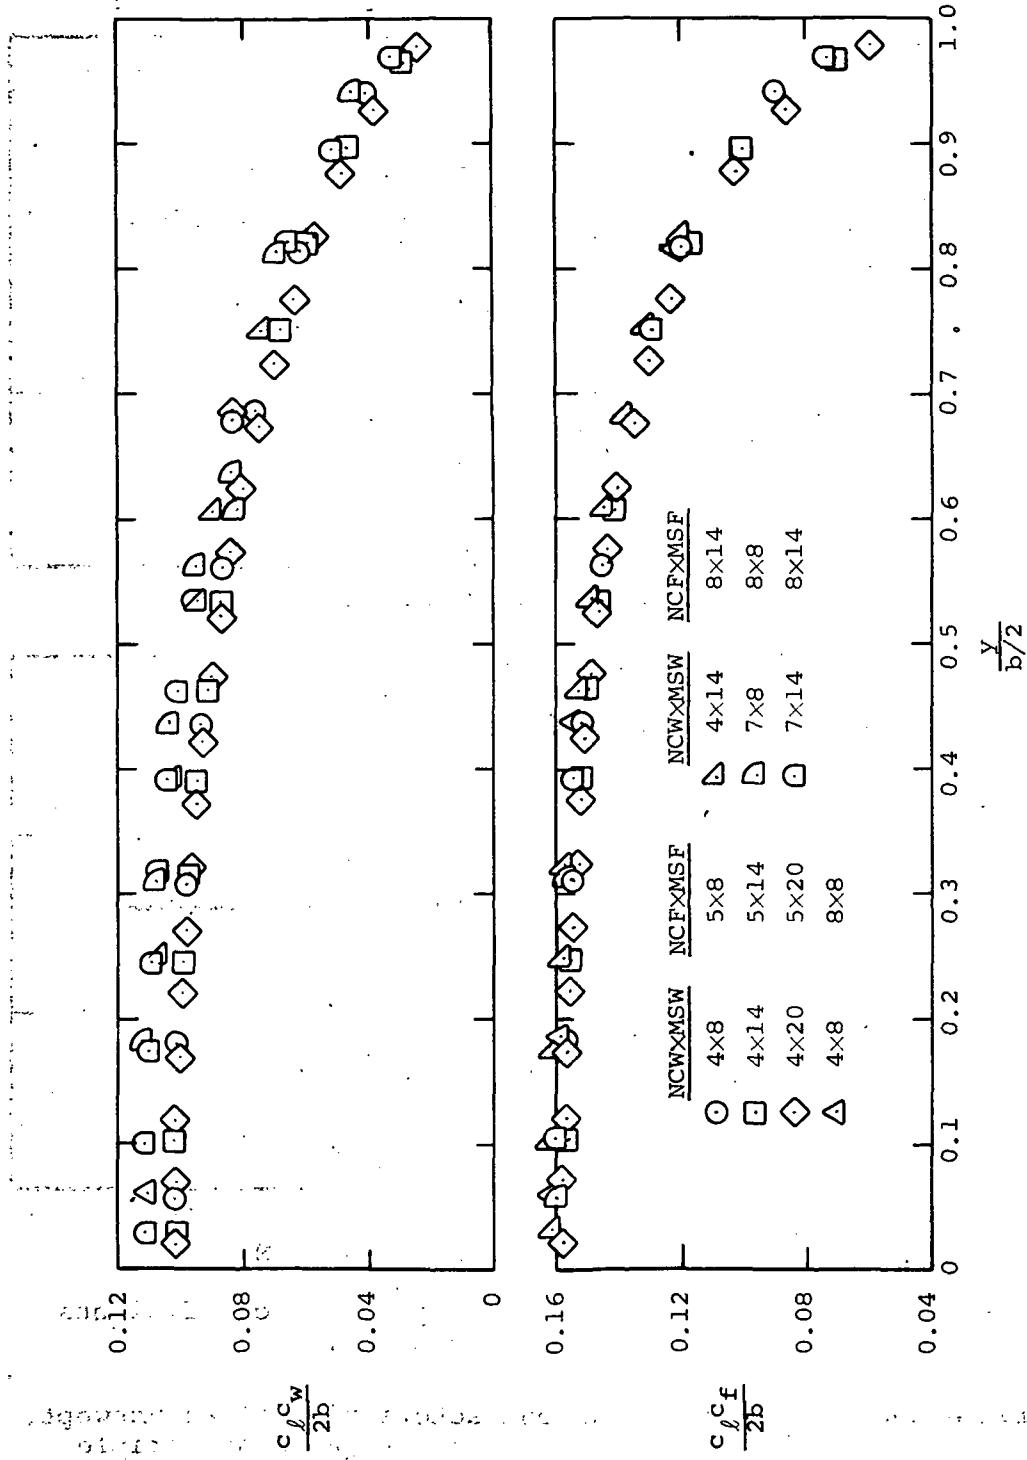

(b) Variation of span load distribution with vortex arrangement.

Figure A-6,- Concluded.


APPENDIX A

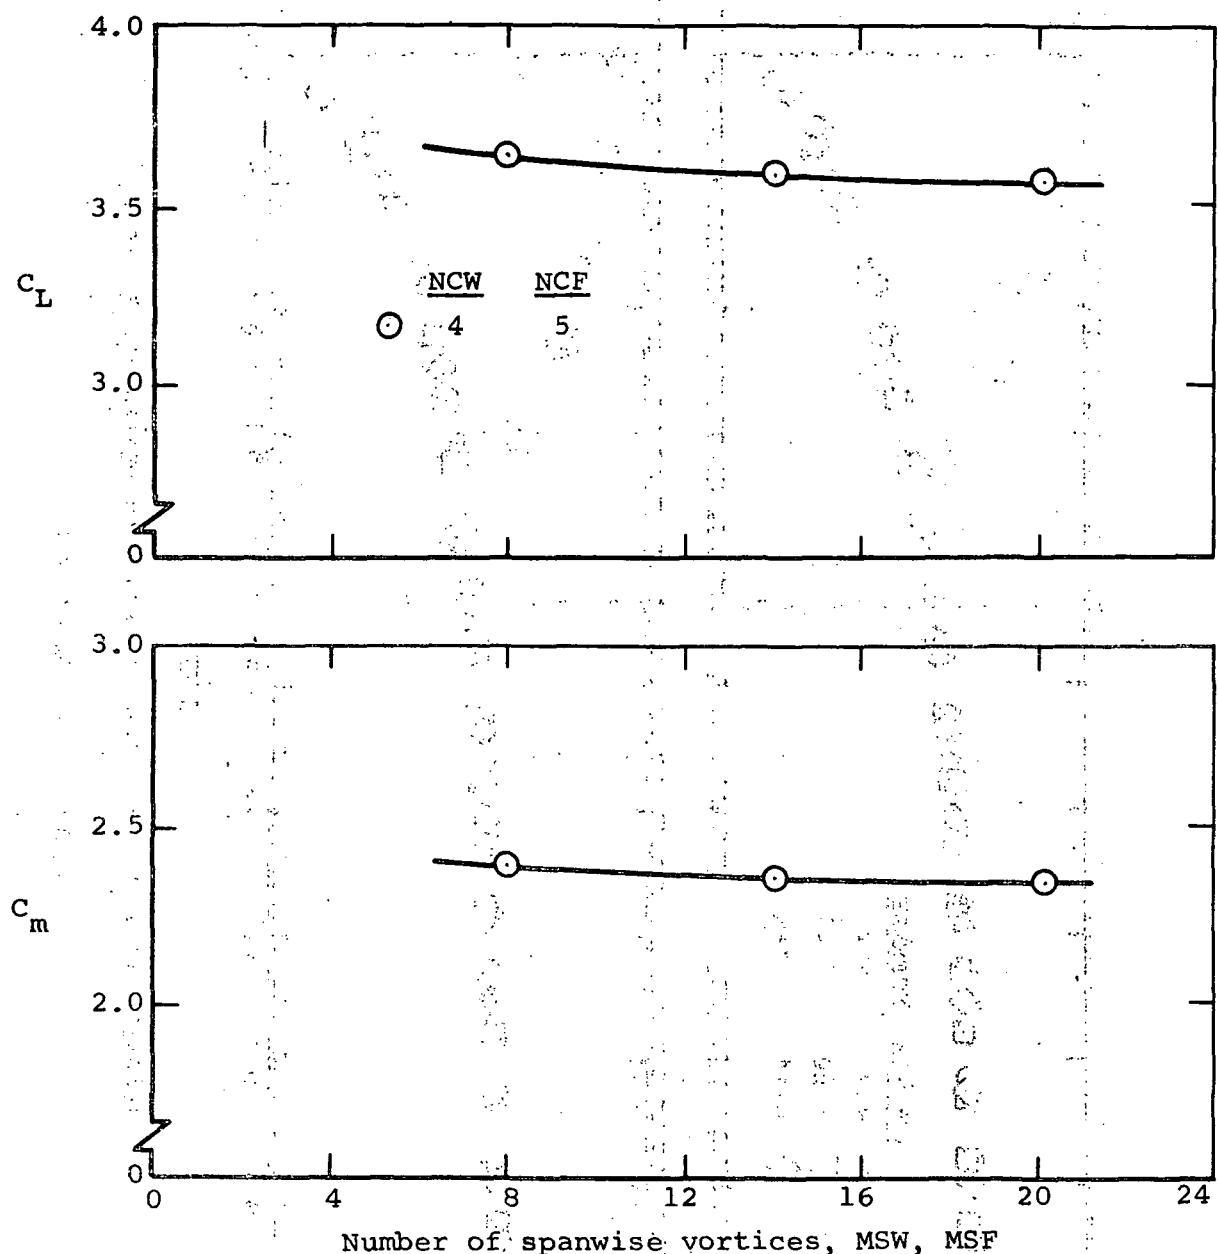

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.

Figure A-7.- Predicted load characteristics of an unswept, aspect ratio 4.4 untapered wing with a large, triple slotted flap at  $\alpha = 0^\circ$ .


APPENDIX A

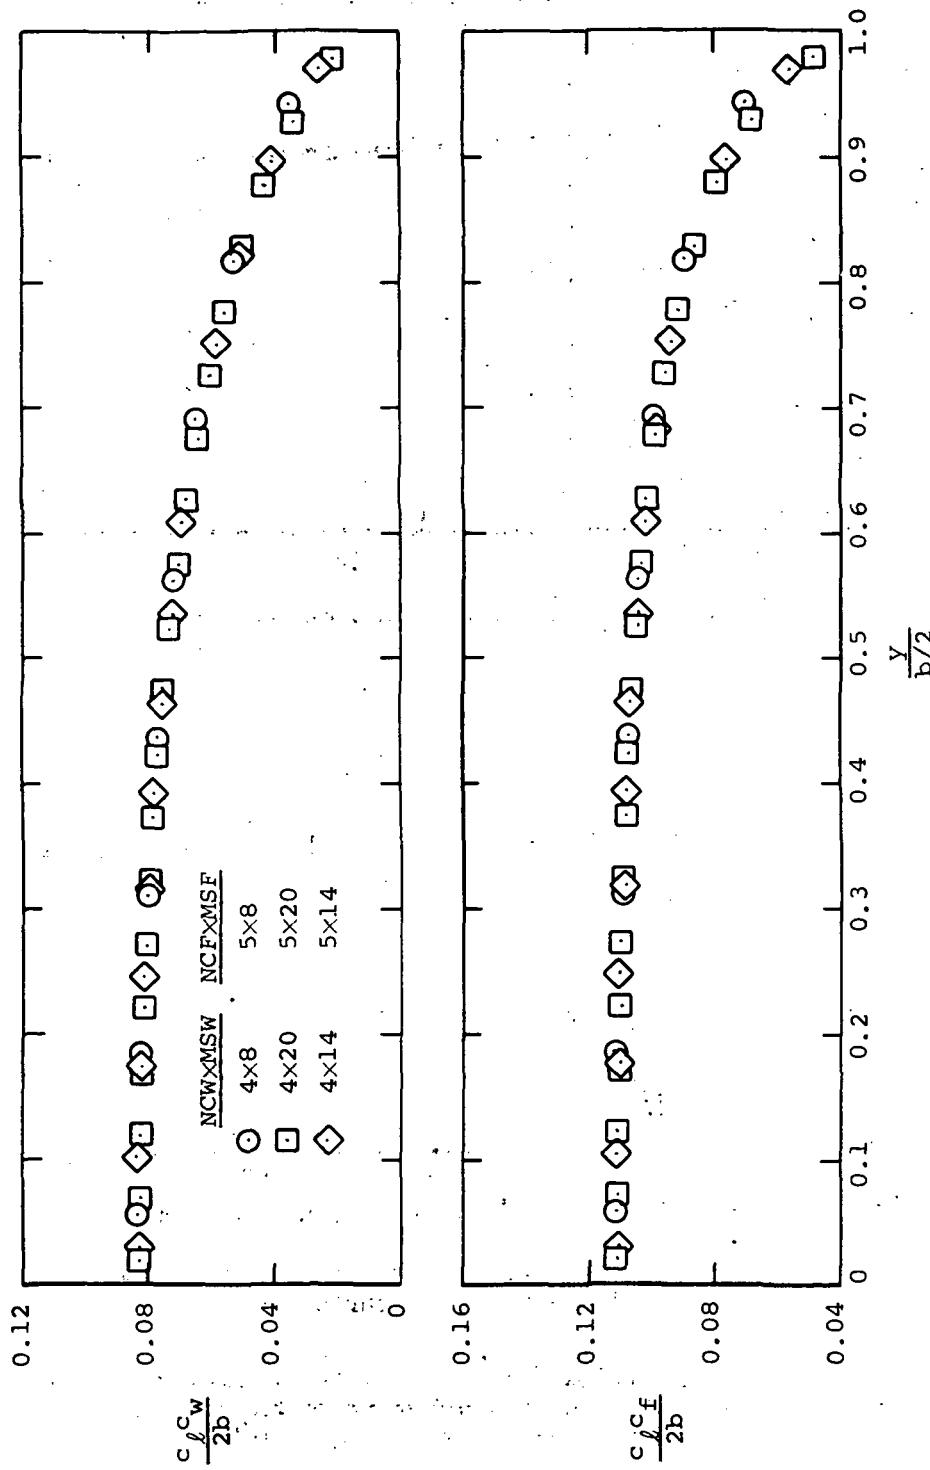

(b) Variation of span load distribution with vortex arrangement.


Figure A-7.- Concluded.

APPENDIX A

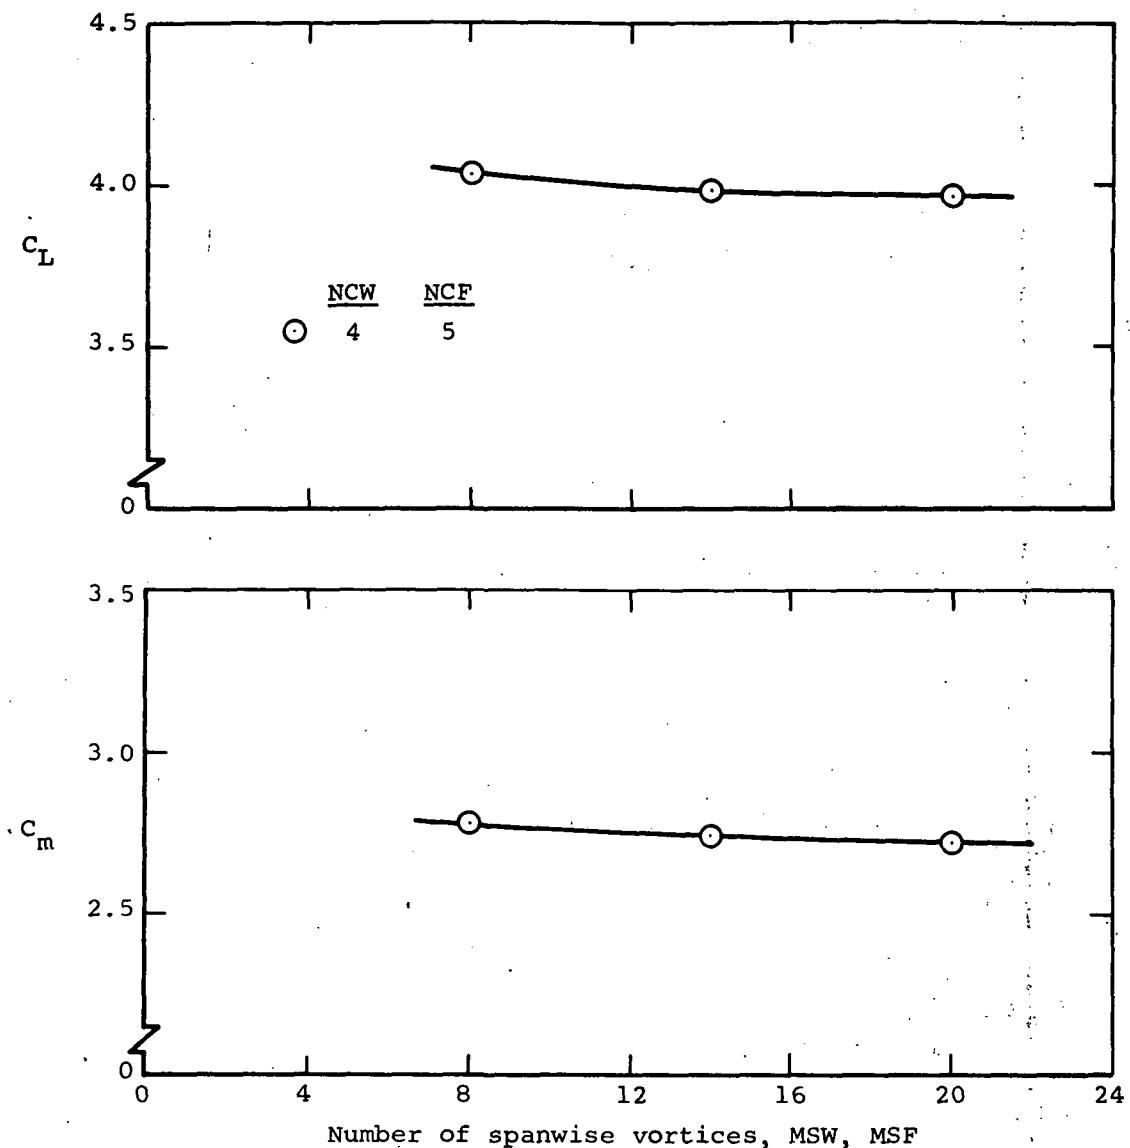

(a) Variation of lift and pitching-moment coefficients with vortex arrangement.


Figure A-8.- Predicted load characteristics of an unswept, aspect ratio 6.1 untapered wing with a large, triple slotted flap at  $\alpha = 0^\circ$ .

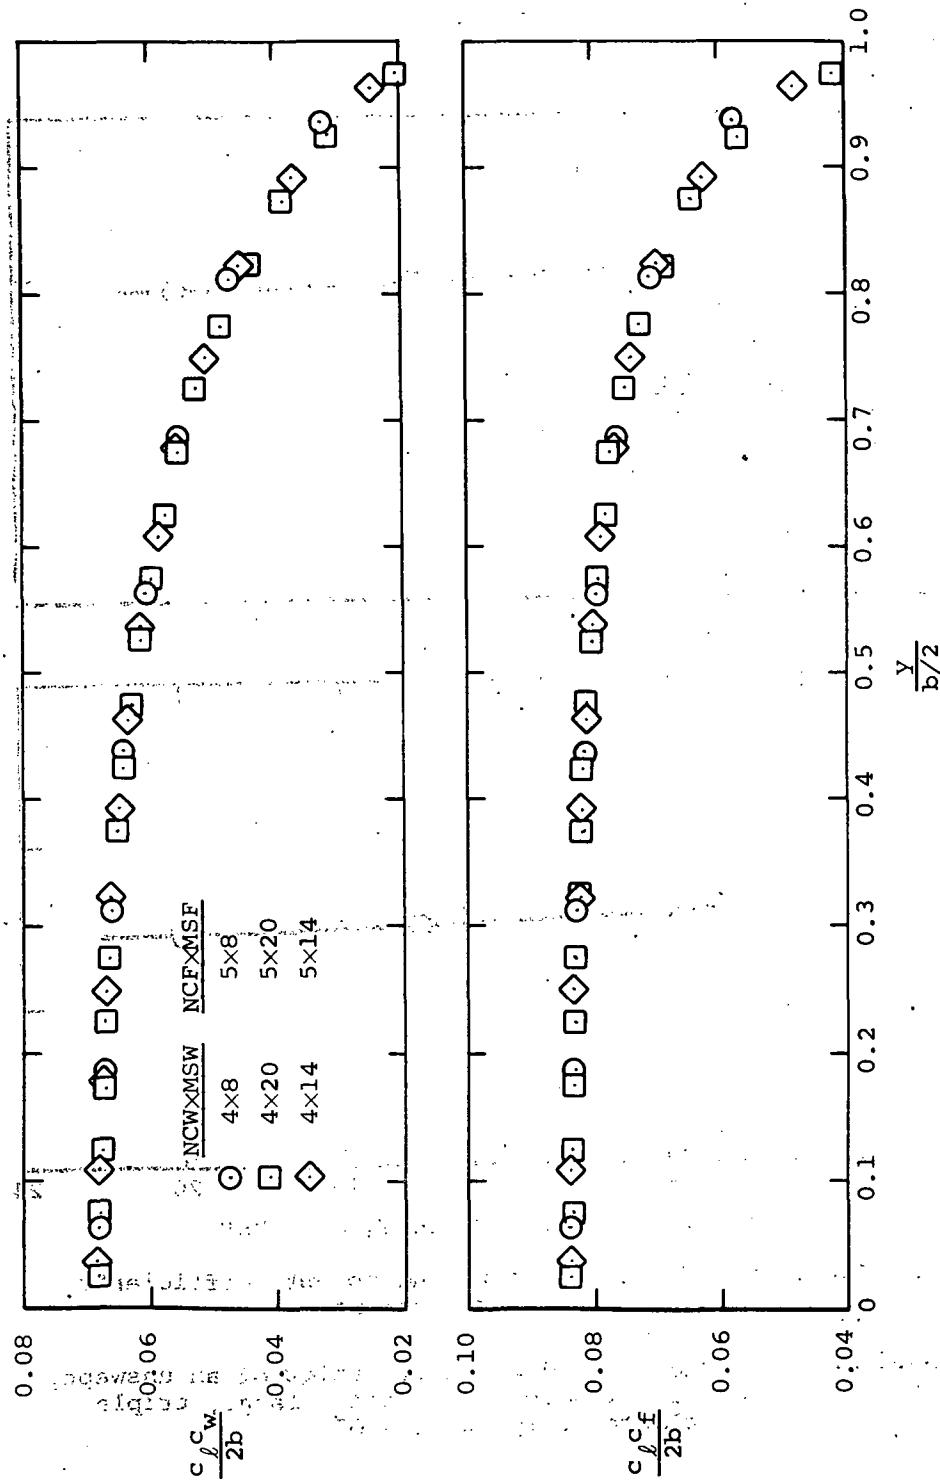

(b) Variation of span load distribution with vortex arrangement.

Figure A-8.— Concluded.

APPENDIX A

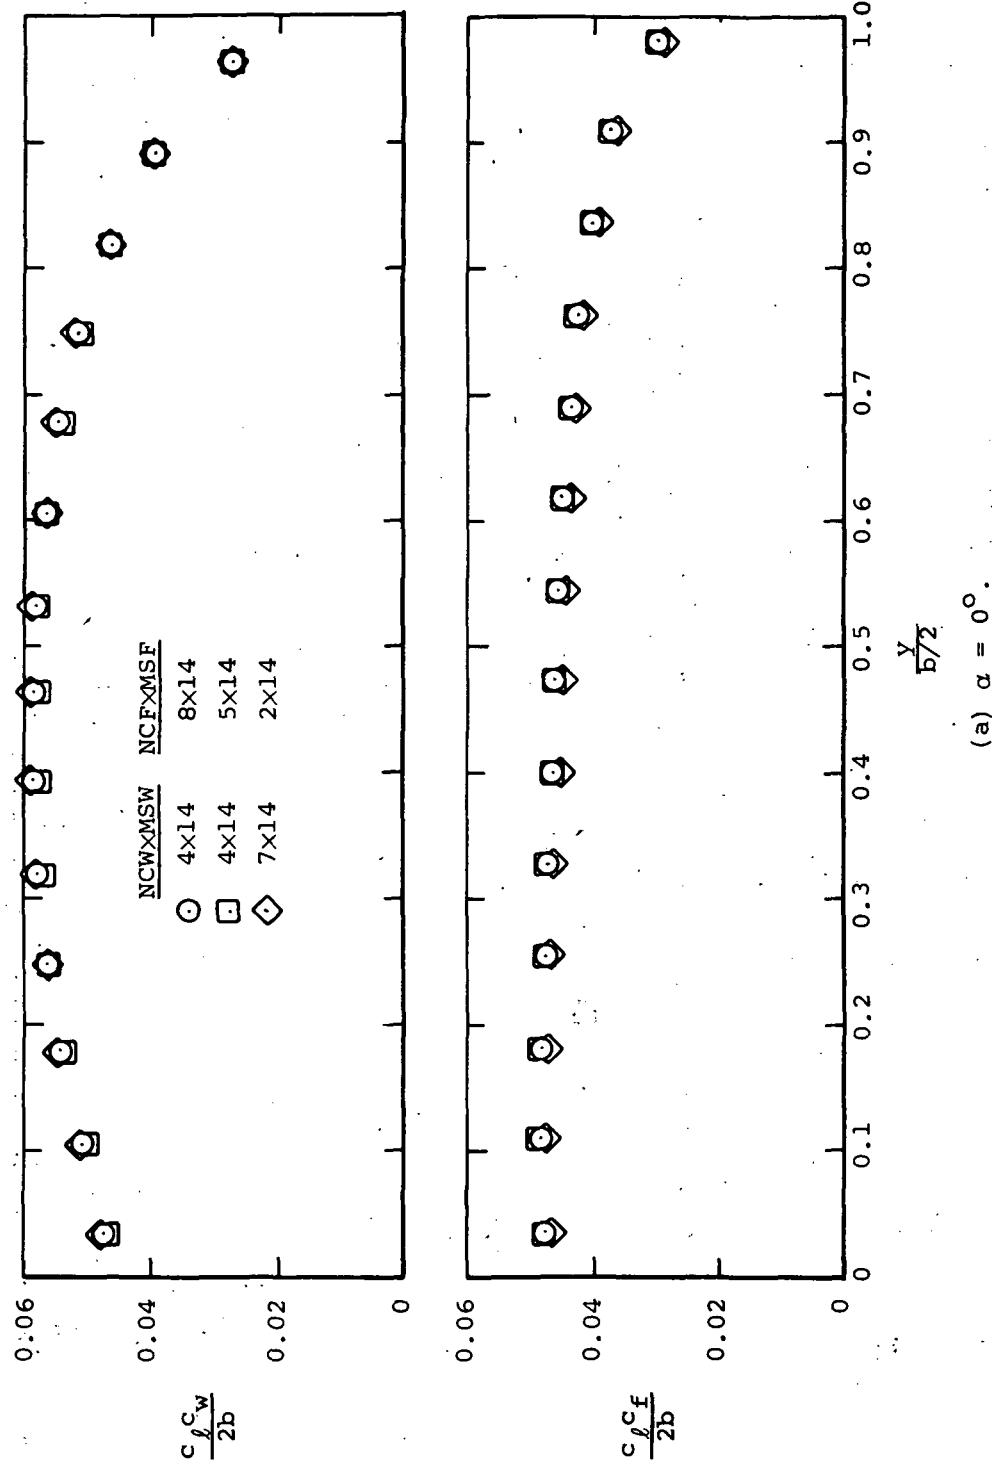

(a)  $\alpha = 0^\circ$ .

Figure A-9. - Predicted variation of span load distribution with chordwise vortex arrangement for a 30° swept, aspect ratio 3.2 untapered wing with a small single flap.

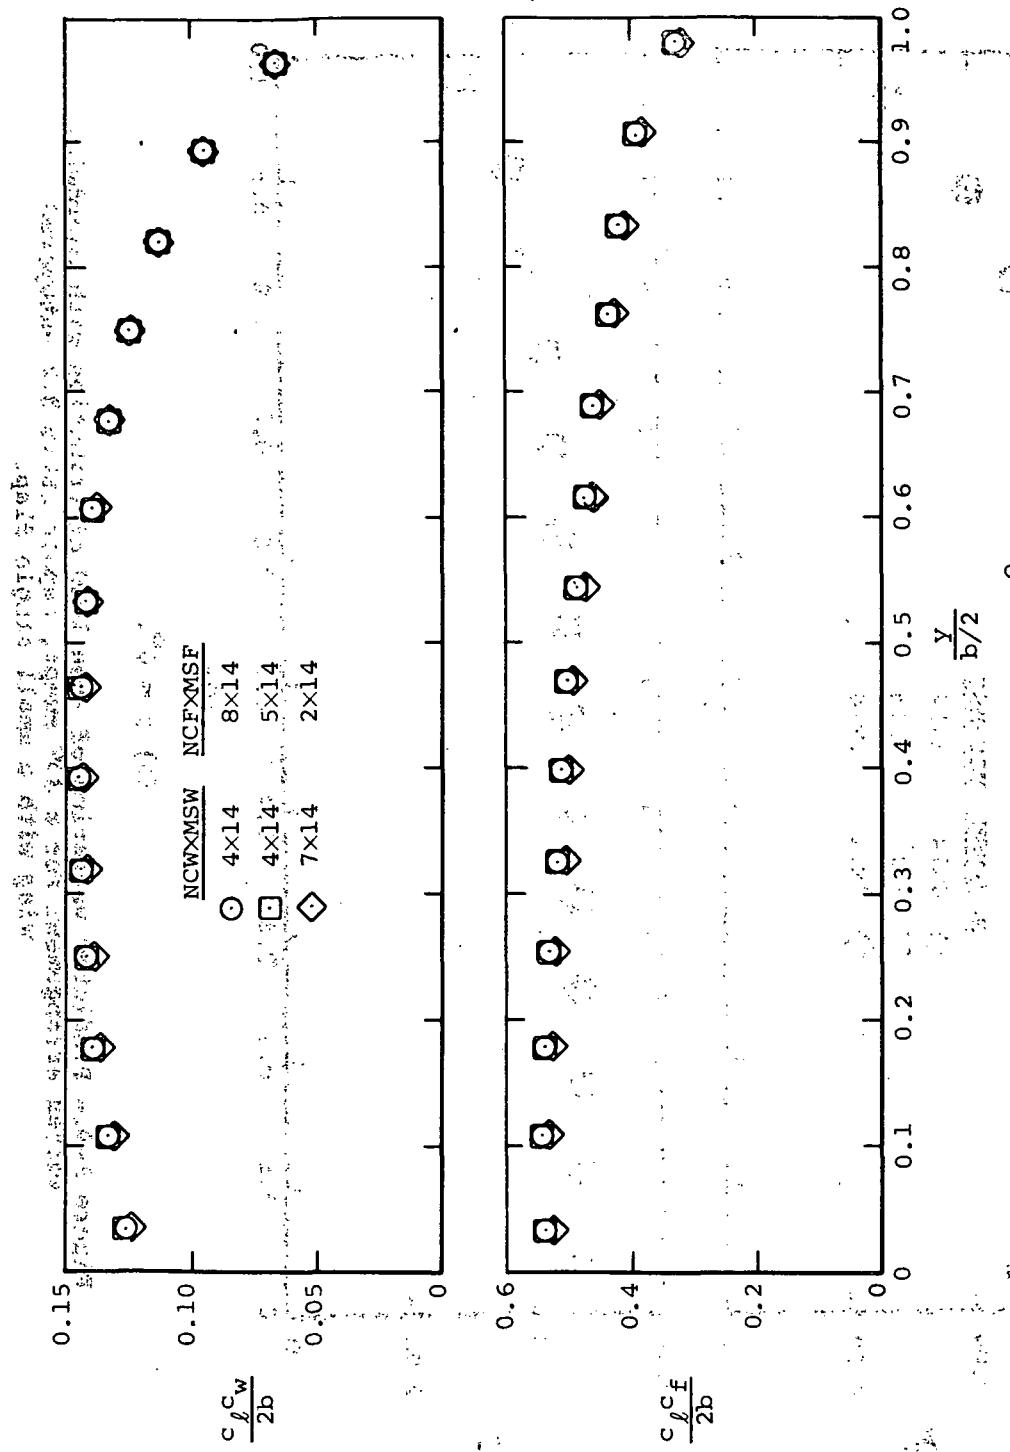


Figure A-9.—Concluded.

APPENDIX A


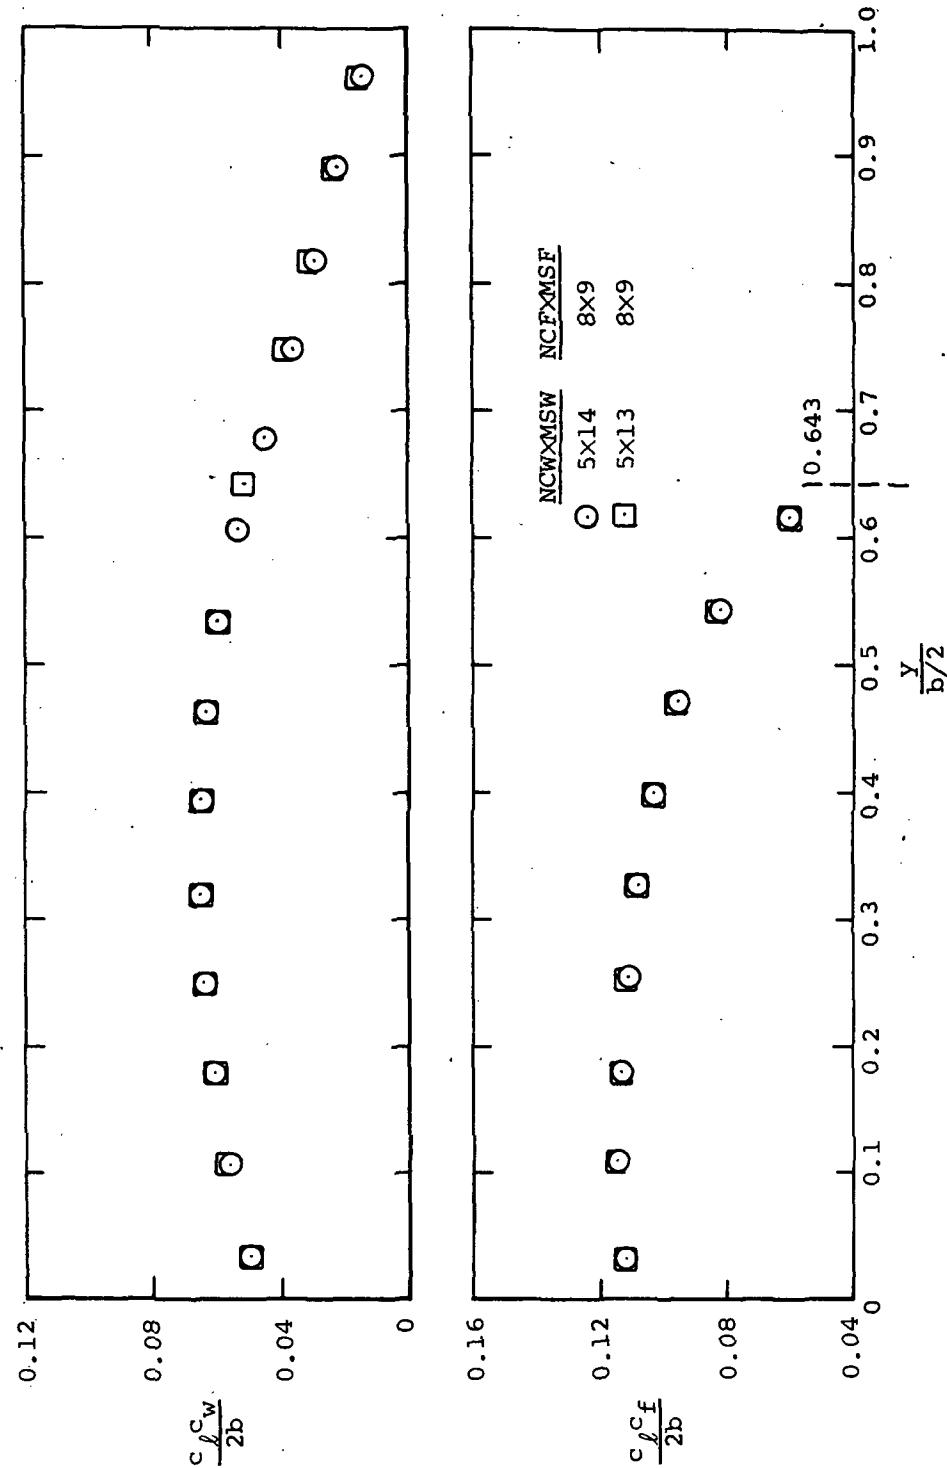


Figure A-10.- Predicted variation of span load distribution with spanwise vortex arrangement for a 30° swept, low-aspect-ratio untapered wing with a part-span flap at  $\alpha = 0^\circ$ .

APPENDIX A

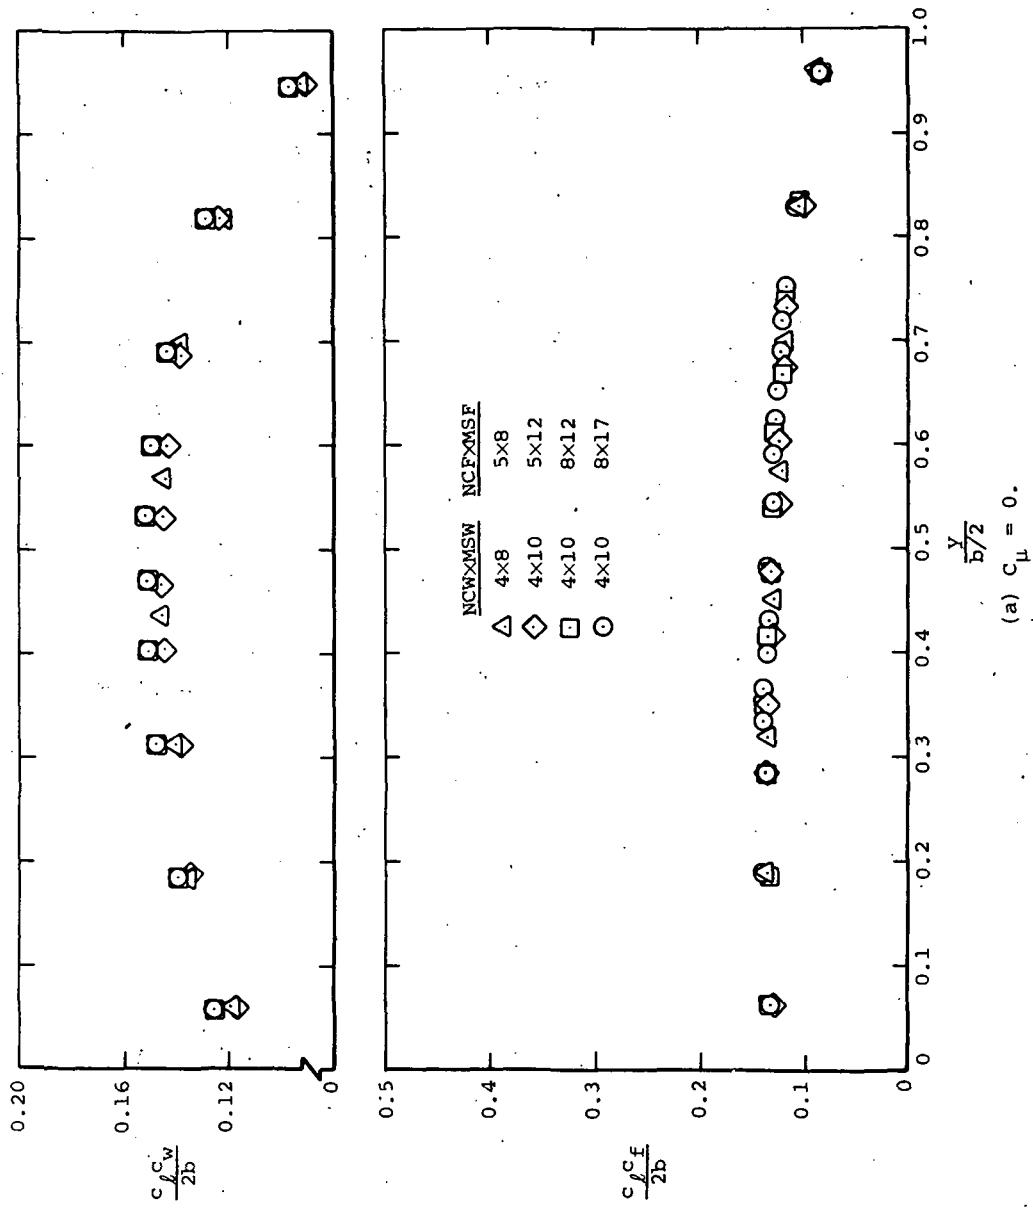

(a)  $C_{L\perp} = 0$ .

Figure A-11.—Predicted effect of vortex arrangement on spanwise load distribution for a 30° swept, aspect ratio 3.2 untapered wing with large triple slotted flap and engine at mid-semispan for  $\alpha = 10^\circ$ .

**APPENDIX A**


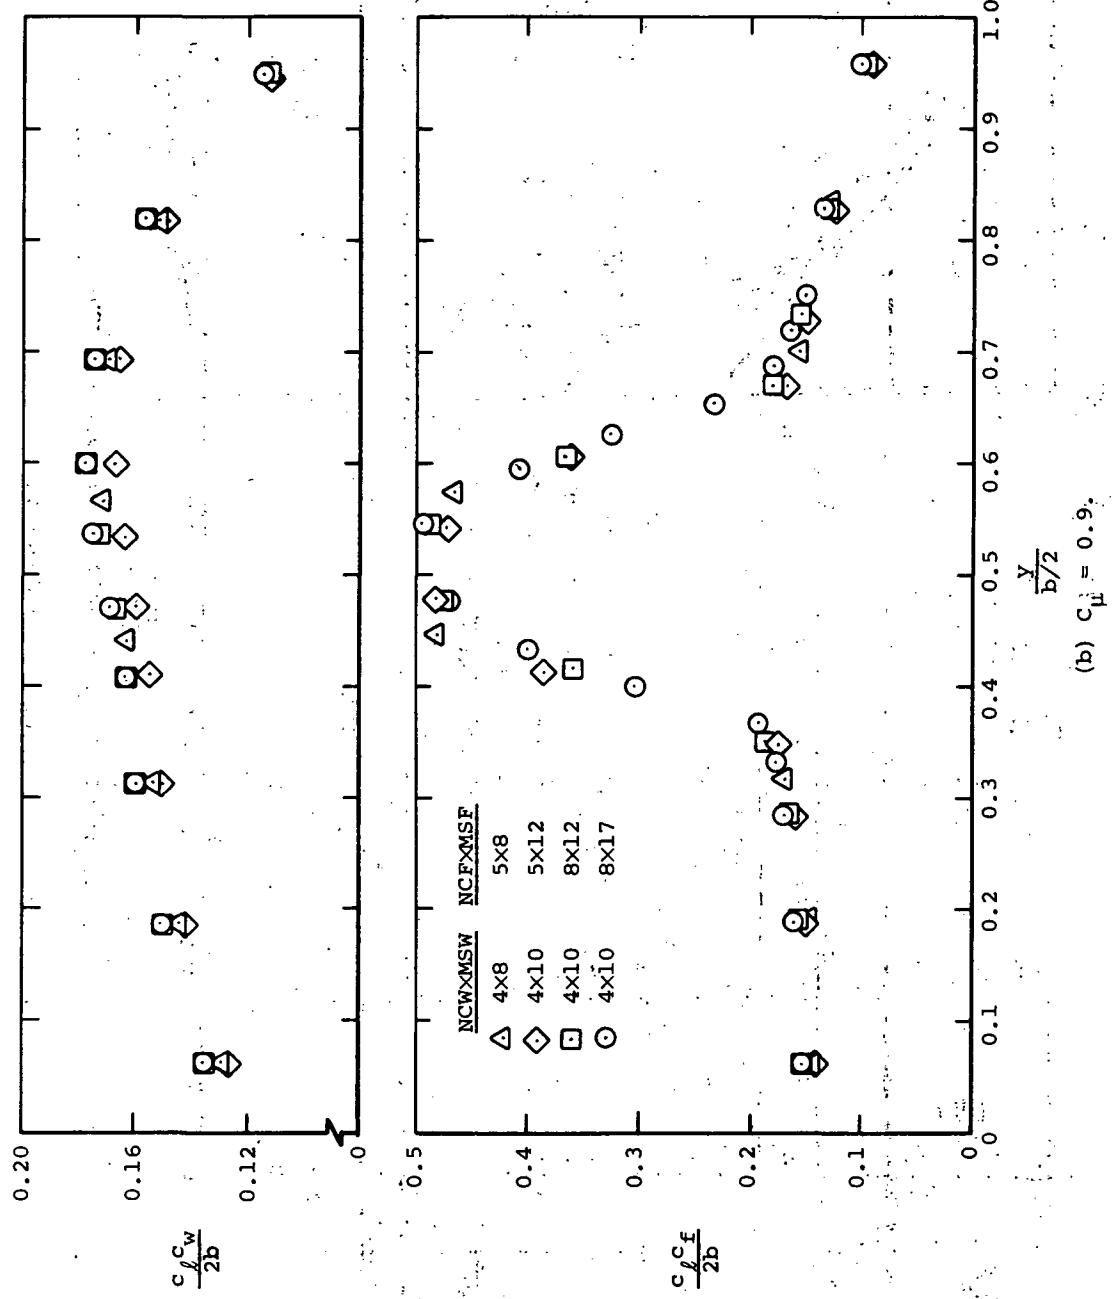


Figure A-11.—Continued.  
(b)  $C_{\mu} = 0.9$ .

APPENDIX A

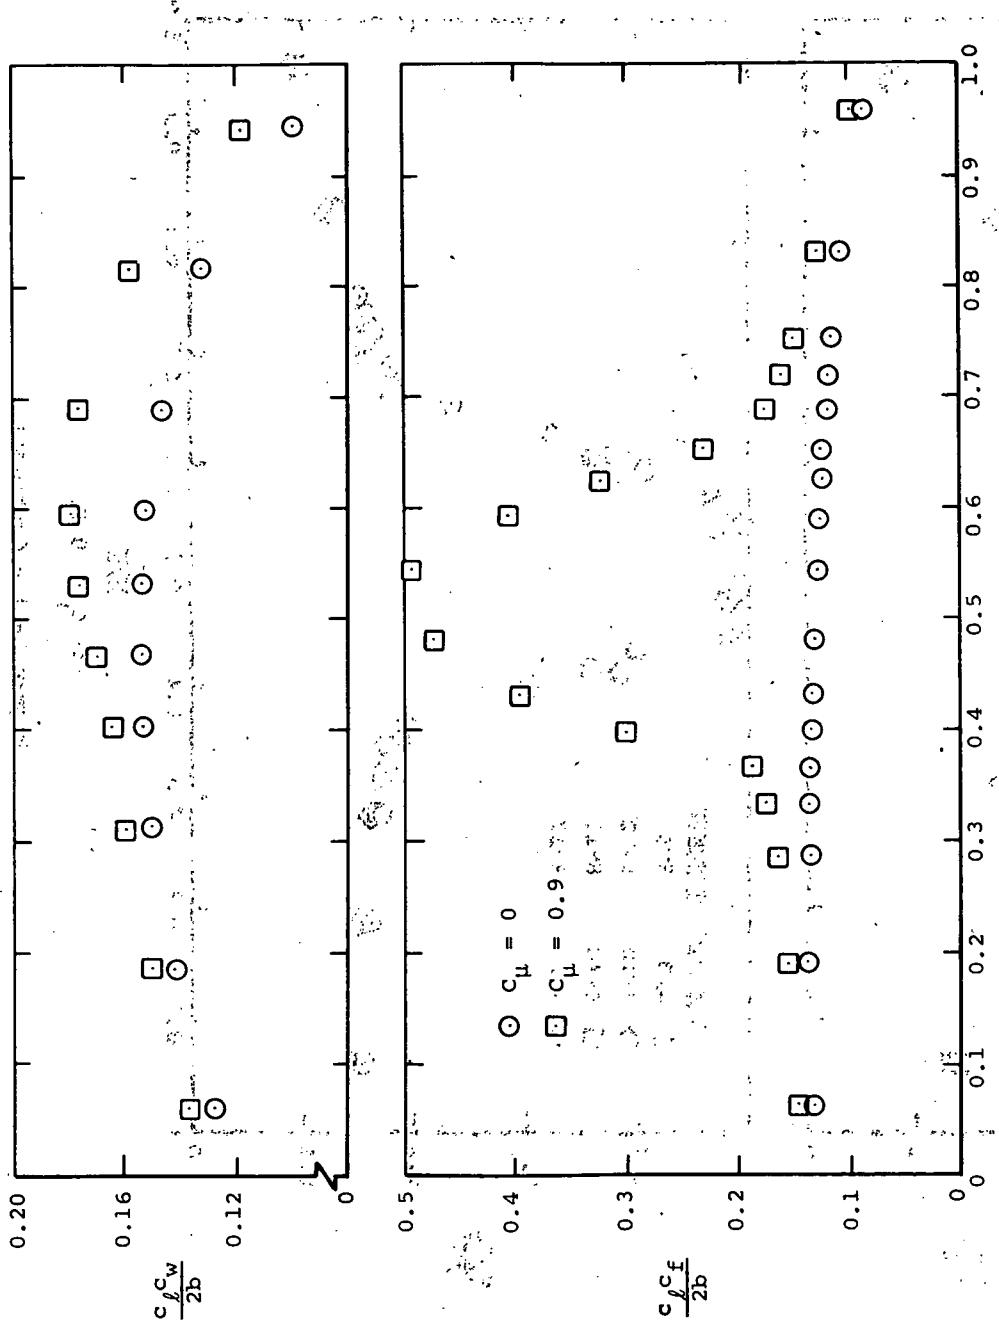

(c) Effect of  $C_L$  for 4x10, 8x17 vortex layout.

Figure A-11-2 Concluded.

## REFERENCES

1. Campbell, J. P. and Johnson, J. L.: Wind-Tunnel Investigation of an External-Flow Jet-Augmented Slotted Flap Suitable for Application to Airplanes with Pod-Mounted Engines. NACA TN 3898, Dec. 1956.
2. Parlett, L. P., Freeman, D. C., and Smith, C. C.: Wind-Tunnel Investigation of a Jet Transport Airplane Configuration with High Thrust-Weight Ratio and an External-Flow Jet Flap. NASA TN D-6058, Nov. 1970.
3. Parlett, L. P., Greer, H. D., and Henderson, R. L.: Wind-Tunnel Investigation of an External-Flow Jet-Flap Transport Configuration Having Full-Span Triple-Slotted Flaps. NASA TN D-6391, Aug. 1971.
4. Smith, C. C.: Effect of Engine Position and High-Lift Devices on the Aerodynamic Characteristics of an External-Flow Jet-Flap STOL Model. NASA TN D-6222, March 1971.
5. Falarski, M. D. and Aiken, T. N.: Large-Scale Wind-Tunnel Investigation of a Ducted-Fan-Deflected-Slipstream Model with an Auxiliary Wing. NASA TM X-62079, July 1971.
6. Lopez, M. L. and Shen, C. C.: Recent Developments in Jet Flap Theory and Its Application to STOL Aerodynamic Analysis. AIAA Paper 71-578, June 1971.
7. Abramovich, G. N.: Theory of Turbulent Jets. MIT Press, 1963.
8. Mendenhall, M. R., Dillenius, M. F. E., and Spangler, S. B.: Theoretical Investigation of the Aerodynamic Interference Induced by Cruise and Lift Fans on Transport-Type Aircraft. NASA CR-1730, Aug. 1971.
9. Dillenius, M. F. E., Mendenhall, M. R., and Spangler, S. B.: Computer Programs for Calculation of Aerodynamic Interference Between Lifting Surfaces and Lift and Cruise Fans. NASA CR-114332, 1971.
10. Margason, R. J., Lamar, J. E.: Vortex-Lattice Fortran Program for Estimating Subsonic Aerodynamic Characteristics of Complex Planforms. NASA TN D-6142, Feb. 1971.
11. Glauert, H.: The Elements of Airfoil and Airscrew Theory. MacMillan Press, 1943. Chapter 12, pp. 156-160.
12. Küchemann, D. and Weber, J.: Aerodynamics of Propulsion, McGraw-Hill Book Co., Inc., 1953.
13. Carter, A. W.: Pressure Distributions on a Wing Having NACA 4415 Airfoil Sections with Trailing-Edge Flaps Set at 0° and 40°. NASA TM X-2225, June 1971.

14. Falarski, M. D. and Mort, K. W.: Large-Scale Wind-Tunnel Investigation of a Ducted-Fan-Deflected-Slipstream Model with an Auxiliary Wing. NASA TN D-6323, April 1971.
15. Abbott, I. H. and Von Doenhoff, A. E.: Theory of Wing Sections. Dover Publications, 1958, p. 405.
16. Hammond, A. D. and Keffer, B. M.: The Effect at High Subsonic Speed of a Flap-Type Aileron on the Chordwise Pressure Distribution Near Mid-Semispan of a Tapered 35° Sweptback Wing of Aspect Ratio 4 Having NACA 65A006 Airfoil Section. NACA RML 53C23, May 1953.

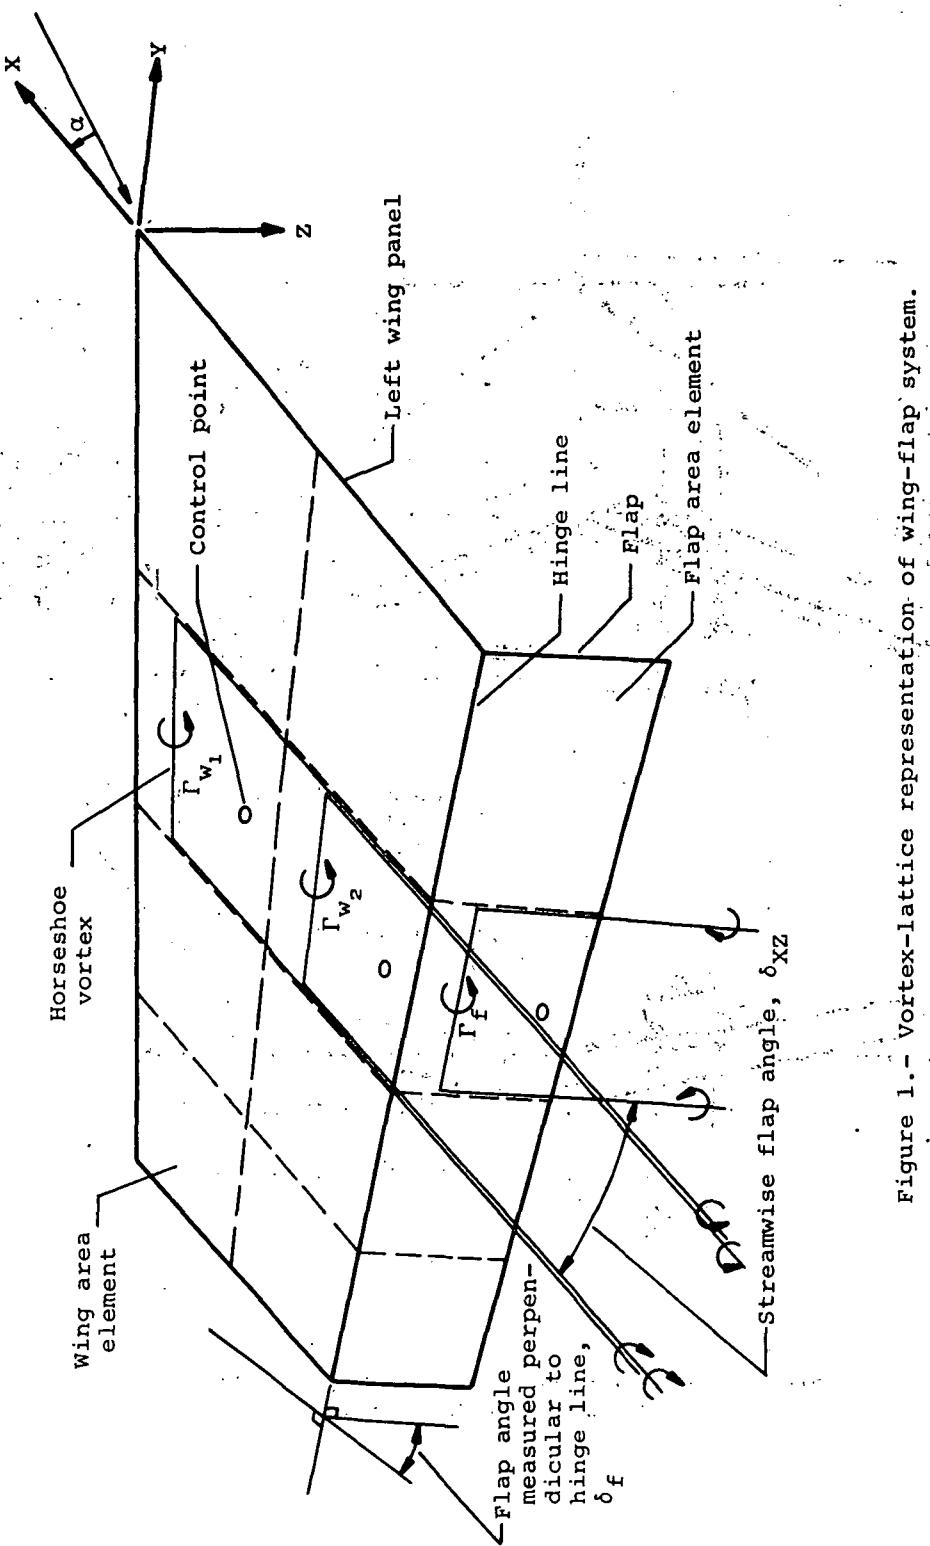


Figure 1.—Vortex-lattice representation of wing-flap system.

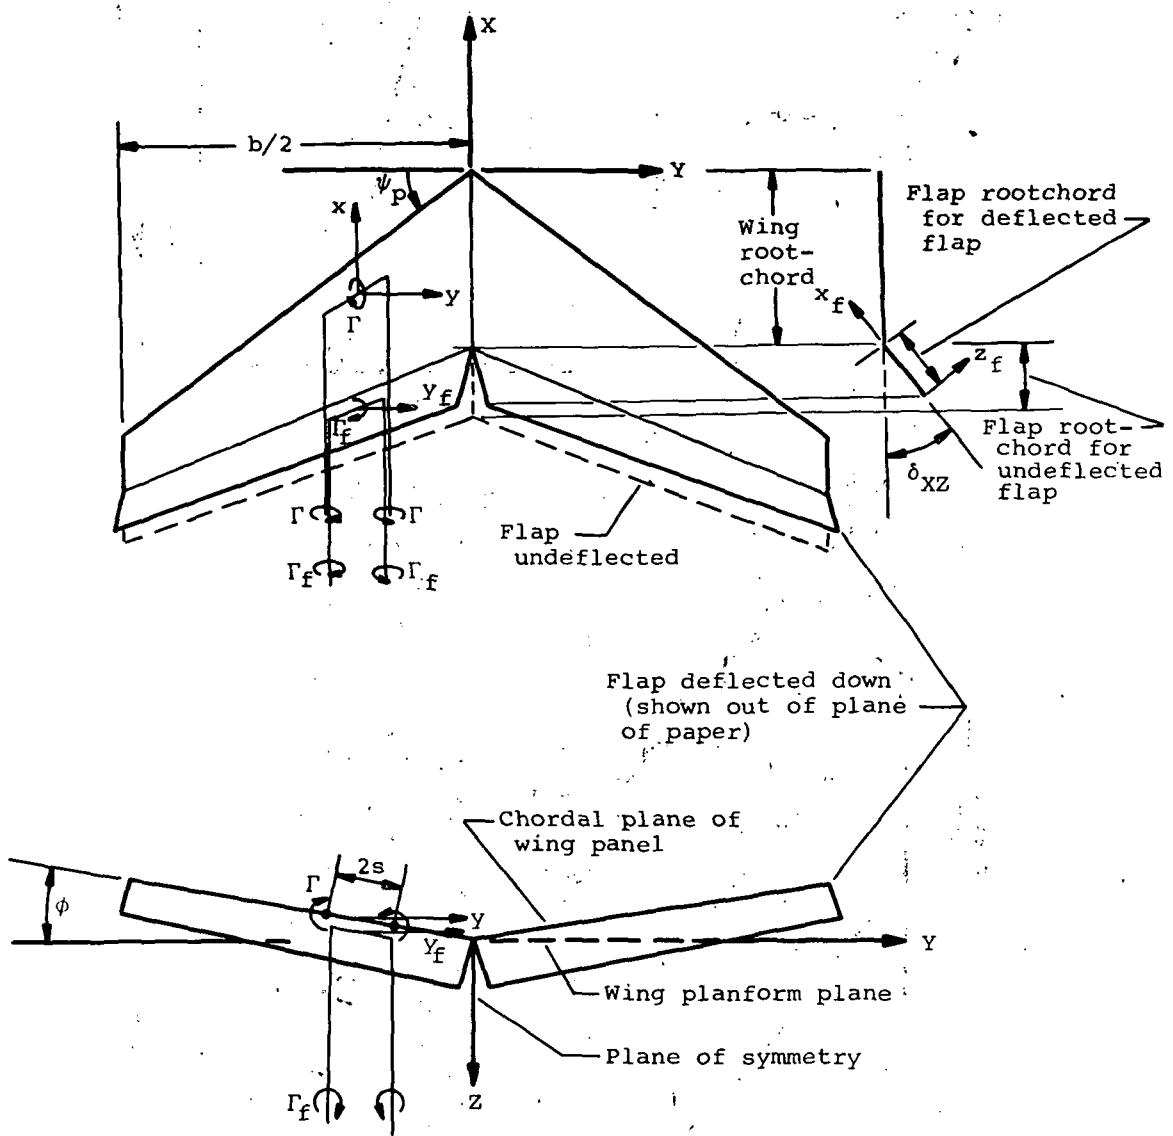


Figure 2.- Coordinate systems for wing-flap and horseshoe vortices.

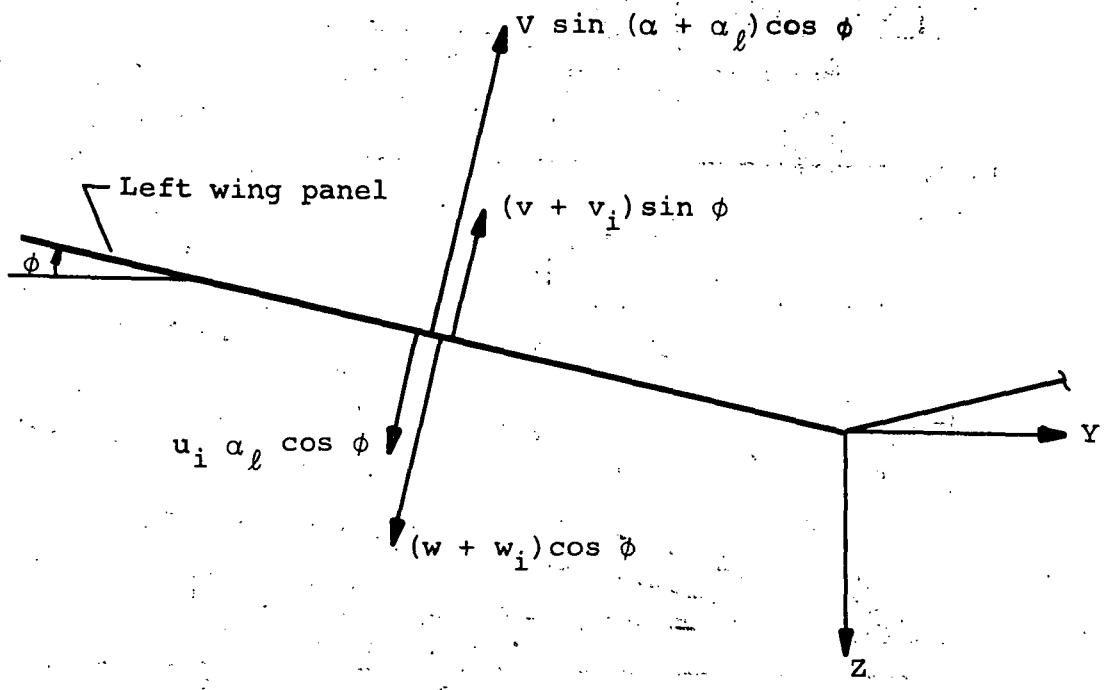


Figure 3.- Wing boundary condition.

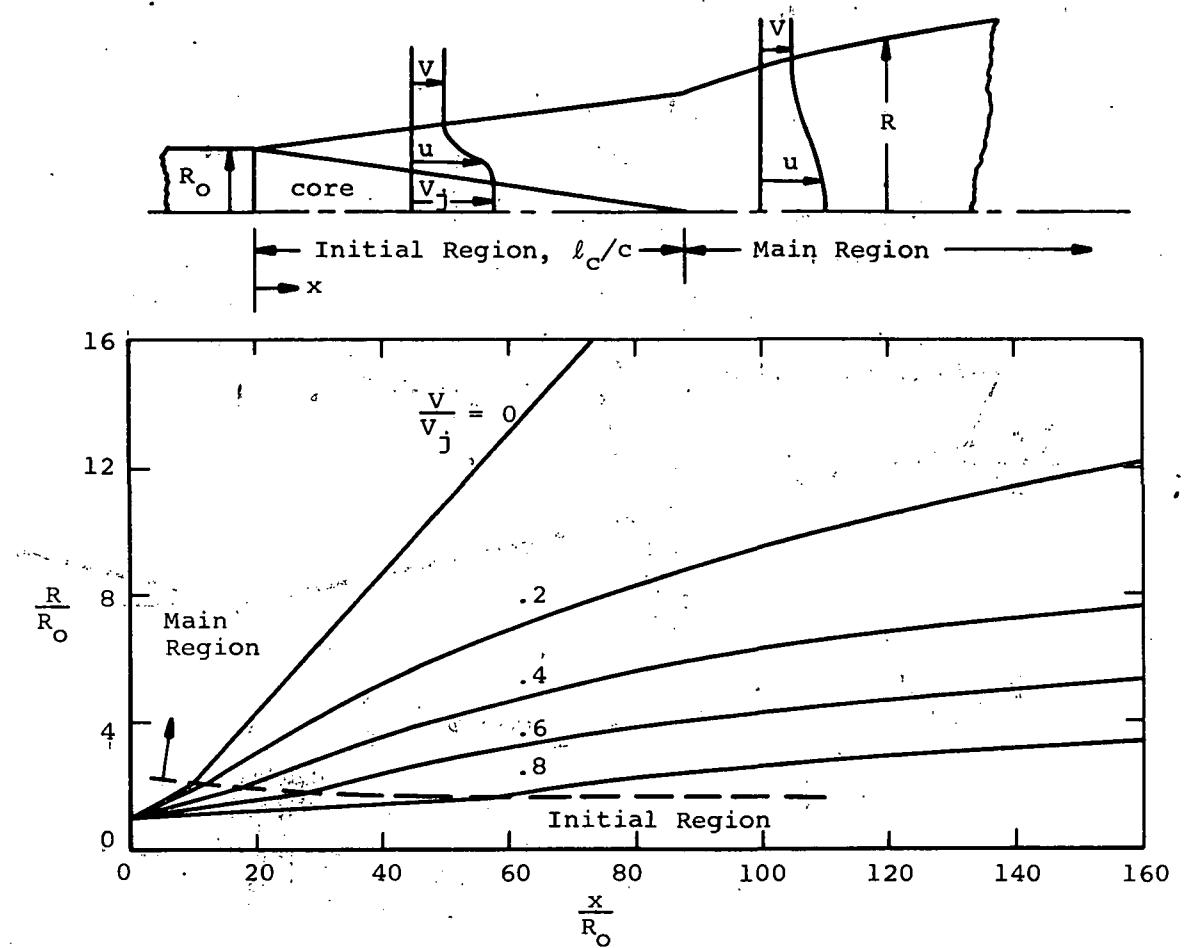


Figure 4.- Analytical spreading rate of an axisymmetric jet in a coflowing stream.

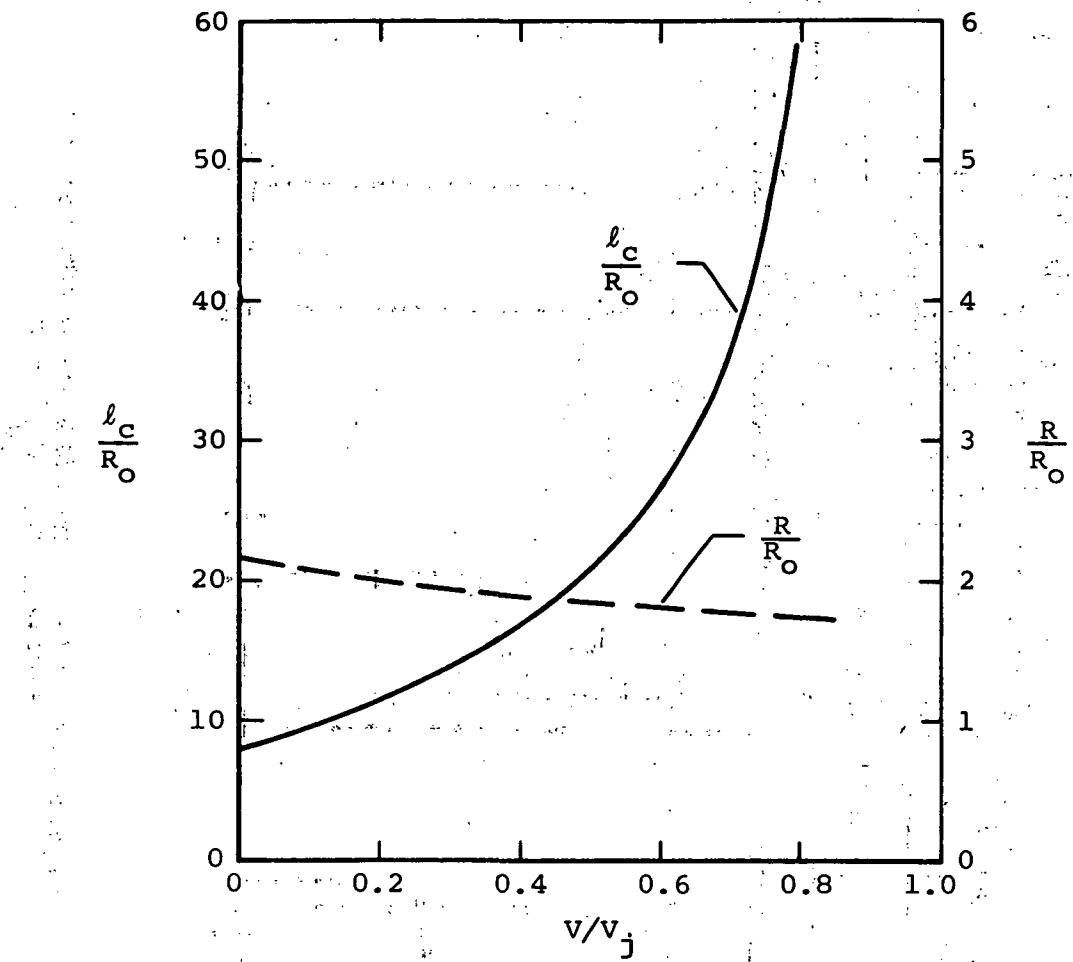


Figure 5.- Characteristics of the initial region of a turbulent jet.

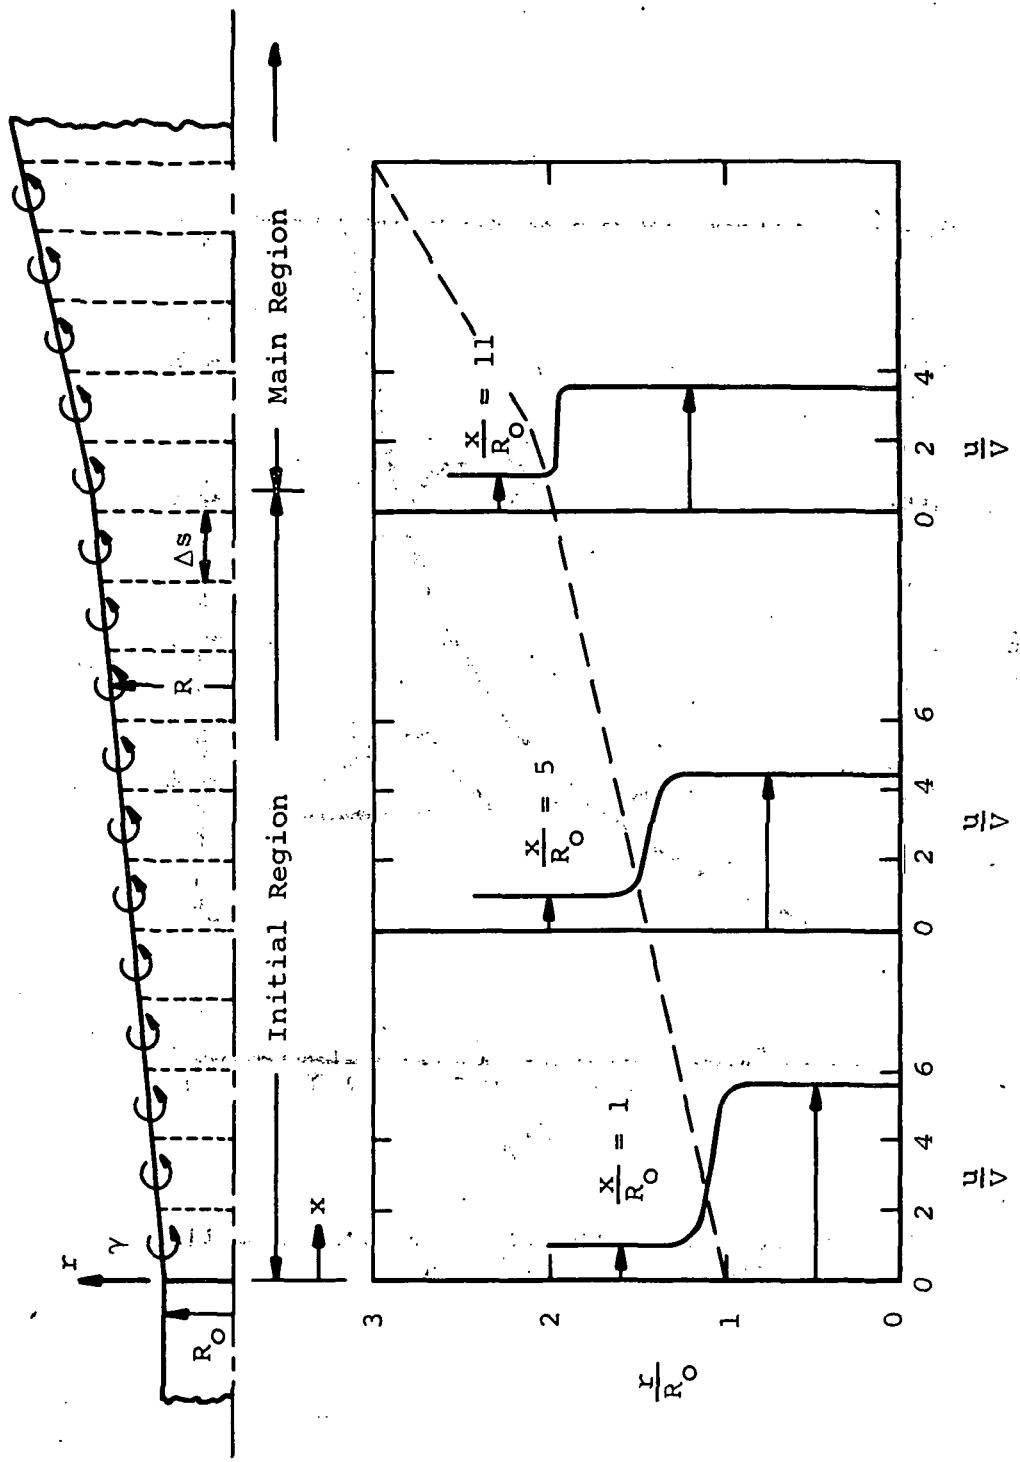


Figure 6.—Vortex ring wake model and velocity profiles for  $v_j/v = 6$ .

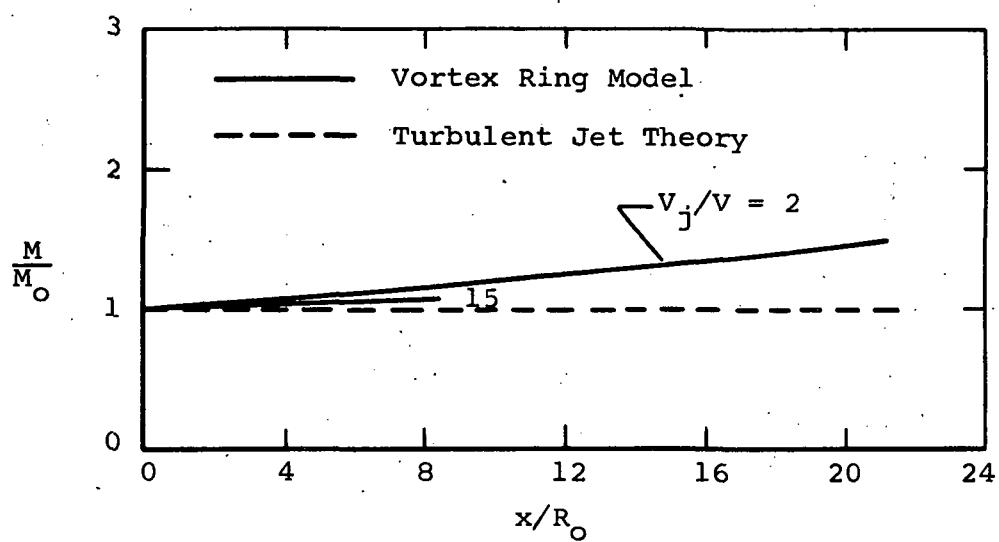


Figure 7.- Momentum in the initial region  
of an axisymmetric turbulent jet wake.



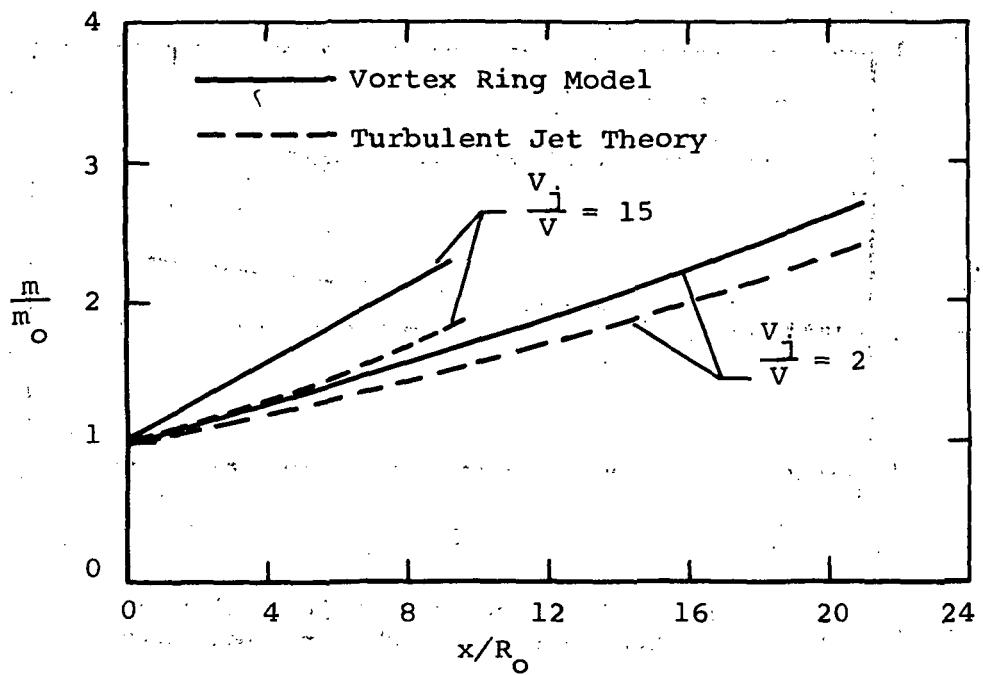


Figure 8.-- Mass flow in the initial region of an axisymmetric turbulent jet wake.

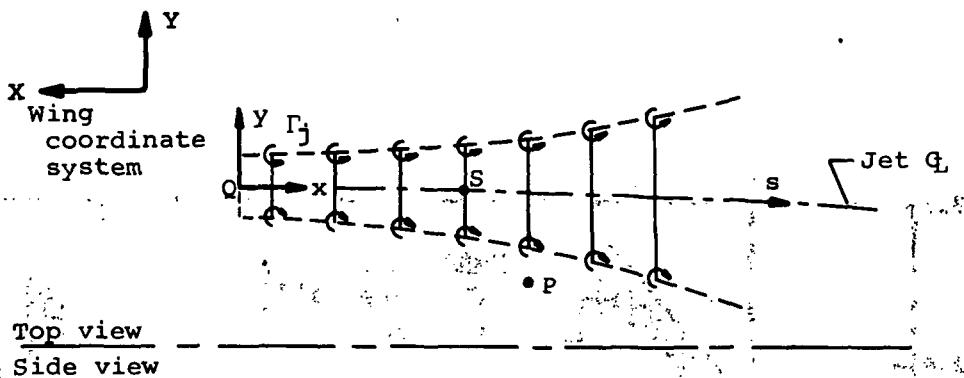


(a) Jet coordinate system.

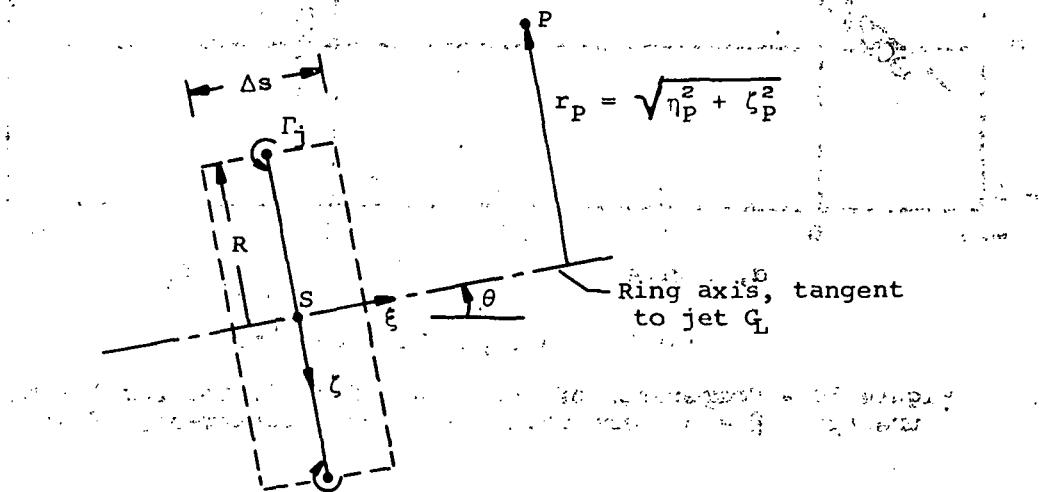


(b) Ring coordinate system.

Figure 9.- Jet wake nomenclature.

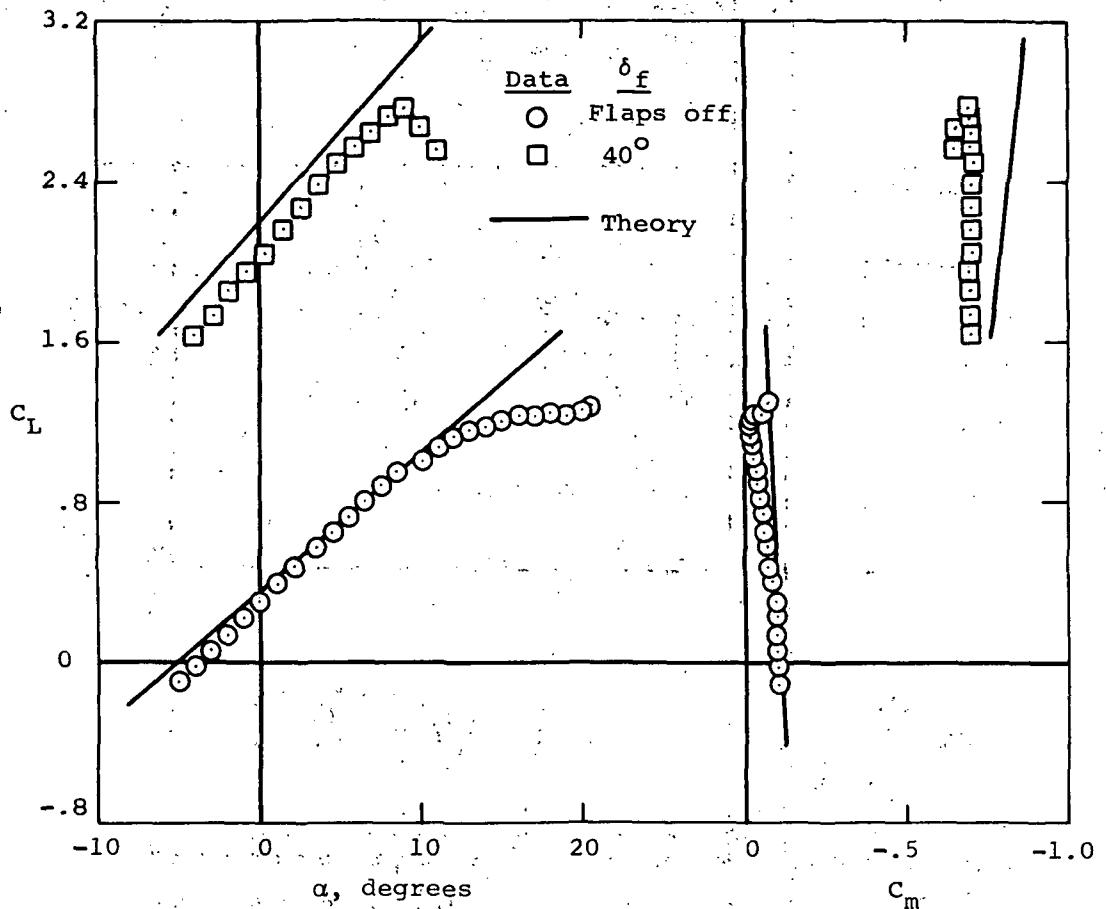

(a) Lift and pitching moment.

Figure 10.- Comparison of measured and predicted results on an unswept  $R = 6$  wing with a slotted trailing-edge flap.

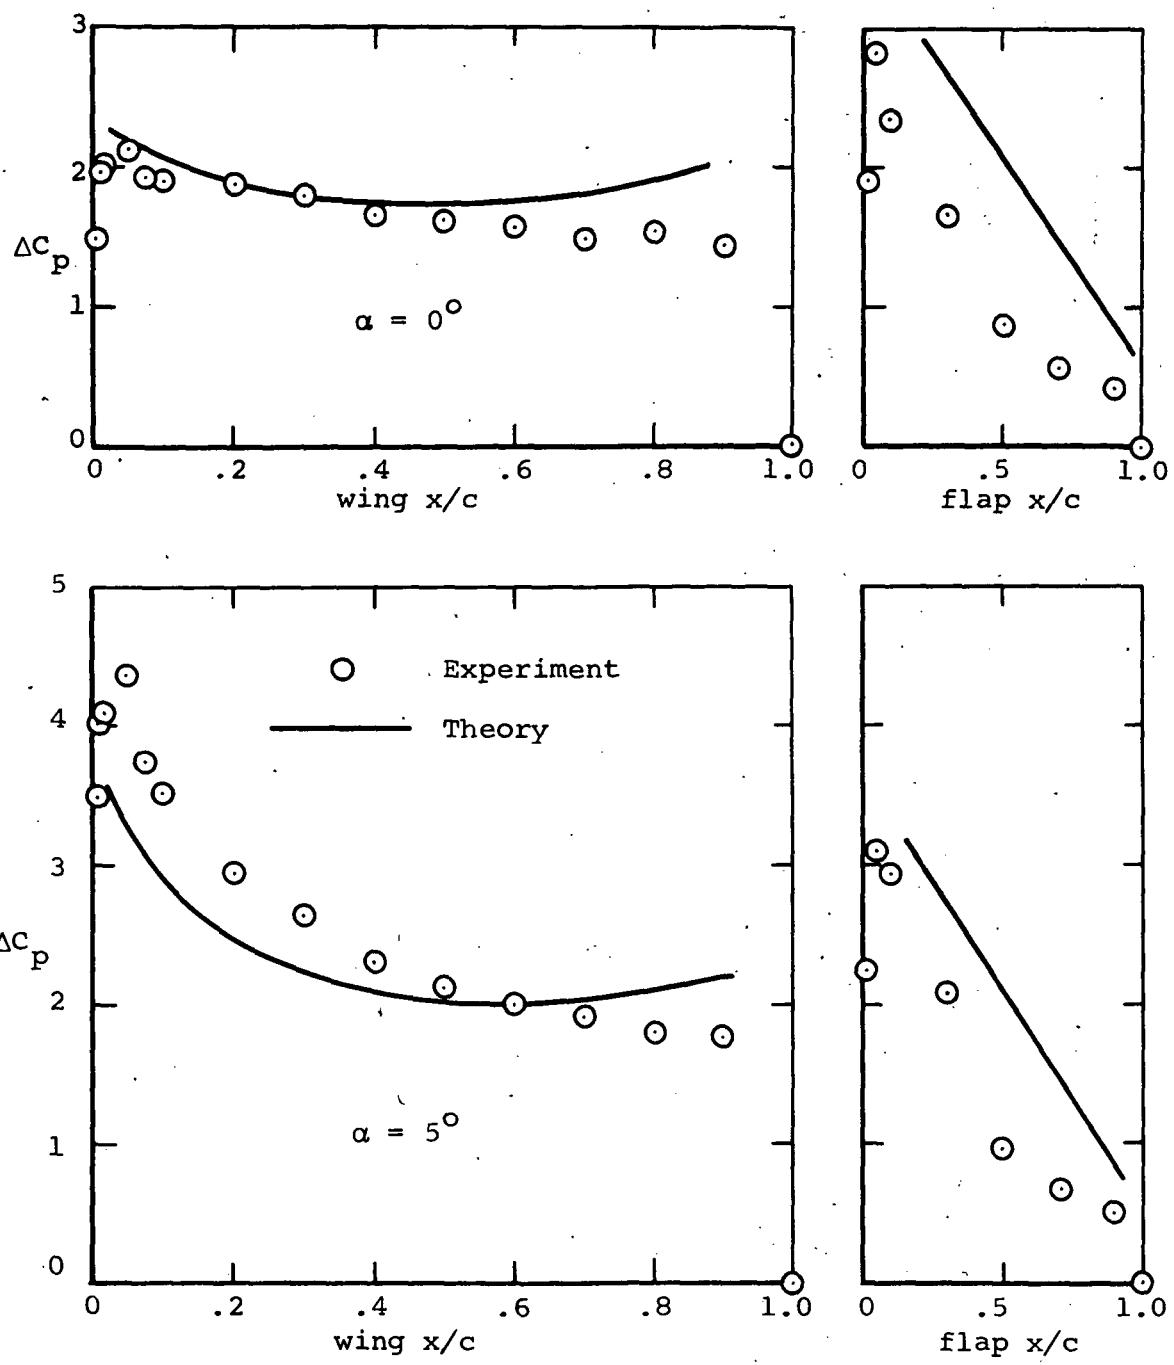

(b) Chordwise loading distribution,  $\delta_f = 40^\circ$

Figure 10.- Concluded.

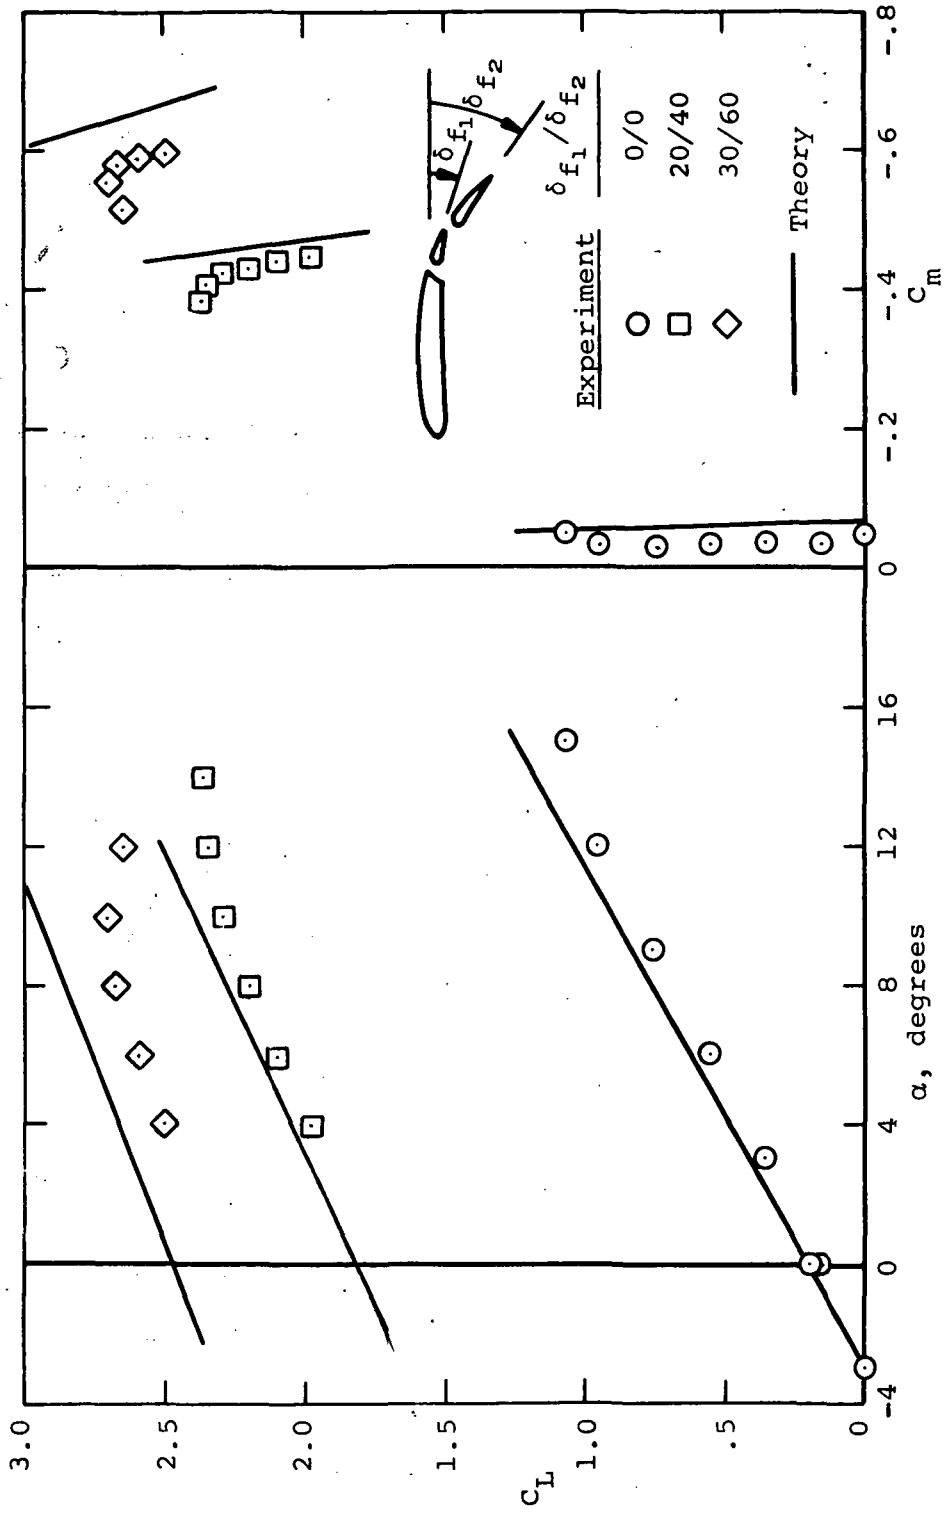


Figure 11.—Comparison of measured and predicted characteristics on an unswept wing model with double-slotted trailing-edge flaps.

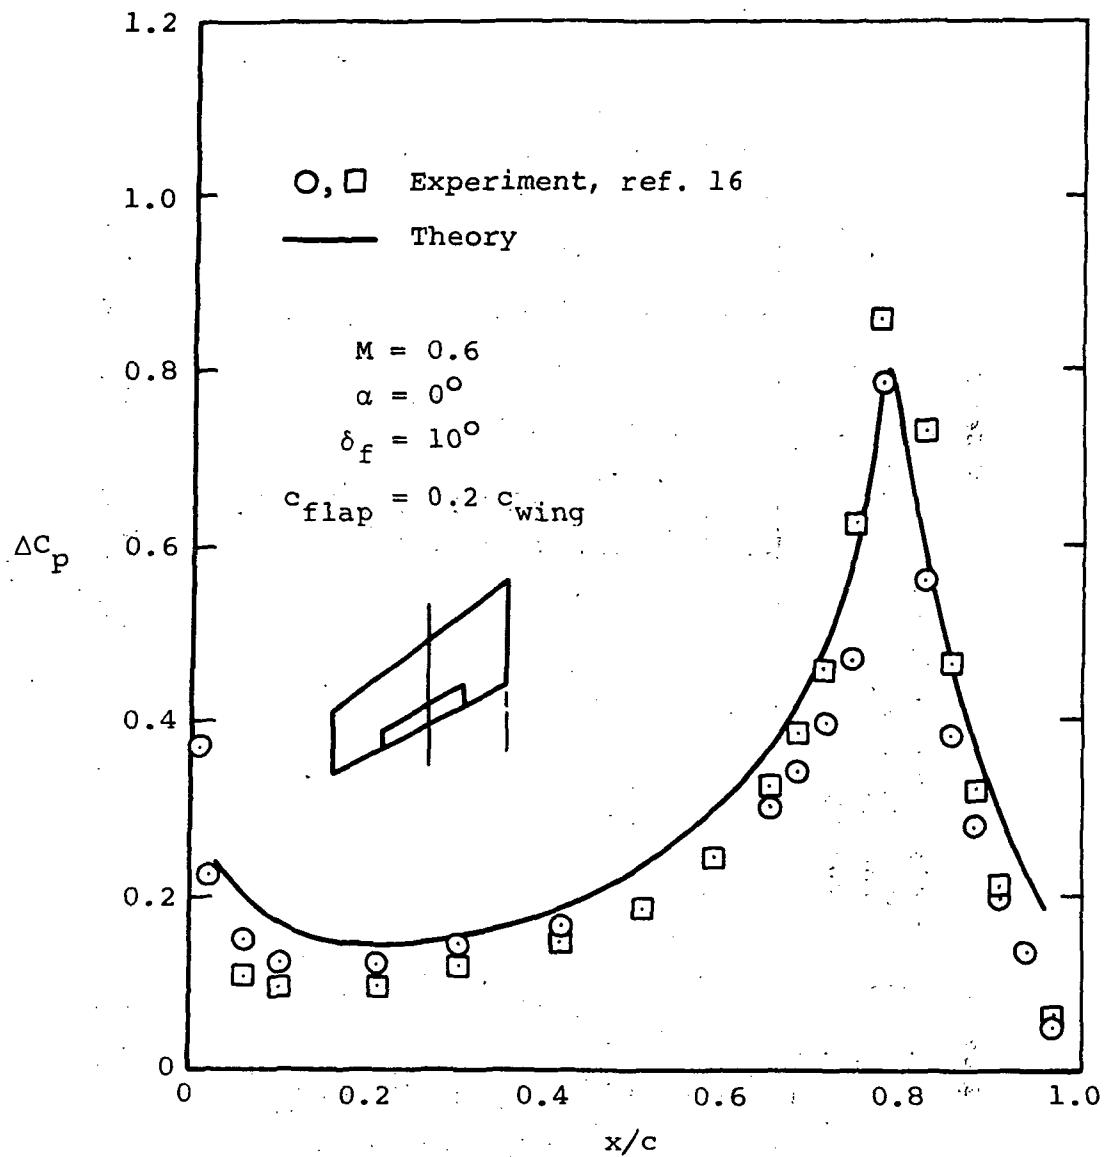


Figure 12.- Pressure distribution at  $\eta = 0.46$  on a  $35^\circ$  swept wing with deflected partial span flap.

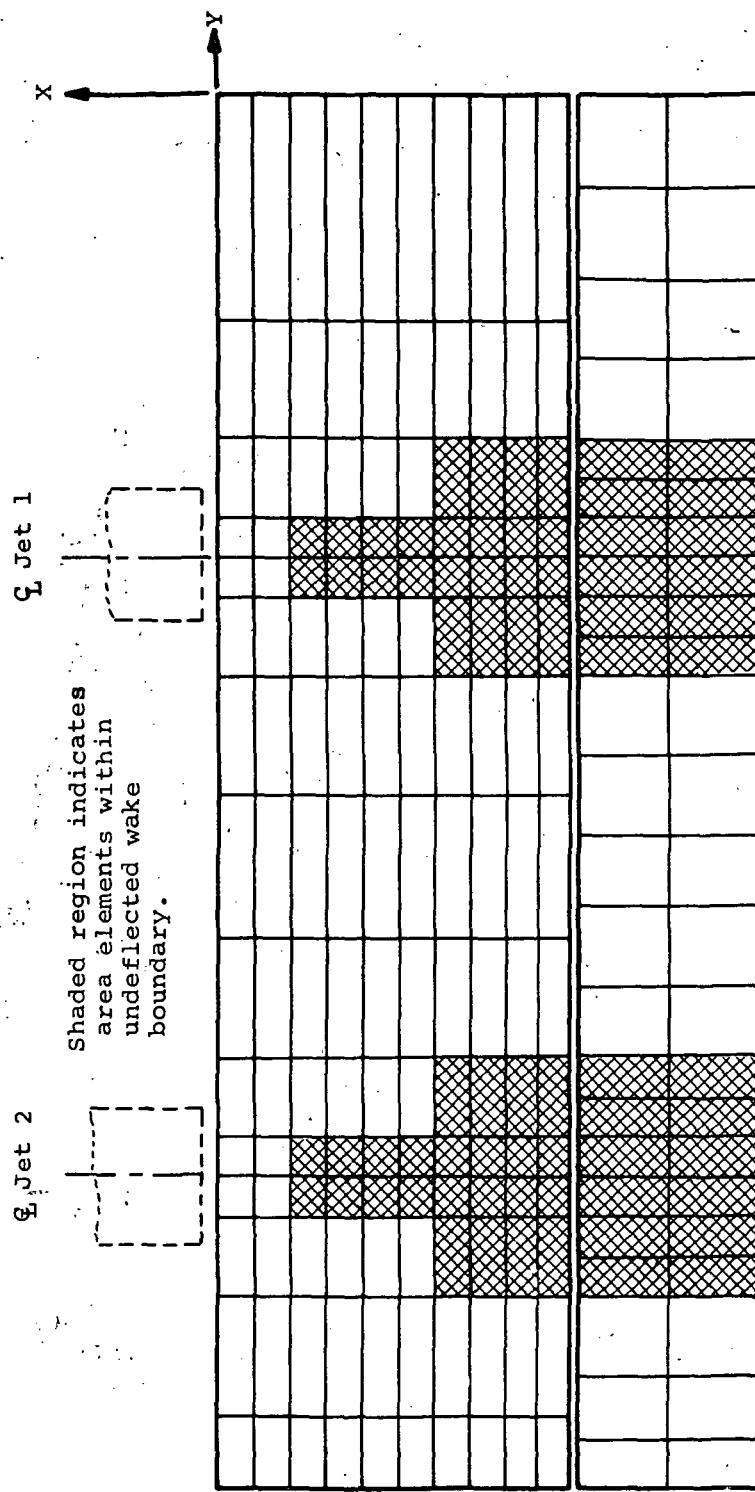


Figure 13.— Vortex-lattice network on an unswept wing with a slotted trailing-edge flap and two engines per semispan.




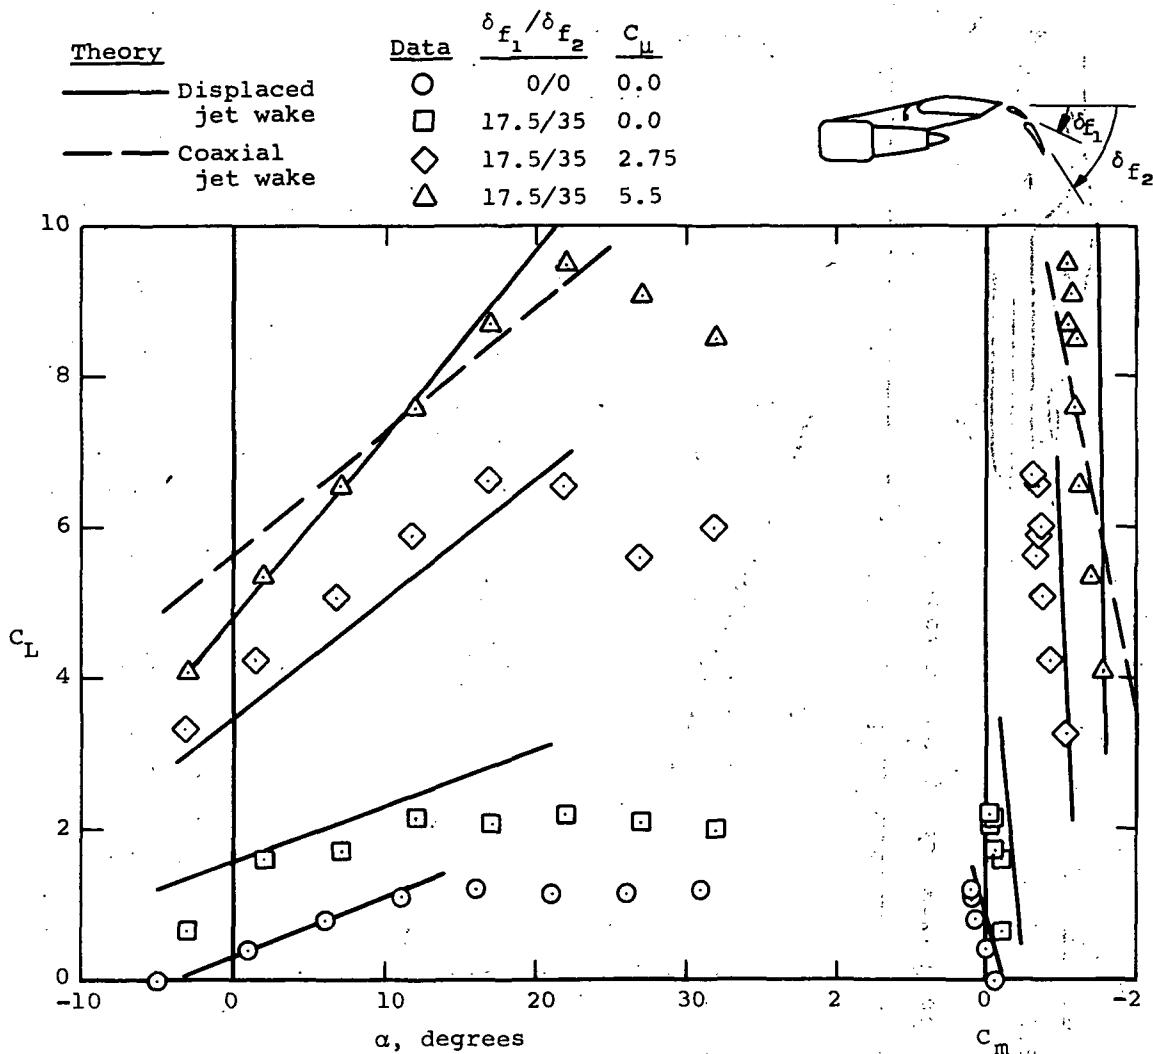


Figure 14.- Comparison of measured and predicted characteristics of an unswept wing with double-slotted trailing-edge flaps, slotted leading-edge slat, and four turbofan engines.

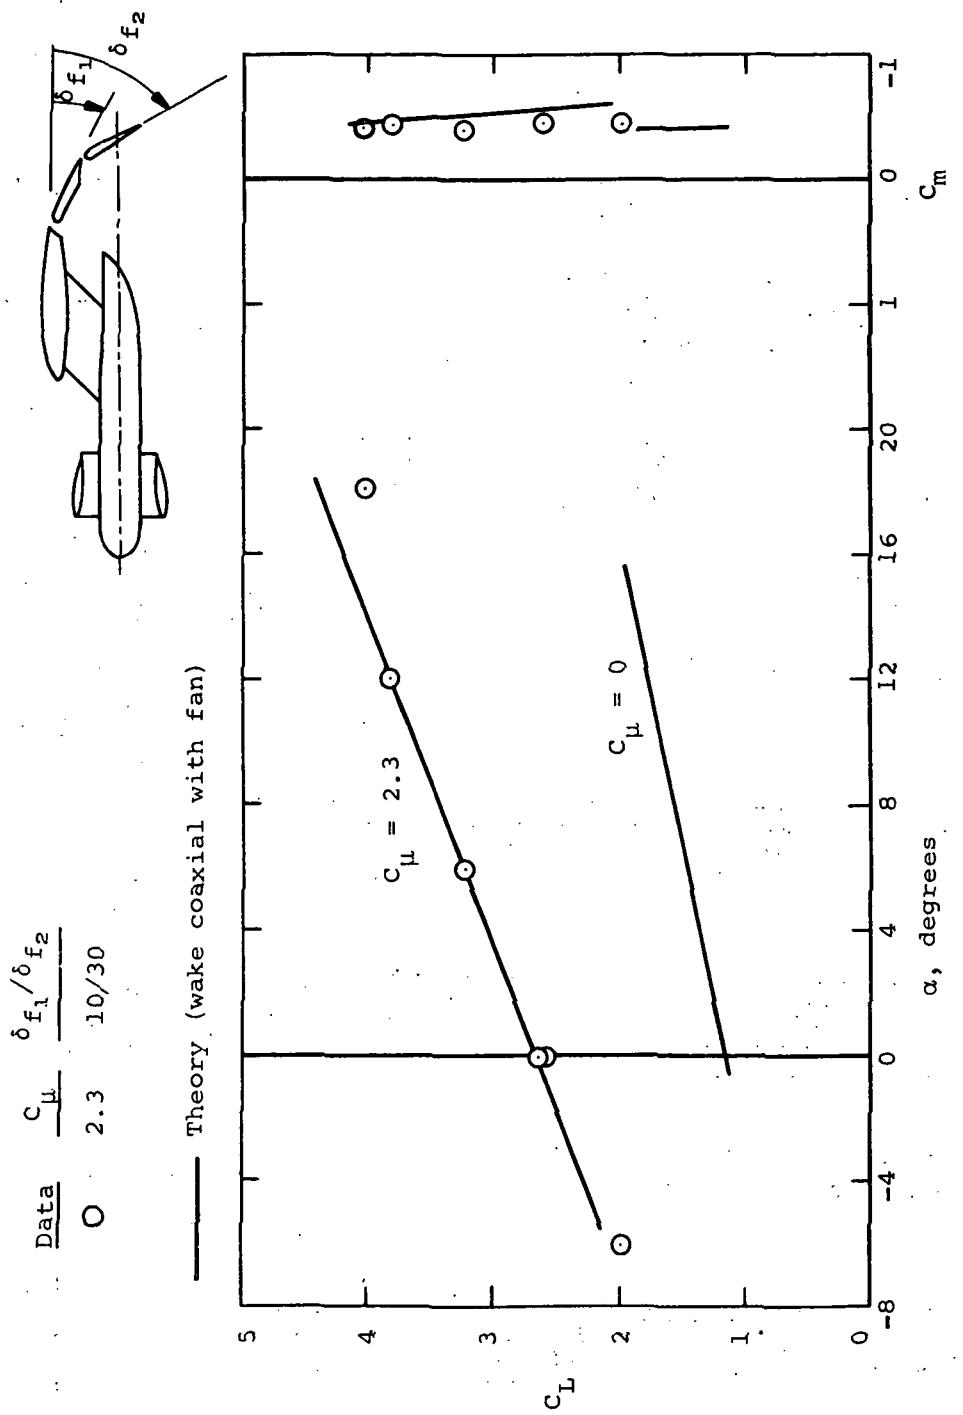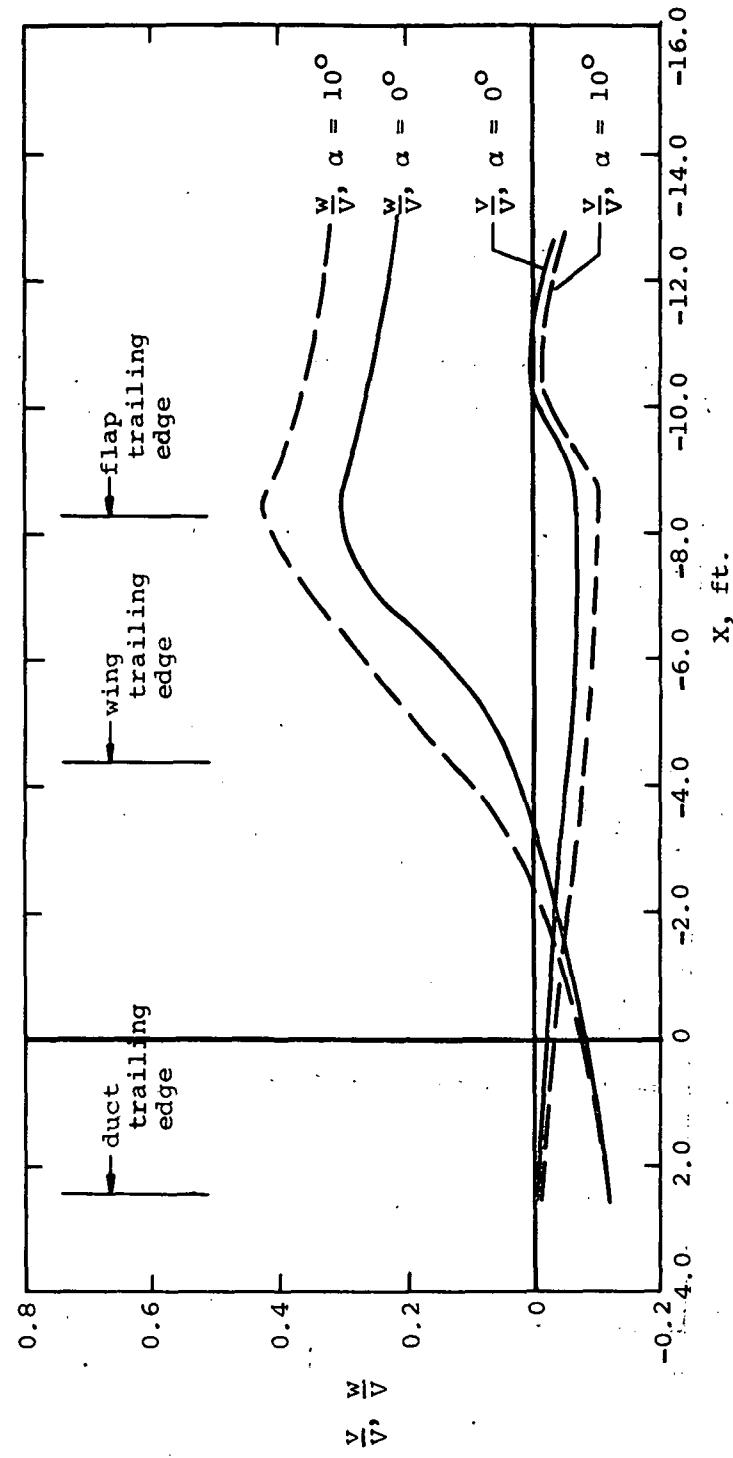


(a) Comparison of predicted and measured lift and moment.

Figure 15.— Characteristics of an unswept wing with externally-blown double-slotted trailing-edge flaps deflected 10/30°.

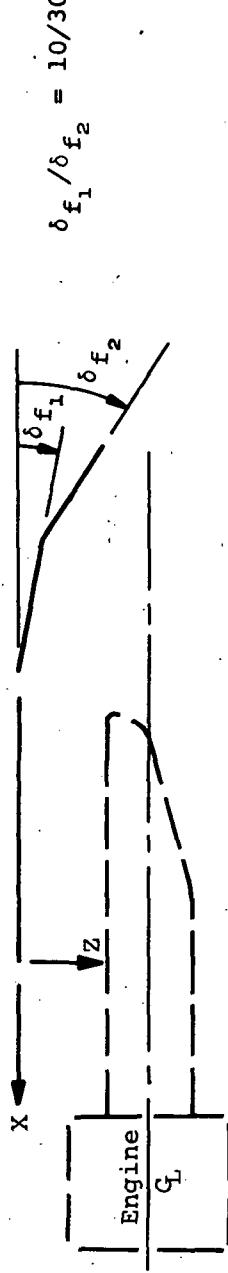


(b) Predicted downwash distribution induced by wing-flap in uniform flow along the engine centerline.

Figure 15.— Concluded.

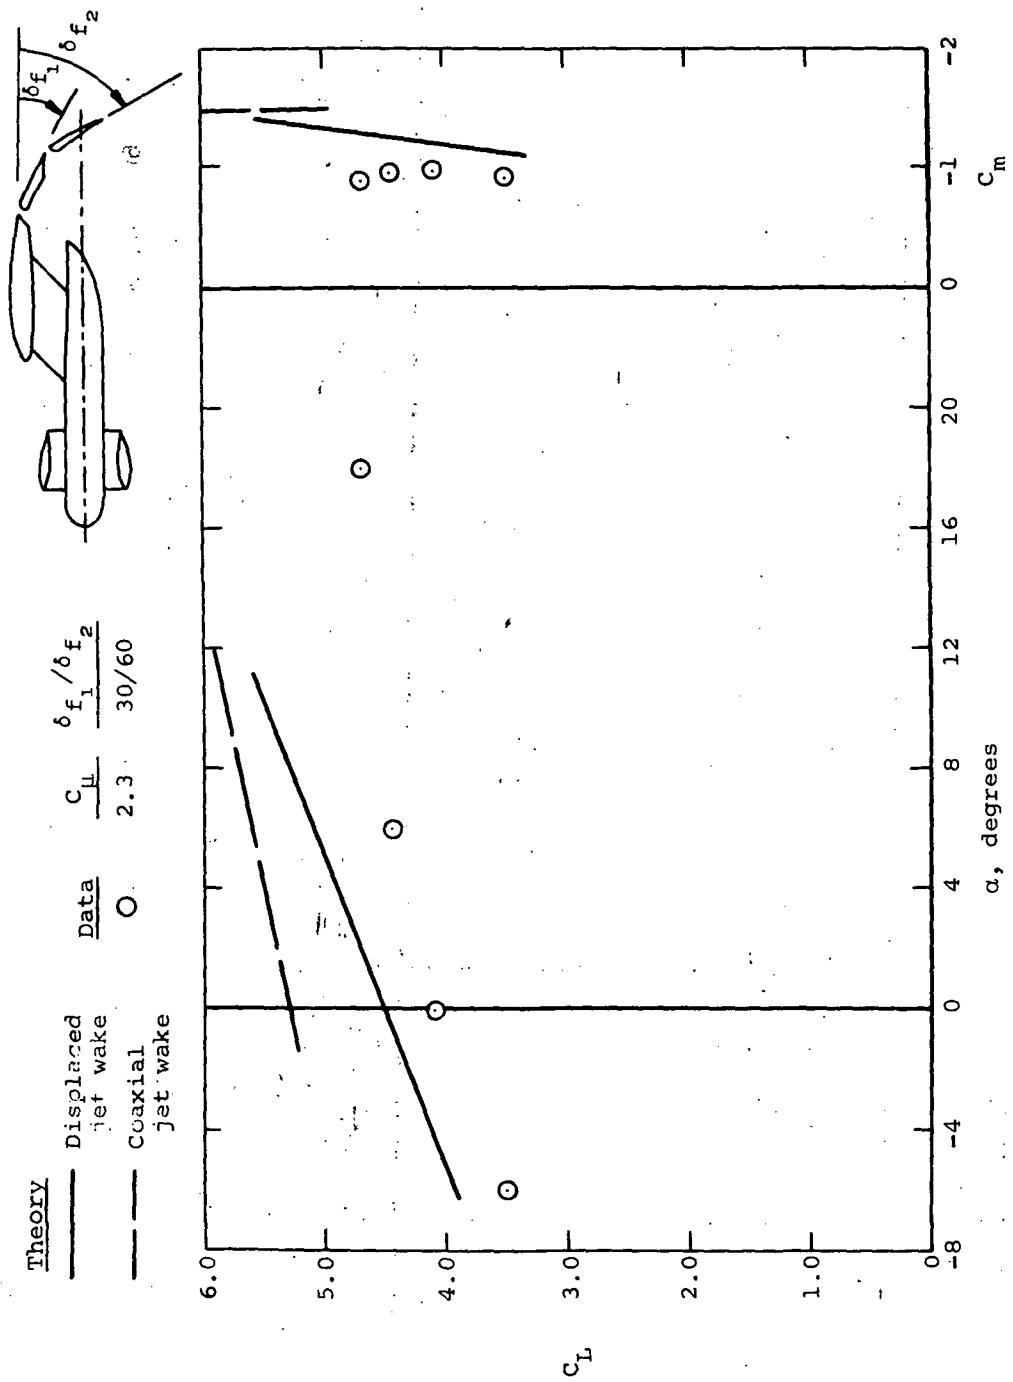


(a) Comparison of predicted and measured lift and moment.

Figure 16.— Characteristics of an unswept wing with externally-blown, double-slotted trailing-edge flaps deflected 30/60°.

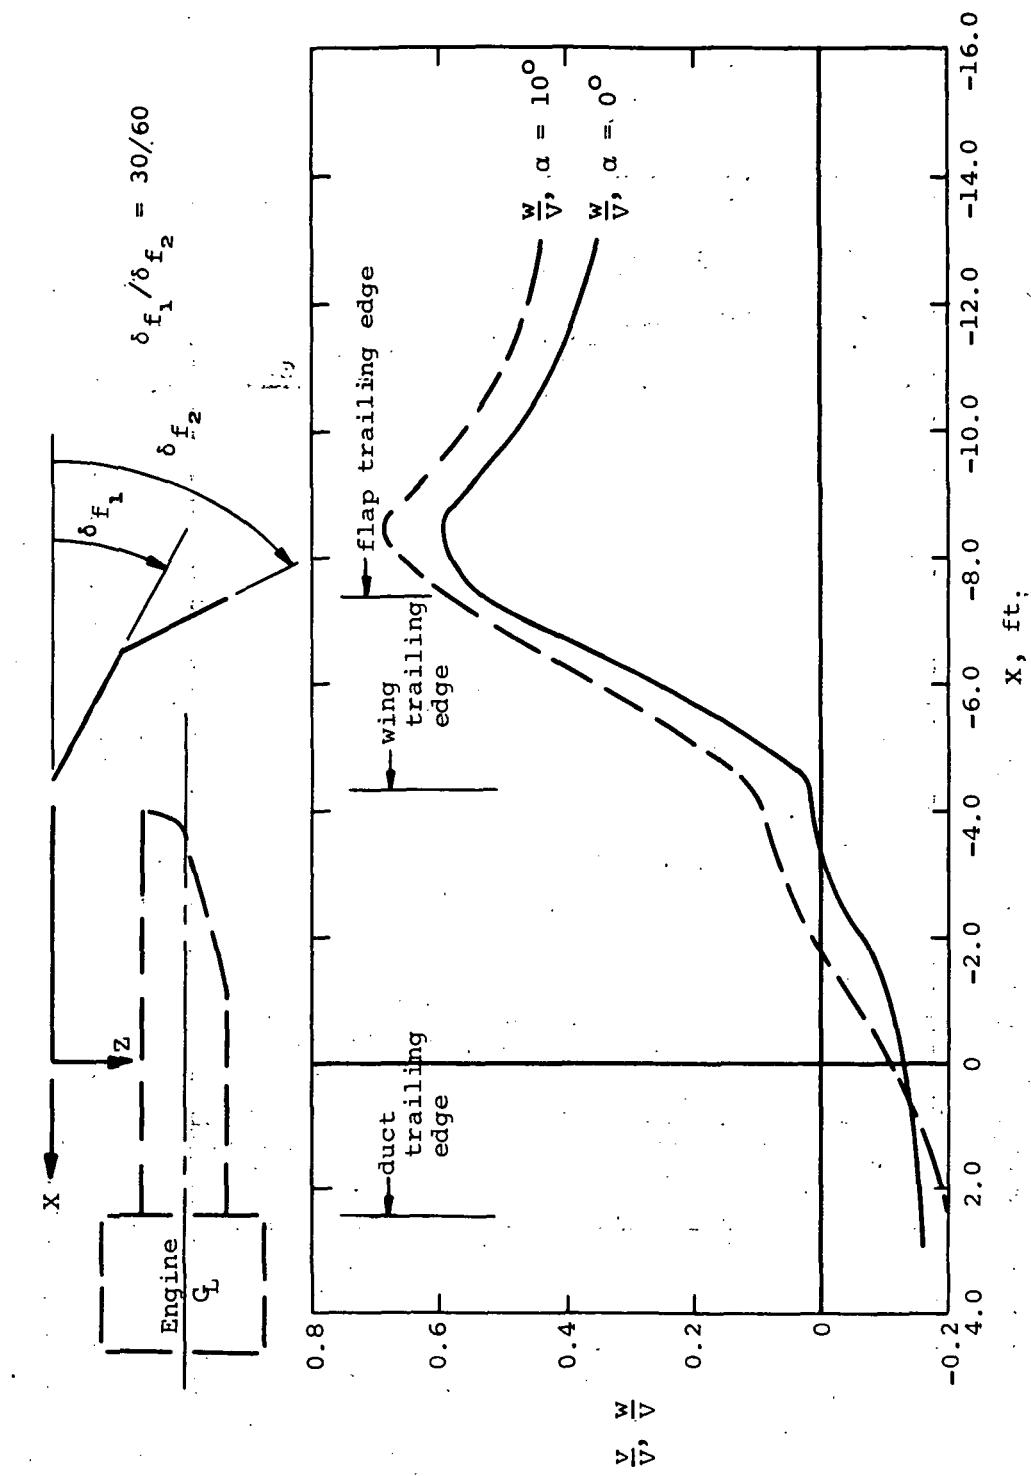


(b). Predicted downwash distribution induced by wing-flap in uniform flow along the engine centerline.

Figure 16.- Concluded.

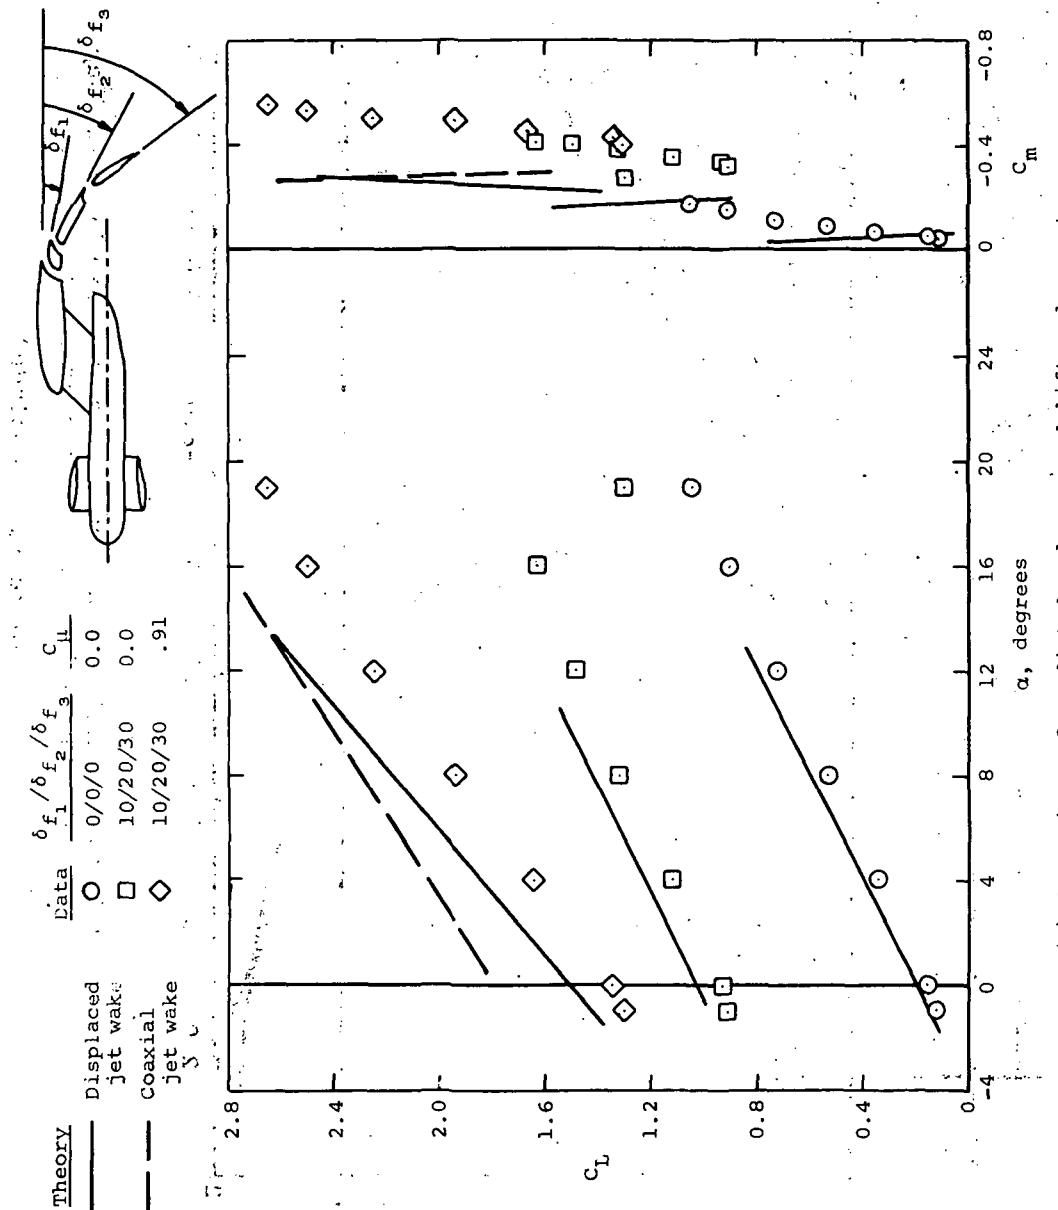

(a) Comparison of predicted and measured lift and moment.

Figure 17.—Characteristics of a  $30^\circ$  swept wing with externally-blown, triple-slotted trailing-edge flaps.

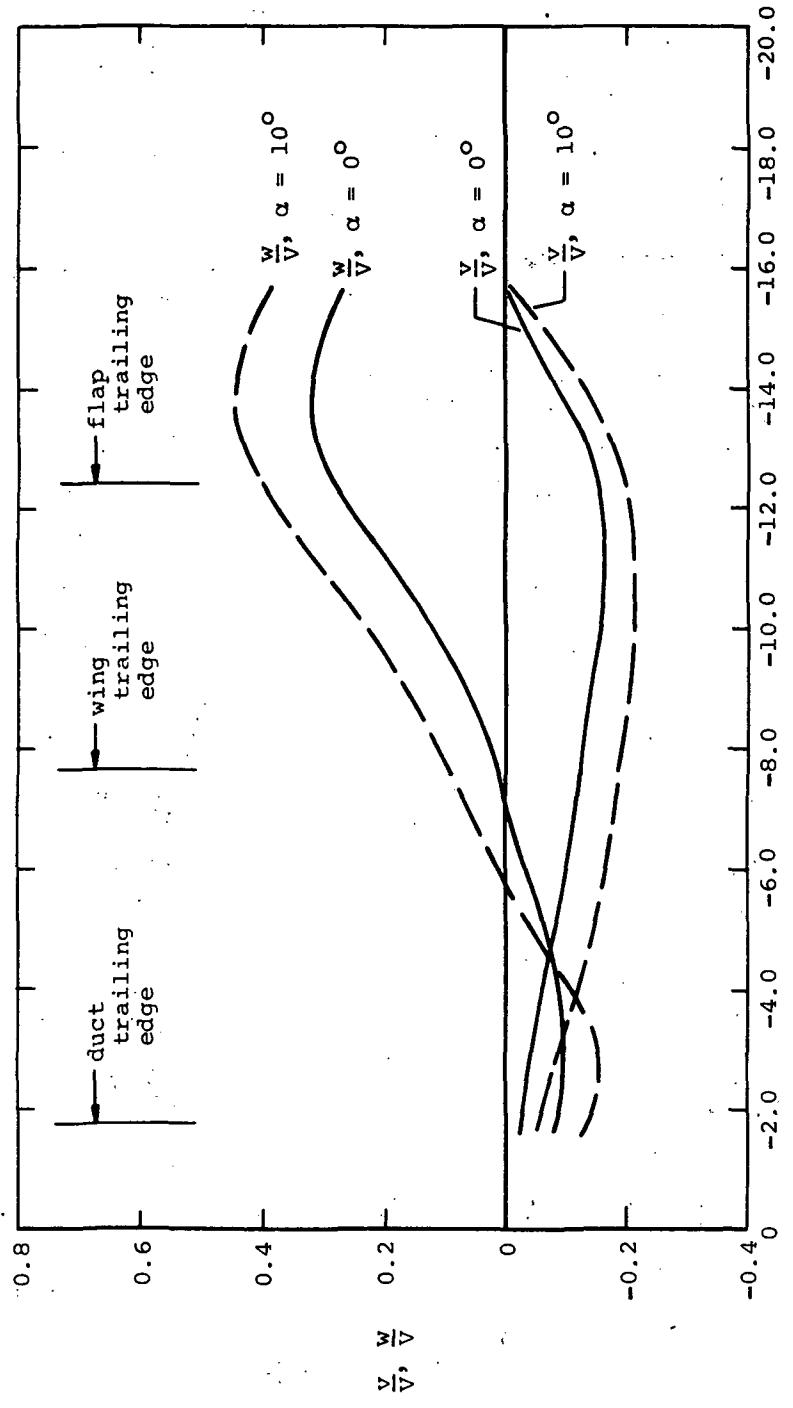

(b) Predicted downwash distribution induced by wing-flap in uniform flow along the engine centerline.

Figure 17. — Concluded.

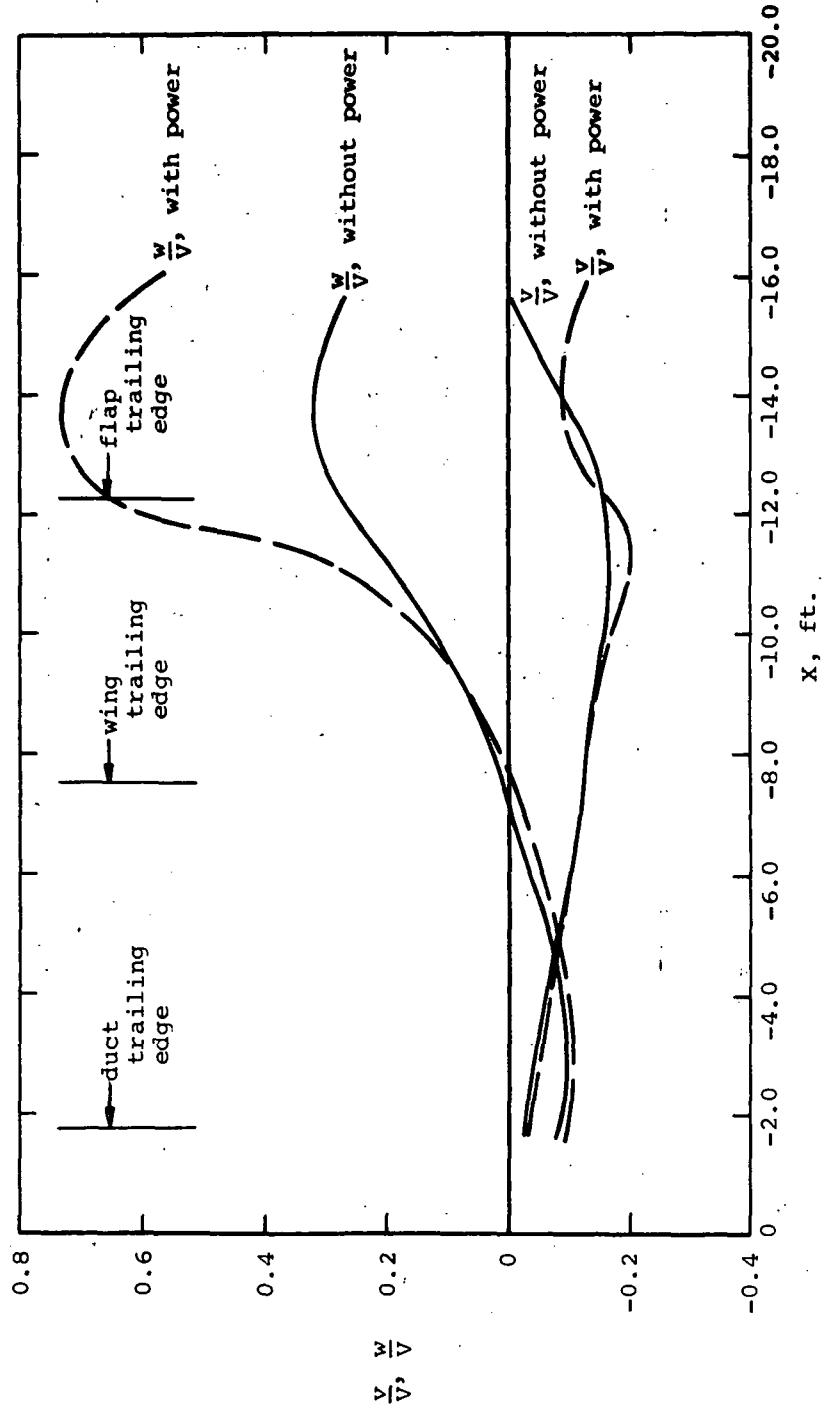


Figure 18.— Comparison of predicted wing-flap-induced down- and sidewash distributions along the engine centerline with and without jet wake interference for a  $30^\circ$  swept wing with triple slotted flaps at  $\alpha = 0^\circ$ .

Item No. 1: Format (20A4), any alphabetic or numeric information  
(1 card)

Column No.	1-80
Program Variable	TALK
Data	+ + + + + + +

Item No. 2: Format (2F5.1,3I5), decimal point required in first two variables  
(1 card)

Column No.	5	10	15	20	25
Program Variable	ALPHLC	DELLC	MMM	MFLAP	MPSPEC
Data					

Item No. 3: Format (8F10.5), decimal point required  
(1 card)

Column No.	10	20	30	40	50
Program Variable	PSIWLE	PSIWTE	CRW	SSPAN	PHID
Data					

Item No. 4: Format (8F10.5), decimal point required  
(1 card)

Column No.	10	20	30	40	50	60
Program Variable Data	PSIFILE	PSIFTE	CRF	FSSPAN	XF	ZF
Notes:	PSIFILE	PSIFTE	CRF	FSSPAN	XF	ZF

Note: If MFLAP = 0 (see item 2), insert blank card for this item.

**Item No. 5: Format (715)**  
**(1 card)**

Column No.	5	10	15	20	
Program Variable	NCW	MSW	NCF	MSF	
Data					

Item No. 6: Format (8F10.5), decimal point required  
(> 1 card) (1)

Column No.	10	20	30	40	50	60	70	80
Program Variable	Y(1)	Y(2)	Y(3)	Y(4)	Y(5)	Y(6)	Y(7)	Y(8)
Data	0.0							

Figure 19.- Input format for wing-flap program.

Item No. 7 (option) : Format (8F10.5), decimal point required

(1)	Column No.	10	20	30	40	50	60	70	80
	Program Variable	YF(1)	YF(2)	YF(3)	YF(4)	YF(5)	YF(6)	YF(7)	YF(8)
	Data								

Note: These quantities are read in when NFLAP = 1 (see item 2); if NFLAP = 0, omit this item.

(2)	Column No.	10	20	30	40	50	60	70	80
	Program Variable	YF(9)	YF(10)	YF(11)	...	YF(IFMAX)			
	Data								

Item No. 8: Format (8F10.5), decimal point required

(1)	Column No.	10	20	30	40	50	60	70	80
	Program Variable	XM	YM	ZM					
	Data								

Item No. 9 (option): Format (8F10.5), decimal point required

(1)	Column No.	10	20	30	40	50	60	70	80
	Program Variable	ALPHAL(1)	ALPHAL(2)	...	...	...	...	...	...
	Data								

Note: These quantities are read in when ALPHLC = 1.0 (see item 2); if ALPHMC = 0.0, omit this item.

Number of data bits per card = number of chordwise wing vortices = NCW

(2)	Column No.	10	20	30	40
	Program Variable	ALPHAL(NCW+1)	ALPHAL(NCW+2)	...	...
	Data				

(MSW)	Column No.	10	20	30	40
	Program Variable	ALPHAL M-(NCW-1)	ALPHAL M-(NCW-2)	...	...
	Data				

Item No. 10 (option): Format (8F10.5), decimal point required  
 (MSF cards)

Column No.	10	20	30	40
Program Variable	DELL(1)	DELL(2)	...	DELL(NCF)
Data				

Note: These quantities are read in when DELLC = 1.0 in item 2;  
 if DELLC = 0.0, omit this item.

Column No.	10	20	30	40
Program Variable	DELL(NCF+1)	DELL(NCF+2)	...	DELL(2NCF)
Data				

Column No.	10	20	30	40
Program Variable	DELL MF-(NCF-1)	DELL MF-(NCF-2)	...	DELL(MSF*NCF=MF)
Data				

Item No. 11 (option): Format (3F10.3), decimal point required  
 (MMM cards)

Column No.	10	20	30
Program Variable	PMX(1)	PMX(2)	PMZ(1)
Data			

Column No.	10	20	30
Program Variable	PMX(2)	PMX(2)	PMZ(2)
Data			

Column No.	10	20	30
Program Variable	PMX(MMM)	PMX(MMM)	PMZ(MMM)
Data			

Figure 19.- Continued.

Item No. 12: Format (1F10.5, 2I10, F10.5), decimal point required in first  
(1 card) variable.

Column No.	10	20	30	40
Program Variable	DELD	KEI	KCP	NRHS
Data				

Item No. 13: Format (F10.5)

Column No.	10			
Program Variable	ALPHAD			
Data				

Item No. 14 (option): Format (3E13.6)  
( $\geq 1$  card)

Column No.	13	26	39
Program Variable	UEI(1)	VEI(1)	WEI(1)
Data			

Note: These quantities are read in via cards as shown here when KEI = 5 (see item 12); if KEI = 0 or KEI = 8, omit this item.

Column No.	13	26	39
Program Variable	UEI(2)	VEI(2)	WEI(2)
Data			

(M)	13	26	39
Program Variable	UEI(M)	VEI(M)	WEI(M)
Data			

Note: If MFLAP = 0 (see item 2) this is the last card in this item; if MFLAP = 1, more cards follow.

(M+1)	13	26	39
Program Variable	UEI(M+1)	VEI(M+1)	WEI(M+1)
Data			

(M+2)	13	26	39
Program Variable	UEI(M+2)	VEI(M+2)	WEI(M+2)
Data			

(M+MF)	13	26	39
Program Variable	UEI(M+MF)	VEI(M+MF)	WEI(M+MF)
Data			

Figure 19.- Concluded.



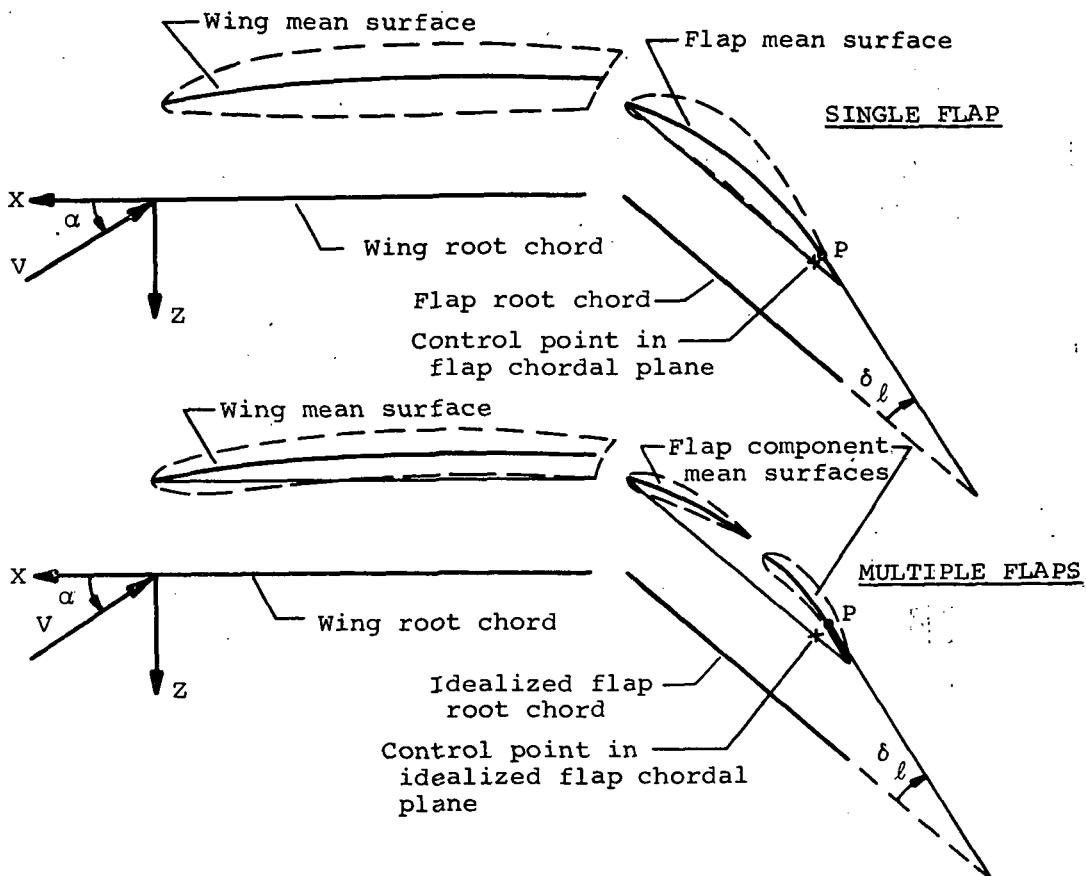


Figure 20.- Definitions of local angles  $\alpha_l$  and  $\delta_l$ .


Figure 21(a).- Input deck for wing-flap program, power off.

Figure 21(b).- Input deck for wing-flap program, power on.

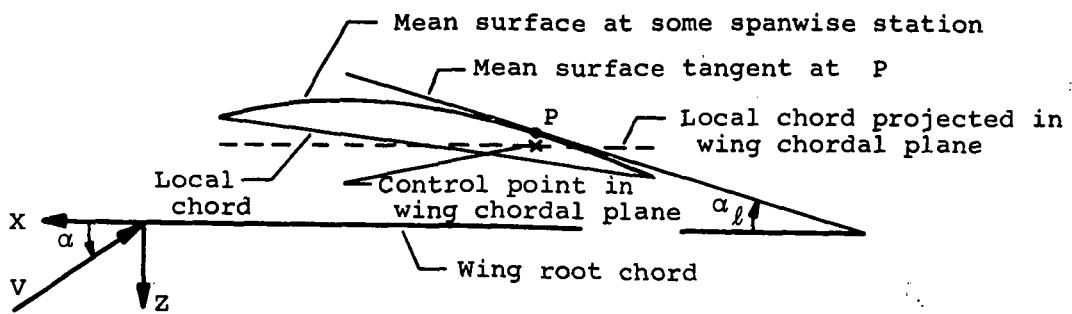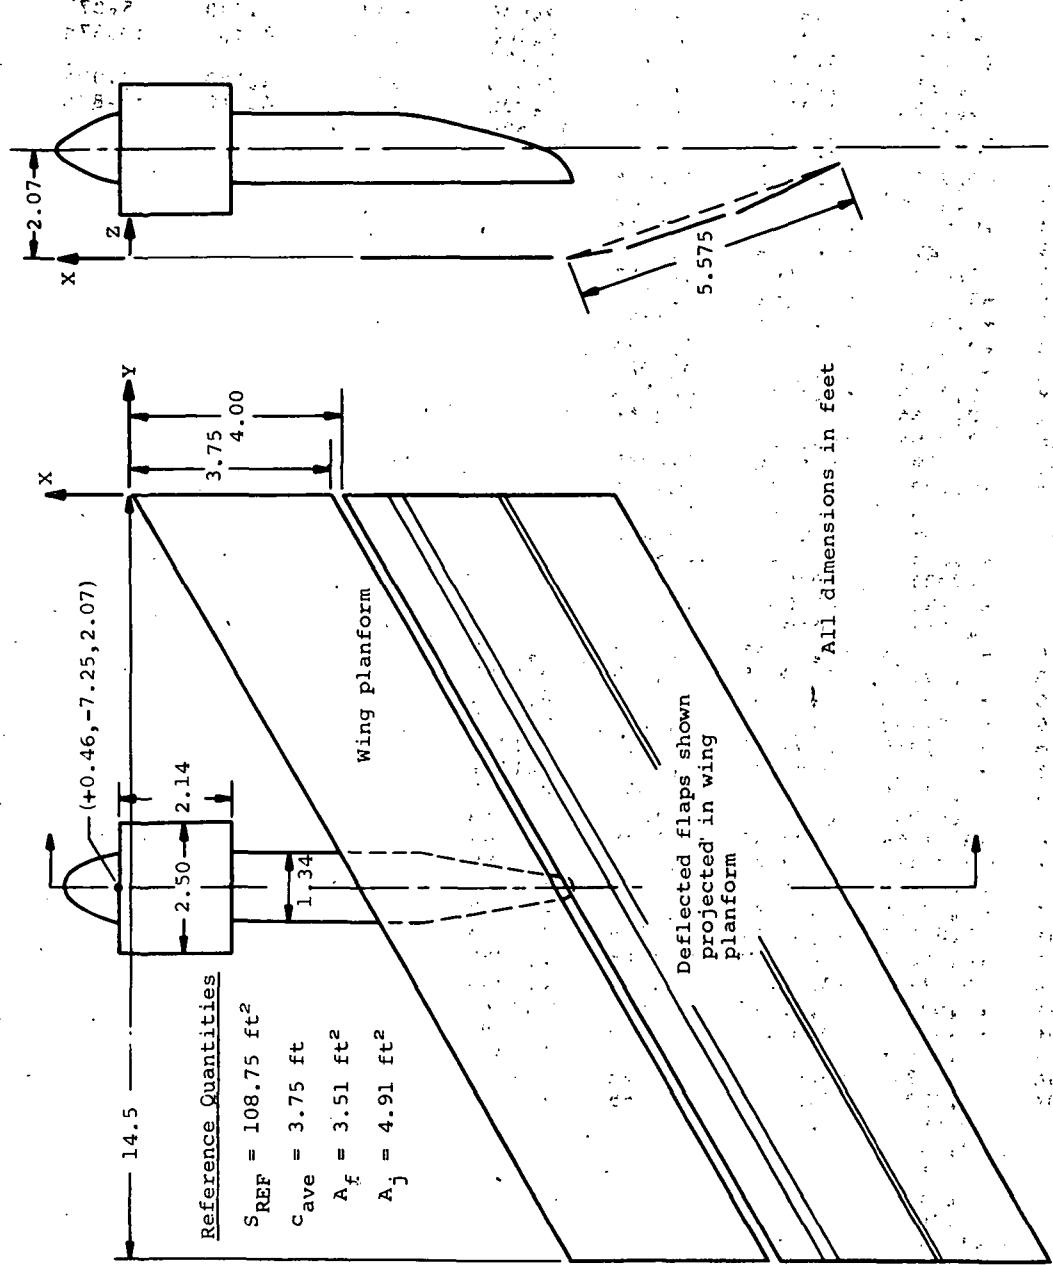


(a) Planform and elevation.

Figure 22.— Swept-wing-flaps I (10/20/30°) configuration of reference 5.

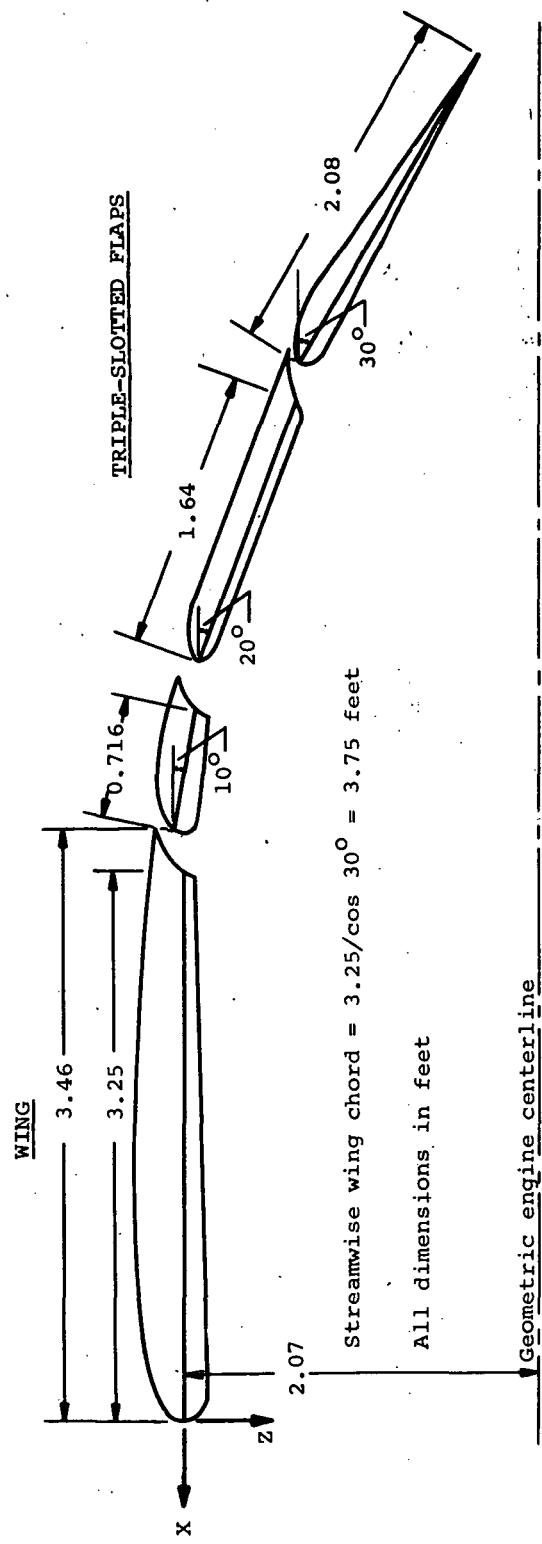

(b) Section normal to wing leading and trailing edges.

Figure 22.- Continued.

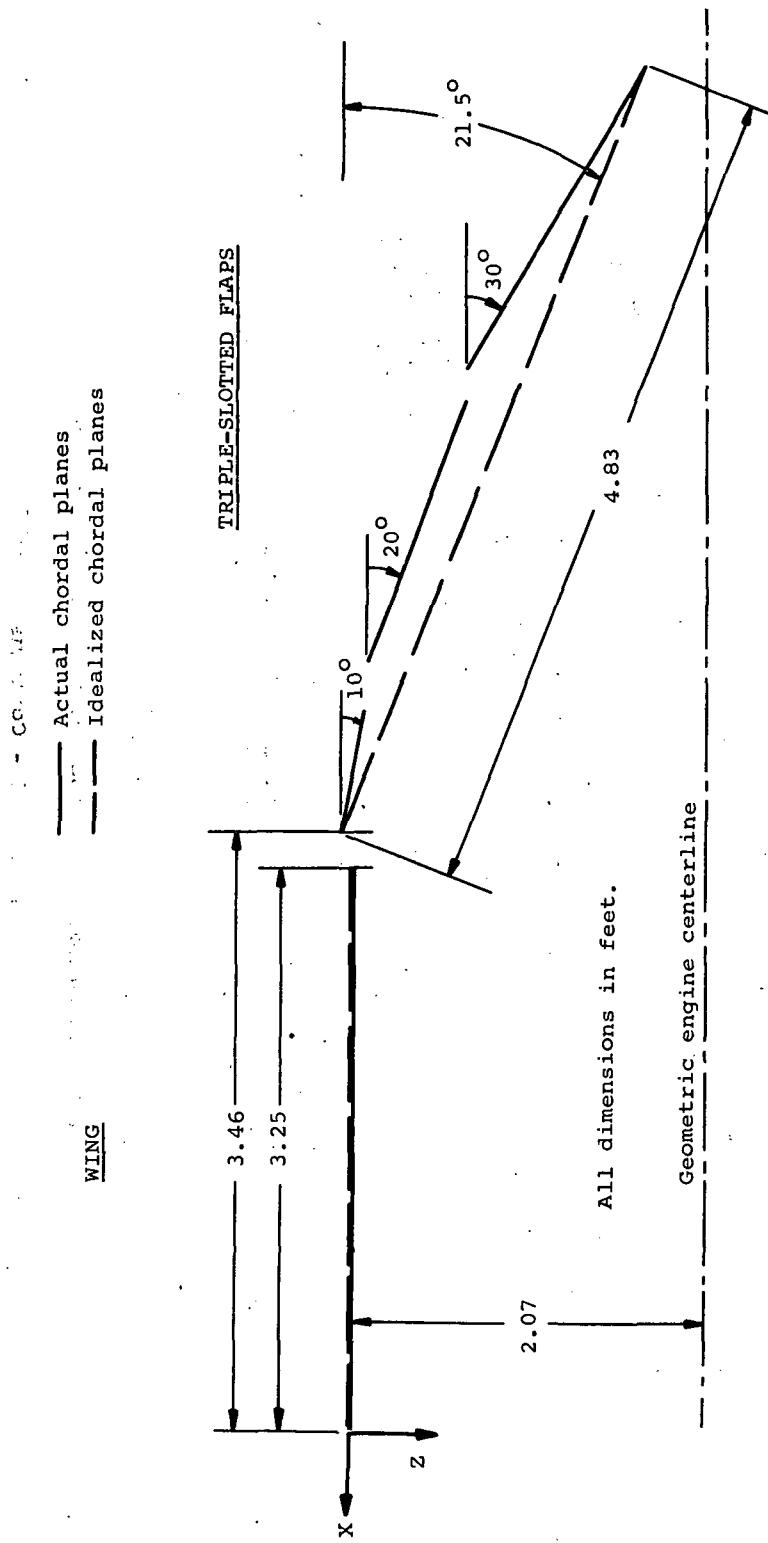

(c) Chordal plane layout in a section normal to wing leading and trailing edges.

Figure 22.—Concluded.

SWEPT WING, FLAP 1 (NASA TMX 62079) FLAP ANGLE = 10/20/30, ALPHA=0, NO JET

GEOMETRY DATA

	WING	FLAP
--	------	------

LE SWEEP, DEG.	30.0000	30.0000
TE SWEEP, DEG.	30.0000	30.0000
DIHEDRAL, DEG.	0.0000	
CHORD AT WING ROOT	3.7500	5.5750
SEMISSPAN	14.5000	14.5000

CHORDWISE VORTICES	4	5
SPANWISE VORTICES	20	20

COORDS. OF ROOTCHORD NOSE OF FLAP EXTENDED TO PLANE OF SYMMETRY

X	Z
-4.0000	-0.0683

UNDEFLECTED FLAP INBOARD SPAN	0.0000
UNDEFLECTED FLAP OUTBOARD SPAN	14.5000

PITCHING MOMENT CENTER	X	Y	Z
	-6.5600	0.0000	0.0000

FLAP ANGLE, DELTA, DEG.	21.5000
CALC. STREAMWISE FLAP ANGLE, DELTA, DEG.	16.8354

FLAP CONDITIONS FOR CASE 1

ANGLE OF ATTACK, ALPHA, DEG.	0.0000
------------------------------	--------

Figure 23(a). Output from wing-flap program, power off.

J	CONTROL POINT COORDINATES AND SLOPES					EXTERNALLY INDUCED VELOCITIES		
	X	Y	Z	MEAN SURFACE SLOPE	J/V	V/V	w/V	
<b>WING CONTROL POINTS</b>								
1	-0.9124	-0.3625	-0.0000	-0.0568	0.00000	0.00000	0.00000	
2	-1.8499	-0.3625	-0.0000	-0.0295	0.00000	0.00000	0.00000	
3	-2.7874	-0.3625	-0.0000	-0.0104	0.00000	0.00000	0.00000	
4	-3.7249	-0.3625	-0.0000	0.0065	0.00000	0.00000	0.00000	
5	-1.3310	-1.0875	-0.0000	-0.0568	0.00000	0.00000	0.00000	
6	-2.2685	-1.0875	-0.0000	-0.0295	0.00000	0.00000	0.00000	
7	-3.2060	-1.0875	-0.0000	-0.0104	0.00000	0.00000	0.00000	
8	-4.1435	-1.0875	-0.0000	0.0065	0.00000	0.00000	0.00000	
9	-1.7490	-1.0125	-0.0000	-0.0568	0.00000	0.00000	0.00000	
10	-2.6871	-1.0125	-0.0000	-0.0295	0.00000	0.00000	0.00000	
11	-3.6246	-1.0125	-0.0000	-0.0104	0.00000	0.00000	0.00000	
12	-4.5621	-1.0125	-0.0000	0.0065	0.00000	0.00000	0.00000	
13	-2.1661	-2.5375	-0.0000	-0.0568	0.00000	0.00000	0.00000	
14	-3.1056	-2.5375	-0.0000	-0.0295	0.00000	0.00000	0.00000	
15	-4.0431	-2.5375	-0.0000	-0.0104	0.00000	0.00000	0.00000	
16	-4.9806	-2.5375	-0.0000	0.0065	0.00000	0.00000	0.00000	
17	-2.5867	-3.2625	-0.0000	-0.0568	0.00000	0.00000	0.00000	
18	-3.5242	-3.2625	-0.0000	-0.0295	0.00000	0.00000	0.00000	
19	-4.4617	-3.2625	-0.0000	-0.0104	0.00000	0.00000	0.00000	
20	-5.3992	-3.2625	-0.0000	0.0065	0.00000	0.00000	0.00000	
21	-3.0053	-3.9875	-0.0000	-0.0568	0.00000	0.00000	0.00000	
22	-3.9426	-3.9875	-0.0000	-0.0295	0.00000	0.00000	0.00000	
23	-4.8803	-3.9875	-0.0000	-0.0104	0.00000	0.00000	0.00000	
24	-5.8178	-3.9875	-0.0000	0.0065	0.00000	0.00000	0.00000	
25	-3.4259	-4.7125	-0.0000	-0.0568	0.00000	0.00000	0.00000	
26	-4.3614	-4.7125	-0.0000	-0.0295	0.00000	0.00000	0.00000	
27	-5.2989	-4.7125	-0.0000	-0.0104	0.00000	0.00000	0.00000	
28	-6.2364	-4.7125	-0.0000	0.0065	0.00000	0.00000	0.00000	
29	-5.6425	-5.4375	-0.0000	-0.0568	0.00000	0.00000	0.00000	
30	-4.7800	-5.4375	-0.0000	-0.0295	0.00000	0.00000	0.00000	
31	-5.7175	-5.4375	-0.0000	-0.0104	0.00000	0.00000	0.00000	
32	-6.6550	-5.4375	-0.0000	0.0065	0.00000	0.00000	0.00000	
33	-4.2610	-6.1625	-0.0000	-0.0568	0.00000	0.00000	0.00000	
34	-5.1985	-6.1625	-0.0000	-0.0295	0.00000	0.00000	0.00000	
35	-6.1360	-6.1625	-0.0000	-0.0104	0.00000	0.00000	0.00000	
36	-7.0735	-6.1625	-0.0000	0.0065	0.00000	0.00000	0.00000	
37	-4.0170	-6.8875	-0.0000	-0.0568	0.00000	0.00000	0.00000	
38	-5.0171	-6.8875	-0.0000	-0.0295	0.00000	0.00000	0.00000	
39	-6.5540	-6.8875	-0.0000	-0.0104	0.00000	0.00000	0.00000	
40	-7.4941	-6.8875	-0.0000	0.0065	0.00000	0.00000	0.00000	
41	-5.0982	-7.6125	-0.0000	-0.0568	0.00000	0.00000	0.00000	
42	-6.0357	-7.6125	-0.0000	-0.0295	0.00000	0.00000	0.00000	
43	-6.9732	-7.6125	-0.0000	-0.0104	0.00000	0.00000	0.00000	
44	-7.9107	-7.6125	-0.0000	0.0065	0.00000	0.00000	0.00000	
45	-5.5160	-8.3375	-0.0000	-0.0568	0.00000	0.00000	0.00000	
46	-6.4543	-8.3375	-0.0000	-0.0295	0.00000	0.00000	0.00000	
47	-7.3918	-8.3375	-0.0000	-0.0104	0.00000	0.00000	0.00000	
48	-3.3249	-9.0625	-0.0000	0.0065	0.00000	0.00000	0.00000	
49	-3.4354	-9.0625	-0.0000	-0.0568	0.00000	0.00000	0.00000	
50	-5.8729	-9.0625	-0.0000	-0.0295	0.00000	0.00000	0.00000	
51	-7.8104	-9.0625	-0.0000	-0.0104	0.00000	0.00000	0.00000	
52	-6.7479	-9.0625	-0.0000	0.0065	0.00000	0.00000	0.00000	
53	-6.5559	-9.7875	-0.0000	-0.0568	0.00000	0.00000	0.00000	
54	-7.4914	-9.7875	-0.0000	-0.0295	0.00000	0.00000	0.00000	
55	-8.2289	-9.7875	-0.0000	-0.0104	0.00000	0.00000	0.00000	
56	-9.1664	-9.7875	-0.0000	0.0065	0.00000	0.00000	0.00000	

Figure 23(a).- Continued.

57	-6.7725	-10.5125	-0.0000	-0.0568	0.00000	0.00000	0.00000
58	-7.7100	-10.5125	-0.0000	-0.0295	0.00000	0.00000	0.00000
59	-8.6475	-10.5125	-0.0000	-0.0104	0.00000	0.00000	0.00000
60	-9.5850	-10.5125	-0.0000	0.0065	0.00000	0.00000	0.00000
61	-7.1911	-11.2375	-0.0000	-0.0568	0.00000	0.30000	0.00000
62	-8.1280	-11.2375	-0.0000	-0.0295	0.00000	0.00000	0.00000
63	-9.0661	-11.2375	-0.0000	-0.0104	0.00000	0.00000	0.00000
64	-10.0036	-11.2375	-0.0000	0.0065	0.00000	0.00000	0.00000
65	-7.6097	-11.9625	-0.0000	-0.0568	0.00000	0.00000	0.00000
66	-8.5472	-11.9625	-0.0000	-0.0295	0.00000	0.00000	0.00000
67	-9.4847	-11.9625	-0.0000	-0.0104	0.00000	0.00000	0.00000
68	-10.4222	-11.9625	-0.0000	0.0065	0.00000	0.00000	0.00000
69	-8.0282	-12.6875	-0.0000	-0.0568	0.00000	0.00000	0.00000
70	-8.9657	-12.6875	-0.0000	-0.0295	0.00000	0.00000	0.00000
71	-9.9032	-12.6875	-0.0000	-0.0104	0.00000	0.00000	0.00000
72	-10.8407	-12.6875	-0.0000	0.0065	0.00000	0.00000	0.00000
73	-8.4468	-13.4125	-0.0000	-0.0568	0.00000	0.00000	0.00000
74	-9.3843	-13.4125	-0.0000	-0.0295	0.00000	0.00000	0.00000
75	-10.3218	-13.4125	-0.0000	-0.0104	0.00000	0.00000	0.00000
76	-11.2593	-13.4125	-0.0000	0.0065	0.00000	0.00000	0.00000
77	-8.8654	-14.1375	-0.0000	-0.0568	0.00000	0.00000	0.00000
78	-9.8029	-14.1375	-0.0000	-0.0295	0.00000	0.00000	0.00000
79	-10.7404	-14.1375	-0.0000	-0.0104	0.00000	0.00000	0.00000
80	-11.6779	-14.1375	-0.0000	0.0065	0.00000	0.00000	0.00000
FLAP CONTROL POINTS							
81	-5.0008	-0.3625	0.2017	-0.1736	0.00000	0.00000	0.00000
82	-6.0560	-0.3625	0.5617	-0.0226	0.00000	0.00000	0.00000
83	-7.1113	-0.3625	0.9217	-0.0226	0.00000	0.00000	0.00000
84	-8.1660	-0.3625	1.2817	0.1285	0.00000	0.00000	0.00000
85	-9.2219	-0.3625	1.6417	0.1285	0.00000	0.00000	0.00000
86	-5.4193	-1.0675	0.2017	-0.1736	0.00000	0.00000	0.00000
87	-6.4746	-1.0875	0.5617	-0.0226	0.00000	0.00000	0.00000
88	-7.5299	-1.0875	0.9217	-0.0226	0.00000	0.00000	0.00000
89	-8.5852	-1.0875	1.2817	0.1285	0.00000	0.00000	0.00000
90	-9.6405	-1.0875	1.6417	0.1285	0.00000	0.00000	0.00000
91	-5.8379	-1.8125	0.2017	-0.1736	0.00000	0.00000	0.00000
92	-6.8932	-1.8125	0.5617	-0.0226	0.00000	0.00000	0.00000
93	-7.9485	-1.8125	0.9217	-0.0226	0.00000	0.00000	0.00000
94	-9.0036	-1.8125	1.2817	0.1285	0.00000	0.00000	0.00000
95	-10.0590	-1.8125	1.6417	0.1285	0.00000	0.00000	0.00000
96	-6.2565	-2.5375	0.2017	-0.1736	0.00000	0.00000	0.00000
97	-7.3118	-2.5375	0.5617	-0.0226	0.00000	0.00000	0.00000
98	-8.3671	-2.5375	0.9217	-0.0226	0.00000	0.00000	0.00000
99	-9.4223	-2.5375	1.2817	0.1285	0.00000	0.00000	0.00000
100	-10.4770	-2.5375	1.6417	0.1285	0.00000	0.00000	0.00000
101	-6.6751	-3.2625	0.2017	-0.1736	0.00000	0.00000	0.00000
102	-7.7304	-3.2625	0.5617	-0.0226	0.00000	0.00000	0.00000
103	-8.7856	-3.2625	0.9217	-0.0226	0.00000	0.00000	0.00000
104	-9.8409	-3.2625	1.2817	0.1265	0.00000	0.00000	0.00000
105	-10.8962	-3.2625	1.6417	0.1285	0.00000	0.00000	0.00000
106	-7.0930	-3.9875	0.2017	-0.1736	0.00000	0.00000	0.00000
107	-8.1484	-3.9875	0.5617	-0.0226	0.00000	0.00000	0.00000
108	-9.2042	-3.9875	0.9217	-0.0226	0.00000	0.00000	0.00000
109	-10.2595	-3.9875	1.2817	0.1285	0.00000	0.00000	0.00000
110	-11.3146	-3.9875	1.6417	0.1285	0.00000	0.00000	0.00000
111	-7.5122	-4.7125	0.2017	-0.1736	0.00000	0.00000	0.00000
112	-8.5675	-4.7125	0.5617	-0.0226	0.00000	0.00000	0.00000
113	-9.6228	-4.7125	0.9217	-0.0226	0.00000	0.00000	0.00000
114	-10.6781	-4.7125	1.2817	0.1285	0.00000	0.00000	0.00000
115	-11.7334	-4.7125	1.6417	0.1285	0.00000	0.00000	0.00000
116	-7.9308	-5.4375	0.2017	-0.1736	0.00000	0.00000	0.00000
117	-8.9861	-5.4375	0.5617	-0.0226	0.00000	0.00000	0.00000

Figure 23(a).- Continued

118	-10.0414	-5.4375	0.9217	-0.0226	0.00000	0.00000	0.00000
119	-11.0967	-5.4375	1.2817	0.1285	0.00000	0.00000	0.00000
120	-12.1519	-5.4375	1.6417	0.1285	0.00000	0.00000	0.00000
121	-8.3494	-6.1625	0.2017	-0.1736	0.00000	0.00000	0.00000
122	-9.4047	-6.1625	0.5617	-0.0226	0.00000	0.00000	0.00000
123	-10.4600	-6.1625	0.9217	-0.0226	0.00000	0.00000	0.00000
124	-11.5152	-6.1625	1.2817	0.1285	0.00000	0.00000	0.00000
125	-12.5705	-6.1625	1.6417	0.1285	0.00000	0.00000	0.00000
126	-8.7680	-6.8875	0.2017	-0.1736	0.00000	0.00000	0.00000
127	-9.8232	-6.8875	0.5617	-0.0226	0.00000	0.00000	0.00000
128	-10.8785	-6.8875	0.9217	-0.0226	0.00000	0.00000	0.00000
129	-11.9338	-6.8875	1.2817	0.1285	0.00000	0.00000	0.00000
130	-12.9891	-6.8875	1.6417	0.1285	0.00000	0.00000	0.00000
131	-9.1865	-7.6125	0.2017	-0.1736	0.00000	0.00000	0.00000
132	-10.2418	-7.6125	0.5617	-0.0226	0.00000	0.00000	0.00000
133	-11.2971	-7.6125	0.9217	-0.0226	0.00000	0.00000	0.00000
134	-12.3524	-7.6125	1.2817	0.1285	0.00000	0.00000	0.00000
135	-13.4077	-7.6125	1.6417	0.1285	0.00000	0.00000	0.00000
136	-9.6051	-8.3375	0.2017	-0.1736	0.00000	0.00000	0.00000
137	-10.6604	-8.3375	0.5617	-0.0226	0.00000	0.00000	0.00000
138	-11.7157	-8.3375	0.9217	-0.0226	0.00000	0.00000	0.00000
139	-12.7710	-8.3375	1.2817	0.1285	0.00000	0.00000	0.00000
140	-13.8263	-8.3375	1.6417	0.1285	0.00000	0.00000	0.00000
141	-10.0237	-9.0625	0.2017	-0.1736	0.00000	0.00000	0.00000
142	-11.0790	-9.0625	0.5617	-0.0226	0.00000	0.00000	0.00000
143	-12.1343	-9.0625	0.9217	-0.0226	0.00000	0.00000	0.00000
144	-13.1896	-9.0625	1.2817	0.1285	0.00000	0.00000	0.00000
145	-14.2448	-9.0625	1.6417	0.1285	0.00000	0.00000	0.00000
146	-10.4423	-9.7875	0.2017	-0.1736	0.00000	0.00000	0.00000
147	-11.4976	-9.7875	0.5617	-0.0226	0.00000	0.00000	0.00000
148	-12.5528	-9.7875	0.9217	-0.0226	0.00000	0.00000	0.00000
149	-13.6081	-9.7875	1.2817	0.1285	0.00000	0.00000	0.00000
150	-14.6634	-9.7875	1.6417	0.1285	0.00000	0.00000	0.00000
151	-10.8609	-10.5125	0.2017	-0.1736	0.00000	0.00000	0.00000
152	-11.9161	-10.5125	0.5617	-0.0226	0.00000	0.00000	0.00000
153	-12.9714	-10.5125	0.9217	-0.0226	0.00000	0.00000	0.00000
154	-14.0267	-10.5125	1.2817	0.1285	0.00000	0.00000	0.00000
155	-15.0820	-10.5125	1.6417	0.1285	0.00000	0.00000	0.00000
156	-11.2794	-11.2375	0.2017	-0.1736	0.00000	0.00000	0.00000
157	-12.3347	-11.2375	0.5617	-0.0226	0.00000	0.00000	0.00000
158	-13.3900	-11.2375	0.9217	-0.0226	0.00000	0.00000	0.00000
159	-14.4452	-11.2375	1.2817	0.1285	0.00000	0.00000	0.00000
160	-15.5006	-11.2375	1.6417	0.1285	0.00000	0.00000	0.00000
161	-11.0980	-11.9625	0.2017	-0.1736	0.00000	0.00000	0.00000
162	-12.7533	-11.9625	0.5617	-0.0226	0.00000	0.00000	0.00000
163	-13.5086	-11.9625	0.9217	-0.0226	0.00000	0.00000	0.00000
164	-14.8639	-11.9625	1.2817	0.1285	0.00000	0.00000	0.00000
165	-15.9191	-11.9625	1.6417	0.1285	0.00000	0.00000	0.00000
166	-12.1160	-12.6875	0.2017	-0.1736	0.00000	0.00000	0.00000
167	-13.1719	-12.6875	0.5617	-0.0226	0.00000	0.00000	0.00000
168	-14.2272	-12.6875	0.9217	-0.0226	0.00000	0.00000	0.00000
169	-15.2624	-12.6875	1.2817	0.1285	0.00000	0.00000	0.00000
170	-16.3377	-12.6875	1.6417	0.1285	0.00000	0.00000	0.00000
171	-12.3352	-13.4125	0.2017	-0.1736	0.00000	0.00000	0.00000
172	-13.5905	-13.4125	0.5617	-0.0226	0.00000	0.00000	0.00000
173	-14.6457	-13.4125	0.9217	-0.0226	0.00000	0.00000	0.00000
174	-15.7010	-13.4125	1.2817	0.1285	0.00000	0.00000	0.00000
175	-16.7563	-13.4125	1.6417	0.1285	0.00000	0.00000	0.00000
176	-12.9537	-14.1375	0.2017	-0.1736	0.00000	0.00000	0.00000
177	-14.0090	-14.1375	0.5617	-0.0226	0.00000	0.00000	0.00000
178	-15.0649	-14.1375	0.9217	-0.0226	0.00000	0.00000	0.00000
179	-16.1196	-14.1375	1.2817	0.1285	0.00000	0.00000	0.00000
180	-17.1749	-14.1375	1.6417	0.1285	0.00000	0.00000	0.00000

Figure 23(a).- Continued.

### HORSESHOE VORTEX CHARACTERISTICS

#### WING VORTICES BOUNDELEG MIDPOINT COORDINATES

J	X	Y	Z	SWEET, DEG.	SEMIWIDTH
1	-0.4437	-0.3625	-0.0000	30.0000	0.3625
2	-1.3812	-0.3625	-0.0000	30.0000	0.3625
3	-2.3187	-0.3625	-0.0000	30.0000	0.3625
4	-3.2562	-0.3625	-0.0000	30.0000	0.3625
5	-0.8622	-1.0875	-0.0000	30.0000	0.3625
6	-1.7997	-1.0875	-0.0000	30.0000	0.3625
7	-2.7372	-1.0875	-0.0000	30.0000	0.3625
8	-3.6747	-1.0875	-0.0000	30.0000	0.3625
9	-1.2808	-1.8125	-0.0000	30.0000	0.3625
10	-2.2183	-1.8125	-0.0000	30.0000	0.3625
11	-3.1558	-1.8125	-0.0000	30.0000	0.3625
12	-4.0933	-1.8125	-0.0000	30.0000	0.3625
13	-1.6994	-2.5375	-0.0000	30.0000	0.3625
14	-2.6369	-2.5375	-0.0000	30.0000	0.3625
15	-3.5744	-2.5375	-0.0000	30.0000	0.3625
16	-4.5119	-2.5375	-0.0000	30.0000	0.3625
17	-2.1180	-3.2625	-0.0000	30.0000	0.3625
18	-3.0555	-3.2625	-0.0000	30.0000	0.3625
19	-3.9930	-3.2625	-0.0000	30.0000	0.3625
20	-4.9305	-3.2625	-0.0000	30.0000	0.3625
21	-2.5366	-3.9875	-0.0000	30.0000	0.3625
22	-3.4741	-3.9875	-0.0000	30.0000	0.3625
23	-4.4116	-3.9875	-0.0000	30.0000	0.3625
24	-5.3491	-3.9875	-0.0000	30.0000	0.3625
25	-2.9551	-4.7125	-0.0000	30.0000	0.3625
26	-3.8926	-4.7125	-0.0000	30.0000	0.3625
27	-4.8301	-4.7125	-0.0000	30.0000	0.3625
28	-5.7676	-4.7125	-0.0000	30.0000	0.3625
29	-3.3737	-5.4375	-0.0000	30.0000	0.3625
30	-4.3112	-5.4375	-0.0000	30.0000	0.3625
31	-5.2487	-5.4375	-0.0000	30.0000	0.3625
32	-6.1862	-5.4375	-0.0000	30.0000	0.3625
33	-3.7923	-6.1625	-0.0000	30.0000	0.3625
34	-4.7298	-6.1625	-0.0000	30.0000	0.3625
35	-5.6673	-6.1625	-0.0000	30.0000	0.3625
36	-6.6048	-6.1625	-0.0000	30.0000	0.3625
37	-4.2109	-6.8875	-0.0000	30.0000	0.3625
38	-5.1484	-6.8875	-0.0000	30.0000	0.3625
39	-6.0859	-6.8875	-0.0000	30.0000	0.3625
40	-7.0234	-6.8875	-0.0000	30.0000	0.3625
41	-4.6295	-7.6125	-0.0000	30.0000	0.3625
42	-5.5670	-7.6125	-0.0000	30.0000	0.3625
43	-6.5045	-7.6125	-0.0000	30.0000	0.3625
44	-7.4420	-7.6125	-0.0000	30.0000	0.3625
45	-5.0480	-8.3375	-0.0000	30.0000	0.3625
46	-5.9855	-8.3375	-0.0000	30.0000	0.3625
47	-6.9230	-8.3375	-0.0000	30.0000	0.3625
48	-7.8605	-8.3375	-0.0000	30.0000	0.3625
49	-5.4666	-9.0625	-0.0000	30.0000	0.3625
50	-6.4041	-9.0625	-0.0000	30.0000	0.3625
51	-7.3416	-9.0625	-0.0000	30.0000	0.3625
52	-8.2791	-9.0625	-0.0000	30.0000	0.3625
53	-5.8852	-9.7875	-0.0000	30.0000	0.3625
54	-6.8227	-9.7875	-0.0000	30.0000	0.3625
55	-7.7602	-9.7875	-0.0000	30.0000	0.3625
56	-8.6977	-9.7875	-0.0000	30.0000	0.3625
57	-6.3036	-10.5125	-0.0000	30.0000	0.3625
58	-7.2419	-10.5125	-0.0000	30.0000	0.3625
59	-8.1788	-10.5125	-0.0000	30.0000	0.3625
60	-9.1163	-10.5125	-0.0000	30.0000	0.3625

#### VORTEX STRENGTHS, GAMMA/V

ALPHAD= 0.0000, DELD= 21.5000

Figure 23(a).- Continued

61	-6.7223	-11.2375	-0.0000	30.0000	0.3625	0.6508
62	-7.0556	-11.2375	-0.0000	30.0000	0.3625	0.4325
63	-8.5973	-11.2375	-0.0000	30.0000	0.3625	0.3908
64	-9.5348	-11.2375	-0.0000	30.0000	0.3625	0.3759
65	-7.1409	-11.9625	-0.0000	30.0000	0.3625	0.6145
66	-8.0784	-11.9625	-0.0000	30.0000	0.3625	0.4027
67	-9.0159	-11.9625	-0.0000	30.0000	0.3625	0.3602
68	-9.9534	-11.9625	-0.0000	30.0000	0.3625	0.3464
69	-7.5595	-12.6875	-0.0000	30.0000	0.3625	0.5035
70	-8.4970	-12.6875	-0.0000	30.0000	0.3625	0.3606
71	-9.4345	-12.6875	-0.0000	30.0000	0.3625	0.3179
72	-10.3720	-12.6875	-0.0000	30.0000	0.3625	0.3067
73	-7.9781	-13.4125	-0.0000	30.0000	0.3625	0.4885
74	-8.9156	-13.4125	-0.0000	30.0000	0.3625	0.2977
75	-9.8531	-13.4125	-0.0000	30.0000	0.3625	0.2585
76	-10.7906	-13.4125	-0.0000	30.0000	0.3625	0.2523
77	-8.3967	-14.1375	-0.0000	30.0000	0.3625	0.3010
78	-9.3342	-14.1375	-0.0000	30.0000	0.3625	0.1968
79	-10.2717	-14.1375	-0.0000	30.0000	0.3625	0.1719
80	-11.2092	-14.1375	-0.0000	30.0000	0.3625	0.1722

#### FLAP VERTICES

81	-4.4731	-0.3625	0.0217	28.2437	0.3687	0.9474
82	-5.5284	-0.3625	0.0217	28.2437	0.3687	0.6556
83	-6.5337	-0.3625	0.7417	28.2437	0.3687	0.6436
84	-7.6390	-0.3625	1.1017	28.2437	0.3687	0.6943
85	-8.6943	-0.3625	1.4617	28.2437	0.3687	0.3728
86	-4.8917	-1.0075	0.0217	28.2437	0.3687	0.9989
87	-5.9470	-1.0075	0.3817	28.2437	0.3687	0.6071
88	-7.0023	-1.0075	0.7417	28.2437	0.3687	0.6492
89	-8.0579	-1.0075	1.1017	28.2437	0.3687	0.0752
90	-9.1126	-1.0075	1.4617	28.2437	0.3687	0.3411
91	-5.3103	-1.0125	0.0217	28.2437	0.3687	1.0225
92	-6.3650	-1.0125	0.3817	28.2437	0.3687	0.9021
93	-7.4200	-1.0125	0.7417	28.2437	0.3687	0.6513
94	-8.4761	-1.0125	1.1017	28.2437	0.3687	0.6661
95	-9.5314	-1.0125	1.4617	28.2437	0.3687	0.3286
96	-5.7286	-2.0375	0.0217	28.2437	0.3687	1.0334
97	-6.7841	-2.0375	0.3817	28.2437	0.3687	0.9070
98	-7.8394	-2.0375	0.7417	28.2437	0.3687	0.6497
99	-8.0947	-2.0375	1.1017	28.2437	0.3687	0.6008
100	-9.0500	-2.0375	1.4617	28.2437	0.3687	0.3229
101	-5.1474	-3.0225	0.0217	28.2437	0.3687	1.0373
102	-7.2027	-3.0225	0.3817	28.2437	0.3687	0.9068
103	-8.2580	-3.0225	0.7417	28.2437	0.3687	0.6463
104	-9.3133	-3.0225	1.1017	28.2437	0.3687	0.6565
105	-10.3660	-3.0225	1.4617	28.2437	0.3687	0.3191
106	-8.5680	-3.9075	0.0217	28.2437	0.3687	1.0368
107	-7.6213	-3.9075	0.3817	28.2437	0.3687	0.9037
108	-8.6766	-3.9075	0.7417	28.2437	0.3687	0.6418
109	-9.7319	-3.9075	1.1017	28.2437	0.3687	0.6323
110	-10.7871	-3.9875	1.4617	28.2437	0.3687	0.3157
111	-6.9840	-4.7125	0.0217	28.2437	0.3687	1.0334
112	-8.0399	-4.7125	0.3817	28.2437	0.3687	0.8988
113	-9.0951	-4.7125	0.7417	28.2437	0.3687	0.6305
114	-10.1504	-4.7125	1.1017	28.2437	0.3687	0.6478
115	-11.2057	-4.7125	1.4617	28.2437	0.3687	0.3122
116	-7.4032	-5.4375	0.0217	28.2437	0.3687	1.0276
117	-8.4584	-5.4375	0.3817	28.2437	0.3687	0.6926
118	-9.5157	-5.4375	0.7417	28.2437	0.3687	0.6303
119	-10.5690	-5.4375	1.1017	28.2437	0.3687	0.6427

Figure 23(a).- Continued.

120	-11.6243	-5.4375	1.4617	28.2437	0.3687	0.3084
121	-7.8217	-6.1625	0.0217	28.2437	0.3687	1.0195
122	-8.8770	-6.1625	0.3817	28.2437	0.3687	0.8849
123	-9.9323	-6.1625	0.7417	28.2437	0.3687	0.6233
124	-10.9876	-6.1625	1.1017	28.2437	0.3687	0.6370
125	-12.0429	-6.1625	1.4617	28.2437	0.3687	0.3042
126	-8.2403	-6.8875	0.0217	28.2437	0.3687	1.0091
127	-9.2956	-6.8875	0.3817	28.2437	0.3687	0.8758
128	-10.3509	-6.8875	0.7417	28.2437	0.3687	0.6151
129	-11.4062	-6.8875	1.1017	28.2437	0.3687	0.6303
130	-12.4615	-6.8875	1.4617	28.2437	0.3687	0.2994
131	-8.6589	-7.6125	0.0217	28.2437	0.3687	0.9961
132	-9.7142	-7.6125	0.3817	28.2437	0.3687	0.8649
133	-10.7695	-7.6125	0.7417	28.2437	0.3687	0.6055
134	-11.8248	-7.6125	1.1017	28.2437	0.3687	0.6225
135	-12.8800	-7.6125	1.4617	28.2437	0.3687	0.2939
136	-9.0775	-8.3375	0.0217	28.2437	0.3687	0.9798
137	-10.1328	-8.3375	0.3817	28.2437	0.3687	0.8517
138	-11.1880	-8.3375	0.7417	28.2437	0.3687	0.5941
139	-12.2433	-8.3375	1.1017	28.2437	0.3687	0.6134
140	-13.2986	-8.3375	1.4617	28.2437	0.3687	0.2875
141	-9.4961	-9.0625	0.0217	28.2437	0.3687	0.9596
142	-10.5513	-9.0625	0.3817	28.2437	0.3687	0.8359
143	-11.6066	-9.0625	0.7417	28.2437	0.3687	0.5805
144	-12.6619	-9.0625	1.1017	28.2437	0.3687	0.6026
145	-13.7172	-9.0625	1.4617	28.2437	0.3687	0.2799
146	-9.9146	-9.7875	0.0217	28.2437	0.3687	0.9342
147	-10.9699	-9.7875	0.3817	28.2437	0.3687	0.8166
148	-12.0252	-9.7875	0.7417	28.2437	0.3687	0.5642
149	-13.0805	-9.7875	1.1017	28.2437	0.3687	0.5894
150	-14.1358	-9.7875	1.4617	28.2437	0.3687	0.2707
151	-10.3332	-10.5125	0.0217	28.2437	0.3687	0.9023
152	-11.3885	-10.5125	0.3817	28.2437	0.3687	0.7929
153	-12.4438	-10.5125	0.7417	28.2437	0.3687	0.5442
154	-13.4991	-10.5125	1.1017	28.2437	0.3687	0.5732
155	-14.5544	-10.5125	1.4617	28.2437	0.3687	0.2594
156	-10.7518	-11.2375	0.0217	28.2437	0.3687	0.8617
157	-11.8071	-11.2375	0.3817	28.2437	0.3687	0.7634
158	-12.8624	-11.2375	0.7417	28.2437	0.3687	0.5193
159	-13.9176	-11.2375	1.1017	28.2437	0.3687	0.5525
160	-14.9729	-11.2375	1.4617	28.2437	0.3687	0.2448
161	-11.1704	-11.9625	0.0217	28.2437	0.3687	0.8090
162	-12.2257	-11.9625	0.3817	28.2437	0.3687	0.7262
163	-13.2809	-11.9625	0.7417	28.2437	0.3687	0.4871
164	-14.3362	-11.9625	1.1017	28.2437	0.3687	0.5248
165	-15.3915	-11.9625	1.4617	28.2437	0.3687	0.2250
166	-11.5889	-12.6875	0.0217	28.2437	0.3687	0.7391
167	-12.6442	-12.6875	0.3817	28.2437	0.3687	0.6772
168	-13.6995	-12.6875	0.7417	28.2437	0.3687	0.4428
169	-14.7548	-12.6875	1.1017	28.2437	0.3687	0.4845
170	-15.8101	-12.6875	1.4617	28.2437	0.3687	0.1962
171	-12.0075	-13.4125	0.0217	28.2437	0.3687	0.6410
172	-13.0628	-13.4125	0.3817	28.2437	0.3687	0.6079
173	-14.1181	-13.4125	0.7417	28.2437	0.3687	0.3746
174	-15.1734	-13.4125	1.1017	28.2437	0.3687	0.4196
175	-16.2287	-13.4125	1.4617	28.2437	0.3687	0.1517
176	-12.4261	-14.1375	0.0217	28.2437	0.3687	0.4821
177	-13.4814	-14.1375	0.3817	28.2437	0.3687	0.4849
178	-14.5367	-14.1375	0.7417	28.2437	0.3687	0.2492
179	-15.5920	-14.1375	1.1017	28.2437	0.3687	0.2987
180	-16.6472	-14.1375	1.4617	28.2437	0.3687	0.0829

Figure 23(a).- Continued

AERODYNAMIC LOADING RESULTS FOR ALPHA = 0.00000 DEG.

WING LIFT COEFFICIENT		FLAP LIFT COEFFICIENT			
	0.9808		1.6580		
TOTAL LIFT COEFFICIENT, CL		PITCHING MOMENT COEFFICIENT, CM			
	2.6388	-1.1817			
REFERENCE QUANTITIES					
WING SPAN,B	WING PLANFORM AREA,SREF	WING AVE.CHORD,CAVE			
29.0000	108.7500	3.7500			
SPANWISE LOAD DISTRIBUTION					
STATION	Y/(B/2)	LOCAL CHORD,C	CL*C/CL*CAVE	CL*C/(2*B)	
<b>WING</b>					
1	0.0250	3.7500	0.6091	0.0513	
2	0.0750	3.7500	0.8848	0.0561	
3	0.1250	3.7500	0.9530	0.0604	
4	0.1750	3.7500	1.0097	0.0640	
5	0.2250	3.7500	1.0556	0.0689	
6	0.2750	3.7500	1.0918	0.0692	
7	0.3250	3.7500	1.1193	0.0710	
8	0.3750	3.7500	1.1390	0.0722	
9	0.4250	3.7500	1.1515	0.0730	
10	0.4750	3.7500	1.1571	0.0734	
11	0.5250	3.7500	1.1557	0.0733	
12	0.5750	3.7500	1.1470	0.0727	
13	0.6250	3.7500	1.1303	0.0717	
14	0.6750	3.7500	1.1045	0.0700	
15	0.7250	3.7500	1.0678	0.0677	
16	0.7750	3.7500	1.0170	0.0645	
17	0.8250	3.7500	0.9476	0.0601	
18	0.8750	3.7500	0.8513	0.0540	
19	0.9250	3.7500	0.7129	0.0452	
20	0.9750	3.7500	0.4951	0.0314	
<b>FLAP</b>					
1	0.0254	5.5750	1.0905	0.1169	
2	0.0703	5.5750	1.1073	0.1187	
3	0.1272	5.5750	1.1186	0.1199	
4	0.1780	5.5750	1.1227	0.1204	
5	0.2289	5.5750	1.1223	0.1203	
6	0.2797	5.5750	1.1186	0.1199	
7	0.3306	5.5750	1.1126	0.1193	
8	0.3815	5.5750	1.1046	0.1184	
9	0.4323	5.5750	1.0947	0.1173	
10	0.4832	5.5750	1.0827	0.1161	
11	0.5340	5.5750	1.0682	0.1145	
12	0.5849	5.5750	1.0507	0.1126	
13	0.6358	5.5750	1.0295	0.1104	
14	0.6866	5.5750	1.0035	0.1076	
15	0.7375	5.5750	0.9713	0.1041	
16	0.7883	5.5750	0.9303	0.0997	
17	0.8392	5.5750	0.8767	0.0940	
18	0.8901	5.5750	0.8029	0.0861	
19	0.9409	5.5750	0.6922	0.0742	
20	0.9918	5.5750	0.5001	0.0536	
CD,WING	CD,FLAP	CD,WING	CD,FLAP	CD	CD/CL*CL
0.26375	-1.44541	-0.07666	0.35821	0.28155	0.04043

Figure 23(a).- Continued

Figure 23(a). - Concluded.

VELOCITIES INDUCED AT SPECIFIED POINTS IN THE VICINITY OF THE WING

N	X	Y	Z	U/V	V/W	W/V
1	-1.7000	-7.2500	2.0700	0.05404	-0.02610	-0.07911
2	-3.7000	-7.2500	2.0700	0.11256	-0.05904	-0.08841
3	-5.7000	-7.2500	2.0700	0.17087	-0.09431	-0.04045
4	-7.7000	-7.2500	2.0700	0.20652	-0.12167	0.01573
5	-9.7000	-7.2500	2.0700	0.23903	-0.15162	0.10427
6	-11.7000	-7.2500	2.0700	0.23202	-0.16010	0.23445
7	-13.7000	-7.2500	2.0700	0.10073	-0.10177	0.32020
8	-15.7000	-7.2500	2.0700	0.05532	-0.00027	0.26956

Figure 23(a). - Concluded.

SWEPT WING, FLAP I (NASA TMX 62079) FLAP ANGLE = 10/20/30, ALPHA= 0, C(MU)=0.9.

GEOMETRY DATA

	WING	FLAP
LE SWEET, DEG.	30.0000	30.0000
TE SWEET, DEG.	30.0000	30.0000
DIHEDRAL, DEG.	0.0000	
CHORD AT WING ROOT	3.7500	5.5750
SEMISSPAN	14.5000	14.5000
CHORDWISE VORTICES	4	5
SPANWISE VORTICES	20	20

COORDS. OF ROOTCHORD NOSE OF FLAP EXTENDED TO PLANE OF SYMMETRY

X                    Y                    Z  
-4.0000            0.0000            -0.0683

UNDEFLECTED FLAP INBOARD SPAN            0.0000  
UNDEFLECTED FLAP OUTBOARD SPAN            14.5000

PITCHING MOMENT CENTER            X            Y            Z  
-6.5600            0.0000            0.0000

FLAP ANGLE, DEG., DEG.            21.5000  
CALC. STREAMWISE FLAP ANGLE, DLXD, DEG.            18.8364

FLOW CONDITIONS FOR CASE 1

ANGLE OF ATTACK, ALPHA, DEG.            0.0000

SOURCE OF EXTERNALLY INDUCED VELOCITIES, ALPHA=0 DEGREES, C(MU)=0.9

Figure 23(b).- Output from wing-flap program, with power.

J	CONTROL POINT COORDINATES AND SLOPES MEAN SURFACE				EXTERNALLY INDUCED VELOCITIES		
	X	Y	Z	SLOPE	U/V	V/W	W/V
<b>WING CONTROL POINTS</b>							
1	-0.9124	-0.3625	-0.0000	-0.0568	-0.00204	-0.02287	0.00690
2	-1.8499	-0.3625	-0.0000	-0.0295	-0.00016	-0.02206	0.00664
3	-2.7874	-0.3625	-0.0000	-0.0104	0.00121	-0.02087	0.00625
4	-3.7249	-0.3625	-0.0000	0.0065	0.00209	-0.01954	0.00581
5	-1.3310	-1.0875	-0.0000	-0.0568	-0.00034	-0.02617	0.00882
6	-2.2685	-1.0875	-0.0000	-0.0295	0.00165	-0.02457	0.00826
7	-3.2060	-1.0875	-0.0000	-0.0104	0.00287	-0.02272	0.00759
8	-4.1435	-1.0875	-0.0000	0.0065	0.00349	-0.02096	0.00692
9	-1.7496	-1.8125	-0.0000	-0.0568	0.00223	-0.02953	0.01128
10	-2.6871	-1.8125	-0.0000	-0.0295	0.00402	-0.02687	0.01023
11	-3.6246	-1.8125	-0.0000	-0.0104	0.00480	-0.02432	0.00917
12	-4.5621	-1.8125	-0.0000	0.0065	0.00497	-0.02219	0.00823
13	-2.1681	-2.5375	-0.0000	-0.0568	0.00574	-0.03245	0.01430
14	-3.1056	-2.5375	-0.0000	-0.0295	0.00680	-0.02863	0.01253
15	-4.0431	-2.5375	-0.0000	-0.0104	0.00680	-0.02553	0.01101
16	-4.9806	-2.5375	-0.0000	0.0065	0.00636	-0.02321	0.00977
17	-2.5867	-3.2625	-0.0000	-0.0568	0.00998	-0.03424	0.01777
18	-3.5242	-3.2625	-0.0000	-0.0295	0.00963	-0.02953	0.01513
19	-4.4617	-3.2625	-0.0000	-0.0104	0.00857	-0.02626	0.01314
20	-5.3992	-3.2625	-0.0000	0.0065	0.00745	-0.02410	0.01164
21	-3.0053	-3.9875	-0.0000	-0.0568	0.01416	-0.03421	0.02147
22	-3.9428	-3.9875	-0.0000	-0.0295	0.01191	-0.02943	0.01804
23	-4.8803	-3.9875	-0.0000	-0.0104	0.00972	-0.02661	0.01569
24	-5.8178	-3.9875	-0.0000	0.0065	0.00803	-0.02502	0.01402
25	-3.4239	-4.7125	-0.0000	-0.0568	0.01709	-0.03221	0.02521
26	-4.3614	-4.7125	-0.0000	-0.0295	0.01299	-0.02853	0.02136
27	-5.2989	-4.7125	-0.0000	-0.0104	0.00993	-0.02684	0.01896
28	-6.2364	-4.7125	-0.0000	0.0065	0.00790	-0.02624	0.01736
29	-3.3425	-5.4375	-0.0000	-0.0568	0.01769	-0.02886	0.02905
30	-4.7600	-5.4375	-0.0000	-0.0295	0.01243	-0.02729	0.02559
31	-5.7175	-5.4375	-0.0000	-0.0104	0.00899	-0.02721	0.02369
32	-6.6550	-5.4375	-0.0000	0.0065	0.00694	-0.02788	0.02260
33	-4.2610	-6.1625	-0.0000	-0.0568	0.01568	-0.02522	0.03404
34	-5.1985	-6.1625	-0.0000	-0.0295	0.01020	-0.02582	0.03204
35	-6.1360	-6.1625	-0.0000	-0.0104	0.00692	-0.02719	0.03146
36	-7.0735	-6.1625	-0.0000	0.0065	0.00517	-0.02895	0.03155
37	-4.6796	-6.8875	-0.0000	-0.0568	0.01195	-0.01994	0.04232
38	-5.0171	-6.8875	-0.0000	-0.0295	0.00722	-0.02139	0.04234
39	-6.5548	-6.8875	-0.0000	-0.0104	0.00428	-0.02308	0.04347
40	-7.4921	-6.8875	-0.0000	0.0065	0.00305	-0.02501	0.04513
41	-5.0982	-7.6125	-0.0000	-0.0568	0.00859	-0.00759	0.05124
42	-6.0357	-7.6125	-0.0000	-0.0295	0.00459	-0.00849	0.05234
43	-6.9732	-7.6125	-0.0000	-0.0104	0.00246	-0.00938	0.05436
44	-7.9107	-7.6125	-0.0000	0.0035	0.00148	-0.01052	0.05688
45	-5.5168	-8.3375	-0.0000	-0.0568	0.00620	0.00972	0.05135
46	-6.4543	-8.3375	-0.0000	-0.0295	0.00326	0.00941	0.05238
47	-7.3918	-8.3375	-0.0000	-0.0104	0.00155	0.00925	0.05420
48	-8.3293	-8.3375	-0.0000	0.0065	0.00093	0.00885	0.05659
49	-5.9354	-9.0625	-0.0000	-0.0568	0.00459	0.02205	0.04268
50	-6.8729	-9.0625	-0.0000	-0.0295	0.00243	0.02189	0.04334
51	-7.8104	-9.0625	-0.0000	-0.0104	0.00116	0.02195	0.04464
52	-8.7479	-9.0625	-0.0000	0.0065	0.00080	0.02181	0.04652
53	-6.3539	-9.7875	-0.0000	-0.0568	0.00336	0.02699	0.03236
54	-7.2914	-9.7875	-0.0000	-0.0295	0.00187	0.02679	0.03276
55	-8.2289	-9.7875	-0.0000	-0.0104	0.00092	0.02679	0.03367
56	-9.1664	-9.7875	-0.0000	0.0065	0.00065	0.02665	0.03508
57	-6.7725	-10.5125	-0.0000	-0.0568	0.00239	0.02746	0.02399

Figure 23(b). - Continued.

58	-7.7100	-10.5125	-0.0000	-0.0295	0.00134	0.02719	0.02428
59	-8.6475	-10.5125	-0.0000	-0.0104	0.00068	0.02712	0.02496
60	-9.5850	-10.5125	-0.0000	0.0065	0.00046	0.02698	0.02599
61	-7.1911	-11.2375	-0.0000	-0.0568	0.00162	0.02602	0.01796
62	-8.1286	-11.2375	-0.0000	-0.0295	0.00092	0.02574	0.01819
63	-9.0661	-11.2375	-0.0000	-0.0104	0.00047	0.02563	0.01871
64	-10.0036	-11.2375	-0.0000	0.0065	0.00031	0.02553	0.01945
65	-7.6097	-11.9625	-0.0000	-0.0568	0.00103	0.02398	0.01371
66	-8.5472	-11.9625	-0.0000	-0.0295	0.00058	0.02373	0.01392
67	-9.4847	-11.9625	-0.0000	-0.0104	0.00031	0.02361	0.01430
68	-10.4222	-11.9625	-0.0000	0.0065	0.00022	0.02353	0.01481
69	-8.0282	-12.6875	-0.0000	-0.0568	0.00060	0.02187	0.01070
70	-8.9657	-12.6875	-0.0000	-0.0295	0.00034	0.02165	0.01086
71	-9.9032	-12.6875	-0.0000	-0.0104	0.00019	0.02154	0.01113
72	-10.8407	-12.6875	-0.0000	0.0065	0.00016	0.02147	0.01147
73	-8.4468	-13.4125	-0.0000	-0.0568	0.00030	0.01989	0.00850
74	-9.3843	-13.4125	-0.0000	-0.0295	0.00016	0.01971	0.00863
75	-10.3218	-13.4125	-0.0000	-0.0104	0.00011	0.01961	0.00882
76	-11.2593	-13.4125	-0.0000	0.0065	0.00013	0.01954	0.00904
77	-8.8654	-14.1375	-0.0000	-0.0568	0.00008	0.01811	0.00687
78	-9.8029	-14.1375	-0.0000	-0.0295	0.00004	0.01796	0.00696
79	-10.7404	-14.1375	-0.0000	-0.0104	0.00005	0.01786	0.00708
80	-11.6779	-14.1375	-0.0000	0.0065	0.00012	0.01778	0.00722
	FLAP CONTROL POINTS						
81	-5.0008	-0.3625	0.2017	-0.1736	0.00281	-0.01811	0.00480
82	-6.0560	-0.3625	0.5617	-0.0226	0.00315	-0.01723	0.00365
83	-7.1113	-0.3625	0.9217	-0.0226	0.00330	-0.01636	0.00259
84	-8.1666	-0.3625	1.2817	0.1285	0.00336	-0.01549	0.00163
85	-9.2219	-0.3625	1.6417	0.1285	0.00333	-0.01460	0.00078
86	-5.4193	-1.0875	0.2017	-0.1736	0.00388	-0.01926	0.00564
87	-6.4746	-1.0875	0.5617	-0.0226	0.00403	-0.01832	0.00425
88	-7.5299	-1.0875	0.9217	-0.0226	0.00407	-0.01742	0.00299
89	-8.5852	-1.0875	1.2817	0.1285	0.00405	-0.01649	0.00184
90	-9.6405	-1.0875	1.6417	0.1285	0.00397	-0.01548	0.00084
91	-5.8379	-1.8125	0.2017	-0.1736	0.00492	-0.02038	0.00663
92	-6.8932	-1.8125	0.5617	-0.0226	0.00488	-0.01951	0.00498
93	-7.9485	-1.8125	0.9217	-0.0226	0.00484	-0.01865	0.00346
94	-9.0038	-1.8125	1.2817	0.1285	0.00481	-0.01765	0.00206
95	-10.0590	-1.8125	1.6417	0.1285	0.00469	-0.01645	0.00085
96	-6.2565	-2.5375	0.2017	-0.1736	0.00584	-0.02155	0.00785
97	-7.3118	-2.5375	0.5617	-0.0226	0.00567	-0.02093	0.00588
98	-8.3671	-2.5375	0.9217	-0.0226	0.00565	-0.02018	0.00401
99	-9.4223	-2.5375	1.2817	0.1285	0.00570	-0.01904	0.00226
100	-10.4776	-2.5375	1.6417	0.1285	0.00555	-0.01749	0.00077
101	-6.6751	-3.2625	0.2017	-0.1736	0.00653	-0.02293	0.00942
102	-7.7304	-3.2625	0.5617	-0.0226	0.00636	-0.02279	0.00706
103	-8.7856	-3.2625	0.9217	-0.0226	0.00657	-0.02222	0.00466
104	-9.8409	-3.2625	1.2817	0.1285	0.00686	-0.02076	0.00235
105	-10.8962	-3.2625	1.6417	0.1285	0.00661	-0.01850	0.00045
106	-7.0936	-3.9875	0.2017	-0.1736	0.00689	-0.02480	0.01158
107	-8.1489	-3.9875	0.5617	-0.0226	0.00698	-0.02551	0.00872
108	-9.2042	-3.9875	0.9217	-0.0226	0.00780	-0.02523	0.00547
109	-10.2595	-3.9875	1.2817	0.1285	0.00859	-0.02286	0.00209
110	-11.3148	-3.9875	1.6417	0.1285	0.00783	-0.01923	-0.00043
111	-7.5122	-4.7125	0.2017	-0.1736	0.00685	-0.02756	0.01490
112	-8.5575	-4.7125	0.5617	-0.0226	0.00756	-0.02983	0.01143
113	-9.6228	-4.7125	0.9217	-0.0226	0.00991	-0.03006	0.00659
114	-10.6781	-4.7125	1.2817	0.1285	0.01128	-0.02511	0.00069
115	-11.7334	-4.7125	1.6417	0.1285	0.00866	-0.01945	-0.00274
116	-7.9308	-5.4375	0.2017	-0.1736	0.00628	-0.03152	0.02076
117	-8.9861	-5.4375	0.5617	-0.0226	0.00819	-0.03699	0.01699

Figure 23 (b). - Continued.

118	-10.0414	-5.4375	0.9217	-0.0226	0.01445	-0.03852	0.00868
119	-11.0967	-5.4375	1.2817	0.1285	0.01276	-0.02736	-0.00403
120	-12.1519	-5.4375	1.6417	0.1285	0.00803	-0.02036	-0.00872
121	-8.3494	-6.1625	0.2017	-0.1736	0.00504	-0.03552	0.03206
122	-9.4047	-6.1625	0.5617	-0.0226	0.00806	-0.04730	0.03082
123	-10.4600	-6.1625	0.9217	-0.0226	0.02889	-0.04845	0.00865
124	-11.5152	-6.1625	1.2817	0.1285	-1.50771	-0.00280	0.07772
125	-12.5705	-6.1625	1.6417	0.1285	-1.50105	-0.00451	0.08834
126	-8.7680	-6.8875	0.2017	-0.1736	0.00282	-0.03301	0.05091
127	-9.8232	-6.8875	0.5617	-0.0226	0.00713	-0.05166	0.06325
128	-10.8785	-6.8875	0.9217	-0.0226	-1.58238	-0.02323	0.07702
129	-11.9338	-6.8875	1.2817	0.1285	-1.53258	-0.02271	0.08143
130	-12.9891	-6.8875	1.6417	0.1285	-1.47985	-0.02160	0.08638
131	-9.1865	-7.6125	0.2017	-0.1736	0.00196	-0.01503	0.06770
132	-10.2418	-7.6125	0.5617	-0.0226	-0.50867	-0.03051	0.09550
133	-11.2971	-7.6125	0.9217	-0.0226	-1.56507	-0.04142	0.07416
134	-12.3524	-7.6125	1.2817	0.1285	-1.51100	-0.04038	0.07962
135	-13.4077	-7.6125	1.6417	0.1285	-1.45871	-0.03809	0.08454
136	-9.6051	-8.3375	0.2017	-0.1736	0.00215	0.00950	0.06667
137	-10.6604	-8.3375	0.5617	-0.0226	0.01152	0.00575	0.07908
138	-11.7157	-8.3375	0.9217	-0.0226	-1.54339	-0.06042	0.07241
139	-12.7710	-8.3375	1.2817	0.1285	-1.48896	-0.05752	0.07802
140	-13.8263	-8.3375	1.6417	0.1285	-1.43717	-0.05378	0.08267
141	-10.0237	-9.0625	0.2017	-0.1736	0.00208	0.02404	0.05257
142	-11.0790	-9.0625	0.5617	-0.0226	0.00320	0.02735	0.06068
143	-12.1343	-9.0625	0.9217	-0.0226	0.00349	0.03323	0.07110
144	-13.1896	-9.0625	1.2817	0.1285	-1.46025	-0.07486	0.07482
145	-14.2448	-9.0625	1.6417	0.1285	-1.41626	-0.06878	0.08096
146	-10.4423	-9.7875	0.2017	-0.1736	0.00114	0.02873	0.03824
147	-11.4976	-9.7875	0.5617	-0.0226	0.00134	0.03365	0.04188
148	-12.5528	-9.7875	0.9217	-0.0226	0.00086	0.04044	0.04548
149	-13.5081	-9.7875	1.2817	0.1285	0.00004	0.05018	0.04830
150	-14.6634	-9.7875	1.6417	0.1285	0.00040	0.06263	0.04854
151	-10.8609	-10.5125	0.2017	-0.1736	0.00053	0.02874	0.02756
152	-11.9161	-10.5125	0.5617	-0.0226	0.00049	0.03288	0.02864
153	-12.9714	-10.5125	0.9217	-0.0226	0.00031	0.03794	0.02915
154	-14.0267	-10.5125	1.2817	0.1285	0.00004	0.04417	0.02864
155	-15.0820	-10.5125	1.6417	0.1285	-0.00026	0.05159	0.02652
156	-11.2794	-11.2375	0.2017	-0.1736	0.00029	0.02691	0.02013
157	-12.3347	-11.2375	0.5617	-0.0226	0.00023	0.02997	0.02003
158	-13.3900	-11.2375	0.9217	-0.0226	0.00020	0.03345	0.01940
159	-14.4453	-11.2375	1.2817	0.1285	0.00027	0.03738	0.01799
160	-15.5006	-11.2375	1.6417	0.1285	0.00060	0.04165	0.01547
161	-11.6980	-11.9625	0.2017	-0.1736	0.00021	0.02457	0.01500
162	-12.7533	-11.9625	0.5617	-0.0226	0.00021	0.02675	0.01441
163	-13.8086	-11.9625	0.9217	-0.0226	0.00031	0.02911	0.01341
164	-14.8639	-11.9625	1.2817	0.1285	0.00058	0.03160	0.01184
165	-15.9191	-11.9625	1.6417	0.1285	0.00117	0.03404	0.00949
166	-12.1166	-12.6875	0.2017	-0.1736	0.00021	0.02223	0.01141
167	-13.1719	-12.6875	0.5617	-0.0226	0.00028	0.02377	0.01064
168	-14.2272	-12.6875	0.9217	-0.0226	0.00046	0.02536	0.00957
169	-15.2824	-12.6875	1.2817	0.1285	0.00083	0.02691	0.00807
170	-16.3377	-12.6875	1.6417	0.1285	0.00148	0.02822	0.00602
171	-12.5352	-13.4125	0.2017	-0.1736	0.00023	0.02008	0.00883
172	-13.5905	-13.4125	0.5617	-0.0226	0.00035	0.02115	0.00804
173	-14.6457	-13.4125	0.9217	-0.0226	0.00060	0.02221	0.00700
174	-15.7010	-13.4125	1.2817	0.1285	0.00099	0.02313	0.00565
175	-16.7563	-13.4125	1.6417	0.1285	0.00155	0.02375	0.00394
176	-12.9537	-14.1375	0.2017	-0.1736	0.00025	0.01815	0.00695
177	-14.0090	-14.1375	0.5617	-0.0226	0.00041	0.01889	0.00618
178	-15.0643	-14.1375	0.9217	-0.0226	0.00067	0.01957	0.00523
179	-16.1196	-14.1375	1.2817	0.1285	0.00102	0.02008	0.00405
180	-17.1749	-14.1375	1.6417	0.1285	0.00145	0.02031	0.00265

Figure 23(b) :- Continued.

HORSESHOE VORTEX CHARACTERISTICS

BOUNDLEG MIDPOINT COORDINATES					VORTEX STRENGTHS, GAMMA/V	
J	X	Y	Z	SWEET, DEG.	SEMIWIDTH	ALPHAD = 0.0000, DELD = 21.5000
WING VORTICES						
1	-0.4437	-0.3625	-0.0000	30.0000	0.3625	0.3972
2	-1.3912	-0.3625	-0.0000	30.0000	0.3625	0.3797
3	-2.3187	-0.3625	-0.0000	30.0000	0.3625	0.4027
4	-3.2562	-0.3625	-0.0000	30.0000	0.3625	0.4191
5	-0.8622	-1.0875	-0.0000	30.0000	0.3625	0.4717
6	-1.7997	-1.0875	-0.0000	30.0000	0.3625	0.4068
7	-2.7372	-1.0875	-0.0000	30.0000	0.3625	0.4226
8	-3.6747	-1.0875	-0.0000	30.0000	0.3625	0.4417
9	-1.2808	-1.8125	-0.0000	30.0000	0.3625	0.5320
10	-2.2183	-1.8125	-0.0000	30.0000	0.3625	0.4351
11	-3.1558	-1.8125	-0.0000	30.0000	0.3625	0.4444
12	-4.0933	-1.8125	-0.0000	30.0000	0.3625	0.4612
13	-1.6994	-2.5375	-0.0000	30.0000	0.3625	0.5818
14	-2.6369	-2.5375	-0.0000	30.0000	0.3625	0.4604
15	-3.5744	-2.5375	-0.0000	30.0000	0.3625	0.4635
16	-4.5119	-2.5375	-0.0000	30.0000	0.3625	0.4760
17	-2.1180	-3.2625	-0.0000	30.0000	0.3625	0.6230
18	-3.0555	-3.2625	-0.0000	30.0000	0.3625	0.4819
19	-3.9930	-3.2625	-0.0000	30.0000	0.3625	0.4791
20	-4.9305	-3.2625	-0.0000	30.0000	0.3625	0.4873
21	-2.5366	-3.9875	-0.0000	30.0000	0.3625	0.6565
22	-3.4741	-3.9875	-0.0000	30.0000	0.3625	0.4993
23	-4.4116	-3.9875	-0.0000	30.0000	0.3625	0.4915
24	-5.3491	-3.9875	-0.0000	30.0000	0.3625	0.4964
25	-2.9551	-4.7125	-0.0000	30.0000	0.3625	0.6831
26	-3.8926	-4.7125	-0.0000	30.0000	0.3625	0.5126
27	-4.3301	-4.7125	-0.0000	30.0000	0.3625	0.5010
28	-5.7676	-4.7125	-0.0000	30.0000	0.3625	0.5040
29	-3.3737	-5.4375	-0.0000	30.0000	0.3625	0.7028
30	-4.3112	-5.4375	-0.0000	30.0000	0.3625	0.5216
31	-5.2487	-5.4375	-0.0000	30.0000	0.3625	0.5076
32	-6.1862	-5.4375	-0.0000	30.0000	0.3625	0.5103
33	-3.7923	-6.1625	-0.0000	30.0000	0.3625	0.7147
34	-4.7295	-6.1625	-0.0000	30.0000	0.3625	0.5263
35	-5.6673	-6.1625	-0.0000	30.0000	0.3625	0.5118
36	-6.6048	-6.1625	-0.0000	30.0000	0.3625	0.5158
37	-4.2109	-6.8875	-0.0000	30.0000	0.3625	0.7179
38	-5.1484	-6.8875	-0.0000	30.0000	0.3625	0.5282
39	-6.0859	-6.8875	-0.0000	30.0000	0.3625	0.5146
40	-7.0234	-6.6875	-0.0000	30.0000	0.3625	0.5209
41	-4.6295	-7.6125	-0.0000	30.0000	0.3625	0.7172
42	-5.5670	-7.6125	-0.0000	30.0000	0.3625	0.5303
43	-6.5045	-7.6125	-0.0000	30.0000	0.3625	0.5174
44	-7.4420	-7.6125	-0.0000	30.0000	0.3625	0.5256
45	-5.0480	-8.3375	-0.0000	30.0000	0.3625	0.7234
46	-5.9855	-8.3375	-0.0000	30.0000	0.3625	0.5334
47	-6.9230	-8.3375	-0.0000	30.0000	0.3625	0.5194
48	-7.8605	-8.3375	-0.0000	30.0000	0.3625	0.5277
49	-5.4666	-9.0625	-0.0000	30.0000	0.3625	0.7372
50	-6.4041	-9.0625	-0.0000	30.0000	0.3625	0.5355
51	-7.3416	-9.0625	-0.0000	30.0000	0.3625	0.5176
52	-8.2791	-9.0625	-0.0000	30.0000	0.3625	0.5230
53	-5.8852	-9.7875	-0.0000	30.0000	0.3625	0.7496
54	-6.8227	-9.7875	-0.0000	30.0000	0.3625	0.5330
55	-7.7602	-9.7875	-0.0000	30.0000	0.3625	0.5091
56	-8.6977	-9.7875	-0.0000	30.0000	0.3625	0.5095
57	-6.3038	-10.5125	-0.0000	30.0000	0.3625	0.7528
58	-7.2413	-10.5125	-0.0000	30.0000	0.3625	0.5231
59	-8.1788	-10.5125	-0.0000	30.0000	0.3625	0.4921
60	-9.1163	-10.5125	-0.0000	30.0000	0.3625	0.4867

Figure 23(b). - Continued.

61	-6.7223	-11.2375	-0.0000	30.0000	0.3625	0.7422
62	-7.6598	-11.2375	-0.0000	30.0000	0.3625	0.5034
63	-8.5973	-11.2375	-0.0000	30.0000	0.3625	0.4654
64	-9.5348	-11.2375	-0.0000	30.0000	0.3625	0.4551
65	-7.1409	-11.9625	-0.0000	30.0000	0.3625	0.7144
66	-8.0784	-11.9625	-0.0000	30.0000	0.3625	0.4715
67	-9.0159	-11.9625	-0.0000	30.0000	0.3625	0.4274
68	-9.9534	-11.9625	-0.0000	30.0000	0.3625	0.4140
69	-7.5595	-12.6875	-0.0000	30.0000	0.3625	0.6646
70	-8.4970	-12.6875	-0.0000	30.0000	0.3625	0.4230
71	-9.4345	-12.6875	-0.0000	30.0000	0.3625	0.3749
72	-10.3720	-12.6875	-0.0000	30.0000	0.3625	0.3616
73	-7.9781	-13.4125	-0.0000	30.0000	0.3625	0.5827
74	-8.9156	-13.4125	-0.0000	30.0000	0.3625	0.3487
75	-9.8531	-13.4125	-0.0000	30.0000	0.3625	0.3023
76	-10.7906	-13.4125	-0.0000	30.0000	0.3625	0.2934
77	-8.3967	-14.1375	-0.0000	30.0000	0.3625	0.4340
78	-9.3342	-14.1375	-0.0000	30.0000	0.3625	0.2290
79	-10.2717	-14.1375	-0.0000	30.0000	0.3625	0.1992
80	-11.2092	-14.1375	-0.0000	30.0000	0.3625	0.1977

#### FLAP VORTICES

81	-4.4731	-0.3625	0.0217	28.2437	0.3687	0.9979
82	-5.5284	-0.3625	0.3817	28.2437	0.3687	0.9073
83	-6.5837	-0.3625	0.7417	28.2437	0.3687	0.6989
84	-7.6390	-0.3625	1.1017	28.2437	0.3687	0.7477
85	-8.6943	-0.3625	1.4617	28.2437	0.3687	0.4152
86	-4.8917	-1.0875	0.0217	28.2437	0.3687	1.0549
87	-5.9470	-1.0875	0.3817	28.2437	0.3687	0.9446
88	-7.0023	-1.0875	0.7417	28.2437	0.3687	0.7087
89	-8.0575	-1.0875	1.1017	28.2437	0.3687	0.7315
90	-9.1128	-1.0875	1.4617	28.2437	0.3687	0.3844
91	-5.3103	-1.8125	0.0217	28.2437	0.3687	1.0843
92	-6.3656	-1.8125	0.3817	28.2437	0.3687	0.9663
93	-7.4208	-1.8125	0.7417	28.2437	0.3687	0.7181
94	-8.4761	-1.8125	1.1017	28.2437	0.3687	0.7296
95	-9.5314	-1.8125	1.4617	28.2437	0.3687	0.3777
96	-5.7288	-2.5375	0.0217	28.2437	0.3687	1.1027
97	-6.7841	-2.5375	0.3817	28.2437	0.3687	0.9803
98	-7.8394	-2.5375	0.7417	28.2437	0.3687	0.7279
99	-8.8947	-2.5375	1.1017	28.2437	0.3687	0.7370
100	-9.9500	-2.5375	1.4617	28.2437	0.3687	0.3832
101	-6.1474	-3.2625	0.0217	28.2437	0.3687	1.1156
102	-7.2027	-3.2625	0.3817	28.2437	0.3687	0.9933
103	-8.2580	-3.2625	0.7417	28.2437	0.3687	0.7424
104	-9.3133	-3.2625	1.1017	28.2437	0.3687	0.7542
105	-10.3686	-3.2625	1.4617	28.2437	0.3687	0.3983
106	-6.3660	-3.9875	0.0217	28.2437	0.3687	1.1295
107	-7.6213	-3.9875	0.3817	28.2437	0.3687	1.0097
108	-8.6766	-3.9875	0.7417	28.2437	0.3687	0.7666
109	-9.7319	-3.9875	1.1017	28.2437	0.3687	0.7869
110	-10.7871	-3.9875	1.4617	28.2437	0.3687	0.4265
111	-6.9846	-4.7125	0.0217	28.2437	0.3687	1.1436
112	-8.0399	-4.7125	0.3817	28.2437	0.3687	1.0334
113	-9.0951	-4.7125	0.7417	28.2437	0.3687	0.8093
114	-10.1504	-4.7125	1.1017	28.2437	0.3687	0.8519
115	-11.2057	-4.7125	1.4617	28.2437	0.3687	0.4747
116	-7.4032	-5.4375	0.0217	28.2437	0.3687	1.1604
117	-8.4584	-5.4375	0.3817	28.2437	0.3687	1.0692
118	-9.5137	-5.4375	0.7417	28.2437	0.3687	0.6898
119	-10.5690	-5.4375	1.1017	28.2437	0.3687	1.0064
120	-11.6243	-5.4375	1.4617	28.2437	0.3687	0.5436

Figure 23(b).- Continued.

121	-7.8217	-6.1625	0.0217	28.2437	0.3687	1.1803
122	-8.3770	-6.1625	0.3817	28.2437	0.3687	1.1222
123	-9.9323	-6.1625	0.7417	28.2437	0.3687	1.0592
124	-10.9876	-6.1625	1.1017	28.2437	0.3687	1.6162
125	-12.0429	-6.1625	1.4617	28.2437	0.3687	0.5664
126	-8.2403	-6.8875	0.0217	28.2437	0.3687	1.2036
127	-9.2956	-6.8875	0.3817	28.2437	0.3687	1.1985
128	-10.3509	-6.8875	0.7417	28.2437	0.3687	1.5425
129	-11.4062	-6.8875	1.1017	28.2437	0.3687	1.3521
130	-12.4615	-6.8875	1.4617	28.2437	0.3687	0.5397
131	-8.6589	-7.6125	0.0217	28.2437	0.3687	1.2299
132	-9.7142	-7.6125	0.3817	28.2437	0.3687	1.3553
133	-10.7695	-7.6125	0.7417	28.2437	0.3687	1.4855
134	-11.8248	-7.6125	1.1017	28.2437	0.3687	1.3001
135	-12.8800	-7.6125	1.4617	28.2437	0.3687	0.5214
136	-9.0775	-8.3375	0.0217	28.2437	0.3687	1.2387
137	-10.1328	-8.3375	0.3817	28.2437	0.3687	1.2353
138	-11.1880	-8.3375	0.7417	28.2437	0.3687	1.4940
139	-12.2433	-8.3375	1.1017	28.2437	0.3687	1.2767
140	-13.2996	-8.3375	1.4617	28.2437	0.3687	0.5047
141	-9.4961	-9.0625	0.0217	28.2437	0.3687	1.2186
142	-10.5513	-9.0625	0.3817	28.2437	0.3687	1.1664
143	-11.6066	-9.0625	0.7417	28.2437	0.3687	1.0220
144	-12.6619	-9.0625	1.1017	28.2437	0.3687	1.5150
145	-13.7172	-9.0625	1.4617	28.2437	0.3687	0.4587
146	-9.9146	-9.7875	0.0217	28.2437	0.3687	1.1748
147	-10.9699	-9.7875	0.3817	28.2437	0.3687	1.0844
148	-12.0252	-9.7875	0.7417	28.2437	0.3687	0.8740
149	-13.0805	-9.7875	1.1017	28.2437	0.3687	0.8951
150	-14.1358	-9.7875	1.4617	28.2437	0.3687	0.4028
151	-10.3332	-10.5125	0.0217	28.2437	0.3687	1.1131
152	-11.3885	-10.5125	0.3817	28.2437	0.3687	1.0065
153	-12.4438	-10.5125	0.7417	28.2437	0.3687	0.7567
154	-13.4991	-10.5125	1.1017	28.2437	0.3687	0.7470
155	-14.5544	-10.5125	1.4617	28.2437	0.3687	0.3531
156	-10.7518	-11.2375	0.0217	28.2437	0.3687	1.0387
157	-11.8071	-11.2375	0.3817	28.2437	0.3687	0.9309
158	-12.8624	-11.2375	0.7417	28.2437	0.3687	0.6711
159	-13.9176	-11.2375	1.1017	28.2437	0.3687	0.6716
160	-14.9729	-11.2375	1.4617	28.2437	0.3687	0.3136
161	-11.1704	-11.9625	0.0217	28.2437	0.3687	0.9528
162	-12.2257	-11.9625	0.3817	28.2437	0.3687	0.8566
163	-13.2809	-11.9625	0.7417	28.2437	0.3687	0.6000
164	-14.3362	-11.9625	1.1017	28.2437	0.3687	0.6126
165	-15.3913	-11.9625	1.4617	28.2437	0.3687	0.2768
166	-11.5899	-12.6875	0.0217	28.2437	0.3687	0.8520
167	-12.6442	-12.6875	0.3817	28.2437	0.3687	0.7785
168	-13.5995	-12.6875	0.7417	28.2437	0.3687	0.5285
169	-14.7548	-12.6875	1.1017	28.2437	0.3687	0.5505
170	-15.8101	-12.6875	1.4617	28.2437	0.3687	0.2352
171	-12.0075	-13.4125	0.0217	28.2437	0.3687	0.7251
172	-13.0628	-13.4125	0.3817	28.2437	0.3687	0.6658
173	-14.1191	-13.4125	0.7417	28.2437	0.3687	0.4385
174	-15.1734	-13.4125	1.1017	28.2437	0.3687	0.4671
175	-16.2287	-13.4125	1.4617	28.2437	0.3687	0.1791
176	-12.4261	-14.1375	0.0217	28.2437	0.3687	0.5375
177	-13.4814	-14.1375	0.3817	28.2437	0.3687	0.5415
178	-14.5367	-14.1375	0.7417	28.2437	0.3687	0.2892
179	-15.5920	-14.1375	1.1017	28.2437	0.3687	0.3257
180	-16.6472	-14.1375	1.4617	28.2437	0.3687	0.0978

Figure 23(b). - Continued.

AERODYNAMIC LOADING RESULTS FOR ALPHA = 0.00000 DEG.

WING LIFT COEFFICIENT

1.0918

FLAP LIFT COEFFICIENT

2.7312

TOTAL LIFT COEFFICIENT, CL

3.8230

PITCHING MOMENT COEFFICIENT, CM

-2.5953

REFERENCE QUANTITIES

WING SPAN,B 29.0000	WING PLANFORM AREA,SREF 108.7500	WING AVE.CHORD,CAVE 3.7500
------------------------	-------------------------------------	-------------------------------

SPANWISE LOAD DISTRIBUTION

STATION	Y/(B/2)	LOCAL CHORD,C	CL*C/CL*CAVE	CL*C/(2*B)
---------	---------	---------------	--------------	------------

WING

1	0.0250	3.7500	0.7816	0.0552
2	0.0750	3.7500	0.8508	0.0601
3	0.1250	3.7500	0.9122	0.0644
4	0.1750	3.7500	0.9627	0.0680
5	0.2250	3.7500	1.0033	0.0708
6	0.2750	3.7500	1.0361	0.0731
7	0.3250	3.7500	1.0625	0.0750
8	0.3750	3.7500	1.0832	0.0765
9	0.4250	3.7500	1.0984	0.0775
10	0.4750	3.7500	1.1104	0.0784
11	0.5250	3.7500	1.1253	0.0794
12	0.5750	3.7500	1.1339	0.0807
13	0.6250	3.7500	1.1572	0.0817
14	0.6750	3.7500	1.1559	0.0816
15	0.7250	3.7500	1.1351	0.0801
16	0.7750	3.7500	1.0922	0.0771
17	0.8250	3.7500	1.0239	0.0723
18	0.8750	3.7500	0.9240	0.0652
19	0.9250	3.7500	0.7793	0.0550
20	0.9750	3.7500	0.5621	0.0397

FLAP

1	0.0254	5.5750	0.7107	0.1255
2	0.0763	5.5750	0.7245	0.1279
3	0.1272	5.5750	0.7374	0.1302
4	0.1780	5.5750	0.7494	0.1323
5	0.2289	5.5750	0.7639	0.1349
6	0.2797	5.5750	0.7853	0.1387
7	0.3306	5.5750	0.8205	0.1449
8	0.3815	5.5750	0.8842	0.1561
9	0.4323	5.5750	1.6382	0.2893
10	0.4832	5.5750	2.0706	0.3656
11	0.5340	5.5750	2.1649	0.3823
12	0.5849	5.5750	1.9969	0.3526
13	0.6358	5.5750	1.5580	0.2751
14	0.6866	5.5750	0.8656	0.1529
15	0.7375	5.5750	0.7772	0.1372
16	0.7883	5.5750	0.7084	0.1251
17	0.8392	5.5750	0.6437	0.1137
18	0.8901	5.5750	0.5733	0.1012
19	0.9409	5.5750	0.4838	0.0854
20	0.9918	5.5750	0.3437	0.0607

CM,WING	CM,FLAP	CD,WING	CD,FLAP	CD	CO/CL*CL
0.25150	-2.84678	-0.08432	0.65771	0.57339	0.03923

Figure 23(b).- Continued.

VELOCITIES INDUCED AT SPECIFIED POINTS IN THE VICINITY OF THE WING

N	X	Y	Z	U/V	V/W	W/V
1	-1.7000	-7.2500	2.0700	0.06080	-0.02753	-0.09245
2	-3.7000	-7.2500	2.0700	0.12594	-0.06215	-0.10663
3	-5.7000	-7.2500	2.0700	0.19800	-0.09940	-0.06224
4	-7.7000	-7.2500	2.0700	0.26257	-0.12752	-0.00573
5	-9.7000	-7.2500	2.0700	0.37937	-0.16295	0.11820
6	-11.7000	-7.2500	2.0700	0.47324	-0.19667	0.47547
7	-13.7000	-7.2500	2.0700	0.25392	-0.08860	0.73498
8	-15.7000	-7.2500	2.0700	0.16644	-0.12091	0.61595

Figure 23(b).- Concluded.

Item 1: Format (20A4), any alphabetic or numeric information  
(1 card)

Column No.	1-80						
Program Variable	TITLE						
Data							

Item 2: Format (6I5, F10.5), decimal point required for last variable  
(1 card)

Column No.	5	10	15	20	25	30	40
Program Variable	NJET	NP	NCYL	NPRNT	KIN	KOUT	DS
Data							

Item 3: Format (5F10.5), decimal point required  
(1 + NCYL cards)

Column No.	10	20	30	40	50
Program Variable	GAMVJ(J)	RJET(J)	XO(J)	YO(J)	ZO(J)
Data					

Column No.	10	20	.30	40	50
Program Variable	XCLR(J,1)	YCLR(J,1)	ZCLR(J,1)	RGR(J,1)	THETA(J,1)
Data					

Column No.	10	20	30	40	50
Program Variable	XCLR(J,N)	YCLR(J,N)	ZCLR(J,N)	RGR(J,N)	THETA(J,N)
Data					

where N = 1, 2, ..., NCYL

Note: Item 3 is repeated for each jet; J = 1, 2, ..., NJET

If KIN > 6, Item 4 is omitted; but, if KIN = 5, include the following cards:

Item 4: Format (3F10.5), decimal point required  
(NP cards)

Column No.	10	20	30
Program Variable	XP(N)	YP(N)	ZP(N)
Data			

where N = 1, 2, ..., NP

Figure 24.- Input format for jet-wake program.

SOURCE OF EXTERNALLY INDUCED VELOCITIES, ALPHA=0 DEGREES, C(MU)=0.9

	1	180	5	1	7	8	0.125	
2.46		1.25		0.46		-7.25		2.07
0.0		0.0		0.0		1.0		0.0
1.72		0.0		0.0		1.0		0.0
8.5		-0.2		-0.3		1.5		-4.5
15.3		-0.6		-0.8		1.97		-4.5
150.0		-3.0		-5.0		9.5		0.0

SOURCE OF EXTERNALLY INDUCED VELOCITIES, ALPHA=10 DEGREES, C(MU)=0.9

	1	180	5	0	7	8	0.125	
-2.46		1.25		0.46		-7.25		2.07
0.0		0.0		0.0		1.0		0.0
-1.72		0.0		0.0		1.0		0.0
8.5		-0.32		-0.10		1.5		-1.4
15.3		-0.88		-0.26		1.97		-1.4
150.0		-4.0		-2.0		9.5		0.0

(a) Input for single jet case, including use of data sets and optional output.

UNSWEPT WING (NASA TN D-6222) FLAP ANGLE = 17.5/35, ALPHA = 0, C(MU) = 5.5

	2	20	4	0	5	6	0.17	
4.61		1.70		6.96		-11.64		2.5
0.0		0.0		0.0		1.0		3.0
2.68		0.0		0.14		1.0		3.0
13.4		0.0		0.70		2.0		3.0
150.0		0.0		4.0		12.0		0.0
4.61		1.70		6.96		-27.22		2.5
0.0		0.0		0.0		1.0		3.0
2.68		0.0		0.14		1.0		3.0
13.4		0.0		0.70		2.0		3.0
150.0		0.0		4.0		12.0		0.0
-0.760		-2.82		0.0				
-1.773		-2.82		0.0				
-2.786		-2.82		0.0				
-3.799		-2.82		0.0				
-4.812		-2.82		0.0				
-5.825		-2.82		0.0				
-6.838		-2.82		0.0				
-7.851		-2.82		0.0				
-8.864		-2.82		0.0				
-9.877		-2.82		0.0				
-10.722		-28.720		1.565				
-11.950		-28.720		2.426				
-10.722		-29.720		1.565				
-11.950		-29.720		2.462				
-10.722		-31.22		1.565				
-11.950		-31.22		2.426				
-10.722		-33.02		1.565				
-11.950		-33.02		2.426				
-10.722		-34.41		1.565				
-11.950		-34.41		2.426				

(b) Input for multiple jet case, including use of conventional input and output.

Figure 25.- Sample input to jet-wake program.

SOURCE OF EXTERNALLY INDUCED VELOCITIES, ALPHA=0 DEGREES, C(MU)=0.9

D(SI) KIN KOUT  
0.1250 7 8

(1) JET PARAMETERS DIS/R = 0.1000

X/R	Y/R	Z/R	S/R	THETA	R GAM/R	R	X0	Y0	Z0	GAMMA/V
0.00	0.00	0.00	0.00	0.00	1.00	1.2500	0.460	-7.250	2.070	2.460
1.72	0.00	0.00	1.72	0.00	1.00					
8.50	-0.20	-0.30	8.51	-9.50	1.50					
15.30	-0.60	-0.80	15.34	-4.50	1.97					
150.00	-3.00	-5.00	150.13	0.00	9.50					

VELOCITIES INDUCED BY JET 1 - JET COORDINATE SYSTEM

N	XP/R	YP/R	ZP/R	U/V	V/V	W/V
1	1.098	5.510	1.656	2.0391E-03	-2.2873E-02	-6.8959E-03
2	1.848	5.510	1.656	1.6129E-04	-2.2063E-02	-6.6390E-03
3	2.598	5.510	1.656	-1.2063E-03	-2.0865E-02	-6.2502E-03
4	3.348	5.510	1.656	-2.0918E-03	-1.9542E-02	-5.8060E-03
5	4.133	4.930	1.656	3.3611E-04	-2.6178E-02	-8.8246E-03
6	2.183	4.930	1.656	-1.6543E-03	-2.4567E-02	-8.2609E-03
7	2.933	4.930	1.656	-2.8705E-03	-2.2720E-02	-7.5919E-03
8	3.683	4.930	1.656	-3.4909E-03	-2.0935E-02	-6.9228E-03
9	1.768	4.350	1.656	-2.2277E-03	-2.9530E-02	-1.1289E-02
10	2.518	4.350	1.656	-4.0164E-03	-2.6866E-02	-1.0226E-02
11	3.268	4.350	1.656	-4.7980E-03	-2.4324E-02	-9.1722E-03
12	4.018	4.350	1.656	-4.9669E-03	-2.2187E-02	-8.2301E-03
13	2.103	3.770	1.656	-5.7426E-03	-3.2453E-02	-1.4298E-02
14	2.853	3.770	1.656	-6.7992E-03	-2.8628E-02	-1.2527E-02
15	3.603	3.770	1.656	-6.7986E-03	-2.5527E-02	-1.1007E-02
16	4.353	3.770	1.656	-6.3568E-03	-2.3215E-02	-9.7701E-03
17	2.437	3.190	1.656	-9.9766E-03	-3.4239E-02	-1.7766E-02
18	3.187	3.190	1.656	-9.6276E-03	-2.9529E-02	-1.5133E-02
19	3.937	3.190	1.656	-8.5661E-03	-2.6259E-02	-1.3138E-02
20	4.687	3.190	1.656	-7.4462E-03	-2.4102E-02	-1.1636E-02
21	2.772	2.610	1.656	-1.4162E-02	-3.4213E-02	-2.1474E-02
22	3.522	2.610	1.656	-1.1909E-02	-2.9438E-02	-1.8037E-02
23	4.272	2.610	1.656	-9.7224E-03	-2.6609E-02	-1.5668E-02
24	5.022	2.610	1.656	-8.0289E-03	-2.5023E-02	-1.4022E-02
25	3.107	2.030	1.656	-1.7094E-02	-3.2205E-02	-2.5207E-02
26	3.857	2.030	1.656	-1.2992E-02	-2.8529E-02	-2.1361E-02
27	4.607	2.030	1.656	-9.9278E-03	-2.6835E-02	-1.8959E-02
28	5.357	2.030	1.656	-7.8992E-03	-2.6241E-02	-1.7361E-02
29	4.442	1.450	1.656	-1.7690E-02	-2.8865E-02	-2.9049E-02
30	4.192	1.450	1.656	-1.2427E-02	-2.7294E-02	-2.5588E-02
31	4.942	1.450	1.656	-8.9887E-03	-2.7209E-02	-2.3691E-02
32	5.692	1.450	1.656	-6.9391E-03	-2.7883E-02	-2.2602E-02
33	3.777	0.870	1.656	-1.5676E-02	-2.5218E-02	-3.4042E-02
34	4.527	0.870	1.656	-1.0204E-02	-2.5815E-02	-3.2043E-02
35	5.277	0.870	1.656	-6.9242E-03	-2.7186E-02	-3.1457E-02
36	5.027	0.870	1.656	-5.1580E-03	-2.8949E-02	-3.1548E-02
37	5.112	0.290	1.656	-1.1953E-02	-1.9936E-02	-4.2320E-02
38	4.862	0.290	1.656	-7.2162E-03	-2.1387E-02	-4.2341E-02
39	5.612	0.290	1.656	-4.2772E-03	-2.3080E-02	-4.3470E-02
40	6.362	0.290	1.656	-3.0488E-03	-2.5006E-02	-4.5128E-02
41	5.447	-0.290	1.656	-8.5923E-03	-7.5891E-03	-5.1245E-02
42	5.197	-0.290	1.656	-4.5946E-03	-8.4872E-03	-5.2345E-02
43	5.947	-0.290	1.656	-2.4600E-03	-9.3811E-03	-5.4356E-02
44	6.597	-0.290	1.656	-1.4756E-03	-1.0521E-02	-5.6877E-02
45	7.761	-0.370	1.656	-6.2014E-03	-9.7228E-03	-5.1351E-02
46	5.531	-0.870	1.656	-3.2631E-03	-9.4125E-03	-5.2381E-02
47	6.281	-0.470	1.656	-1.5477E-03	-9.2532E-03	-5.4199E-02
48	7.031	-0.870	1.656	-9.3422E-04	-8.8547E-03	-5.6587E-02
49	8.116	-1.450	1.656	-5.5941E-03	-2.2050E-02	-4.2681E-02
50	5.886	-1.450	1.656	-2.4343E-03	-2.1894E-02	-4.3339E-02
51	6.616	-1.450	1.656	-1.1601E-03	-2.1951E-02	-4.4643E-02
52	7.356	-1.450	1.656	-7.9592E-04	-2.1814E-02	-4.6523E-02
53	5.451	-2.030	1.656	-3.3636E-03	-2.6992E-02	-3.2358E-02
54	6.201	-2.030	1.656	-1.8660E-03	-2.6787E-02	-3.2760E-02
55	6.951	-2.030	1.656	-2.2253E-04	-2.6788E-02	-3.3075E-02
56	7.701	-2.030	1.656	-6.4568E-04	-2.6648E-02	-3.5081E-02
57	5.706	-2.610	1.656	-2.3922E-03	-2.7463E-02	-2.3991E-02
58	6.536	-2.610	1.656	-1.3437E-03	-2.7193E-02	-2.4275E-02
59	7.286	-2.610	1.656	-6.8351E-04	-2.7117E-02	-2.4957E-02
60	9.036	-2.610	1.656	-4.6196E-04	-2.6977E-02	-2.5994E-02

Figure 26.- Output from jet-wake program (single jet).

61	6.121	-3.190	1.656	-1.6225E-03	2.6023E-02	-1.7957E-02
62	6.871	-3.190	1.656	-9.1544E-04	2.5745E-02	-1.8194E-02
63	7.621	-3.190	1.656	-4.6646E-04	2.5635E-02	-1.8711E-02
64	8.371	-3.190	1.656	-3.1326E-04	2.5526E-02	-1.9451E-02
65	6.456	-3.770	1.656	-1.0345E-03	2.3978E-02	-1.3715E-02
66	7.206	-3.770	1.656	-5.8306E-04	2.3725E-02	-1.3917E-02
67	7.956	-3.770	1.656	-3.0549E-04	2.3612E-02	-1.4299E-02
68	8.706	-3.770	1.656	-2.1843E-04	2.3529E-02	-1.4807E-02
69	5.791	-4.350	1.656	-6.0354E-04	2.1869E-02	-1.0699E-02
70	7.541	-4.350	1.656	-3.3750E-04	2.1653E-02	-1.0863E-02
71	8.291	-4.350	1.656	-1.8943E-04	2.1545E-02	-1.1135E-02
72	9.041	-4.350	1.656	-1.6152E-04	2.1471E-02	-1.1474E-02
73	7.125	-4.930	1.656	-2.9580E-04	1.9934E-02	-8.5041E-03
74	7.875	-4.930	1.656	-1.6419E-04	1.9712E-02	-8.6298E-03
75	8.625	-4.930	1.656	-1.0761E-04	1.9608E-02	-8.8172E-03
76	9.375	-4.930	1.656	-1.3317E-04	1.9537E-02	-9.0374E-03
77	7.460	-5.510	1.656	-8.2246E-05	1.8110E-02	-6.8692E-03
78	8.210	-5.510	1.656	-4.3353E-05	1.7955E-02	-6.9604E-03
79	8.950	-5.510	1.656	-5.2318E-05	1.7856E-02	-7.0848E-03
80	9.710	-5.510	1.656	-1.1593E-04	1.7781E-02	-7.2225E-03
81	4.369	5.510	1.495	-2.8080E-03	-1.8110E-02	-4.7958E-03
82	5.213	5.510	1.207	-3.1461E-03	-1.7225E-02	-3.6463E-03
83	6.057	5.510	0.919	-3.3042E-03	-1.6356E-02	-2.5892E-03
84	6.901	5.510	0.631	-3.3582E-03	-1.5489E-02	-1.6321E-03
85	7.746	5.510	0.343	-3.3298E-03	-1.4602E-02	-7.8299E-04
86	4.703	4.930	1.495	-3.8775E-03	-1.9255E-02	-5.6355E-03
87	5.548	4.930	1.207	-4.0286E-03	-1.8322E-02	-4.2517E-03
88	6.392	4.930	0.919	-4.0669E-03	-1.7424E-02	-2.9886E-03
89	7.236	4.930	0.631	-4.0519E-03	-1.6491E-02	-1.8434E-03
90	8.080	4.930	0.343	-3.9665E-03	-1.5482E-02	-8.3637E-04
91	5.038	4.350	1.495	-4.9215E-03	-2.0375E-02	-6.6343E-03
92	5.883	4.350	1.207	-4.5828E-03	-1.9513E-02	-4.9812E-03
93	6.727	4.350	0.919	-4.8429E-03	-1.8652E-02	-3.4563E-03
94	7.571	4.350	0.631	-4.8107E-03	-1.7648E-02	-2.0620E-03
95	8.415	4.350	0.343	-4.6880E-03	-1.6449E-02	-8.4976E-04
96	5.373	3.770	1.495	-5.8376E-03	-2.1546E-02	-7.8549E-03
97	6.217	3.770	1.207	-5.6671E-03	-2.0927E-02	-5.8846E-03
98	7.062	3.770	0.919	-5.6542E-03	-2.0176E-02	-4.0064E-03
99	7.906	3.770	0.631	-5.6989E-03	-1.9040E-02	-2.2584E-03
100	8.750	3.770	0.343	-5.5467E-03	-1.7486E-02	-7.6624E-04
101	5.708	3.190	1.495	-6.5278E-03	-2.2930E-02	-9.4189E-03
102	6.552	3.190	1.207	-6.3529E-03	-2.2787E-02	-7.0580E-03
103	7.397	3.190	0.919	-6.5698E-03	-2.2224E-02	-4.6648E-03
104	8.241	3.190	0.631	-5.8583E-03	-2.0758E-02	-2.3503E-03
105	9.095	3.190	0.343	-5.6089E-03	-1.8500E-02	-4.5091E-04
106	6.043	2.610	1.495	-6.8913E-03	-2.4803E-02	-1.1578E-02
107	5.887	2.610	1.207	-6.9777E-03	-2.5506E-02	-8.7166E-03
108	7.731	2.610	0.919	-7.7992E-03	-2.5225E-02	-5.4740E-03
109	8.576	2.610	0.631	-8.5949E-03	-2.2858E-02	-2.0925E-03
110	9.420	2.610	0.343	-7.8285E-03	-1.9229E-02	4.3320E-04
111	6.376	2.030	1.495	-6.9482E-03	-2.7563E-02	-1.4899E-02
112	7.222	2.030	1.207	-7.5598E-03	-2.9827E-02	-1.1431E-02
113	8.066	2.030	0.919	-9.9061E-03	-3.0059E-02	-6.5894E-03
114	8.910	2.030	0.631	-1.1276E-02	-2.5106E-02	-6.9186E-04
115	9.755	2.030	0.343	-8.6615E-03	-1.9451E-02	2.7377E-03
116	6.713	1.450	1.495	-6.2836E-03	-3.1524E-02	-2.0762E-02
117	7.557	1.450	1.207	-8.1902E-03	-3.6987E-02	-1.6993E-02
118	8.401	1.450	0.919	-1.4448E-02	-3.8520E-02	-8.6848E-03
119	9.245	1.450	0.631	-1.2757E-02	-2.7359E-02	4.0333E-03
120	10.090	1.450	0.343	-8.0256E-03	-2.0358E-02	8.7195E-03

Figure 26.- Continued.

121	7.048	0.870	1.495	-5.0402E-03	-3.5520E-02	-3.2064E-02
122	7.892	0.870	1.207	-3.0614E-03	-4.7297E-02	-3.0816E-02
123	8.736	0.870	0.919	-2.8888E-02	-4.8448E-02	-8.6527E-03
124	9.565	0.870	0.632	1.5077E 00	-2.7968E-03	-7.7724E-02
125	10.424	0.870	0.343	1.5011E 00	-4.5142E-03	-8.8344E-02
126	7.382	0.290	1.495	-2.8240E-03	-3.3011E-02	-5.0909E-02
127	8.202	0.290	1.208	-7.1290E-03	-5.1663E-02	-6.3253E-02
128	9.071	0.290	0.919	1.5624E 00	-2.3233E-02	-7.7019E-02
129	9.915	0.290	0.631	1.5326E 00	-2.2715E-02	-8.1433E-02
130	10.759	0.290	0.343	1.4798E 00	-2.1599E-02	-8.6376E-02
131	7.717	-0.290	1.495	-1.9642E-03	-1.5031E-02	-6.7699E-02
132	8.608	-0.290	1.203	5.0867E-01	-3.0515E-02	-9.5502E-02
133	9.406	-0.290	0.919	1.5651E 00	-4.1419E-02	-7.4156E-02
134	10.250	-0.290	0.631	1.5110E 00	-4.0377E-02	-7.9623E-02
135	11.094	-0.290	0.343	1.4587E 00	-3.8089E-02	-8.4539E-02
136	8.052	-0.870	1.495	-2.1478E-03	9.5024E-03	-6.6667E-02
137	8.896	-0.870	1.207	-1.1516E-02	5.7506E-03	-7.9075E-02
138	9.741	-0.870	0.919	1.5434E 00	-6.0416E-02	-7.2407E-02
139	10.585	-0.870	0.631	1.4890E 00	-5.7518E-02	-7.8022E-02
140	11.429	-0.870	0.343	1.4372E 00	-5.3784E-02	-8.2672E-02
141	8.387	-1.450	1.495	-2.0813E-03	2.4040E-02	-5.2569E-02
142	9.231	-1.450	1.207	-3.2005E-03	2.7353E-02	-6.0675E-02
143	10.075	-1.450	0.919	-3.4866E-03	3.3227E-02	-7.1103E-02
144	10.967	-1.450	0.627	1.4602E 00	-7.4860E-02	-7.4821E-02
145	11.764	-1.450	0.343	1.4163E 00	-6.8781E-02	-8.0958E-02
146	8.722	-2.030	1.495	-1.1425E-03	2.8734E-02	-3.8241E-02
147	9.566	-2.030	1.207	-1.3384E-03	3.3651E-02	-4.1883E-02
148	10.410	-2.030	0.919	-8.6345E-04	4.0440E-02	-4.5477E-02
149	11.255	-2.030	0.631	-3.5204E-05	5.0177E-02	-4.8295E-02
150	12.099	-2.030	0.343	-4.0137E-04	6.2633E-02	-4.8540E-02
151	9.057	-2.610	1.495	-5.3472E-04	2.8738E-02	-2.7564E-02
152	9.901	-2.610	1.207	-4.8953E-04	3.2879E-02	-2.8639E-02
153	10.745	-2.610	0.919	-3.0809E-04	3.7937E-02	-2.9148E-02
154	11.589	-2.610	0.631	-3.5176E-05	4.4174E-02	-2.8644E-02
155	12.434	-2.610	0.343	2.5759E-04	5.1593E-02	-2.6521E-02
156	9.392	-3.190	1.495	-2.9058E-04	2.6913E-02	-2.0132E-02
157	10.236	-3.190	1.207	-2.2924E-04	2.9968E-02	-2.0028E-02
158	11.090	-3.190	0.919	-1.9707E-04	3.3448E-02	-1.9400E-02
159	11.924	-3.190	0.631	-2.5732E-04	3.7377E-02	-1.7986E-02
160	12.768	-3.190	0.343	-6.0065E-04	4.1655E-02	-1.5466E-02
161	9.725	-3.770	1.495	-2.1072E-04	2.4570E-02	-1.5002E-02
162	10.571	-3.770	1.207	-2.1352E-04	2.5747E-02	-1.4411E-02
163	11.415	-3.770	0.919	-3.0621E-04	2.9109E-02	-1.3410E-02
164	12.259	-3.770	0.631	-3.7661E-04	3.1600E-02	-1.1836E-02
165	13.103	-3.770	0.343	-1.1697E-03	3.4045E-02	-9.4877E-03
166	10.081	-4.350	1.495	-2.0687E-04	2.2231E-02	-1.1407E-02
167	10.905	-4.350	1.207	-2.7738E-04	2.3770E-02	-1.0644E-02
168	11.750	-4.350	0.919	-4.6391E-04	2.5361E-02	-9.5650E-03
169	12.594	-4.350	0.631	-8.3280E-04	2.6913E-02	-8.0655E-03
170	13.438	-4.350	0.343	-1.4799E-03	2.8223E-02	-6.0230E-03
171	10.396	-4.930	1.495	-2.2703E-04	2.0077E-02	-8.8339E-03
172	11.240	-4.930	1.207	-3.5444E-04	2.1154E-02	-8.0350E-03
173	12.085	-4.930	0.919	-5.9540E-04	2.2206E-02	-6.9952E-03
174	12.929	-4.930	0.631	-9.6509E-04	2.3133E-02	-5.6485E-03
175	13.773	-4.930	0.343	-1.5463E-03	2.3750E-02	-3.9366E-03
176	10.731	-5.510	1.495	-2.5058E-04	1.8152E-02	-6.9515E-03
177	11.575	-5.510	1.207	-4.1415E-04	1.5895E-02	-6.1800E-03
178	12.419	-5.510	0.919	-6.6881E-04	1.9569E-02	-5.2258E-03
179	13.264	-5.510	0.631	-1.0230E-03	2.0084E-02	-4.0535E-03
180	14.108	-5.510	0.343	-1.4529E-03	2.0308E-02	-2.6486E-03

Figure 26.- Continued.

WING COORDINATE SYSTEM	N	XW	YW	ZW	U/V	V/W	W/V
	1	-0.912	-0.362	-0.000	-2.0391E-03	-2.2873E-02	6.8959E-03
	2	-1.850	-0.362	-0.000	-1.6129E-04	-2.2063E-02	6.6390E-03
	3	-2.787	-0.362	-0.000	1.2063E-03	-2.0865E-02	6.2502E-03
	4	-3.725	-0.362	-0.000	2.0918E-03	-1.9542E-02	5.8060E-03
	5	-1.331	-1.087	-0.000	-3.3611E-04	-2.6174E-02	8.8246E-03
	6	-2.268	-1.087	-0.000	1.6543E-03	-2.4567E-02	8.2609E-03
	7	-3.206	-1.087	-0.000	2.8705E-03	-2.2720E-02	7.5919E-03
	8	-4.143	-1.087	-0.000	3.4909E-03	-2.0955E-02	6.9228E-03
	9	-1.750	-1.813	-0.000	2.2277E-03	-2.9530E-02	1.1285E-02
	10	-2.687	-1.813	-0.000	4.0164E-03	-2.6866E-02	1.0226E-02
	11	-3.625	-1.813	-0.000	4.7980E-03	-2.4324E-02	9.1722E-03
	12	-4.562	-1.813	-0.000	4.9669E-03	-2.2187E-02	8.2301E-03
	13	-2.168	-2.537	-0.000	5.7426E-03	-3.2453E-02	1.4298E-02
	14	-3.106	-2.537	-0.000	6.7992E-03	-2.8628E-02	1.2527E-02
	15	-4.043	-2.537	-0.000	6.7986E-03	-2.5527E-02	1.1007E-02
	16	-4.981	-2.537	-0.000	6.3568E-03	-2.3215E-02	9.7701E-03
	17	-2.587	-3.262	-0.000	9.5766E-03	-3.4238E-02	1.7766E-02
	18	-3.524	-3.262	-0.000	9.6276E-03	-2.9529E-02	1.5133E-02
	19	-4.462	-3.262	-0.000	8.5661E-03	-2.6259E-02	1.3138E-02
	20	-5.399	-3.262	-0.000	7.4462E-03	-2.4102E-02	1.1636E-02
	21	-3.005	-3.987	-0.000	1.4162E-02	-3.4213E-02	2.1474E-02
	22	-3.943	-3.987	-0.000	1.1909E-02	-2.9434E-02	1.8037E-02
	23	-4.880	-3.987	-0.000	9.7224E-03	-2.6609E-02	1.5686E-02
	24	-5.818	-3.987	-0.000	8.0289E-03	-2.5023E-02	1.4022E-02
	25	-3.424	-4.712	-0.000	1.7094E-02	-3.2205E-02	2.5207E-02
	26	-4.361	-4.712	-0.000	1.2992E-02	-2.8529E-02	2.1361E-02
	27	-5.299	-4.712	-0.000	9.9278E-03	-2.6835E-02	1.8959E-02
	28	-6.236	-4.712	-0.000	7.8992E-03	-2.6241E-02	1.7361E-02
	29	-3.842	-5.438	-0.000	1.7690E-02	-2.8865E-02	2.9049E-02
	30	-4.780	-5.438	-0.000	1.2427E-02	-2.7294E-02	2.5588E-02
	31	-5.717	-5.438	-0.000	8.9887E-03	-2.7209E-02	2.3691E-02
	32	-6.655	-5.438	-0.000	6.9391E-03	-2.7883E-02	2.2602E-02
	33	-7.261	-6.162	-0.000	1.5676E-02	-2.5218E-02	3.4042E-02
	34	-5.199	-6.162	-0.000	1.0204E-02	-2.5816E-02	3.2043E-02
	35	-6.136	-6.162	-0.000	6.9242E-03	-2.7186E-02	3.1457E-02
	36	-7.074	-6.162	-0.000	5.1680E-03	-2.8949E-02	3.1548E-02
	37	-4.680	-6.887	-0.000	1.1953E-02	-1.9936E-02	4.2320E-02
	38	-5.617	-6.887	-0.000	7.2162E-03	-2.1387E-02	4.2341E-02
	39	-6.555	-6.887	-0.000	4.2772E-03	-2.3080E-02	4.3470E-02
	40	-7.492	-6.887	-0.000	3.0488E-03	-2.5006E-02	4.5128E-02
	41	-5.098	-7.512	-0.000	8.5923E-03	-7.5891E-03	5.1245E-02
	42	-6.036	-7.512	-0.000	4.5946E-03	-8.4872E-03	5.2345E-02
	43	-6.973	-7.612	-0.000	2.4600E-03	-9.3811E-03	5.4356E-02
	44	-7.911	-7.612	-0.000	1.4756E-03	-1.0521E-02	5.6877E-02
	45	-5.517	-8.337	-0.000	6.2014E-03	-9.7228E-03	5.1351E-02
	46	-6.454	-8.337	-0.000	3.2631E-03	-9.4125E-03	5.2381E-02
	47	-7.392	-8.337	-0.000	1.5477E-03	-9.2532E-03	5.4199E-02
	48	-8.329	-8.337	-0.000	9.3422E-04	-8.8547E-03	5.6587E-02
	49	-5.935	-9.062	-0.000	4.5941E-03	-2.2050E-02	4.2681E-02
	50	-6.873	-9.062	-0.000	2.4343E-03	-2.1894E-02	4.3339E-02
	51	-7.810	-9.062	-0.000	1.1601E-03	-2.1951E-02	4.4643E-02
	52	-8.748	-9.062	-0.000	7.9592E-04	-2.1814E-02	4.6523E-02
	53	-6.354	-9.787	-0.000	3.3636E-03	-2.6992E-02	3.2358E-02
	54	-7.291	-9.787	-0.000	1.8660E-03	-2.6787E-02	3.2760E-02
	55	-8.229	-9.787	-0.000	9.2253E-04	-2.6788E-02	3.3675E-02
	56	-9.166	-9.787	-0.000	6.4568E-04	-2.6648E-02	3.5081E-02
	57	-6.773	-10.512	-0.000	2.3922E-03	-2.7463E-02	2.3991E-02
	58	-7.710	-10.512	-0.000	1.3437E-03	-2.7193E-02	2.4275E-02

Figure 26.- Continued.

59	-9.648	-10.512	-0.000	6.8351E-04	2.7117E-02	2.4957E-02
60	-9.585	-10.512	-0.000	4.6166E-04	2.6977E-02	2.5994E-02
61	-7.191	-11.237	-0.000	1.6225E-03	2.6023E-02	1.7957E-02
62	-9.129	-11.237	-0.000	9.1544E-04	2.5745E-02	1.8194E-02
63	-9.066	-11.237	-0.000	4.6646E-04	2.5635E-02	1.6711E-02
64	-10.004	-11.237	-0.000	3.1326E-04	2.5526E-02	1.9451E-02
65	-7.610	-11.962	-0.000	1.0345E-03	2.3978E-02	1.3719E-02
66	-8.547	-11.962	-0.000	5.8306E-04	2.3725E-02	1.3917E-02
67	-9.485	-11.962	-0.000	3.0549E-04	2.3612E-02	1.4299E-02
68	-10.422	-11.962	-0.000	2.1843E-04	2.3529E-02	1.4807E-02
69	-8.028	-12.687	-0.000	6.0354E-04	2.1869E-02	1.0699E-02
70	-8.966	-12.687	-0.000	3.3750E-04	2.1653E-02	1.0863E-02
71	-9.903	-12.687	-0.000	1.8943E-04	2.1545E-02	1.1135E-02
72	-10.841	-12.687	-0.000	1.6152E-04	2.1471E-02	1.1474E-02
73	-8.447	-13.412	-0.000	2.9580E-04	1.9894E-02	8.5041E-03
74	-9.384	-13.412	-0.000	1.6419E-04	1.9712E-02	8.6298E-03
75	-10.322	-13.412	-0.000	1.0761E-04	1.9608E-02	8.8172E-03
76	-11.259	-13.412	-0.000	1.3317E-04	1.9537E-02	9.0374E-03
77	-8.865	-14.137	-0.000	8.2246E-05	1.8110E-02	6.8692E-03
78	-9.803	-14.137	-0.000	4.3353E-05	1.7955E-02	6.9604E-03
79	-10.740	-14.137	-0.000	5.2318E-05	1.7856E-02	7.0848E-03
80	-11.678	-14.137	-0.000	1.1593E-04	1.7781E-02	7.2225E-03
81	-5.001	-0.362	0.202	2.8080E-03	-1.8110E-02	4.7958E-03
82	-6.056	-0.362	0.562	3.1461E-03	-1.7225E-02	3.6463E-03
83	-7.111	-0.362	0.922	3.3042E-03	-1.6356E-02	2.5862E-03
84	-8.167	-0.362	1.282	3.3562E-03	-1.5489E-02	1.6321E-03
85	-9.222	-0.362	1.642	3.3298E-03	-1.4602E-02	7.8299E-04
86	-5.419	-1.087	0.202	3.8775E-03	-1.9255E-02	5.6355E-03
87	-6.475	-1.087	0.562	4.0286E-03	-1.8322E-02	4.2517E-03
88	-7.530	-1.087	0.922	4.0669E-03	-1.724E-02	2.9886E-03
89	-8.585	-1.087	1.282	4.0519E-03	-1.6491E-02	1.8434E-03
90	-9.640	-1.087	1.642	3.9665E-03	-1.5482E-02	8.3637E-04
91	-5.838	-1.813	0.202	4.9215E-03	-2.0375E-02	6.6343E-03
92	-6.893	-1.813	0.562	4.8828E-03	-1.9513E-02	4.9812E-03
93	-7.948	-1.813	0.922	4.8429E-03	-1.8652E-02	3.4563E-03
94	-9.004	-1.813	1.282	4.8107E-03	-1.7648E-02	2.0620E-03
95	-10.059	-1.813	1.642	4.6880E-03	-1.6449E-02	8.4976E-04
96	-6.256	-2.537	0.202	5.8376E-03	-2.1546E-02	7.8549E-03
97	-7.312	-2.537	0.562	5.6671E-03	-2.0927E-02	5.8846E-03
98	-8.367	-2.537	0.922	5.6542E-03	-2.0176E-02	4.0064E-03
99	-9.422	-2.537	1.282	5.6989E-03	-1.9040E-02	2.2584E-03
100	-10.478	-2.537	1.642	5.5467E-03	-1.7486E-02	7.6624E-04
101	-6.675	-3.262	0.202	6.5278E-03	-2.2930E-02	9.4189E-03
102	-7.730	-3.262	0.562	6.3629E-03	-2.2787E-02	7.0580E-03
103	-8.786	-3.262	0.922	6.5698E-03	-2.2224E-02	4.6648E-03
104	-9.841	-3.262	1.282	6.8583E-03	-2.0758E-02	2.3503E-03
105	-10.896	-3.262	1.642	6.6089E-03	-1.8500E-02	4.5091E-04
106	-7.094	-3.987	0.202	6.8913E-03	-2.4803E-02	1.1578E-02
107	-8.149	-3.987	0.562	6.4777E-03	-2.5506E-02	8.7166E-03
108	-9.204	-3.987	0.922	7.7992E-03	-2.5225E-02	5.4740E-03
109	-10.259	-3.987	1.282	8.5949E-03	-2.2858E-02	2.0925E-03
110	-11.315	-3.987	1.642	7.8285E-03	-1.9229E-02	-4.3320E-04
111	-7.512	-4.712	0.202	6.8482E-03	-2.7563E-02	1.4899E-02
112	-8.558	-4.712	0.562	7.5598E-03	-2.9827E-02	1.1431E-02
113	-9.623	-4.712	0.922	9.9061E-03	-3.0059E-02	6.5894E-03
114	-10.678	-4.712	1.282	1.1276E-02	-2.5106E-02	6.9186E-04
115	-11.733	-4.712	1.642	8.6615E-03	-1.9451E-02	-2.7377E-03
116	-7.931	-5.438	0.202	6.2836E-03	-3.1524E-02	2.0762E-02
117	-8.986	-5.438	0.562	8.1902E-03	-3.6987E-02	1.6993E-02
118	-10.041	-5.438	0.922	1.4448E-02	-3.8520E-02	8.6848E-03
119	-11.097	-5.438	1.282	1.2757E-02	-2.7359E-02	-4.0333E-03

Figure 26.-- Continued.

120	-12.152	-5.438	1.642	8.0256E-03	-2.0358E-02	-8.7195E-03
121	-8.349	-6.162	0.202	5.0402E-03	-3.5520E-02	3.2064E-02
122	-9.405	-6.162	0.562	8.0614E-03	-4.7297E-02	3.0816E-02
123	-10.460	-6.162	0.922	2.8888E-02	-4.8448E-02	8.6527E-03
124	-11.515	-6.162	1.282	-1.5011E-00	-2.7968E-03	7.7724E-02
125	-12.571	-6.162	1.642	-1.5011E-00	-4.5142E-03	8.8344E-02
126	-8.768	-6.887	0.202	2.8240E-03	-3.3011E-02	5.0909E-02
127	-9.823	-6.887	0.562	7.1290E-03	-5.1663E-02	6.3253E-02
128	-10.879	-6.887	0.922	-1.5824E-00	-2.3233E-02	7.7019E-02
129	-11.934	-6.887	1.282	-1.5326E-00	-2.2715E-02	8.1433E-02
130	-12.989	-6.887	1.642	-1.4798E-00	-2.1599E-02	8.6376E-02
131	-9.187	-7.612	0.202	1.9642E-03	-1.5031E-02	6.7699E-02
132	-10.242	-7.612	0.562	-5.0867E-01	-3.0515E-02	9.5502E-02
133	-11.297	-7.612	0.922	-1.5651E-00	-4.1419E-02	7.4156E-02
134	-12.352	-7.612	1.282	-1.5110E-00	-4.0377E-02	7.9623E-02
135	-13.408	-7.612	1.642	-1.4587E-00	-3.8089E-02	8.4539E-02
136	-9.605	-8.337	0.202	2.1478E-03	9.5024E-03	6.6667E-02
137	-10.660	-8.337	0.562	1.1516E-02	5.7506E-03	7.9075E-02
138	-11.716	-8.337	0.922	-1.5434E-00	-6.0416E-02	7.2407E-02
139	-12.771	-8.337	1.282	-1.4890E-00	-5.7518E-02	7.8022E-02
140	-13.826	-8.337	1.642	-1.4372E-00	-5.3784E-02	8.2672E-02
141	-10.024	-9.063	0.202	2.0813E-03	2.4040E-02	5.2569E-02
142	-11.079	-9.063	0.562	3.2005E-03	2.7353E-02	6.0675E-02
143	-12.134	-9.063	0.922	3.4866E-03	3.3227E-02	7.1103E-02
144	-13.190	-9.063	1.282	-1.4602E-00	-7.4860E-02	7.4821E-02
145	-14.245	-9.063	1.642	-1.4163E-00	-6.8781E-02	8.0958E-02
146	-10.442	-9.787	0.202	1.1429E-03	2.8734E-02	3.8241E-02
147	-11.498	-9.787	0.562	1.3384E-03	3.3651E-02	4.1883E-02
148	-12.553	-9.787	0.922	8.6345E-04	4.0440E-02	4.5477E-02
149	-13.608	-9.787	1.282	3.5204E-05	5.0177E-02	4.8295E-02
150	-14.663	-9.787	1.642	4.0137E-04	6.2633E-02	4.8540E-02
151	-10.861	-10.512	0.202	5.3472E-04	2.8738E-02	2.7564E-02
152	-11.916	-10.512	0.562	4.8953E-04	3.2879E-02	2.8639E-02
153	-12.971	-10.512	0.922	3.0809E-04	3.7937E-02	2.9148E-02
154	-14.027	-10.512	1.282	3.5176E-05	4.4174E-02	2.8644E-02
155	-15.082	-10.512	1.642	-2.5759E-04	5.1593E-02	2.6521E-02
156	-11.279	-11.237	0.202	2.9058E-04	2.6913E-02	2.0132E-02
157	-12.335	-11.237	0.562	2.2924E-04	2.9968E-02	2.0028E-02
158	-13.390	-11.237	0.922	1.9707E-04	3.3448E-02	1.9400E-02
159	-14.445	-11.237	1.282	2.6732E-04	3.7377E-02	1.7986E-02
160	-15.501	-11.237	1.642	6.0065E-04	4.1655E-02	1.5466E-02
161	-11.598	-11.962	0.202	2.1072E-04	2.4570E-02	1.5002E-02
162	-12.753	-11.962	0.562	2.1352E-04	2.6747E-02	1.4411E-02
163	-13.803	-11.962	0.922	3.0621E-04	2.9109E-02	1.3410E-02
164	-14.864	-11.962	1.282	5.7661E-04	3.1600E-02	1.1836E-02
165	-15.919	-11.962	1.642	1.1697E-03	3.4045E-02	9.4877E-03
166	-12.117	-12.687	0.202	2.0687E-04	2.2231E-02	1.1407E-02
167	-13.172	-12.687	0.562	2.7738E-04	2.3770E-02	1.0644E-02
168	-14.227	-12.687	0.922	4.6391E-04	2.5361E-02	9.5650E-03
169	-15.282	-12.687	1.282	8.3280E-04	2.6913E-02	8.0655E-03
170	-16.338	-12.687	1.642	1.4799E-03	2.8223E-02	6.0230E-03
171	-12.535	-13.412	0.202	2.2703E-04	2.0077E-02	8.8339E-03
172	-13.590	-13.412	0.562	3.5444E-04	2.1154E-02	8.0350E-03
173	-14.646	-13.412	0.922	5.9540E-04	2.2206E-02	6.9952E-03
174	-15.701	-13.412	1.282	9.9509E-04	2.3133E-02	5.6485E-03
175	-16.756	-13.412	1.642	1.5463E-03	2.3750E-02	3.9366E-03
176	-12.654	-14.137	0.202	2.5058E-04	1.8152E-02	6.9515E-03
177	-14.009	-14.137	0.562	4.1415E-04	1.8895E-02	6.1800E-03
178	-15.064	-14.137	0.922	6.6881E-04	1.9569E-02	5.2258E-03
179	-16.120	-14.137	1.282	1.0230E-03	2.0084E-02	4.0535E-03
180	-17.175	-14.137	1.642	1.4529E-03	2.0308E-02	2.6486E-03

Figure 26.- Concluded.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
WASHINGTON, D.C. 20546

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300      **SPECIAL FOURTH-CLASS RATE  
BOOK**

POSTAGE AND FEES PAID  
NATIONAL AERONAUTICS AND  
SPACE ADMINISTRATION  
451



POSTMASTER : If Undeliverable (Section 158  
Postal Manual) Do Not Return

*"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."*

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

## NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

**TECHNICAL REPORTS:** Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

**TECHNICAL NOTES:** Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

**TECHNICAL MEMORANDUMS:** Information receiving limited distribution because of preliminary data, security classification, or other reasons. Also includes conference proceedings with either limited or unlimited distribution.

**CONTRACTOR REPORTS:** Scientific and technical information generated under a NASA contract or grant and considered an important contribution to existing knowledge.

**TECHNICAL TRANSLATIONS:** Information published in a foreign language considered to merit NASA distribution in English.

**SPECIAL PUBLICATIONS:** Information derived from or of value to NASA activities. Publications include final reports of major projects, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

**TECHNOLOGY UTILIZATION PUBLICATIONS:** Information on technology used by NASA that may be of particular interest in commercial and other non-aerospace applications. Publications include Tech Briefs, Technology Utilization Reports and Technology Surveys.

*Details on the availability of these publications may be obtained from:*

**SCIENTIFIC AND TECHNICAL INFORMATION OFFICE**

**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION**

Washington, D.C. 20546