

Technical University of Denmark



Harnessing Big-Data for Estimating the Energy Consumption and Driving Range of Electric Vehicles

Fetene, Gebeyehu Manie; Prato, Carlo Giacomo; Kaplan, Sigal; Mabit, Stefan Eriksen; Jensen, Anders Fjendbo

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Fetene, G. M., Prato, C. G., Kaplan, S., Mabit, S. L., & Jensen, A. F. (2016). Harnessing Big-Data for Estimating the Energy Consumption and Driving Range of Electric Vehicles. Paper presented at Transportation Research Board (TRB) 95th Annual Meeting , Washington, D.C, United States.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

1 **Harnessing Big-Data for Estimating the Energy Consumption and Driving**
2 **Range of Electric Vehicles**

3
4 Gebeyehu M. Fetene^{*a}, Carlo G. Prato^b, Sigal Kaplan^c, Stefan L. Mabit^d, Anders F. Jensen^e

5
6 ^aPhD student, Department of Transport
7 Technical University of Denmark
8 Bygningstorvet 116B, 2800 Kgs. Lyngby, Denmark
9 Tel: +45.4525.6533
10 Email: gebefe@transport.dtu.dk

11 ^bProfessor, Department of Transport
12 Technical University of Denmark
13 Bygningstorvet 116B, 2800 Kgs. Lyngby, Denmark
14 Tel: + 45.4525.6595
15 Email: cgp@transport.dtu.dk
16 ^cAssociate Professor, Department of Transport
17 Technical University of Denmark
18 Bygningstorvet 116B, 2800 Kgs. Lyngby, Denmark
19 Tel: + 45.4525.6559
20 Email: siga@transport.dtu.dk

21
22 ^dAssociate Professor, Department of Transport
23 Bygningstorvet, 116B, 2800 Kgs. Lyngby
24 Tel.: 45251510
25 Email: slm@transport.dtu.dk

26
27 ^eResearcher, Department of Transport
28 Technical University of Denmark
29 Bygningstorvet 116B, 116B, 2800 Kgs. Lyngby
30 Tel: +45 45 25 65 96
31 E-mail afje@transport.dtu.dk

32
33 * Corresponding author
34
35

36

37

38 Final manuscript for presentation at the 95th Annual Meeting of the Transportation Research
39 Board, January 10-14, 2016, Washington D.C.

40 Submission date: July 30, 2015

41 Word count: 6623 (text) + 2 × 250 (figures and tables) = 7123

42

1 **ABSTRACT**

2 This study analyses the driving range and investigates the factors affecting the energy
3 consumption rate of fully-battery electric vehicles under real-world driving patterns accounting
4 for weather condition, drivers' characteristics, and road characteristics. Four data sources are
5 used: (i) up to six months driving pattern data collected from 741 drivers, (ii) drivers'
6 characteristics; (iii) road characteristics; (iv) weather data. We found that the real-world driving
7 range of BEVs is highly sensitive to driving pattern and weather variables. The most important
8 determinants of energy efficiency found to be driving patterns (acceleration and speed, both non-
9 linearly) followed by seasonal variation (a winter dummy), temperature (non-linearly) and
10 precipitation. Mean ECR is higher by about 34 % and the driving range is lower by about 25 %
11 in winter than in summer. A fixed-effects econometrics model used in this paper predicts that the
12 energy saving speed of driving is between 45 and 56 km/h. In addition to the contribution to the
13 literature about energy efficiency of electric vehicles, the findings from this study enlightens
14 consumers to choose appropriate cars that suit their travel demand under the driving environment
15 they live in, to know about energy saving patterns of drive, and to reduce driving range anxiety
16 problem.

17

18

19

20

21

22

23

24

25

26

27

28

29

30 **Keywords:** fully battery electric vehicles, energy consumption rate, driving range, driving
31 environment

32

1 1. INTRODUCTION

2 As the transport sector is one of the largest contributors of greenhouse gas at a global
3 level (see, e.g., Alessandrini et al., 2012; Zahabi et al., 2014), there have been efforts by car-
4 makers, car drivers and governments to improve fuel consumption efficiency, to reduce pollution
5 and to limit dependence on fossil fuel. For example, some of the EU and US governments have
6 set standards that limit the pollution level of cars and they use incentives and taxes to induce car
7 manufacturers to produce, and car users to use fuel-efficient vehicles (Kono et al., 2008). Battery
8 electric vehicles (BEVs) are considered as one alternative to curtail pollution from the sector and
9 to reduce dependence on the scarce and insecure petroleum since the electricity needed to charge
10 BEVs can be obtained from renewable resources such as wind, solar power and hydro.

11 However, the market penetration rate of BEVs is lethargic, mainly because of high
12 purchase prices, limited recharging infrastructures, limited driving range coupled with long
13 recharging times, uncertainties concerning driving range and battery life, and risk aversion
14 behavior in adopting new technologies (see, e.g., Egbue and Long, 2012; Birrell et al., 2014;
15 Kihm and Trommer, 2014). It is clear that uncertainty plays a significant role in the (non-)choice
16 of BEVs, especially when thinking about the cost and time for refueling a BEV with respect to a
17 conventional vehicle. Uncertainty plays an even larger role when factoring in that customers
18 have limited knowledge about the performances of BEVs and their sensitivity to driving
19 environments, adversely affecting the demand for BEV (Jensen et al., 2013; Birrell et al., 2014).
20 Accordingly, providing insight into the factors that affect the energy consumption rate (ECR)
21 and driving range of BEVs under different driving environments is very relevant to support, on
22 the one hand, consumers in choosing appropriate vehicles that suit their needs, and, on the other
23 hand, manufacturers in distinguishing and targeting different customers depending on the driving
24 environments that the customers live and move in.

25 Insights into the factors that affect the ECR and information about the driving range of
26 conventional vehicles have been provided extensively, as the fuel consumption of conventional
27 cars is well-documented in both the theoretical literature (Nam and Giannelli, 2005; Mellios et
28 al., 2011) and the empirical literature (Ericsson, 2001; Brundell-Freij and Ericsson, 2005; Hu et
29 al., 2012). Existing studies show that the fuel consumption rate of conventional vehicles is
30 affected by road width (Brundell-Freij and Ericsson, 2005; Yao et al., 2007; Kono et al., 2008;
31 Hu et al., 2012), road grade (Nam and Giannelli, 2005; Wang et al., 2008), traffic congestion and
32 speed limits (Brundell-Freij and Ericsson, 2005), as well as by traffic information provided to
33 drivers (Kono et al., 2008; Fotouhi et al., 2014). Existing studies also illustrate that driving
34 patterns (in terms of speed and acceleration profiles) are the main factors affecting fuel
35 consumption of conventional vehicles (Ericsson, 2001; El-Shawarby et al., 2005; Nesamani and
36 Subramanian, 2006; Wang et al., 2008; Heide and Mohazzabi, 2013). Moreover, a number of
37 studies have provided mathematical and technical detailed accounts of the effects of different car
38 characteristics on the fuel consumption of conventional cars (see, e.g., Brundell-Freij and
39 Ericsson, 2005; Nam and Giannelli, 2005; Heide and Mohazzabi, 2013; U.S.E.P.A., 2014). It
40 should be noted that the effects of car features on fuel consumption are usually taken into
41 account during the design of the vehicle by the manufacturers, and are usually made available to
42 the consumers during the purchase of the vehicle (Kono et al., 2008; Ben-Chaim et al., 2013).

43 Insights into the factors that affect the ECR of hybrid electric vehicles (HEVs) using both
44 fuel and rechargeable batteries have been provided to a lesser extent. For example, winter has
45 been related to a decrease of 20% in the fuel efficiency of HEVs, and the overall fuel economy
46 of HEVs with respect to conventional vehicles has been evaluated as possibly outweighed by

1 the poor performance of HEVs in cold weather locations (Zahabi et al., 2014). The temperature
2 has been found as relevant in other studies that have focused also on the driving environment
3 (Fontaras et al., 2008; Alvarez and Weilenmann, 2012; Lohse-Busch et al., 2013), while the
4 power ratio of HEV components and the applied control strategy have been demonstrated
5 analytically related to the ECR of HEVs (Banjac et al., 2009).

6 Insights into the factors that influence the ECR of BEVs have been scarce, mainly
7 because of their recent market penetration. Most studies include technical analyses that
8 investigated the effects of car components on the ECR (see, e.g., Duke et al., 2009) and analyses
9 by car manufacturers and other stakeholders. Large differences are usually observed between the
10 results of car manufacturers and the results observed in real-world (Huo et al., 2011), mainly
11 because manufacturers test BEVs by performing a long and continue test drive from a fully
12 charged battery to a completely flat battery, thus, ignoring basic real-world energy expenditures
13 such as the energy used to overcome the inertia force to propel a parked car and the energy used
14 to cool down a propelling car for each short trips. A limited number of studies have focused on
15 the ECR and the driving range of BEVs: ECR of BEVs was estimated by taking into account
16 driving patterns and car features from GPS data, and in-city driving was deemed more energy
17 efficient than freeway driving (Wu et al., 2015); ECR of BEVs was compared by considering the
18 driving range reported by the manufacturer versus the actual driving range of drivers (Birrell et
19 al., 2014). However, these studies present limitations: (i) the study samples consisted
20 respectively of one (Wu et al., 2015) and 11 drivers (Birrell et al., 2014), with obvious
21 consequences on the possibility of generalizing any finding; (ii) the data collections did not cover
22 the winter months, with obvious consequences on the possibility of analyzing the ECR in cold
23 temperatures; (iii) the data analyses did not control for possible confounders, with obvious
24 consequences on the possibility of assessing whether the differences were caused by other
25 factors.

26 As aforementioned, the uncertainty and the consequent anxiety about the driving range
27 and the ECR of BEVs is one of the major barriers to their wider market penetration. It is
28 therefore essential to provide insights into the actual ECR and driving range of BEVs under
29 different driving environments as well as the factors that affect them while controlling for
30 drivers' characteristics, weather variations, spatial areas, and road characteristics. The current
31 study fills this gap by analyzing real-world data collected over a two-year period in Denmark,
32 namely by addressing questions about the ECR of BEVs under various driving environments, the
33 sensitivity of BEVs to speed and acceleration profiles, the optimal speed for the most energy
34 efficient use of BEVs, the variability in the performances of BEVs with varying factors such as
35 speed, wind, temperature, and location. Addressing these questions not only could help
36 customers in reducing the uncertainty about energy consumption and driving range because of
37 the provided information, but also could support customers in adopting the optimal driving
38 pattern for energy efficient driving.

39 Big data are used for providing answers to these questions, as more than a quarter of a
40 million trips performed by 741 BEV drivers have been analyzed in the current study. The data
41 were collected over a two-year period between January 2012 and January 2014 by Clever A/S,
42 an electric mobility operator in Denmark, using three models of BEVs, namely Citroen C-Zero,
43 Peugeot Ion and Mitsubishi iMiev. The data contained information for each trip about vehicle
44 positioning (i.e., longitude, latitude), driving patterns (i.e., speed profile, acceleration profile),
45 battery charge level, time and duration of the trip, and road characteristics after map-matching.
46 Data included also information about the weather conditions during each trip as well as the

1 driver characteristics as reported by drivers while renting the BEV. The analysis focused on the
 2 computation of the ECR and the corresponding driving range of BEVs from the large sample of
 3 trips in real-world driving conditions, and the estimation of the effects of driving patterns, road
 4 characteristics and weather conditions on the ECR of BEVs from the estimation of individual-
 5 specific fixed effects econometric models. Moreover, the analysis proposes a simple formula that
 6 allows consumers to compare BEVs and conventional vehicles in terms of fuel (electricity) cost
 7 under varying intensity of the winter season. The current study contributes to the literature about
 8 energy efficiency of BEVs by overcoming limitations of existing studies: (i) the sample of the
 9 study is significantly larger than previous studies with about 2.3 million km driven; (ii) the
 10 seasonal variation is accounted for, as the study period covers two summers and three winters;
 11 (iii) the weather effects are considered, as the study looks at the effect of temperature,
 12 precipitation and wind speed; (iv) the actual driving patterns are analyzed, as the speed and
 13 acceleration profiles are collected for each trip; (v) econometric models are used to disentangle
 14 the effect of each variable on the ECR after controlling for possible confounders.

15 The remainder of this paper is structured as follows. The next section presents the data
 16 collection and the methods used to compute the ECR of BEVs and to estimate the model of the
 17 ECR of BEVs. Then, the results of the computation and the estimation are presented, and
 18 conclusions and further research directions are offered in the last section.
 19

20 **2. METHODS**

21 **2.1 Data Collection**

22 Four data sources were used for this paper: (i) driving patterns collected from GPS data
 23 loggers installed on 200 BEVs used by 741 drivers for 276,102 trips and about 2.3 million km
 24 travelled; (ii) drivers' characteristics obtained from registration during receiving BEVs for 3 to 6
 25 months drive; (iii) road characteristics collected from the map-matching of the GPS data with the
 26 Danish road network; (iv) weather information obtained from the Danish Meteorological
 27 Institute (DMI).

28 Clever A/S collected the driving pattern data from customers who have been driving
 29 BEVs for a period of 3 to 6 months in a project called "test-en-elbil" (in English: "test an electric
 30 car") where Danish drivers were invited to drive BEVs and were proposed an agreement to
 31 collect information about their trips during the period. The total number of individuals
 32 participated in the project was 1600, but the number of drivers with relevant data for this paper is
 33 741. Each driver had been using a BEV for 3 to 6 months, after which, the BEV was given to
 34 other drivers in that 1600 drivers used the 200 BEVs within two years. The data were collected
 35 using GPS during the period from January 2012 to January 2014, and the GPS data loggers were
 36 mounted on three fully BEV models, namely Citroen C-Zero, Peugeot Ion, and Mitsubishi
 37 iMievst, which are made by the same manufacturer and are practically identical.

38 Variables related to driving patterns (i.e., speed profiles, acceleration profiles), date and
 39 time of each trip, distance and duration of each trip, geographical coordinates of each trip, and
 40 percentage change in the battery charge level for each trip, were extracted from the GPS data.
 41 Time-of-day periods and seasonal variation were defined on the basis of the date and time
 42 stamps of the GPS loggers.

43 Variables related to income and demographic characteristics (age and gender) of drivers
 44 were collected during the registration process for testing BEVs. The drivers were mainly men
 45 (56%), with average age of about 44 years old, and heterogeneous distribution of income as 48%
 46 declared a yearly income higher than the then mean national income.

Controlling for the road and traffic characteristics revealed cumbersome since road grade and traffic congestion dynamics even within a trip. However, after map-matching the GPS data for each trip, it was considered that road grade is not relevant to Denmark as one of the flattest countries in the world, and we use rush hour as a proxy to traffic congestion hours. Moreover, it was discerned whether each trip was performed on a highway in order to account for road variability.

Controlling for the weather conditions revealed also cumbersome because weather varies dynamically across time and location even for a single trip. It was considered that a driver could experience different types and level of weather conditions, but the changes would have marginal effects when considering that most trips in Denmark are rather short. Accordingly, and similarly to existing literature, we the mean values for temperature, precipitation, wind speed and visibility of each trip as reported by DMI.

Considering the initially registered 276,102 trips, the data cleaning process implied looking for missing values and possible errors in the variables. In particular, 10,977 trips had missing information about the battery charge level, 10,420 trips had unreliable information with extremely low or high values of battery charge level variation, and 9,394 trips had missing information concerning the identity of the driver. Following the data cleaning process, the data analysis focused on 239,247 trips for the descriptive part and 229,853 trips for the regression part.

2.2 Data Analysis

2.2.1 Descriptive Analysis of BEV Performance

Initially, this study examined the performance of BEVs in terms of ECR (analogous to the fuel consumption rate for conventional cars). Namely, the ECR was calculated as the ratio between the power consumed and the distance traveled for different models and different driving environments:

$$\text{ECR} = \frac{\text{Power consumed (kWh)}}{\text{Distance traveled (km)}} \quad (1)$$

The lower is the ECR, the better is the energy efficiency. In this study, the data contained the percentage change in battery charge level before and after each trip, which implied that the value obtained from the data collection had to be multiplied by the watt-hour of the battery of the vehicle (i.e., 16 kWh) in order to obtain the power consumed in kWh.

Given the ECR, the driving range of BEVs was computed as follows:

$$\text{Driving Range} = \frac{\text{Power of a fully charged BEV (kWh)}}{\text{ECR (kWh/km)}} \quad (2)$$

It should be noted that the driving range depends on the battery capacity, the car performance, or both. Accordingly, a higher driving range would not necessarily indicate that the BEV performs better in terms of ECR, but could possibly relate to a higher battery capacity that comes at a heftier price. For this reason, comparing ECR between BEVs provides more correct insight into the energy efficiency of BEVs.

2.2.2 Modeling Analysis of the ECR Of BEVs

Explaining the factors that affect the ECR of BEVs under different driving environments is relevant to consumers for choosing vehicles that suit their driving needs and to manufacturers

1 to distinguish and target market segments according to their driving environments. Accordingly,
 2 this study provides the estimation of a model that unravels the sign and magnitude of the factors
 3 that affect the ECR.

4 An unobserved effects model was used because this is the most suitable model for panel
 5 data as the ones collected in this study (Wooldridge, 2000). In fact, considering unobserved
 6 (latent) individual-specific effects allows controlling for unobservable factors such as car
 7 maintenance (e.g., oil, brakes), weight load, and usage of car devices that could affect energy
 8 consumption, which are less likely to vary for an individual while they certainly vary across
 9 individuals. Accordingly, an unobserved individual specific effect model was estimated to
 10 explain the ECR variation. A general model that can be used to estimate the factors explaining
 11 the variation in ECR can be given by

$$12 \quad ECR_{it} = \theta_t + X_i\beta + W_{it}\alpha + Y_{it}\delta + Z_{it}\gamma + \phi_i + v_{it} \quad (3)$$

13 where ECR_{it} is the ECR of a trip by driver i at time t , θ denotes a time-varying intercept, X_i is a
 14 row vector of the characteristics of the vehicle used by individual i , W_{it} is a row vector of
 15 weather variables that vary among individuals i and across time for an individual, Y_{it} is a row
 16 vector of road characteristics that vary across individuals i and across time t , Z_{it} is a row vector
 17 of household characteristics that could vary across individuals i and within a household across
 18 time t , ϕ_i is individual-specific unobserved effect that is time-invariant, v_{it} is the idiosyncratic
 19 error term with mean zero and is uncorrelated with any of the explanatory variables, and the
 20 column vectors α , β , γ and δ contain the population parameters to be estimated.

21 The choice of the appropriate model among unobserved effects models mainly depends
 22 on how the ϕ_i is correlated with the explanatory variables. The random effects model is preferred
 23 to fixed effects model when ϕ_i is uncorrelated with explanatory variables, and when the main
 24 variables of interest are dummies. Whereas the fixed effects model is preferred when there is
 25 strong correlation between the unobserved factors and the explanatory variables included in the
 26 model since the unobserved time-invariant variable will be effectively concealed out by time-
 27 demeaning in the fixed effects model. One way of choosing between random and fixed effects
 28 models is to conduct the Hausman test (Wooldridge, 2010). Having found that the fixed effects
 29 model is preferred to random effects model via a Hausman test for the data collected in this
 30 study, a fixed effects model was estimated to investigate the factors that explain the variation of
 31 ECR. Correspondingly, the explanatory variables X_i , and Z_{it} and the latent variable, ϕ_i , were
 32 canceled out by time-demeaning given that these variables did not vary over the period in which
 33 the data were collected. Accordingly, the model we estimated is given by

$$34 \quad ECR_{it} - \overline{ECR}_i = \theta_t - \bar{\theta} + (W_{it} - \bar{W}_i)\tilde{\alpha} + (Y_{it} - \bar{Y}_i)\tilde{\delta} + v_{it} - \bar{v}_i \quad (3')$$

35 Where the bars subtracted on each corresponding variable denotes the mean of each
 36 variable computed over time, not the mean across individuals. That is, for example,

$$37 \quad \overline{ECR}_i = \frac{1}{T} \sum_t ECR_{it}, \quad \bar{W}_i = \frac{1}{T} \sum_t W_{it}, \quad \text{and so on. This transformation enables to cancel out the}$$

38 latent variable that could affect the estimation result otherwise, and the model provides
 39 consistent estimates regardless of the correlation between the latent variable and the explanatory
 40 variables (Wooldridge, 2010). The fixed effects model enables to control for unobserved
 41 activities of drivers corresponding to driving BEVs, such as weight loaded, usage of the car
 42 tools, etc. that could bias estimates.

1 3. RESULTS

2 In this section, the results from the data analyses are presented. The main results presented in
3 this section include descriptive statistics results about the trips, ECR (by different categories),
4 and result from the fixed effects model estimation of the factors explaining ECR variation.
5

6 3.1 OVERVIEW of TRIPS by BEVS

7 On average, each driver had 307.1 trips during 90.7 days where the individuals used
8 BEVs. Concerning the length of the trips, about 50% of trips were less than 5 km, and only about
9 1 % of the total trips were over 50 km. A possible reason for the short trip distances could be the
10 fact that about 39% of Danes commuted less than 5 km in 2013 (Denmark Statistics, 2014), and
11 another reason could be that the customers had a range anxiety problem and used the BEV for
12 shorter distances.

13 Given the average short distances, it is not surprising that a great share of individuals did
14 not recharge the BEVs upon arrival from each trip. It is however interesting that the infrequent
15 recharging does not correspond to waiting for having an empty battery: the mean and the median
16 of battery charge when the recharging was performed were equal respectively to 55.5% and 56%,
17 namely individuals recharged their BEVs well before risking to have their batteries empty.
18

19 3.2 Observed ECR of BEVs

20 3.2.1 Overall ECR

21 The mean ECR in the sample equals 0.183 kWh/km, namely each km traveled consumes
22 on average 183 Wh (= 0.183 kWh) and hence a minimum power of 9.125 KWh must be
23 available for a trip of 50 km not requiring recharging of the battery.

24 Figure 1 presents the distribution of the ECR from the 239,247 trips in the analyzed data.
25 The vertical line at 125 Wh/km denotes the mean ECR from the specification of the BEVs in the
26 sample, whereas the vertical line at 183 Wh/km denotes the mean ECR from the observation of
27 the data. The resulting driving range is about 25.5% lower than the driving range reported in the
28 specification of the BEV models used in this study. Figure 1 shows that the distribution of the
29 ECR presents high heterogeneity and indicates that BEVs consume more energy per distance
30 unit than reported by manufacturers since a massive share is clearly over the specification of the
31 BEVs used in the study. A reason for the difference is that the testing conditions of
32 manufacturers do not include the energy consumed to propel a parked vehicle or to cool down a
33 propelling vehicle that characterize real-world trips. Another reason for the difference and for the
34 heterogeneity is possibly the difference in driving environment whose investigation motivated
35 the modeling of the variation of the ECR presented later.
36
37
38
39
40
41
42
43
44

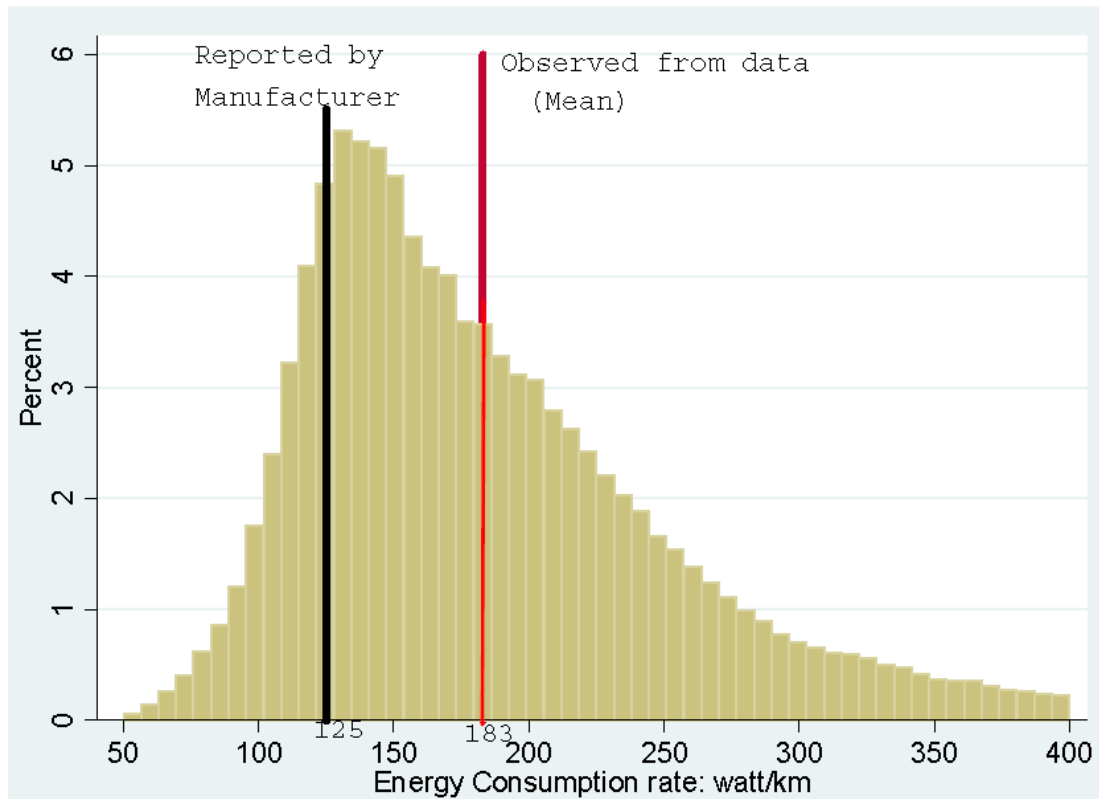


Figure 1 The distribution of ECR, and observed versus reported ECR of BEVs

1
2
3
4
5
6
7
8
9
10
11
12

3.2.2 ECR by Season

The ECR was computed for the summer and the winter seasons, and results showed that ECR is higher and consequently the driving range is shorter in winter with respect to summer: the average ECR is equal to 0.168 kWh/km during the summer and 0.225 kWh/km during winter, with an observed 34% increase in consumption in winter per km driven. Both a parametric t-test and a non-parametric Mann-Whitney test proved the difference to be statistically significant, and the difference is higher than the 20% reported in Canada for hybrid vehicles (Zahabi et al., 2014).

3.2.3 ECR by Trip Distance

As driving patterns could vary with the trip distance (Fosgerau, 2005), and in turn the distance could affect the ECR (Ericsson, 2001), it is relevant to consider the ECR for different trip distances in order to know for which trip distances BEVs are more energy efficient. The distribution of the distances in the trips analyzed in this study suggested to consider short trips (less than 2 km), medium trips (between 2 and 10 km) and long trips (longer than 10 km).

It emerges that the mean ECR decreases (and consequently the mean driving range increases) with the increase of the trip distance: for example, in average short trips consume 40 Wh/km more than medium trips and 57 Wh/km more than long trips. The difference is observed for all percentiles except the lower one, and it is statistically significant according to both a parametric t-test and a non-parametric Mann-Whitney test. Roughly speaking, these findings suggest that BEVs are more energy-efficient for individuals with relatively longer commuting distance rather than ones with shorter commuting distance.

25

1

2 **3.2.4 ECR by Road Type**

3 As road characteristics have an effect on the fuel economy of conventional and hybrid
4 vehicles (Brundell-Freij and Ericsson, 2005; Ericsson, 2001; Zahabi et al., 2014), ECR was
5 computed for highway and non-highway trips.

6 No clear difference emerges between driving on highway or non-highway roads, although
7 the average ECR is slightly lower for highway portions of the trips. More specifically, while the
8 5th and 25th percentiles of the ECR of trips on highway are higher (and consequently the driving
9 ranges are shorter) than for trips on non-highways, the opposite is observed when looking at the
10 mean, median, 75th and 95th percentile of the ECR of BEVs. The differences are not statistically
11 significant according to both a parametric t-test and a non-parametric Mann-Whitney test.
12

13 **3.3 Comparison of BEVs and Conventional Vehicles in terms of Energy Cost**

14 Having the mean ECR from the analyzed data allows formulating an equation for the
15 (rough) comparison of BEVs and conventional vehicles in terms of fuel efficiency, at least in the
16 Danish driving environments.

17 Consider that the mean ECR of BEVs in the analyzed sample is equal to 0.183 kWh/km,
18 and that the electricity tariff that the individuals pay for recharging their BEVs is equal to P_e per
19 kWh. Accordingly, the mean electricity cost per km traveled is equal to $0.183 P_e$. Consider that
20 the mean fuel consumption per km traveled of a conventional car is equal to v , and that the fuel
21 tariff that the individuals pay for fueling the car is equal to P_f per liter. Obviously, driving a BEV
22 is cheaper than driving a conventional vehicle in the case that the cost per km of the former
23 ($0.183 P_e$) is lower than the cost per km of the latter (vP_f), namely if:

$$24 \quad 0.183P_e \leq vP_f \quad (4)$$

25 For example, if the fuel cost P_f is equal to 11 DKK/liter (i.e., current price of gasoline in
26 Denmark) and the fuel consumption v is equal to 0.05 liters (i.e., 20 km/liter), then it would be
27 cheaper to drive a BEV if and only if the electricity tariff P_e is not higher than 3 DKK/kWh.

28 Consider a possible extension that differentiates the ECR into summer and winter
29 seasons, and define the number of months θ with summer weather. Given the mean ECR for
30 summer and winter computed from the analyzed data, it would be cheaper to drive a BEV rather
31 than a conventional vehicle in terms of only running cost if and only if:

$$32 \quad 0.168P_e \left(\frac{\theta}{12} \right) + 0.225P_e \left(\frac{1-\theta}{12} \right) \leq vP_f \quad (5)$$

33 It should be noted that more precision could be obtained by relating to the number of days rather
34 than the number of months.
35

36 **3.4 Modeling of the ECR Variation**

37 Table 1 presents the estimation results of the unobserved individual specific fixed effects
38 model that explains about 70% of the ECR variation between drivers, 28% of the ECR variation
39 within drivers, and 41.5% of the ECR variation overall in the sample of 229,853 trips.
40 Interestingly, most of the explanatory variables are statistically significant and have the expected
41 sign also when considering non-linearity in their relation to the ECR. The model estimates
42 present effects on the ECR per km traveled, which means that the potential effects when
43 considering yearly travel distances are considerably high.

1 Speed of driving and acceleration are extremely relevant to the ECR variation. The
 2 seasonal variation is proved to be associated with the ECR, and this finding is important because
 3 it shows that winter is positively related to an increase in ECR even when controlling for other
 4 variables. The weather conditions are also very important in explaining the ECR variation. It
 5 should be noted that the lower the ECR is, the better is the fuel efficiency, and thus statistically
 6 significant negative parameters in this specific model indicate which variables have a positive
 7 effect in terms of energy efficiency and driving range.

8 **TABLE 1 ECR Model Estimates**

Explanatory Variables	Estimate	standard error	p-value
Mean driving speed	-19.000	0.365	0.0000
Mean driving speed square	0.761	0.015	0.0000
Mean acceleration	55.521	7.156	0.0000
Mean acceleration square	27.828	9.150	0.0020
Trip distance	-1.110	0.062	0.0000
Trip distance square	0.010	0.001	0.0000
Winter	14.687	0.364	0.0000
Highway	0.534	0.381	0.1610
Rush hour	-1.926	0.204	0.0000
Battery level (at trip start)	3.401	0.206	0.0000
Battery level (at trip start) square	-0.056	0.003	0.0000
Battery level (at trip start) cube	0.000	0.000	0.0000
Temperature	-4.807	0.040	0.0000
Temperature square	0.081	0.002	0.0000
Wind speed	0.695	0.042	0.0000
Visibility	-0.118	0.005	0.0000
Precipitation	5.287	0.229	0.0000
Constant	135.489	6.378	0.0000
R-square: within	0.2714	sigma_u	20.0258
R-square: between	0.7020	sigma_e	44.8110
R-square: overall	0.4078	rho	0.1665
Number of observations			229,853

9
 10 An interesting finding from the model estimation is that the mean driving speed presents
 11 a quadratic term, namely driving at both very slow and very fast speed increases the ECR (and,
 12 correspondingly, decreases driving range). A possible explanation for the slow speed relation
 13 could be associated with the energy required for keeping the BEV moving for a longer period,
 14 while a possible reason for the high speed relation could be linked to the energy required to
 15 speed up the BEV. To substantiate this finding, we also run a locally weighted scatter plot
 16 smoothing estimation of the effect of speed of driving on ECR.

17 Another interesting finding from the model estimation is the fact that the acceleration has
 18 an important effect on the ECR variation, and that this variation is positive for each unit increase
 19 in the acceleration, ceteris paribus. This finding is in line with another study looking at
 20 acceleration effect on the fuel consumption rate of conventional and hybrid vehicles (Zahabi et
 21 al., 2014), but there is a clear quadratic effect that has been ignored in previous studies.

1 The seasonal variation has a significant impact on the ECR, with a higher consumption of
 2 15 Wh/km in winter with respect to summer, even when controlling for the weather effects such
 3 as temperature, precipitation, and wind. It is possible to assess the total effect of the winter
 4 season by taking the average values of the weather variables in the winter months and calculate
 5 the compound effect on the ECR, which suggests that the 15 Wh/km are a conservative estimate.

6 Another interesting result from the model estimation is that the temperature has a non-
 7 linear U-shaped effect on the ECR, namely driving at both too low and too high temperature
 8 affects (negatively) the energy efficiency of BEVs. This finding is not in line with the results
 9 reported by Birrell et al. (2014) that did not find any relation between temperature and driving
 10 range of BEVs, possibly because there was not enough variation in the temperature for a study
 11 conducted between May and October. This finding is in line with the results presented by Lohse-
 12 Busch et al. (2013) that observed an increase of about 100% in the ECR of BEVs in a controlled
 13 laboratory experiment with temperature falling from 70 °F to 20 °F. It should be noted that
 14 previous studies did not consider non-linearity that appears intuitively relevant, as lower
 15 temperatures require more energy for warming the vehicle, and higher temperatures need more
 16 energy for cooling the vehicle. *Ceteris paribus*, the mode indicates that the most favorable
 17 temperature in terms of energy efficiency of BEVs is equal to 14 °C.

18 Moreover, it is very interesting that the initial level of the battery has a polynomial (third
 19 degree) effect on the ECR. Specifically, individuals can observe different rates of battery power
 20 consumption for driving in the same environment for the same distance, just because of a
 21 different battery charge level at the beginning of the trip.

22 Table 1 reveals also that, as expected, wind speed and precipitation have positive and
 23 statistically significant effect on ECR, whereas visibility (sunshiness) has a positive and
 24 statistically significant effect on ECR. Driving on highway does not seem to have a statistically
 25 significant (within conventional levels of significance) effect on ECR. This may not be
 26 surprising since the main differences between driving on and off highway, speed of driving and
 27 acceleration, are already controlled for.

28 **4. CONCLUSIONS**

29 The current study proposes the analysis of the ECR and the factors that affect its variation
 30 by harnessing big data from a variety of sources. The study is innovative in its investigation of a
 31 very large number of vehicles, an immense number of trips (over 230,000) and km travelled
 32 (about 2.3 million), and a great number of sources of information concerning vehicles, roads,
 33 weather and seasons. Moreover, the study is novel in its proposition of a model for disentangling
 34 the effects of different variables on the ECR of BEVs.

35 The findings from this study provide insight into the actual energy efficiency of BEVs.
 36 The overall mean ECR is equal to 0.183 KWh/km, which for a traditional battery capacity of 16
 37 KWh of a Citroen C-Zero corresponds to a mean driving range of about 87 km, far less than the
 38 driving range of 130 km reported by the manufacturer or even 150 km set at the European
 39 Driving Test. The consumption of electricity is significantly higher in winter, as the ECR
 40 increases by about 34% with respect to summer conditions, which for countries with longer
 41 (shorter) winters implies a lower (higher) driving range. Most relevantly, the findings from the
 42 calculation of the ECR allow understanding where the price of electricity should be for
 43 consumers to have convenience from an energy cost perspective of purchasing a BEV rather than
 44 a conventional vehicle.

45 The most significant findings from this study provide insight into the effect of several
 46 variables on the ECR variation. Remarkably, several variables have quadratic or polynomial

1 effects. This appears logical for example for temperature, given that more energy needs to be
 2 spent to warm the vehicle at lower temperatures and to cool it down at higher temperatures, and
 3 for speed, given that more energy requires to be spent to move the vehicle from lower speeds and
 4 to maintain higher driving regimes. Optimal values for the temperature at 14 °C and for the
 5 driving speed at about 52 km/h are found from the model estimation results, and these are on the
 6 one hand good indicative values for potential consumers of BEVs who might want to maximize
 7 the use of their battery and hence their vehicle. Interestingly, the battery charge level at the
 8 beginning of the trip has a polynomial effect that indicates how the battery level decreases
 9 drastically for full charge rather than for lower charge levels, and these are on the other hand not
 10 so good indicative values for potential customers of BEVs who might want not to take chances
 11 given anxiety about the performance of the vehicles.

12 The results from this study could be used in order to perform a cost-benefit analysis of
 13 the introduction of BEVs under different market penetration scenarios, to estimate more
 14 accurately the level of emissions of BEVs in comparison with conventional vehicles (while
 15 accounting the emissions related to the charging), and to predict more precisely the driving range
 16 of BEVs that causes the anxiety hindering most consumers to prefer BEVs over conventional
 17 vehicles. Specifically, the results indicate that optimal driving speed and acceleration within
 18 given weather conditions can be selected by consumers in order to have energy efficient vehicles
 19 guaranteeing to reach the destination without the need for recharging.

20 ACKNOWLEDGMENTS

21 The authors gratefully acknowledge the financial support from the ForskEL program of the
 22 Danish Ministry for Climate and Energy, and the technical support of Morten Aabrink for the
 23 setting of the data as well as to Clever A/S and to the Danish Meteorological Institute (DMI) for
 24 providing the data.

25 REFERENCES

- 26 Alessandrini, A., Cattivera, A., Filippi, F., Ortenzi, F., 2012. Driving style influence on car CO2
 27 emissions. *Proceedings of the 20th International Emission Inventory Conference*, Tampa,
 28 FL.
- 29 Alvarez, R., Weilenmann, M., 2012. Effect of low ambient temperature on fuel consumption and
 30 pollutant and CO2 emissions of hybrid electric vehicles in real-world conditions. *Fuel*,
 31 97, 119-124.
- 32 Banjac, T., Trenc, F., Kutrašnik, T., 2009. Energy conversion efficiency of hybrid electric heavy-
 33 duty vehicles operating according to diverse drive cycles. *Energy Conversion and*
 34 *Management*, 50, 2865-2878.
- 35 Ben-Chaim, M., Shmerling, E., Kuperman, A., 2013. Analytic modeling of vehicle fuel
 36 consumption. *Energies*, 6, 117-127.
- 37 Birrell, S., McGordon, A., Jennings, P., 2014. Defining the accuracy of real-world range
 38 estimations of an electric vehicle. *Proceedings of the 17th International Conference on*
 39 *Intelligent Transportation Systems*, 2590-2595.
- 40 Brundell-Frej, K., Ericsson, E., 2005. Influence of street characteristics, driver category and car
 41 performance on urban driving patterns. *Transportation Research Part D: Transport and*
 42 *Environment*, 10, 213-229.
- 43 Clever A/S, 2014. <https://www.clever.dk/om/>.
- 44 Danish Metrological Institute. <http://www.dmi.dk/en/vejlr/>

- 1 Duke, M., Andrews, D., Anderson, T., 2009. The feasibility of long range battery electric cars in
 2 New Zealand. *Energy Policy*, 37, 3455-3462.
- 3 Egbue, O., Long, S., 2012. Barriers to widespread adoption of electric vehicles: An analysis of
 4 consumer attitudes and perceptions. *Energy Policy*, 48, 717-729.
- 5 El-Shawarby, I., Ahn, K., Rakha, H., 2005. Comparative field evaluation of vehicle cruise speed
 6 and acceleration level impacts on hot stabilized emissions. *Transportation Research Part*
 7 *D: Transport and Environment*, 10, 13-30.
- 8 Ericsson, E., 2001. Independent driving pattern factors and their influence on fuel-use and
 9 exhaust emission factors. *Transportation Research Part D: Transport and Environment*,
 10 6, 325-345.
- 11 Fontaras, G., Pistikopoulos, P., Samaras, Z., 2008. Experimental evaluation of hybrid vehicle
 12 fuel economy and pollutant emissions over real-world simulation driving cycles.
 13 *Atmospheric Environment*, 42, 4023-4035.
- 14 Fosgerau, M., 2005. Speed and income. *Journal of Transport Economics and Policy*, 39, 225-
 15 240.
- 16 Fotouhi, A., Yusof, R., Rahmani, R., Mekhilef, S., Shateri, N., 2014. A review on the
 17 applications of driving data and traffic information for vehicles' energy conservation.
 18 *Renewable and Sustainable Energy Reviews*, 37, 822-833.
- 19 Heide, C.H., Mohazzabi, P., 2013. Fuel economy of a vehicle as a function of airspeed: the
 20 concept of parallel corridors. *International Journal of Energy and Environmental*
 21 *Engineering*, 4, 28.
- 22 Hu, J., Wu, Y., Wang, Z., Li, Z., Zhou, Y., Wang, H., Bao, X., Hao, J., 2012. Real-world fuel
 23 efficiency and exhaust emissions of light-duty diesel vehicles and their correlation with
 24 road conditions. *Journal of Environmental Sciences*, 24, 865-874.
- 25 Huo, H., Yao, Z., He, K., Yu, X., 2011. Fuel consumption rates of passenger cars in China:
 26 Labels versus real-world. *Energy Policy*, 39, 7130-7135.
- 27 Jensen, A.F., Cherchi, E., Mabit, S.L., 2013. On the stability of preferences and attitudes before
 28 and after experiencing an electric vehicle. *Transportation Research Part D: Transport*
 29 *and Environment*, 25, 24-32.
- 30 Kihm, A., Trommer, S., 2014. The new car market for electric vehicles and the potential for fuel
 31 substitution. *Energy Policy*, 73, 147-157.
- 32 Kono, T., Fushiki, T., Asada, K., Nakano, K., 2008. Fuel consumption analysis and prediction
 33 model for eco route search. *Proceedings of the 15th World Congress on Intelligent*
 34 *Transport Systems*, New York, NY.
- 35 Lohse-Busch, H., Duoba, M., Rask, E., Stutenberg, K., Gowri, V., Slezak, L., Anderson, D.,
 36 2013. Ambient Temperature (20°F, 72°F and 95°F) Impact on fuel and energy
 37 consumption for several conventional vehicles, hybrid and plug-in hybrid electric
 38 vehicles and battery electric vehicle. *SAE Technical Paper 2013-01-1462*,
 39 doi:10.4271/2013-01-1462..
- 40 Mellios, G., Hausberger, S., Keller, M., Samaras, C., Ntziachristos, L., 2011. *Parameterisation*
 41 *of Fuel Consumption and CO2 Emissions of Passenger Cars and Light Commercial*
 42 *Vehicles for Modelling Purposes*. European Commission Joint Research Centre, Institute
 43 for Energy and Transport, Ispra, Italy.
- 44 Nam, E.K., Giannelli, R., 2005. *Fuel Consumption Modeling of Conventional and Advanced*
 45 *Technology Vehicles in the Physical Emission Rate Estimator (PERE)*. U.S.
 46 Environmental Protection Agency, Washington, D.C.

- 1 Nesamani, K.S., Subramanian, K.P., 2006. Impact of real-world driving characteristics on
2 vehicular emissions. *JSME International Journal Series B*, 49, 19-26.
- 3 United States Environmental Protection Agency, 2014. Fuel Economy Guide. Available at:
4 <http://www.epa.gov/fueleconomy/>, Washington, D.C.
- 5 Wang, H., Fu, L., Zhou, Y., Li, H., 2008. Modelling of the fuel consumption for passenger cars
6 regarding driving characteristics. *Transportation Research Part D: Transport and*
7 *Environment*, 13, 479-482.
- 8 Wooldridge, J.M., 2010. *Econometric Analysis of Cross Section and Panel Data*. MIT Press,
9 Cambridge, MA.
- 10 Wu, X., Freese, D., Cabrera, A., Kitch, W.A., 2015. Electric vehicles' energy consumption
11 measurement and estimation. *Transportation Research Part D: Transport and*
12 *Environment*, 34, 52-67.
- 13 Yao, Z. Wang, Q., He, K., Huo, H., Ma, Y., Zhang, Q., 2007. Characteristics of real-world
14 vehicular emissions in Chinese cities. *Journal of the Air & Waste Management*
15 *Association*, 57, 1379-1386.
- 16 Zahabi, S.A.H., Miranda-Moreno, L., Barla, P., Vincent, B., 2014. Fuel economy of hybrid-
17 electric versus conventional gasoline vehicles in real-world conditions: A case study of
18 cold cities in Quebec, Canada. *Transportation Research Part D: Transport and*
19 *Environment*, 32, 184-192.

20