

University of Warwick institutional repository: <http://go.warwick.ac.uk/wrap>

This paper is made available online in accordance with publisher policies. Please scroll down to view the document itself. Please refer to the repository record for this item and our policy information available from the repository home page for further information.

To see the final version of this paper please visit the publisher's website. Access to the published version may require a subscription.

Author(s): Kefeng Zhang , Tuqiao Zhang and Dejun Yang

Article Title: An explicit hydrological algorithm for basic flow and transport equations and its application in agro-hydrological models for water and nitrogen dynamics

Year of publication: 2010

Link to published article: <http://dx.doi.org/10.1016/j.agwat.2010.08.004>

Publisher statement: Zhang, K. et al. (2010). An explicit hydrological algorithm for basic flow and transport equations and its application in agro-hydrological models for water and nitrogen dynamics. *Agricultural Water Management*, Vol. 98(1), pp. 114-123

1

2 **An explicit hydrological algorithm for basic flow and transport equations and its**
3 **application in agro-hydrological models for water and nitrogen dynamics**

4

5 Kefeng Zhang^{a,*}, Tuqiao Zhang^b, Dejun Yang^c

6

7 ^aWarwick-HRI, Warwick University, Wellesbourne, Warwick, CV35 9EF, UK

8 ^bDepartment of Civil Engineering, Zhejiang University, Hangzhou 310027, China

9 ^cSchool of Environment Science and Spatial Informatics, China University of Mining and
10 Technology, Xuzhou 221116, China

11

12 *Corresponding author

13

14 Address: Warwick-HRI, The University of Warwick, Wellesbourne,
15 Warwick CV35 9EF, UK

16

17 Tel: 0044 24 7657 4996

18 Fax: 0044 24 7657 4500

19 E-mail: kfzhang@hotmail.com; kefeng.zhang@warwick.ac.uk

20

21 Number of text pages: 25

22 Number of tables: 6

23 Number of figures: 9

24

1 **Abstract**

2

3 Hydrological simulation is a key component in agro-hydrological models for
4 optimizing resources use and minimizing the environmental consequences in
5 agriculture. In this study we extended a simple and explicit algorithm for solving the
6 basic soil water flow equation by Yang et al. (J. Hydrol. 370, 177-190) to the solute
7 transport equation. The key feature of the algorithm is to use a uniform soil layer
8 thickness and a small time step in solving the soil water and solute transport equations,
9 so that the calculations can be made on a layer basis. This drastically simplifies the
10 procedure of modeling water and solute transport in soil using the basic equations.
11 The proposed algorithm was tested against the complex finite element (FE) numerical
12 scheme in simulating soil water and solute transport in different soils via numerical
13 experiments. The results showed that the proposed algorithm with a uniform soil layer
14 thickness of 5 cm and a small time step of 0.001d was able to achieve the identical
15 accuracy as the FE method. Tests of the proposed algorithm in simulating water and
16 nitrogen dynamics against data from a field experiment on wheat revealed that the
17 predicted results with the simple algorithm were in good agreement with the time-
18 course measurements of soil water and mineral N concentration at the various depths
19 in the profile, suggesting that the proposed algorithm performed well and can be
20 reliably applied in agro-hydrological models. The simplicity and accuracy of the
21 algorithm will encourage scientists to use basic equations for soil water and solute
22 transport more in the future for improving performance of agro-hydrological models.

23

24 Key words: Richards' equation, transport equation, soil-crop system, soil water
25 movement, solute transport.

1

2 **1. Introduction**

3

4 With the advance in computing power and increasingly understanding of soil
5 and plant sciences, process-based agro-hydrological models have become powerful
6 tools in optimizing resources use and minimizing environmental consequences in crop
7 production. Numerous agro-hydrological models have been devised for the optimal
8 use of water, fertilizer and pesticide in the literature over the last few decades (see
9 reviews by Bastiaanssen et al.; 2007; Cannavo et al., 2008; Ranatunga et al., 2008).
10 For example, according to the review by Cannavo et al. (2008), for crop nitrogen (N)
11 models alone, there are 62 models available for evaluating the effect of different N
12 management on plant growth and environmental impacts.

13

14 Hydrological simulation is a key module in agro-hydrological models. Mainly
15 there are two approaches used for hydrological simulations in such models, i.e.
16 cascade approach and numerical method based on basic soil water flow and solute
17 transport equations (Bastiaanssen et al., 2007; Cannavo et al., 2008; Ranatunga et al.,
18 2008). The cascade approach assumes that water moves into the soil profile where it is
19 routed through the soil layers, and the solute transports with water flow. Water drains
20 between two soil layers when the soil water is above field capacity. Due to the
21 simplicity of the algorithm and stability of numerical results, the cascade approach has
22 been used in many agro-hydrological models for hydrological simulations (Arnold et
23 al., 1993; Ritchie, 1998; Greenwood, 2001; Droogers et al., 2001; Brisson et al., 2003;
24 Zhang et al., 2007, 2009; Renaud et al., 2008; Pederson et al., 2009; Raes et al., 2009).
25 Cannavo et al. (2008) surveyed 16 models for predicting nitrate leaching in the

1 cropped soils, and found that a large proportion (7 out of 16) of models adopted this
2 approach. However, as pointed out by Cannavo et al. (2008), this approach cannot
3 correctly simulate soil water content between field capacity and saturation, which has
4 become a severe limitation for calculating denitrification. Further, this approach
5 produces poor daily drainage dynamics, and is not capable of simulating capillary
6 flow (Gandolfi et al., 2006), and thus cannot be applied in the cases where
7 groundwater table is high and capillary flow is important to meet crop
8 evapotranspiration. Besides it is difficult to implement precise boundary conditions,
9 such as free drainage, often imposed at the lower boundary in a cascade approach
10 (Yang et al., 2009), which could result in unacceptable results as the hydrological
11 results are highly sensitive to parameterization at the lower boundary (Boone and
12 Wetzel, 1996).

13

14 The other approach, named the numerical method, uses the basic equations for
15 soil water movement and solute transport, and generally produces more accurate
16 results, compared to those by the cascade algorithm (Gandolfi et al., 2006; Yang et al.,
17 2009). Such an approach is now widely accepted, especially in the research models.
18 However, the uptake of models of this type for practical use is still low (Bastiaanssen
19 et al. 2007). One reason for this might be due to the complex nature of the numerical
20 methods involved, and the associated long program code (Yang et al., 2009). Since
21 these equations are highly non-linear partial differential equations, complex numerical
22 schemes, such as finite element (FE) method, are often employed to solve the
23 equations (Šimůnek et al., 1992). This contrasts with the simple algorithms used in
24 modeling other processes such as plant dry matter accumulation, root growth, solute
25 reactions and transformations in agro-hydrological models (Cannavo et al., 2008;

1 Zhang et al., 2009). Although the numerical schemes such as the FE method used for
2 the solutions to the basic equations are well developed (Šimůnek et al., 2008), and
3 software such as HYDRUS-1D and HYDRUS (2D/3D) (Šimůnek et al., 2005; 2006)
4 is readily available for 1-D or multi-dimensional simulations, its use requires
5 specialized expertise that many potential users have not got. Further, the numerical
6 solutions to the transport equation often exhibit oscillatory behavior, especially when
7 relatively steep concentration fronts are simulated (Šimůnek et al., 1992). Extra
8 measures such as ‘upstream weighting and artificial dispersion coefficients’ are
9 therefore often introduced within the FE method, which makes the numerical scheme
10 even more complex. This partially explains why many agro-hydrological models in
11 practical use, as reported in Cannavo et al. (2008), do not adopt this method for water
12 and nutrients management in agriculture.

13

14 Apart from cascade models and numerical methods, attempts have long been
15 made to derive analytical solutions to the basic flow equation (Green and Ampt, 1911;
16 Gardner, 1958; Philip, 1958; Parlange, 1971; Parlange et al., 1985; Mollerup, 2007;
17 Wang et al., 2009). Since the flow equation is a highly non-linear differential equation,
18 assumptions have to be made in deriving such analytical solutions. These assumptions
19 include: soil hydraulic conductivity is an analytical function of soil water content;
20 hysteresis is neglected; and the medium is homogeneous and isotropic (Feddes et al.,
21 1988). Due to these restrictions, together with the difficulties in dealing with the
22 initial soil water distributions and boundary conditions, the derived solutions have
23 found limited application. Although there are reports on the studies of water
24 infiltration into layered soils using the similar approach (Hachum and Alfaro, 1980;
25 Chu and Marino, 2005) and of the development of the kinematic models for soil water

1 movement and solute transport for unsaturated groundwater recharge (Charbeneau,
2 1984), the derived algorithms are only able to estimate the wetting front in the events
3 of water infiltration, and are not capable of simulating capillary flow and predicting
4 soil water content distribution. Thus they are not appropriate to be employed in agro-
5 hydrological models in which the simulation of upwards water flow resulting from
6 evaporation in layered soils is crucially important.

7

8 A new approach using the integrated Richards' equation (IRE) strategy has
9 been proposed and tested for water transfer in the soil-crop system (Yang et al., 2009).
10 The approach, based on the work by Lee and Abriola (1999), strikes a balance
11 between the simplicity and robustness of cascade approaches and accuracy of
12 numerical methods. The IRE approach considers that water content in a soil layer is
13 only influenced by neighbouring layers, i.e. the above and below layers. The water
14 flux between two soil layers is calculated by integrating the Richards' equation over
15 the layer in a small time step. It has been demonstrated that the algorithm worked well
16 with 5 cm layer thickness and a time step of 0.001 d in different cropped soils (Yang
17 et al., 2009). However, the approach is only valid for soil water movement, and
18 therefore cannot be applied in simulating solute transport in the soil which is a key
19 process in agro-hydrological models for fertilizer and pesticide practices.

20

21 The objectives of this study were three-folds: 1) to formulate the simple and
22 explicit algorithm using the integration strategy over the basic equations for soil water
23 movement and solute transport by extending the work by Yang et al. (2009), so that
24 the proposed algorithm can have a wide application in agro-hydrological models; 2) to
25 evaluate the proposed algorithm against the FE method in simulating water and solute

1 dynamics in different soils via numerical experiments; 3) to validate the proposed
2 approach in predicting water and N dynamics in a soil-wheat system against data from
3 a field experiment.

4

5 **2. Theory**

6

7 *2.1 Governing equations for water and solute dynamics in the soil-crop system*

8

9 In 1-D situations, the differential equations for water and solute transfer within
10 the soil profile in the soil-crop system, based on the general governing equations for
11 water flow and solute transport in porous media (Bear, 1972), are

12

$$13 \quad \frac{\partial \theta}{\partial t} = \frac{\partial}{\partial z} [K(\theta) \left(\frac{\partial h}{\partial z} + 1 \right)] - S_w \quad (1)$$

$$14 \quad \frac{\partial \theta c}{\partial t} = \frac{\partial}{\partial z} \left(\theta D_z \frac{\partial c}{\partial z} \right) - v_z \frac{\partial c}{\partial z} + f - S_c \quad (2)$$

15 where θ ($L^3 L^{-3}$) is the volumetric soil water content, h (L) is the soil pressure head, S_w
16 (L^{-1}) is the sink term, i.e. root water uptake, z (L) is the vertical coordinate, t (T) is
17 time, K ($L T^{-1}$) is the soil hydraulic conductivity, c ($M L^{-3}$) is the solute concentration,
18 v_z ($L T^{-1}$) is the water flux, f ($M L^{-3} T^{-1}$) is the function for the zero- and first-order rate
19 reactions for solute in the liquid and soil phases, S_c ($M L^{-3} T^{-1}$) is the root solute uptake,
20 D_z ($L^2 T^{-1}$) is the dispersion coefficient.

21

22 The soil hydraulic functions are defined according to van Genuchten (1980)
23 and Mualem (1976)

24

$$\Theta = (\theta - \theta_r) / (\theta_s - \theta_r) = [1 + |\alpha h|^n]^{-m} \quad (3)$$

$$K(\theta) = K_s \Theta^{0.5} [1 - (1 - \Theta^{1/m})^m]^2 \quad (4)$$

3

4 where Θ is the relative saturation, θ_s and θ_r are the saturated and residual soil water
 5 contents, α (L^{-1}) and n are the shape parameters of the retention and conductivity
 6 functions, $m=1-1/n$, and K_s is the saturated hydraulic conductivity.

7

8 The dispersion coefficient in Eq. (2) is given by Bear (1972)

9

$$\theta D_z = D_L v_z + \theta D_d \tau \quad (5)$$

11

12 where D_d ($L^2 T^{-1}$) is the ionic molecular diffusion coefficient in free water, D_L (L) is
 13 the dispersivity, and τ is the tortuosity factor, which is defined by Millington and
 14 Quirk (1961), i.e.

15

$$\tau = \theta^{7/3} / \theta_s^2 \quad (6)$$

17

18 *2.2 Explicit algorithm for the governing equations*

19

20 Eqs. (1) and (2) are partial differential equations which normally requires
 21 complex numerical schemes such as the FE method to solve them (Šimůnek et al.,
 22 1992). This involves an iterative procedure to obtain the solution to the water flow
 23 equation (Eq. 1) by solving the system of linear algebraic equations and a solution to
 24 the transport equation (Eq. 2). Yang et al. (2009) have demonstrated that a procedure

1 using an integration strategy of Eq. (1) over the soil layers could result in a much
 2 simpler algorithm and satisfactory results in simulating soil water movement. The
 3 approach works with soil layers with uniform thickness. The thickness of soil layer is
 4 fixed as 5 cm which is considered appropriate and commonly used in agro-
 5 hydrological models (Greenwood, 2001; Zhang et al., 2007, 2009; Renaud et al., 2008;
 6 Pedersen et al., 2010) to describe processes such as root length distribution in the soil-
 7 crop system. In this study, this technique has further been expanded to Eq. (2) so that
 8 the simulations of soil water movement and solute transport were made easier. The
 9 proposed approach considers that water movement and solute transport in a soil layer
 10 is only influenced by the adjacent layers in a small time step, allowing soil water flow
 11 and solute transport to be calculated on a layer basis.

12

13 Integrating Eq. (1) vertically over a soil layer leads to (Yang et al., 2009)

14

$$15 \quad \Delta\theta_i / \Delta t = (v_{w_{i+1}} - v_{w_i}) / \Delta z - S_w \quad (7)$$

16

17 Similarly, using the same scheme to Eq. (2) yields

18

$$19 \quad \Delta(\theta_i c_i) / \Delta t = (v_{c_{i+1}} - v_{c_i}) / \Delta z - f - S_c \quad (8)$$

20

21 where i is the soil layer number, Δt is the time step, $\Delta\theta_i$ is the layer-average soil
 22 water content change in layer i in Δt , Δz is the soil layer thickness, $v_{w_{i+1}}$ and $v_{c_{i+1}}$,
 23 v_{w_i} and v_{c_i} represent water flux and solute transport from the layer $i+1$ to i and from i
 24 to $i-1$, which are calculated

1

$$2 \quad v_{wi+1} = K_{i+1}(\theta_{i+1})(\Delta h_{i+1,i} / \Delta z + 1) \quad (9)$$

$$3 \quad v_{ci+1} = (D_L v_{zi+1} + \theta_{i+1} D_d \tau)(\Delta c_{i+1,i} / \Delta z - v_{zi+1} c_{i+1}) \quad (10)$$

$$4 \quad v_{wi} = K_i(\theta_i)(\Delta h_{i,i-1} / \Delta z + 1) \quad (11)$$

$$5 \quad v_{ci} = (D_L v_{zi} + \theta_i D_d \tau)(\Delta c_{i,i-1} / \Delta z - v_{zi} c_i) \quad (12)$$

6

7 where $\Delta h_{i+1,i}$, $\Delta h_{i,i-1}$ and $\Delta c_{i+1,i}$, $\Delta c_{i,i-1}$ are the differences in soil pressure head and
8 solute concentration between layers $i+1$ and i , and i and $i-1$, respectively.

9

10 To implement the proposed procedure, the soil domain is discretized into 5 cm
11 layers. The bottom layer is numbered 1, and the soil layer number increases upwards
12 to the top layer. Eqs. (7) and (8) are applied from the layer 1 at the bottom to the top
13 layer for the re-distributions of water content and solute concentration in the soil
14 profile at each time step Δt . Detailed steps of implementing the procedure for the soil
15 water movement, which is similar with that for the present work, can be seen
16 elsewhere (Yang et al., 2009)

17

18 *2.3 Sink and N transformation terms in the soil-crop system*

19

20 Eqs. (1) and (2) are general equations describing water movement and solute
21 transport in soil. In this study, in addition to the evaluation of the proposed algorithm
22 in modeling soil water movement and solute transport, we also tested the algorithm
23 for predicting water and N dynamics in a soil-wheat system. To do so the sink terms
24 for water and N uptake and N transformation required to be specified.

1

2 2.3.1 Sink term for water uptake S_w

3

4 The sink term for root water uptake S_w is dependent on crop water demand,
5 root length distribution and soil water availability. It is formulated as (Feddes et al.,
6 1978)

7

$$8 S_w = \alpha_w(h) L(z)T_{pot} / \Sigma L(z) \quad (13)$$

9

10 in which

11

$$12 \alpha_w(h) = \begin{cases} 0 & h \leq h_3, h \geq h_1 \\ (h - h_3)/(h_2 - h_3) & h_3 < h < h_2 \\ 1 & h_2 \leq h < h_1 \end{cases} \quad (14)$$

13

14 where α_w is the root water stress reduction factor, similar with that by Feddes et al.
15 (1978), T_{pot} ($L T^{-1}$) is the potential crop transpiration, and L ($L L^{-3}$) is the root length
16 density. Root water uptake is assumed to be zero when soil pressure head is below h_3 ,
17 i.e. the soil pressure head at the permanent wilting point ($h_3 = -15000$ cm), and is
18 unlimited for soil pressure head between h_1 (-1 cm) and h_2^{high} (-500 cm) for a rapid
19 transpiration (0.5 cm d^{-1}) and h_2^{low} (-1100 cm) for a slow transpiration (0.1 cm d^{-1}).
20 The increase in water uptake between h_3 and h_2 is linearly related to the soil pressure
21 head. Water uptake is also assumed to be 0 for soil pressure head greater h_1 due to
22 lack of oxygen in the root zone (Zhang et al., 2009, 2010a).

23

1 The potential crop transpiration is calculated according to the FAO 56 crop
 2 coefficient method (Allen et al., 1998)

3

$$4 \quad T_{pot} = K_{cb}ET_0 \quad (15)$$

5

6 where K_{cb} , dependent on crop species and its development stage, is the basal crop
 7 coefficient for transpiration, ET_0 ($L T^{-1}$) is the reference evapotranspiration. ET_0 and
 8 K_{cb} can be determined according to Allen et al. (1998).

9

10 Root growth simulation is in accordance with that proposed by Pedersen et al.
 11 (2010). The rooting depth is calculated as a product of the cumulative mean day
 12 temperature and the specific root growth rate, while crop total root length is calculated
 13 as a product of root dry weight and a fixed specific root length. The root length
 14 declines logarithmically from the soil surface downwards (Pedersen et al., 2010), i.e.

15

$$16 \quad \Delta L_0 = \Delta W_r S_r \quad (16)$$

$$17 \quad \Delta R_z = \max[0, \Delta(T - T_{rbase})K_{rz}] \quad (17)$$

$$18 \quad L(z) = \begin{cases} L_0 e^{-a_z z} & z < R_z \\ L_0 e^{-a_z z} [1 - (z - R_z)/(0.3R_z)] & R_z \leq z \leq 1.3R_z \end{cases} \quad (18)$$

19

20 where ΔW_r ($M L^{-2}$) is the increment in root dry weight, which is a function of the
 21 increment in crop dry weight and crop dry weight (Zhang et al., 2009), S_r ($L M^{-1}$) is a
 22 specific root length density, ΔR_z and R_z (L) are the increment in rooting depth and the
 23 rooting depth, respectively, T (K) is the mean daily air temperature, T_{rbase} (K) is the
 24 base temperature for root growth, K_{rz} ($L T^{-1} K^{-1}$) is the vertical root growth rate, ΔL_0

1 and L_0 (L) are the increment of root length and the total root length, respectively, and
2 a_z is the shape parameter controlling root distribution down the profile.

3

4 2.3.2 Sink term for N uptake S_c

5

6 The sink term for N uptake, based on the crop N demand, root length
7 distribution, soil mineral N concentration and the minimum soil mineral N
8 concentration for root uptake, is formulated as (Pedersen et al., 2010)

9

$$10 \quad S_c = (U_N + U_{Nr})[1 - e^{-N_{pot}/(U_N + U_{Nr})}] \quad (19)$$

11

12 in which the potential N uptake N_{pot} is estimated by modifying the equation from
13 Nielsen and Barber (1978)

14

$$15 \quad N_{pot} = \sum L(z) k_N (c_N - c_{Nmin}) / (c_N + c_0) \quad (20)$$

16

17 where U_N and U_{Nr} ($M L^{-2}$) are the N demand in the above-ground and root biomass,
18 respectively, N_{pot} ($M L^{-2}$) is the potential N uptake, c_N ($M L^{-3}$) is the layer-specific soil
19 mineral N concentration in the 5 cm soil layers, c_{Nmin} ($M L^{-3}$) is the minimum soil
20 mineral N concentration below which no N uptake is possible, c_0 ($M L^{-3}$) is the plant
21 N uptake coefficient, and k_N ($M L^{-1} T^{-1}$) is the plant N uptake efficiency.

22

23 2.3.3 N transformation term f

24

1 N mineralization from soil organic matter is considered in the model. The
 2 algorithm is devised based on the assumption that the organic matter breakdown rate
 3 is first-order. The equation for estimating N released from soil organic matter is given
 4 in Zhang et al. (2009) and Zhang et al. (2010b).

$$6 \quad f = N_{smin} = k_{min} Q_{10}^{(T-T_s)/10} \rho Z_{smin} m_c / R_{CN} \quad (21)$$

7
 8 where N_{smin} ($M L^{-2} T^{-1}$) is the daily N mineralization rate from soil organic matter, k_{min}
 9 (T^{-1}) is the rate of temperature-independent organic matter breakdown, ρ ($M L^{-3}$) is
 10 the soil bulk density, Z_{smin} (L) is the soil depth where N mineralization takes place, m_c
 11 is the soil organic C content, R_{CN} is the C:N ratio of the soil organic matter, T_s (K) is
 12 the base temperature at which $Q_{10}^{(T-T_s)/10}$ equals 1, and Q_{10} is the factor change in rate
 13 with a 10 degree change in temperature.

15 2.4 Water flux on the soil surface

17 The soil surface is subject to the atmospheric condition, i.e. rainfall and
 18 potential soil evaporation (irrigation is treated in the same way as rainfall). The
 19 potential soil evaporation is estimated using the FAO approach (Allen et al., 1998)

$$21 \quad E_{pot} = K_e ET_0 \quad (22)$$

22
 23 where E_{pot} ($L T^{-1}$) is the potential soil evaporation, and K_e is the evaporation
 24 coefficient, which can be calculated using the FAO approach according to the crop
 25 species and its development stage (Allen et al., 1998).

1

2 In the case of the sum of rainfall and irrigation greater than the potential
3 evaporation, the water flux from the surface is considered as infiltration. The actual
4 infiltration flux in a given time step, ΔI_{act} ($L T^{-1}$), is determined by the following
5 equation (Yang et al., 2009).

6

$$7 \quad \Delta I_{act} = \min[(\theta_s - \theta_{Top})\Delta z / \Delta t, w_{Top}] \quad (23)$$

8

9 in which, θ_{Top} is the water content in the top soil layer, and w_{Top} ($L T^{-1}$) is the potential
10 net water flux at the surface.

11

12 Otherwise, the water flux on the soil surface is treated as evaporation, and the
13 actual evaporation in a given time step from the top soil layer, ΔE_{act} ($L T^{-1}$), is
14 expressed as (Yang et al., 2009)

15

$$16 \quad \Delta E_{act} = \min\{ K_{Top} |(h_{min} - h_{Top}) / \Delta z + 1|, w_{Top} \} \quad (24)$$

17

18 where K_{Top} and h_{Top} are the soil hydraulic conductivity and soil pressure head in the
19 top layer, respectively, and h_{min} ($= -26500$ cm) is the minimum soil pressure head that
20 the atmosphere could possibly exert in the top soil layer (Yang et al., 2009).

21

22 In order to calculate plant transpiration and soil evaporation, daily potential
23 transpiration by plant (Eq. 15) and evaporation from soil surface (Eq. 22) are first
24 calculated. The amounts of transpiration and evaporation in Δt are then determined
25 by evenly distributing daily transpiration and evaporation over 24 h. The calculated

1 potential soil evaporation in Δt is applied to the soil surface for computing actual
2 evaporation, whereas the potential crop transpiration is applied in the root zone for
3 computing actual root water uptake.

4

5 It should be pointed out that soil evaporation and plant transpiration are
6 coupled processes, and therefore they should be dealt with simultaneously as
7 implemented in numerical methods such as the FE method. However, in cascade
8 models these processes are decoupled at daily intervals. This leads to a much simpler
9 calculation procedure, but could compromise the estimation of plant transpiration. For
10 example, under the circumstances of soils containing limited water, if soil evaporation
11 is satisfied first, then plant transpiration could be underestimated. In this study, the
12 identical approach for calculating soil evaporation and plant transpiration used in
13 cascade models is adopted, and both transpiration and evaporation are computed in
14 each time step Δt . Since plant transpiration and soil evaporation in each time step are
15 very small (as a result of the small time step of 0.001 d), the error in calculating plant
16 transpiration is greatly reduced. Thus the proposed algorithm has the simplicity and
17 robustness of cascade approaches and accuracy of numerical methods. Moreover, the
18 proposed algorithm, compared with cascade models, has the advantage of considering
19 water infiltration more accurately in the cases where rainfall or irrigation intensity is
20 known in detail (Yang et al., 2009).

21

22 *2.5 Model evaluation*

23

24 Model performance is often evaluated using the correlation coefficient (R) or
25 the coefficient of determination (R^2). However, Willmott and Wicks (1980) found that

1 high values of R or R^2 may not be related to the sizes and the differences between
 2 measurement and simulation, and thus could in fact be misleading. In this study a
 3 more exhaustive approach for an evaluation of model performance was carried out as
 4 suggested by Willmott (1982). The calculated metrics on which the model
 5 performance was assessed included: the Nash-Sutcliffe efficiency (NSE) (Nash and
 6 Sutcliffe, 1970), the root of the mean squared error ($RMSE$), and the mean absolute
 7 error (MAE)

8

$$9 \quad NSE = 1 - \frac{\sum_{i=1}^{N_o} (P_i - O_i)^2}{\sum_{i=1}^{N_o} (P_i - O')^2} \quad (25)$$

$$10 \quad RMSE = \left[N_o^{-1} \sum_{i=1}^{N_o} (P_i - O_i)^2 \right]^{0.5} \quad (26)$$

$$11 \quad MAE = N_o^{-1} \sum_{i=1}^{N_o} |P_i - O_i| \quad (27)$$

12

13 where P_i and O_i are the predicted and measured values, respectively, O' is the
 14 average of the measured values, and N_o is the number of measurements.

15

16 **3. Experiments**

17

18 The experiment used for testing the fitness of the proposed algorithm was
 19 conducted in the Bouwing farm on winter wheat at the Institute for Soil Fertility
 20 Research, The Netherlands in 1983 (Groot and Verberne, 1991). The summary of the
 21 experiment relevant to this study including fertilization is given in Table 1. The
 22 measurements included spatial-temporal soil water content, soil mineral N in the

1 layers of 0-30, 30-60 and 60-90 cm as well as above-ground dry matter accumulation,
2 and N contents in various organs during growth made at intervals of three weeks from
3 February 1983. N contained in the above-ground dry weight was measured at the
4 same time as these for soil water content and mineral N concentration. The weather
5 variables including air temperature, radiation and rainfall were measured during the
6 experiment. Details of the experiment can be seen in Groot and Verberne (1991).

7

8 **4. Model parameterization**

9

10 This study was carried out in two parts. The first part examined the proposed
11 algorithm in the simulation of water movement and solute transport in different soils
12 via numerical experiments, and included a comparison of its performance against the
13 FE method. The second part involved comparing of the simulation results using the
14 proposed algorithm for water and N dynamics in the soil-wheat system with the data
15 from the field experiment described above.

16

17 *4.1 Numerical study*

18

19 To examine the performance of the proposed algorithm in hydrological
20 simulations, a case of modeling water movement and nitrate transport in a soil column
21 immediately after an application of 100 kg ha⁻¹ nitrate-N (NO₃-N) was assumed. The
22 FE method was selected for comparison. The simulations were carried out on three
23 soils: i.e. a coarse, a medium and a fine texture. The hydraulic properties for both soils
24 were set to those suggested by Wösten et al. (1999) (see Table 2 for details). The soil
25 columns were assumed to have a depth of 100 cm, with an initial soil water content

1 set to be 0.393, 0.432 and 0.513 $\text{cm}^3 \text{cm}^{-3}$ throughout the column for the coarse,
2 medium and fine soils, respectively. The lower boundary condition was specified as
3 free drainage, whereas no water flux was allowed at the surface. It was assumed that
4 $\text{NO}_3\text{-N}$ was dissolved in the top 5 cm soil layer immediately after the application. The
5 calculated $\text{NO}_3\text{-N}$ concentrations were 0.513, 0.463 and 0.390 mg cm^{-3} for the coarse,
6 medium and fine soils, respectively. The diffusion coefficient and dispersivity were
7 1.64 $\text{cm}^2 \text{d}^{-1}$ and 0.5 cm, respectively. For the proposed algorithm, the soil column
8 was divided into 20 uniform 5 cm layers, with a simulation time step for both soils of
9 0.001 d, similar to that proposed by Lee and Abriola (1999) and Yang et al. (2009). In
10 the FE method, the soil column was divided into 50 soil layers with various
11 thicknesses (thin layers at the bottom where the lower boundary condition was
12 imposed). Two FE methods with and without the ‘upstream weighting and the
13 artificial dispersion’ scheme, named as the ‘complex’ and ‘ordinary’ FE methods,
14 were used in the simulations for comparison.

15

16 *4.2 Validation experiment*

17

18 Soil water retention curves for different layers (0-40 and 40-100 cm) in the
19 validation experiment were given in Groot and Verberne (1991). The values of the
20 hydraulic parameters used in Eqs (3) and (4) to describe the soil water retention
21 curves were fitted using the RETC software (van Genuchten et al., 1991) and are
22 listed in Table 3 (after Yang et al., 2009), based on the data provided by Groot and
23 Verberne (1991). The calculated soil domain was 120 cm down from the soil surface,
24 and the boundary condition at the bottom was set as free drainage (Yang et al., 2009).

1 The soil hydraulic properties in the layer of 100-120 cm were assumed the same as
2 those in the layer of 40-100 cm.

3

4 The daily above-ground N requirement was calculated using the following
5 equations which were obtained by differentiating the cumulative N curves fitted based
6 on the measurements given by Groot and Verberne (1991) with respect to time (Fig.
7 1a)

8

$$9 \quad U_N = \begin{cases} 0.077 & 38 \leq DOY < 87 \\ 0.0358DOY - 2.6119 & 87 \leq DOY < 164 \\ 1.245 & 164 \leq DOY \leq 213 \end{cases} \quad \text{kg ha}^{-1} \quad (28)$$

10

11 where DOY is the Julian day of the year.

12

13 The amount of N partitioned in the roots was estimated using the approach
14 described in Zhang et al. (2009). The increment in root dry weight is a fraction of the
15 increment in the above-ground crop dry weight with the fraction decreasing with an
16 increase in above-ground dry weight. The above-ground dry weight was modeled
17 using a simple growth equation which mimics initial exponential followed by near
18 constant growth. The equation, which is temperature-driven and uses the targeted
19 yield, calculates the daily above-ground dry weight ΔW (t ha^{-1}) as $W/(1+W)$
20 (Greenwood et al., 1985; Greenwood, 2001). The root %N changes with W in the way
21 of $\%N_{crit} = 1 + 1.35e^{-0.26W}$ (Greenwood et al., 1985; Greenwood, 2001). By setting the
22 measured dry yield of 17 t ha^{-1} as the target yield in the growth equation, the modeled
23 root dry weight and corresponding N amount in the experiment are shown in Fig. 1(b).
24 The modeled ratio of above-ground dry weight to root dry weight at harvest was 0.16,

1 close to the experimental finding of 0.19 (Arima et al., 1999). This, together with the
2 root %N equation which is based on experimental evidence (Osaki et al., 1997),
3 makes the estimation of N partitioned into the roots reliable. Since the variations of N
4 in the roots do not change markedly in the very early stages and towards maturity,
5 only N uptake in roots at the middle growth stages was considered and the uptake rate
6 was $0.42 \text{ kg N ha}^{-1} \text{ d}^{-1}$. Other parameter values used in the simulations for the
7 validation experiment are shown in Table 4, based on the work by Pedersen et al.
8 (2009) and Zhang et al. (2007; 2009). The weather information used in the simulation
9 periods, including daily mean, minimum and maximum air temperatures, wind speed,
10 rainfall and global radiation, was given in Groot and Verberne (1991).

11

12 The simulation started on the first measurements on 7 February 1983 of soil
13 water content and mineral N concentration in the profile. The measured soil water
14 content and mineral N concentration distributions down the profile were set as the
15 initial conditions. The time step for solving the governing equations using the
16 proposed algorithm was 0.001 d, which is the same as suggested by Yang et al. (2009)
17 for 5 cm soil layers.

18

19 **5. Results and discussion**

20

21 *5.1 Numerical study*

22

23 *5.1.1 Fine and medium soils*

24

1 Soil water content and NO₃-N concentration distributions at various time
2 intervals were simulated and compared using the proposed algorithm and the FE
3 methods for the fine and medium soils (Figs. 2, 3). It is clear that the profiles
4 predicted by the proposed algorithm agree well with those from the FE methods. It
5 was also found that the simulated results from both the ‘ordinary’ and ‘complex’ FE
6 methods were virtually identical for the fine soil, whereas there were slight
7 differences in the simulated soil NO₃-N concentration between the ‘ordinary’ and
8 ‘complex’ FE methods in the medium soil. This indicates that the ‘ordinary’ FE
9 method may sufficiently be accurate in simulating water movement and solute
10 transport in both soils, and the simple algorithm proposed in this study can achieve the
11 same accuracy of the simulated results as those from the FE methods.

12

13 *5.1.2 Coarse soil*

14

15 The same simulations and comparisons were also carried out for the coarse
16 soil (Fig. 4). Further, the statistical metrics including *RMSE*, *NSE*, *MAE* and *R*² were
17 calculated for NO₃-N concentration, and the results are shown in Table 5. The
18 simulated soil water content profiles at intervals using the proposed algorithm are in
19 good agreement with those from the FE methods (Fig. 4a), which confirms that the
20 proposed algorithm is capable of simulating soil water movement in different soils
21 accurately. While the simulated NO₃-N concentration profiles at intervals using the
22 proposed algorithm agree fairly well with those from the ‘complex’ FE method (Fig.
23 4bcd, Table 5), large discrepancies were observed in the simulated results between the
24 ‘ordinary’ FE method and the ‘complex’ FE method, and between the ‘ordinary’ FE
25 method and the proposed algorithm. The ‘ordinary’ FE method severely

1 underestimated $\text{NO}_3\text{-N}$ transport in the soil profile, resulting in much higher $\text{NO}_3\text{-N}$
2 concentration in the top 20 cm soil layer. This can be attributed to the steep $\text{NO}_3\text{-N}$
3 concentration front and the dominant convection in the simulated coarse soil.
4 However, the case studied is a real scenario of the fertilization in a wet soil. This
5 suggests that caution should be taken when using the ‘ordinary’ FE method in
6 predicting $\text{NO}_3\text{-N}$ movement, especially in estimating $\text{NO}_3\text{-N}$ leaching in the coarse
7 soil. The differences in $\text{NO}_3\text{-N}$ concentration profiles simulated by the proposed
8 algorithm and the ‘complex’ FE method might be due to the artificial dispersion in the
9 FE method resulting from the ‘upstream weighting and the artificial dispersion’
10 scheme.

11

12 *5.1.3 Effect of dispersion term in $\text{NO}_3\text{-N}$ transport*

13

14 Fig. 5 shows $\text{NO}_3\text{-N}$ concentration distributions down the soil profile after 30
15 day free drainage simulated using the proposed algorithm for the transport equation
16 with and without the dispersion term. The dispersion term has a bigger effect on $\text{NO}_3\text{-N}$
17 transport in the fine and medium soils (Fig. 5bc) than the coarse soil (Fig. 5a). This
18 can be explained by the fact that in the coarse soil $\text{NO}_3\text{-N}$ transport is dominated by
19 the convection term, i.e. $\text{NO}_3\text{-N}$ mainly moves with water flow. However, in the
20 medium and fine soils water flow is not as easy as that in the coarse soil due to narrow
21 pores. As a result dispersion becomes an important process in $\text{NO}_3\text{-N}$ transport in the
22 soil. This implies that in modeling $\text{NO}_3\text{-N}$ transport in the medium and fine soils, the
23 dispersion term has to be taken into consideration to enable the predictions to be
24 reasonable.

25

1 It is evident, from the above, that the proposed algorithm presented in this
2 study produces the results as accurately as those from the ‘complex’ FE method in
3 modeling soil water dynamics and NO₃-N transport in different soils. Given the
4 simplicity, stability and the ability of the proposed algorithm, it can be concluded that
5 the proposed algorithm has a good potential to be used in agro-hydrological models
6 for accurately simulating soil water movement and solute transport.

7

8 *5.2 Validation experiment*

9

10 *5.2.1 Comparison of simulated and measured soil water content and mineral N* 11 *concentration*

12

13 Fig. 6 shows the overall comparisons of the simulated and measured values of
14 soil water content and soil mineral N concentration in the various soil layers at time
15 intervals, whereas Figs. 7 and 8 show the detailed comparisons of the time-course soil
16 water content and mineral N concentration in various layers. The statistical
17 comparisons between the measured and simulated values of soil water content and
18 soil mineral N are given in Table 6. The calculated *RMSE* and *MAE* values for soil
19 water content are 0.038 cm³ cm⁻³ and 0.032 cm³ cm⁻³. Likewise, the values for soil
20 mineral N are 8.95 kg-N ha⁻¹ and 5.49 kg-N ha⁻¹. This, and relatively high values of
21 *NSE* of 0.620 and 0.841 for soil water content and soil mineral N, indicates that the
22 overall performance of the model for water and N dynamics in the soil-wheat system
23 was satisfactory. However, a noticeable discrepancy was observed from soil mineral
24 N in the top 30 cm layer on DOY of 164, 31 days after the fertilizer-N application
25 (Fig. 8). The model simulated a sharp increase in soil mineral N in the top 30 cm layer

1 after the fertilization event. But this was not materialized in the measurement. Such a
2 phenomenon of ‘disappearance’ of the applied fertilizer-N was observed elsewhere
3 (Neeteson et al., 1986; Nielsen and Jensen, 1986), and might be attributed to the soil
4 processes such as ammonia volatilization, denitrification and microbial
5 immobilization which were not considered in this study. Accurate simulations of N
6 transformation in these processes currently remain challenging due to the difficulties
7 in quantifying various factors controlling these processes (Barton et al., 1999;
8 Cannavo et al., 2008).

9

10 *5.2.2 Simulated water and N dynamics in the soil-wheat system*

11

12 Actual soil evaporation, crop transpiration and water percolation at 1 m depth
13 were simulated (Fig. 9a). The simulated cumulative soil evaporation and crop
14 transpiration were 108 and 285 mm, respectively. Crop evapotranspiration was mainly
15 met by rainfall during the growing season (344 mm) and soil water originally
16 contained in the soil. Water percolation at 1 m depth was not significant and only
17 occurred at the early crop development stages when the soil was relatively wet (Fig.
18 9a). The simulated cumulative N uptake, N mineralization from soil organic matter
19 and N leaching at 1 m depth are shown in Fig. 9b. N uptake by the crop before DOY
20 of 100 was small, and followed by a steady increase. N mineralized from soil organic
21 matter accumulated with time, and the accumulation rate increased with time due to
22 the increase in air temperature. During the growing period, the total N mineralized
23 from soil organic matter was 65 kg ha⁻¹. At the end of the simulation the simulated
24 cumulative N uptake was 219 kg ha⁻¹, which was mainly met by the applied fertilizer-
25 N, mineral N originally contained in the soil and the mineralized N from the soil. N

1 leaching at 1m depth was small as the total simulated value was approximately 12 kg
2 ha⁻¹. This was supported by previous studies that in N leaching in the west Europe is
3 not great between spring and autumn when the soil is cropped (Neeteson and Carton,
4 2001; Zhang et al., 2009).

5

6 **6. Conclusions**

7

8 The simple and explicit algorithm for solving the basic soil flow equation
9 (Yang et al., 2009) has been extended to solve the basic solute transport equation
10 using a 5 cm soil layer and a small time step of 0.001 d. Numerical experiments show
11 that the algorithm is able to produce the results as accurately as those from the FE
12 method in modeling soil water dynamics and solute transport, even in the coarse soil
13 where convection is dominated. Compared with the FE method, the proposed
14 algorithm is much simpler, and easier to implement. Thus, the proposed algorithm
15 provides an alternative to the FE method for accurate simulation of water and solute
16 transport in soil using the basic theory. The reliability of the proposal algorithm was
17 also tested in simulating water and N dynamics in the soil-wheat system. Good
18 agreement of the time-course soil water content and mineral N concentration at
19 different depths in the soil profile between measurement and simulation was achieved,
20 suggesting that the proposed algorithm has a potential to be employed in agro-
21 hydrological models.

22

23 **7. Acknowledgements**

24

1 The work was partly supported by the UK Department for Environment, Food
2 and Rural Affairs through project HH3509SFV. The author is grateful to Dr J
3 Neeteson for kindly providing the essential dataset for validating the algorithm
4 proposed in this study.

5

6 **8. References**

7

8 Allen, R.G., Pereira, L.S., Raes, D., Smith, M., 1998. Crop evapotranspiration.

9 Guidelines for computing crop water requirements. FAO Irrigation and Drainage

10 Paper 56. FAO, Rome.

11 Arima, S., Harada, J., Tanaka, N., Hoque, Md. A., 1999. Growth and panicle

12 characters of wheat with a single primary seminal root allowed to grow. *Plant*

13 *Prod. Sci.* 2, 21-24.

14 Arnold, J.G., Allen, P.M., Bernhardt, G.T., 1993. A comprehensive surface-

15 groundwater flow model. *J. Hydrol.* 142, 47-69.

16 Bastiaanssen, W.G.M., Allen, R.G., Droogers, P., D'Urso, G., Steduto, P., 2007.

17 Twenty-five years modeling irrigated and drained soils: State of the art. *Agri.*

18 *Water Manage.* 92, 111-125.

19 Barton, L., McLay, C.D.A., Schipper, L.A., Smith, C.T., 1999. Annual denitrification

20 rates in agricultural and forest soils: a review. *Aust. J. Soil Res.* 37, 1073-1093.

21 Bear, J., 1972. *Dynamics of Fluid in Porous Media*, Elsevier, New York, NY.

22 Boone, A., Wetzal P.J., 1996. Issues related to low resolution modeling of soil

23 moisture: Experience with the PLACE model. *Global Planet. Change* 13, 161-

24 181.

1 Brisson, N., Gary, C., Justes, E., Roche, D., Zimmer, D., Sierra, J., Bertuzzi, P.,
2 Burger, P., Bussi re, F., Cabidoche, Y.M., Cellier, P., Debaeke, P., Gaudill re,
3 J.P., H nault, C., Maraux, F., Seguin, B., Sinoquet, H., 2003. An overview of the
4 crop model STICS. *Eur. J. Agron.* 18, 309-332.

5 Cannavo, P., Recous, S., Parnaudeau, V., Reau, R., 2008. Modelling N dynamics to
6 assess environmental impacts of cropped soils. *Adv. Agron.* 97, 131-174.

7 Charbeneau, R. J., 1984. Kinematic models for soil moisture and solute transport.
8 *Water Resour. Res.* 20, 699–706.

9 Chu, X. F., Marino, M. A., 2005. Determination of ponding condition and infiltration
10 into layered soils under unsteady rainfall. *J. Hydrol.* 313, 195-207.

11 Feddes, R.A., Kabat, P., Van Bakel, P.J.T., Bronswijk, J.J.B., Halbertsma, J., 1988.
12 Modelling soil water dynamics in the unsaturated zone - State of the art. *J.*
13 *Hydrol.* 100, 69-111.

14 Feddes, R.A., Kowalik, P.J., Zaradny, H., 1978. Water uptake by plant roots. In:
15 Feddes, R.A., Kowalik, P.J., Zaradny, H. (Eds.), *Simulation of Field Water Use*
16 *and Crop Yield.* John Wiley & Sons, Inc., New York, pp. 16-30.

17 Gardner, W.R., 1958. Some steady-state solutions of the unsaturated moisture flow
18 equations with application to evaporation from a water table. *Soil Sci.* 85, 228-
19 232.

20 Green, R. E., Ampt, G. A., 1911. Studies on soil physics. I. Flow of air and water
21 through soils. *J. Agric. Sci.* 4, 1-24.

22 Greenwood, D.J., 2001. Modelling N-response of field vegetable crops grown under
23 diverse conditions with N_ABLE: A review. *J. Plant Nutr.* 24, 1799-1815.

24 Greenwood, D.J., Neeteson, J.J., Draycott, A., 1985. Response of potatoes to
25 Nfertilizer: dynamic model. *Plant Soil* 85, 185–203.

- 1 Groot, J.J.R., Verberne, E.L.J., 1991. Response of wheat to
2 fertilization, a data set to validate simulation models for nitrogen dynamics in
3 crop and soil. *Fert. Res.* 27, 349-383.
- 4 Hachum, A. Y., Alfaro, J. F., 1980. Rain infiltration into layered soils: prediction. *J.*
5 *Irrig. Drain. Div.* 106, 311-319.
- 6 Lee, D.H., Abriola, L.M., 1999. Use of the Richards equation in land surface
7 parameterizations. *J. Geophys. Res.* 104, 27519-27526.
- 8 Mollerup, M., 2007. Philip's infiltration equation for variable-head ponded infiltration.
9 *J. Hydrol.* 347, 173-176.
- 10 Mualem, Y., 1976. A new model for predicting the hydraulic conductivity of
11 unsaturated porous media. *Water Resour. Res.* 12, 513-522.
- 12 Nash, J.E., Sutcliffe J.V., 1970. River flow forecasting through conceptual models
13 part I - A discussion of principles. *J. Hydrol.* 10, 282-290.
- 14 Neeteson, J.J., Greenwood, D.J., Habets, E.J.M.H., 1986. Dependence of soil mineral
15 N on N-fertilizer application. *Plant Soil* 91, 417-420.
- 16 Neeteson, J.J., Carton, O.T., 2001. The environmental impact of Nitrogen in Field
17 Vegetable Production. *Acta Hort.* 563, 21-28.
- 18 Nielsen, N.E., Barber, S.A., 1978. Differences among genotypes of corn in the kinetics
19 of P uptake. *Agron. J.* 70, 695-698.
- 20 Nielsen, N.E., Jensen, H.E., 1986. The cause of nitrogen uptake by spring barley from
21 soil and fertilizer nitrogen. *Plant Soil* 91, 391-395.
- 22 Osaki, M., Shinano, T., Matsumoto, M., Ushiki, J., Shinano, M., Yamada, S.,
23 Urayama, M., Tadano, T., 1997. Relationship between root activity and N, P, K,
24 Ca and Mg contents in roots of field crops. *Soil Sci. Plant Nutr.* 43, 11-24.

- 1 Parlange, J.Y., 1971. Theory of water movement in soils. II. One-dimensional
2 infiltration. *Soil Sci.* 111, 171-174.
- 3 Parlange, J. Y., Haverkamp, R., Touma, J., 1985. Infiltration under ponded conditions:
4 1 optimal analytical solution and comparison with experimental observations.
5 *Soil Sci.* 139, 305-311.
- 6 Pedersen, A., Zhang, K., Thorup-Kristensen, K., Jensen, L.S., 2010. Modelling
7 diverse root density dynamics and deep nitrogen uptake – A simple approach.
8 *Plant Soil* 326, 493-510.
- 9 Philip, J.R., 1958. The theory of infiltration. *Soil Sci.* 85, 278-286.
- 10 Raes, D., Steduto, P., Hsiao, T.C., Fereres, E., 2009. AquaCrop — The FAO Crop
11 Model to Simulate Yield Response to Water: II. Main Algorithms and Software
12 Description. *Agron. J.* 101, 438–447.
- 13 Ranatunga, K., Nation, E.R., Barratt, D.G., 2008. Review of soil water models and
14 their applications in Australia. *Environ. Modell. Softw.* 23, 1182-1206.
- 15 Renaud, F.G., Bellamy, P.H., Brown, C.D., 2008. Simulation pesticides in ditches to
16 asses ecological risk (SPIDER): I. Model description. *Sci. Total Environ.* 394,
17 112-123.
- 18 Ritchie, J.T., 1998. Soil water balance and plant water stress. In: Tsuji G.Y.,
19 Hoogenboom G., Thornton P.K. (Eds), *Understanding Options for Agricultural*
20 *Production*, pp. 41-54.
- 21 Šimůnek, J., Vogel, T., Van Genuchten, M.Th., 1992. The SWMS_2D code for
22 simulating water flow and solute transport in two-dimensional variably saturated
23 media, v 1.1, Research Report No. 126, U. S. Salinity Lab, ARS USDA,
24 Riverside.

- 1 Šimůnek, J., van Genuchten, M.Th., Šejna, M., 2005. The HYDRUS-1D software
2 package for simulating the one-dimensional movement of water, heat, and
3 multiple solutes in variably-saturated media. Version 3.0. HYDRUS Softw. Ser.
4 1. Department of Environmental Sciences, University of California, Riverside,
5 CA.
- 6 Šimůnek, J., van Genuchten, M.Th., Šejna, M. 2006. The HYDRUS software package
7 for simulating two- and three-dimensional movement of water, heat, and multiple
8 solutes in variably-saturated media: Technical manual. Version 1.0. PC-Progress,
9 Prague, Czech Republic.
- 10 Šimůnek, J., Van Genuchten, M.Th., Šejna, M., 2008. Development and applications
11 of the HYDRUS and STANMOD software packages and related codes. *Vadose*
12 *Zone J.* 7, 587–600.
- 13 Van Genuchten. M.Th., 1980. A closed-form equation for predicting the hydraulic
14 conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 44, 892-898.
- 15 Van Genuchten, M.Th., Leij, F.J., Yates, S.R., 1991. The RETC code for quantifying
16 the hydraulic functions of unsaturated soils. Robert S. Kerr Environmental
17 Research Laboratory, U. S. Environmental Protection Agency, Oklahoma, USA,
18 83pp.
- 19 Wang, Q. J., Horton, R., Fan, J., 2009. An analytical solution for one-dimensional
20 water infiltration and redistribution in unsaturated soil. *Pedosphere* 19, 104-110.
- 21 Willmott, C.J., 1982. Some comments on the evaluation of model performance. *B. Am.*
22 *Meteorol. Soc.* 63, 1309-1369.
- 23 Willmott, C.J., Wicks, D.E., 1980. An empirical method for the spatial interpolation
24 of monthly precipitation within California. *Phys. Geogr.* 1, 59-73.

- 1 Yang, D., Zhang, T., Zhang, K., Greenwood, D.J., Hammond, J., White, P.J., 2009.
2 An easily implemented agro-hydrological procedure with dynamic root
3 simulation for water transfer in the crop-soil system: validation and application. *J.*
4 *Hydrol.* 370, 177-190.
- 5 Zhang, K., Greenwood, D.J., White, P.J., Burns, I.G., 2007. A dynamic model for the
6 combined effects of N, P and K fertilizers on yield and mineral composition;
7 description and experimental test. *Plant Soil* 298, 81-98.
- 8 Zhang, K., Yang, D., Greenwood, D.J., Rahn, C.R., Thorup-Kristensen, K., 2009.
9 Development and critical evaluation of a generic 2-D agro-hydrological model
10 (SMCR_N) for the responses of crop yield and nitrogen composition to nitrogen
11 fertilizer. *Agri. Ecosyst. Environ.* 132, 160-172.
- 12 Zhang, K., Burns, I.G., Greenwood, D.J., Hammond, J.P., White, P.J., 2010a.
13 Developing a reliable strategy to infer the effective soil hydraulic properties from
14 field evaporation experiments for agro-hydrological models. *Agri. Water*
15 *Manage.* 97, 399–409.
- 16 Zhang, K., Greenwood, D.J., Spracklen, W.P., Rahn, C.R., Hammond, J.P., White,
17 P.J., Burns, I.G., 2010b. A universal agro-hydrological model for water and
18 nitrogen cycles in the soil-crop system SMCR_N: critical update and further
19 validation. *Agri. Water Manage.* 97, 1411–1422.

1 **Figure captions:**

2 **Fig. 1.** Measured N uptake in the above-ground parts (a) and estimated root dry matter
3 and N accumulations (b) in the validation experiment.

4 **Fig. 2.** Comparison of soil water content (a) and NO₃-N concentration down the soil
5 profile at intervals (b) for the fine soil.

6 **Fig. 3.** Comparison of soil water content (a) and NO₃-N concentration down the soil
7 profile after 5 days (b), 10 days (c) and 30 days (d) for the medium soil.

8 **Fig. 4.** Comparison of soil water content (a) and NO₃-N concentration down the soil
9 profile after 5 days (b), 10 days (c) and 30 days (d) for the coarse soil. Key to
10 symbols: see legend to Fig. 3.

11 **Fig. 5.** NO₃-N concentration distributions down the soil profile after 30 days
12 calculated with and without dispersion term for the fine soil (a), medium soil
13 (b) and coarse soil (c).

14 **Fig. 6.** Overall comparison of soil water content (a) and soil mineral N (b) in different
15 soil layers and at time intervals between measurement and simulation in the
16 validation experiment.

17 **Fig. 7.** Comparison of soil water content θ in the layers of 0-30 cm (a) and 30-60 cm
18 (b) and 60-90 cm (c) in the validation experiment.

19 **Fig. 8.** Comparison of soil mineral N between measurement and simulation in the
20 layers of 0-30 cm, 30-60 cm and 60-90 cm in the validation experiment (60
21 kg-N ha⁻¹ of N fertilizer was applied on DOY of 133).

22 **Fig. 9.** Simulated cumulative actual crop transpiration, soil evaporation and water
23 percolation at 1 m depth (a) and cumulative N uptake, N mineralization from
24 soil organic matter and N leaching at 1 m depth (b) in the validation
25 experiment.

Table 1

Summary of the validation experiment

Soil type	Silty clay loam
Crop	Wheat
Sowing and harvest dates	21 Oct. 1982, 01 Aug. 1983
Layer thickness of measured soil water content and mineral N concentration (cm)	0-30, 30-60, 60-90
Dates of soil water and mineral N measurements (mmdd)	0207,0228,0328,0418,0509,0531,0613,0704,0718,0801
N fertilizer (kg N ha ⁻¹) rate and date of fertilization (mmdd)	(60) 0513

Table 2

Soil hydraulic parameter values for the coarse and fine soils in the numerical experiments (Wösten et al., 1999)

	θ_s (cm ³ cm ⁻³)	θ_r (cm ³ cm ⁻³)	α (-)	n (-)	K_s (cm d ⁻¹)
Coarse soil	0.40	0.03	0.0383	1.3744	60.0
Medium soil	0.44	0.01	0.0314	1.1804	12.1
Fine soil	0.52	0.01	0.0367	1.1012	24.8

Table 3

Fitted soil hydraulic parameter values in the validation experiment using the RETC software^a (Yang et al., 2009)

	θ_s (cm ³ cm ⁻³)	θ_r (cm ³ cm ⁻³)	α (-)	n (-)	K_s (cm d ⁻¹)
0–40 cm	0.51	0.00	0.0266	1.1841	40.0
40–100 cm	0.49	0.00	0.0046	1.1835	2.0

^a The RETC software was developed by van Genuchten et al. (1991).

Table 4

Model parameter values used in the simulations in the validation experiment

Parameter	Value	Unit	Explanation
a_z	3.0	-	Shape parameter for root distribution
c_0	0.007	kg m ⁻³	Mineral N concentration constant
c_{Nmin}	0.002	kg m ⁻³	Min. mineral N concentration in soil layer
k_{min}	0.00015	d ⁻¹	Rate of organic matter breakdown
k_N	0.07	g m ⁻¹ d ⁻¹	Plant N uptake coefficient
Q_{10}	3	-	Value of Q ₁₀
S_r	300000	m kg ⁻¹	Specific root length density
T_{max}	27	°C	Max. temperature for root growth
T_{min}	7	°C	Min. temperature for root growth
T_s	20	°C	Base temperature when Q ₁₀ function equals 1
z_{min}	30	cm	Soil depth where N mineralization occurs

Table 5

Statistical analysis of simulated NO₃-N concentration between the 'complex' FE method and the proposed algorithm, and between the 'complex' and the 'ordinary' FE methods


	RMSE (mg cm ⁻³)	NSE(-)	MAE (mg cm ⁻³)	R ² (-)
'Complex' FE method vs proposed algorithm	0.022	0.949	0.014	0.965
'Complex' FE method vs 'ordinary' FE method	0.064	0.585	0.039	0.970

Table 6


Statistical analysis of soil water content and soil mineral N between measurement and simulation

	RMSE ^a	NSE(-)	MAE ^a	R ² (-)
Soil water content (cm ³ cm ⁻³)	0.04	0.620	0.03	0.749
Soil mineral N (kg-N ha ⁻¹)	8.95	0.841	5.49	0.846

^a RMSE and MAE have the same unit of the analyzed item.

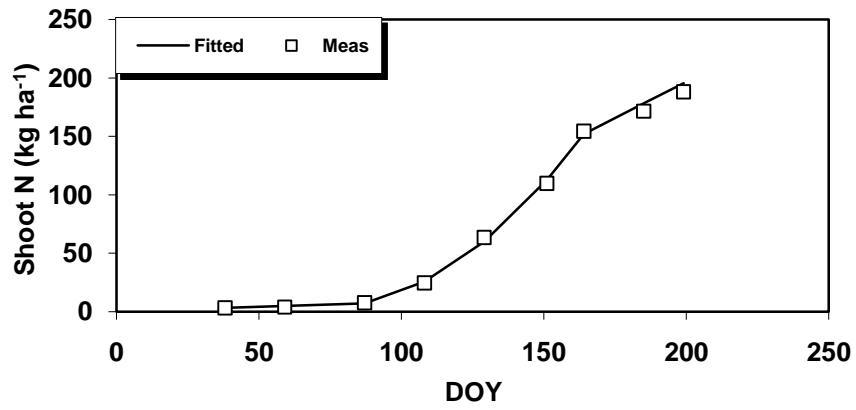

(a)

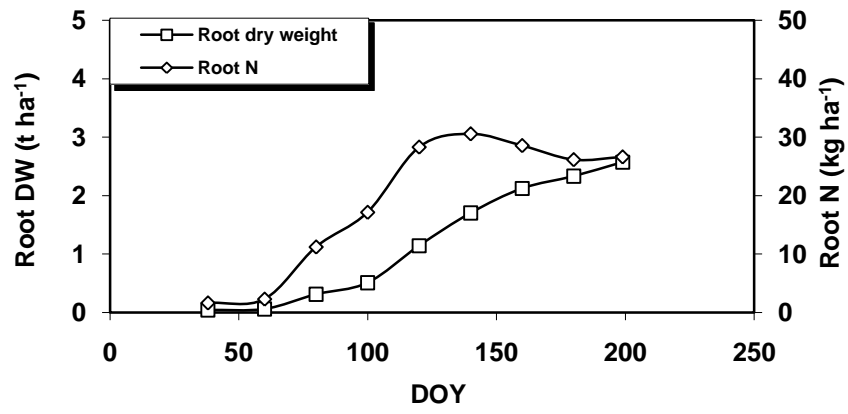

(b)

Fig. 1

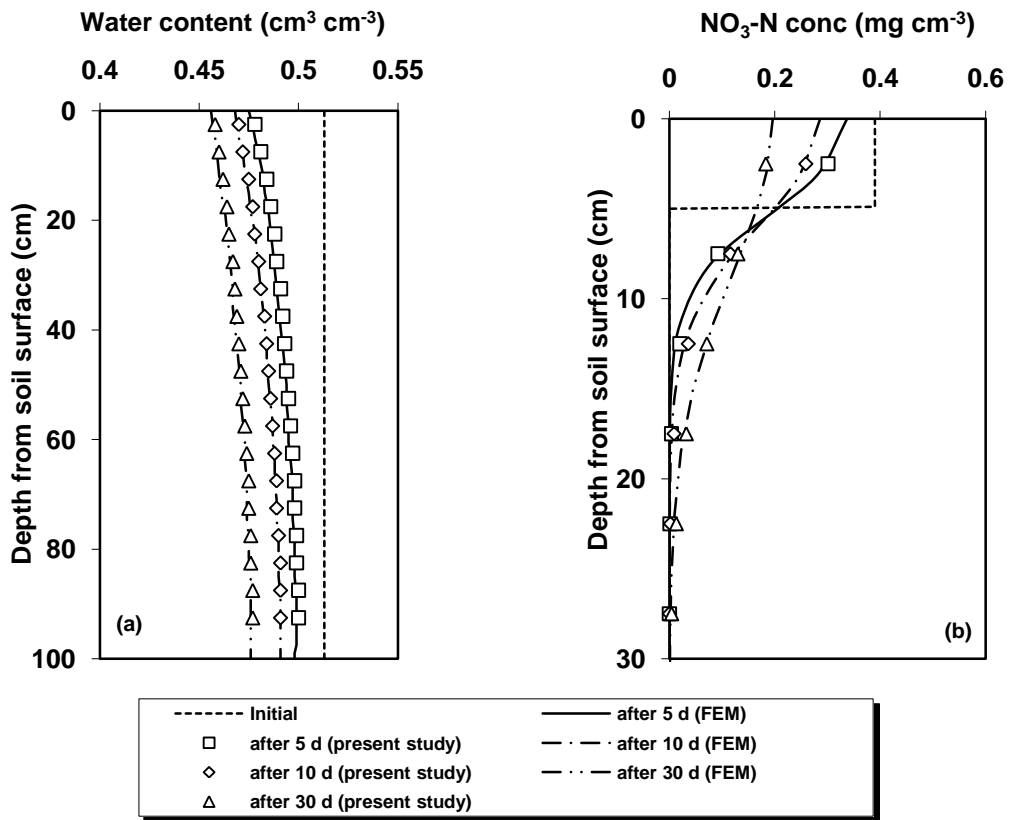


Fig. 2

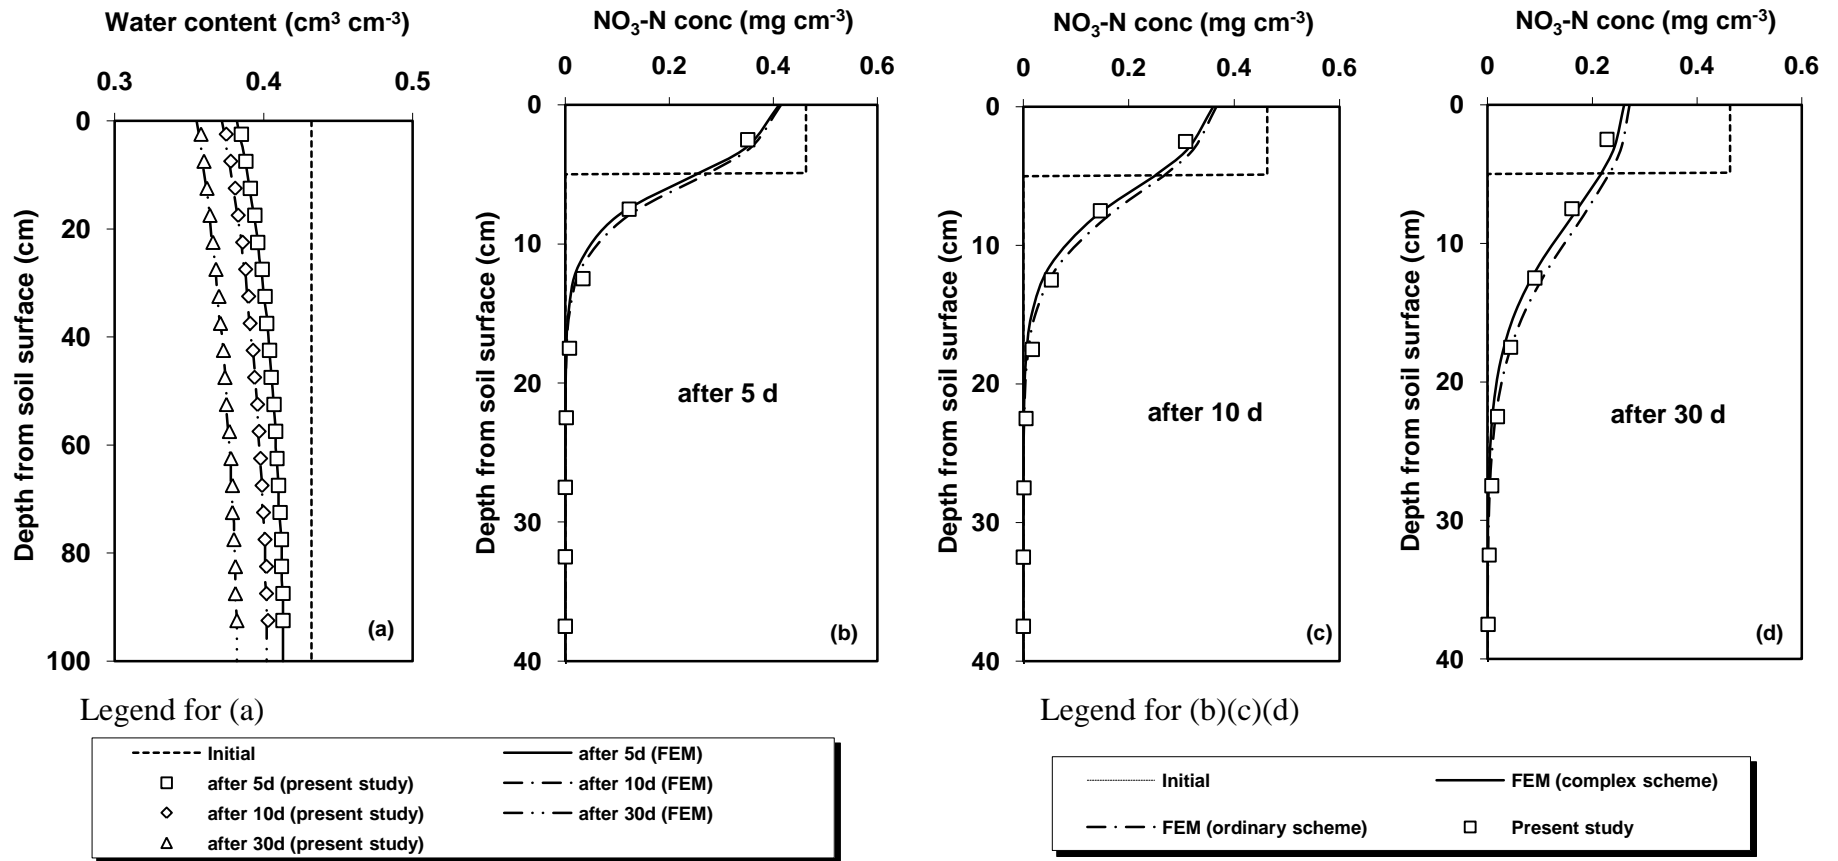


Fig. 3

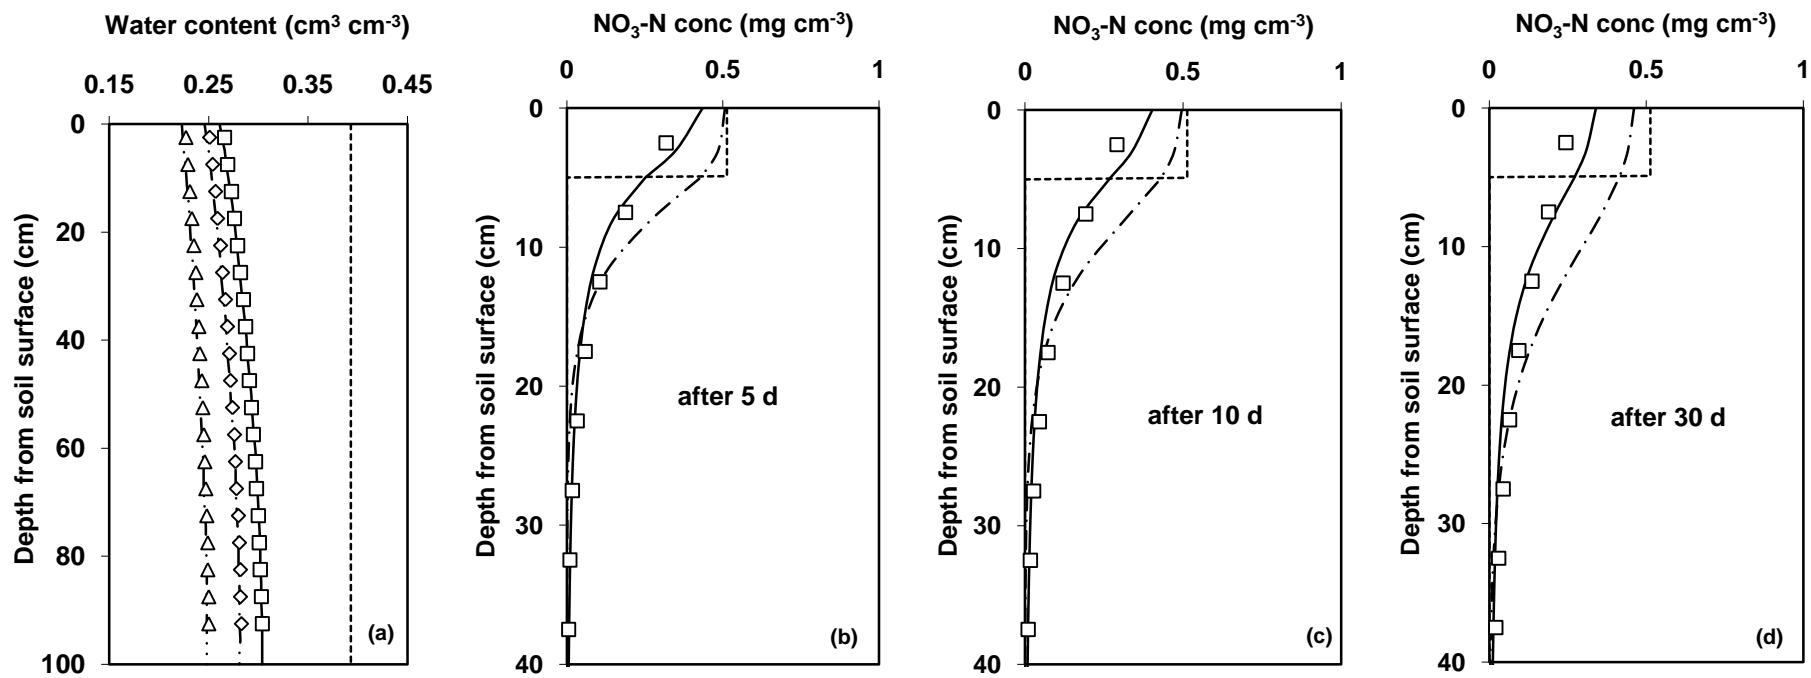


Fig. 4



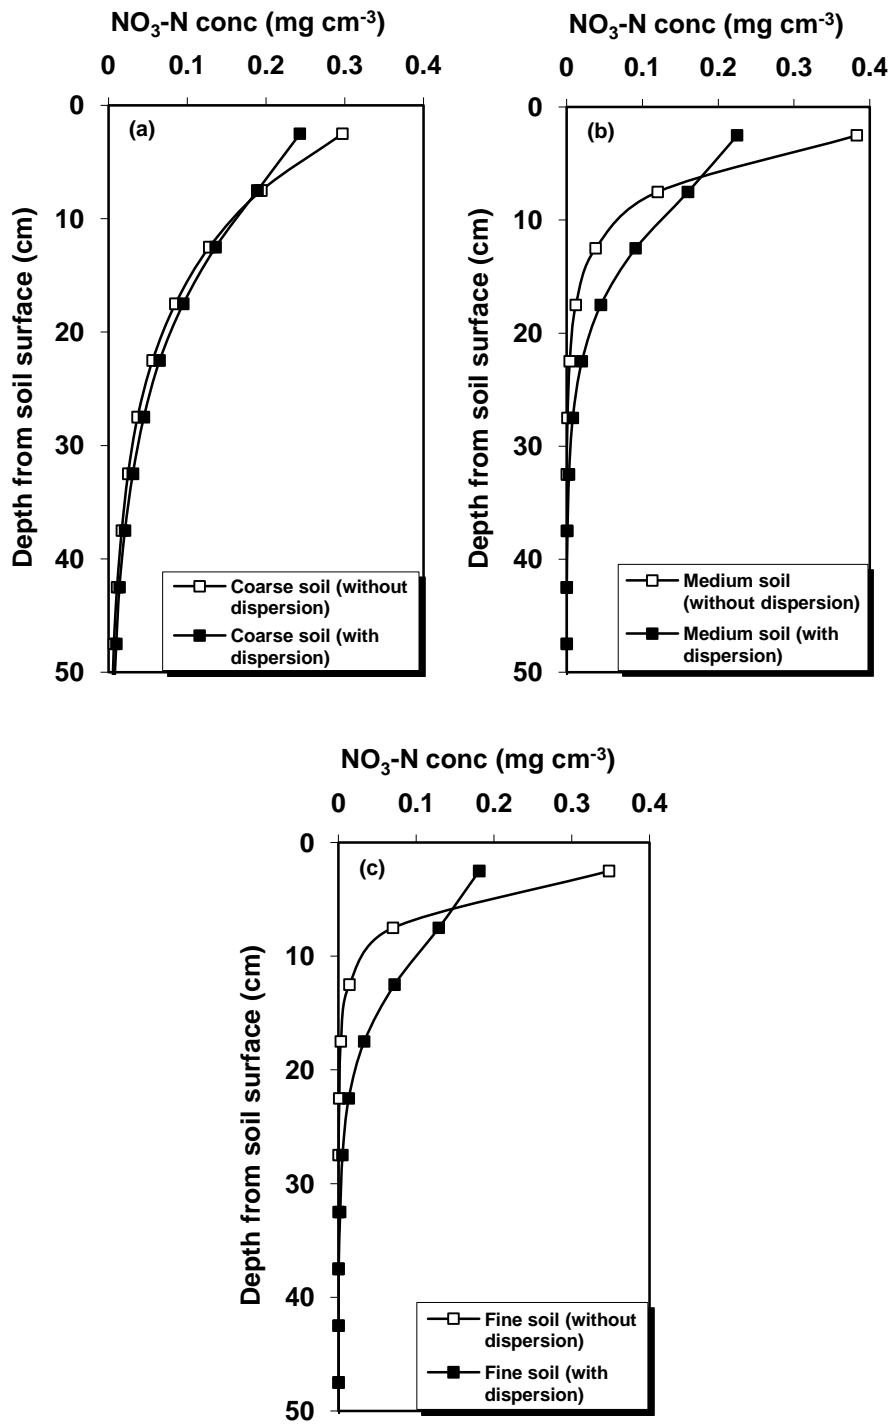


Fig. 5

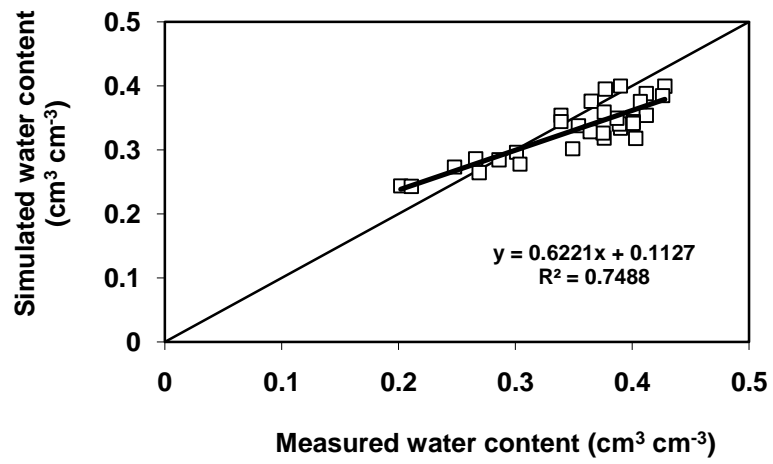


(a)

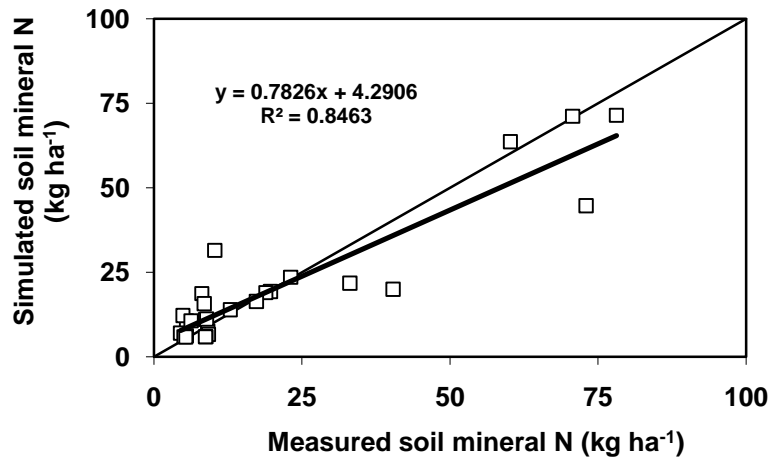


(b)


Fig. 6

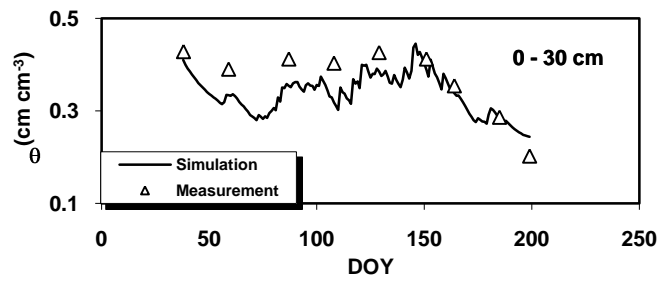

(a)

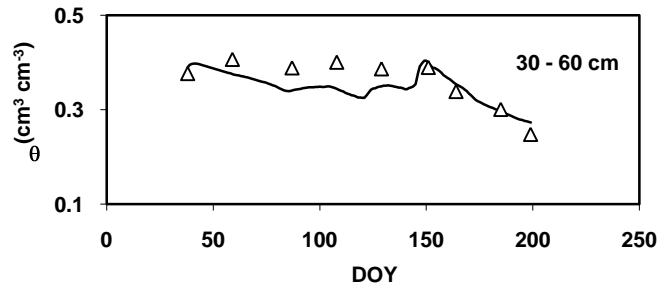

(b)

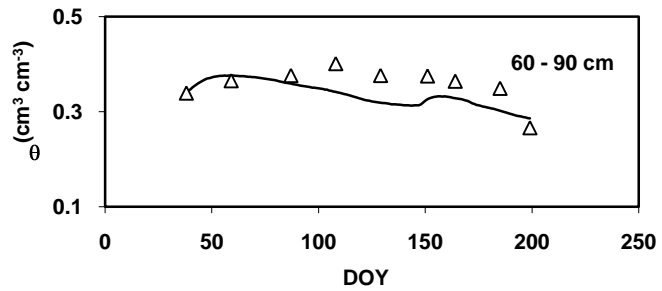

(c)

Fig. 7



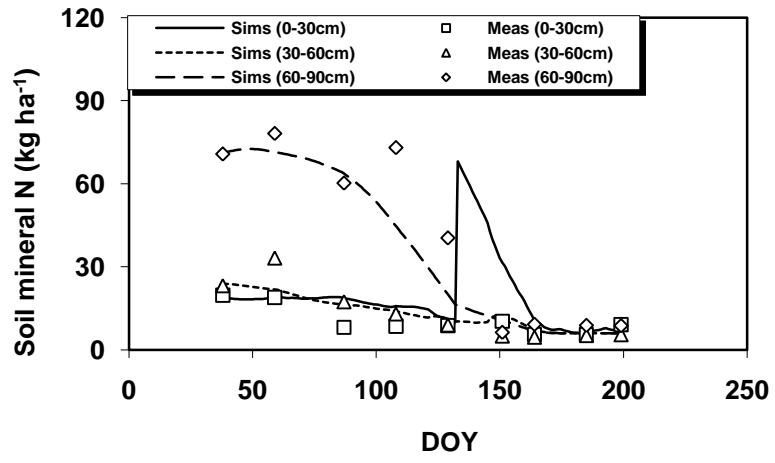


Fig. 8

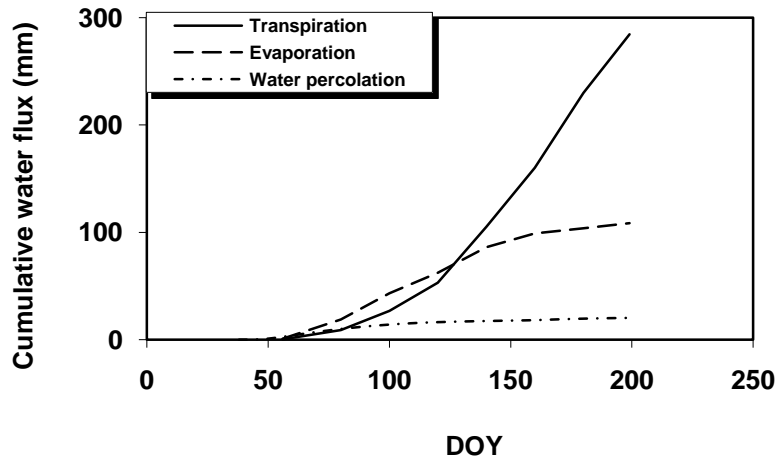

(a)

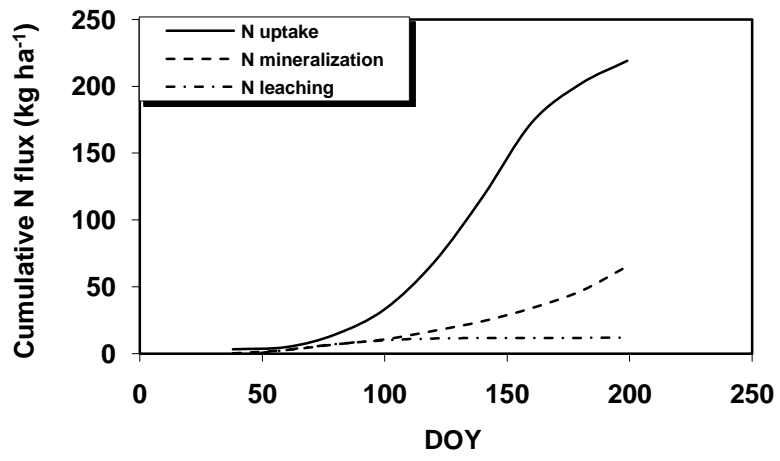

(b)

Fig. 9