



University of HUDDERSFIELD

University of Huddersfield Repository

Ali, Jafar, Fieldhouse, John D. and Talbot, Chris J.

The study of cooling water discharge into British Waterways canal

Original Citation

Ali, Jafar, Fieldhouse, John D. and Talbot, Chris J. (2011) The study of cooling water discharge into British Waterways canal. In: Sustainable Futures | Where we want to be and how we get there, 30th–31st March, 2011, Univeristy of Manchester, Manchester, UK. (Unpublished)

This version is available at <http://eprints.hud.ac.uk/10118/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

Aim

To develop a 3D interactive mathematical model to ensure safe and effective use of a natural resource.



The problem


Excessive increase in ambient water temperature reduces the dissolved oxygen in the water which threatens aquatic life.

Advantages of British Waterways canal water cooling system

- Using British Waterways canals for cooling systems can save **£100 million** on energy bills
- Reduce carbon emissions by **one million tonnes**.



Cooling water discharge into British Waterways canal

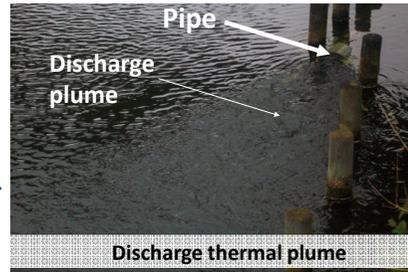


What size is the plume?



Cooling water discharge into British Waterways canal



Thermal camera used to predict the heat distribution on the surface

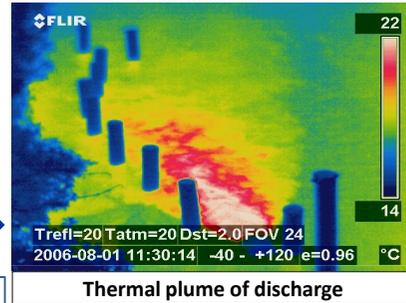

On-site measurements

Laboratory Testing


Combine



Coloured water shows the vertical extension of the plume



Results

The final predictive model has been applied to existing canal sites where the results compare very favourably with the measured on-site results. It is now complete for national use on canal waters and lakes.

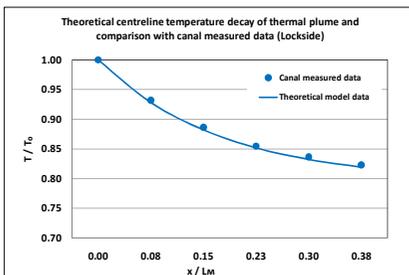

$$T(x, y) = \left(\frac{T_0 - T_a}{2} \right) \left(\operatorname{erf} \frac{b - z}{2 \sqrt{p_1 \cdot x}} + \operatorname{erf} \frac{b + z}{2 \sqrt{p_1 \cdot x}} \right) + T_a$$

T₀, T_a: Discharge and Ambient Temperature, b: Nozzle Radius, z: Depth, p₁: (U)velocity/(D)Turbulent Diffusivity

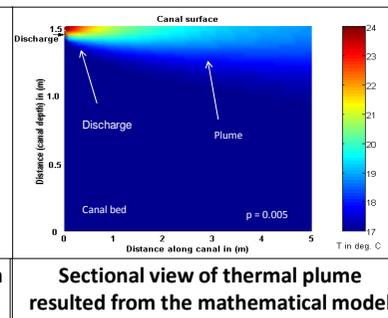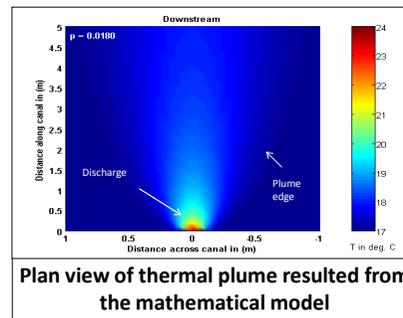

Conclusion

The work results in an interactive model that can be used to maximise use of canal water and lakes without prejudice to aquatic life. Environmental Agency approval is now being sought for its use on a national scale.

