



## Temperature and texture dependent dielectric model for moist soils at 1.4 GHz

V. Mironov, Y.H. Kerr, J.-P. Wigneron, L. Kosolapova, F. Demontoux

### ► To cite this version:

V. Mironov, Y.H. Kerr, J.-P. Wigneron, L. Kosolapova, F. Demontoux. Temperature and texture dependent dielectric model for moist soils at 1.4 GHz. IEEE Geoscience and Remote Sensing Letters, IEEE - Institute of Electrical and Electronics Engineers, 2013, 10 (3), pp.419-423. <10.1109/LGRS.2012.2207878>. <ird-00828324>

**HAL Id: ird-00828324**

**<http://hal.ird.fr/ird-00828324>**

Submitted on 31 May 2013

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Temperature and Texture Dependent Dielectric Model for Moist Soils at 1.4 GHz

*Valery Mironov, Member IEEE, Yann Kerr, Senior Member IEEE, Jean-Pierre Wigneron, Senior Member IEEE, Liudmila Kosolapova, and François Demontoux*

**Abstract—** In this paper, a monofrequent dielectric model for moist soils taking into account dependences on the temperature and texture is proposed, in the case of electromagnetic frequency equal to 1.4 GHz. The proposed model is deduced from a more general model proposed by Mironov and Fomin (2009) that provides estimations of the complex dielectric constant (CDC) of moist soils as a function of frequency, temperature, moisture and texture of soils. The latter employs the physical laws of Debye, Clausius-Mossotii, and the law of ion conductance to calculate the CDC of water solutions in the soil. The parameters of the respective physical laws were determined by using the CDCs of moist soils measured by Curtis et al. (1995) for a wide ensemble of soil textures (clay content from 0 to 76%), moistures (from drying at 105°C to nearly saturation), temperatures (10 – 40°C), and frequencies (0.3 - 26.5 GHz). This model has standard deviations of calculated CDCs from the measured values equal to 1.9 and 1.3 for the real and imaginary parts of CDC, respectively. In the model proposed in this paper, the respective standard deviations were decreased to the values of 0.87 and 0.26. In addition, the equations to calculate the complex dielectric constant as a function of moisture, temperature, and texture were represented in a simple form of the refractive mixing dielectric model, which is commonly used in the algorithms of radiometric and radar remote sensing to retrieve moisture in the soil.

## I. INTRODUCTION

1  
2 For retrieving correct soil moisture with the use of the brightness temperature measured by  
3 the SMOS at frequency of 1.4 GHz, we need such a dielectric model of moist soils which takes  
4 into account the dependence of the complex dielectric constant (CDC) of soil not only on the  
5 moisture, but also on temperature and texture. Currently, the algorithm for retrieving soil  
6 moisture from the SMOS measurements uses the dielectric model by Dobson [1], which does not  
7 account for the temperature dependence. Meanwhile, as follows from the dielectric  
8 measurements of [2]-[4], the variations of the real part of the complex dielectric constant can  
9 reach 10-15%, with temperature changing in the range from 5 to 40 °C. Except for [5], there are  
10 no published dielectric models accounting for temperature dependence at the frequency of 1.4  
11 GHz.  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

24 The dielectric model of [5] provides for predictions of the CDC as a function of four  
25 variables, namely, wave frequency, moisture and temperature of the soil, as well as the  
26 percentage of clay in the soil texture. A physical origin of this model is based on the following.  
27 By using the GRMDM [6] and dielectric data measured at different temperatures for an  
28 individual type of the soil, there were determined the following parameters and their temperature  
29 dependences: 1) CDC of dry soil, 2) maximum fraction of bound water that can be adsorbed by  
30 soil (see [6]), 3) the parameters of dielectric relaxation spectrum by Debye, namely, the values of  
31 dielectric constant in the low and high frequency limits, time of relaxation, and 4) ohmic  
32 conductivity. At that, all the values were derived separately for bound and free water in soil.  
33 Further in [5], by using the procedure outlined in [4], [7], the formulas of physical laws by  
34 Clausius-Mossotti, Debye, and ion conductance were used for regression analyses of the  
35 mentioned above parameters as a function of temperature. As a result, for each individual soil, a  
36 set of thermodynamic parameters were derived, namely, 1) the volumetric expansion coefficient,  
37 2) energy of activation, 3) entropy of activation. This procedure was applied with respect to the  
38 ensemble of soils having different clay percentage in their texture. In [5], for this purpose, the  
39 measured in [2] CDC spectra were employed. The ensemble of them covers the temperatures of  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

10, 20, 30, and 40°C, contents of clay in soil texture from 0 to 0.76 cm<sup>3</sup>/cm<sup>3</sup>, and frequencies from 0.03 to 26.5 GHz.

Finally, the totality of parameters in the model of [5] consisted of 1) CDC of dry soil, 2) maximum fraction of bound water, 3) low and high frequency limits of dielectric constant, 4) ohmic conductivities at the temperature of 20 °C, 5) volumetric expansion coefficients, 6) energies of activation, 7) entropies of activation, and 8) temperature coefficients of ion conductance, as derived separately for the bound and free water in the soil. In [5], all the above mentioned parameters were expressed with the use of polynomial functions as a function of clay content in soil texture. This methodology involves only an implicit consideration of soil mineralogy by a single parameter, namely the content of clay fraction in the soil texture, but within the mineralogical diversity of soils included in the dielectric data base of [2].

The model developed in such a way was validated in [5] by correlating the calculated CDCs with those measured in the whole range of moistures, clay contents, frequencies, and temperatures involved in the measurements of [2]. As shown in [5], [6], in the case of model [5], the standard deviation of calculated and measured CDCs from each other was substantially smaller than that of the model in [1].

According to [9], the dielectric model [5], due to smaller error in CDC predictions, demonstrated a substantially smaller error when modeling the brightness temperature [9], as compared with the dielectric model [1]. Currently, the model of [5] has been implemented in the prototype algorithm of the SMOS mission for remote sensing of soil moisture, and, currently, it undergoes tests in a routine mode. However, as seen from its description above, the model of [5] has a complex structure, which to a certain extent hampers its practical usage.

In this paper, the dielectric model of [5] was converted into a simple form of the refractive mixing dielectric model of moist soils, which provides for the CDC dependence on moisture, temperature and clay content in soil texture at the single frequency of 1.4 GHz. As a result, it has become convenient for practical use, simultaneously retaining the ability of model [5] to account

for temperature dependence, which is a substantial advantage over the widely used models [1] and [10]. Moreover, in terms of error of the CDC predictions, it was shown that the proposed model has the same accuracy as the model [5] has.

## II. THE MONOFREQUENT TEMPERATURE AND TEXTURE DEPENDENT SOIL DIELECTRIC MODEL

In accordance with the GRMDM proposed in [6], the real part of CDC,  $\varepsilon'_s$ , and imaginary part of CDC,  $\varepsilon''_s$ , as a function of volumetric moisture,  $W$ , can be represented in the form of:

$$\varepsilon'_s = n_s^2 - \kappa_s^2, \varepsilon''_s = 2n_s\kappa_s \quad (1)$$

$$n_s = \begin{cases} n_d + (n_b - 1)W, & W \leq W_t \\ n_d + (n_b - 1)W_t + (n_u - 1)(W - W_t), & W \geq W_t \end{cases} \quad (2)$$

$$\kappa_s = \begin{cases} \kappa_d + \kappa_b W, & W \leq W_t \\ \kappa_d + \kappa_b W_t + \kappa_u (W - W_t), & W \geq W_t, \end{cases} \quad (3)$$

where  $n_s$ ,  $n_d$ ,  $n_b$ ,  $n_u$  and  $\kappa_s$ ,  $\kappa_d$ ,  $\kappa_b$ ,  $\kappa_u$  are the values of refractive index and normalized attenuation coefficient for moist soil, dry soil, bound soil water, and free soil water. The normalized attenuation coefficient is understood here as a proportion of the standard attenuation coefficient to the free space propagation constant.  $W_t$  is a value of the maximum bound water fraction in a given type of the soil. Using the model proposed in [5], we calculated the GRMDM parameters  $n_b$ ,  $\kappa_b$ ,  $n_u$ ,  $\kappa_u$  at the frequency of 1.4 GHz as a function of gravimetric clay contents,  $C$ , equal to 0, 10, 20, 30, 40, 50, 60, 70 % and temperatures,  $T$ , equal to 10, 20, 30 and 40°C. Then, the calculated data were fitted as a function of clay content, with the temperatures being a parameter. For this purpose, second order polynomials  $f^{(i)} = A_i(T_j) + B1_i(T_j)C + B2_i(T_j)C^2$ , where used. Here,  $f^{(i)}$  denotes any of the GRMDM parameters ( $f^{(i)} = n_b, n_u, \kappa_b, \kappa_u$ ), and the subscript  $i$  of the polynomial coefficients takes the respective GRMDM parameter designation, that is,  $i = n_b, n_u, \kappa_b, \kappa_u$ .  $T_j$  is a soil temperature. The obtained values of polynomial coefficients  $A_i(T_j)$ ,  $B1_i(T_j)$ ,  $B2_i(T_j)$  for all the GRMDM parameters were fitted as a function of temperature by using a first or

second order polynomials. Parameters of  $W_t$ ,  $n_d$  and  $\kappa_d$  were assumed to be independent of the temperature, and their dependences on clay content were taken from [5]. As a result, we came up with the following formulas for the GRMDM parameters in equations (1)-(3) as a function of clay content and temperature:

$$W_t = 0.0286 + 0.00307C; \quad (4)$$

$$n_d = 1.634 - 0.00539C + 2.75 \cdot 10^{-5}C^2; \quad (5)$$

$$k_d = 0.0395 - 4.038 \cdot 10^{-4}C; \quad (6)$$

$$n_b = (8.86 + 0.00321T) + (-0.0644 + 7.96 \cdot 10^{-4}T)C + (2.97 \cdot 10^{-4} - 9.6 \cdot 10^{-6}T)C^2; \quad (7)$$

$$\kappa_b = (0.738 - 0.00903T + 8.57 \cdot 10^{-5}T^2) + (-0.00215 + 1.47 \cdot 10^{-4}T)C + (7.36 \cdot 10^{-5} - 1.03 \cdot 10^{-6}T + 1.05 \cdot 10^{-8}T^2)C^2; \quad (8)$$

$$n_u = (10.3 - 0.0173T) + (6.5 \cdot 10^{-4} + 8.82 \cdot 10^{-5}T)C + (-6.34 \cdot 10^{-6} - 6.32 \cdot 10^{-7}T)C^2; \quad (9)$$

$$\kappa_u = (0.7 - 0.017T + 1.78 \cdot 10^{-4}T^2) + (0.0161 + 7.25 \cdot 10^{-4}T)C + (-1.46 \cdot 10^{-4} - 6.03 \cdot 10^{-6}T - 7.87 \cdot 10^{-9}T^2)C^2. \quad (10)$$

The ensemble of equations (1)-(10) represents the developed dielectric model, with the input parameters being expressed in the following units: clay content,  $C$ , in %, temperature,  $T$ , in °C, and moisture,  $W$ , in  $\text{cm}^3/\text{cm}^3$ .

### III. VALIDATION OF THE MONOFREQUENT MODEL PREDICTIONS OVER DIELECTRIC DATA

Using available in the literature [2], [10] dielectric data and the results of our own measurements of the CDCs at 1.4 GHz, we estimated relative to measured data the error of calculations of the CDCs by using the monofrequent model. In addition, we tested the deviations between the CDCs calculated with proposed model, on the one hand, and the ones obtained by using the model of [5] on the other hand. At that, we chose the soils with 1) low clay content, 2) middle clay content, and 3) maximum clay content. In order to supplement the missing in literature data, we carried out own measurements of the CDCs with the soils collected near Bordeaux and Toulouse, France. In terms of texture, the soils measured by the authors were 1)

1 sand (0% clay, 100% sand, and the bulk density of  $1.65 \text{ g/cm}^3$ ), 2) a loamy soil (17% clay, 36%  
2 sand, and the bulk density of  $1.4 \text{ g/cm}^3$ , and 3) a clay loamy soil (34% clay, 29% sand, and the  
3 bulk density of  $1.3 \text{ g/cm}^3$ ). Our dielectric measurements were performed using a waveguide  
4 technique at the frequency of 1.4 GHz and the temperatures of  $22^\circ\text{C} \pm 1^\circ\text{C}$ . The soil samples  
5 were placed in a segment of the waveguide, which served as a measuring container. The CDCs  
6 of the samples were determined using the Nicolson, Ross and Weir method (NRW) [11], [12]  
7 adapted to a rectangular waveguide.  
8  
9

10 Fig. 1 shows the measured and calculated values of real and imaginary parts of CDC as a  
11 function of volumetric moisture at room temperature (20 to  $24^\circ\text{C}$ ) for the soils with varying clay  
12 content. The following soil types are analyzed: (a) sand (SP) light gray (C=0%), sand (SP) white  
13 (C=0%), data of [2]; Yuma sand (C=0%), data of [10]; sand (C=0%), data of own measurements;  
14 (b) clay (CH) gray (C=34%), data of [2]; clay loamy soil (C=34%), data of own measurements;  
15 (c) Miller clay (C=62%), data of [10], clay (CH) light gray (C=76%), data of [2]. As seen from  
16 the Fig. 1, the experimental data of different authors correlate well with each other and with the  
17 dielectric calculations obtained by using the model of [5] and the proposed monofrequent model.  
18 In Fig. 1, the dielectric calculations obtained by using the model of [5] and the monofrequent  
19 model are also very close to each other, so that in some cases they are graphically  
20 indistinguishable from each other.  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41

42 Next, we compared with each other dependencies of CDCs on the temperature at fixed  
43 moistures, that were calculated by using the proposed monofrequent model and the model of [5],  
44 on the one hand, and the ones that were either measured by the authors or taken from [2], on the  
45 other hand. In Fig. 2 are shown at fixed moistures the CDCs as a function of temperature (5 to  
46  $40^\circ\text{C}$ ) for different soil types: 1) sand (SP) white (C=0%), data of [2]; 2) loamy soil (C=17%),  
47 data of own measurements; 3) sandy clay loam (C=25%), data of own measurements; and 4) clay  
48 (CH) gray (C=34%), data of [2]. As seen from the Fig. 2, the experimental data well correlated  
49 with the calculations performed by using the model of [5] or the monofrequent model. In  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

addition, the estimates obtained by using different models deviate from each other of maximum 3%, that occurs only in the case of greater moistures,  $W \geq 0.5$ .

#### IV. ERROR ESTIMATION

To estimate an error of the proposed model we correlated the dielectric data taken from [2], [10] as well as the data measured by the authors, with the results of calculations made by using the model of [5] and the proposed model. In this correlation analysis are used only the dielectric data shown in Figs. 1 and 2. In Fig. 3 are shown the calculated CDCs of the analyzed soils as a function of respective measured CDCs. The values of correlation coefficients for the real,  $R_{\epsilon'}$ , and imaginary,  $R_{\epsilon''}$ , parts of CDC, alongside with their standard deviations,  $SD_{\epsilon'}$  and  $SD_{\epsilon''}$ , as well as the equations of linear regression, are given below:

1) model of [5]:  $R_{\epsilon'}=0.996$ ,  $R_{\epsilon''}=0.993$ ;  $SD_{\epsilon'}=0.83$ ,  $SD_{\epsilon''}=0.25$ ;  $\epsilon'_{cal}= -0.12+0.98\epsilon'_{meas}$ ,  $\epsilon''_{cal}= 0.04+0.99 \epsilon''_{meas}$ ;

2) proposed monofrequent model:  $R_{\epsilon'}=0.996$ ,  $R_{\epsilon''}=0.992$ ;  $SD_{\epsilon'}=0.87$ ,  $SD_{\epsilon''}=0.26$ ;  $\epsilon'_{cal}= -0.24+1.00\epsilon'_{meas}$ ,  $\epsilon''_{cal}= 0.07+0.99 \epsilon''_{meas}$ .

As seen from this analysis, the errors of CDC, in terms of standard deviation, obtained by using the model of [5] or monofrequent model are very close to each other. It is also worth noting that the error of calculated CDCs, relative to the measured ones, are of the same order as the error of dielectric measurements is.

#### V. CONCLUSION

A simple temperature and texture dependent moist soil dielectric model at the SMOS frequency of 1.4 GHz is proposed based on the model developed in [5]. The proposed model provides for predictions of the real and imaginary parts of CDC of moist soils with error of 0.83 and 0.25, respectively, in terms of their standard deviations with respect to the measured values. As was shown in [13], in the case of using the model of [5], the dielectric model error causes uncertainties in the quantitative determination of soil moisture from the SMOS data which lie in



1 the range  $\pm 0.06 \text{ cm}^3/\text{cm}^3$ , in terms of 95% confidence interval. As was shown in section IV, the  
2 errors of the monofrequent model and the model of [5] are equal to each other. Hence the  
3  
4  
5  
6 estimate of uncertainties obtained in [13] for sounding moisture is valid for the proposed model.  
7

8 Concerning the influence of the soils mineralogy, it should be stated that the dielectric data  
9  
10 base of [2] consists of the soils containing the following minerals: quartz (from 0 to 100%),  
11  
12 smectite clays (from 0 to 80%), K-feldspar (from 0 to 23%), dolomite (from 0 to 21%), as well  
13  
14 as the traces of such mineral components as calcite, Na-plagioclase, mica, and cristobalite.  
15  
16 Therefore, it is unreasonable to apply the proposed model to calculate the CDCs of the soils  
17  
18 containing mineral components other than those comprising the data base of [2], in particular the  
19  
20 kaolinites, sulfate hydrates, and zeolites. In addition, it should be noted that the proposed model  
21  
22 has not been validated regarding the organic rich and saline soils.  
23  
24

25  
26 The range of bulk density of soils, for which the proposed monofrequent model can be  
27  
28 applied, must correspond to the density of the soils in [2]. Unfortunately, the values of bulk  
29  
30 densities are not explicitly given in [2]. Nevertheless, they were estimated to fall in the range  
31  
32 from  $0.9 \text{ g/cm}^3$  to  $1.65 \text{ g/cm}^3$ , with using the relationships between the refractive index of dry  
33  
34 soil and its bulk density, by the formulas from [14]. For this purpose, were employed the data  
35  
36 given in [8] and [15] for refractive indexes of soils and minerals comprising soils. Finally, it  
37  
38 should be noted that a simple and clear structure of the formulas in proposed model is its major  
39  
40 advantage over the model of [5]. At that, the errors of both models are equal to each other.  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

## 4. REFERENCES

- 1  
2  
3  
4 [1] M. C. Dobson, F. T. Ulaby, M. T. Hallikainen, and M. A. El-Rayes, "Microwave dielectric  
5 behavior of wet soil–Part II: Dielectric Mixing Models," *IEEE Trans. Geosci. Remote Sens.*, vol.23,  
6 no.1, pp. 35-46, Jan. 1985.  
7  
8  
9  
10 [2] J. O. Curtis, C. A. Weiss, Jr., and J. B. Everett, "Effect of soil composition on dielectric properties,"  
11 *Technical Report EL-95-34*, Dec. 1995.  
12  
13 [3] N. Wagner, K. Emmerich, F. Bonitz, and K. Klaus, "Experimental investigations on the frequency-  
14 and temperature-dependent dielectric material properties of soil," *IEEE Trans. Geosci. Remote*  
15 *Sensing*, vol. 49, no. 7, pp. 2518-2530, Jul. 2011.  
16  
17 [4] V. L. Mironov, R. D. De Roo, and I. V. Savin, "Temperature-dependable microwave dielectric  
18 model for an arctic soil," *IEEE Trans. Geosci. Remote Sens.*, vol. 48, no. 6, pp. 2544-2556, Jun.  
19 2010.  
20  
21 [5] V. L. Mironov., S. V. Fomin, "Temperature and mineralogy dependable model for microwave  
22 dielectric spectra of moist soils," in *Proc. PIERS*, August 18-21, Moscow RUSSIA, pp. 938 – 942,  
23 2009.  
24  
25 [6] V. L. Mironov, M. C. Dobson, V. H. Kaupp, S. A. Komarov and V. N. Kleshchenko "Generalized  
26 refractive mixing dielectric model for moist soils," *IEEE Trans. Geosci. Remote Sens.*, vol. 42, no.  
27 4, pp.773-785, Apr. 2004.  
28  
29 [7] Mironov V. L. and Fomin S. V. "Temperature dependable microwave dielectric model for moist  
30 soils," in *Proc. PIERS*, March 23-27, Beijing CHINA, pp. 831 - 835, 2009.  
31  
32 [8] V.L. Mironov, L.G. Kosolapova, and S.V. Fomin, "Physically and Mineralogically Based  
33 Spectroscopic Dielectric Model for Moist Soils," *IEEE Trans. Geosci. Remote Sens.*, vol. 47, no. 7,  
34 part 1, pp. 2059-2070, Jul. 2009.  
35  
36 [9] Wigneron J.-P., Chanz A., Kerr Yann H., Lawrence H., Shi J., Escorihuela M. J., Mironov V.,  
37 Mialon A., Demontoux F., Patricia de Rosnay, and Saleh-Contell K., "Evaluating an Improved  
38 Parameterization of the Soil Emission in L-MEB," *IEEE Trans. Geosci. Remote Sens.*, vol. 49,  
39 no.4, pp. 1177-1187, Apr. 2011.  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

- 1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60
- [10] J. R. Wang, T. J. Schmugge, "An empirical model for the complex dielectric permittivity of soils as a function of water content," *IEEE Trans. Geosci. Remote Sens.*, vol. GE-18, No. 4, pp. 288-295, 1980.
- [11] F. Demontoux, B. Le Crom, G. Ruffie, J.-P. Wigneron, J. P. Grant, V. Mironov, "Electromagnetic characterization of soil-litter media. Application to the simulation of the microwave emissivity of the ground surface in forests," in *EPJ Applied Physics*, vol. 44, no. 3, pp. 303-315, 2008.
- [12] Weir W. B., "Automatic measurement of complex dielectric constant and permeability at microwave frequencies," in *Proc. IEEE*, vol. 62, pp. 33-36, Jan. 1974.
- [13] V. L. Mironov, L. G. Kosolapova, and F. Demontoux, "Error of Moisture Retrieving from the SMOS Radiobrightness with the Use of the Temperature Dependable Soil Dielectric Model," in *Proc. PIERS*, September 12-16, Suzhou, CHINA, pp. 709 – 711, 2011.
- [14] V. L. Mironov, and P. P. Bobrov, "Soil Dielectric Spectroscopy Parameters Dependence on Humus Content," in *Proc. IGARSS*, July 21-25, Toulouse, FRANCE, part II, pp. 1106-1108, 2003.
- [15] F. T. Ulaby, T. N. Bengal, M. C. Dobson, J. R. East, J. B. Garvin, D. L. Evans, "Microwave Dielectric Properties of Dry Rocks," *IEEE Trans. Geosci. Remote Sens.*, vol. 28, no. 3, pp. 325-336, Mar. 1990.

## Captions to Figures


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Fig. 1. Measured and calculated complex dielectric constant,  $\varepsilon = \varepsilon' + i\varepsilon''$ , for the soils with different clay content at room temperature (20°C): (a)  $C=0\%$ , (b)  $C= 34\%$ , and (c)  $C= 62$  and  $76\%$ . Measured data are taken from [2, 10] and obtained by the authors (own meas). Dielectric calculations with the model of [5] and monofrequent model are given with solid and dashed lines, respectively.

Fig. 2. Measured and calculated complex dielectric constant as a function of temperature for soils with different clay content,  $C$ , and soil moisture,  $W$ : (a)  $C=0\%$  , (b)  $C=34\%$ , (c)  $C= 17\%$  and  $25\%$ . Measured data are taken from [2] and obtained by the authors. Dielectric calculations with the model of [5] and monofrequent model are given with solid and dashed lines, respectively.


Fig. 3. Correlation of the measured real part,  $\varepsilon'$ , (a) and imaginary part,  $\varepsilon''$ , (b) of complex dielectric constant (CDC) with the calculations ones obtained by using the model of [5] and monofrequent model, respectively.

Fig. 1a

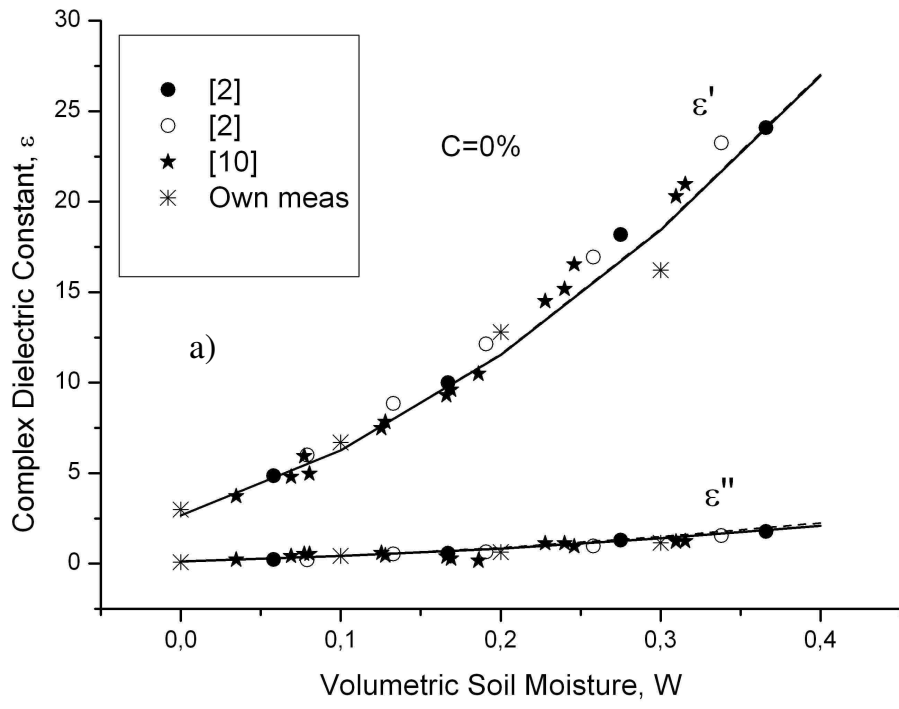


Review

Fig. 1b

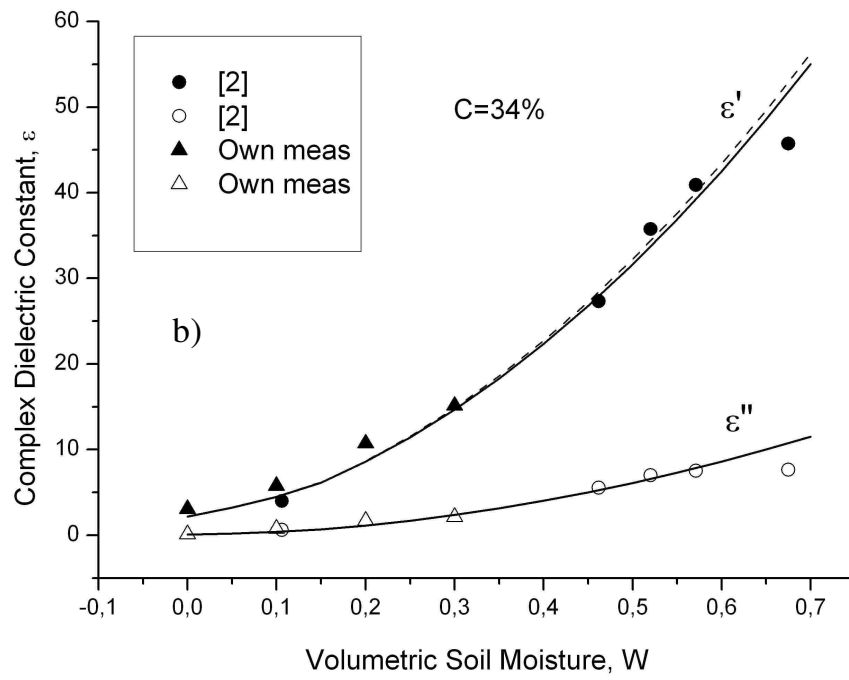

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Fig. 1c

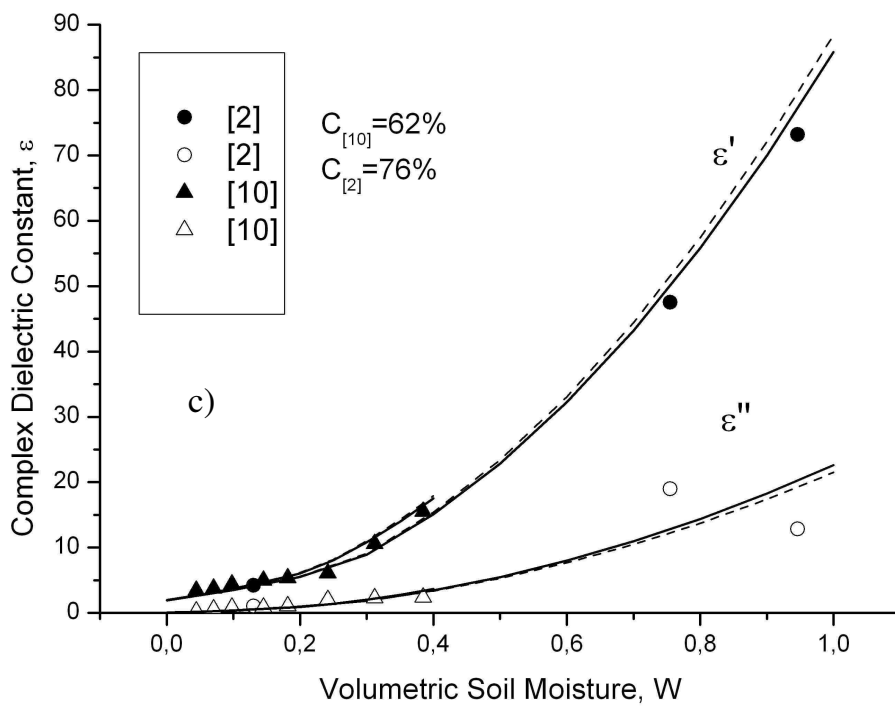

view

Fig. 2a


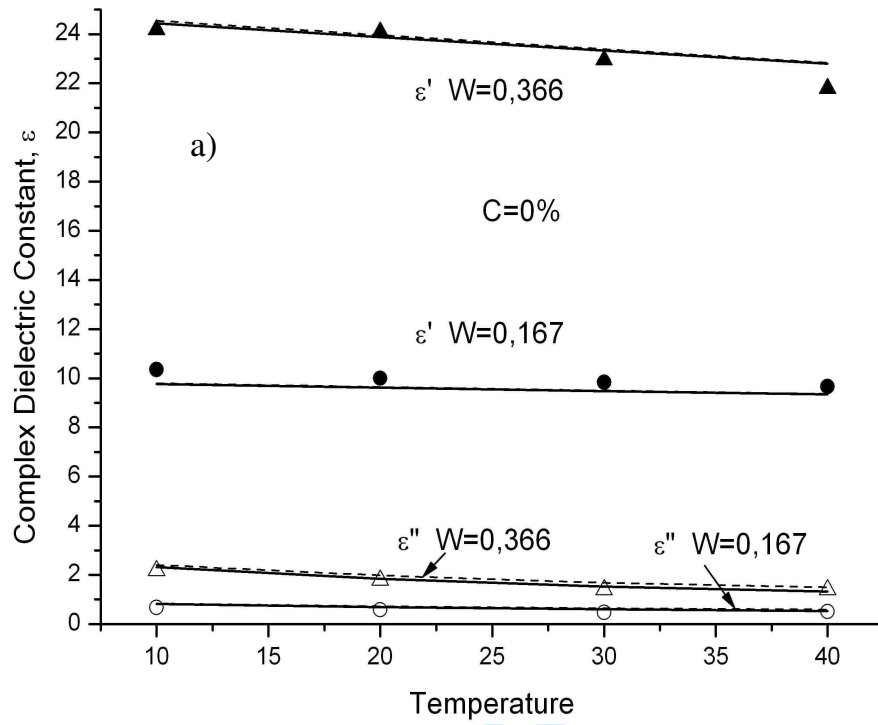





Fig. 2b

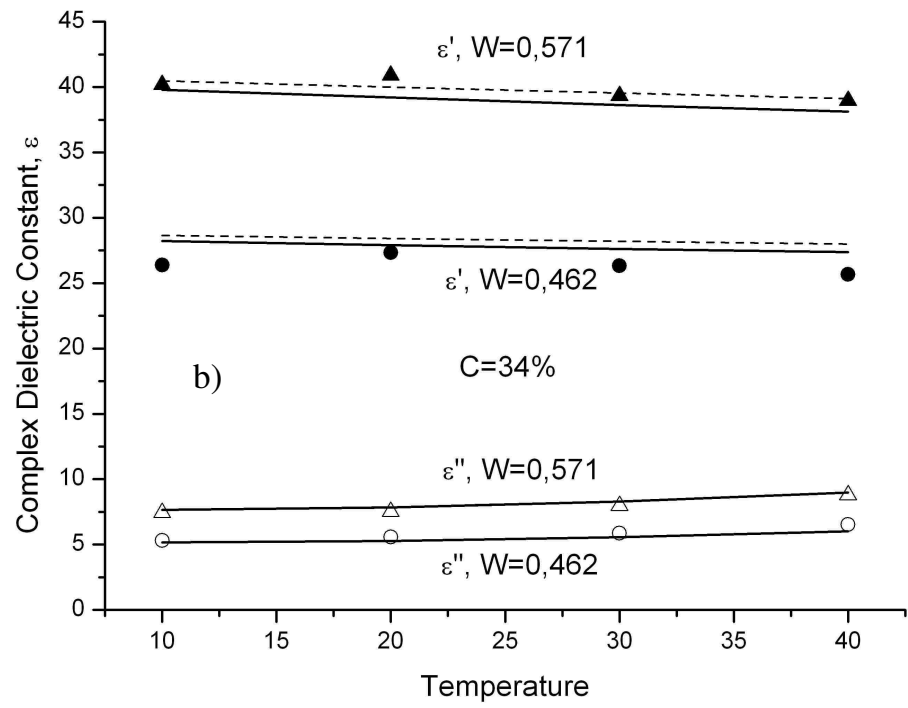

Review


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Fig. 2c

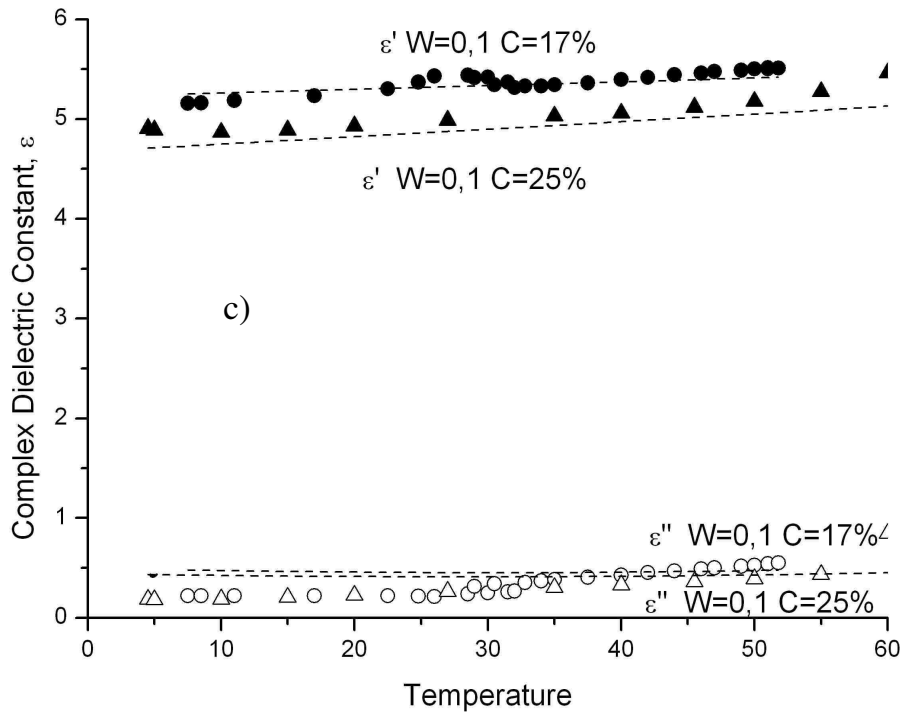


review

Fig. 3a

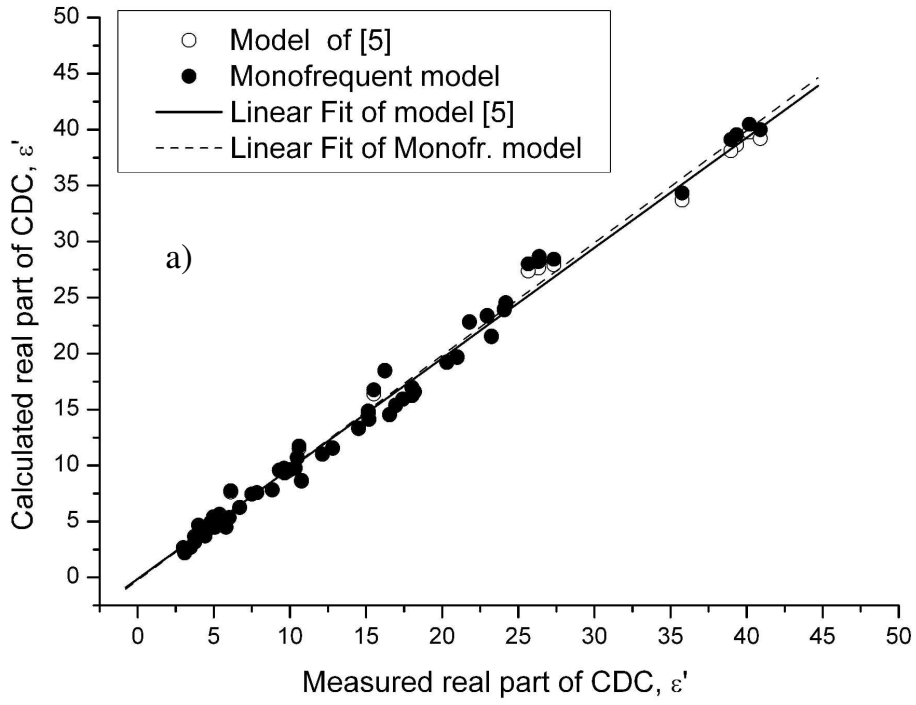

view

Fig. 3b

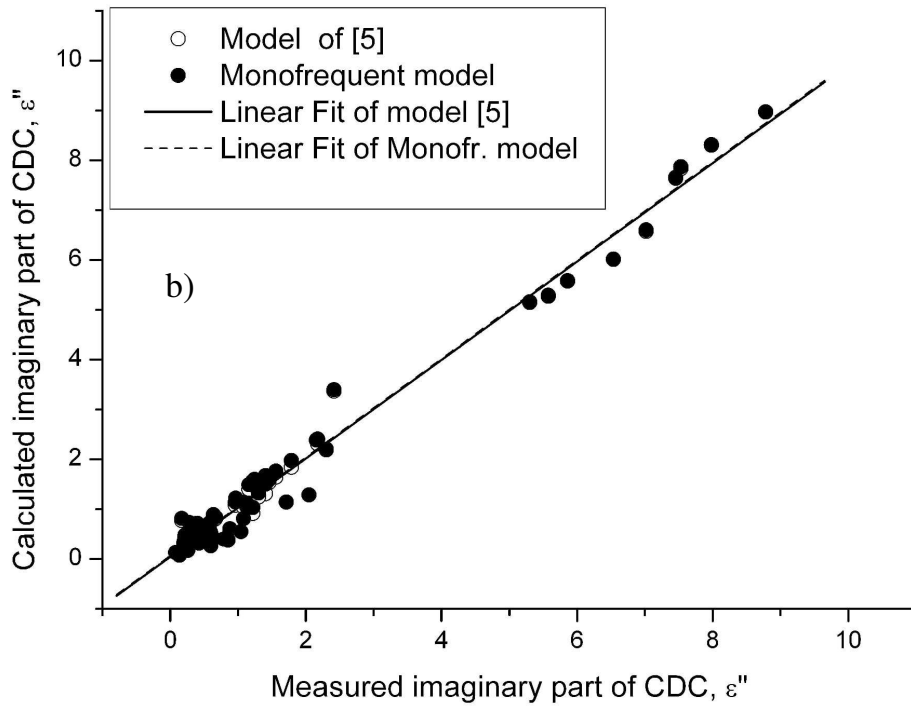

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Postal mailing address:

Kosolapova L.G.

Kirensky Institute of Physics

Akademgorodok, 50/38

Krasnoyarsk, 660036, RUSSIA

Tel./Fax: +7 391 2905028

E mail: [rsdvk@ksc.krasn.ru](mailto:rsdvk@ksc.krasn.ru)

Corresponding author: Kosolapova L.G.

For Peer Review