

# Design of Near Allpass Strictly Stable Minimal Phase Real Valued Rational IIR Filters

Charlotte Yuk-Fan Ho<sup>1</sup>, *Student Member, IEEE*, Bingo Wing-Kuen Ling<sup>2</sup>, *Member, IEEE*, Zhi-Wei Chi<sup>2</sup>, Mohammad Shikh-Bahaei<sup>2</sup>, Yan-Qun Liu<sup>3</sup>, and Kok-Lay Teo<sup>4</sup>, *Senior Member, IEEE*

**Abstract**—In this brief, a near allpass strictly stable minimal phase real valued rational IIR filter is designed so that the maximum absolute phase error is minimized subject to a specification on the maximum absolute allpass error. This problem is actually a minimax nonsmooth optimization problem subject to both linear and quadratic functional inequality constraints. To solve this problem, the nonsmooth cost function is first approximated by a smooth function and then our previous proposed method is employed for solving the problem. Computer numerical simulation result shows that the designed filter satisfies all functional inequality constraints and achieves a small maximum absolute phase error.

**Index Terms**—Strictly stable, minimal phase, near allpass, real valued rational IIR filters, functional inequality constraints, minimax nonsmooth optimization problem.

## I. INTRODUCTION

ALLPASS real valued rational IIR filters are found in many signal processing, communications and control applications [1]-[12]. On the other hand, real valued rational IIR filters with both the strictly stable and the minimal phase properties are found in many analog-to-digital conversion applications [13].

The most common allpass real valued rational IIR filters are that with the numerator coefficients being the flip version of the denominator coefficients. For those filters, the zeros are the complex conjugate reciprocal of the poles. In other words, if these filters are strictly stable, then they are not minimal phase.

Since both the strictly stable and the minimal phase properties are important for some applications, it would be useful to relax the allpass condition to a near allpass condition and design a near allpass strictly stable minimal phase real

Manuscript received June 18, 2007; revised July 30, 2007. This work was substantially supported by a research grant (project number G-YD26) from the Hong Kong Polytechnic University, the Centre for Multimedia Signal Processing, The Hong Kong Polytechnic University, the CRGC grant (project number PolyU 5101\01E) from the Research Grants Council of Hong Kong.

Bingo Wing-Kuen Ling is with the department of Electronic Engineering, King's College London (e-mail: wing-kuen.ling@kcl.ac.uk). Charlotte Yuk-Fan Ho is with the department of Electronic Engineering, Queen Mary, University of London. Peter Kwong-Shun Tam is with the department of Electronic and Information Engineering, The Hong Kong Polytechnic University.

Copyright (c) 2007 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending an email to pubs-permissions@ieee.org.

valued rational IIR filter so that the maximum absolute phase error is minimized subject to a specification on the maximum absolute allpass error. However, this design problem is actually a nonsmooth optimization problem subject to both linear and quadratic functional inequality constraints, which is very difficult to solve. This brief is to address this issue.

The outline of this brief is as follows. In Section II, notations used throughout this brief are introduced. In Section III, the design of a near allpass strictly stable minimal phase real valued rational IIR filter is formulated as a nonsmooth optimization problem. The problem is then approximated by a smooth problem so that our previous proposed method can be applied for solving the problem. In Section IV, computer numerical simulation results are presented. Finally, conclusions are drawn in Section V.

## II. NOTATIONS

Denote the frequency response of a rational IIR filter as  $H(\omega)$ . Denote the order of the numerator transfer function and that of the denominator transfer function as  $M$  and  $N$ , respectively. Denote the numerator coefficients as  $b_m$  for  $m = 0, 1, \dots, M$  and the denominator coefficients as  $a_n$  for  $n = 0, 1, \dots, N$ . In this brief, as we only consider real valued rational IIR filters, so we assume that  $b_m \in \mathfrak{R}$  for  $m = 0, 1, \dots, M$ ,  $a_n \in \mathfrak{R}$  for  $n = 1, 2, \dots, N$ ,  $a_0 = 1$  and

$$H(\omega) = \frac{\sum_{m=0}^M b_m e^{-jm\omega}}{\sum_{n=0}^N a_n e^{-jn\omega}}. \text{ A rational IIR filter is said to be achieved}$$

an allpass characteristic if  $|H(\omega)| = 1 \quad \forall \omega \in [-\pi, \pi]$ .

## III. PROBLEM FORMULATION

As discussed in Section I that for those allpass real valued rational IIR filters with the numerator coefficients being the flip version of the denominator coefficients, if they are strictly stable, then they are not minimal phase. Since stability is a very important property because of safety reasons, stability has to be guaranteed. For some applications, such as some applications in analog-to-digital conversions, minimal phase property is also important. For these applications, the allpass characteristic is relaxed and a near allpass strictly stable minimal phase real valued rational IIR filter is designed.

To design such a filter, denote

$$\boldsymbol{\eta}_c^n(\omega) \equiv [1 \quad \cos \omega \quad \cdots \quad \cos M\omega]^T, \quad (1)$$

$$\boldsymbol{\eta}_s^n(\omega) \equiv [0 \quad \sin \omega \quad \cdots \quad \sin M\omega]^T, \quad (2)$$

$$\boldsymbol{\eta}_c^d(\omega) \equiv [\cos \omega \quad \cos 2\omega \quad \cdots \quad \cos N\omega]^T, \quad (3)$$

$$\boldsymbol{\eta}_s^d(\omega) \equiv [\sin \omega \quad \sin 2\omega \quad \cdots \quad \sin N\omega]^T, \quad (4)$$

$$\mathbf{x}_b \equiv [b_0 \quad b_1 \quad \cdots \quad b_M]^T \quad (5)$$

and

$$\mathbf{x}_a \equiv [a_1 \quad a_2 \quad \cdots \quad a_N]^T, \quad (6)$$

then we have

$$H(\omega) = \frac{(\boldsymbol{\eta}_c^n(\omega))^T \mathbf{x}_b - j(\boldsymbol{\eta}_s^n(\omega))^T \mathbf{x}_b}{1 + (\boldsymbol{\eta}_c^d(\omega))^T \mathbf{x}_a - j(\boldsymbol{\eta}_s^d(\omega))^T \mathbf{x}_a}. \quad (7)$$

The phase response of the filter is

$$\angle H(\omega) = \tan^{-1} \left( \frac{\mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T - \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) \mathbf{x}_a - (\boldsymbol{\eta}_s^n(\omega))^T \mathbf{x}_b}{\mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T + \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T) \mathbf{x}_a + (\boldsymbol{\eta}_c^n(\omega))^T \mathbf{x}_b} \right). \quad (8)$$

Denote  $\mathbf{x} \equiv [\mathbf{x}_a^T \quad \mathbf{x}_b^T]^T$  and a desired phase response as  $\angle H_d(\omega)$ . Define

$$E(\mathbf{x}, \omega) \equiv \mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T - \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) \mathbf{x}_a - (\boldsymbol{\eta}_s^n(\omega))^T \mathbf{x}_b - (\mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T + \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T) \mathbf{x}_a + (\boldsymbol{\eta}_c^n(\omega))^T \mathbf{x}_b) \tan(\angle H_d(\omega)) \quad (9)$$

It can be seen from equation (8) that if  $E(\mathbf{x}, \omega)$  is small  $\forall \omega \in [-\pi, \pi]$ , then  $\angle H(\omega)$  will be close to  $\angle H_d(\omega)$   $\forall \omega \in [-\pi, \pi]$ . Hence,  $E(\mathbf{x}, \omega)$  represents the phase error between the designed and the desired phase responses. Equation (8) can be further rewritten as

$$E(\mathbf{x}, \omega) = \frac{1}{2} \mathbf{x}^T \tilde{\mathbf{Q}}(\omega) \mathbf{x} + \tilde{\boldsymbol{\alpha}}^T(\omega) \mathbf{x}, \quad (10)$$

where

$$\tilde{\mathbf{Q}}(\omega) \equiv \begin{bmatrix} \mathbf{0} \\ \mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T - \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T) - (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^d(\omega))^T + \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^d(\omega))^T) \tan(\angle H_d(\omega)) \mathbf{0} \end{bmatrix} \quad (11)$$

and

$$\tilde{\boldsymbol{\alpha}}(\omega) \equiv \begin{bmatrix} \mathbf{0} \\ -(\boldsymbol{\eta}_s^n(\omega))^T - (\boldsymbol{\eta}_c^n(\omega))^T \tan(\angle H_d(\omega)) \end{bmatrix}. \quad (12)$$

Define  $h_1(\mathbf{x}, \omega) \equiv -1 - (\boldsymbol{\eta}_c^n(\omega))^T \mathbf{x}_a$ . If the filter is strictly stable [14], then we have  $h_1(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]$ . Similarly, define  $h_2(\mathbf{x}, \omega) \equiv -(\boldsymbol{\eta}_c^n(\omega))^T \mathbf{x}_b$ . If the filter is minimal phase, then we have  $h_2(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]$ . Denote  $\varepsilon$  as the acceptable bound on the maximum absolute allpass error, that is  $||H(\omega)|^2 - 1| < \varepsilon \quad \forall \omega \in [-\pi, \pi]$ . This is equivalent to

$$\begin{aligned} & \mathbf{x}_b^T (\boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_s^n(\omega))^T + \boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^n(\omega))^T) \mathbf{x}_b \\ & - \mathbf{x}_a^T (1 + \varepsilon) (\boldsymbol{\eta}_s^d(\omega)(\boldsymbol{\eta}_s^d(\omega))^T + \boldsymbol{\eta}_c^d(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) \mathbf{x}_a \\ & - 2(1 + \varepsilon) (\boldsymbol{\eta}_c^d(\omega))^T \mathbf{x}_a - 1 - \varepsilon < 0 \end{aligned} \quad (13)$$

and

$$\begin{aligned} & \mathbf{x}_a^T (1 - \varepsilon) (\boldsymbol{\eta}_s^d(\omega)(\boldsymbol{\eta}_s^d(\omega))^T + \boldsymbol{\eta}_c^d(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) \mathbf{x}_a \\ & - \mathbf{x}_b^T (\boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^n(\omega))^T + \boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^n(\omega))^T) \mathbf{x}_b \\ & + 2(1 - \varepsilon) (\boldsymbol{\eta}_c^d(\omega))^T \mathbf{x}_a + 1 - \varepsilon < 0 \end{aligned} \quad (14)$$

$\forall \omega \in [-\pi, \pi]$ . Define  $h_3(\mathbf{x}, \omega) \equiv \frac{1}{2} \mathbf{x}^T \mathbf{Q}_1(\omega) \mathbf{x} + \boldsymbol{\alpha}_1^T(\omega) \mathbf{x} + \beta_1$  and

$h_4(\mathbf{x}, \omega) \equiv \frac{1}{2} \mathbf{x}^T \mathbf{Q}_2(\omega) \mathbf{x} + \boldsymbol{\alpha}_2^T(\omega) \mathbf{x} + \beta_2$ , where

$$\mathbf{Q}_1(\omega) \equiv \begin{bmatrix} -2(1 + \varepsilon) (\boldsymbol{\eta}_s^d(\omega)(\boldsymbol{\eta}_s^d(\omega))^T + \boldsymbol{\eta}_c^d(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) & \mathbf{0} \\ \mathbf{0} & \boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^n(\omega))^T + \boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^n(\omega))^T \end{bmatrix}, \quad (15)$$

$$\mathbf{Q}_2(\omega) \equiv \begin{bmatrix} 2(1 - \varepsilon) (\boldsymbol{\eta}_s^d(\omega)(\boldsymbol{\eta}_s^d(\omega))^T + \boldsymbol{\eta}_c^d(\omega)(\boldsymbol{\eta}_c^d(\omega))^T) & \mathbf{0} \\ \mathbf{0} & -(\boldsymbol{\eta}_s^n(\omega)(\boldsymbol{\eta}_s^n(\omega))^T + \boldsymbol{\eta}_c^n(\omega)(\boldsymbol{\eta}_c^n(\omega))^T) \end{bmatrix}, \quad (16)$$

$$\boldsymbol{\alpha}_1(\omega) \equiv -2(1 + \varepsilon) \begin{bmatrix} (\boldsymbol{\eta}_c^d(\omega))^T \\ \mathbf{0} \end{bmatrix}, \quad (17)$$

$$\boldsymbol{\alpha}_2(\omega) \equiv 2(1 - \varepsilon) \begin{bmatrix} (\boldsymbol{\eta}_c^d(\omega))^T \\ \mathbf{0} \end{bmatrix}, \quad (18)$$

$$\beta_1 \equiv -1 - \varepsilon \quad (19)$$

and

$$\beta_2 \equiv 1 - \varepsilon. \quad (20)$$

Then we have  $h_3(\mathbf{x}, \omega) < 0$  and  $h_4(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]$ .

Hence, the design of a near allpass strictly stable minimal phase real valued rational IIR filter can be formulated as the following optimization problem:

**Problem (I)**

$$\min_{\mathbf{x}} \max_{\omega \in [-\pi, \pi]} |E(\mathbf{x}, \omega)|, \quad (21a)$$

$$\text{subject to } h_1(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (21b)$$

$$h_2(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (21c)$$

$$h_3(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi] \quad (21d)$$

and

$$h_4(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]. \quad (21e)$$

It is worth noting that this optimization problem involves a minimax nonsmooth cost function as well as both the linear and the quadratic functional inequality constraints. Compared to the problem discussed in [15], in which it consists of a smooth cost function, the method used in [15] cannot be applied to solve this optimization problem. To solve this optimization problem,  $|E(\mathbf{x}, \omega)|$  is approximated by the following function:

$$E_\delta(\mathbf{x}, \omega) \equiv \begin{cases} |E(\mathbf{x}, \omega)| & |E(\mathbf{x}, \omega)| \geq \frac{\delta}{2} \\ \frac{(E(\mathbf{x}, \omega))^2}{\delta} + \frac{\delta}{4} & |E(\mathbf{x}, \omega)| < \frac{\delta}{2} \end{cases}. \quad (22)$$

It can be easily shown that  $E_\delta(\mathbf{x}, \omega)$  is both continuous and differentiable  $\forall \mathbf{x} \in \mathfrak{R}^{M+N+1}$  and  $\forall \omega \in (-\pi, \pi)$ . Also, if  $\delta \rightarrow 0$ , then  $E_\delta(\mathbf{x}, \omega) - |E(\mathbf{x}, \omega)| \rightarrow 0$ . Hence,  $E_\delta(\mathbf{x}, \omega)$  is a good approximation of  $|E(\mathbf{x}, \omega)|$ , and Problem (I) can be approximated by the following smooth optimization problem:

**Problem (II)**

$$\min_{\mathbf{x}} \max_{\omega \in [-\pi, \pi]} E_\delta(\mathbf{x}, \omega), \quad (23a)$$

$$\text{subject to } h_1(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (23b)$$

$$h_2(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (23c)$$

$$h_3(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi] \quad (23d)$$

and

$$h_4(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]. \quad (23e)$$

The form of this optimization problem is the same as that in

[16], so our previous proposed method in [16] can be applied for solving this problem. A brief review of the method in [16] is summarized as follows. Problem (II) is equivalent to the following problem:

**Problem (III)**

$$\min_{\mathbf{x}} \alpha, \quad (24a)$$

$$\text{subject to } E_{\delta}(\mathbf{x}, \omega) \leq \alpha, \quad (24b)$$

$$h_1(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (24c)$$

$$h_2(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi], \quad (24d)$$

$$h_3(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi] \quad (24e)$$

and

$$h_4(\mathbf{x}, \omega) < 0 \quad \forall \omega \in [-\pi, \pi]. \quad (24f)$$

Define

$$P_{\delta'}(y) \equiv \begin{cases} y & y > \delta' \\ \frac{(y + \delta')^2}{4\delta'} & \delta' \geq y > -\delta' \\ 0 & y \leq -\delta' \end{cases} \quad (25)$$

and

$$\hat{J}(\delta', \delta, \alpha) \equiv \min_{\mathbf{x}} \int_{-\pi}^{\pi} \left( P_{\delta'}(E_{\delta}(\mathbf{x}, \omega) - \alpha) + \sum_{i=1}^4 P_{\delta'}(h_i(\mathbf{x}, \omega)) \right) d\omega. \quad (26)$$

Then Problem (III) is further equivalent to the following optimization problem:

**Problem (IV)**

$$\min_{\alpha} \lim_{\delta \rightarrow 0^+} \lim_{\delta' \rightarrow 0^+} \hat{J}(\delta', \delta, \alpha). \quad (27)$$

This problem is a standard smooth optimization problem and can be solved via many CAD tools, such as Matlab optimization toolbox.

#### IV. COMPUTER NUMERICAL SIMULATION RESULTS

Although there are plenty existing designs on allpass strictly stable real valued rational IIR filters, none of them are minimal phase. Hence, it is difficult to have a fair comparison. As minimal phase real valued FIR filters are a particular type of real valued rational filters satisfying both the minimal phase and the strictly stable conditions, minimal phase real valued FIR filters are compared. For an interesting purpose, conventional strictly stable non-minimal phase real valued rational allpass IIR filters are also compared.

Since fractional delay filters are found in many applications [7]-[12] including the A/D conversion application [17], a fractional delay strictly stable minimal phase real valued IIR filter is designed. The phase response of the filter is in the form of  $\angle H_d(\omega) = m\omega$  where  $m$  is a rational number. In this brief,  $m = \frac{1}{6}$  is chosen. As all

discrete-time filters are  $2\pi$  periodic, the frequency response of the corresponding ideal fractional delay filter contains a discontinuity at the frequencies  $\omega = \pi$  and  $\omega = -\pi$ . Hence, the passband of the filter excludes neighborhoods around  $\pi$  and  $-\pi$ . Denote the band of interest as  $B_i = [\Delta - \pi, \pi - \Delta]$ , where  $2\Delta$  refers to the transition bandwidth.  $\Delta$  depends on  $M$ ,  $N$  and  $\varepsilon$ . In general, the larger the values of  $M$ ,  $N$  and  $\varepsilon$  would result to a smaller value of  $\Delta$ . However, large

values of  $M$  and  $N$  would increase the computational efforts, while too small values of  $M$ ,  $N$  and  $\varepsilon$  may not result to a solution. To tradeoff among these specifications,  $M = 10$ ,  $N = 10$ ,  $\Delta = 0.05\pi$  and  $\varepsilon = -40$  dB (0.01) are chosen because these values are typical in many applications. In order to convert the nonsmooth optimization problem to a smooth one, the values of  $\delta$  and  $\delta'$  play an important role. If  $\delta$  and  $\delta'$  are large, then the optimization problem is smooth, but the difference between the original nonsmooth optimization problem and the approximated problem is large. On the other hand, if  $\delta$  and  $\delta'$  are small, then the difference between the original nonsmooth optimization problem and the approximated problem is small, but the problem becomes less smooth. To tradeoff between these factors,  $\delta = \delta' = 10^{-6}$  are chosen because this value is typical for most applications [16].

By following the formulation discussed in Section III and applying our proposed method discussed in [16] for solving the optimization problem, the near allpass strictly stable minimal phase real valued rational IIR filter could be designed. Since there are 21 coefficients in the designed IIR filter, a near allpass minimal phase FIR filter with 21 coefficients is designed for a comparison. The magnitude and the phase responses of the designed IIR filter, the conventional strictly stable non-minimal phase real valued rational allpass IIR filter and the FIR filter are shown in Figure 1a and Figure 1b, respectively. The absolute allpass errors and the absolute phase errors of these filters are shown in Figure 1c and Figure 1d, respectively. The poles and the zeros of the designed IIR filter, the conventional IIR filter and the FIR filter are shown in Figure 2a, Figure 2b and Figure 2c, respectively. It can be seen from Figure 2a that all the poles and the zeros of our designed IIR filter are strictly inside the unit circle. Hence, our designed IIR filter satisfies both the strictly stable and the minimal phase conditions. On the other hand, all the zeros of the conventional IIR filter are outside the unit circle. Hence, the conventional IIR filter is non-minimal phase.

Although it can be seen from Figure 2c that all the zeros of the FIR filter are strictly inside the unit circle, it can be seen from Figure 1c that the maximum absolute allpass error of the FIR filter is larger than -40dB. Hence, the FIR filter does not satisfy the maximum absolute allpass constraint. On the other hand, the maximum absolute allpass error of our designed IIR filter is -40.0529dB, in which it satisfies the required specification. Although the conventional IIR filter could ideally achieve the zero maximum absolute allpass error, the maximum absolute phase error of the conventional IIR filter is just closed to that of our designed IIR filter, while that of FIR filter is unacceptable.

Although it is hard to guarantee that the obtained solution is the global optimal solution, we have run the optimization algorithm using 50 different initial conditions and find that the solutions corresponding to all these initial conditions are the same. Hence, even though the obtained solution is a local optimal solution, it corresponds to the optimal solution within the most common ranges of filter coefficients.

## V. CONCLUSIONS

In this brief, the allpass condition is relaxed to a near allpass condition so that a strictly stable minimal phase real valued IIR filter is designed. The design problem is actually a minimax nonsmooth optimization problem subject to both linear and quadratic functional inequality constraints. To solve this problem, the nonsmooth cost function is approximated by a smooth function and our previous proposed method is applied for solving the problem. Computer numerical simulation results show that a small maximum absolute phase error could be achieved subject to a small maximum absolute allpass error.

## ACKNOWLEDGEMENT

The work obtained in this brief was supported by a research grant from an Australian Research Council.

## REFERENCES

- [1] Dennis R. Morgan and Christi K. Madsen, "Wide-band system identification using multiple tones with allpass filters and square-law detectors," *IEEE Transactions on Circuits and Systems—I: Regular Papers*, vol. 53, no. 5, pp. 1151-1165, 2006.
- [2] Yuan-Hau Yang and Ju-Hong Lee, "Design of 2-D recursive digital filters using nonsymmetric half-plane allpass filters," to appear in *IEEE Transactions on Signal Processing*.
- [3] Alfonso Fernandez-Vazquez and Gordana Jovanovic-Dolecek, "A new method for the design of IIR filters with flat magnitude response," *IEEE Transactions on Circuits and Systems—I: Regular Papers*, vol. 53, no. 8, pp. 1761-1771, 2006.
- [4] Jukka Rauhala and Vesa Välimäki, "Tunable dispersion filter design for piano synthesis," *IEEE Signal Processing Letters*, vol. 13, no. 5, pp. 253-256, 2006.
- [5] Antonio Petraglia, Jorge M. Cañive and Mariane R. Petraglia, "Efficient parametric fault detection in switched-capacitor filters," *IEEE Design and Test of Computers*, vol. 23, no. 1, pp. 58-66, 2006.
- [6] Xi Zhang, Wei Wang, Toshinori Yoshikawa and Yoshinori Takei, "Design of IIR orthogonal wavelet filter banks using lifting scheme," *IEEE Transactions on Signal Processing*, vol. 54, no. 7, pp. 2616-2624, 2006.
- [7] Chien-Cheng Tseng, "Closed-form design of digital IIR integrators using numerical integration rules and fractional sample delays," *IEEE Transactions on Circuits and Systems—I: Regular Papers*, vol. 54, no. 3, pp. 643-655, 2007.
- [8] M. A. Al-Alaoui, "Using fractional delay to control the magnitudes and phases of integrators and differentiators," *IET Signal Processing*, vol. 1, no. 2, pp. 107-119, 2007.
- [9] Tian-Bo Deng, "Noniterative WLS design of allpass variable fractional-delay digital filters," *IEEE Transactions on Circuits and Systems—I: Regular Papers*, vol. 53, no. 2, pp. 358-371, 2006.
- [10] Chien-Cheng Tseng, "Improved design of digital fractional-order differentiators using fractional sample delay," *IEEE Transactions on Circuits and Systems—I: Regular Papers*, vol. 53, no. 1, pp. 193-203, 2006.
- [11] Hüseyin Hacıhabiboğlu, Banu Günel and Ahmet M. Kondoç, "Analysis of root displacement interpolation method for tunable allpass fractional-

- delay filters," *IEEE Transactions on Signal Processing*, vol. 55, no. 10, pp. 4896-4906, 2007.
- [12] Kyung-Ju Cho, Ji-Suk Park, Byeong-Kuk Kim, Jin-Gyun Chung and Keshab K. Parhi, "Design of a sample-rate converter from CD to DAT using fractional delay allpass filter," *IEEE Transactions on Circuits and Systems—II: Express Briefs*, vol. 54, no. 1, pp. 19-23, 2007.
- [13] Michael Gerzon and Peter G. Graven, "Optimal noise shaping and dither of digital signals," *Audio Engineering Society Convention*, paper no. 2822, 1989.
- [14] W. S. Lu, "Design of stable IIR digital filters with equiripple passbands and peak-constrained least squares stopbands," *IEEE Transactions on Circuits and Systems—II: Analog and Digital Signal Processing*, vol. 46, no. 11, pp. 1421-1426, 1999.
- [15] Charlotte Yuk-Fan Ho, Bingo Wing-Kuen Ling, Yan-Qun Liu, Peter Kwong-Shun Tam and Kok-Lay Teo, "Optimal design of magnitude responses of rational infinite impulse response filters," *IEEE Transactions on Signal Processing*, vol. 54, no. 10, pp. 4039-4046, 2006.
- [16] D. C. Jiang, K. L. Teo and W. Y. Yan, "A new computational method for the functional inequality constrained minimax optimization problem," *Mathematical and Computer Modelling*, vol. 33, no. 6, pp. 53-63, 1997.
- [17] Qiuting Huang and Paul T. Maguire, " $\Sigma$ - $\Delta$  modulator-based linear phase IIR filters," *The 37<sup>th</sup> Midwest Symposium on Circuits and Systems, MWSCAS*, vol. 2, pp. 1087-1090, 3-5 August 1994.

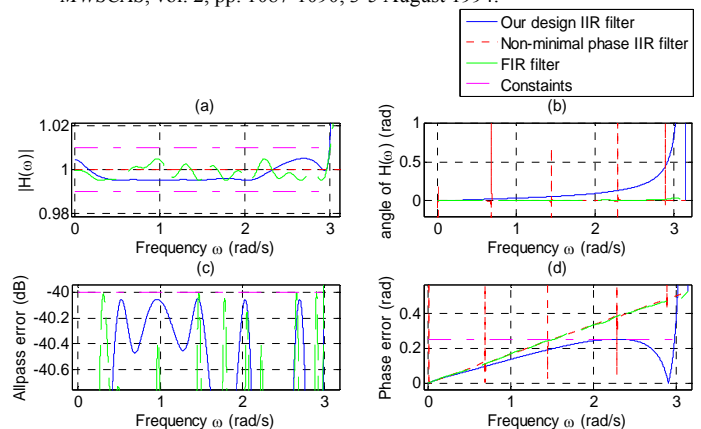


Figure 1. (a) Magnitude response, (b) phase response, (c) allpass error, and (d) phase error of the designed near allpass strictly stable minimal phase IIR filter, a conventional allpass non-minimal phase IIR filter and a near allpass minimal phase FIR filter.

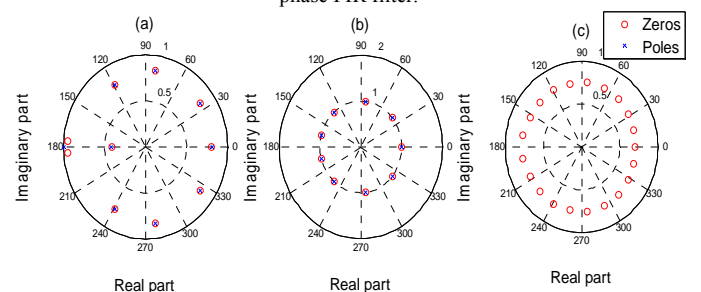


Figure 2. Pole zero plot of the designed near allpass strictly stable minimal phase IIR filter, a conventional allpass non-minimal phase IIR filter and a near allpass minimal phase FIR filter.