

Article (refereed)

Cape, J. Neil; Hamilton, Richard; Heal, Mathew R.. 2009 Reactive uptake of ozone at simulated leaf surfaces: implications for 'non-stomatal' ozone deposition. *Atmospheric Environment*, 43 (5). 1116-1123. doi:10.1016/j.atmosenv.2008.11.007

Copyright © 2008 Elsevier Ltd All rights reserved.

This version available at <http://nora.nerc.ac.uk/3934/>

NERC has developed NORA to enable users to access research outputs wholly or partially funded by NERC. Copyright and other rights for material on this site are retained by the authors and/or other rights owners. Users should read the terms and conditions of use of this material at <http://nora.nerc.ac.uk/policies.html#access>

This document is the author's final manuscript version of the journal article, incorporating any revisions agreed during the peer review process. Some differences between this and the publisher's version remain. You are advised to consult the publisher's version if you wish to cite from this article.

<http://www.elsevier.com/>

Contact CEH NORA team at
nora@ceh.ac.uk

Reactive uptake of ozone at simulated leaf surfaces: implications for ‘non-stomatal’ ozone flux.

J. Neil Cape^{1*}, Richard Hamilton^{1,2} and Mathew R. Heal²

¹Centre for Ecology & Hydrology, Bush Estate, Penicuik, Midlothian EH26 0QB, UK

²School of Chemistry, University of Edinburgh, West Mains Road, Edinburgh EH9 3JJ, UK

* contact author: email jnc@ceh.ac.uk telephone +44 (0)131 445 8533

Abstract

The reaction of ozone (O₃) with α -pinene has been studied as a function of temperature and relative humidity and in the presence of wax surfaces that simulate a leaf surface. The objective was to determine whether the presence of a wax surface, in which α -pinene could dissolve and form a high surface concentration, would lead to enhanced reaction with O₃. The reaction of O₃ itself with the empty stainless steel reactor and with aluminium and wax surfaces demonstrated an apparent activation energy of around 30 kJ mol⁻¹ for all the surfaces, similar to that observed in long-term field measurements of O₃ fluxes to vegetation. However the absolute reaction rate was 14 times greater for aluminium foil and saturated hydrocarbon wax surfaces than for stainless steel, and a further 5 times greater for beeswax than hydrocarbon wax. There was no systematic dependence on either relative or absolute humidity for these surface reactions over the range studied (20-100% RH). Reaction of O₃ with α -pinene occurred at rates close to those predicted for the homogeneous gas-phase reaction, and was similar for both the empty reactor and in the presence of wax surfaces. The hypothesis of enhanced reaction at leaf surfaces caused by enhanced surface concentrations of α -pinene was therefore rejected. Comparison of surface decomposition reactions on different surfaces as reported in the literature with the results obtained here demonstrate that the loss of ozone at the earth’s surface by decomposition to molecular oxygen (i.e. without oxidative reaction with a substrate) can account for measured ‘non-stomatal’ deposition velocities of a few mm s⁻¹. In order to quantify such removal, the effective molecular surface area of the vegetation/soil canopy must be known. Such knowledge, combined with the observed temperature dependence, provides necessary input to global-scale models of O₃ removal from the troposphere at the earth’s surface.

Key words

Surface fluxes; dry deposition; biogenic VOCs; α -pinene; ozone destruction; leaf surface wax; epicuticular wax

Introduction

The removal of ozone (O₃) from the atmosphere by deposition at the earth’s surface is an important process governing the budget of O₃ in the troposphere, and approximately balances the transport of O₃ downwards from the stratosphere into the troposphere (Lamarque, et al., 2005, Lelieveld and Dentener, 2000). Consequently, it is important to be able to measure and model the flux to the ground across a broad range of vegetation types and climatic conditions. Actual measurements of surface fluxes are difficult to make, as they are constrained by instrumental availability, and

the need for appropriate micrometeorological conditions in which to make the measurements. Nevertheless, much progress has been made in understanding the contributory processes and sinks of O₃, whether they be to soil, to water, to vegetation, or to the canopy space where biogenic emissions of O₃-reactive compounds occur.

Interest in surface fluxes of O₃ has also been stimulated because of its reactivity towards plants, and consequent limitations on growth, or occurrence of visible damage symptoms. Several metrics for evaluating exposure, and relating exposure to effects, have been developed (Fuhrer, et al., 1997, Mauzerall and Wang, 2001), but there have been moves away from a simple exposure metric (measured as a product of O₃ concentration and time) to a metric based on the uptake of O₃ by plant leaves through stomata (Emberson, et al., 2000, Musselman and Massman, 1999). Measurements of the stomatal O₃ flux are inferred from measurements above plant canopies by assuming that the flux into leaves is proportional to the (measured) water vapour flux out of leaves when stomata are open, based simply on the relative rates of molecular diffusion of water vapour and O₃ to/from the sub-stomatal cavity (Altimir, et al., 2002, Zeller and Nikolov, 2000). The 'non-stomatal' flux is inferred by subtracting the calculated stomatal flux from the measured total flux. There is now a significant body of published literature for many plant types based on long-term measurements of O₃ fluxes. These measurements have consistently shown that surface fluxes can be divided into three components: stomatal uptake (relevant to effects), 'non-stomatal' uptake, and gas-phase reactions. Sometimes, the last two processes are not distinguished; the former refers to assumed loss of O₃ on plant (or soil) surfaces, and the latter refers to reactions of ozone with molecules such as nitric oxide (NO) or biogenic volatile organic compounds (BVOCs) in the canopy space, or immediately above the plant canopy, (e.g. Kurpius and Goldstein, 2003). However, the role of biogenic VOCs may not be confined to gas-phase reactions; hydrocarbons dissolve in plant surface waxes (Binnie, et al., 2002, Brown, et al., 1998), and may form high surface concentrations, acting as a potential reactive sink in the leaf surface.

Leaf surfaces are coated with waxes, formed during leaf expansion and development. Most of the components of plant waxes (at least for most temperate crop and forest species) are saturated alkanes or oxygenated alkanes (Jetter, et al., 2006), i.e. without any obvious reactive sites for O₃. The detailed mechanism of O₃ removal by the 'non-stomatal' route (i.e. on leaf surfaces) is not known, although several researchers have demonstrated that losses of O₃ other than through stomata can be the dominant sink for O₃ as an annual budget. A combined measurement and modelling approach for a ponderosa pine forest in southern California showed that 37% of the annual O₃ removal could be explained by in-canopy gas-phase reactions, with 21.5% lost to surfaces and 41.5% to stomata (Kurpius and Goldstein, 2003). Five years of measurement over a Norway spruce forest in Denmark suggested that stomatal uptake only contributed 21% of the total O₃ flux (Mikkelsen, et al., 2004); measurements during summer over a range of different vegetation types, when stomatal uptake might be expected to be at a maximum, gave values between 14 and 69% of the total (Cieslik, 2004); long-term measurements over moorland showed stomatal uptake contributing only 30% of the total over 4 years (Fowler, et al., 2001). In these examples no distinction was made between surface uptake and gas-phase reaction. However, the overall removal rate can depend markedly on surface wetness (Altimir,

et al., 2006, Fuentes, et al., 1992, Grantz, et al., 1997, Grantz, et al., 1995, Lamaud, et al., 2002, Pleijel, et al., 1995), suggesting a major role for surface removal. Both inhibition and enhancement of O₃ fluxes to wet surfaces have been observed, depending on the plant species under investigation.

This paper presents a study using simulated leaf surfaces to test the specific hypothesis that surface reaction of O₃ with (dissolved) BVOCs can occur on leaf surfaces, thereby enhancing the surface flux of O₃. The reaction rate of O₃ with α -pinene has been measured in the absence and in the presence of wax-covered surfaces, simulating the epicuticular surfaces of plant leaves. The reaction rate was studied over a range of ambient temperatures and humidity.

Methods

Reaction chamber

All experiments took place in a Conviron CMP 3246 controlled environment exposure cabinet, which enabled the overall control of temperature and relative humidity. The reaction chamber itself, placed inside the cabinet, was made from stainless steel, with internal dimensions of 0.5 m \times 0.5 m \times 1 m. Figure 1 shows a schematic of the experimental system. Oxygen from an external cylinder was supplied to an electric discharge O₃ generator (Dryden Aqua OZ500); for most experiments a constant O₃ production rate was used, which gave a concentration in the reaction chamber of around 130 ppb (parts in 10⁹ by volume). The O₃ source was diluted by charcoal-filtered air pumped from within the cabinet; average flow rates of around 0.02 m³ min⁻¹ were recorded using a dry-gas meter placed upstream of the pump. The exhaust air from the chamber was vented to the outside of the building through a mirror dewpoint meter (Michell Instruments Series 3000). Temperatures inside the chamber were recorded using a chromel/alumel K-type thermocouple.

The inlet O₃ sampling line (0.125" o.d. stainless steel) was sealed to the interior of the chamber so as to sample from the inlet air as it entered the chamber, thereby ensuring that sampling was undertaken at the chamber internal pressure, rather than the slightly higher pressure of the inlet tube itself. The outlet air stream was sampled immediately downstream of the reaction chamber. The inlet and outlet air streams were alternately sampled over five minute periods, using a 3-way stainless steel solenoid valve controlled by a Campbell Scientific 21X micrologger. The first minute's data after switching the valve were not used for data analysis. O₃ concentrations in the inlet and outlet air were measured using a Thermo Environmental Instruments 49C O₃ analyser (dual channel, UV absorption, nominal precision 1 ppb). Mixing within the chamber was achieved using a stainless steel fan mounted on one wall; the efficiency of mixing was measured by using an O₃-reactive surface sink to assess the maximum surface flux achievable (see later).

Methods for generating controlled α -pinene concentrations

α -Pinene was introduced into the chamber using a diffusion source. After several trials of different methods, a reliable source with the appropriate release rate to provide an air concentration of around 100 μ g m⁻³ was devised by placing 0.5 ml pure α -pinene (Sigma-Aldrich, as received) in a 2 ml glass sample vial sealed with a polyethylene plug (Chromacol) that was slightly permeable to the vapour. The vial was maintained at the constant temperature of the cabinet inside a glass bottle through

which a charcoal-filtered air flow of around $0.002 \text{ m}^3 \text{ min}^{-1}$ was maintained, leading into the reaction chamber. Measurements made over a period of up to 24 days and over a range of temperatures (5 to $35 \text{ }^\circ\text{C}$) showed that the rate of mass loss was approximately linear for a given vial, at ca. 3 mg d^{-1} . The rate varied from vial to vial and was not predictably related to temperature, so the mass of each sample vial was measured at the beginning and end of each experiment, and the average α -pinene concentration was calculated based on the change in mass and the measured overall air flow rate through the chamber.

Methods for producing wax surfaces

To prepare a model leaf surface, a stainless steel plate ($0.31 \text{ m} \times 0.71 \text{ m}$) was covered with a pre-weighed sheet of aluminium foil as a substrate for wax deposition. For the experiments a target wax coverage of 1 mg cm^{-2} was used, equivalent to 2.20 g for the area of the steel plate. This mass of wax was dissolved in 25 ml of dichloromethane at $40 \text{ }^\circ\text{C}$ then decanted in 3 aliquots into a small glass bottle attached to a spray nebulizer (Badger Airbrush) driven by a compressed gas propellant. The contents of the bottle were then evenly sprayed onto the foil-covered plate in a fume cupboard. Rapid evaporation of the dichloromethane produced an even coating of wax on the Al foil. The process was repeated with the remaining two aliquots to ensure that the plate was adequately covered. The actual mass of wax on the foil surface was determined by weighing the wax-coated foil at the end of each experiment.

Data analysis techniques

The removal of O_3 within the empty reaction chamber was calculated from the difference in O_3 concentrations between the inlet and outlet ($\Delta[\text{O}_3]$), the air flow rate (F), the internal surface wall area (A) and the well-mixed (outlet) concentration $[\text{O}_3]$, to give a removal 'resistance' (R_w) having units of s m^{-1} :

$$R_w = \frac{[\text{O}_3] \cdot A}{\Delta[\text{O}_3] \cdot F} \quad (1)$$

R_w was measured as a function of temperature between 10 and $35 \text{ }^\circ\text{C}$. This overall resistance comprises a turbulent transfer resistance to the surface (R_t) and a surface resistance (R_s), acting in series.

The mass flux of O_3 to the stainless steel walls of the chamber is given by:

$$[\text{O}_3]/R_w \text{ g m}^{-2} \text{ s}^{-1}$$

where concentration is expressed in g m^{-3} ,

and the loss rate to the walls is then:

$$A \cdot [\text{O}_3]/R_w = \Delta[\text{O}_3] \cdot F \text{ g s}^{-1}.$$

In order to estimate the transfer resistance (R_t), which was assumed to be invariant for fixed air flow rates and fan mixing speed, a sheet of plastic-backed absorbent paper, thoroughly wetted with potassium iodide solution (which reacts rapidly with O_3) was introduced into the base of the chamber. The overall loss of O_3 measured as $\Delta[\text{O}_3] \cdot F$ was then equated to the loss to the steel walls ($A - A_{\text{abs}}$) $\cdot [\text{O}_3]/R_w$ plus the loss to the absorbent surface $A_{\text{abs}} \cdot [\text{O}_3]/R_{\text{abs}}$, where A_{abs} is the area of the absorbent paper. The value of $R_{\text{abs}} = R_t + (R_s)_{\text{abs}}$ can thus be obtained, and is taken to be equivalent to R_t , on the assumption that $(R_s)_{\text{abs}}$ is effectively zero for the reactive absorbent surface. Four replicate experiments over a period of a month gave a value for $R_{\text{abs}} \sim R_t$ of $206 (\pm 25)$

s m^{-1} . This is negligible relative to typical values of R_w of around $3 \times 10^4 \text{ s m}^{-1}$ (see below), and indicates good mixing within the reaction chamber.

In order to test the uptake of O_3 by different surfaces, the steel plate covered in a sheet of aluminium foil (with and without a wax coating) was introduced, and a similar set of calculations undertaken using the values of R_w and R_t to measure R_s for the different surfaces over a range of temperatures.

A similar calculation was done in the presence of α -pinene, where an additional O_3 loss term was included:

$$\Delta[\text{O}_3].F = (A-A_s).[O_3]/R_w + A_s.[O_3]/R_s + k.V.[O_3].[\alpha\text{-pinene}] \quad (2)$$

where V is the volume of the reaction chamber (0.25 m^3).

In this case the reaction rate coefficient (k , $\text{m}^3\text{g}^{-1}\text{s}^{-1}$) includes both the homogeneous gas-phase reactions of O_3 with α -pinene, and any reactions occurring at the walls or other surfaces in the chamber. Only the inlet concentration of α -pinene is known (from the diffusion source), so the effective well-mixed concentration of α -pinene to be used in Equation 2 was calculated by assuming that the initial reaction with O_3 had unit molar stoichiometry. In a typical experiment, α -pinene was introduced to the chamber and allowed to equilibrate with the wax-coated Al foil (2-3 h) before introduction of O_3 . After a new equilibrium had been established, the reaction rate was measured, then the α -pinene source was turned off, and a new equilibrium was established for the box containing the wax plate. The reaction rate with α -pinene was taken as the simple difference between the two reaction rates, with and without α -pinene present. In some experiments the α -pinene source was repeatedly attached and removed; no significant hysteresis was observed.

Results

Empty box (reaction of O_3 with stainless steel)

Over 50 experiments were conducted over a period of 14 months, at temperatures between 8 and 33 °C and dew points between 6 and 19 °C. There was a strong dependence of the surface resistance (R_s) on temperature (Figure 2), and although there was some variation between experiments, this was not related to water vapour concentration, whether expressed as absolute or relative humidity. The dependence can be expressed in an Arrhenius form:

$$\ln(R_s) = 31.3 (\pm 4.1) \times 10^3/RT + 0.2 (\pm 1.7) \quad (3)$$

where the error terms are the standard errors of the fitted parameters. The Pearson correlation coefficient (r^2) was 0.52. This implies a reaction with an activation energy of 31 kJ mol^{-1} . In all, 22 experiments were conducted at a temperature of 23.5 (± 0.3) °C, with an average absolute value of R_s of 4.4 (± 0.8) $\times 10^5 \text{ s m}^{-1}$; the predicted value from Equation 3 is 4.0 $\times 10^5 \text{ s m}^{-1}$.

There was some evidence of a general increase in variability over time. The data from the 24 experiments in April 2005 were best fitted by:

$$\ln(R_s) = 40.1 (\pm 3.8) \times 10^3/RT - 3.28 (\pm 1.55) \quad (4)$$

with an r^2 of 0.84,

while the data from the 31 experiments in June 2006 were best fitted by:

$$\ln(R_s) = 15.2 (\pm 5.9) \times 10^3/RT + 6.6 (\pm 2.4) \quad (5)$$

but this relationship, although statistically significant, had an r^2 of only 0.19.

The respective predicted and measured values at 23.5 °C were $4.3 \times 10^5 \text{ s m}^{-1}$ (Eqn.4) (measured $4.5 (\pm 1.0) \times 10^5$) and $3.5 \times 10^5 \text{ s m}^{-1}$ (Eqn.5) (measured $4.4 (\pm 0.8) \times 10^5$), respectively.

In the following calculations for estimating fluxes to other surfaces in the reaction chamber, the rate of loss to the steel walls (which must be subtracted from the overall ozone loss to obtain the rate of loss to the other surface) was calculated using either Equation 4 or Equation 5, depending on the date of the experiments.

Flux to aluminium foil

Aluminium foil was used as a substrate for building the artificial leaf surfaces, so the flux and reaction of O₃ with the bare surface was measured in a series of 30 experiments over a range of temperatures. The results are shown in Figure 2. The typical uncertainty (combined error from the calculation) for each value is 15%. As for the steel walls, the surface flux increased with temperature with an apparent activation energy of $25 (\pm 8) \text{ kJ mol}^{-1}$. The reaction rate with Al foil was significantly greater than with stainless steel; the predicted R_s at 23.5 °C was $2.8 \times 10^4 \text{ s m}^{-1}$ compared with $4.0 \times 10^5 \text{ s m}^{-1}$ for steel.

Flux to paraffin wax

The first artificial leaf surface to be constructed was made from paraffin wax (melting point 49-52 °C, Fisher Chemicals, Loughborough, UK, used as received) as described above, with an average wax loading of 0.4 mg cm^{-2} on the Al foil. The results are shown in Figure 2, again with an apparent activation energy, of $23 (\pm 19) \text{ kJ mol}^{-1}$, although the uncertainty on this is much larger than for the uncoated foil, partly because of the smaller number of experiments (9). The absolute values of R_s were not significantly different from those for the substrate Al foil. No effect of differences in surface coverage was observed.

Flux to beeswax

Beeswax was chosen as a potentially ozone-reactive wax, as it contains unsaturated long-chain hydrocarbons. The surface flux to beeswax (refined, yellow, ACROS Organics, Geel, Belgium, used as received) was significantly faster than to paraffin wax, even though the coverage achieved in the experiments was variable, and on average only 0.1 mg cm^{-2} . The apparent activation energy from 10 experiments at a range of temperatures was $16 (\pm 6) \text{ kJ mol}^{-1}$, and there was no obvious dependence on the wax coverage achieved. However, the overall rate of reaction was almost 5 times greater than to paraffin wax or Al foil, with an estimated R_s at 23.5 °C of $6.0 \times 10^3 \text{ s m}^{-1}$. This surface resistance is still 30 times greater than the estimated gas-phase transfer resistance (R_t) measured for the 'perfect' sink surface, so reaction rates at the surface were controlled by the surface itself rather than by rates of transfer from the gas-phase.

Reactions with α -pinene

An initial set of experiments investigated the reactions of O₃ with α -pinene in the empty steel box. The loss of O₃ in the box was measured with and without the addition of a known mass flow of α -pinene, and the difference in O₃ loss is attributed to the sum of the gas-phase reaction of O₃ with α -pinene and any reactions which may have occurred on the wall surfaces. A set of 7 experiments, all at 23.5 °C, gave an effective rate coefficient for the reaction of $1.4 (\pm 0.4) \times 10^{-16} \text{ cm}^3 \text{ molec}^{-1} \text{ s}^{-1}$, where the uncertainty is the standard deviation ($n = 7$). Introduction of the Al foil made little difference to the effective rate coefficient, for 5 experiments at 3.6 °C and 2 experiments at 33.5 °C (Figure 3), where the values of k were $8.6 (\pm 2.1) \times 10^{-17} \text{ cm}^3 \text{ molec}^{-1} \text{ s}^{-1}$ and $2.0 (\pm 0.2) \times 10^{-16} \text{ cm}^3 \text{ molec}^{-1} \text{ s}^{-1}$, respectively.

The original hypothesis – that O₃ and α -pinene react on leaf surfaces in addition to the gas-phase, because of the presence of epicuticular waxes – was then tested by reacting α -pinene with O₃ with a wax-coated foil surface in the chamber. In these experiments, the α -pinene was introduced first and allowed to equilibrate with the wax surface before the O₃ was introduced, and the steady-state removal rate measured. The α -pinene source was then removed, and the subsequent reaction of O₃ with the surfaces in the box was measured, again after several hours equilibration, by which time any α -pinene that had been adsorbed on the wax surface would have desorbed and left the reactor. The results of 2 experiments at each of 3 temperatures (3.6, 23.5 and 33.7 °C) are shown in Figure 3. The reaction rate between O₃ and α -pinene in the presence of a wax surface is not significantly different from that with the empty box, i.e. the hypothesis that the solution /adsorption of α -pinene in the surface wax leads to enhanced removal of O₃ by reaction with adsorbed α -pinene, has to be rejected. Similar results were found in 6 experiments with beeswax (Figure 3).

Discussion

Interest in the rate of reaction of O₃ with surfaces has led to experimental studies by a range of different researchers: losses of O₃ to dust particles in the atmosphere, such as soot (Kamm, et al., 1999), or mineral dust (Hanisch and Crowley, 2003, Sullivan, et al., 2004), have been studied in a variety of experimental systems. As part of these studies, loss rates to ‘inert’ surfaces have also been measured. Although there have been no controlled laboratory measurements of loss rates to plant leaf surfaces prior to this study, interest in O₃ losses and reactions in indoor environments has led to several studies of O₃ reaction on the surfaces of building materials and furnishings (Grøntoft and Raychaudhuri, 2004, Nicolas, et al., 2007), particularly in aircraft (Coleman, et al., 2008). The deliberate removal of O₃ from air has received considerable interest in terms of suitable catalysts (Dhandapani and Oyama, 1997) or absorbents such as activated charcoal. Each discipline has used slightly different methods of expressing their results: the rate of O₃ loss may be expressed in terms of the reaction probability (γ), or as a deposition velocity (v_d), with appropriate correction for the rate of transfer of O₃ molecules to the reacting surface. These different measures may be related to the surface resistance (R_s) used in this study by the following:

$$R_s = 1/v_d, \text{ where } v_d \text{ is corrected for turbulent transfer to the surface}$$

$R_s = 4/(\gamma \cdot \langle v \rangle)$, where $\langle v \rangle$ is the mean Boltzmann collision velocity for O₃ molecules at a surface, dependent upon (temperature)^{1/2} and molecular mass, and equivalent to 360 m s⁻¹ at 293 K.

In some experiments, results are expressed in terms of a first-order rate coefficient for wall reactions (k) that can be related to R_s by:

$R_s = A/(k \cdot V)$, where A and V are the internal surface area and volume of the reactor, respectively.

Given these conversion equations, the results from this experiment can be set in the context of a wide range of similar data relating to reaction and/or decomposition of O₃ on solid surfaces. A summary of O₃ fluxes to a range of relevant surfaces is shown in Table 1, converted into the same units of surface resistance (R_s) as given above. Many of these refer to instantaneous reaction rates, which change with time during an experiment, rather than those that would apply at equilibrium under steady-state conditions, as in our experiments.

There have been few systematic studies of the temperature-dependence of this reaction, although an apparent activation energy for reaction with dry soot aerosol during the ‘slow reaction’ phase of 46 kJ mol⁻¹ has been measured (Kamm, et al., 1999). Although this is similar to the values observed in this study (Figure 2), the reaction with soot is undoubtedly more complex than with the ‘inert’ surfaces used here (steel, Al foil and wax), but may reflect the underlying energy dependence of the heterogeneous decomposition of O₃ to O₂ which is suggested as the rate-determining step. In many of the studies with mineral dust aerosols, surfaces show a very rapid uptake of O₃ followed by a slower rate of O₃ loss, and gradual deactivation of the surface, accompanied by evolution of molecular O₂ (Karagulian and Rossi, 2006). In our study, the initial reaction rate was not recorded, only the steady-state condition after several hours’ exposure.

The effects of humidity have been studied in some experiments, although many of the measurements have been made in totally dry air, in very different conditions from those that would obtain in the real troposphere. Where O₃ loss rates have been measured explicitly as a function of humidity, initial rapid reaction rates in dry air were greatly reduced as humidity increased, leading to a lower ‘plateau’ at RH > 30% (Mogili, et al., 2006). This behaviour is interpreted as competition between water vapour and O₃ molecules for active sites on the aerosol surface, and the eventual accumulation of several monolayers of water on the surface at RH > 30%. However, for ‘aged’ or reactive surfaces, the surface resistance tends to decrease as humidity increases (Table 1), but in some experiments no dependence on humidity was observed (Sullivan, et al., 2004). These observations confirm the lack of humidity dependence noted in our study, where RH varied only between 20 and 100%, and ‘aged’ surfaces were used. In controlled experiments with artificial mineral substrates, surface wetness or layers of water on the surface would not lead to the dissolution or leaching of O₃-reactive materials, and the reaction of O₃ at the surface may appear similar to reaction with pure water, albeit modified by being constrained to a surface layer (Grøntoft, et al., 2004). However, for potentially reactive surfaces such as wood or leaves, surface wetness may also lead to leaching or dissolution of materials from

the surface, and these (rather than simple decomposition of O₃) may determine the actual surface resistance and surface flux of O₃ to field-grown plants.

In general, the initial reaction rates with surfaces are reported to be higher at smaller concentrations of O₃, interpreted as a feature of surface saturation of reactive sites, albeit partially reversible by removing O₃. The initial rates reported in Table 1 refer to a system which is not in steady state, in contrast to the conditions in our experiments, where the observed removal rates are under thermodynamic rather than kinetic control. In one study (Mogili, et al., 2006), the reaction rate at high humidity appeared to be zero-order in O₃. The order of the reaction was not studied in our experiments, because the inlet O₃ concentration was approximately constant.

The following conclusions may be drawn from Table 1: 'inert' surfaces such as glass, PTFE or stainless steel have high surface resistances, while Al has a lower surface resistance, possibly because metallic Al exposed to the atmosphere is covered in a thin oxide (Al₂O₃) layer, and therefore behaves in a similar way to Al₂O₃ aerosol particles, which have been the subject of several experimental studies (Mogili, et al., 2006, Sullivan, et al., 2004, Usher, et al., 2003). Non-reactive (alkane) wax layers might be expected to show similar reactivity to paints or plastics, and this is indeed observed, while untreated wood surfaces are more reactive, and approach the reactivity of living plant material.

The results presented above for reactions in the absence of α -pinene show that the 'steady-state' loss of O₃ on 'inert' surfaces is temperature-dependent, with a common apparent activation energy of around 30 kJ mol⁻¹. This suggests that O₃ is lost through heterogeneous decomposition at the surface. The absolute reaction rate depends on other properties of the surface; stainless steel was least reactive of all the surfaces studied, approximately 14 times less reactive (as measured by the surface resistance) than aluminium foil or paraffin wax. This is consistent with earlier data (see Table 1), where R_s for stainless steel was 6.5 times greater than for aluminium when measured in the same apparatus (Cano-Ruiz, et al., 1993). The additional reactivity of aluminium (coated in a surface layer of Al₂O₃) may relate to the availability of surface reaction sites for O₃ adsorption and reaction, as noted by authors who have investigated O₃ uptake and reaction on Al₂O₃ aerosols (Mogili, et al., 2006, Sullivan, et al., 2004, Usher, et al., 2003).

The similar reactivity of the paraffin wax surface may reflect the full saturation of the wax molecules, in contrast to polyethylene, which appears to be more reactive (lower R_s) than aluminium when compared in the same experiment (Table 1). Although chemically similar to a saturated wax surface, the polymer may still contain a significant number of reactive sites for O₃. The 5-times greater reactivity of beeswax in our experiments can be ascribed to the presence of unsaturated molecules in the beeswax, and/or may be because of a rougher surface structure. An experiment using C₈-alkene and C₈-alkane coatings on silica particles showed a 2-fold larger initial reaction rate for an alkene-coated surface than an alkane-coated surface (Usher, et al., 2003). The absolute resistances for these reactions in Table 1 refer to the initial reaction rates, which decreased markedly with exposure time, so cannot be compared directly with the values obtained in our experiments.

In studies of powders and building materials, the accessible surface area (as opposed to the geometric surface area) is explicitly measured as an important factor in normalising the chemical reaction rate. For vegetation, this is explicitly taken into account in many dry deposition models, even though deposition velocities (and surface resistances) measured above a vegetation canopy are usually expressed in terms of the geometric land area below the measurement point. This has to be multiplied by the (two-sided) leaf area index (LAI) as a measure of the effective surface area accessible for O₃ destruction. Moreover, the fine-scale structure of leaf surfaces, which may be covered in trichomes or semi-crystalline epicuticular waxes, should also be considered. For example, a Scots pine needle surface is covered in C₂₉-alkanol wax tubes, typically 1.5 µm long and 150 nm in diameter, at a density of 10 tubes µm⁻² (Crossley and Fowler, 1986), leading to an increase in surface area by a factor of 7 relative to a smooth wax surface, even without consideration of the effective area at the molecular scale. The effective area available for O₃ destruction of a plant canopy with a (two-sided) LAI of 5, typical of a Scots pine forest (Bealde, et al., 1982), may therefore be over 30 times the ground area, and it should therefore not be surprising that the surface resistance for O₃ loss to vegetation is as low as several hundred s m⁻¹ when the surface resistance for an ‘inert’ smooth wax surface is 3 × 10⁴ s m⁻¹, as measured in this study. No chemical reaction of O₃ with a reactive substance at the surface is required – the heterogeneous decomposition of O₃ to molecular O₂ would be expected to occur at rates similar to this on all surfaces exposed to a humid atmosphere.

Conclusions

Ozone is generally regarded as having a very low rate of reaction or decomposition at ‘inert’ surfaces, as shown for stainless steel in the experimental results reported here. For more polar surfaces, because of surface oxide groups and/or the presence of thin layers of water molecules (as would be expected for polar surfaces in most tropospheric situations), the decomposition of O₃ is enhanced relative to ‘inert’ surfaces, even on surfaces that are well ‘aged’ and where specific surface reaction sites have been reacted or blocked. The apparent activation energy for this reaction is around 30 kJ mol⁻¹, leading to an increase in the removal rate at the surface with ambient temperatures by a factor of 2 between 9 and 25 °C. The absolute reaction rate appears to depend on the effective surface area at a microscopic scale. Although this is explicitly recognised when dealing with dusts or aerosols, it may not be appreciated just how great the effective surface of a plant canopy may be for O₃ removal. A simple calculation for one type of forest indicates that this area may be over 30 times the ground area. Consequently, a surface resistance of 3 × 10⁴ s m⁻¹ for a smooth ‘inert’ surface measured in the laboratory at >50% relative humidity could correspond to a canopy surface resistance of a few hundred s m⁻¹ (equivalent to a deposition velocity of a few mm s⁻¹) if the only process removing O₃ was decomposition at the complex surface of the foliage. In the presence of light, with the potential for photolytic processes to contribute to O₃ reactions, and in the presence of a range of material present on the canopy surface (from prior deposition, from biota on the leaf surface, or from leaching from inside the leaf), the potential removal rate at a canopy could be very much greater. If such processes are to be incorporated explicitly into models of the removal of O₃ at the earth’s surface, for example for use in global climate and chemistry modelling, then the above measurements give an indication of the likely temperature response, and indicate the need for the

measurement or estimation of the actual canopy surface responsible for the removal of O₃ by heterogeneous decomposition.

References

- Altimir N., Kolari P., Tuovinen J.P., Vesala T., Back J., Suni T., Kulmala M., Hari P., 2006. Foliage surface ozone deposition: a role for surface moisture? *Biogeosciences* 3, 209-228
- Altimir N., Vesala T., Keronen P., Kulmala M., Hari P., 2002. Methodology for direct field measurements of ozone flux to foliage with shoot chambers. *Atmospheric Environment* 36, 19-29
- Altshuller, A.P., Wartburg, A.F., Taft, R.A., 1961 The interaction of ozone with plastic and metallic materials in a dynamic flow system. *International Journal of Air and Water Pollution* 4, 70-78.
- Bealde C.L., Talbot H., Jarvis P.G., 1982. Canopy Structure and Leaf Area Index in a Mature Scots Pine Forest. *Forestry* 55, 105-123
- Binnie J., Cape J.N., Mackie N., Leith I.D., 2002. Exchange of organic solvents between the atmosphere and grass - the use of open top chambers. *Science of the Total Environment* 285, 53-67
- Brown R.H.A., Cape J.N., Farmer J.G., 1998. Partitioning of chlorinated solvents between pine needles and air. *Chemosphere* 36, 1799-1810
- Cano-Ruiz J.A., Kong D., Balas R.B., Nazaroff W.W., 1993. Removal of reactive gases at indoor surfaces - combining mass transport and surface kinetics. *Atmospheric Environment Part a-General Topics* 27, 2039-2050
- Cieslik S.A., 2004. Ozone uptake by various surface types: a comparison between dose and exposure. *Atmospheric Environment* 38, 2409-2420
- Cohen, I.C., Smith, A.F., Wood, R., 1968. A field method for determination of ozone in the presence of nitrogen dioxide. *Analyst* 93, 507-517.
- Coleman B.K., Destailats H., Hodgson A.T., Nazaroff W.W., 2008. Ozone consumption and volatile byproduct formation from surface reactions with aircraft cabin materials and clothing fabrics. *Atmospheric Environment* 42, 642-654
- Cox, R.A., Penkett, S.A., 1972. Effect of relative humidity on disappearance of ozone and sulfur dioxide in contained systems. *Atmospheric Environment* 6, 365-368.
- Crossley A., Fowler D., 1986. The weathering of Scots pine epicuticular wax in polluted and clean air. *New Phytologist* 103, 207-218
- Dhandapani B., Oyama S.T., 1997. Gas phase ozone decomposition catalysts. *Applied Catalysis B-Environmental* 11, 129-166
- Emberson L.D., Ashmore M.R., Cambridge H.M., Simpson D., Tuovinen J.P., 2000. Modelling stomatal ozone flux across Europe. *Environmental Pollution* 109, 403-413
- Fowler D., Flechard C., Cape J.N., Storeton-West R.L., Coyle M., 2001. Measurements of ozone deposition to vegetation quantifying the flux, the stomatal and non-stomatal components. *Water Air and Soil Pollution* 130, 63-74
- Fuentes J.D., Gillespie T.J., Denhartog G., Neumann H.H., 1992. Ozone Deposition onto a Deciduous Forest During Dry and Wet Conditions. *Agricultural and Forest Meteorology* 62, 1-18

Atmospheric Environment (2009) 43/5, 1116-1123

- Fuhrer J., Skarby L., Ashmore M.R., 1997. Critical levels for ozone effects on vegetation in Europe. *Environmental Pollution* 97, 91-106
- Grantz D.A., Zhang X.J., Massman W.J., Delany A., Pederson J.R., 1997. Ozone deposition to a cotton (*Gossypium hirsutum* L) field: stomatal and surface wetness effects during the California Ozone Deposition Experiment. *Agricultural and Forest Meteorology* 85, 19-31
- Grantz D.A., Zhang X.J., Massman W.J., DenHartog G., Neumann H.H., Pederson J.R., 1995. Effects of stomatal conductance and surface wetness on ozone deposition in field-grown grape. *Atmospheric Environment* 29, 3189-3198
- Grøntoft T., Henriksen J.F., Seip H.M., 2004. The humidity dependence of ozone deposition onto a variety of building surfaces. *Atmospheric Environment* 38, 59-68
- Grøntoft T., Raychaudhuri M.R., 2004. Compilation of tables of surface deposition velocities for O₃, NO₂ and SO₂ to a range of indoor surfaces. *Atmospheric Environment* 38, 533-544
- Grosjean D., 1985. Wall loss of gaseous pollutants in outdoor Teflon chambers. *Environmental Science & Technology* 19, 1059-1065
- Hanisch F., Crowley J.N., 2003. Ozone decomposition on Saharan dust: an experimental investigation. *Atmospheric Chemistry and Physics* 3, 119-130
- IUPAC, 2007. Data sheet Ox_VOC8 (17/12/07), http://www.iupac-kinetic.ch.cam.ac.uk/datasheets/gas/Ox_VOC8_O3_apinene.pdf,
- Jetter R., Kunst L., Samuels A.L., 2006. Composition of plant cuticular waxes, in: Riederer M., Muller C. (ed.), *Biology of the Plant Cuticle*, Wiley-Blackwell, Oxford
- Kamm S., Mohler O., Naumann K.H., Saathoff H., Schurath U., 1999. The heterogeneous reaction of ozone with soot aerosol. *Atmospheric Environment* 33, 4651-4661
- Karagulian F., Rossi M.J., 2006. The heterogeneous decomposition of ozone on atmospheric mineral dust surrogates at ambient temperature. *International Journal of Chemical Kinetics* 38, 407-419
- Kerstiens G., Lenzian K.J., 1989. Interactions between ozone and plant cuticles. 1. Ozone deposition and permeability. *New Phytologist* 112, 13-19
- Kurpius M.R., Goldstein A.H., 2003. Gas-phase chemistry dominates O₃ loss to a forest, implying a source of aerosols and hydroxyl radicals to the atmosphere. *Geophysical Research Letters* 30(7), 1371
- Lamarque J.F., Hess P., Emmons L., Buja L., Washington W., Granier C., 2005. Tropospheric ozone evolution between 1890 and 1990. *Journal of Geophysical Research-Atmospheres* 110, D08304
- Lamaud E., Carrara A., Brunet Y., Lopez A., Druilhet A., 2002. Ozone fluxes above and within a pine forest canopy in dry and wet conditions. *Atmospheric Environment* 36, 77-88
- Lelieveld J., Dentener F.J., 2000. What controls tropospheric ozone? *Journal of Geophysical Research-Atmospheres* 105, 3531-3551
- Mauzerall D.L., Wang X., 2001. Protecting agricultural crops from the effects of tropospheric ozone exposure: reconciling science and standard setting in the United States, Europe and Asia. *Annual Review of Energy and the Environment* 26, 237-268

Atmospheric Environment (2009) 43/5, 1116-1123

- Mikkelsen T.N., Ro-Poulsen H., Hovmand M.F., Jensen N.O., Pilegaard K., Egelov A.H., 2004. Five-year measurements of ozone fluxes to a Danish Norway spruce canopy. *Atmospheric Environment* 38, 2361-2371
- Mogili P.K., Kleiber P.D., Young M.A., Grassian V.H., 2006. Heterogeneous uptake of ozone on reactive components of mineral dust aerosol: An environmental aerosol reaction chamber study. *Journal of Physical Chemistry A* 110, 13799-13807
- Mueller, F.X., Loeb, L., Mapes, W.H., 1973. Decomposition rates of ozone in living areas. *Environmental Science & Technology* 7, 342-346.
- Musselman R.C., Massman W.J., 1999. Ozone flux to vegetation and its relationship to plant response and ambient air quality standards. *Atmospheric Environment* 33, 65-73
- Nicolas M., Ramalho O., Maupetit F., 2007. Reactions between ozone and building products: Impact on primary and secondary emissions. *Atmospheric Environment* 41, 3129-3138
- Pleijel H., Karlsson G.P., Danielsson H., Sellden G., 1995. Surface wetness enhances ozone deposition to a pasture canopy. *Atmospheric Environment* 29, 3391-3393
- Sabersky, R.H., Sinema, D.A., Shair, F.H., 1973. Concentrations, decay rates, and removal of ozone and their relation to establishing clean indoor air. *Environmental Science & Technology* 7, 347-353.
- Simmons, A., Colbeck, I., 1990. Resistance of various building materials to ozone deposition. *Environmental Technology* 11, 973-978.
- Sullivan R.C., Thornberry T., Abbatt J.P.D., 2004. Ozone decomposition kinetics on alumina: effects of ozone partial pressure, relative humidity and repeated oxidation cycles. *Atmospheric Chemistry and Physics* 4, 1301-1310
- Sutton, D.J., Nodolf, K.M., Makino, K.K., 1976. Predicting ozone concentrations in residential structures. *ASHRAE Journal American Society of Heating Refrigerating and Air-conditioning Engineers* 18, 21-26.
- Tillmann R., Mentel T.F., Kiendler-Scharr A., Brauers T., Saathof H., 2007. Temperatur dependent rate coefficients of the α -pinene + ozone reaction. *Geophysical Research Abstracts* 9, 09179
- Tkalich, V.S., Klimovskii, A.O., Lisachenko, A.A., 1984. Heterogeneous reaction of ozone - experimental unit and procedure. *Kinetics and Catalysis* 25, 942-949.
- Usher C.R., Michel A.E., Stec D., Grassian V.H., 2003. Laboratory studies of ozone uptake on processed mineral dust. *Atmospheric Environment* 37, 5337-5347
- Zeller K.F., Nikolov N.T., 2000. Quantifying simultaneous fluxes of ozone, carbon dioxide and water vapor above a subalpine forest ecosystem. *Environmental Pollution* 107, 1-20

Table 1. Summary of relevant surface ozone loss data for temperatures 10-30 °C and 1 atm total pressure (unless otherwise indicated), expressed as surface resistance (R_s) ($s\ m^{-1}$)

Surface	ppb O ₃ where given	RH (%) where given	R_s ($s\ m^{-1}/$ 1000)	comment	Reference
clean glass			2	calc. from Simmons and Colbeck, 1990	(Cano-Ruiz, et al., 1993)
plate glass			202	Aged; calc. from Sabersky et al., 1973	(Cano-Ruiz, et al., 1993)
glass	105	48	1429		(Nicolas, et al., 2007)
glass	160	52	625		(Nicolas, et al., 2007)
PTFE film	340-1550	dry air	654		(Grosjean, 1985)
FEP Teflon			20	calc. from Simmons and Colbeck, 1990	(Cano-Ruiz, et al., 1993)
teflon			556	calc. from Altshuller et al., 1961	(Cano-Ruiz, et al., 1993)
stainless steel			12	Aged; calc. from Mueller et al., 1973	(Cano-Ruiz, et al., 1993)
stainless steel			2778	calc. from Tkalich et al., 1984; low press.	(Cano-Ruiz, et al., 1993)
stainless steel			556	calc. from Altshuller et al., 1961	(Cano-Ruiz, et al., 1993)
stainless steel	140	50-90	440		this study
aluminium			202	Aged; calc. from Sabersky et al., 1973	(Cano-Ruiz, et al., 1993)
aluminium		5	227	calc. from Mueller et al., 1973	(Cano-Ruiz, et al., 1993)
aluminium		40-50	85	Aged; calc. from Mueller et al., 1973	(Cano-Ruiz, et al., 1993)
aluminium		87	5	calc. from Mueller et al., 1973	(Cano-Ruiz, et al., 1993)
aluminium		32	144	calc. from Cox & Penkett, 1972	(Cano-Ruiz, et al., 1993)
aluminium		83	48	calc. from Cox & Penkett, 1972	(Cano-Ruiz, et al., 1993)
aluminium			85	calc. from Altshuller et al., 1961	(Cano-Ruiz, et al., 1993)
aluminium	150	dry air	15	assumes V/A=1	(Kamm, et al., 1999)

aluminium foil	130	50-90	28		this study
Al ₂ O ₃			1	initial uptake rate; pressure 10-70 Pa	(Sullivan, et al., 2004)
Saharan dust	>10 ⁸	dry N ₂	6	total pressure < 0.13 Pa	(Hanisch and Crowley, 2003)
C8-alkene on SiO ₂	10 ⁸	dry	0.2	initial uptake rate; total pressure 0.009 Pa	(Usher, et al., 2003)
C8-alkane on SiO ₂	10 ⁸	dry	0.4	initial uptake rate; total pressure 0.009 Pa	(Usher, et al., 2003)
polyethylene		8	16	calc. from Sutton et al., 1976	(Cano-Ruiz, et al., 1993)
polyethylene		70	8	calc. from Sutton et al., 1976	(Cano-Ruiz, et al., 1993)
polyethylene			9	Aged; calc. from Sabersky et al., 1973	(Cano-Ruiz, et al., 1993)
polyethylene			14	calc. from Altshuller et al., 1961	(Cano-Ruiz, et al., 1993)
polyethylene			4	calc. from Cohen et al., 1968	(Cano-Ruiz, et al., 1993)
paint on polyester	124	52	33		(Nicolas, et al., 2007)
paraffin wax	130	50-90	30		this study
beeswax	130	50-90	6		this study
dewaxed leaf					
cuticle	400	dry air	90 to 200		(Kerstiens and Lenzian, 1989)
tomato fruit cuticle	400	dry air	2		(Kerstiens and Lenzian, 1989)
tomato fruit cuticle	400	60	1		(Kerstiens and Lenzian, 1989)
spruce wood		0	20		(Grøntoft, et al., 2004)
spruce wood		30	25		(Grøntoft, et al., 2004)
spruce wood		50	10		(Grøntoft, et al., 2004)
spruce wood		70	6		(Grøntoft, et al., 2004)
spruce wood		90	2		(Grøntoft, et al., 2004)
spruce wood			14	for 'wet' surface	(Grøntoft, et al., 2004)
deionised water			29		(Grøntoft, et al., 2004)
moorland	30		0.2		(Fowler, et al., 2001)
vegetation					

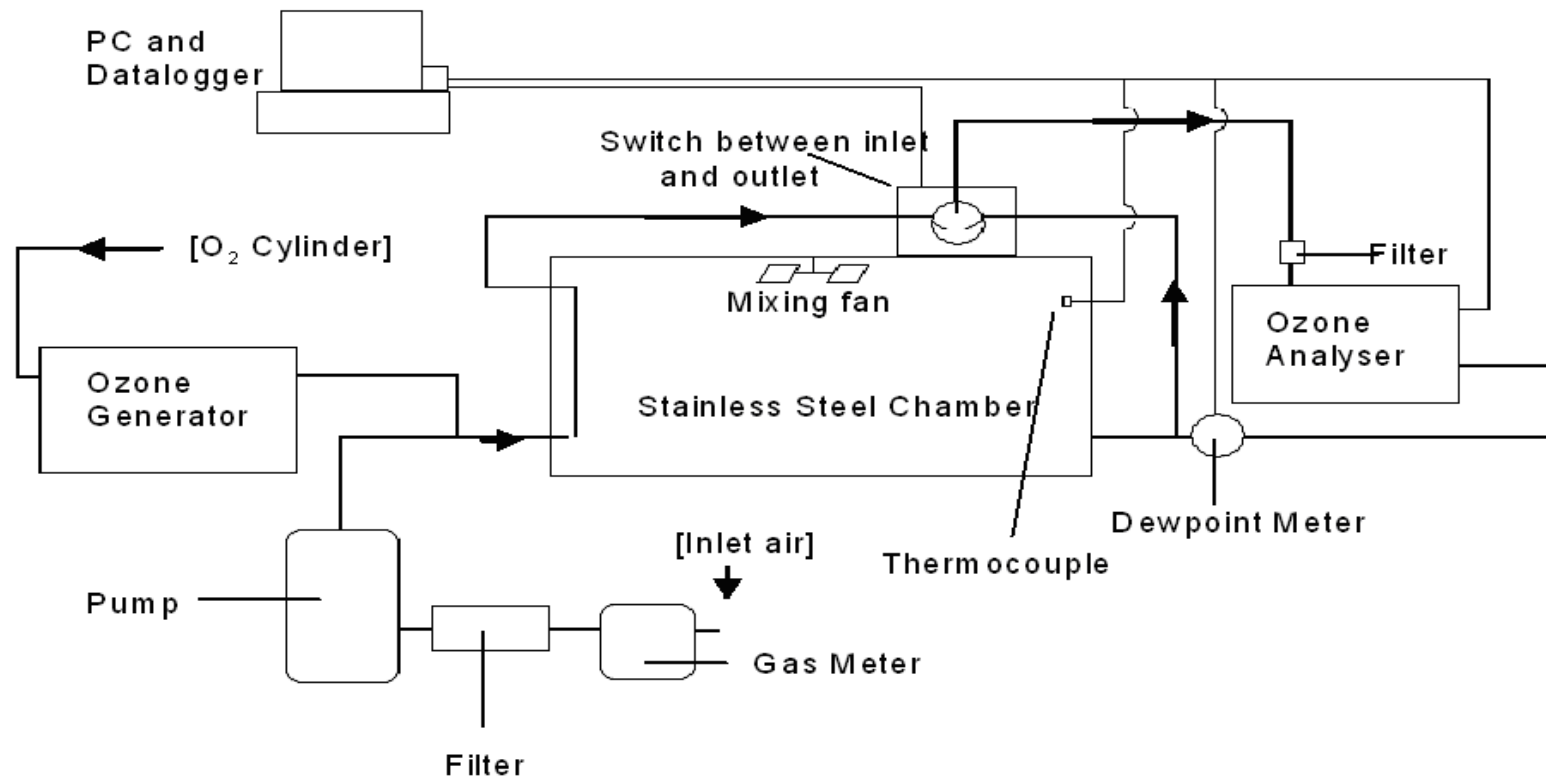


Figure 1. Schematic diagram of experimental system.

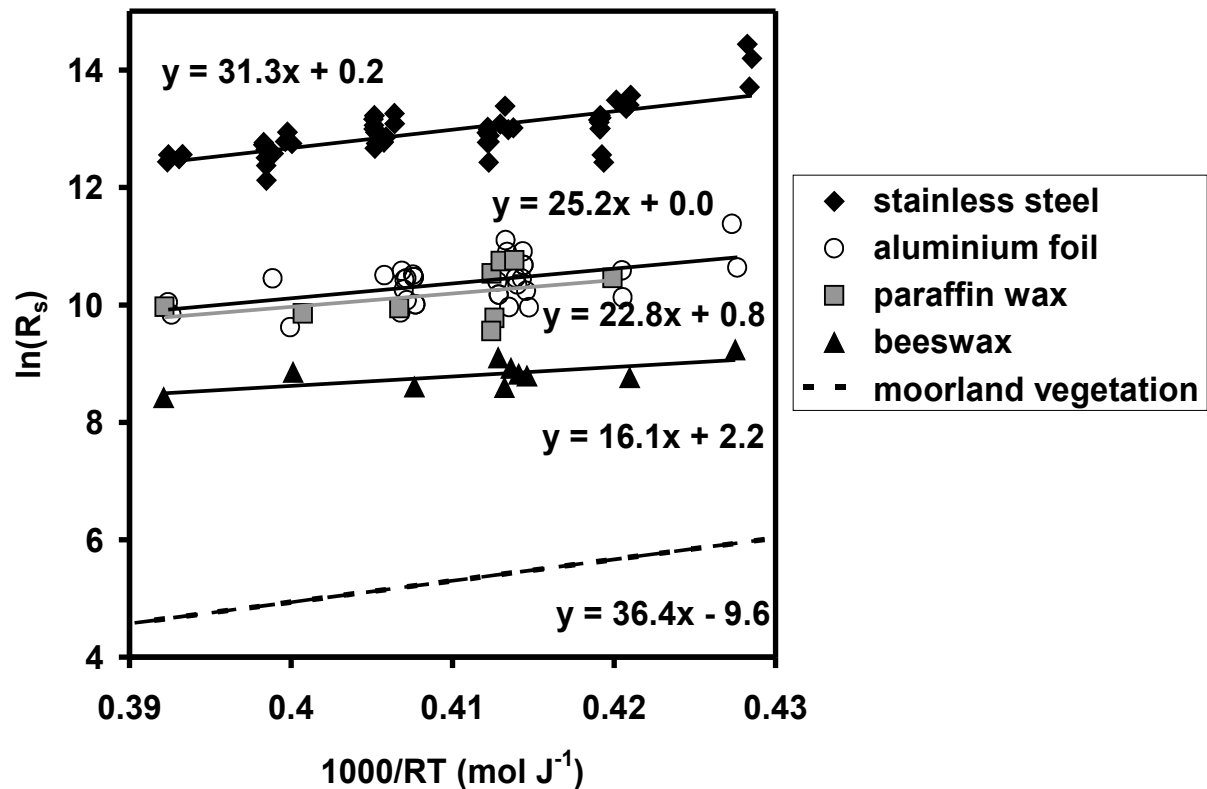


Figure 2. Dependence on temperature of O_3 removal rate at a range of surfaces, expressed as the natural logarithm (\ln) of the surface resistance (R_s). Each point represents a single experiment. The slope of the plot gives an apparent Arrhenius activation energy for the process. The line representing moorland vegetation is from long-term field measurements (Fowler et al., 2001).

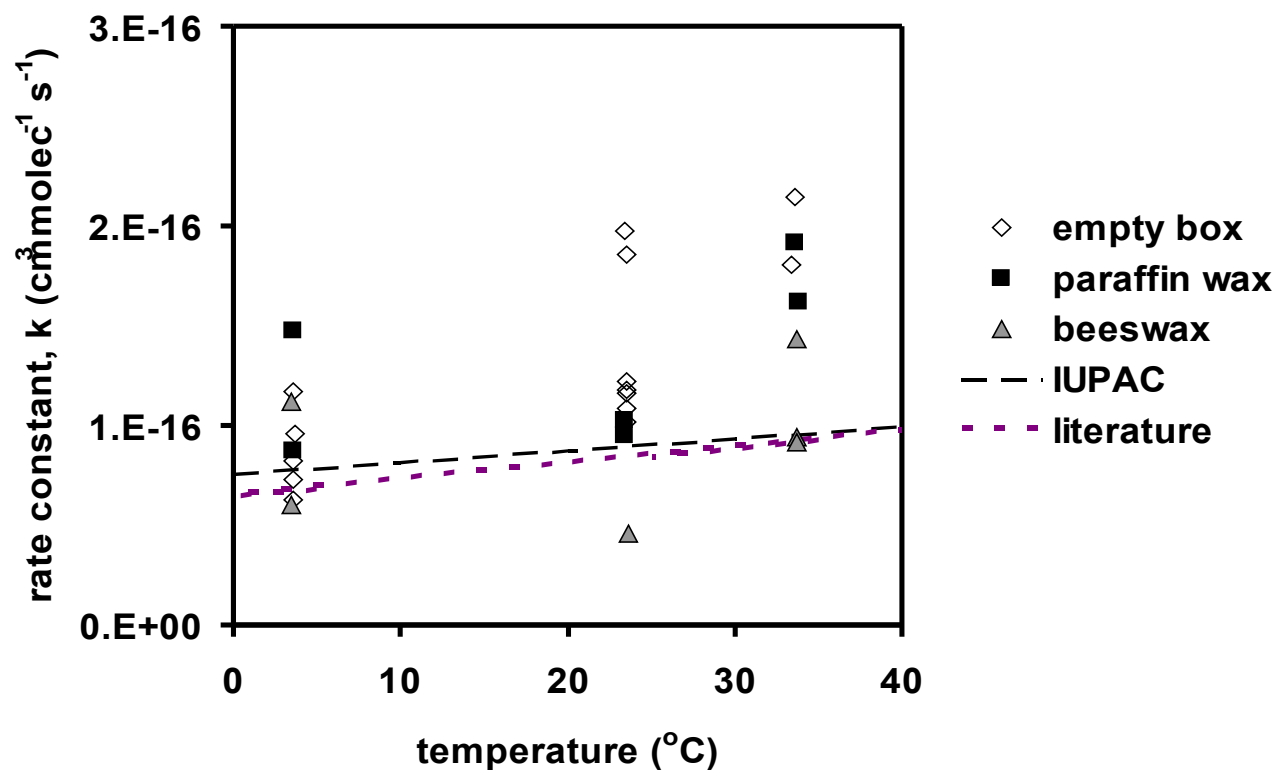


Figure 3. Calculated rate coefficient for the reaction of O₃ with α -pinene in the reaction chamber in the empty chamber (stainless steel walls) and in the presence of different wax surfaces, over a range of temperatures. Each point represents a single experiment. The recommended IUPAC rate coefficient for the homogeneous gas-phase reaction is shown (IUPAC, 2007), along with a recent literature value (Tillmann, et al., 2007).