

*Handwritten signature*

NASA CR-120789



# ACOUSTIC TESTING OF A 1.5 PRESSURE RATIO, LOW TIP SPEED FAN (QEP FAN B SCALE MODEL)

(NASA-CR-120789)	ACOUSTIC TESTING OF A 1.5	N72-21994
PRESSURE RATIO, LOW TIP SPEED FAN (QEP FAN		
B SCALE MODEL) S.B. Kazin, et al (General		
Electric Co.) [1972] 111 p	CSCL 01A	Unclas
	3	24153
	G2/01	

by

S.B. Kazin, W.R. Minzner, and J.E. Paas

GENERAL ELECTRIC COMPANY



prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

NASA-Lewis Research Center  
Contract NAS 3-12430  
James J. Kramer, Project Manager

*CAT. 01*  
~~\_\_\_\_\_~~

## NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the National Aeronautics and Space Administration (NASA), nor any person acting on behalf of NASA:

- A.) Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- B.) Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method or process disclosed in this report.

As used above, "person acting on behalf of NASA" includes any employee or contractor of NASA, or employee of such contractor, to the extent that such employee or contractor of NASA, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with NASA, or his employment with such contractor.

Requests for copies of this report should be referred to:

National Aeronautics and Space Administration  
Office of Scientific and Technical Information  
Attention: AFSS-A  
Washington, D. C. 20546

1. Report No. NASA CR-120789	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle ACOUSTIC TESTING OF A 1.5 PRESSURE RATIO, LOW TIP SPEED FAN (QEP FAN B SCALE MODEL)		5. Report Date	
		6. Performing Organization Code	
7. Author(s)  S.B. Kazin, W.R. Minzner and J.E. Paas		8. Performing Organization Report No.	
		10. Work Unit No.	
9. Performing Organization Name and Address  General Electric Company Aircraft Engine Group Evendale, Ohio 45215		11. Contract or Grant No. NAS3-12430	
		13. Type of Report and Period Covered Contractor Report	
12. Sponsoring Agency Name and Address  National Aeronautics and Space Administration Washington, D.C. 20546		14. Sponsoring Agency Code	
15. Supplementary Notes  Project Manager, James J. Kramer, V/STOL & Noise Division, NASA Lewis Research Center, Cleveland, Ohio			
16. Abstract  A scale model (0.484 scale factor) of a single stage fan designed for a 1.5 pressure ratio and 1160 ft/sec (353.6 m/sec) tip speed was tested to determine its noise characteristics. The fan had 26 blades and 60 outlet guide vanes, with vanes spaced two rotor blade aerodynamic chords from the blades. The effects of speed, exhaust nozzle area and fan frame acoustic treatment on the scale model's noise characteristics were investigated.  Level flyover projections to a full scale engine of 22,000 pounds (97,900 newtons) static thrust indicates single fan noise levels of 98.6 PNdB at approach [370 ft (112.8 m) altitude, flight Mach number 0.25, 4900 pounds (21,805 newtons) net thrust] and 98.4 PNdB at takeoff [1000 ft (304.8 m) altitude, flight Mach number 0.25, 16,000 pounds (71,200 newtons) net thrust] for the untreated fan with nominal nozzle. The corresponding configuration with acoustic treatment in the fan frame resulted in 94.3 PNdB at approach and 94.6 PNdB at takeoff. The noise reductions occurred at the blade passing frequency and harmonic tones as well as in the broadband noise.  Runs with exhaust nozzle 16% oversized and 6% undersized showed similar results.			
17. Key Words (Suggested by Author(s))  Experimental Quiet Engine Program Turbofan frame acoustic treatment Turbofan noise		18. Distribution Statement  Unclassified - unlimited	
19. Security Classif. (of this report)  Unclassified	20. Security Classif. (of this page)  Unclassified	21. No. of Pages	22. Price* \$3.00

PRECEDING PAGE BLANK NOT FILMED

TABLE OF CONTENTS

	<u>Page</u>
I. Abstract . . . . .	v
II. Summary . . . . .	1
III. Introduction . . . . .	3
IV. Test Vehicle Description . . . . .	5
V. Test Program . . . . .	13
A. Farfield Data Acquisition . . . . .	13
B. Testing Schedule . . . . .	18
VI. Acoustic Data Reduction & Acoustic Scaling Procedure . . . . .	20
A. One Third Octave Data . . . . .	20
B. Scaling Procedure . . . . .	22
1. Adjustment for Fan Frequency Shift . . . . .	22
2. Adjustment for Jet Noise Frequency Shift . . . . .	22
3. Adjustment for Size . . . . .	23
4. Adjustment for Atmospheric Absorption . . . . .	23
C. Narrowband Data . . . . .	23
VII. Acoustic Data Analysis . . . . .	26
A. Noise Variations with Speed . . . . .	26
B. Noise Variations with Fan Nozzle Area . . . . .	33
C. Acoustic Treatment Effects . . . . .	45
D. Scaled-Up to Full Scale Results . . . . .	57
VIII. Conclusions . . . . .	73
IX. Appendix . . . . .	75
X. Nomenclature . . . . .	100
XI. Report Distribution List . . . . .	101

I. ABSTRACT

A scale model (.484 scale factor) of a single stage fan designed for a 1.5 pressure ratio and 1160 ft/sec (353.6 m/sec) tip speed was tested to determine its noise characteristics. The fan had 26 blades and 60 outlet guide vanes, with vanes spaced two rotor blade aerodynamic chords from the blades. The effects of speed, exhaust nozzle area and fan frame acoustic treatment on the scale model's noise characteristics were investigated.

Level flyover projections to a full scale engine of 22,000 pounds (97,900 newtons) static thrust indicates single fan noise levels of 98.6 PNdB at approach [370 ft (112.8 m) altitude, flight Mach number 0.25, 4900 pounds (21,805 newtons) net thrust] and 98.4 PNdB at takeoff [1000 ft (304.8 m) altitude, flight Mach number 0.25, 16,000 pounds (71,200 newtons) net thrust] for the untreated fan with nominal nozzle. The corresponding configuration with acoustic treatment in the fan frame resulted in 94.3 PNdB at approach and 94.6 PNdB at takeoff. The noise reductions occurred at the blade passing frequency and harmonic tones as well as in the broadband noise.

Runs with exhaust nozzles 16% oversized and 6% undersized showed similar results.

## II. SUMMARY

A scale model fan, designated "Fan B," was utilized to determine the acoustic characteristics of a single stage fan designed for a corrected tip speed of 1160 ft/sec (353.6 m/sec) at a bypass pressure ratio of 1.5. The fan had 26 rotor blades and 60 vanes with 2 rotor aerodynamic chord spacing between the rotor and the OGV's. The scale model fan which represented a .484 linear scale model version of the full scale Fan B, simulated the bypass flow region through the fan.

The scale model was tested to determine the effects of speed, exhaust nozzle area and fan frame acoustic treatment on the fan's noise characteristics. Acoustic data was recorded at ten speed points covering a range from 30% to 100% sea level static thrust. The fan was tested with three different nozzles - nominal, 16% oversize and 6% undersize - for this sequence of speed points in order to identify operating points which would produce lower noise at a given thrust level. Each set of tests was run with and without acoustic treatment in the fan frame. This frame treatment consisted of ½ inch (1.25 cm) thick Scottfelt covered with a 22½% porosity plate.

The data obtained at each of these test points was scaled up to full scale to evaluate the projected effectiveness of the design in reducing the noise of the fan system. Projections of a full scale, uninstalled, 22,000 pounds (97,900 newton) static thrust engine with nominal nozzle indicate the following single fan, maximum Perceived Noise Levels (PNL) for a level flyover:

FAN B LEVEL FLYOVER PROJECTIONS  
 MAXIMUM PERCEIVED NOISE LEVELS  
 SINGLE FAN

	<u>Untreated</u>	<u>Treated</u>
Takeoff 1000 ft (304.8 m) altitude $M_o = .25$	98.4 PNdB	94.6 PNdB
Approach 370 ft (112.8 m) altitude $M_o = .25$	98.6 PNdB	94.3 PNdB

The 200 foot (61.0 m) sideline, maximum PNL's for all three fan exhaust nozzles, treated and untreated, at approach and takeoff thrust are summarized below for a single full scale Fan B.

Full Scale Fan B  
 200 Foot (61.0 M) Sideline, Maximum PNL

	Approach*	Takeoff**
Nominal nozzle, untreated	104.4 PNdB	116.6 PNdB
Nominal nozzle, treated	100.2 PNdB	112.4 PNdB
Large nozzle, untreated	106.0 PNdB	117.2 PNdB
Large nozzle, treated	100.8 PNdB	113.6 PNdB
Small nozzle, untreated	106.8 PNdB	117.5 PNdB
Small nozzle, treated	101.6 PNdB	113.6 PNdB

\* 6,684 pounds (29,744 newtons) static fan thrust  
 \*\*17,140 pounds (76,277 newtons) static fan thrust

The nozzle size variations did not produce any appreciable new low noise operating points for approach or takeoff rated fan thrust. However, thru the mid-thrust region, the large nozzle resulted in the lowest sideline PNL in both the treated and untreated configurations.

### III. INTRODUCTION

This report describes work performed by the General Electric Company for the NASA-Lewis Research Center on the Experimental Quiet Engine Program.

The major objectives of this program were:

- (1) To determine the noise levels produced by turbofan bypass engines designed for low noise output and to confirm that predicted noise reductions can be achieved;
- (2) To demonstrate the technology and innovations which will reduce the production and radiation of noise in turbofan engines;
- (3) To acquire experimental acoustic and aerodynamic data for high bypass turbofan engines from which acoustic theory and experience can be correlated to provide a better understanding of the noise production mechanisms.

A scale model fan program was utilized to provide information pertinent to achieving these objectives. The results of the scale model testing provided directly applicable experimental data on noise reduction features that might be applied to full size fan systems. Experience indicates that such scale model acoustic tests provide accurate and effective means to readily evaluate such low noise design configurations.

Fan B was incorporated into the NASA/GE Quiet Engine Program to investigate the noise generating and radiating characteristics of a low speed, moderately loaded, single stage fan. The Fan B scale model, the first scaled fan tested, was approximately a half scale version (48.4%) of the full size fan and it essentially reproduced the bypass flow region through Fan B.




The effects on the scale model's noise characteristics of speed, exhaust nozzle area and fan frame acoustic treatment were examined during the first phase of testing. Acoustic data was recorded at speed points corresponding to a range from 30% to 100% sea level static thrust. The fan was tested with three different nozzles for this sequence of speed points in order to identify operating points which would produce lower noise at a given thrust level. Further, each set of tests was run for two configurations, designated untreated and treated, to determine the effectiveness of the fan frame acoustic treatment. The data obtained at each test point was scaled up to full scale to evaluate the projected effectiveness of each design in reducing the noise of the fan system.

#### IV. Test Vehicle Description

Full scale Fan B is a low speed, moderately loaded, single stage fan. It has been designed at the altitude cruise condition for a corrected tip speed of 1160 ft/sec (353.6 m/sec), at a bypass pressure ratio of 1.5 and with a corrected fan flow of 950 lb/sec (430.9 kg/sec). This fan incorporates 26 shroudless rotor blades and 60 outlet guide vane (OGV's) with a rotor - OGV spacing of two aerodynamic rotor chords to minimize noise generation.

The scale model used to determine the acoustic characteristics of different low noise designs, essentially simulated the bypass portion (outer 84.5% of flow) of the full size Fan B, as shown schematically in Figure 1. The design basis was to provide the same corrected tip speed, pressure ratio and weight flow per unit area as the bypass portion of the full scale Fan B. To maintain the bypass pressure ratio on the scale model, it was necessary to increase the loading at the hub to account for the end-wall-blade boundary layer interaction. Figures 2 and 3 show the scale model Fan B aerodynamic characteristics - pressure ratio vs corrected weight flow and corrected weight flow vs percent corrected fan speed, respectively - for three nozzle sizes. Some other pertinent scale model and full scale characteristics are shown in Table II.

The effects of varying the fan operating line were investigated with the scale model by running three nozzle sizes, consisting of 372 sq. in. ( $.24 \text{ m}^2$ ), 396 sq. in. ( $.26 \text{ m}^2$ ), and 460 sq. in. ( $.30 \text{ m}^2$ ), or about 6% less than nominal, nominal and 16% greater than nominal, with the nominal nozzle being equivalent to a  $1700 \text{ in}^2$  ( $1.10 \text{ m}^2$ ) nozzle on the full scale fan. The nozzle variations were run on both treated and untreated configurations.

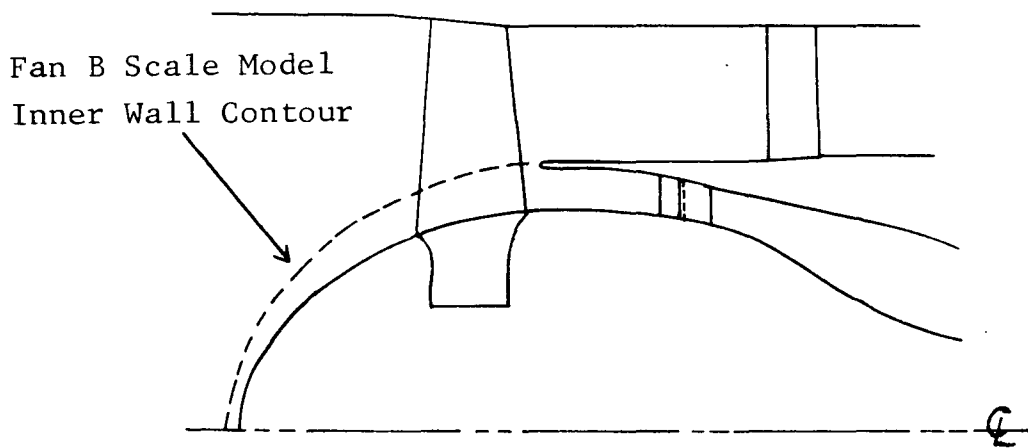

Schematic of Fan B  
Figure 1

QUIET ENGINE PERFORMANCE  
SCALE MODEL FAN B

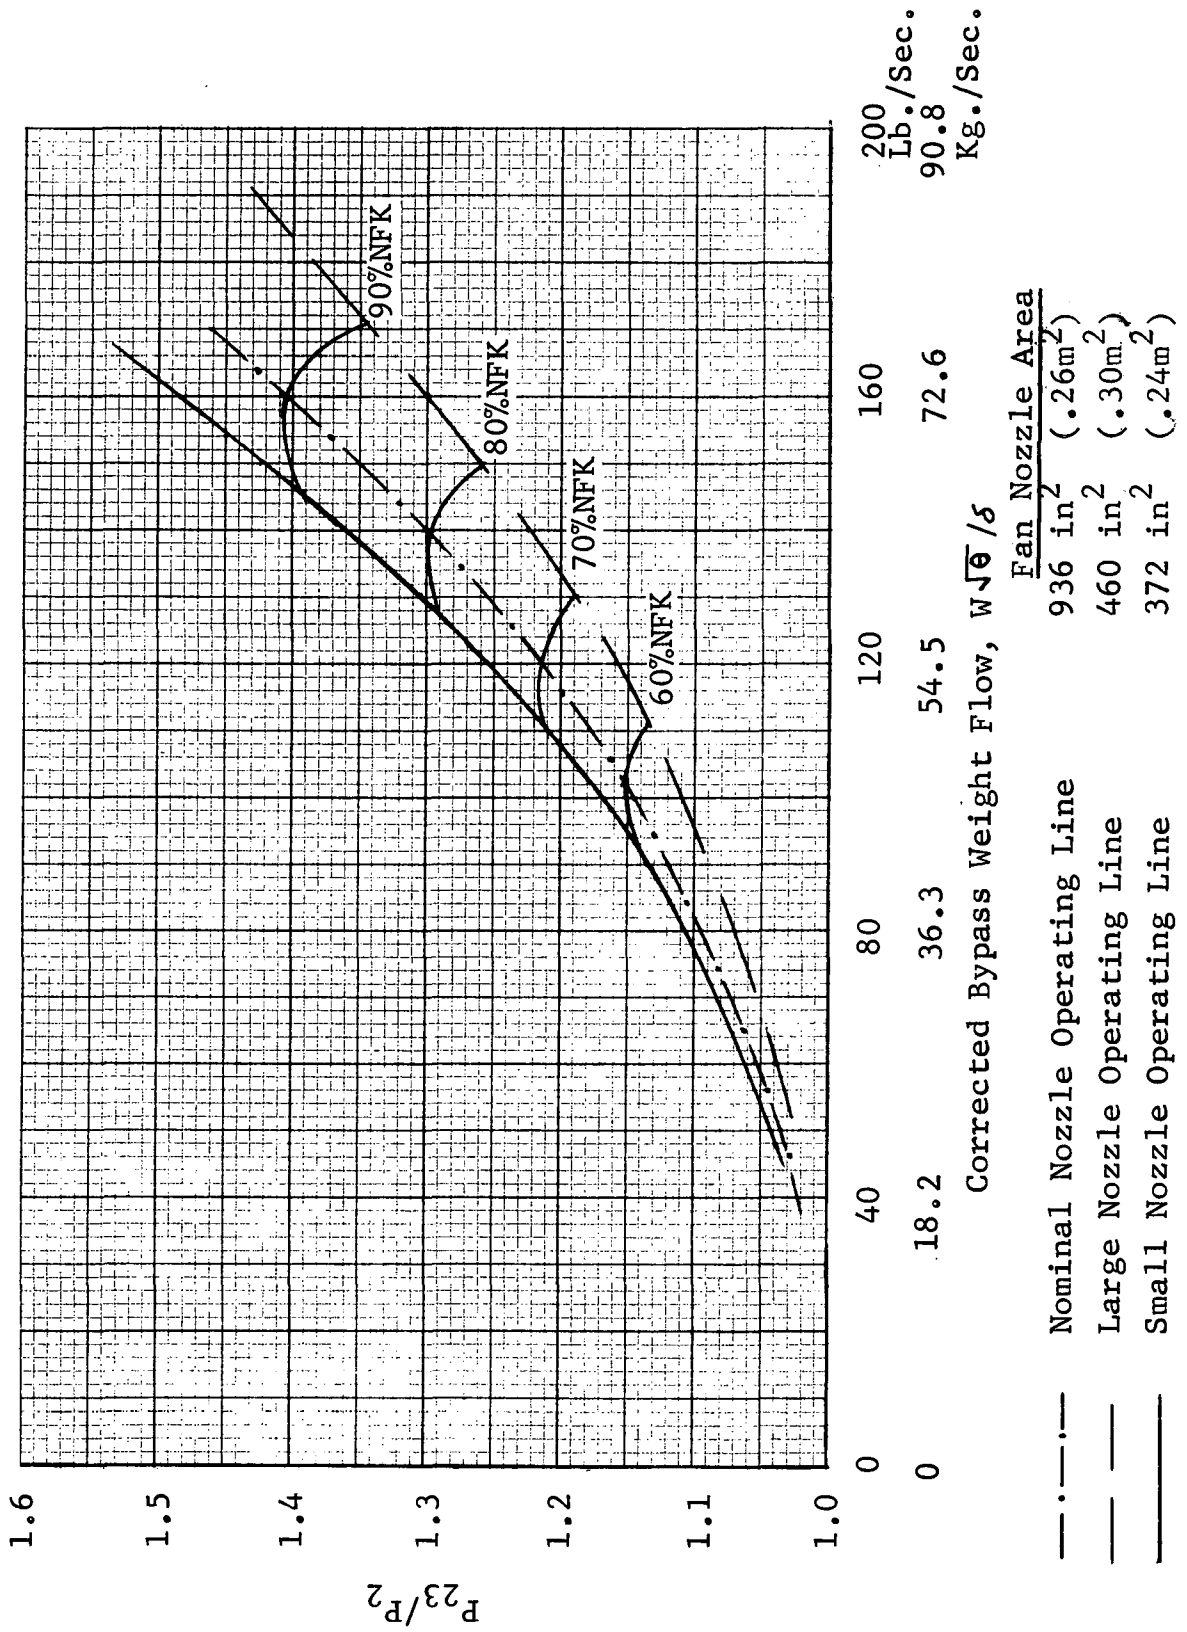


Figure 2

QUIET ENGINE PERFORMANCE  
SCALE MODEL FAN B

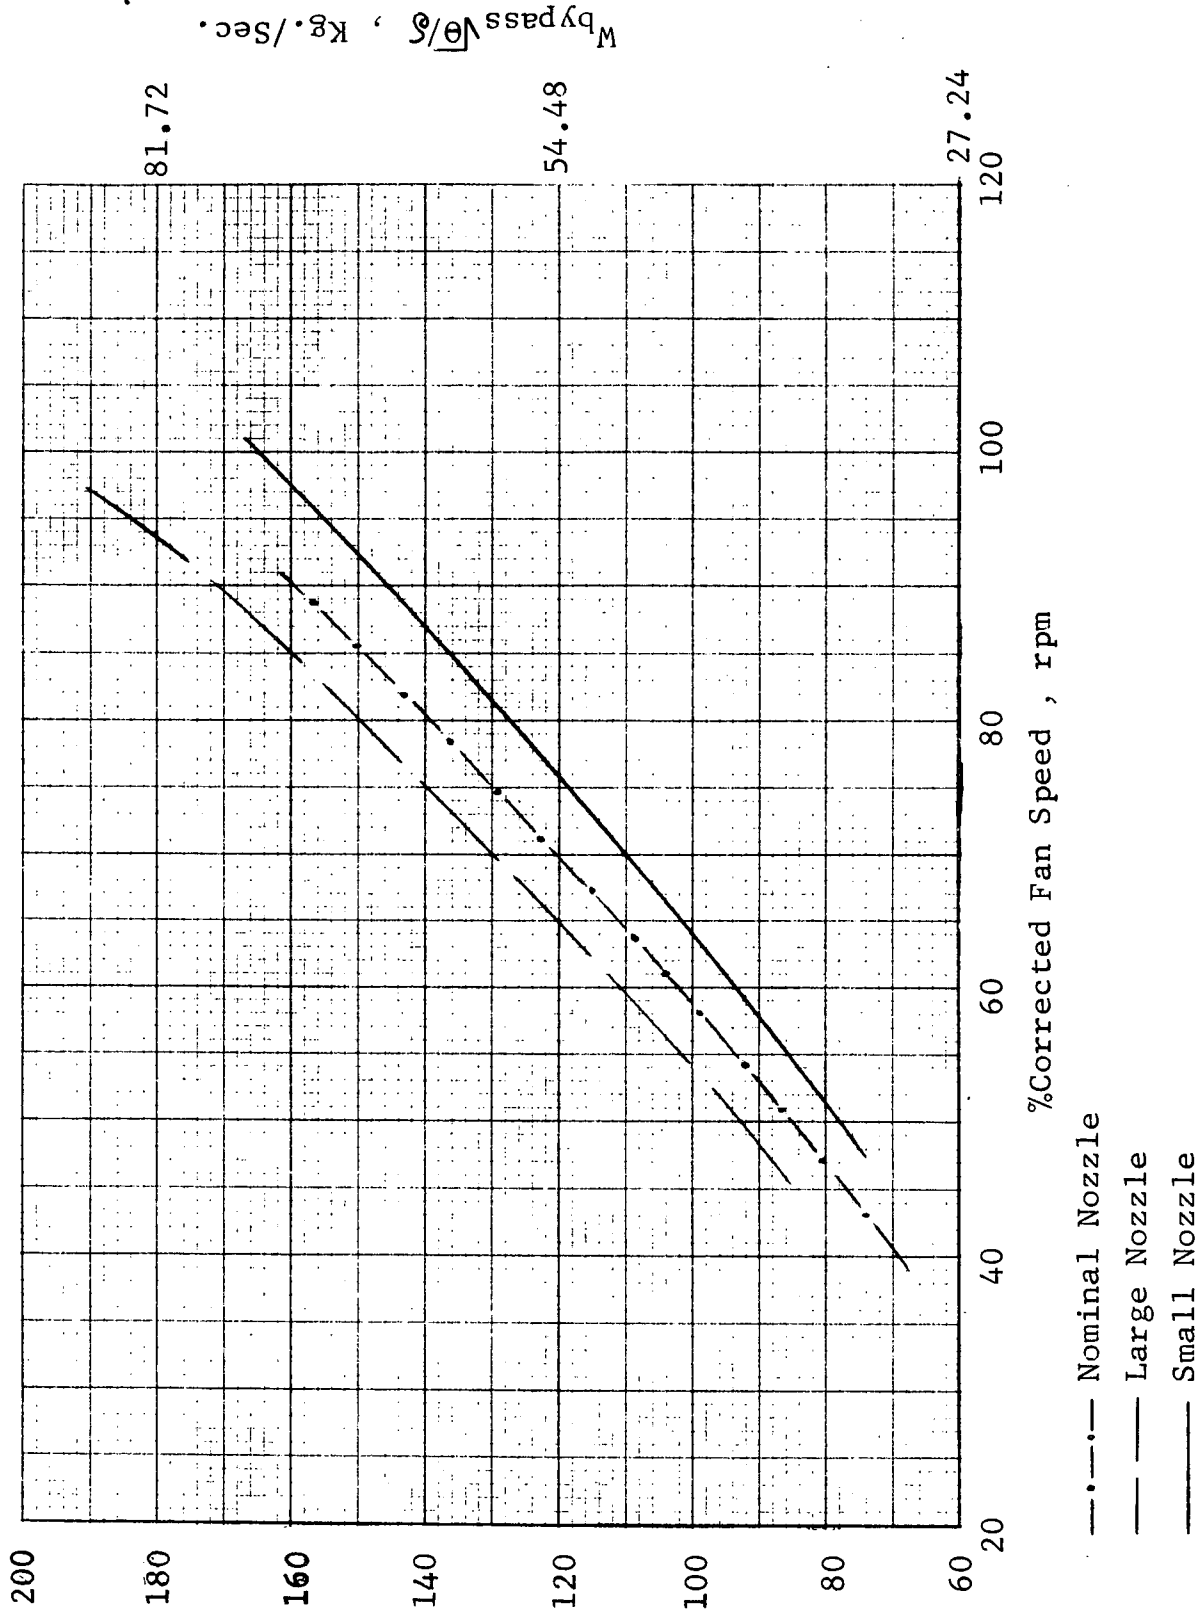


Figure 3

TABLE I  
 QEP FAN B  
 FULL SCALE AND SCALE MODEL CHARACTERISTICS  
 SEA LEVEL STATIC, STD. DAY  
 TAKEOFF POWER - 91% FAN SPEED

	<u>Full Scale</u>	<u>Scale Model</u>
100% Speed, RPM	3625	7488
Tip Speed, Ft/Sec (M/Sec)	1055 (322)	1055 (322)
Bypass Total Pressure Ratio	1.415	1.415
Bypass Flow, Lb/Sec (Kg/Sec)	692 (313.9)	162 (73.5)
Fan Duct Thrust, Lbs (Newtons)	17,140 (76,277)	4010 (17,844)
Rotor Inlet Tip Diameter, Inches (M)	73.35 (1.9)	35.5 (.9)
Inlet Hub/Tip Ratio	.465	.579
Number of Rotor Blades	26	26
Number of OGV's	60	60

The acoustic treatment of the fan frame area was scaled from the full scale fan and incorporated in the scale model. Figure 4 shows a cross section of the fan indicating the location of the acoustic treatment. The amount of acoustic treatment at each location is listed in Table III. The areas shown are effective areas, allowing for fasteners, assembly methods, rake pads, support ribs, etc. The treatment material used on the scaled fan was Scottfelt 3-900,  $\frac{1}{2}$ " (1.3 cm) an open-celled polylurethane foam material, having suppression characteristics similar to the Multiple-Degree-of-Freedom resonator suppression material used on the full scale vehicle. The scale model treatment was held in position by means of a perforated face plate with  $1/16$  inch diameter holes and a porosity of  $22\frac{1}{2}\%$ .

For the untreated configurations, the treatment was neutralized by covering with an adhesive backed foil tape.

FAN B SCALE MODEL  
CROSS SECTION INDICATING LOCATION OF ACOUSTIC TREATMENT

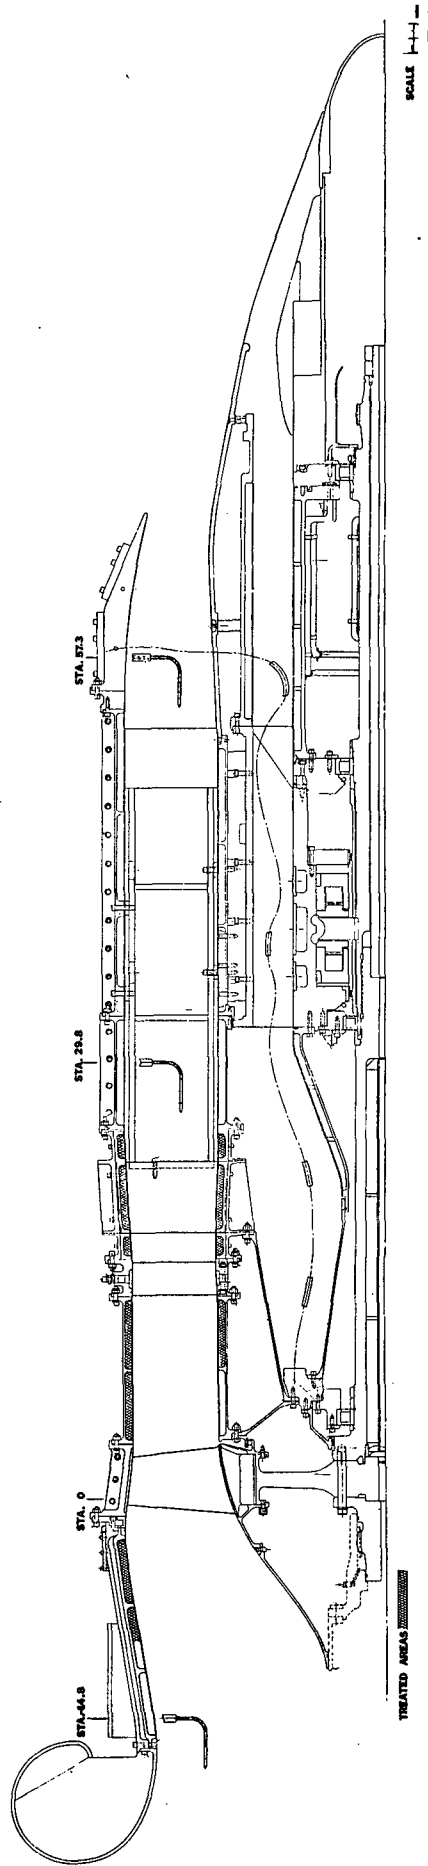


Figure 4



TABLE II  
QEP SCALE MODEL FAN B  
ACOUSTIC TREATMENT AREAS

<u>LOCATION</u>	<u>AREA</u>	
Inlet	812 in <sup>2</sup>	5240 cm <sup>2</sup>
Rotor - OGV's		
Inner Wall	315 in <sup>2</sup>	2030 cm <sup>2</sup>
Outer Wall	1007 in <sup>2</sup>	6500 cm <sup>2</sup>
Aft of OGV's		
Inner Wall	417 in <sup>2</sup>	2690 cm <sup>2</sup>
Outer Wall	668 in <sup>2</sup>	4310 cm <sup>2</sup>
Total	3219 in <sup>2</sup>	20,770 cm <sup>2</sup>
	22.4 ft <sup>2</sup>	2.08 m <sup>2</sup>

## V. Test Program

Testing of the scale model vehicle was performed at the Peebles Test Operation, General Electric's out-door test facility shown in Figures 5 and 6. Testing was performed on Site 4B, using a G.E. LM1500 stationary gas turbine as the drive system. Figure 7 shows a typical scale model vehicle installation. As can be seen, the scale model fans were driven from the front to eliminate noise generation by discharge flow over the drive structures.


### A. Farfield Data Acquisition

The acoustic data was taken with microphones located on a 100 foot (30.5 m) arc, positioned at 10 degree increments from 20° to 160° as measured from the fan inlet centerline at the rotor leading edge. The microphones were set at the height of the fan centerline, 12 feet (3.7 m) above the sound field surface. This sound field surface consisted of a level, 250 ft. (76.2 m) arc of crushed stone.

Data was recorded on FM with a Sangamo 28 channel recorder, Model 4700. A tape speed of 60 ips (1.5 m/sec) was used to provide a flat frequency response through the 20 KHz 1/3 octave band. Data was recorded for a minimum of 60 seconds, with all angles being recorded simultaneously.

Each microphone system consisted of the following equipment:

<u>Component</u>	<u>Manufacturer</u>	<u>Model</u>
Microphone	B & K	4133 ½ inch (1.3 cm)
Cathode Follower	B & K	2615
Power supply	B & K	2801

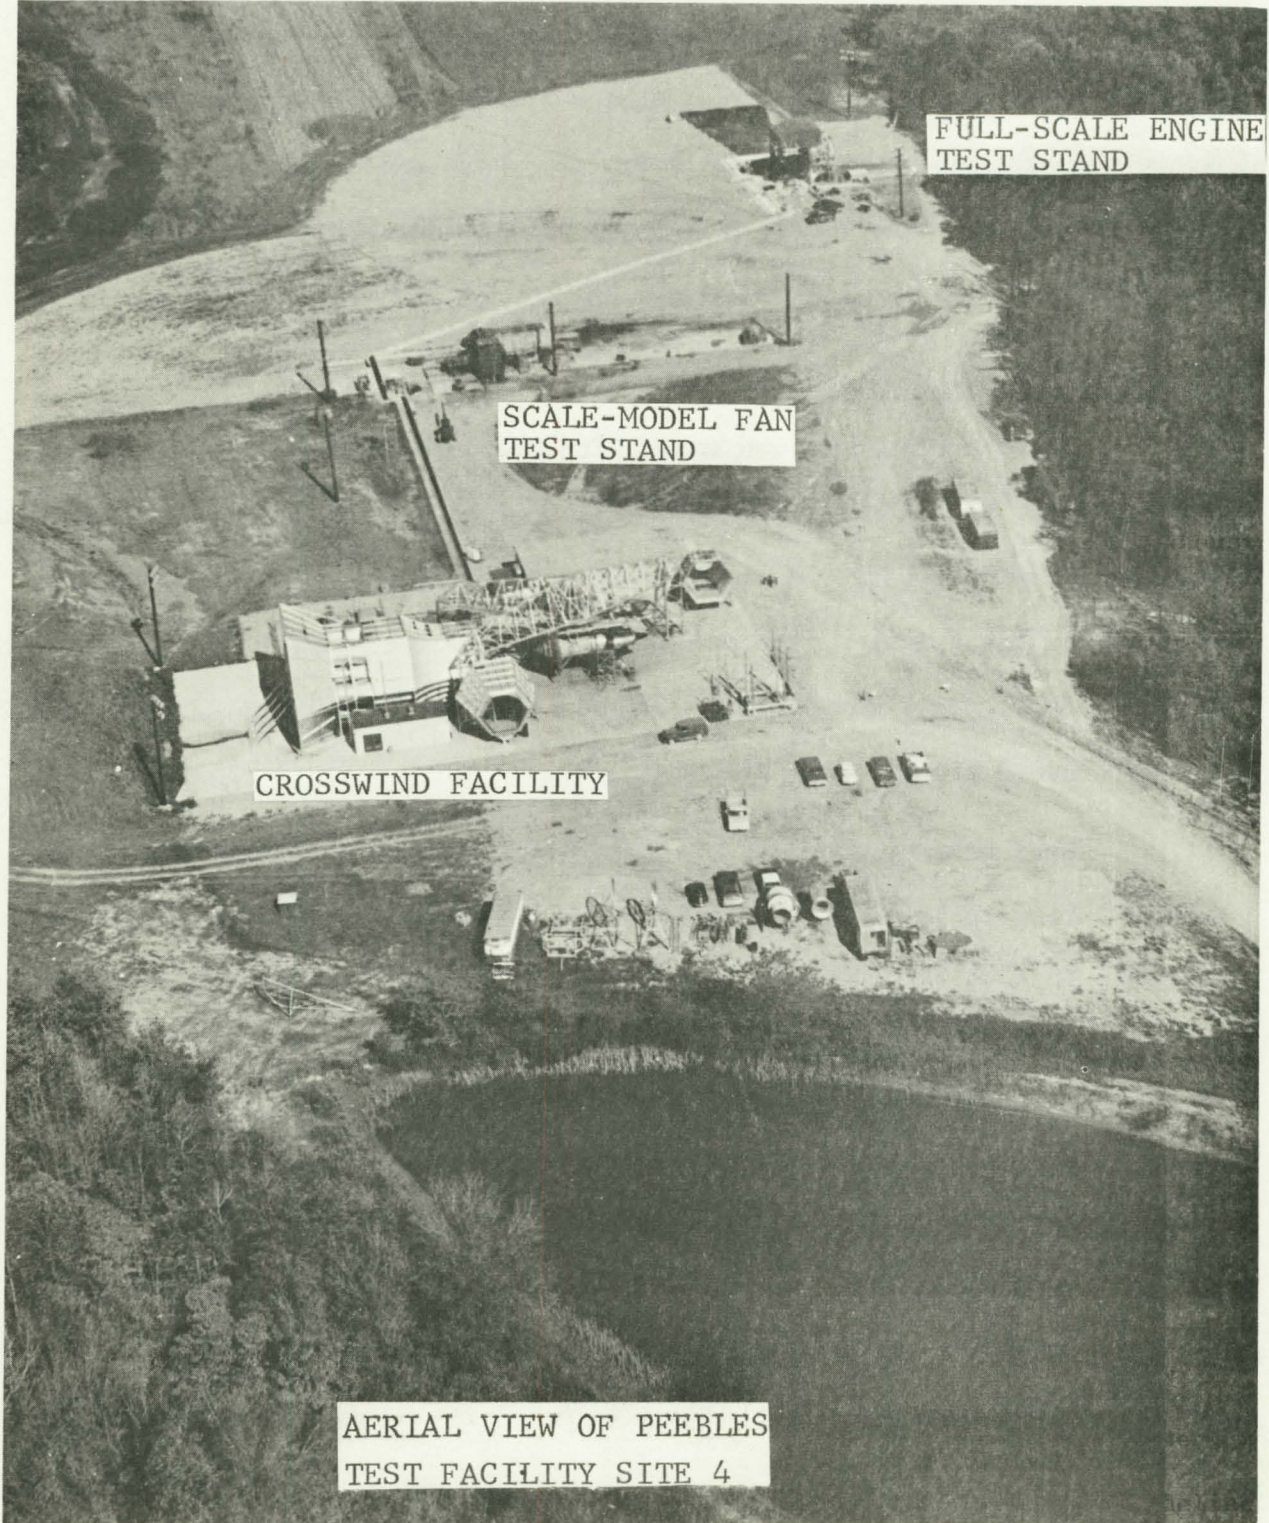

FULL-SCALE ENGINE TEST STAND

SCALE-MODEL FAN TEST STAND

CROSSWIND FACILITY

AERIAL VIEW OF PEBBLES TEST FACILITY SITE 4

FIGURE 5




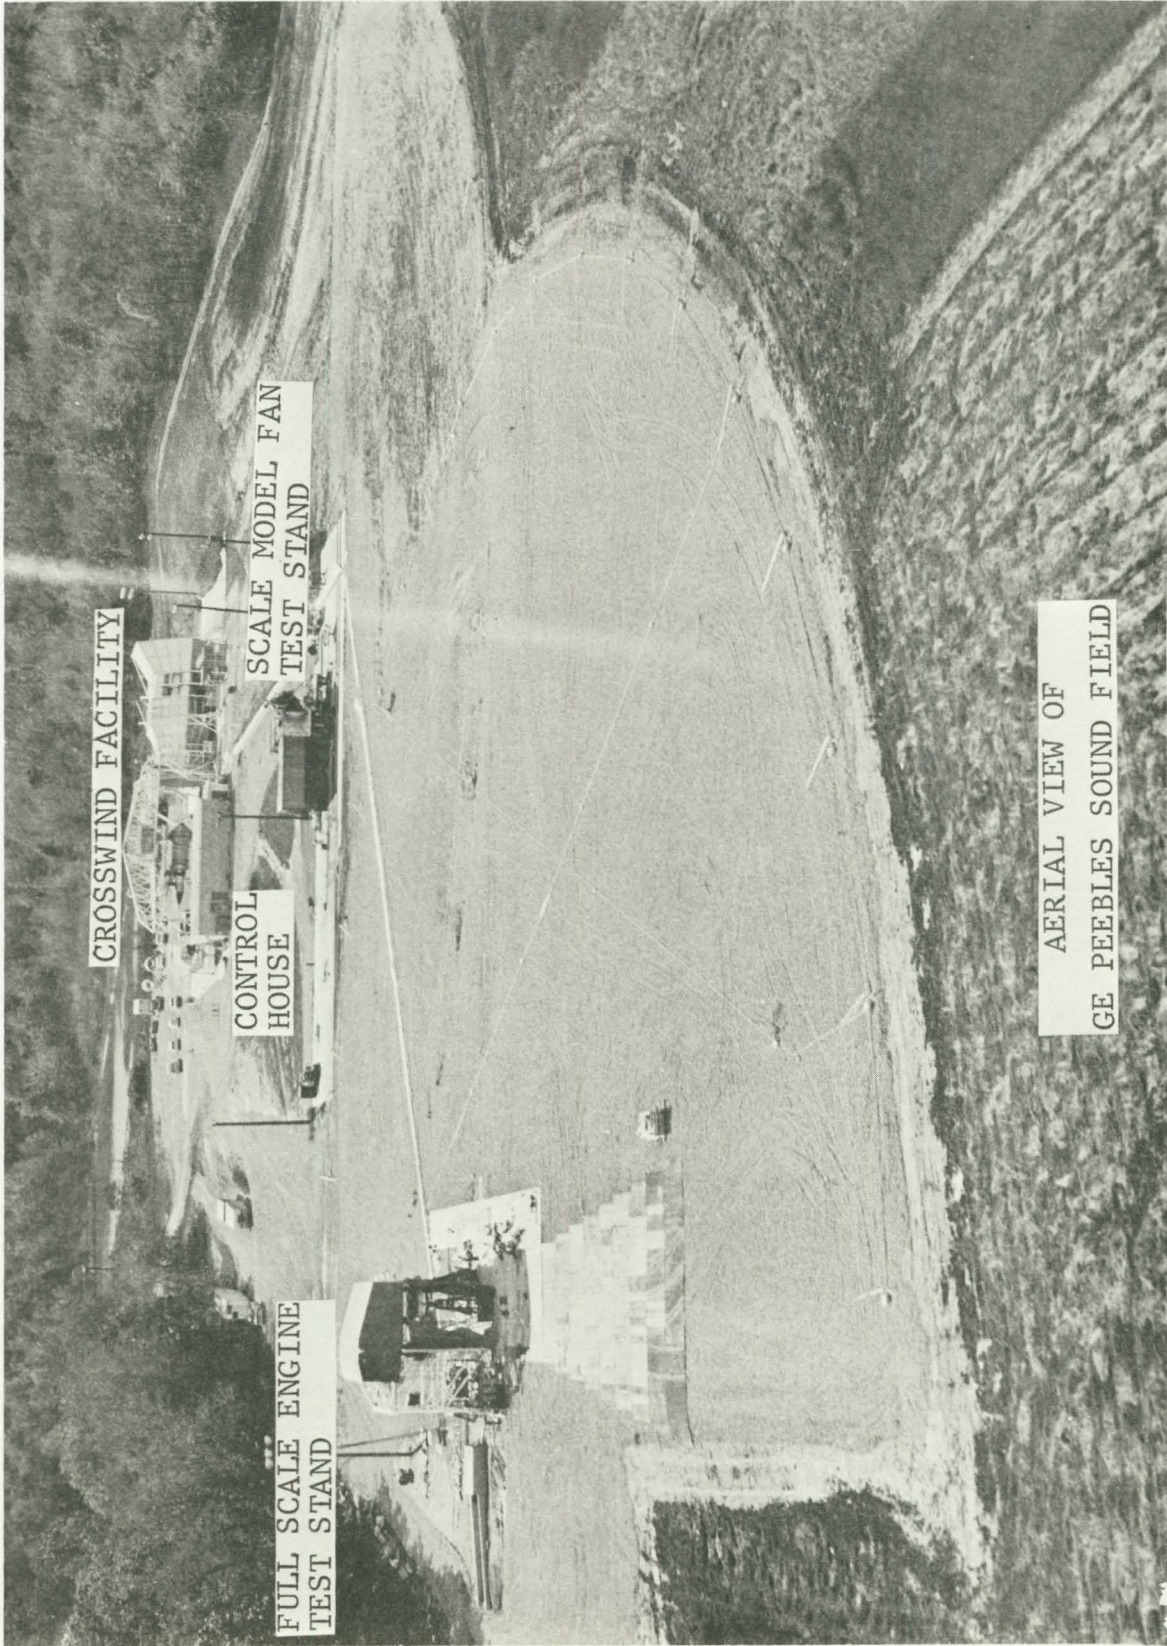


Figure 6

Reproduced from  
best available copy.



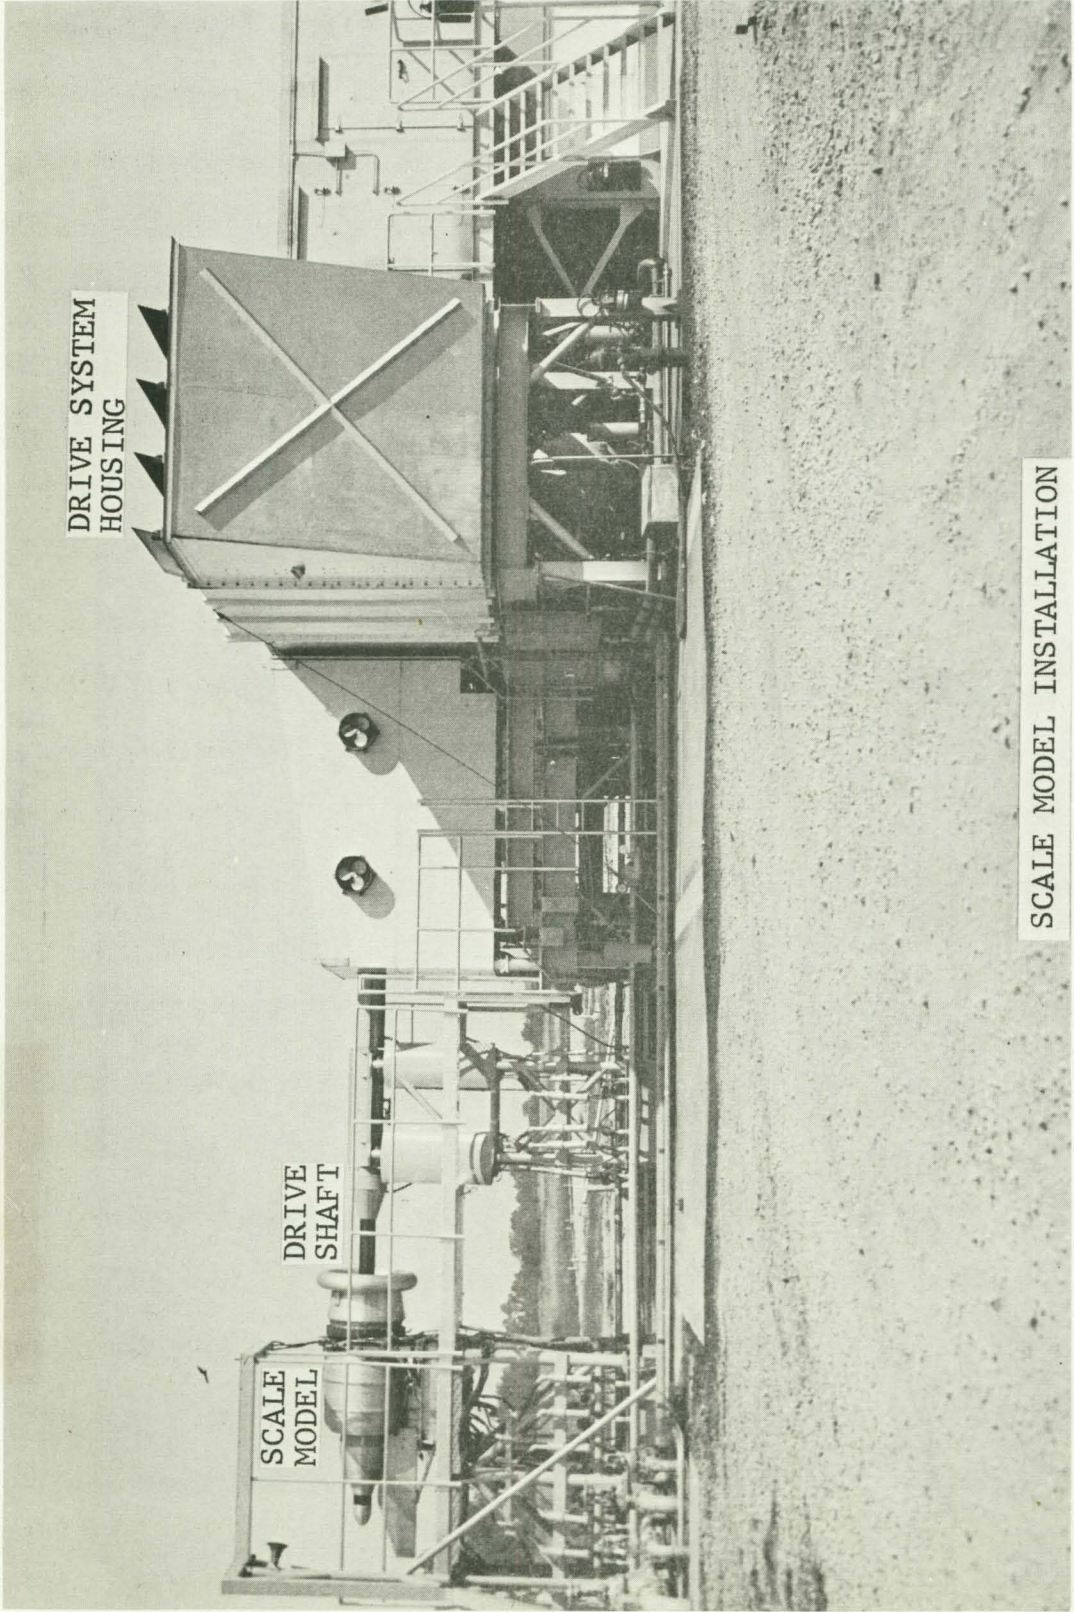

DRIVE SYSTEM  
HOUSING

SCALE  
MODEL

DRIVE  
SHAFT

SCALE MODEL INSTALLATION

Prior to testing, the frequency response of the system was determined by removing the microphone head and inputting a constant voltage at various frequencies throughout the range of interest. For a range of 50 Hz to 25 KHz, this was performed at frequencies of 50, 250, 1000, 5K, 8K, 10K, 12.5K, 16K, 20K and 25KHz. The voltage input was chosen at 10 millivolts, approximately the equivalent to 94 dB for a ½ inch (1.3 cm) microphone and an approximation of the levels encountered during an actual test.

The loss through each system was measured by removing the microphone head and inputting one volt RMS at the microphone preamplifier at a frequency of 250 Hz, to correspond with the pistonphone frequency. If the system loss was not within a specified limit, based on the specifications of the components, then the system was checked and/or changed before continuing.

With the 124 dB pistonphone on the microphone, the voltage output was compared with the calculated output based on the system losses and the microphone sensitivity. If the actual voltage output agreed within ½ dB (approximately 5%) of the calculated output, the microphone was functioning properly. Microphone cartridges falling outside this limit were set aside for repair and/or recalibration prior to reuse.

The amplifiers, tape recorder, and data reduction facilities were checked by recording a broadband electrical signal of known amplitude, known as "pink noise." Reduction of this signal provided a measure of the frequency response of these components.

In addition to these system checks, a pre and post test calibration was recorded on each channel using the 124 dB pistonphone (B&K model 4220).

## B. Testing Schedule

Acoustic tests were conducted at ten speed points, with three nozzle sizes, for both the untreated and treated configurations. Table IV summarizes the configurations for which data was obtained.

The speeds selected correspond to the net engine thrusts shown below:

RPM	% SPEED	% F <sub>n</sub> SLS <sup>*</sup>	% F <sub>n</sub> alt=0 <sup>**</sup> M =.25
4040	54.0	29.5	22.3
4474	59.8	36.8	30.6
4700	62.8	40.9	35
4907	65.5	45.2	40
5505	73.5	58.6	55
5990	80	71.1	70
6354	84.9	81.9	82.5
6526	87.1	88.4	90
6649	88.8	92.9	95
6845	91.4	100	102.5

\* 100% = 22,000 lbs (97,900 newtons) full scale

\*\* 100% = 16,000 lbs (71,200 newtons) full scale

These physical speeds were set in order to avoid shifting the frequency of the tones between 1/3 octave bands due to day to day ambient temperature variations.

Moreover, the following restrictions were imposed on acoustic testing:

1. Acoustic data were not taken with steady winds greater than 5 mph. (8.05 km/sec) or gusts greater than 3 mph. (4.83 km/sec);
2. Water or snow accumulation on the sound field prohibited testing;
3. Rain, snow or fog at the test site prohibited testing;
4. Testing was restricted to conditions where the relative humidity was greater than 30% and lower than 90%;
5. No absolute level acoustic data was taken while aerodynamic instrumentation was installed.

TABLE III.

QEP FAN B

TEST DATA ACCUMULATED ON SCALE MODEL  
TREATED AND UNTREATED WITH NOZZLE VARIATIONS

Run No.	Untreated Configurations			Treated Configurations			
	3	4	5	6	13	14	17
Test Date	8/14/70	8/20/70	8/21/70	8/24/70	9/19/70	9/19/70	10/6/70
Nozzle Size	Nom.	Large	Small	Nom.	Small	Large	Nom
Fan Speed	Reading No's						Reading No's
4040 RPM	19	39	60	--	218	--	261
	23	44	67	--	229	--	271
4474 (Approach)	20	40	61	--	219	239	262
	24	45	68	--	230	244	272
4700	21	42	62	--	220	--	263
	25	46	69	--	231	--	273
4907	22	43	63	--	221	240	264
	26	47	70	--	232	245	274
5505	27	48	64	--	222	--	265
	30	51	71	--	233	--	275
5990	28	49	65	--	223	241	266
	31	52	72	--	234	246	276
6354	29	50	66	--	224	--	267
	32	53	73	--	235	--	277
6526	33	54	74	79	226	242	268
	34	56	--	82	236	247	278
6649	--	55	75	80	227	--	269
	--	57	77	83	237	--	279
6845 (Take-off)	--	58	76	81	228	243	270
	--	59	78	84	238	248	280

Small nozzle = 372 in<sup>2</sup> (.24 m<sup>2</sup>)  
 Nom. nozzle = 396 in<sup>2</sup> (.26 m<sup>2</sup>)  
 Large nozzle = 460 in<sup>2</sup> (.30 m<sup>2</sup>)



## VI. Acoustic Data Reduction & Acoustic Scaling Procedure

### A. One Third Octave Data

The acoustic data reduction system, schematically illustrated in Figure 8, was designed specifically to perform time-averaged spectral analysis using a 30 second averaging time with a 1/3 octave bandwidth parallel filter system. Data was recorded on FM analog magnetic tape. This tape was played back through an amplifier/attenuator to provide the optimum signal input level to utilize the 50 dB dynamic range of the 1/3 octave filter system. The output of each filter was directly connected to a detector/integrator circuit which had built-in "hold" capabilities. The "hold" capability enabled the system to accumulate average signal amplitudes for each of the 1/3 octave bands and to hold them until they were processed through the analog-to-digital converter. The digital signal was then input to the DDP-116 Computer which provided a digital magnetic tape used for further computations and an on-line "quick-look" printout of sound pressure level spectra (temperature and humidity corrected to Standard Day). The "quick-look" information was used as a quality check prior to addition data reduction.

Additional data reduction included "Standard Data Reduction" and "Scaled Data." The former consisted of PNL, OASPL, PWL, OAPWL and D.I., as well as extrapolations to various sideline distances via the DDP-116 Computer. The latter, used for scale model data, provided the same type of data for both scale model and scale model projected to full size by methods described in the following section.

The 1/3 octave scale model data used to prepare this report are presented in the Appendix, Section IX.

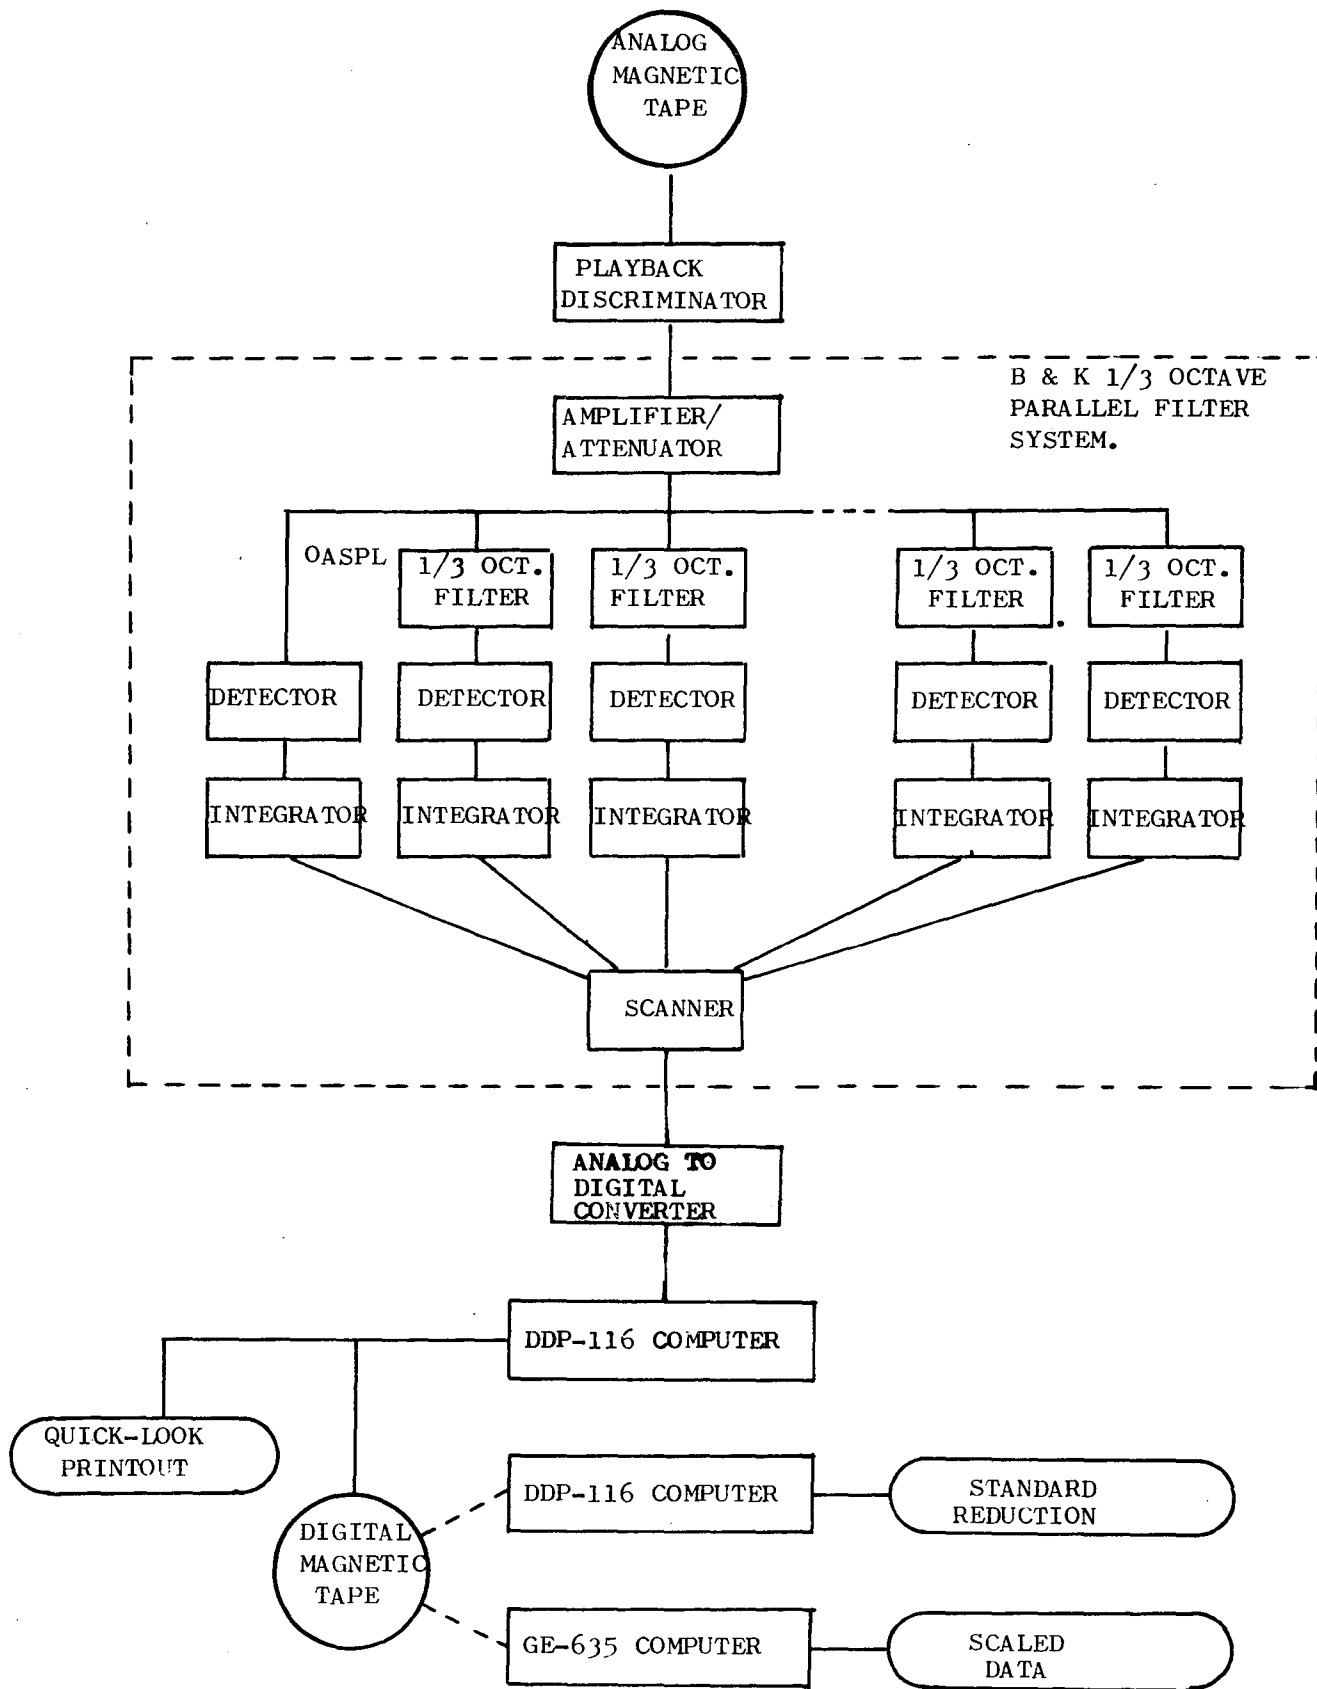


Figure 8

## B. Scaling Procedure

In addition to providing comparative data on noise reduction features, the scale model results were used to predict the full scale fan noise levels. In order to scale up the results, the frequency dependent atmospheric absorption corrections were removed from the scale model spectra to form an ideal spectra. This ideal spectra was then shifted as follows: the jet noise below the 1/3 octave band preceding the fundamental was shifted by the square root of the airflow ratio; the fan spectra were shifted by the ratio of the fan fundamental frequencies; and, a size adjustment of  $10 \log_{10}$  of the airflow ratio was added to all frequencies. The resulting spectra were then extrapolated, using the attenuations of the shifted frequencies, to various arc and sideline distances.

For example:

### 1. Adjustment for Fan Frequency Shift

Fundamental Frequency = Number of blades x RPM/60

$$f_1 \text{ scale model} = 26 \times 6845/60 = 2970 \text{ Hz}$$

$$f_1 \text{ full scale} = 26 \times 3320/60 = 1440 \text{ Hz}$$

The scale model fundamental appeared in the 3150 Hz 1/3 O.B. The full scale fundamental appeared in the 1600 Hz 1/3 O.B. Hence, the fan spectra was shifted three 1/3 octave bands.

### 2. Adjustment for Jet Noise Frequency Shift

$$\begin{aligned} \text{Shift factor} &= \sqrt{\text{airflow ratio}} = \sqrt{\frac{\text{flow, full scale}}{\text{flow, scale model}}} \\ &= \sqrt{4.26} \\ &= 2.07 \end{aligned}$$

Therefore, levels at 200 Hz were shifted by  $200/2.07$  to 97 Hz or to the 100 Hz  $1/3$  octave band. Thus, the jet noise was shifted three  $1/3$  octave bands.

### 3. Adjustment for Size

To account for the size difference, a general adder of  $10 \log_{10}$  airflow ratio or  $10 \log_{10} 4.26 = 6.3$  dB, was added at all frequencies.

### 4. Adjustment for Atmospheric Absorption

The model spectrum data was increased by an atmospheric absorption number (which increases with frequency) before frequencies were shifted for scaling. After shifting, atmospheric absorption numbers for the shifted frequencies were subtracted to account for the fact that the shifted frequencies showed less absorption.

Table V shows the scaling technique applied to a typical scale model spectra.

### C. Narrow Band Data

Narrow Band frequency analysis was performed by means of a Federal Scientific Ubiquitous Spectrum Analyzer, Model UA-6A, in conjunction with an Option 12913 High Resolution Digital Averager. The analyzer was capable of Fourier-analyzing all frequencies, within a selected frequency range, in real time. This analysis could be performed on continuous and intermittent signals as well as one time transients.

TABLE IV

QEP FAN B

SCALE MODEL

SCALING TECHNIQUE

1/3 Octave Band Center Frequency (Hz)	①	②	③	④	⑤	⑥
	Scale Model 100' (30.5m) Arc W/Std. Day Corr.	Atmospheric Attenuation per 100' (30.5m)	① + ②	Shifted Spectra	④ + 6.3 dB Weight flow Adder=6.3 dB	⑤ - ② Full Scale Spectra 100' (30.5m) Arc W/Std. Day Corr.
50	82.0	0	82.0	83.8	90.1	90.1
63	84.1	0	84.1	83.3	89.6	89.6
80	83.2	0	83.2	80.7	87.3	87.3
100	83.8	0	83.8	84.7	91.0	91.0
125	83.3	0	83.3	89.3	95.6	95.6
160	80.7	0	80.7	91.9	98.2	98.2
200	84.7	0	84.7	89.3	95.6	95.6
250	89.3	0	89.3	86.2	92.5	92.5
315	91.9	0	91.9	88.7	95.0	95.0
400	89.2	.1	89.3	86.3	92.6	92.5
500	86.1	.1	86.2	87.7	94.0	93.9
630	88.6	.1	88.7	86.5	92.8	92.7
800	86.2	.1	86.3	87.8	94.1	94.0
1000	87.6	.1	87.7	86.5	92.8	92.7
1250	86.3	.2	86.5	86.2	92.5	92.3
1600	87.6	.2	87.8	91.7	98.0	97.8
2000	86.2	.3	86.5	88.7	95.0	94.7
2500	85.8	.4	86.2	89.8	96.1	95.7
3150	91.2	.5	91.7	93.2	99.5	99.0
4000	88.0	.7	88.7	90.8	97.1	96.4
5000	88.9	.8	89.8	89.1	95.4	94.5
6300	92.0	1.2	93.2	87.5	93.8	92.6
8000	89.1	1.7	90.8	84.9	91.2	89.5
10000	86.6	2.5	89.1	84.5	90.8	88.3
12500	83.6	3.9	87.5			
16000	79.0	5.9	84.9			
20000	76.0	8.5	84.5			

114.7 PNdB

121.7 PNdB

The Averager accumulated the short-term spectra (produced by the Ubiquitous Analyzer) and obtained the mean spectrum characteristics in real time. Successive spectra were summed digitally over a selected period of time and the resultant average was displayed via an X-Y plotter. Averaging resulted in signal-to-noise ratio enhancement and was useful for detecting spectrum components which are "buried" in noise.

Narrow Band analysis performed for this report consisted of a frequency range of 20 to 10K Hz with a nominal filter band width of 20 Hz. The integration time used was 12.8 seconds, with 256 scans during this time period.

## VII. ACOUSTIC DATA ANALYSIS

### A. NOISE VARIATIONS WITH SPEED

Figures 9 - 13 show the noise characteristics at several speeds for the untreated configuration of scale model Fan B with the nominal nozzle. The data presented were recorded around a 100 foot (30.5 m) arc and have been corrected to Standard Day conditions of 59°F (15°C) temperature and 70% relative humidity.

Figures 9 and 10 show the distribution of the fundamental and second harmonic respectively around the arc at approach and takeoff thrust. The SPL's of the tones were derived from narrowband data and then corrected to Standard Day. The sound power levels were calculated from these arc SPL values. The fundamental at approach was 10.7 dB PWL lower than at takeoff and the second harmonic was 8.5 dB PWL lower at approach than at takeoff thrust. The maximum fundamental tones occurred in the front quadrant for both takeoff and approach thrusts while the maximum second harmonic occurred in the rear quadrant for both power settings.


Figures 11 and 12 present the 1/3 octave spectrum at 50° and 120° respectively, for 60%, 70%, 80% and 90% corrected fan speeds. (The 1/3 octave scale model data is presented in the Appendix for all angles). Although the blade passing frequency occurred in different 1/3 octave bands for different fan speeds, it can be seen that the fundamental increased with increasing speed at both angles. Further, the noise level below 1600 Hz generally increased with speed.

The second harmonics likewise increased with increasing speed with the exception of the one at  $50^\circ$  for  $90\% N_{f_c}$  which was lower than the second harmonics for this angle at  $70\%$  and  $80\% N_{f_c}$ . Note that the difference between  $60\%$  and  $70\%$  speeds was markedly greater than between any other pair of adjacent speeds.

Figure 13 contains sound power level spectra versus frequency for the four speeds. Again, it can be seen that the levels of the tones and the broadband noise increased with increasing speed. Note the  $60\% N_{f_c}$  PWL was quite a bit lower than the  $70\% N_{f_c}$  PWL while the  $70\%$ ,  $80\%$  and  $90\%$  PWL's were rather closely grouped - approximately 7 dB difference between the  $60\%$  and  $70\%$  fundamental while only  $2\frac{1}{2}$  dB between the  $70\%$  and  $90\%$  fundamental.



SCALE MODEL FAN B  
 FUNDAMENTAL - STANDARD DAY

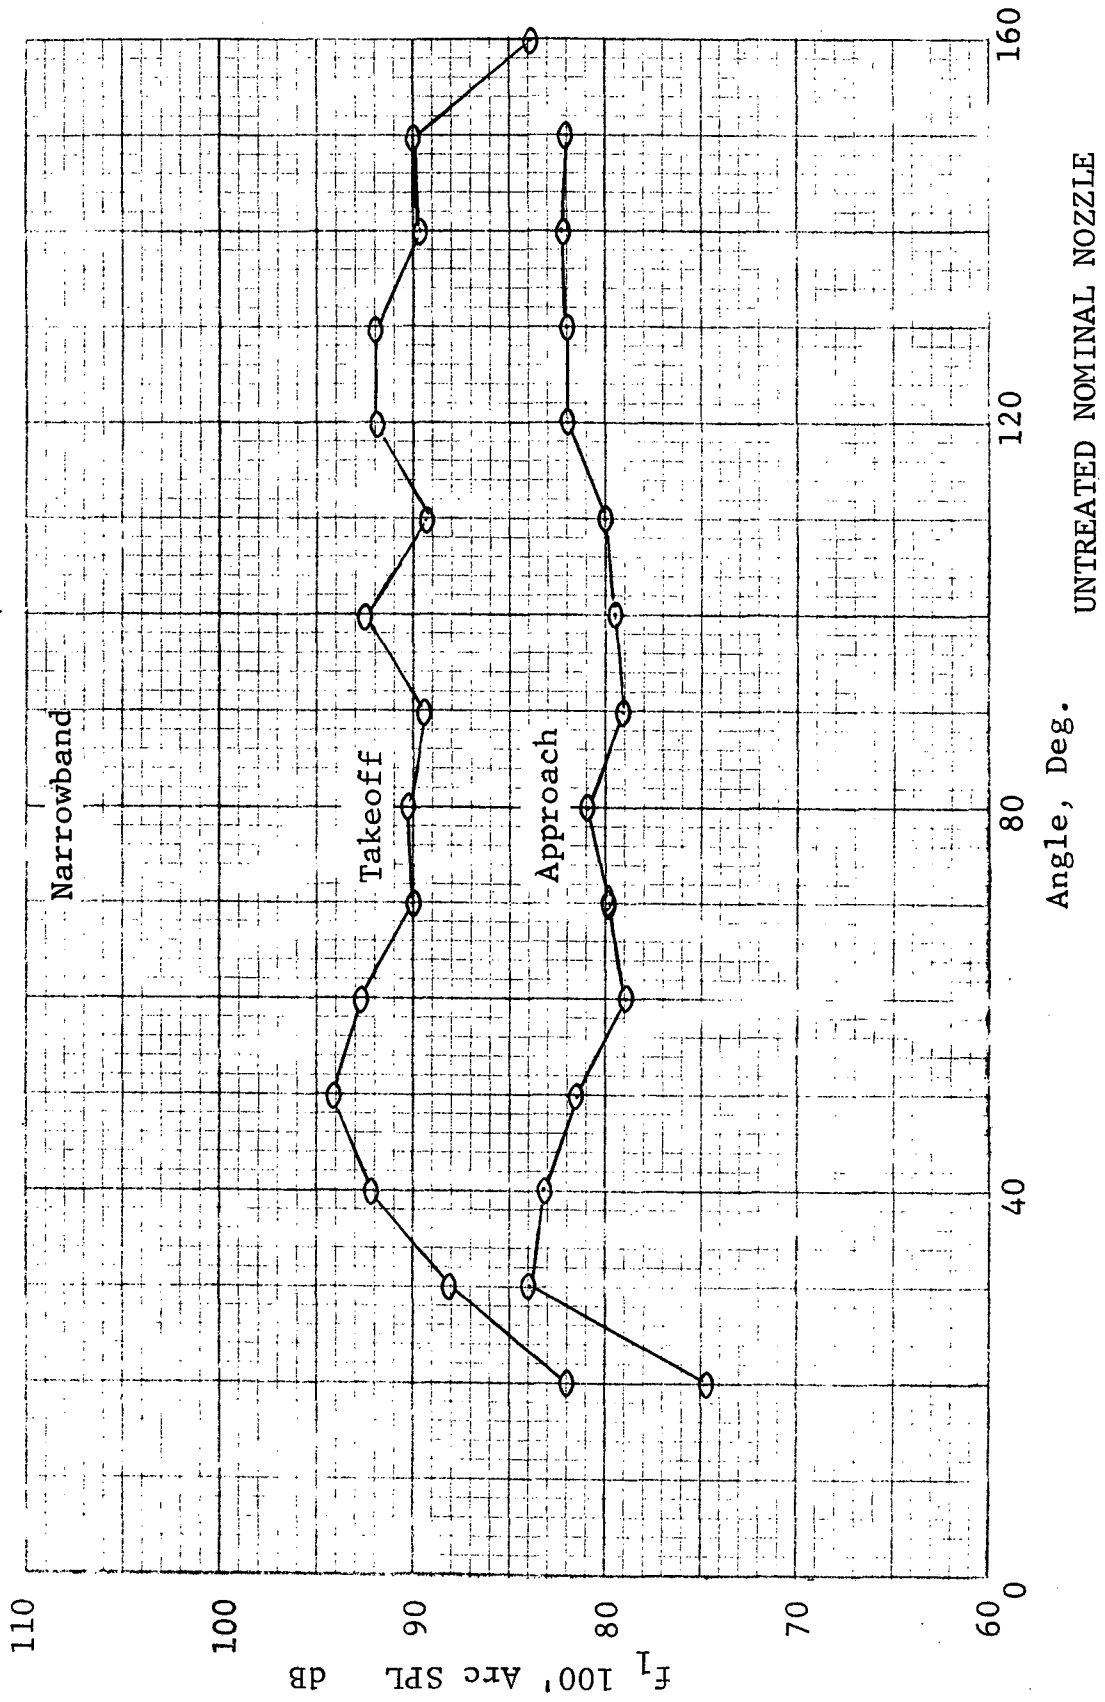

Approach - PWL=131.5 dB  
 Takeoff - PWL=142.2 dB

Figure 9

SCALE MODEL FAN B  
 SECOND HARMONIC - STANDARD DAY

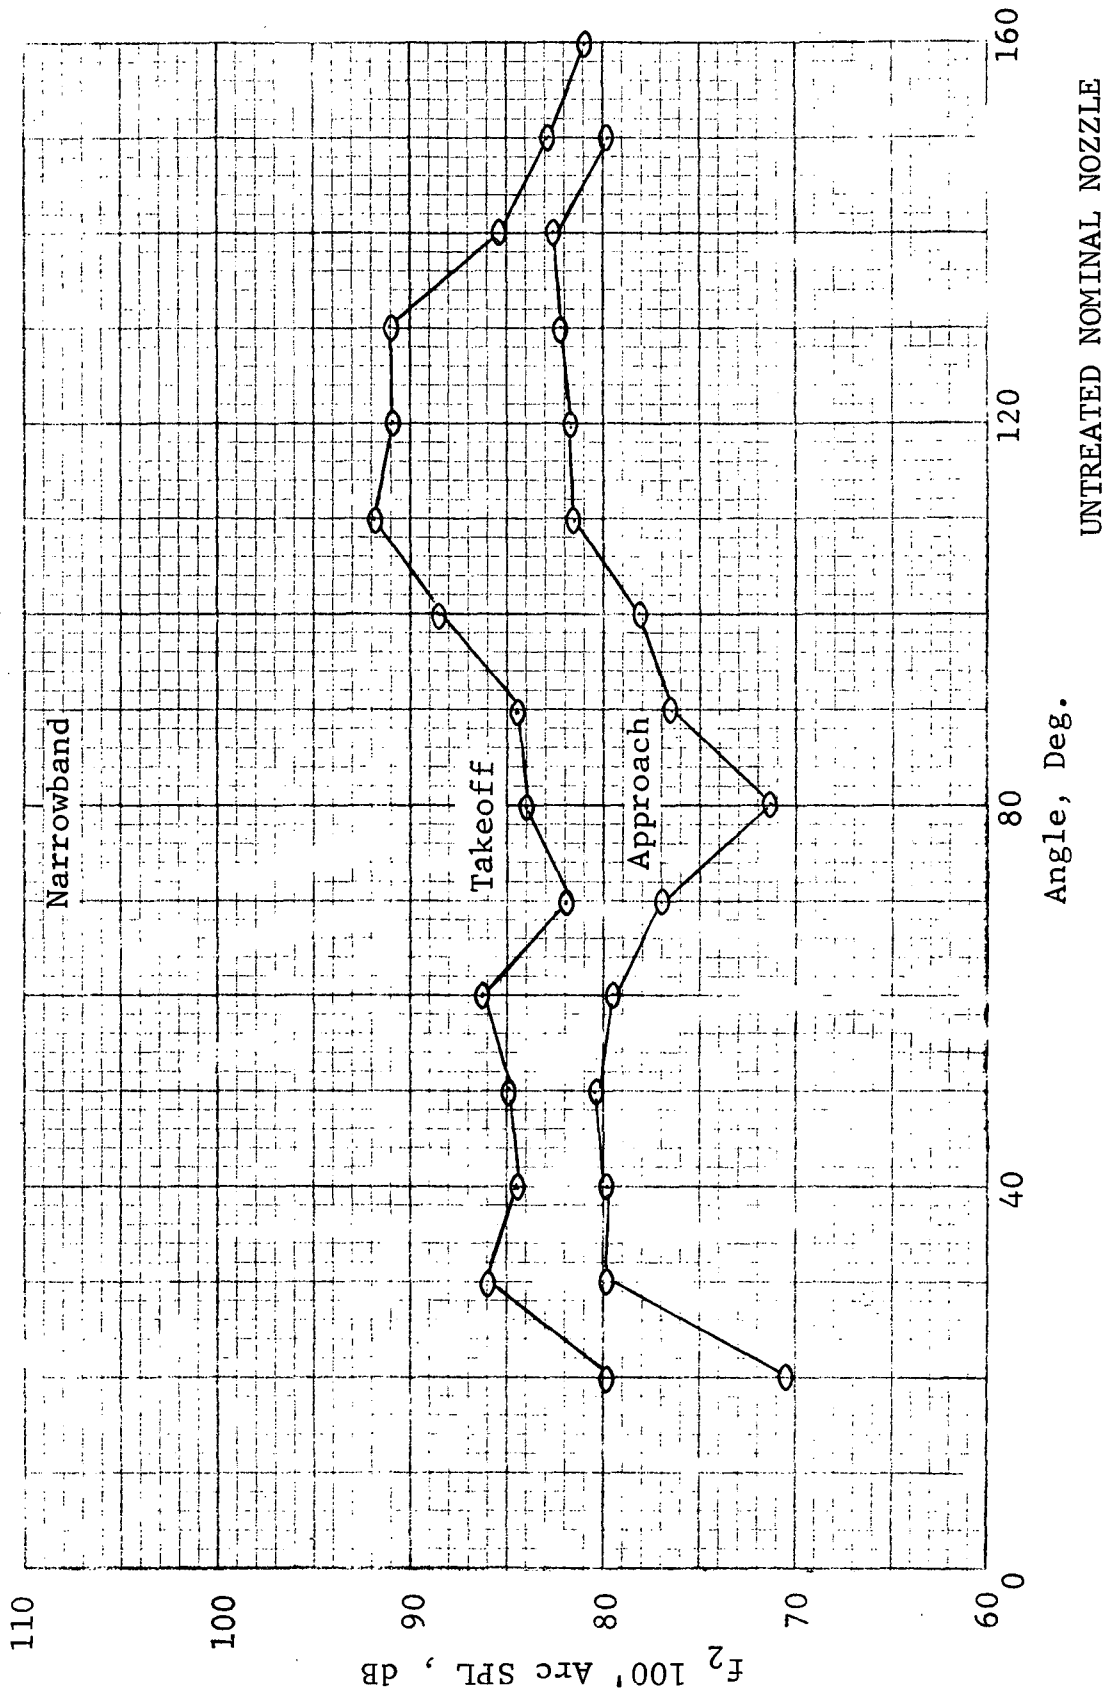


Figure 10

Approach - PWL=130.7 dB  
 Takeoff - PWL=139.5 dB

QEP FAN B SCALE MODEL RESULTS

50°

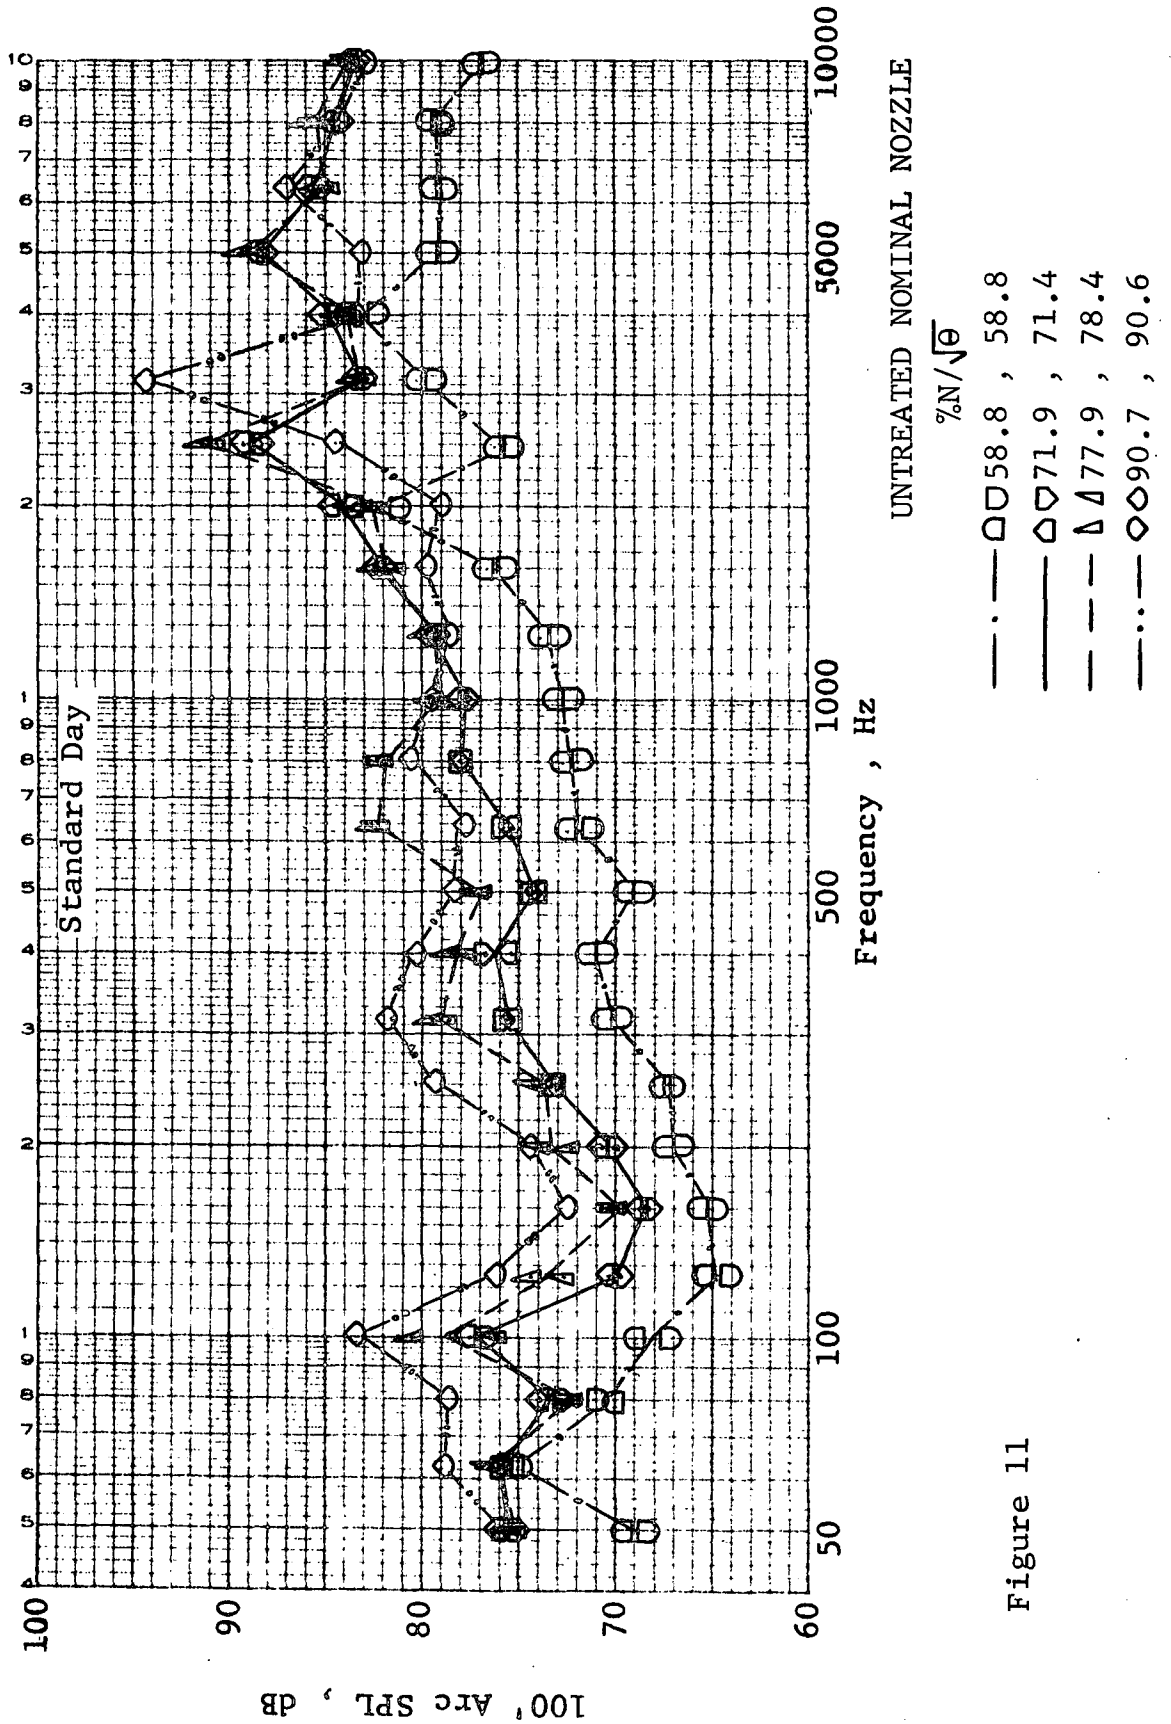


Figure 11

QEP FAN B SCALE MODEL RESULTS

120°

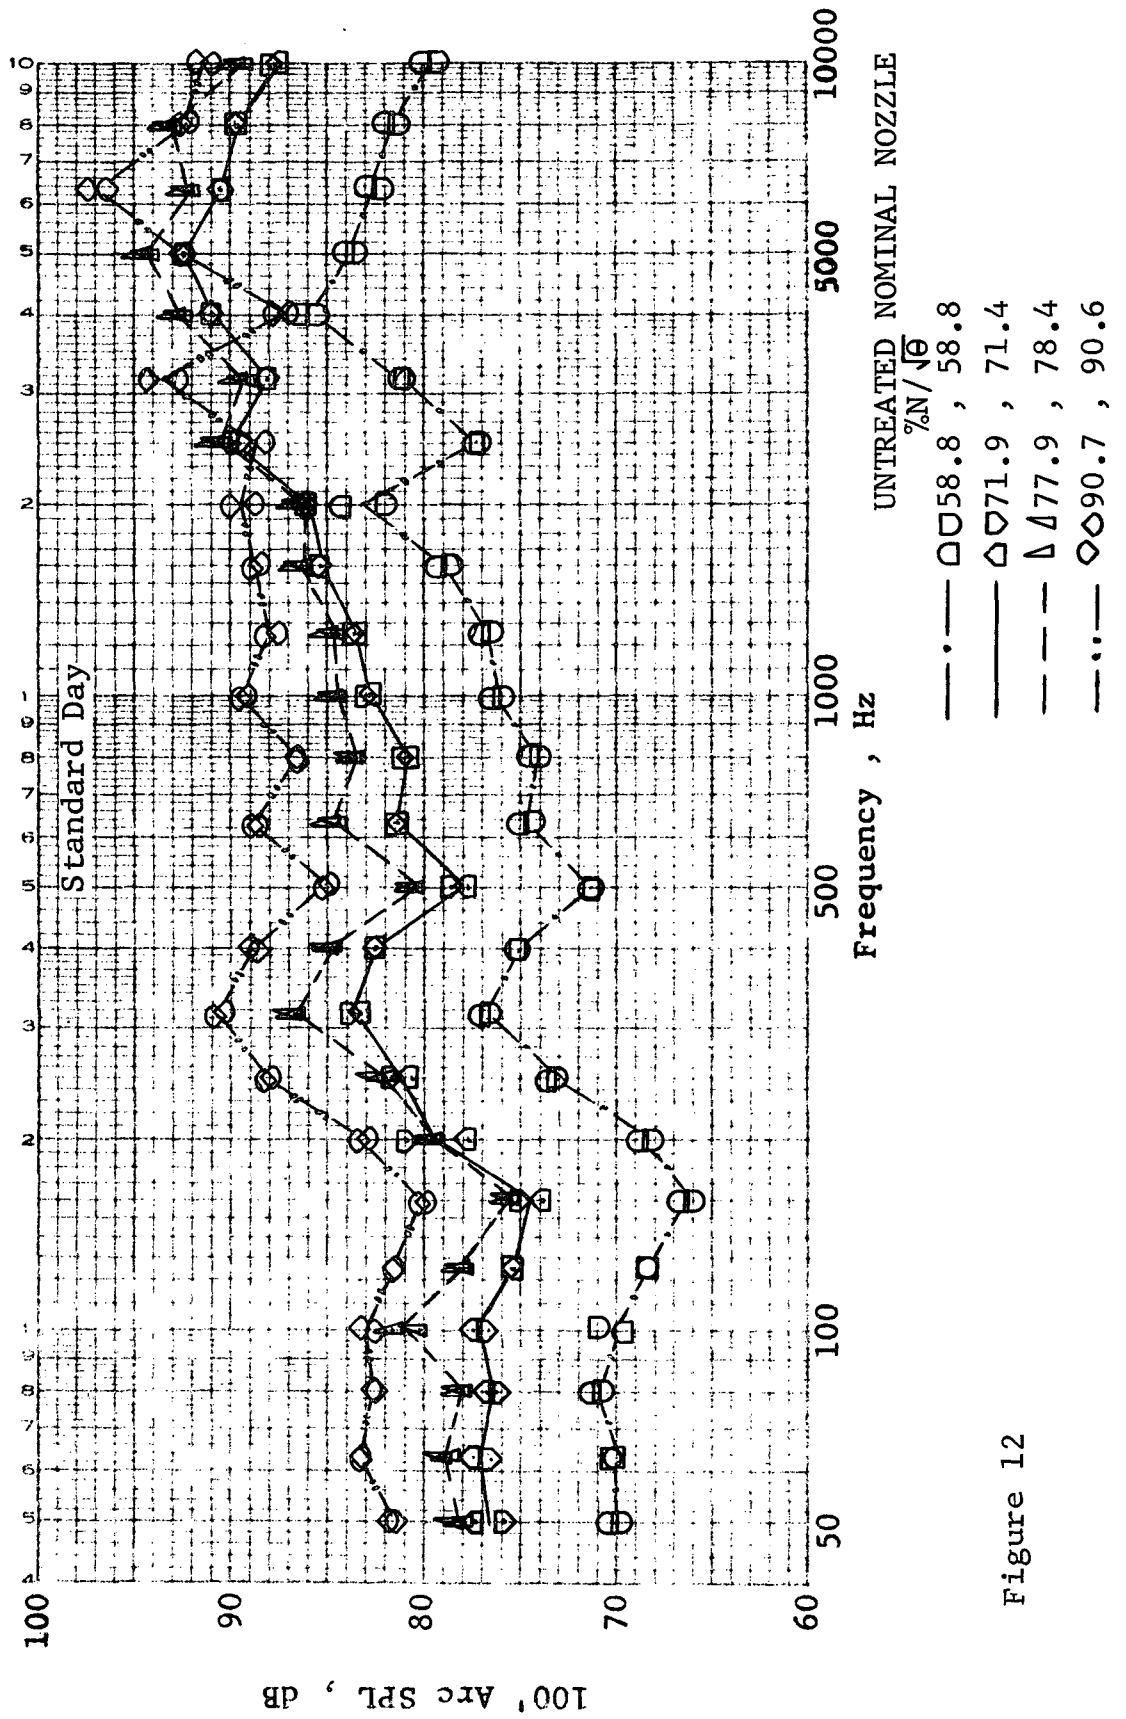


Figure 12

QEP FAN B SCALE MODEL RESULTS  
SOUND POWER LEVELS

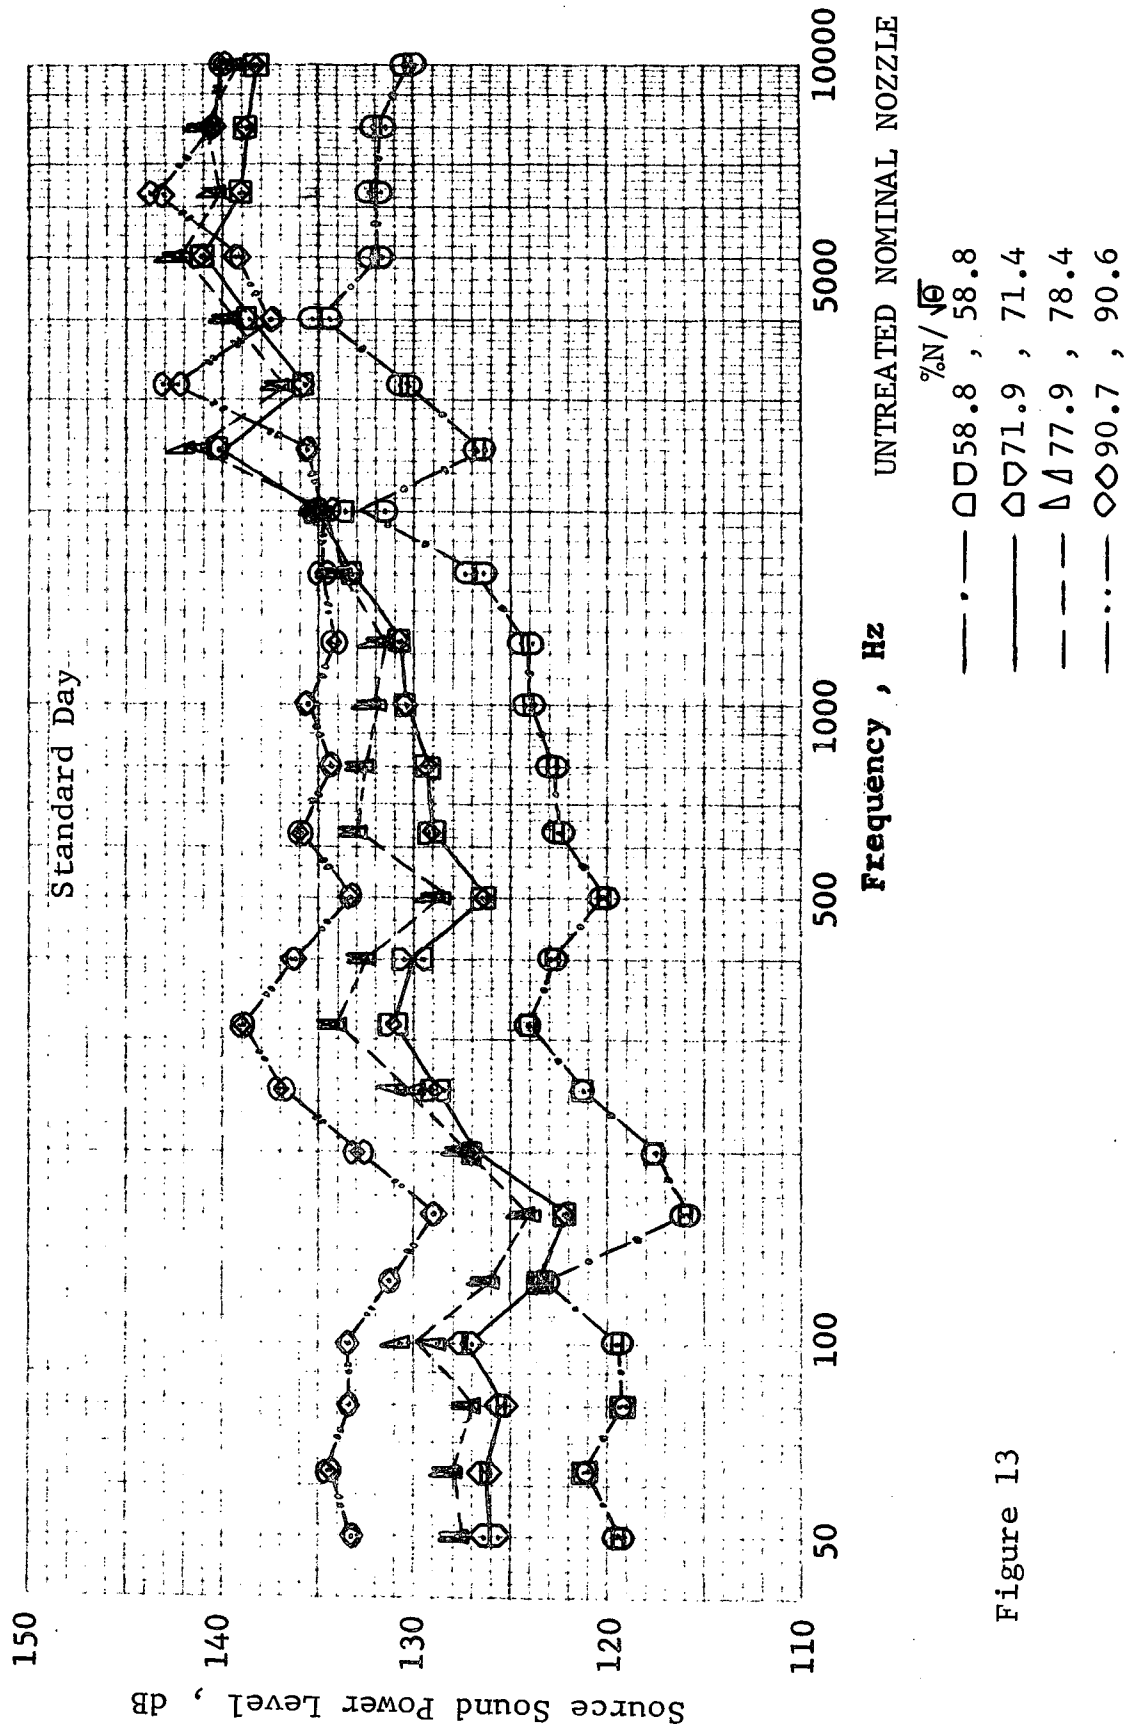


Figure 13

## B. NOISE VARIATIONS WITH FAN NOZZLE AREA


Figures 14 - 23 present the noise characteristics of the untreated scale model configuration at approach and takeoff thrusts with three different fan nozzles. These nozzles were designated small, 372 square inches ( $.24 \text{ m}^2$ ); nominal, 396 sq. inches ( $.26 \text{ m}^2$ ); and large, 460 sq. inches ( $.30 \text{ m}^2$ ). The data presented in these figures are for a 100 foot (30.5 m) arc.

The distribution around the arc of the fundamental and the second harmonic of the fan with three nozzles is shown in Figures 14 and 15 for approach thrust and in Figures 16 and 17 for takeoff thrust. The sound pressure levels of the tones were derived from narrowband data and these levels have been corrected to Standard Day conditions. In each of the four cases, the tone level of the large nozzle was the highest while that of the small nozzle was the lowest. The sound power level of the fundamental at approach differed by 2.1 dB PWL between the large and nominal nozzles and by 2.1 dB PWL between the nominal and small nozzles, respectively. The PWL of the second harmonic at approach was very similar for the large and nominal nozzles, while the small nozzle was 2.2 dB PWL lower than the nominal nozzle. However, at takeoff thrust, the PWL of the tones for the nominal and small nozzle were both similar amounts lower than the large nozzle. The maximum tones for each of the four cases occurred in the rear quadrant, although the rear to front quadrant difference is slight for the fundamental at approach.

The 1/3 octave spectra for approach thrust at 50° and 120° (Figures 18 and 19) likewise indicate that the tone levels of the small nozzle were less than those of the other nozzles. However, these figures also indicate that the broadband noise of the small nozzle was substantially higher than the broadband noise of the other nozzles from 315 Hz to 10 KHz at 50° and from 315 Hz to 2000 Hz at 120°. The broadband noise was generally higher for the small nozzle at takeoff thrust from 315 Hz to 10 KHz as well, as indicated by Figure 20 for 50° and by Figure 21 for 120°.

Figure 22 contains sound power levels versus frequency for the three nozzles at approach thrust. Again, the broadband noise for the small nozzle is shown to be significantly higher than the other two nozzles from 315 Hz to 4000 Hz. Figure 23 contains the PWL spectra at takeoff thrust for the three nozzles. The broadband noise was also higher at this thrust level for the small nozzle than for the other nozzles, although the difference was not as great as that at approach thrust.

QEP FAN B SCALE MODEL  
 FUNDAMENTAL AT APPROACH  
 STANDARD DAY NARROWBAND

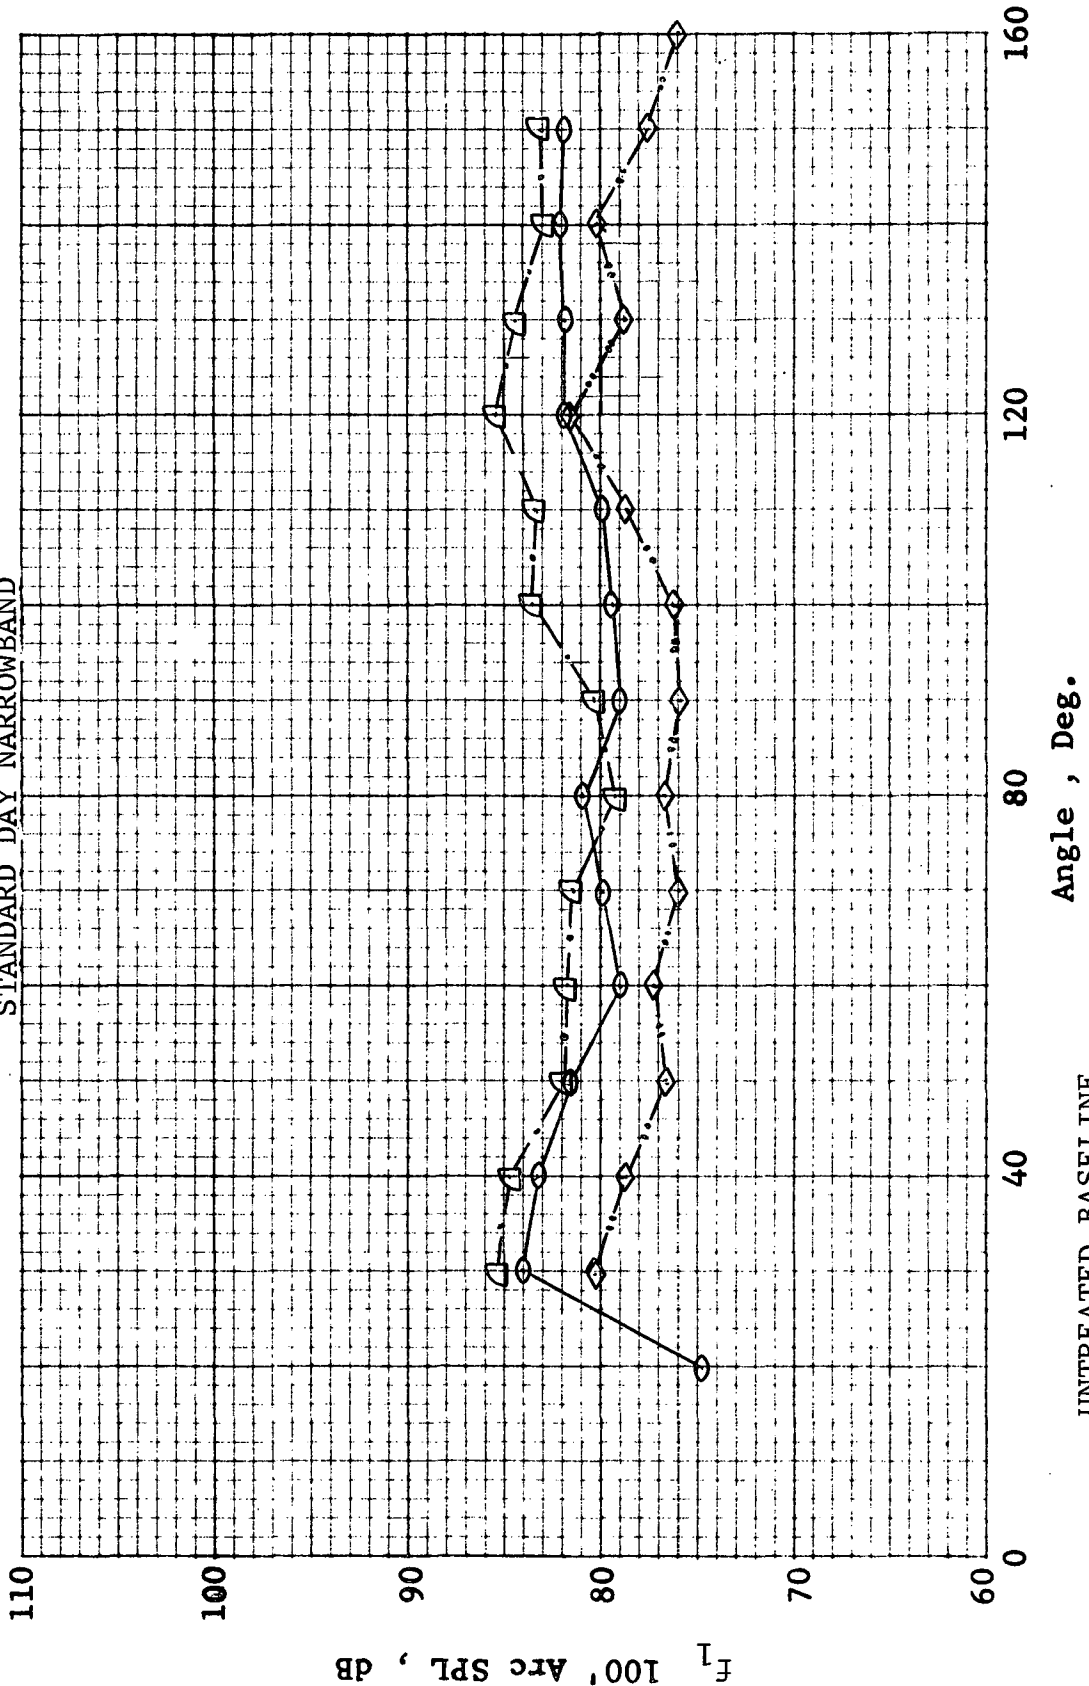

UNTREATED BASELINE  
 $\frac{\%N}{\sqrt{\theta}}$

○ Nominal Nozzle	58.8	PWL=131.5 dB
△ Large Nozzle	58.2	PWL=133.6 dB
◇ Small Nozzle	59.0	PWL=128.9 dB

Figure 14



QEP FAN B SCALE MODEL  
 SECOND HARMONIC AT APPROACH  
 STANDARD DAY NARROWBAND


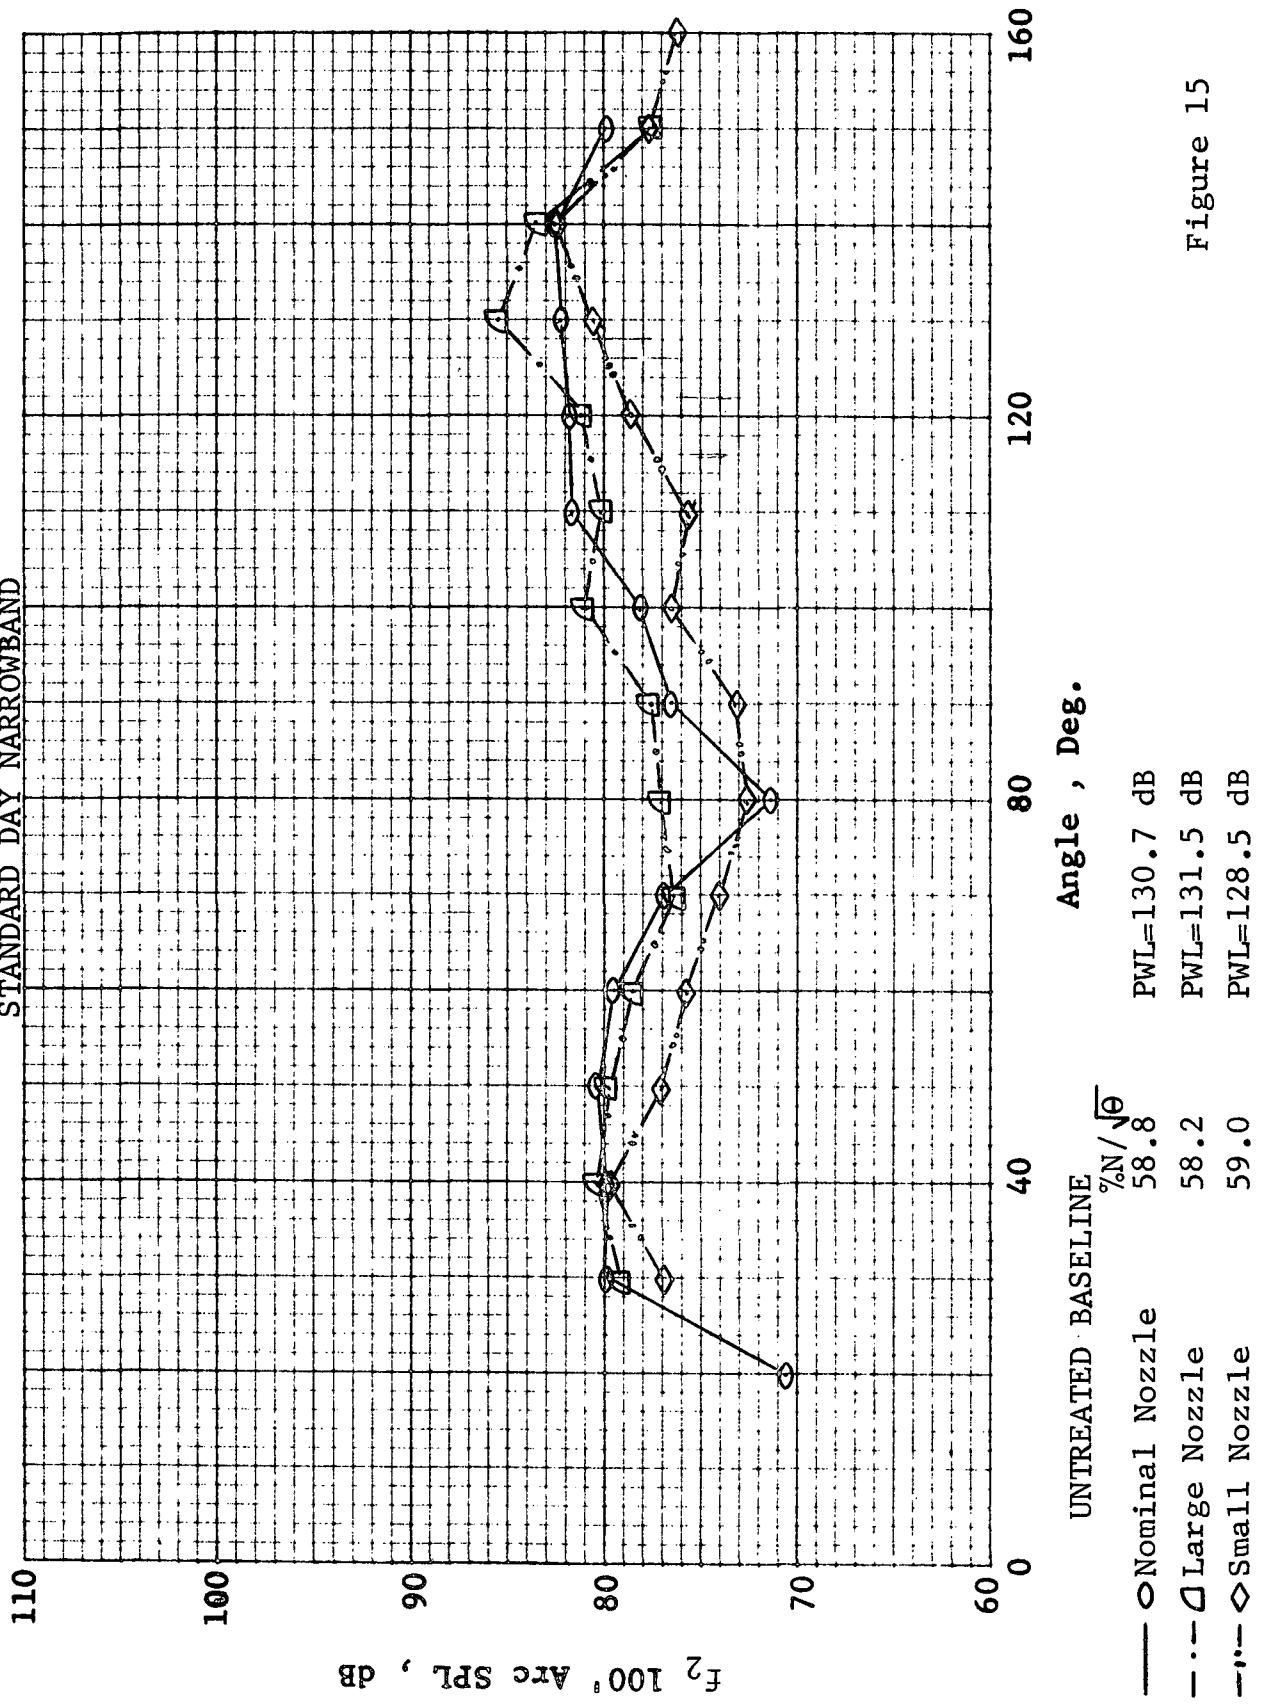


Figure 15

QEP FAN B SCALE MODEL  
 FUNDAMENTAL AT TAKEOFF  
 STANDARD DAY NARROWBAND

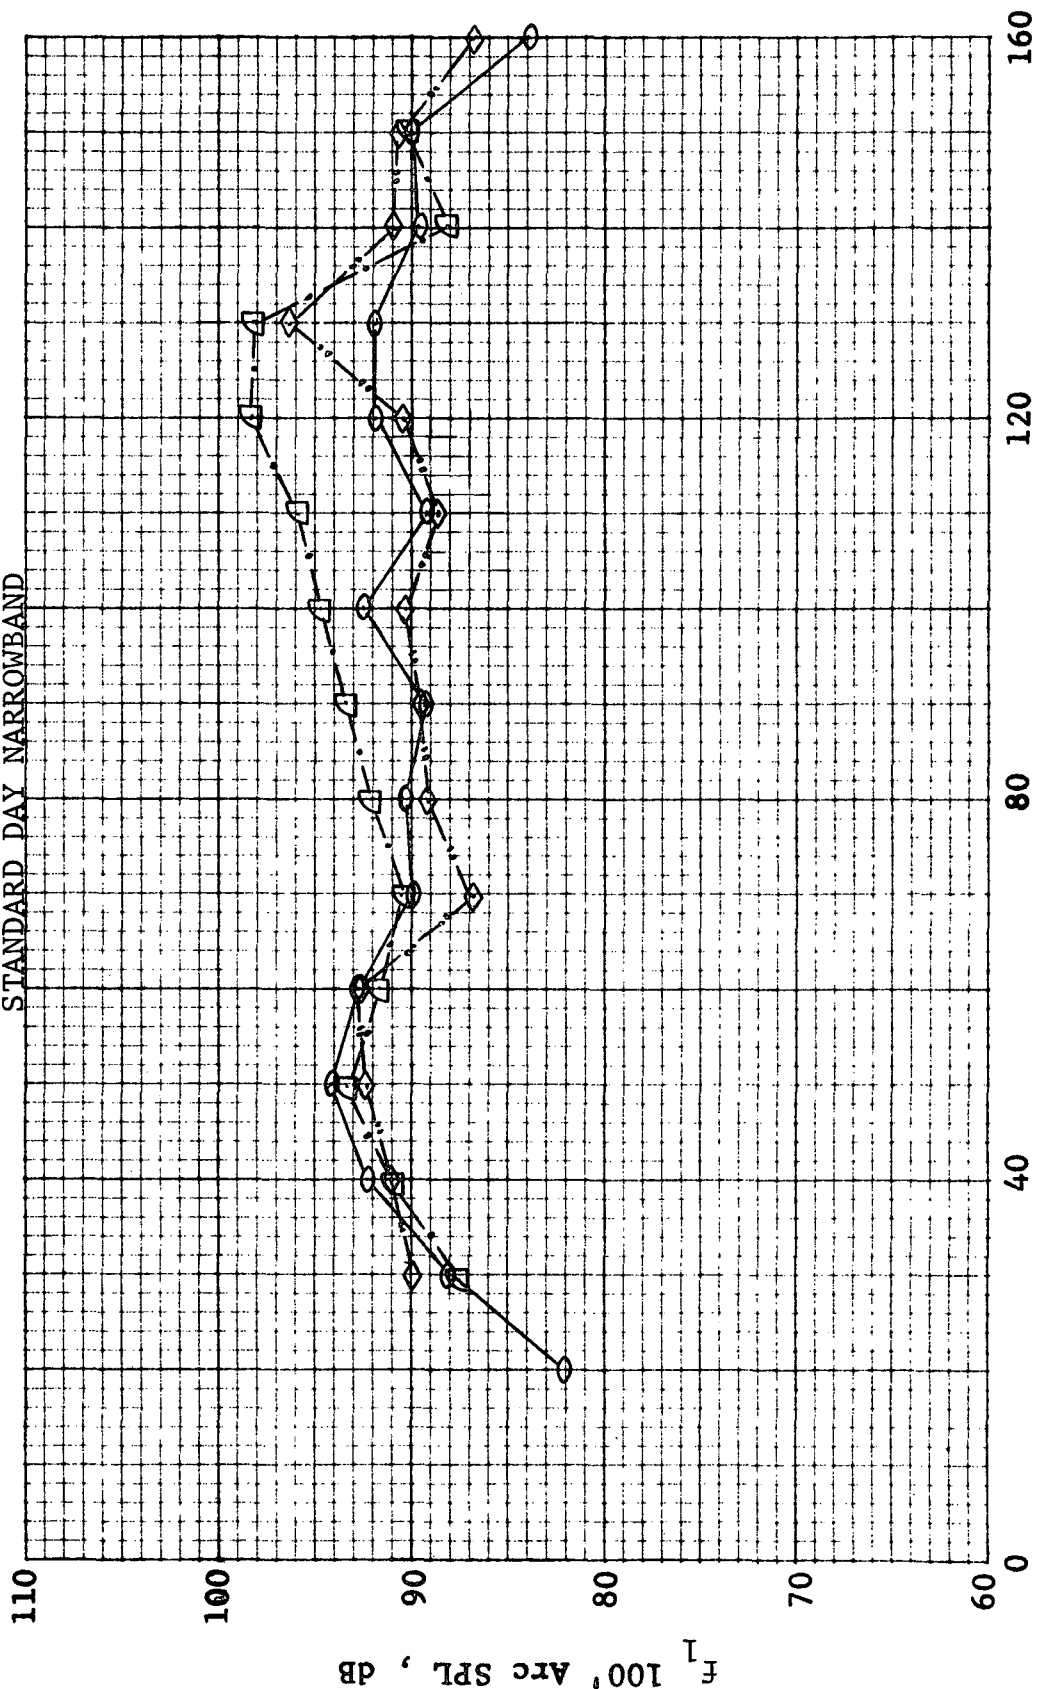

Angle, Deg.

UNTREATED BASELINE  
 $\%N/\sqrt{\theta}$

- Nominal Nozzle      PWL=142.2 dB
- Large Nozzle      PWL=145.2 dB
- Small Nozzle      PWL=142.0 dB

Figure 16

QEP FAN B SCALE MODEL  
 SECOND HARMONIC AT TAKEOFF  
 STANDARD DAY NARROWBAND

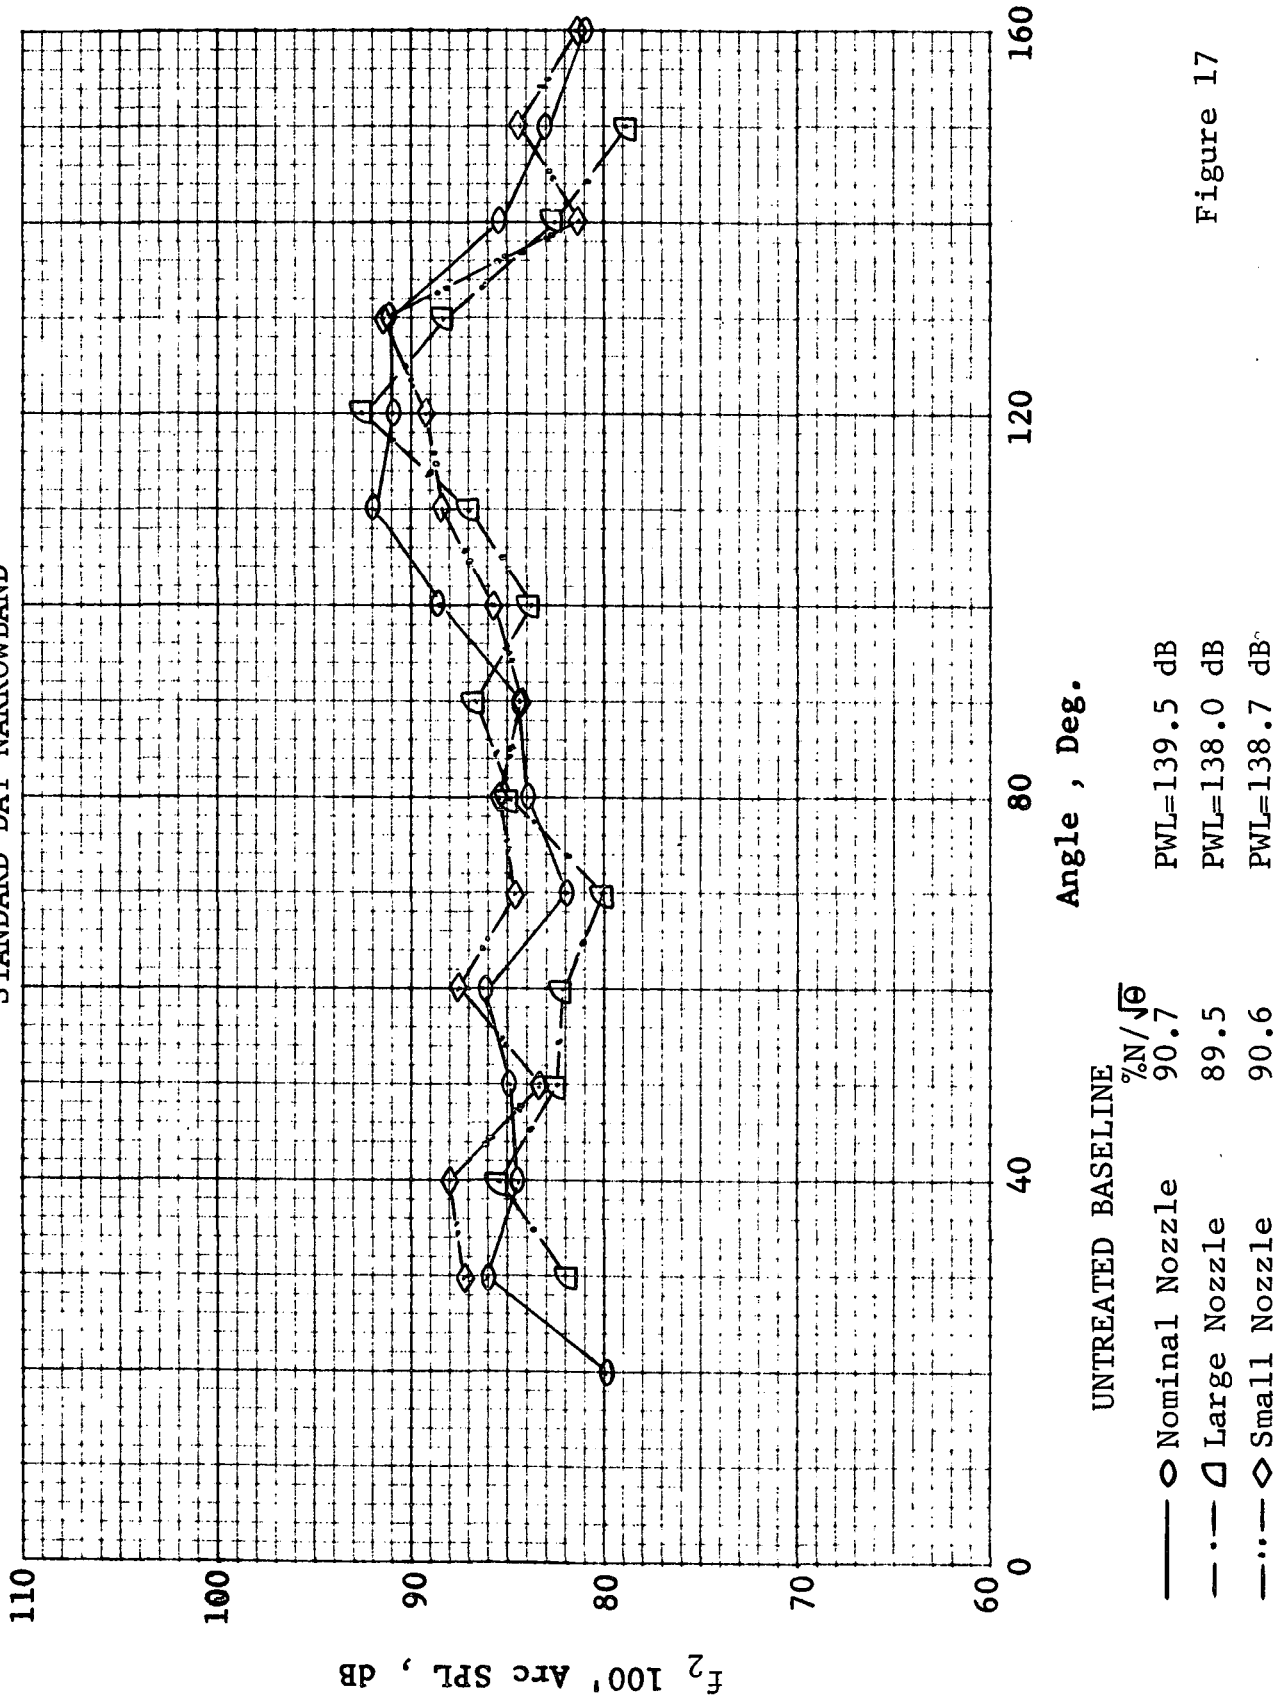


Figure 17

QEP FAN B SCALE MODEL RESULTS  
50° AT APPROACH

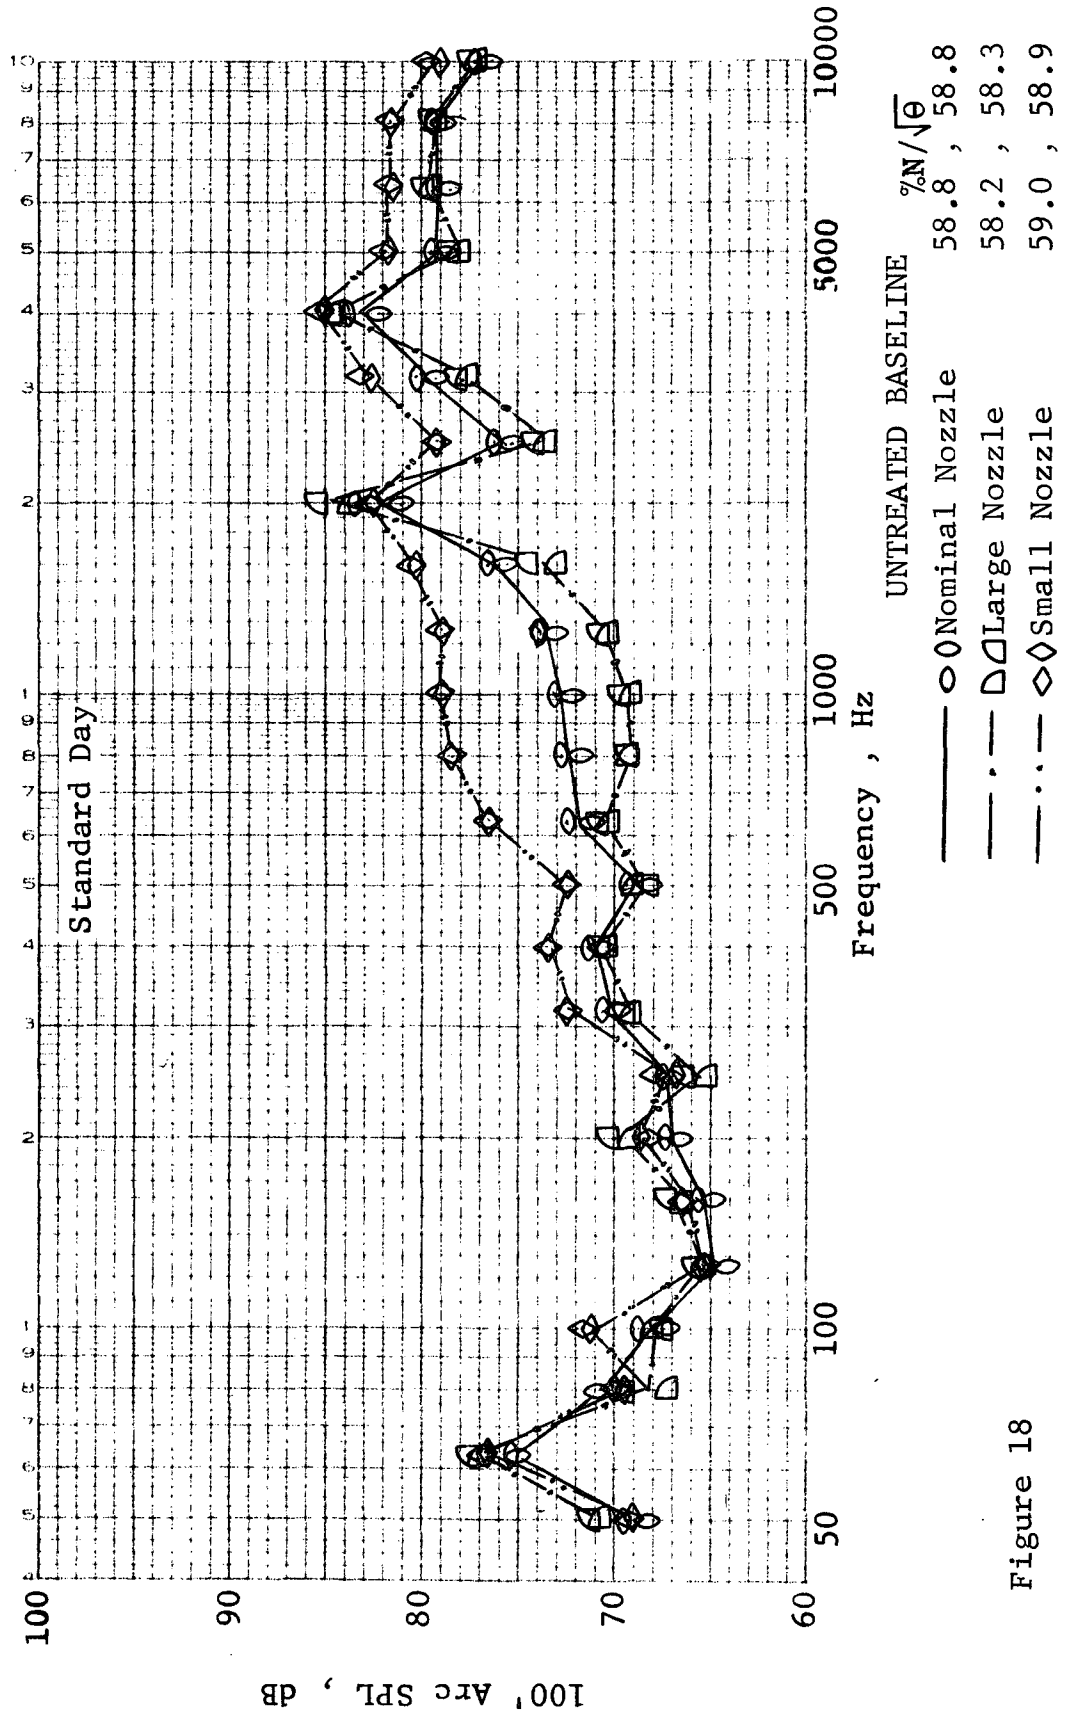


Figure 18

QEP FAN B SCALE MODEL RESULTS  
120° AT APPROACH

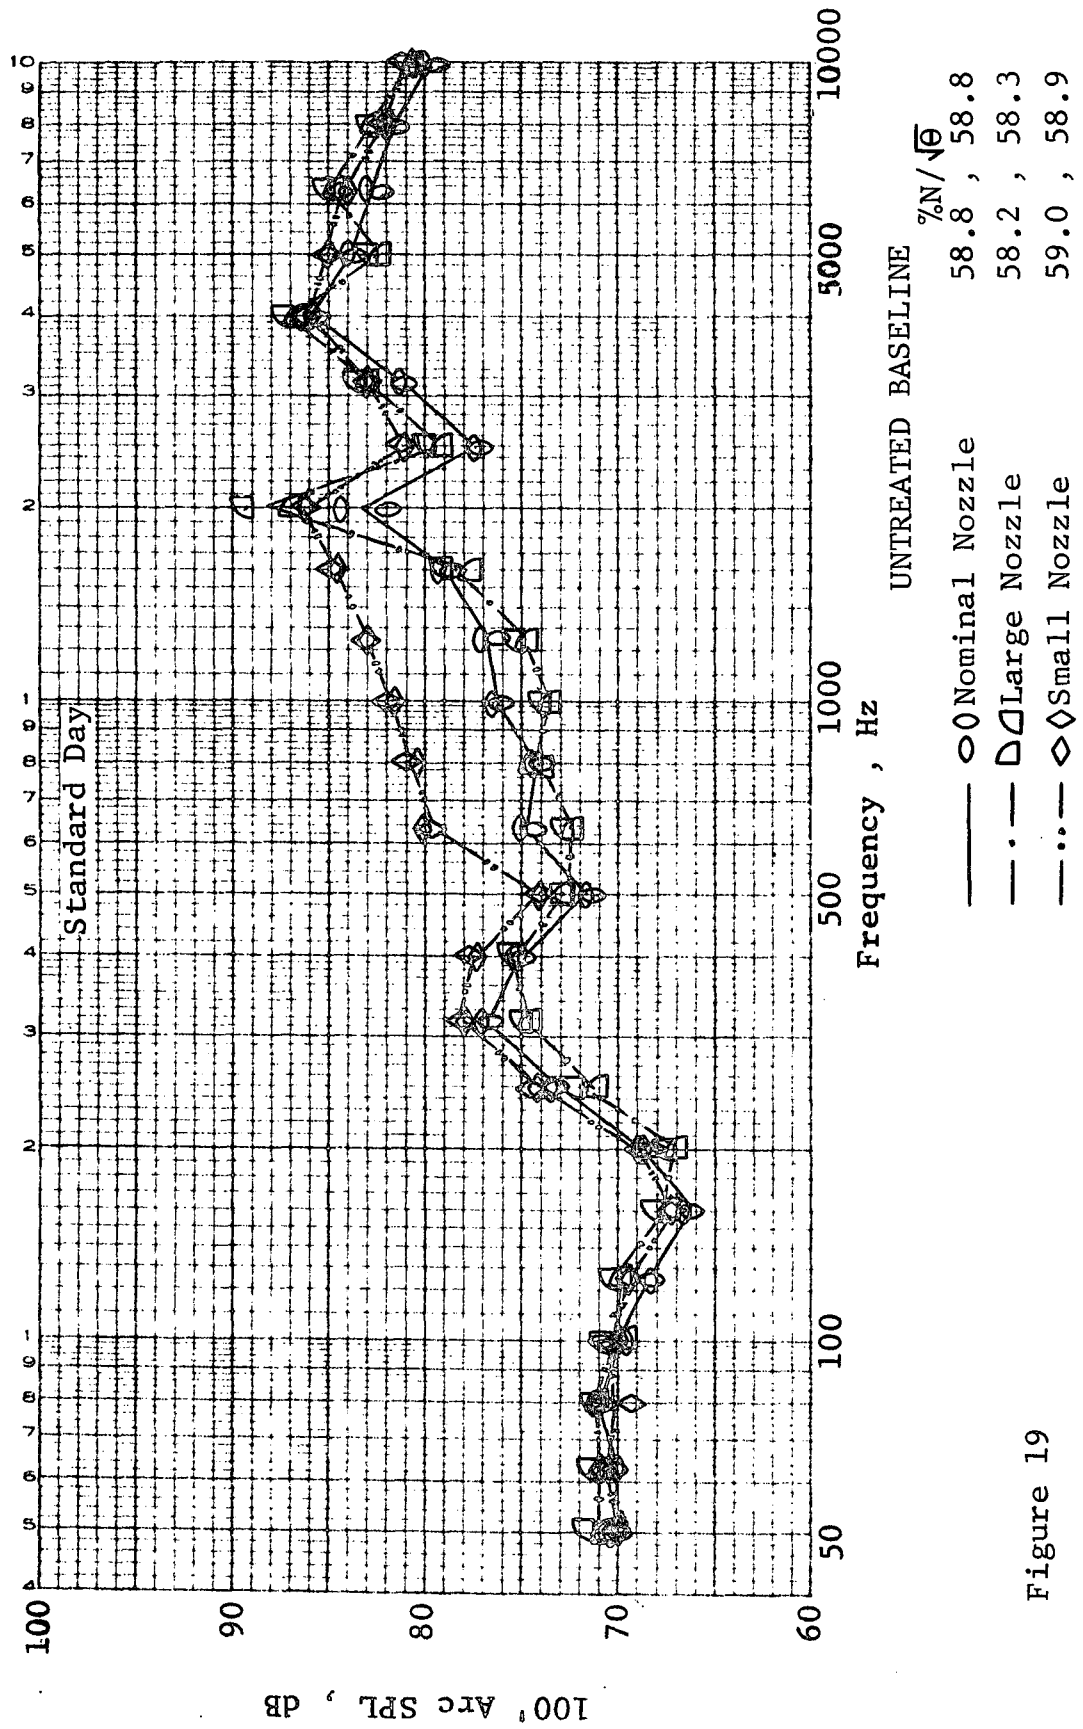


Figure 19

QEP FAN B SCALE MODEL RESULTS  
50° AT TAKEOFF

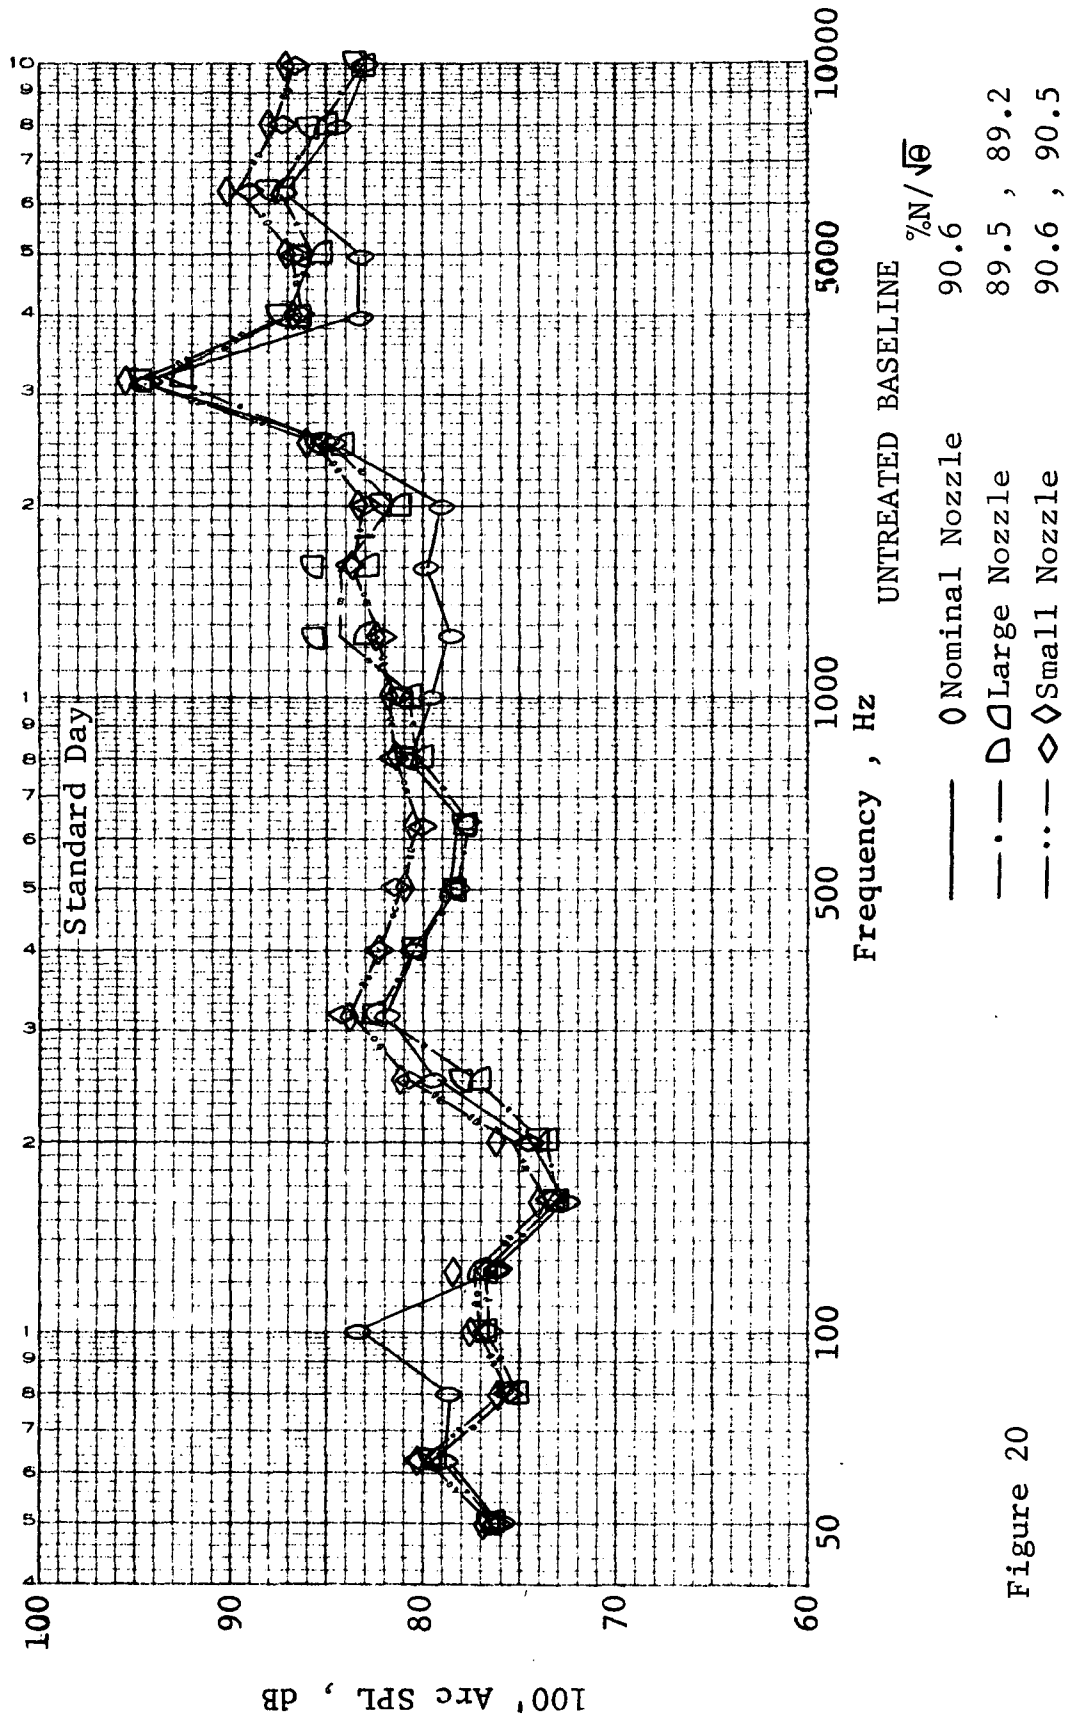


Figure 20

QEP FAN B SCALE MODEL RESULTS  
120° AT TAKEOFF

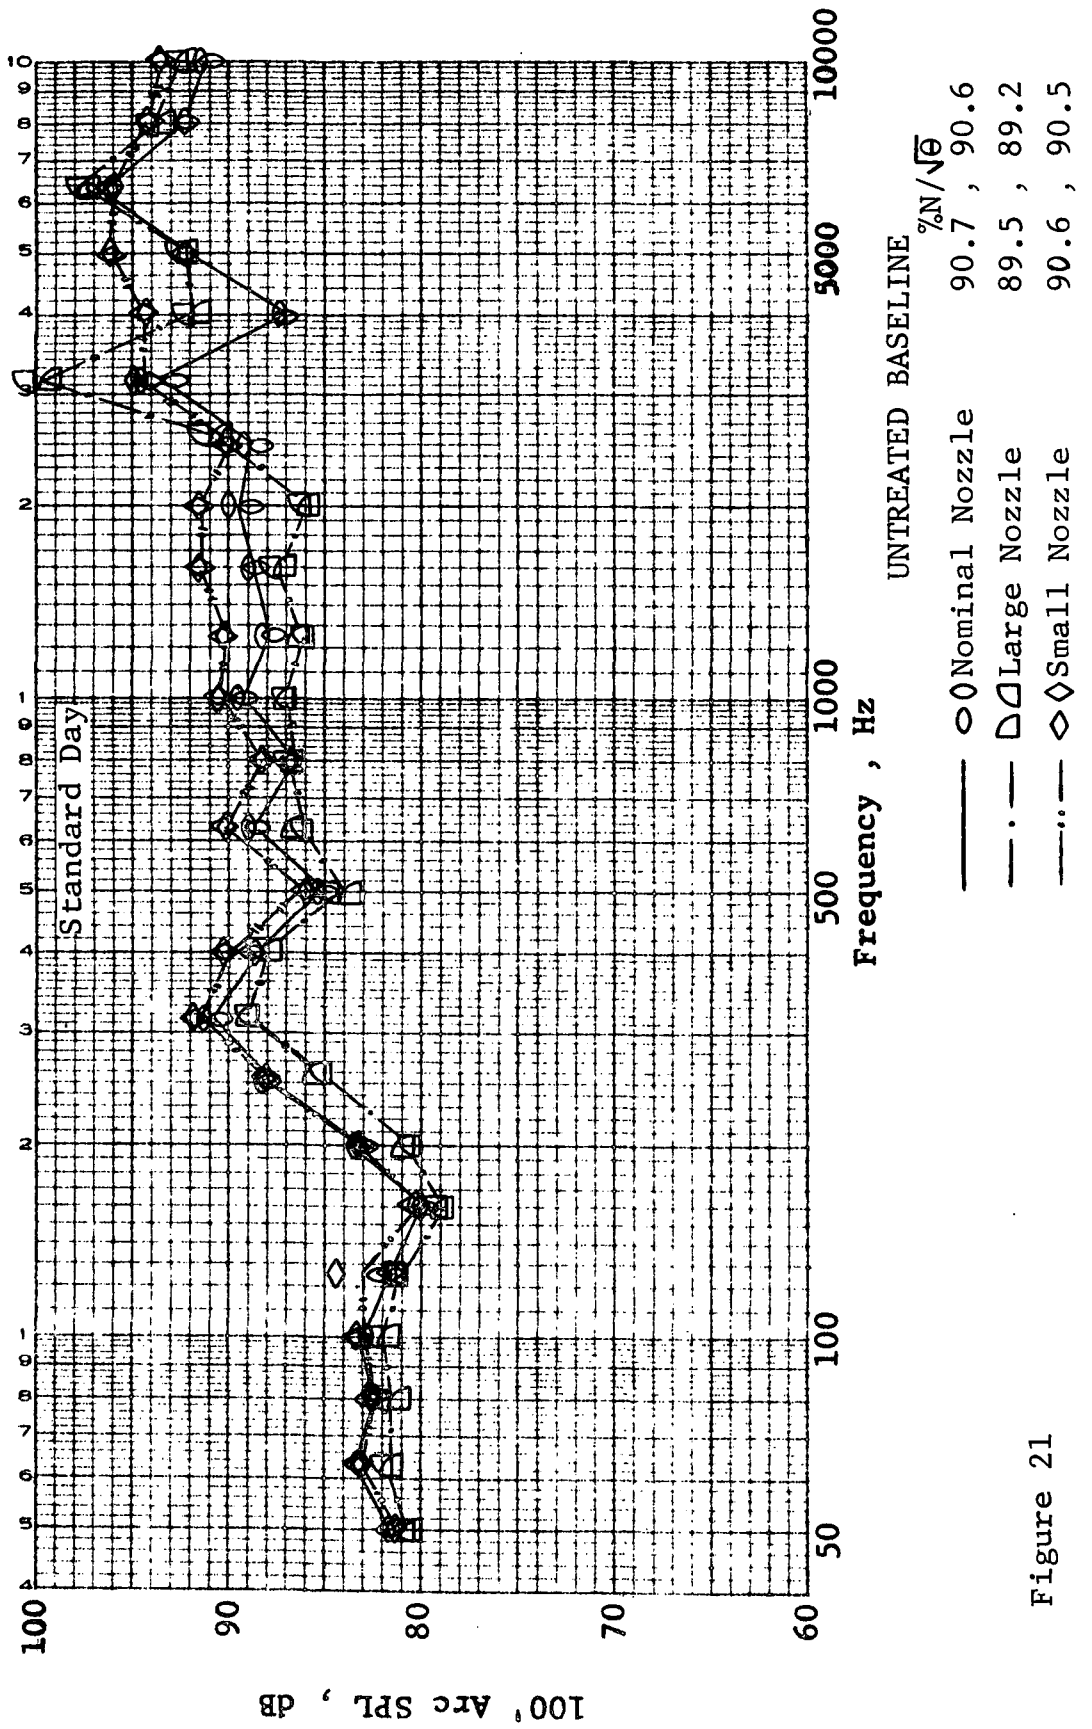


Figure 21

QEP FAN B SCALE MODEL RESULTS  
SOUND POWER LEVELS AT APPROACH

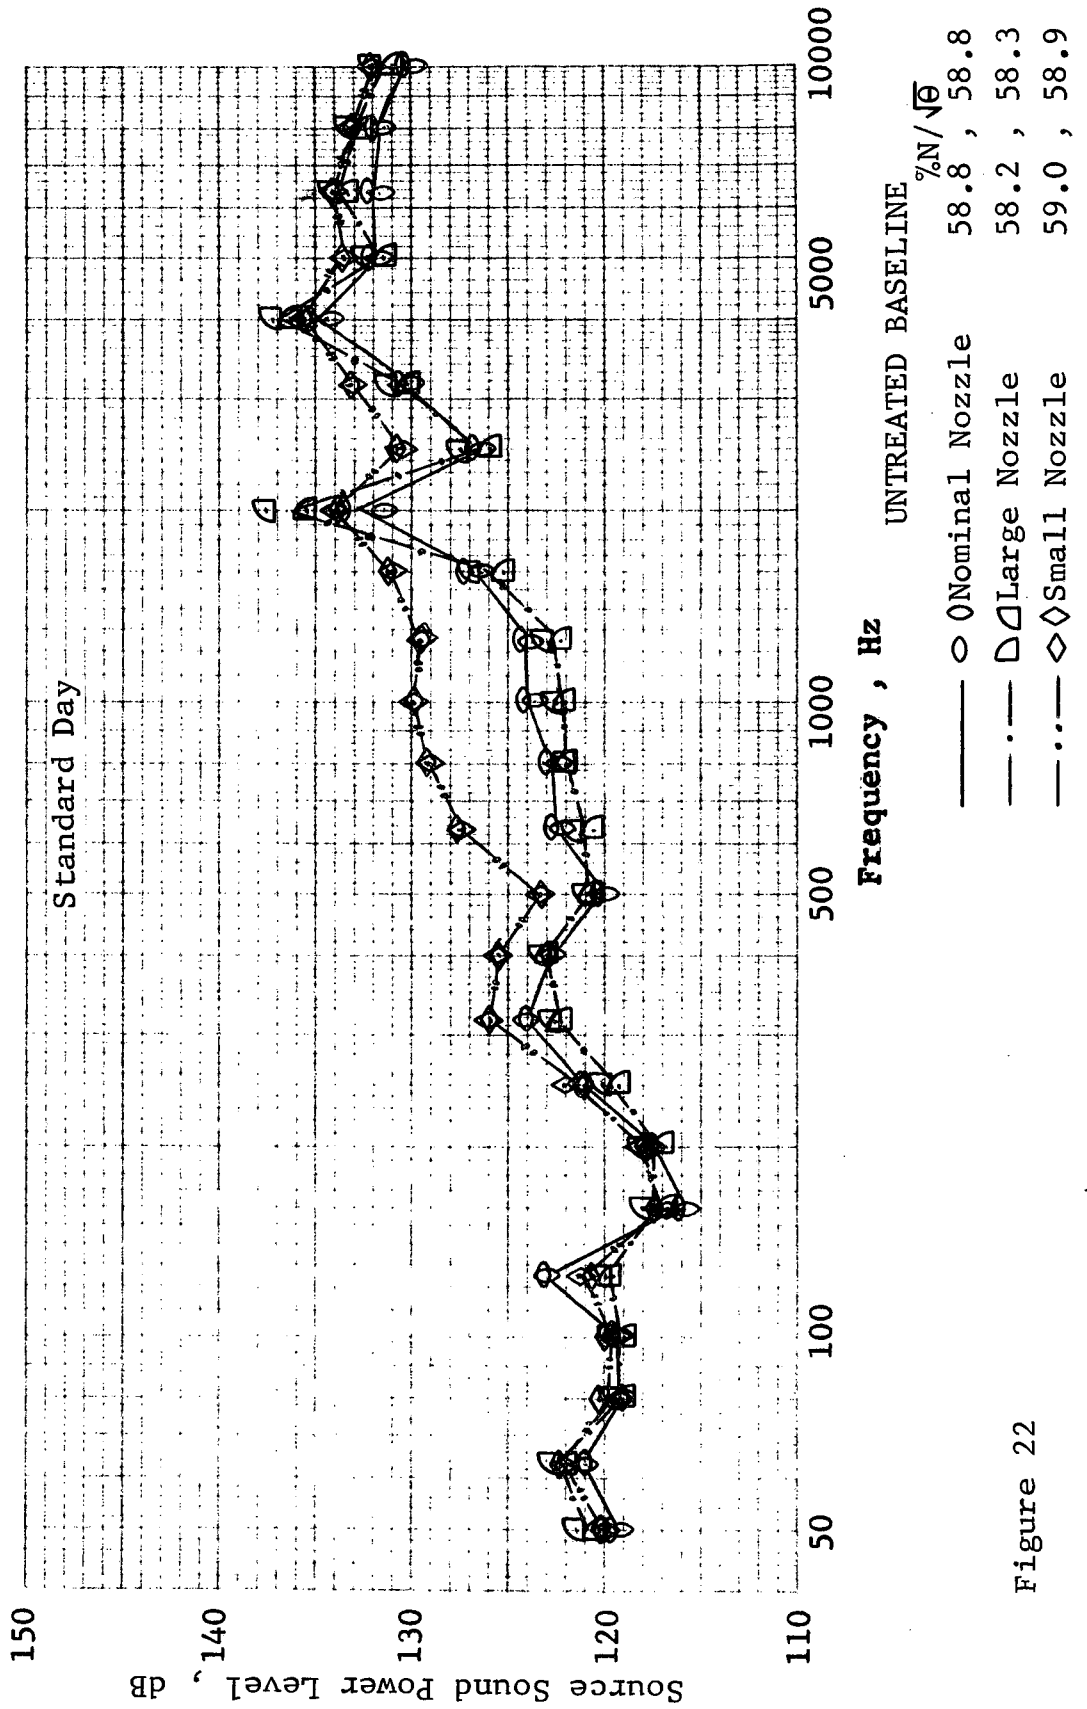


Figure 22



QEP FAN B SCALE MODEL RESULTS  
 SOUND POWER LEVELS AT TAKEOFF

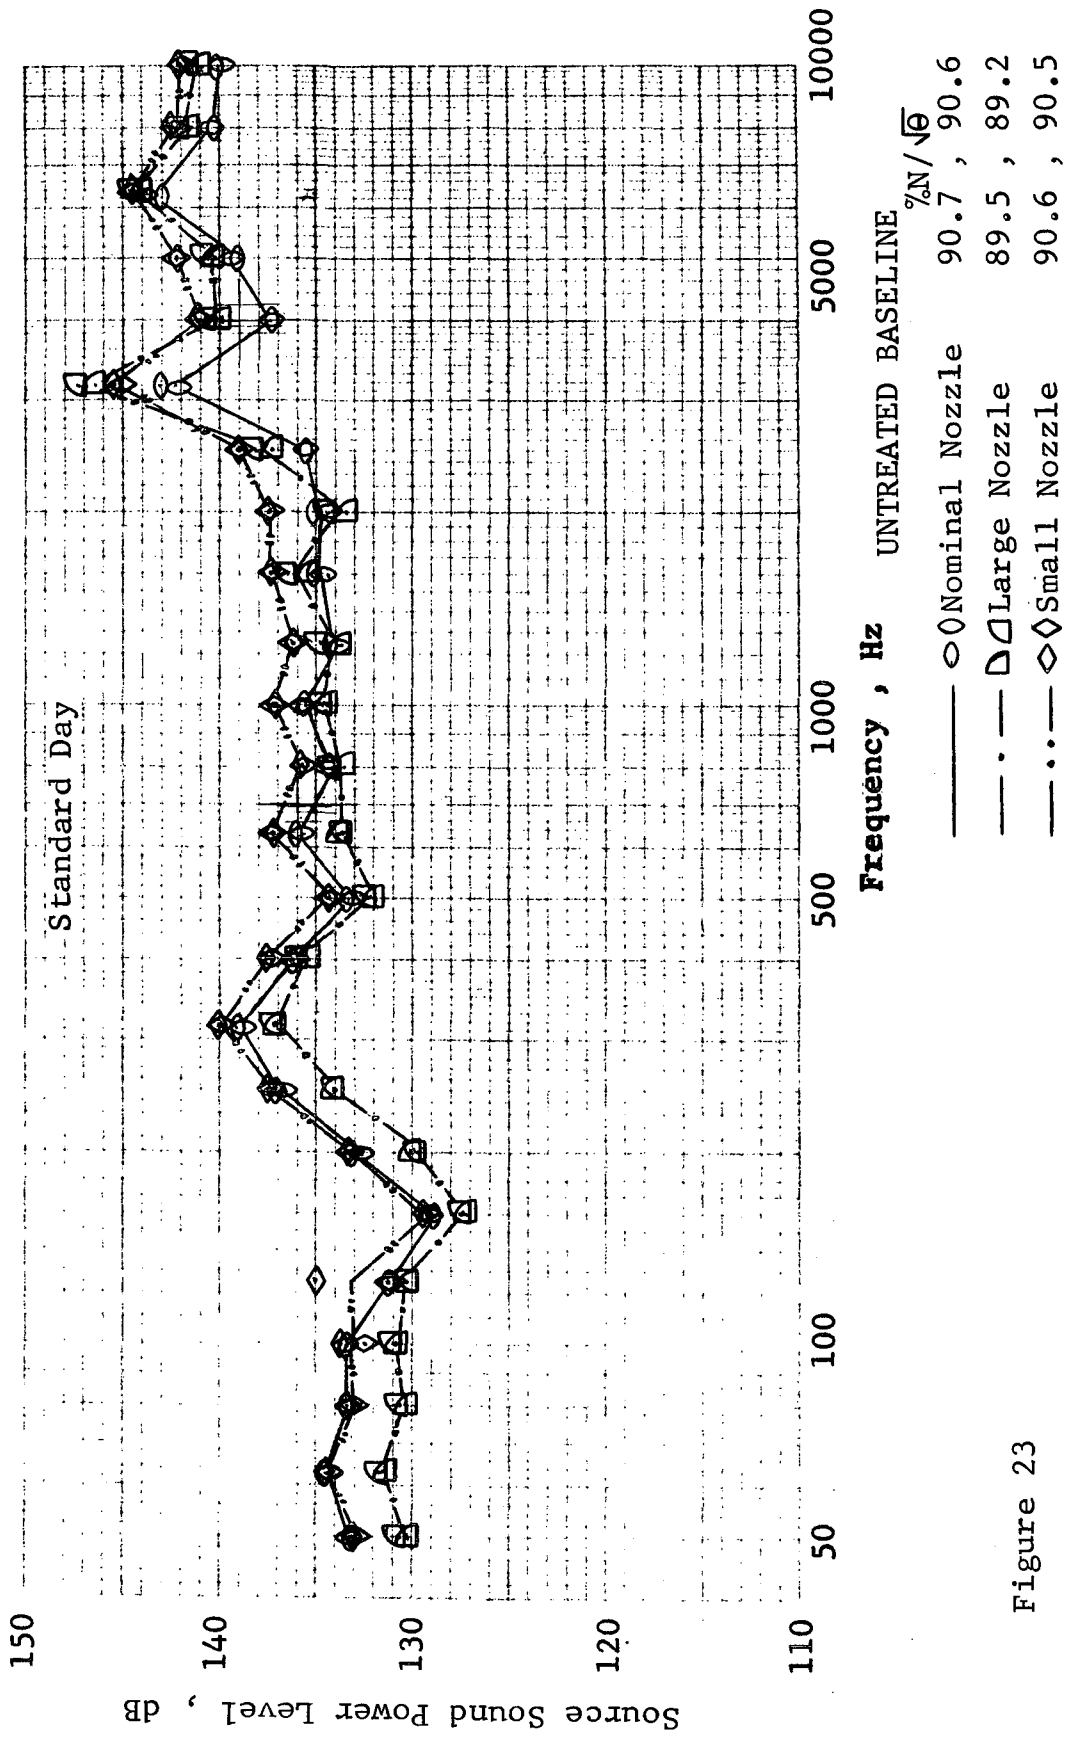


Figure 23

### C. ACOUSTIC TREATMENT EFFECTS

Comparisons of the untreated and the treated configurations of the scale model fan with the nominal nozzle are presented in Figures 24 - 33. The acoustic treatment of the frame area is described in the Test Vehicle Description, Section IV. To produce the untreated configuration, this acoustic treatment was neutralized by covering it with tape.

Figures 24 - 27 show the distribution of the fundamental and second harmonic around the 100 foot (30.5 m) arc as derived from narrowband data which have been corrected to Standard Day conditions. At approach thrust, (Figures 24 and 25), both tones have been significantly reduced due to the acoustic treatment - the fundamental by 4.5 dB PWL and the second harmonic by 5.2 dB PWL. The fundamental reduction was noticeable around most of the arc while the second harmonic reduction was most significant in the aft quadrant. At takeoff thrust, the tones also showed a noise decrease in the aft quadrant, however, the fundamental showed a noise increase in the front quadrant. Figure 26 shows a split PWL, computed by segmenting the arc into front quadrant at angles less than 85 degrees and aft quadrant at angles greater than 85 degrees. The front fundamental noise increased by 3.8 dB PWL while the aft decreased 1.9 dB PWL. The total, accordingly, showed an increase with treatment. In the case of the second harmonic, (Figure 27), there was a sizable decrease of 5.8 dB PWL in the aft quadrant but effectively no change in the front.

The one third octave data clearly indicates that not only have the tones been reduced at approach thrust but the broadband noise between the tones has been decreased as well by the acoustic treatment.

At  $50^\circ$  (Figure 28), the greatest reduction occurred in the 2500 Hz and 3150 Hz bands. At  $120^\circ$  (Figure 29), the broadband noise was decreased 5 dB or more from 2 to 10 KHz. The  $120^\circ$  results for takeoff thrust indicate similar broadband noise reductions for the treated configuration as indicated in Figure 31. However, the 1/3 octave data at  $50^\circ$  (Figure 30) indicates the broadband noise of the two configurations was generally the same across the spectrum except at 1600 Hz where the treated data shows some increase. Upon examination of narrowband data, this increase appears to be attributable to multiple pure tones occurring with the treated configuration. The present hypothesis is that this noise increase is attributed to the increase turbulence generated by the presence of the treatment close to the rotor.

Figure 32 contains the sound power level spectra for the two configurations at approach thrust, showing the noise reduction for the treated fan at the tones and for the broadband noise from 1.6 to 10 KHz. The PWL spectra for takeoff thrust (Figure 33) indicates less noise reduction of broadband noise and the second harmonic tone along with a 2 dB PWL increase at the fundamental tone.

SCALE MODEL FAN B  
 FUNDAMENTAL AT APPROACH  
 STANDARD DAY

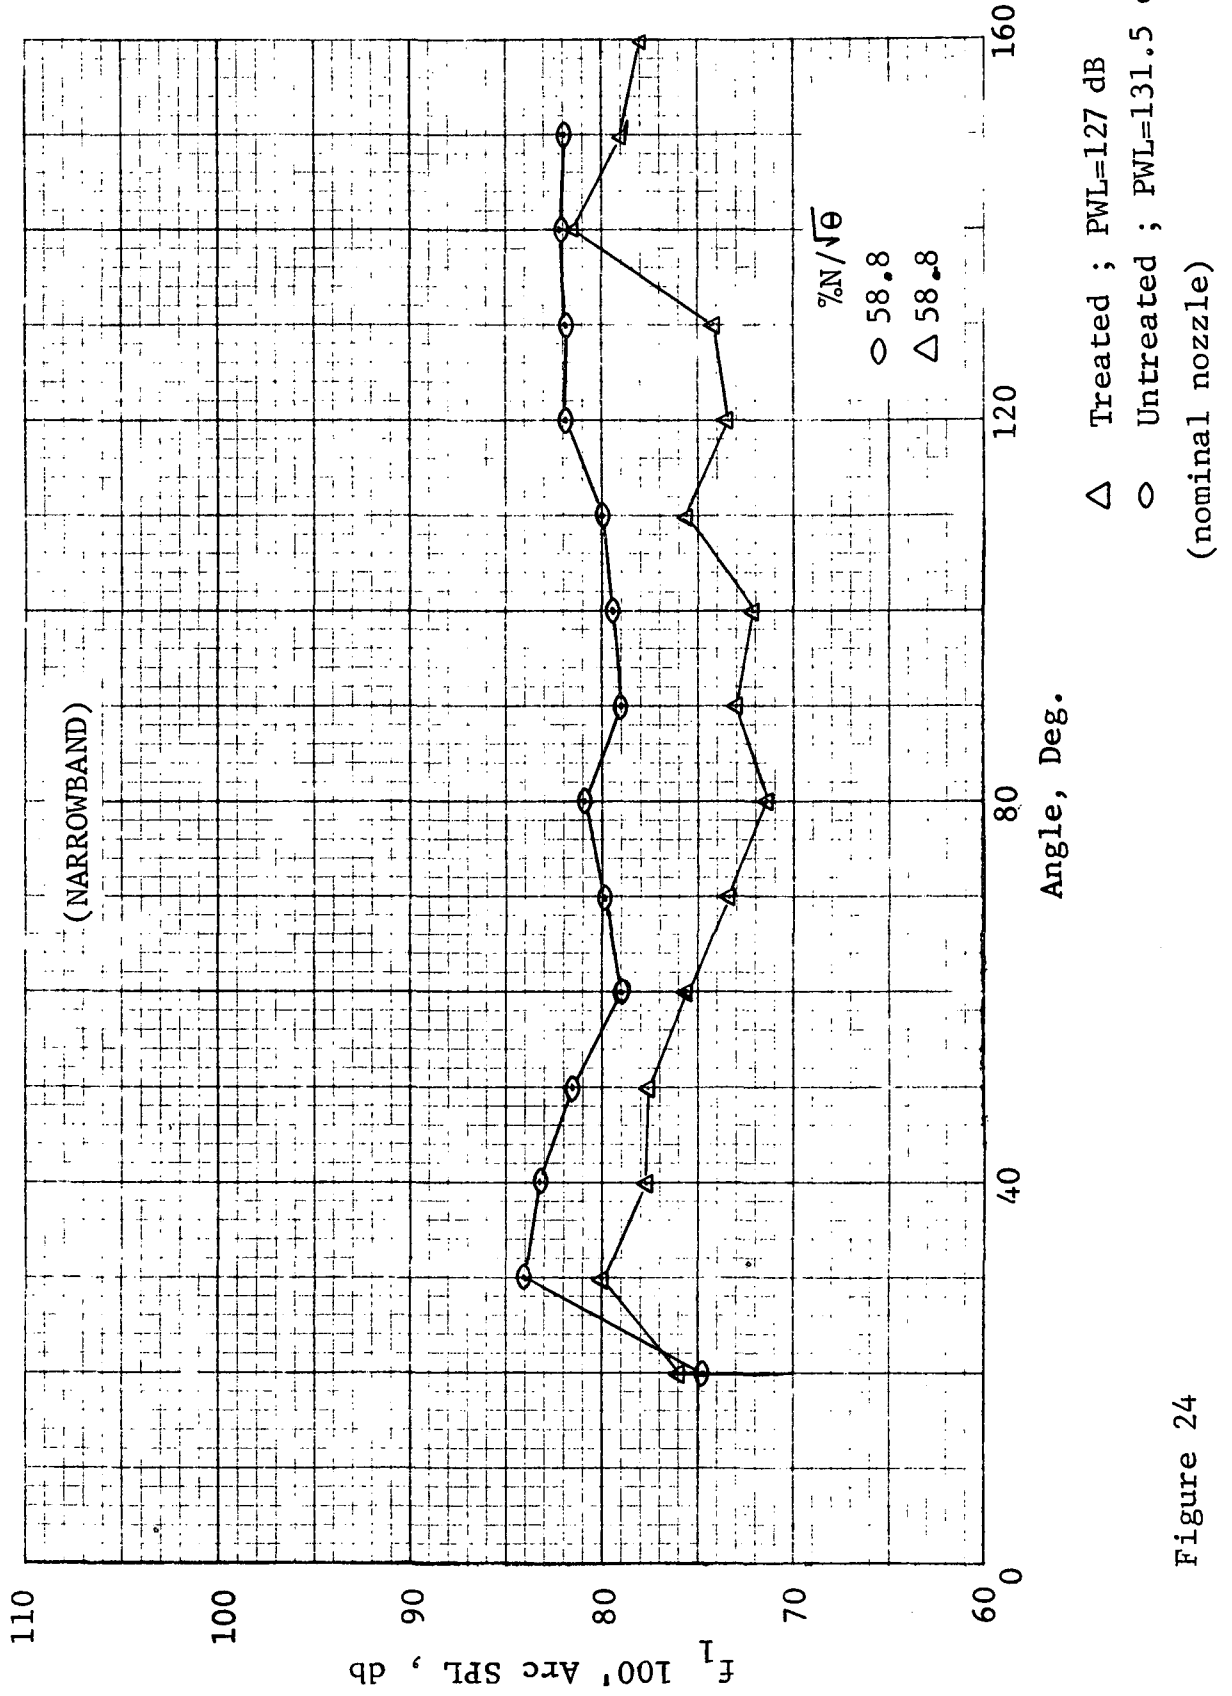


Figure 24

SCALE MODEL FAN B  
SECOND HARMONIC AT APPROACH

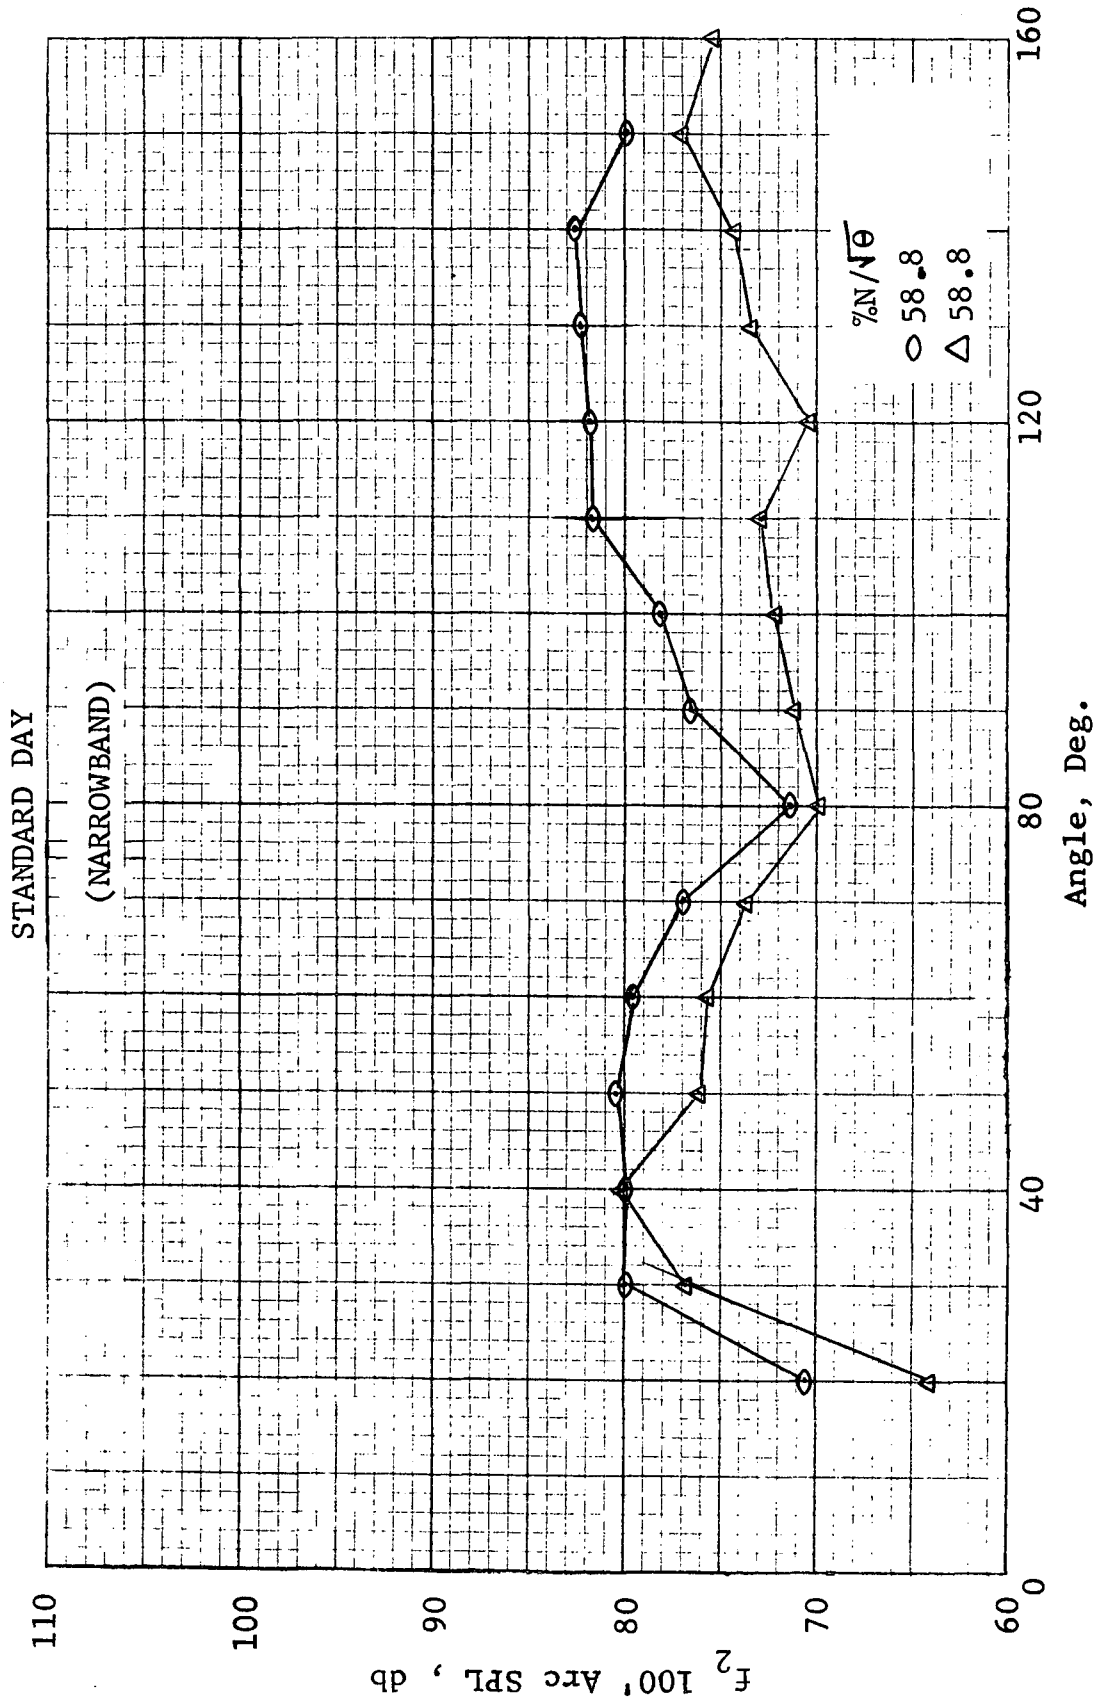


Figure 25

SCALE MODEL FAN B  
 FUNDAMENTAL AT TAKEOFF  
 STANDARD DAY


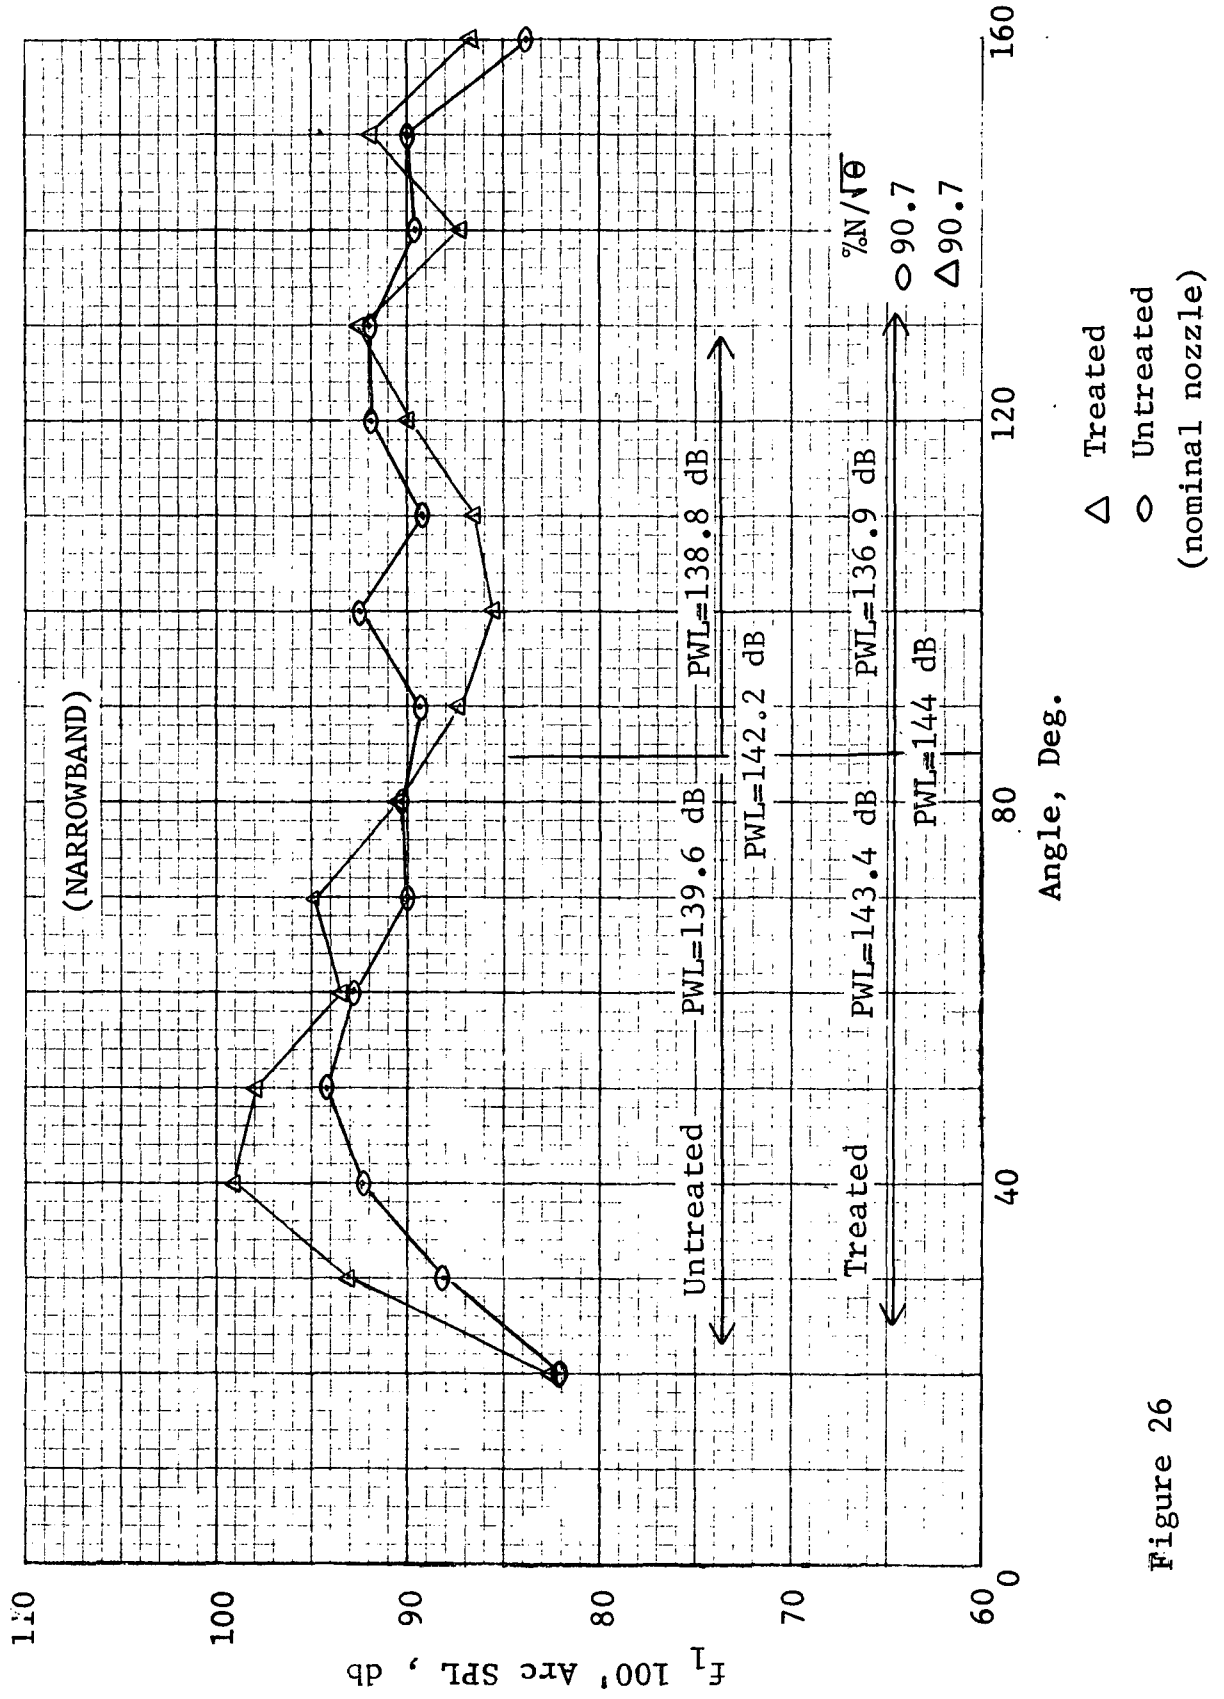


Figure 26

SCALE MODEL FAN B  
SECOND HARMONIC AT TAKEOFF

STANDARD DAY

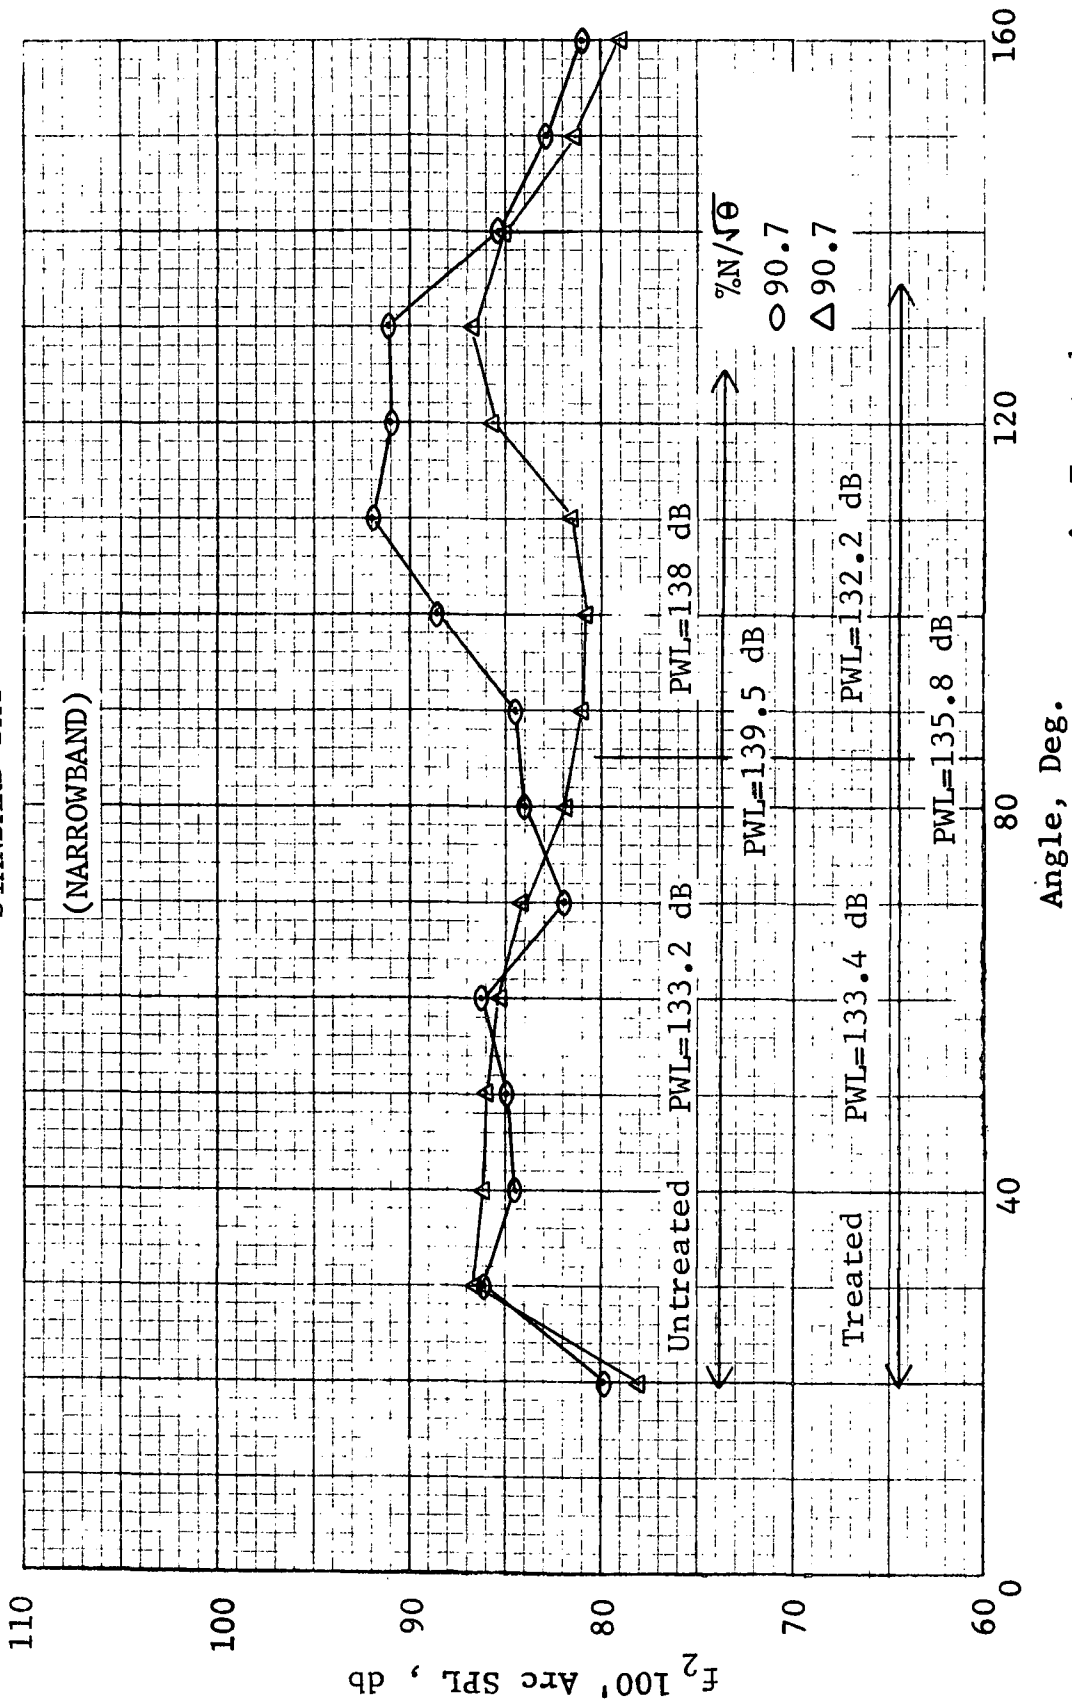

△ Treated  
○ Untreated  
(nominal nozzle)

Figure 27

QEP FAN B  
 SCALE MODEL RESULTS  
 100' ARC SPL  
 TREATED VS UNTREATED  
 APPROACH

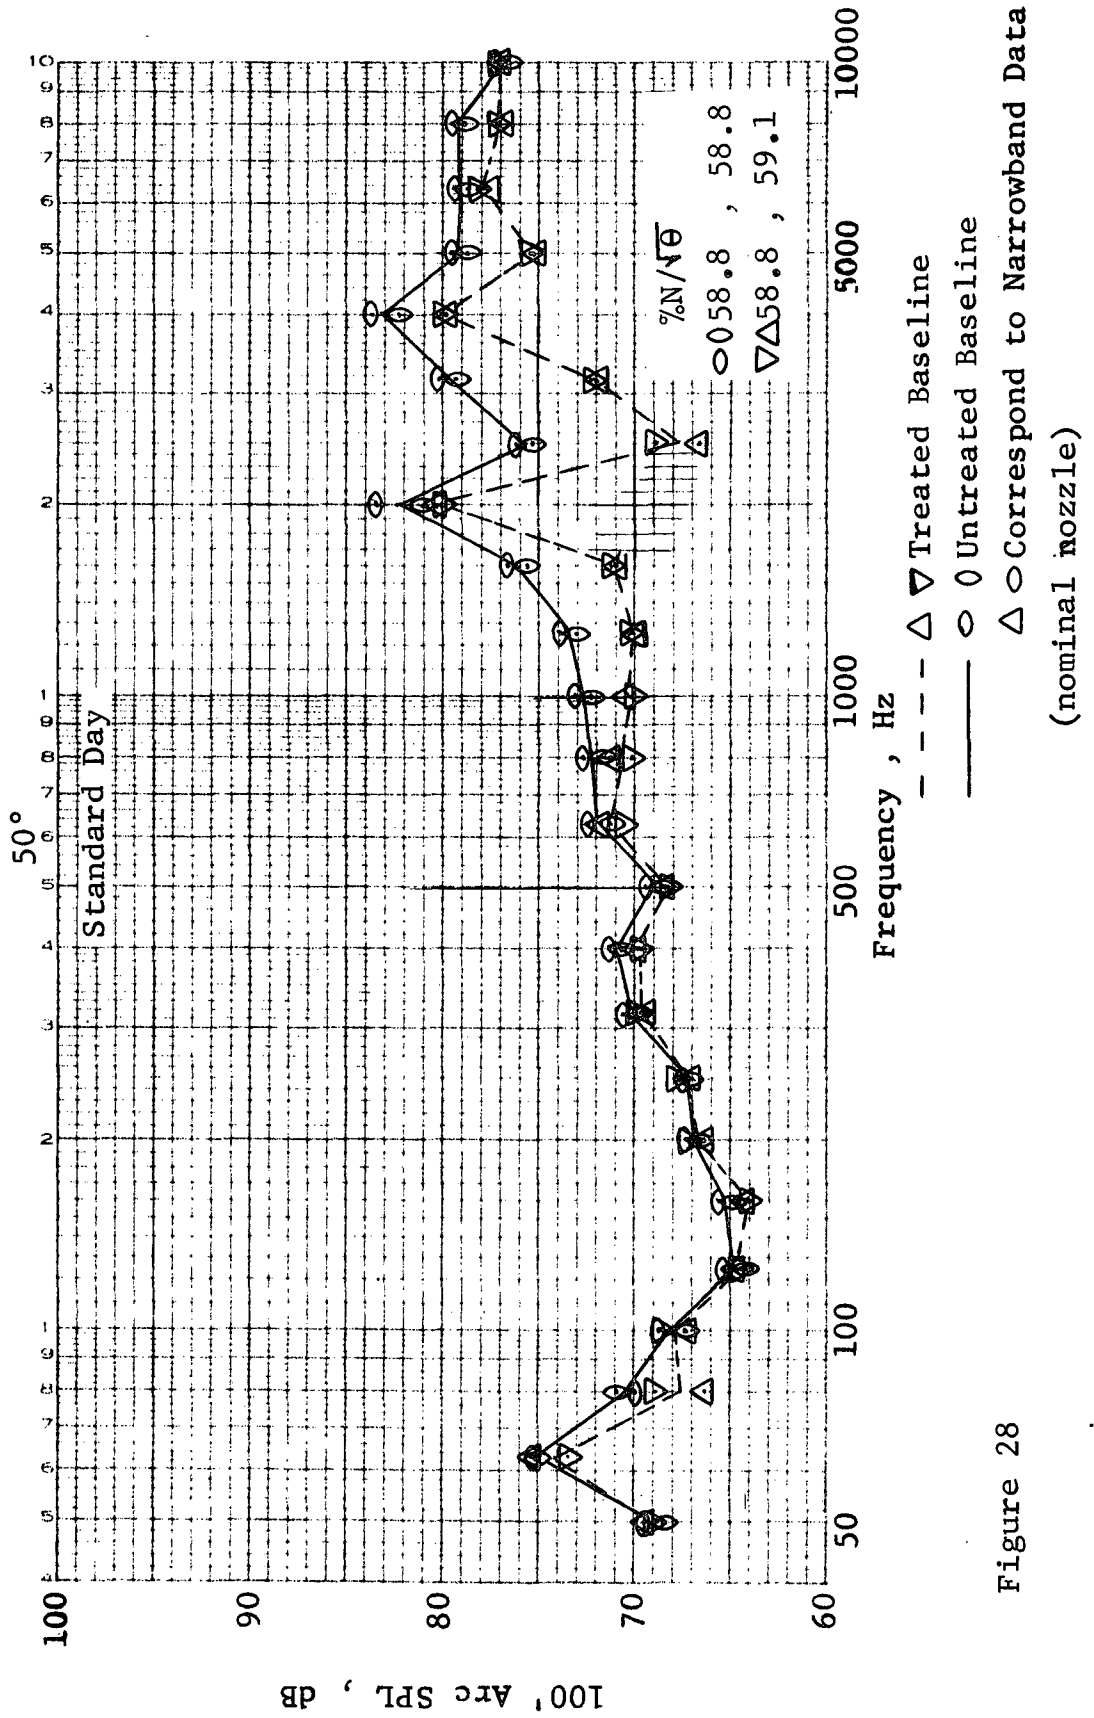


Figure 28



QEP FAN B  
 SCALE MODEL RESULTS  
 100' ARC SPL  
 TREATED VS UNTREATED  
 APPROACH

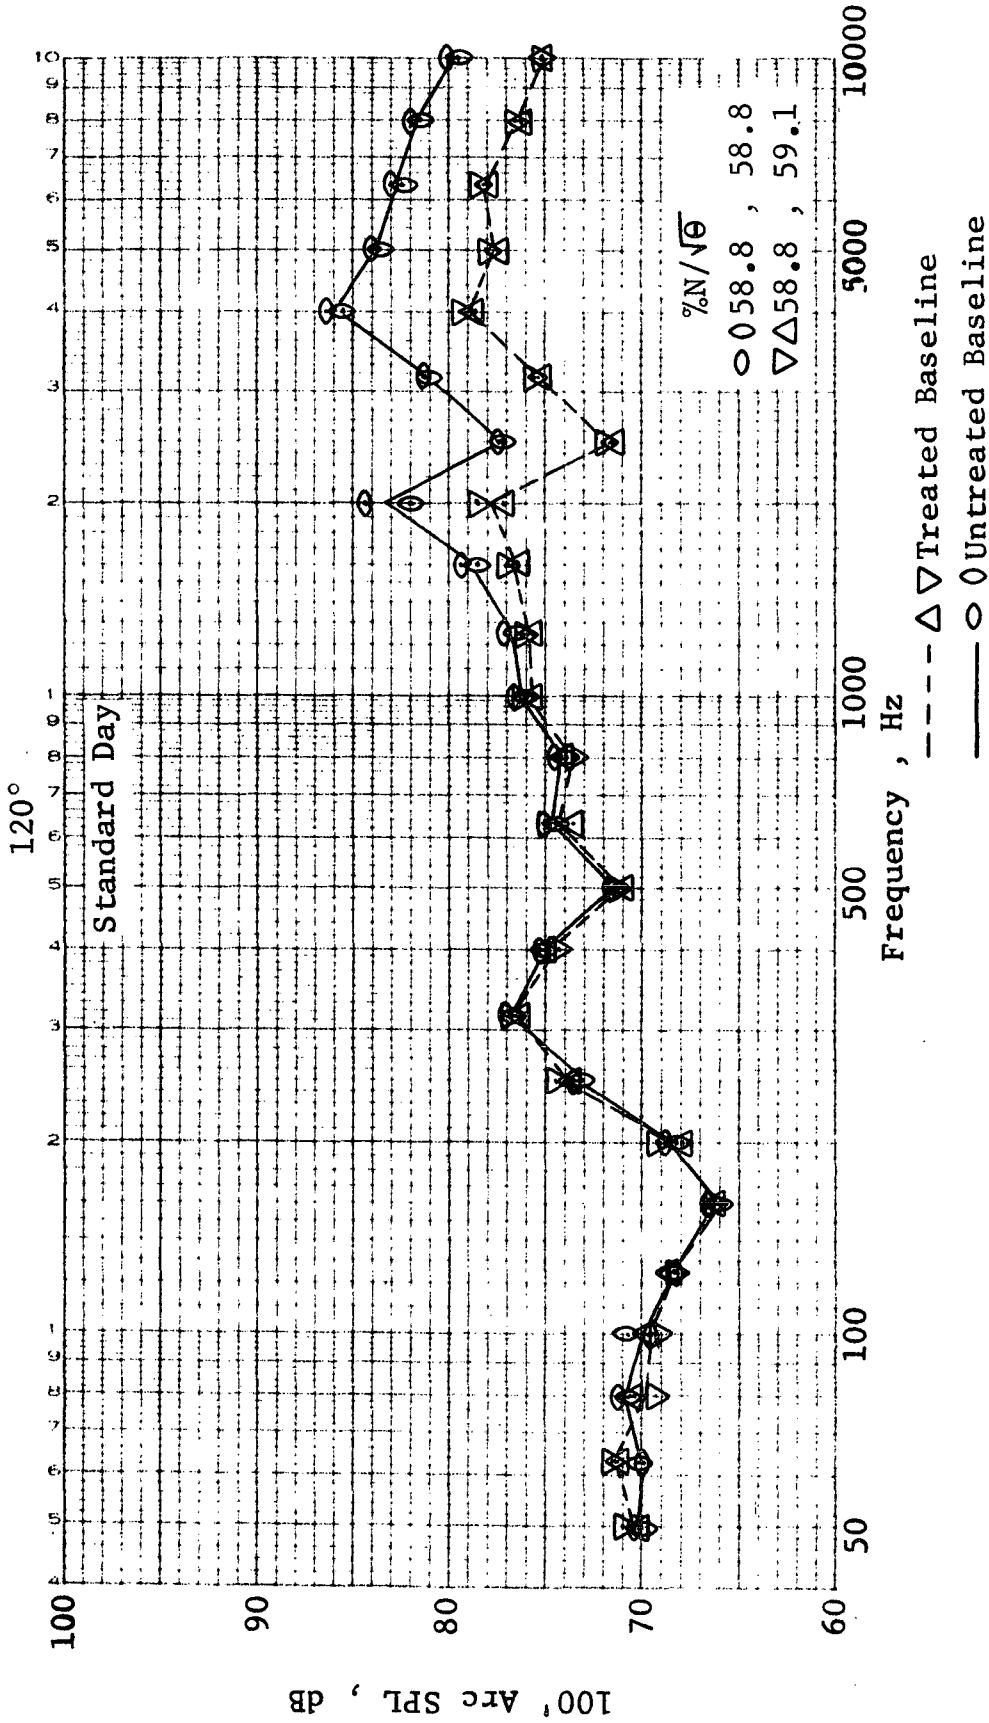


Figure 29

QEP FAN B  
 SCALE MODEL RESULTS  
 100' ARC SPL  
 TREATED VS UNTREATED

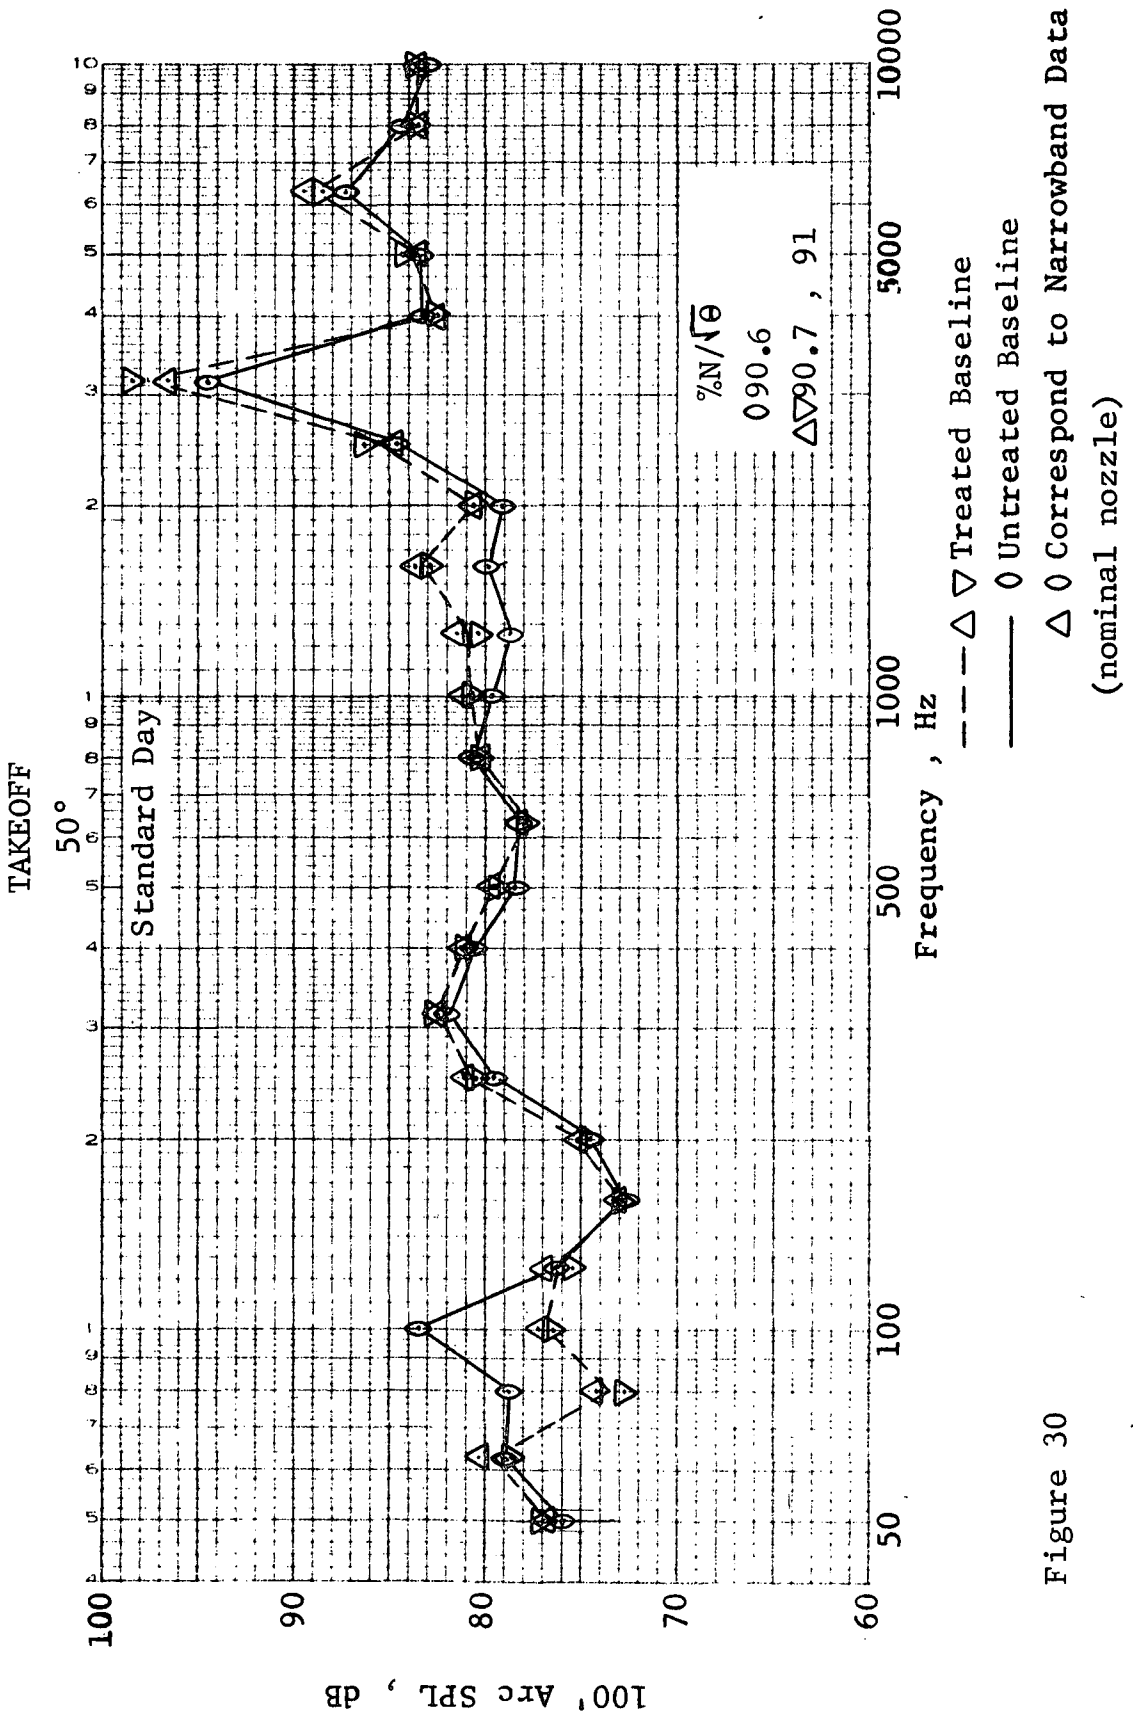


Figure 30

QEP FAN B  
 SCALE MODEL RESULTS  
 100' ARC SPL  
 TREATED VS UNTREATED

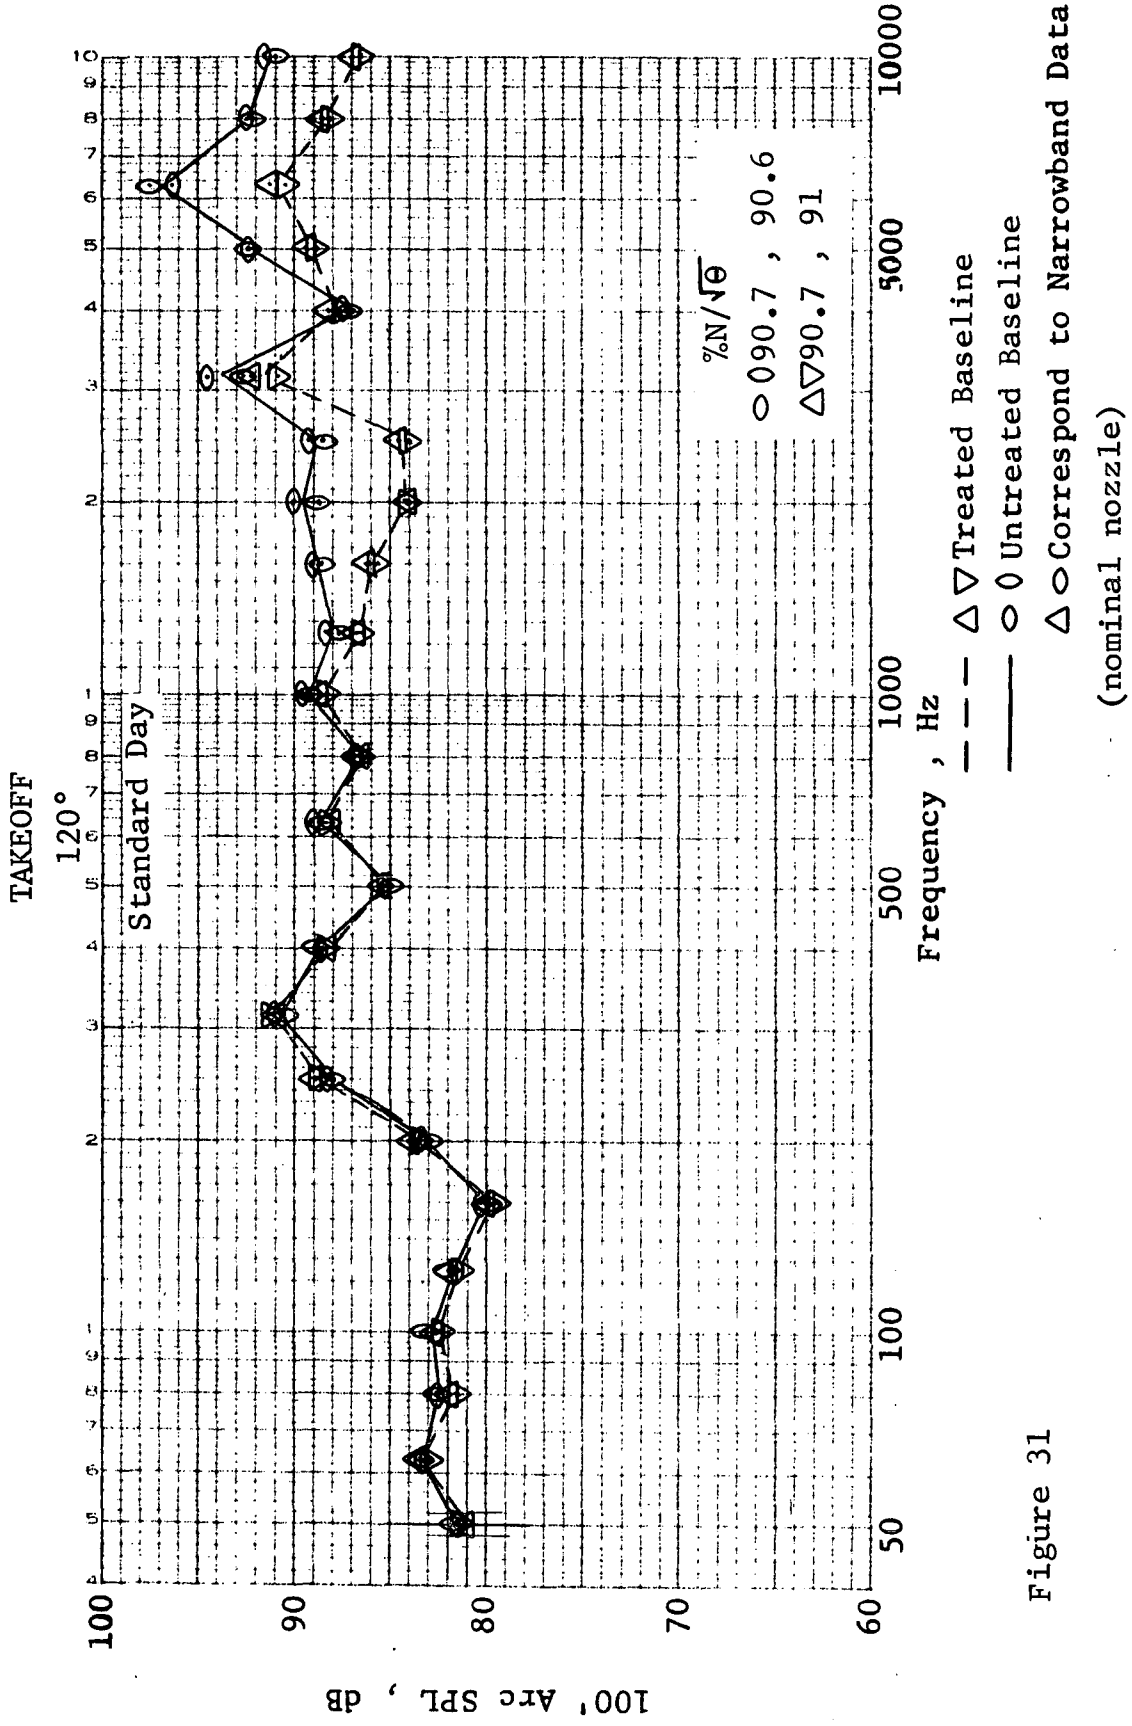


Figure 31

QEP FAN B SCALE MODEL RESULTS  
 SOUND POWER LEVELS AT APPROACH  
 TREATED VS UNTREATED

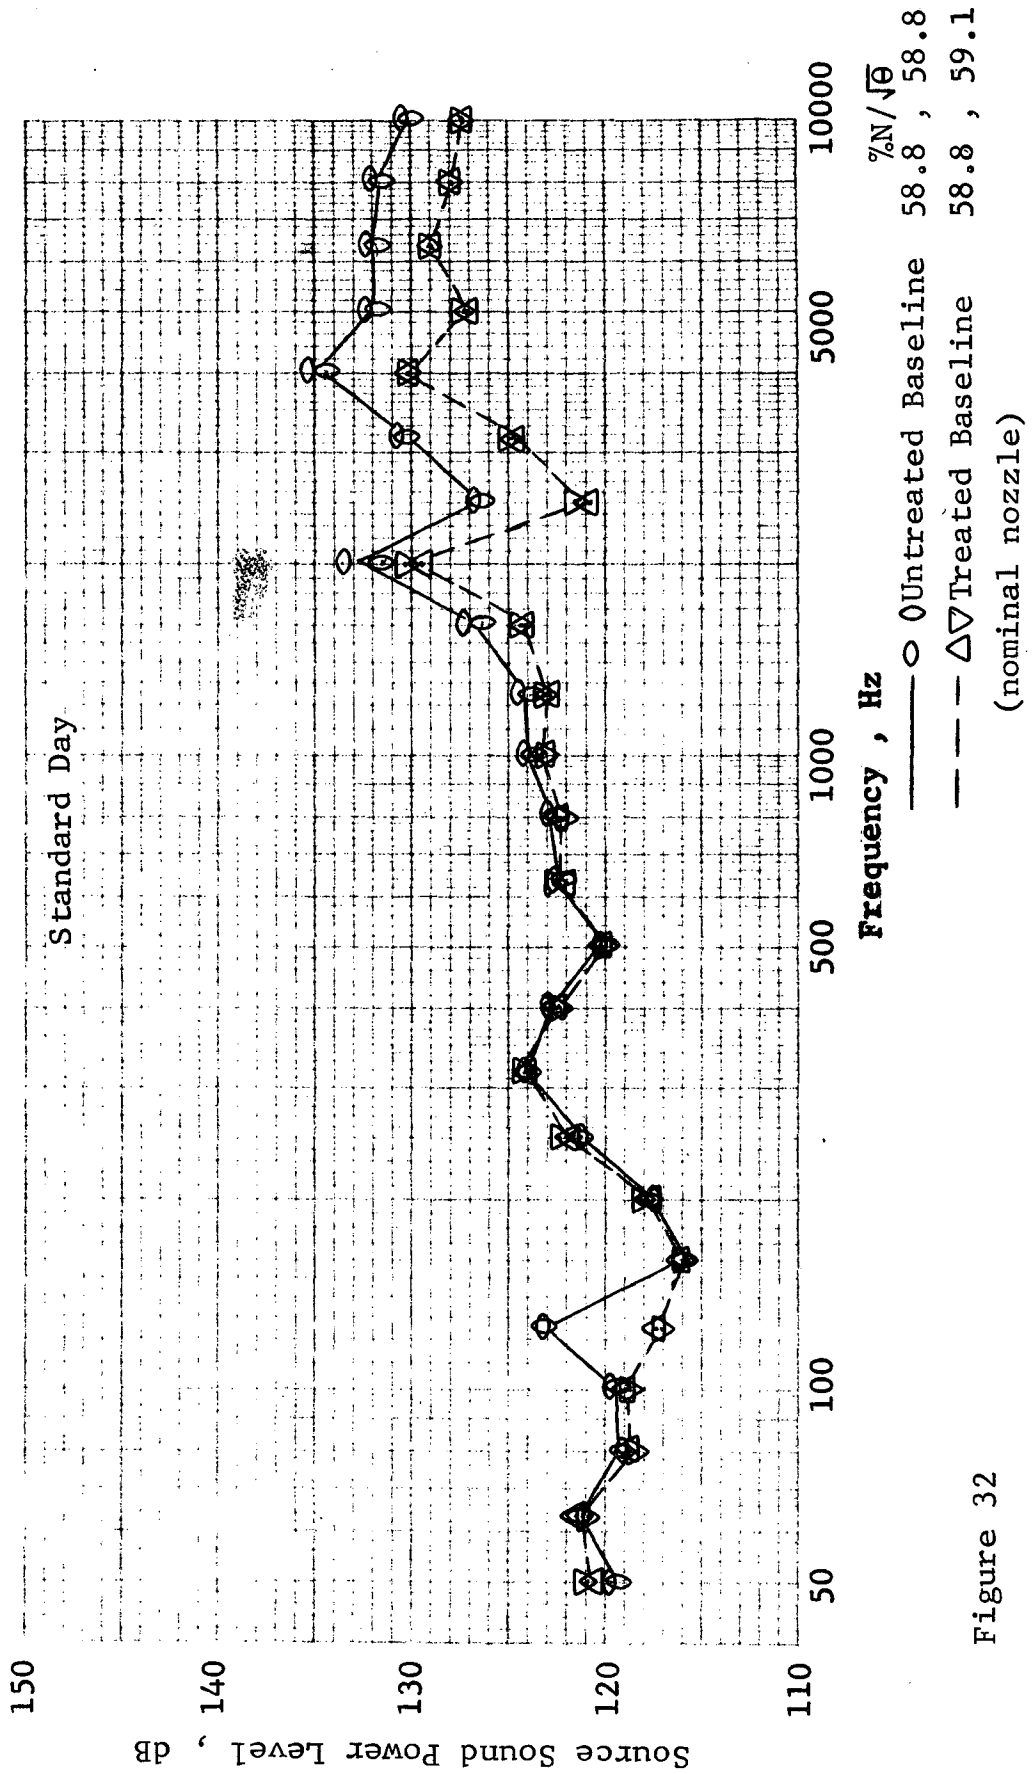


Figure 32

QEP FAN B SCALE MODEL RESULTS  
 SOUND POWER LEVELS AT TAKEOFF  
 TREATED VS UNTREATED

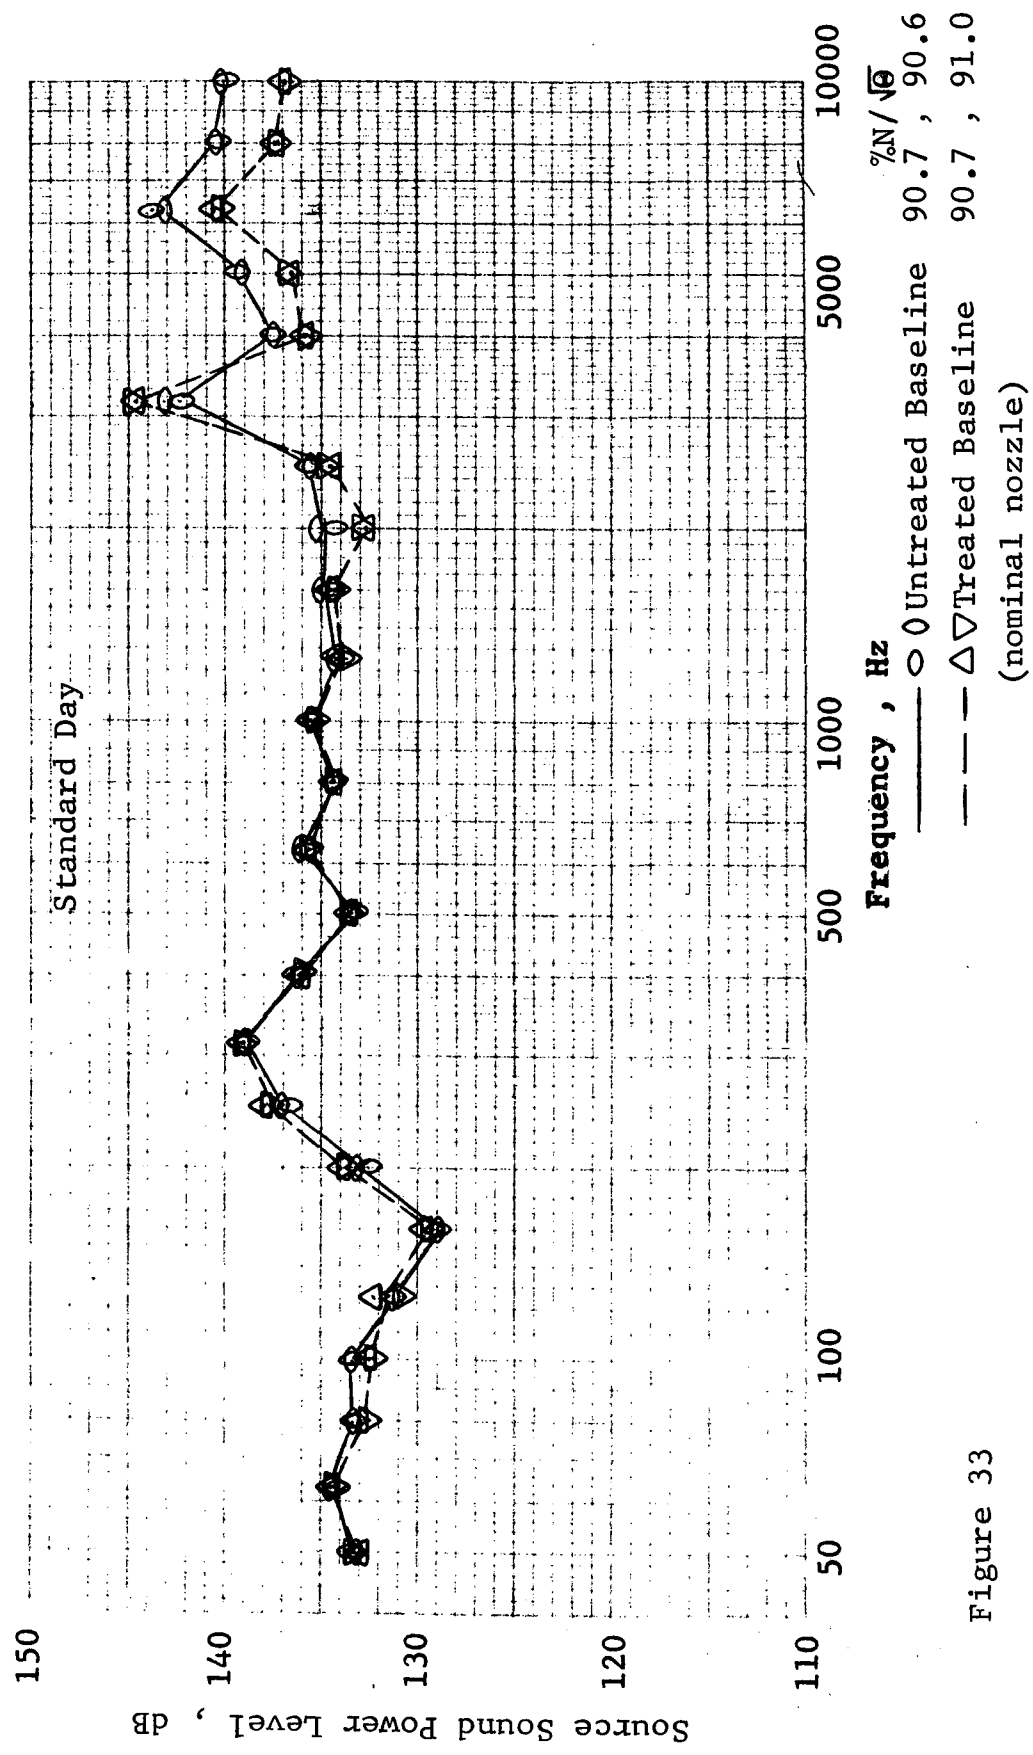


Figure 33

#### D. SCALED-UP TO FULL SCALE RESULTS

In order to obtain a picture of the full scale results, the scale model data was scaled up to full scale (see Section VI-B for details of the scaling procedure). Figures 34 - 39 present 200 foot (61.0 m) sideline perceived noise levels for both the treated and untreated configurations at approach and takeoff thrust levels for each of the three fan nozzle sizes tested. There was a definite noise reduction around the arc for all three nozzles at approach thrust due to the acoustic treatment, with noticeably greater reduction occurring in the rear quadrant. At takeoff thrust, the noise reduction was less in the aft quadrant for the three nozzles while no reduction occurred in the front quadrant for the large and small nozzle sizes. The treated fan with nominal nozzle resulted in a 3 dB increase in 200 foot (61.0 m) sideline PNL at  $40^\circ$ .

In all cases, the fan noise was aft noise dominant with the aft peak being more pronounced for the untreated case at high speed. It is also observed that the fan frame acoustic treatment as it was designed was more effective in the rear quadrant.

Figures 40 - 43 present the variation of maximum 200 foot (61.0 m) sideline PNL with corrected speed. The approach and takeoff points which have been examined in detail are shown. There has been a noise reduction over the entire speed range for each of the three nozzles.

It is interesting to note the dip in the results from the unsuppressed fan with the nominal nozzle at about 85% corrected speed. This, in part, may

account for the less than expected suppression results at takeoff thrust. The suppressed perceived noise level increased smoothly with increasing speed so that at 85% corrected speed, where the unsuppressed results decreased, the delta between the two configurations was reduced. Whereas with the large nozzle, the reduction due to the treatment was consistent over the entire speed line. Although a slight fall off was noticeable around 79% fan speed, it was not as severe as with the nominal nozzle. Likewise, the suppression varied smoothly with speed with the small nozzle, the amount of suppression gradually decreasing with increasing speed.

Another data presentation which provides more insight into the thrust maximum PNL situation is an iso-noise map. Figure 43 presents this information for the untreated case. Lines of constant maximum PNL, fan speed, and fan thrust appear along with the three operating lines. The identification of a point along a constant thrust line which produces the least noise represents an improvement from an acoustics viewpoint.

At both takeoff (100% thrust) and approach (39% thrust) points, the constant PNL lines are such that at operating points other than on the nominal operating line noise increases.

At 80% thrust, the large nozzle produces the lowest noise. Traversing the line of constant thrust, it can be seen that the noise decreases from more than 117 PNdB with the small nozzle to less than 115 PNdB with the large nozzle. However, the important approach and takeoff thrust levels do not show this trend.

The iso-noise map, Figure 44, shows basically the same result as in the untreated case. At approach static thrust, the constant thrust, speed and PNL lines are for all practical purposes parallel. At takeoff thrust, movement off the nominal nozzle increases noise. Thus, nozzle variations do not provide a means of noise reduction at these critical points.

Figure 45 shows the PNL for a level flyover of a single uninstalled fan at 370 feet (112.8 m) with a flight speed of 279 feet per second (85.0 m/sec), flight Mach number .25.

The PNL directivity shows a maximum angle noise reduction of 4.3 PNdB. Also included in Figure 45 are the maximum PNL predictions made before testing began. The suppressed level is very close to that measured while the unsuppressed level differs by about 1.7 PNdB. The suppression effectiveness was less than expected being 4.3 PNdB as opposed to a predicted level of 5.6 PNdB.

Figure 46 presents the PNL for a 1000 foot (304.8 m) level flyover of a single uninstalled fan at Mach number 0.25. At this condition, a noise increase is noted in the front, but peak PNL has been reduced 3.8 PNdB. The unsuppressed prediction is very close to that measured. However, the power suppression resulted in a 3.5 PNdB difference in the suppressed maximum.



QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL

TREATED VS UNTREATED

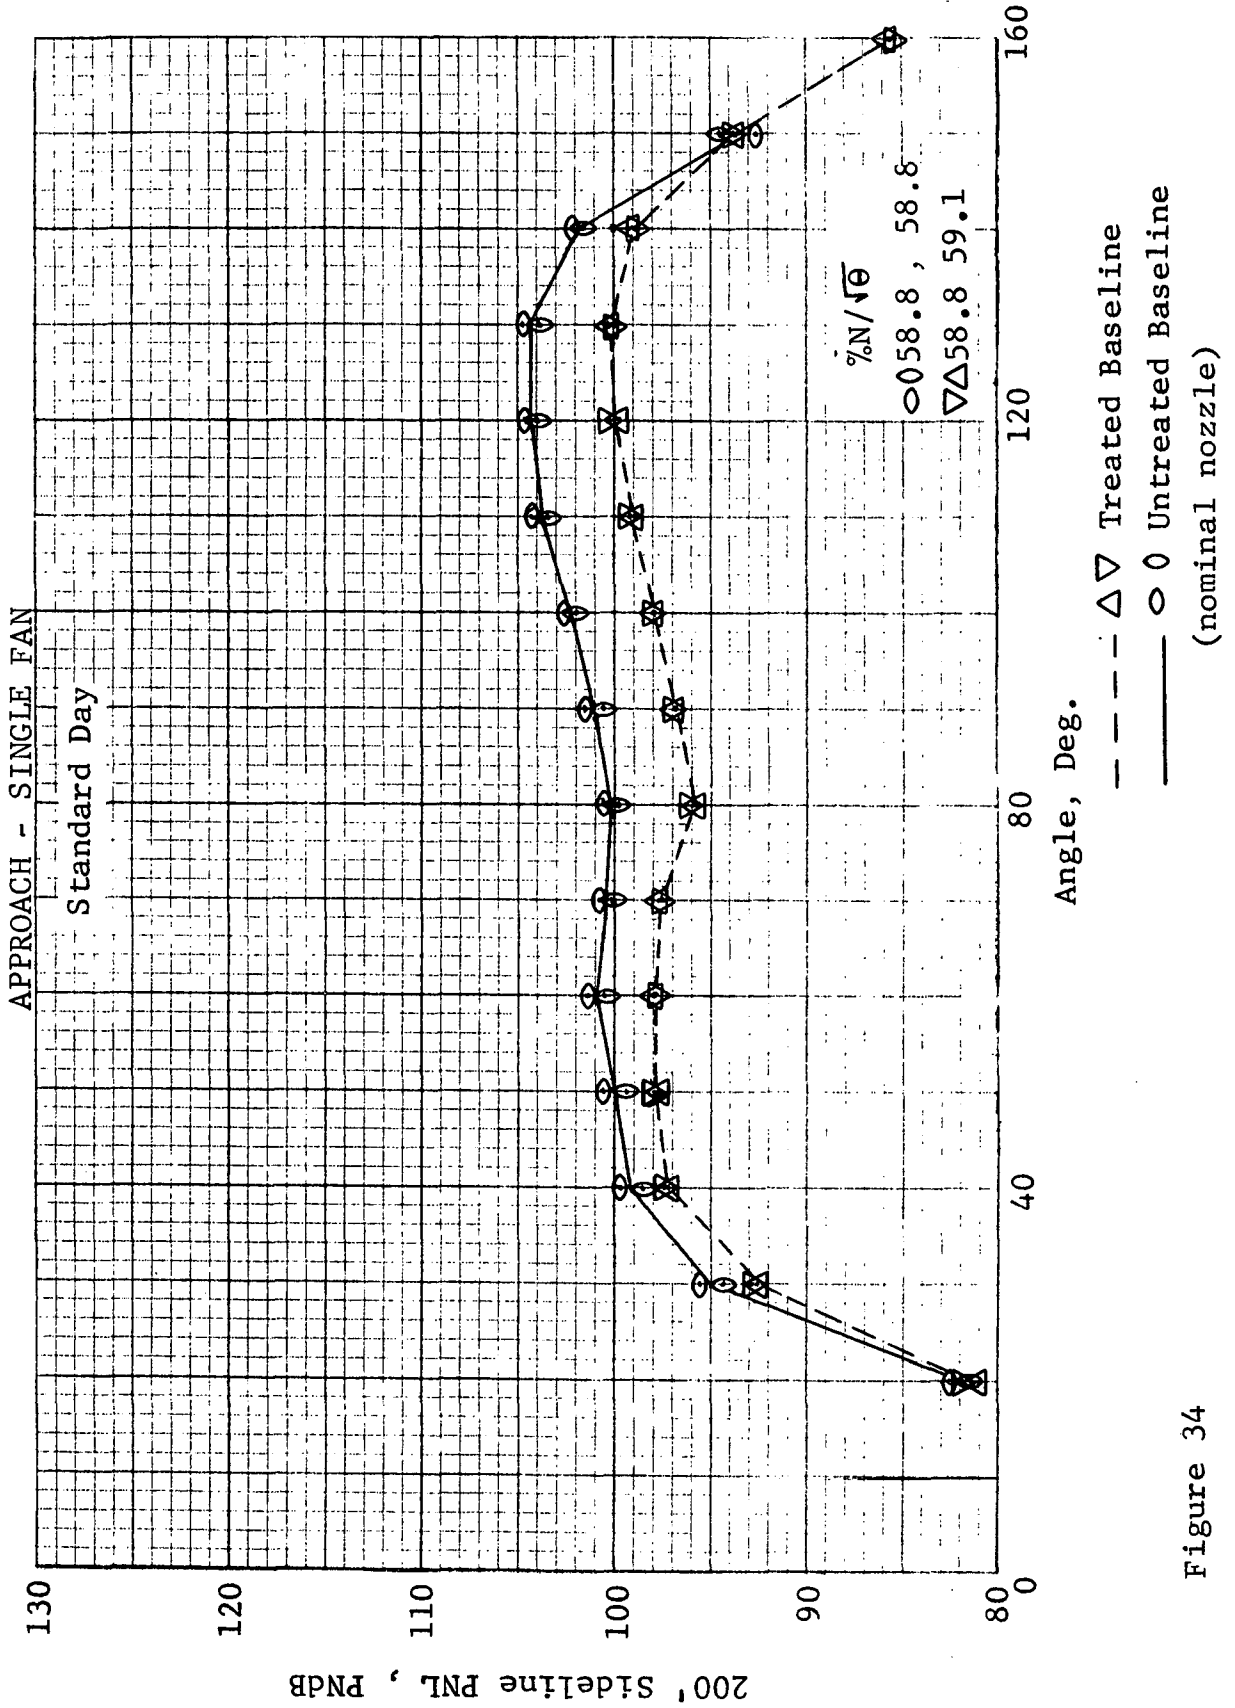


Figure 34

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL  
 TREATED VS UNTREATED  
 TAKEOFF - SINGLE FAN  
 Standard Day

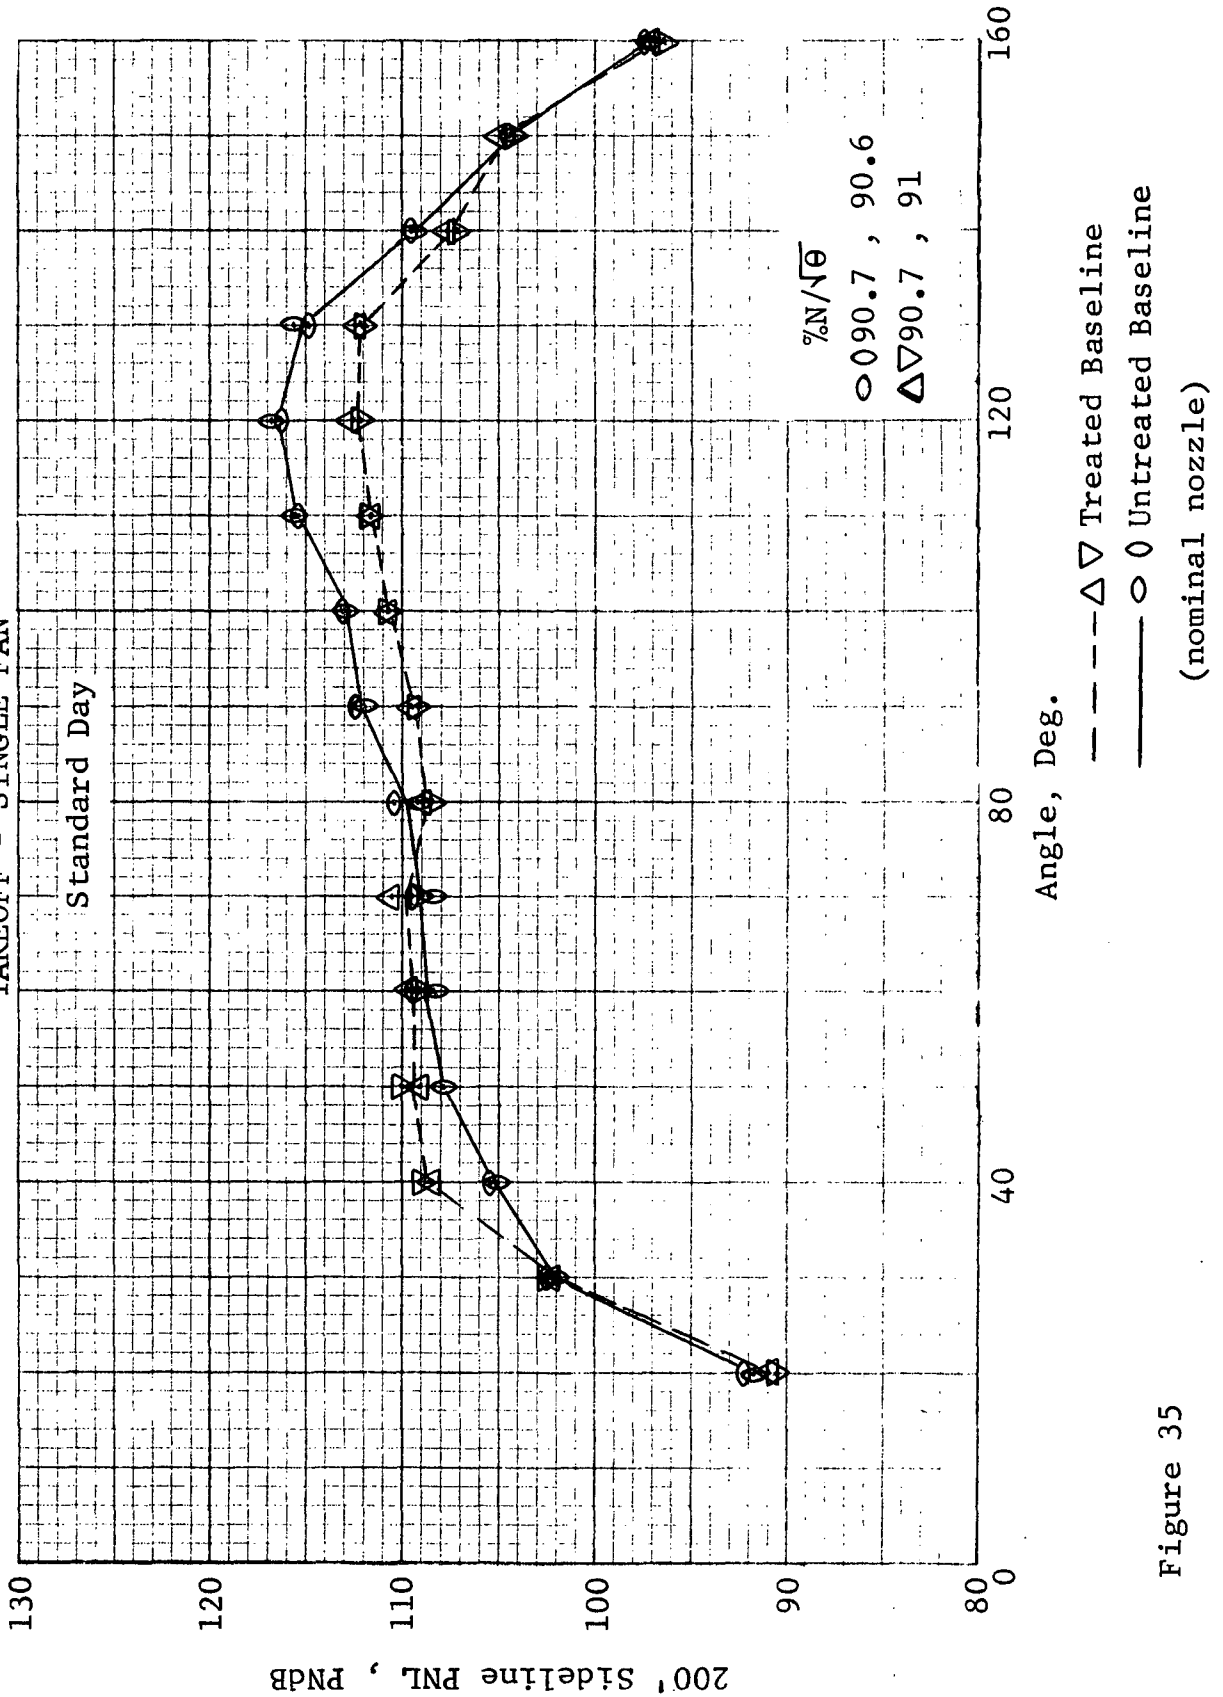


Figure 35

QEP FAN E  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL

TREATED VS UNTREATED  
 APPROACH - SINGLE FAN

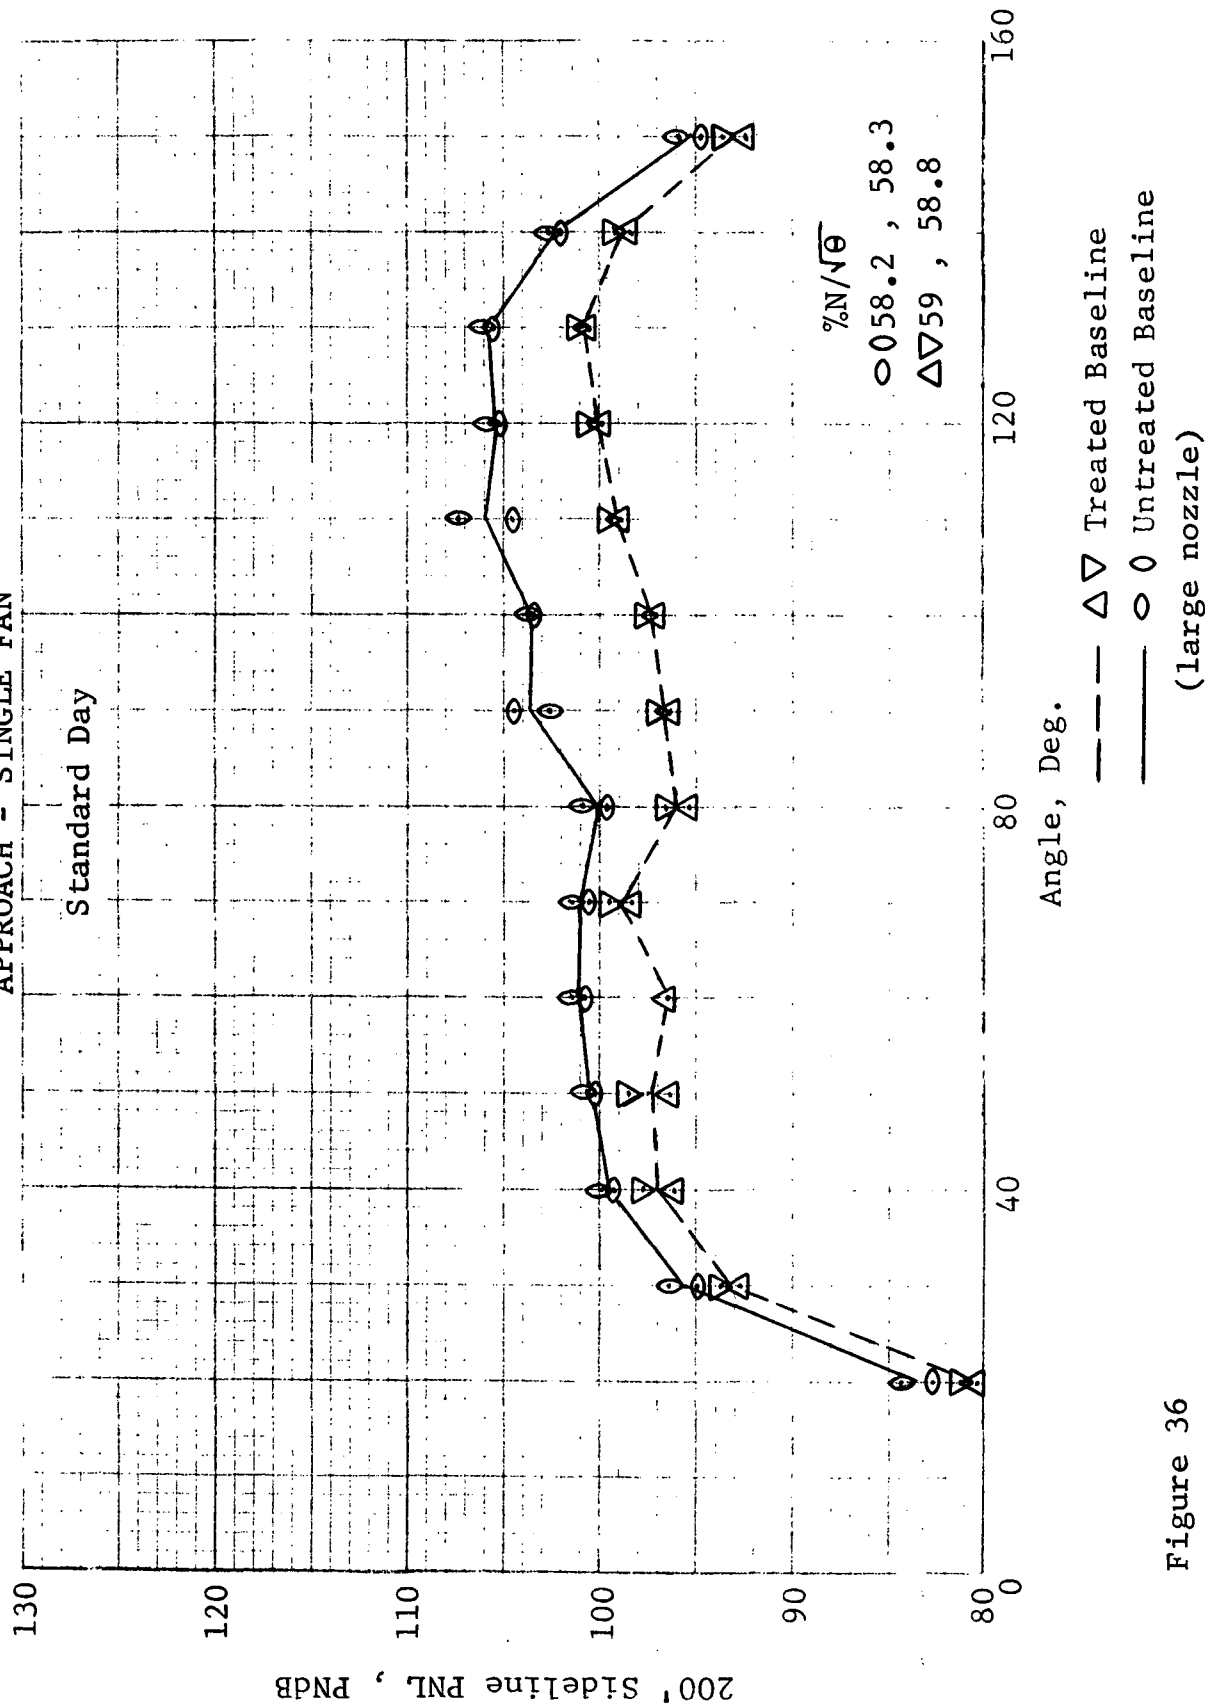


Figure 36

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL

TREATED VS UNTREATED  
 TAKEOFF - SINGLE FAN

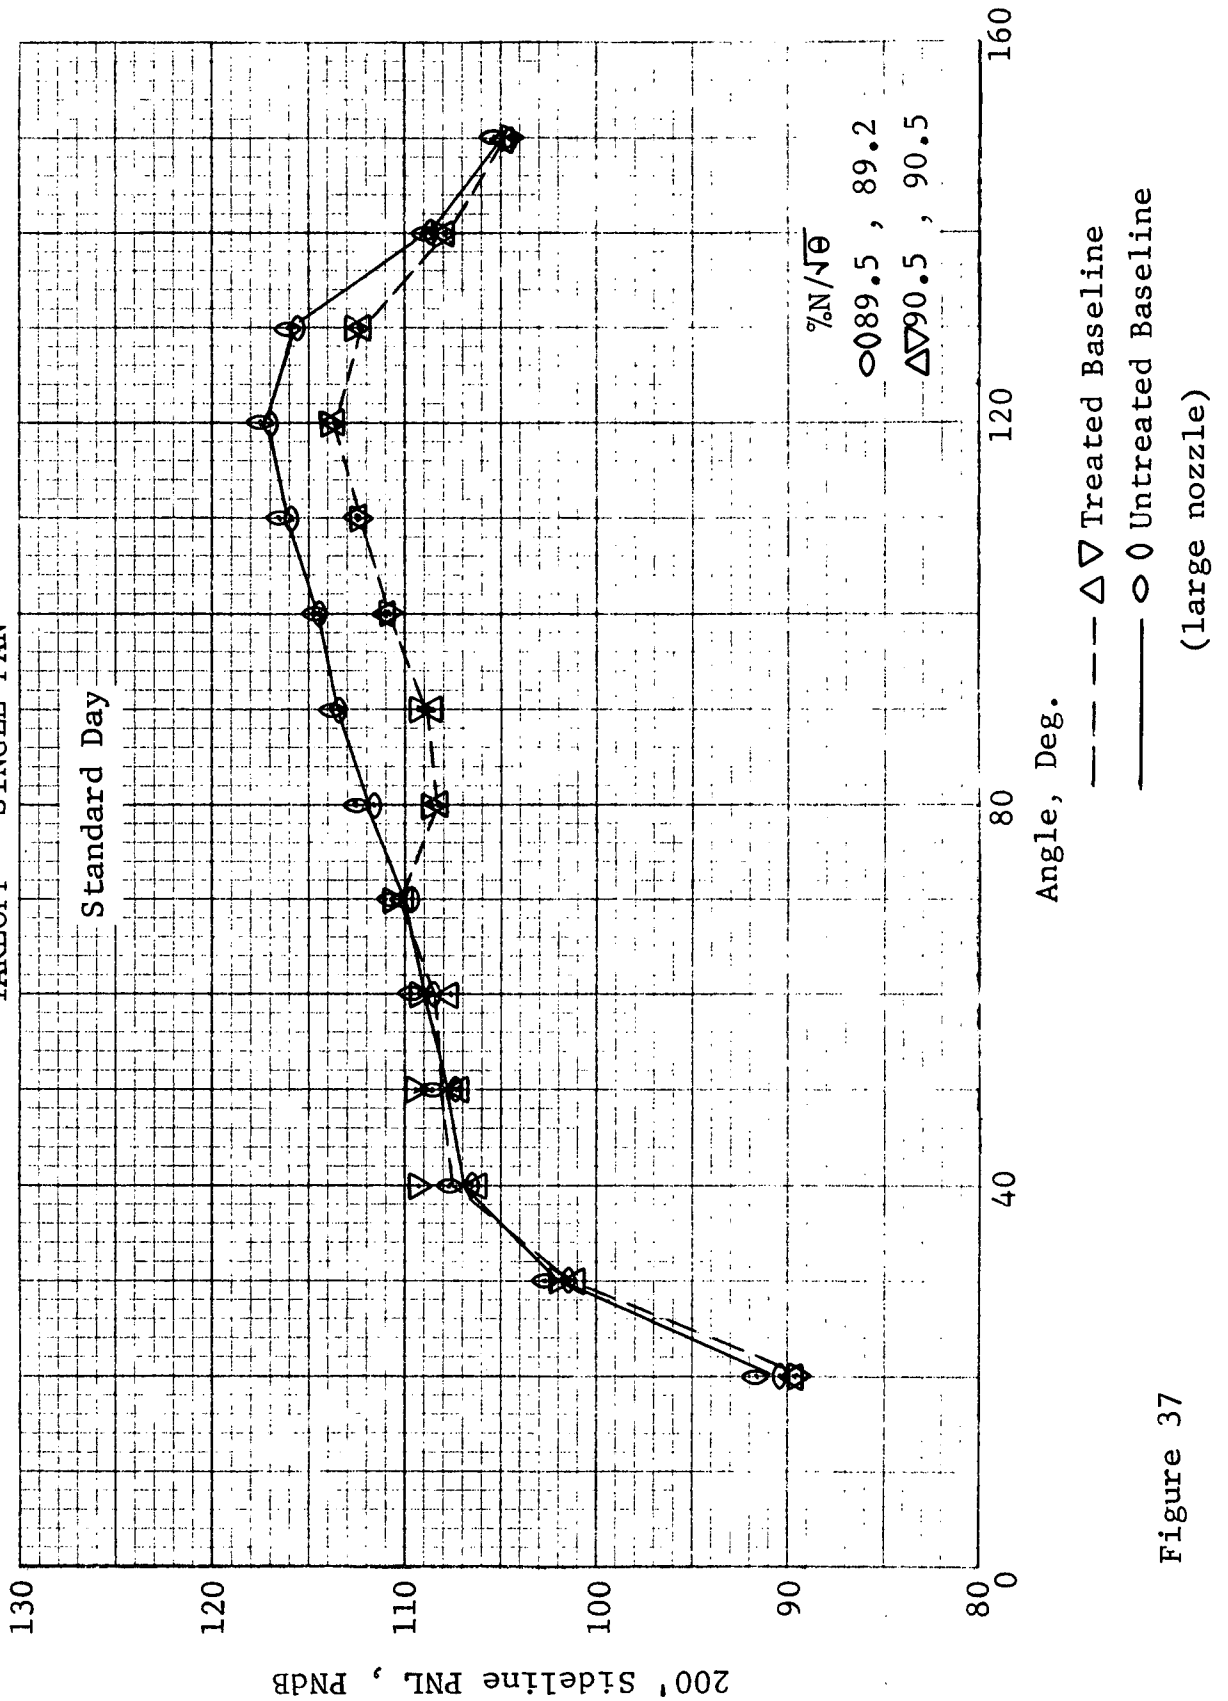


Figure 37

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL  
 TREATED VS UNTREATED  
 APPROACH - SINGLE FAN

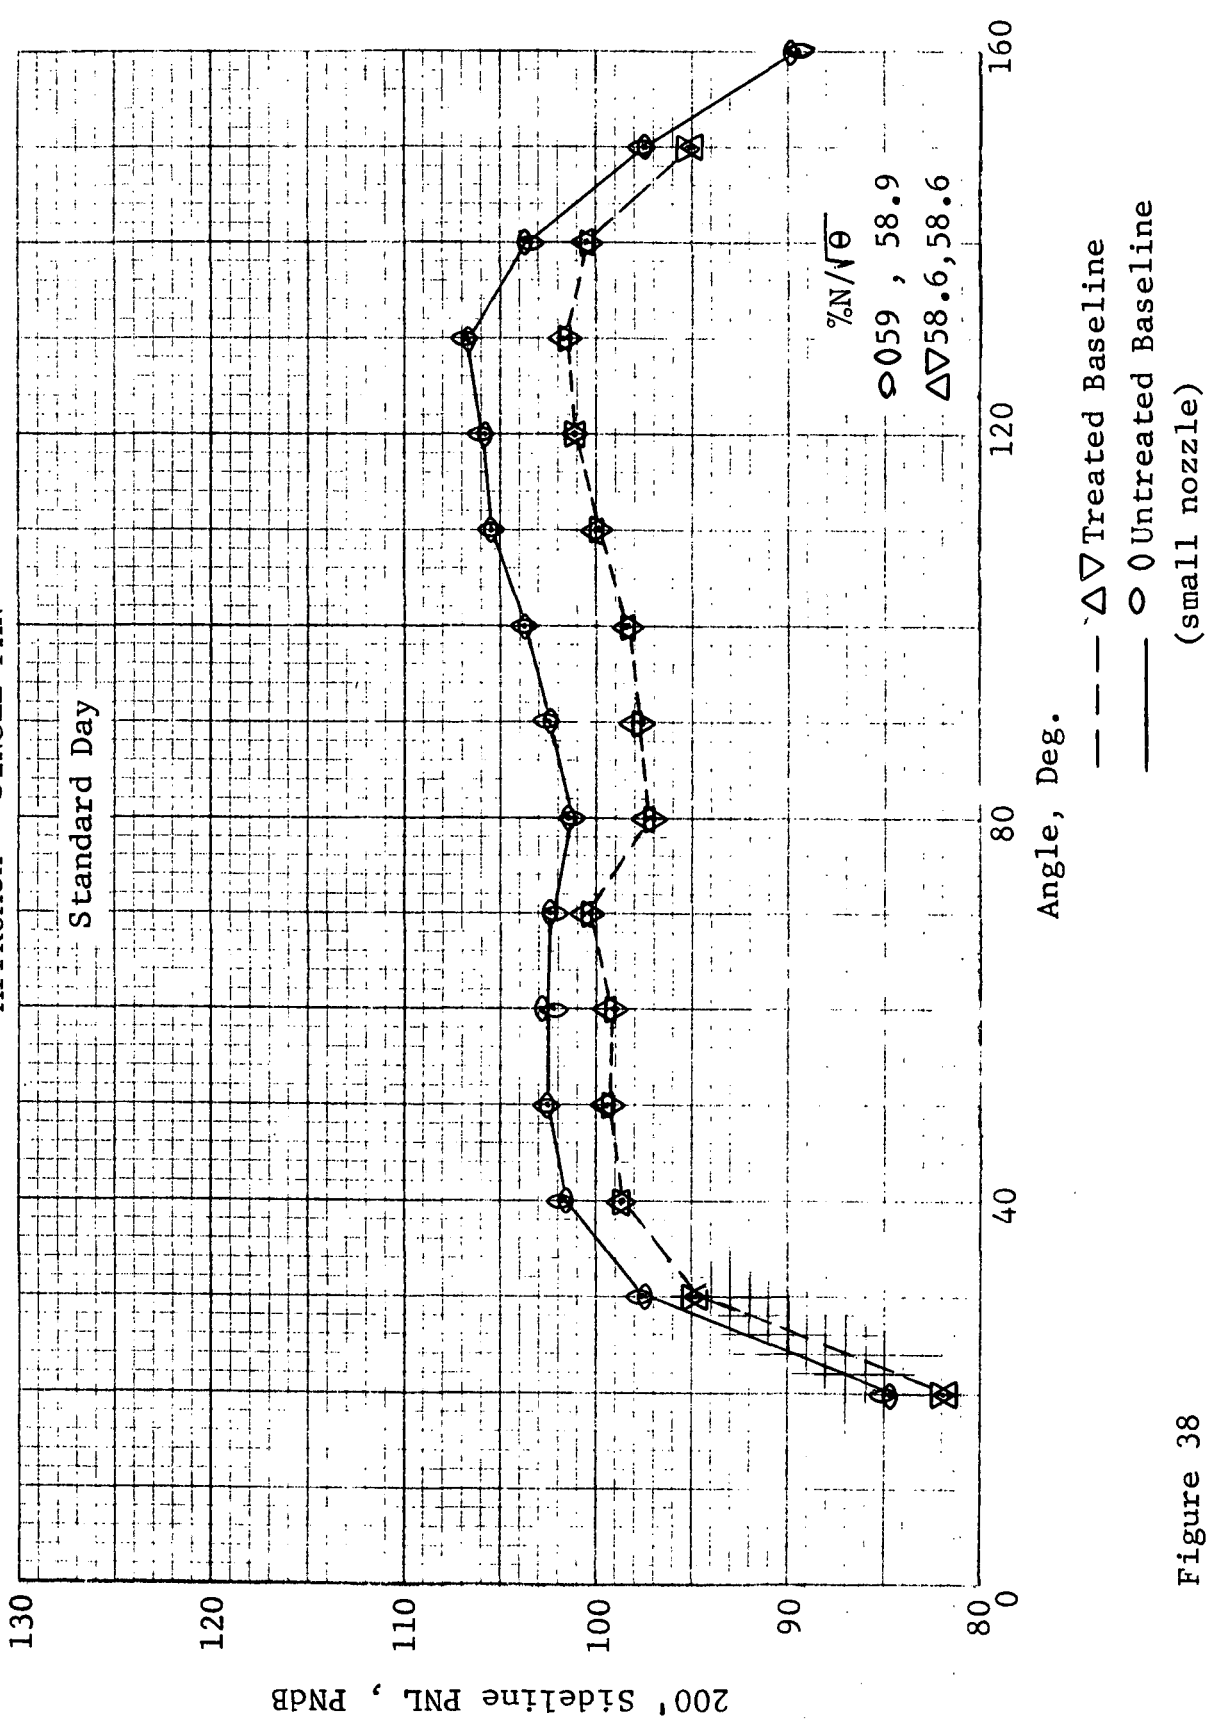


Figure 38

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE PNL  
 TREATED VS UNTREATED  
 TAKEOFF - SINGLE FAN


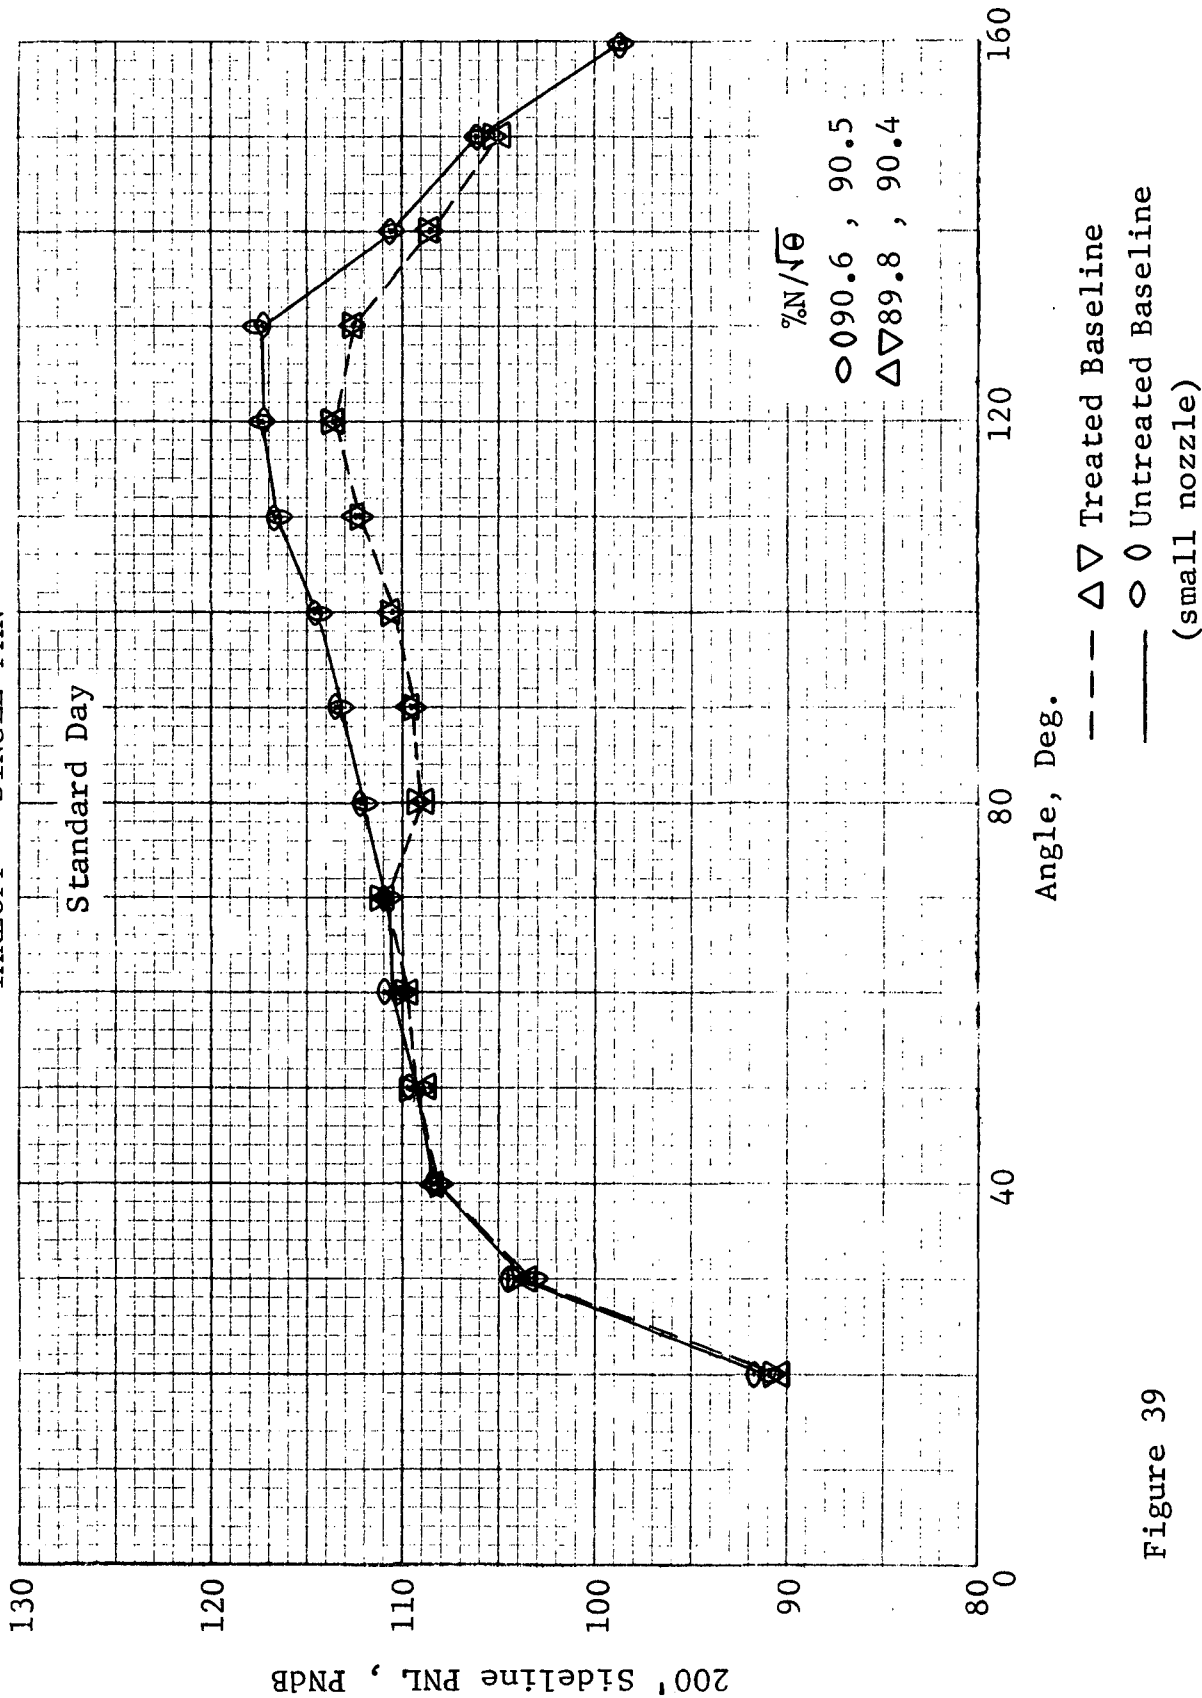


Figure 39

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE MAX PNL  
 TREATED VS UNTREATED  
 STANDARD DAY  
 SINGLE FAN

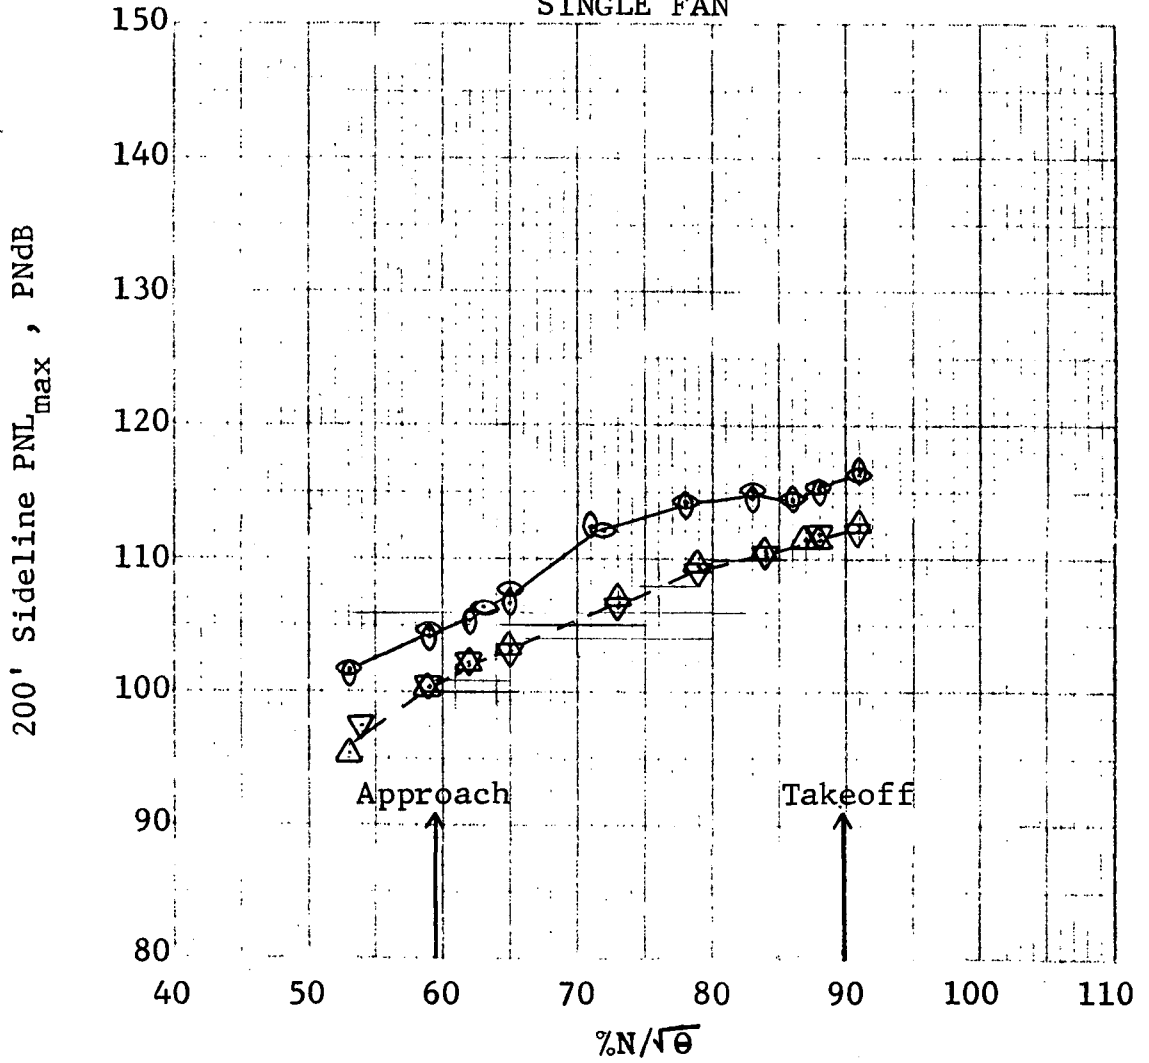


100%=3625 rpm

--- Δ ▽ Treated  
 ——— ○ ○ Untreated  
 (nominal nozzle)

Figure 40

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE MAX PNL  
 TREATED VS UNTREATED  
 STANDARD DAY  
 SINGLE FAN

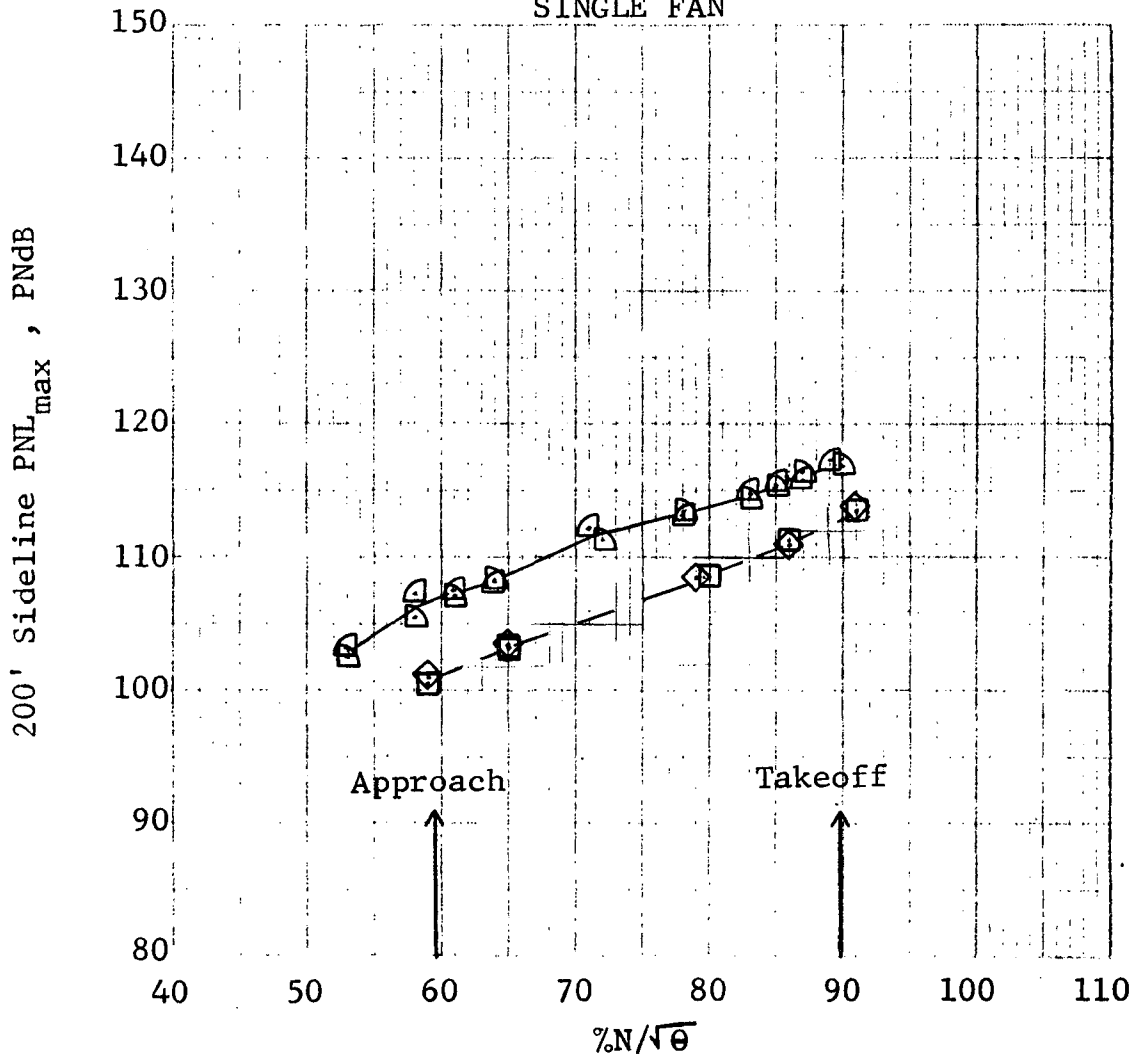


100%=3625 rpm

--- ◊ Treated  
 ——— ◻ Untreated  
 (large nozzle)

Figure 41



QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 200' SIDELINE MAX PNL  
 TREATED VS UNTREATED  
 STANDARD DAY  
 SINGLE FAN

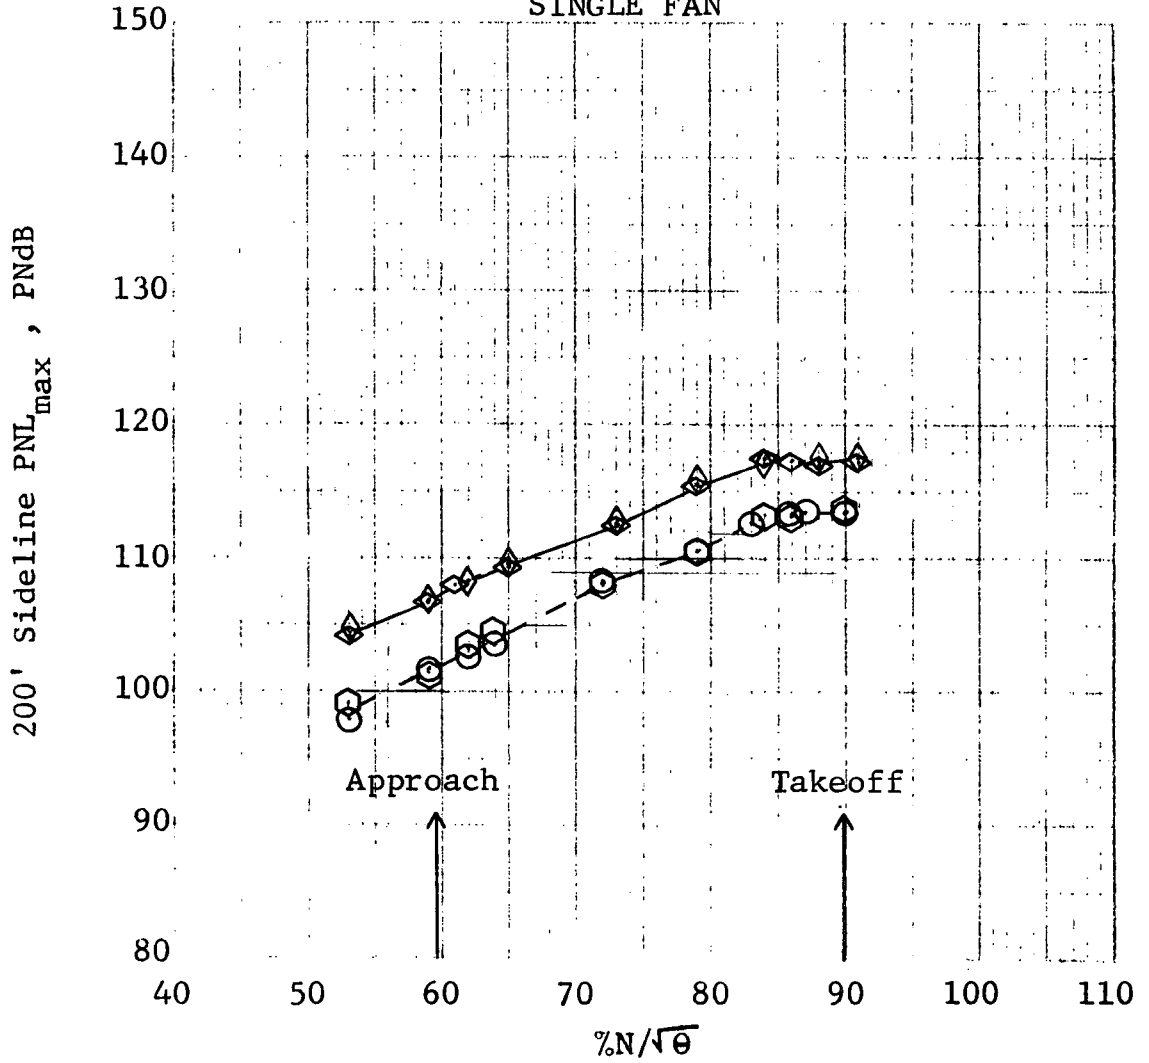

100%=3625 rpm

--- ○ ◻ Treated  
 — — — ◇ ◊ Untreated  
 (small nozzle)

Figure 42

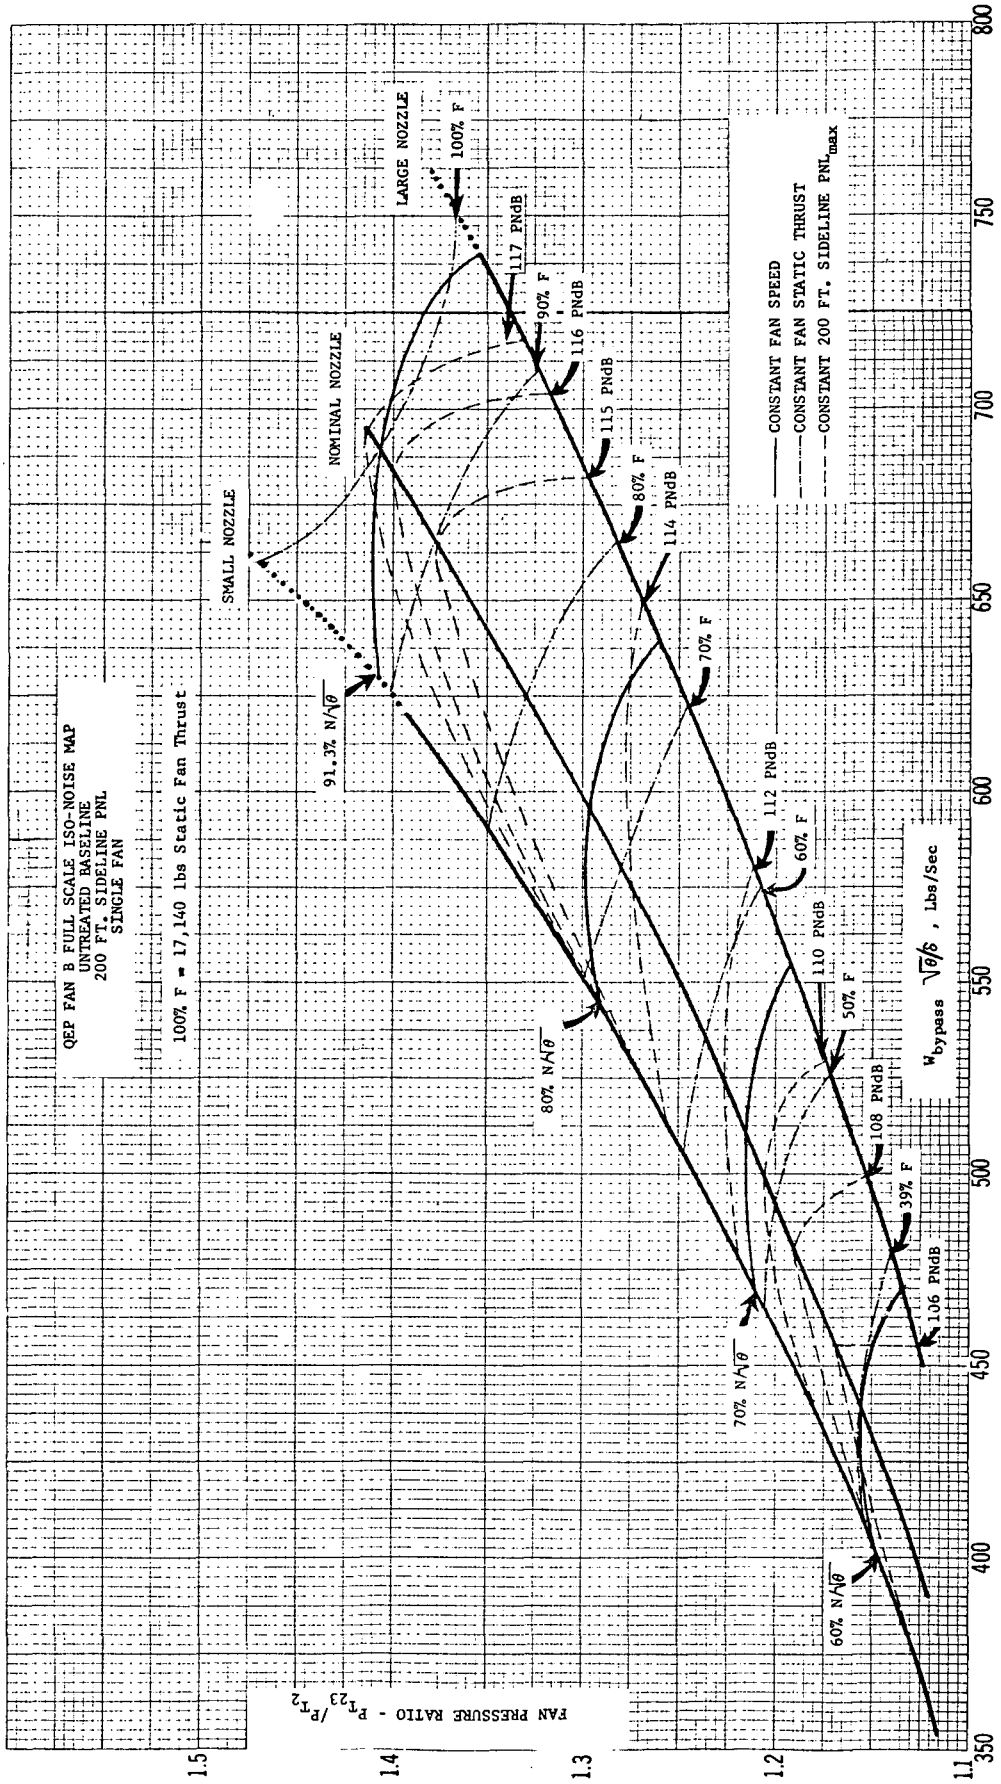


Figure 43


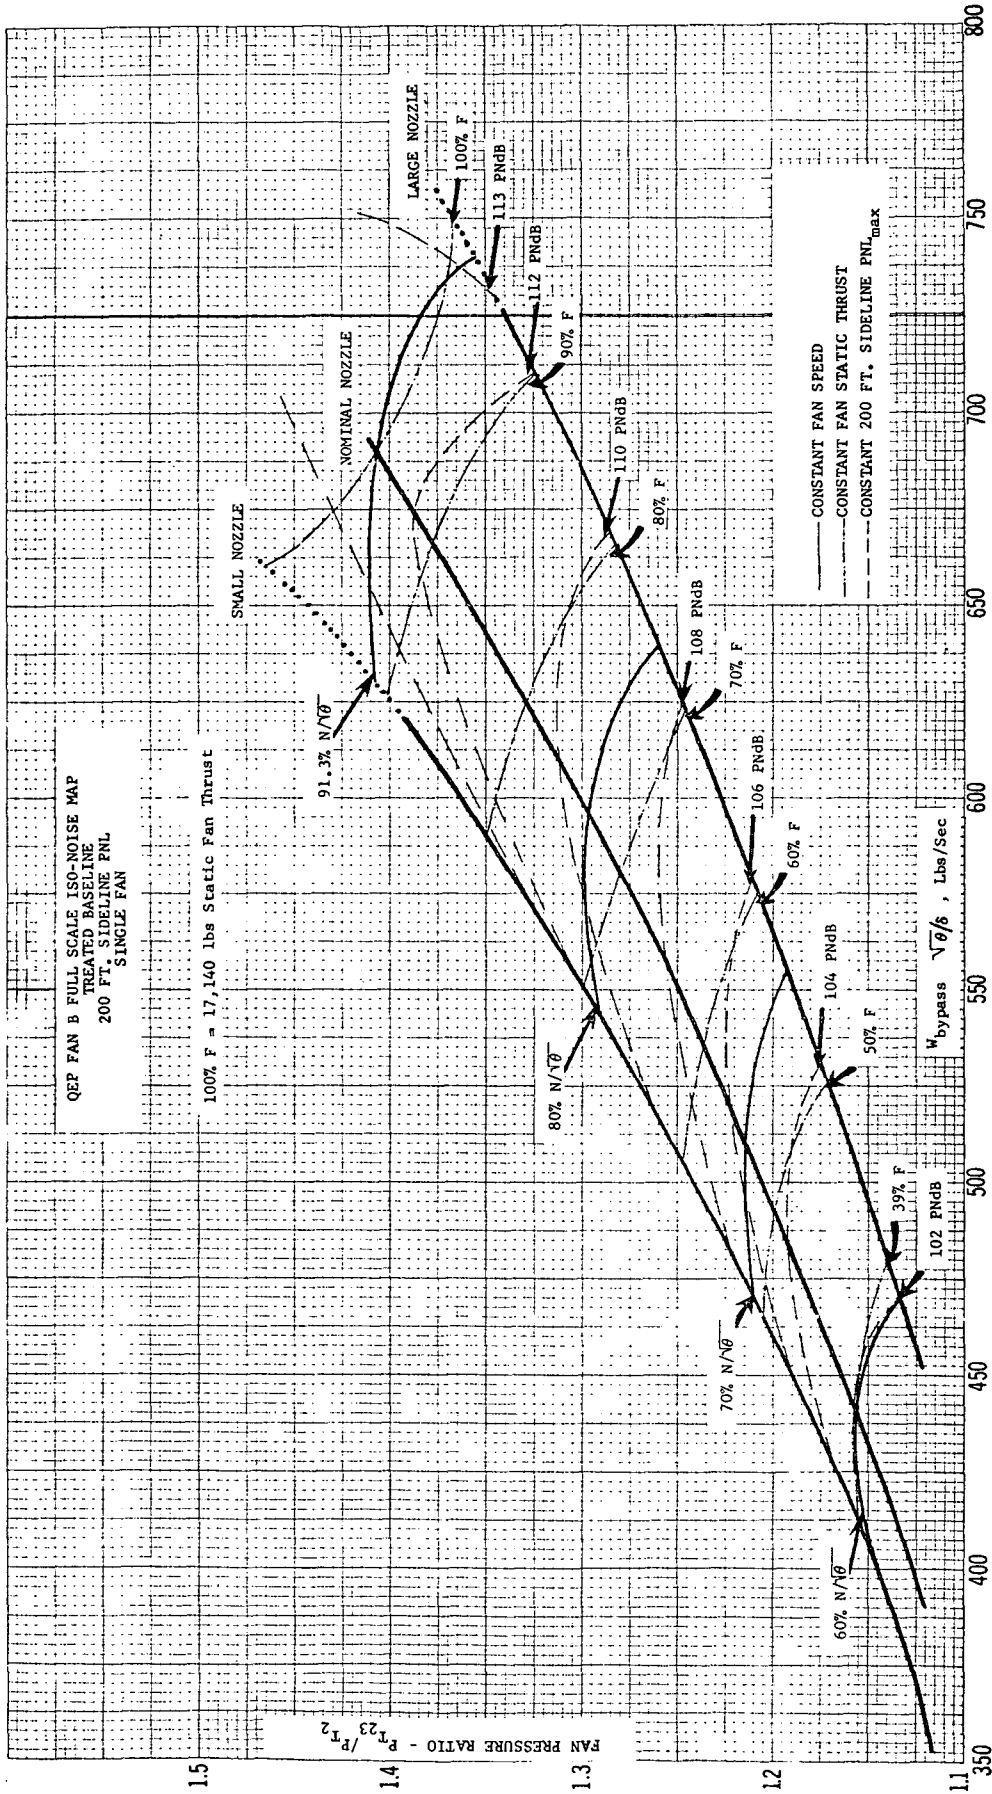


Figure 44

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS  
 LEVEL FLYOVER

77°F DAY  
 APPROACH

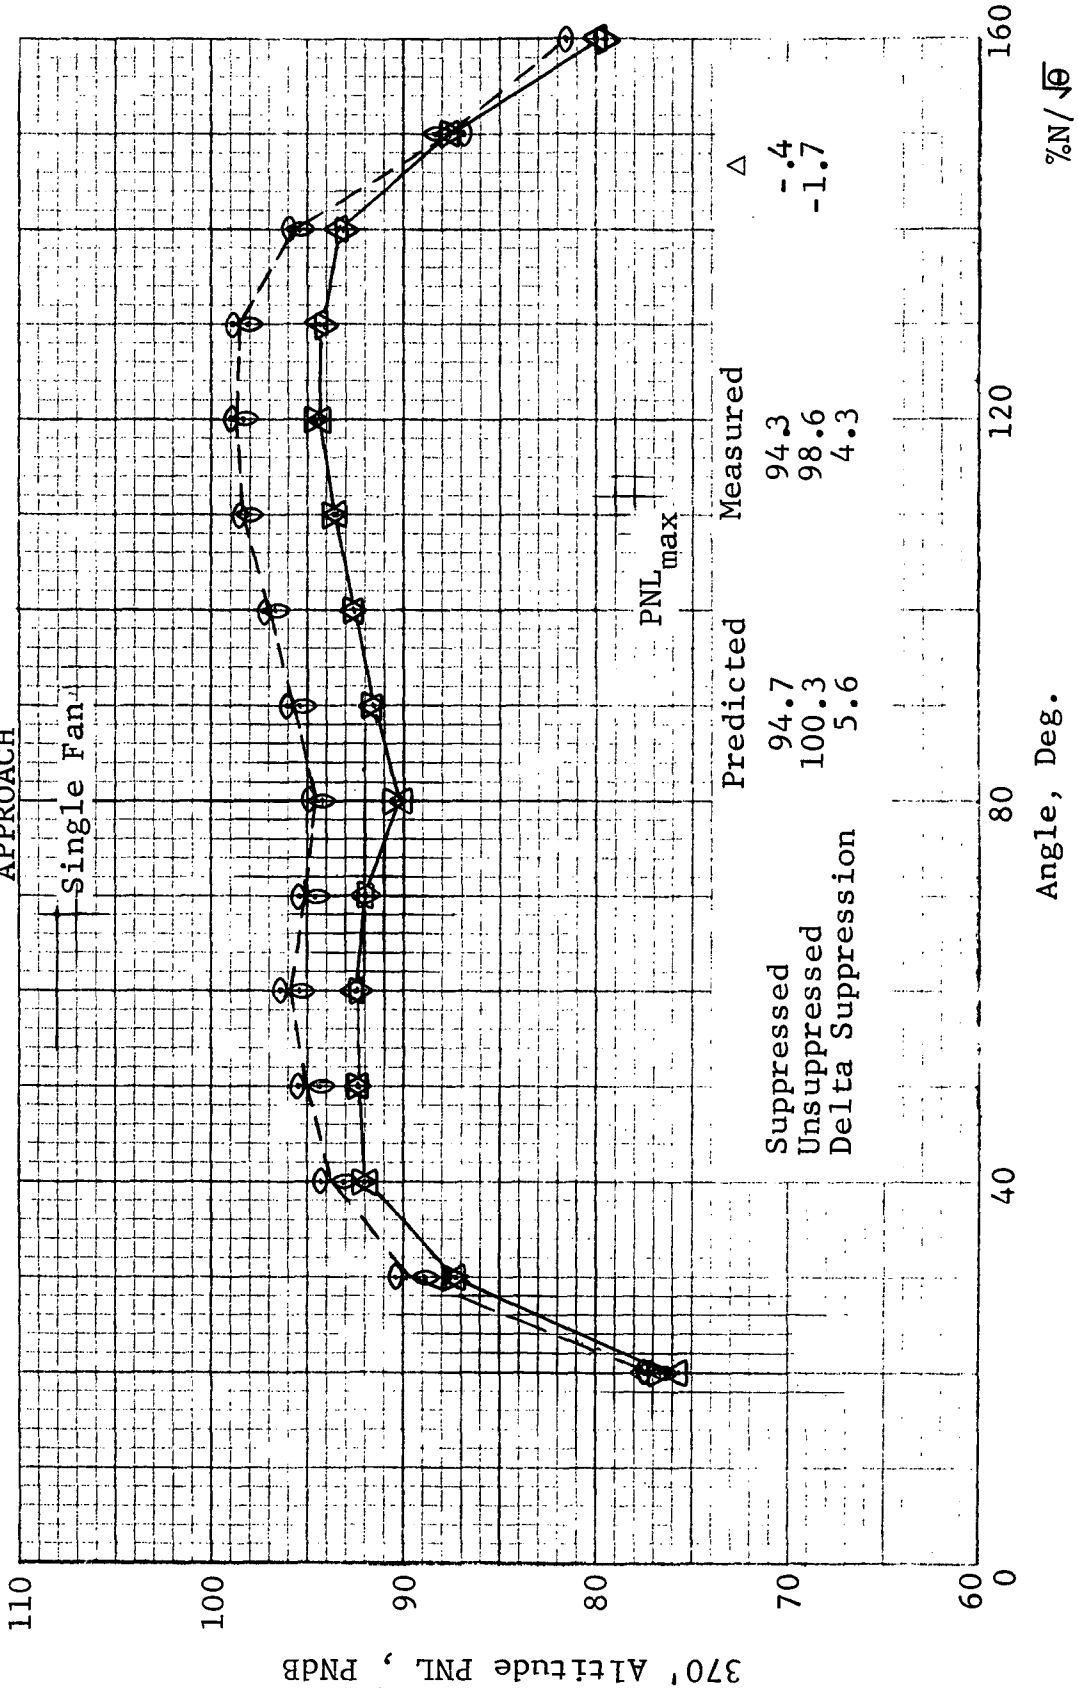

$V_{plane} = 279 \text{ Ft./Sec.}$   
 Altitude = 370'  
 Nominal Nozzle

Legend:  
 - - -  $\circ$  Untreated Baseline 58.8, 58.8  
 - - -  $\Delta$  Treated Baseline 58.8, 59.1


Y-axis: 370' Altitude PNL, PNDB  
 X-axis: Angle, Deg.  
 Right-side label: %N/ $\sqrt{\theta}$

Figure 45

QEP FAN B  
 FULL SCALE PROJECTIONS FROM SCALE MODEL RESULTS

LEVEL FLYOVER

77°F DAY  
 TAKEOFF

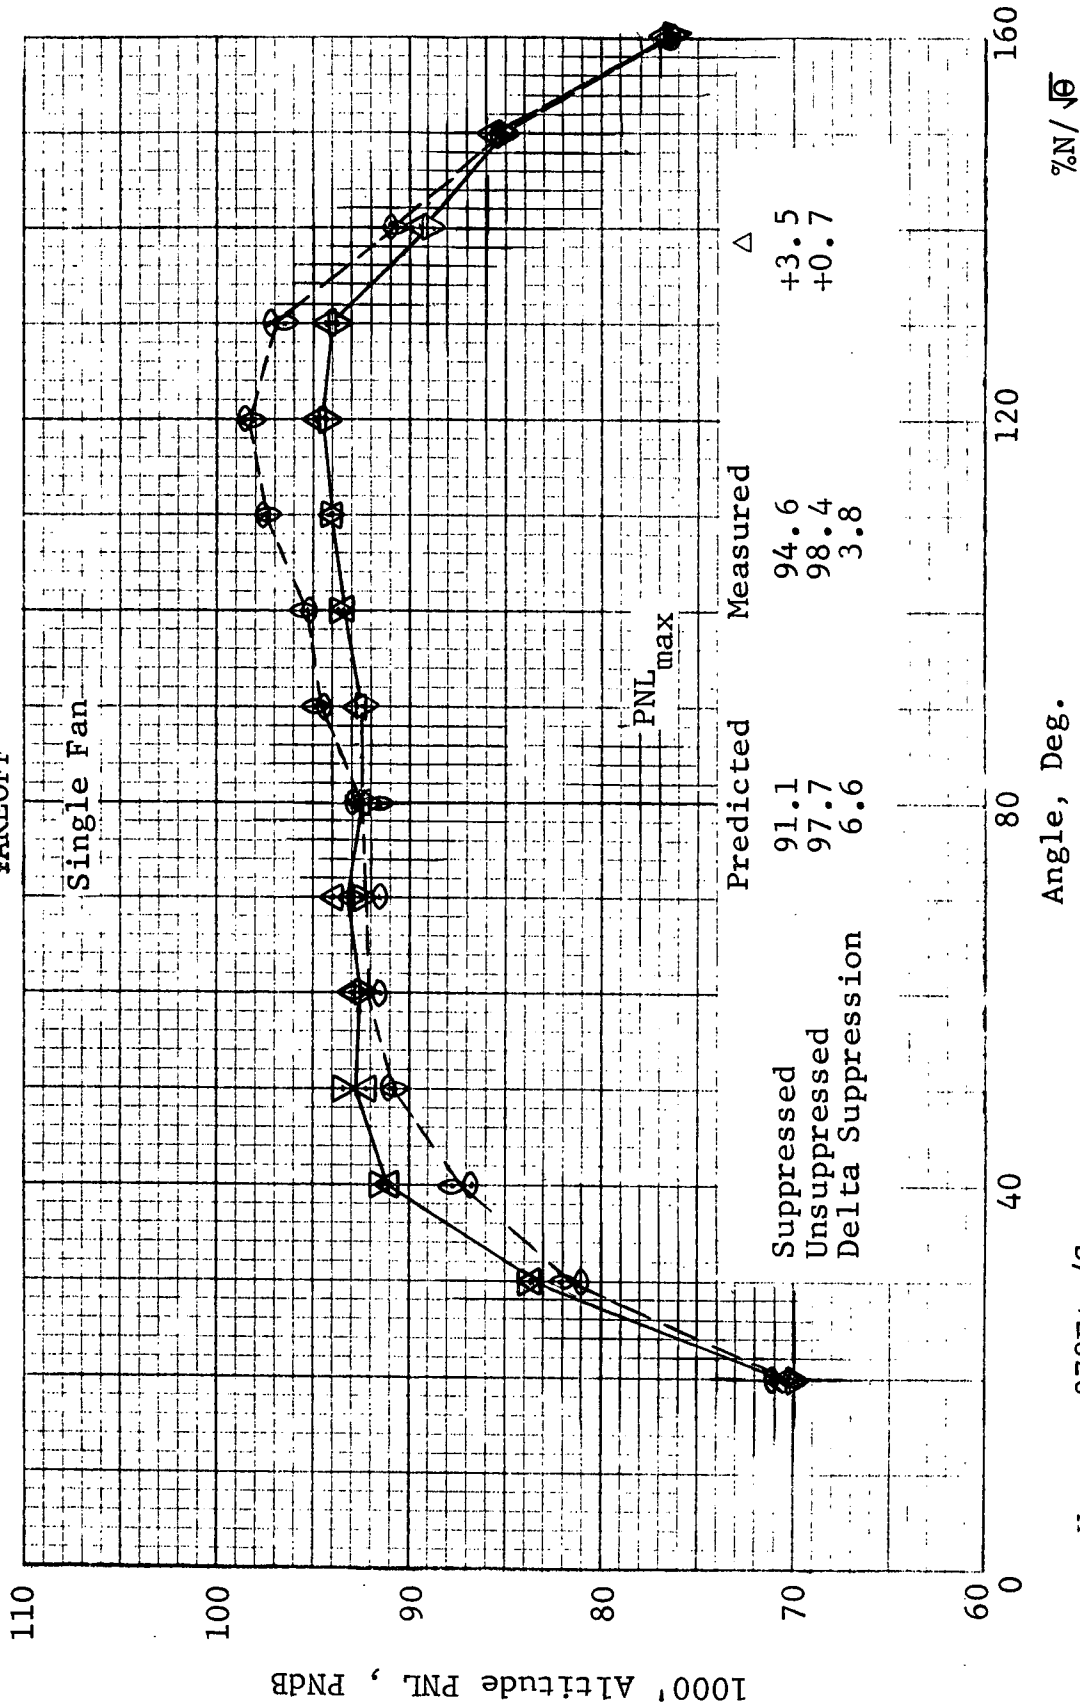

V<sub>plane</sub> = 279 Ft./Sec.

Altitude = 1000'

Nominal Nozzle

Angle, Deg.      %N/√θ

--- ○ ---    Untreated Baseline    90.7, 90.6

—    Δ    Treated Baseline        90.7, 91.0

Figure 46

## VIII. CONCLUSIONS

From these data, it can be concluded:

1. On this fan exhaust nozzle area, changes did not reduce noise at takeoff and approach thrust levels; although the large nozzle (16% oversized) did show the lowest noise in the mid-thrust range.
2. Fan frame acoustic treatment was effective in reducing maximum sideline PNL. The suppression obtained was over a wide frequency range, 1 - 10 KHz.
3. Pretest flyover noise predictions agreed quite well with test results for unsuppressed noise.

Summarizing the results, projections of full scale Fan B with nominal nozzle indicate the following single fan, maximum Perceived Noise Levels (PNL) for a level flyover:

FAN B LEVEL FLYOVER PROJECTIONS  
MAXIMUM PERCEIVED NOISE LEVELS  
SINGLE FAN

	<u>Untreated</u>	<u>Treated</u>
Takeoff 1000 ft (304.8 m) altitude $M_o = .25$	98.4 PNdB	94.6 PNdB
Approach 370 ft (112.8 m) altitude $M_o = .25$	98.6 PNdB	94.3 PNdB

The 200 foot (61.0 m) sideline maximum PNL's for a single full stage Fan B were as follows:

Full Scale Fan B  
200 Foot (61.0 M) Sideline, Maximum PNL

	Approach*	Takeoff**
Nominal nozzle, untreated	104.4 PNdB	116.6 PNdB
Nominal nozzle, treated	100.2 PNdB	112.4 PNdB
Large nozzle, untreated	106.0 PNdB	117.2 PNdB
Large nozzle, treated	100.8 PNdB	113.6 PNdB
Small nozzle, untreated	106.8 PNdB	117.5 PNdB
Small nozzle, treated	101.6 PNdB	113.6 PNdB

\*6684 pounds (29,744 newtons) static thrust

\*\*17,140 pounds (76,277 newtons) static thrust

## IX. APPENDIX

Tables A1 - A24 contain the 1/3 octave scale model data used to prepare this report. The data presented is for the 100 foot (30.5 m) arc and has been corrected to Standard Day conditions. Tables A1 - A4 contain the data for the untreated configuration with nominal nozzle for speeds as close as possible to 60, 70, 80 and 90% corrected fan speed. Tables A5 - A8 present the data for the treated configuration at these speeds. Tables A9 - A16 contain the same set of information for the fan with large nozzle and Tables A17 - A24 present the data for the small nozzle.



QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 58.8% N<sub>fc</sub> ; NOMINAL NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PROC. DATE - MONTH 10 DAY 16 Hr. 7:2												
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN),														
FREQ., (0.55)	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'	PWL
RADIAL 100, FT.	50	72.0	69.1	66.3	63.6	61.0	58.4	55.8	53.2	50.6	48.0	45.4	42.8	119.5
VEHICLE (30' M)	63	69.2	65.7	62.3	59.0	55.8	52.6	49.4	46.2	43.0	39.8	36.6	33.4	121.0
CO:FIG FAN B	80	66.6	63.0	59.6	56.3	53.0	49.7	46.4	43.1	39.8	36.5	33.2	29.9	119.0
LOC PPG	100	71.1	64.3	73.2	68.8	65.9	63.0	60.1	57.2	54.3	51.4	48.5	45.6	119.6
DATE 8/14/70	125	66.9	65.2	66.2	65.3	66.0	65.5	66.6	66.7	67.7	68.4	69.1	69.9	123.2
RUN 3, PFI 20	150	66.1	65.5	64.3	62.3	62.2	64.6	64.6	65.2	66.8	66.8	68.1	69.3	119.1
TAPE S1090	200	64.8	64.8	64.3	67.8	67.2	69.1	70.3	71.0	72.6	73.7	74.7	75.6	117.6
BAR 28.9 HG	315	67.3	68.0	69.3	70.6	70.3	71.6	73.3	74.3	75.9	77.0	77.3	77.9	121.2
(97859) N/M2)	400	68.3	70.9	72.1	71.2	70.4	71.2	73.3	73.2	74.0	75.3	75.3	75.1	122.9
TAMB (23) DEG F	500	70.0	71.9	70.8	69.8	69.8	68.3	68.3	69.1	69.7	71.7	72.3	72.0	120.8
TMET (71) DEG K)	630	70.4	72.0	72.7	72.8	72.0	70.8	73.4	73.1	73.2	74.3	74.7	74.0	123.1
MACT (295) DEG K)	800	70.4	71.3	74.6	73.9	71.2	71.0	71.9	73.4	74.8	76.5	77.4	76.0	124.2
(0.1786 KG/M3)	1250	69.0	72.8	75.3	73.9	72.3	70.9	71.5	73.0	74.0	77.1	77.3	76.6	124.4
NFA 4471 RPM	1600	71.4	76.3	77.9	76.7	74.8	74.4	74.1	75.7	77.0	79.3	79.2	78.1	127.4
(403) RPM/SEC)	2000	76.8	81.8	85.6	83.4	81.8	81.7	81.0	81.3	81.0	81.3	81.9	81.1	133.7
(461) RAD/SEC)	2500	68.4	75.7	77.1	76.2	75.0	73.7	73.7	75.1	76.1	77.3	78.4	74.3	128.9
(748) RAD/SEC)	3150	71.7	76.7	77.2	80.1	79.3	77.0	74.7	77.9	79.3	80.7	83.6	81.9	130.6
NO. BLADES	4000	75.7	83.9	84.3	83.8	83.4	81.8	77.1	81.5	83.4	85.9	86.4	86.1	135.3
OVERALL MEASURED	5000	71.3	80.9	81.8	79.5	79.0	78.1	76.9	81.2	84.0	85.6	83.1	77.7	132.2
OVERALL CALCULATED	5300	71.0	81.1	82.5	79.5	79.2	77.4	78.3	78.5	80.3	83.0	83.9	77.2	132.3
	8000	69.6	80.3	80.2	77.2	76.7	75.5	76.7	77.9	80.6	82.0	84.2	75.5	132.5
	10000	67.2	79.0	80.1	77.2	76.7	74.6	73.4	74.2	75.4	77.4	81.3	73.1	130.5
	12500	64.3	75.7	76.0	74.3	74.2	72.2	71.2	74.3	75.9	77.0	75.4	68.9	128.0
	16000	61.4	72.4	73.5	70.7	70.7	68.5	66.4	66.3	69.2	71.7	73.0	66.0	126.2
	20000	60.0	68.6	68.5	67.3	66.6	64.5	62.3	63.5	67.2	68.7	67.5	62.2	124.8
	25000	55.9	62.7	63.5	62.4	61.4	60.2	59.6	60.5	64.9	66.6	65.8	59.8	
	31500	51.1	52.0	52.0	50.8	49.9	48.8	48.0	49.1	51.8	54.2	54.9	48.1	
	PNCB	97.9	104.8	105.5	104.9	104.1	102.8	101.8	103.1	104.4	107.4	109.0	108.7	103.2

TABLE A1

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 71.9%N<sub>fC</sub> ; NOMINAL NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PRESSURE LEVELS PRESENTED FOR STANDARD DAY		P <sub>0,OC</sub> DATE MONTH DAY 16 HS' (AND RADIANS)									
FREQ.	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
RADIAL 100' FT.	(0.35)	(0.76)	(1.07)	(1.40)	(1.75)	(2.12)	(2.50)	(2.87)	(3.24)	(3.61)	(3.98)	(4.35)	(4.72)
VEHICLE (30' M) FAN A	77.0	77.5	76.2	76.1	73.6	72.9	73.8	74.7	75.0	75.0	77.3	77.4	79.5
VEHICLE (30' M) FAN B	71.5	70.9	70.8	70.8	71.9	72.4	73.2	76.3	76.2	77.3	78.1	81.1	83.1
LOC CONFIB	69.8	69.2	70.8	73.9	71.3	64.3	75.1	75.3	75.7	76.8	77.5	79.9	81.7
LOC	73.3	73.8	76.4	77.6	74.9	76.3	78.7	77.9	76.8	77.4	77.9	80.6	81.4
DATE 8/17/70	69.6	69.6	70.2	70.2	70.6	70.7	71.5	72.2	73.1	74.1	75.3	77.2	77.8
RUN 3' FT; 27	89.5	70.0	69.8	68.8	68.7	70.1	70.9	71.3	71.3	72.4	73.9	74.1	75.6
TARE	85.5	73.0	70.3	70.8	72.8	74.3	73.1	73.9	73.3	75.1	77.8	77.7	80.4
BAR 28.8 HG S10961	68.7	70.6	71.2	73.1	72.4	73.0	74.9	76.0	77.7	79.2	80.7	82.3	84.2
TAMB (97351' N/M2)	73.5	73.2	73.2	75.4	75.3	75.8	76.3	79.0	80.1	82.2	83.3	84.2	85.1
TAMB (30' DEG F)	74.1	75.2	76.4	76.4	76.4	75.4	76.7	78.4	80.1	81.0	82.5	82.4	82.0
TAMB (30' DEG K)	74.3	76.2	76.2	74.0	74.1	73.9	73.9	73.9	75.5	76.2	77.9	79.1	80.8
TAMB (298' DEG K)	73.7	75.4	75.7	75.3	74.6	74.7	75.4	77.4	78.9	79.7	81.3	82.1	82.1
HAC(21.24 G/M3)	800	76.0	78.4	79.6	78.6	77.2	76.7	77.7	79.7	79.7	80.8	80.7	80.1
NFA(5510' RPM)	75.0	77.8	79.7	78.1	77.9	77.0	77.2	78.0	79.6	81.5	82.7	83.5	81.3
NFA(577' RAD/SEC)	74.0	78.0	80.6	79.7	78.9	77.9	77.9	79.9	80.8	83.3	83.9	81.4	78.8
NFA(564' RAD/SEC)	81.1	83.3	82.4	81.2	80.2	80.2	81.5	83.1	85.3	85.3	85.5	83.3	81.3
NFA(784' RAD/SEC)	82.6	85.5	84.5	83.9	83.2	82.1	83.5	85.1	83.9	86.0	88.9	83.4	82.4
NFA(564' RPM)	85.4	90.1	91.8	89.3	89.7	88.2	87.3	88.3	89.4	88.5	89.9	93.2	88.1
NFA(784' RPM)	75.2	83.5	83.5	83.1	82.1	82.1	82.8	83.7	87.1	88.1	87.6	87.6	82.5
NFD(564' RPM)	86.7	88.2	85.2	85.5	84.7	85.4	87.5	89.3	89.3	90.9	91.0	88.2	84.9
NFD(784' RPM)	79.8	88.8	87.6	88.9	88.9	88.2	87.7	87.8	88.9	90.6	92.5	94.2	87.4
NFD(564' RAD/SEC)	75.5	86.0	87.6	85.9	85.2	85.0	84.3	84.4	86.8	88.2	90.4	92.2	87.4
NFD(784' RAD/SEC)	75.9	87.1	87.5	84.8	85.1	82.7	83.8	84.3	85.3	87.7	89.6	90.1	87.7
NO, BLADES	85.9	85.9	86.2	81.1	81.3	80.0	79.1	82.1	83.8	85.3	87.1	84.5	83.7
	71.6	83.9	84.2	81.1	81.3	80.0	79.1	82.1	83.8	85.3	87.1	84.5	83.7
	68.1	81.2	82.0	78.0	78.3	78.5	75.6	75.9	78.9	81.6	83.3	80.7	79.5
	65.3	77.5	78.6	74.3	74.3	74.2	71.5	70.8	74.4	77.1	78.9	74.0	76.5
OVERALL MEASURED	90.6	98.1	100.1	97.8	97.8	96.8	96.7	97.4	98.6	99.8	101.6	103.0	99.7
OVERALL CALCULATED	91.5	97.9	98.7	96.4	96.3	95.2	95.1	95.6	97.9	98.3	100.0	101.4	97.9
PMDB	10' 1	110' 4	112' 0	110' 0	110' 0	109' 8	108' 8	109' 4	110' 7	111' 8	113' 6	111' 0	111' 3



Reproduced from  
best available copy.

TABLE A2

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 77.9%N<sub>fc</sub> ; NOMINAL NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PROC. DATE - MONTH 10 DAY 16 HR. 7.3												
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)														
FREQ. (0.235)	30	40	50	60	70	80	90	100	110	120	130	140	150	PWL
RADIAL 100, FT. (301 M)	(0.235)	(0.270)	(0.315)	(0.370)	(0.435)	(0.510)	(0.595)	(0.690)	(0.795)	(0.920)	(1.065)	(1.230)	(1.415)	(17.6)
VEHICLE FAN A	50	74.9	75.4	74.7	75.5	74.3	74.1	75.0	75.6	76.0	76.9	78.0	82.0	84.9
CONFIG FAN B	63	68.3	71.7	72.3	76.4	73.6	74.2	74.8	77.7	77.7	78.7	79.7	83.0	85.4
LOC PPG	80	69.4	70.4	70.8	72.4	71.9	72.4	73.8	74.5	75.8	76.8	79.6	82.0	84.2
DATE 8/27/70	100	82.8	82.2	81.8	80.6	82.2	81.8	79.1	79.3	79.8	80.3	81.7	81.0	82.3
RUN 3, PT 1, 28	125	75.6	72.3	74.0	74.4	75.5	75.2	74.4	75.1	75.9	76.8	78.2	79.1	79.6
TAPE 28.8 MG S1096	160	70.8	71.0	71.2	69.9	71.7	72.2	72.2	72.2	72.8	74.6	75.6	78.3	79.8
BAR (97351, N/M2)	200	73.1	71.2	72.3	73.3	73.3	73.3	72.2	74.0	74.0	76.5	78.7	81.1	84.6
TAB (302, DEG K)	250	68.7	70.5	71.3	73.3	70.9	74.0	74.1	77.7	77.1	77.5	82.0	85.8	87.5
THET (298, DEG K)	315	74.9	78.1	78.8	79.5	79.1	79.3	79.1	81.7	82.0	84.6	85.6	87.4	88.8
MACTG.94 GM/M3	400	76.7	79.8	82.2	78.6	78.4	78.1	79.0	80.3	82.1	83.6	84.8	85.3	86.0
NFA 5970, RPM	500	77.5	79.4	77.7	76.9	76.3	76.1	76.1	77.7	79.1	80.4	81.2	82.3	81.6
NFK 5911, RPM	630	78.7	81.1	78.8	82.4	79.9	79.7	80.2	82.1	82.7	83.2	84.9	85.9	85.7
NFD 7488, RPM	800	77.9	80.3	81.0	81.9	85.1	81.1	80.4	84.5	83.4	83.3	83.5	85.0	83.2
NFB 784, RAD/SEC	1000	74.8	78.2	80.3	79.7	79.3	79.0	78.5	79.7	81.3	82.3	84.7	85.5	84.5
NO, BLADES 26	1600	76.8	81.2	82.6	82.3	81.9	81.2	80.8	82.2	83.7	84.3	86.6	87.8	84.3
	2000	75.8	81.6	83.4	83.0	82.9	82.0	82.1	83.7	85.4	84.2	86.6	89.5	83.3
	2500	84.0	92.5	92.9	91.4	91.7	90.4	89.2	90.2	91.5	90.7	90.9	94.5	89.0
	3150	76.5	83.6	83.7	83.6	83.6	83.5	83.8	84.4	85.5	88.6	89.6	89.4	88.8
	4000	78.5	86.7	86.9	84.1	83.8	83.3	84.3	87.0	91.1	92.8	92.5	88.8	85.3
	5000	81.2	89.9	89.5	89.4	89.8	89.1	89.3	89.3	90.7	94.5	95.9	89.7	88.4
	6300	75.8	86.0	86.8	85.3	84.9	85.5	85.4	87.8	88.8	90.2	92.3	93.9	88.0
	8000	77.4	88.6	88.2	85.8	85.3	85.5	86.2	88.8	88.0	90.6	91.2	92.9	87.9
	10000	74.3	86.3	87.6	84.0	83.3	83.5	83.7	83.4	85.8	88.2	87.0	87.5	85.6
	12500	71.9	84.1	83.7	81.0	81.4	81.2	80.8	82.8	85.7	87.0	87.0	87.5	83.0
	16000	64.7	76.9	77.5	74.6	74.3	73.4	73.1	75.9	73.9	77.9	80.3	81.0	75.8
OVERALL MEASURED	20000	64.7	76.9	77.5	74.6	74.3	73.4	73.1	75.9	73.9	77.9	80.3	81.0	75.8
OVERALL CALCULATED	93.4	99.5	100.2	98.8	99.0	98.5	98.5	98.5	99.2	100.5	101.6	103.2	101.3	100.1
PNOB	104.9	112.0	112.6	111.4	111.5	110.8	110.2	111.3	112.5	113.7	115.6	116.8	112.8	111.5

TABLE A3

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 90.7%N<sub>fc</sub> ; NOMINAL NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PROC. DATE - MONTH 9 DAY 3 HR. 7.0	
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIANS)			
FREQ. (0.33)	(0.52)	(0.70)	(0.87)
50	7519	7218	7015
63	7614	7313	7110
80	7719	7418	7215
100	7814	7513	7310
125	7919	7618	7415
160	8014	7713	7510
200	8119	7818	7615
250	8214	7913	7710
315	8319	8018	7815
400	8414	8113	7910
500	8519	8218	8015
630	8614	8313	8110
800	8719	8418	8215
1000	8814	8513	8310
1250	8919	8618	8415
1600	9014	8713	8510
2000	9119	8818	8615
2500	9214	8913	8710
3150	9319	9018	8815
4000	9414	9113	8910
5000	9519	9218	9015
6300	9614	9313	9110
8000	9719	9418	9215
10000	9814	9513	9310
12500	9919	9618	9415
16000	10014	9713	9510
20000	10119	9818	9615
25000	10214	9913	9710
OVERALL MEASURED	10319	10018	9815
OVERALL CALCULATED	10414	10113	9910
	10519	10218	10015
	10614	10313	10110
	10719	10418	10215
	10814	10513	10310
	10919	10618	10415
	11014	10713	10510
	11119	10818	10615
	11214	10913	10710
	11319	11018	10815
	11414	11113	10910
	11519	11218	11015
	11614	11313	11110
	11719	11418	11215
	11814	11513	11310
	11919	11618	11415
	12014	11713	11510
	12119	11818	11615
	12214	11913	11710
	12319	12018	11815
	12414	12113	11910
	12519	12218	12015
	12614	12313	12110
	12719	12418	12215
	12814	12513	12310
	12919	12618	12415
	13014	12713	12510
	13119	12818	12615
	13214	12913	12710
	13319	13018	12815
	13414	13113	12910
	13519	13218	13015
	13614	13313	13110
	13719	13418	13215
	13814	13513	13310
	13919	13618	13415
	14014	13713	13510
	14119	13818	13615
	14214	13913	13710
	14319	14018	13815
	14414	14113	13910
	14519	14218	14015
	14614	14313	14110
	14719	14418	14215
	14814	14513	14310
	14919	14618	14415
	15014	14713	14510
	15119	14818	14615
	15214	14913	14710
	15319	15018	14815
	15414	15113	14910
	15519	15218	15015
	15614	15313	15110
	15719	15418	15215
	15814	15513	15310
	15919	15618	15415
	16014	15713	15510
	16119	15818	15615
	16214	15913	15710
	16319	16018	15815
	16414	16113	15910
	16519	16218	16015
	16614	16313	16110
	16719	16418	16215
	16814	16513	16310
	16919	16618	16415
	17014	16713	16510
	17119	16818	16615
	17214	16913	16710
	17319	17018	16815
	17414	17113	16910
	17519	17218	17015
	17614	17313	17110
	17719	17418	17215
	17814	17513	17310
	17919	17618	17415
	18014	17713	17510
	18119	17818	17615
	18214	17913	17710
	18319	18018	17815
	18414	18113	17910
	18519	18218	18015
	18614	18313	18110
	18719	18418	18215
	18814	18513	18310
	18919	18618	18415
	19014	18713	18510
	19119	18818	18615
	19214	18913	18710
	19319	19018	18815
	19414	19113	18910
	19519	19218	19015
	19614	19313	19110
	19719	19418	19215
	19814	19513	19310
	19919	19618	19415
	20014	19713	19510
	20119	19818	19615
	20214	19913	19710
	20319	20018	19815
	20414	20113	19910
	20519	20218	20015
	20614	20313	20110
	20719	20418	20215
	20814	20513	20310
	20919	20618	20415
	21014	20713	20510
	21119	20818	20615
	21214	20913	20710
	21319	21018	20815
	21414	21113	20910
	21519	21218	21015
	21614	21313	21110
	21719	21418	21215
	21814	21513	21310
	21919	21618	21415
	22014	21713	21510
	22119	21818	21615
	22214	21913	21710
	22319	22018	21815
	22414	22113	21910
	22519	22218	22015
	22614	22313	22110
	22719	22418	22215
	22814	22513	22310
	22919	22618	22415
	23014	22713	22510
	23119	22818	22615
	23214	22913	22710
	23319	23018	22815
	23414	23113	22910
	23519	23218	23015
	23614	23313	23110
	23719	23418	23215
	23814	23513	23310
	23919	23618	23415
	24014	23713	23510
	24119	23818	23615
	24214	23913	23710
	24319	24018	23815
	24414	24113	23910
	24519	24218	24015
	24614	24313	24110
	24719	24418	24215
	24814	24513	24310
	24919	24618	24415
	25014	24713	24510

TABLE A4

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 58.8%N<sub>FC</sub> ; NOMINAL NOZZLE ; TREATED

PAGE 1 NASAQUIETENGINE		1/2SCALEFAN		SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY		PRGC, DATE, MONTH 12 DAY 8 HR, 20.8		ANGLES FROM INLET IN DEGREES (AND RADIAN)		PWL					
MODEL	FREQ	20'	30'	40'	50'	60'	70'	80'	90'	105'	120'	130'	145'	150'	155'
RADIAL 100; FT; (30' M)	50	(0.35)	(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.74)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)
VEHICLE	60	61.3	63.6	63.8	66.3	66.0	66.2	64.8	67.0	68.6	69.6	70.4	70.4	71.6	73.1
CONFIG	100	64.5	67.1	70.8	67.3	66.9	68.5	69.6	67.7	68.7	68.9	69.8	70.5	72.0	71.9
LOC PTO	125	65.0	65.1	66.0	64.7	66.9	66.7	66.1	66.3	66.3	67.3	68.7	68.9	69.2	70.3
DATE 10/6/70	160	63.7	62.9	64.5	64.1	66.2	65.7	63.9	66.0	64.9	66.2	67.4	67.9	68.5	68.4
RUN 171 PT, 202	200	62.7	62.9	62.6	65.4	62.6	64.5	63.3	66.9	65.4	67.7	67.9	69.1	71.1	72.5
TAPE 19541	250	65.0	65.7	65.6	67.2	66.9	67.9	68.7	70.9	71.4	72.6	73.7	75.0	75.3	75.0
BAR 2910 HG	315	66.3	67.7	68.7	69.6	69.4	70.2	70.2	72.7	73.8	75.3	76.4	77.4	77.5	74.3
(97750; N/M2)	400	67.9	70.9	71.1	69.9	70.2	70.3	70.1	71.6	72.5	73.7	74.9	75.1	74.4	71.8
TAMB 73; DEG F	500	69.7	71.0	69.9	69.4	69.1	69.4	68.2	71.9	71.4	72.9	73.8	75.3	73.5	73.0
(266; DEG K)	630	67.6	68.6	69.1	71.8	68.7	68.4	68.4	70.3	71.4	72.9	73.8	74.6	72.7	71.2
TMET 60; DEG F	800	71.1	70.6	70.7	71.3	70.4	71.3	70.1	72.3	72.4	72.6	74.0	73.5	73.0	71.9
(259; DEG K)	1000	69.0	69.4	73.6	70.3	70.6	69.9	69.2	71.9	72.2	73.9	75.6	76.1	73.0	72.2
HACT 9.52 GY/M3	1250	67.5	68.7	71.1	70.1	59.8	69.2	68.5	70.0	72.2	73.3	75.7	75.1	73.0	71.5
(1.0052 KG/M3)	1500	70.4	71.3	71.7	71.0	70.0	69.4	69.7	70.5	72.8	74.5	76.4	76.9	74.6	72.6
NFA 4400; RPM	2000	79.1	82.1	80.3	80.2	76.7	76.2	74.9	75.9	76.3	78.6	77.1	78.2	81.2	80.2
(467; RAD/SEC)	2500	66.7	69.6	67.1	66.7	66.5	65.2	66.0	66.0	69.0	70.2	71.6	75.1	74.4	69.3
NFK 4401; RPM	3250	64.0	74.9	73.6	72.0	71.9	71.0	70.4	70.3	71.5	73.2	75.0	75.6	75.2	72.0
(451; RAD/SEC)	4000	69.9	80.8	82.7	79.9	78.5	78.4	73.4	74.9	76.3	78.4	78.8	80.8	80.6	78.4
NFD 7488; RPM	5000	70.6	75.3	76.7	75.2	72.9	72.3	69.7	72.4	74.2	75.7	77.5	80.0	80.7	73.7
(784; RAD/SEC)	6000	71.0	78.6	78.1	77.8	76.7	74.8	72.3	72.3	73.6	75.1	78.0	82.5	76.9	74.2
NO; BLADES 26	8000	66.2	76.9	78.6	77.1	75.6	74.3	70.4	71.6	72.4	74.7	76.3	78.1	78.6	72.7
	10000	66.5	75.8	77.7	77.0	74.7	73.5	69.2	70.2	72.1	73.9	75.0	76.4	73.8	71.1
	12000	66.1	73.2	75.6	74.2	72.7	71.4	66.8	68.3	68.3	69.8	71.4	72.8	71.7	68.2
	16000	64.0	69.6	73.3	70.8	69.7	68.7	64.4	64.6	66.7	66.2	67.9	66.0	69.0	55.8
	20000	67.9	67.5	71.8	69.7	68.9	69.0	65.2	60.1	68.5	66.5	67.2	63.6	67.0	65.3
OVERALL MEASURED		83.8	89.3	90.0	88.6	84.1	86.2	83.5	85.9	87.0	88.6	89.8	91.5	92.4	90.7
OVERALL CALCULATED		97.1	101.3	102.9	101.2	99.9	99.1	96.5	98.0	99.3	100.9	101.9	103.6	103.4	100.8

TABLE A5

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 73.0%N<sub>fc</sub> ; NOMINAL NOZZLE ; TREATED

PAGE 1 NASAGUETTENGINE		1/25SCALEFAN SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY													PROC. DATE		MONTH 12 DAY 8 HR.		20.9		AVD. RADIAN(S)	
MODEL		20.	30.	40.	50.	60.	70.	80.	90.	100.	110.	120.	130.	140.	150.	160.	(2.62)		(2.79)			
FREQ.		(0.35)	(0.70)	(1.40)	(2.80)	(5.60)	(11.20)	(22.40)	(44.80)	(89.60)	(179.20)	(358.40)	(716.80)	(1433.60)	(2867.20)	(5734.40)	(2.62)		(2.79)			
RADIAL 100, FT.		20.	30.	40.	50.	60.	70.	80.	90.	100.	110.	120.	130.	140.	150.	160.	(2.62)		(2.79)			
VEHICLE (30, M)		74.9	72.6	71.9	74.1	73.0	71.1	71.8	73.9	74.4	75.2	75.7	76.4	79.4	82.6	85.9	(2.62)		(2.79)			
CONFIG FAN		69.7	67.5	68.3	71.9	72.0	71.1	71.4	71.6	71.6	71.6	71.7	71.7	71.7	71.7	71.7	(2.62)		(2.79)			
LOC PTO		100	74.9	71.2	74.6	74.7	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	(2.62)		(2.79)			
DATE 10/6/70		125	68.7	69.5	69.4	70.8	70.4	70.8	71.7	72.7	73.6	74.1	74.9	75.0	75.3	75.6	(2.62)		(2.79)			
RUN 17 PT. 265		200	67.7	69.1	70.3	72.4	73.4	73.2	73.5	73.3	73.0	72.6	72.6	72.6	72.6	72.6	(2.62)		(2.79)			
TAPE 19889		250	69.0	70.8	73.4	74.2	74.6	75.2	77.3	78.2	80.0	81.7	83.7	85.4	87.0	88.7	(2.62)		(2.79)			
BAR 29.0 HG		315	72.6	73.7	76.2	75.8	76.2	76.6	77.1	77.6	78.1	78.6	79.1	79.6	80.1	80.6	(2.62)		(2.79)			
(97760 N/M2)		400	74.0	75.0	76.6	75.6	75.6	75.8	76.4	77.0	77.6	78.1	78.6	79.1	79.6	80.1	(2.62)		(2.79)			
FANS 59 DEG F		500	73.2	75.5	75.0	73.6	73.7	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	(2.62)		(2.79)			
(29.4 DEG K)		630	74.9	73.9	74.7	75.0	73.8	75.0	75.3	77.8	79.5	81.4	83.2	85.1	87.0	88.9	(2.62)		(2.79)			
THET 59 DEG K		800	74.6	76.5	76.5	76.1	76.5	76.8	76.1	77.5	79.8	81.1	82.3	83.6	85.0	86.4	(2.62)		(2.79)			
(28.5 DEG K)		1000	73.3	75.2	76.4	75.9	75.5	75.7	75.5	77.0	79.0	80.1	81.3	82.6	84.0	85.4	(2.62)		(2.79)			
HACT 9.93 G/M3		1250	72.6	74.2	76.0	75.8	75.6	75.4	74.8	76.3	78.3	80.9	82.2	83.6	85.0	86.4	(2.62)		(2.79)			
(9.093 KG/M3)		1500	74.2	75.3	76.7	76.3	75.5	75.7	74.7	76.9	79.1	81.1	82.6	84.1	85.6	87.1	(2.62)		(2.79)			
NFA 5524 RPM		2000	73.7	76.7	77.1	76.4	75.7	75.3	74.5	76.9	79.1	81.1	82.6	84.1	85.6	87.1	(2.62)		(2.79)			
(578.7 RAD/SEC)		2500	79.1	88.4	84.7	85.6	83.8	81.6	80.0	78.5	78.3	81.4	82.6	84.1	85.6	87.1	(2.62)		(2.79)			
NFK 5469 RPM		3150	69.2	80.4	79.1	73.1	78.1	77.3	77.0	77.5	78.3	80.2	81.7	83.2	84.7	86.2	(2.62)		(2.79)			
(573.7 RAD/SEC)		4000	71.5	80.0	81.5	79.9	79.1	76.4	76.1	78.3	80.2	82.7	84.5	86.3	88.1	89.9	(2.62)		(2.79)			
(573.7 RAD/SEC)		5000	77.4	83.7	85.3	82.2	82.5	81.9	79.1	80.9	82.7	84.5	86.3	88.1	89.9	91.7	(2.62)		(2.79)			
(788.6 RAD/SEC)		6300	75.2	82.6	82.7	82.6	81.3	76.9	78.5	79.1	81.5	83.3	85.1	86.9	88.7	90.5	(2.62)		(2.79)			
NOI BLADES 26		8000	73.6	82.4	85.8	82.6	81.6	80.7	77.9	78.6	81.3	83.3	85.1	86.9	88.7	90.5	(2.62)		(2.79)			
		10000	71.4	80.7	82.7	82.4	80.7	79.4	76.3	77.0	79.1	81.6	83.6	85.6	87.6	89.6	(2.62)		(2.79)			
		12500	70.4	77.8	80.5	79.0	76.4	76.7	73.6	75.6	76.8	79.1	81.6	84.1	86.6	89.1	(2.62)		(2.79)			
		15000	69.2	73.6	77.7	75.3	74.8	73.7	69.5	73.2	74.2	76.1	78.6	81.1	83.6	86.1	(2.62)		(2.79)			
		20000	66.7	69.6	74.4	72.2	71.2	71.8	66.4	69.0	72.0	74.8	77.9	80.6	83.3	86.0	(2.62)		(2.79)			
OVERALL MEASURED		89.1	94.7	94.9	94.2	93.0	92.3	91.1	92.4	93.8	95.5	96.9	98.6	100.6	102.6	104.6	(2.62)		(2.79)			
OVERALL CALCULATED		87.4	93.3	93.6	93.0	91.9	91.1	91.8	91.2	92.4	94.1	95.3	96.9	98.6	100.6	102.6	(2.62)		(2.79)			
		100.6	107.6	107.1	105.4	105.2	104.1	102.8	104.0	105.4	107.2	108.4	110.4	112.4	114.4	116.4	(2.62)		(2.79)			
		PADB	100.6	107.6	107.1	105.4	105.2	104.1	102.8	104.0	105.4	107.2	108.4	110.4	112.4	114.4	(2.62)		(2.79)			

TABLE A6

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 79.3%N<sub>fc</sub> ; NOMINAL NOZZLE ; TREAT<sub>1</sub>

PAGE 1		NASAQUIETENGINE		1/2SCALEFAN		SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY		PROC. DATE - MONTH 12 DAY 8 HR, 2019		ANGLES FROM INLET IN DEGREES (AND RADIAN)		PWL																			
MODEL		FREQ.		30		40		50		60		70		80		90		100		110		120		130		140		150		160	
RADIAL 100, FT. (301 M)		50		76.2		74.8		74.1		74.8		75.8		76.8		77.8		78.8		79.8		80.8		81.8		82.8		83.8		84.8	
VEHICLE		53		70.5		70.7		71.1		71.5		71.9		72.3		72.7		73.1		73.5		73.9		74.3		74.7		75.1		75.5	
CONFIG		80		67.5		69.9		70.7		71.4		72.0		72.6		73.2		73.8		74.4		75.0		75.6		76.2		76.8		77.4	
LOC		100		73.8		72.1		72.9		73.4		73.9		74.4		74.9		75.4		75.9		76.4		76.9		77.4		77.9		78.4	
PTO		125		71.4		70.5		71.1		71.6		72.1		72.6		73.1		73.6		74.1		74.6		75.1		75.6		76.1		76.6	
DATE		160		70.4		69.7		70.3		70.8		71.3		71.8		72.3		72.8		73.3		73.8		74.3		74.8		75.3		75.8	
RUN		17		71.7		71.3		71.9		72.4		72.9		73.4		73.9		74.4		74.9		75.4		75.9		76.4		76.9		77.4	
PT. 266		200		75.7		72.8		71.5		72.0		72.5		73.0		73.5		74.0		74.5		75.0		75.5		76.0		76.5		77.0	
17		250		70.0		72.4		74.5		76.6		78.7		80.8		82.9		85.0		87.1		89.2		91.3		93.4		95.5		97.6	
TAP		315		75.1		76.3		78.6		80.9		83.2		85.5		87.8		90.1		92.4		94.7		97.0		99.3		101.6		103.9	
2940 HG		400		76.5		77.7		79.1		80.5		81.9		83.3		84.7		86.1		87.5		88.9		90.3		91.7		93.1		94.5	
(97760 N/MH2)		500		76.0		77.7		79.1		80.6		82.1		83.6		85.1		86.6		88.1		89.6		91.1		92.6		94.1		95.6	
TANS		630		74.0		77.1		79.1		81.1		83.1		85.1		87.1		89.1		91.1		93.1		95.1		97.1		99.1		101.1	
(294 DEG F)		800		75.9		76.7		79.2		80.6		82.1		83.6		85.1		86.6		88.1		89.6		91.1		92.6		94.1		95.6	
TNET 59, DEG K)		1000		75.1		77.6		78.2		78.9		79.8		80.7		81.6		82.5		83.4		84.3		85.2		86.1		87.0		87.9	
(288, DEG K)		1250		74.7		76.3		77.9		79.5		81.1		82.7		84.3		85.9		87.5		89.1		90.7		92.3		93.9		95.5	
HACT 9.93 G/M3		1600		75.7		76.4		78.5		79.0		79.8		80.6		81.4		82.2		83.0		83.8		84.6		85.4		86.2		87.0	
(1.0093 KG/M3)		2000		74.5		76.0		77.7		79.4		81.1		82.8		84.5		86.2		87.9		89.6		91.3		93.0		94.7		96.4	
NFA 5994, RPM		2500		81.7		91.7		89.1		88.8		89.6		90.4		91.2		92.0		92.8		93.6		94.4		95.2		96.0		96.8	
(625, RAD/SEC)		3150		72.2		82.9		81.5		81.4		81.0		80.7		80.4		80.1		79.8		79.5		79.2		78.9		78.6		78.3	
NFK 5939, RPM		4000		70.6		79.9		81.6		80.1		79.9		79.3		78.6		77.6		76.9		76.1		75.2		74.4		73.6		72.8	
(625, RAD/SEC)		5000		79.4		85.7		87.7		86.8		86.1		85.4		84.7		84.0		83.3		82.6		81.9		81.2		80.5		79.8	
NFD 7488, RPM		6300		76.1		83.0		83.7		82.9		82.1		81.3		80.5		79.8		79.1		78.4		77.7		77.0		76.3		75.6	
(784, RAD/SEC)		8000		75.2		83.4		85.1		84.3		83.5		82.7		81.9		81.1		80.3		79.5		78.7		77.9		77.1		76.3	
NO1, BLADES		10000		72.6		81.3		83.8		83.5		83.2		82.9		82.6		82.3		82.0		81.7		81.4		81.1		80.8		80.5	
26		12500		71.2		78.0		81.4		81.4		81.2		81.0		80.8		80.6		80.4		80.2		80.0		79.8		79.6		79.4	
		16000		66.6		73.5		78.2		75.8		75.4		74.6		73.4		72.1		70.9		69.7		68.5		67.3		66.1		64.9	
		20000		66.7		69.3		74.3		72.6		71.5		70.3		69.1		67.9		66.7		65.5		64.3		63.1		61.9		60.7	
		OVERALL MEASURED		89.3		96.9		97.0		96.2		95.9		94.6		93.8		93.0		92.4		91.4		90.7		89.9		89.1		88.3	
		OVERALL CALCULATED		89.3		96.9		97.0		96.2		95.9		94.6		93.8		93.0		92.4		91.4		90.7		89.9		89.1		88.3	
		PNDB		102.7		110.0		109.3		108.8		108.9		108.8		108.0		106.8		105.0		103.1		101.6		100.4		99.4		98.4	

TABLE A7

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 90.7%N<sub>fc</sub> ; NOMINAL NOZZLE ; TREATED

PAGE 1 NASAQUIETENGINE		1/3SCALEFAN										PROC. DATE = MONTH 12 DAY 8 HR, 20.8									
MODEL	SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY = ANGLES FROM INLET IN DEGREES (AND RADIANS)	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	PKL				
FREQ. (0.35)	(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.75)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)	(2.79)	(2.97)	(3.14)	( )				
RADIAL 100' FT. (30 M)	50	78.1	76.9	75.4	76.8	76.8	77.7	77.7	77.1	79.1	80.6	81.6	81.9	81.9	81.7	81.7	( )				
VEHICLE CONFIG	63	71.5	77.8	77.4	80.3	77.2	76.8	77.7	77.1	80.4	80.4	81.9	81.9	81.9	81.7	81.7	( )				
LOC	80	71.7	73.8	72.6	74.2	75.1	75.1	75.1	77.1	79.1	80.6	81.6	81.9	81.9	81.7	81.7	( )				
DATE	100	74.7	75.7	74.2	77.2	76.9	76.8	77.7	77.1	79.1	80.6	81.6	81.9	81.9	81.7	81.7	( )				
PTO	125	79.0	77.0	76.1	76.9	79.3	77.7	79.3	79.3	80.3	80.3	81.0	81.0	81.0	81.0	81.0	( )				
RUN	160	73.3	73.0	73.4	73.1	74.5	73.9	74.6	75.0	76.4	76.4	78.3	80.0	81.7	83.5	86.7	( )				
TIME	200	72.4	73.6	72.8	73.2	75.8	77.1	77.0	78.6	80.0	82.1	82.1	84.0	85.6	89.2	93.7	( )				
TYPE	250	75.8	77.1	75.5	76.1	81.7	82.3	82.0	84.4	83.5	85.2	86.7	89.0	93.1	95.0	92.8	( )				
BAR	313	80.4	81.1	82.3	82.7	83.3	84.0	84.4	86.2	86.2	87.4	89.3	91.2	93.1	94.7	92.1	( )				
(97794) N/M2)	400	80.6	81.5	82.6	83.3	82.1	82.1	82.9	84.2	85.8	86.8	88.5	91.2	93.1	94.7	92.1	( )				
TAMB (58) DEG F	500	79.3	80.8	80.0	79.7	80.4	81.4	81.4	83.3	83.5	84.8	86.8	88.5	91.2	93.1	92.1	( )				
TAMB (23) DEG K	630	77.9	78.9	78.7	79.2	79.1	80.1	81.5	81.5	83.8	83.8	85.6	88.5	91.2	93.1	92.1	( )				
THET (58) DEG F	800	77.9	79.7	81.1	80.2	81.8	82.9	82.9	84.9	85.6	86.5	88.5	91.2	93.1	94.7	92.1	( )				
THET (28) DEG K	1000	78.3	80.3	81.0	81.2	81.2	81.5	82.1	83.6	83.6	85.7	87.6	88.8	91.0	93.0	91.8	( )				
HACT (9.50 GM/M3)	1250	78.4	80.1	82.5	81.5	81.5	81.7	81.7	83.6	83.6	85.6	87.6	88.8	91.0	93.0	91.8	( )				
HACT (.00950 KG/M3)	1600	79.8	81.1	85.2	83.5	83.5	83.5	84.9	86.4	86.4	88.4	90.4	91.4	93.6	95.6	93.4	( )				
NFA (6850) RPM	2000	78.1	79.1	80.9	80.6	79.2	79.4	78.7	81.1	81.1	82.7	84.6	84.6	86.5	88.4	86.3	( )				
(.717) RAD/SEC)	2500	76.9	84.2	85.0	84.7	83.5	83.9	82.2	81.3	81.6	82.2	84.5	84.5	86.8	88.7	86.6	( )				
NFK (679) RPH	3150	84.6	94.2	95.6	95.6																
(.711) RAD/SEC)	4000	74.3	81.2	83.7	82.9	82.7	81.3	81.3	83.3	85.0	87.1	88.2	88.2	91.4	93.2	91.6	( )				
NFD (748) RPM/SEC)	5000	77.5	82.9	85.3	83.6	82.7	81.4	81.4	83.3	85.2	87.4	89.4	89.4	92.6	94.4	92.8	( )				
(.784) RAD/SEC)	6500	82.5	89.4	90.2	89.4																
NO1 BLADES	8000	74.7	81.7	84.8	83.7	83.5	83.1	81.8	83.6	84.6	85.7	87.3	87.3	90.7	92.7	90.7	( )				
10000	93.7	80.7	84.2	83.7	82.8	82.8	80.7	82.5	84.3	85.3	87.0	88.1	88.1	91.4	93.4	91.4	( )				
12500	71.1	76.6	81.1	80.0	79.7	78.8	77.0	78.7	80.0	81.3	82.6	83.8	82.6	85.8	87.8	85.8	( )				
16000	66.3	71.6	77.6	75.4	75.1	73.9	72.3	73.9	76.2	77.5	79.7	79.7	82.4	84.8	87.5	84.8	( )				
20000	66.7	67.4	74.1	72.2	71.5	72.6	66.1	70.4	73.0	73.0	73.5	73.5	75.2	77.0	79.2	75.2	( )				
OVERALL MEASURED	93.7	99.2	101.7	100.5	99.8	99.8	96.7	99.2	101.1	102.6	104.1	104.1	103.3	104.3	104.3	102.7	( )				
OVERALL CALCULATED	92.3	97.6	100.7	99.3	98.5	98.5	96.7	97.3	98.3	98.3	98.3	98.3	101.4	102.6	103.2	102.7	( )				
PND8	106.1	112.9	116.1	114.7	113.7	114.0	111.8	111.8	111.8	112.9	114.9	116.1	116.1	115.7	115.6	112.9	( )				

TABLE A8



QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 58.2%N<sub>fc</sub> ; LARGE NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE MODEL SOUND		1/2 SCALE FAN PRESSURE LEVELS PRESENTED FOR STANDARD DAY		PROC. DATE - MONTH 10 DAY 17 HR. 18.8													
		- ANGLES FROM INLET IN DEGREES (AND RADIAN)															
FREQ. (0.35)(0.52)(0.70)(1.0)(1.4)(1.75)(2.0)(2.27)(2.44)(2.62)(2.79)( )		30.	40.	50.	60.	70.	80.	90.	100.	110.	120.	130.	140.	150.	160.	PWL	
RADIAL 100, FT.		50	71.8	70.3	68.8	70.6	68.9	68.1	69.7	70.5	69.4	70.3	70.5	70.8	72.8	74.1	120.3
(30, M)		63	70.2	66.8	67.2	77.0	67.1	67.0	67.5	75.6	68.7	69.7	70.7	70.8	75.7	74.1	121.8
VEHICLE	5 FAN	80	67.6	66.0	66.3	67.2	67.0	67.3	67.8	69.0	69.5	71.0	71.3	71.9	73.3		119.1
CONFIG	FAN B	100	70.3	66.4	70.0	68.0	68.5	67.4	66.9	67.8	68.5	69.6	69.9	71.2	71.8		119.0
LOC		125	66.9	65.1	66.1	65.4	66.0	65.9	66.2	67.3	68.2	69.0	69.8	70.1	70.7		119.6
DATE	8/26/70	150	65.5	64.6	65.1	65.5	65.7	64.6	65.4	66.2	67.7	67.1	68.2	69.0	68.4		116.7
RUN	41 Pt. 40	200	64.9	63.9	62.8	63.6	62.2	63.6	62.6	69.1	64.2	67.4	66.8	70.6	70.7		117.0
TAPE	19590	275	64.7	64.5	63.9	64.2	64.2	64.2	65.3	66.7	67.5	70.2	71.1	72.3	73.2		119.3
BAR	28.8 HG	355	65.9	66.7	67.6	69.1	68.4	68.9	69.1	71.2	72.0	73.8	74.5	75.0	75.6		122.2
	(97152, N/A2)	400	67.0	69.2	71.4	70.2	70.6	69.5	70.6	72.0	73.8	74.6	75.3	75.0	74.4		122.9
TAMB	86 DEG F	500	68.6	70.5	70.1	68.8	68.4	69.0	68.4	69.3	70.9	71.7	72.8	72.4	71.0		120.6
	(303, REG K)	630	66.4	68.0	68.8	70.2	68.5	67.1	68.0	69.5	71.9	72.3	73.2	73.5	71.8		120.6
TWET	77, DEG F	800	67.8	69.7	69.2	68.2	70.7	67.4	68.4	69.7	73.1	74.5	75.2	72.9	71.3		122.0
	(298, DEG K)	1000	69.6	69.0	71.7	69.2	70.1	68.4	68.4	68.8	70.8	73.0	73.6	76.2	73.9		122.0
HACT	20.36 GM/MS	1250	67.1	69.7	71.6	70.4	69.8	68.5	68.5	69.4	71.0	72.8	74.7	75.6	76.2		125.2
	(1.02038 KG/MS)	1600	70.1	75.0	75.0	73.1	72.5	72.0	70.8	72.3	73.6	76.1	77.8	76.6	73.9		125.5
NFA	4470, RPM	2000	79.4	86.9	86.7	83.8	84.1	83.5	81.5	82.1	84.3	86.3	87.0	86.4	85.9		125.9
	(468, RAD/SEC)	2500	68.1	74.0	75.0	73.6	72.3	71.4	72.4	73.0	75.3	75.7	79.1	78.3	76.8		130.2
NFK	4356, RPM	3150	71.1	75.1	76.1	77.7	76.8	75.5	76.4	77.6	80.7	79.7	82.9	83.3	80.6		130.3
	(456, RAD/SEC)	4000	75.3	84.5	85.1	84.4	83.4	82.1	80.7	82.4	84.5	86.4	86.7	89.8	80.4		131.4
NFD	7488, RPM	5000	70.2	78.7	80.9	78.1	77.4	76.7	76.8	77.2	79.4	82.1	82.2	84.5	83.8		133.2
	(784, RA/D/SEC)	6300	70.8	80.3	82.6	79.7	79.0	78.3	78.1	80.3	82.0	84.7	86.3	84.5	79.2		132.4
NO. BLADES	26	8000	79.0	78.2	80.3	79.3	78.5	76.8	74.5	76.9	79.9	81.0	82.6	84.9	83.9		130.9
		10000	67.0	76.1	79.3	77.1	76.0	72.8	74.3	76.8	80.6	80.6	80.6	80.8	75.8		128.1
		12500	64.2	72.9	75.1	73.8	73.2	71.5	69.1	70.1	72.4	74.5	76.9	77.5	75.8		125.8
		16000	60.1	68.2	71.6	68.8	68.8	67.8	65.9	65.8	68.3	68.7	72.6	73.1	71.8		123.7
		20000	57.5	63.4	66.9	65.5	64.5	63.3	60.8	63.1	63.6	67.7	67.0	63.4			122.8
OVERALL MEASURED		86.0	92.6	93.4	91.7	91.2	90.2	88.9	90.3	92.4	95.4	97.0	95.7	92.1			123.7
OVERALL CALCULATED		84.8	91.1	91.9	89.7	88.8	87.5	89.0	90.9	92.6	93.8	95.3	94.0	90.6			122.8
PNDP		98.1	104.5	105.4	104.5	103.7	102.6	101.5	103.2	105.1	106.8	107.7	109.8	103.5	104.6		

TABLE A9

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 71.8%N<sub>fc</sub> ; LARGE NOZZLE ; UNTREATED

PAGE 1 NASA QUJET ENGINE 1/2 SCALE FAN		PROC. DATE - MONTH 10 DAY 17 HR. 18.8														
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IV DEGREES (AND RADIAN)																
FREQ.	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	PAL
(0.35)	(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.75)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)	(2.79)	(2.96)	( )
RADIAL 100. FT.	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	124.4
(30. M)	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	125.0
VEHICLE 'S FAN	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	123.8
FAN B	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	128.4
CONFIG	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	128.4
LOC	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	122.9
PPG	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	121.1
DATE 8/20/70	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	124.8
RUN 41 FT. 48	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	126.7
IAPE 28.7 HG T <sup>1.590</sup>	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	128.9
BAR 315 (97084, M/M2)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	128.6
400 (97084, DEG F)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	125.5
500 (303, DEG K)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	126.3
600 (297, DEG K)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	126.3
800 (297, DEG K)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	127.8
1000 (297, DEG K)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	129.9
HACT18.38 GM/M3	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	139.8
(.01868 KG/M3)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	133.1
NFA 5517 RPM	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	139.9
(.5771 RAD/SEC)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	135.5
NFK 5380 RPM	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	139.9
(.563 RAD/SEC)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	135.9
NFD 7488 RPM	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	137.4
(.784 RAD/SEC)	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	137.4
NO. BLADES 26	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	147.2
10000	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	
12500	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	
16000	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	
20000	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	
OVERALL MEASURED	87.3	93.2	95.7	93.9	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	96.3
OVERALL CALCULATED	87.3	93.2	95.7	93.9	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	96.3
PNDB 101.6	107.6	109.3	109.3	107.6	107.6	107.6	107.6	107.6	107.6	107.6	107.6	107.6	107.6	107.6	107.6	108.5

TABLE A10

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 78.1%N<sub>FC</sub> ; LARGE NOZZLE ; UNTREATED

PAGE 1	NASA QUIET ENGINE	1/2 SCALE FAN	PRESSURE LEVELS PRESENTED FOR STANDARD DAY												PROC. DATE	MONTH	DAY	16 HR	5.8
			MODEL SOUND	20	30	40	50	60	70	80	90	100	110	120					
RADIAL 100, FT.	50	74.8	75.2	74.1	75.3	74.3	75.1	74.3	75.7	76.6	77.1	78.0	78.5	79.3	81.7	85.0		127.9	
VEHICLE (30, M)	63	72.1	72.6	73.2	74.1	75.3	74.3	74.7	75.8	76.8	77.1	78.1	79.2	79.8	82.7	85.3		128.4	
VEHICLE (30, M)	80	70.4	71.3	71.9	73.3	72.4	73.1	74.6	75.4	76.3	77.6	78.2	79.2	79.0	81.4	83.6		126.9	
LOC CONFIG FAN B	100	81.9	76.7	78.5	79.7	79.9	80.7	79.4	80.6	78.3	79.2	82.7	83.4	82.5	82.6	82.6		130.6	
LOC PRG	125	74.6	72.5	73.9	74.4	74.3	74.0	74.2	74.5	74.9	76.3	77.8	79.7	78.7	79.8	79.8		125.1	
DATE 8/20/70	160	71.1	71.0	71.2	71.4	71.3	70.6	71.9	72.3	72.8	74.8	75.7	76.3	77.6	79.4			124.1	
RUN 4, PT. 49	200	75.6	77.3	75.0	73.6	72.5	73.3	73.0	74.6	75.0	77.0	80.4	80.0	83.4	85.3			128.3	
TAPE T9053	250	68.8	70.9	72.6	73.8	73.2	75.9	73.3	78.3	79.3	81.3	82.8	84.2	85.3	96.6			130.7	
BAR 28.7 HG	315	73.3	74.4	76.3	77.6	78.5	79.7	79.7	81.6	82.8	84.7	85.8	87.3	87.6	87.6			133.5	
(97034) N/M2)	400	74.8	76.4	78.3	75.8	77.7	79.1	79.4	80.1	81.6	82.9	83.4	83.9	83.7	83.1			131.1	
TAM3 85, DEG F	500	75.0	76.6	77.1	77.0	77.9	75.4	74.8	75.2	76.8	79.0	79.8	81.3	81.2	81.5			128.2	
(303) DEG K	630	73.1	76.0	77.0	77.0	77.9	77.4	77.6	79.7	81.9	82.8	83.9	84.0	83.7	82.5			131.2	
TNET 75, DEG F	800	74.6	75.1	76.6	76.2	77.4	77.4	76.0	77.9	80.0	80.6	81.5	82.0	81.1	80.2			129.8	
(297, DEG K)	1000	74.5	77.6	79.9	79.0	77.0	76.4	77.3	78.4	80.0	82.3	83.3	84.6	82.2	81.2			129.0	
HAC(16.68 GY/M3)	1250	72.3	75.8	78.4	75.9	75.5	75.5	76.1	77.4	76.9	81.8	83.1	80.3	80.3	75.7			130.5	
(.01888 KG/M3)	1500	73.9	78.7	80.5	78.1	78.0	77.4	77.0	77.6	81.0	81.0	82.5	84.3	80.9	79.7			130.5	
NFA 5991, RPM	2000	72.3	79.0	80.2	79.1	77.7	77.5	77.0	78.1	78.6	81.5	82.6	94.1	79.9	78.3			130.5	
(.627) RAD/SEC)	2500	84.7	91.3	92.8	91.9	91.3	90.3	92.3	93.3	91.4	92.8	96.1	96.0	91.1	89.1			130.2	
NPK 5845, RPM	3150	75.1	79.7	81.0	81.9	81.4	81.6	83.6	84.3	86.3	85.5	89.1	89.4	84.4	82.7			135.9	
(.43) RAD/SEC)	4000	73.2	81.9	82.5	82.1	82.0	82.6	83.0	85.4	85.0	88.5	88.8	90.4	85.4	82.4			136.9	
NFD 7485, RPM	5000	79.8	89.3	91.9	85.1	88.2	85.1	84.3	88.3	89.3	93.1	93.8	93.3	90.2	86.0			142.2	
(.784) RAD/SEC)	6000	74.0	82.6	84.2	82.0	82.0	83.5	86.0	87.0	89.9	91.9	92.1	85.8	83.5				139.7	
NO1 BLADES 26	8000	76.6	84.9	86.8	85.6	85.6	84.2	84.3	86.8	87.7	90.2	91.7	92.8	84.9				140.3	
	10000	72.2	81.6	84.5	81.8	81.5	80.9	84.7	84.0	84.9	87.3	89.1	90.6	86.2	82.2			135.4	
	12000	68.5	78.5	80.1	78.3	78.7	77.6	78.2	80.2	81.0	84.2	85.8	85.6	80.7	78.1			135.6	
	16000	64.9	74.7	77.1	75.2	74.9	74.2	74.3	76.7	77.1	80.4	83.1	83.1	77.9	75.1			134.6	
	20000	62.5	70.7	72.9	71.1	70.8	69.9	69.7	72.2	72.4	77.1	79.2	79.4	74.2	71.0			133.3	
OVERALL MEASURED	91.8	97.5	99.4	97.9	97.4	97.1	97.7	98.3	99.4	101.5	103.3	104.4	100.3	99.3				149.8	
OVERALL CALCULATED	90.3	95.8	97.7	96.2	95.8	96.2	95.8	96.2	98.8	97.8	99.9	101.8	102.8	98.8					
PADS 104.3	110.1	111.7	110.6	110.2	109.8	110.8	110.6	111.7	113.5	115.8	116.5	112.3	116.8						

TABLE A11

**QEP SCALE MODEL FAN B  
1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
100' (30.5M) ARC ; 89.5%N<sub>fc</sub> ; LARGE NOZZLE ; UNTREATED**

**PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN**

MODEL	SOUND	PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)	PROC. DATE	MONTH	10 DAY 16 HR, 3.8	FWL
	20	40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160,			(1.62)(2.09)(2.44)(2.62)(2.79)( )	
RADIAL 100, FT.	30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160,	(1.03)(1.37)(1.73)(2.10)(2.47)(2.84)(3.21)(3.58)(3.95)(4.32)			80.6 82.0 84.4 88.6	130.2
VEHICLE (30, H)	50 76.5 76.8 74.6 73.1 71.6 70.1 68.6 67.1 65.6 64.1 62.6 61.1 59.6 58.1	75.1 75.4 75.7 76.0 76.3 76.6 76.9 77.2 77.5 77.8 78.1 78.4 78.7 79.0 79.3			81.5 82.6 85.1 87.5	131.4
CONFIG .5 FAN	80 71.3 73.4 73.9 74.9 74.9 74.4 75.4 75.4 75.9 75.9 76.4 76.4 76.9 76.9	74.4 74.4 74.4 75.4 75.4 75.9 75.9 76.4 76.4 76.9 76.9 77.4 77.4 77.9 77.9			81.0 81.0 81.7 82.9 85.1 87.5	130.3
LCC FAN B	125 72.3 75.1 74.3 75.5 75.3 75.5 76.7 76.7 77.0 77.0 77.5 77.5 77.8 78.0 78.3	73.8 73.8 73.8 74.8 74.8 75.3 75.3 75.8 75.8 76.3 76.3 76.8 76.8 77.3 77.3			81.3 81.0 81.3 83.0 83.6	130.4
DATE 8/20/70	160 72.7 71.8 73.4 73.4 73.6 73.6 73.9 73.9 74.4 74.4 74.6 74.6 75.1 75.1 75.4	74.8 74.8 74.8 74.8 74.8 75.1 75.1 75.4 75.4 75.7 75.7 76.2 76.2 76.7 76.7			80.9 83.2 85.8 85.1	130.1
RUN 4, PT, 5B	200 73.7 74.3 74.3 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1	74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1			83.9 85.6 89.6 91.2	134.1
TARE T9443,	250 72.7 74.3 74.3 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1	74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1 74.1			89.0 89.0 89.0 89.0	137.1
BAR 28.7 HG	315 78.1 78.0 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1 80.1	81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9 81.9			91.8 91.8 91.8 91.8	137.1
(97014, N/M2)	400 78.1 79.3 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1 81.1	82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5 82.5			89.1 89.1 89.1 89.1	135.5
TAMB B3) DEG F	500 76.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3 79.3	78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3 78.3			85.3 85.3 85.3 85.3	131.9
(301; DEG K)	630 72.9 77.8 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5 78.5	79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2 79.2			86.7 86.7 86.7 86.7	133.6
TWET (75; DEG F	800 76.0 78.9 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6 79.6	81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4 81.4			85.4 85.4 85.4 85.4	131.6
(297; DEG K)	1000 76.8 79.2 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8 80.8	80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9 80.9			84.0 84.0 84.0 84.0	133.8
MACT. 10.26 GH/M3	1250 76.1 82.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7 86.7	86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0 86.0			82.6 82.6 82.6 82.6	135.4
(.01926 KG/M3)	1500 77.3 82.7 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2 85.2	86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2 86.2			81.4 81.4 81.4 81.4	133.5
NFA 6857, RPH	2000 74.8 81.5 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6 82.6	83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0 83.0			82.8 82.8 82.8 82.8	137.5
(718; RAD/SEC)	2500 77.5 82.4 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1 84.1	84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8 84.8			84.7 84.7 84.7 84.7	131.9
NFK 6704, RPH	3150 85.9 89.5 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0 92.0	93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3 93.3			91.6 91.6 91.6 91.6	136.3
(702; RAD/SEC)	4000 76.7 85.2 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6 86.6	89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6 89.6			92.5 92.5 92.5 92.5	139.9
NFD 7488, RPM	5000 77.5 85.5 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6 87.6	89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9 89.9			91.8 91.8 91.8 91.8	140.2
(784; RAD/SEC)	6300 75.9 83.3 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1 85.1	88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5 88.5			90.3 90.3 90.3 90.3	143.9
NO1 BLADES 26	10000 73.4 82.2 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4 84.4	84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5 84.5			87.1 87.1 87.1 87.1	140.9
	12500 70.6 79.3 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5 80.5	81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6 81.6			89.3 89.3 89.3 89.3	139.7
OVERALL MEASURED	20003 63.2 71.6 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0 73.0	70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9 70.9			86.4 86.4 86.4 86.4	137.9
OVERALL CALCULATED	92.7 91.7 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5 91.5	99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4 99.4			101.2 101.2 101.2 101.2	136.1
PND8 109.2 110.5 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6 112.6						

TABLE A12

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 59.0%N<sub>fc</sub> ; LARGE NOZZLE ; TREATED

PAGE 1	NASA QUIET FAN MODEL	SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)	PROC. DATE - MONTH 10 DAY 15 HR. 11.4														
			20	30	40	50	60	70	80	90	100	110	120	130	140	150	PWL
RADIAL 100, FT.	FREQ. (0.35)	(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.75)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)	(2.80)	(2.97)	(3.14)
(30. M)	50	71.9	69.2	67.2	65.2	63.2	61.2	59.2	57.2	55.2	53.2	51.2	49.2	47.2	45.2	43.2	41.2
VEHICLE	63	66.2	66.5	66.8	67.1	67.4	67.7	68.0	68.3	68.6	68.9	69.2	69.5	69.8	70.1	70.4	70.7
15 FAN	80	64.8	65.1	65.4	65.7	66.0	66.3	66.6	66.9	67.2	67.5	67.8	68.1	68.4	68.7	69.0	69.3
CONFIG FAN B	100	74.9	72.7	70.5	68.3	66.1	63.9	61.7	59.5	57.3	55.1	52.9	50.7	48.5	46.3	44.1	41.9
LOC PTO	125	67.0	66.1	65.2	64.3	63.4	62.5	61.6	60.7	59.8	58.9	58.0	57.1	56.2	55.3	54.4	53.5
DATE 9/19/70	140	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
RUN 14, PT. 239	200	64.8	65.3	62.9	65.3	64.9	64.2	64.0	63.8	63.6	63.4	63.2	63.0	62.8	62.6	62.4	62.2
TAPE S11501	250	65.2	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
BAR 2910 HG	315	66.7	68.4	69.2	70.0	69.2	70.1	69.8	70.2	70.8	71.0	71.2	71.4	71.6	71.8	72.0	72.2
(97780) N/M2)	400	67.8	69.4	70.7	69.4	69.0	70.1	69.8	70.1	70.8	71.0	71.2	71.4	71.6	71.8	72.0	72.2
TAMB 70, DEG F	500	68.1	70.2	69.4	67.4	67.4	69.5	67.6	67.6	68.7	68.4	70.1	70.4	70.4	70.4	70.4	70.4
(294, DEG F)	600	66.6	68.9	67.7	67.5	67.0	69.8	69.0	69.2	70.7	71.3	73.2	73.4	73.3	71.3	71.3	71.3
TNEY 63, DEG F	800	66.9	67.6	67.3	65.1	69.1	70.1	68.1	69.4	69.8	70.5	71.5	70.7	70.8	70.4	70.6	70.6
(290, DEG K)	1000	66.7	67.8	69.2	67.5	68.0	69.4	68.4	68.9	70.2	71.1	73.2	72.9	72.4	70.6	70.6	70.6
HACT12162 GH/M3	1250	66.5	67.7	68.2	67.5	67.9	69.2	67.0	67.8	69.2	70.1	73.1	72.6	73.4	69.7	69.7	69.7
(101252 KG/M3)	1500	68.5	72.1	70.6	69.6	69.8	71.2	68.2	69.7	70.9	72.3	74.0	74.3	75.9	72.8	72.8	72.8
NFA 4460, RPM	2000	78.2	84.5	82.7	80.3	81.1	80.4	79.8	77.8	77.7	80.3	80.0	82.2	85.3	83.0	83.0	83.0
(467, RAD/SEC)	2500	63.5	68.1	68.6	66.4	66.0	67.2	65.3	65.6	67.3	69.0	69.2	72.4	72.9	69.2	69.2	69.2
NFK 4413, RPM	3150	64.1	72.1	73.0	70.5	67.9	69.6	68.0	68.7	70.1	70.5	73.7	75.4	74.3	72.7	72.7	72.7
(462, RAD/SEC)	4000	72.8	81.9	82.0	80.0	77.8	78.9	74.8	74.7	76.0	77.5	81.1	83.4	81.1	80.6	80.6	80.6
NFD 7488, RPM	5000	67.7	74.5	73.8	72.5	72.6	72.6	68.5	71.4	73.5	75.7	77.5	80.4	80.7	74.6	74.6	74.6
(784, RAD/SEC)	6300	68.5	77.3	77.9	76.0	74.6	74.8	71.3	71.7	73.0	76.3	78.3	81.0	81.3	76.0	76.0	76.0
NO1 BLADES 26	8000	67.1	76.4	77.5	76.0	73.9	75.0	70.8	71.7	72.4	74.0	76.6	80.2	78.2	75.8	75.8	75.8
	10000	65.8	76.0	75.4	74.0	70.3	74.0	68.8	69.6	71.1	73.8	75.3	77.1	77.0	73.2	73.2	73.2
	12500	63.4	72.5	73.5	71.2	70.3	70.3	65.6	66.9	67.7	69.5	71.2	73.5	72.0	70.4	70.4	70.4
	16000	60.3	69.0	70.2	66.7	66.7	67.4	62.9	64.6	63.4	65.9	67.7	69.4	69.0	66.1	66.1	66.1
	20000	60.6	66.4	67.5	64.5	64.1	65.8	61.9	65.3	62.0	64.6	65.9	66.6	63.6	63.6	63.6	63.6
OVERALL MEASURED		85.4	90.3	90.1	88.2	87.7	87.9	88.9	85.2	87.0	88.6	90.5	92.5	90.6	90.1	90.1	90.1
OVERALL CALCULATED		83.6	88.9	88.6	87.2	86.3	86.3	83.5	85.2	85.6	87.3	89.0	90.6	90.9	88.9	88.9	88.9
PND8		96.4	102.2	102.3	100.7	99.5	100.0	96.9	97.7	98.7	100.3	102.8	104.6	104.2	102.2	102.2	102.2

TABLE A13

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 64.9%N<sub>FC</sub> ; LARGE NOZZLE ; TREATED

PAGE 1 NASARUIENGINE		1/2SCALEFAN		PROC. DATE -- MONTH 10 DAY 31 HR. 16.4		
MODEL	SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY	DAY	INLET ANGLE IN DEGREES	(AND RADIANS)	PWL	
RADIAL 100' FT.	30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150	(0.52)	(1.57)	(2.62)	(3.67)	121.5
( 30. M)	73.1 79.2 85.3 91.4 97.5 103.6 109.7 115.8 121.9 128.0 134.1 140.2 146.3 152.4	(0.70)	(1.46)	(2.22)	(2.98)	122.9
FREQ:	50 63 77 91 105 119 133 147 161 175 189 203 217 231 245	(0.87)	(1.05)	(1.23)	(1.41)	119.2
VEHICLE	50 64.5 79 93.5 108 122.5 137 151.5 166 180.5 195 209.5 224 238.5 253	(0.57)	(1.14)	(1.71)	(2.28)	119.8
CONFIG	50 64.5 79 93.5 108 122.5 137 151.5 166 180.5 195 209.5 224 238.5 253	(0.57)	(1.14)	(1.71)	(2.28)	119.8
LOC	50 64.5 79 93.5 108 122.5 137 151.5 166 180.5 195 209.5 224 238.5 253	(0.57)	(1.14)	(1.71)	(2.28)	119.8
DATE	9/19/70					119.8
RUN	14 PT. 240.					119.8
TAPE	S1157					119.8
BAR	29.0 HG					125.7
(977801 N/M2)						123.6
TAMS	70 DEG F					121.2
(241 DEG K)						121.9
THET	63 DEG F					122.3
(290 DEG K)						122.8
HACT	12.62 GM/M3					123.7
(.03262 KG/M3)						122.8
NFA	47101 RPM					123.7
( 514 RAD/SEC)						132.5
NFK	48591 RPM					124.3
( 5091 RAD/SEC)						132.7
NFD	74881 RPM					129.5
( 784 RAD/SEC)						130.9
NO: BLADES	26					130.4
10000						129.5
12500						126.0
15000						126.0
20000						126.0
OVERALL MEASURED	86.1					141.0
OVERALL CALCULATED	84.8					

TABLE A14

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 79.5%N<sub>fc</sub> ; LARGE NOZZLE ; TREATED

PAGE 1 NASQUA/TENGING MODEL		1/2 SCALE FAN SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)		PROC. DATE	MONTH	DAY	HR.	16.4			
RADIAL	FT.	50	70	90	100	110	120	130	140	150	PWL
VEHICLE (38. M)	50	76.2	74.0	73.9	73.6	73.6	73.6	73.6	73.6	73.6	127.0
VEHICLE (38. M)	63	70.5	74.4	73.0	73.9	73.5	74.2	76.9	77.7	79.2	127.6
VEHICLE (38. M)	80	67.1	70.4	70.4	71.2	71.9	73.3	74.3	75.6	76.4	126.3
VEHICLE (38. M)	100	79.2	76.3	78.1	78.9	78.8	77.6	77.6	77.6	77.6	130.2
VEHICLE (38. M)	125	72.6	72.8	73.1	73.3	73.4	73.9	74.2	74.3	75.5	125.1
VEHICLE (38. M)	150	70.6	69.8	70.1	69.9	70.7	71.6	72.0	73.6	75.1	123.4
VEHICLE (38. M)	200	77.9	72.6	69.2	70.7	69.3	72.8	71.7	73.8	80.1	127.5
VEHICLE (38. M)	250	69.3	71.4	72.9	73.6	73.8	75.6	78.9	79.5	81.1	131.0
VEHICLE (38. M)	315	74.1	74.9	77.3	77.6	77.6	77.6	78.8	81.7	83.4	132.6
VEHICLE (38. M)	400	75.1	76.3	77.2	78.0	78.6	78.6	80.3	81.6	83.5	130.3
VEHICLE (38. M)	500	74.9	75.4	74.7	75.4	74.6	75.7	74.8	75.9	77.2	127.5
VEHICLE (38. M)	630	72.3	74.7	74.3	75.0	75.6	77.6	77.2	80.9	82.9	130.0
VEHICLE (38. M)	800	72.3	73.5	74.4	75.1	75.6	78.2	78.9	79.9	81.2	128.9
VEHICLE (38. M)	1000	72.5	74.4	74.5	74.7	75.1	77.2	78.0	78.9	81.6	128.6
VEHICLE (38. M)	1250	71.7	73.2	73.7	74.6	75.5	76.9	78.3	80.4	81.6	127.5
VEHICLE (38. M)	1600	72.4	75.1	74.7	74.4	75.1	77.4	78.1	80.0	81.2	127.5
VEHICLE (38. M)	2000	71.0	74.5	74.3	74.3	74.3	76.3	78.2	80.8	81.2	127.2
VEHICLE (38. M)	2500	79.6	87.3	91.1	87.1	86.8	85.8	84.1	80.9	83.9	136.2
VEHICLE (38. M)	3150	69.4	76.6	76.4	77.0	75.0	76.6	77.0	77.0	81.3	128.8
VEHICLE (38. M)	4000	73.4	78.4	78.1	77.9	76.3	74.9	76.9	80.1	83.0	131.5
VEHICLE (38. M)	5000	79.0	87.0	86.2	85.6	85.5	85.5	85.0	85.0	85.0	137.4
VEHICLE (38. M)	6300	71.7	79.5	80.4	79.6	78.5	79.4	78.1	80.6	81.4	133.8
VEHICLE (38. M)	8000	73.6	82.7	84.0	83.6	81.8	82.9	80.2	81.8	83.5	135.7
VEHICLE (38. M)	10000	70.4	80.4	80.9	79.8	79.2	80.5	77.5	78.3	80.5	134.1
VEHICLE (38. M)	12500	67.6	76.1	77.7	75.2	76.0	74.1	76.7	78.7	81.5	131.6
VEHICLE (38. M)	16000	63.5	72.3	74.3	71.3	72.2	71.3	74.4	77.0	77.4	131.7
VEHICLE (38. M)	20000	62.8	69.1	71.1	68.7	70.4	67.2	68.7	70.8	73.3	128.9
VEHICLE (38. M)	OVERALL MEASURED	80.4	94.6	96.3	94.4	94.4	92.8	94.7	95.3	98.4	96.9
VEHICLE (38. M)	OVERALL CALCULATED	80.4	93.1	94.7	92.9	93.2	94.8	96.9	97.9	98.4	96.9
VEHICLE (38. M)	PND	101.1	106.9	109.1	105.8	106.5	106.4	105.0	106.6	108.0	109.2

TABLE A15

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 90.5%N<sub>FC</sub> ; LARGE NOZZLE ; TREATED

PAGE 1	NASA QUIET FAN MODEL	FREQ. (0.35)	PRESSURE LEVELS PRESENTED FOR STANDARD DAY											PROC. DATE - MONTH 10 DAY 15 HR, 11.4		
			20	30	40	50	60	70	80	90	100	110	120	130	140	150
RADIAL 100, FT.		(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.75)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)		
(30, M)		50	78.2	76.3	74.2	75.5	75.7	66.4	76.9	78.5	79.5	80.1	81.2	82.3	85.1	89.6
VEHICLE		63	76.2	75.0	75.1	78.1	74.0	69.1	77.2	79.7	80.1	81.3	82.9	83.3	85.9	90.0
15 FAN		80	71.1	73.5	74.6	74.6	74.3	69.1	76.4	77.8	79.6	80.73	81.6	82.6	85.2	88.9
CONFIG FAN B		100	73.3	74.8	73.6	76.1	75.3	72.0	77.4	77.9	79.5	80.5	81.6	83.4	85.0	87.9
LOC		125	74.4	75.3	75.5	75.3	75.2	73.1	76.5	77.1	79.5	80.6	81.2	83.2	83.0	85.1
PTO		160	72.6	72.4	72.7	72.4	73.2	70.3	74.0	74.1	75.4	77.2	78.9	80.4	82.3	84.8
DATE 9/19/70		200	72.2	73.3	71.7	73.4	73.2	75.2	77.2	78.7	80.8	83.1	85.2	87.8	90.0	
RUN 14, PT, 243		250	74.1	76.2	76.6	78.3	78.0	80.0	80.5	81.9	83.6	85.2	88.0	89.5	91.4	92.8
TAPE S1159,		315	78.5	79.6	80.8	81.2	80.7	82.4	82.7	84.6	86.6	88.0	90.4	91.5	92.8	93.5
BAR 29.0 HG		400	78.8	80.2	80.9	79.5	80.0	81.4	81.7	83.2	85.3	86.4	87.9	88.2	88.6	88.6
(97800, N/M2)		500	78.8	81.0	80.1	77.8	78.1	80.2	78.5	78.5	80.4	82.1	84.1	85.3	86.4	86.1
TAMB 70, DEG F		630	75.6	77.7	77.7	77.6	78.5	81.5	80.6	82.4	85.0	87.4	87.4	88.5	86.8	
(294, DEG K)		800	76.9	79.3	79.4	79.1	80.1	82.3	81.1	82.2	84.0	84.7	85.9	85.0	85.7	84.9
TWEY 63, DEG F		1000	76.5	78.8	79.6	79.6	79.5	81.6	80.4	81.9	83.9	85.6	87.4	86.6	86.3	85.1
(290, DEG K)		1250	75.9	79.4	80.8	78.9	80.7	82.0	79.5	80.9	82.6	83.5	86.1	83.5	85.9	83.9
HACT12.62 GM/H3		1600	78.6	81.6	81.6	82.0	82.7	83.4	80.5	81.2	83.4	84.4	85.7	85.8	86.0	84.6
(91262 KG/H3)		2000	77.1	81.6	80.8	80.4	82.0	83.0	78.9	80.1	82.4	83.7	84.1	85.7	84.5	82.6
NFA 6848, RPM		2500	76.9	83.1	83.4	83.4	82.2	83.3	81.0	79.5	81.2	82.5	84.9	85.6	83.3	84.6
(717, RAD/SEC)		3150	84.5	91.6	94.7	93.3	90.4	91.4	89.6	97.0	88.2	87.7	92.7	91.9	89.9	93.8
NFK 6777, RPM		4000	77.6	84.8	85.6	85.8	84.5	86.7	83.3	84.1	86.3	87.1	89.1	89.0	85.7	86.3
(710, RAD/SEC)		5000	78.1	84.7	84.9	84.2	85.4	86.0	82.2	84.0	86.3	88.5	90.0	90.1	86.6	85.0
NFD 7488, RPM		6300	78.3	86.8	88.6	86.5	86.7	86.0	85.6	85.0	88.3	90.9	93.0	92.5	89.2	86.8
(784, RAD/SEC)		8000	74.4	82.8	85.1	84.3	83.5	85.3	83.0	84.1	85.8	87.4	89.9	90.5	85.6	84.9
NO, BLADES 26		10000	72.8	82.4	82.4	82.4	82.3	84.2	81.0	82.3	84.8	86.8	88.4	88.3	85.4	83.1
		12500	69.5	78.5	80.8	79.3	79.3	80.2	77.7	79.6	82.1	84.2	85.4	85.7	81.5	80.0
		16000	65.1	74.5	76.8	74.1	74.8	76.2	73.6	74.8	77.0	79.5	82.0	81.6	78.5	75.8
		20000	62.9	70.5	72.7	70.5	72.0	69.4	71.3	73.3	75.3	79.0	78.5	77.7	73.7	
OVERALL MEASURED			92.4	98.0	99.6	98.7	97.7	99.0	97.1	97.3	99.4	100.9	103.0	103.2	102.5	103.3
OVERALL CALCULATED			91.2	96.4	98.2	97.2	96.2	97.4	95.6	96.0	98.0	99.4	101.6	101.8	101.2	102.2
PNDB			105.6	111.5	113.5	112.5	111.0	112.1	110.3	109.6	111.3	112.4	115.1	115.0	113.6	115.3

TABLE A16



QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 59.0%N<sub>fc</sub> ; SMALL NOZZLE ; UNTREATED

PAGE #	NASA QUIET ENGINE MODEL	1/2 SCALE FAN PRESSURE LEVELS PRESENTED FOR STANDARD DAY	PMUC DATE - MONTH	Y DAY	14 HM	13.4	IN DEGREES (AND RADIANS)	PHL
1	50	301	10	10	10	10	10	10
2	63	401	11	11	11	11	11	11
3	80	501	12	12	12	12	12	12
4	100	601	1	1	1	1	1	1
5	125	701	2	2	2	2	2	2
6	150	801	3	3	3	3	3	3
7	175	901	4	4	4	4	4	4
8	200	1001	5	5	5	5	5	5
9	225	1101	6	6	6	6	6	6
10	250	1201	7	7	7	7	7	7
11	275	1301	8	8	8	8	8	8
12	300	1401	9	9	9	9	9	9
13	325	1501	10	10	10	10	10	10
14	350	1601	11	11	11	11	11	11
15	375	1701	12	12	12	12	12	12
16	400	1801	1	1	1	1	1	1
17	425	1901	2	2	2	2	2	2
18	450	2001	3	3	3	3	3	3
19	475	2101	4	4	4	4	4	4
20	500	2201	5	5	5	5	5	5
21	525	2301	6	6	6	6	6	6
22	550	2401	7	7	7	7	7	7
23	575	2501	8	8	8	8	8	8
24	600	2601	9	9	9	9	9	9
25	625	2701	10	10	10	10	10	10
26	650	2801	11	11	11	11	11	11
27	675	2901	12	12	12	12	12	12
28	700	3001	1	1	1	1	1	1
29	725	3101	2	2	2	2	2	2
30	750	3201	3	3	3	3	3	3
31	775	3301	4	4	4	4	4	4
32	800	3401	5	5	5	5	5	5
33	825	3501	6	6	6	6	6	6
34	850	3601	7	7	7	7	7	7
35	875	3701	8	8	8	8	8	8
36	900	3801	9	9	9	9	9	9
37	925	3901	10	10	10	10	10	10
38	950	4001	11	11	11	11	11	11
39	975	4101	12	12	12	12	12	12
40	1000	4201	1	1	1	1	1	1
41	1025	4301	2	2	2	2	2	2
42	1050	4401	3	3	3	3	3	3
43	1075	4501	4	4	4	4	4	4
44	1100	4601	5	5	5	5	5	5
45	1125	4701	6	6	6	6	6	6
46	1150	4801	7	7	7	7	7	7
47	1175	4901	8	8	8	8	8	8
48	1200	5001	9	9	9	9	9	9
49	1225	5101	10	10	10	10	10	10
50	1250	5201	11	11	11	11	11	11
51	1275	5301	12	12	12	12	12	12
52	1300	5401	1	1	1	1	1	1
53	1325	5501	2	2	2	2	2	2
54	1350	5601	3	3	3	3	3	3
55	1375	5701	4	4	4	4	4	4
56	1400	5801	5	5	5	5	5	5
57	1425	5901	6	6	6	6	6	6
58	1450	6001	7	7	7	7	7	7
59	1475	6101	8	8	8	8	8	8
60	1500	6201	9	9	9	9	9	9
61	1525	6301	10	10	10	10	10	10
62	1550	6401	11	11	11	11	11	11
63	1575	6501	12	12	12	12	12	12
64	1600	6601	1	1	1	1	1	1
65	1625	6701	2	2	2	2	2	2
66	1650	6801	3	3	3	3	3	3
67	1675	6901	4	4	4	4	4	4
68	1700	7001	5	5	5	5	5	5
69	1725	7101	6	6	6	6	6	6
70	1750	7201	7	7	7	7	7	7
71	1775	7301	8	8	8	8	8	8
72	1800	7401	9	9	9	9	9	9
73	1825	7501	10	10	10	10	10	10
74	1850	7601	11	11	11	11	11	11
75	1875	7701	12	12	12	12	12	12
76	1900	7801	1	1	1	1	1	1
77	1925	7901	2	2	2	2	2	2
78	1950	8001	3	3	3	3	3	3
79	1975	8101	4	4	4	4	4	4
80	2000	8201	5	5	5	5	5	5
81	2025	8301	6	6	6	6	6	6
82	2050	8401	7	7	7	7	7	7
83	2075	8501	8	8	8	8	8	8
84	2100	8601	9	9	9	9	9	9
85	2125	8701	10	10	10	10	10	10
86	2150	8801	11	11	11	11	11	11
87	2175	8901	12	12	12	12	12	12
88	2200	9001	1	1	1	1	1	1
89	2225	9101	2	2	2	2	2	2
90	2250	9201	3	3	3	3	3	3
91	2275	9301	4	4	4	4	4	4
92	2300	9401	5	5	5	5	5	5
93	2325	9501	6	6	6	6	6	6
94	2350	9601	7	7	7	7	7	7
95	2375	9701	8	8	8	8	8	8
96	2400	9801	9	9	9	9	9	9
97	2425	9901	10	10	10	10	10	10
98	2450	10001	11	11	11	11	11	11
99	2475	10101	12	12	12	12	12	12
100	2500	10201	1	1	1	1	1	1

TABLE A17

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 72.7%N<sub>fc</sub> ; SMALL NOZZLE ; UNTREATED

PAGE 1 NASA QUIET ENGINE		1/2 SCALE FAN		1/2 SCALE FAN		LEVELS PRESENTED FOR STANDARD DAY		PHASE DATE - MONTH 9 DAY 14 HRT 1913		ANGLES FROM 180 IN DEGREES (AND RADIANS)				
FREQ (1035)	301	401	501	601	701	801	901	101	110	120	130	140	150	160
(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)	(.70)
RADIAL 1001 FT	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
VEHICLE (301 M)	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14
CONFIG 5 FAN	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12
LONGIT 80	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14
CONFIG 5 FAN B	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12
LONGIT 80	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14
DATE 9/21/79	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14	69.14
RUN 5' FT 64	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12	70.12
TEMP 250	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 310	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 500	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 800	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 1250	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 1500	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 2000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 3150	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 4000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 5000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 6300	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 8000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 10000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 16000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 20000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 30000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 40000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 50000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 60000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 70000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 80000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 90000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12
TEMP 100000	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12	72.12

TABLE A18

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 79.0%N<sub>FC</sub> ; SMALL NOZZLE ; UNTREATED

PAGE 1		NASA QUIET ENGINE SOUND		1/2 SCALE FAN		PRESSURE LEVELS PRESENTED FOR STANDARD DAY		PROJ. DATE		MONTH		9 DAY		14 HRI		(AND RADIAN)		PWL	
RADIAL	1001 FT	MODEL	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
CONFIG	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63
LOC	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
DATE	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70	8/24/70
TAPE	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65	5, P11 65
FAN	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250
FAN B	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310
FAN C	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400
FAN D	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
FAN E	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600
FAN F	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800	800
FAN G	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
FAN H	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
FAN I	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
FAN J	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
FAN K	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150	3150
FAN L	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000
FAN M	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
FAN N	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300	6300
FAN O	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000
FAN P	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000
FAN Q	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000	12000
FAN R	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000	16000
FAN S	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000	20000
FAN T	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000	25000
FAN U	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000	31000
FAN V	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000	40000
FAN W	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000	50000
FAN X	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000	63000
FAN Y	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000	80000
FAN Z	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000	100000
NOI	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25	RADES 25
OVERALL MEASUREMENT	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510
OVERALL CALCULATED	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510	10510

TABLE A19

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 90.6%N<sub>FC</sub> ; SMALL NOZZLE ; UNTREATED

PAGE 1	HASA QUIET ENGINE	1/2 SCALE FAN	PROC. DATE	- MONTH	8 DAY	31 HR.	6.3	MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)		PKL				
								20	30					
RADIAL 100; FT.	50	77.2	76.6	74.6	76.1	76.9	77.7	79.1	80.5	82.9	85.7	90.0	94.0	133.12
( 30; H)	63	74.3	74.6	75.3	80.1	76.7	79.1	80.7	81.6	84.5	87.7	91.9	95.3	134.15
VEHICLE .5 FAN	80	72.6	73.8	74.3	75.3	76.2	77.3	78.7	80.1	84.2	87.3	91.9	93.4	133.15
CONFIG FAN B	100	76.1	75.6	74.6	77.7	77.6	79.3	80.0	82.6	83.4	87.2	88.2	90.3	133.18
LOC	125	78.1	76.5	76.5	78.5	79.6	80.5	82.9	84.7	86.8	91.2	89.3	87.1	135.70
DATE 8/21/70	160	74.8	73.9	73.8	73.9	74.8	75.7	76.3	77.2	78.9	81.6	83.3	85.5	129.14
RUN 5; PT. 76	200	74.4	74.5	73.4	75.1	76.3	75.7	77.7	78.9	80.8	83.3	85.8	90.0	133.13
TAPE	250	76.7	77.2	78.6	81.0	80.6	81.2	83.0	84.3	86.1	88.2	90.0	92.6	137.13
BAR 28.8 H3 S11.08	315	80.7	81.2	83.9	83.8	84.1	85.3	86.5	88.6	91.8	93.4	94.8	95.5	140.19
(97250; N/M2)	400	81.6	82.0	83.6	82.6	82.6	82.4	83.9	85.0	88.4	90.2	91.4	91.2	137.17
TAMB 70; DEG F	500	81.2	81.4	80.9	80.7	79.9	80.2	81.0	82.5	84.3	86.1	88.3	87.7	134.13
(294; DEG K)	630	79.5	80.4	80.6	80.5	80.1	81.2	81.8	82.5	84.1	86.1	89.8	87.0	137.12
TMET 53; DEG F	800	79.5	81.2	82.3	81.5	81.9	82.4	82.7	84.1	86.0	89.6	89.4	86.9	135.19
(290; DEG K)	1000	79.12	81.1	82.0	81.9	82.2	82.9	84.1	86.4	89.1	91.3	89.0	87.3	137.11
MACT 12.63 CV/M3	1150	78.4	80.6	83.4	82.2	82.5	82.9	83.0	83.6	84.9	87.1	88.6	84.0	136.12
(.01263 KG/M3)	1400	80.0	83.4	84.3	83.8	84.0	84.0	84.4	85.2	86.4	88.1	89.7	86.4	137.14
NFA 6860; RPH	2000	78.9	83.8	83.4	83.2	83.6	84.1	85.5	85.8	86.8	89.6	89.4	83.6	137.16
( 718; RAD/SEC)	2500	78.0	84.1	85.4	85.1	85.3	84.5	85.3	85.8	87.1	90.3	90.1	85.5	139.11
NFK 6750; RPH	3150	84.2	90.9	94.6	93.5	94.6	91.5	92.2	93.0	94.9	98.1	95.0	92.6	145.15
( 711; RAD/SEC)	4000	79.7	86.4	87.7	85.9	86.2	86.8	86.8	87.0	88.4	90.4	93.2	85.7	141.12
NFD 7488; RPH	5000	80.6	87.7	88.4	86.9	86.6	86.8	88.2	90.4	91.2	92.7	96.2	85.1	142.12
( 784; RAD/SEC)	6300	82.1	91.9	94.7	90.1	90.6	91.1	90.3	90.6	91.7	93.8	97.8	87.7	144.15
NO; BLADES 26	8000	77.4	86.1	88.6	89.0	86.7	86.3	85.4	86.1	87.9	90.6	94.6	84.5	142.13
	10000	76.6	86.3	87.9	87.0	86.1	84.9	85.8	87.1	88.6	91.7	94.4	85.6	142.11
	12500	71.4	82.5	83.7	83.6	82.6	81.9	82.0	85.4	86.9	90.5	83.7	80.8	140.11
	16000	69.0	80.1	80.9	80.4	79.5	78.6	78.6	80.5	81.4	84.2	81.7	77.4	138.16
	20000	65.9	80.1	76.9	76.2	75.1	74.3	73.7	76.0	77.0	81.8	76.7	73.9	137.13
OVERALL MEASURED	94.5	99.9	101.4	103.0	99.7	100.2	104.8	103.1	104.6	106.7	108.5	105.3	104.2	
OVERALL CALCULATED	93.1	98.4	99.9	99.3	98.2	98.6	100.3	101.6	103.3	105.2	106.9	103.8	103.3	
P: DB	106.8	112.3	114.6	114.9	114.3	112.6	112.7	114.2	115.5	116.6	118.4	117.3	114.2	

TABLE A20

QEP SCALE MODEL FAN B  
1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
100' (30.5M) ARC ; 58.6%N<sub>FC</sub> ; SMALL NOZZLE ; TREATED

PAGE 1 NASA QUIET FAN MODEL

FREQ.	SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY	PROC. DATE - MONTH 10 DAY 15 HR, 11.4														
		20	30	40	50	60	70	80	90	100	110	120	130	140	150	PHL
50	71.8	68.9	66.9	64.9	62.9	60.9	58.9	56.9	54.9	52.9	50.9	48.9	46.9	44.9	42.9	119.5
63	65.2	65.4	65.7	67.5	67.1	69.7	67.9	69.0	69.7	69.3	69.2	69.9	70.6	72.6	74.5	121.7
80	64.8	65.6	66.8	67.3	65.9	60.6	67.4	68.2	68.8	68.9	69.5	68.8	71.4	73.2	75.0	118.3
100	76.8	67.4	76.5	71.6	70.0	66.8	67.0	69.3	71.7	71.9	72.1	72.7	73.0	73.0	73.0	121.4
125	66.2	65.7	66.6	65.9	67.4	63.9	67.0	68.1	68.2	69.1	69.2	69.5	70.9	70.9	70.9	117.7
160	64.3	64.9	65.5	65.5	65.3	63.1	65.8	66.1	66.0	66.3	67.0	68.8	68.1	68.1	68.1	116.3
200	65.1	65.3	64.0	67.9	63.5	64.3	65.3	68.3	68.1	69.1	69.1	70.0	71.9	72.3	72.3	117.9
250	66.0	67.0	66.4	68.4	67.8	67.9	70.0	71.0	71.8	72.6	74.7	75.0	75.7	76.3	76.3	122.1
315	68.6	69.5	71.7	71.9	71.8	72.7	72.7	74.0	75.3	76.5	78.6	78.3	79.3	78.7	78.7	125.6
400	70.4	71.2	73.5	72.7	72.0	72.4	72.1	72.9	73.9	74.6	76.5	76.7	76.9	76.4	76.4	124.3
500	71.3	72.9	72.7	71.4	71.3	72.5	70.5	69.9	70.4	71.1	72.9	74.0	73.9	73.7	73.7	124.2
630	71.3	72.5	73.7	75.4	73.4	74.1	72.6	73.0	75.0	75.7	78.0	78.9	78.6	76.3	76.3	125.7
800	72.9	75.6	76.2	75.1	74.6	75.9	73.7	74.6	75.7	76.2	78.1	77.6	78.0	77.6	77.6	126.3
1000	71.2	73.5	75.3	74.4	73.9	75.6	73.5	74.0	75.8	77.4	79.7	79.9	79.8	78.2	78.2	127.0
1250	70.2	72.9	74.2	73.2	73.2	74.3	72.6	73.8	75.2	76.3	79.8	79.5	80.5	76.6	76.6	126.6
1600	70.6	74.2	73.8	73.3	73.2	75.0	72.5	74.0	75.7	77.3	80.1	80.8	81.9	77.8	77.8	127.5
2000	75.0	81.3	79.2	79.1	78.1	79.7	75.1	76.8	77.2	80.1	80.3	80.9	80.7	80.7	80.7	130.0
2500	65.8	71.2	72.4	70.6	69.8	70.8	68.7	68.8	70.4	72.2	73.2	75.9	77.2	73.5	73.5	123.0
3150	66.2	74.9	77.0	75.3	71.4	72.7	71.7	70.8	71.6	72.3	75.3	77.0	77.1	76.5	76.5	123.1
4000	72.8	81.9	82.3	80.9	78.6	79.0	75.4	75.4	76.6	77.2	79.0	81.7	81.4	81.8	81.8	130.4
5000	70.5	78.2	77.8	76.1	76.8	75.8	70.9	73.2	74.7	76.2	78.6	82.1	82.3	78.0	78.0	128.7
6300	70.4	80.0	81.0	78.9	77.5	77.7	73.2	72.7	73.6	76.6	78.6	81.4	83.0	78.1	78.1	129.8
8000	69.2	79.2	80.6	79.4	77.0	77.9	72.6	73.1	73.1	74.4	76.9	80.3	79.3	78.2	78.2	129.5
10000	69.2	79.4	79.4	78.1	77.0	75.9	71.0	71.3	72.0	73.9	75.7	77.3	78.1	76.1	76.1	129.0
12500	65.7	76.2	77.5	75.7	74.3	74.2	68.0	68.4	68.6	70.1	72.2	74.2	74.2	73.7	73.7	127.4
16000	62.7	73.1	74.5	73.8	71.0	70.8	64.9	65.8	65.8	66.5	69.1	70.4	71.4	69.5	69.5	126.1
20000	62.7	70.2	71.5	68.9	67.8	69.4	63.8	66.3	63.6	65.6	68.5	67.8	70.3	66.4	66.4	126.6
OVERALL MEASURED	85.8	90.9	91.6	90.3	89.0	89.5	85.5	87.0	87.6	88.6	90.0	92.0	94.1	92.1	92.1	140.5
OVERALL CALCULATED	84.6	89.7	90.4	89.4	87.9	88.3	85.5	86.6	87.3	88.7	90.6	91.9	92.6	90.8	90.8	
PND8	96.5	103.3	103.9	102.8	101.0	101.4	96.6	99.1	100.1	101.2	103.1	105.0	105.3	104.3	104.3	

TABLE A21

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 72.3%N<sub>fc</sub> ; SMALL NOZZLE ; TREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PRG. DATE - MONTH 10 DAY 28 HR 1 14'6														
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)																
RADIAL 100, FT.	FREQ. (C, 35)(0.75)	30	40	50	60	70	80	90	100	110	120	130	140	150	PWL	
(30, M)	50	74.0	73.2	71.2	73.2	71.9	62.0	71.6	73.5	74.0	74.1	(2.25)	(2.27)	(2.44)	(2.62)	( )
VEHICLE (30, M)	63	68.5	69.3	69.8	77.4	71.0	63.7	71.1	76.8	73.4	74.4	76.5	76.7	79.4	81.7	( )
CONFIG (30, M)	80	67.1	69.0	69.2	70.7	70.0	64.6	71.5	72.4	73.6	74.4	75.4	76.2	78.7	80.7	124.4
LOC PTO (30, M)	100	74.6	72.9	72.2	74.3	74.7	74.2	73.7	73.5	75.1	75.2	76.2	77.7	78.9	80.1	125.2
DATE 5/19/70	125	69.2	69.5	70.3	69.6	70.8	67.6	71.3	71.8	72.3	73.4	75.0	74.7	76.4	77.6	122.8
RUN 137 PT. 222	160	68.9	70.9	70.2	70.8	72.1	67.4	70.9	70.6	72.1	73.4	74.2	76.1	76.4	77.4	122.2
TAPE S1156,	200	72.6	76.6	73.8	75.5	78.8	72.3	74.5	74.6	73.0	77.9	77.9	79.6	81.4	81.5	127.2
BAR 20.9 M <sup>2</sup>	250	68.5	71.1	72.5	75.9	74.8	74.6	77.1	77.4	78.8	80.7	81.0	82.8	84.3	84.6	129.6
TAMB (289) DEG K	315	72.7	74.3	76.4	77.0	77.1	78.2	78.4	78.8	80.1	81.4	83.2	83.6	83.4	82.5	130.7
THET (285) DEG F	400	75.2	76.9	78.2	77.2	77.1	78.4	78.4	78.8	80.1	81.4	83.2	83.6	83.4	82.5	127.8
HAUT 11.90 G/M <sup>3</sup>	500	75.5	77.2	77.4	76.1	76.0	76.3	74.7	74.8	76.1	77.1	79.6	80.2	81.3	79.8	131.1
NFA 5510 RPM	600	78.3	80.7	80.9	79.3	78.8	80.6	78.4	78.8	81.3	81.8	83.4	82.2	82.6	81.6	131.2
(577) RAD/SEC	1000	77.4	79.6	79.6	79.5	78.6	80.1	77.9	79.2	80.8	81.7	83.2	85.7	85.8	83.9	132.6
(507) RAD/SEC	1250	76.4	79.4	79.6	78.6	76.2	80.1	77.9	79.2	80.8	81.7	83.2	85.7	85.5	83.9	132.8
(784) RAD/SEC	1600	75.7	79.7	79.1	78.6	78.6	80.6	78.3	78.7	81.5	83.4	85.9	85.8	85.8	82.4	132.4
NO. BLADES 26	2000	74.7	79.6	78.3	78.3	79.0	80.8	77.6	79.4	81.2	82.9	84.5	85.8	85.6	83.3	133.3
	2500	77.6	83.8	83.5	81.9	82.3	83.7	78.6	78.4	79.0	81.4	82.9	85.9	85.8	83.1	131.2
	3150	71.8	80.6	82.7	81.2	77.4	78.6	78.1	77.3	78.1	82.3	83.1	82.9	82.9	82.0	136.4
	4000	76.2	84.1	84.1	83.1	81.4	82.5	79.9	81.3	82.8	85.0	86.6	86.3	84.6	83.4	135.5
	5000	78.3	85.9	85.7	85.1	85.1	84.8	79.5	81.3	84.3	86.5	89.5	89.5	88.0	85.4	133.2
	6300	74.8	84.6	85.7	84.2	82.5	82.8	79.6	78.0	80.9	83.6	86.9	86.9	86.4	83.3	135.2
	8000	74.7	84.9	86.0	84.2	82.9	84.1	79.5	79.7	81.5	83.9	86.3	86.3	84.0	83.2	133.7
	10000	73.6	85.3	85.1	83.9	83.1	82.4	78.0	78.0	81.0	82.7	83.8	83.8	82.8	81.1	133.2
	12500	71.1	82.2	83.2	81.5	80.3	80.6	75.3	75.2	75.7	77.6	79.4	78.8	78.8	80.0	132.1
	16000	67.5	79.1	80.3	77.4	77.2	77.2	72.0	71.4	73.7	75.8	76.9	75.7	74.8	74.4	131.2
	20000	65.0	75.7	76.7	74.1	73.3	73.9	68.5	68.1	63.4	70.3	72.1	73.2	72.1	71.4	131.2
OVERALL MEASURED	89.8	95.6	96.2	95.3	94.6	95.1	92.5	93.2	94.5	94.5	98.4	99.6	99.6	97.8	97.8	135.2
OVERALL CALCULATED	86.7	94.6	95.2	94.3	93.5	93.6	91.2	92.1	93.2	93.2	94.8	96.9	98.1	97.9	96.6	135.2
	101.3	107.7	107.8	107.2	106.7	106.9	103.8	104.7	105.8	107.5	109.7	111.5	110.9	110.9	109.1	146.2
	PNDB															

TABLE A22

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 78.6%N<sub>fc</sub> ; SMALL NOZZLE ; TREATED

PAGE 1 NASA QUIET ENGINE 1/2 SCALE FAN		PROC. DATE - MONTH 10 DAY 28 HR, 14:6											
MODEL SOUND PRESSURE LEVELS PRESENTED FOR STANDARD DAY - ANGLES FROM INLET IN DEGREES (AND RADIAN)		100	110	120	130	140	150	160	170	180	190	200	PHL
RADIAL (0, FT.)	FREQ. (0.5, 1, 2, 3, 5, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100)	(0.5)	(1.0)	(2.0)	(3.0)	(5.0)	(10.0)	(20.0)	(30.0)	(40.0)	(50.0)	(60.0)	(70.0)
VEHICLE (30, M)	50	76.9	75.2	74.7	75.4	73.4	64.8	73.6	75.2	75.5	76.2	77.5	77.4
LOC	63	70.1	71.5	72.2	72.7	72.7	65.9	73.2	77.8	75.6	76.8	78.9	82.1
DATE 5/19/70	80	67.9	69.6	70.6	71.9	71.1	65.3	73.0	74.3	75.7	76.6	77.4	81.2
TAPE S1156	125	89.7	75.7	78.7	78.3	80.2	74.0	77.6	78.1	79.3	78.9	80.2	83.9
BAR 28.9 HS	160	70.3	70.7	70.9	70.5	71.4	65.8	72.0	72.3	72.3	73.6	75.6	79.0
TANG 78 DEG F	200	71.4	72.4	69.7	71.3	71.8	73.8	75.4	73.7	74.4	82.1	81.9	84.2
TMET (299, DEG K)	250	70.5	73.1	73.9	75.8	75.1	75.9	77.6	78.7	79.9	81.7	84.2	87.7
HACT 11.90 G/M3	315	76.5	78.1	79.7	80.7	79.6	85.4	80.4	82.8	83.1	84.7	87.0	89.0
NFA 5920 RPM	400	78.0	79.2	81.3	80.2	79.8	90.1	90.1	81.0	83.1	84.7	86.4	89.1
NPK 5883 RPM	500	76.0	79.7	79.3	78.6	79.1	79.0	77.3	77.4	78.4	79.8	82.4	84.5
NFD 7488 RPM	600	77.3	79.0	81.1	79.9	80.3	81.6	79.6	81.1	83.1	84.3	87.0	89.0
NFL 7844 RAD/SEC	800	81.0	83.9	83.4	82.0	81.7	82.8	81.1	82.1	83.9	84.7	86.2	89.0
NO. BLADES 26	1000	80.0	82.6	82.7	82.0	81.1	83.0	81.3	82.6	84.1	85.8	88.1	89.0
	1250	79.6	82.8	82.5	82.3	81.5	83.9	80.8	82.0	84.1	85.5	88.8	89.2
	1500	78.3	82.2	81.3	81.2	81.3	83.4	81.9	82.4	84.0	85.7	88.3	88.8
	2000	76.7	81.8	80.7	80.1	81.4	83.1	83.3	82.0	83.8	85.3	88.3	88.8
	2500	79.3	87.5	89.4	85.9	84.6	85.8	82.1	80.4	82.2	83.7	85.7	87.1
	3150	74.5	83.3	85.3	84.3	80.8	82.2	81.3	80.2	81.0	81.7	85.2	85.1
	4000	76.5	86.3	86.0	85.4	83.9	85.0	81.9	82.5	84.0	85.4	87.8	88.0
	5000	80.0	87.5	87.5	85.9	87.3	86.7	81.7	83.7	85.1	86.9	89.5	89.9
	6000	76.6	86.3	87.4	85.9	84.9	85.0	82.0	81.4	83.3	85.8	88.1	87.4
	8000	76.8	86.9	87.9	87.1	85.5	86.7	82.3	82.4	82.5	86.3	88.7	87.4
	10000	75.5	87.2	86.7	85.7	85.0	84.6	80.6	80.4	81.2	83.4	85.0	83.8
	12500	73.0	84.1	85.0	83.2	82.6	82.7	78.8	77.8	78.6	80.2	83.4	81.0
	15000	69.2	81.0	82.0	80.0	79.3	79.3	74.8	73.9	74.1	76.3	79.5	80.3
	20000	66.5	77.6	78.4	75.8	75.3	75.7	70.9	71.0	73.7	72.8	77.7	78.0
OVERALL MEASURED	92.6	92.4	96.8	97.7	97.0	97.5	95.0	95.8	97.2	98.8	103.2	102.6	100.3
OVERALL CALCULATED	91.3	97.3	97.7	95.5	95.8	96.3	93.7	94.5	95.7	97.4	99.7	101.4	109.3
PND8	103.5	109.6	110.8	109.3	109.9	105.1	106.4	107.1	103.4	110.1	112.3	113.6	111.4

TABLE A23

QEP SCALE MODEL FAN B  
 1/3 OCTAVE DATA CORRECTED TO STANDARD DAY  
 100' (30.5M) ARC ; 89.8%N<sub>fc</sub> ; SMALL NOZZLE ; TREATED

PAGE 1	NASA QUIET FAN	PRESSURE LEVELS PRESENTED FOR STANDARD DAY								PROC. DATE - MONTH 10 DAY 15 HR , 11.4				
MODEL	FAN	20	30	40	50	60	70	80	90	100	INLET IV DEGREES (AND RADIAN)	PWL		
	FREQ. (0.35)	(0.52)	(0.70)	(0.87)	(1.05)	(1.22)	(1.40)	(1.57)	(1.75)	(1.92)	(2.09)	(2.27)	(2.44)	(2.62)
RADIAL 100; FT.	50	78.4	76.8	75.4	76.1	75.7	76.1	75.7	76.8	79.3	80.5	81.3	84.5	89.0
VEHICLE ( 30; M)	63	73.8	76.6	77.2	79.5	76.8	69.4	67.0	77.3	78.8	79.3	80.5	84.5	89.0
CONFIG FAN B	80	71.2	72.6	74.2	75.12	74.6	69.6	76.8	77.9	79.1	79.7	81.5	82.4	85.2
LOC PTO	100	72.9	75.8	75.3	76.5	76.8	73.0	79.2	80.1	78.8	81.3	81.9	83.3	85.3
DATE 9/19/70	125	75.8	77.4	77.8	75.8	76.8	74.6	81.2	81.9	82.12	81.3	83.8	83.9	87.0
RUN 13; PT. 228	160	73.6	73.6	73.6	73.12	74.2	71.3	74.6	74.8	75.6	77.0	79.1	80.5	82.4
TAPE S1197	200	72.4	73.9	72.8	75.4	75.9	76.8	76.2	77.5	78.9	80.8	83.6	85.3	88.2
BAR 29.0 HG	250	73.8	76.6	77.8	80.8	81.3	82.2	81.9	82.9	84.3	85.9	89.2	92.2	93.9
(97780. N/M2)	315	80.7	82.5	84.3	83.9	84.1	84.2	85.3	86.2	86.9	87.7	91.1	92.3	94.5
TAMB 75; DEG F	400	81.3	82.7	84.2	83.1	83.0	83.4	83.7	84.4	85.9	85.0	89.1	89.5	89.4
(299; DEG K)	500	80.4	81.6	81.5	81.0	81.1	82.0	80.1	80.4	82.3	84.0	86.2	87.4	87.5
TWEY 65; DEG F	600	81.4	84.1	83.6	83.4	83.7	85.4	83.5	84.8	86.2	86.9	88.3	87.9	88.1
(291; DEG K)	800	80.5	83.0	83.9	82.6	82.7	85.2	83.4	85.0	86.5	87.3	90.7	90.2	88.4
HAQT11.90 GH/M3	1000	80.0	83.2	83.8	82.7	83.3	85.4	82.7	84.3	86.0	87.7	90.4	89.6	88.5
(101190 KG/M3)	1250	80.0	83.9	84.3	84.5	84.7	86.5	84.7	86.5	87.9	90.1	90.4	89.3	86.9
NFA 6850; RPM	1600	80.0	82.4	81.8	81.3	82.8	84.9	82.2	84.1	85.8	87.0	88.4	90.3	87.7
( 717; RAD/SEC)	2000	79.9	83.3	86.0	83.5	83.7	86.6	81.6	81.6	83.0	85.1	86.5	88.8	85.3
NFK 6728; RPM	3150	80.9	92.0	96.2	93.0	90.8	90.5	88.1	86.7	86.8	93.6	91.9	93.1	90.0
( 704; RAD/SEC)	4000	78.0	85.8	85.3	85.5	84.1	85.9	83.7	84.6	86.3	87.8	90.5	91.0	87.1
NFD 7488; RPM	5000	79.5	86.6	86.3	85.2	85.9	85.5	82.4	85.0	87.0	89.2	91.9	91.1	88.2
( 784; RAD/SEC)	6300	79.7	89.5	90.8	88.9	89.1	88.6	85.5	86.4	88.5	91.5	91.9	89.2	86.5
NB; BLADES 26	8000	76.4	85.8	87.5	86.4	85.6	85.4	82.5	83.2	84.8	86.8	89.1	90.3	85.9
	10000	75.3	85.8	86.6	85.4	85.2	85.1	83.3	82.5	83.5	85.9	87.4	87.8	84.1
	12500	71.7	82.1	84.2	82.8	82.4	82.4	78.8	79.5	80.7	82.4	84.3	84.9	81.0
	16000	68.1	78.5	80.6	78.2	78.4	79.1	75.0	76.3	78.2	80.8	80.9	78.3	80.9
	20000	62.5	74.8	77.1	74.9	74.2	74.6	70.7	71.2	73.6	74.5	77.1	76.1	72.6
OVERALL MEASURED		93.5	99.4	101.6	99.7	99.1	99.7	97.9	98.7	99.9	103.8	104.0	103.7	104.1
OVERALL CALCULATED		92.3	98.2	100.3	98.5	97.8	98.3	96.3	97.4	98.6	100.4	102.5	103.1	102.4
PND8 104.9		112.7	119.4	113.3	112.1	112.3	110.4	110.4	111.2	113.0	115.6	116.4	114.5	115.3

TABLE A24



## X. NOMENCLATURE

A	Nozzle Area
B&K	B&K Instruments, Inc. - Bruel & Kjaer Precision Instruments
D.I.	Directivity Index, the sound pressure level at a particular position and frequency minus the spaced average sound pressure level at that frequency.
$f_1$	Fan blade passing frequency fundamental
$f_2$	Fan blade passing frequency second harmonic
$F_n$	Net engine thrust
$M_o$	Aircraft Mach Number
$N/\sqrt{\theta}$	Fan rotational speed, corrected to standard day
Nom.	Nominal
OAPWL	Overall sound power level calculated by summation of power level spectra from 50 Hz to 20K Hz.
OASPL	Overall sound pressure level calculated by summation of sound pressure levels at each 1/3 octave from 50 Hz to 20K Hz.
O.B.	Octave band
O.G.V.	Outlet guide vane
$P_{T23}/P_{T2}$	Ratio of fan bypass exit total pressure to fan inlet total pressure
PNL	Preceived noise level; a calculated, annoyance weighted sound level
PWL	Sound power level, Re $10^{-13}$ watts
QEP	Quiet Engine Program
RMS	Root mean square
SL	Sideline
SLS	Sea level static
SPL	Sound pressure level, Re $.0002 \text{ dynes/cm}^2$
$V_{\text{plane}}$	Aircraft velocity
$\frac{W_{\text{bypass}} \sqrt{\theta}}{\delta}$	Bypass air flow, corrected to standard day
dB	Decibel
Hz	Hertz (cycles per second)
ips	Inches per second
PNdB	Preceived noise decibel

XI. REPORT DISTRIBUTION LIST

<u>Addressee:</u>	<u>Number of Copies</u>
1. NASA Lewis Research Center	
21000 Brookpark Road	
Cleveland, Ohio 44135	
Attention:	
Report Control Office	MS: 5-5           1
Technology Utilization Office	MS: 3-19          1
Library	MS: 60-3          2
Dr. B. Lubarsky	MS: 3-3           1
A. Ginsburg	MS: 5-3           1
M.J. Hartmann	MS: 5-9           1
W.A. Benser	MS: 5-9           1
T.F. Gelder	MS: 5-9           1
S. Lieblein	MS: 100-1         1
J.H. Povolny	MS: 60-4          1
L.W. Schopen	MS: 77-3          2
N.D. Sanders	MS: 100-1         1
J.C. Williams	MS: 500-111      1
James J. Kramer	MS: 7-1           1
A.A. Medeiros	MS: 7-1           20
2. NASA Headquarters	
600 Independence Avenue, S.W.	
Washington, D.C. 20546	
Attention:	
N.F. Rekos (RL)	1
R. Ziem (RL)	1
H. Rothen (RL)	1
3. FAA Headquarters	
800 Independence Avenue, S.W.	
Washington, D.C. 20553	
Attention:	
John Powers	1
W.C. Sperry	1
4. National Technical Information Service	40
Department of Commerce	
Springfield, Virginia 22151	

		<u>Number of Copies</u>
5.	NASA Langley Research Center Hampton, Virginia 23365 Attention:	
	Donald Raals	MS: 403           1
	Harvey Hubbard	MS: 239           1
	Mark Nichols	MS: 403           1
	John Becker	MS: 186           1
	I. E. Garrick	MS: 115           1
6.	NASA Ames Research Center Moffett Field, California 94035 Attention:	
	David Hickey	MS: 221-2         1
7.	NASA Flight Research Center P. O. Box 273 Edwards, California 93523 Attention:	
	Norman McLeod	Room 2100         1
	Don Bellman	Room 2106         1
8.	Office of Secretary of Transportation 800 Independence Avenue, S.W. Washington, D. C. 20590 Attention:	
	Charles Foster	TRT-30            1
9.	Naval Air Propulsion Test Center Aeronautical Engine Department Philadelphia, Pennsylvania 19112 Attention:	
	Robert Benham	1
10.	Naval Air Systems Command Washington, D. C. 20360 Attention:	
	Eugene Lichtman	Code Aer 330E     1
11.	U. S. Army Aviation Material Laboratory Fort Eustis, Virginia Attention:	
	John White	1
12.	Headquarters, USAF Wright Patterson AFB, Ohio 45433 Attention:	
	Zeke Gershon	Building 18       1
	J. L. Wilkins	SESOS             1
	S. Kobelak	APTP              1
	R. P. Carmichael	SESSP             1

Number of Copies

13.	Department of Navy Bureau of Weapons Washington, D.C. 20525 Attention: Robert Brown	RAPP14	1
14.	The Boeing Company 3801 South Oliver Street Wichita, Kansas 67210 Attention: George Gregg Steve Storch Dean Nelson	MS: 16-17 MS: 16-12 MS: 16-31	1 1 1
15.	The Boeing Company Commercial Airplane Division Renton, Washington 98055 Attention: J. F. McBride J. V. O'Keefe	MS: 47-35	1 1
16.	The Boeing Company P. O. Box 3707 Seattle, Washington 98124 Attention: G. J. Schott	MS: 73-24	1
17.	Douglas Aircraft Company 3855 Lakewood Boulevard Long Beach, California 90801 Attention: J. E. Merriman	CI-250	1
18.	Allison Division, GMC P. O. Box 894 Indianapolis, Indiana 46206 Attention: L. Corrigan P. Tramm Library	Dept. 8890 Dept. 8894	1 1 1
19.	Pratt and Whitney Aircraft Division, UAC East Hartford, Connecticut 06108 Attention: C. W. Bristol J. D. Kester A. A. Mikolajczak Library (UARL)		1 1 1 1

Number of Copies

20.	Pratt and Whitney Aircraft Florida Research and Development Center West Palm Beach, Florida 33402 Attention: H. D. Stetson B. A. Jones		1 1
21.	Lockheed Aircraft Corporation P. O. Box 551 Burbank, California 91503 Attention: Harry Drell	Code 61-30	1
22.	Lockheed Missile and Space Company P. O. Box 879 Mountain View, California 94040 Attention: Raymond Poppe	Dept. 80-91	1
23.	Lockheed Georgia Company Marietta, Georgia 30060 Attention: H. S. Sweet	Dept. 72-71	1
24.	Northern Research and Engineering 219 Vassar Street Cambridge, Massachusetts Attention: K. Ginwala		1
25.	Curtiss-Wright Corporation Wright Aeronautical Woodridge, New Jersey Attention: S. Lombardo		1
26.	Air Research Manufacturing Company 402 South 36th Street Phoenix, Arizona 85034 Attention: R. O. Bullock		1
27.	Air Research Manufacturing Company 8951 Sepulveda Boulevard Los Angeles, California 90009 Attention: Linwood Wright		1

Number of Copies

28. AVCO Corporation  
Lycoming Division  
550 South Main Street  
Stratford, Connecticut 06497  
Attention:  
    David Knöblock                   1  
    Clause Bolton                    1
29. Ford Tractor Operations, FMC  
2500 E. Maple Road  
Birmingham, Michigan 48012  
Attention:  
    Ver Ploeg                        1
30. Teledyne Cae  
1330 Laskey Road  
Toledo, Ohio 43601  
Attention:  
    Eli Bernstein                    1
31. Solar  
San Diego, California 92112  
Attention:  
    P. A. Pitt                        1
32. Williams Research Corporation  
P. O. Box 95  
Walled Lake, Michigan  
Attention:  
    J. Joy                            1
33. Caterpillar Tractor Company  
Peoria, Illinois 61601  
Attention:  
    J. Wiggins                       1
34. Iowa State University  
Dept. of Mechanical Engineering  
Ames, Iowa 50010  
Attention:  
    George Serovy                    1
35. Cornell University  
Aerospace Engineering Department  
Ithaca, New York 14850  
Attention:  
    W. R. Sears                       1

Number of Copies

36. California Institute of Technology  
Pasadena, California 91109  
Attention: Duncan Rannie 1
37. Massachusetts Institute of Technology  
Cambridge, Massachusetts 02139  
Attention: J. L. Kerrebrock 1
38. University of Toronto  
Institute of Aerospace Studies  
Toronto, Canada  
Attention: H. S. Ribner 1
39. Ministry of Technology  
National Gas Turbine Establishment  
Pyestock, Farnborough, Hants.  
England  
Attention: Michael Neale 5
40. Institute of Sound and Vibration Research  
The University, Southampton SO9 5NH  
England  
Attention: John Large 1
41. Rolls-Royce Limited  
Aero Engine Division  
P. O. Box 31  
Derby, England  
Attention: L. G. Dawson 1
42. Rolls-Royce Limited  
Flight Test Establishment  
Hucknall, Nottingham, England  
Attention: J. S. B. Mather Dept. 428F 1
43. Rolls-Royce Limited  
Flight Test Establishment  
Hucknall, Nottingham, England  
Attention: M. E. House 1

Number of Copies

44. Hawker-Siddeley Aviation Ltd.  
Hatfield, Hertz.  
England  
Attention: E. D. G. Kemp 1
45. Massport  
Aviation Technical Service Division 1  
470 Atlantic Avenue  
Boston, Massachusetts 02210  
Attention: George Bender, Jr.