

## RESEARCH

## Open Access



# Multiple statuses of through-wall human being detection based on compressed UWB radar data

Wei Wang\*, Dan Wang and Yu Jiang

## Abstract

Ultra-wideband (UWB) radar is one of the most favorable methods for through-wall human detection due to its strong penetration ability in many common non-metallic obstructions. The paper proposed the residual subspace projection method for multiple statuses of through-wall human being detection behind. And the compressed sensing method was presented to collect incomplete UWB radar data because of its large dimension. The experiments with brick wall and seven statuses were implemented, and the results showed that the proposed algorithm could detect the human being under the multiple statuses in compressed data and uncompressed data. But classification algorithm should be used to distinguish the status.

**Keywords:** Ultra-Wideband radar, Compressed sensing, Residual subspace projection, Through-wall human being detection, Multiple statuses

## 1 Introduction

Through-wall human being detection is of considerable interest to police, rescue, security, surveillance, antiterrorism, and so on. But wall attenuation becomes a prominent limitation in the ensuing power budget and objection detection. Ultra-wideband (UWB) radar operates in the baseband approximately up to 3.5 GHz. It has the ability to penetrate many common non-metallic obstructions (such as walls), and also can detect, locate, and track the target hidden behind the obstructions. The ultra-wideband radar for detection targets through walls has become to a promising technique to prevent crimes and terror as its high range resolution, strong penetrating power, and good resolving ability. At present, UWB radar technology has been accumulated wealthy research achievements in various fields including target detection, medical monitoring, ranging positioning, and human being detection through wall. The focus of this paper is using PulsON 410 UWB radar for multiple status of through-wall human being detection.

Many researchers have focused on through-wall radars imaging (TWRI) for human being detection. In [1], an efficient method of TOA estimation using UWB through-wall radar is proposed to detect and track moving target behind wall based on TWRI algorithm. In [2], a multi-channel through-wall radar imaging based on image fusion for combining the single-channel images to obtain a high signal-to-clutter ratio image was proposed for through-wall human being detection. In [3], a signal processing strategy was proposed to track multiple extended targets in a scene by means of a wide-band monostatic through-wall radar. And this method used the preprocessing of raw data, model-based radar image formation for objection detection and tracking. In [4], the authors presented a technique for classifying stationary targets based on the high-range resolution profile extracted from 3-D TWRIs and the targets classified which using a naïve Bayesian classifier supported by principal component analysis. In [5], a novel near-field through-wall imaging algorithm with ability in the presence of wall ambiguities was proposed, and the capability of the new algorithm to detect the targets was verified by finite-difference time-domain method. In [6], an extension iterative target detector

\* Correspondence: [weiwangvip@163.com](mailto:weiwangvip@163.com)

Tianjin Key laboratory of Wireless Mobile Communications and Power Transmission, College of Electronic and Communication Engineering, Tianjin Normal University, Tianjin, China

and another detector based on Bayes' test were proposed with joint detection and fusion of a set of multipolarization radar images. In [7], a compressive sensing-based through-the-wall imaging algorithm was presented, and the algorithm performance was analyzed with respect to the total number of measurements for different sparsity levels and for varying SNR levels.

Although these methods could detect human being effectively, two or more UWB radars were needed and the algorithms were complex. Some methods were also proposed which only used the one UWB radar data directly for through-wall human being detection. In [8] and [9], the authors proposed some signal processing methods such as discrete Fourier transform, short Fourier transform for periodic respiratory motion of human target detection based on PulsOn 220 UWB radar data. In [10], a time domain, moving target detection processing formulation for detecting human motion behind walls was presented with consisting of exponential averaging background subtraction, ordered statistics constant false alarm rate detection and binary accumulation. In [11], the authors presented methods based on fast Fourier transform and S transform to detect and identify the human's life characteristic which was concentrated in the processing and identifying of the life signal under strong clutter. In [12], an improved UWB respiratory signal model is built up based on an even power of cosine function which is used to reveal the harmonic structure of respiratory signal. In [13], the authors used the compressed UWB data and acquired the singular values of the compressed data based on singular value decomposition algorithm.

Although many methods have been presented for through-wall human being detection based on UWB radars, there are few research on multiple status of human being detection. In this paper, we will propose an algorithm based on anomaly detection method with residual subspace projection theory for some status of human being detection through brick wall. In the mean time, according to the data needed for human being detection far less than the actual sampling amount of UWB radar data, we also proposed the detection algorithm with compressed data. The paper is organized as follows. In Section 1, we introduced the research status of through-wall human being detection with UWB radar. In Section 2, we introduced the principle of spectrum theory and the proposed algorithm for multiple status of through-wall human being detection. In Section 3, the experimental system configuration was introduced and the experimental results was showed and analyzed. In Section 4, it was the conclusion and discussion of this paper.

## 2 Multiple status of through-wall human being detection algorithm

### 2.1 Residual subspace projection and multiple status of through-wall human being detection

Let the multiple echo signals of UWB radar could be represented by a matrix  $X = [x_1, x_2, \dots, x_L] \in R^{N \times L}$ . Where  $x_i \in R^{N \times 1}$  ( $i = 1, 2, \dots, L$ ) is one echo signal of UWB radar and  $L$  is the number of UWB radar echoes.

For notational simplicity, we get the mean value  $\bar{X}_i$  of each echo firstly and remove the mean value then.

$$\bar{X}_i = \sum_{j=1}^N x_{ij} \quad (1)$$

Furthermore, we normalized each echo signal and acquire the centralized matrix  $X_c$ . If  $X_c$  is available, the residual subspace projection performs the eigenvalue decomposition of the sample covariance matrix as [14]:

$$\Sigma_X = (1/L)X_c X_c^T = U \Lambda U^T \quad (2)$$

From which the  $K$  principal eigenvectors  $U$  corresponding to the largest  $K$  eigenvalues can be found. Thus, we get the residual subspace matrix:

$$P = (I - U U^T) \quad (4)$$

The projection value of any echo vector onto residual subspace could be given as follows:

$$z = P x = (I - U U^T) x \quad (5)$$

And we can get the squared prediction error  $T_{\text{spe}}$  as:


$$T_{\text{spe}} = \|z\|_2^2 = \|(I - U U^T) x\|_2^2 \quad (6)$$

In residual subspace analysis, the  $T_{\text{spe}}$  follows a non-central chi-square distribution under the null hypothesis. Hence, rejection of the null hypothesis could be based on whether norm of the error vector exceeds a certain threshold corresponding to a desired false alarm rate.

The through-wall detection of human being is based on the fact that the human body is always in a state of motion even if it sleeps or is trapped because of breathing. These tiny human motions would also cause changes of electromagnetic wave which is emitted by UWB radar and return through walls from human body target. According to this theory, the  $T_{\text{spe}}$  will be different when the status of human being is different, so we can achieve the multiple status of through-wall human being detection based on the varying trend of  $T_{\text{spe}}$ .

### 2.2 Multiple status of through-wall human being detection with compressed UWB radar data

It is difficult and useless to collect all UWB radar data due to the correlation of the echo signal. This is

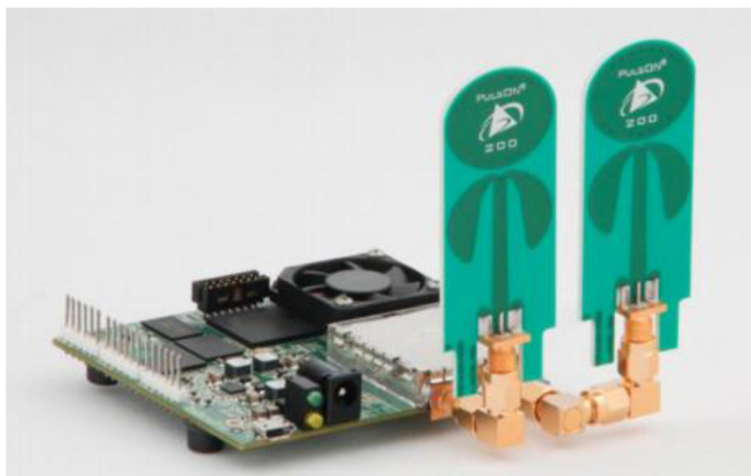

**Fig. 1** Time domain UWB P410 in monostatic mode

equivalent to sub-sampling the temporal UWB radar echo stream. Inspired by the compressive sensing (CS) theory, we proposed a compressed detection algorithm based on UWB radar data.

Random Gaussian measurement matrix is used to compress the  $x_i$  from  $N$  to  $M$  and its relation with the compressed data can be given by

$$y_i = \Phi x_i \tag{7}$$

where  $y_i \in R^{M \times 1}$  and  $\Phi \in R^{M \times N}$  is a random Gaussian matrix. And with a probability of at least  $1 - \delta$ , the changes in the eigenvalues could be bound by [14].

$$|\lambda_i - \zeta_i| \leq 4\sqrt{2}\lambda_1 \left( \sqrt{\frac{K}{M}} + \sqrt{\frac{2 \ln \frac{1}{\delta}}{M}} \right) \tag{8}$$

where  $\lambda_i$  and  $\zeta_i$  are the eigenvalues of the complete data  $X$  and compressed data  $Y$ . The Eq. (8) is a direct consequence of the concentration property of Gaussian ensembles. From the Eq. (8), it can be showed that as the principal subspace spanned by  $X$  is nearly kept in the compressed data  $Y$  with a high probability.

According to the detection algorithm in Eq. (6), it can be seen that the detection of human being is entirely based on the total power of the residuals rather on the actual residual subspace itself. It can be obviously shown that when the measurement matrix  $\Phi$  is normalized, the total power of residuals is unchanged. In other words, the total power of residual subspace in the compressed UWB radar data can also be used for through-wall human being detection.

### 3 Experiments and results


#### 3.1 UWB radar and experimental system

This paper uses P410 UWB radar which is worked in monostatic mode and waveform pulses are transmitted and received from a single Omni-direction antenna. The radar is showed in Fig. 1. The two antenna ports on the P410 are utilized for the transmitting and receiving antennas. A cable is utilized to connect the radio to the PC and radar can be controlled by the application software. The P410 UWB radar has center frequency of 4.3 GHz, a pulse sampling points set for 1000 of the P410 MRM, and its sampling interval is 61.024 ps. The P410 MRM transmit pulse repetition rate is 10.1 MHZ. The parameters of P410 radar in the experiments are as follows in Table 1. In this section, we will introduce a few significant parameters:

- (1)Pulse integration index (PII): Integration is the number of the pulses that radar enhances the single-to-noise ratio. It is the total number of UWB pulses per waveform scan sample. Each

**Table 1** PulsON 410 specifications

PulsON 410 specifications	
Parameter	UWB PulsON 410
Center freq	4.3 GHZ
PII	13
Scan time	38,928 us
Start scan	4999 ps
Stop scan	75,311 ps
(Step size) sampling interval	61.024 ps
Transmit pulse repetition rate	10.1 MHZ
A pulse sampling points	1000

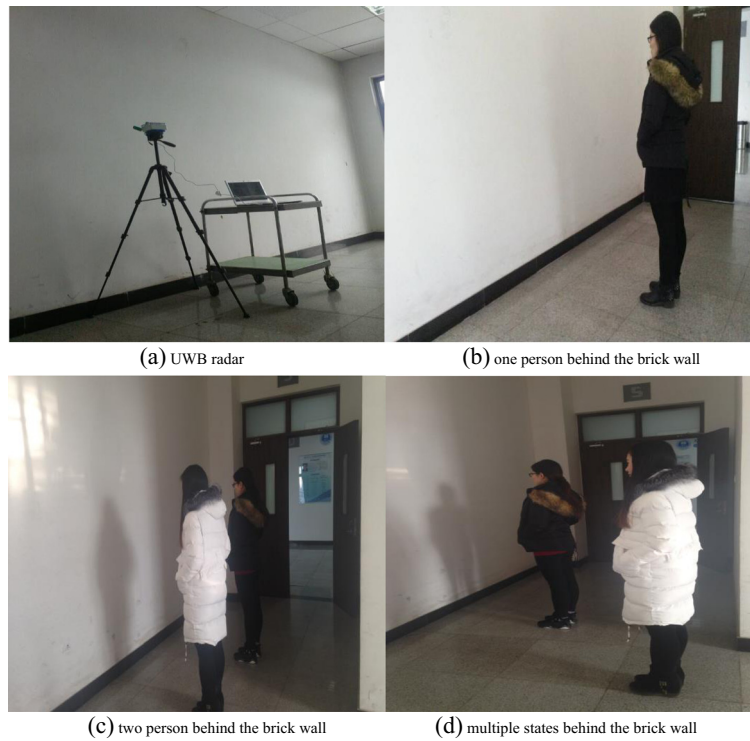

**Fig. 2** The experimental figures. **a** UWB radar. **b** One person behind the brick wall. **c** Two person behind the brick wall. **d** Multiple states behind the brick wall

time the integration is doubled, the SNR of received single will enhance by 3 dB. Time domain stipulated that the minimum integration the user can set is 64:1 which the PII is 6. Thus, a PII setting of 6 will enhance the SNR by 18 dB. The maximum PII of 15 which it will provide an SNR of 45 dB.


- (2) Step size (ps): Step size is the length between the two data points which is increase with 32 bin, in picosecond (1 bin = 1.907 ps). Each data point is a difference of 61.024 ps.
- (3) Scan time: Each scan requires a certain amount of time to complete. This time is a function of the integration rate and the size of the scan window (different between the scan start and scan stop times). The time required is determined by the following equations:

$$\text{The number of quanta} = (\text{stop scan(ps)} - \text{start scan(ps)}) / 5859\text{ps}$$

$$\text{Scantime(us)} = (\text{number of quanta in scan window}) \times (0.792\text{us}) \times 2^{(\text{PulseIntegrationIndex})}$$

We set up an experimental system which is shown in Fig. 2. The material of the wall is brick with the thickness of 23.5 cm. The P410 UWB radar is placed at a distance of 20 cm from the brick wall. The distance

between the P410 and the ground is the half of the brick wall (about 140 cm). The main beam of the transmitting and receiving antenna is oriented perpendicularly to the surface of the brick wall to avoid the multiple influence of reflection from the ground. The computer is Win7 with 64 operating systems. There are two kinds of experiments for through-wall human being detection in this experiment environment. The first kind is one person

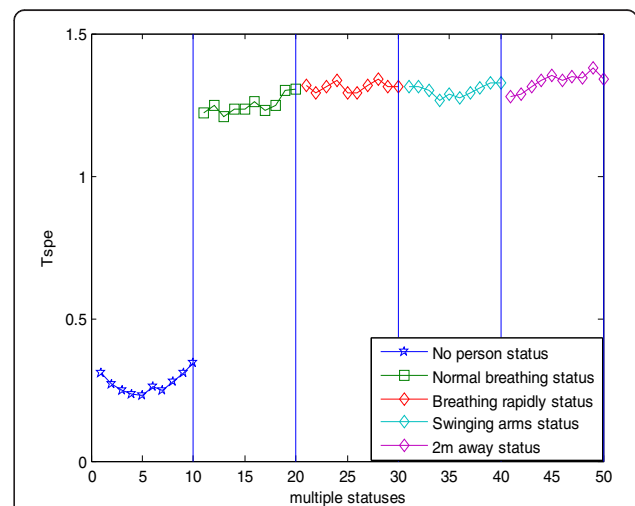

**Fig. 3** The Tspe for one person under multiple statuses

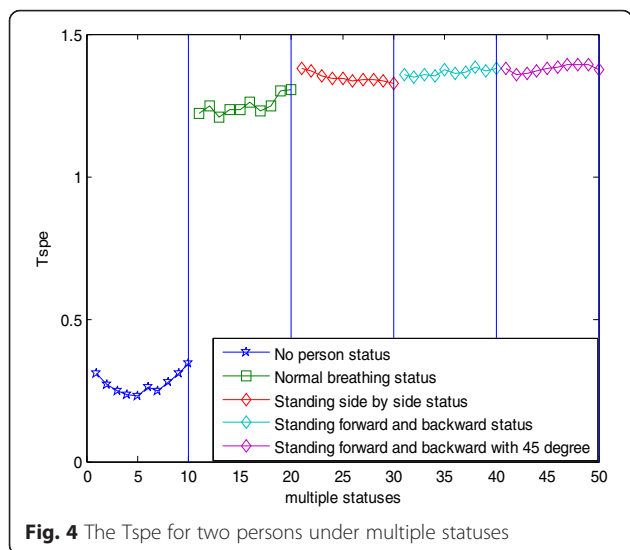


Fig. 4 The Tspe for two persons under multiple statuses

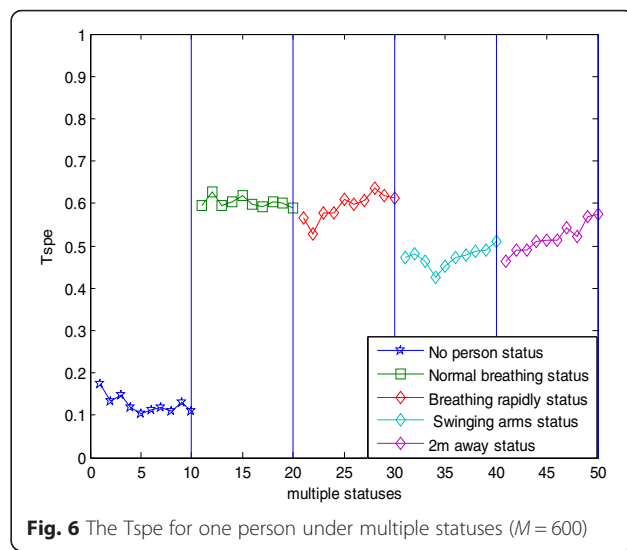


Fig. 6 The Tspe for one person under multiple statuses ( $M = 600$ )

with four statuses and no person behind the brick wall. And the statuses included the position of one person standing away from the wall 1 m with normal breathing, breathing rapidly, swinging their arms with periodic motion, and standing 2 m away from the brick wall. The second experiment is two people with three statuses behind the brick wall. And the statuses included two persons standing side by side, two persons standing forward and backward, and two persons standing forward and backward with 45°. The parameters of P410 radar in the experiments are as follows:

### 3.2 Results and analysis

In the experiments, we collect five hundreds echoes of P410 radar for no person status and other seven statuses with 1000 samples for each echo. Firstly, the residual sub-space matrix  $P$  could be achieved by the echo signal matrix

under no person status. For the human being detection, we select the signals from the 200th echo to the 300th echo and obtain one test echo signal from the average of every ten echoes. The experimental results are showed below.

The Tspe of different statuses with one person are shown in Fig. 3. It can be seen that the Tspe under no person status is less than under person status. And the Tspe under norm breathing is less than under breathing rapidly. But the Tspe under breathing rapidly is close to the Tspe under swinging arms and we could not distinguish the two statuses only based on the value of Tspe. Meanwhile, it can be seen that the Tspe will be larger when the person stands farther away from the wall.

The Tspe of different statuses with two persons are shown in Fig. 4. It can be obviously shown that the values of Tspe are similar, and it also can be thought that the Tspe is not sensitive to the direction of human beings.

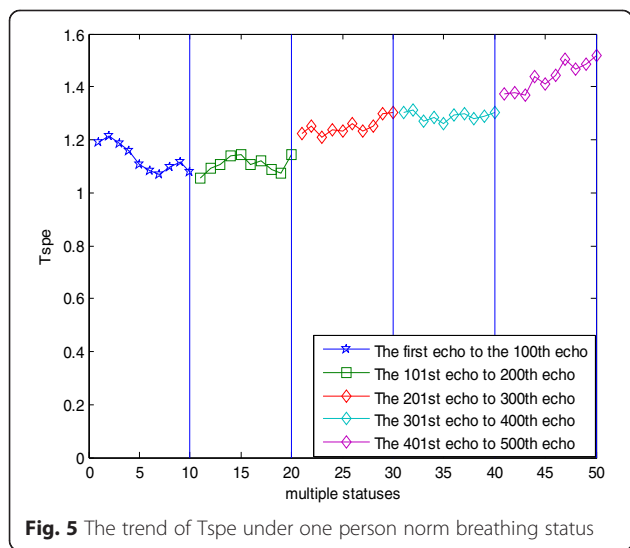


Fig. 5 The trend of Tspe under one person norm breathing status


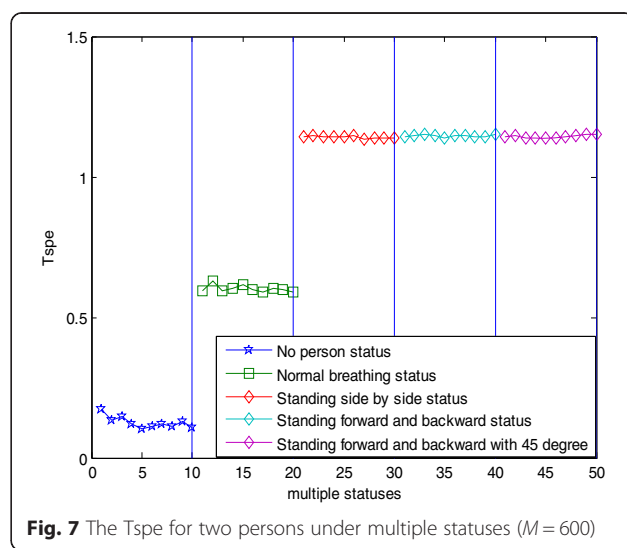



Fig. 7 The Tspe for two persons under multiple statuses ( $M = 600$ )



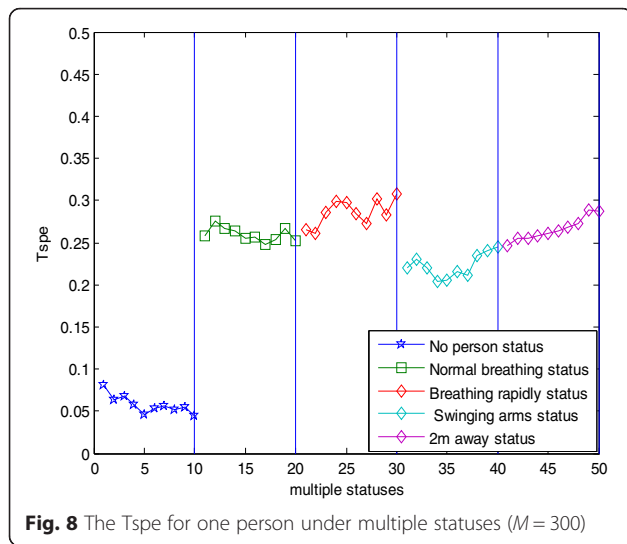

We calculated the Tspe for all five hundreds echoes under one person norm breathing status based on the some calculation method described above. The results are shown in Fig. 5. We can see that the Tspe is small for the first two hundreds echoes, and it increases for the last one hundred echoes. It may indicate that the receiving echoes of different UWB pulse can produce the superposition effect. So, we should select the middle echoes for human being detection based on the values of Tspe.

We also calculate the Tspe with the compressed UWB echo data based on the compressed sensing theory. We chose the  $M = 600$  and  $M = 300$ , and the results are shown in Figs. 6, 7, 8, and 9. It can be seen that the through-wall human being can be detected with Tspe for both one person multiple statuses and two person statuses. But for one person multiple statuses, the value of

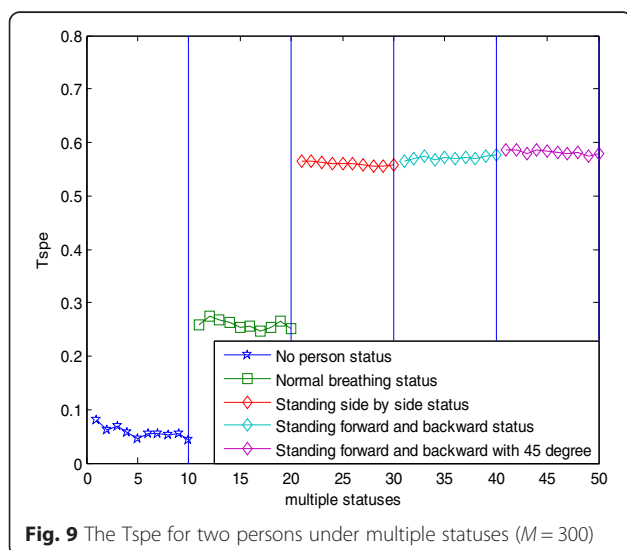

Tspe are smaller and the trends of Tspe are varied compared with uncompressed data.

## 4 Conclusions

We have presented a framework for through-wall human being detection under multiple statuses with P410 UWB radar based on residual subspace projection theory. The work addressed the compressed sensing theory for dealing with incomplete UWB radar echoes. The experiments were tested under seven statuses for brick wall in complete data and compressed data. The results exploited the fact that the proposed algorithm could detect the human being through brick wall, but classification method should be studied for class the statuses further.

## Acknowledgements

This paper is supported by Natural Science Foundation of China (61271411), Natural Youth Science Foundation of China (61501326). It also supported by Tianjin Research Program of Application Foundation and Advanced Technology (15JCZDJC1500), Tianjin Science Foundation (16JCYBJC16500).

## Competing interests

The authors declare that they have no competing interests.

Received: 21 March 2016 Accepted: 26 August 2016

Published online: 02 September 2016

## References

1. S Wu, G Fang, *Detection and Tracking of Moving Target Behind Wall using UWB Through-Wall Radar* (Proceedings of IEEE on Intelligent System Design and Engineering Application (ISDEA), Changsha, 2010), pp. 605–608
2. Y Jia, L Kong, X Yang, K Wang, *Multi-Channel Through-Wall-Radar Imaging Based on Image Fusion* (IEEE Radar Conference, Kansas City, 2011), pp. 103–105
3. G Gennarelli, G Vivone, P Braca, Multiple Extended Target Tracking for Through-Wall Radars. *IEEE Trans. Geosci. Remote Sens.* **53**(12), 6482–6494 (2015)
4. GE Smith, BG Mobasseri, Robust Through-the-Wall Radar Image Classification Using a Target-Model Alignment Procedure. *IEEE Trans. Image Process.* **21**(2), 754–767 (2012)
5. W-J Zhong, C-M Tong, L Xin, Y Geng, *A Novel Near Field Imaging Approach for Through-wall Imaging* (Cross Strait Quad-Regional Radio Science and Wireless Technology Conference, Harbin, 2011), pp. 164–167
6. C Debes, AM Zoubir, MG Amin, Enhanced Detection Using Target Polarization Signatures in Through-the-Wall Radar Imaging. *IEEE Trans. Geosci. Remote Sens.* **50**(5), 1968–1979 (2012)
7. M Duman, AC Gurbuz, *Analysis of Compressive Sensing Based Through the Wall Imaging* (IEEE Radar Conference, Atlanta, 2012), pp. 0641–0646
8. S Singh, Q Liang, D Chen, L Sheng, Sense Through Wall Human Detection Using UWB Radar. *EURASIP J. Wireless Commun. Netw.* **2011**(1), 1–11 (2011)
9. A Kumar, Q Liang, Z Li, B Zhang, X Wu, *Experimental Study of Through-wall Human Being Detection Using Ultra-wideband(UWB) Radar* (IEEE Globecom Workshops, Anaheim, 2012), pp. 1455–1459
10. G Zhu, J Hu, Z Yuan, X Huang, *Automatic Human Target Detection of Ultra-Wideband Through-Wall Radar* (2013 IEEE Radar Conference, Ottawa, 2013), pp. 1–4
11. J Li, Z Zeng, J Sun, F Liu, Through-Wall Detection of Human Being's Movement by UWB Radar. *IEEE Geosci. Remote Sens. Lett.* **9**(6), 1079–1083 (2012)
12. X Li, D Qiao, Y Li, H Dai, *A Novel Through-Wall Respiration Detection Algorithm Using UWB Radar* (International Conference of the IEEE Engineering in Medicine and Biology Society(EMBS), Osaka, 2013), pp. 1013–1016
13. W Wang, X Zhou, B Zhang, J Mu, Anomaly Detection in Big Data from UWB Radars. *Secur. Commun. Netw. Secur. Commun. Netw.* **8**(14), 2469–2475 (2015)
14. D-S Pham, S Venkatesh, M Lazarescu, S Budhaditya, Anomaly Detection in Large-Scale Data Stream Networks. *Data Min. Knowl. Discov.* **28**(1), 145–189 (2014)