

Available online at [www.sciencedirect.com](http://www.sciencedirect.com)**ScienceDirect**

Energy Procedia 63 (2014) 5870 – 5878

Energy

**Procedia**

GHGT-12

## An experimental approach to adsorption of CO<sub>2</sub> + CH<sub>4</sub> gas mixtures onto coal (European RFCS CARBOLAB research project)

Stéphane LAFORTUNE<sup>a,\*</sup>, Francis ADELISE<sup>a</sup>, Gaëtan BENTIVEGNA<sup>a</sup>,  
Christophe DIDIER<sup>a</sup>, Régis FARRET<sup>a</sup>, Philippe GOMBERT<sup>a</sup>, Candice LAGNY<sup>a</sup>,  
Zbigniew POKRYSZKA<sup>a</sup> and Noel CANTO TOIMIL<sup>b</sup>

<sup>a</sup>*French National Institute for Industrial Environment and Risks  
Institut National de l'Environnement Industriel et des Risques (INERIS)  
Parc Technologique ALATA, BP2  
60555 Verneuil-en-Halatte, France*

<sup>b</sup>*HUNOSA (Grupo SEPI), Departamento Nuevos Desarrollos  
Av. Galicia 44  
33005 Oviedo, Asturias, Spain*

---

### Abstract

Results from adsorption experiments of CO<sub>2</sub> + CH<sub>4</sub> gas mixtures onto coal show that adsorption capacities determined with pure gas phases cannot be added to determine the total adsorption capacity of a gas mixture; and that both CO<sub>2</sub> and CH<sub>4</sub> adsorption capacities for experiments performed with gas mixtures are lower than those determined for experiments with pure gases. These results confirm that gases compete to adsorb onto coal. Results also show that the extended Langmuir model that is often used to model sorption of binary gas mixtures does not fit our experimental data. Thus, authors propose here another model.

© 2014 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/3.0/>).

Peer-review under responsibility of the Organizing Committee of GHGT-12

**Keywords:** ECBM ; CO<sub>2</sub> ; storage ; adsorption ; Langmuir ; modeling.

---

---

\* Corresponding author. Tel.: +33-3-44-55-67-91; fax: +33-3-44-55-67-00.  
E-mail address: [stephane.lafortune@ineris.fr](mailto:stephane.lafortune@ineris.fr)

### 1.1. The RFCS CARBOLAB research project

The main goal of the RFCS CARBOLAB research project was to fill the gap concerning the lack of data and comprehension of the physicochemical mechanisms that exist between laboratory experiments on gas adsorption properties of coal and full-scale CO<sub>2</sub> injection tests from the surface. This project was funded by European commission through the Research Fund for Coal and Steel from 2009 to 2013.

Gathering Spanish (HUNOSA, AITEMIN), French (BRGM, INERIS) and Polish (GIG) partners, the project contained three main actions: laboratory tests, numerical modeling and in-situ injection at a seam scale. The injection site was within an existing underground infrastructure, a crosscut of a coal mine located in Asturias (North of Spain) and owned by HUNOSA (project coordinator). This article details some of the results from laboratory tests. For further details on the injection test and monitoring at the seam scale, see [1] and [2].

### 1.2. Laboratory tests

Injection of CO<sub>2</sub> in coal can enhance methane recovery. This technique known as CO<sub>2</sub>-ECBM (Enhanced coal bed methane recovery) can be used in conjunction with carbon capture and storage to mitigate anthropogenic CO<sub>2</sub> emissions. The mechanisms involved are known (injected CO<sub>2</sub> will flush the pore space, drive methane desorption and CO<sub>2</sub> will adsorb onto coal at approximately twice the sorption capacity of methane) but not well understood.

Thus, INERIS has performed adsorption experiments of gas mixtures onto a coal sample in order to (1) draw an experimental protocol to study the adsorption of gas mixtures; (2) characterize competitive processes between adsorption of CO<sub>2</sub> and adsorption of CH<sub>4</sub>; and (3) determine mathematical equations to model the adsorption of gas mixture onto coal.

## 2. Coal sample

Coal sample was collected in situ using a hammer and a crow bar from the wall of the CARBOLAB crosscut. Sample was placed in a plastic bag which was sealed underground before carrying it to our laboratory. Proximate analyses have been done on sample (tab. 1; for further details refer to sample ES04 in [3]).

Table 1. Proximate analyses. DAF = dry and ash-free coal.

| Parameter   | Sample |
|---|--------|
| Moisture content<br>[mass %, raw coal]<br>(156h at 105°C) | 0.31   |
| Ash content<br>[mass %, dry coal]<br>(16h at 820°C)       | 17.18  |
| Vitrinite reflectance [%]                                 | 1.16   |
| Volatile matter content<br>[mass %, DAF]                  | 27.5   |

## 3. Adsorption isotherms determined through gravimetric experiment

Adsorption isotherms have been determined through a gravimetric experiment on a magnetic suspension balance, in order to assess quantities of gas that can be adsorbed or desorbed (fig. 1 and [4]). Adsorption experiments have been determined for pure gas phases (CO<sub>2</sub> and CH<sub>4</sub>) and binary gas mixtures (tab. 2). All experiments have been performed at 298 K (25°C) and on dry crushed coal samples (40-250 μm).

The magnetic suspension balance has been coupled with a gas chromatography apparatus (GC; not shown on fig. 1) to determine the composition of the residual free gas phase when equilibrium between free and adsorbed gas

phases has been reached. Composition of the adsorbed phase at equilibrium is calculated from the measured composition of the residual free gas phase.

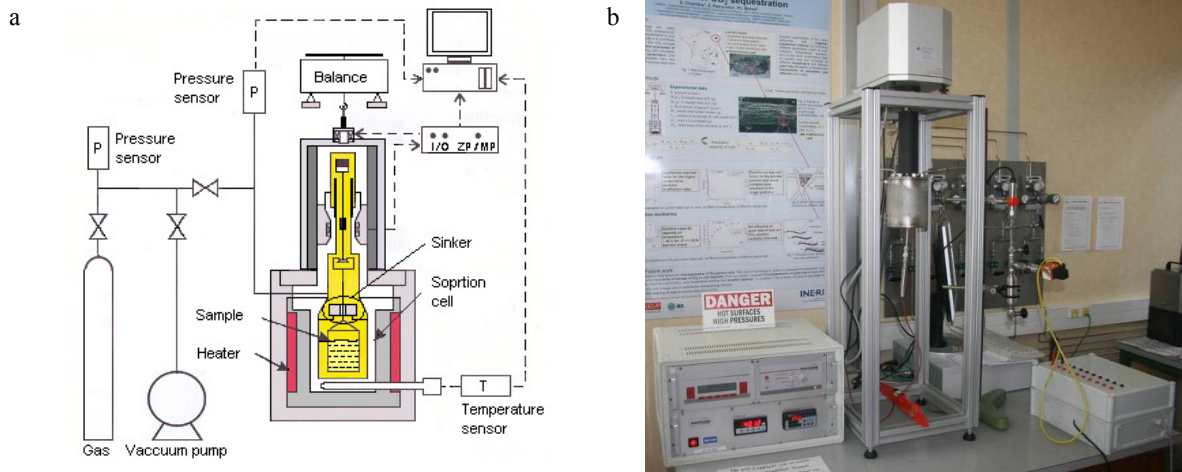


Fig. 1. Magnetic suspension balance: (a) diagram of the equipment; (b) photography of the equipment. Note that GC apparatus is not shown.

Table 2. Compositions of gas mixtures.

| Mixture name (related to CO <sub>2</sub> concentration) | CO <sub>2</sub> concentration | CH <sub>4</sub> concentration |
|---|-------------------------------|-------------------------------|
| “100%”; pure CO <sub>2</sub>                            | 100%                          | 0%                            |
| “90%”   | 90%                           | 10%                           |
| “70%”   | 70%                           | 30%                           |
| “50%”   | 50%                           | 50%                           |
| “30%”   | 30%                           | 70%                           |
| “10%”   | 10%                           | 90%                           |
| “0%”; pure CH <sub>4</sub>                              | 0%                            | 100%                          |

Results are presented as adsorption isotherms giving sorption capacities at different values of pressure for a given temperature. Values are in mmol of sorbed gas per gram of dry and ash-free coal (DAF coal = pure organic matter). Results from adsorption experiments are given in the figure below (fig. 2).

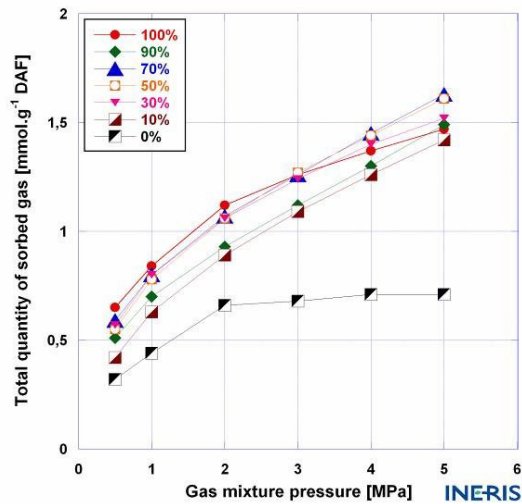


Fig. 2. Total adsorption isotherms ( $\text{CO}_2 + \text{CH}_4$ ) determined for adsorption experiments of gas mixtures at 298 K.

By estimating the composition of the free gas phase at equilibrium, it is possible to estimate the quantity of  $\text{CO}_2$  and  $\text{CH}_4$  that has actually been adsorbed onto the sample and then to plot specific adsorption isotherms for  $\text{CO}_2$  and  $\text{CH}_4$  (fig. 3)

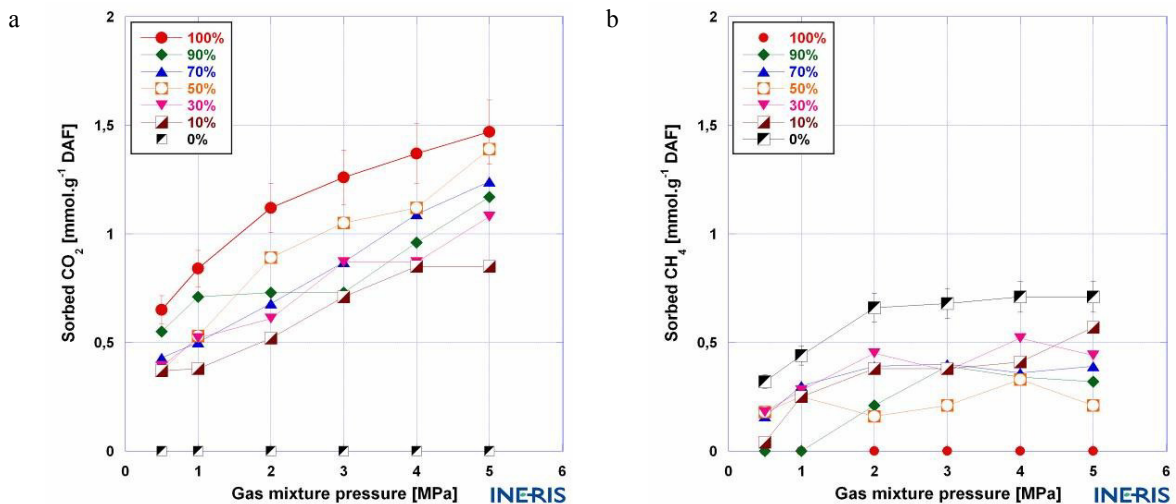


Fig. 3. Adsorption isotherms determined for adsorption experiments of gas mixtures at 298 K: (a)  $\text{CO}_2$ ; (b)  $\text{CH}_4$ .

The coupling between the magnetic suspension balance and GC is not optimal. Errors on the determination of the composition of the free gas phase at equilibrium are high ( $>10\%$ ) because the quantity of free gas is very important compare to the quantity of gas that can be adsorbed on the sample. Thus, adsorption that occurs during experiments has a very low impact on the composition of the free gas phase (change are very small and are not easily detected by GC). Note that errors have not been precisely calculated and will not be plotted on the figures. Experimental results are detailed in the following tables (tab. 3 and 4).

Table 3. CO<sub>2</sub> adsorption capacities measured during adsorption of gas mixtures. Color scale: highest values in red, lower values in green. Values in mmol.g<sup>-1</sup> of dry and ash-free coal.

| Gas mixture pressure [MPa] | Gas mixtures |       |       |       |       |       | "0%" |
|----------------------------|--------------|-------|-------|-------|-------|-------|------|
|                            | "100%"       | "90%" | "70%" | "50%" | "30%" | "10%" |      |
| 0.5                        | 0.65         | 0.55  | 0.43  | 0.37  | 0.39  | 0.37  | -    |
| 1.0                        | 0.84         | 0.71  | 0.50  | 0.53  | 0.52  | 0.38  | -    |
| 2.0                        | 1.12         | 0.73  | 0.68  | 0.89  | 0.61  | 0.52  | -    |
| 3.0                        | 1.26         | 0.73  | 0.87  | 1.05  | 0.87  | 0.71  | -    |
| 4.0                        | 1.37         | 0.96  | 1.09  | 1.12  | 0.87  | 0.85  | -    |
| 5.0                        | 1.47         | 1.17  | 1.24  | 1.39  | 1.08  | 0.85  | -    |

Table 4. CH<sub>4</sub> adsorption capacities measured during adsorption of gas mixtures. Color scale: highest values in red, lower values in green. Values in mmol.g<sup>-1</sup> of dry and ash-free coal.

| Gas mixture pressure [MPa] | Gas mixtures |       |       |       |       |       | "0%" |
|----------------------------|--------------|-------|-------|-------|-------|-------|------|
|                            | "100%"       | "90%" | "70%" | "50%" | "30%" | "10%" |      |
| 0.5                        | -            | 0.00  | 0.16  | 0.18  | 0.18  | 0.04  | 0.32 |
| 1.0                        | -            | 0.00  | 0.30  | 0.25  | 0.28  | 0.25  | 0.44 |
| 2.0                        | -            | 0.21  | 0.39  | 0.16  | 0.45  | 0.38  | 0.66 |
| 3.0                        | -            | 0.39  | 0.40  | 0.21  | 0.37  | 0.38  | 0.68 |
| 4.0                        | -            | 0.34  | 0.36  | 0.33  | 0.52  | 0.41  | 0.71 |
| 5.0                        | -            | 0.32  | 0.39  | 0.21  | 0.44  | 0.57  | 0.71 |

Adsorption experiments that have been performed with binary gas mixtures allow highlighting the following conclusions:

- CO<sub>2</sub> and CH<sub>4</sub> adsorption capacities determined with pure gas phases cannot be summed to determine the total adsorption capacity of a gas mixture (see fig. 2).
- Respective CO<sub>2</sub> and CH<sub>4</sub> adsorption capacities for experiments performed with gas mixtures are lower than those determined for experiments with pure gases (see fig. 3).
- CO<sub>2</sub> adsorption capacities seem to be higher when gas pressure and CO<sub>2</sub> volume fraction in the mixture increase (see tab. 4). CH<sub>4</sub> adsorption capacities increase with gas pressure, but no clear relation can be stated with the CH<sub>4</sub> volume fraction (see tab. 5).

#### 4. Modeling adsorption of gas mixtures onto coal

Modeling the adsorption of gas mixtures onto coal cannot be done by using the Langmuir's model applied on partial pressures:

$$\frac{q_i}{q_{m,i}} = \frac{\alpha_i P_i}{1 + \sum \alpha_i P_i}$$

Where:

Subscript i refers to gas component i in the mixture;

P<sub>i</sub> is the partial pressure of gas component i;

q<sub>i</sub> is the adsorbed quantity of gas component i at P<sub>i</sub>;

q<sub>m,i</sub> is the maximum quantity of gas component i that can be adsorbed onto the surface (known as "first Langmuir's parameter");

α<sub>L,i</sub> is the second Langmuir's parameter for gas component i.

This model doesn't fit our experimental data (see fig. 4 for an example with experimental data from experiment performed with mixture "10%"). Thus, we must use other models. Two models will be presented and discussed below for the adsorption of binary gas mixtures onto coal.

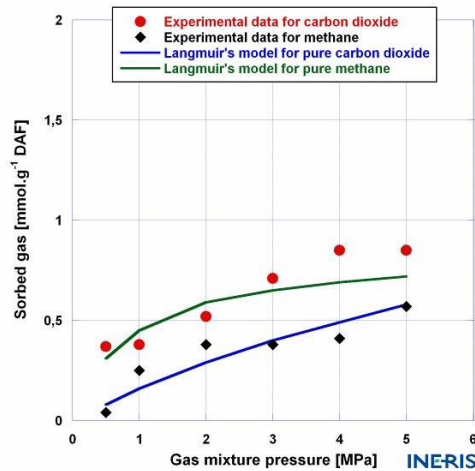


Fig. 4. Misuse of Langmuir's models for pure gas adsorptions to model the adsorption of a gas mixture. Experimental data from experiment performed with gas mixture "10%".

#### 4.1. Models

##### 4.1.1. Extended Langmuir's model

Extended Langmuir's model (EL model) is an improvement of the Langmuir's model for adsorption of binary gas mixtures [5,6,7]:

$$q_i = \frac{\alpha_i P_i}{1 + \chi_i P_i + \chi_j P_j}$$

With:

Subscript i refers to the first gas component in the mixture and subscript j refers to the second gas component;

$P_i$  and  $P_j$  are the partial pressures of gas components i and j;

$q_i$  is the adsorbed quantity of gas component i at  $P_i$ ;

$q_{m,i}$  is the maximum quantity of gas component i that can be adsorbed onto the surface (known as "first Langmuir's parameter");

$\alpha_{L,i}$  and  $\alpha_{L,j}$  are the second Langmuir's parameters for gas components i and j.

Note that parameters  $q_m$  and  $\alpha_L$  are here the same than those determined for pure gas adsorption.

##### 4.1.2. Empirical model proposed by INERIS

INERIS proposes an empirical model which was fitted from experimental data for adsorption of CO<sub>2</sub> + CH<sub>4</sub> mixtures. This model lies on the Langmuir's theory:

First equation to model the adsorption of CH<sub>4</sub>:

$$q_{CH_4} = l_{m,CH_4} x_{CH_4} \frac{\alpha_{CH_4} P}{1 + \chi_{CH_4} P}$$

Second equation to model the adsorption of CO<sub>2</sub>:

$$q_{CO_2} = l_{m,CO_2} \frac{\alpha_{,CO_2} P}{1 + \alpha_{,CO_2} P} - l_{CH_4}$$

With:

P is the total gas mixing pressure;

x<sub>CH<sub>4</sub></sub> is the volume fraction of CH<sub>4</sub> in the mixture;

q<sub>CH<sub>4</sub></sub> and q<sub>CO<sub>2</sub></sub> are the adsorbed quantities of each gas at P;

q<sub>m,CH<sub>4</sub></sub> and q<sub>m,CO<sub>2</sub></sub> are the maximum quantities of each gas that can be adsorbed onto the surface (known as “first Langmuir’s parameters”);

α<sub>L,CH<sub>4</sub></sub> and α<sub>L,CO<sub>2</sub></sub> are the second Langmuir’s parameters for each gas.

This model lies on hypotheses drawn from the adsorption experiments of gas mixtures performed at INERIS. During the adsorption of a gas mixture, sorption sites for CO<sub>2</sub> and CH<sub>4</sub> are considered to be the same and we suppose that (fig. 5):

- CH<sub>4</sub> is adsorbed onto a number of sites that is smaller than the number of sites that the gas occupies during adsorption experiments of pure methane. The number of sites that are occupied is considered to be proportional to the volume fraction of CH<sub>4</sub> in the mixing;
- CO<sub>2</sub> is adsorbed onto a number of sites that equals the number of sites that the gas occupies during adsorption experiments of pure carbon dioxide minus the number of sites which are occupied by CH<sub>4</sub>.

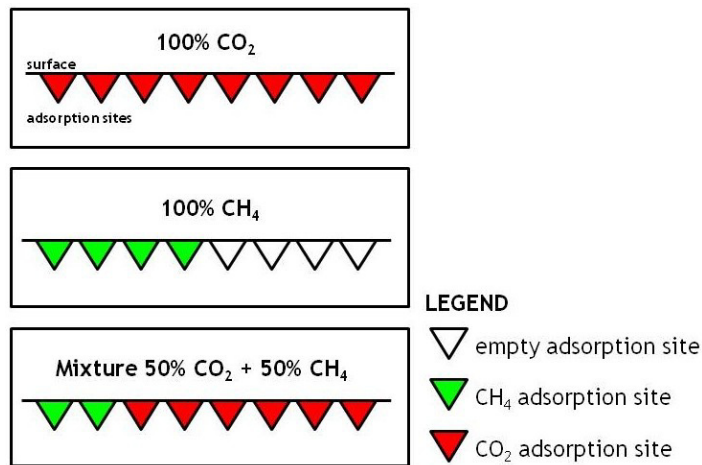


Fig. 5. Empirical model proposed by INERIS for the adsorption of CO<sub>2</sub> + CH<sub>4</sub> gas mixtures. Example with mixture “50%”.

#### 4.2. Comparison of models and discussion

Results for CO<sub>2</sub> + CH<sub>4</sub> adsorption experiments are plotted on the following figure (fig. 6). Theoretical isotherms from EL model and model proposed by INERIS are also plotted to determine which model ensures the better fit of the experimental data.

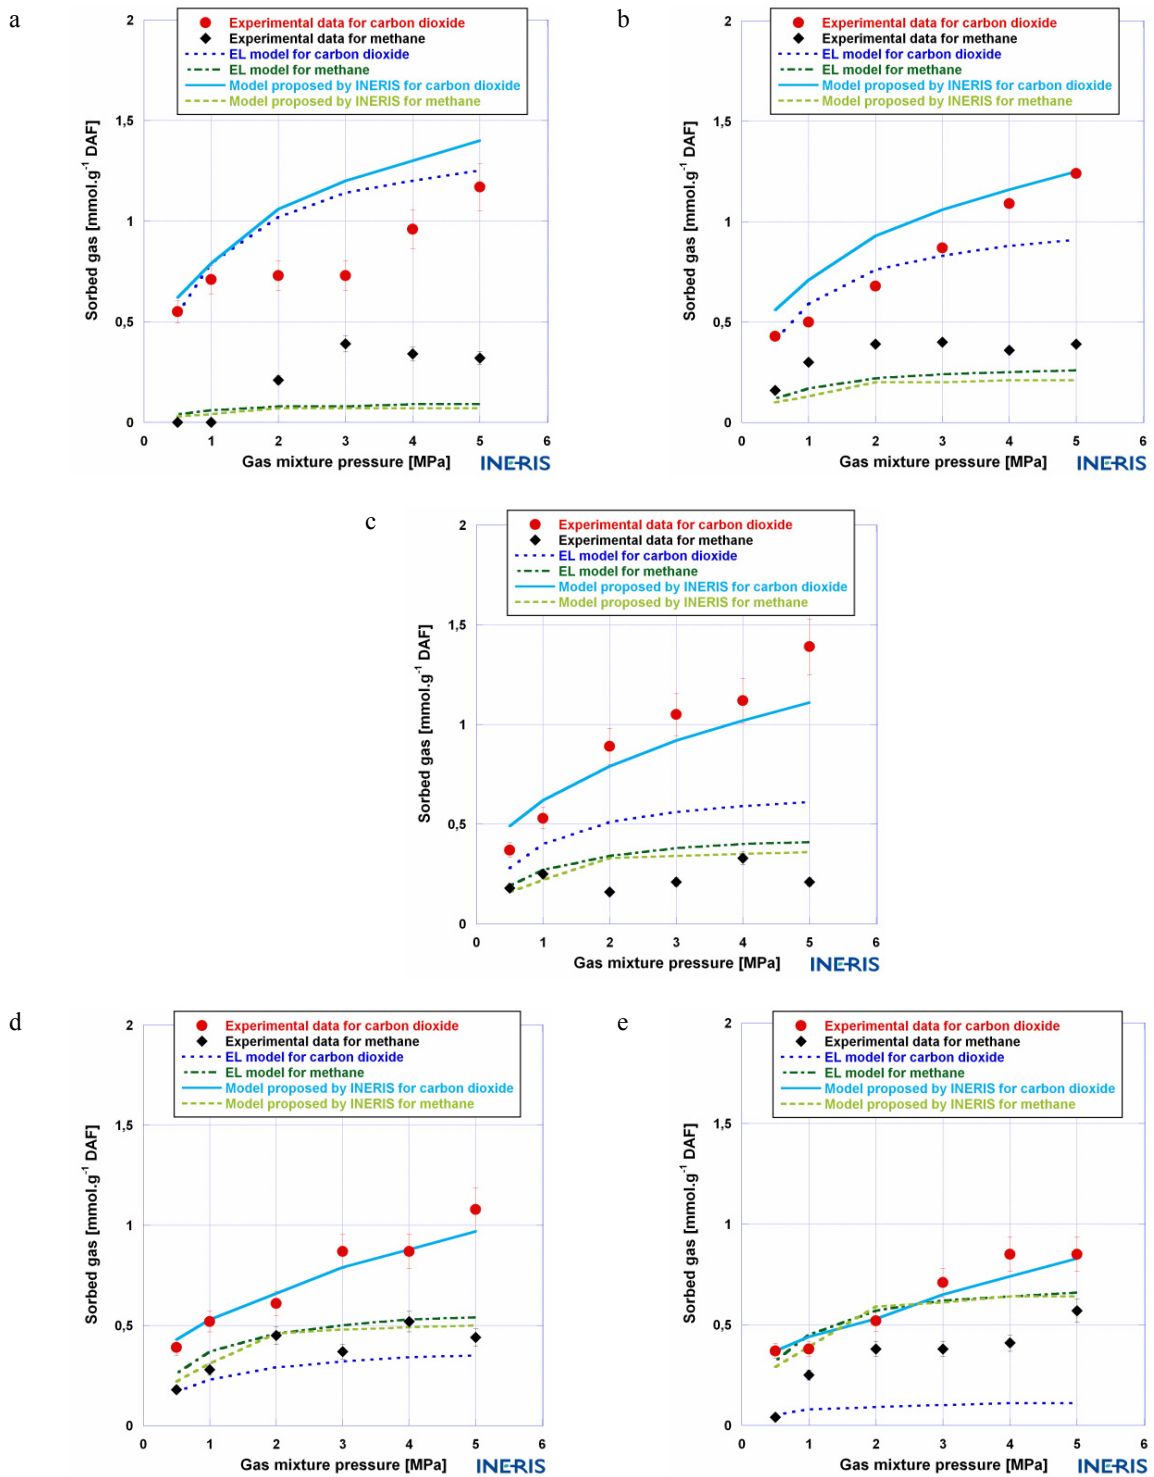


Fig. 6. Experimental results and theoretical isotherms for adsorption experiments of gas mixtures: (a) 90% CO<sub>2</sub> + 10% CH<sub>4</sub>; (b) 70% CO<sub>2</sub> + 30% CH<sub>4</sub>; (c) 50% CO<sub>2</sub> + 50% CH<sub>4</sub>; (d) 30% CO<sub>2</sub> + 70% CH<sub>4</sub>; (e) 10% CO<sub>2</sub> + 90% CH<sub>4</sub>.



The two models don't fit well all the data obtained for the different experiments that have been done with gas mixtures. But one can note that:

- EL model underestimates the adsorption capacities of CO<sub>2</sub> for experiments performed with mixtures having a CO<sub>2</sub> concentration  $\leq 50\%$ ;
- EL model underestimates the adsorption capacities of CH<sub>4</sub> for experiments performed with mixtures having a CO<sub>2</sub> concentration  $> 50\%$ ;
- EL model overestimates the adsorption capacities of CH<sub>4</sub> for experiment performed with mixture "10%";
- Model proposed by INERIS is quite in good accordance with experimental data concerning the CO<sub>2</sub> adsorption capacities. But the model overestimates the CO<sub>2</sub> adsorption capacities for experiment performed with mixture "90%";
- Model proposed by INERIS gives the same results as the EL model concerning the CH<sub>4</sub> adsorption capacities.

## 5. Conclusion

INERIS has performed adsorption experiments of CO<sub>2</sub> + CH<sub>4</sub> gas mixtures onto a coal sample from a Spanish mine. Results show that CO<sub>2</sub> and CH<sub>4</sub> adsorption capacities determined with pure gas phases cannot be added to determine the total adsorption capacity of a gas mixture; and that both CO<sub>2</sub> and CH<sub>4</sub> adsorption capacities for experiments performed with gas mixtures are lower than those determined for experiments with pure gases. Thus, these results confirm that both gases compete to adsorb onto coal.

In this study, the Extended Langmuir model that is often used to model sorption of binary gas mixtures appears to not fit the experimental data. Indeed, this model underestimates the adsorption capacities of CO<sub>2</sub> for experiments performed with binary gas mixtures having a CO<sub>2</sub> concentration  $\leq 50$  vol. %; and underestimates the adsorption capacities of CH<sub>4</sub> for experiments performed with binary gas mixtures having a CO<sub>2</sub> concentration  $> 50$  vol. %. Thus, INERIS has proposed a new empirical model that better fits experimental results and that can be used in numerical codes.

## Acknowledgements

Authors thank the European commission and the Research Fund for Coal and Steel for funding the CARBOLAB project (grant agreement No. RFCR-CT-2009-001).

## References

- [1] Lafortune S., Adeline F., Lahaie F., Beaufile B., Bentivegna G., Didier C., Farret R., Gombert P., Pokryszka Z., Canto Toimil N. Monitoring a 120-kg CO<sub>2</sub> injection in a coal seam with continuous gas and microseismic measurements (European RFCR CARBOLAB research project). GHGT-12 conference, 2014. To be published in Energy Procedia.
- [2] Gal F., Proust E., Leynet A. CO<sub>2</sub> injection in a coal seam – Insights from the European CARBOLAB project with focus on water geochemical monitoring. GHGT-12 conference, 2014. To be published in Energy Procedia.
- [3] Gaucher E., Defosse P., Bizi M., Bonijoly D., Disnar J-R, Laggoun-Defarge F, Garnier C, Finquenesiel G, Zimmy T, Grgic D, Pokryszka Z, Lafortune S, Vidal-Gilbert S. Coal laboratory characterisation for CO<sub>2</sub> geological storage. Energy Procedia 2011, 4, p. 3147-3154.
- [4] Charrière D, Pokryszka Z and Behra P. Effect of pressure and temperature on diffusion of CO<sub>2</sub> and CH<sub>4</sub> into coal from the Lorraine basin (France). International Journal of Coal Geology 2010, 81(4), p. 373-380.
- [5] EMarkham EC, Benton AF. The adsorption of gas mixtures by silica. Journal of the American Chemical Society 1931, 53(2), p. 497-507.
- [6] Kapoor A, J. Ritter A, Yang RT. An extended Langmuir model for adsorption of gas mixtures on heterogeneous surfaces. Langmuir 1990, 6, p. 660-664.
- [7] Chen Z, Liu J, Elsworth D, Connell LD, Pan Z. Impact of CO<sub>2</sub> injection and differential deformation on CO<sub>2</sub> injectivity under in-situ stress conditions. International Journal of Coal Geology 2010, 81, p. 97-108.