



King Saud University  
**Journal of King Saud University –  
 Science**

[www.ksu.edu.sa](http://www.ksu.edu.sa)  
[www.sciencedirect.com](http://www.sciencedirect.com)



## ORIGINAL ARTICLE

# Consideration of transient stream/aquifer interaction with the nonlinear Boussinesq equation using HPM

S.S. Ganji <sup>a</sup>, A. Barari <sup>b,\*</sup>, M.G. Sfahani <sup>c</sup>, G. Domairry <sup>d</sup>, P. Teimourzadeh Baboli <sup>e</sup>

<sup>a</sup> Department of Transportation Engineering, Islamic Azad University, Science and Research Branch, Tehran, Iran

<sup>b</sup> Department of Civil Engineering, Aalborg University, Sohngårdsholmsvej 57, DK-9000 Aalborg, Denmark

<sup>c</sup> Department of Civil Engineering, Faculty of Structural Engineering, Babol University of Technology, P.O. Box 484, Babol, Iran

<sup>d</sup> Department of Mechanical Engineering, Babol University of Technology, P.O. Box 484, Babol, Iran

<sup>e</sup> Department of Civil Engineering, Babol Noshirvani University of Technology, Babol, Iran

Received 31 May 2010; accepted 9 July 2010

Available online 15 July 2010

### KEYWORDS

Transient stream/aquifer interaction;  
 Mathematical model;  
 Boussinesq equation;  
 Approximate analytical solution;  
 Homotopy Perturbation Method (HPM)

**Abstract** The phenomenon of stream–aquifer interaction was investigated via mathematical modeling using the Boussinesq equation. A new approximate solution of the one-dimensional Boussinesq equation is presented for a semi-infinite aquifer when the hydraulic head at the source is an arbitrary function of time. The differential equations were solved using the method of Homotopy Perturbation. The simplicity and accuracy of the approximation are compared with “exact” solution and illustrated numerically and graphically. The results reveal that the HPM is very effective and simple and provides highly accurate solutions for nonlinear differential equations.

© 2010 King Saud University. Production and hosting by Elsevier B.V. All rights reserved.

## 1. Introduction

The study of stream–aquifer hydraulics is of great interest as several flow and contaminant problems can be modeled,

\* Corresponding author. Tel.: +45 99408457.  
 E-mail addresses: [amin78404@yahoo.com](mailto:amin78404@yahoo.com), [ab@civil.aau.dk](mailto:ab@civil.aau.dk) (A. Barari).

1018-3647 © 2010 King Saud University. Production and hosting by Elsevier B.V. All rights reserved.

Peer review under responsibility of King Saud University.  
 doi:10.1016/j.jksus.2010.07.011



Production and hosting by Elsevier

understood and quantified. It is an important problem in studying of alluvial aquifer. Alluvial valley aquifers are hydraulically connected to their adjacent channels and exchange flow through the streambed (Perkins and Koussis, 1996). The connection causes ground water levels in these systems to fluctuate with respect to the other. Small changes in the stream elevation can cause a large variation in the groundwater elevation in the aquifer. If the stream stage increases over a short period of time, a flow reversal between the channel and aquifer will occur as a result of a change in the hydraulic gradient (Workman et al., 1997). A flood wave is then propagated into the aquifer and increases bank storage. While the stream is returning to normal flows, the bank storage is released. The quantification of the hydraulics of the stream–aquifer in an alluvial valley require a good knowledge of the controlling input hydro-geological parameters, such as hydraulic conductivity, specific yield, recharge, as well as boundary conditions

(Srivastava et al., 2006). Alluvial valley aquifers pose some interesting boundary conditions. One side of the flow domain is the river source/sink, which is fluctuating. As a result of the alluvial valley formation, the other side of the flow domain is the valley wall, which is a no flow boundary condition. The spread of contaminants in stream–aquifer systems from the river to the aquifer or from the aquifer to the river is also of concern (Serrano et al., 2007).

The hydraulics of the stream–aquifer system could be studied via the solution of the Laplace equation subject to a nonlinear free-surface boundary condition, and time-dependent river boundary conditions. In this way, the groundwater flow in an unconfined aquifer may be approximately modeled by the nonlinear Boussinesq equation, assuming Dupuit’s hypothesis of zero resistance to vertical flow is valid, to be a viable alternative to the use of Laplace’s equation. With the Boussinesq equation, the vertical coordinate does not exist, and the free-surface boundary condition is not needed (Serrano and Workman, 1998). The result is a simplified model where the effect of time-dependent river boundary conditions can easily be incorporated into the analysis. Solutions of the Boussinesq equation are applied in catchment hydrology and base flow studies as well as agricultural drainage problems and constructed, subsurface wetlands (Lockington et al., 2000).


The governing equation for one-dimensional, lateral, unconfined groundwater flow similar to the Fig. 1 with Dupuit assumptions is the Boussinesq equation (Bear, 1979):

$$\frac{1}{S} \frac{\partial}{\partial x} \left( Kh \frac{\partial h}{\partial x} \right) = \frac{\partial h}{\partial t} \quad 0 \leq x \leq l_x \quad (1)$$

$$h(0, t) = H_1(t), \quad h(l_x, t) = H_2(t), \quad h(x, 0) = H_0(x)$$

where  $h(x, t)$  is the hydraulic head ( $m$ );  $K$  is the aquifer hydraulic conductivity ( $m/day$ );  $S$  is the aquifer specific yield;  $H_1(t)$  and  $H_2(t)$  are the time fluctuating heads at the left and right boundaries, respectively;  $x$  is the spatial coordinate ( $m$ );  $l_x$  is the horizontal dimension of the aquifer ( $m$ );  $t$  is the time coordinate ( $day$ ); and  $H_0(x)$  is the initial head across the aquifer ( $m$ ).

Until recently, analytical solutions of nonlinear partial differential equations were rare, due to the lack of systematic solution methods. Next section is a very brief review on some analytical methods for this class of equations. One of the most beneficent of these methods is the Homotopy Perturbation Method (HPM). In this paper, we solve the Boussinesq equation by means of HPM and then compare the obtained results with exact solution.

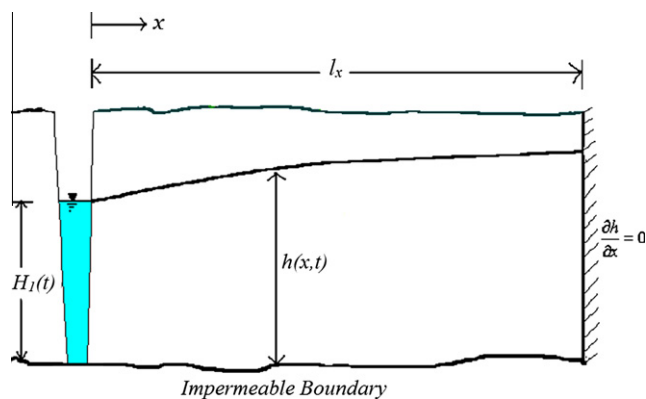

**Figure 1** Idealized cross section for the mathematical modeling of transient stream–aquifer interaction.

## 2. Analysis of the Homotopy Perturbation Method

Nonlinear phenomena play a crucial role in applied mathematics and physics. Although it is very easy for us now to find the solutions of some problems by means of computers, it is still rather difficult to solve nonlinear problems either numerically or theoretically or obtaining an exact solution for these problems. So, it is often more useful to have an approximate closed form solution to describe a nonlinear problem. In recent decades, numerical analysis and the approximate methods have been developed considerably for nonlinear partial equations. More recently, some promising analytical techniques have been proposed, such as Lindstedt–Poincaré (He, 2002b,c), Parameter-Expanding (Shou and He, 2007; Ganji et al., 2009a), Parameterized Perturbation (He, 1999), Harmonic Balance (Telli and Kopmaz, 2006; Gottlieb, 2006), Linearized Perturbation (He, 2003), Energy Balance (He, 2002a; Momeni et al., 2010; Ganji et al., 2009), Variational Approach (Xu, 2008; He, 2004; Ganji et al., 2008), Max–Min (Babazadeh et al., 2010; Ibsen et al., 2010), Exp-Function (Ganji et al., 2009b; Mohyud-Din et al., 2010), Amplitude–Frequency Formulation (Ganji et al., 2010b), Adomian Decomposition (Mirgolbabaei et al., 2010; Wazwaz, 2005), Variational Iteration (Faraz et al., 2011; Babelahi et al., 2009; Barari et al., 2008a,b; Fouladi et al., 2010), and the Homotopy Perturbation Method (He, 2000, 2005; Ghotbi et al., 2008; Omidvar et al., 2010; Miansari et al., 2010; Ganji et al., 2009c, 2010a).

The Homotopy Perturbation Method is a combination of the classical perturbation and Homotopy technique. To explain this, we consider the following nonlinear differential equation:

$$A(u) - f(r) = 0, \quad r \in \Omega, \quad (2)$$

Subject to boundary condition:

$$B(u, \partial u / \partial n) = 0, \quad r \in \Gamma \quad (3)$$

where  $A$  is a general differential operator,  $B$  a boundary operator,  $f(r)$  is a known analytical function,  $\Gamma$  is the boundary of domain  $\Omega$  and  $\partial u / \partial n$  denotes differentiation along the normal drawn outwards from  $\Omega$ . The operator  $A$  can be divided into two parts: a linear part  $L$  and a nonlinear part  $N$ . Therefore Eq. (2) can be rewritten as follows:

$$L(u) + N(u) - f(r) = 0, \quad (4)$$

In case that the nonlinear Eq. (2) has no “small parameter”, we can construct the following Homotopy:

$$H(v, p) = L(v) - L(u_0) + pL(u_0) + p(N(v) - f(r)) = 0, \quad (5)$$

Where,

$$v(r, p) : \Omega \times [0, 1] \rightarrow R, \quad (6)$$

In Eq. (6),  $p \in [0, 1]$  is an embedding parameter and  $u_0$  is the first approximation that satisfies the boundary condition. We can assume that the solution of Eq. (5) can be written as a power series in  $p$ , as follows:

$$v = v_0 + pv_1 + p^2v_2 + \dots, \quad (7)$$

Then the best approximation for the solution is:

$$u = \lim_{p \rightarrow 1} v = v_0 + v_1 + v_2 + \dots, \quad (8)$$

### 3. Analytical solution to the nonlinear transient groundwater flow

Assume that the aquifer is in contact with a drainage canal at  $x = 0$  and it is bounded by a condition of zero flux at the impervious surface at  $x = 3$  so, the horizontal dimension of the aquifer is  $l_x = 3$  (use a dimensionless length scale for convenience). Initial water table in the aquifer is express by:

$$H_0(x) = x - \frac{x^2}{6} \quad (9)$$

So, the water level at  $x = 3$  is  $H_2(t) = 3/2$ . Note that the initial depth at  $x = 0$  is taken as zero. The depth of the canal located at  $x = 0$  varies with time by

$$H_1(t) = \frac{3}{2(t+1)} \left[ (t+1)^{2/3} - 1 \right] \quad (10)$$

We aim to solve the dimensionless Boussinesq equation (Parlange et al., 2000):

$$\frac{dh}{dt} = \left( \frac{dh}{dx} \right)^2 - h \frac{d^2h}{dx^2}, \quad 0 < t, \quad 0 < x < 3 \quad (11)$$

Note that we take  $K/S = 1$ . With the initial condition Eq. (9), the boundary condition Eq. (10) at  $x = 0$  and the condition of zero flux at the impervious surface  $x = 3$  together (Parlange et al., 2000):

$$\frac{\partial h(3,t)}{\partial x} = 0 \quad (12)$$

The exact solution of Eq. (9)–(12) is Parlange et al., 2000,:

$$h(x,t) = \frac{x}{t+1} - \frac{x^2}{6(t+1)} + \frac{3}{2(t+1)} \left[ (t+1)^{2/3} - 1 \right] \quad (13)$$

Using HPM for solving Eq. (11), we have:

$$\begin{aligned} H(v,p) = (1-p) & \left[ \frac{\partial v(x,t)}{\partial t} - \frac{\partial v_0(x,t)}{\partial t} \right] \\ & + p \left[ \frac{\partial v(x,t)}{\partial t} - \left( \frac{\partial v(x,t)}{\partial x} \right)^2 - v(x,t) \frac{\partial^2 v(x,t)}{\partial x^2} \right] = 0 \end{aligned} \quad (14)$$

We consider  $v(x,t)$  as follows:

$$v(x) = v_0 + pv_1 + p^2v_2 + p^3v_3 + \dots \quad (15)$$

Assuming  $\frac{\partial v_0(x,t)}{\partial t} = 0$  and some simplification and rearranging based on powers of  $p$ -terms, we have:

$$p^0 : \left\{ \frac{\partial v_0(x,t)}{\partial t} = 0, \right. \quad (16)$$

$$p^1 : \left\{ \frac{\partial v_1(x,t)}{\partial t} - \left( \frac{\partial v_0(x,t)}{\partial x} \right)^2 - v_0(x,t) \left( \frac{\partial^2 v_0(x,t)}{\partial x^2} \right) = 0, \right. \quad (17)$$

$$\begin{aligned} p^2 : \left\{ \frac{\partial v_2(x,t)}{\partial t} - v_0(x,t) \left( \frac{\partial^2 v_1(x,t)}{\partial x^2} \right) - v_1(x,t) \left( \frac{\partial^2 v_0(x,t)}{\partial x^2} \right) \right. \\ \left. - 2 \left( \frac{\partial v_1(x,t)}{\partial x} \right) \left( \frac{\partial v_0(x,t)}{\partial x} \right) = 0, \right. \end{aligned} \quad (18)$$

$$p^3 = 0 \quad (19)$$

Solving Eq. (16)–(19) ( $n = 30$ ), we have:

$$v_0(x,t) = x - \frac{x^2}{6}, \quad (20)$$

$$v_1(x,t) = t \left( 1 - x + \frac{x^2}{6} \right), \quad (21)$$

$$v_2(x,t) = -\frac{t^2}{6} (7 - 6x + x^2), \quad (22)$$

$$v_{30}(x,t) = t^{30} x - \frac{t^{30}}{6} x^2 - \frac{9468382206 \ 2787934811 \ 3}{6565139347 \ 8907415525 \ 4} t^{30} \quad (23)$$

The solution of Eq. (11) when  $p \rightarrow 1$  will be as follows:

$$\begin{aligned} h(x,t) = \sum_{i=0}^{30} h_i(x,t) = & x - \frac{x^2}{6} + \left( 1 - x + \frac{x^2}{6} \right) t \\ & + \left( -\frac{7}{6} + x - \frac{x^2}{6} \right) t^2 + \left( \frac{67}{54} - x + \frac{x^2}{6} \right) t^3 \\ & + \left( -\frac{104}{81} + x - \frac{x^2}{6} \right) t^4 + \left( \frac{319}{243} - x + \frac{x^2}{6} \right) t^5 \\ & + \left( -\frac{5833}{4374} + x - \frac{x^2}{6} \right) t^6 + \left( \frac{17707}{13122} - x + \frac{x^2}{6} \right) t^7 \\ & + \left( -\frac{53615}{39366} + x - \frac{x^2}{6} \right) t^8 + \left( \frac{1458473}{1062882} - x + \frac{x^2}{6} \right) t^9 \\ & + \left( -\frac{4402589}{3188646} + x - \frac{x^2}{6} \right) t^{10} + \left( \frac{13276927}{9565938} - x + \frac{x^2}{6} \right) t^{11} \\ & + \left( \frac{120028333}{86093442} + x - \frac{x^2}{6} \right) t^{12} + \left( \frac{361486819}{258280326} - x + \frac{x^2}{6} \right) t^{13} \\ & + \left( \frac{1088165267}{774840978} + x - \frac{x^2}{6} \right) t^{14} \\ & + \left( \frac{9823125883}{6973568802} - x + \frac{x^2}{6} \right) t^{15} \\ & + \left( \frac{14774515532}{10460353203} + x - \frac{x^2}{6} \right) t^{16} \\ & + \left( \frac{44431312981}{31381059609} - x + \frac{x^2}{6} \right) t^{17} \\ & + \left( \frac{2404571453839}{1694577218886} + x - \frac{x^2}{6} \right) t^{18} \\ & + \left( \frac{7228166400937}{5083731656658} - x + \frac{x^2}{6} \right) t^{19} \\ & + \left( \frac{10862121155608}{7625597484987} + x - \frac{x^2}{6} \right) t^{20} \\ & + \left( \frac{97923740421007}{1694577218886} - x + \frac{x^2}{6} \right) t^{21} \\ & + \left( \frac{588455501730827}{411782264189298} + x - \frac{x^2}{6} \right) t^{22} \\ & + \left( \frac{1767907191675361}{1235346792567894} - x + \frac{x^2}{6} \right) t^{23} \\ & + \left( \frac{15932442974372369}{11118121133111046} + x - \frac{x^2}{6} \right) t^{24} \\ & + \left( \frac{47856908021140643}{33354363399333138} - x + \frac{x^2}{6} \right) t^{25} \\ & + \left( \frac{143738003838641857}{100063090197999414} + x - \frac{x^2}{6} \right) t^{26} \\ & + \left( \frac{11655491573846704945}{8105110306037952534} - x + \frac{x^2}{6} \right) t^{27} \\ & + \left( \frac{35002344284769416539}{24315330918113857602} + x - \frac{x^2}{6} \right) t^{28} \\ & + \left( \frac{105108457136542826849}{72945992754341572806} - x + \frac{x^2}{6} \right) t^{29} \\ & + \left( \frac{946838220627879348113}{656513934789074155254} + x - \frac{x^2}{6} \right) t^{30} \end{aligned} \quad (24)$$


To assess the efficiency of the HPM, the results together with the exact solution are given in Tables 1 and 2. From

**Table 1** The results of HPM and exact solutions for  $t = 0.25$ .


$x_i$	$t = 0.25$		
	HPM	Exact	Error
0.00	0.19247665008383366747	0.19247665008383366772	2.5 E-19
0.20	0.34714331675050033416	0.34714331675050033439	2.3 E-19
0.40	0.49114331675050033417	0.49114331675050033439	2.2 E-19
0.60	0.62447665008383366757	0.62447665008383366772	1.5 E-19
0.80	0.74714331675050033425	0.74714331675050033439	1.4 E-19
1.00	0.85914331675050033425	0.85914331675050033439	1.4 E-19
1.20	0.96047665008383366764	0.96047665008383366772	8.0 E-20
1.40	1.05114331675050033430	1.05114331675050033440	1.0 E-19
1.60	1.13114331675050033420	1.13114331675050033440	2.0 E-19
1.80	1.20047665008383366750	1.20047665008383366770	2.0 E-19
2.00	1.25914331675050033430	1.25914331675050033440	1.0 E-19
2.20	1.30714331675050033430	1.30714331675050033440	1.0 E-19
2.40	1.34447665008383366760	1.34447665008383366770	1.0 E-19
2.60	1.37114331675050033450	1.37114331675050033440	1.0 E-19
2.80	1.38714331675050033440	1.38714331675050033440	0.00000
3.00	1.39247665008383366770	1.39247665008383366770	0.00000

**Table 2** The results of HPM and Exact solutions for  $t = 0.50$ .

$x_i$	$t = 0.50$		
	HPM	Exact	Error
0.00	0.31037069665646221117	0.31037069710444830360	4.4798609243 E-10
0.20	0.43925958560536966603	0.43925958599333719249	3.8796752647 E-10
0.40	0.55925958566124902048	0.55925958599333719249	3.3208817202 E-10
0.60	0.67037069682410027460	0.67037069710444830360	2.8034802900 E-10
0.80	0.77259291909392342844	0.77259291932667052583	2.3274709740 E-10
1.00	0.86592625247071848192	0.86592625266000385916	1.8928537726 E-10
1.20	0.95037069695448543506	0.95037069710444830360	1.4996286852 E-10
1.40	1.02592625254522428790	1.02592625266000385920	1.1477957130 E-10
1.60	1.09259291924293504030	1.09259291932667052590	8.3735485600 E-11
1.80	1.15037069704761769250	1.15037069710444830360	5.6830611100 E-11
2.00	1.19925958595927224440	1.19925958599333719250	3.4064948100 E-11
2.20	1.23925958597789869590	1.23925958599333719250	1.5438496700 E-11
2.40	1.27037069710349704700	1.27037069710444830360	9.5125640000 E-13
2.60	1.29259291933606729790	1.29259291932667052580	9.3967721000 E-12
2.80	1.30592625267560944830	1.30592625266000385920	1.5605589200 E-11
3.00	1.31037069712212349850	1.31037069710444830360	1.7675194800 E-11

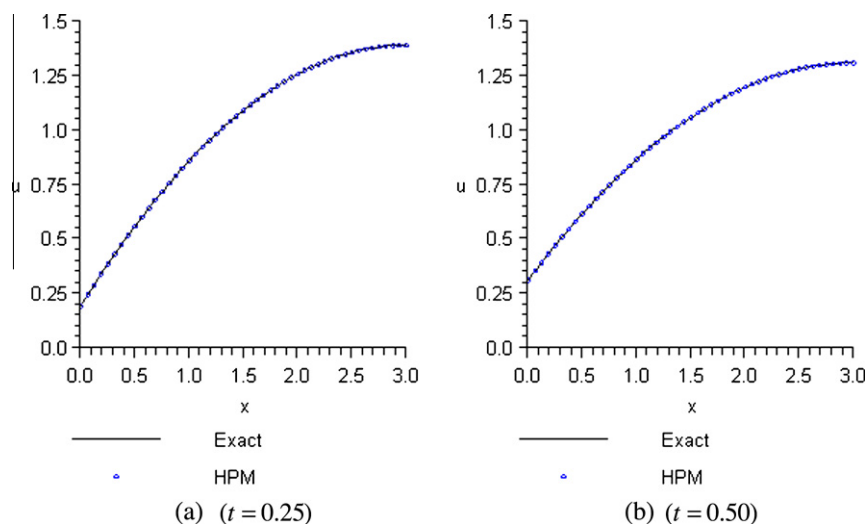

**Figure 2** Comparison of the HPM and exact solutions for  $n = 30$ .

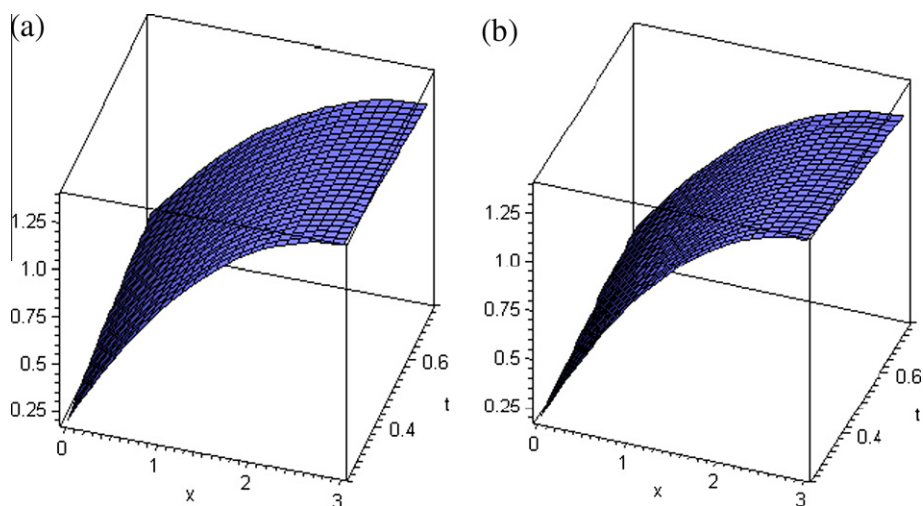

**Figure 3** Three-dimensional plot for the exact and HPM solutions for  $n = 30$ . (a) Exact and (b) HPM.

Fig. 2, it can be seen that the two graphs are similar such that the error is negligible. The exact and HPM solutions whose results are given in Tables 1 and 2 are also compared by the consequent results of the two different methods as shown in Figs. 1 and 2.

#### 4. Conclusions

In this article the effect of highly fluctuating stream stage on the adjacent alluvial valley aquifer is studied with a new analytical solution to the nonlinear transient groundwater flow equation subject to stochastic conductivity and time varying boundary conditions (Fig. 3). The drainage system under consideration is modeled by nonlinear Boussinesq equation. An approximate closed form solution constrained by initial and boundary conditions of the system is presented which can be used for prediction of the transient water table via the Homotopy Perturbation Method (HPM). For illustration the HPM solution compared with the exact one numerically and graphically. It is apparently seen that HPM is a powerful and efficient technique for solving large class of linear and nonlinear, ordinary or partial, deterministic or stochastic differential equations arising in various fields of science and engineering and present a rapid convergence for the solutions.

#### References

- Babaelahi, M., Ganji, D.D., Joneidi, A.A., 2009. Analysis of velocity equation of steady flow of a viscous incompressible fluid in channel with porous walls. *International Journal for Numerical Methods in Fluids*. doi:10.1002/fld.2114.
- Babazadeh, H., Domairry, G., Barari, A., Azami, R., Davodi, A.G., 2010. Numerical analysis of strongly nonlinear oscillation systems using He's max-min method. *Frontiers of Mechanical Engineering in China*. doi:10.1007/s11465-010-0029-6.
- Barari, A., Omidvar, M., Ghotbi, Abdoul R., Ganji, D.D., 2008a. Application of Homotopy Perturbation Method and variational iteration method to nonlinear oscillator differential equations. *Acta Applicandae Mathematicae* 104, 161–171.
- Barari, A., Omidvar, M., Ganji, D.D., Tahmasebi Poor, A., 2008b. An approximate solution for boundary value problems in structural engineering and fluid mechanics. *Journal of Mathematical Problems in Engineering*, 1–13 (Article ID 394103).
- Bear, J., 1979. *Hydraulics of Groundwater*. McGraw-Hill, New York, NY.
- Faraz, Naeem, Khan, Yasir, Yildirim, Ahmet, 2011. Analytical approach to two-dimensional viscous flow with a shrinking sheet via variational iteration algorithm-II. *Journal of King Saud University – Science*. 23 (1), 77–81.
- Fouladi, F., Hosseinzadeh, E., Barari, A., Domairry, G., 2010. Highly nonlinear temperature dependent fin analysis by variational iteration method. *Journal of Heat Transfer Research* 41 (2), 155–165.
- Ganji, S.S., Karimpour, S., Ganji, D.D., Ganji, Z.Z., 2009. Periodic solution for strongly nonlinear vibration systems by energy balance method. *Acta Applicandae Mathematicae*. doi:10.1007/s10440-008-9283-6.
- Ganji, S.S., Ganji, D.D., Babazadeh, H., Karimpour, S., 2008. Variational approach method for nonlinear oscillations of the motion of a rigid rod rocking back and cubic–quintic duffing oscillators. *Progress in Electromagnetics Research M* 4, 23.
- Ganji, S.S., Sfahani, M.G., Modares Tonekaboni, S.M., Moosavi, A.K., Ganji, D.D., 2009. Higher-order solutions of coupled systems using the parameter expansion method. *Mathematical Problems in Engineering* 2009, p. 20 (Article ID 327462). doi:10.1155/2009/327462.
- Ganji, D.D., Babaelahi, M., Joneidi, A.A., Davodi, A.G., 2009b. Application of exp-function method to reduced Ostrovsky equation and Kuramoto–Sivashinsky equation. *Asian–European Journal of Mathematics* 2 (4), 567–578.
- Ganji, S.S., Ganji, D.D., Karimpour, S., Babazadeh, H., 2009c. Applications of He's homotopy perturbation method to obtain second-order approximations of the coupled two-degree-of-freedom systems. *International Journal of Nonlinear Sciences and Numerical Simulation* 10 (3), 303.
- Ganji, D.D., Housman B., Rokni, Ganji, S.S., Sfahani, M.G., 2010. Approximate traveling wave solutions for coupled Whitham–Broer–Kaup shallow water. *Advances in Engineering Software*. doi:10.1016/j.advengsoft.2010.05.008.
- Ganji, S.S., Ganji, D.D., Sfahani, M.G., Karimpour, S., 2010. Application of AFF and HPM to the systems of strongly nonlinear oscillation. *Current Applied Physics*. doi:10.1016/j.cap.2010.03.015.
- Ghotbi, Abdoul R., Barari, A., Ganji, D.D., 2008. Solving ratio-dependent predator–prey system with constant effort harvesting using Homotopy Perturbation Method. *Journal of Mathematical Problems in Engineering*, 1–8 (Article ID 945420).

- Gottlieb, H.P.W., 2006. Harmonic balance approach to limit cycles for nonlinear jerk equations. *Journal of Sound and Vibration* 297, 243.
- He, J.H., 1999. Some new approaches to duffing equation with strongly and high order nonlinearity (II) parameterized perturbation technique. *Communications in Nonlinear Science and Numerical Simulation* 4, 81.
- He, J.H., 2000. Homotopy perturbation method for bifurcation of nonlinear problems. *International Journal of Non-Linear Mechanics* 35 (1), 37.
- He, J.H., 2002a. Preliminary report on the energy balance for nonlinear oscillations. *Mechanics Research Communications* 29, 107.
- He, J.H., 2002b. Modified Lindstedt–Poincare methods for some strongly nonlinear oscillations, Part I: a new transformation. *International Journal of Non-linear Mechanics* 37, 315.
- He, J.H., 2002c. Modified Lindstedt–Poincare methods for some strongly nonlinear oscillations, Part II: expansion of a constant. *International Journal of Non-linear Mechanics* 37, 309.
- He, J.H., 2003. Linearized perturbation technique and its applications to strongly nonlinear oscillators. *Computers and Mathematics with Applications* 45, 1.
- He, J.H., 2004. Variational principles for some nonlinear partial differential equations with variable coefficients. *Chaos, Solitons and Fractals* 19 (4), 847.
- He, J.H., 2005. Homotopy perturbation method for bifurcation on nonlinear problems. *International Journal of Non-Linear Sciences and Numerical Simulation* 6, 207.
- Ibsen, L.B., Barari, A., Kimiaefar, A., 2010. Analysis of highly nonlinear oscillation systems using He's max–min method and comparison with homotopy analysis and energy balance methods. *Sadhana* 35 (4), 1–16.
- Lockington, D.A., Parlange, J.-Y., Parlange, M.B., Selker, J., 2000. Similarity solution of the Boussinesq equation. *Advances in Water Resources* 23, 725–729.
- Miansari, M.O., Miansari, M.E., Barari, A., Domairry, G., 2010. Analysis of Blasius equation for flat-plate flow with infinite boundary value. *International Journal for Computational Methods in Engineering Science and Mechanics* 11 (2), 79–84.
- Mirgolbabaee, H., Barari, A., Ibsen, L.B., Sfahani, M.G., 2010. Numerical solution of boundary layer flow and convection heat transfer over a flat plate. *Archives of Civil and Mechanical Engineering* 10 (2), 41–51.
- Mohyud-Din, Syed Tauseef, Noor, Muhammad Aslam, Noor, Khalida Inayat, 2010. Exp-function method for traveling wave solutions of modified Zakharov–Kuznetsov equation. *Journal of King Saud University – Science* 22 (4), 213–216.
- Momeni, M., Jamshidi, N., Barari, A., Ganji, D.D., 2010. Application of He's Energy Balance Method to Duffing Harmonic Oscillators. *International Journal of Computer Mathematics*. doi:10.1080/00207160903337239.
- Omidvar, M., Barari, A., Momeni, M., Ganji, D.D., 2010. New class of solutions for water infiltration problems in unsaturated soils. *Geomechanics and Geoengineering: An International Journal* 5 (2), 127–135.
- Parlange, J.-Y., Hogarth, W.L., Govindaraju, R.S., Parlange, M.B., Lockington, D., 2000. On an exact analytical solution of the Boussinesq equation. *Transport in Porous Media* 39, 339–345.
- Perkins, S.P., Koussis, A.D., 1996. Stream–aquifer interaction model with diffusive wave routing. *ASCE Journal of Hydraulic Engineering* 122 (4), 210–217.
- Serrano, S.E., Workman, S.R., 1998. Modeling transient stream/aquifer interaction with the non-linear Boussinesq equation and its analytical solution. *Journal of Hydrology* 206, 245–255.
- Serrano, Sergio E., Workman, S.R., Srivastava, Kirti, Cleave, Brenda Miller-Van, 2007. Models of nonlinear stream aquifer transients. *Journal of Hydrology* 336, 199–205.
- Shou, D.H., He, J.H., 2007. Application of parameter-expanding method to strongly nonlinear oscillators. *International Journal of Non-Linear Science and Numerical Simulation* 8 (1), 121.
- Srivastava, Kirti, Serrano, Sergio E., Workman, S.R., 2006. Stochastic modeling of transient stream–aquifer interaction with the nonlinear Boussinesq equation. *Journal of Hydrology* 328, 538–547.
- Telli, S., Kopmaz, O., 2006. Free vibrations of a mass grounded by linear and nonlinear springs in series. *Journal of Sound and Vibration* 289, 689–710.
- Wazwaz, A.M., 2005. Adomian decomposition method for a reliable treatment of the Bratu-type equations. *Journal of Applied Mathematics and Computing* 166, 652.
- Workman, S.R., Serrano, S.E., Liberty, K., 1997. Development and application of an analytical model of stream/aquifer interaction. *Journal of Hydrology* 200, 149–163.
- Xu, L., 2008. Variational approach to Solitons of nonlinear dispersive  $K(m,n)$  equations. *Chaos, Solitons and Fractals* 37, 137.