

Contents lists available at ScienceDirect

Journal of Rock Mechanics and Geotechnical Engineering

journal homepage: www.rockgeotech.org

Review

Utilisation of transparent synthetic soil surrogates in geotechnical physical models: A review



Abideen Adekunle Ganiyu ^{a,*}, Ahmad Safuan A. Rashid ^a, Mohd Hanim Osman ^b

^a Department of Geotechnics and Transportation, Faculty of Civil Engineering, Universiti Teknologi Malaysia, Skudai, Johor, Malaysia

^b Forensic Engineering Centre, Institute for Smart Infrastructure and Innovative Construction, Faculty of Civil Engineering, Universiti Teknologi Malaysia, Skudai, Johor, Malaysia

ARTICLE INFO

Article history:

Received 28 August 2015

Received in revised form

19 October 2015

Accepted 9 November 2015

Available online 18 March 2016

Keywords:

Transparent soil

Model tests

1g modelling

Soil-structure interaction

ABSTRACT

Efforts to obtain non-intrusive measurement of deformations and spatial flow within soil mass prior to the advent of transparent soils have perceptible limitations. The transparent soil is a two-phase medium composed of both the synthetic aggregate and fluid components of identical refractive indices aiming at attaining transparency of the resulting soil. The transparency facilitates real life visualisation of soil continuum in physical models. When applied in conjunction with advanced photogrammetry and image processing techniques, transparent soils enable the quantification of the spatial deformation, displacement and multi-phase flow in physical model tests. Transparent synthetic soils have been successfully employed in geotechnical model tests as soil surrogates based on the testing results of their geotechnical properties which replicate those of natural soils. This paper presents a review on transparent synthetic soils and their numerous applications in geotechnical physical models. The properties of the aggregate materials are outlined and the features of the various transparent clays and sands available in the literature are described. The merits of transparent soil are highlighted and the need to amplify its application in geotechnical physical model researches is emphasised. This paper will serve as a concise compendium on the subject of transparent soils for future researchers in this field.

© 2016 Institute of Rock and Soil Mechanics, Chinese Academy of Sciences. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Earliest researches to visualise the interior of soils were achieved using X-ray techniques (Kirkpatrick and Belshaw, 1968; Bransby and Milligant, 1975; Kharchafi and Dysli, 1993), and later tomography X-ray and radiography methods (Desrues et al., 1996; Shi et al., 1999; Wong, 1999; Ngan-Tillard et al., 2005; Hall et al., 2010a; Paniagua et al., 2013). However, their usage is restricted because of their experimental limitations, technical sophistications and economic considerations. In addition, some of the investigations were intrusive (Bergfelt, 1956; Nemat-Nasser and Okada, 2001) and the embedded particles have distinctive features from the adjoining soils. The evolution of transparent synthetic soils which permits studying spatial behaviours and flow features inside a soil continuum non-intrusively (Mannheimer and Oswald, 1993; Iskander et al., 1994) coupled with the advances in optical

technologies and image processing techniques such as particle image velocimetry (PIV) (White et al., 2001a, 2001b; Take and Bolton, 2002; Liu and Iskander, 2004) has enhanced the capability of modelling geotechnical and geo-environmental engineering problems in the last two decades (Iskander, 2010).

The transparent synthetic soil is a two-phase medium composed of both the synthetic aggregate and fluid components. Transparency is attained by using aggregate materials and pore fluids with identical refractive indices, thus permitting complete penetration of light (Iskander et al., 2002b). The refractive index is the ratio of speed of light in a vacuum to that in a medium (Iskander, 2010). The aggregate materials that have been used for transparent synthetic soils include precipitated amorphous silica, silica gel, fumed silica, fused silica, fused quartz, aquabeads and gelbeads. The materials were matched with different fluids or blends of fluids such as mineral oils, paraffinic oil, white oil, mineral spirit, brine mixture, sucrose solution and water. Previous researches investigated the geotechnical properties of transparent soils and confirmed that their properties were consistent with those of natural soils (Liu et al., 2003; Zhao and Ge, 2007, 2014; Cao et al., 2011; Guzman and Iskander, 2013).

* Corresponding author. Tel.: +60 149189780.

E-mail address: gabideen2@live.utm.my (A.A. Ganiyu).

Peer review under responsibility of Institute of Rock and Soil Mechanics, Chinese Academy of Sciences.

<http://dx.doi.org/10.1016/j.jrmge.2015.11.009>

1674-7755 © 2016 Institute of Rock and Soil Mechanics, Chinese Academy of Sciences. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Today, transparent soils have been used in the laboratory to model soil-structure interaction problems (Toiya et al., 2007; Zhao, 2007; Liu et al., 2010; Lwti, 2015), including tunnelling-induced movements (Ahmed, 2011; Ahmed and Iskander, 2011c, 2011d), soil-geosynthetic interactions (Ferreira, 2013; Tatarı, 2014; Bathurst and Ezzein, 2015), soil deformation measurements (Liu, 2003; White et al., 2005; Beckett and Augarde, 2011), projectile penetration in sand (Cave et al., 2014; Chen et al., 2014; Guzman, 2014; Omidvar et al., 2015a), visualisation of grout permeation in soil and rock (Liu et al., 2013; Sui et al., 2015), performance of vibrated stone columns (McKelvey et al., 2004; Kelly, 2014a), study of three-dimensional (3D) flow and geo-environmental problems (Hunter, 2012; Serrano, 2012; Siemens et al., 2014; Kashuk et al., 2015; Ma, 2015; Sills, 2015), centrifuge models (Song, 2008; Song and Hu, 2009), and those in unsaturated soils (Beckett and Augarde, 2010; Oldroyd, 2011; Siemens and Oldroyd, 2014).

Although the basic principle of modelling using the transparent synthetic soil is well established, its application is still restricted to a cluster of researchers and is not yet widely spread across the world. Hence, there is a need to further propagate its potentials and explore its abundant research values. A review of the characteristics of transparent soils and their application in geotechnical physical models is the focus of this paper.

2. Characteristics of aggregate materials

2.1. Precipitated amorphous silica

Amorphous silica powders are inert and insoluble in water but are hygroscopic. They consist of micro-particles in the order of 0.02 μm which coalesce to form larger particles with the specific gravity of 2–2.1. The unit weight ranges from 0.4 kN/m^3 to 1 kN/m^3 with a moisture content of 6–7% and aggregate sizes ranging from 1.4 μm to 175 μm (Sadek, 2002). The internal porosity of the aggregates led to their lower bulk densities in comparison with the majority of natural soils, and most of their physical properties are dictated by their aggregate sizes. They absorb pore fluids and dislodge air and are highly suitable for making transparent clays (Iskander et al., 2002a).

2.2. Silica gel

Silica gel is a colloidal form of silica and is obtained by partial dehydration of H_2SiO_3 . It consists of a massive network of interconnected microscopic pores with diameters ranging from 5×10^{-10} m to 300×10^{-10} m and is characterised by a high apparent total void ratio as a result of the internal porosity of the aggregates (Zhao and Ge, 2014). It is inert and porous, obtainable in different sizes between 0.5 mm and 5 mm with a specific gravity of 2.2. The dry unit weight of the silica gel is 6–9 kN/m^3 and varies with its grain size, shape and packing. The particle shapes are the angular and rounded beads, while the saturated unit weight depends on the pore fluid. Silica gels are best utilised to model medium to coarse transparent sands (Sadek et al., 2002).

2.3. Fumed silica

Fumed silica is obtained from silica heated to high temperature and condensed from the vapour state in a powdery form (Gill and Lehane, 2001; Stanier, 2011). Its particle size is 0.014 μm with a surface area of (200 ± 25) m^2/g ; the bulk density is 36.8 kg/m^3 , and the particle density is 2200 kg/m^3 (Kelly, 2014b). The average compression index C_c of fumed silica is 10.5 and the swelling index C_s is 0.86 (Hird and Stanier, 2010).

2.4. Fused silica

Fused silica is a typical glass calcined by high temperature. It contains more than 99.9% of SiO_2 with a specific gravity of 2.21 and pH value of 6. The refractive index of fused silica varies from 1.55 to 1.4 through the transmission range of 0.16 μm –3 μm . The fused silica is available in different grades (Cao et al., 2011), consisting of solid particles without any pores inside it. It is colourless in appearance and suitable to model transparent sands (Sun and Liu, 2014).

2.5. Fused quartz

Fused quartz is a non-crystalline form of quartz sand manufactured by melting natural quartz crystals at 2000 $^\circ\text{C}$ and then cooling. The crystals become fused together and non-porous. The particles are hard, fractured and chemically resistant, and have good optical transmission (Ezzein and Bathurst, 2011b). The fused quartz has the shape, structural and chemical properties comparable to those of natural silicate sand (Guzman and Iskander, 2013). Its particles are angular with a void ratio range of 0.65–0.97 and refractive index of 1.458 at 25 $^\circ\text{C}$ (Kashuk et al., 2014).

2.6. Aquabeads

Aquabeads is a water absorbent polymer produced from a resin which is capable of absorbing water up to 200 times its own weight. The aquabeads is primarily designed for ground improvement purposes. It retains the absorbed water under pressure provided that the prevailing stress remains constant. It has a good stability under varying temperatures and excellent durability against heat (Tabe, 2009). Its refractive index is exactly that of water, i.e. 1.333, with a density of 980 g/L, and a pH value of 8.5–10. Although it appears yellowish when dry, it becomes very transparent after absorbing water (Lo et al., 2008a, 2009). It can be applied to modelling transparent clays, silts or fine sands depending on the type of aquabeads used (Lo et al., 2008b; Tabe et al., 2011).

2.7. Gelbeads

Gelbeads is also a water absorbent polymer produced from a resin. It has a porosity of about 0.45 and a hydraulic conductivity of 4.6–6.8 cm/s. It possesses a higher strength when compared to aquabeads (Ma et al., 2014).

3. Preparation and physical properties of transparent soil

After mixing the aggregate materials and the pore fluid, the resulting material is then put under vacuum for a period of time not less than 4 h to de-air the mix and improve its transparency. The soil becomes homogenous with invisible particles permitting the flow of light particles and internal visualisation within the soil upon saturation (Iskander, 2010). Fig. 1 is a freshly prepared transparent soil.

Transparent synthetic clay specimens display a high apparent void ratio because of the internal porosity of the aggregates. Interaggregate void ratio, e_i , which takes into account only the volume in between the aggregates, is more appropriate for geotechnical intents. In addition, the pore fluid does not completely evaporate in normal moisture content tests due to the higher boiling point. Hence, a correction factor j is often applied for this purpose (Iskander et al., 2002a, 2002b).

Some researchers have utilised test cards (Ni et al., 2010) or ophthalmic chart (Guzman et al., 2014a) to measure the degree of transparency of the soils while others simply viewed written signs



Fig. 1. A freshly prepared transparent soil.

such as “no smoking” from the transparent soil (Liu et al., 2003; Lo et al., 2009). A more autonomous qualitative method for assessing the transparency of transparent soils by means of modulation transfer function was presented by Black and Take (2015).

4. Factors affecting the degree of transparency

The transparency of the model (transparent soil and container) is influenced by variations in the refractive indices of the transparent soil and the containing vessel. The best material for the containing vessel is the one whose refractive index is proximate to that of the transparent soil (Ezzein and Bathurst, 2011b). The transparency is also influenced by slight variation in temperature (Ni et al., 2010; Stanier, 2011; Black and Tatari, 2015; Siemens et al., 2015), presence of impurities in the materials (Ezzein and Bathurst, 2011b), non-saturation of the transparent soil (Sadek et al., 2002; Iskander and Liu, 2010), size of the model (Sadek et al., 2003; Liu and Iskander, 2010), type of aggregate materials (Hird and Stanier, 2010; Kelly and Black, 2012), size of aggregate materials (Iskander et al., 1994; Sivakumar et al., 2007), and most importantly the imprecise matching of refractive indices of pore fluids and aggregate material (Sadek et al., 2003; Iskander and Liu, 2010; Zhao et al., 2010). The addition of reflective materials to give the needed texture for some measurements also impacts the transparency negatively (Ni et al., 2010; Stanier et al., 2012). When laser light source is being utilised in transparent soil model, the use of a dark room or temporary creation of dark background behind the testing is recommended to avoid reflection of light which also impacts negatively on the readings (Sadek et al., 2003).

5. Transparent synthetic clays

Two amorphous silica sample sizes of 1.4 μm and 25 μm with a concentration of 9% and 20% by weight, respectively, were matched with a 50:50 blend by weight of normal paraffinic solvent and colourless mineral oil to get a transparent clay with a refractive index of 1.447 at 25 °C. The density and viscosity of the pore fluid were 804 kg/m^3 and 5 mPa s, respectively. The amorphous silica was also matched with a brine mixture of calcium bromide and water to obtain a refractive index of 1.448 at 25 °C. The density and viscosity of the brine mixture were 1572 kg/m^3 and 3.6 mPa s, respectively (Iskander et al., 2003; Liu, 2009).

The fumed silica having aggregate sizes of 0.1–0.4 μm and concentration of 7% by weight was also added to pore fluid

containing 30:70 blend of mineral spirit and liquid paraffin to form transparent clay. The refractive index of the oil blend was 1.456 at 20 °C. The material dubbed Trinity College Dublin (TCD) clay has been widely utilised by many researchers to model transparent synthetic clay (Lehane and Gill, 2004; McKelvey et al., 2004; Sivakumar et al., 2007; Song et al., 2009). The TCD clay mixed with sand and pea gravel in the ratio of 5:4:1 has also been used to produce “artificial rammed earth” (Beckett and Augarde, 2011).

Another transparent clay composed of fumed silica was made with pore fluid consisting of paraffin oil and white oil in the ratio of 77:23, and the fumed silica was 6% by mass (Hird and Stanier, 2010; Kelly and Black, 2012; Forlati and Black, 2014; Stanier et al., 2014; Hussin, 2015). In summary, transparent clay made from fumed silica produced superior quality to that produced from amorphous silica based on visibility of test card reported by Stanier (2011) and hence it permitted the use of a model twice the size applied for amorphous silica (Stanier et al., 2012).

Geotechnical tests on transparent clays, including consolidation tests, consolidated undrained triaxial tests, and consolidated drained triaxial tests, were carried out by Iskander et al. (1994). Further tests on consolidation utilising both the one-dimensional (1D) and isotropic consolidation to obtain consolidation indices, compression isochromes, pore pressure dissipation, etc., were carried out by Liu et al. (2003). The study also obtained permeability properties of transparent soil using the constant head method. The conclusions from these studies confirm that the properties of transparent soil are in congruence with those of many natural clays or sand but not of any specific clay or sand (Iskander et al., 2002a). Fig. 2 shows a transparent soil after consolidation.

6. Transparent synthetic sands

Silica gel was the first material employed for making transparent sand. The gels in two sizes of 0.5–1.5 mm and 2–5 mm were employed. The pore fluid was either a mixture of mineral oil and paraffin or brine (Iskander et al., 1994). Then, it was used in conjunction with amorphous silica in order to create two layers of

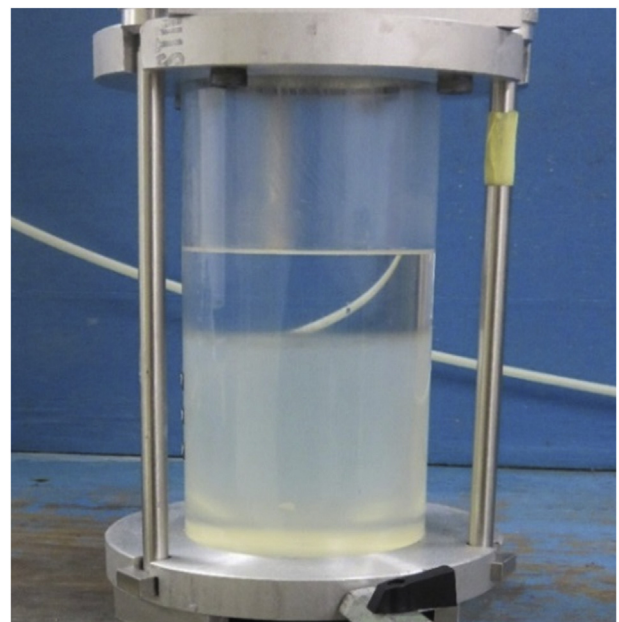


Fig. 2. Transparent soil after consolidation.

soils (sand and clay) in the same model. The resulting transparent sand has the same refractive index of 1.447 at 25 °C (Iskander et al., 2002b, 2003; Liu, 2009). The geotechnical properties of the transparent soil made from the silica gel was studied by Liu and Iskander (2010). Additionally, the dynamic properties such as damping ratio and small-strain shear modulus of transparent sand were examined by utilising resonant column tests in Zhao and Ge (2007, 2014).

Fused silica was also mixed with calcium bromide solution of 60% concentration to obtain a transparent sand with a refractive index of 1.4585. The sand was reported in a few studies (Liu et al., 2013; Liu and Sun, 2014; Sun and Liu, 2014), and the geotechnical properties of the resulting transparent soil were also studied by Cao et al. (2011).

Fused quartz has also been widely used to replicate transparent sand. It was matched with a blend of mineral oils in some studies (Ezzein and Bathurst, 2014; Chen et al., 2015; Ferreira and Zornberg, 2015) with emphasis on unsaturated applications (Siemens et al., 2011, 2012). The geotechnical properties of this material were assessed in Ezzein and Bathurst (2011b). In addition, a sucrose solution of 66.5% concentration was also added to fused quartz to produce a transparent sand with a refractive index of 1.458 at 23 °C (Guzman et al., 2014b). The sucrose solution is devoid of many setbacks of mineral oils and calcium bromide in aspects like transparency degradation, flammability, toxicity and stability (Zhao et al., 2010). The geotechnical properties of water based sucrose saturated fused quartz transparent sand were also investigated (Guzman and Iskander, 2013; Guzman et al., 2014a). Also, sodium iodide-thiosulfate solution has been recently matched with fused quartz to produce a transparent sand and its geotechnical properties were examined (Carvalho et al., 2015).

Aquabeads is a water-based material utilised to model transparent sands, and its pore fluid is 100% water (Lo et al., 2008a; Serrano et al., 2011). Its superiority over previously mentioned materials includes the ability to model large-scale models without degradation and suitability for multi-phase flow and geo-environmental problems (Lo et al., 2008b; Tabe et al., 2011). The hydraulic properties of aquabeads-based transparent sand have been investigated by Lo et al. (2008a, 2009). Gelbeads is another water-based material that has been recently utilised to model transparent fine gravel (Ma et al., 2014). A new synthetic material commercially termed LAPONITE RD has also been discovered to

hydrate and swell upon dispersal in water to form a transparent slurry. A comprehensive description of the material and its geotechnical properties have been carefully described by Wallace and Rutherford (2015). The material was employed in Chini et al. (2015) and Wallace et al. (2015b). Table 1 shows the aggregate material, pore fluid composition, and physical properties of transparent synthetic soils.

7. Displacement measurement using PIV in transparent synthetic soils

PIV was originally developed in the fluid mechanics field to determine the velocity of a fluid flow that is seeded with small particles (White and Bolton, 2004; Zhang et al., 2005). In recent years, the method has been utilised in geotechnical modelling using the terms such as block matching (Guler et al., 1999; Michalowski and Shi, 2003) and digital image correlation (Hall et al., 2010b; Houda et al., 2014; Suleiman et al., 2014). In PIV, successive images are compared through a precise identification of several minute parts in image space (pixel) and later converted to object space (in millimetres) (Sadek et al., 2003). Accurate calibration of PIV algorithm and the camera is essential in order for the system to process the images perfectly (Yuan et al., 2012; Zhao and Ge, 2008).

Internal deformations in a transparent soil slurry are measured by relating images of speckles generated both before and after soil deformation. This is obtained by employing the PIV combined with advanced photogrammetry and the use of laser light source to optically slice the soil. The speckle is the interface between the laser and the soil matrix (Kong et al., 2015).

GeoPIV is a MATLAB-based module developed specifically for geotechnical applications. In GeoPIV, image processing algorithms are written to apply the PIV principle to the images of soil. It correlates a time-lapse sequence of images to a reference image, and a grid of discrete patches is added to each image to track the displacement of these patches (White and Take, 2002).

In transparent soils, PIV along with close-range photography has been used to examine the spatial displacement field under a model footing (Iskander and Liu, 2010), effect of pile geometry on the interior displacement of soil surrounding the laterally loaded pile (Liu et al., 2010), deformation and failure behaviour of vibrated stone columns (Kelly and Black, 2012), movement of soil

Table 1
Composition and typical properties of transparent synthetic soils.

Aggregate material	Pore fluid composition	Properties			Reference
		Refractive index	Viscosity (mPa s)	Density (kg/m ³)	
Precipitated (amorphous) silica	Mineral oil	1.447 at 25 °C	5	804	Iskander et al. (1994)
	Paraffinic oil				
Silica gel	Calcium bromide solution	1.448 at 25 °C	3.6	1572	Iskander et al. (1994)
	Mineral oil	1.447 at 25 °C	5	804	Sadek et al. (2002)
	Paraffinic oil				
Fumed silica	Calcium bromide solution	1.448 at 25 °C	3.6	1572	Sadek et al. (2002)
	Paraffin	1.456 at 20 °C	8	817.1	Gill and Lehane (2001)
	Mineral spirits				
Fused silica	Paraffin	1.467 at 20 °C	7.7	^a 942	Black (2015)
	Technical white oil				
	Calcium bromide solution	1.4585 at 25 °C	2.8	1590	Liu et al. (2015)
Fused quartz	Mineral oils	1.4585 at 30 °C	7	1170	Sui et al. (2015)
	Mineral oils	1.4586 at 22 °C	10	838	Ezzein and Bathurst (2011b)
	Sucrose solution	1.458 at 23 °C	201	1340	Guzman et al. (2014b)
Aquabeads	Sodium iodide solution	1.458 at 22 °C	2.2	850	Carvalho et al. (2015)
	Water	1.333 at 20 °C	^b 0.9	980	Tabbe et al. (2011)

^a The datum comes from Stanier (2011).

^b The datum comes from Carvalho et al. (2015).

particles in two layers of soils under compaction (Beckett and Augarde, 2011), and some aspects of tunnelling (Ahmed and Iskander, 2011a, 2012; Sun and Liu, 2014). A comprehensive review on the implementation of PIV in geotechnical engineering is presented by Take (2015).

8. Applications of transparent soil in geotechnical physical models

8.1. Soil-structure interaction

Song et al. (2006) utilised the transparent synthetic clay to investigate the pullout bearing capacity and rotational behaviour of vertically driven plate anchor (VDPA) under different loading stages. Liu et al. (2010) also employed the synthetic transparent soil to study the effect of pile shape on the displacement of sand surrounding a laterally loaded pile. Stanier et al. (2012, 2014) studied the failure process of helical screw piles in the transparent clay, while Hird et al. (2011) investigated the vertical displacement field in the vicinity of piling auger using transparent clay. A model test using transparent soil to investigate the influence of a driving shoe and surface body ribs on the resistance during press-in installation of a tubular pile was presented by Forlati and Black (2014). Kong et al. (2015) studied the internal deformation in transparent sand caused by a pile moving under oblique pullout loads. Also, the strain path brought about by tube sampling in clay was examined in transparent soil (Hover et al., 2013a; Hover, 2014). The failure mechanism, surface heaving, internal field of deformation, load–displacement behaviour and ultimate oblique pulling resistances were obtained and the results are analogous with previously measured values in natural soils.

8.2. Tunnelling-induced movements

Experimental studies on the internal soil deformation ahead (Sun and Liu, 2014) and around (Liu and Sun, 2014) a tunnel boring machine were carried out by using transparent sand with an overburden cover of one and twice the tunnel diameter. Ahmed and Iskander (2011b) also focused their research on the subsurface settlement profiles above tunnels in transparent soil. The surface settlement profile and the dispersal of soil deformation within transparent soil mass near a tunnel were studied by Ahmed and Iskander (2011a). It was observed that the data obtained are in line with field measurements in which the trough width parameter is directly related to the depth of the tunnel and independent of the volume loss. Ahmed (2013) also presented the result of a study using a transparent soil to detect 3D deformations resulting from submerged cavities that led to a sinkhole.

8.3. Soil-geosynthetic interaction

Ezzein and Bathurst (2011a, 2014) developed a pullout box apparatus and a test method to investigate soil-geosynthetic interaction during pullout test using transparent synthetic soil. The apparatus possesses a glass bottom and the transparent soil permits real life photographs of the inserted geosynthetic specimen to be taken. The apparatus was embedded with a geogrid specimen up to 2 m in length and the specimens subjected to constant rate-of-displacement in-air testing and in-soil pullout testing under a range of normal stress. The results confirmed that the transparent soil is an excellent replica of natural soil for the investigation of soil–geogrid interaction (Bathurst and Ezzein, 2015). Ferreira and Zornberg (2015) also presented another transparent pullout testing device envisioned with the aim of investigating soil–

geogrid interaction under small displacements and strains using transparent synthetic soil.

8.4. Soil deformation measurements

Transparent synthetic soils were used to observe the displacements generated during the installation of cylindrical model piles in clay (Ni et al., 2010) and the undrained penetration of penetrometer in clay (Lehane and Gill, 2004). The results were compared favourably with those of already established shallow strain path method. Also, transparent soil was employed in the observation of soil deformation patterns around penetrometers (Gill and Lehane, 2001) where it was observed that the relocation of soil particle spread furthest in a ring surrounding the penetrometer and was not directly under its base (Toiya et al., 2007). An investigation into the effect of tube sampling using transparent soil was carried out. The centreline strain path of the sample during tube penetration was obtained and it was comparatively similar to that of an existing analytical model (Hover et al., 2013b). The transparent clay was also employed to determine the failure zone in a laboratory vane shear test (Hussin, 2015; Hussin et al., 2015; Wallace et al., 2015a).

The displacements and spatial deformation of soil under a model strip footing (shallow foundation) were examined in Liu (2009), Iskander and Liu (2010), and Liu and Iskander (2010). Creep was more pronounced in the resulting load–displacement performance of the footing (Iskander and Liu, 2010). The strain fields and deformation observed from the footing are similar to those from the natural soil (Liu, 2009; Liu and Iskander, 2010) and also the results from finite element modelling using Plaxis software (Iskander et al., 2003).

8.5. Projectile penetration in sand

A physical modelling approach of studying projectile penetration in sand was developed to quantify the response of granular soils to non-intrusive, high-speed penetration using transparent soil (Chen et al., 2014; Guzman et al., 2015). Rapid penetration into soil was studied using transparent soil in 1g model tests. Penetration tests were carried out by accelerating a conical rod into the transparent soil, and the images from the penetration were taken and analysed to obtain the soil velocity in the soil–projectile interaction zone (Chen et al., 2015). Another approach for quantitative analysis of dynamic penetration into granular media was also formulated using transparent synthetic soils (Omidvar et al., 2015b). A series of 80 penetration tests was carried out by shooting spherical projectiles at speeds of up to 200 m/s into dry and saturated transparent sands to determine the terminal depth of penetration (Guzman et al., 2014b). The penetrations were analysed using existing empirical and physical models and the results agreed with those of previously published models.

8.6. Grout permeation in soil and rock

Transparent synthetic soil was employed to visualise the permeation process in soil (Liu et al., 2013). A grout injection station with a constant pressure head was used to inject grout into the transparent soil model. Image processing techniques were utilised to separate the front of grout body. At the end, it was observed that the radius of grout body varies directly with the grouting time and this confirms Maag's permeation grouting formula. Transparent soils were also utilised to model saturated fractured rock mass (Sui and Qu, 2015), and the grout permeation process was visually observed (Liu et al., 2015; Sui et al., 2015).

8.7. Vibrated stone columns

Laboratory reduced scale test on vibrated stone column in transparent clay model was investigated (McKelvey et al., 2004; Sivakumar et al., 2007). It was discovered that bulging was prominent in long columns while punching was dominant in short columns. The bearing capacity of the transparent clay bed was enhanced by the existence of the columns. In another research, it was observed that isolated stone column fails via an end bearing, bulging and compressive failure in transparent clay soil (Kelly and Black, 2012).

8.8. 3D flow and geo-environmental contamination problems

One of the earliest uses of transparent soil in geotechnical physical model tests was to study the flow of prefabricated vertical drain (PVD) (Welker et al., 1999, 2000). Both full size and reduced size PVDs with diameters between 100 mm and 300 mm were utilised and the results closely matched those obtained from mathematical models and electrical analogue. Different types of aqueous-based aquabeads have been employed to simulate two-dimensional (2D) flow, contaminants separation and surfactant flushing (Lo et al., 2008a, 2008b, 2009; Tabe et al., 2011) and the conclusion was that it is the best transparent soil aggregate to visualise multi-phase systems. Transparent soils were also employed to visualise contaminants in different non-aqueous phase liquid (NAPL) systems, i.e. light NAPL (Serrano et al., 2011), and dense NAPL (Kashuk et al., 2014; Kashuk and Iskander, 2015). The overall results indicated that the transparent soil technique is adequate for visualising pollutant transport in porous media (Liu et al., 2005; Kashuk et al., 2013).

8.9. Centrifuge models

Transparent soils have been employed to observe the pullout bearing capacity and rotation of VDPA in a centrifuge (Song et al., 2006), also the loss in anchor embedment during keying with a suggestion of a simple relationship to assess the loss (Song et al., 2009). In addition, the loss in anchor embedment during keying of suction embedded plate anchors was investigated using transparent soil in a centrifuge study (Song and Hu, 2009). Black (2015) recently developed an experimental method incorporating transparent soil and laser aided imaging technology in a centrifuge modelling and validated it with a test on a strip foundation using the principle of “modelling of models”.

8.10. Unsaturated soils

Siemens et al. (2012) investigated the accuracy of unsaturated conductivity estimations for an unsaturated transparent soil which permits exact measurement of degree of saturation along the soil profile as well as the spatial measurements of conductivity. Transparent soil was also utilised to track the movement of the air–fluid interface during a drawdown test (Siemens et al., 2011) in a 2D infiltration experiment (Siemens and Oldroyd, 2014), to assess the influence of air entrapment on infiltration (Siemens et al., 2013, 2014). It was also used to accurately measure the moisture content in unsaturated soil column experiments (Peters et al., 2011).

9. Merits and prospects of transparent synthetic soils

The primary merit of transparent synthetic soils is the ability to substitute real soil in model tests with additional functionality of transparency which allows for the study of 3D deformation and flow in the soil continuum non-intrusively. Water-based

transparent soils are excellent materials for teaching geotechnical engineering to undergraduates and even elementary school students (Suescun-Florez et al., 2013). Aquabeads are specifically suitable for NAPL transport features in educational settings (Lo et al., 2009). The suitability of transparent soils in explaining triaxial test to students was emphasised by Sadek et al. (2002). When applied in conjunction with advanced photogrammetry and PIV (White et al., 2003; Take, 2015), transparent synthetic soils enable the quantification of the spatial deformation to be evaluated and provide a major break-through in geotechnical engineering physical model tests (Sadek et al., 2003; Ni et al., 2010; Peters et al., 2011; Stanier et al., 2012).

All the above-mentioned applications of transparent soils in geotechnical physical models are widely open for exploration of future researches. In addition, it is highly probable to adopt transparent soils in many other areas of geotechnical engineering researches based on their versatility and many of their excellent attributes earlier highlighted. The present authors are currently exploring soil-structure interactions by observing the spatial deformation of soil surrounding differently shaped axially loaded piles using transparent soil, PIV and close range photogrammetry.

10. Conclusions

Efforts to obtain non-intrusive measurement of deformation and spatial flow within soil mass prior to the advent of transparent soils have perceptible limitations. These limitations were overcome by the sterling qualities of transparent soils which facilitate real life visualisation of soil continuum and, at the same time, mimicking the geotechnical properties of natural soils. Many materials, mostly of silica background, have been matched with different pore fluids to obtain transparent clays and sands. The advent of transparent soils also catalysed the development of image measurements techniques and their adoption in geotechnical physical models. Transparent synthetic soils have found numerous applications in geotechnical physical models including soil–structure interaction, soil deformation measurement and multi-phase flow problems. The merits of transparent soil also include its appropriateness for teaching geotechnical engineering to undergraduate students.

This paper provides a concise compendium of previous researches in the field of transparent soils in order to enable prospective researchers to grasp the substance of past researches and possible future direction for relevant applications of transparent soils to attain their optimum applications in geotechnical physical models.

Conflict of interest

The authors wish to confirm that there are no known conflicts of interest associated with this publication and there has been no significant financial support for this work that could have influenced its outcome.

Acknowledgement

Appreciation goes to the Ministry of Education, Malaysia for the MTCF scholarship awarded to the first author.

References

- Ahmed M, Iskander M. Analysis of tunneling-induced ground movements using transparent soil models. *Journal of Geotechnical and Geoenvironmental Engineering* 2011a;137(5):525–35.
- Ahmed M, Iskander M. Evaluation of tunnel face stability by transparent soil models. *Tunnelling and Underground Space Technology* 2012;27(1):101–10.

- Ahmed M, Iskander M. Investigation of subsurface settlement profiles above tunnels using transparent soil models. In: 2011 Pan-Am CGS Geotechnical Conference; 2011. Toronto.
- Ahmed M, Iskander M. Transparent soil model tests and FE analyses on tunneling induced ground settlement. In: Geo-Frontiers 2011. American Society of Civil Engineers (ASCE); 2011c. p. 3381–90.
- Ahmed M, Iskander M. Tunnel face support pressure and associated risk. In: Georisk 2011. ASCE; 2011d. p. 939–47.
- Ahmed M. Application of digital image cross correlation to study sinkhole collapse. ISRN Soil Science 2013. <http://dx.doi.org/10.1155/2013/478547>.
- Ahmed M. Investigation of tunnel face stability and ground movements using transparent soil models. PhD Thesis. New York: Polytechnic Institute of New York University; 2011.
- Bathurst RJ, Ezzein FM. Geogrid and soil displacement observations during pullout using a transparent granular soil. *Geotechnical Testing Journal* 2015;38(5):673–85.
- Beckett CTS, Augarde CE. A novel image-capturing technique for the experimental study of soil deformations during compaction. *Geotechnical Testing Journal* 2011;34(6):571–8.
- Beckett CTS, Augarde CE. Development of microstructure in compacted earthen building materials. In: Alonso E, Gens A, editors. *Unsaturated soils*. London: Taylor & Francis Group; 2010. p. 139–44.
- Bergfelt A. Loading tests on clay. *Géotechnique* 1956;6(1):15–31.
- Black JA, Take WA. Quantification of optical clarity of transparent soil using the modulation transfer function. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140216>.
- Black JA, Tatarı A. Transparent soil to model thermal processes: an energy pile example. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140215>.
- Black JA. Centrifuge modelling with transparent soil and laser aided imaging. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140231>.
- Bransby PL, Milligant GWE. Soil deformations near cantilever sheet pile walls. *Géotechnique* 1975;25(2):175–95.
- Cao Z, Liu J, Liu H. Transparent fused silica to model natural sand. In: 2011 Pan-Am CGS Geotechnical Conference; 2011. Toronto.
- Carvalho T, Suescun-Florez E, Omidvar M, Iskander M. A nonviscous water-based pore fluid for modeling with transparent soils. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140278>.
- Cave A, Roslyakov S, Iskander M, Bless S. Design and performance of a laboratory pneumatic gun for soil ballistic applications. *Experimental Techniques* 2014. <http://dx.doi.org/10.1111/ext.12091>.
- Chen Z, Omidvar M, Iskander M, Bless S. Modelling of projectile penetration using transparent soils. *International Journal of Physical Modelling in Geotechnics* 2014;14(3):68–79.
- Chen Z, Omidvar M, Iskander M, Bless S. Visualizing the fundamental physics of rapid earth penetration, using transparent soils. In: Iskander M, Suleiman MT, Anderson JB, Laefer DF, editors. *International Foundations Congress and Equipment Expo 2015*. ASCE; 2015. p. 2617–26.
- Chini CM, Wallace JF, Rutherford CJ, Peschel JM. Shearing failure visualization via particle tracking in soft clay using a transparent soil. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140210>.
- Desrues J, Chambon R, Mokni M, Mazerolle F. Void ratio evolution inside shear bands in triaxial sand specimens studied by computed tomography. *Géotechnique* 1996;46(3):529–46.
- Ezzein F, Bathurst RJ. Development of a geosynthetic pullout test apparatus with transparent granular soil. In: 2011 Pan-Am CGS Geotechnical Conference; 2011. Toronto.
- Ezzein FM, Bathurst RJ. A new approach to evaluate soil-geosynthetic interaction using a novel pullout test apparatus and transparent granular soil. *Geotextiles and Geomembranes* 2014;42(3):246–55.
- Ezzein FM, Bathurst RJ. A transparent sand for geotechnical laboratory modeling. *Geotechnical Testing Journal* 2011b;34(6):590–601.
- Ferreira JAZ, Zornberg JG. A transparent pullout testing device for 3D evaluation of soil-geogrid interaction. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140198>.
- Ferreira JAZ. Evaluation of soil-geogrid interaction at different load levels using pullout tests and transparent soil. PhD Thesis. The University of Texas at Austin; 2013.
- Forlani G, Black JA. Impact of pile geometry on the installation of open-ended press-in piles. In: Gaudin C, White D, editors. *Proceedings of the 8th International Conference on Physical Modeling in Geotechnics*. London: Taylor & Francis Group; 2014. p. 763–9.
- Gill DR, Lehane BM. An optical technique for investigating soil displacement patterns. *Geotechnical Testing Journal* 2001;24(3):324–9.
- Guler M, Edil TB, Bosscher PJ. Measurement of particle movement in granular soils using image analysis. *Journal of Computing in Civil Engineering* 1999;13(2):116–22.
- Guzman IL, Iskander M, Bless S, Qi CG. Terminal depth of penetration of spherical projectiles in transparent granular media. *Granular Matter* 2014b;16(6):829–42.
- Guzman IL, Iskander M, Bless S. Observations of projectile penetration into a transparent soil. *Mechanics Research Communications* 2015;70:4–11.
- Guzman IL, Iskander M, Suescun-Florez E, Omidvar M. A transparent aqueous-saturated sand surrogate for use in physical modeling. *Acta Geotechnica* 2014a;9(2):187–206.
- Guzman IL, Iskander M. Geotechnical properties of sucrose-saturated fused quartz for use in physical modeling. *Geotechnical Testing Journal* 2013;36(3):448–54.
- Guzman IL. Development of a transparent soil for simulating projectile penetration into sands. PhD Thesis. New York: Polytechnic Institute of New York University; 2014.
- Hall SA, Bornert M, Desrues J, Pannier Y, Lenoir N, Viggiani G, Bésuelle P. Discrete and continuum analysis of localised deformation in sand using X-ray μ CT and volumetric digital image correlation. *Géotechnique* 2010a;60(5):315–22.
- Hall SA, Muir Wood D, Ibraim E, Viggiani G. Localised deformation patterning in 2D granular materials revealed by digital image correlation. *Granular Matter* 2010b;12(1):1–14.
- Hird CC, Ni Q, Guymer I. Physical modelling of deformations around piling augers in clay. *Géotechnique* 2011;61(11):993–9.
- Hird CC, Stanier SA. Modelling helical screw piles in clay using a transparent soil. In: Springman S, Laue J, Seward L, editors. *Physical modelling in geotechnics*. London: Taylor & Francis Group; 2010. p. 769–74.
- Houda M, Jenck O, Emeriault F. Physical evidence of the effect of vertical cyclic loading on soil improvement by rigid piles: a small-scale laboratory experiment using digital image correlation. *Acta Geotechnica* 2014;11(2):325–46. <http://dx.doi.org/10.1007/s11440-014-0350-z>.
- Hover E, Ni Q, Guymer I. Physical modelling of tube sampling disturbance in clays. In: The 5th International Young Geotechnical Engineers' Conference – 5th iYGEC. IOS Press; 2013a. p. 415–8.
- Hover E. The investigation of tube sampling disturbance using transparent soil and particle image velocimetry. PhD Thesis. University of Warwick; 2014.
- Hover ED, Ni Q, Guymer I. Investigation of centreline strain path during tube penetration using transparent soil and particle image velocimetry. *Géotechnique Letters* 2013b;3(2):37–41.
- Hunter RP. Development of transparent soil testing using planar laser induced fluorescence in the study of internal erosion of filters in embankment dams. MS Thesis. University of Canterbury; 2012.
- Hussin N, Rashid ASA, Mohamad H, Samuri AR. Determination of failure zone of vane shear test using artificial transparent soil. *Electronic Journal of Geotechnical Engineering* 2015;20(15):6515–26.
- Hussin N. Determination of failure zone of vane shear test using artificial transparent soil. MS Thesis. Johor Bahru, Malaysia: Universiti Teknologi Malaysia; 2015.
- Iskander M, Lai J, Oswald CJ, Mannheimer RJ. Development of a transparent material to model the geotechnical properties of soils. *Geotechnical Testing Journal* 1994;17(4):425–33.
- Iskander M, Liu J, Sadek S. Transparent amorphous silica to model clay. *Journal of Geotechnical and Geoenvironmental Engineering* 2002a;128(3):262–73.
- Iskander M, Liu J. Spatial deformation measurement using transparent soil. *Geotechnical Testing Journal* 2010;33(4):314–21.
- Iskander M, Sadek S, Liu J. Soil structure interaction in transparent synthetic soils using digital image correlation. In: TRB session on recent advances in modeling techniques in geomechanics (Committee A2K05); 2003. Paper No.: 03–2360.
- Iskander M. Modelling with transparent soils: visualising soil structure interaction and multi phase flow, non-intrusively. Springer; 2010.
- Iskander MG, Sadek S, Liu J. Optical measurement of deformation using transparent silica gel to model sand. *International Journal of Physical Modelling in Geotechnics* 2002b;2(4):13–26.
- Kashuk S, Iskander M. Reconstruction of three dimensional convex zones using images at model boundaries. *Computers & Geosciences* 2015;78:96–109.
- Kashuk S, Mercurio SR, Iskander M. Ideal color space component for reconstruction of contamination plumes. *Journal of Flow Visualization and Image Processing* 2013;20(3):125–59.
- Kashuk S, Mercurio SR, Iskander M. Methodology for optical imaging of NAPL 3D distribution in transparent porous media. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140153>.
- Kashuk S, Mercurio SR, Iskander M. Visualization of dyed NAPL concentration in transparent porous media using color space components. *Journal of Contaminant Hydrology* 2014;162–163:1–16.
- Kelly P, Black JA. Optimisation of stone column design using transparent soil and particle image velocimetry (PIV). In: *International Symposium on Ground Improvement*, Brussels, Belgium. International Society for Soil Mechanics and Geotechnical Engineering; 2012. p. 443–52.
- Kelly P. Physical modelling of vibro stone column foundations using transparent soil. In: *Proceedings of the 13th BGA Young Geotechnical Engineers' Symposium*, Manchester, UK; 2014. p. 5–6.
- Kelly P. Soil structure interaction and group mechanics of vibrated stone column foundation. PhD Thesis. University of Sheffield; 2014b.
- Kharchafi M, Dysli M. Study of soil geotextile interaction by an X-ray-method. *Geotextiles and Geomembranes* 1993;12(4):307–25.
- Kirkpatrick W, Belshaw D. On the interpretation of the triaxial test. *Géotechnique* 1968;18(3):336–50.
- Kong CQ, Cao ZH, Zhou H, Sun XJ. Analysis of piles under oblique pullout load using transparent-soil models. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140109>.
- Lehane BM, Gill DR. Displacement field induced by penetrometer installation in an artificial soil. *International Journal of Physical Modelling in Geotechnics* 2004;4(1):25–36.
- Liu J, Gao Y, Sui W. Visualization of grout permeation inside transparent soil. In: *Challenges and recent advances in geotechnical and seismic research and practices*. ASCE; 2013. p. 188–94.

- Liu J, Iskander M, Sadek S. Consolidation and permeability of transparent amorphous silica. *Geotechnical Testing Journal* 2003;26(4):390–401.
- Liu J, Iskander M, Tabe K, Kosterelos K. Flow visualization using transparent synthetic soils. In: Proceedings of the 16th International Conference on Soil Mechanics and Geotechnical Engineering, Osaka, Japan; 2005. p. 2411–4.
- Liu J, Iskander M. Modelling capacity of transparent soil. *Canadian Geotechnical Journal* 2010;47(4):451–60.
- Liu J, Liu M, Gao H. Influence of pile geometry on internal sand displacement around a laterally loaded pile using transparent soil. In: GeoShanghai International Conference. ASCE; 2010. p. 104–10.
- Liu J, Sui W, Gao Y. Visualization of chemical grout permeation in transparent soil. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140202>.
- Liu J, Sun J. Internal sand deformation around a tunnel boring machine. In: Advances in transportation geotechnics and materials for sustainable infrastructure. ASCE; 2014. p. 65–72.
- Liu J. Visualization of 3-D deformations using transparent “soil” models. PhD Thesis. New York: Polytechnic University of New York; 2003.
- Liu J. Visualizing 3-D internal soil deformation using laser speckle and transparent soil techniques. In: Characterization, modeling, and performance of geomaterials. ASCE; 2009. p. 123–8.
- Liu JY, Iskander M. Adaptive cross correlation for imaging displacements in soils. *Journal of Computing in Civil Engineering* 2004;18(1):46–57.
- Lo H, Iskander M, Tabe K. Modeling of 2D flow using transparent aquabeads. In: GeoCongress 2008. ASCE; 2008a. p. 838–45.
- Lo H, Tabe K, Iskander M, Yoon S. A transparent water-based polymer for simulating multiphase flow. *Geotechnical Testing Journal* 2009;33(1). <http://dx.doi.org/10.1520/GTJ102375>.
- Lo H, Tabe K, Iskander M, Yoon S. Modeling of multi-phase flow and surfactant flushing using transparent aquabeads. In: GeoCongress 2008. ASCE; 2008b. p. 846–53.
- Lwti NK. Assessment of disturbance impact of hydraulic jack in pile penetration using artificial transparent clay. MS Thesis. Johor Bahru, Malaysia: Universiti Teknologi Malaysia; 2015.
- Ma Y, Yan G, Scheuermann A, Li L, Galindo-Torres SA, Bringemeier D. Discrete microbubbles flow in transparent porous media. In: Unsaturated Soils: Research and Applications—Proceedings of the 6th International Conference on Unsaturated Soils (UNSAT 2014). Leiden, Netherlands: CRC Press/A.A. Balkema; 2014. p. 1219–23.
- Ma Y. Preferential flow paths in a complex coal seam system. PhD Thesis. Brisbane, Queensland, Australia: The University of Queensland; 2015.
- Mannheimer RJ, Oswald CJ. Development of transparent porous-media with permeabilities and porosities comparable to soils, aquifers, and petroleum reservoirs. *Ground Water* 1993;31(5):781–8.
- McKelvey D, Sivakumar V, Bell A, Graham J. Modelling vibrated stone columns in soft clay. Proceedings of the Institution of Civil Engineers—Geotechnical Engineering 2004;157(3):137–49.
- Michalowski RL, Shi L. Deformation patterns of reinforced foundation sand at failure. *Journal of Geotechnical and Geoenvironmental Engineering* 2003;129(5):439–49.
- Nemat-Nasser S, Okada N. Radiographic and microscopic observation of shear bands in granular materials. *Géotechnique* 2001;51(9):753–65.
- Ngan-Tillard DJM, Cheng XH, Nes JV, Zitha PLJ. Application of X-ray computed tomography to cone penetration tests in sands. In: Site characterization and modeling. ASCE; 2005. p. 1–12.
- Ni Q, Hird CC, Guymier I. Physical modelling of pile penetration in clay using transparent soil and particle image velocimetry. *Géotechnique* 2010;60(2):121–32.
- Oldroyd CP. Experimental investigation of two-dimensional flow phenomena using unsaturated transparent soil. MS Thesis. Royal Military College of Canada; 2011.
- Omidvar M, Malioche JD, Bless S, Iskander M. Phenomenology of rapid projectile penetration into granular soils. *International Journal of Impact Engineering* 2015a;85:146–60.
- Omidvar M, Malioche JD, Chen Z, Iskander M, Bless S. Visualizing kinematics of dynamic penetration in granular media using transparent soils. *Geotechnical Testing Journal* 2015b;38(5). <http://dx.doi.org/10.1520/GTJ20140206>.
- Paniagua P, Ando E, Silva M, Emdal A, Nordal S, Viggiani G. Soil deformation around a penetrating cone in silt. *Géotechnique Letters* 2013;3(4):185–91.
- Peters SB, Siemens G, Take WA. Characterization of transparent soil for unsaturated applications. *Geotechnical Testing Journal* 2011;34(5):445–56.
- Sadek S, Iskander M, Liu J. Accuracy of digital image correlation for measuring deformations in transparent media. *Journal of Computing in Civil Engineering* 2003;17(2):88–96.
- Sadek S, Iskander M, Liu J. Geotechnical properties of transparent silica. *Canadian Geotechnical Journal* 2002;39(1):111–24.
- Sadek SG. Soil structure interaction in transparent synthetic soils using digital image correlation. PhD Thesis. New York: Polytechnic University; 2002.
- Serrano RF, Iskander M, Tabe K. 3D contaminant flow imaging in transparent granular porous media. *Géotechnique Letters* 2011;1(3):71–8.
- Serrano RF. Geotechnical analysis of contaminated sand by light non-aqueous phase liquids. PhD Thesis. Universidad Politécnica de Madrid; 2012.
- Shi B, Murakami Y, Wu Z, Chen J, Inyang H. Monitoring of internal failure evolution in soils using computerized X-ray tomography. *Engineering Geology* 1999;54(3–4):321–8.
- Siemens G, Mumford K, Kucharczuk D. Characterization of transparent soil for use in heat transport experiments. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140218>.
- Siemens G, Peters S, Take WA. Analysis of a drawdown test displaying the use of transparent soil in unsaturated flow applications. In: Proceedings of the 5th International Conference on Unsaturated Soils. London: Taylor & Francis Group; 2011. p. 733–8.
- Siemens G, Peters S, Take WA. Comparison of confined and unconfined infiltration in transparent porous media. *Water Resources Research* 2013;49(2):851–63.
- Siemens G, Take A, Peters S. Examination of unsaturated conductivity curves using transparent soil. In: Mancuso C, Jommi C, D’Onza F, editors. *Unsaturated soils: research and applications*. Springer; 2012. p. 213–8.
- Siemens G, Take WA, Peters S. Physical and numerical modeling of infiltration including consideration of the pore-air phase. *Canadian Geotechnical Journal* 2014;51(12):1475–87.
- Siemens GA, Oldroyd CP. Comparison of 1D and 2D infiltration results using unsaturated transparent soil. In: Khalili N, Russell AR, Khoshghalb A, editors. *Unsaturated soils: research & applications*. London: Taylor & Francis Group; 2014. p. 1085–9.
- Sills LAK. Investigation of gas breakthrough of two-dimensional capillary barriers using transparent soil. MS Thesis. Queen’s University; 2015.
- Sivakumar V, Glynn D, Black J, McNeill J. A laboratory model study of the performance of vibrated stone columns in soft clay. In: Proceedings of the 14th European Conference on Soil Mechanics and Geotechnical Engineering. Rotterdam, Netherlands: Millpress; 2007. p. 1545–50.
- Song Z, Hu Y, O’Loughlin C, Wang D. Pullout capacity and rotational behaviour of square anchors. In: Proceedings of the 6th International Conference on Physical Modelling in Geotechnics. London: Taylor & Francis Group; 2006. p. 1325–31.
- Song Z, Hu Y, O’Loughlin C, Randolph M. Loss in anchor embedment during plate anchor keying in clay. *Journal of Geotechnical and Geoenvironmental Engineering* 2009;135(10):1475–85.
- Song Z, Hu Y. Plate anchor keying under inclined pullout in clay: observation and estimation. In: Proceedings of the 17th International Conference on Soil Mechanics and Geotechnical Engineering. Amsterdam, Netherlands: IOS Press; 2009. p. 708–11.
- Song Z. Pullout behaviour of suction embedded plate anchors in clay. PhD Thesis. Curtin University of Technology; 2008.
- Stanier SA, Black J, Hird CC. Enhancing accuracy and precision of transparent synthetic soil modelling. *International Journal of Physical Modelling in Geotechnics* 2012;12(4):162–75.
- Stanier SA, Black J, Hird CC. Modelling helical screw piles in soft clay and design implications. Proceedings of the Institution of Civil Engineers—Geotechnical Engineering 2014;167(5):447–60.
- Stanier SA. Modelling the behaviour of helical screw piles. PhD Thesis. University of Sheffield; 2011.
- Suescun-Florez E, Iskander M, Kapila V, Cain R. Geotechnical engineering in US elementary schools. *European Journal of Engineering Education* 2013;38(3):300–15.
- Sui W, Qu H, Gao Y. Modeling of grout propagation in transparent replica of rock fractures. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140188>.
- Sui W, Qu H. Simulation of contaminant transportation in saturated transparent rock fractures. In: Proceedings of the 10th International Conference on Acid Rock Drainage & IMWA Annual Conference (ICARD-IMWA 2015); 2015. p. 490–6.
- Suleiman M, Ni L, Helm J, Raich A. Soil-pile interaction for a small diameter pile embedded in granular soil subjected to passive loading. *Journal of Geotechnical and Geoenvironmental Engineering* 2014;140(5). [http://dx.doi.org/10.1061/\(ASCE\)GT.1943-5606.0001081](http://dx.doi.org/10.1061/(ASCE)GT.1943-5606.0001081).
- Sun J, Liu J. Visualization of tunnelling-induced ground movement in transparent sand. *Tunnelling and Underground Space Technology* 2014;40:236–40.
- Tabe K, Iskander M, Honma S. Transparent aquabeads to visualize flow in porous material. *Advanced Materials Research* 2011;2602–5. CEAM 2011.
- Tabe K. Aquabeads to model the geotechnical behaviour of natural soils. PhD Thesis. New York: Polytechnic Institute of New York University; 2009.
- Take WA, Bolton MD. The use of centrifuge modelling to investigate progressive failure of overconsolidated clay embankments. In: *Constitutive and centrifuge modelling: two extremes*. Lisse, Netherlands: Swets & Zeitlinger; 2002. p. 191–7.
- Take WA. Thirty-sixth Canadian Geotechnical Colloquium: advances in visualization of geotechnical processes through digital image correlation. *Canadian Geotechnical Journal* 2015;52(9):1199–220.
- Tatari A. Interaction behaviour of soil and geo-grid reinforcement. In: Proceedings of the 13th BGA Young Geotechnical Engineers’ Symposium; 2014. p. 73–4. Manchester, UK.
- Toiya M, Hettlinga J, Losert W. 3D imaging of particle motion during penetrometer testing – from microscopic to macroscopic soil mechanics. *Granular Matter* 2007;9(5):323–9.
- Wallace JF, Chini CM, Rutherford CJ, Peschel JM. Visualizing the failure surface of a laboratory vane shear in soft clay using transparent surrogate soil. In: Meyer V, editor. *Frontiers in offshore geotechnics III*. London: Taylor & Francis Group; 2015a. p. 1227–32.

- Wallace JF, Chini CM, Rutherford CJ, Peschel JM. Visualizing the shallow failure mechanism of the T-bar penetrometer. In: Iskander M, Suleiman MT, Anderson JB, Laefer DF, editors. Proceedings of the International Foundations Congress and Equipment Expo 2015. ASCE; 2015b. p. 330–8.
- Wallace JF, Rutherford CJ. Geotechnical properties of LAPONITE RD®. *Geotechnical Testing Journal* 2015;38(5). <http://dx.doi.org/10.1520/GTJ20140211>.
- Welker AL, Bowders JJ, Gilbert RB. Applied research using a transparent material with hydraulic properties similar to soil. *Geotechnical Testing Journal* 1999;22(3):266–70.
- Welker AL, Gilbert RB, Bowders JJ. Using a reduced equivalent diameter for a pre-fabricated vertical drain to account for smear. *Geosynthetics International* 2000;7(1):47–57.
- White DJ, Bolton MD. Displacement and strain paths during plane-strain model pile installation in sand. *Géotechnique* 2004;54(6):375–97.
- White DJ, Take WA, Bolton MD, Munachen SE. A deformation measurement system for geotechnical testing based on digital imaging, close-range photogrammetry, and PIV image analysis. In: Proceedings of the 15th International Conference on Soil Mechanics and Geotechnical Engineering. Rotterdam: A.A.Balkema; 2001a. p. 539–42.
- White DJ, Take WA, Bolton MD. Discussion of “Accuracy of digital image correlation for measuring deformations in transparent media” by Samer Sadek, Magued G. Iskander, and Jinyuan Liu. *Journal of Computing in Civil Engineering* 2005;19(2):217–9.
- White DJ, Take WA, Bolton MD. Measuring soil deformation in geotechnical models using digital images and PIV analysis. In: Proceedings of the 10th International Conference on Computer Methods and Advances in Geomechanics. Rotterdam: A.A. Balkema; 2001b. p. 997–1002.
- White DJ, Take WA, Bolton MD. Soil deformation measurement using particle image analysis (PIV) and photogrammetry. *Géotechnique* 2003;53(7):619–31.
- White DJ, Take WA. GeoPIV: particle image velocimetry (PIV) software for use in geotechnical testing. Technical Report. University of Cambridge; 2002.
- Wong RCK. Mobilized strength components of Athabasca oil sand in triaxial compression. *Canadian Geotechnical Journal* 1999;36(4):718–35.
- Yuan BX, Liu JY, Chen WW, Xia KW. Development of a robust Stereo-PIV system for 3-D soil deformation measurement. *Journal of Testing and Evaluation* 2012;40(2):256–64.
- Zhang Y, Tan T, Leung C. Application of particle imaging velocimetry (PIV) in centrifuge testing of uniform clay. *International Journal of Physical Modelling in Geotechnics* 2005;5(1):15–26.
- Zhao HH, Ge L, Luna R. Low viscosity pore fluid to manufacture transparent soil. *Geotechnical Testing Journal* 2010;33(6):463–8.
- Zhao HH, Ge L. Camera calibration using neural network for image-based soil deformation measurement systems. *Geotechnical Testing Journal* 2008;31(2):192–7.
- Zhao HH, Ge L. Dynamic properties of transparent soil. In: *Dynamic response and soil properties*. ASCE; 2007. p. 1–9.
- Zhao HH, Ge L. Investigation on the shear moduli and damping ratios of silica gel. *Granular Matter* 2014;16(4):449–56.
- Zhao HH. Development and assessment of transparent soil and particle image velocimetry in dynamic soil-structure interaction. PhD Thesis. University of Missouri-Rolla; 2007.



Abideen Adekunle Ganiyu is a PhD candidate in Department of Geotechnics and Transportation, Faculty of Civil Engineering, Universiti Teknologi Malaysia (UTM), Johor, Malaysia. His research covers unit gravity modelling of pile foundation, visualisation of pile penetration in transparent synthetic soil using advanced photogrammetry and particle image velocimetry, and 3D numerical modelling of pile foundation. He had both Diploma and Bachelor degrees in Civil Engineering from the Polytechnic Ibadan, Nigeria and Ladoko Akintola University of Technology, Ogbomoso, Nigeria, respectively. He obtained his Master degree in Construction Engineering and Management from King Fahd University of Petroleum & Minerals, Dhahran, Saudi Arabia. He is a certified Project Management Professional (PMP), a corporate member of the Nigerian Society of Engineers (NSE), and a registered Engineer with the Council for the Regulation of Engineering in Nigeria (COREN).



Dr. Ahmad Safuan A. Rashid joined UTM as an academic staff in December 2005 after completing his Master degree in the same institution. He obtained his PhD degree from the University of Sheffield in the UK in September 2011. His expertise is on small-scale physical modelling and he has conducted a study on behaviour of failure on Deep Mixing (DM) Method as a foundation. He teaches Soil Mechanics and laboratory subjects for undergraduates. He has also supervised more than 40 students cutting across Undergraduate, Master and PhD levels.



Dr. Mohd Hanim Osman is a professor at the Faculty of Civil Engineering, UTM. He is active in research and consultancies in specialised areas related to construction, in particular analysis, design and assessment of building. Currently, he is the Director of the Forensic Engineering Centre, and fellow member of the Construction Research Centre, UTM. He holds B.Eng. (Civil) (Hon.) from UTM, M.Sc. (Struct.) from University of Surrey, and PhD (Struct.) from University of Wales, Cardiff, UK. He is an active member of Malaysian Structural Steel Association, a member of the Institute of Engineers Malaysia and Professional Engineer with Board of Engineers Malaysia. He was the Deputy Dean (Academic), and the Technical Manager of Civil Engineering Testing Unit, Faculty of Civil Engineering. He is a qualified internal auditor for Laboratory Accreditation ISO 17025, and also for EAC-BEM Academic Programme Accreditation. His current major researches are on affordable building construction system, and the design of co-curriculum programme for student holistic development.