



GHGT-12

Impact of CO₂ impurity on CO₂ compression, liquefaction and transportation

Wetenhall, B.^{a*}, Aghajani, H.^a, Chalmers, H.^b, Benson, S.D.^a, Ferrari, M-C.^b, Li, J.^b, Race, J.M.^a, Singh, P.^c, Davison, J.^c

^aNewcastle University, School of Marine Science and Technology, Newcastle upon Tyne NE1 7RU, UK.

^bUniversity of Edinburgh, School of Engineering, Edinburgh EH9 3JL, UK.

^cIEA Greenhouse Gas R&D Programme, Pure Offices, Cheltenham Office Park, Hatherley Lane, Cheltenham, UK

Abstract

The impurities present in carbon dioxide (CO₂) streams for Carbon Capture and Storage (CCS) schemes are extremely important for CO₂ pipeline and ship transportation affecting, for instance, the range of operation, safety considerations, fracture, cracking, corrosion control, dispersion in the event of a release, fluid density, operating pressure and temperature and the quantity of CO₂ that can be transported. The range and levels of potential impurities present in captured CO₂ from CO₂ capture facilities will differ between sources and also between the capture technologies installed at the CO₂ emission sources. However, the potential CO₂ specifications that could enter the transport and storage systems, particularly from industrial sources, remain relatively under-researched. Consequently, the effect of these potential impurities in CO₂ streams on CO₂ transportation also needs to be understood. This paper summarises the main findings of an IEAGHG study, “Impact of CO₂ Impurity on CO₂ Compression, Liquefaction and Transportation”, commissioned to identify potential impurities and address the consequences of their impact on CO₂ transportation.

© 2014 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/3.0/>).

Peer-review under responsibility of the Organizing Committee of GHGT-12

Keywords: Impurity; CO₂ Compression; CO₂ liquefaction; Transportation

* Corresponding author. Tel.: +44-191-2085862; fax: +44-191-2225491.
E-mail address: ben.wetenhall@newcastle.ac.uk

1. Introduction

The impurities present in CO₂ streams are extremely important for CO₂ pipeline and ship transportation affecting, amongst other things, the range of operation, safety considerations, fracture control, cracking, corrosion control, dispersion in the event of a release, fluid density, operating pressure and temperature and the quantity of CO₂ that can be transported. The range and levels of potential impurities emitted from Carbon Capture and Storage (CCS) facilities will differ between different power plant and industrial sources and also between the capture technologies installed at the source. However, the potential CO₂ specifications that could enter the transport and storage systems, particularly from industrial sources, remain relatively under-researched. Therefore, it is of critical importance to improve the understanding of the effect of these potential impurities, which have not been widely studied, on CO₂ compression, liquefaction and transportation in relevant conditions.

This paper, reviews the CO₂ impurities that could be present from different capture technologies and develops twelve CO₂ scenario compositions for analysis. The physical and transport properties of the scenarios are evaluated including the bubble point, density, Joule-Thomson coefficients, speed of sound, viscosity and thermal conductivity. The effects of the impurities on CO₂ compression in terms of performance and energy requirements are also explored. Additionally, this work identifies the effects of impurities on the operating conditions for both pipeline and ship based transportation. Finally, the effect of the impurities on the selection of materials is discussed.

2. Review of possible impurities present in captured CO₂

Although there is some public domain information in the literature on impurities that are likely to enter CO₂ transport systems (e.g.[1]-[11]), it is also widely acknowledged that state-of-the-art understanding in industry and from pilot plant operations is not fully reflected in public domain literature. The project team have, therefore, combined a critical review of the literature with a questionnaire used to elicit feedback from relevant experts that is not readily available in the public domain to explore possible impurities that may be present in captured CO₂. This section provides an overview of the scenarios developed for use in this study based on this work.

Two general types of impurities can be considered. These are (1) those that may be present at %vol levels and, hence, have an impact on thermodynamic properties etc and (2) those that are likely to be present only at much lower (e.g. ppm) levels, but that may have important impacts on material performance, safety etc. The primary purpose of this section is to identify a realistic set of potential impurities present at the %vol level in CO₂ produced by a range of CO₂ capture processes¹.

Although the scope of work is not exhaustive, it does aim to be sufficiently comprehensive to allow a range of plausible “worst case” scenarios that could be faced by future CO₂ transport systems operating within CCS projects to be identified. It should be noted that this section does not take into account downstream constraints that may limit pipeline specifications^{2†}. The remainder of this paper will explore the implications of potential impurities being present in CO₂ entering CO₂ transport systems, so that better informed judgements can be made on which impurities, if any, need to be removed before CO₂ transport.

Table 1 presents the scenarios used in the remainder of this study, building on the work outlined above. The intention of this work is to provide scenarios that are “worst case” but also plausible given current understanding of likely constraints on CO₂ transport and storage systems. In most cases, values are similar to those reported in the review of possible impurities present in captured CO₂ carried out by the project team, but indicative values have been selected since these scenarios are intended to indicate illustrative CO₂ compositions entering CCS transport and storage systems. This approach also increases potential for comparison between scenarios (e.g. where identical CO₂ purity is obtained, but the impurities are different).

¹The compositions reported and discussed in this section are typically provided on a dry basis.

²For example, at the time of writing, there is an emerging body of work on acceptable O₂ levels in the sub-surface that may lead to substantially tighter CO₂ transport specifications that would not be met by some of the scenarios considered in this study.

In many cases, it is possible to improve CO₂ purity produced in the CO₂ capture scenarios considered in this study. There is, however, often expected to be a cost trade-off between improving purity of CO₂ entering CO₂ transport systems rather than designing a CO₂ transport (and storage) system that is able to handle some impurity in the CO₂. Overall, this study should make a substantial contribution to the evidence base that can be used by CCS project developers to determine which approaches are best to manage CO₂ impurities within CCS systems.

Table 1. CO₂ purity scenarios for developed in this study.

Scenario number	Scenario	Component (all values % by volume)							
		CO ₂	O ₂	N ₂	AR	H ₂	CO	H ₂ S	CH ₄
1	REF	100							
2	CO2 MEM1	93		7					
3	CO2 MEM2	97	3						
4	ADS1	90	1	9					
5	ADS2	95		5					
6	Ca LOOP (also OXY-like)	95	1	2	2				
7	OXY1	90	6	3	1				
8	OXY2	96.5	0.5	2.5	0.5				
9	PRE	98				2			
10	H2 MEM	96		1		1	0.5	1.5	
11	CH4-RICH	98							2
12	ULCOS	96		0.5			3.5		

Acronyms: ADS-adsorption; Ca LOOP-Calcium looping; CO2 MEM-CO2 membrane; H2 MEM-H2 membrane; OXY-oxyfuel; PRE-pre-combustion; REF-reference

3. The impact of impurities on CO₂ physical properties

This section investigates the effect of the addition of the components identified in the scenarios developed in Section 3 on the physical properties of CO₂. In particular, the effects on the location of the phase boundaries, density, speed of sound, Joule-Thomson coefficient, viscosity and thermal conductivity relative to pure CO₂, for the combination of impurities in each scenario. The twelve scenarios identified represent a plausible range of ‘worst case’ scenarios for steady-state operation. The pressures and temperature ranges to cover the physical properties were selected to be representative of dense phase pipeline operation, a pressure of 15MPa was chosen and a temperature range of 0 to 50°C.

Based on the effects of the impurities, worst case scenarios are developed for dense phase transportation taking into account the effect of the impurities on the thermodynamic and transport properties.

This paper uses the reference equations of state for each component [12]-[19], and solving routines identical to REFPROP [20]. Mixing rules for compositions with more than one component are taken from GERG2008 [21]. Transport properties cannot be calculated from equations of state and are not defined in the two-phase region. To calculate viscosity [22]-[25] are used and [26]-[29] are used to calculate thermal conductivity.

Since not all experimental work covers the regions of interest in this paper, the thermodynamic and physical properties of the mixtures are modelled. Furthermore, there is extremely limited experimental data available for the properties of potential captured CO₂ streams. In addition, for some impurity combinations, due to the lack of experimental data, the equations of state are operating in regions where they are expected to be less robust.

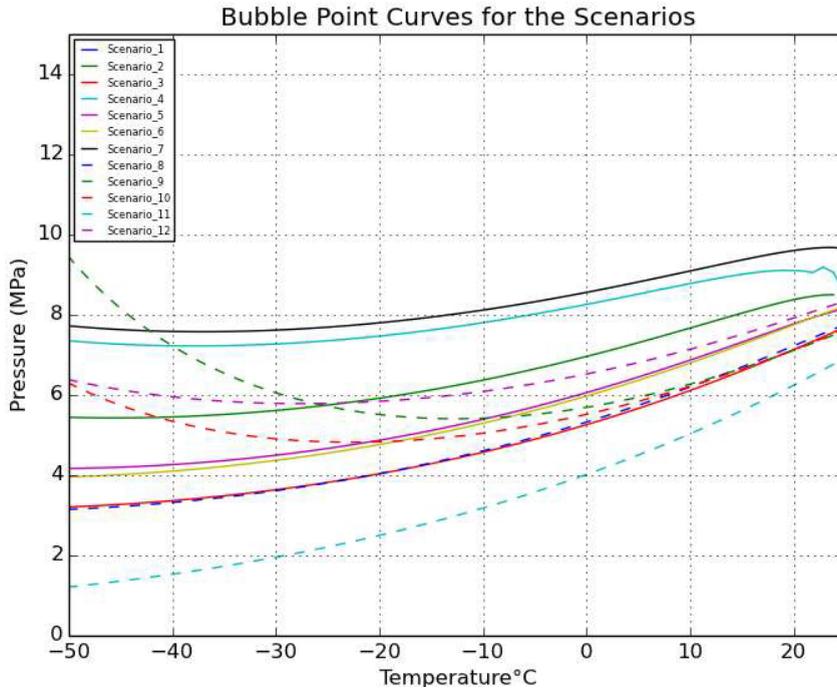


Fig. 1. The bubble point curves of the scenarios.

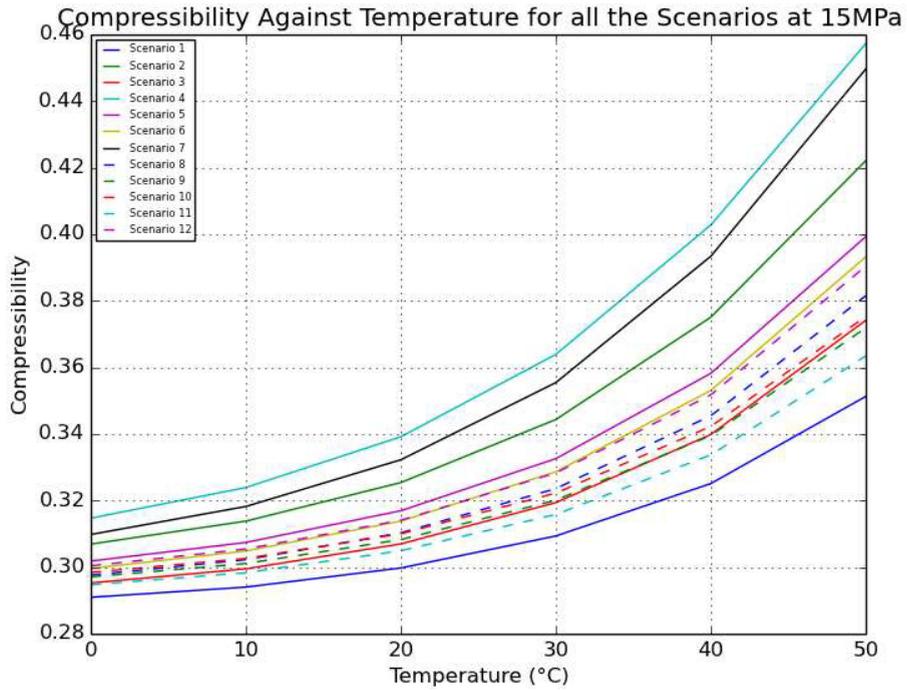


Fig. 2. The compressibility of the scenarios.

Physical and transportation properties of the scenarios are demonstrated in Figs. 1 to 7. In the dense phase Scenarios 4 (ADS1), 7 (OXY1) and 2 (CO₂MEM) tend to produce the least desirable qualities for dense phase pipeline transportation. These CO₂ streams have the lowest proportions of CO₂ and have the highest bubble point curves, compressibility, Joule-Thomson coefficient and the lowest densities, speed of sound and thermal conductivities. However, it is worth noting that these scenarios also have the lowest viscosities.

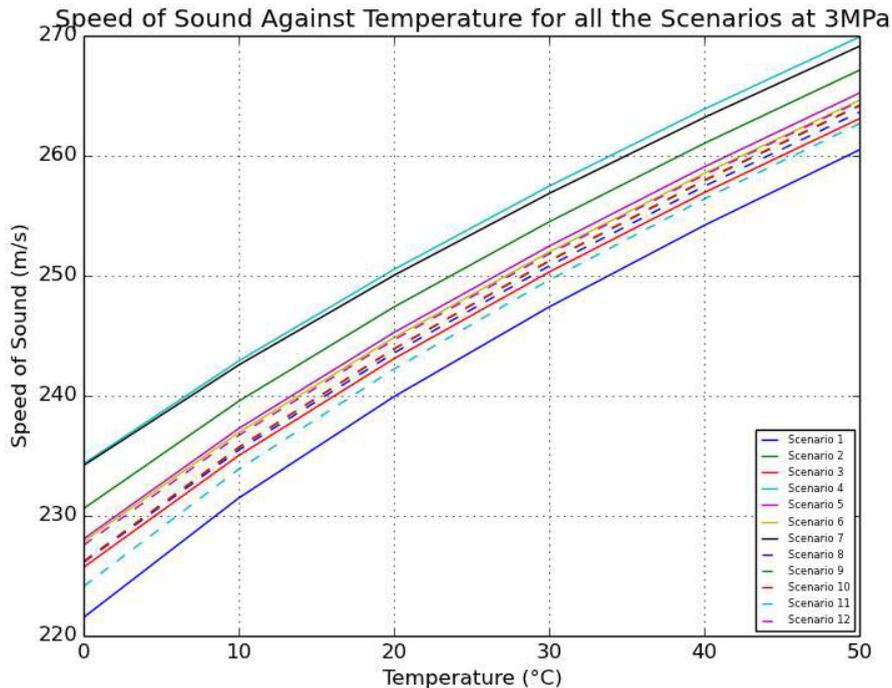


Fig. 3. Speed of sound in gaseous phase for the scenarios.

Apart from pure carbon dioxide, Scenario 11 (CH₄-RICH) has the most desirable qualities for dense phase pipeline transportation with the lowest dew point curve, Joule-Thomson coefficients and compressibility and the greatest density and speed of sound. That is balanced with the fact that it has the lowest thermal conductivity and the highest viscosities. It should also be noted that, even though it has a high carbon dioxide purity (98%), Scenario 9 (PRE) has shown relatively undesirable dense phase pipeline transportation characteristics because hydrogen has large effects in small quantities. For these reasons, Scenarios 4 (ADS1), 7 (OXY1) and 2 (CO₂MEM) are selected for the worst cases for dense phase pipeline transportation. It also expected that these scenarios will show the highest compression power requirements for compression to dense phase due to their relatively high compressibility.

4. Impact of impurities on CO₂ compression

Using commercially available pipeline simulation software [30], the energy requirement and cost for a set of compressors for each scenario relative to a base case of pure CO₂ was evaluated and compared. The compression costs were calculated using the approach outlined in [31] and the compression base case was modelled on case B₀ from [33].

The choice of base case sets the number of compression stages[‡] and the compression ratio at each stage. It should be noted, however, that the number of compression stages is process-specific and different project developers may adapt the number of compression stages used to better integrate the CO₂ capture and compression processes (e.g. by reducing the number of stages in cases where a relatively high inlet pressure is delivered by the capture process).

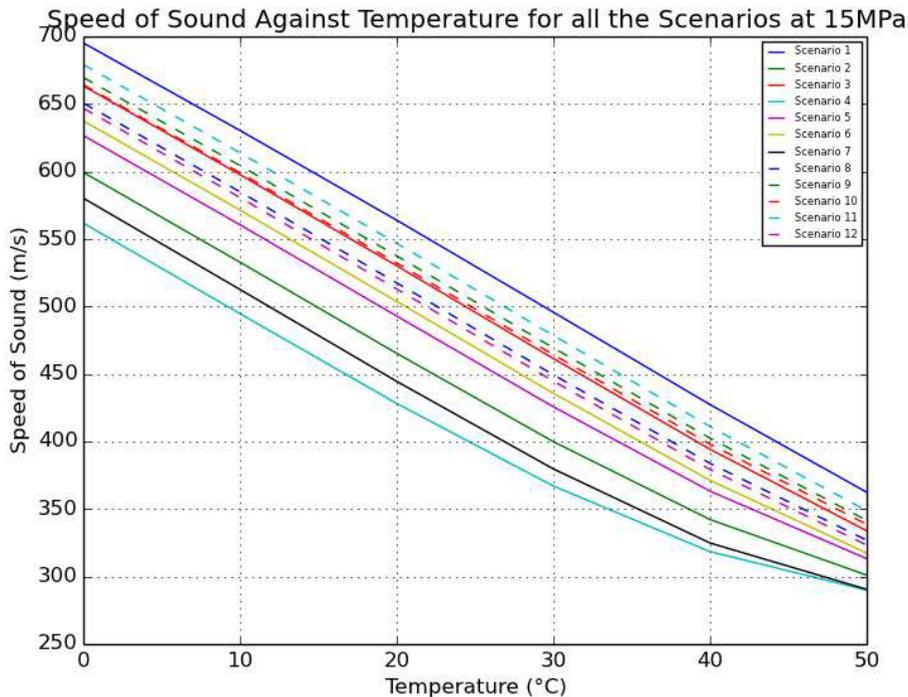


Fig. 4. Speed of sound in dense phase for the scenarios.

The inlet pressure and temperature were selected to be 1.6bar and 38°C respectively. These initial conditions are broadly representative of current recognized capture technologies and allow comparisons to be made between the scenarios. It should be noted that for specific CO₂ capture options actual compressor entry conditions should be used since these can have a noticeable impact on CO₂ compressor power requirements and costs.

In the analysis reported here a constant mass flow rate of 700,000 kg/h is assumed to be entering the compressor and that the CO₂ flow delivered to the pipeline in the dense phase has a pressure of 110bar and temperature of 30°C. This information is summarized in the Table 2.

For simplicity, this study has assumed a constant composition throughout the CO₂ compression process. As seen in Fig.8, CO₂ composition only has a small effect on CO₂ compression requirements. Further work could take into account variations in CO₂ composition during CO₂ compression.

The total power requirements and individual compressor power requirements for each case relative to pure CO₂ are shown in Fig. 8. These are the data obtained assuming a compressor with an isentropic efficiency of 85%. To draw clearer conclusions, the total power requirements of the anthropogenic CO₂ streams were normalized against the total power requirement of the REF case and the results are demonstrated in Fig.8.

ADS1 showed to be the worst case scenario of all, with slightly below 7% extra energy requirements. Sorting the energy requirement of the anthropogenic scenarios, if only the composition varies (i.e. given that inlet conditions are

[‡]Which varies between 4-6 stages in the literature for CO₂ compression.

assumed constant), then, in descending order, the scenarios that cause the most significant changes to compression power requirements are as follows ADS1, OXY1, CO2MEM1, ADS2, PRE, Ca LOOP and ULCOS, H2MEM, OXY2, CH4RICH and CO2MEM2. This is in agreement with the compressibilities calculated in Section 3.

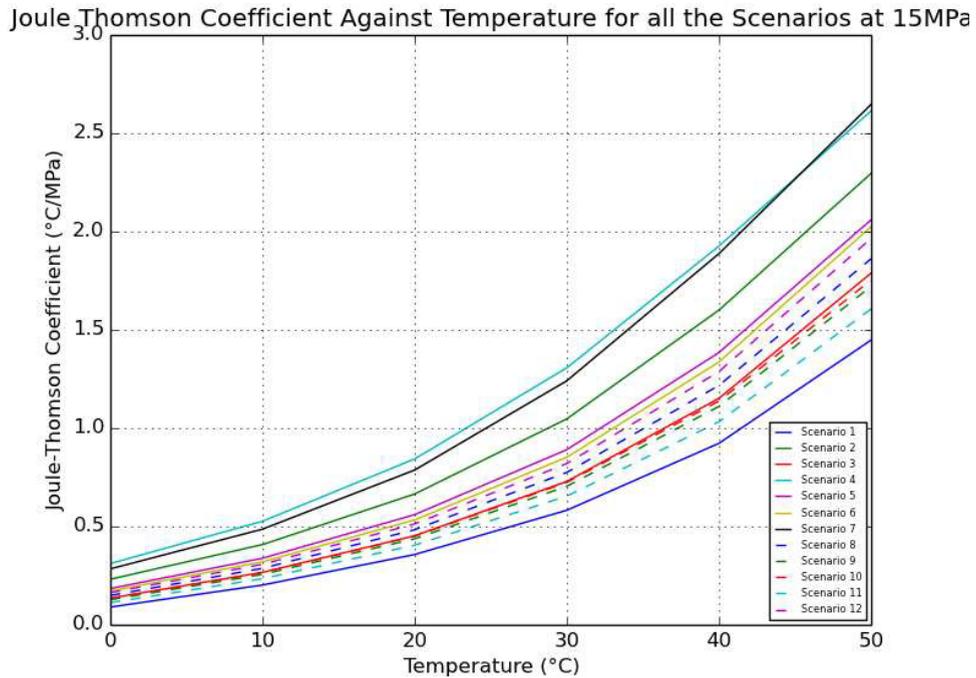


Fig. 5. Joule-Thomson Coefficient for the scenarios.

5 Impact of impurities on pipeline specification and hydraulics

The importance of the effect of impurities on CO₂ transportation was previously discussed by many scholars [33]-[35]. As demonstrated in Section 3, the impurities are expected to influence a wide range of thermodynamic and other properties relevant to CO₂ pipeline transport, including the density of the stream, the specific pressure drop and the critical point. As a consequence, the pipeline design parameters such as diameter, wall thickness, inlet pressure, Minimum Allowable Operational Pressure (MAOP) and the distance between booster stations are potentially subject to change. These all will also have an impact on the cost of transportation. CO₂ is generally transported in pipelines in the dense phase at temperature and pressure ranges between 12°C and 44°C and 85bara and 200bara. The lower pressure limit is set by the phase behaviour of CO₂ and should be sufficient to maintain single phase conditions while the upper pressure limit is mostly due to economic and material concerns. Regarding the temperatures, the upper temperature limit is determined by the compressor station discharge temperature and the temperature limits of the external pipeline coating material, while the lower limit is determined by the winter ground temperature of the surrounding soil [36].

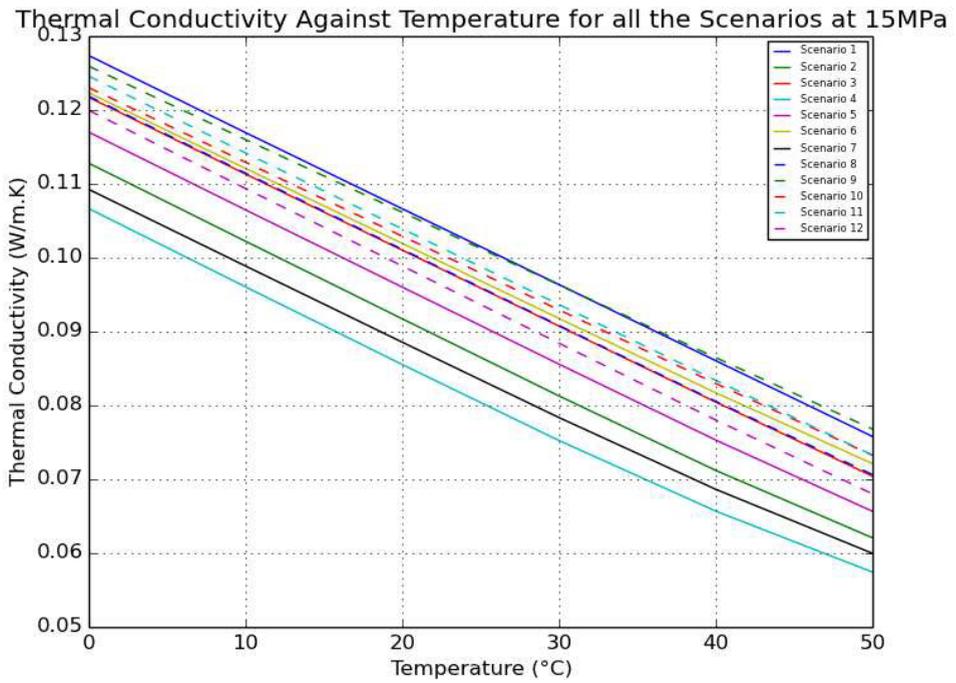


Fig. 6. Thermal conductivity of the scenarios.

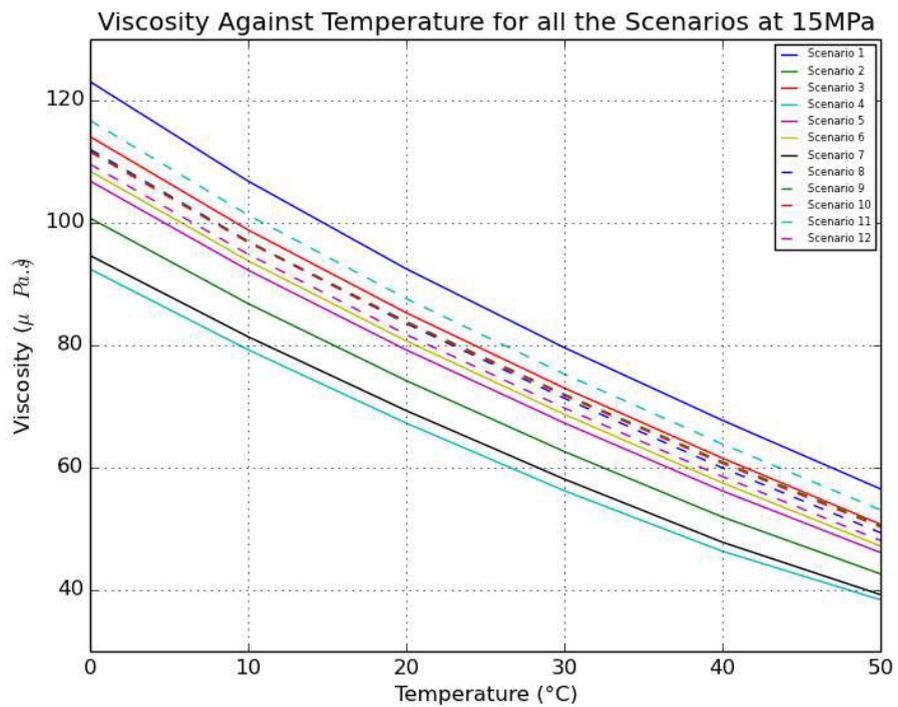


Fig. 7. Viscosity of the scenarios.

Table 2: Electrical consumption at different stages along the post combustion case B₀ from Appendix 1 of IEAGHG 2011/07)

Stage	State	Temperature (°C)	Pressure (bar)	Power to compress (MW) IEAGHG 2011/07)	Evaluated Isentropic Power to compress 546855 kg/h CO ₂ flow stream (MW)
1	1	38	1.6	21.7	21.2
	2	184	7		
2	3	19	6.6	24.1	21.9
	4	176	34		
3	5	24	32.7	8.0	7.8
	6	97	70		
4	7	40	69.6	3.7	3.7
	8	81	111.2		
	9	73	111		
SUM				57.5	54.7

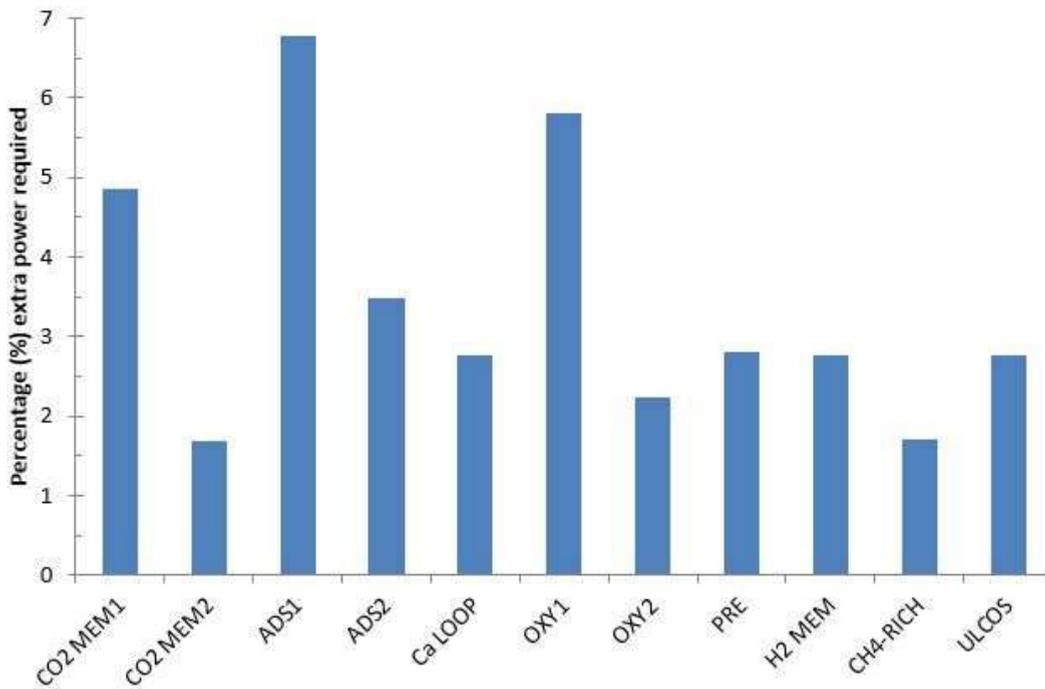


Fig. 8. The extra power requirement for anthropogenic CO₂ stream composition (relative to the case of pure CO₂) assuming 1.6bara and 38°C entry conditions for all streams.

To study the impact of the impurities on the cost of transportation, a set of assumptions have been made as listed in Table 3. Within this study, the analysis considered designing pipelines that transport the (anthropogenic) CO₂ stream from the capture site, where the CO₂ stream enters the pipeline at 110bar and 30°C to an onshore storage site or a terminal a distance of 150km away from the capture site. A single point to point pipeline on a flat terrain is considered, with the center of the pipeline buried 1.1m below the ground level. The surrounding soil temperature is 5°C and the conductivity of the steel pipeline and the soil are taken to be 60.55 and 2.595W/m²K respectively.

Table 3: Initial conditions considered for transport of CO₂ in dense phase

Parameter	Value	Unit
Rate of Undulations	0	/1000
Horizontal Distance	150	km
Elevation Difference	0	m
Roughness	0.0457	mm
Ambient Temperature	5	°C
Inlet Pressure	110	bar
Mass flow rate	700	Ton/hr
Inlet Temp (°C)	30	°C
Burial depth	1.1	m
Steel Heat Transfer Coefficient	60.55	W/m ² /K
Soil Heat Transfer Coefficient	2.595	W/m ² /K

Using the parameters in Table 3, the pipeline geometry requirements for dense phase transportation for the worst case scenarios and a pure CO₂ case were calculated and are summarized in Table 4.

Table 4: Comparison of the pipeline dimensions, pressure and temperature losses for dense phase transportation of a pure CO₂ and the worst anthropogenic cases.

	Calculated Pipe Parameters (mm)			P _i bar	T _i °C	P _f bar	T _f °C	Hoop Stress (MPa)
	ID	W	OD					
REF	490.4	8.8	508	110	30	84.9	15.4	317.5
ADS1	588.0	11.0	610	110	30	96.8	17.1	305.0
OXY1	588.0	11.0	610	110	30	97.2	17.5	305.0
PRE	490.4	8.8	508	110	30	83.3	15.8	317.5

In order to transport 700Ton/hr (194.4kg/s) of pure CO₂ in dense phase, a pipeline of 508mm outside diameter would be required. The minimum thickness for this pipeline to comply with the maximum allowable tangential stress is 8.8mm. The maximum allowable tangential stress calculated as 324MPa and the designed stress limit is 317.5MPa. The choice of optimum wall thickness also keeps the pipeline weight to a minimum. This setup results in a 25.1bar pressure drop along the length of the pipeline which is equivalent to 16.8kPa/km and is in agreement with allowable pressure drops limits in pipeline engineering [37]. The delivery pressure is such that two phase flow in the pipeline is prevented. There is almost a 15°C drop in the temperature of the fluid, which makes the fluid slightly denser at the delivery point. This, in turn, causes a slight reduction in the erosional velocity. The erosional velocity ratio (flow mean velocity to erosional velocity) is around 0.3. The same design considerations as reference case have been applied in pipeline design for the worst case anthropogenic scenarios. The cases ADS1 and OXY1 require pipelines OD sizes of 610mm with wall thicknesses of 11mm. This keeps the hoop stress under 305MPa.

6 Effect of impurities on materials selection

It is highlighted that there is little published work on the types and levels of trace elements that could be present in the final captured CO₂. It could be considered that any components which could be present in the streams delivered to the CO₂ capture plant could also be carried through to the exported CO₂ stream at very low levels. The types and levels of these trace elements therefore becomes very hard to quantify as coal and biomass can contain many different types of elements at low levels and some capture options might also add trace elements due to the nature of the process. Consequently, the approach that has been taken for this study has been to consider the effect that the trace elements could have on the various aspects of pipeline transportation and comment on the levels required for these conditions to occur.

In order to identify a worst case composition from the scenarios identified in this current work, the saturation pressures have been calculated for each composition based on decompression from the pipeline operating conditions of 150bara and 30°C. The results are presented in Table 5. From this analysis, it can be seen that the OXY1

composition is the most onerous composition to transport in terms of fracture control and will require careful consideration when designing the pipeline to ensure fracture arrest.

Table 5: Saturation pressures for scenario compositions for a pipeline decompressing from 150bar and 30°C.

Scenario	CO ₂	O ₂	N ₂	Ar	H ₂	CO	H ₂ S	CH ₄	Saturation Pressure (bar)
REF	100								
CO2 MEM1	93		7						82.0
CO2 MEM2	97	3							69.5
ADS1	90	1	9						82.2
ADS2	95		5						75.5
Ca LOOP	95	1	2	2					79.8
OXY1	90	6	3	1					86.7
OXY2	96.5	0.5	2.5	0.5					77.2
PRE	98				2				62.3
H2 MEM	96		1		1	0.5	1.5		77.1
CH4-RICH	98							2	59.0
ULCOS	96		0.5			3.5			82.5

The solubility of water in pure CO₂ has been studied extensively as a function of temperature and pressure. The specification of water in currently operating pipelines ranges between 640ppmv and 20ppmv [38] to avoid the formation of free water in the pipeline at the operating conditions. However, whilst it is known that the presence of impurities will affect the solubility of water in CO₂, there has been little research into the absolute effects of these impurities and the published data is limited. The CO₂-H₂O-CH₄ system has been studied by a number of researchers [39]-[41] and the experimental results and thermodynamic models indicate that the addition of CH₄ requires a more stringent water content to be specified as the solubility of water decreases with increasing CH₄ content. Similar results have been seen in the CO₂-H₂O-N₂ system where it has been shown that at a temperature of 40°C, an addition of 10% N₂ can lower the solubility of water in CO₂ by up to 26% [42]. It is highlighted that this composition is similar to the ADS1 composition. Conversely, in the CO₂-H₂O-H₂S system, de Visser and Hendriks [43] showed that, on the basis of thermodynamic calculation, the solubility of water would increase with the addition of H₂S. Although these ternary systems provide useful information on the potential effects of individual components, the data on representative CO₂ streams as presented in the scenarios in this paper is extremely limited. Pereira et al [44] studied a system of CO₂ and 5.05% N₂ -3.07% O₂, 2.05% Ar at a pressure of 150bar and have shown that the addition of these impurities reduced the solubility of water by 20% compared to pure CO₂. This composition is similar to the OXY1 scenario considered in this paper and therefore water content for this scenario would have to be very carefully specified at the pipeline operating conditions to avoid associated degradation mechanisms.

7 Ship transportation

An efficient transport mode for CO₂ over relatively long distances is by sea. At atmospheric pressure, impure CO₂ will be in either the gas or solid phase. For transportation by ship it is desirable to keep the product in liquid form. A specialised ship is therefore required with a suitable product containment system to keep the CO₂ in the liquid phase. A liquid state maximises the payload capability (the amount of cargo that can be carried) of the ship.

In order for the pressure requirement to be met for product to be kept in liquid phase, liquid carbon dioxide (LCD) will need to be transported in Type C tanks. Currently Type C tanks have typical application for smaller liquefied natural gas (LNG) ships which are usually suitable for coastal trade for areas which lack conventional gas pipelines. For example, 1000m³ capacity ships currently operate in remoter coastal areas of Norway. However, larger vessels are currently being developed with Type C tanks. TGE Marine are currently constructing two 30,000m³ carriers, with class approval in principle, and already operate a 7,500 m³ vessel, the Coral Methane [45]. An advantage of Type C is the minimisation of the boil-off-gas (BOG). Some ships do not carry any BOG re-processing facility.

To enable containment of CO₂ mixtures in liquid form, the containment system must keep the product (above the triple point pressure) at pressures and temperatures that are above the bubble and melting point lines. This zone varies for different impurity scenarios. As seen in Section 3, some of the impurity scenarios can be transported in the liquid phase around -57°C and 1 to 1.5MPa, with the others requiring high pressures. The melting points are fairly invariant for the feasible containment pressures and range from -57°C to -73°C. Increasing the tank pressure further will move more scenarios further into the liquid phase. This improves the capabilities of the containment system for different impurity scenarios but some scenarios require unfeasible storage pressures. These scenarios would require further clean up in order to be transported by ship.

Care must be taken to avoid formation of solids (dry ice) in the storage tank and when loading/unloading. This may indicate that higher tank pressures would be required. The suggested containment pressures/temperatures are similar to previously reported values [46], [47].

It is, however, feasible to transport certain impurities of CO₂ by ship. An equivalence to Type C LNG ships shows that the operating pressures and temperatures are within existing ship design scope. A suitable pressure/temperature combination for high purity CO₂ scenarios is 0.6MPa and -57°C. As noted above, increasing the tank pressure moves less pure scenarios into the liquid phase and improves the capabilities of the containment system for different impurity scenarios, although the majority of the worst case scenarios will require storage at unfeasible pressures. Overall, the general arrangement and fundamental design parameters of an LCD ship would likely be similar to a Type C LNG ship. The density of different impurity scenarios varies significantly. This would need to be considered for stability and sea-keeping during the ship design. It will also affect the payload capacity of the ship and would therefore impact on transportation costs.

8 Buffer storage and liquefaction

Intermediate buffer storage could add valuable flexibility into the CO₂ transportation system allowing for temporary storage on route to storage or utilisation; it is a vital component for the loading of CO₂ onto ships. Buffer storage could consist of saline aquifers and tanks along the route of a pipeline or at a CO₂ terminal at the shore. However, these options could run into difficulties with health and safety regulators as well difficulties in public acceptance of onshore CO₂ storage, as seen in the Dutch CCS case in Barendrecht [48].

Liquefaction of CO₂ is not a novel technology. However, liquefaction of impure anthropogenic CO₂ is not straightforward. Supplied CO₂ would be liquefied via dehydration and refrigeration processes. For CO₂ mixtures to be in the liquid state they must be stored at pressures and temperatures on the liquid side of the bubble point and melting point curves. Additional impurities to a pure CO₂ stream cause a 2-phase region to open up. Large quantities of these impurities tend to increase the size of the envelope, especially if they have properties that are very different to CO₂, and the envelope opens out away from critical point, i.e. at lower temperatures the bubble and dew point curves are further apart. Wider envelopes also have the dew and bubble point lines further apart and will require higher pressures to reach the liquid phase. There has been very little work done on low temperature CO₂ mixtures near the solid phase and impurities will affect the melting line, although there has been work done on the equation of state for solid carbon dioxide [12], [49], [50] and the impurities in their pure form. The lack of data on the melting point line for CO₂ mixtures leads to uncertainties in the liquid storage region. In order for mixtures with large amount of impurities to be on the liquid side of the bubble point curve at low temperatures, large pressures are required. Therefore buffer storage of these types of mixtures is unlikely. For mixtures with a small amount of impurity, the properties of the mixtures will be very similar to pure CO₂ and therefore the storage conditions and tank properties will also be similar to those of pure CO₂. However, storage sites such as saline aquifers will allow for temporary storage of these kinds of mixtures in the dense or supercritical phase.

The liquefaction states of CO₂ transport by ships that were specified for this study were (i) 50°C, 7bara and (ii) -130°C and 7bara. A closer look at the condition (ii) reveals that all of the streams would be at their solid state for this condition; while in condition (i), many of the scenarios are either in the 2-phase region or in the gaseous phase (see Fig. 1). Therefore it can be concluded that the decision on the conditions under which anthropogenic streams should be transported depends on the phase envelope of each stream.

9 Conclusions

Based on the work conducted in this study, it has been possible to identify twelve worst case, but plausible, scenarios which are representative of a range of CO₂ capture processes. These scenarios are summarized in Table 1. It should be remembered that although these scenarios are considered plausible, it is also likely that many of the impurities reported in Table 1 could be removed if this was considered to be the most cost effective approach for a particular CCS project.

In the dense phase the ADS1, OXY1 and CO₂MEM1 scenarios tend to produce the least desirable qualities for dense phase pipeline transportation. These CO₂ streams have the lowest proportions of CO₂ and have the highest bubble point curves, compressibility, Joule-Thomson coefficient and the lowest densities, speed of sound and thermal conductivities. However, it should be noted that these scenarios have the lowest viscosities. Apart from pure carbon dioxide, the CH₄-rich scenario has the most desirable qualities for dense phase pipeline transportation with the lowest dew point curve, Joule-Thomson coefficients and compressibility and the greatest density and speed of sound. That is balanced with the fact that it has the lowest thermal conductivity and the highest viscosities. The ADS1 composition shows the highest compression energy requirements amongst all of the scenarios studied and this was 7% more than the base scenario. It is highlighted that this extra energy requirement is only at the compressor stages and does not represent the overall energy requirement for the whole process unit. Also, the results reported here assumed identical entry CO₂ compressor pressure and temperature but variations in these entry conditions can be expected in reality and should be considered in further work.

In terms of dense phase transport, only the worst case scenarios (ADS1 and OXY1) require increased pipeline sizes over the reference case of pure CO₂ for the design conditions considered. This will affect the capital cost of these pipelines.

For fracture control, the saturation pressure of the CO₂ stream is a critical variable that will determine the required pipeline dimensions and toughness to prevent a long-running ductile fracture. Hydrogen in particular has the most potent effect in raising the saturation pressure. The OXY1 scenario was the most onerous scenario composition to transport due to the high levels of oxygen and nitrogen which also raise the saturation pressure. Corrosion and stress corrosion cracking of plain carbon steel will not occur without the presence of water. The effect of impurities on water solubility is therefore critical. There is little information on water solubility available in the literature, but it has been shown that water specification for the ADS1 and OXY1 scenarios would require careful specification.

For ship transportation, it would be necessary to liquefy the scenario compositions studied in this paper. High pressure and low temperature conditions are required to maintain the fluid in its liquid phase. Although it is feasible to transport high purity CO₂ streams by ship, this renders the worst case scenario compositions considered in this study uneconomical for transportation in the cryogenic liquid phase. For high purity CO₂ streams, an equivalence to Type C LNG ships shows that the operating pressures and temperatures are within existing ship design scope. A suitable pressure and temperature combination for CO₂ streams with a very high purity is 0.6MPa and -57°C. Increasing the tank pressure moves the scenarios into the liquid phase. However, most of the scenarios considered in this study require an unfeasibly large pressure for ship transportation in the liquid phase and would require further cleanup. Type C vessels have, thus far, been used as containment on relatively small LNG ships. Therefore, there are significant design and approval consequences if Type C vessels are applied for LCD in large volumes.

On the capture side, it should be noted that there can be differences between what systems actually achieve and what they are guaranteed to achieve and this may be particularly the case in the early stages of CCS implementation. Additionally, the focus of this study is on steady-state performance at design conditions. Further work could consider the potential for more challenging CO₂ specifications to be supplied to CO₂ transport systems in non-steady state conditions and particularly in upset conditions.

Particularly for CO₂ capture from industrial sources, it may be valuable to review plant permits (rather than more generic Best Available Technology documents considered for this study) to improve understanding of the flows entering CO₂ capture and, hence, potentially also CO₂ transport and storage systems.

There is also scope for somewhat more significant variations in pressure and temperature of the CO₂ stream exiting the CO₂ capture plant than the quantitative analysis in this study considered, with several configurations under development for several CO₂ capture technology options. Further work could, therefore, usefully explore what

the best approach to setting pressure and temperature at the exit of the CO₂ capture plant might be given the implications this will have for CO₂ transport (and also compression or liquefaction).

Further work could consider a broader range of CO₂ compression scenarios with, for example, different intercooling temperatures assumed (e.g. depending on cooling source assumed to be available) and a broader variety of heat exchanger options than were included in the analysis. A tailored, optimized compression route could also be designed for each scenario based on the impurities existing in the CO₂ stream.

Acknowledgements

This work was supported by IEAGHG. The authors are very grateful to colleagues who have provided expert guidance through questionnaire responses and related discussions. Some respondents have chosen to remain anonymous, but they include CO₂CRC Ltd, Australia and RWE Power. The information reported and conclusions made are, however, entirely the responsibilities of the project team.

References

- [1] Drage TC, Snape CE, Stevens LA, Wood J, Wang J, Cooper AI, Dawson R, Guo X, Satterley C, Irons R. Materials challenges for the development of solid sorbents for post-combustion carbon capture. *J Mater Chem* 2012; 22: 2815-2823.
- [2] Berstad D, Anantharaman R, Jordal K. Post-combustion CO₂ capture from a natural gas combined cycle by CaO/CaCO₃ looping. *International Journal of Greenhouse Gas Control*, 2012; 11:25-33.
- [3] National Energy Technology Laboratory (NETL), 2012a. Current and future technologies for power generation with post combustion, Final report: DOE/NETL-2012/1557, March; 2012.
- [4] National Energy Technology Laboratory (NETL), 2013b. CO₂ capture by Sub-ambient Membrane Operation, Final Scientific Report, DOE Award Number: DE-FE0004278, January; 2013.
- [5] IEAGHG, CO₂ Capture at Coal-Based Power and Hydrogen Plants, 2014/03, 2014b
- [6] Merkel TC, Zhou M, Baker RW. (2012) Carbon dioxide capture with membranes at an IGCC power plant. *Journal of Membrane Science*, 2012, 389, 441-450.
- [7] Copin D. The storage dimension of the oxy-combustion based integrated CCS project at Lacq and Rouse. In: 3rd Oxyfuel Combustion Conference, Ponferrada, Spain 2013.
- [8] Ojlatrev Group (2011), FEED Study CO₂ Transport Pipeline, CCS Demonstration Project Janschwalde, Non confidential study, Vattenfall Europe Carbon Storage GmbH & Co. KG, Job No.: P1011, <http://www.globalccsinstitute.com/publications/feed-study-CO2-transport-pipeline-ccs-demonstration-project-j%20C3%A4nschwalde>
- [9] IEA Greenhouse Gas R&D Programme (IEAGHG), CO₂ Capture in the Cement Industry, 2008/3, July 2008.
- [10] Danloy G, van der Stel J, Schmile P. Heat and mass balances in the ULCOS Blast Furnace, In: Proceedings of the 4th ULCOS seminar, 1-2 October 2008.
- [11] Birat JP, and Maizires-Is-Metz D. Steel sectoral report: Contribution to the UNIDO roadmap on CCS - fifth draft. 2010.
- [12] Span R, and Wagner W. A new equation of state for carbon dioxide covering the fluid region from the triple-point temperature to 1100K at pressures up to 800MPa. *J Phys Chem Ref Data* 1996; 25(6): 1509-1596.
- [13] Tegeler C, Span R, and Wagner W. A new equation of state for Argon covering the fluid region for temperatures from the melting line to 700K at pressures up to 1000MPa. *J Phys Chem Ref Data* 1999; 28(3): 779-850.
- [14] Lemmon EW, and Span R. Short Fundamental Equations of State for 20 Industrial Fluids, *J. Chem. Eng. Data*, 51:785-850, 2006.
- [15] Leachman JW, Jacobsen RT, Penoncello SG, Lemmon EW. Fundamental Equations of State for Parahydrogen, Normal Hydrogen, and Orthohydrogen. *J Phys Chem Ref Data* 2009; 38(3): 721- 748.
- [16] Span R, Lemmon EW, Jacobsen RT, Wagner W, and Yokozeki A. A Reference Equation of State for the Thermodynamic Properties of Nitrogen for Temperatures from 63.151 to 1000 K and Pressures to 2200MPa. *J Phys Chem Ref Data* 2000; 29(6): 1361-1433.
- [17] Setzmann U, and Wagner W. A New Equation of State and Tables of Thermodynamic Properties for Methane Covering the Range from the Melting Line to 625 K at Pressures up to 1000MPa. *J Phys Chem Ref Data* 1991; 20(6): 1061-1151.
- [18] Lemmon EW, and Jacobsen RT. Viscosity and Thermal Conductivity Equations for Nitrogen, Oxygen, Argon, and Air. *Int J Thermophys* 2004; 25: 21-69.
- [19] Wagner W, and Pruss A. The IAPWS Formulation 1995 for the Thermodynamic Properties of Ordinary Water Substance for General and Scientific Use. *J Phys Chem Ref Data* 2002; 31(2): 387- 535.
- [20] Lemmon EW, Huber ML, McLinden MO. NIST Standard Reference Database 23: Reference Fluid Thermodynamic and Transport Properties-REFPROP, Version 9.1, National Institute of Standards and Technology, Standard Reference Data Program, Gaithersburg, 2013.
- [21] Kunz O, and Wagner W. The GERG-2008 Wide-Range Equation of State for Natural Gases and Other Mixtures: An Expansion of GERG-2004. *J Chem Eng Data* 2012; 57: 3032-3091.
- [22] Fenghour A, Wakeham WA, Vesovic V. The Viscosity of Carbon Dioxide. *J Phys Chem Ref Data* 1998; 27: 31-44.
- [23] Muzny CD, Huber ML, and Kazakov AF. Correlation for the viscosity of normal hydrogen obtained from symbolic regression, *J. Chem. Eng. Data*, 2013, 58 (4), pp 969-979.

- [24] Quinones-Cisneros SE, Huber ML, and Deiters UK. unpublished work, 2011.
- [25] Huber ML, Perkins RA, Laesecke A, Friend DG, Sengers JV, Assael MJ, Metaxa IM, Vogel E, Mares R, and Miyagawa K., "New international formulation for the viscosity of water", *J Phys Chem Ref Data* 2009; 38(2): 101- 125.
- [26] Vesovic V, Wakeham WA, Olchowy GA, Sengers JV, Watson JTR, and Millat J. The transport properties of carbon dioxide. *J Phys Chem Ref Data* 1990; 19: 763-808.
- [27] Assael MJ, Assael JAM, Huber ML, Perkins RA, and Takata Y. Correlation of the thermal conductivity of normal and parahydrogen from the triple point to 1000 K and up to 100MPa. *J Phys Chem Ref Data* 2011; 40(3): 1-13.
- [28] Friend DG, Ely JF, and Ingham H. Tables for the thermophysical properties of methane, NIST Technical Note 1325, 1989.
- [29] Assael MJ, Metaxa IN, Miyagawa K, Hellmann R, Vogel E. New international formulation for the thermal conductivity of H₂O. *J Phys Chem Ref Data* 2012; 41(3): 1-23. [<http://dx.doi.org/10.1063/1.4738955>]
- [30] Schlumberger, 2013. PIPESIM software version, 2013.1.
- [31] IEAGHG, 2011. Rotating equipment for carbon dioxide capture and storage. 2011/07.
- [32] IEA Greenhouse Gas R&D Programme (IEAGHG). Criteria for technical and economic assessment of plants with low CO₂ emissions, Report: 2009/TR3, May 2009.
- [33] Yan J, Anhedan M, Bernstone C, Liljemark S, Pettersson H, Li H, and Yan J. Impact of non-condensable components on CO₂ compression/purification, pipeline transport and geological storage. In: 1st IEA Oxyfuel Combustion Conference, Cottbus, Germany, 2009.
- [34] Wang J, Ryan D, Anthony EJ, Wildgust N, and Aiken T. Effect of impurities on CO₂ transport, injection and storage. *Energy Procedia* 2011; 4: 3071-3078.
- [35] Race JM, Wetenhall B, Seevam PN, and Downie MJ. Towards a CO₂ Pipeline specification: Defining tolerance limits for impurities. *Journal of Pipeline Engineering* 2012; 11(3): 173-189.
- [36] Mohitpour M, Seevam P, Botros KK, Rothwell B, and Ennis C. Pipeline transportation of carbon dioxide containing impurities. ASME Press: New York, NY, USA, 2011.
- [37] Mohitpour M, Golshan H, and Murray MA. Pipeline design and construction: A practical approach. 3rd Ed. The American Society of Mechanical Engineers, Three Park Av., New York, NY 10016, 2007.
- [38] Seevam PN, Race JM, Downie MJ, Barnett J, and Cooper R. (2010) 8th International Pipeline Conference, IPC2010. Calgary, AB. Available at:<http://www.scopus.com/inward/record.url?eid=2-s2.0-80054044775&partnerID=40&md5=9a4518b9a3e5e70d9ab533238ae44fcb> (Accessed: 27 September 2010 through 1 October 2010).
- [39] Heggum G, Weydahl T, Mo R, Molnvik M, and Austegaard A. CO₂ conditioning and transportation, in Thomas, D.C. and Benson, S.M. (eds.) Carbon Dioxide Capture for Storage in Deep Geologic Formations. Elsevier Ltd; 2005. p. 925-936.
- [40] Seiersten M. (2001) Material selection for separation, transportation and disposal of CO₂, CORROSION 2001. Houston, Texas. NACE International, p. Paper no. 1042.
- [41] Austegard A, Solbraa E, de Koeijer G, and Mlnvik MJ. Thermodynamic models for calculating mutual solubilities in H₂O-CO₂-CH₄ mixtures, *Chemical Engineering Research and Design* 2006; 84(9 A): 781-794.
- [42] Foltran S, Suleiman N, Vosper M, Jie K, Poliakoff M, and George M. Determination of water solubility limits in CO₂ mixtures: Ensuring the safety of CO₂ transport. UKCCSRC Biannual Meeting - CCS in the Bigger Picture. Cambridge: www.slideshare.net/UKCCSRC/presentations Accessed on 07.07.14, 2-3 April 2014.
- [43] de Visser E. et al. Dynamis CO₂ quality recommendations, *International Journal of Greenhouse Gas Control* 2008; 2(4): 478-484.
- [44] Pereira L, Kapateh M, and Chapoy A. Impact of impurities on thermophysical properties and dehydration requirements of CO₂-rich systems in CCS, UKCCSRC Biannual Meeting - CCS in the Bigger Picture. Cambridge: www.slideshare.net/UKCCSRC/presentations Accessed on 07.07.14, 2-3 April 2014.
- [45] TGE. TGE-Marine — Presentations. [Online]. Available: <http://www.tge-marine.com/51-0- Presentations.html>. [Accessed: 10-Dec-2013].
- [46] WorleyParsons. CCS Learning from the LNG Sector. 401010-0106000-PM-REP-0001. 2013.
- [47] Yoo BY, Choi DK, Kim HJ, Moon YS, Na HS, and Lee SG. Development of CO₂ terminal and CO₂ carrier for future commercialized CCS market. *Int J Greenh Gas Control* 2013; 12: 323-332.
- [48] Brunsting S, de Best-Waldhober M, Feenstra CFJ, and Mikunda T, Stakeholder participation practices and onshore CCS: Lessons from the Dutch CCS Case Barendrecht, 10th International Conference on Greenhouse Gas Control Technologies, *Energy Procedia*, Volume 4, 2011, Pages 6376-6383.
- [49] Trusler JPM, Equation of state for solid phase I of carbon dioxide Valid for Temperatures up to 800 K and Pressures up to 12 GPa. *J Phys Chem Ref Data* 2011; 40: , 043105 (2011).
- [50] Jäger A, and Span R, Equation of State for Solid Carbon Dioxide Based on the Gibbs Free Energy. *J Chem Eng Data* 2012; 57(2): 590-597.