

# Timing fluctuation correction for the front end of 100-PW laser

Hongyang Li,<sup>1,2,3†</sup> Keyang Liu,<sup>3,4†</sup> Xinliang Wang,<sup>2,3</sup> Xingyan Liu,<sup>2,3</sup> Xianze Meng,<sup>2,3</sup> Yanqi Liu,<sup>2,3</sup>  
Liwei Song,<sup>2,3</sup> Yuxin Leng,<sup>2,3</sup> and Ruxin Li<sup>2,3</sup>

<sup>1</sup>*School of Physics Science and Engineering, Tongji University, Shanghai 200092, China*

<sup>2</sup>*State Key Laboratory of High Field Laser Physics, Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences, Shanghai 201800, China*

<sup>3</sup>*Center of Materials Science and Optoelectronics Engineering, University of Chinese Academy of Sciences, Beijing 100049, China*

<sup>4</sup>*XIOPM Center for Attosecond Science and Technology, State Key Laboratory of Transient Optics and Photonics, Xi'an Institute of Optics and Precision Mechanics, Chinese Academy of Sciences, Xi'an, Shaanxi 710119, China*

## Abstract

The development of high-intensity ultrafast laser facilities provides the possibility to create novel physical phenomena and matter states. The timing fluctuation of the laser pulses is crucial for the pump-probe experiments, which is one of the vital means to observe the ultrafast dynamics driven by intense laser pulses. In this letter, we demonstrate the timing fluctuation characterization and control of the front end of 100-PW laser which is composed of a high-contrast optical parametric amplifier (seed) and a 200-TW optical parametric chirped pulse amplifier (preamplifier). By combining the timing jitter measurement with a feedback system, the laser seed and preamplifier are synchronized to the reference with timing fluctuation of 1.82 fs and 4.48 fs, respectively. The timing system will be a key prerequisite for the stable operation of 100-PW laser facility and provide the basis for the potential pump-probe experiments performed on the laser.

**Keywords:** high-intensity ultrafast laser; timing fluctuation; feedback control

## 1. Introduction

High-intensity ultrafast laser facility provides laser pulses with ultra-high peak power within a

few femtoseconds to picoseconds, which create

---

Correspondence to: L. Song, State Key Laboratory of High Field Laser Physics, Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of

This peer-reviewed article has been accepted for publication but not yet copyedited or typeset, and so may be subject to change during the production process. The article is considered published and may be cited using its DOI.

This is an Open Access article, distributed under the terms of the Creative Commons Attribution licence (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted re-use, distribution, and reproduction in any medium, provided the original work is properly cited.

10.1017/hpl.2023.41

Sciences, Shanghai 201800, China. Email: slw@siom.ac.cn

†These authors contributed equally to this work.


unique and extreme laboratory conditions that can accelerate and collide intense beams of elementary particles<sup>[1-3]</sup>, actuate nuclear reactions<sup>[4-6]</sup>, heat matter to conditions found in stars<sup>[7, 8]</sup>, or even create matter out of the empty vacuum<sup>[9-11]</sup>. The progress of high-intensity ultrafast lasers promotes the development of a wide variety of fields, including high-field laser physics<sup>[12, 13]</sup>, laser ignition devices<sup>[14, 15]</sup>, generation of hard X-rays<sup>[16, 17]</sup>, atomic physics<sup>[18, 19]</sup>, particle acceleration<sup>[1, 20]</sup>, attosecond science<sup>[21, 22]</sup> and generation of intense terahertz sources<sup>[23-25]</sup>. Thanks to the development of chirped pulse amplification (CPA) and optical parametric chirped pulse amplification (OPCPA) in recent decades, super-intense ultrashort laser has been significantly promoted in many laboratories and aroused extensive interest of researchers<sup>[26, 27]</sup>. Nowadays, using CPA and OPCPA technologies, the peak power of super-intense ultrashort laser has reached several petawatts (PWs) or even tens of PWs, thus quite a few technologically powerful countries or laboratories are aiming at 100-PW lasers<sup>[28-31]</sup>.

However, a high-resolution time synchronization system that corrects the timing jitter of different time reference sources at each stage is extremely important to realize the value of these large scientific facilities. T. R. Schibli et al. first demonstrated a balanced optical cross-correlator (BOC) in 2003 to synchronize two mode-locked lasers with measurement accuracy of 300 attoseconds<sup>[32]</sup>. The BOC method shows the advantages of simple experimental setup and the detected error signal is not affected by the amplitude noise of lasers. Most importantly, the BOC method has excellent attosecond resolution measurement ability, so it is widely used in high-precision timing synchronization system. Kemal Safak et al. introduced a based on BOC method to measure the local and remote timing jitter of two different mode-locked lasers, with root mean square (RMS) of 2.1 fs and 8.55 fs,

respectively<sup>[33]</sup>. Alexis Casanova et al. reported a combined method to measure the absolute timing jitter of a mode-locked laser by combining two BOC systems with cross spectrum technology<sup>[34]</sup>.

The project of Shanghai X-ray Free Electron Laser (SHINE) was launched in 2018. In the project, a 100-PW laser will be built in the Station of Extreme Light (SEL) to create extreme conditions and new states of matter. And the hard X-ray pulses from an X-ray free electron laser (XFEL) will be used to probe the ultrafast phenomena. As the pulse duration of the optical and X-ray pulses are 15 fs and 20 fs, respectively, precise synchronization of the two lasers with a synchronization accuracy of sub-20 fs is critical for pump-probe experiments. Therefore, the front end of 100-PW laser synchronization accuracy should be sub-5fs due to the existence of systematic errors. In this work, we perform the synchronization of the front end of 100-PW laser to a reference laser which will be synchronized to the timing master laser of XFEL. The front end system contains a high-contrast optical parametric amplifier (seed) and a 200-TW optical parametric chirped pulse amplifier (OPCPA, preamplifier). By combining the timing jitter measurement with a feedback system, the root-mean-square (RMS) timing fluctuation of the seed and the preamplifier are controlled within 1.82 fs and 4.48 fs, respectively. This work lays the foundation for the precise synchronization of the 100-PW laser and XFEL which will further provide the timing condition for pump-probe experiments.

## 2. Synchronization of the front end of 100-PW laser

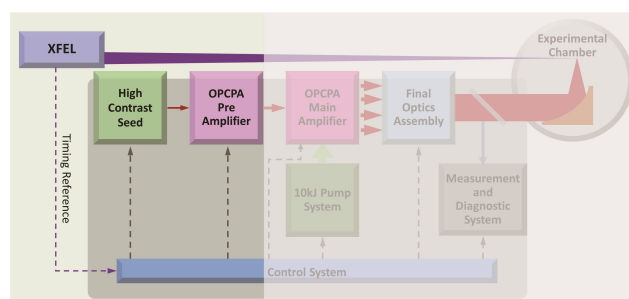

**Figure 1.** Schematic illustration of the synchronization of 100-PW laser and XFEL.

The synchronization scheme of 100-PW laser and XFEL is shown in Figure 1. The 100-PW laser consists of a high contrast laser seed, a 200-TW OPCPA preamplifier, an OPCPA main amplifier and a final optics assembly system. The pulses from the timing master laser of XFEL are delivered to the control system as the reference signal (RS). The RS is first synchronized to an ultra-low noise commercial femtosecond laser (Menhir Inc.) by a commercial BOC synchronization module (Cycle Inc.), and then the oscillator of the High Contrast Seed system is synchronized to the commercial femtosecond laser (Menhir Inc.) also by the commercial BOC synchronization module. This method ensures accurate synchronization of the oscillator and RS, and the synchronization accuracy mainly depends on the BOC module. The subsequent amplifiers are synchronized to the seed by home-built timing fluctuation measurement and feedback control system. So far, the synchronization of the seed and preamplifier are realized which will be thoroughly discussed in the following sections.

### *2.1. Timing fluctuation measurement and correction between the regenerative amplifier and oscillator*

For the ultra-intense laser, a seed with high contrast and broadband spectrum is one of the prerequisites. In previous work, a seed laser with  $10^{12}$  temporal contrast and 200 nm bandwidth has been built<sup>[35]</sup>. The seed laser is driven by a commercial Ti:sapphire laser (Astrella, Coherent Inc.) with an average power of 7 W, a repetition rate of 1 kHz, a pulse duration of 35 fs and a center wavelength of 800 nm. The oscillator of the Ti:sapphire laser system can be synchronized to a reference signal from XFEL. And a part of its output power is injected into the regenerative amplifier and amplified after repeated reciprocation in the regenerative cavity. In this progress, the laser pulses propagate hundreds of nanoseconds, which is equivalent to tens of


meters optical path. Considering the temperature fluctuation caused by the diode pump and environment, the regenerative amplifier might be a major source of the timing drift in High Contrast Seed system. Therefore, it is necessary to characterize and control the timing fluctuation of the regenerative amplifier.

An overview of the synchronization for the seed and preamplifier is shown in Figure 2(a). In the setup, the timing system of the oscillator and amplifiers are connected in series to prevent mutual interference. The laser pulses from the amplifier and oscillator are sent into a timing measurement and feedback control link shown in Figure 2(b). The laser pulses from oscillator with 2 nJ pulse energy and 72 MHz repetition rate pass through a stable multi-pass cavity (MPC) and chirped mirrors for the compensation of optical distance and dispersion. The MPC consists of two high reflectivity concave mirrors with 250 mm focal length. The distance between the concave mirrors is set to 810 mm. After 25 round trips in the MPC, the pulses from oscillator travel a similar distance as the ones from the amplifier, which ensures the measured pulses are from the same one in the oscillator and the timing jitter caused by the oscillator is eliminated. Two lenses with 1 m focal length are utilized to optimize the beam divergence of the input and output of MPC, respectively. In order to ensure the stability of the MPC system, we built it on a separate platform with high thermal stability, good vibration isolation and damping characteristics, and made a box with the same material to isolate the MPC system from the surrounding space, ensuring that the input and output pulses characteristics of the MPC system are constant. The chirped mirrors are used to compensate the dispersion ( $\sim 880 \text{ fs}^2$ ) introduced by the transmission and reflection.

The amplifier pulses propagate 117 ns (35 m in distance) in the regenerative amplifier and pass through a delay line for timing control. The timing drift between the laser pulses from oscillator and amplifier is measured by using a BOC, which has been widely used to characterize the timing fluctuation between

different optical pulses due to its excellent attosecond timing resolution and robustness to environmental fluctuations.<sup>[32, 36, 37]</sup> The structure of a noncollinear BOC is shown in Figure 2(c). The pulses from oscillator and amplifier are combined and split by a 50:50 beam splitter (BS). Each half of the combined beam is focused on a 2-mm thick type-

I ( $\theta = 29.2^\circ, \varphi = 0^\circ$ ) beta barium borate (BBO) crystal for sum frequency generation (SFG). A 100- $\mu\text{m}$  thick glass plate is inserted into one arm to introduce additional optical path difference as the time offset reference for the cross-correlation signal.

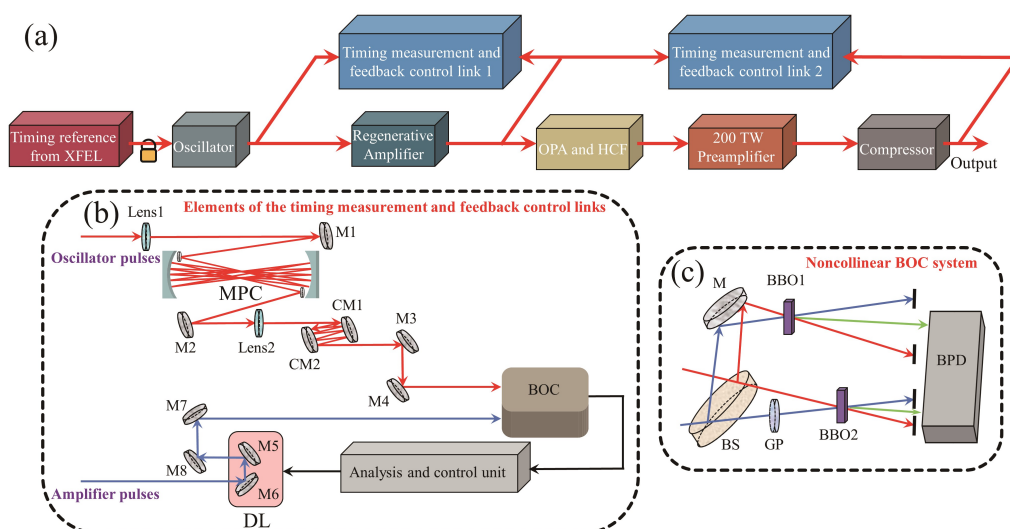

**Figure 2.** (a) An overview of the synchronization for the seed and preamplifier. OPA, optic parametric amplification; HCF, hollow core fiber. (b) Timing measurement and feedback control links. MPC, multi-pass cavity; M1-8, mirrors; CM1, 2, chirped mirrors; DL, delay line; BOC, balanced optical cross-correlator. (c) Schematic of the noncollinear BOC. M, mirror; BS, beam splitter; GP, glass plate; BBO, beta barium borate crystal; BPD, balanced photodetector.


The intensity of sum frequency is measured by a balanced detector (PDB450, Thorlabs Inc.), while generating a baseband voltage signal proportional to the time offset reference. The baseband voltage signal can characterize timing fluctuations and can be used to synchronize two light sources with different wavelengths. The delay line moves according to the baseband voltage signal to compensate for timing fluctuations. The noncollinear SFG configuration enables background-free detection by separating the cross-correlation signal from the fundamental and the second harmonic pulses. To avoid additional time jitter, the timing fluctuation characterization and correction system is built on a temperature-insensitive and vibration-isolated platform.

At the beginning, the oscillator pulses are directly delivered into the BOC without passing

through the MPC and chirped mirrors. In this case, the measured oscillator pulses propagate much more times in the resonant cavity than the amplifier pulses. Meanwhile, as the timing reference from the XFEL has not yet been sent into the oscillator, the cavity has not been locked. Thus, the cavity length changes continuously because of the heat accumulation during the operation. Therefore, the timing fluctuation caused by vibration of the oscillator cavity is included in the measurement. From the BOC measurement, a timing-to-voltage conversion “S” shape function is obtained. The slope of the linear region of the “S” curve is 2.5 mv/fs, which represents the measurement accuracy of the BOC. Figure 3(a) shows the measurement result of the in-loop timing drift over 5 hours. Controlled by the time fluctuation measurement and feedback control system, the

timing fluctuation between the oscillator and regenerative amplifier is compensated to 2.61 fs RMS. The feedback bandwidth is 5 Hz limited by the speed of the stepper motor in the delay line. The movement trend of the feedback delay line is also recorded. As shown in Figure 3(b), the delay increases monotonically to about 700 fs over 5 hours, which means the same time increase without feedback. As the cavity of the

oscillator is not locked, the timing fluctuation between the oscillator and amplifier is mainly caused by the cavity length drift. The environmental temperature fluctuation during the timing measurement is recorded around the amplifier. There is no obvious correlation between the trend of temperature variation shown in Figure 3(c) and the timing fluctuation shown in Figure 3(b).

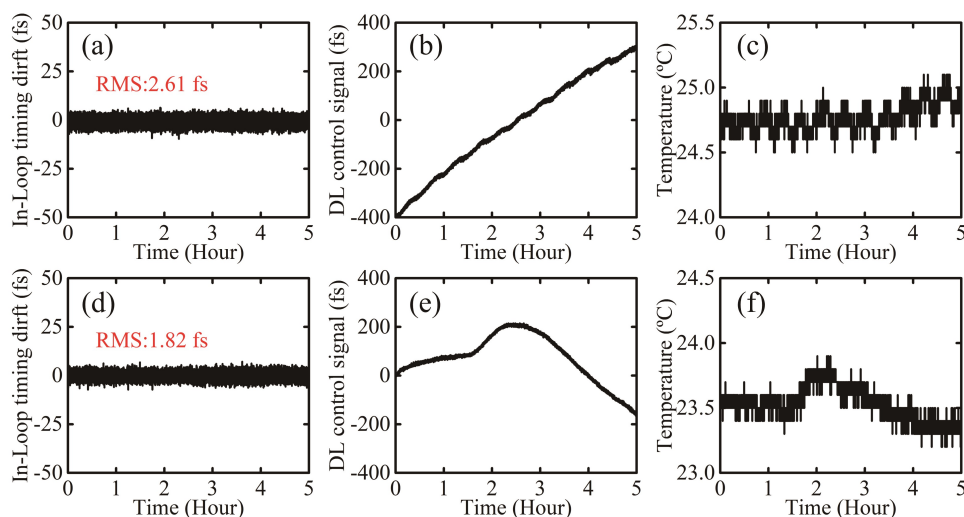

**Figure 3.** Regenerative amplifier timing drift measurement results without MPC for more than 5 hours (a) in-loop timing drift, (b) the DL control signal, and (c) environment temperature fluctuation. (d)-(f) show the measurement results of the in-loop timing drift, DL control signal, and temperature variation over 5 hours with MPC in the optical path, respectively.

To avoid the influence of the oscillator cavity, the optical path difference between the oscillator and amplifier is compensated, e.g., the measured pulses are emitted at the same time from the oscillator cavity. The pulses travel about 117 ns in the regenerative amplifier, corresponding to 35.1 m in length. A stable MPC is used to increase the optical path of the oscillator pulses, ensuring that the pulses participated in the SFG process in BOC are same ones from the oscillator cavity. In this condition, the timing fluctuation is controlled to 1.82 fs RMS over 5 hours, shown in Figure 3(d). The change of the delay line and environment temperature are shown in Figure 3(e) and (f), respectively. It is worth noting that, the variation trend of the delay line is in good agreement with the temperature vibration around the amplifier which indicates the timing fluctuation of the

regenerative amplifier is caused by temperature vibration. And the fluctuation can be largely eliminated by such a home-built timing synchronization system.

## 2.2. Timing fluctuation measurement and correction of the 200-TW Pre-amplifier


As shown in Figure 2(a), an optic parametric amplifier (OPA) is driven by the regenerative amplifier to generate high contrast infrared seed for the 100-PW laser. Afterwards, the OPA pulses are injected into a gas-filled hollow core fiber (HCF) and a thin BBO crystal for spectrum broadening and second harmonic generation. Through these processes, high contrast broadband seed pulses around 910 nm are achieved<sup>[35]</sup>. The seed pulses pass through a 200 TW preamplifier consisting of a double-grating

Offner stretcher, three LBO crystal-based cascaded OPCPA amplifiers and a pulse compressor sequentially. The three-stage cascaded OPCPA amplifier contains three independent pump sources, there are OPCPA-1 (pulse duration is 4 ns, pulse energy is 100mJ at a repetition rate of 100 Hz), OPCPA-2 (pulse duration is 4.5 ns, pulse energy is 3 J at a repetition rate of 1 Hz) and OPCPA-3 (pulse duration 4.5 ns, pulse energy 25 J at a repetition rate of 0.1 Hz). Finally, a pulse train with pulse energy of 5.26 J, full spectral width of 210 nm at center wavelength of 925 nm, and pulse duration of 13.4 fs close to Fourier transform limit is successfully output, and its peak power is as high as 263 TW<sup>[38]</sup>.

Additional timing fluctuation is brought in during these stages. Because the repetition rate of the 200-TW preamplifier is 0.1 Hz, this is detrimental to feedback control system that requires high repetition rate. Therefore, laser pulses from the first OPCPA stage with a repetition rate of 100 Hz are used in the experiment. The pulses pass through following OPCPA stages without amplification but catch the timing information. This way not only

ensures that the output pulses of the 200-TW preamplifier contains entire time drift information, but also obtains output pulses with a repetition rate of 100 Hz, which ensures that the feedback control system corrects the time fluctuation more accurately.

A timing link is built to compensate the timing fluctuation of the 200-TW laser pulses, as timing measurement and feedback control link shown in Figure 2(a). The experimental setup is similar to the one of preamplifier shown in Figure 2(b). In this setup, the pulses from the regenerative amplifier and the 200-TW preamplifier are injected into a noncollinear BOC through different optical paths. The distance between the two concave mirrors of the MPC is set to 800 mm, and the pulses perform 31 times round-trip in the MPC, which is equivalent to 49.6 m optical path to compensate the optical path length caused by the 200-TW preamplifier. In the noncollinear BOC setup for preamplifier a 150- $\mu\text{m}$  thick glass plate is used to increase the measurement range. The analysis and control system processed the BOC signal and control the delay line to correct the timing jitter in real-time.

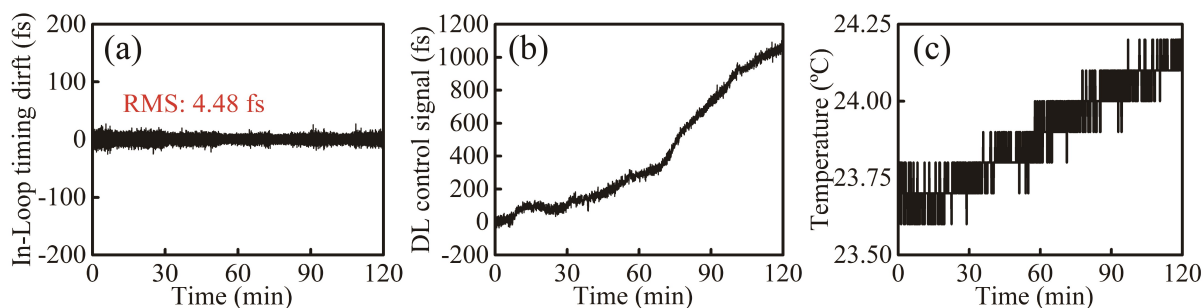

**Figure 4.** Timing drift measurement of the 200-TW preamplifier over 120 minutes. (a) In-loop timing drift, (b) the DL control signal, and (c) environment temperature fluctuation.

The “S” shape BOC cross-correlation curve characterizing the measurement accuracy is first measured, with a fitted timing-to-amplitude conversion slope of 64.44 mv/fs. Figure 4 shows long-term measurement of (a) in-loop timing drift, (b) DL control signal, and (c) environment temperature. As shown in Figure 4(a), by turning on the feedback system with a feedback bandwidth of 100 Hz, the timing fluctuation of

the 200-TW preamplifier is corrected to an RMS of 4.48 fs over 120 minutes. According to Figure 4(b), the DL control signal is continuously increased to 1074 fs over 120 minutes, which is much longer than the pulse duration of the 200-TW preamplifier and regenerative amplifier. The results show that the timing drift of the 200-TW preamplifier is severe. Severe timing drift not only affects subsequent experiments but also

limits the possibility of integrating the 200-TW preamplifier into 100 PW laser facility. During the timing drift measurement, the environment temperature variation is recorded beside the 200-TW preamplifier, as shown in Figure 4(c). Comparing Figure 4(b) and Figure 4(c), the change trend of the DL control signal has a strong correlation with the temperature change trend outside the 200-TW preamplifier. Therefore, temperature is the main factor causing timing drift in the long-term stable operation of the laser systems.

As the results shown above, the timing fluctuation of the laser pulses becomes much more serious after a complex system. It is because the nonlinear processes in OPA, HCF and OPCPA will bring in timing fluctuation and increase the noise from the seed and environment. The measured pulse energy stability of seed and preamplifier is 0.7% and 4.6% in RMS, respectively. The standard deviation of seed pulses and preamplifier pulses pointing fluctuation in the horizontal direction are  $9.99 \mu\text{rad}$  and  $9.45 \mu\text{rad}$ , while in the vertical direction are  $8.67 \mu\text{rad}$  and  $10.77 \mu\text{rad}$ , respectively. Large variations in pulse energy and beam pointing for the seed and 200-TW preamplifier greatly increase the difficulty of timing characterization and control. As these results show, to improve the synchronization accuracy, one efficient means is to improve the speed of data acquisition and feedback bandwidth to eliminate high-frequency noise. Although, the double arm configuration of BOC can eliminate the fluctuation of input pulse energy and spectrum to a certain extent because the energy and spectrum of double arm increase and decrease simultaneously. However, the pointing fluctuation of the BOC input pulses lead to errors in the baseband voltage signal, which greatly affects the BOC measurement accuracy and increases the difficulty of synchronous work. Therefore, the measurement and control accuracy was limited in experiment. Recently, we have stably and flexibly delivered multi- $\mu\text{J}$ , sub-200-fs pulses in a  $\sim 10$ -meter-long vacuum antiresonant hollow-core fiber, which has been

successfully used for high-power pulses synchronization and demonstrated its excellent immunity to environmental perturbations<sup>[39]</sup>.

To the best of our knowledge, we have achieved, for the first time, a long-term correction of timing jitter for a 200-TW laser pulse. The timing synchronization system will be applied to the main amplifier and the final optics assembly to synchronize the 100-PW laser facility pulses with the XFEL pulses. Given the advantages of antiresonant hollow-core fiber with high damage threshold, low dispersion and low delay in data transmission, we have used it to transmit femtosecond laser pulses with high power and obtained preliminary results. The antiresonant hollow-core fiber can not only improve the pointing jitter of the output pulses, but also eliminate the influence of the external environment on RS, which greatly reduces the system error and will be integrated into the high-precision timing synchronization system for improved synchronization accuracy.

### 3. Conclusion

To summarize, we propose a high-precision timing synchronization system for long-term correction of timing jitter in the front end of 100-PW laser facility. An MPC and chirped mirrors are used to compensate the optical path and the dispersion to improve the control accuracy. The timing jitter error signal was obtained by a BOC, and processed and corrected by home-built analysis and control system. It is demonstrated that the high contrast seed system of the 100-PW laser is synchronized to the oscillator with a fluctuation of 1.82 fs RMS for over 5 hours, and the 200-TW preamplifier is synchronized to the seed with a fluctuation of 4.48 fs RMS for over 120 minutes, which demonstrates the excellent performance of the synchronization feedback system. To the best of our knowledge, we have achieved, for the first time, a timing characterization and control for a 200-TW laser. In the future, the timing synchronization system will be upgraded to control the timing of the main amplifier and the final optics assembly of

100-PW laser facility. The timing system will provide the basic condition for the joint pump-probe experiments of the 100-PW and XFEL.

## Acknowledgments

This work is supported by Shanghai high repetition rate XFEL and extreme light facility (SHINE) project, National Natural Science Foundation of China (Grant No. 62105346), CAS Project for Young Scientists in Basic Research (YSBR-059), 100 Talents Program of CAS, Basic research project of Shanghai Science and Technology Innovation Action Plan (20JC1416000). L. S. thanks Mr. Anan Dai and Prof. Bo Liu for valuable discussions.

## References

- Malka, V., Faure, J., Gauduel, A. Y., Lefebvre, E., Rousse, A., and Phuoc, T. K., “Principles and applications of compact laser–plasma accelerators”, *Nat. Phys.* **4**, 447 (2008).
- Cole, M. J., Behm, T. K., Gerstmayr, E., and Blackburn, G. T., “Experimental evidence of radiation reaction in the collision of a high-intensity laser pulse with a laser-wakefield accelerated electron beam”, *Phys. Rev. X* **8**, 011020 (2018).
- Seipt, D., Del Sorbo, D. D., Ridgers, P. C., and Thomas, R. A., “Ultrafast polarization of an electron beam in an intense bichromatic laser field”, *Phys. Rev. A* **100**, 061402 (2019).
- Kemp, J. A., Wilks, C. S., Hartouni, P. E., and Grim, G., “Generating keV ion distributions for nuclear reactions at near solid-density using intense short-pulse lasers”, *Nat. Commun.* **10**, 1 (2019).
- Higginson, P. D., Vassura, L., Gugiu, M. M., and Antici, P., “Temporal narrowing of neutrons produced by high-intensity short-pulse lasers”, *Phys. Rev. Lett.* **115**, 054802 (2015).
- Ditmire, T., Zweiback, J., Yanovsky, P. V., Cowan, E. T., Hays, G., and Wharton, B. K., “Nuclear fusion from explosions of femtosecond laser-heated deuterium clusters”, *Nature* **398**, 489 (1999).
- Chen, K. J., Latham, P. W., and Beraun, E. J., “The role of electron–phonon coupling in ultrafast laser heating”, *J. Laser Appl.* **17**, 63 (2005).
- Patel, K. P., Mackinnon, J. A., Key, H. M., Cowan, E. T., Foord, E. M., Allen, M., Price, F. D., Ruhl, H., Springer, T. P., and Stephens, R., “Isochoric heating of solid-density matter with an ultrafast proton beam”, *Phys. Rev. Lett.* **91**, 125004 (2003).
- Ataman, S., “Vacuum birefringence detection in all-optical scenarios”, *Phys. Rev. A* **97**, 063811 (2018).
- King, B. and Heinzl, T., “Measuring vacuum polarization with high-power lasers”, *High Power Laser Sci. Eng.* **4**, e5 (2016).
- Bragin, S., Meuren, S., Keitel, H. C., and Piazza, D. A., “High-energy vacuum birefringence and dichroism in an ultrastrong laser field”, *Phys. Rev. Lett.* **119**, 250403 (2017).
- Südmeyer, T., Marchese, V. S., Hashimoto, S., Baer, E. R. C., Gingras, G., Witzel, B., and Keller, U., “Femtosecond laser oscillators for high-field science”, *Nat. Photonics* **2**, 599 (2008).
- Kiriyama, H., Mori, M., Pirozhkov, S. A., and Ogura, K., “High-contrast, high-intensity petawatt-class laser and applications”, *IEEE J. Sel. Top. Quantum Electron.* **21**, 232 (2014).
- Roth, M., Cowan, E. T., Key, H. M., and Hatchett, P. S., “Fast ignition by intense laser-accelerated proton beams”, *Phys. Rev. Lett.* **86**, 436 (2001).
- Zang, H., Li, H., Zhang, W., Fu, Y., Chen, S., Xu, H., and Li, R., “Robust and ultralow-energy-threshold ignition of a lean mixture by an ultrashort-pulsed laser in the filamentation regime”, *Light Sci. Appl.* **10**, 1 (2021).
- Yoshida, M., Fujimoto, Y., Hironaka, Y., Nakamura, G. K., Kondo, K., Ohtani, M., and Tsunemi, H., “Generation of picosecond hard x rays by tera watt laser focusing on a copper target”, *Appl. Phys. Lett.* **73**, 2393 (1998).
- Kmetec, D. J., “Ultrafast laser generation of hard X-rays”, *IEEE J. Quantum Electron.* **28**, 2382 (1992).
- Salières, P., Carré, B., Le Déroff, L., Grasbon, F., Paulus, G. G., Walther, H., Kopold, R., Becker, W., Milosevic, B. D., Sanpera, A., and Lewenstein, M., “Feynman's path-integral approach for intense-laser-atom interactions”, *Science* **292**, 902 (2001).
- Ditmire, T., Springate, E., Tisch, G. W. J., Shao, L. Y., Mason, B. M., Hay, N., Marangos, P. J., and Hutchinson, R. H. M., “Explosion of atomic clusters heated by high-intensity femtosecond laser pulses”, *Phys. Rev. A* **57**, 369 (1998).
- Joshi, C., Mori, B. W., Katsouleas, T., Dawson, M. J., Kindel, M. J., and Forslund, W. D., “Ultra-high gradient particle acceleration by intense laser-driven plasma density waves”, *Nature* **311**, 525 (1984).
- Corkum, P. B., and Krausz, F., “Attosecond science”, *Nat. Phys.* **3**, 381 (2007).
- Vincenti, H., and Quéré, F., “Attosecond lighthouses: how to use spatiotemporally coupled



- light fields to generate isolated attosecond pulses”, *Phys. Rev. Lett.* **108**, 113904 (2012).
23. Zeng, Y., Zhou, C., Song, L., Lu, X., Li, Z., Ding, Y., Bai, Y., Xu, Y., Leng, Y., and Tian, Y., “Guiding and emission of millijoule single-cycle THz pulse from laser-driven wire-like targets”, *Opt. Express* **28**, 15258 (2020).
  24. Zhang, D., Bai, Y., Zeng, Y., Ding, Y., Li, Z., Zhou, C., Leng, Y., Song, L., Tian, Y., and Li, R., “Towards high-repetition-rate intense terahertz source with metal wire-based plasma”, *IEEE Photonics J.* **14**, 5910605 (2022).
  25. Zhang, B., Ma, Z., Ma, J., Wu, X., Ouyang, C., Kong, D., Hong, T., Wang, X., Yang, P., and Chen, L., “1.4-mJ high energy terahertz radiation from lithium niobates”, *Laser Photon. Rev.* **15**, 2000295 (2021).
  26. Strickland, D., and Mourou, G., “Compression of amplified chirped optical pulses”, *Opt. Commun.* **55**, 447 (1985).
  27. Piskarskas, A., Stabinis, A., and Yankauskas, A., “Phase phenomena in parametric amplifiers and generators of ultrashort light pulses”, *Soviet Physics Uspekhi* **29**, 869 (1986).
  28. Carlidge, E., “The light fantastic”, *Science* **359**, 382 (2018).
  29. Yu, J. Y., Lee, K. S., Sung, H. J., Yoon, W. J., Jeong, M. T., and Lee, J., “Generation of high-contrast, 30 fs, 1.5 PW laser pulses from chirped-pulse amplification Ti: sapphire laser”, *Opt. Express* **20**, 10807 (2012).
  30. Gan, Z., Yu, L., Li, S., Wang, C., Liang, X., Liu, Y., Li, W., Guo, Z., Fan, Z., and Yuan, X., “200 J high efficiency Ti: sapphire chirped pulse amplifier pumped by temporal dual-pulse”, *Opt. Express* **25**, 5169 (2017).
  31. Li, W., Gan, Z., Yu, L., Wang, C., Liu, Y., Guo, Z., Xu, L., Xu, M., Hang, Y., and Xu, Y., “339 J high-energy Ti: sapphire chirped-pulse amplifier for 10 PW laser facility”, *Opt. Lett.* **43**, 5681 (2018).
  32. Schibli, R. T., Kim, J., Kuzucu, O., Gopinath, T. J., Tandon, N. S., Petrich, S. G., Kolodziejski, A. L., Fujimoto, G. J., Ippen, P. E., and Kaertner, X. F., “Attosecond active synchronization of passively mode-locked lasers by balanced cross correlation”, *Opt. Lett.* **28**, 947 (2003).
  33. Şafak, K., Xin, M., Zhang, Q., Chia, S., Mücke, D. O., and Kärtner, X. F., “Jitter analysis of timing-distribution and remote-laser synchronization systems”, *Opt. Express* **24**, 21752 (2016).
  34. Casanova, A., Courjaud, A., Trophème, B., and Santarelli, G., “Measurement of absolute timing jitter of SESAM mode-locked lasers with yoctosecond sensitivity”, *Opt. Lett.* **45**, 6098 (2020).
  35. Shao, B., Li, Y., Peng, Y., Wang, P., Qian, J., Leng, Y., and Li, R., “Broad-bandwidth high-temporal-contrast carrier-envelope-phase-stabilized laser seed for 100 PW lasers”, *Opt. Lett.* **45**, 2215 (2020).
  36. Schulz, S., Schmuser, P., Zemella, J., and Arsov, V., in *11th European Particle Accelerator Conference*, (Academic, Genoa, Italy, 2008), p.3366.
  37. Xin, M., Şafak, K., and Kärtner, X. F., “Ultra-precise timing and synchronization for large-scale scientific instruments”, *Optica* **5**, 1564 (2018).
  38. Wang, X., Liu, X., Lu, X., Chen, J., Long, Y., Li, W., Chen, H., Chen, X., Bai, P., and Li, Y., “13.4 fs, 0.1 Hz OPCPA front end for the 100 PW-class laser facility”, *Ultrafast Science* **2022**, 1 (2022).
  39. Yan, C., Li, H., Huang, Z., Wang, X., Liu, D., Liu, X., Pan, J., Luo, Z., Yang, F., Zheng, Y., Yin, R., Yu, H., Leng, Y., Song, L., Pang, M., and Jiang, X., “Highly stable, flexible delivery of microjoule-level ultrafast pulses in vacuumized anti-resonant hollow-core fibers for active synchronization”, *Opt. Lett.* **48**, 1838 (2023).