



LAWRENCE  
LIVERMORE  
NATIONAL  
LABORATORY

# Dielectric Characterization and Microwave Interferometry in HMX-based Explosives

J. W. Tringe, R. J. Kane, K. T. Lorenz, E. V.  
Baluyot, K. S. Vandersall

October 16, 2013

APS Topical Group on Shock Compression of Condensed  
Matter

Seattle, WA, United States

July 7, 2013 through July 12, 2013

## **Disclaimer**

---

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

# Dielectric characterization and microwave interferometry in HMX-based explosives

J.W. Tringe, R. J. Kane, K. T. Lorenz, E. V. Baluyot and K. S. Vandersall

*Lawrence Livermore National Laboratory  
Livermore, CA 94550  
tringe2@llnl.gov*

**Abstract.** Microwave interferometry is a useful technique for understanding the development and propagation of detonation waves. The velocity of the front can be determined directly with the dielectric constant of the explosive and the instantaneous phase difference of the reflected microwave signal from the detonation front. However, the dielectric constant of HMX-based explosives has been measured only over a small range of wavelengths. Here we employ an open-ended coaxial probe to determine the complex dielectric constant for LX-10 and other HMX-based explosives over the 5-20 GHz range. The propagation of a detonation wave in a lightly-confined cylindrical charge geometry is described where the microwave-reflective properties of the detonation front are characterized with a waveguide. For comparison, piezoelectric pins were used to measure the detonation velocity and indirectly estimate the dielectric constant of LX-10 at 26.5 GHz. Future work in this area will also be discussed.

## 1. Introduction

Microwave interferometry (MI) can directly measure the velocity of detonation, compaction and deflagration fronts in explosives and porous materials. First demonstrated in the 1950's on detonation waves in explosives,[1, 2] the technique has subsequently been refined and expanded to enable velocity measurement in a wide range of materials.[3-6] The spatial resolution of front motion is limited to a fraction of the wavelength of the interrogating signal in the medium, which may be as small as a few mm. While optical techniques such as Photonic Doppler Velocimetry (PDV) and Velocity Interferometer System for Any Reflector (VISAR) offer significantly better spatial resolution from optically-reflective surfaces, MI has the important advantage that it can interrogate moving fronts inside of most explosives and many other insulating materials.

As previously described,[3, 4] the front velocity  $U_s$  measured by MI can be calculated from the Doppler period  $T$  of the return signal and the microwave wavelength,  $\lambda_g$ , inside the interrogated medium:

$$U_s = \frac{\lambda_g}{2T} \quad (1)$$

The interrogated medium is typically enclosed in a cylindrical waveguide. The reflection of the microwave energy results from a dielectric discontinuity in the medium, which may be a detonation front, for example, or a shock-induced density change. Deflagration fronts or other non-shock related transformations may also be observable as long as the phenomenon under study creates a moving boundary separating regions with different dielectric constants.

The wavelength of the microwaves inside the medium,  $\lambda_g$ , can be estimated by:

$$\lambda_g = \frac{\lambda_0}{\sqrt{\epsilon_r - (\lambda_0/\lambda_c)^2}} \quad (2)$$

where  $\lambda_0$  is the vacuum wavelength of the microwave signal and  $\lambda_c$  is the cutoff wavelength of the signal in the waveguide.  $\epsilon_r$  is the relative dielectric constant of the medium at the interrogation frequency.

From Equations 1 and 2 it may be observed that the calculated front velocity  $U_s$  is a function of the relative dielectric constant  $\epsilon_r$ . However, previous measurements of the dielectric constant of HMX-based explosives have been made at low frequencies, or at discrete higher frequencies such as 8.3 GHz.[7] This dearth of data motivates the investigation of the coaxial probe technique as a method for measuring the dielectric constant of HMX-based explosives over a larger frequency range.

The coaxial probe method for dielectric constant estimation relies on the theory of circular diffraction antennas. This approach employs Maxwell's equations and the variational method for calculating lumped circuit elements.[8] Scattering parameters are determined for a coaxial line terminated by a semi-infinite medium with uniform dielectric constant.

Experimentally, the coaxial probe dielectric measurement is relatively straightforward. Compared to transmission line and resonant cavity dielectric measurement techniques, this approach has the advantage that sample geometry does not need to be rigidly fixed to accommodate the geometry of the sampling apparatus. A specialized coaxial probe termination is connected to a network analyzer; the probe is then brought into contact with the material under test which may be a solid with a planar surface, or a granular solid or a liquid. The system is typically calibrated with a liquid standard such as water or methanol. We employ software from Speag (Switzerland) to calculate the frequency-dependent dielectric constant of the material under test based on measured scattering parameters, together with the calibration standard results. We use the Speag DAK 1.2 probe which has a nominal frequency measurement range 5-50 GHz.[9] In practice the upper frequency was limited by the network analyzer, an Agilent E8362B, to 20 GHz.

## 2. Coaxial probe results

Figure 1 shows the coaxial probe termination in contact with a 2.54 cm (1") diameter, 2.54 cm tall explosive pellet. We confirm the validity of the assumption that this sample is effectively semi-infinite for the purpose of the dielectric constant measurements over 5-20 GHz by placing a conductive (metal) base below a 2.54 cm diameter, 2.54 cm tall Teflon pellet. The extracted dielectric constant values were the same with and without the conductive base. Similarly, we used a 5.08 cm diameter Teflon pellet and found that the extracted dielectric constant was comparable in the range 5-20 GHz to the dielectric constant extracted from a 2.54 cm diameter pellet. To measure the dielectric constant of explosive pellets, we use a mechanically-compliant foam base to ensure stable contact between probe and sample without applying excessive force. Measurements were made in air at approximately 23 C, 40% relative humidity.



Figure 1. Coaxial probe measurement of an LX-10 explosive pellet.

Calibration was performed using deionized water as a reference. Because of the large dielectric mismatch between water and the explosives in the frequency range 5-20 GHz, results obtained for explosives were further normalized to the ratio of the known to measured  $\epsilon_r$  value for Teflon,  $2.1/1.5 = 1.4$ . Measured  $\epsilon_r$  values for Teflon and explosives were somewhat constant in the frequency range 5-20 GHz, generally decreasing 10-20% over the measurement range. Calculated  $\epsilon_r$  at 10 GHz are shown in Table 1 for three HMX-based explosives, LX-04, LX-14, and LX-10. Pressed ultra-fine TATB (no binder) is also shown as a reference. Calculated  $\epsilon_r$  for explosives at 100% theoretical maximum density (TMD) were determined using the Maxwell-Garnett mixing formula,

$$\epsilon_{eff} = \epsilon_r + 3f\epsilon_r \frac{\epsilon_i - \epsilon_r}{\epsilon_i - 2\epsilon_r + f(\epsilon_i - \epsilon_r)} \quad (3)$$

where  $\epsilon_{eff}$  is the effective (measured) dielectric constant,  $\epsilon_i$  is the inclusion's dielectric constant (here, air,  $\epsilon_i = 1$ ), and  $f$  is the volume fraction of the inclusion.[10]

Explosive	Binder, fraction (wt%)	Density (%TMD)	$\epsilon_r$ at 10 GHz for 100% TMD, Teflon-normalized
LX-04 (HMX)	Viton A, 15	95.6	3.8
LX-14 (HMX)	Estane-5702, 4.5	95.9	4.1
LX-10 (HMX)	Viton A, 5	98.2	3.9
UF TATB	N/A	92.9	4.6

The extracted  $\epsilon_r$  values for the HMX-based explosives are close to 4.1, previously estimated for HMX at 100% TMD and 8.3 GHz.[7] The extracted  $\epsilon_r$  values for UF-TATB is close to 4.5, previously estimated for TATB at 100% TMD and 10 GHz.[11] For the HMX-based explosives the dielectric constant of the binder itself should be taken into account in the future when uncertainties associated with the coaxial probe dielectric measurement technique for explosives can be reduced.

### 3. Dynamic measurement results

Given the dependence of the MI-measured velocity on the dielectric constant of the material under test (Eq. 1 and 2), the effective dielectric constant may be calculated from the front velocity if this velocity can be independently measured. Figure 2 shows the experimental geometry used for this type of characterization.[12]

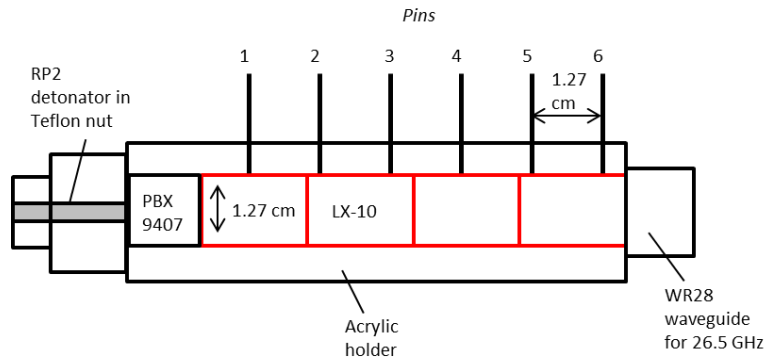


Figure 2. Geometry for dynamic estimation of LX-10 permittivity at 26.5 GHz

In the experiment shown in Figure 2, an acrylic tube is filled with four 1.27 cm diameter pellets of LX-10 pressed to 1.862 g/cc, or 98% theoretical maximum density (TMD). Each pellet is 1.91 cm long. The explosive is interrogated by a 26.5 GHz signal, corresponding to a free-space wavelength of 1.13 cm. The explosive is instrumented with 6 piezoelectric pins to provide an independent estimate of the detonation velocity. The detonation velocity measured by the pins is  $0.887 \pm 0.0014$  cm/ $\mu$ s.

MI data from the side of the charge remote from the detonator is shown in Figure 3. The data was analyzed by multiplying the return signal by a simultaneously-obtained reference signal, then low-pass filtering the product with a 5 MHz pass band and 10 MHz stop band. An oscillating pattern between  $\sim 7$  and 17  $\mu$ s contains the information relevant to detonation velocity.

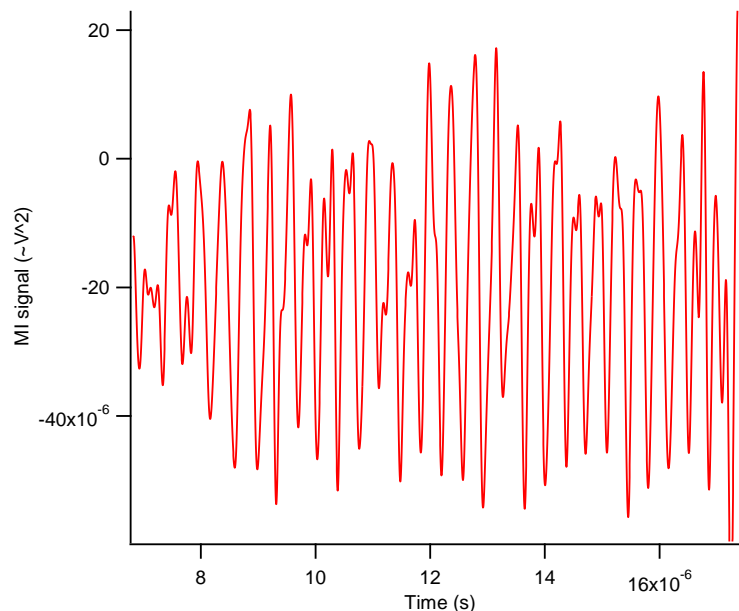


Figure 3. MI signal extracted from 26.5 GHz interrogation of the LX-10 experiment shown in Figure 2. 28 Doppler cycles are observed over 10  $\mu$ s.

With a known detonation velocity from the shorting pins, the effective dielectric of LX-10 at 26.5 GHz can be calculated from (1) and (2). From data shown in Figure 2,  $T = 10 \mu$ s/28 cycles = 0.357  $\mu$ s/cycle. Then the pin-measured velocity of 0.887 cm/ $\mu$ s then implies  $\epsilon_r = 3.5$  at 26.5 GHz. This value is somewhat lower than the 3.9

value obtained by the coaxial probe technique for LX-10 at 10 GHz, and lower also than the 4.1 value at 8.3 GHz previously determined for 100% TMD HMX with a waveguide scheme.[7]

#### 4. Summary and future work

MI is an effective method for characterizing detonation velocity and the velocity of other propagating fronts in explosives. The independent estimation of front velocity by MI, however, requires the characterization of the dielectric constant of the explosive or propagating medium. Preliminary measurements on the HMX-based explosives LX-04, LX-10 and LX-14, as well as TATB, indicate that the coaxial probe technique may be useful for routine dielectric characterization of these materials at frequencies up to 20 GHz. Alternately, the dielectric constant may be estimated by making an independent measure of the front velocity, as was demonstrated in this work for a 1.27 cm diameter cylinder of LX-10 at 26.5 GHz. The permittivity of all HMX-based explosives measured in this work by coaxial probe, or calculated from the front velocity, are in the range 3.5-4.4, comparable to the value of 4.1 which has been previously measured for neat HMX at 8.3 GHz. In the future we will use the coaxial probe method to measure the dielectric constant of explosives over an extended range of densities and samples for frequencies up to 50 GHz. We will use MI to examine a variety of deflagration, shock-related, and detonation phenomena in explosives and reactive materials.

#### 5. Acknowledgements

We gratefully acknowledge Ron Chambers for valuable assistance with explosives testing. We also thank Dr. Ferenc Muranyi of Speag, Schmid & Partner Engineering AG, and Harry Vine of Beacon Technical Sales, Inc., for helpful discussions on the subject of coaxial probe dielectric measurements. This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

#### References

- [1] M. A. Cook, R. L. Doran, and G. J. Morris, "MEASUREMENT OF DETONATION VELOCITY BY DOPPLER EFFECT AT 3-CENTIMETER WAVELENGTH," *Journal of Applied Physics*, vol. 26, pp. 426-428, 1955 1955.
- [2] J. L. Farrands and G. F. Cawsey, "MICROWAVE OBSERVATION OF DETONATION," *Nature*, vol. 177, pp. 34-35, 1956 1956.
- [3] B. C. Glancy, H. W. Sandusky, and A. D. Krall, "MICROWAVE INTERFEROMETRY OF SHOCK-WAVES .2. REACTING POROUS-MEDIA," *Journal of Applied Physics*, vol. 74, pp. 6328-6334, Nov 15 1993.
- [4] A. D. Krall, B. C. Glancy, and H. W. Sandusky, "MICROWAVE INTERFEROMETRY OF SHOCK-WAVES .1. UNREACTING POROUS-MEDIA," *Journal of Applied Physics*, vol. 74, pp. 6322-6327, Nov 15 1993.
- [5] V. M. Bel'skii, A. L. Mikhailov, A. V. Rodionov, and A. A. Sedov, "Microwave diagnostics of shock-wave and detonation processes," *Combustion Explosion and Shock Waves*, vol. 47, pp. 639-650, Nov 2011.
- [6] P. J. Rae, B. B. Glover, J. A. Gunderson, and W. L. Perry, "FREE-FIELD MICROWAVE INTERFEROMETRY FOR DETONATION FRONT

- TRACKING AND RUN-TO-DETONATION MEASUREMENTS," in *Shock Compression of Condensed Matter - 2011, Pts 1 and 2*. vol. 1426, M. L. Elert, W. T. Buttler, J. P. Borg, J. L. Jordan, and T. J. Vogler, Eds., ed, 2012.
- [7] B. C. Glancy and A. Krall, "Automated Microwave Dielectric Constant Measurement System," Naval Surface Weapons Center, Dahlgren, Virginia 1987.
- [8] H. Levine and C. H. Papas, "THEORY OF THE CIRCULAR DIFFRACTION ANTENNA," *Journal of Applied Physics*, vol. 22, pp. 29-43, 1951.
- [9] Speag. (2013). *Systems: DAK 10 MHz – 50 (67) GHz*. Available: <http://www.speag.com/products/dak/dak-dielectric-probe-systems/dak-10-mhz-50-67-ghz/>
- [10] A. H. Sihvola, *Electromagnetic Mixing Formulas and Applications*: Institution of Electrical Engineers, 1999.
- [11] B. B. Glover and W. L. Perry, "Microwave Properties of TATB Particles from Measurements of the Effective Permittivity of TATB Powders," *Propellants Explosives Pyrotechnics*, vol. 34, pp. 347-350, Aug 2009.
- [12] K. T. Lorenz, E. L. Lee, P. F. Pagoria, and M. X. Zhang, "Reliable Small-scale Performance Characterization of Energetic Materials," in *JANNAF 37th Propellant and Explosives Development and Characterization*, San Antonio, TX, 2012.