



UNIVERSITY OF LEEDS

This is a repository copy of *High order optical sideband generation with Terahertz quantum cascade lasers*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/83255/>

Version: Accepted Version

Proceedings Paper:

Cavalié, P, Madéo, J, Freeman, J et al. (13 more authors) (2013) High order optical sideband generation with Terahertz quantum cascade lasers. In: International Conference on Infrared, Millimeter, and Terahertz Waves, IRMMW-THz. International Conference on Infrared, Millimeter, and Terahertz Waves, 1-6 September 2013, Mainz, Germany. IEEE . ISBN 9781467347174

<https://doi.org/10.1109/IRMMW-THz.2013.6665599>

Reuse

Unless indicated otherwise, fulltext items are protected by copyright with all rights reserved. The copyright exception in section 29 of the Copyright, Designs and Patents Act 1988 allows the making of a single copy solely for the purpose of non-commercial research or private study within the limits of fair dealing. The publisher or other rights-holder may allow further reproduction and re-use of this version - refer to the White Rose Research Online record for this item. Where records identify the publisher as the copyright holder, users can verify any specific terms of use on the publisher's website.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

High order optical sideband generation with Terahertz quantum cascade lasers

P. Cavalié^{1*}, J. Madéo¹, J. Freeman¹, K. Maussang¹, E. Strupiechonski,² G. Xu,² R. Colombelli², H. E. Beere³, D. A. Ritchie³, L. Li,⁴ A. G. Davies,⁴ E. H. Linfield⁴, C. Sirtori⁵, J. Mangeney,¹ J. Tignon¹ and S. S. Dhillon¹

¹Laboratoire Pierre Aigrain, Ecole Normale Supérieure, CNRS (UMR 8551),

Université Paris P. et M. Curie, Université D. Diderot, 75231 Paris Cedex 05, France

²Institut d'Electronique Fondamentale, University Paris Sud, UMR8622 CNRS, 91405 Orsay, France.

³Semiconductor Physics, Cavendish Laboratory, University of Cambridge, United Kingdom

⁴School of Electronic and Electrical Engineering, University of Leeds, Leeds LS9 2JT, United Kingdom.

⁵Matériaux et Phénomène Quantique, Université Paris 7, 75205 Paris cedex 13, France

Email: pierrick.cavalié@lpa.ens.fr

Abstract – Optical sidebands are generated by difference frequency mixing between a resonant bandgap near-infrared beam and a terahertz (THz) wave. This is realized within the cavity of a THz quantum cascade laser using resonantly enhanced non-linearities. Multiple order optical sidebands and conversion efficiencies up to 0.1% are shown.

The nonlinear optical properties of intersubband and interband transitions in quantum wells has recently received considerable attention owing to their enhanced susceptibilities compared to bulk properties and potential applications in devices such as optical switches and modulators. Indeed efficient non-linear wave mixing between a near-infrared probe (interband resonance) in presence of an intense terahertz (THz) beam (intersubband resonance) in quantum wells systems has been already demonstrated [1,2]. However, the THz radiation was provided by a Free Electron Laser (FEL). In this work, we demonstrate [3] that these types of high order nonlinear processes can be realized using the resonant interband nonlinearities of a compact and practical device – the quantum cascade laser (QCL) [4].

Figure 1a shows a schematic of the process. The THz QCL laser transition E_{QCL} occurs within the conduction band between the highlighted green states ($E_u - E_n$). A near-infrared beam (NIR) E_{NIR} is coupled into the QCL cavity resulting in a bandgap excitation from the confined hole state. The geometry results in a resonance enhancement of the second order non-linearity permitting non-linear frequency mixing. As a result the difference frequency $E_{NIR} - E_{QCL}$ is generated via a virtual state below the bandgap and is therefore not absorbed. This concept permitted the generation of the difference frequency at $E_{NIR-QCL} = 1.5171$ eV ($\lambda = 817$ nm) with $E_{NIR} = 1.53$ eV, i.e. separated from the pump E_{NIR} by exactly the photon energy of the THz QCL (operating at $f = 2.78$ THz, $E_{QCL} \sim 12$ meV). When the QCL is taken above laser threshold, the difference frequency is observed for pump excitations over a range of few meV (1.523 eV $< E_{NIR} < 1.534$ eV). A resonant behaviour is found for the conversion efficiency with a maximum of 0.13% observed for pump energies of 1.527eV, comparable to those obtained in FEL experiments [3].

We have also demonstrated high order terahertz (THz) frequency sidebands (up to 3rd order) within the THz QCL i.e. $E_{NIR} \pm nE_{QCL}$ with integer $n > 1$. This was achieved with a double metal QCL cavity to enhance the intracavity power density,

approaching those used in FEL studies. Figure 1b shows the typical sideband spectra observed with the QCL above laser threshold. Each sideband was investigated as a function of THz input power. The 1st order sideband intensity shows a linear dependence with THz power corresponding to a single THz photon, while the second order sideband has a quadratic dependence implying a two THz photon interaction and hence a third order susceptibility. We show that the first and second order sidebands correspond to an enhanced second and third order susceptibility, respectively, that are two orders of magnitude greater than the bulk value.

The perspectives of this work include tuning the interband resonances to the telecom window using mid-infrared InP-based QCLs. The latter operate at room temperature and would allow wavelength shifting between different telecommunication bands.

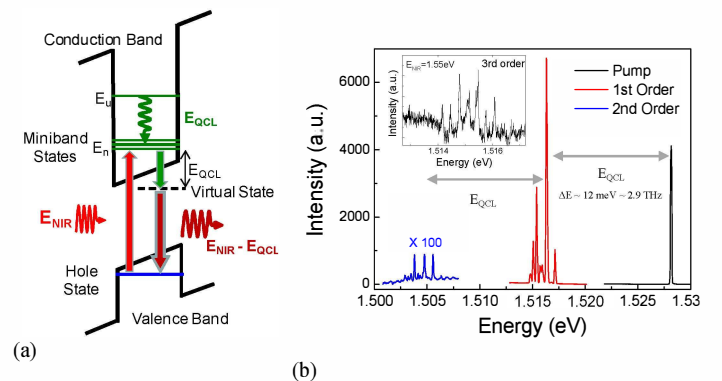


Fig. 1a) Schematic of the resonant non-linear process for the generation of the difference frequency ($E_{NIR} - E_{QCL}$) in a QCL operating at E_{QCL} . A NIR pump E_{NIR} is tuned in resonance with interband transitions. This allows the generation of a lower energy beam at $E_{NIR} - E_{QCL}$ via a virtual state below the material bandgap. **b)** Pump laser spectrum through QCL and spectrum of the below bandgap generated sidebands at the generated differences, $E_{NIR} - E_{QCL}$ and $E_{NIR} - 2E_{QCL}$. The third order sideband $E_{NIR} - 3E_{QCL}$ is shown in the inset.

REFERENCES

- [1] S. G. Carter et al., App. Phys. Lett. **84**, 840-843, 2004
- [2] B. Zaks et al, Nature **83**, 580, 2012.
- [3] J. Madéo et al, Nature Photonics, **6**, 519-524, 2012
- [4] R. Köhler et al., Nature **417**, 156-159, 2002