

2021

## Solution of the Telegraph Equation Using Adomian Decomposition Method with Accelerated Formula of Adomian Polynomials

Ahmed. Y. Sayed

*Department of Physics and Engineering Mathematics, Faculty of Engineering El-Mataria, Halwan University, Cairo, Egypt, AHMED\_BADR@m-eng.helwan.edu.eg*

K. M. Abdelgaber

*Department of Physics and Engineering Mathematics, Faculty of Engineering El-Mataria, Halwan University, Cairo, Egypt, AHMED\_BADR@m-eng.helwan.edu.eg*

A. R. Elmahdy

*Department of Physics and Engineering Mathematics, Faculty of Engineering El-Mataria, Halwan University, Cairo, Egypt, AHMED\_BADR@m-eng.helwan.edu.eg*

I. L. El-Kalla

*Department of Physics and Engineering Mathematics, Faculty of Engineering, Mansoura University, PO 35516, Mansoura, Egypt, AHMED\_BADR@m-eng.helwan.edu.eg*

Follow this and additional works at: <https://digitalcommons.aaru.edu.jo/isl>

### Recommended Citation

Y. Sayed, Ahmed.; M. Abdelgaber, K.; R. Elmahdy, A.; and L. El-Kalla, I. (2021) "Solution of the Telegraph Equation Using Adomian Decomposition Method with Accelerated Formula of Adomian Polynomials," *Information Sciences Letters*: Vol. 10 : Iss. 1 , Article 6.

Available at: <https://digitalcommons.aaru.edu.jo/isl/vol10/iss1/6>

This Article is brought to you for free and open access by Arab Journals Platform. It has been accepted for inclusion in Information Sciences Letters by an authorized editor. The journal is hosted on Digital Commons, an Elsevier platform. For more information, please contact [rakan@aarj.edu.jo](mailto:rakan@aarj.edu.jo), [marah@aarj.edu.jo](mailto:marah@aarj.edu.jo), [u.murad@aarj.edu.jo](mailto:u.murad@aarj.edu.jo).

# Solution of the Telegraph Equation Using Adomian Decomposition Method with Accelerated Formula of Adomian Polynomials

Ahmed. Y. Sayed<sup>1,\*</sup>, K. M. Abdelgaber<sup>1</sup>, A. R. Elmahdy<sup>1</sup> and I. L. El-Kalla<sup>2</sup>

<sup>1</sup> Department of Physics and Engineering Mathematics, Faculty of Engineering El-Matara, Halwan University, Cairo, Egypt

<sup>2</sup> Department of Physics and Engineering Mathematics, Faculty of Engineering, Mansoura University, PO 35516, Mansoura, Egypt

Received: 7 Jun. 2020, Revised: 21 Sep. 2020, Accepted: 8 Sep. 2020

Published online: 1 Jan. 2021

**Abstract:** In this paper, we will apply the Adomian decomposition method (ADM) to three different examples of the Telegraph Equation with a nonlinear term by the two polynomials called Adomian polynomials and the new accelerated Adomian polynomials proposed by El-kalla [12] that called El-kalla polynomials and compare the solution with the exact solution, we found that the new accelerated polynomials is easier and converges rapidly than Adomian polynomials, also we found that the error between the exact solution and the solution using the new accelerated polynomials is less than the error between the exact solution and the solution using Adomian polynomials.

**Keywords:** Telegraph equation; Adomian polynomial; El-kalla polynomial

## 1 Introduction

There are many applications of the telegraph equation for example, in wave phenomena and also in wave propagation of electric signals in a cable transmission line

Some studies were done to solve the telegraph equation numerically or analytically as in [1], [2], [3], [4], [5], [6], [7], [14], [15], [16], [17].

ADM was discussed by the mathematician George Adomian [8], [9], [10], [11], [13]. It has been shown that ADM can solve a large class of ordinary or partial differential equations and the approximate solution converges rapidly to the accurate solutions.

The main purpose of this study is to solve the nonlinear telegraph equation by using ADM and clarify the advantages of El-kalla polynomials using the ADM for solving nonlinear telegraph equation.

The results are presented graphically to show the difference between using the two polynomials.

## 2 The Methods

In this section we will illustrate the main points of the Adomian decomposition method in case of nonlinear partial differential equations.

### 2.1 Adomian decomposition method in case of nonlinear P.D.E

Let,  $u = u(x, t)$  and consider the differential equation

$$L_t u + L_x u + Ru(x, t) + f(u(x, t)) = f(x, t), \quad (1)$$

where  $L_t u = \frac{dn}{dt}$  is the higher derivative of the  $t$  variable,  $L_x u = \frac{dn}{dx^n}$  is the higher derivative of the  $x$  variable,  $Ru(x, t)$  is the other derivative terms,  $f(u(x, t))$  will be a term of nonlinearity and  $f(x, t)$  is the terms containing independent variables only. firstly we separate the higher derivative of the  $(x)$  variable or of the  $(t)$  variable in any side of the equal sign of the equation.

$$L_x u = f(x, t) + L_t u + Ru(x, t) + f(u(x, t)), \quad (2)$$

\* Corresponding author e-mail: [AHMED.BADR@m-eng.helwan.edu.eg](mailto:AHMED.BADR@m-eng.helwan.edu.eg)



and making the integration  $L_x^{-1}$  to the sides of the equation, where  $L_x^{-1}$  is the integration from 0 to  $x$  equal  $n$  times of the derivative, we get

$$u(x, t) = u(0, t) + L_x^{-1} f(x, t) + L_x^{-1} L_t u + L_x^{-1} R u(x, t) + L_x^{-1} A_n. \tag{3}$$

Then the solution of Adomian will be

$$u(x, t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{4}$$

$$\begin{aligned} u_0 &= u(0, t) + L_x^{-1} f(x, t), \\ u_1 &= L_x^{-1} (L_t u_0) + L_x^{-1} (R u_0(x, t)) + L_x^{-1} (A_0), \\ u_2 &= L_x^{-1} (L_t u_1) + L_x^{-1} (R u_1(x, t)) + L_x^{-1} (A_1), \\ u_3 &= L_x^{-1} (L_t u_2) + L_x^{-1} (R u_2(x, t)) + L_x^{-1} (A_2), \\ &\vdots \end{aligned} \tag{5}$$

And getting the solution of the equation by the integration, where  $A_0, A_1, A_2, \dots$  called Adomian polynomials or using the polynomials called El-kalla polynomials  $\bar{A}_0, \bar{A}_1, \bar{A}_2, \dots$  as we will see later.

### 2.2 Adomian polynomial formula

$$A_n = \frac{1}{n!} \left( \frac{d^n}{d\lambda^n} [N(\sum_{i=0}^n \lambda^i u_i)] \right)_{\lambda=0}, \tag{6}$$

such that  $N(u_i)$  is the term of the nonlinearity

$$\begin{aligned} A_0 &= \frac{1}{0!} \left( \frac{d^0}{d\lambda^0} [N(u_0)] \right)_{\lambda=0} = N(u_0), \\ A_1 &= \frac{1}{1!} \left( \frac{d}{d\lambda} [N(u_0 + \lambda u_1)] \right)_{\lambda=0}, \\ A_2 &= \frac{1}{2!} \left( \frac{d^2}{d\lambda^2} [N(u_0 + \lambda u_1 + \lambda^2 u_2)] \right)_{\lambda=0}, \\ &\vdots \end{aligned} \tag{7}$$

### 2.3 El-kalla polynomial formula

$$\bar{A}_n = f(s_n) - \sum_{i=0}^{n-1} \bar{A}_i, \tag{8}$$

where  $\bar{A}_n$ , are El-kalla polynomials,  $\bar{A}_0, \bar{A}_1, \bar{A}_2, \dots$

$f(s_n)$ : is making a substitution of the summation of the solutions in the term of the nonlinearity  $n$  times,

for instance if the nonlinear function is  $f(u) = \sin(u)$  then

$$\begin{aligned} f(u_0) &= \sin(u_0), \\ f(u_0 + u_1) &= \sin(u_0 + u_1), \\ f(u_0 + u_1 + u_2) &= \sin(u_0 + u_1 + u_2), \\ &\vdots \end{aligned}$$

so,

$$\begin{aligned} \bar{A}_1 &= f(u_0) - \bar{A}_0, \\ \bar{A}_2 &= f(u_0 + u_1) - (\bar{A}_0 + \bar{A}_1), \\ \bar{A}_3 &= f(u_0 + u_1 + u_2) - (\bar{A}_0 + \bar{A}_1 + \bar{A}_2), \\ &\vdots \end{aligned} \tag{9}$$

For example, consider the nonlinear term  $y^3$ , we clarify both polynomials, the Adomian and El-kalla as in Table (1) and it is clear that the terms of the polynomials proposed by El-kalla has higher accuracy than the polynomials of Adomian

## 3 Numerical Examples

### 3.1 Example 1

Consider the nonlinear telegraph equation

$$\begin{aligned} u_{xx} &= u_{tt} + 2u_t + u^2 - e^{(2x-4t)} + e^{(x-2t)}, \\ u(x, 0) &= e^x, \quad u_t(x, 0) = -2e^x. \end{aligned} \tag{10}$$

Applying the ADM by El-kalla and Adomian

For the Adomian polynomials, the solution will be as following: First we will assume the solution as following

$$u(x, t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{11}$$

$$u_{tt} = u_{xx} - 2u_t - u^2 + e^{(2x-4t)} - e^{(x-2t)}. \tag{12}$$

Then, we integrate the two sides from 0 to  $t$ ,

$$\begin{aligned} u_t &= u_t(x, 0) + \int_0^t u_{xx} dt - \int_0^t 2u_t dt \\ &\quad - \int_0^t u^2 dt + \int_0^t (e^{(2x-4t)} - e^{(x-2t)}) dt, \end{aligned} \tag{13}$$

Then, we integrate the two sides from 0 to  $t$  again, to get

$$\begin{aligned} u &= u(x, 0) + \int_0^t u_t(x, 0) dt + \int_0^t \int_0^t u_{xx} dt dt - \int_0^t \int_0^t 2u_t dt dt \\ &\quad - \int_0^t \int_0^t u^2 dt dt + \int_0^t \int_0^t (e^{(2x-4t)} - e^{(x-2t)}) dt dt, \end{aligned} \tag{14}$$

$$u_0 = e^x + \int_0^t -2e^x dt + \int_0^t \int_0^t (e^{(2x-4t)} - e^{(x-2t)}) dt dt,$$

$$u_1 = \int_0^t \int_0^t u_{0xx} dt dt - \int_0^t \int_0^t 2u_{0t} dt dt - \int_0^t \int_0^t A_0 dt dt,$$

$$u_2 = \int_0^t \int_0^t u_{1xx} dt dt - \int_0^t \int_0^t 2u_{1t} dt dt - \int_0^t \int_0^t A_1 dt dt,$$

$$\vdots \tag{15}$$

In the given problem the nonlinear term is  $u^2$ , calculating  $A_0, A_1, A_2, \dots$  using Equation (6), we get

$$\begin{aligned}
 u &= u(x,0) + \int_0^t u_t(x,0)dt + \int_0^t \int_0^t u_{xx}dt - \int_0^t \int_0^t 2u_t dt \\
 &\quad - \int_0^t \int_0^t u^2 dt + \int_0^t \int_0^t (e^{2x-4t} - e^{x-2t}) dt, \\
 A_0 &= (e^x + \frac{(e^{2x}(4t + e^{-4t} - 1))}{16} - \frac{(e^x(2t + e^{-2t} - 1))}{4} - 2te^x)^2 \\
 A_1 &= \frac{1}{1!} \left( \frac{d}{d\lambda} [(u_0 + \lambda u_1)^2] \right)_{\lambda=0}, \\
 A_2 &= \frac{1}{2!} \left( \frac{d^2}{d\lambda^2} [(u_0 + \lambda u_1 + \lambda^2 u_2)^2] \right)_{\lambda=0}, \\
 &\vdots
 \end{aligned}
 \tag{16}$$

so, the solution will be

$$u(x,t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + \dots, \tag{17}$$

$$\begin{aligned}
 u(x,t) &= e^x + \frac{(e^{2x}(4t + e^{-4t} - 1))}{16} - \\
 &\quad \frac{(e^x(2t + e^{-2t} - 1))}{4} - 2te^x + \dots,
 \end{aligned}
 \tag{18}$$

where the exact solution is


$$u(x,t) = e^{x-2t}. \tag{19}$$

3.1.1 For the polynomials called El-kalla polynomials the solution will be as following:

The steps will be the same as previous Equations (11), (12), (13), (14), (15) but, for El-kalla polynomials it will be as follow,

$$\begin{aligned}
 \bar{A}_0 &= u_0^2 = (e^x + \frac{(e^{2x}(4t + e^{-4t} - 1))}{16} - \\
 &\quad \frac{(e^x(2t + e^{-2t} - 1))}{4} - 2te^x)^2, \\
 \bar{A}_1 &= 2u_0u_1 + u_1^2, \\
 \bar{A}_2 &= u_2^2 + 2u_0u_2 + 2u_1u_2, \\
 &\vdots
 \end{aligned}
 \tag{20}$$

$$\begin{aligned}
 u_0 &= e^x + \frac{(e^{2x}(4t + e^{-4t} - 1))}{16} - \frac{(e^x(2t + e^{-2t} - 1))}{4} - 2te^x \\
 u_1 &= \int_0^t \int_0^t u_{0xx} dt - \int_0^t \int_0^t 2u_{0t} dt - \int_0^t \int_0^t A_0 dt, \\
 u_2 &= \int_0^t \int_0^t u_{1xx} dt - \int_0^t \int_0^t 2u_{1t} dt - \int_0^t \int_0^t A_1 dt, \\
 &\vdots
 \end{aligned}
 \tag{21}$$

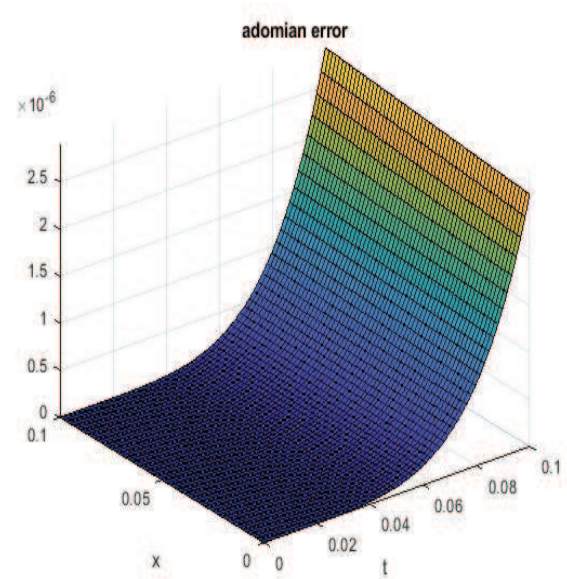

**Fig. 1:** The difference between the exact solution and the solution with Adomian polynomial of  $u_{xx} = u_{tt} + 2u_t + u^2 - e^{(2x-4t)} + e^{(x-2t)}$ .

The solution is

$$u(x,t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{22}$$

$$\begin{aligned}
 u(x,t) &= e^x + \frac{(e^{2x}(4t + e^{-4t} - 1))}{16} - \\
 &\quad \frac{(e^x(2t + e^{-2t} - 1))}{4} - 2te^x + \dots,
 \end{aligned}
 \tag{23}$$

The data in Table (1) was calculated with three terms of the solution  $u(x,t) = u_0 + u_1 + u_2$ , where the difference between the exact solution and solution with El-kalla polynomial called absolute relative error (ARE) and the difference between the exact solution and with solution Adomian polynomial at  $x = 0.01$  for values of  $t$  in Example 1.

Also time of the program when calculating the solution by Matlab R2014a as following:

Time when solving by Adomian polynomials = 22.8280 seconds.


Time when solving by El-kalla polynomials = 18.1860 seconds.

### 3.2 Example 2

Consider the nonlinear telegraph equation

$$\begin{aligned}
 u_{tt} - u_{xx} + 2u_t - u^2 &= e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x, \\
 u(x,0) &= \cosh x, \quad u_t(x,0) = -\cosh x.
 \end{aligned}
 \tag{24}$$

Applying the ADM by El-kalla and Adomian:

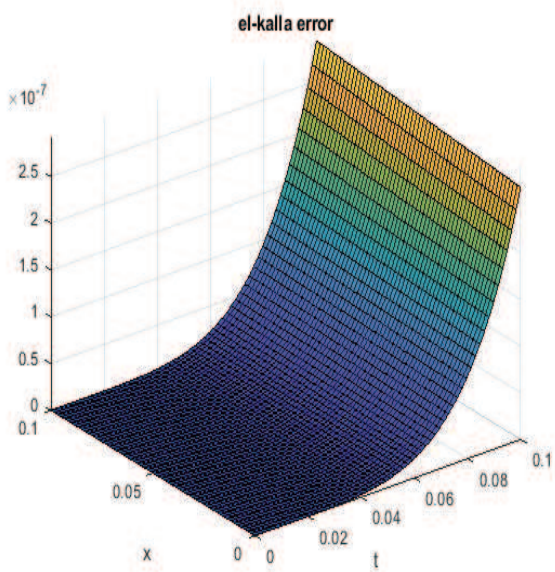

**Fig. 2:** The difference between the exact solution and the solution with El-kalla polynomial of  $u_{xx} = u_{tt} + 2u_t + u^2 - e^{(2x-4t)} + e^{(x-2t)}$ .

3.2.1 For the Adomian polynomials the solution will be as following

We will assume the solution as following,

$$u(x, t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + \dots, \quad (25)$$

$$u_{tt} = u_{xx} - 2u_t + u^2 - e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh(x), \quad (26)$$

integrate the two sides from 0 to  $t$ ,

$$u_t = u_t(x, 0) + \int_0^t u_{xx} dt - \int_0^t 2u_t dt + \int_0^t u^2 dt + \int_0^t e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh(x) dt, \quad (27)$$

integrate the two sides from 0 to  $t$ ,

$$u = u(x, 0) + \int_0^t u_t(x, 0) dt + \int_0^t \int_0^t u_{xx} dt dt - \int_0^t \int_0^t 2u_t dt dt - \int_0^t \int_0^t u^2 dt dt + \int_0^t \int_0^t [e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x] dt dt, \quad (28)$$

$$\begin{aligned} u_0 &= \cosh x + \int_0^t -\cosh x dt \\ &+ \int_0^t \int_0^t e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x dt dt, \\ u_1 &= \int_0^t \int_0^t u_{0,xx} dt dt - \int_0^t \int_0^t 2u_{0,t} dt dt - \int_0^t \int_0^t A_0 dt dt, \\ u_2 &= \int_0^t \int_0^t u_{1,xx} dt dt - \int_0^t \int_0^t 2u_{1,t} dt dt - \int_0^t \int_0^t A_1 dt dt, \\ &\vdots \end{aligned} \quad (29)$$

In the given problem the nonlinear term is  $u^2$ , calculating  $A_0, A_1, A_2, \dots$  using Equation (6)

$$\begin{aligned} A_0 &= (\cosh x + \frac{t}{8} (\frac{e^{-x}}{2} + e^x)^2 - t \cosh x + \frac{1}{16} (\frac{e^{-x}}{2} + e^x)^2 (e^{-2t} - 1) - e^{-x-t} (e^{2x} + 1) (te^t - e^t + 1))^2, \\ A_1 &= \frac{1}{1!} \left( \frac{d}{d\lambda} [(u_0 + \lambda u_1)^2] \right)_{\lambda=0}, \\ A_2 &= \frac{1}{2!} \left( \frac{d^2}{d\lambda^2} [(u_0 + \lambda u_1 + \lambda^2 u_2)^2] \right)_{\lambda=0}, \\ &\vdots \end{aligned} \quad (30)$$

so, the solution is

$$u(x, t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \quad (31)$$

$$\begin{aligned} u(x, t) &= (\cosh x + \frac{t}{8} (\frac{e^{-x}}{2} + e^x)^2 - t \cosh x + \frac{1}{16} (\frac{e^{-x}}{2} + e^x)^2 (e^{-2t} - 1) - e^{-x-t} (e^{2x} + 1) (te^t - e^t + 1))^2 + \dots, \end{aligned} \quad (32)$$

where the exact solution

$$u(x, t) = e^{-t} \cosh x. \quad (33)$$

3.2.2 For the polynomials called El-kalla polynomials the solution will be as following

The steps will be the same as previous equations (25), (26), (27), (28), (29) but, for El-kalla polynomials it will be as follow,

$$\begin{aligned} \bar{A}_0 &= u_0^2 = (\cosh x + \frac{t}{8} (\frac{e^{-x}}{2} + e^x)^2 - t \cosh x + \frac{1}{16} (\frac{e^{-x}}{2} + e^x)^2 (e^{-2t} - 1) - e^{-x-t} (e^{2x} + 1) (te^t - e^t + 1))^2, \\ \bar{A}_1 &= 2u_0 u_1 + u_1^2, \\ \bar{A}_2 &= u_2^2 + 2u_0 u_2 + 2u_1 u_2, \\ &\vdots \end{aligned} \quad (34)$$

$$\begin{aligned}
 u_0 &= \cosh x + \int_0^t -\cosh x dt + \\
 &\int_0^t \int_0^t \left[ e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x \right] dt dt, \\
 u_1 &= \int_0^t \int_0^t u_{0xx} dt dt - \int_0^t \int_0^t 2u_{0t} dt dt - \int_0^t \int_0^t A_0 dt dt, \\
 u_2 &= \int_0^t \int_0^t u_{1xx} dt dt - \int_0^t \int_0^t 2u_{1t} dt dt - \int_0^t \int_0^t A_1 dt dt, \\
 &\vdots
 \end{aligned} \tag{35}$$

The solution is

$$u(x,t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + \dots, \tag{36}$$

$$\begin{aligned}
 u(x,t) &= (\cosh x + \frac{t}{8} (\frac{e^{-x}}{2} + e^x)^2 - \\
 &t \cosh x + \frac{1}{16} (\frac{e^{-x}}{2} + e^x)^2 (e^{-2t} - 1) - \\
 &e^{-x-t} (e^{2x} + 1)(te^t - e^t + 1))^2 + \dots,
 \end{aligned} \tag{37}$$

The data in the Table (3) calculated with three terms of the solution  $u(x,t) = u_0 + u_1 + u_2$ .

In the Table (3), we clear the difference between the solution using El-kalla polynomials and the exact solution that called absolute relative error (ARE) and the difference between the solution using Adomian polynomials and the Exact solution at  $x = 0.01$  for values of  $t$  in Example 2.

Also time of the program when calculating the solution in Matlab R2014a as following Time when solving by Adomian polynomials= 63.0717 seconds.

Time when solving by El-kalla polynomials= 57.1515 seconds.

### 3.3 Example 3

Consider the following nonlinear telegraph equation

$$\begin{aligned}
 u_{tt} - u_{xx} &= u^3 - 2u_t - u, \\
 u(x,0) &= \frac{1}{2} + \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right), \\
 u_t(x,0) &= \frac{3}{16} + \frac{3}{16} \left(\tanh\left(\frac{x}{8} + 5\right)\right)^2.
 \end{aligned} \tag{38}$$


Applying the ADM by El-kalla and Adomian

3.3.1 For the Adomian polynomials the solution will be as following:


We will assume the solution as following

$$u(x,t) = \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{39}$$

$$u_{tt} = u_{xx} + u^3 - 2u_t - u, \tag{40}$$

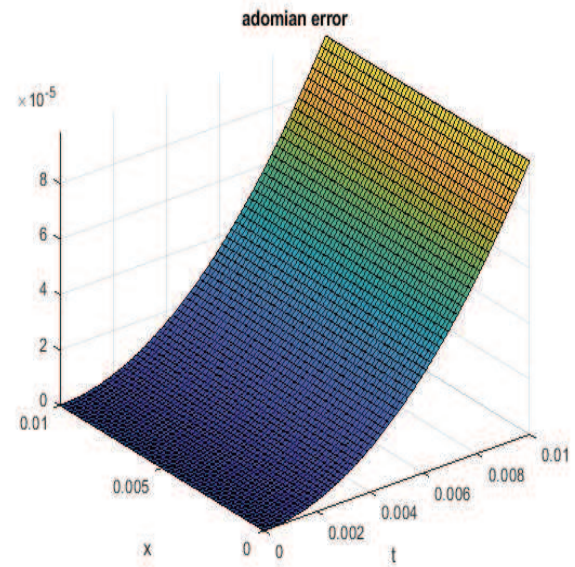

**Fig. 3:** The difference between the exact solution and the solution with El-kalla polynomial of The difference between the exact solution and solution with Adomian polynomial of  $u_{tt} - u_{xx} + 2u_t - u^2 = e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x$ .

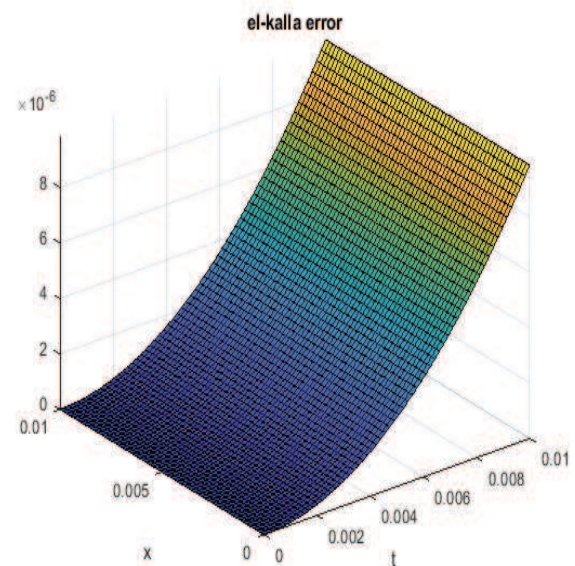

**Fig. 4:** The difference between the exact solution and the solution with El-kalla polynomial of The difference between the exact solution and solution with Adomian polynomial of  $u_{tt} - u_{xx} + 2u_t - u^2 = e^{-2t} (\cosh x)^2 - 2e^{-t} \cosh x$ .

integrate the two sides from 0 to  $t$ ,

$$u_t = u_t(x, 0) + \int_0^t u_{xx} dt + \int_0^t u^3 dt - \int_0^t 2u_t dt - \int_0^t u dt, \tag{41}$$

integrate the two sides from 0 to  $t$

$$u = u(x, 0) + \int_0^t u_t(x, 0) dt + \int_0^t \int_0^t u_{xx} dt dt + \int_0^t \int_0^t u^3 dt dt - \int_0^t \int_0^t 2u_t dt dt - \int_0^t \int_0^t u dt dt, \tag{42}$$

$$\begin{aligned} u_0 &= \frac{1}{2} + \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) + \int_0^t \left[ \frac{3}{16} + \frac{3}{16} \tanh\left(\frac{x}{8} + 5\right)^2 \right] dt, \\ u_1 &= \int_0^t \int_0^t u_{0xx} dt dt + \int_0^t \int_0^t A_0 dt dt \\ &\quad - \int_0^t \int_0^t 2u_{0t} dt dt - \int_0^t \int_0^t 2u_0 dt dt, \\ u_2 &= \int_0^t \int_0^t u_{1xx} dt dt + \int_0^t \int_0^t A_1 dt dt \\ &\quad - \int_0^t \int_0^t 2u_{1t} dt dt - \int_0^t \int_0^t 2u_1 dt dt, \\ &\vdots \end{aligned} \tag{43}$$

In the given problem the nonlinear term is  $u^3$ , calculating  $A_0, A_1, A_2, \dots$  using Equation (6)

$$\begin{aligned} A_0 &= u_0^3 = \left[ \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) - \frac{3t}{16} \left( \left( \tanh\left(\frac{x}{8} + 5\right)^2 - 1 \right) + \frac{1}{2} \right) \right]^3, \\ A_1 &= \frac{1}{1!} \left( \frac{d}{d\lambda} [(u_0 + \lambda u_1)^3] \right)_{\lambda=0}, \\ A_2 &= \frac{1}{2!} \left( \frac{d^2}{d\lambda^2} [(u_0 + \lambda u_1 + \lambda^2 u_2)^3] \right)_{\lambda=0}, \\ &\vdots \end{aligned} \tag{44}$$

So, the solution is

$$\begin{aligned} u(x, t) &= \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{45} \\ u(x, t) &= \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) \\ &\quad - \frac{3t}{16} \left( \tanh\left(\frac{x}{8} + 5\right)^2 - 1 \right) + \frac{1}{2} + \dots, \end{aligned} \tag{46}$$

where the exact solution

$$u(x, t) = \frac{1}{2} + \frac{1}{2} \tanh\left(\frac{x}{8} + \frac{3t}{8} + 5\right). \tag{47}$$

3.3.2 For the polynomials called El-kalla polynomials the Solution will be as following

The steps will be the same as previous Equations (39), (40), (41), (42), (43) but, for El-kalla polynomials it will

be as follow:

$$\begin{aligned} \bar{A}_0 &= u_0^3 = \left[ \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) - \frac{3t}{16} \left( \left( \tanh\left(\frac{x}{8} + 5\right)^2 - 1 \right) + \frac{1}{2} \right) \right]^3, \\ \bar{A}_1 &= (u_0 + u_1)^3 - u_0^3, \\ \bar{A}_2 &= (u_0 + u_1 + u_2)^3 - \bar{A}_0 - \bar{A}_1, \\ &\vdots \end{aligned} \tag{48}$$

$$\begin{aligned} u_0 &= \frac{1}{2} + \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) + \int_0^t \left[ \frac{3}{16} + \frac{3}{16} \tanh\left(\frac{x}{8} + 5\right)^2 \right] dt, \\ u_1 &= \int_0^t \int_0^t u_{0xx} dt dt + \int_0^t \int_0^t A_0 dt dt \\ &= - \int_0^t \int_0^t 2u_{0t} dt dt - \int_0^t \int_0^t 2u_0 dt dt, \\ u_2 &= \int_0^t \int_0^t u_{1xx} dt dt + \int_0^t \int_0^t A_1 dt dt \\ &= - \int_0^t \int_0^t 2u_{1t} dt dt - \int_0^t \int_0^t 2u_1 dt dt, \\ &\vdots \end{aligned} \tag{49}$$

The solution is

$$\begin{aligned} u(x, t) &= \sum_{n=0}^{\infty} u_n = u_0 + u_1 + u_2 + u_3 + \dots, \tag{50} \\ u(x, t) &= \frac{1}{2} \tanh\left(\frac{x}{8} + 5\right) \\ &\quad - \frac{3t}{16} \left( \tanh\left(\frac{x}{8} + 5\right)^2 - 1 \right) + \frac{1}{2} + \dots, \end{aligned} \tag{51}$$

The data in the Table (4) calculated with three terms of the solution  $u(x, t) = u_0 + u_1 + u_2$ .

In the Table (4), we clear the difference between the exact solution and solution with El-kalla polynomial that called absolute relative error (ARE) and the difference between the exact solution and solution with Adomian polynomial at  $x = 0.01$  for values of  $t$  in Example 3.

Also time of the program when calculating the solution in Matlab R2014a as following:

Time when solving by Adomian polynomials= 5.2057 seconds.  
Time when solving by El-kalla polynomials= 4.7091 seconds.

**Table 1:** An example of the  $y^3$  nonlinear term to clear that the polynomials of Adomian appear slower than the polynomials of El-kalla

By the traditional formula	By El-Kalla's formula
$A_0 = y_0^3,$	$A_0 = y_0^3,$
$A_1 = 3y_0^2y_1,$	$\bar{A}_1 = 3y_0^2y_1 + 3y_0y_1^2 + y_1^3,$
$A_2 = 3y_0^2y_1 + 3y_1^2y_0,$	$\bar{A}_2 = 3y_0^2y_2 + 6y_0y_1y_2 + 3y_1^2y_2 + 3y_0y_2^2 + 3y_1y_2^2 + y_2^3,$
$A_3 = y_1^3 + 3y_0^2y_3 + 6y_0y_1y_3,$	$\bar{A}_3 = 3y_0^2y_3 + 6y_0y_1y_3 + 3y_1^2y_3 + 6y_0y_2y_3 + 6y_1y_2y_3 + 3y_2^2y_3 + 3y_0y_3^2 + 3y_1y_3^2 + 3y_2y_3^2 + y_3^3.$
$A_4 = 3y_0^2y_4 + 3y_1^2y_2 + 3y_2^2y_0 + 6y_0y_1y_3.$	

**Table 2:** The difference between the exact solution and solution with El-kalla polynomial that called absolute relative error (ARE). And the difference between the exact solution and solution with Adomian polynomial at  $x = 0.01$  for values of  $t$ , in Example 1


$t$	(ARE)of ADM at $x = 0.01$	(ARE)of El-kalla at $x = 0.01$
0.1	$6.70184245 * 10^{-5}$	$6.715700672 * 10^{-6}$
0.2	$1.054413173 * 10^{-3}$	$1.0634826002 * 10^{-4}$
0.3	$5.179816713 * 10^{-3}$	$5.2852626316 * 10^{-4}$
0.4	$1.568758671 * 10^{-2}$	$1.6290984728 * 10^{-3}$
0.5	$3.625025864 * 10^{-2}$	$3.858860689 * 10^{-3}$
0.6	$7.0250310527 * 10^{-2}$	$7.73238466857 * 10^{-3}$
0.7	0.12000282907	$1.3801903921 * 10^{-2}$
0.8	0.18596913217	$2.26388934648 * 10^{-2}$
0.9	0.26600379658	$3.4823923093 * 10^{-2}$
1	0.35467204962	$5.09435831384 * 10^{-2}$

**Table 3:** The difference between the exact solution and solution with El-kalla polynomial that called absolute relative error (ARE). And the difference between the exact solution and solution with Adomian polynomial at  $x = 0.01$  for values of  $t$ , in Example 2


$t$	(ARE)of ADM at $x = 0.01$	(ARE)of El-kalla at $x = 0.01$
0.1	$8.73122605 * 10^{-3}$	$8.7313578254 * 10^{-4}$
0.2	$3.030788465 * 10^{-2}$	$3.0316217252 * 10^{-3}$
0.3	$5.868434229 * 10^{-2}$	$5.877812371 * 10^{-3}$
0.4	$8.8702292699 * 10^{-2}$	$8.92229621507 * 10^{-3}$
0.5	0.11572650561	$1.1768939792 * 10^{-2}$
0.6	0.13526819187	$1.410620088106 * 10^{-2}$
0.7	0.14259270381	$1.57039933919 * 10^{-2}$
0.8	0.13230896442	$1.641576130971 * 10^{-2}$
0.9	$9.79377771519 * 10^{-2}$	$1.61858050708 * 10^{-2}$
1	$3.1455235866 * 10^{-2}$	0.150623247937

**Table 4:** The difference between the exact solution and solution with El-kalla polynomial that called absolute relative error (ARE). And the difference between the exact solution and solution with Adomian polynomial at  $x = 0.01$  for values of  $t$ , in Example 3

$t$	(ARE)of ADM at $x = 0.01$	(ARE)of El-kalla at $x = 0.01$
0.1	$6.1887411743 * 10^{-7}$	$6.18874116796 * 10^{-8}$
0.2	$2.2490574667 * 10^{-7}$	$2.249057426 * 10^{-7}$
0.3	$4.584065585 * 10^{-6}$	$4.58406514 * 10^{-7}$
0.4	$7.3605672875 * 10^{-6}$	$7.3605648385 * 10^{-7}$
0.5	$1.03570304106 * 10^{-5}$	$1.035702126 * 10^{-6}$
0.6	$1.33923610671 * 10^{-5}$	$1.3392334357 * 10^{-6}$
0.7	$1.63245368513 * 10^{-5}$	$1.632447097 * 10^{-6}$
0.8	$1.904923443947 * 10^{-5}$	$1.904909088 * 10^{-6}$
0.9	$2.149845197 * 10^{-5}$	$2.1498167436 * 10^{-6}$
1	$2.3639126642 * 10^{-5}$	$2.3638603288 * 10^{-6}$

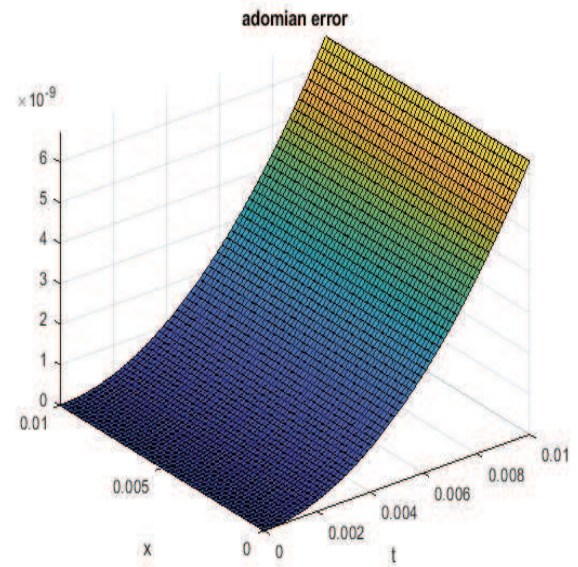

**Fig. 5:** The difference between the exact solution and solution with Adomian polynomial of  $u_{tt} - u_{xx} = u^3 - 2u_t - u$ .

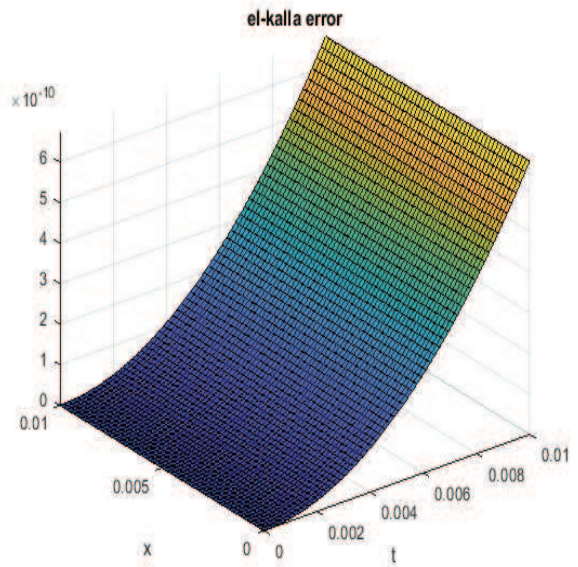

**Fig. 6:** The difference between the exact solution and solution with El-kalla polynomial of  $u_{tt} - u_{xx} = u^3 - 2u_t - u$ .

### Acknowledgements

The authors express their sincere gratitude to the editors and anonymous referees for the careful reading of the original manuscript and useful comments that helped to improve the presentation of the results and accentuate important details.



## Conflicts of Interest

The authors declare that there is no conflict of interest regarding the publication of this article.

## References

- [1] A.H. Bhrawy, M.A. Abdelkawy, Anjan Biswas, Conoidal and snoidal wave solutions to coupled nonlinear wave equations by the extended Jacobi's elliptic function method, *Commun. Nonlinear Science Numer. Simulat.*, 18, 915-925, 2013.
- [2] A.H. Bhrawy, M.A. Abdelkawy, Anjan Biswas, Optical solitons in  $(1 + 1)$  and  $(2 + 1)$  dimensions, *Optik - International Journal for Light and Electron Optics*, 125, 1537-1549, 2014.
- [3] Anwar Ja'afar Mohamad Jawad, Marko D. Petkovic, Anjan Biswas, Modified simple equation method for nonlinear evolution equations, *Applied Mathematics and Computation*, 217, 869-877, 2010.
- [4] Anwar Ja'afar Mohamad Jawad, Marko D. Petković, Anjan Biswas, Soliton solutions of Burgers equations and perturbed Burgers equation, *Applied Mathematics and Computation*, 216, 3370-3377, 2010.
- [5] Anwar Ja'afar Mohamad Jawad, Marko D. Petković, Anjan Biswas, Soliton solutions of a few nonlinear wave equations, *Applied Mathematics and Computation*, 216, 2649-2658, 2010.
- [6] Anwar Ja'afar Mohamad-Jawad, Marko D. Petkovic, Anjan Biswas, Applications of He's principles to partial differential equations, *Applied Mathematics and Computation*, 217, 7039-7047, 2011.
- [7] A.H. Kara, Polina Razborov, Anjan Biswas, Solitons and conservation laws of coupled Ostrovsky equation for internal waves, *Applied Mathematics and Computation*, 258, 95-99, 2015.
- [8] G. Adomian, *Nonlinear Stochastic Operator Equations*, Academic Press, San Diego, 1986.
- [9] G. Adomian, *Nonlinear stochastic systems: Theory and applications to Physics*, Kluwer Academic press, 1989.
- [10] G. Adomian, *Solving Frontier problem of Physics: The Decomposition Method*, Kluwer Academic press, 1994.
- [11] G. Adomian, *Stochastic System*, Academic Press, 1983.
- [12] Ibrahim L. El-kalla, Error analysis of Adomian series solution to a class of Nonlinear differential equations, *Math. Appl.*, 7, 214-221, 2007.
- [13] M. El-Tawil, M. Saleh, I.L. El-kalla, Decomposition solution of stochastic nonlinear oscillator, *Int. J. Differ. Equ. Appl.*, 6, 411-422, 2002.
- [14] M. Mirzazadeh, M. Eslami, B. Fathi Vajargah, Anjan Biswas, Optical solitons and optical rogons of generalized resonant dispersive nonlinear Schrödinger's equation with power law nonlinearity, *Optic - International Journal for Light and Electron Optics*, 125, 4246-4256, 2014.
- [15] M. Mirzazadeh, M. Eslami, Anjan Biswas, Dispersive optical solitons by Kudryashov's method, *Optic - International Journal for Light and Electron Optics*, 125, 6874-6880, 2014.
- [16] Sami Atif, Daniela Milovic, Anjan Biswas, 1-Soliton solution of the complex KdV equation in plasmas with power law nonlinearity and time-dependent coefficients, *Applied Mathematics and Computation*, 217, 1785-1789, 2010.
- [17] S. Fucik, Generalized periodic solutions of nonlinear telegraph equations, *Nonlinear Analysis: Theory, Methods & Applications*, 2, 609-617, 1987.