



Egyptian Mathematical Society  
**Journal of the Egyptian Mathematical Society**

[www.etms-eg.org](http://www.etms-eg.org)  
[www.elsevier.com/locate/joems](http://www.elsevier.com/locate/joems)



ORIGINAL ARTICLE

# Numerical study for systems of fractional differential equations via Laplace transform



Sumit Gupta <sup>a</sup>, Devendra Kumar <sup>a,\*</sup>, Jagdev Singh <sup>b</sup>

<sup>a</sup> Department of Mathematics, Jagan Nath Gupta Institute of Engineering and Technology, Jaipur 302022, Rajasthan, India

<sup>b</sup> Department of Mathematics, Jagan Nath University, Village- Rampura, Tehsil-Chaksu, Jaipur 303901, Rajasthan, India

Received 2 February 2014; revised 21 March 2014; accepted 10 April 2014

Available online 14 May 2014

**KEYWORDS**

Systems of fractional differential equations;  
 Laplace transform;  
 Homotopy analysis method;  
 Approximate solution

**Abstract** In this paper, we propose a numerical algorithm for solving system of fractional differential equations by using the homotopy analysis transform method. The homotopy analysis transform method is the combined form of the homotopy analysis method and Laplace transform method. The solutions of our modeled equations are calculated in the form of convergent power series with easily computable components. The numerical results shows that the approach is easy to implement and accurate when applied to various fractional differential equations.

**2010 MATHEMATICS SUBJECT CLASSIFICATION:** 34A08; 35A20; 35A22

© 2014 Production and hosting by Elsevier B.V. on behalf of Egyptian Mathematical Society.

**1. Introduction**

Fractional order ordinary and partial differential equations, as generalization of classical integer order differential equations, are increasingly used to model problems in fluid mechanics, viscoelasticity, biology, physics and engineering, and others applications [1–4]. The most important advantage of making use of fractional differential equations in mathematical modeling is their non-local property. It is well known that the integer order differential operator is a local operator but the

fractional order differential operator is non-local. This means that the next state of a system depends not only upon its current state but also upon all of its historical states. This is more realistic and it is one reason why fractional calculus has become more and more popular in scientific and technological fields [5–11]. The homotopy analysis method is introduced by Liao [12] for solving linear and non-linear differential and integral equations. Different from perturbation technique, the HAM does not need any small or large parameters in the equations. The HAM was successfully applied to solve many non-linear problems [13–17]. In recent years various techniques have been applied to handle various physical problems [18–24]. The Laplace transform [25] is a powerful technique for solving various linear partial differential equations having considerable significance in various fields such as engineering and applied sciences. Coupling of semi-analytical methods with Laplace transform giving time-consuming consequences and less C.P.U time (Processor 2.65 GHz or more and RAM-1 GB or more) for solving non-linear problems. Many authors

\* Corresponding author. Tel.: +91 9460905223.

E-mail addresses: [guptasumit.edu@gmail.com](mailto:guptasumit.edu@gmail.com) (S. Gupta), [devendra.maths@gmail.com](mailto:devendra.maths@gmail.com) (D. Kumar), [jagdevsinghrathore@gmail.com](mailto:jagdevsinghrathore@gmail.com) (J. Singh).

Peer review under responsibility of Egyptian Mathematical Society.



Production and hosting by Elsevier

have paid attention for using these techniques in literature [26–28]. On the other hand, homotopy analysis method (HAM) is also combined with well defined Laplace transform to produce highly effective technique, namely the homotopy analysis transform method (HATM) for non-linear problems [29].

In this paper we consider the system of fractional differential equations of the type:

$$\begin{aligned} D_*^{\alpha_1} x &= a_1 x^n + b_1 y^n + c_1 z^n, \\ D_*^{\alpha_2} y &= a_2 x^n + b_2 y^n + c_2 z^n, \\ D_*^{\alpha_3} z &= a_3 x^n + b_3 y^n + c_3 z^n, \end{aligned} \tag{1}$$

with the initial conditions:

$$D^{n-1}x(0) = A_{n-1}, D^{n-1}y(0) = B_{n-1} \text{ and } D^{n-1}z(0) = C_{n-1}, \tag{2}$$

where  $D \equiv \frac{d}{dt}$ ,  $a_i, b_i, c_i, A_{n-1}, B_{n-1}$  and  $C_{n-1}$  are constant. For  $n = 1$  the system of Eq. (1) combined with initial conditions is said to be linear fractional differential equations while for  $n \geq 2$  the system is non-linear. Momani and Odibat [30] used Adomian decomposition method (ADM) and homotopy perturbation method (HPM) for solving these types of differential equations. Zurigat et al. [31] applied homotopy analysis method (HAM) for solving systems of differential Eq. (1).

In this paper we implement the homotopy analysis transform method (HATM) for solving systems of differential equations. The HATM is an elegant combination of the Laplace transform method and HAM. The advantage of this technique is its capability of combining two powerful methods for obtaining exact and approximate analytical solutions for non-linear equations.

**2. Basic definitions of fractional calculus and Laplace transform**

In this section, we mention the following basic definitions of fractional calculus and Laplace transform.

**Definition 1.1.** The Laplace transform of the function  $f(t)$  is defined as

$$F(s) = L[f(t)] = \int_0^\infty e^{-st} f(t) dt. \tag{3}$$

**Definition 1.2.** The Laplace transform  $L[u(x,t)]$  of the Riemann–Liouville fractional integral is defined by [7]:

$$L[I_t^\alpha u(x,t)] = s^{-\alpha} L[u(x,t)]. \tag{4}$$

**Definition 1.3.** The Laplace transform  $L[u(x,t)]$  of the Caputo fractional derivative is given as [7]:

$$\begin{aligned} L[D_t^\alpha u(x,t)] &= s^\alpha L[u(x,t)] - \sum_{k=0}^{n-1} s^{(\alpha-k-1)} u^{(k)}(x,0), \\ n-1 < \alpha \leq n. \end{aligned} \tag{5}$$

**3. Basic idea of homotopy analysis transform method (HATM)**

To illustrate the basic idea, let us consider the following fractional differential equation

$$D_*^\alpha v(t) = F(t, v(t), v'(t)), \quad t \geq 0, \quad 0 < \alpha \leq 2. \tag{6}$$

subject to the initial conditions:

$$v(0) = a. \tag{7}$$

Applying Laplace transform on both sides of Eq. (6), we get

$$\mathcal{L}[v(t)] = \frac{a}{s} + \frac{1}{s^\alpha} \mathcal{L}[F(t, v(t), v'(t))]. \tag{8}$$

The zero-order deformation equation of the Laplace Eq. (8) has the form

$$\begin{aligned} (1-q)[\phi(s;q) - \bar{v}_0(s)] &= q\hbar[\phi(s;q) - \frac{a}{s} \\ &\quad - \frac{1}{s^\alpha} \mathcal{L}[F(t, \phi(s;q), \phi'(s;q))], \end{aligned} \tag{9}$$

where  $q \in [0,1]$  is an embedding parameter,  $\hbar \neq 0$  is a non-zero auxiliary parameter, we have  $\phi(s;0) = \bar{v}_0(s)$  and  $\phi(s;1) = \bar{v}(s)$ . Thus, as  $q$  increases from 0 to 1, the solution  $\phi(s;q)$  varies from the initial guess  $\bar{v}_0(s)$  to the solution  $\bar{v}(s)$ . Expanding  $\phi(s;q)$  by Taylor series with respect to  $q$ , we get

$$\phi(s;q) = \bar{v}_0(s) + \sum_{m=1}^\infty \bar{v}_m(s) q^m, \tag{10}$$

where

$$\bar{v}_m(s) = \frac{1}{m!} \frac{\partial^m \phi(s;q)}{\partial q^m} |_{q=0}. \tag{11}$$

If the auxiliary linear operator, the initial guess, the auxiliary parameter  $\hbar$  and the auxiliary function are so properly chosen, the series (10) converges at  $q = 1$ , then we have

$$\bar{v}(s) = \bar{v}_0(s) + \sum_{m=1}^\infty \bar{v}_m(s), \tag{12}$$

which must be one of the solutions of the original non-linear equation. The governing equation can be deduced from the zero-order deformation Eq. (9). Define the vector

$$\vec{v}_n = \{v_0(s), v_1(s), \dots, v_n(s)\}. \tag{13}$$

Differentiating Eq. (9)  $m$ -times with respect to the embedding parameter  $q$ , then setting  $q = 0$  and finally dividing them by  $m!$ , we obtain the  $m$ th-order deformation equation.

$$\bar{v}_m(s) = \chi_m \bar{v}_{m-1} - R_m(\bar{v}_{m-1}(s)), \tag{14}$$

where

$$\begin{aligned} R_m(\bar{v}_{m-1}(s)) &= \bar{v}_{m-1}(s) \\ &\quad - \frac{1}{s^\alpha} \left( \frac{1}{(m-1)!} \frac{\partial^{m-1}}{\partial q^{m-1}} [L(F(t, \phi(t;q), \phi'(t;q))] |_{q=0} \right) \\ &\quad - \frac{a}{s} (1 - \chi_m), \end{aligned} \tag{15}$$

and

$$\chi_m = \begin{cases} 0, & m \leq 1, \\ 1, & m > 1. \end{cases} \tag{16}$$

Operating inverse Laplace transform of Eq. (14), we get power series solution of Eq. (6) with convergence control parameter.

**4. Numerical implementations**

In order to assess both the accuracy and convergence of the HATM presented in this paper for fractional system of differ-

ential equations, we have applied it to the following three examples.

**Example 4.1.** Consider the following linear system of fractional differential equations:

$$\begin{aligned} D_*^{\alpha_1} x &= x + y, \\ D_*^{\alpha_2} y &= -x + y, \quad 0 < \alpha_1, \alpha_2 \leq 1, \end{aligned} \tag{17}$$

subject to the initial condition:

$$x(0) = 0, \quad y(0) = 1. \tag{18}$$

The exact solution of this system, when  $\alpha_1 = \alpha_2 = 1$ , is given by

$$x(t) = e^t \sin t, \quad y(t) = e^t \cos t.$$

Taking Laplace transform both of sides, we get

$$\begin{aligned} s^\alpha \mathcal{L}[x(t)] - s^{\alpha-1} x(0) &= \mathcal{L}[x(t) + y(t)], \\ s^\alpha \mathcal{L}[y(t)] - s^{\alpha-1} y(0) &= \mathcal{L}[-x(t) + y(t)]. \end{aligned}$$

By applying initial conditions, we get

$$\mathcal{L}[x(t)] = \frac{1}{s^\alpha} \mathcal{L}[x(t) + y(t)], \tag{19}$$

$$\mathcal{L}[y(t)] = \frac{1}{s} + \frac{1}{s^\alpha} \mathcal{L}[-x(t) + y(t)]. \tag{20}$$

We now define the non-linear operators as

$$N_1(\phi_1(t; q), \phi_2(t; q)) = \mathcal{L}[\phi_1(t; q)] - \frac{1}{s^\alpha} \mathcal{L}[\phi_1(t; q) + \phi_2(t; q)], \tag{21}$$

$$N_2(\phi_1(t; q), \phi_2(t; q)) = \mathcal{L}[\phi_2(t; q)] - \frac{1}{s} - \frac{1}{s^\alpha} \mathcal{L}[-\phi_1(t; q) + \phi_2(t; q)]. \tag{22}$$

Using the above definition, we construct the zero-order deformation equation

$$(1 - q)\mathcal{L}[\phi_i(t; q) - x_{i,0}(t)] = q\hbar_i H_i(t) N_i[\phi_1(t; q), \phi_2(t; q)]. \tag{23}$$

Obviously when  $q = 0$  and  $q = 1$

$$\begin{aligned} \phi_1(t; 0) &= x_{1,0} = x_0(t), & \phi_1(t; 1) &= x(t), \\ \phi_2(t; 0) &= x_{2,0} = y_0(t), & \phi_2(t; 1) &= y(t). \end{aligned} \tag{24}$$

We now define the  $m$ th-order deformation equation is given by

$$\mathcal{L}[x_m(t) - \chi_m x_{i(m-1)}(t)] = \hbar_i H_i(t) R_{im}(\vec{x}_{(m-1)}(t), \vec{y}_{(m-1)}(t)), \tag{25}$$

$i = 1, 2, 3 \dots n.$

where  $R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1}) = \mathcal{L}[x_{m-1}(t)] - \frac{1}{s^\alpha} \mathcal{L}[x_{m-1}(t) + y_{m-1}(t)]$

$$\begin{aligned} R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1}) &= \mathcal{L}[y_{m-1}(t)] - \frac{1}{s} (1 - \chi_m) \\ &\quad - \frac{1}{s^\alpha} \mathcal{L}[-x_{m-1}(t) + y_{m-1}(t)]. \end{aligned} \tag{26}$$

Applying inverse Laplace transform, we get

$$x_m(t) = \chi_m x_{(m-1)}(t) + h_1 \mathcal{L}^{-1}[R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1})], \tag{27}$$

$$y_m(t) = \chi_m y_{(m-1)}(t) + h_2 \mathcal{L}^{-1}[R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1})]. \tag{28}$$

for simplicity let us take  $\hbar_1 = \hbar_2 = \hbar$  and  $H_1(t) = H_2(t) = 1$ .

$$\begin{aligned} x_1(t) &= -\hbar t, \\ y_1(t) &= -\hbar t, \\ x_2(t) &= -\hbar t + \hbar^2 t^2 - \frac{\hbar^2 t^{(2-\alpha_1)}}{(2-\alpha_1)\Gamma(2-\alpha_1)}, \\ y_2(t) &= -\hbar t - \frac{\hbar^2 t^{(2-\alpha_2)}}{(2-\alpha_2)\Gamma(2-\alpha_2)}, \\ &\vdots \end{aligned} \tag{29}$$

and so on.

We now define the  $m$ th-order deformation equation is given by

$$\begin{aligned} \mathcal{L}[x_m(t) - \chi_m x_{(m-1)}(t)] &= \hbar_1 J^{\alpha_1} R_{1m}(\vec{x}_{(m-1)}(t), \vec{y}_{(m-1)}(t)), \\ \mathcal{L}[y_m(t) - \chi_m y_{(m-1)}(t)] &= \hbar_2 J^{\alpha_2} R_{2m}(\vec{x}_{(m-1)}(t), \vec{y}_{(m-1)}(t)). \end{aligned}$$

Taking inverse Laplace transform, we get

$$x_m(t) = \chi_m x_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_1} R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1})], \tag{30}$$

$$y_m(t) = \chi_m y_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_2} R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1})]. \tag{31}$$

Then we obtain the following components as follows:

$$\begin{aligned} x_1(t) &= -\frac{\hbar t^{\alpha_1}}{\Gamma(1 + \alpha_1)}, \\ y_1(t) &= -\frac{\hbar t^{\alpha_2}}{\Gamma(1 + \alpha_2)}, \\ x_2(t) &= -\frac{\hbar(1 + \hbar)t^{\alpha_1}}{\Gamma(1 + \alpha_1)} + \frac{\hbar^2 t^{(\alpha_1 + \alpha_2)}}{\Gamma(1 + \alpha_1 + \alpha_2)} + \frac{\hbar^2 t^{2\alpha_1}}{\Gamma(1 + 2\alpha_1)}, \\ y_2(t) &= -\frac{\hbar(1 + \hbar)t^{\alpha_2}}{\Gamma(1 + \alpha_2)} - \frac{\hbar^2 t^{(\alpha_1 + \alpha_2)}}{\Gamma(1 + \alpha_1 + \alpha_2)} + \frac{\hbar^2 t^{2\alpha_2}}{\Gamma(1 + 2\alpha_2)}, \\ &\vdots \end{aligned} \tag{32}$$

Setting  $\hbar = -1$  in Eqs. (29) and (32), the above expressions are exactly the same as given by the HPM and ADM [30] and HAM [31].

**Example 4.2.** Consider the following non-linear fractional system

$$\begin{aligned} D_*^{\alpha_1} x &= \frac{1}{2} x, \\ D_*^{\alpha_2} y &= x^2 + y, \quad 0 < \alpha_1, \alpha_2 \leq 1. \end{aligned} \tag{33}$$

The exact solution of this system, when  $\alpha_1 = \alpha_2 = 1$ , is given by

$$x(t) = e^{t/2}, \quad y(t) = te^t.$$

To solve above system using HATM, we select the initial guesses as  $x_0(t) = 1, y_0(t) = 0$

$$\begin{aligned} R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1}) &= \mathcal{L}[x_{m-1}(t)] - \frac{1}{s} (1 - \chi_m) - \frac{1}{2s^\alpha} \mathcal{L}[x_{m-1}(t)], \\ R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1}) &= \mathcal{L}[y_{m-1}(t)] - \frac{1}{s^\alpha} \mathcal{L}\left[\sum_{i=0}^{m-1} x_i(t)x_{m-1-i}(t) + y_{m-1}\right]. \end{aligned} \tag{34}$$

Applying inverse Laplace transform, we get

$$\begin{aligned} x_m(t) &= \chi_m x_{(m-1)}(t) + h_1 \mathcal{L}^{-1}[R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1})], \\ y_m(t) &= \chi_m y_{(m-1)}(t) + h_2 \mathcal{L}^{-1}[R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1})] \end{aligned} \tag{35}$$

for simplicity let us take  $h_1 = h_2 = h$  and  $H_1(t) = H_2(t) = 1$ . Then we obtain the following components as follows:

$$\begin{aligned} x_1(t) &= -\frac{\hbar t}{2}, \\ y_1(t) &= -\hbar t, \\ x_2(t) &= -\frac{\hbar t}{2} + \frac{\hbar^2 t^2}{8} - \frac{\hbar^2 t^{2-\alpha_1}}{2(2-\alpha_1)\Gamma(2-\alpha_1)}, \\ y_2(t) &= -\hbar t + \hbar^2 t^2 - \frac{\hbar^2 t^{2-\alpha_2}}{2(2-\alpha_2)\Gamma(2-\alpha_2)}, \\ &\vdots \end{aligned} \tag{36}$$

and so on.

we now define the  $m$ th-order deformation equation is given by

$$\begin{aligned} \mathcal{L}[y_m(t) - \chi_m y_{(m-1)}(t)] &= \hbar_1 J^{\alpha_1} R_{1,m}(\vec{x}_{(m-1)}(t), \vec{y}_{(m-1)}(t)), \\ \mathcal{L}[y_m(t) - \chi_m y_{(m-1)}(t)] &= \hbar_2 J^{\alpha_2} R_{2,m}(\vec{x}_{(m-1)}(t), \vec{y}_{(m-1)}(t)). \end{aligned}$$

Taking inverse Laplace transform, we get

$$x_m(t) = \chi_m x_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_1} R_{1,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)})], \tag{37}$$

$$y_m(t) = \chi_m y_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_2} R_{2,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)})]. \tag{38}$$

Then we obtain the following components as follows:

$$\begin{aligned} x_1(t) &= -\frac{\hbar t^{\alpha_1}}{2\Gamma(1+\alpha_1)}, \\ y_1(t) &= -\frac{\hbar t^{\alpha_2}}{\Gamma(1+\alpha_2)}, \\ x_2(t) &= -\frac{\hbar(1+\hbar)t^{\alpha_1}}{2\Gamma(1+\alpha_1)} + \frac{\hbar^2 t^{2\alpha_1}}{4\Gamma(1+2\alpha_1)}, \\ y_2(t) &= -\frac{\hbar(1+\hbar)t^{\alpha_2}}{\Gamma(1+\alpha_2)} + \frac{\hbar^2 t^{\alpha_1+\alpha_2}}{\Gamma(1+\alpha_1+\alpha_2)} + \frac{\hbar^2 t^{2\alpha_2}}{\Gamma(1+2\alpha_2)}, \\ &\vdots \end{aligned} \tag{39}$$

and so on.

Setting  $h = -1$  in Eqs. (36) and (39), the above expressions are exactly the same as given by the HPM and ADM [30] and HAM [31].

**Example 4.3.** Consider the following non-linear fractional system

$$\begin{aligned} D_*^{\alpha_1} x &= x, \\ D_*^{\alpha_2} y &= 2x^2, \\ D_*^{\alpha_3} z &= 3xy, \end{aligned} \tag{40}$$

with the initial conditions:

$$x(0) = 1, y(0) = 1, z(0) = 0. \tag{41}$$

To solve above system using HATM, we select the initial guesses as  $x_0(t) = 1, y_0(t) = 1$  and  $z_0(t) = 0$ .

$$\begin{aligned} R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1}) &= \mathcal{L}[x_{m-1}(t)] - \frac{1}{s}(1 - \chi_m) - \frac{1}{s^{\alpha_1}} \mathcal{L}[x_{m-1}(t)], \\ R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1}) &= \mathcal{L}[y_{m-1}(t)] - \frac{1}{s}(1 - \chi_m) \\ &\quad - \frac{1}{s^{\alpha_2}} \mathcal{L}\left[2 \sum_{i=0}^{m-1} x_i(t) x_{m-1-i}(t)\right], \\ R_{3,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1}) &= \mathcal{L}[z_{m-1}(t)] - \frac{1}{s^{\alpha_3}} \mathcal{L}\left[3 \sum_{i=0}^{m-1} x_i(t) y_{m-1-i}(t)\right]. \end{aligned} \tag{42}$$

Applying inverse Laplace transform, we get

$$\begin{aligned} x_m(t) &= \chi_m x_{(m-1)}(t) + h_1 \mathcal{L}^{-1}[R_{1,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1})], \\ y_m(t) &= \chi_m y_{(m-1)}(t) + h_2 \mathcal{L}^{-1}[R_{2,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1})], \\ z_m(t) &= \chi_m z_{(m-1)}(t) + h_3 \mathcal{L}^{-1}[R_{3,m}(\vec{x}_{m-1}, \vec{y}_{m-1}, \vec{z}_{m-1})] \end{aligned} \tag{43}$$

for simplicity let us take  $h_1 = h_2 = h$  and  $H_1(t) = H_2(t) = 1$ . Then we obtain the following components as follows:

$$\begin{aligned} x_1(t) &= -\hbar t, \\ y_1(t) &= -2\hbar t, \\ z_1(t) &= -3\hbar t, \\ x_2(t) &= -\hbar t + \frac{\hbar^2 t^2}{2} - \frac{\hbar^2 t^{2-\alpha_1}}{(2-\alpha_1)\Gamma(2-\alpha_1)}, \\ y_2(t) &= -2\hbar t + 2\hbar^2 t^2 - \frac{2\hbar^2 t^{2-\alpha_2}}{(2-\alpha_2)\Gamma(2-\alpha_2)}, \\ z_2(t) &= -3\hbar t + \frac{9}{2}\hbar^2 t^2 - \frac{3\hbar^2 t^{2-\alpha_3}}{(2-\alpha_3)\Gamma(2-\alpha_3)}, \\ &\vdots \end{aligned} \tag{44}$$

and so on.

We now define the  $m$ th-order deformation equation is given by

$$\begin{aligned} \mathcal{L}[x_m(t) - \chi_m x_{(m-1)}(t)] &= \hbar_1 J^{\alpha_1} R_{1,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)}), \\ \mathcal{L}[y_m(t) - \chi_m y_{(m-1)}(t)] &= \hbar_2 J^{\alpha_2} R_{2,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)}), \\ \mathcal{L}[z_m(t) - \chi_m z_{(m-1)}(t)] &= \hbar_3 J^{\alpha_3} R_{3,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)}). \end{aligned} \tag{45}$$

Taking inverse Laplace transform, we get

$$\begin{aligned} x_m(t) &= \chi_m x_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_1} R_{1,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)})], \\ y_m(t) &= \chi_m y_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_2} R_{2,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)})], \\ z_m(t) &= \chi_m z_{(m-1)}(t) + \hbar \mathcal{L}^{-1}[J^{\alpha_3} R_{3,m}(\vec{x}_{(m-1)}, \vec{y}_{(m-1)}, \vec{z}_{(m-1)})]. \end{aligned} \tag{46}$$

Then we obtain the following components as follows:


$$\begin{aligned} x_1(t) &= -\frac{\hbar t^{\alpha_1}}{\Gamma(1+\alpha_1)}, \\ y_1(t) &= -\frac{2\hbar t^{\alpha_2}}{\Gamma(1+\alpha_2)}, \\ z_1(t) &= -\frac{3\hbar t^{\alpha_3}}{\Gamma(1+\alpha_3)}, \\ x_2(t) &= -\frac{\hbar(1+\hbar)t^{\alpha_1}}{\Gamma(1+\alpha_1)} + \frac{\hbar^2 t^{2\alpha_1}}{\Gamma(1+2\alpha_1)}, \\ y_2(t) &= -\frac{2\hbar(1+\hbar)t^{\alpha_2}}{\Gamma(1+\alpha_2)} + \frac{4\hbar^2 t^{\alpha_1+\alpha_2}}{\Gamma(1+\alpha_1+\alpha_2)} + \frac{2\hbar^2 t^{2\alpha_2}}{\Gamma(1+2\alpha_2)}, \\ z_2(t) &= -\frac{3\hbar(1+\hbar)t^{\alpha_3}}{\Gamma(1+\alpha_3)} + \frac{6\hbar^2 t^{\alpha_2+\alpha_3}}{\Gamma(1+\alpha_2+\alpha_3)} + \frac{3\hbar^2 t^{\alpha_1+\alpha_2}}{\Gamma(1+\alpha_1+\alpha_2)}, \\ &\vdots \end{aligned} \tag{47}$$

and so on


Setting  $h = -1$  in Eqs. (44) and (47), the above expressions are exactly the same as given by the HPM and ADM [30] and HAM [31].

### 5. Discussions


Setting  $h = -1$  in the above three examples of two and three respective systems of equations, it can be seen that the above

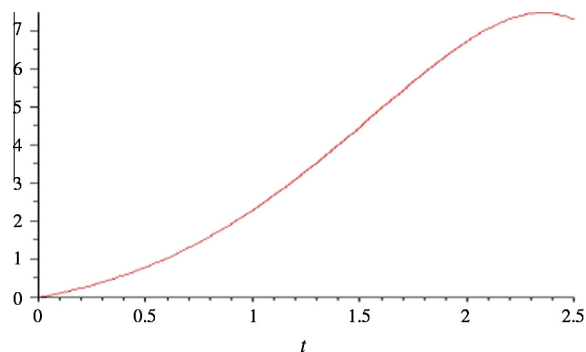


**Fig. 1** Exact solution graph of  $x[t]$  of Example 4.1 for  $t \in [0, 2.5)$ , when  $\alpha_1 = \alpha_2 = 1$ .

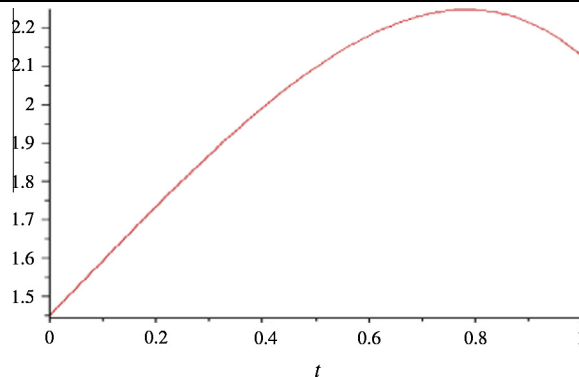


**Fig. 4** Approximate solution graph of  $y[t]$  of Example 4.1 by HATM for fourth-order approximations for  $t \in [0, 1)$ , when  $\alpha_1 = \alpha_2 = 1$  and  $h = -1$ .

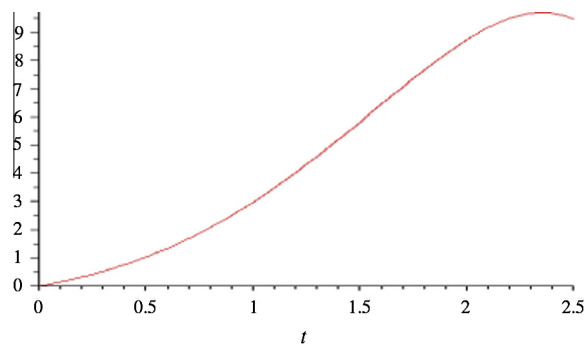

**Fig. 2** Approximate solution graph of  $x[t]$  of Example 4.1 by HATM for fourth-order approximations for  $t \in [0, 2.5)$ , when  $\alpha_1 = \alpha_2 = 1$  and  $h = -1$ .

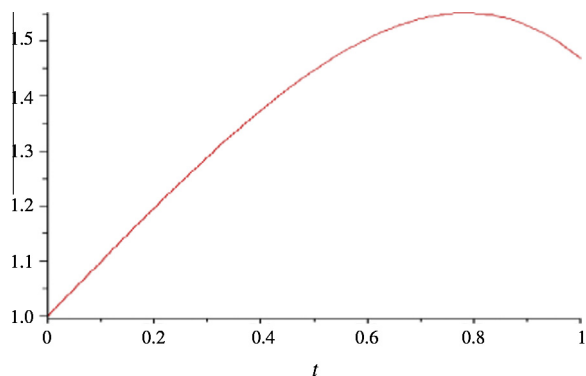


**Fig. 3** Exact solution graph of  $y[t]$ , of Example 4.1 for  $t \in [0, 1)$ , when  $\alpha_1 = \alpha_2 = 1$ .

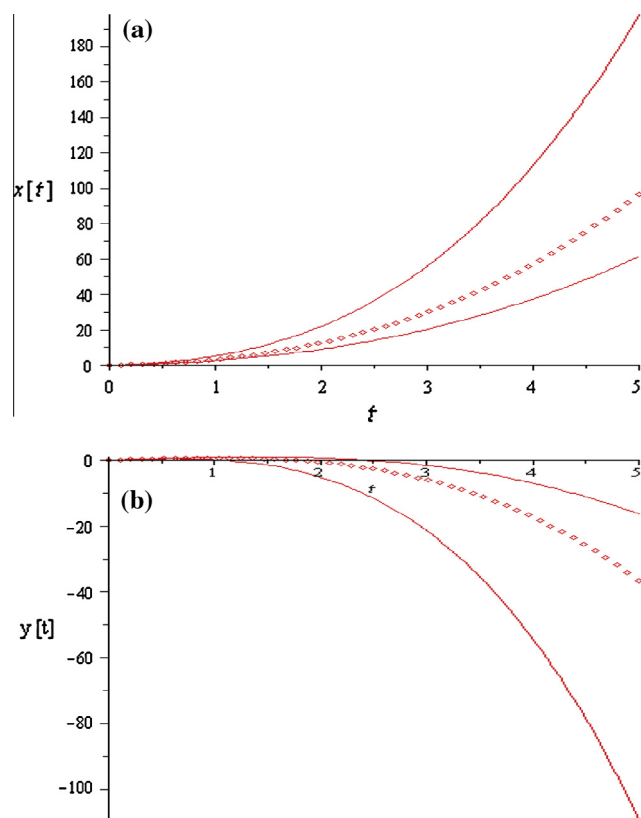


**Fig. 5** Plot of system (17) for (a) and (b) when  $\alpha_1 = \alpha_2 = 1$ ; dotted line: exact solution; upper and lower solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.1

expression are exactly same as those by HPM and ADM [30] respectively. This illustrates that the two methods are indeed special cases of HAM [31] and HATM. However, the results given by the ADM and HPM converge to the corresponding numerical solutions in a rather small region and calculations of complicated Adomian's polynomials. But, different from those two methods, the HATM provides us with a simple


way to adjust and control the convergence region of series solution by choosing proper values for the auxiliary parameter  $h$ , by using the suitable auxiliary linear operators  $L_i = \frac{d}{dt}$ , and  $L_i = D_*^{\alpha_i}$ . It is to be noted that only four terms of the HATM series solution were used in evaluating the approximate solutions as shown in the Figs. 1–10. It manifests that the efficiency of this approach can be significantly improved by computing further terms of  $x(t)$ ,  $y(t)$  and  $z(t)$ .

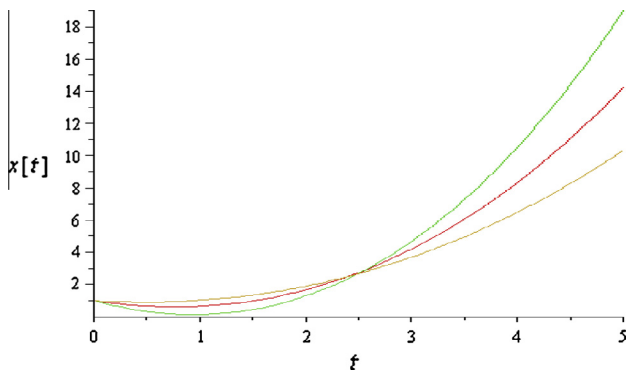


**Fig. 6** plot of system (46) for  $x[t]$  when  $\alpha_1 = \alpha_2 = 1$ ; red line: exact solution; green and yellow solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.2

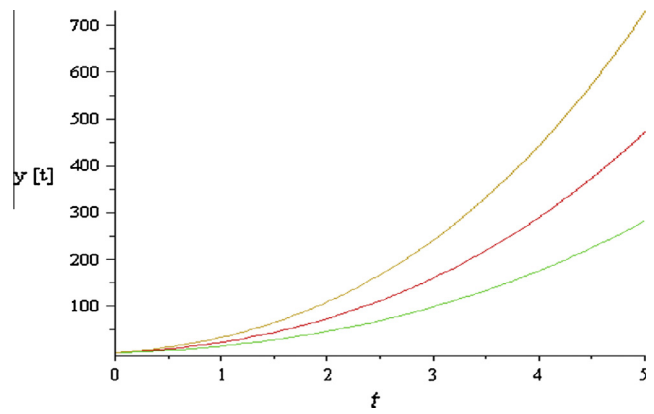


**Fig. 9** Plot of system (40) for  $y[t]$  when  $\alpha_1 = \alpha_2 = 1$ ; red line: exact solution; green and yellow solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.3

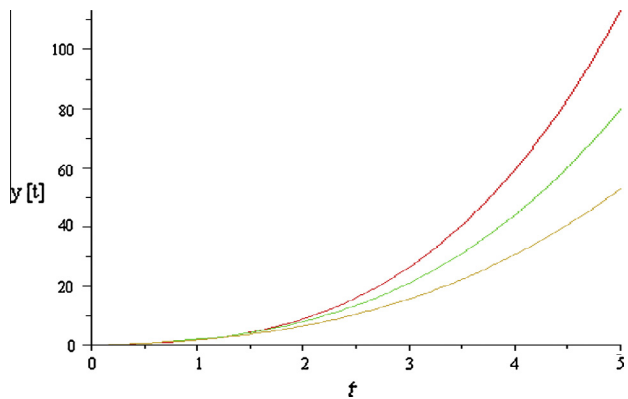

**Fig. 7** Plot of system (46) for  $y[t]$  when  $\alpha_1 = \alpha_2 = 1$ ; red line: exact solution; green and yellow solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.2.

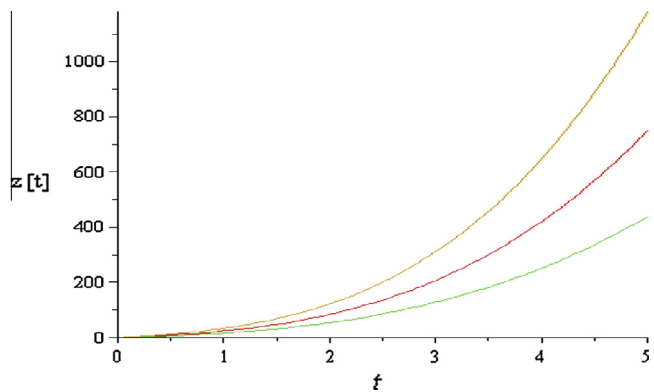

**Fig. 10** Plot of system (40) for  $z[t]$  when  $\alpha_1 = \alpha_2 = 1$ ; red line: exact solution; green and yellow solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.3.

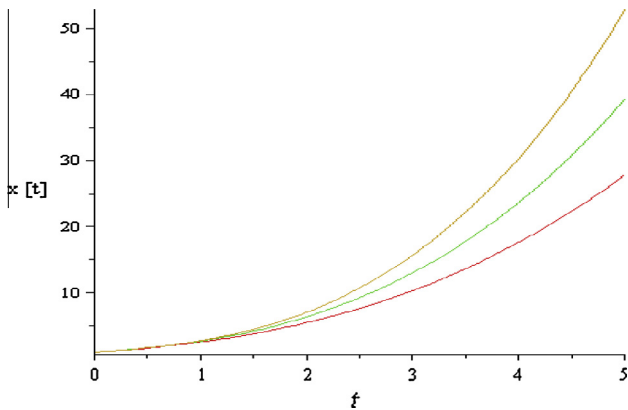

**Fig. 8** plot of system (40) for  $x[t]$  when  $\alpha_1 = \alpha_2 = 1$ ; red line: exact solution; green and yellow solid lines denote approximate solution at:  $h = -1.4$  and  $h = -0.8$  respectively for Example 4.3

**6. Concluding remarks**

In the present paper the HATM has been successfully applied to calculate the approximate solutions for systems of fractional

differential equations. Different from all other analytic methods, it provides us with a convenient way to adjust and control the convergence region of solution series by choosing proper values for auxiliary parameter  $h$  and auxiliary linear operator. In conclusion, the HATM may be considered as a nice refinement in existing numerical techniques and might find the wide applications in science and engineering.

**Acknowledgements**

The authors are extending their heartfelt thanks to the reviewer for his valuable suggestions for the improvement of the article.

**References**

- [1] G.O. Young, Definition of physical consistent damping laws with fractional derivatives, *Z. Angew. Math. Mech.* 75 (1995) 623–635.
- [2] A. Carpinteri, F. Mainardi, *Fractals and Fractional Calculus in Continuum Mechanics*, Springer Verlag, Wien, New York, 1997.
- [3] L. Debnath, Fractional integrals and fractional differential equations in fluid mechanics, *Frac. Calc. Appl. Anal.* 6 (2003) 119–155.



- [4] F. Mainardi, Fractional calculus: some basic problems in continuum and statistical mechanics, in: A. Carpinteri, F. Mainardi (Eds.), *Fractals and Fractional Calculus in Continuum Mechanics*, Springer, New York, 1997, pp. 291–348.
- [5] K.S. Miller, B. Ross, *An Introduction to the Fractional Calculus and Fractional Differential Equations*, Wiley, New York, 1993.
- [6] K.B. Oldham, J. Spanier, *The Fractional Calculus*, Academic Press, New York, 1974.
- [7] I. Podlubny, *Fractional Differential Equations*, Academic Press, San Diego, 1999.
- [8] I. Podlubny, Fractional-order systems and fractional-order controllers, Report UEF-03-94, Slovak Academy of Sciences, Institute of Experimental Physics, Kosice, Slovakia, November 1994, 18p.
- [9] R. Gorenflo, F. Mainardi, Fractional calculus: integral and differential equations of fractional order, in: A. Carpinteri, F. Mainardi (Eds.), *Fractals and Fractional Calculus in Continuum Mechanics*, Springer, New York, 1997, pp. 223–276.
- [10] Y. Luchko, R. Gorenflo, The initial value problem for some fractional differential equations with the Caputo derivative, Preprint Series A08-98, Fachbereich Mathematik und Informatik, Freie Universität Berlin, 1998.
- [11] K. Deithlem, An algorithm for the numerical solution of the differential equation of fractional order, *Electron. Trans. Numer. Anal.* 5 (1997) 1–6.
- [12] S.J. Liao, An approximate solution technique which does not depend upon small parameters: a special example, *Int. J. Nonlinear Mech.* 32 (1997) 815–822.
- [13] S. Abbasbandy, Homotopy analysis method for the Kawahara equation, *Nonlinear Anal.: Real World Appl.* 11 (2010) 307–312.
- [14] W. Qi, Application of homotopy analysis method to solve relativistic Toda-Lattice system, *Commun. Theor. Phys.* 53 (2010) 1111–1116.
- [15] S. Abbasbandy, The application of homotopy analysis method to nonlinear equations arising in heat transfer, *Phys. Lett. A* 360 (2006) 109–113.
- [16] S.J. Liao, An analytical approximation of the drag coefficient for the viscous-flow past a sphere, *Int. J. Nonlinear Mech.* 37 (2002) 1–18.
- [17] S.T. Mohyud-Din, A. Yildirim, The numerical solution of three dimensional Helmholtz equation, *Chinese Phys. Lett.* 27 (6) (2010) 060201.
- [18] D. Younesian, H. Askari, Z. Saadatnia, M.K. Yazdi, Frequency analysis of strongly nonlinear generalized Duffing oscillators using He's frequency–amplitude formulation and He's energy balance method, *Comput. Math. Appl.* 59 (9) (2010) 3222–3228.
- [19] A. Yildirim, H. Askari, M.K. Yazdi, Y. Khan, A relationship between three analytical approaches to nonlinear problems, *Appl. Math. Lett.* 25 (11) (2012) 1729–1733.
- [20] A. Yildirim, Z. Saadatnia, H. Askari, Y. Khan, M.K. Yazdi, Higher order approximate periodic solutions for nonlinear oscillators with the Hamiltonian approach, *Appl. Math. Lett.* 24 (12) (2011) 2042–2051.
- [21] H. Askari, Z. Saadatnia, D. Younesian, A. Yildirim, M.K. Yazdi, Approximate periodic solutions for the Helmholtz–Duffing equation, *Comp. Math. Appl.* 62 (10) (2011) 3894–3901.
- [22] H. Askari, Z.S. Nia, A. Yildirim, M.K. Yazdi, Y. Khan, Application of higher order Hamiltonian approach to nonlinear vibrating systems, *J. Theor. Appl. Mech.* 51 (2) (2013) 287–296.
- [23] D. Younesian, H. Askari, Z. Saadatnia, A. Yildirim, Analytical solution for nonlinear wave propagation in shallow media using the variational iteration method, *Wave Rand. Comp. Med.* 22 (2) (2012) 133–142.
- [24] L. Cveticanin, M.K. Yazdi, H. Askari, Analytical approximations to the solutions for a generalized oscillator with strong nonlinear terms, *J. Eng. Math.* 7 (1) (2012) 211–223.
- [25] J.L. Schiff, *The Laplace Transform: Theory and Applications*, Undergraduate Text in Mathematics, Springer, 1999.
- [26] S.A. Khuri, A Laplace decomposition algorithm applied to a class of nonlinear differential equations, *J. Appl. Math.* 1 (2001) 141–155.
- [27] Y. Khan, Q. Wu, Homotopy perturbation transform method for solving nonlinear equations using He's polynomials, *Comput. Math. Appl.* 6 (2011) 234–238.
- [28] S. Kumar, A. Yildirim, Y. Khan, L. Wei, A fractional model of the diffusion equation and its analytical solution using Laplace transform, *Sci. Iranica B* 19 (4) (2012) 1117–1123.
- [29] M. Khan, M. Asif Gondal, I. Hussain, S.K. Vanani, A new comparative study between homotopy analysis transform method and homotopy perturbation transform method on semi infinite domain, *Math. Comput. Modell.* 55 (2012) 1143–1150.
- [30] S. Momani, Z. Odibat, Numerical approach to differential equation of fractional order, *Appl. Math. Comput.* 207 (2007) 96–110.
- [31] M. Zurigat, S. Momani, Z. Odibat, A. Alawneh, The homotopy analysis method for handling systems of fractional differential equations, *Appl. Math. Modell.* 34 (2010) 24–35.