

You have downloaded a document from RE-BUŚ repository of the University of Silesia in Katowice

Title: Effect of Magnesium Substitution on Dielectric Constant of Zn2-xMgxInV3O11 (x = 0.0, 0.4, 1.6) Solid Solutions

Author: Bogdan Sawicki, M. Bosacka, E. Filipek, Tadeusz Groń, Henryk Duda, Monika Oboz, Piotr Urbanowicz

Citation style: Sawicki Bogdan, Bosacka M., Filipek E., Groń Tadeusz, Duda Henryk, Oboz Monika, Urbanowicz Piotr. (2018). Effect of Magnesium Substitution on Dielectric Constant of Zn2-xMgxInV3O11 (x = 0.0, 0.4, 1.6) Solid Solutions. "Acta Physica Polonica A" (Vol. 134, No. 4 (2018), s. 958-961), doi 10.12693/APhysPolA.134.958



Uznanie autorstwa - Użycie niekomercyjne - Bez utworów zależnych Polska - Licencja ta zezwala na rozpowszechnianie, przedstawianie i wykonywanie utworu jedynie w celach niekomercyjnych oraz pod warunkiem zachowania go w oryginalnej postaci (nie tworzenia utworów zależnych).







Proceedings of the 47th International School and Conference on the Physics of Semiconductors "Jaszowiec 2018"

Effect of Magnesium Substitution on Dielectric Constant of $\text{Zn}_{2-x}\text{Mg}_x\text{InV}_3\text{O}_{11}$ ($x=0.0,\,0.4,\,1.6$) Solid Solutions

B. Sawicki a , M. Bosacka b , E. Filipek b , T. Groń a,* , H. Duda a , M. Oboz a and P. Urbanowicz a

^aUniversity of Silesia, Institute of Physics, Uniwersytecka 4, 40-007 Katowice, Poland
^bWest Pomeranian University of Technology, Szczecin, Faculty of Chemical Technology and Engineering,
Department of Inorganic and Analytical Chemistry, al. Piastów 42, 71-065 Szczecin, Poland

The results of magnetic and dielectric measurements of $\mathrm{Zn}_{2-x}\mathrm{Mg}_x\mathrm{InV}_3\mathrm{O}_{11}$ phases with $x=0.0,\ 0.4$, and 1.6 showed diamagnetic behavior above room temperature and a strong increase in the relative electrical permittivity, ε_r , with an increase in the magnesium content as well as the high loss tangent, $\tan\delta$, above 150 K, irrespective of the magnesium content in the sample. With the increase in the frequency of the electric field both ε_r and $\tan\delta$ strongly decreased. At low temperatures a residual paramagnetism coming from the paramagnetic ions of vanadium was observed. These effects were interpreted within a framework of the vacancy trapping centers acting as the accumulation of electric charges on the one hand and a mixed valence of vanadium ions on the other.

DOI: 10.12693/APhysPolA.134.958

PACS/topics: 72.20.Pa, 72.80.Ga, 75.50.Pp, 75.20.-g

1. Introduction

Vanadates (V) of divalent metals exhibiting the presence of isolated VO₄ tetrahedra in their structure display a good selectivity and high activity as catalysts for the oxidation processes of light hydrocarbons or as cathode materials in high-energy cells. Among phases recently obtained there are some compound which are formed in the systems: MO–Fe₂O₃/In₂O₃–V₂O₅, where M = Mg, Zn, Co, Ni, Pb, Ba, Sr [1–6]. The double vanadates of the general formula $M_2^{II}M^{III}V_3O_{11}$, i.e. M_2 FeV₃O₁₁ (M = Mg, Zn, Co, Ni, Pb) and M_2 InV₃O₁₁ (M = Mg, Zn, Co, Pb, Ba, Sr) contain isolated VO₄ tetrahedra in their structure [1–6].

Research conducted in the quaternary oxide system $\rm ZnO-MgO-In_2O_3-V_2O_5$ have revealed that a new solid solution of the formula $\rm Zn_{2-x}Mg_x \rm InV_3O_{11}$ is formed in the whole concentration range of $\rm Zn_2 \rm InV_3O_{11}-Mg_2 \rm InV_3O_{11}$ subsystem [6]. This new phase can be obtained by conventional solid state reaction method. The solid solution crystallized in the triclinic system; its unit cell parameters a and b increased with increase of $\rm Mg^{2+}$ ions incorporation into the crystal lattice of $\rm Zn_2 \rm InV_3O_{11}$ while the values of the unit cell parameter c decreased with increase of magnesium content. The solid-state density values obtained experimentally and calculated on the basis of X-ray diffraction (XRD) data decreased as a function of the degree of $\rm Mg^{2+}$ ions incorporation in the crystal lattice of $\rm Zn_2 \rm InV_3O_{11}$ [6].

In the present work we have measured magnetic isotherms, electrical permittivity, and loss tangent of $Zn_{2-x}Mg_xInV_3O_{11}$ ceramics.

2. Experimental details

Magnetization was measured with the use of a Quantum Design MPMS-XL-7AC SQUID magnetometer in the temperature range of $2-300~{\rm K}$ and in the magnetic field to $70~{\rm kOe}$.

Broadband dielectric spectroscopy measurements were carried out using pellets, polished, and sputtered with (\approx 80 nm) Ag electrodes in a frequency range from $2\times10^2-2\times10^6$ Hz with the use of a Novocontrol Alpha Impedance Analyzer and in the temperature range 80–400 K. For the electrical measurements, the powder samples were compacted in a disc form (10 mm in diameter and 1–2 mm thick) using a pressure of 1.5 GPa and then they were sintered for 2 h at 923 K. The electrical and thermal contacts were made by a silver lacquer mixture (Degussa Leitsilber 200).

3. Results and discussion

The results of magnetization measurements of solid solution of $\mathrm{Zn}_{2-x}\mathrm{Mg}_x\mathrm{InV_3O_{11}}$ $(x=0.0,\,0.4,\,\mathrm{and}\,1.6)$ composition displayed in Figs. 1–3 showed diamagnetic properties at room temperature and a residual paramagnetism at low temperatures below 30 K visible on the universal function of M(H/T). The deviation from the universal curve of M(H/T) for x=0.4 (Fig. 2) additionally suggests the appearance of a small spin–orbit coupling. It may be the result of defective structure or the appearance of a small amount of vanadium ions at a different degree of oxidation than the fifth (diamagnetic).

The results of the broadband dielectric spectroscopy measurements of $\text{Zn}_{2-x}\text{Mg}_x\text{InV}_3\text{O}_{11}$ (x=0.0, 0.4, and 1.6) showed a strong increase in the relative electrical permittivity, ε_r , with an increase in the magnesium content

^{*}corresponding author; e-mail: tadeusz.gron@us.edu.pl

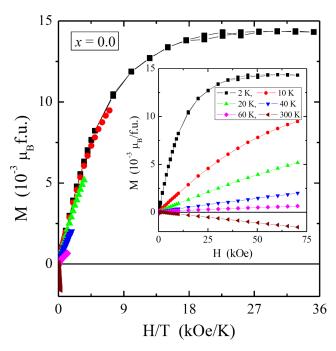


Fig. 1. Magnetization M vs. H/T and H (inset) at 2, 10, 20, 40, 60, and 300 K for $\rm Zn_2 InV_3 O_{11}$.

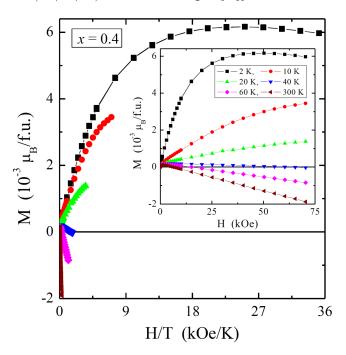


Fig. 2. As in Fig. 1, but for $Zn_{1.6}Mg_{0.4}InV_3O_{11}$.

(Figs. 4–6) and high loss tangent, $\tan \delta$, above 150 K, irrespective of the magnesium content in the sample (Figs. 7–9). With the increase in the frequency of the electric field both ε_r and $\tan \delta$ strongly decreased.

From Figs. 4–6 one can see that a variation in ε_r strongly depends on the content of magnesium ions, whose presence leads to a greater accumulation of electric charge in the so-called trapping centers [7] with their electronic states located below the bottom of the

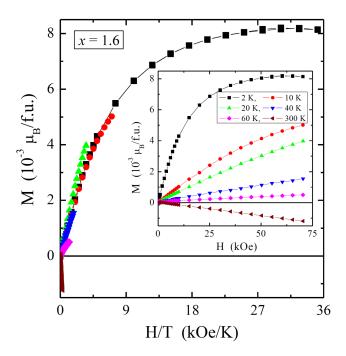


Fig. 3. As in Fig. 1, but for $Zn_{0.4}Mg_{1.6}InV_3O_{11}$.

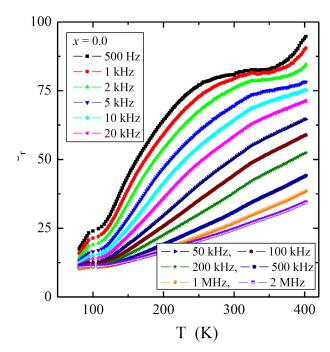


Fig. 4. Dielectric constant ε_r vs. temperature T for $\mathrm{Zn_2InV_3O_{11}}$ in the frequency range 500 Hz to 2 MHz.

conduction band. A natural source of these traps can be grain-boundaries with depletion layers of adjacent grains, as it has been observed for ZnO varistors [8], Nb₂VSbO₁₀ ceramics [9] and some copper/cobalt and rare-earth metal tungstates [10] as well as reported for $(Co,Mn)Pr_2W_2O_{10}$ [11]. The above-mentioned dielectric properties could be interpreted as related to the relaxation process like with Maxwell–Wagner [12] or Jonscher [13], because the solid-state density of the phases

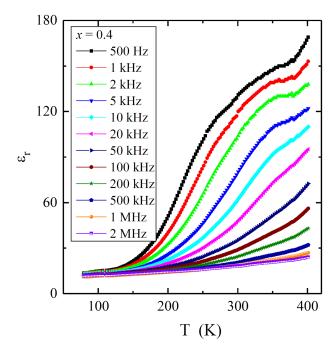


Fig. 5. As in Fig. 4, but for $Zn_{1.6}Mg_{0.4}InV_3O_{11}$.




Fig. 6. As in Fig. 4, but for $Zn_{0.4}Mg_{1.6}InV_3O_{11}$.

under study decreased with increasing magnesium content [6]. The reduction in this density was a consequence of the reduction in the number of vanadium ions with mixed valence.

From Figs. 7–9 one can see that a variation in $\tan \delta$ strongly depends on temperature and frequency, and slightly depends on the content of magnesium ions. In particular, high loss is observed at low frequencies, characteristic of the Joule–Lenz type losses.

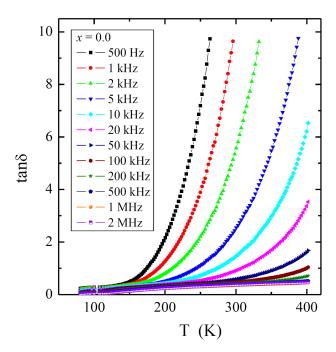


Fig. 7. Loss tangent $\tan\delta$ vs. temperature T of $\rm Zn_2 InV_3 O_{11}$ in the frequency range 500 Hz to 2 MHz.

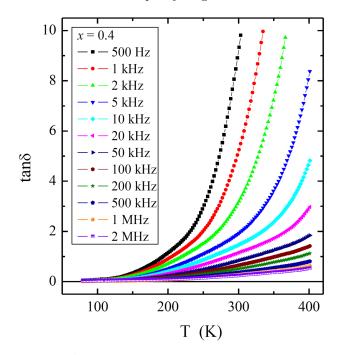


Fig. 8. As in Fig. 7, but for $Zn_{1.6}Mg_{0.4}InV_3O_{11}$.

4. Conclusions

In summary, the $\mathrm{Zn}_{2-x}\mathrm{Mg}_x\mathrm{InV}_3\mathrm{O}_{11}$ ($x=0.0,\,0.4,\,\mathrm{and}\,1.6$) ceramics were characterized by magnetic isotherms and dielectric spectroscopy measurements. They have shown diamagnetic properties and strong dependence on temperature, frequency and magnesium content of relative dielectric constant and loss tangent. These effects were explained within a framework of the vacancy trapping centers and the mixed valence of vanadium ions.

Therefore, diverse and interesting properties of the studied ceramics under study make them much promising for electronic applications.




Fig. 9. As in Fig. 7, but for $Zn_{0.4}Mg_{1.6}InV_3O_{11}$.

Acknowledgments

This work was partly supported by Ministry of Science and Higher Education (Poland) and funded from Science Resources: No.1S-0300-500-1-05-06 and UPB-DZS 518-10-020-3101-01/18.

The authors are also grateful to the team workshop of the Institute of Physics (University of Silesia) for providing practical and technical assistance.

References

- T. Groń, A. Blonska-Tabero, E. Filipek, Z. Stokłosa, H. Duda, B. Sawicki, J. Magn. Magn. Mater. 447, 73 (2018).
- [2] E. Filipek, A. Pacześna, M. Piz, Ceram. Int. 42, 14148 (2016).
- [3] M. Bosacka, J. Therm. Anal. Calorim. 88, 43 (2007).
- [4] M. Bosacka, J. Alloys Comp. 542, 228 (2012).
- [5] J. Huang, Q. Gu, A.W. Sleight, J. Solid State Chem. 110, 226 (1994).
- [6] M. Bosacka, E. Filipek, J. Therm. Anal. Calorim. 130, 63 (2017).
- [7] J.G. Simmons, *Phys. Rev.* **155**, 657 (1967).
- [8] C. Li, J. Wang, W. Su, H. Chen, W. Wang, D. Zhuang, *Physica B* 307, 1 (2001).
- [9] T. Groń, E. Filipek, M. Piz, H. Duda, T. Mydlarz, Mater. Res. Bull. 48, 2712 (2013).
- [10] T. Groń, E. Tomaszewicz, Z. Kukuła, S. Pawlus, B. Sawicki, *Mater. Sci. Eng. B* 184, 14 (2014).
- [11] Z. Kukuła, E. Tomaszewicz, S. Mazur, T. Groń, H. Duda, S. Pawlus, S.M. Kaczmarek, H. Fuks, T. Mydlarz, *Philos. Mag.* 92, 4167 (2012).
- [12] A. Von Hippel, Dielectrics and Waves, Artech House, London 1995, p. 228..
- [13] A.K. Jonscher, Dielectric Relaxation in Solids, Chelsea Dielectric Press, London 1983, p. 310.