

(NASA CR-161353) SPACE CONSTRUCTION BASE
CONTROL SYSTEM Final Report (Bendix Corp.)
479 D HC A21/MT A01 CSCL 22B

N80-15194

Unclas
14 46605



FOREWORD

This Final Report is submitted in accordance with the Statement of Work, Exhibit "A" for Contract NAS8-32660. The study was directed from the Guidance Systems Division (GSD) of The Bendix Corporation. The program manager at this location was Mr. Raymond Kaczynski. Contributors from GSD were Mr. Raymond Kaczynski (Sections 1, 3, 5 and 9), Dr. Frederick Chichester (Sections 3 and 4) and the late Dr. Solomon Nachmias who initiated the study in Section 5. Other tasks were completed by personnel from the Bendix Research Laboratories Division (BRL) and the Bendix Energy, Environment and Technology Office (BEETO). The BRL effort, primarily Sections 2, 6 and 7, was coordinated by Mr. William Gelbach. Material in Sections 2 and 6 was generated by Dr. Mike Lodaya, with consultant Dr. Gary Leininger contributing to the basic approach in Section 6. Dr. Robert Gregory provided the material in Section 7. Mr. Don Lipski of BRL was responsible for the programming and some of the vehicle modeling in Sections 2, 4, 6 and 8. Mr. Dan Johnson of BRL was available for some of the mathematical modeling in the first half of the study. Mr. Calvin Rybak and Dr. Rao Karanam of BEETO were responsible for the material presented in Section 8. The guidance of Dr. Michael Borelli of MSFC throughout the study is again gratefully acknowledged.

ABSTRACT

Several approaches for an attitude control system are studied and developed for a large space construction base that is structurally flexible. Digital simulations were obtained using the following techniques: (a) the multivariable Nyquist array method combined with closed loop pole allocation, (b) the linear quadratic regulator method. Equations for the three-axis simulation using the multilevel control method were generated and are presented. Several alternate control approaches are also described. A technique is demonstrated for obtaining the dynamic structural properties of a vehicle which is constructed of two or more submodules of known dynamic characteristics.

THE
BENDIX
CORPORATION

GUIDANCE
SYSTEMS
DIVISION

TETERBORO,
NEW JERSEY 07608

SPACE CONSTRUCTION
BASE CONTROL SYSTEM

FINAL REPORT


SEPTEMBER 1, 1979

PREPARED FOR:

GEORGE C. MARSHALL
SPACE FLIGHT CENTER
HUNTSVILLE, ALABAMA

NASA CONTRACT NO.
NAS8-32660

APPROVED BY:



DR. D. A. ZOMICK
ENGINEERING MANAGER,
SYSTEMS ENGINEER AND
ANALYSIS

PREPARED BY:



R. F. KACZYNSKI
PROGRAM MANAGER



G. W. GARTNER
DIRECTOR OF ENGINEERING

TABLE OF CONTENTS

SECTION NO.	TITLE	PAGE NO.
	ABSTRACT	i
1.0	INTRODUCTION	1-1
1.1	OBJECTIVES	1-1
1.2	SCOPE	1-1
1.3	GENERAL	1-3
1.4	REFERENCES	1-4
2.0	DYNAMIC MODELING OF THE VEHICLE	2-1
2.1	MATHEMATICAL MODEL	2-1
2.2	MODEL REDUCTION EIGENVALUE ANALYSIS	2-11
2.3	REFERENCES	2-16
3.0	CONTROL APPROACHES	3-1
3.1	MULTILEVEL CONTROL	3-1
3.1.1	GENERAL APPROACH	3-4
3.1.2	STATE VARIABLE MODEL	3-5
3.1.3	DECOMPOSED MODEL	3-5
3.1.4	PERFORMANCE INDEX	3-6
3.1.5	HAMILTONIAN	3-7
3.1.6	COSTATE EQUATIONS	3-8
3.1.7	COSTATE COORDINATION EQUATIONS	3-8
3.1.8	CONTROL EQUATIONS	3-8
3.1.9	SUBPROBLEM HIERARCHY	3-9
3.2	LINEAR QUADRATIC REGULATOR (LQR)	3-10
3.3	MULTIVARIABLE NYQUIST ARRAY (MNA)	3-12
3.3.1	MNA DESIGN PROCEDURE	3-12
3.3.2	RETALLACK POLE PLACEMENT METHOD	3-18
3.4	REFERENCES	3-21

TABLE OF CONTENTS (Cont'd)

<u>SECTION NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
4.0.	SIMULATION OF MULTILEVEL CONTROL	4-1
4.1	LINEARIZED THREE-DIMENSIONAL DISCRETE MASS ROTATIONAL MODEL FOR CONFIGURATION 1	4-1
4.1.1	DEFINITIONS	4-4
4.1.2	ROTATIONAL EQUATIONS OF MOTION	4-5
4.1.3	EULER ANGLE EQUATIONS	4-9
4.1.4	SUSPENSION EQUATIONS	4-11
4.1.5	ROTATIONAL STATE EQUATIONS	4-12
4.2	APPLICATION OF MULTILEVEL CONTROL TECHNIQUES TO A LINEARIZED DISCRETE MASS MODEL	4-16
4.2.1	DECOMPOSITION	4-16
4.2.2	PERFORMANCE INDEX FOR THE LINEARIZED MODEL OF SCB CONFIG- URATION 1 WITH CONTROL TORQUE APPLIED ONLY TO BODY 1	4-18
4.2.3	HAMILTONIAN FOR LINEARIZED MODEL OF SCB CONFIGURATION 1 WITH CONTROL APPLIED ONLY TO BODY 1	4-19
4.2.4	COSTATE EQUATIONS FOR LINEARIZED MODEL OF SCB CONFIGURATION 1	4-20
4.2.5	CONTROL EQUATIONS FOR LINEARIZED MODEL OF SCB CONFIGURATION 1	4-20
4.2.6	ADDITIONAL NECESSARY CONDITIONS FOR LINEARIZED SYSTEM	4-21
4.2.7	SUMMARY OF COORDINATION EQUATIONS FOR LINEARIZED MODEL	4-21
4.2.8	VECTOR REPRESENTATION OF VARIABLES FOR LINEARIZED MODEL OF SCB CON- FIGURATION 1 WITH CONTROL APPLIED ONLY TO BODY 1	4-22

TABLE OF CONTENTS (Cont'd)

<u>SECTION NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
4.3	APPLICATION OF MULTILEVEL CONTROL TECHNIQUES TO A HYBRID COORDINATE MODEL	4-23
4.3.1	DISCRETE RIGID BODY MODEL OF A SPACECRAFT	4-23
4.3.2	HYBRID COORDINATE MODEL	4-25
4.3.3	DECOMPOSED HYBRID COORDINATE MODEL	4-27
4.3.4	DECOMPOSED PERFORMANCE INDEX AND HAMILTONIAN	4-28
4.3.5	COSTATE AND COSTATE COORDINATION EQUATIONS	4-29
4.3.6	THE CONTROL ALGORITHM	4-30
4.3.7	CONSTRUCTION OF THE SUBPROBLEM HIERARCHY	4-30
4.4	CONCLUSIONS AND RECOMMENDATIONS	4-30
4.5	REFERENCES	4-34
5.0	SIMULATION OF LQR CONTROL	5-1
5.1	VEHICLE EQUATIONS	5-1
5.2	OPTIMUM FEEDBACK GAIN	5-11
5.3	SIMULATION	5-14
5.4	DISCUSSION	5-21
5.5	REFERENCES	5-24
6.0	SIMULATION OF MNA CONTROL	6-1
6.1	CONTROL DESIGN FOR THE Z-AXIS	6-2
6.2	MNA DESIGN FOR ROM Z-AXIS	6-5
6.3	RETAILLACK POLE PLACEMENT FOR ROM Z-AXIS	6-12
6.4	CONCLUSIONS AND RECOMMENDATIONS	6-35
6.5	REFERENCES	6-37

TABLE OF CONTENTS (Cont'd)

<u>SECTION NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
7.0	ALTERNATE CONTROL APPROACHES	7-1
7.1	LINEAR, CONSTANT PARAMETER, MULTI- VARIABLE CONTROL APPROACH	7-2
7.1.1	PLANT	7-2
7.1.2	DESIGN OF STATE FEEDBACK CONTROLLER	7-4
7.1.3	DESIGN OF STATE ESTIMATOR	7-9
7.1.4	SYSTEM DESIGN PARAMETERS	7-12
7.2	APPLICATION TO SPACE BASE	7-13
7.2.1	WEIGHTING OF STATE VARIABLES	7-14
7.2.2	AERODYNAMIC DISTURBANCE TORQUE	7-15
7.2.3	WEIGHTING COEFFICIENTS FOR DISTURBANCE STATE VARIABLE ESTIMATION ERROR	7-16
7.2.4	KNOWN INPUT AND PLANT DISTURBANCES	7-18
8.0	STRUCTURAL ANALYSIS STUDY	8-1
8.1	SUMMARY OF APPROACH	8-1
8.2	TECHNICAL DISCUSSION	8-2
8.2.1	PRELIMINARIES	8-6
8.2.2	CONSTRAINT FORCES AND CONSTRAINT TORQUES	8-8
8.2.3	TRANSLATIONAL EQUATIONS OF MOTION FOR THE FULL BEAM	8-15
8.2.4	ROTATIONAL EQUATIONS OF MOTION FOR THE FULL BEAM	8-18
8.2.5	MATRIX EQUATION OF MOTION FOR THE FULL BEAM	8-21
8.2.6	SPLIT-BEAM INTERFACE FORCES AND TORQUES	8-25
8.2.7	TRANSLATIONAL EQUATIONS FOR BODIES OF THE SPLIT-BEAM	8-30
8.2.8	ROTATIONAL EQUATIONS FOR BODIES OF THE SPLIT-BEAM	8-33

TABLE OF CONTENTS (Cont'd)

<u>SECTION NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
8.2.9	MATRIX EQUATION OF MOTION FOR THE SPLIT-BEAM	8-36
8.2.10	DETERMINATION OF THE VIBRATION FREQUENCIES AND MODE SHAPES	8-39
8.2.11	STIFFNESS MATRICES	8-40
8.2.12	SIMULATION RESULTS	8-46
8.3	CONCLUSIONS	8-53
8.4	REFERENCES	8-54
9.0	CONCLUSIONS AND RECOMMENDATIONS	9-1
9.1	CONCLUSIONS	9-2
9.2	RECOMMENDATIONS	9-4

TABLE OF CONTENTS (Cont'd)

<u>SECTION NO.</u>	<u>TITLE</u>
APPENDICES	
A	NUMERICAL VALUES OF MATRICES USED IN ANALYSIS AND DESIGN
B	TRANSFER FUNCTIONS FOR SYMMETRIC Z-AXIS WITH STATE VECTOR $X^T(t) = [\omega_{11}, \omega_{21}, \omega_{42}, \psi_{21}, \psi_{42},]$
C	DERIVATION AND ANALYSIS OF MINIMUM (TRACE $E_c^T E_c$) ^{1/2} SOLUTION FOR STATE CONTROLLER MATRIX C
D	ALGORITHM FOR GENERATING OPTIMUM STATE CONTROLLER OR ESTIMATOR GAIN MATRIX
E	DERIVATION AND ANALYSIS OF MINIMUM (TRACE $E_e^T E_e$) ^{1/2} SOLUTION FOR STATE ESTIMATION GAIN MATRIX H
F	EQUATIONS FOR THE FULL BEAM AND SPLIT-BEAM
G	MODE SHAPES OF THE NATURAL FREQUENCIES FOR THE ORIGINAL BEAM
H	MODE SHAPES OF THE NATURAL FREQUENCIES FOR THE SPLIT-BEAM

LIST OF ILLUSTRATIONS

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
2-1	CONFIGURATION 1 OF SPACE CONSTRUCTION BASE	2-2
2-2	TOPOLOGICAL DIAGRAM OF SCB CONFIGURATION 1	2-3
3-1	TWO LEVEL SUBPROBLEM HIERARCHY FOR MULTILEVEL CONTROL	3-3
3-2	MULTIVARIABLE SYSTEM CONFIGURATION	3-13
3-3	CLOSED LOOP SPACECRAFT CONTROL DESIGN	3-17
4-1	TOPOLOGICAL DIAGRAM OF SCB CONFIGURATION 1	4-3
4-2	SUBPROBLEM HIERARCHY FOR LINEARIZED SPACE CONSTRUCTION BASE ROTATIONAL MODEL WITH MULTILEVEL CONTROL	4-24
4-3	TORSIONAL MODEL OF THE VEHICLE	4-26
4-4	SUBPROBLEM HIERARCHY FOR MULTILEVEL CONTROL	4-31
5-1	SPACE CONSTRUCTION BASE CONFIGURATION 1	5-2
5-2	INERTIA MODEL FOR CONFIGURATION 1	5-3
5-3	TORSIONAL MODEL OF THE VEHICLE	5-6
5-4	MATRIX PARAMETERS FOR DISCRETE INERTIA, SPRING AND DAMPING CONSTANTS	5-10
5-5	THE INVERSE OF INERTIA MATRIX, A_K , A_D AND B^T	5-10
5-6	BLOCK DIAGRAM OF LQR-CONTROLLED SYSTEM	5-13
5-7	SYSTEM MATRICES A AND B, WEIGHTING FACTORS Q AND R, AND INITIAL CONDITIONS FOR SOLUTION OF THE MATRIX RICCATI EQUATION	5-15
5-8	"FINAL" CONDITIONS OF MATRIX RICCATI EQUATION SOLUTION AT TIME = 200 SECONDS	5-15

LIST OF ILLUSTRATIONS (Cont'd)

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
5-9	FULL STATE LQR FEEDBACK, CENTRAL BODY ATTITUDE AND CONTROL TORQUE, INITIAL CONDITION: $\theta_1(0) = 1$ DEGREE	5-17
5-10	FULL STATE LQR FEEDBACK, RELATIVE MOTION OF INBOARD AND OUTBOARD APPENDAGES	5-18
5-11	PARTIAL STATE "LQR" FEEDBACK, CENTRAL BODY ATTITUDE AND CONTROL TORQUE INITIAL CONDITION: $\theta_1(0) = 1$ DEGREE	5-19
5-12	PARTIAL STATE "LQR" FEEDBACK, RELATIVE MOTION OF INBOARD AND OUTBOARD APPENDAGES	5-20
5-13	SINGLE AXIS N-DIMENSIONAL REPRESENTATION OF A LARGE FLEXIBLE VEHICLE	5-23
6-1	A TYPICAL BODE DIAGRAM FOR THE Z-AXIS	6-4
6-2	CLOSED LOOP SPACECRAFT CONTROL DIAGRAM	6-6
6-3	BODE DIAGRAM LOOP 1 FOR ROM Z-AXIS	6-7
6-4	BODE DIAGRAM LOOP 2 FOR ROM Z-AXIS	6-7
6-5	CLOSED LOOP TIME RESPONSE FOR ψ_{21} , WITH NO DYNAMIC COMPENSATION	6-9
6-6	BODE DIAGRAM LOOP 2 WITH BRIDGED-T COMPENSATOR INSERTED	6-10
6-7	CLOSED LOOP ψ_{21} TIME RESPONSE FOR COMPENSATED SYSTEM	6-11
6-8	BODE PLOT FOR LOOP 2 WITH SIMULTANEOUS FREQUENCY AND DAMPING RATIO SHIFT OF POLE AT $\omega = 1.0$	6-13
6-9	CLOSED LOOP TIME RESPONSE FOR ψ_{21}	6-14
6-10	ANGULAR POSITION BODY 1	6-20
6-11	RELATIVE ANGULAR POSITION BODY 2	6-20
6-12	RELATIVE ANGULAR POSITION BODY 4	6-21

LIST OF ILLUSTRATION (Cont'd)

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
6-13	CONTROL TORQUE BODY 1	6-21
6-14	CONTROL TORQUE BODY 2	6-22
6-15	ANGULAR POSITION BODY 1	6-23
6-16	RELATIVE ANGULAR POSITION BODY 2	6-23
6-17	RELATIVE ANGULAR POSITION BODY 4	6-24
6-18	CONTROL TORQUE BODY 1	6-24
6-19	CONTROL TORQUE BODY 2	6-25
6-20	ANGULAR POSITION BODY 1	6-26
6-21	RELATIVE ANGULAR POSITION BODY 2	6-26
6-22	RELATIVE ANGULAR POSITION BODY 4	6-27
6-23	CONTROL TORQUE BODY 1	6-27
6-24	CONTROL TORQUE BODY 2	6-28
6-25	MAXIMUM TORQUE $\{ \tau_{1z} \}$ VS POLE LOCATION FOR RIGID BODY	6-30
6-26	ANGULAR POSITION BODY 1	6-32
6-27	RELATIVE ANGULAR POSITION BODY 2	6-32
6-28	RELATIVE ANGULAR POSITION BODY 4	6-33
6-29	CONTROL TORQUE BODY 1	6-33
6-30	CONTROL TORQUE BODY 2	6-34
7-1	BLOCK DIAGRAM OF COMPLETE SYSTEM	7-11
8-1	IDEALIZED MODEL OF THE BEAM	8-3
8-2	ILLUSTRATION OF SOME NOMENCLATURE	8-3
8-3	CONNECTION OF BODIES i AND $i+2$	8-9
8-4	CONNECTION OF BODIES i AND $i+1$	8-9
8-5	CONNECTION OF THE HALF-BEAMS	8-25
8-6	ILLUSTRATION OF THE COORDINATE SYSTEM	8-41
8-7	RELATIONSHIP BETWEEN BODIES	8-41

LIST OF TABLES

<u>TABLE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
5-1	INERTIA CHARACTERISTICS OF BODY 1	5-5
5-2	SUMMARY OF PHYSICAL CONSTANTS	5-9
6-1	CLOSED LOOP RESPONSE	6-19
6-2	GAIN MATRIX FOR τ_{2Z}	6-31
8-1	NOMENCLATURE	8-4
8-2	COMPARISON OF THE FREQUENCIES OF VIBRATION FOR THE ORIGINAL BEAM AND THE SPLIT-BEAM	8-48

SECTION 1

1.0 INTRODUCTION

This report is submitted in compliance with the statement of Work under contract NAS8-32660. The period of performance covered by the report is the calendar year of August 26, 1978 to August 26, 1979. The submission and approval of this report constitute the successful completion of the Exhibit "A" and Exhibit "B" portions of the contract.

This report is the second of a series under the same contract number. The previous report (Reference 1-1) was submitted in October 1978 and covered the period from July 27, 1977 to July 27, 1978 in compliance with Exhibit "A" of contract NAS8-32660.

1.1 OBJECTIVES

The sections that follow summarize the effort expended on the Space Construction Base (SCB) Control System Study contract. The primary objective of the study was to develop a control system and flexible control techniques that will stabilize a large and growing space station of the future. The study emphasized control methods, but additional topics include dynamic modeling of the vehicle and a technique for combining the dynamics of two or more submodules into one overall model.

1.2 SCOPE

Study effort was concentrated in two major areas:

- a. Application of different methods for control of large flexible spacecraft.

b. Generation of flexible vehicle dynamic models.

Control equations were developed for three distinct approaches:

- a. Multilevel control
- b. Linear quadratic regulator (LQR)
- c. Multivariable Nyquist array (MNA) method and Pole Placement Techniques.

Single axis simulations were generated for control of the SCB Configuration 1 using the LQR and MNA techniques. Control equations were generated for three-axis control of the same vehicle using the Multilevel control method. A heavy programming load resulting from one of the vehicle modeling tasks pre-empted the completion of this three-axis multilevel control simulation.

Equations were generated for this three-axis vehicle model and are presented along with control equations for the multilevel approach. Single axis vehicle models also were derived for application with the other control approach simulations. One additional vehicle modeling task was a structural analysis study in which the dynamic models of two submodules were combined to form a single structural model. Vibration modes for the individual submodules and those for the composite structure were obtained using computerized matrix techniques for finite elements of the bodies. Analytical techniques also were applied to verify the results.

Some assumptions used throughout the report are that sensor and actuator dynamics are negligible in the control analysis because of their relatively broad bandwidths, computer quantization and other non-linearities were assumed to be negligible for the time being.

A number of other items related to SCB control are not discussed here since they were completed in the previous study (Reference 1-1):

- a. Mission requirements
- b. Pointing and orientation requirements
- c. Actuator sizing requirements
- d. Momentum desaturation requirements.

1.3

GENERAL

This report is comprised of nine sections. Section 2 contains an SCB vehicle model (Configuration 1), which is used in Section 4 in equation form and in Section 6 as numerical data. Sections 3 through 7 treat control techniques for attitude stabilization of flexible vehicles. Section 3 contains a preliminary description of each of the control techniques utilized in Sections 4, 5 and 6. Section 4 describes equations for three axis simulation of the multilevel control method. Section 5 presents a single axis simulation of control using the linear quadratic regulator (LQR) method. Section 6 describes a simulation of one axis of the SCB using the multi-variable Nyquist array (MNA) method of control, and also applies a technique for closed loop pole placement. Section 7 discusses several alternate control approaches

which may be considered in future efforts. Section 8 treats a potentially important tool for flexible vehicle modeling: a structural analysis study for combining the dynamics of two or more distributed parameter submodules into a single model when the submodules are securely fastened together. Section 9 is a discussion of conclusions and recommendations. A number of Appendices are placed at the end of the report. References are cited liberally and are listed at the end of each section.

The original RFQ requested that the International System of units (designated as SI) be used in the program and in any reporting. Torques, moments, angular momentum, moments of inertia and distances, however, are stated in English units since this was the system of units used in presenting all of the vehicle inertia data in the RFQ.

A liberal approach was also followed in the numbering of SCB configurations. The original RFQ initially used Roman numerals, but the text here used Arabic numerals in most cases -- except where material is reprinted from the RFQ.

1.4

REFERENCES

1-1 Guidance Systems Division, The Bendix Corporation, Space Construction Base Control System, Final Report, Contract NAS8-32660 for George C. Marshall Space Flight Center, Oct. 27, 1979.

SECTION 2

SECTION 2


2.0 DYNAMIC MODELING OF THE VEHICLE

Configuration 1 of the SCB consists of two solar wings connected to four contiguous modules which are considered to be rigid relative to the solar wings. Each solar wing is converted to two rigid bodies as shown in Figure 2-1. The five individual bodies are designated as in the diagram of Figure 2-2. They are connected to each other via the three degree of freedom hinge suspensions, designated as 2 through 5 as shown.


2.1 MATHEMATICAL MODEL

The mathematical model for the SCB Configuration 1 spacecraft was obtained using the discrete coordinate method described in Reference 2-1. The system model consists of five rigid bodies connected by joints or hinges and subjected to arbitrary external forces and torques. The modeling procedure assumes that the bodies are connected in the form of a topological tree and hence contains no "closed loops". The relative motion about each joint is assumed to be rotational, and a three axis model which includes all cross-coupled axis interactions was developed.


SOLAR WING MODES
(RADIANS/SECOND)



TORSIONAL




NORMAL

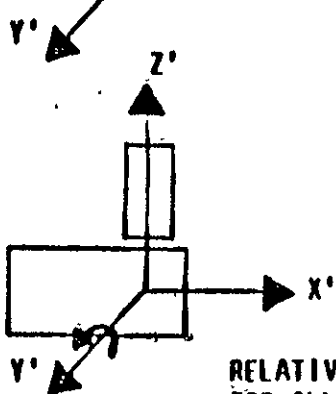

LATERAL


RELATIVE DAMPING RATIO
FOR ALL MODES = 0.005

2-2

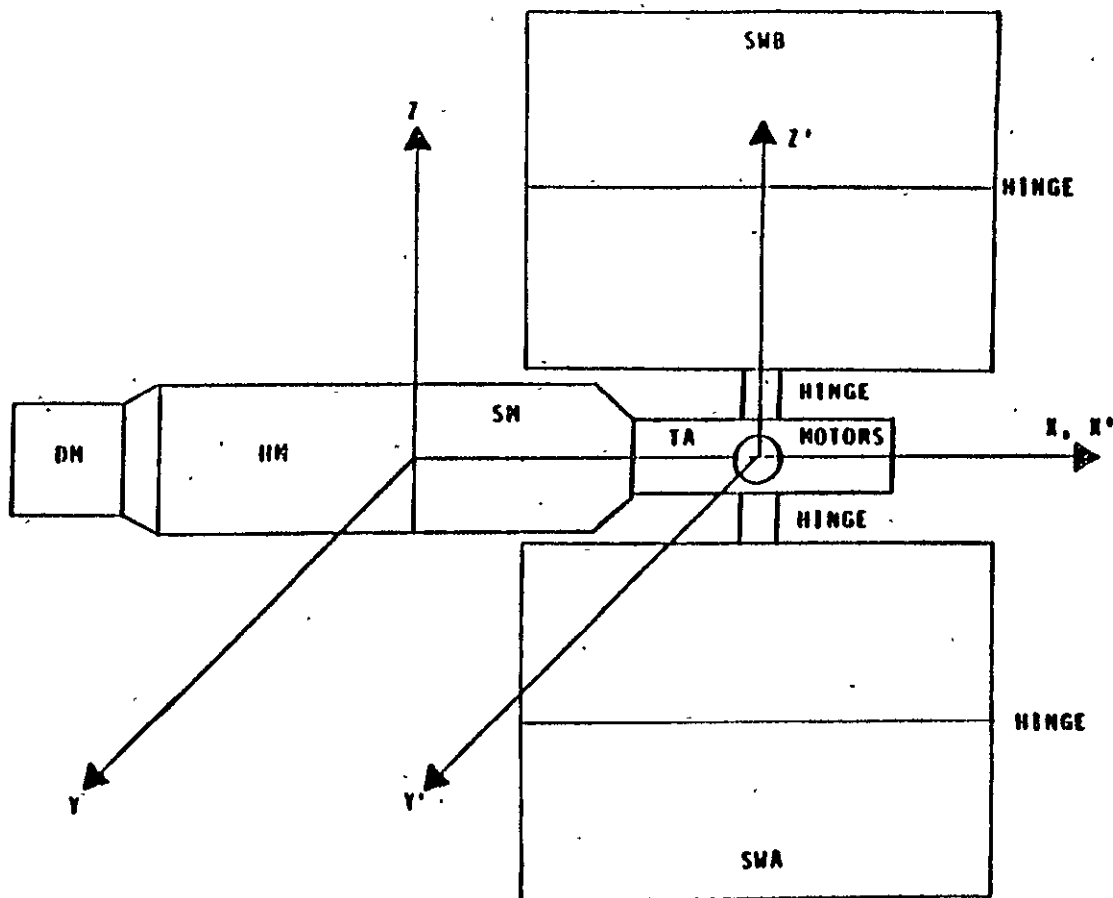

CONFIGURATION 1 OF SPACE CONSTRUCTION BASE

FIGURE 2-1

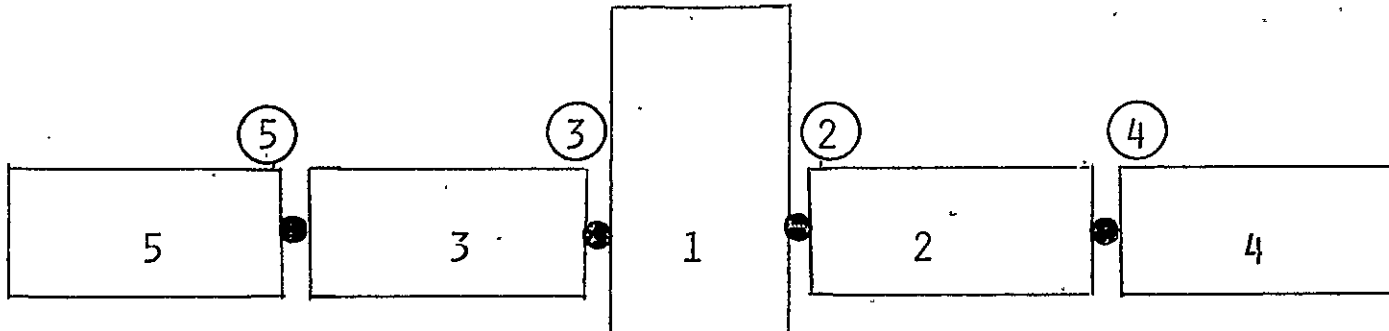

(The individual bodies are connected to each other via three degree of freedom spring hinge suspensions. Hinge numbers are circled.)

TOPOLOGICAL DIAGRAM OF SCB CONFIGURATION 1
FIGURE 2-2

The linearized model, derived based on small relative assumptions using the discrete coordinate approach (References 2-2 and 2-3), is expressible in the form.

$$P\dot{\omega} = Q \quad (2-1)$$

where: P is 15 x 15 nonsingular matrix, function of the model parameters (inertias, masses, etc.)

ω is 15 x 1 angular velocity vector, defined as

$$\omega = \begin{bmatrix} \omega_{1X}, \omega_{1Y}, \omega_{1Z}, \omega_{2X}, \omega_{2Y}, \omega_{2Z}, \omega_{3X}, \omega_{3Y}, \omega_{3Z}, \\ \omega_{4X}, \omega_{4Y}, \omega_{4Z}, \omega_{5X}, \omega_{5Y}, \omega_{5Z} \end{bmatrix}^T$$

Q is 15 x 1 torque vector,

defined as:

$$Q = [Q_1, Q_2, Q_3, Q_4, Q_5]^T \text{ and}$$

$$Q_i = (Q_{iX}, Q_{iY}, Q_{iZ})^T \text{ for } i=1, \dots, 5$$

The vector components of the Matrix Q are given as follows:

$$\begin{aligned}
 Q_1 &= T_{e_1} + T_{a_1} - T_{S_{12}} - T_{S_{13}} \\
 Q_2 &= T_{e_2} + T_{a_2} + T_{S_{12}} + T_{S_{24}} \\
 Q_3 &= T_{e_3} + T_{a_3} + T_{S_{13}} - T_{S_{35}} \\
 Q_4 &= T_{e_4} + T_{a_4} + T_{S_{24}} \\
 Q_5 &= T_{e_5} + T_{a_5} + T_{S_{35}}
 \end{aligned}
 \tag{2-2}$$

where T_{e_i} is an external torque vector on body i given by $T_{e_i} = (T_{e_{iX}}, T_{e_{iY}}, T_{e_{iZ}})^T$

T_{a_i} is an actuator, torque vector on body i given as $T_{a_i} = (T_{a_{iX}}, T_{a_{iY}}, T_{a_{iZ}})^T$

$T_{S_{ij}}$ is a suspension torque vector between i and j given as

$$T_{S_{ij}} = (T_{S_{ijX}}, T_{S_{ijY}}, T_{S_{ijZ}})^T$$

Define thirty state variables as follows:

$$\begin{array}{ll}
 X_1 = \omega_{1X} & X_{16} = \phi_1 \\
 X_2 = \omega_{1Y} & X_{17} = \theta_1 \\
 X_3 = \omega_{1Z} & X_{18} = \psi_1
 \end{array} \quad (2-3) \qquad (2-8)$$

$$\begin{array}{ll}
 X_4 = \omega_{2X} - \omega_{1X} & X_{19} = \phi_2 - \phi_1 \\
 X_5 = \omega_{2Y} - \omega_{1Y} & X_{20} = \theta_2 - \theta_1 \\
 X_6 = \omega_{2Z} - \omega_{1Z} & X_{21} = \psi_2 - \psi_1
 \end{array} \quad (2-4) \qquad (2-9)$$

$$\begin{array}{ll}
 X_7 = \omega_{3X} - \omega_{1X} & X_{22} = \phi_3 - \phi_1 \\
 X_8 = \omega_{3Y} - \omega_{1Y} & X_{23} = \theta_3 - \theta_1 \\
 X_9 = \omega_{3Z} - \omega_{1Z} & X_{24} = \psi_3 - \psi_1
 \end{array} \quad (2-5) \qquad (2-10)$$

$$\begin{array}{ll}
 X_{10} = \omega_{4X} - \omega_{2X} & X_{25} = \phi_4 - \phi_2 \\
 X_{11} = \omega_{4Y} - \omega_{2Y} & X_{26} = \theta_4 - \theta_2 \\
 X_{12} = \omega_{4Z} - \omega_{2Z} & X_{27} = \psi_4 - \psi_2
 \end{array} \quad (2-6) \qquad (2-11)$$

$$\begin{array}{ll}
 X_{13} = \omega_{5X} - \omega_{3X} & X_{28} = \phi_5 - \phi_3 \\
 X_{14} = \omega_{5Y} - \omega_{3Y} & X_{29} = \theta_5 - \theta_3 \\
 X_{15} = \omega_{5Z} - \omega_{3Z} & X_{30} = \psi_5 - \psi_3
 \end{array} \quad (2-7) \qquad (2-12)$$

Where ϕ_i , θ_i , ψ_i are the Euler angles about X, Y and Z axis, respectively, for body i.

$\phi_{ij} = \phi_i - \phi_j$ represents a relative angle of body i with respect to body j in the X direction.

Similarly, $\theta_{ij} = \theta_i - \theta_j$, $\psi_{ij} = \psi_i - \psi_j$, $\omega_{ijx} = \omega_{ix} - \omega_{jx}$,
 $\omega_{ijy} = \omega_{iy} - \omega_{jy}$ and $\omega_{ijz} = \omega_{iz} - \omega_{jz}$.

Also define:

$$X_{H1} = (X_1, X_2, X_3, X_4, X_5, X_6, X_7, X_8, X_9, X_{10}, X_{11}, X_{12}, X_{13}, X_{14}, X_{15})^T \quad (2-13)$$

$$X_{H2} = (X_{16}, X_{17}, X_{18}, X_{19}, X_{20}, X_{21}, X_{22}, X_{23}, X_{24}, X_{25}, X_{26}, X_{27}, X_{28}, X_{29}, X_{30})^T \quad (2-14)$$

$$X = \begin{bmatrix} X_{H1} \\ X_{H2} \end{bmatrix} = (X_1, X_2, X_3, X_4, X_5, X_6, X_7, X_8, X_9, X_{10}, X_{11}, X_{12}, X_{13}, X_{14}, X_{15}, X_{16}, X_{17}, X_{18}, X_{19}, X_{20}, X_{21}, X_{22}, X_{23}, X_{24}, X_{25}, X_{26}, X_{27}, X_{28}, X_{29}, X_{30})^T \quad (2-15)$$

From the definition of the state variables:

$$\dot{X}_{H2} = X_{H1} \quad (2-16)$$

i.e., $\dot{X}_{16} = X_1, \dot{X}_{17} = X_2, \text{ etc.}$

Equations (2-3) through (2-7) can easily be rearranged so that ω can be expressed in terms of X_{H1} by the following relationship:

$$\omega = N X_{H1} \quad (2-17)$$

Where N is 15 x 15 constant, nonsingular matrix.

Differentiating (2-17) with respect to time yields;

$$\dot{\omega} = N \dot{X}_{H1} \quad (2-18)$$

Multiplying both sides of equation (2-1) by P^{-1} and substituting for angular acceleration vector $\dot{\omega}$ from equation (2-18) yields;

$$N \dot{X}_{H1} = P^{-1} Q \quad (2-19)$$

Multiplying both sides of equation (2-19) by N^{-1} gives;

$$\dot{X}_{H1} = N^{-1} P^{-1} Q \quad (2-20)$$

Assuming no external torques, equation set (2-2) can be written as;

$$Q = T_a + T_S \quad (2-21)$$

where T_a is 15 x 1 actuating torque vector.

T_S is 15 x 1 suspension torque vector, given by:

$$T_S = (-T_{S_{12}} - T_{S_{13}}, T_{S_{12}} - T_{S_{24}}, T_{S_{13}} - T_{S_{35}}, T_{S_{24}}, T_{S_{35}})^T \quad (2-22)$$

$(-T_{S_{12}} - T_{S_{13}})$, etc., are 3 x 1 vectors.

The scalar suspension torques can be expressed in terms of rate and displacement constants and inertial rate difference and relative displacements, for example:

$$\begin{aligned} T_{S_{12X}} &= -K_{S_{12X}} \phi_{21} - C_{S_{12X}} (\omega_{2X} - \omega_{1X}) \\ T_{S_{12Y}} &= -K_{S_{12Y}} \theta_{21} - C_{S_{12Y}} (\omega_{2Y} - \omega_{1Y}) \\ T_{S_{35Z}} &= -K_{S_{35Z}} \psi_{53} - C_{S_{35Z}} (\omega_{5Z} - \omega_{3Z}) \end{aligned} \quad (2-23)$$

Substituting equation set (2-23) for all scalar suspension torques in (2-22), using definitions of the state variables (2-3 through 2-12) and re-arranging the terms, equation (2-22) can be expressed as

$$T_s = KD X_{H1} + KS X_{H2} \quad (2-24)$$

where KD is 15 x 15 matrix of damping constants and KS is 15 x 15 stiffness matrix.

Substituting (2-24), into (2-21) gives

$$Q = T_a + KD X_{H1} + KS X_{H2} \quad (2-25)$$

substituting Q given by (2-25) into (2-20) and multiplying by N^{-1} yields;

$$\dot{X}_{H1} = N^{-1} P^{-1} [T_a + KD X_{H1} + KS X_{H2}] \quad (2-26)$$

Rewriting (2-16) in the following form:

$$\dot{X}_{H2} = I X_{H1} + 0 X_{H2} \quad (2-27)$$

where I is 15x15 identity matrix
and 0 is 15x15 null matrix.

Combining (2-26) and (2-27) Yields

$$\begin{bmatrix} \dot{X}_{H1} \\ \dot{X}_{H2} \end{bmatrix} = \begin{bmatrix} N^{-1}P^{-1}KD & N^{-1}P^{-1}KS \\ I & 0 \end{bmatrix} \begin{bmatrix} X_{H1} \\ X_{H2} \end{bmatrix} + \begin{bmatrix} N^{-1}P^{-1} \\ 0 \end{bmatrix} T_a \quad (2-28)$$

This can be further expressed as:

$$\dot{X}(t) = AX(t) + B\tau(t) \quad (2-29)$$

$$\text{where } X = [X_1, \dots, X_{30}]^T$$

$$\tau(t) = T_a = [T_{a1x}, T_{a1y}, T_{a1z}, \dots, T_{a5z}]_{15 \times 1}^T$$

$$A = \begin{bmatrix} N^{-1}P^{-1}KD & N^{-1}P^{-1}KS \\ I & 0 \end{bmatrix}_{30 \times 30}$$

$$B = \begin{bmatrix} N^{-1}P^{-1} \\ 0 \end{bmatrix}_{30 \times 15}$$

Assuming no torque applied to body 4 and 5, τ can be written as

$$\tau = [\tau_{1x}, \dots, \tau_{3z}]_{9 \times 1}^T \quad (2-30)$$

and B can be reduced to 30x9 matrix.

Numerical values of matrices P, N, KD, KS, A and B used for analysis and design purposes are shown in Appendix A.

2.2

Model Reduction Eigenvalue Analysis

The eigenvalues for the five-body three-axis models were obtained as follows: (Set A)

(1)	-.0149042	\pm	j 1.61213
(2)	-.0268672	\pm	j 1.20486
(3)	-.0153772	\pm	j 0.642112
(4)	-.00228948	\pm	j 0.312132
(5)	-.43191	\pm	j20.9923
(6)	-.462163	\pm	j20.4238
(7)	-.0653141	\pm	j 7.13316
(8)	-.0356952	\pm	j 5.55713
(9)	-.00502089	\pm	j 1.00192
(10)	-.00500057	\pm	j 1.00005
(11)	-.00172613	\pm	j 0.322123
(12)	-.00160014	\pm	j 0.32009

There are also six eigenvalues at the origin.

Setting all cross-axis coupling terms to zero, three five-body single-axis models can be developed. Under this condition the eigenvalues were computed as follows (Set B):

<u>X-axis</u>			<u>Y-axis</u>		
	0.0			0.0	
	0.0			0.0	
-0.014904	<u>+</u>	j 1.61213	-0.431645	<u>+</u>	j20.989
-0.0266921	<u>+</u>	j 1.18467	-0.462423	<u>+</u>	j20.427
-0.0153771	<u>+</u>	j 0.642111	-0.0654125	<u>+</u>	j 7.13772
-0.00222516	<u>+</u>	j 0.30449	-0.0356052	<u>+</u>	j 5.55064

Z-axis

0.0
0.0
-0.00502089 + j 1.00192
-0.00500057 + j 1.00005
-0.00172613 + j 0.322132
-0.00160014 + j 0.32009

A comparison of the single axis eigenvalues with the three axis eigenvalues leads to the conclusion that, from an eigenvalue assignment viewpoint, the three axis vehicle control system can be subdivided into three single axis control systems. Further comparison suggests that cross-axis coupling from an eigenvalue perspective is minimal, and thus an increase in the damping and/or stiffness factors of the system by active control can be accomplished by single axis measures.

To examine the eigenstructure further, consider the single axis representations of Figure 2-2. The eigenvalues at the origin represent the rigid body dynamics of the main unit while the flexible modes are attributed to the solar wings. If the main unit were

sufficiently larger than the solar wing, the dynamics would not interact. The eigenvalues would then appear in double complex pairs. As the mass of the main unit decreases the eigenvalues of the open loop single axis system will shift in a predetermined way. These eigenvalues will then appear as single complex pairs.

Assume the state model for a single axis to be represented by the form

$$\dot{\bar{x}} = A\bar{x} + B\tau \quad (2-31)$$

with the state vector as

$$\bar{x}(t) = \left[\begin{array}{c} \omega_{21}\omega_{42}\psi_{21}\psi_{42} \\ \omega_{31}\omega_{53}\psi_{31}\psi_{53} \\ \omega_1\psi_1 \end{array} \right]^T \quad (2-32)$$

or in partitioned form

$$\bar{x}(t) = \left[\begin{array}{c} x_1(t) \\ x_2(t) \\ x_3(t) \end{array} \right]^T \quad (2-33)$$

Substituting (2-33) into (2-31) yields

$$\left[\begin{array}{c} \bar{x}_1 \\ \bar{x}_2 \\ \bar{x}_3 \end{array} \right] = \left[\begin{array}{ccc} A_{11} & A_{12} & A_{13} \\ A_{21} & A_{22} & A_{23} \\ A_{31} & A_{32} & A_{33} \end{array} \right] \left[\begin{array}{c} x_1 \\ x_2 \\ x_3 \end{array} \right] + \left[\begin{array}{c} B_1 \\ B_2 \\ B_3 \end{array} \right] \tau \quad (2-34)$$

with $A_{11} = A_{22}$ a 4x4 matrix representing individual solar wing dynamics, $A_{12} = A_{21}$ a 4x4 matrix representing the dynamic interaction of solar wing A on solar wing B, $A_{13} = 0$, $A_{23} = 0$, A_{31} and A_{32} are 2x4 matrices reflecting

the interaction of the solar wings on the rigid body and

$$A_{33} = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix}$$

contains the rigid body dynamics. Thus (2-34) becomes

$$\dot{x} = \begin{bmatrix} A_{11} & A_{12} & 0 \\ A_{12} & A_{11} & 0 \\ A_{31} & A_{32} & A_{33} \end{bmatrix} x + B\tau \quad (2-35)$$

The open loop eigenvalues of (2-35) consist of the eigenvalues of A_{33} (designated as $\lambda(A_{33})$) plus the eigenvalues of the partitioned block

$$\begin{bmatrix} A_{11} & A_{12} \\ A_{12} & A_{11} \end{bmatrix} \quad (2-36)$$

With A_{11} and A_{12} square and of the same dimension (i.e., 4x4), row and column manipulations on (2-36) yield

$$\begin{bmatrix} A_{11} - A_{12} & 0 \\ A_{12} & A_{11} + A_{12} \end{bmatrix} \quad (2-37)$$

Since eigenvalues of (2-36) are unaffected by row and column manipulations, the eigenvalues in (2-36) equal the eigenvalues of (2-37). But (2-37) is in block diagonal form, thus the eigenvalues of A in (2-34) equal the eigenvalues of A_{33} , plus the eigenvalues of $A_{11} - A_{12}$, plus the eigenvalues of $A_{11} + A_{12}$; i.e.,

$$\lambda(A) = \lambda(A_{33}), \quad \lambda(A_{11}+A_{12}), \quad \lambda(A_{11}-A_{12}) \quad (2-38)$$

If $A_{12} = 0$, then the eigenvalues will appear in double complex pairs. Hence any departure of A_{12} from the zero matrix will cause an eigenvalue shift in the manner described by (2-38).

Re-ordering the state vector for each of the single axis models as in (2-32), the single axis eigenvalues previously computed were similarly obtained using (2-38). Thus the significant eigenvalue shifts in both the X and Y axes result from the cross-coupled interactions of the solar wings in the respective axis and not by any cross-axis coupling.

To obtain a qualitative measure of the interactive eigenshifts, assume $\psi_{21} = \psi_{31}$ and $\psi_{42} = \psi_{53}$ in both magnitude and phase for all time. This is equivalent to a symmetry assumption about the main unit. The eigenvalues for each axis are subsequently computed as (Set C):

	<u>X-axis</u>		<u>Y-axis</u>	
	0.0		0.0	
	0.0		0.0	
-.0153606	<u>+</u>	j 0.641803	-.0697786	<u>+</u> j 7.13515
-.0149224	<u>+</u>	j 1.61229	-.482064	<u>+</u> j20.9874
-.0153606	<u>+</u>	j 0.641803	-.0697786	<u>+</u> j 7.13515
-.0149224	<u>+</u>	j 1.61229	-.482064	<u>+</u> j20.9874

Z-axis

0.0

0.0

-.00500564 + j 1.00112
-.00160836 + j 0.320495
-.00500564 + j 1.00112
-.00160836 + j 0.320495

Comparing eigenvalue Set C with eigenvalue Set B we conclude that the symmetry assumption for the z axis (and possible the y axis) is worthy of further investigation. The eigenvalue shift in the x-axis as caused by the solar panel interations suggests that this axis model should be treated in its entirety.

2.3

REFERENCES

- 2-1 Hooker, W. W. and Margulies, G., "The Dynamical Attitude Equations for an N-body Satellite", Journal of the Astronautical Sciences, Vol. XII, No. 4, PP. 123-128, 1965.
- 2-2 Lipski, D. B., "Discrete Coordinate Approach to Analytical Modeling of Flexible Bodies 11, to Distribution, Bendix Research Lab, 22 February, 1979.
- 2-3 Lipski, D. B., "Linearized Five Body Space Base Simulation Model", to Distribution, Bendix Research Lab, 23 April, 1979.

SECTION 3

SECTION 3

SECTION 3

3.0 CONTROL APPROACHES

Three diverse techniques are, in the succeeding subsections, described which are applicable to the control of large, flexible vehicles. The first technique (multilevel control) solves a complex control problem by reducing the solution to a large number of simpler problems. The second approach (LQR) utilizes some of the basic concepts of modern control theory for determining the optimal control loop feedback. The third scheme (MNA) reduces the effective cross-coupling of a complex "plant" to an extent that the closed loop design reduces to a set of independent single loop design problems; techniques for obtaining closed loop pole placement are also utilized in this approach.

The theoretical background and references for each control approach are presented in this section. The actual equations and some simulation results as applied to Configuration 1 of the Space Construction Base are offered in Sections 4, 5 and 6 for the multilevel, LQR and MNA control approaches respectively.

3.1 MULTILEVEL CONTROL

The control of large-scale multivariable systems is a class of control problems that arises in many areas of practical application. Direct application of control to a large-scale system often severely taxes or exceeds available computer capacity due to the high dimensions involved in the overall control problem to be solved. Application of multilevel systems analysis techniques to the large overall control problem decomposes it into

a multilevel hierarchy of subproblems of smaller dimension. An example of a two level subproblem hierarchy is depicted in Figure 3-1.

In general a subproblem hierarchy resulting from the application of multilevel control techniques may contain several levels of subproblems. The roles of the subproblems are correlated with the levels that they occupy in the hierarchy. Each of the subproblems on the lowest (first) level of the hierarchy pertains to a portion of the original system to be controlled. Each of the subproblems on a level above the lowest one pertain to coordination of the solutions of the subproblems on the next lower level. The number of subproblems per level decreases as the level becomes higher in the hierarchy until the top or supremal level is occupied by a single overall coordination subproblem.

Each subproblem comprising the hierarchy transmits its solution(s) to other subproblems in the hierarchy in the course of the solution of the overall control problem. Such a solution proceeds iteratively. For example, the subproblems of the two level hierarchy may be solved in the following sequence. The second level coordination subproblem provides coordination variables, C , ρ , which are held fixed while the optimal solutions for \underline{x} , $\underline{\lambda}$ and \underline{u} are determined for all of the first level subproblems independently. After the optimal solution is obtained for each first level subproblem, numerical responses are sent to the coordination subproblem on the second level. The coordination subproblem

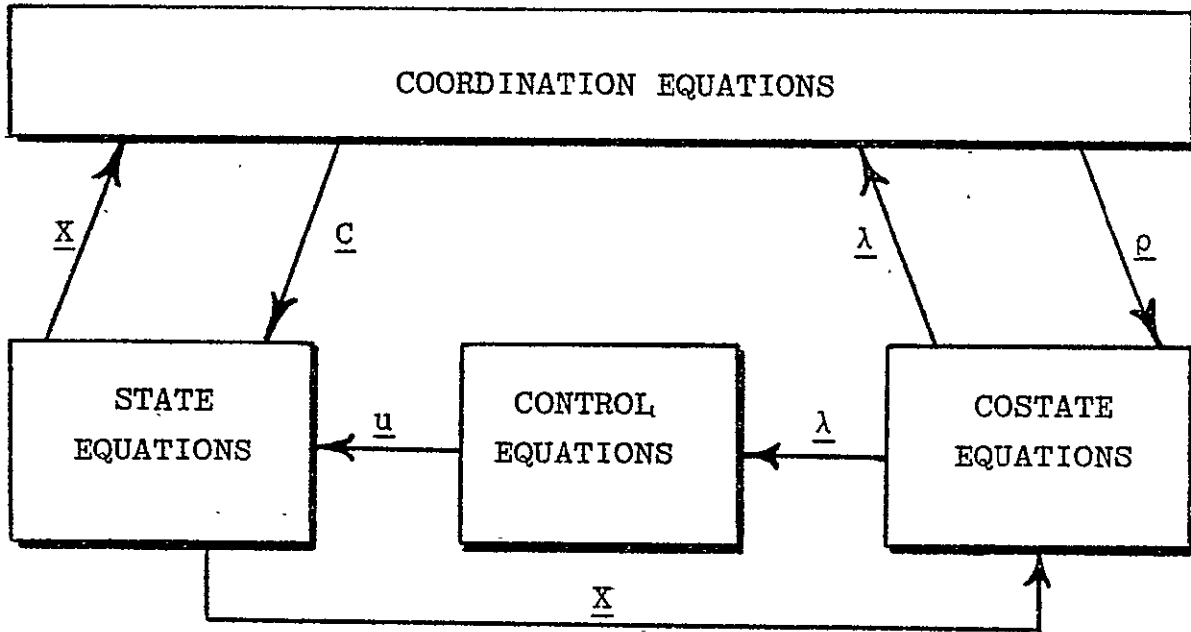


FIGURE 3-1 Two Level Subproblem Hierarchy
For Multilevel Control

now adjusts the coordination variables and sends their adjusted values to the subproblems on the first level. The first level subproblems are again solved independently with the adjusted values of the coordination variables. This procedure continues iteratively until the overall coordination problem at the top of the hierarchy is satisfied. The result sought is an optimized collection of subsystems, with interconnections restored, which is equivalent to the original controlled system optimized. This procedure may be readily extended to subproblem hierarchies with more than two levels.

3.1.1 General Approach

The overall procedure to be utilized in applying multi-level control techniques to a mathematical model of a system to be controlled is outlined as follows:

1. Express mathematical model in state variable form.
2. Decompose mathematical model into set of decoupled equations.
3. Construct decomposed performance index.
4. Form decomposed Hamiltonian.
5. Develop costate equations with associated coordination equations.
6. Develop control algorithm.

7. Construct subproblem hierarchy.

8. Simulate subproblem hierarchy on digital computer.

3.1.2 State Variable Model

$$\dot{\mathbf{x}} = \mathbf{Ax} + \mathbf{Bu} \quad (3-1)$$

where:

$$\mathbf{x} = (x_1, x_2, \dots, x_n)^T \text{ (state vector)} \quad (3-2)$$

$$\mathbf{u} = (u_1, u_2, \dots, u_m)^T \text{ (control vector)} \quad (3-3)$$

$$\mathbf{A} = \text{nxn matrix} \quad (3-4)$$

$$\mathbf{B} = \text{nxm matrix; } m \leq n \quad (3-5)$$

Equation (3-1) is the canonical state variable form of the mathematical model of the system to be controlled. It represents a set of n simultaneous scalar ordinary linear differential equations which, in general, are coupled.

Typical scalar state equation:

$$\dot{x}_i = f_i(\mathbf{x}, \mathbf{u}) = \sum_{j=1}^n a_{ij} x_j + \sum_{j=1}^m b_{ij} u_j, \quad i = 1, 2, \dots, n \quad (3-6)$$

$$\text{where } \mathbf{f} = (f_1, f_2, \dots, f_n)^T \quad (3-7)$$

3.1.3 Decomposed Model

Define state coordination variables with following coordination equations.

$$C_i = g_i = \sum_{\substack{j=1 \\ j \neq i}}^n a_{ij} x_j + \sum_{\substack{j=1 \\ j \neq i}}^m b_{ij} u_j \quad (3-8)$$

Then the scalar state equations may be written in decomposed (decoupled) form as follows:

$$\dot{x}_i = f_i = a_{ii} x_i + b_{ii} u_i + C_i \quad (3-9)$$

with the initial condition,

$$x_i(0) = x_{i0} \quad (3-10)$$

3.1.4 Performance Index

Original performance index to be minimized:

$$P = \int_{t_0}^{t_f} (x^T Q x + u^T R u) dt \quad (3-11)$$

where

Q = nxn weighting matrix

R = mxm weighting matrix

t_0 = initial time in interval considered

t_f = final time in interval considered

If the matrices Q and R are diagonal, the performance index is said to be separable and it may be written in decomposed (decoupled) form as follows:

$$P = \sum P_i \quad i = 1, 2, \dots, n \quad (3-12)$$

$$\text{where: } P_i = \int_{t_0}^{t_f} p_i dt \quad (3-13)$$

$$p_i = q_i x_i^2 + r_i u_i^2 \quad \text{for } i = 1, 2, \dots, m \quad (3-14)$$

$$p_i = q_i x_i^2 \quad \text{for } i = m+1, \dots, n \quad (3-15)$$

3.1.5 Hamiltonian

The Hamiltonian is proportional to the energy of the system and may be written in decomposed form as follows:

$$H = \sum H_i \quad i = 1, 2, \dots, n \quad (3-16)$$

where:

$$H_i = p_i + \lambda_i f_i + \rho_i (g_i - C_i) \quad (3-17)$$

λ_i = ith scalar costate variable.

ρ_i = ith Lagrange multiplier associated with the ith state coordination equation.

According to Pontryagin's minimum principle minimization of the Hamiltonian corresponds to optimization of the controlled system with respect to the performance index given in (3-11). Application of the necessary conditions for minimization of the Hamiltonian of the controlled system generates the costate, control and costate coordination equations for the system to be optimized.

3.1.6 Costate Equations

$$\begin{aligned} \dot{\lambda}_i &= -\frac{\partial H}{\partial x_i} \\ &= -a_{ii}\lambda_i - 2q_i x_i - \sum_{\substack{j=1 \\ j \neq i}}^n a_{ji}\rho_j, \quad i = 1, 2, \dots, n \end{aligned} \quad (3-18)$$

with the final condition,

$$\lambda_i(t_f) = 0 \quad (3-19)$$

3.1.7 Costate Coordination Equations

$$\frac{\partial H}{\partial C_i} = 0 \rightarrow \rho_i = \lambda_i; \quad i = 1, 2, \dots, n \quad (3-20)$$

3.1.8 Control Equations

For a system that is operating suboptimally with respect to its performance index, some of the necessary optimality conditions applied to its Hamiltonian will not be satisfied at the outset. The selection of the specific set of necessary conditions to be temporarily violated at the beginning of operation of the system determines the nature of the decomposition of the system. In this case it is assumed that the system decomposition is such that all of the necessary conditions listed so far, (3-18), (3-20), and the necessary conditions leading to the state and state coordination equations are satisfied throughout the time interval of interest, (t_o, t_f) . Given these conditions, for suboptimal operation at the outset, the necessary condition associated

with the control variables cannot be satisfied at the outset. It is therefore approached during the operation of the system by means of the following gradient formulation.

$$(u_i)_{\ell+1} = (u_i)_{\ell} - s_i \left(\frac{\partial H}{\partial u_i} \right)_{\ell}, \quad i = 1, 2, \dots, m \quad (3-21)$$

where:

ℓ = the iteration subscript

s_i = constants to be chosen on the basis of the rate of approach of the controlled system to optimal operation.

From (3-8), (3-9), (3-14) and (3-17) an expression may be written for the gradient of the Hamiltonian with respect to each scalar control variable as follows.

$$\frac{\partial H}{\partial u_i} = 2r_i u_i + \sum_{j=1}^n b_{ji} \lambda_j \quad (3-22)$$

3.1.9 Subproblem Hierarchy

Equations (3-8) and (3-20) may be assembled into an overall coordination subproblem for the generation of the optimal control contours. Equations (3-9) with their associated initial conditions, equations (3-10), constitute the first level state subproblems to be solved. Since these equations are temporarily decoupled from each other, they may be regarded as n subproblems each of which can be solved independently. Similarly, (3-18) with the final conditions of (3-19) may be associated into a first

level costate subproblem and (3-21) and (3-22) may be assembled into an overall control subproblem. These four subproblems may then be assembled into a hierarchy with the coordination subproblem at its apex as shown in Figure 3-1.

3.2 LINEAR QUADRATIC REGULATOR (LQR)

With a linear system described in the state variable form

$$\dot{x} = Ax + Bu \quad (3-23)$$

where x = the system state variable vector
 u = the control vector
 A, B = the system matrices,

an optimum feedback control $u = Fx$ can be determined by utilizing Pontryagin's minimum principle.

An expression for the optimum feedback F can be derived (References 3-4 and 3-5) through application of either Hamilton-Jacobi equations or utilizing the second method of Liapunov with a "quadratic cost" system performance index.

$$PI = \int_0^T (x^T Q x + u^T R u) dt \quad (3-24)$$

where T = upper limit in time (could also be infinite in some derivations)

Q,R = weighting factors, where Q must be at least a positive semidefinite matrix and R must be positive definite

For an initial state $x(0)$, a matrix Riccati equation is generated by either approach from (3-23) and (3-24),

$$-\dot{P} = PA + A^T P - PBR^{-1} B^T P + Q \quad (3-25)$$

where $P = P(t)$ and must be positive definite
 $\dot{P} = \dot{P}(t)$.

and the equation is subject to the boundary condition $P(T) = 0$. Ordinarily, this equation can be integrated backward in time from the known terminal condition over the time period of interest. \dot{P} approaches zero as T is increased towards infinity, and the P matrix becomes a constant designated as \bar{P} . The optimum feedback matrix is then

$$F = -R^{-1} B^T \bar{P} \quad (3-26)$$

as derived from the approaches cited. Equation (3-23) can now be rewritten as a function of the state variables only

$$\dot{x} = (A - BF)x = (A + BR^{-1} B^T \bar{P})x \quad (3-27)$$

Note that this equation implies that all the state variables must be fed back to obtain an optimal control system. Careful selection of state variables, or filtering of a set of measured variables, will be required

for feedback control of large flexible vehicles. These structures are actually a network of distributed spring and mass parameters, rather than a finite number of discrete or lumped elements.

An application of the LQR technique to the control of a flexible vehicle, represented by discrete parameters, is demonstrated in Section 5 of this report. A solution of the system's matrix Riccati equation is given, along with an optimal closed loop simulation.

3.3 MULTIVARIABLE NYQUIST ARRAY (MNA)

The MNA control method used here is combined with a pole placement technique. The basic MNA approach will be described first and will then be followed by a brief description of the pole placement procedure.

3.3.1 MNA Design Procedure

The fundamental objective of the MNA design method is to decrease crosscoupled system interaction to such an extent that the closed loop system design reduces to a set of independent single loop design problems. Although simply stated, the actual reduction procedure proposed by Rosenbrock (Reference 3-6) and implemented by Munro (Reference 3-7) requires a high degree of designer intervention and is fundamentally a trial and error process.

In Figure 3-2, $G(S)$ is an $m \times m$ transfer matrix representing the coupling of m inputs and m outputs. Restriction of $G(s)$ to a square matrix simplifies the analysis, programming and computational effort considerably.

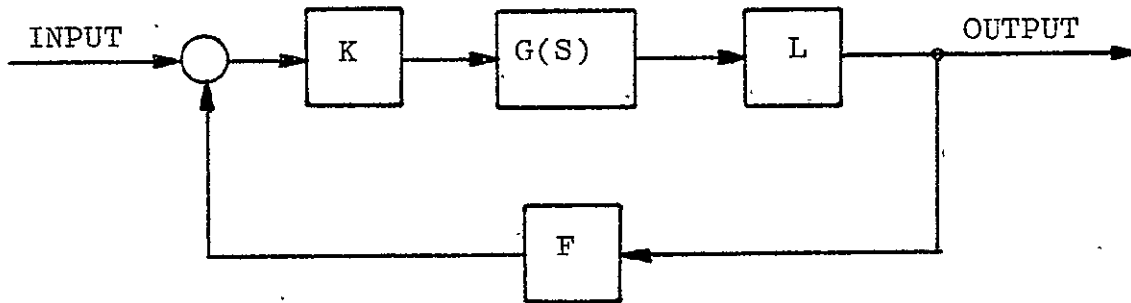


FIGURE 3-2 MULTIVARIABLE SYSTEM CONFIGURATION

The pre- and post-compensator matrices K and L , respectively are each of dimension $m \times m$. The feedback gain matrix, F , is assumed to be diagonal and of similar dimensions. Clearly, if

$$Q(S) = LG(S)K \quad (3-28)$$

is diagonal, loop closure may proceed on an individual loop basis with a guarantee of zero loop interaction. It is this premise upon which the MNA design philosophy is based. The adherence to strict diagonalization is relaxed, however, with the substitution and exploitation of the concept of diagonal dominant matrices.

A matrix $Z(S)$ is diagonal dominant if either or both of the following conditions are present for all S :

a.
$$\sum_{\substack{j=1 \\ i \neq j}}^m |z_{ij}(S)| / |z_{ii}(S)| \leq \theta_i < 1 \text{ for all } i=1, 2, \dots, m \quad (3-29)$$

$$b. \sum_{\substack{j=1 \\ j \neq i}}^m |z_{ji}(S)| / |z_{ii}(S)| \leq \theta_i < 1 \text{ for all } i = 1, 2, \dots, m \quad (3-30)$$

Equation (3-29) defines row dominance while (3-30) defines the column dominance condition where θ_i is the level of dominance obtained for the i th diagonal element.

Before the design process can proceed further, $Q(S)$ for the direct Nyquist array (DNA) method or $Q^{-1}(S)$ in the inverse Nyquist array (INA) method must be made dominant by manipulation of the elements of the compensator matrices. Once dominance is achieved the design process is completed using single loop theory to select the diagonal elements of F . This selection process is enhanced through application of the Gershgorin and the Ostrowski theorems for dominant matrices.

The Gershgorin theorem (Reference 3-6) states that the eigenvalues of a matrix (either $Q(S)$ or $Q^{-1}(S)$) are located in the union of the bands centered about the diagonal elements with widths determined by the sum of the moduli of the off diagonal elements by row or by column. Using the envelope procedure developed by Crossley (Reference 3-8) and considering each control loop separately, a graphical display of open loop system interaction results. The feedback gain selection for control loop i is then made in correspondence with the generalized Nyquist criterion and the stability theorems of Rosenbrock (Reference 3-6).

The Ostrowski theorem may be used to further shrink the Gershgorin bands, thereby reducing the area of uncertainty in each loop. This set of bands is frequently referred to as a set of "fuzzy" Nyquist plots (or inverse Nyquist plots for the INA). Using the innermost band as a conservative estimate of the Nyquist contour in each loop, the design proceeds on a single loop basis. Feedback gain selection must be made exterior to the Gershgorin (Ostrowski) band. Thus, phase margin, gain margin and dynamic compensation may be used to evaluate and/or improve the loop design with a guarantee of low interaction from the closure of the remaining loops.

Diagonal dominance for the DNA method requires the selection of pre- and post-compensator matrix parameters so that (3-29) is satisfied when (3-28) represents the open loop transfer matrix. For the INA method $Q^{-1}(S)$ is used and the parameters of K^{-1} and L^{-1} must be selected.

An efficient and reliable method for the evaluation of the matrix coefficients is described in Reference 3-9. The dominance algorithm uses a conjugate direction function minimization algorithm to adjust the parameter set until a performance index composed of the dominance definitions in (3-29) and (3-30) is minimized. For the INA method in a row dominance mode, the optimization problem can be separated into three independent optimization efforts; one for each row. Here the performance index by row is

$$J_i(K_{ij}) = \max_w \sum_{\substack{j=1 \\ i \neq j}}^m |\hat{q}_{ij}(s)| / |\hat{q}_{ii}(s)|, \quad i=1,2,\dots,m \quad (3-31)$$

where $\hat{q}_{ij}(S)$ is an element of $Q^{-1}(S)$. For each i , the i th row of K^{-1} is adjusted until $J_i(K_{ij})$ is minimized. In practice, the ratio in (3-31) is computed for each discrete frequency point in the range of interest. This array is then scanned to identify the maximum ratio. Adjusting the elements of row i in K^{-1} yields a set of final dominance levels

$$\theta_i = \min_{K_{ij}} J_i(K_{ij}) \quad (3-32)$$

If the dominance levels in (3-32) are less than unity, diagonal dominance has been achieved. In the event that some of the dominance levels are greater than one, the designer may initiate a dominance sharing search or restart the program using new starting values for the unspecified compensator parameters.

The concept of dominance sharing is detailed in Reference 3-10. It is fundamentally a rescaling of the compensator matrices to the extent that low dominance levels may be intentionally increased to a point where the previous non-dominant levels may be shifted to a range of acceptability. This procedure has been automated in the latest version of the dominance algorithm and is initiated by the designer after the final set of dominance levels have been evaluated.

Once a set of coefficients has been determined for dominance of the open loop transfer matrix, each control loop may be treated independently using single-input/

single-output control theory. The dominance algorithm briefly outlined above shifts the burden of establishing the dominance condition from the designer to an automated procedure. Thus designer intervention is only required during the actual design process and is no longer needed to establish the requisite dominance condition. Experience with the algorithm suggests that dominance may often be obtained within several CPU minutes or less depending upon the characteristics of $G(S)$.

Using the appropriate transfer functions for the vehicle model, a DNA design was initiated over a frequency range which includes the critical modes. Recent results described in reference 3-11 for finite frequency Nyquist array design established this range as acceptable for design and stability purposes. For this DNA design the post compensator matrix was prespecified as the identity matrix with the precompensator matrix selected in accordance with the dominance algorithm in reference 3-9. The closed loop diagram for vehicle control, with

$$Q(S) = L G(S)K$$

representing the open loop transfer matrix, is shown in Figure 3-3.

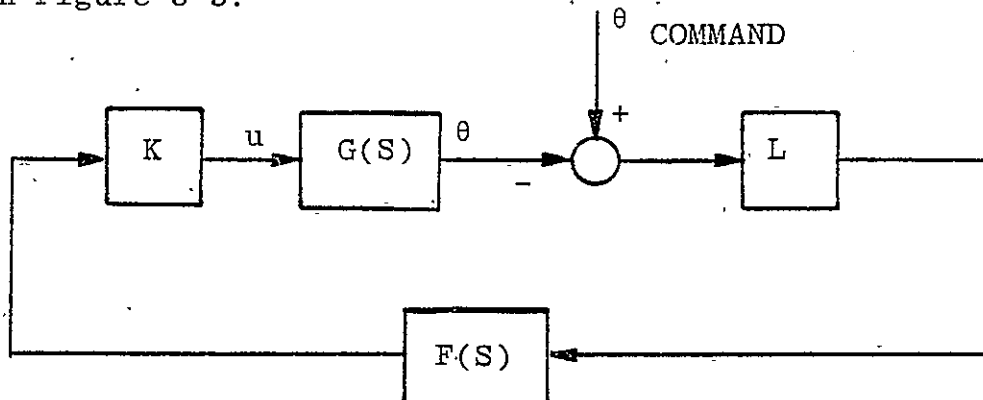


Figure 3-3 Closed Loop Spacecraft Control Design

3.3.2 Retallack Pole Placement Method

The dyadic pole placement technique developed by Simon and Mitter, reference 3-12, and further refined by Retallack and MacFarlane, reference 3-13, utilizes the model structure of a linear system to give the designer direct control over the movement of given system modes to desired closed loop locations. This method is particularly attractive from a design viewpoint whenever the open loop poles can be directly associated with specific parts of the physical system. In this way only those poles directly associated with the subsystem will be shifted. Let λ_j ($j=1, \dots, n$) represent the open loop poles of the system and let $\rho_{\pm}(i=1, \dots, n)$ be the desired closed loop set. Several algorithms are presently available to shift the eigenvalue set $\{\lambda_j\}$ to the desired set $\{\rho_{\pm}\}$. However there is no guarantee that any particular eigenvalue λ_k will be moved to a specific location ρ_k . Without the eigenvalue location assignment flexibility, the resulting control in light of sensor and/or actuator failures could result in very unsatisfactory performance.

Consider the linear, time-invariant, multivariable system described by

$$\dot{x} = Ax + Bu \quad (3-34)$$

where x is n vector of states, u is m vector of inputs and $m \leq n$. If constant gain state feedback of the form

$$u = \gamma - Kx \quad (3-35)$$

is introduced into the system of (3-34) the resulting

system obeys

$$\dot{x} = (A-BK)x + B\gamma \quad (3-36)$$

where γ is the external control. The open-loop poles $(\lambda_1, \dots, \lambda_n)$ of the system of (3-34) and the closed loop poles (ρ_1, \dots, ρ_n) of the system (3-36) are related by the Hsu-Chen equation (reference 3-14).

$$|I_n - (SI_n - A)^{-1}BK| = \frac{\prod_{i=1}^n (S - \rho_i)}{\prod_{j=1}^n (S - \lambda_j)}$$

The Jordan canonical form for A is given by

$$A = U^{-1}AU \quad (3-38)$$

where U is a modal matrix for A. Let $(\lambda_1, \lambda_2, \dots, \lambda_p)$ $p \leq m$ be the open loop poles to be shifted and define the modal controller K in terms of the unity rank dyadic product

$$K = fd^T V \quad (3-39)$$

where f is an m vector, d is a p vector and V contains the p rows of U^{-1} corresponding to $(\lambda_1, \dots, \lambda_p)$. With this definition, K Retallack (reference 3-13) reduces equation (3-37) to

$$1 + d^T (SI_p - \tilde{A})^{-1} \beta = \frac{\prod_{i=1}^p (S - \rho_i)}{\prod_{j=1}^p (S - \lambda_j)} \quad (3-40)$$

where

$$\beta = VBf \quad (3-41)$$

and \tilde{A} is the $p \times p$ Jordan submatrix for $(\lambda_1, \lambda_2, \dots, \lambda_p)$. The remaining open-loop modes $(\lambda_{p+1}, \dots, \lambda_n)$ are unchanged

under dyadic feedback.

To overcome some of the numerical difficulties associated with the computation of the modal controller when clustered poles appear near the imaginary axis (reference 3-15) the system in (3-34) is transferred to the Luenberger canonical form (reference 3-16),

$$\dot{\hat{w}} = \hat{A}\hat{w} + \hat{B}u \quad (3-42)$$

where $w=U^{-1}x$

$$\hat{A}=U^{-1}AU \quad (3-43)$$

$$\hat{B}=U^{-1}B \quad (3-44)$$

An efficient algorithm to realize this transformation is presented in reference 3-17. Since the eigenvalues of $(\hat{A}-\hat{B}\hat{K})$ are identical to those of $(A-BK)$, the pole placement process can be accomplished in the closed loop system of (3-42), rather than in the closed loop system of (3-34). Once the gain matrix \hat{K} has been determined for the canonical system, the desired modal controller K for the original system (3-34), is given by

$$K = \hat{K}U^{-1} \quad (3-45)$$

This pole placement method was used in this study to shift the open loop poles of the vehicle model for analysis and control system design purposes.

3.4

REFERENCES

- 3-1 Wismer, D.A., "Optimal Control of Distributed Parameter Systems Using Multilevel Techniques", Ph.D. dissertation, University of California, Los. Angeles, 1966.
- 3-2 Chichester, F.D., "Application of Multilevel Control Techniques to Classes of Distributed Parameter Plants", Dr. Eng. Sci. dissertation, New Jersey Institute of Technology, 1976.
- 3-3 Chichester, F., "Application of Multilevel Control to a Single Axis Torsional System, Bendix Corporation MT-40,808. Issue A, May 16, 1978.
- 3-4 Melsa, J.L. and Schultz, D.G., State Functions and Linear Control Systems, 1967, McGraw-Hill
- 3-5 Kwakernaak, H. and Sivan, R., Linear Optimal Control Systems, 1972, Wiley-Interscience.
- 3-6 Rosenbrock, H.H., Computer-Aided Control System Design, Academic Press (London), 1974.
- 3-7 Munro, N., "Conversational Mode CAD of Control System", IEE Int. Conf. on CAD, England, 1972.

- 3-8 Crossley, T.R., "Envelope Curves to Inverse Nyquist Array Diagrams", Int. J. Control, Vol. 22, No. 1, 1975.
- 3-9 Leininger, G.G., "Diagonal Dominance for Multi-variable Nyquist Array Methods Using Function Minimization", Automatica, Vol. 15, No. 3, pp. 339-346, 1979.
- 3-10 Leininger, G.G. "The MNA-Concept of Dominance Sharing," NEC International Forum on Alternatives for Linear Multivariable Control, Chicago, 1977.
- 3-11 Leininger, G.G. "New Dominance Characteristics for the Multivariable Nyquist Array Method", to appear International Journal of Control, 1979.
- 3-12 Simon, J.D. and Mitter, S.K., "A Theory of Modal Control", Information and Control, Vol. 13, No. 4, pp. 316-353, October 1968.
- 3-13 Retallack, D.G. and MacFarlane, A.G.J., "Pole-shifting Techniques for Multivariable Feedback Systems", Proc, IEE, Vol. 117, No. 5, pp. 1037-1038, May 1970.
- 3-14 Hsu, C.H. and Chen, C.T.", "A Proof of the Stability of Multivariable Feedback Systems", Proc. IEEE, Vol. 56, pp. 2061-2062, 1968.

- 3-15 Wu, Y.W. Juang, J.N. and Rice, R.B., "Control of Large Flexible Space Structure Using Pole Placement Design Techniques", AIAA Guidance and Control Conference, Boulder, Colorado, August, 1979.
- 3-16 Luenberger, D.G., "Canonical Forms for Linear Multivariable Systems", IEEE-AC, Vol. AC-12, pp. 290-293, June 1967.
- 3-17 Jordan, D., and Sridhar, B., "An Efficient Algorithm for the Calculation of the Luenberger Canonical Form", IEEE-AC, Vol. AC-18, pp. 292-295, June 1973.

SECTION 4

SECTION 4

4.0 SIMULATION OF MULTILEVEL CONTROL

The principal objective of this section is the development of mathematical models of a flexible space vehicle that are amenable to application of multilevel control techniques and construction of digital computer simulations of each vehicle model and its associated multilevel control system. In this development effort mathematical models for attitude stabilization of the Space Construction Base (SCB) have been utilized because these models are deemed representative of the corresponding models of flexible space vehicles in general and because data were available at the outset for the SCB models.

The effort expended on the simulation of models of the vehicle with multilevel control since the last report, Chichester (4-1), has been divided into three main areas which are discussed in subsections 4.1, 4.2 and 4.3, respectively. Subsection 4.1 describes the development of a linearized scalar state variable form of the three dimensional discrete mass rotational model for Configuration 1 of the SCB from the model originally presented by Cornell (4-2). This subsection summarizes work presented in Lipski (4-3) and (4-4), and Chichester (4-5). The resulting models are suitable for direct application of multilevel control techniques.

Subsection 4.2 presents the application of multilevel control techniques to the models of subsection 4.1. This application follows the sequence previously described in Chichester (4-1), (4-6). The resulting model is of rather high dimension for all but the minimum


form of the SCB, Configuration 1, and the most limited application of control torques, application to the central body only.

Subsection 4.3 describes simple hybrid coordinate models of Configuration 1 of the SCB, linear models of lower dimension than the corresponding models of subsection 4.1. This subsection concludes with the application of multilevel control techniques to these hybrid coordinate models. The approach presented in this subsection is based upon work appearing in Likins (4-7) and Chichester, Kaczynski and Nachmias (4-8).

Subsection 4.4 presents conclusions based upon the work presented in Subsections 4.1 through 4.3 and recommendations for future work in the application of multilevel control to models of flexible space vehicles.

4.1 LINEARIZED THREE-DIMENSIONAL DISCRETE MASS ROTATIONAL MODEL FOR CONFIGURATION 1.

Configuration 1 of the SCB consists of two solar wings connected to four contiguous modules which are considered to be rigid relative to the solar wings. The simulation model for this configuration was derived using the discrete coordinate approach and approximation by five rigid bodies. Each solar wing was converted to two rigid bodies with overall designations as shown in Figure 4-1.

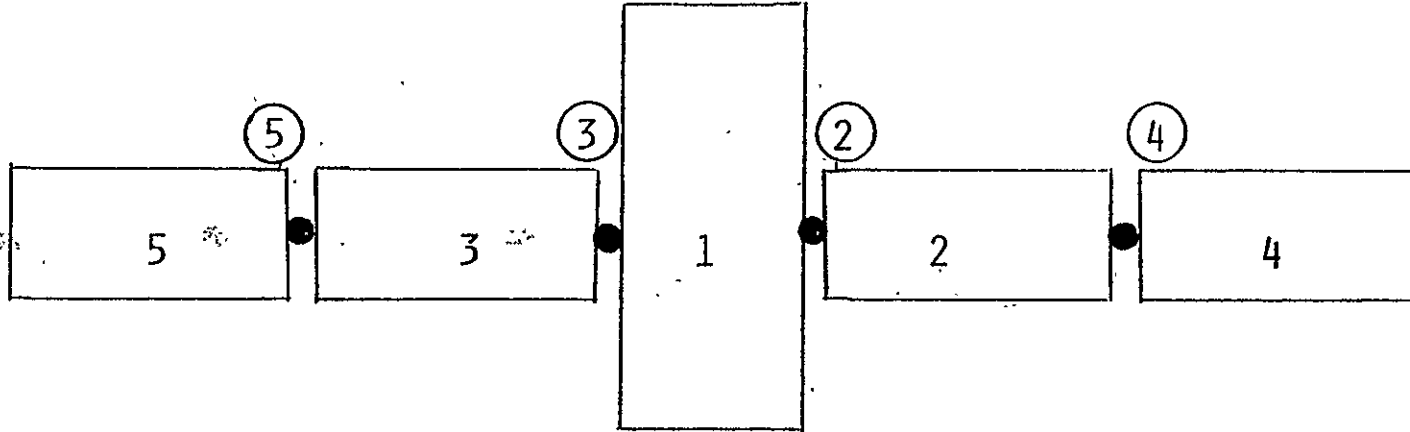

(The individual bodies are connected to each other via three degree of freedom spring hinge suspensions. Hinge numbers are circled.)

TOPOLOGICAL DIAGRAM OF SCB CONFIGURATION 1

FIGURE 4-1

4.1.1 Definitions

\tilde{A} Skew-symmetric matrix of the Gibbsian vector A.

$$\tilde{A} \triangleq \begin{bmatrix} 0 & -a_z & a_y \\ a_z & 0 & -a_x \\ -a_y & a_x & 0 \end{bmatrix}$$

$R_{i,j}$ Vector from C.M. of body i to hinge j in body i coordinates.

$\dot{\omega}_i$ Inertial angular acceleration vector of body i expressed in body i coordinates.

$A_{i,j}$ 3 x 3 submatrix of the 15 x 15 coefficient matrix as shown in paragraph 2.

j^T_i 3 x 3 transformation matrix from body i coordinates to body j coordinates.

m_i Mass of body i.

ΣM Sum of masses of all five bodies.

I_i Inertia matrix of body i.

A^T Matrix transpose of A.

$\omega_{Ri,j} \triangleq \omega_i \times (\omega_i \times R_{i,j})$

T_{ei} External torque vector on body i.

T_{ai} Actuator or control torque vector on body i.

$T_{si,j}$ Suspension torque vector between bodies i and j.

4.1.2 Rotational Equations of Motion

The rotational equations of motion were derived using the method of discrete coordinates and take the generalized form:

$$\begin{bmatrix} a_{1,1} & \dots & \dots & \dots & \dots & a_{1,15} \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ | & & & & & | \\ a_{15,1} & \dots & \dots & \dots & \dots & a_{15,15} \end{bmatrix} \begin{bmatrix} \dot{\omega}_{1x} \\ \dot{\omega}_{1y} \\ | \\ | \\ | \\ | \\ | \\ | \\ | \\ | \\ \dot{\omega}_{5z} \end{bmatrix} = \begin{bmatrix} c_1 \\ c_2 \\ | \\ | \\ | \\ | \\ | \\ | \\ | \\ | \\ c_{15} \end{bmatrix} \quad (4-1)$$

For convenience, (4-1) can be expressed in terms of 3 x 3 submatrices and Gibbsian vectors as:

$$\begin{bmatrix} A_{1,1} & A_{1,2} & A_{1,3} & A_{1,4} & A_{1,5} \\ | & & & & | \\ | & & & & | \\ A_{2,1} & A_{2,2} & & & | \\ | & & & & | \\ | & & & & | \\ | & & & & | \\ | & & & & | \\ A_{5,1} & \dots & \dots & \dots & A_{5,5} \end{bmatrix} \begin{bmatrix} \dot{\omega}_1 \\ | \\ | \\ | \\ | \\ | \\ \dot{\omega}_5 \end{bmatrix} = \begin{bmatrix} c_1 \\ | \\ | \\ | \\ | \\ | \\ c_5 \end{bmatrix} \quad (4-2)$$

For the linearized discrete mass model,

$$i^T j = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \forall i \text{ and } j \quad (4-3)$$

Since the elements of the linearized coefficient matrix are constant, the matrix inverse need be computed only initially. Appropriate symmetry conditions for the linearized model of Configuration 1, may be stated as follows:

$$\begin{aligned} m_3 &= m_2 \\ m_5 &= m_4 \\ I_3 &= I_2 \\ I_5 &= I_4 \\ R_{13} &= R_{12} \\ R_{33} &= R_{22} \\ R_{35} &= R_{24} \\ R_{55} &= R_{44} \end{aligned} \quad (4-4)$$

Using skew-symmetric matrices as defined and the above listed symmetry properties, the 3 x 3 sub-matrices of (4-2) take the following form.

$$A_{1,1} = I_1 - 2(m_2+m_4) \left[1 - 2\left(\frac{m_2+m_4}{\Sigma M}\right) \right] \tilde{R}_{1,2} \tilde{R}_{1,2} \quad (4-5)$$

$$A_{2,2} = I_2 + (m_2+m_4) \left(\frac{m_2+m_4}{\Sigma M} - 1\right) \tilde{R}_{2,2} \tilde{R}_{2,2} \quad (4-6)$$

$$+ m_4 \left(1 - \frac{m_2+m_4}{\Sigma M}\right) \{ \tilde{R}_{2,2} \tilde{R}_{2,4} + \tilde{R}_{2,4} \tilde{R}_{2,2} \}$$

$$+ m_4 \left(\frac{m_2}{\Sigma M} - 1\right) \tilde{R}_{2,4} \tilde{R}_{2,4} = A_{3,3}$$

$$A_{4,4} = I_4 + m_4 \left(\frac{m_4}{\Sigma M} - 1\right) \tilde{R}_{4,4} \tilde{R}_{4,4} = A_{5,5} \quad (4-7)$$

$$A_{1,2} = (m_2+m_4) \left\{ 1 - 2\left(\frac{m_2+m_4}{\Sigma M}\right) \right\} \{ \tilde{R}_{1,2} \tilde{R}_{2,2} + \tilde{R}_{1,2} \tilde{R}_{2,4} \}$$

$$= A_{1,3} = A_{2,1}^T = A_{3,1}^T \quad (4-8)$$

$$A_{1,4} = m_4 \left\{ 1 - 2\left(\frac{m_2+m_4}{\Sigma M}\right) \right\} \tilde{R}_{1,2} \tilde{R}_{4,4} = A_{1,5} \quad (4-9)$$

$$= A_{4,1}^T = A_{5,1}^T$$

$$A_{2,3} = (m_2+m_4) \left(\frac{m_2+m_4}{\Sigma M}\right) \tilde{R}_{2,2} \tilde{R}_{2,2} \quad (4-10)$$

$$- \left(\frac{m_2+m_4}{\Sigma M}\right) m_4 \{ \tilde{R}_{2,2} \tilde{R}_{2,4} + \tilde{R}_{2,4} \tilde{R}_{2,2} \}$$

$$- \frac{m_4^2}{\Sigma M} \tilde{R}_{2,4} \tilde{R}_{2,4} = A_{3,2}$$

$$A_{2,4} = m_4 \left(\frac{m_2+m_4}{\Sigma M} - 1\right) \tilde{R}_{2,2} \tilde{R}_{4,4} + m_4 \left(1 - \frac{m_4}{\Sigma M}\right) \tilde{R}_{2,4} \tilde{R}_{4,4}$$

$$= A_{3,5} = A_{4,2}^T = A_{5,3}^T \quad (4-11)$$

$$A_{2,5} = m_4 \left(\frac{m_2 + m_4}{\Sigma M} \right) \tilde{R}_{2,2} \tilde{R}_{4,4} - \frac{m_4^2}{\Sigma M} \tilde{R}_{2,4} \tilde{R}_{4,4} \quad (4-12)$$

$$= A_{3,4} = A_{5,2}^T = A_{4,3}^T$$

$$A_{4,5} = \frac{m_4^2}{\Sigma M} \tilde{R}_{4,4} \tilde{R}_{4,4} = A_{5,4}^T \quad (4-13)$$

In the expansions of the 3 x 3 linearized coefficient submatrices of (4-5) through (4-13) triple vector products of the following form occur repeatedly.

$$R_{ik} \times (\dot{\omega}_j \times R_{j\ell}) = - \left[\tilde{R}_{ik} \tilde{R}_{j\ell} \right] \dot{\omega}_j \quad (4-14)$$

These triple vector products may be transformed to the following form in order to derive the expressions for each element of the 3 x 3 coefficient submatrices

$$- \left[\tilde{R}_{ik} \tilde{R}_{j\ell} \right] \dot{\omega}_j = \begin{bmatrix} e_{11} & e_{12} & e_{13} \\ e_{21} & e_{22} & e_{23} \\ e_{31} & e_{32} & e_{33} \end{bmatrix} \begin{bmatrix} \dot{\omega}_{jx} \\ \dot{\omega}_{jy} \\ \dot{\omega}_{jz} \end{bmatrix} \quad (4-15)$$

The elements of the coefficient matrix in (4-15) can be expressed in terms of the scalar components of R_{ik} and $R_{j\ell}$ as follows.

$$e_{11} = R_{iky} R_{j\ell y} + R_{ikz} R_{j\ell z}$$

$$e_{12} = -R_{iky} R_{j\ell x}$$

$$e_{13} = -R_{ikz} R_{jlx}$$

$$e_{21} = -R_{ikx} R_{jly}$$

$$e_{22} = R_{ikx} R_{jlx} + R_{ikz} R_{jlz} \quad (4-16)$$

$$e_{23} = -R_{ikz} R_{jly}$$

$$e_{31} = -R_{ikx} R_{jlz}$$

$$e_{32} = -R_{iky} R_{jlz}$$

$$e_{33} = R_{ikx} R_{jlx} + R_{iky} R_{jly}$$

The linearized vector components of the right side of (4-2) are the following vector sums:

$$C_1 = T_{e1} + T_{a1} - T_{s1,2} - T_{s1,3}$$

$$C_2 = T_{e2} + T_{a2} + T_{s1,2} - T_{s2,4}$$

$$C_3 = T_{e3} + T_{a3} + T_{s1,3} - T_{s3,5} \quad (4-17)$$

$$C_4 = T_{e4} + T_{a4} + T_{s2,4}$$

$$C_5 = T_{e5} + T_{a5} + T_{s3,5}$$

4.1.3 Euler Angle Equations

Relative Euler angle rates between bodies 1 and 2, bodies 1 and 3, bodies 2 and 4 and, bodies 3 and 5

are used based on a ψ , θ , ϕ rotational sequence about the Z, Y and X axes respectively. Euler rates are also determined relating body 1 to inertial space. Assuming small angles, the rates become:

$$\begin{aligned}\Delta\dot{\phi}_{1,2} &= \omega_{2x} - \omega_{1x} \\ \Delta\dot{\theta}_{1,2} &= \omega_{2y} - \omega_{1y}\end{aligned}\tag{4-18}$$

$$\begin{aligned}\Delta\dot{\psi}_{1,2} &= \omega_{2z} - \omega_{1z} \\ \Delta\dot{\phi}_{1,3} &= \omega_{3x} - \omega_{1x} \\ \Delta\dot{\theta}_{1,3} &= \omega_{3y} - \omega_{1y}\end{aligned}\tag{4-19}$$

$$\begin{aligned}\Delta\dot{\psi}_{1,3} &= \omega_{3z} - \omega_{1z} \\ \Delta\dot{\phi}_{2,4} &= \omega_{4x} - \omega_{2x} \\ \Delta\dot{\theta}_{2,4} &= \omega_{4y} - \omega_{2y}\end{aligned}\tag{4-20}$$

$$\begin{aligned}\Delta\dot{\psi}_{2,4} &= \omega_{4z} - \omega_{2z} \\ \Delta\dot{\phi}_{3,5} &= \omega_{5x} - \omega_{3x} \\ \Delta\dot{\theta}_{3,5} &= \omega_{5y} - \omega_{3y}\end{aligned}\tag{4-21}$$

$$\Delta\dot{\psi}_{3,5} = \omega_{5z} - \omega_{3z}$$

$$\dot{\phi}_1 = \omega_{1x} \quad (4-22)$$

$$\dot{\theta}_1 = \omega_{1y}$$

$$\dot{\psi}_1 = \omega_{1z}$$

4.1.4 Suspension Equations

The following torque equations are given in terms of rate and displacement constants (program parameters) and inertial rate differences and relative displacements.

$$T_{s1,2x} = -K_{s1,2x} \Delta\phi_{1,2} - C_{s1,2x} (\omega_{2x} - \omega_{1x})$$

$$T_{s1,2y} = -K_{s1,2y} \Delta\theta_{1,2} - C_{s1,2y} (\omega_{2y} - \omega_{1y}) \quad (4-23)$$

$$T_{s1,2z} = -K_{s1,2z} \Delta\psi_{1,2} - C_{s1,2z} (\omega_{2z} - \omega_{1z})$$

$$T_{s1,3x} = -K_{s1,3x} \Delta\phi_{1,3} - C_{s1,3x} (\omega_{3x} - \omega_{1x})$$

$$T_{s1,3y} = -K_{s1,3y} \Delta\theta_{1,3} - C_{s1,3y} (\omega_{3y} - \omega_{1y}) \quad (4-24)$$

$$T_{s1,3z} = -K_{s1,3z} \Delta\psi_{1,3} - C_{s1,3z} (\omega_{3z} - \omega_{1z})$$

$$T_{s2,4x} = -K_{s2,4x} \Delta\phi_{2,4} - C_{s2,4x} (\omega_{4x} - \omega_{2x})$$

$$T_{s2,4y} = -K_{s2,4y} \Delta\theta_{2,4} - C_{s2,4y} (\omega_{4y} - \omega_{2y}) \quad (4-25)$$

$$T_{s2,4z} = -K_{s2,4z} \Delta\psi_{2,4} - C_{s2,4z} (\omega_{4z} - \omega_{2z})$$

$$\begin{aligned}
T_{s3,5x} &= -K_{s3,5x} \Delta\phi_{3,5} - C_{s3,5x} (\omega_{5x} - \omega_{3x}) \\
T_{s3,5y} &= -K_{s3,5y} \Delta\theta_{3,5} - C_{s3,5y} (\omega_{5y} - \omega_{3y}) \\
T_{s3,5z} &= -K_{s3,5z} \Delta\psi_{3,5} - C_{s3,5z} (\omega_{5z} - \omega_{3z})
\end{aligned}
\tag{4-26}$$

4.1.5 Rotational State Equations

The rotational equations of motion, (4-1) and the Euler angle rate equations (4-18) through (4-22), may be transformed to scalar state variable form as follows:

Definition of State Variables

$$\begin{aligned}
YO_1 &= \omega_{1x} \\
YO_2 &= \omega_{1y} \\
YO_3 &= \omega_{1z} \\
YO_4 &= \omega_{2x} \\
YO_5 &= \omega_{2y} \\
YO_6 &= \omega_{2z} \\
YO_7 &= \omega_{3x} \\
YO_8 &= \omega_{3y} \\
YO_9 &= \omega_{3z} \\
YO_{10} &= \omega_{4x} \\
YO_{11} &= \omega_{4y} \\
YO_{12} &= \omega_{4z} \\
YO_{13} &= \omega_{5x}
\end{aligned}
\tag{4-27}$$

$$\begin{aligned}
Y_{O_{14}} &= \omega_{5y} \\
Y_{O_{15}} &= \omega_{5z} \\
Y_{O_{16}} &= \Delta\phi_{2,4} \\
Y_{O_{17}} &= \Delta\theta_{2,4} \\
Y_{O_{18}} &= \Delta\psi_{2,4} \\
Y_{O_{19}} &= \Delta\phi_{3,5} \\
Y_{O_{20}} &= \Delta\theta_{3,5} \\
Y_{O_{21}} &= \Delta\psi_{3,5} \\
Y_{O_{22}} &= \Delta\phi_{1,2} \\
Y_{O_{23}} &= \Delta\theta_{1,2} \\
Y_{O_{24}} &= \Delta\psi_{1,2} \\
Y_{O_{25}} &= \Delta\phi_{1,3} \\
Y_{O_{26}} &= \Delta\theta_{1,3} \\
Y_{O_{27}} &= \Delta\psi_{1,3} \\
Y_{O_{28}} &= \phi_1 \\
Y_{O_{29}} &= \theta_1 \\
Y_{O_{30}} &= \psi_1
\end{aligned}$$

$$\underline{Y}_{O_1} = (Y_{O_1}, Y_{O_2}, \dots, Y_{O_{15}})^T \quad (4-28)$$

$$\underline{Y}_{O_2} = (Y_{O_{16}}, Y_{O_{17}}, \dots, Y_{O_{30}})^T \quad (4-29)$$

$$FT_i = C_i \quad i=1, 2, \dots, 15 \quad (4-30)$$

$$\underline{FT} = (FT_1, FT_2, \dots, FT_{15})^T \quad (4-31)$$

Using the state variable definitions in (4-27), the right hand sides of (4-18) through (4-22) may be written in the following form:

$$D_i = YO_{i-6} - YO_{i-12}; \quad i = 16, 17, \dots, 21 \quad (4-32)$$

$$D_i = YO_{i-18} - YO_{i-21}; \quad i = 22, 23, 24 \quad (4-33)$$

$$D_i = YO_{i-18} - YO_{i-24}; \quad i = 25, 26, 27 \quad (4-34)$$

$$D_i = YO_{i-27}; \quad i = 28, 29, 30 \quad (4-35)$$

Substitution of (4-27) through (4-31) into (4-1) yields the following:

$$\dot{YO}_1 = A^{-1} FT \quad (4-36)$$

where

$$A = \begin{bmatrix} a_{1,1} & \dots & a_{1,15} \\ \vdots & & \vdots \\ a_{15,1} & \dots & a_{15,15} \end{bmatrix} \quad (4-37)$$

With the substitution,

$$A^{-1} = \begin{bmatrix} b_{1,1} & \text{-----} & b_{1,15} \\ \vdots & & \vdots \\ b_{15,1} & \text{-----} & b_{15,15} \end{bmatrix} \quad (4-38)$$

(4-36) may be written in the following form.

$$\dot{Y}O_i = \sum_{j=1}^{15} b_{i,j} FT_j(\underline{Y}O_1, \underline{Y}O_2); \quad i = 1, 2, \dots, 15 \quad (4-39)$$

Substitution of (4-27, (4-29) and (4-32) through (4-35) into (4-18) through (4-22) yields the following form of the Euler rate equations.

$$\dot{Y}O_i = D_i(\underline{Y}O_1, \underline{Y}O_2); \quad i = 16, 17, \dots, 30 \quad (4-40)$$

The set of equations (4-39) and (4-40) constitutes the scalar rotational state equations for the discrete mass mathematical model of SCB Configuration 1. This set of equations is linear and coupled in the state variables, YO_i . Since A is a constant matrix, A^{-1} is also and each YO_i is a linear function of the scalar components of $\underline{Y}O_1$ and $\underline{Y}O_2$.

4.2 APPLICATION OF MULTILEVEL CONTROL TECHNIQUES TO A LINEARIZED DISCRETE MASS MODEL

The overall approach utilized in applying multilevel control techniques was outlined in a memorandum by Chichester (4-6) as follows:

1. Decompose mathematical model into a set of decoupled equations.
2. Construct performance index and form Hamiltonian.
3. Develop costate equations with associated coordination equations.
4. Develop control algorithm.
5. Construct subproblem hierarchy.
6. Discretize equations of each subproblem.

4.2.1 Decomposition

The first step in the application of multilevel control techniques to a system in coupled state variable form is the decomposition of the model to temporarily suppress the coupling between the equations of which it is comprised. With the omission of external and actuator torque terms, (4-40) may be written in the following form:

$$\dot{Y}O_i = DTS_i * YO_i + TSC_i(YO_k), k \neq i, i = 1, 2, \dots, 15 \quad (4-41)$$

where:

$$DTS_i = \sum_{j=1}^{15} b_{i,j} \frac{\partial FT_j}{\partial YO_i} \quad (4-42)$$

$$TSC_i = \sum_{j=1}^{15} b_{i,j} \sum_{\substack{k=1 \\ k \neq i}}^{27} \frac{\partial FT_j}{\partial YO_k} *YO_k$$

$$\sum_{\substack{k=1 \\ k \neq i}}^{27} DTSC_{i,k} YO_k \quad (4-43)$$

$$DTSC_{i,k} = \frac{\partial TSC_i}{\partial YO_k} = \sum_{j=1}^{15} b_{i,j} \frac{\partial FT_j}{\partial YO_k} \quad (4-44)$$

From (4-17) and (4-23) through (4-27) it is evident that the partial derivatives in (4-42) and (4-43) are constants that can be determined.

All of the coupling terms in (4-39) are summed in (4-43). The rotational state coordination variables may thus be defined as follows:

$$D_i = \sum_{\substack{k=1 \\ k \neq i}}^{27} DTSC_{i,k} *YO_k \quad i = 1, 2, \dots, 15 \quad (4-45)$$

With the external and actuator torque terms restored, the decomposed form of the first 15 rotational state equations may be written in the following form:

$$\dot{YO}_i = DTS_i *YO_i + D_i + \sum_{j=1}^{15} b_{ij} (T_{ej} + T_{aj}) \quad (4-46)$$

From (4-32) through (4-35)

$$\frac{\partial D_i}{\partial YO_i} = 0 \quad \text{for } i = 16, 17, \dots, 30. \quad (4-47)$$

Hence, (4-40) is in decomposed form with D_i as state coordination variables. The rotational scalar state equations are given by (4-39) and (4-40) with the corresponding state coordination equations (4-32) through (4-35) and (4-45).

4.2.2 Performance Index For The Linearized Model of SCB Configuration 1 With Control Torque Applied Only To Body 1.

For:

$$TA_1 = T_{alx}$$

$$TA_2 = T_{aly} \quad (4-48)$$

$$TA_3 = T_{alz}$$

$$P = \sum_{i=1}^6 \int_{t_0}^{t_f} p_i dt \quad (4-49)$$

$$p_i = W_i (YO_i)^2 + W_{i+6} (TA_i)^2 \quad i = 1, 2, 3 \quad (4-50)$$

$$p_i = W_i^* (YO_{i+24} - YO_{i+24}^*)^2 \quad i = 4, 5, 6 \quad (4-51)$$

where:

W_i and W_{i+6} are scalar weighting constants to be selected

YO_{i+24}^* are specified optimal values of YO_{i+24} for $i = 4, 5, 6$

4.2.3 Hamiltonian for Linearized Model of SCB Configuration 1 With Control Applied Only to Body 1

$$TE_1 = T_{elx}$$

$$TE_2 = T_{ely} \quad (4-52)$$

$$TE_3 = T_{elz}$$

$$H = \sum_{i=1}^6 H_i \quad (4-53)$$

$$H_i = W_i (YO_i)^2 + W_{i+6} (TA_i)^2 + \lambda_i (DTS_i^* YO_i + D_i^* + \sum_{j=1}^{15} b_{i,j} T_{ej} + \sum_{j=1}^3 b_{ij} T_{aj}) + \beta_i (YO_i - YO_i^*) \quad i = 1, 2, 3 \quad (4-54)$$

where:

$$D_i^* = \sum_{\substack{k=1 \\ k \neq i}}^{27} DTSC_{i,k} * YO_k^* \quad i = 1, 2, 3 \quad (4-55)$$

$$H_i = W_i (YO_{i+24} - YO_{i+24}^*)^2 + \lambda_i D_{i+24}^* \quad i = 4, 5, 6 \quad (4-56)$$

$$D_i^* = YO_{i-27}^* \quad i = 28, 29, 30 \quad (4-57)$$

4.2.4 Costate Equations For Linearized Model of SCB Configuration 1

$$\begin{aligned} \dot{\lambda}_i &= -\frac{\partial H}{\partial YO_i} \\ &= -DTS_i * \lambda_i - 2W_i * YO_i - \beta_i \quad i = 1, 2, 3 \quad (4-58) \end{aligned}$$

$$\lambda_i(t_f) = 0 \quad i = 1, 2, 3$$

$$\dot{\lambda}_i = -\frac{\partial H}{\partial YO_i} \quad (4-59)$$

$$= 2W_i (YO_{i+24}^* - YO_{i+24}) \quad i = 4, 5, 6$$

$$\lambda_i(t_f) = 0 \quad i = 4, 5, 6$$

4.2.5 Control Equations For Linearized Model of SCB Configuration 1

$$(TA_i)_{r+1} = (TA_i)_r - q_i \left(\frac{\partial H}{\partial TA_i} \right)_r \quad (4-60)$$

$$\frac{\partial H}{\partial TA_i} = 2W_{i+6} * TA_i + \sum_{j=1}^3 b_{j,i} \lambda_j \quad i = 1, 2, 3 \quad (4-61)$$

where:

q_i = scalar weighting coefficients

r = subscript identifying iteration number

λ_i = i th costate variable

4.2.6 Additional Necessary Conditions for Linearized System

$$\frac{\partial H}{\partial \beta_i} = 0: YO_i = YO_i^* \quad i = 1, 2, 3 \quad (4-62)$$

$$\frac{\partial H}{\partial YO_i^*} = \sum_{\substack{j=1 \\ j \neq i}}^3 \lambda_j \frac{\partial D_j^*}{\partial YO_i^*} + \sum_{\substack{j=4 \\ j \neq i}}^6 \lambda_j \frac{\partial D_{j+24}^*}{\partial YO_i^*} - \beta_i = 0$$

$$\beta_i = \sum_{\substack{j=1 \\ j \neq i}}^3 DTSC_{j,i} \lambda_j + \lambda_{i+3} \quad i = 1, 2, 3 \quad (4-63)$$

$$\frac{\partial H}{\partial YO_i^*} = 2W_i * (YO_i - YO_i^*) = 0; \quad i = 28, 29, 30 \quad (4-64)$$

$$\therefore YO_i^* = YO_i \quad i = 28, 29, 30 \quad (4-65)$$

4.2.7 Summary of Coordination Equations for Linearized Model

$$D_i = \sum_{\substack{k=1 \\ k \neq i}}^{27} DTSC_{i,k} * YO_k \quad i = 1, 2, \dots, 15 \quad (4-46)$$

$$D_i = YO_{i-6} - YO_{i-12} \quad i = 16, 17, \dots, 21 \quad (4-32)$$

$$D_i = YO_{i-18} - YO_{i-24} \quad i = 22, 23, 24 \quad (4-33)$$

$$D_i = YO_{i-18} - YO_{i-24} \quad i = 25, 26, 27 \quad (4-34)$$

$$D_i = YO_{i-27} \quad i = 28, 29, 30 \quad (4-35)$$

$$\beta_i = \sum_{\substack{j=1 \\ j \neq i}}^3 DTSC_{j,i} \lambda_j + \lambda_{i+3} \quad i = 1, 2, 3 \quad (4-63)$$

4.2.8 Vector Representation of Variables for Linearized Model of SCB Configuration 1 With Control Applied Only to Body 1

$$\begin{aligned} \underline{YO} &= (YO_1, YO_2, \dots, YO_{30})^T \\ \underline{D} &= (D_1, D_2, \dots, D_{30})^T \\ \underline{TA} &= (TA_1, TA_2, TA_3)^T \\ \underline{TE} &= (TE_1, TE_2, \dots, TE_{15})^T \\ \underline{\lambda} &= (\lambda_1, \lambda_2, \dots, \lambda_6)^T \\ \underline{\beta} &= (\beta_1, \beta_2, \beta_3)^T \\ \underline{YO^*} &= (YO_{28}^*, YO_{29}^*, YO_{30}^*)^T \end{aligned} \quad (4-66)$$

The subproblem hierarchy for the linearized discrete mass state variable rotational model of the Space Construction Base is depicted in Figure 4-2.

4.3. APPLICATION OF MULTILEVEL CONTROL TECHNIQUES TO A HYBRID COORDINATE MODEL

An important objective implicit in the construction of a mathematical model for the rotation and flexure of Configuration 1 of the SCB is the development of technique that may be readily extended to successively larger configurations involving greater numbers of rigid bodies. The complexity and high dimension resulting from a discrete mass modeling of Configuration 1 in Section 4.1 motivated a search for a mathematical modeling approach that would yield a model of less complexity and smaller dimension. Linearization of the discrete mass model attained a reduction of complexity but not a reduction of dimension of the model. Hybrid coordinate modeling, an approach developed by Likins (4-7), was seen to offer promise of both linearization and reduction of dimension of the resulting model. To evaluate the efficacy of this approach a single axis torsional space vehicle was modeled in terms of hybrid coordinates and subjected to multilevel control techniques. The results of this particular study were published in a paper by Chichester, Kaczynski and Nachmiás (4-8).

4.3.1 Discrete Rigid Body Model of a Spacecraft

The vehicle to be controlled is shown in Figure 4-1. It consists of a central body with appendages such as solar panels along each direction of the Z axis. Because of

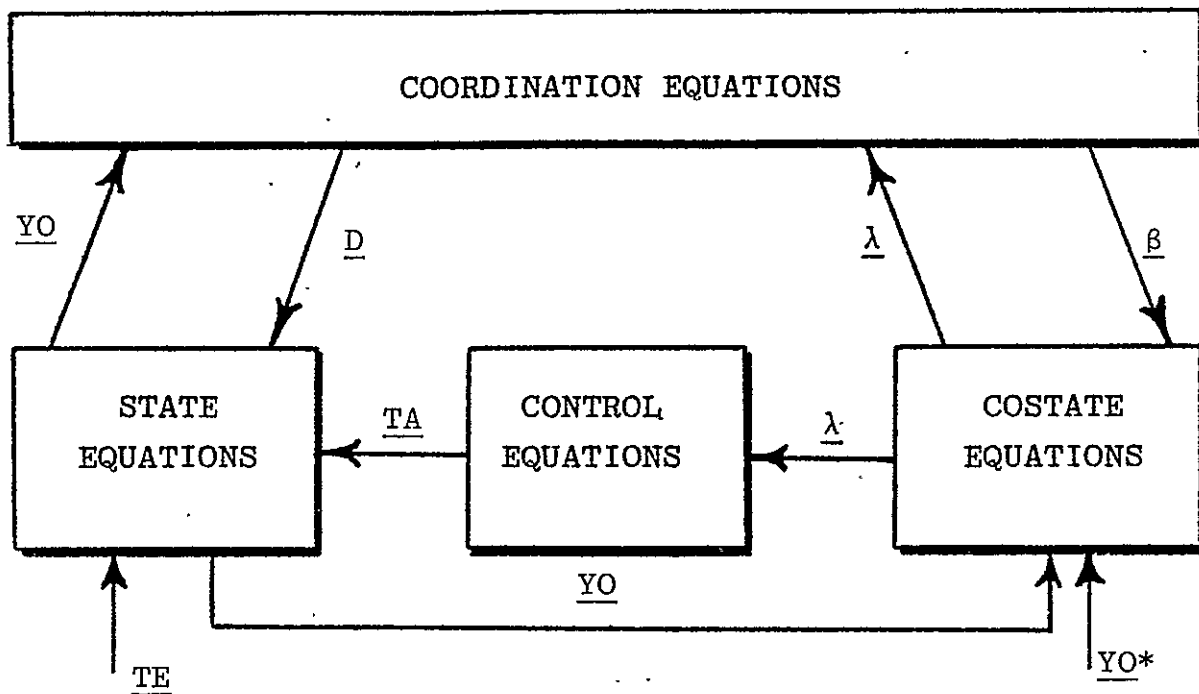


FIGURE 4-2
 SUBPROBLEM HIERARCHY FOR LINEARIZED
 SPACE CONSTRUCTION BASE
 ROTATIONAL MODEL WITH MULTILEVEL CONTROL

symmetry, the five bodies of Figure 1 may be represented by three masses, following Porcelli (4-9) as depicted in Figure 4-3. The equations of motion for the vehicle are the following:

$$\begin{aligned} J_0 \ddot{\theta}_0 &= -K_1(\theta_0 - \theta_1) + T_0 \\ J_1 \ddot{\theta}_1 &= K_1(\theta_0 - \theta_1) - K_2(\theta_1 - \theta_2) \\ J_2 \ddot{\theta}_2 &= K_2(\theta_1 - \theta_2) \end{aligned} \quad (4-67)$$

where: θ_i = angular rotation of the i th body relative to an inertial frame of reference
 T_i = disturbance or control torque on i th body
 J_i = moment of inertia of i th body about the Z-axis
 K_i = torsional spring constant for spring between bodies $i-1$ and i

4.3.2 Hybrid Coordinate Model

The standard form of the hybrid coordinate model of the vehicle described in (4-67) may be written as follows:

$$\begin{aligned} J_t \ddot{\theta}_0 - \delta^T \ddot{\underline{\eta}} &= T_0 \\ \ddot{\underline{\eta}} + [2\zeta\sigma] \dot{\underline{\eta}} + [\sigma^2] \underline{\eta} - \delta \ddot{\theta}_0 &= 0 \end{aligned} \quad (4-68)$$

where: ζ = structural damping (same for all modes)

$[2\zeta\sigma] = 2\zeta [\sigma]$, where $[\sigma]$ is a diagonal matrix of modal frequencies.

$\underline{\eta} = \phi^{-1} \underline{q}$ = vector of modal coordinates.

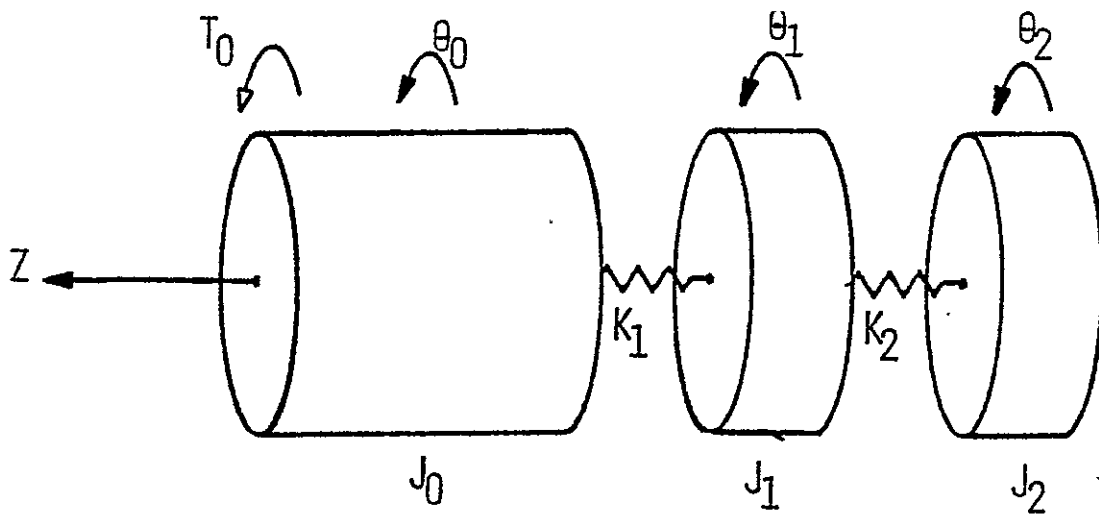


FIGURE 4-3 TORSIONAL MODEL OF THE VEHICLE

$$\underline{q} = [q_1 q_2]^T \quad (4-69)$$

$$q_i = \theta_i - \theta_0 \quad (4-70)$$

$$\begin{aligned} \phi^T [K] \phi &= [\sigma^2] \\ [\sigma^2] &= \begin{bmatrix} \sigma_1^2 & 0 \\ 0 & \sigma_2^2 \end{bmatrix} \end{aligned}$$

$$[J] = \begin{bmatrix} J_1 & 0 \\ 0 & J_2 \end{bmatrix}; [K] = \begin{bmatrix} (K_1 + K_2) & -K_2 \\ -K_2 & K_2 \end{bmatrix}$$

$$\delta = -\phi^T [J] \begin{bmatrix} 1 \\ 1 \end{bmatrix} = -\phi^T \begin{bmatrix} J_1 \\ J_2 \end{bmatrix}$$

$$J_t = J_0 + J_1 + J_2 = \text{total vehicle moment of inertia}$$

4.3.3 Decomposed Hybrid Coordinate Model

Expansion of equation set (4-68) into its scalar components, the substitutions $X_1 = \theta_0$, $X_2 = \dot{\theta}_0$, $X_3 = \eta_1$, $X_4 = \dot{\eta}_1$, $X_5 = \eta_2$, $X_6 = \dot{\eta}_2$ and the simultaneous solution of the resulting equations for X_i , $i=1,2, \dots, 6$, generate a coupled state variable hybrid coordinate model of the vehicle to be controlled. State coordination equations that temporarily suppress coupling between the scalar equations of the state variable model may be written in the following form.

$$C_i = g_i(X_c); \quad i=1,2,\dots,6^* \quad (4-71)$$

$$\text{where: } X_c = [X_1, \dots, X_{i-1}, X_{i,1}, \dots, X_6]^T \quad (4-72)$$

The resulting scalar equations of the decomposed (decoupled) state variable hybrid coordinate model are the following:

$$\dot{X}_i = f_i(X_i) + u_i(T_0) + C_i \quad (4-73)$$

$$\text{where: } X_i(t_0) = X_{i0} \quad (4-74)$$

4.3.4 Decomposed Performance Index and Hamiltonian

When the mathematical model of the vehicle to be controlled is decomposed into subsystems, the corresponding decomposed performance index may be written in the form of a summation of terms each of which corresponds to one of the subsystems of the decomposed model. The decomposed Hamiltonian resulting from such a performance index also may be written in summation form. For the flexible vehicle treated here the decomposed Hamiltonian may be written as follows:

$$H = \sum_{i=1}^6 H_i \quad (4-75)$$

$$\text{where: } H_i = p_i + \lambda_i(f_i + u_i + C_i) + \rho_i(g_i - C_i) \quad (4-76)$$

*This range for the subscript, i , will apply in the sequel unless a specific exception is stated.

$$p_i = W_{i,1}(X_i - X_{isp})^2 + W_{i,2}u_i^2 \quad (4-77)$$

$W_{i,j}$ = constant weighting coefficients

λ_i = costate variable for subsystem i

ρ_i = Lagrange multiplier for the coordination constraint, equation (4-71).

4.3.5 Costate and Costate Coordination Equations

Necessary conditions for effecting optimal control are stated in terms of partial derivatives of the Hamiltonian. Two such conditions for the flexible vehicle treated in this section may be stated as follows:

$$\dot{\lambda}_i = -\frac{\partial H}{\partial X_i} \quad (4-78)$$

$$\frac{\partial H}{\partial C_i} = 0 \quad (4-79)$$

The first of these conditions generates the following costate equations.

$$\dot{\lambda}_i = -\frac{\partial p_i}{\partial X_i} - \frac{\partial f_i}{\partial X_i} \lambda_i - \sum_{\substack{j=1 \\ j \neq i}}^6 \frac{\partial g_j}{\partial X_i} \rho_j \quad (4-80)$$

where: $\lambda_i(t_f) = 0$ (4-81)

The second generates the costate coordination equations which follow:

$$\rho_i = \lambda_i \quad (4-82)$$

4.3.6 The Control Algorithm

The iterative relationship for successive values of the control torque may be expressed as follows:

$$(T_0)_{r+1} = (T_0)_r - q \left(\frac{\partial H}{\partial T_0} \right)_r \quad (4-83)$$

where r is the iteration index and q is a constant to be chosen on the basis of the rate of approach of the performance of the controlled vehicle to optimality. From (4-73), (4-76) and (4-77) it may be seen that the partial derivative in (4-83) is a function of λ_i .

4.3.7 Construction of the Subproblem Hierarchy

The state equations, (4-73) and also (4-74) may be regarded as comprising a state subproblem. Similarly, the costate equations (4-80) and (4-81) may be assembled into a costate subproblem, and the control equations (4-83) may be associated in a control subproblem. The state coordination equations (4-71) and the costate coordination equations (4-82) may be combined into an overall coordination subproblem. Then a hierarchy of these subproblems can be assembled as depicted in Figure 4-4.

4.4 CONCLUSIONS AND RECOMMENDATIONS

From the work reported in Subsections 4.1 through 4.3, the following conclusions may be drawn:

- 1) The three dimensional five body discrete mass rotational model for Configuration 1 of the SCB has been transformed in such a way that it may readily be simulated on a digital computer. The resulting

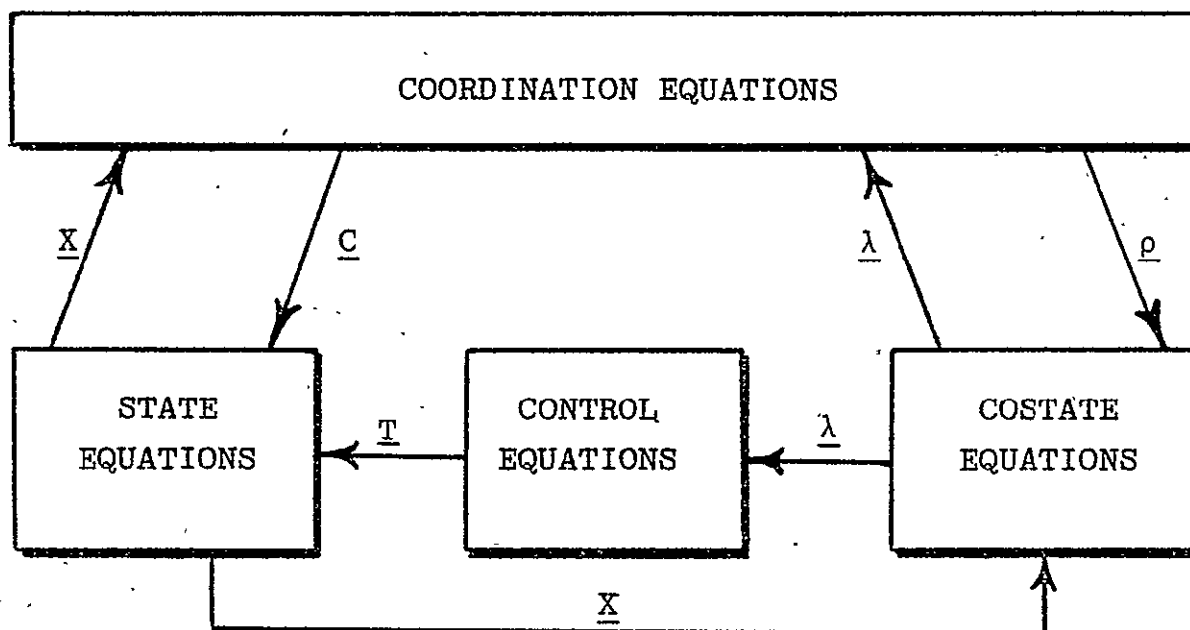


FIGURE 4-4
 SUBPROBLEM HIERARCHY FOR
 MULTILEVEL CONTROL

model is in scalar state variable form.

- 2) Multilevel control techniques have been applied to the scalar state variable form of the three dimensional discrete mass model for Configuration 1. The resulting hierarchy of subproblems to be solved may be easily simulated on a digital computer.
- 3) The multilevel hierarchical rotational form of the three dimensional discrete mass model for Configuration 1 of the SCB is nonlinear and of relatively high dimension. (30 scalar state variables) The remaining 11 Configurations would require discrete mass rotational models of still higher dimension. (Up to 120 state variables)
- 4) The nonlinear discrete mass rotational models of Configuration 1 of the SCB have been linearized using the assumption of small angular displacements.
- 5) Hybrid coordinate modeling appears to yield models that are lower in dimension than the corresponding models generated by the discrete mass approach. Hybrid coordinate models also tend to be linear in most instances. Both of these factors render the model more amenable to the application of multilevel control techniques.
- 6) In extending the combined application of hybrid coordinate modeling and multilevel control techniques from models of low dimension to models of higher

dimension, some of the modal coordinates of the hybrid model should be truncated.

The following recommendations are offered for further work in the application of multilevel control to flexible space vehicles and the computer simulation of the resulting mathematical models.

- 1) Simulation of the linearized scalar state variable form of the three dimensional discrete mass rotational model of Configuration 1 of the SCB should be completed.
- 2) A three dimensional hybrid coordinate rotational model of Configuration 1 of the SCB with multilevel control should be developed for digital computer simulation.
- 3) Candidate control techniques other than multilevel control should be applied to either of the three dimensional rotational model simulations listed above for purposes of comparison.
- 4) Since most of the candidate control techniques presently contemplated require access to all of the state variables, techniques for generation of observers required to synthesize inaccessible state variables should be developed.
- 5) Modeling, control and simulation techniques developed for Configuration 1 rotational models of the SCB

should be extended to other Configurations involving more masses.

4.5 REFERENCES

- (4-1) Chichester, F. D., "Application of Multilevel Control Techniques to Space Construction Base," Section 7 of Space Construction Base Control System Final Report, NASA Contract No. NAS8-32660, The Bendix Corporation, Guidance Systems Division, October 27, 1978.
- (4-2) Cornell, G. A., "Space Base Mathematical Model," Bendix Research Laboratories Internal Memorandum, December 14, 1977.
- (4-3) Lipski, D. B., "Discrete Coordinate Approach to Analytic Modeling of Flexible Bodies," Bendix Research Laboratories Internal Memorandum, February 22, 1979.
- (4-4) Lipski, D. B., "Linearized Five Body Space Base Simulation Model," Bendix Research Laboratories Internal Memorandum, April 23, 1979.
- (4-5) Chichester, F. D., "Multilevel Modeling of the Space Construction Base," Proc. of the Tenth Annual Pittsburgh Conference on Modeling and Simulation, The University of Pittsburgh, Pittsburgh, Pennsylvania, April, 1979.

- (4-6) Chichester, F. D., "Application of Multilevel Control to a Single Axis Torsional System," Bendix Corporation MT-40,808, Issue A, May 16, 1978.
- (4-7) Likins, P., "Dynamics and Control of Flexible Space Vehicles," Jet Propulsion Laboratory, Technical Report 32-1329 Revision 1, January 15, 1970.
- (4-8) Chichester, F. D., R. F. Kaczynski and S. Nachmias "Application of Hybrid Coordinate Modeling and Multilevel Control Techniques to a Single Axis Torsional Model," Proc. of the Tenth Annual Pittsburgh Conference on Modeling and Simulation, The University of Pittsburgh, Pittsburgh, Pennsylvania, April, 1979.
- (4-9) Porcelli, G., "Attitude Control of Flexible Space Vehicles," AIAA Journal, Vol. 10, No. 6, June, 1972, pp. 807-812.

SECTION 5

5.0 SIMULATION OF LQR CONTROL

The linear quadratic regulator (LQR) approach is applied to single axis control of Configuration 1 of the Space Construction Base (SCB). A single axis vehicle model is defined and converted to the state variable form for application of the LQR technique. A control performance index is then defined and weighting factors are selected. A matrix Riccati equation for the system is then solved as a function of time. This result is used to specify the optimal feedback gain coefficients. These feedback gains were used in a simulation of the vehicle control system, and the time responses are presented. A description of an alternate application of LQR is then discussed.

5.1 VEHICLE EQUATIONS

Configuration 1 of the SCB (References 5-1 and 5-2) is shown in Figure 5-1. The vehicle XYZ axes are parallel to the principal axes of inertia. The vehicle is represented here by discrete masses with three-axis hinge springs between adjacent masses. The vehicle is divided into five masses: one central body between the solar wings, and each solar wing is divided into two equal masses. Because of the symmetry and the absence of product of inertia terms, the SCB can be represented as a three-mass rotational model as shown in Figure 5-2. Body 1 is the central body; both inboard solar wing sections are represented as body 2 and both outboard sections as body 3. Module and solar wing dimensions and the inertia properties were obtained from Reference 5-1. Center of mass locations are given in Figure 5-2 relative to the reference origin for the XYZ coordinates. \bar{x}_1 is the center of mass (CM) location

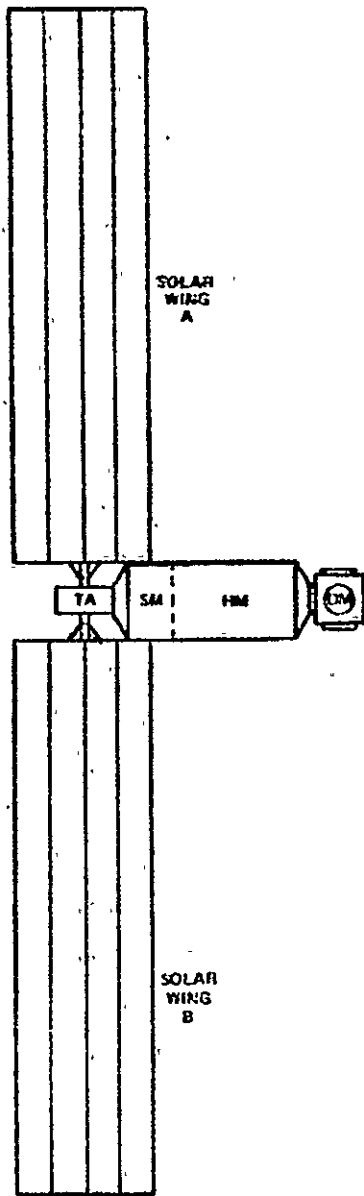


FIGURE 5-1
SPACE CONSTRUCTION BASE-CONFIGURATION 1

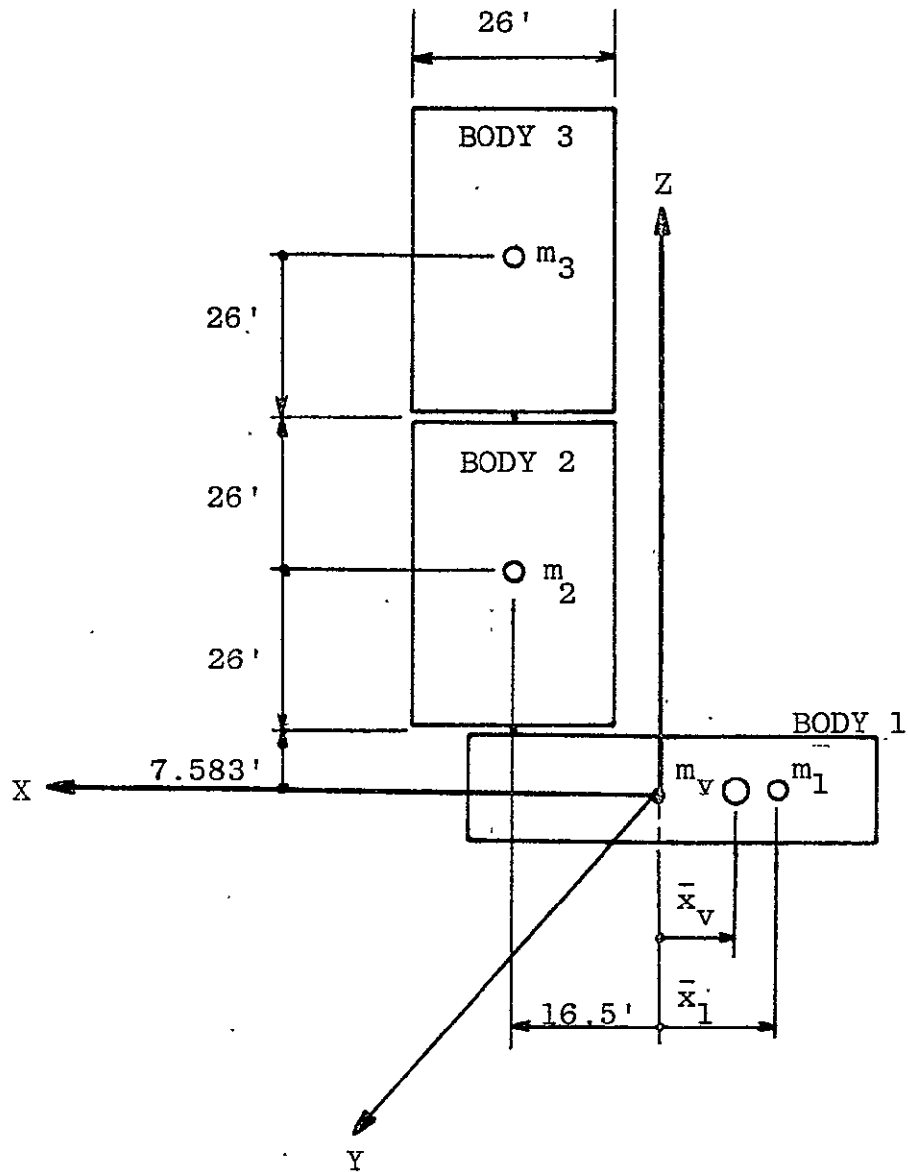


FIGURE 5-2
INERTIA MODEL FOR CONFIGURATION 1

of body 1 along the X axis and \bar{x}_v is the CM of the total vehicle.

With the vehicle modeling limited to the Z axis, the inertia characteristics of the central body (No. 1) are listed in Table 5-1. Key outputs of the table are the CM location and the Z axis moment of inertia about the CM for body 1. It is convenient to represent the single axis vehicle as the torsional model (as in Reference 5-3) of Figure 5-3, where the masses are connected by hinge springs K_1 and K_2 . For the Z axis,

$$J_1 = I_1 + \frac{m_1}{m} (m_2 + m_3) R_{12}^2 \quad (5-1)$$

where J_1 = effective MOI of body 1

I_1 = MOI of body 1 about it's CM

m_i = mass of the i-th body

$m = m_1 + m_2 + m_3$

R_{12} = distance from the CM of body 1 to the contact point with body 2 (the X axis component only in this case)

The MOI of bodies 2 and 3 are obtained by assuming that each solar wing section is a rectangular plane. The MOI about the Z axis of each is then

TABLE 5-1
INERTIA CHARACTERISTICS OF BODY 1

• $\bar{x}_1 = \Sigma W_i x_i / \Sigma W_i = -88.74'' = -7.40'$

MODULE	WEIGHT (LBS)	POSITION (IN)			RAD. OF GYRATION (IN)	POSITION WRT CM (IN)	MOMENT OF INERTIA WRT CM (SLUG-FT ²)
	W	x	y	z	K _Z	x - \bar{x}_1	I ₁
SM	16,440.	66	0	0	57.8	+154.7	96,757.6
HM	16,487.	-156.	0	0	100.	-67.3	51,693.7
TA	650.	198.	0	0	43.5	+286.7	11,795.2
DM	5,625.	-377.	0	0	55.1	-288.3	104,578.9
TOTAL	39,202						264,825.

SM - Subsystems Module

HM - Habitability Module

TA - Turret Assembly

$$I_1 = \frac{W}{g} \left[K_Z^2 + (x - \bar{x}_1)^2 \right]$$

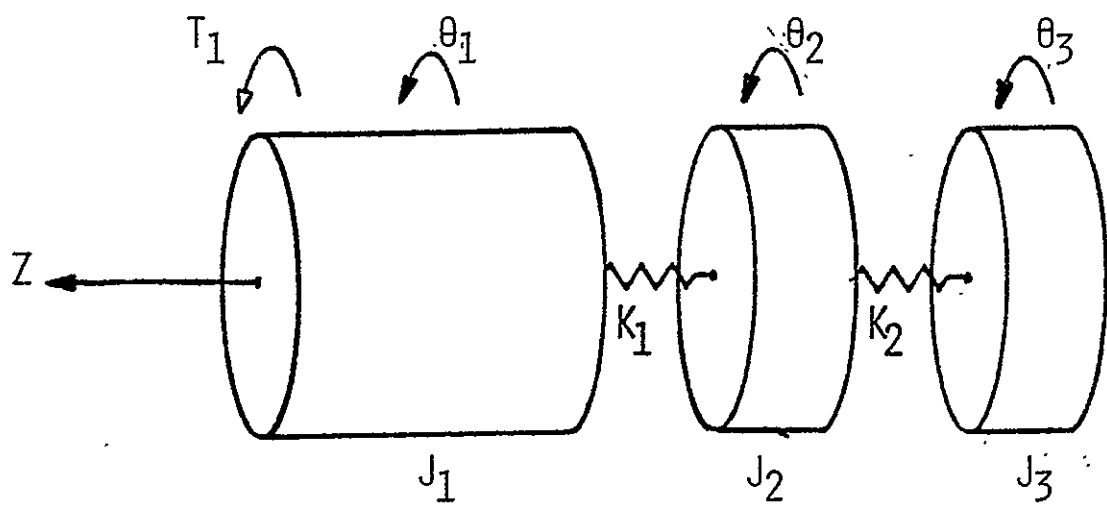


FIGURE 5-3 TORSIONAL MODEL OF THE VEHICLE

$$I_2 = I_3 = (26)^2 \cdot 26.445/12 = 1490 \text{ slug-ft}^2 \text{ and}$$

$$J_2 = I_2 \text{ and } J_3 = I_3.$$

Note that the mass of each section is doubled since it represents both inboard or both outboard portions of the solar wings.

The equations of motion for the torsional model (Reference 5-4) are then defined as

$$J\ddot{\underline{\theta}} = \text{sum of constraint and disturbance torques} \quad (5-2)$$

$$\text{where } J = \begin{bmatrix} J_1 & 0 & 0 \\ 0 & J_2 & 0 \\ 0 & 0 & J_3 \end{bmatrix} \quad (5-3)$$

$$\ddot{\underline{\theta}} = [\ddot{\theta}_1 \quad \ddot{\theta}_2 \quad \ddot{\theta}_3]^T \quad (5-4)$$

Springs K_1 and K_2 and dampers D_1 and D_2 cause constraining torques, while the disturbance is limited to a control torque vector \underline{u} with a component on each body. The equation in matrix form is then

$$J\ddot{\underline{\theta}} = D\dot{\underline{\theta}} + K\underline{\theta} + \underline{u} \quad (5-5)$$

$$\text{where } K = \begin{bmatrix} -K_1 & K_2 & 0 \\ K_1 & -(K_1+K_2) & K_2 \\ 0 & K_2 & -K_2 \end{bmatrix} \quad (5-6)$$

$$D = \begin{bmatrix} -D_1 & D_2 & 0 \\ D_1 & -(D_1+D_2) & D_2 \\ 0 & D_2 & -D_2 \end{bmatrix} \quad (5-7)$$

$$\underline{u} = [u_1 \quad u_2 \quad u_3]^T \quad (5-8)$$

and the $\underline{\theta}$ and $\dot{\underline{\theta}}$ vector are defined in a manner similar to $\ddot{\underline{\theta}}$. K_2 is selected to obtain a 1 rad/sec resonance with J_2 ,

$$K_2 = J_2 \omega^2 \quad (5-9)$$

K_1 is selected to be equal to K_2 . D_2 is set to obtain a damping factor of 0.005 with K_2 and J_2 and D_1 is set equal to D_2 . All numerical values are summarized in Table 5-2. Each matrix formed by these parameters is printed out on Figure 5-4.

To place the model in state variable form, both sides of the equation are premultiplied by J^{-1}

$$\ddot{\underline{\theta}} = J^{-1} D \dot{\underline{\theta}} + J^{-1} K \underline{\theta} + J^{-1} \underline{u} \quad (5-10)$$

This can be redefined as follows, while also setting $u_2 = u_3 = 0$:

$$\ddot{\underline{\theta}} = A_D \dot{\underline{\theta}} + A_K \underline{\theta} + B \underline{u} \quad (5-11)$$

Matrices J^{-1} , A_K , A_D and the transpose of B are printed out in Figure 5-5.

TABLE 5-2
SUMMARY OF PHYSICAL CONSTANTS

- Z AXIS OF CONFIGURATION 1
- $R_{12} = (16.50 + 7.40)\text{FT.} = 23.9 \text{ FT ALONG X AXIS}$

	MASS	M.O.I. ABOUT EACH C.M.	EFFECTIVE M.O.I.	SPRING CONSTANT	DAMPING CONSTANT
i	M_i (slugs)	I_i (slug-ft) ²	J_i (slug-ft) ²	K_i (ft-lb/rad)	D_i (ft-lb-sec)
1	1218.21.	264,825.	293,767.	1490.	14.9
2	26.445	1490.	1490.	1490.	14.9
3	26.445	1490.	1490.	--	--

$$J_1 = I_1 + \frac{m_1}{m}(m_2+m_3)R_{12}^2$$

$$m = m_1 + m_2 + m_3$$

R_{12} = DISTANCE IN BODY 1 FROM IT'S CM TO POINT OF CONTACT WITH BODY 2

DAMPING SELECTED TO GIVE A DAMPING FACTOR OF 0.005.

J=	0,29377D 06	0,0	0,0
	0,0	0,14900D 04	0,0
	0,0	0,0	0,14900D 04
K=	-0,14900D 04	0,14900D 04	0,0
	0,14900D 04	-0,29800D 04	0,14900D 04
	0,0	0,14900D 04	-0,14900D 04
D=	-0,14900D 02	0,14900D 02	0,0
	0,14900D 02	-0,29800D 02	0,14900D 02
	0,0	0,14900D 02	-0,14900D 02

FIGURE 5-4 MATRIX PARAMETERS FOR DISCRETE INERTIA, SPRING AND DAMPING CONSTANTS

J INVERSE=	0,34041D=05	0,0	0,0
	0,0	0,67114D=03	0,0
	0,0	0,0	0,67114D=03
AK=	-0,50720D=02	0,50720D=02	0,0
	0,10000D 01	-0,20000D 01	0,10000D 01
	0,0	0,10000D 01	-0,10000D 01
AD=	-0,50720D=04	0,50720D=04	0,0
	0,10000D=01	-0,20000D=01	0,10000D=01
	0,0	0,10000D=01	-0,10000D=01
BT=	0,34041D=05	0,0	0,0

FIGURE 5-5 THE INVERSE OF INERTIA MATRIX,
 A_K , A_D AND B^T

The system can be redefined as

$$\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}u \quad (5-12)$$

$$\text{where } \mathbf{x} = [\theta_1 \ \dot{\theta}_1 \ \theta_2 \ \dot{\theta}_2 \ \theta_3 \ \dot{\theta}_3]^T \quad (5-13)$$

$$\text{and } u = u_1$$

Then A is a recasting of A_K and A_D as follows:

$$\mathbf{A} = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ -.5072\text{E-}2 & -.5072\text{E-}4 & .5072\text{E-}2 & .5072\text{E-}4 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 1 & .01 & -2 & -.02 & 1 & .01 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & .01 & -1 & -.01 \end{bmatrix} \quad (5-14)$$

And the dimension of B is increased to six:

$$\mathbf{B}^T = \begin{bmatrix} 0 & .34041\text{E-}5 & 0 & 0 & 0 & 0 \end{bmatrix} \quad (5-15)$$

5.2 OPTIMUM FEEDBACK GAIN

The linear optimum feedback control gain can be determined by setting a performance index (References 5-5, 5-6 and 5-7) as follows:

$$PI = \int_0^{\infty} (\mathbf{x}^T \mathbf{Q} \mathbf{x} + u^T \mathbf{R} u) dt \quad (5-16)$$

where Q, R = weighting factor matrices.

The diagonal of Q is selected to indicate the relative importance of each element of x. In this case,

$$Q = \begin{bmatrix} q & 0 & 0 & 0 & 0 & 0 \\ 0 & & & & & \\ 0 & & & & & \\ 0 & & & & & \\ 0 & & & & & \\ 0 & & & & & \end{bmatrix} \quad (5-17)$$

where q is selected as $W_{BW}^4 = (0.1)^4 = 10^{-4}$, and W_{BW} is the control loop bandwidth. R is a 1 by 1, where $r = (J_1)^{-2}$

Once the model is placed in the state variable form

$$\dot{x} = Ax + Bu \quad (5-18)$$

the matrix Riccati equation which follows was solved until $\dot{P} = 0$:

$$\dot{P} = PA + A^T P - PBR^{-1}B^T P + Q \quad (5-19)$$

The LQR feedback matrix for these conditions is defined as

$$F = -R^{-1} B^T \bar{P} = -[F_1 \ F_2 \ F_3 \ F_4 \ F_5 \ F_6] \quad (5-20)$$

where \bar{P} is the steady state solution of (5-19).

A block diagram of the system is given in Figure 5-6. The input constants (Q, A, B, R) used in the solution

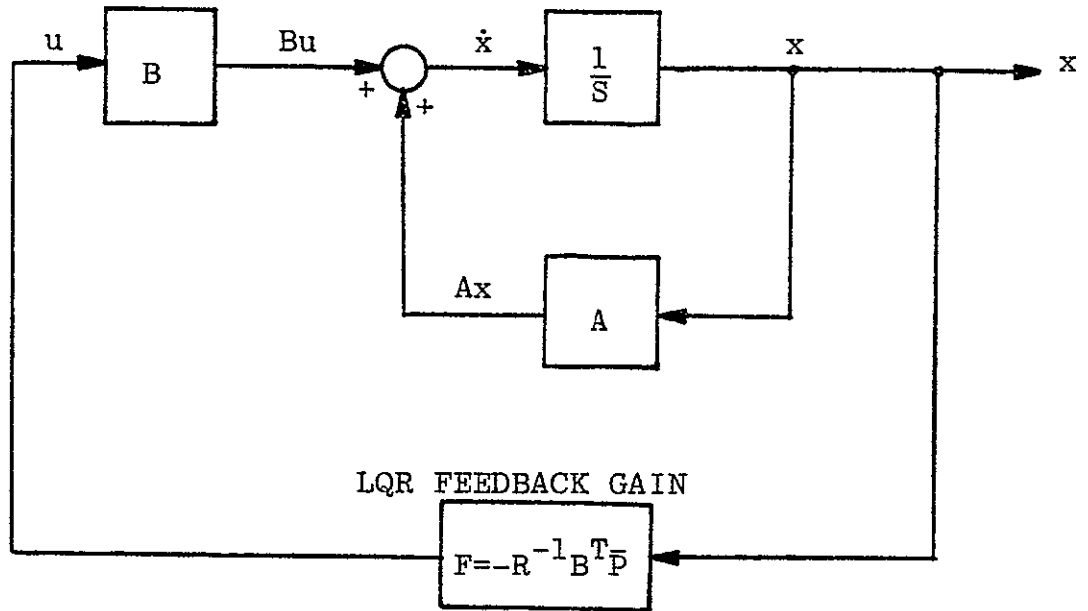


FIGURE 5-6
BLOCK DIAGRAM OF LQR-CONTROLLED SYSTEM

of the Riccati equation are given in Figure 5-7, along with the initial conditions which were used. Note that q and r were normalized with $q = 1$ and $r = (J_1^2 W_{BW}^4)^{-1}$. The final values of the solution, when $t \approx 200$ seconds, are shown in Figure 5-8. F is also printed out and the time solution provided the following component gains of F :

$$\begin{aligned}
 F_1 &= 2906. \\
 F_2 &= 41320. \\
 F_3 &= 15.0 \\
 F_4 &= 209.3 \\
 F_5 &= 15.1 \\
 F_6 &= 209.1
 \end{aligned}
 \tag{5-20}$$

It is interesting to note that:

$$\begin{aligned}
 F_1/J_1 &\cong W_{BW}^2 = (0.1 \text{ rad/sec})^2 \\
 F_2/J_1 &\cong 2\zeta W_{BW} = 2 (.707) (0.1)
 \end{aligned}
 \tag{5-21}$$

Thus if the appendages were ignored, the same attitude and attitude rate gains would be obtained for central body feedback if a standard non-optimal servo technique was applied.

5.3 SIMULATION

The system was simulated on the digital computer using the full LQR feedback matrix for an initial attitude error of

SOLUTION OF MATRIX RICCATI EQUATION, SCB CONFIG 1, Z AXIS

CONSTANT DATA INPUT

							Q#	0,100000 01	0,0	0,0	0,0	0,0	0,0	0,0	
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
							A#	0,0	0,100000 01	0,0	0,0	0,0	0,0	0,0	0,0
								-0,507200=02	-0,507200=04	0,507200=02	0,507200=04	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,100000 01	0,0	0,0	0,0	0,0
								0,100000 01	0,100000=01	-0,200000 01	-0,200000=01	0,100000 01	0,100000=01	0,100000 01	0,100000 01
								0,0	0,0	0,0	0,0	0,0	0,0	0,100000 01	0,100000 01
								0,0	0,0	0,100000 01	0,100000=01	-0,100000 01	-0,100000=01	0,100000 01	0,100000=01
							B#	0,0	0,340410=05	0,0	0,0	0,0	0,0	0,0	0,0
							R#	0,114000=04							
							T#	0,0 SEC							
							F#	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
							PDOT#	0,100000 01	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
								0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

FIGURE 5-7 SYSTEM MATRICES A AND B, WEIGHTING FACTORS Q AND R, AND INITIAL CONDITIONS FOR SOLUTION OF THE MATRIX RICCATI EQUATION.

							T#	200,0 SEC						
							F#	0,290600 04	0,413200 05	0,149960 02	0,209290 03	0,151200 02	0,209120 03	
								0,139380 02	0,990260 02	0,681150=01	0,492060 00	0,665800=01	0,486940 00	
								0,990260 02	0,140800 04	0,511000 00	0,713190 01	0,515230 00	0,712800 01	
								0,681150=01	0,511000 00	0,130320=02	0,255800=02	0,181290=02	0,253690=02	
								0,492060 00	0,713190 01	0,255800=02	0,383660=01	0,299440=02	0,400160=01	
								0,665800=01	0,515230 00	0,181290=02	0,299440=02	0,277870=02	0,298060=02	
								0,486940 00	0,712800 01	0,253690=02	0,400160=01	0,298060=02	0,424360=01	
							PDOT#	0,644940=04	-0,183130=04	0,455760=04	0,753090=05	-0,100950=05	0,114430=04	
								-0,185130=04	0,869110=04	0,646530=05	-0,371080=04	0,112460=04	-0,591270=04	
								0,455760=04	0,446530=05	-0,421560=04	-0,253620=05	-0,483460=07	-0,397680=05	
								0,753090=05	-0,371080=04	-0,253620=05	0,150010=04	-0,486110=05	0,231610=04	
								-0,100950=05	0,112460=04	-0,483460=07	-0,466110=05	0,986200=06	-0,733830=05	
								0,118430=04	-0,591270=04	-0,397680=05	0,251610=04	-0,733830=05	0,400860=04	

FIGURE 5-8 "FINAL" CONDITIONS OF MATRIX RICCATI EQUATION SOLUTION AT TIME = 200 SECONDS

ORIGINAL PAGE IS OF POOR QUALITY

$$\underline{\theta}(0) = \begin{bmatrix} 1 \text{ degree} \\ 0 \\ 0 \end{bmatrix} \quad (5-22)$$

The θ_1 , u , η_2 and η_3 variables are shown on print-plots of Figure 5-9 and 5-10, where:

$$\begin{aligned} \eta_2 &= \text{relative motion of inboard appendage} = \theta_2 - \theta_1 \\ \eta_3 &= \text{relative motion of outboard appendage} = \theta_3 - \theta_1 \end{aligned} \quad (5-23)$$

Since the central actuator is located at body 1, the θ_1 transient is well behaved. η_2 and η_3 , however, oscillate at about 0.1 Hz and appear to be lightly damped. The control u also appears as a smooth transient - even though it is also dependent upon oscillatory states from bodies 2 and 3. All six states have been applied to minimize the performance index based upon the weighted integration of θ_1 and u .

To examine this further, the simulation was repeated with $F_3 = F_4 = F_5 = F_6 = 0$, since these gains were already very low in the optimal case. The result of this "partial LQR" feedback was basically the same as that obtained previously for θ_1 , η_2 and η_3 (Figures 5-9 and 5-10). But the control torque u had a 0.1 Hz oscillatory component superimposed on the basic response obtained in Figure 5-9. These results are shown in Figures 5-11 and 5-12. Obviously, the performance index here is not minimal since the integral of the $u^T R u$ term would approach infinity.


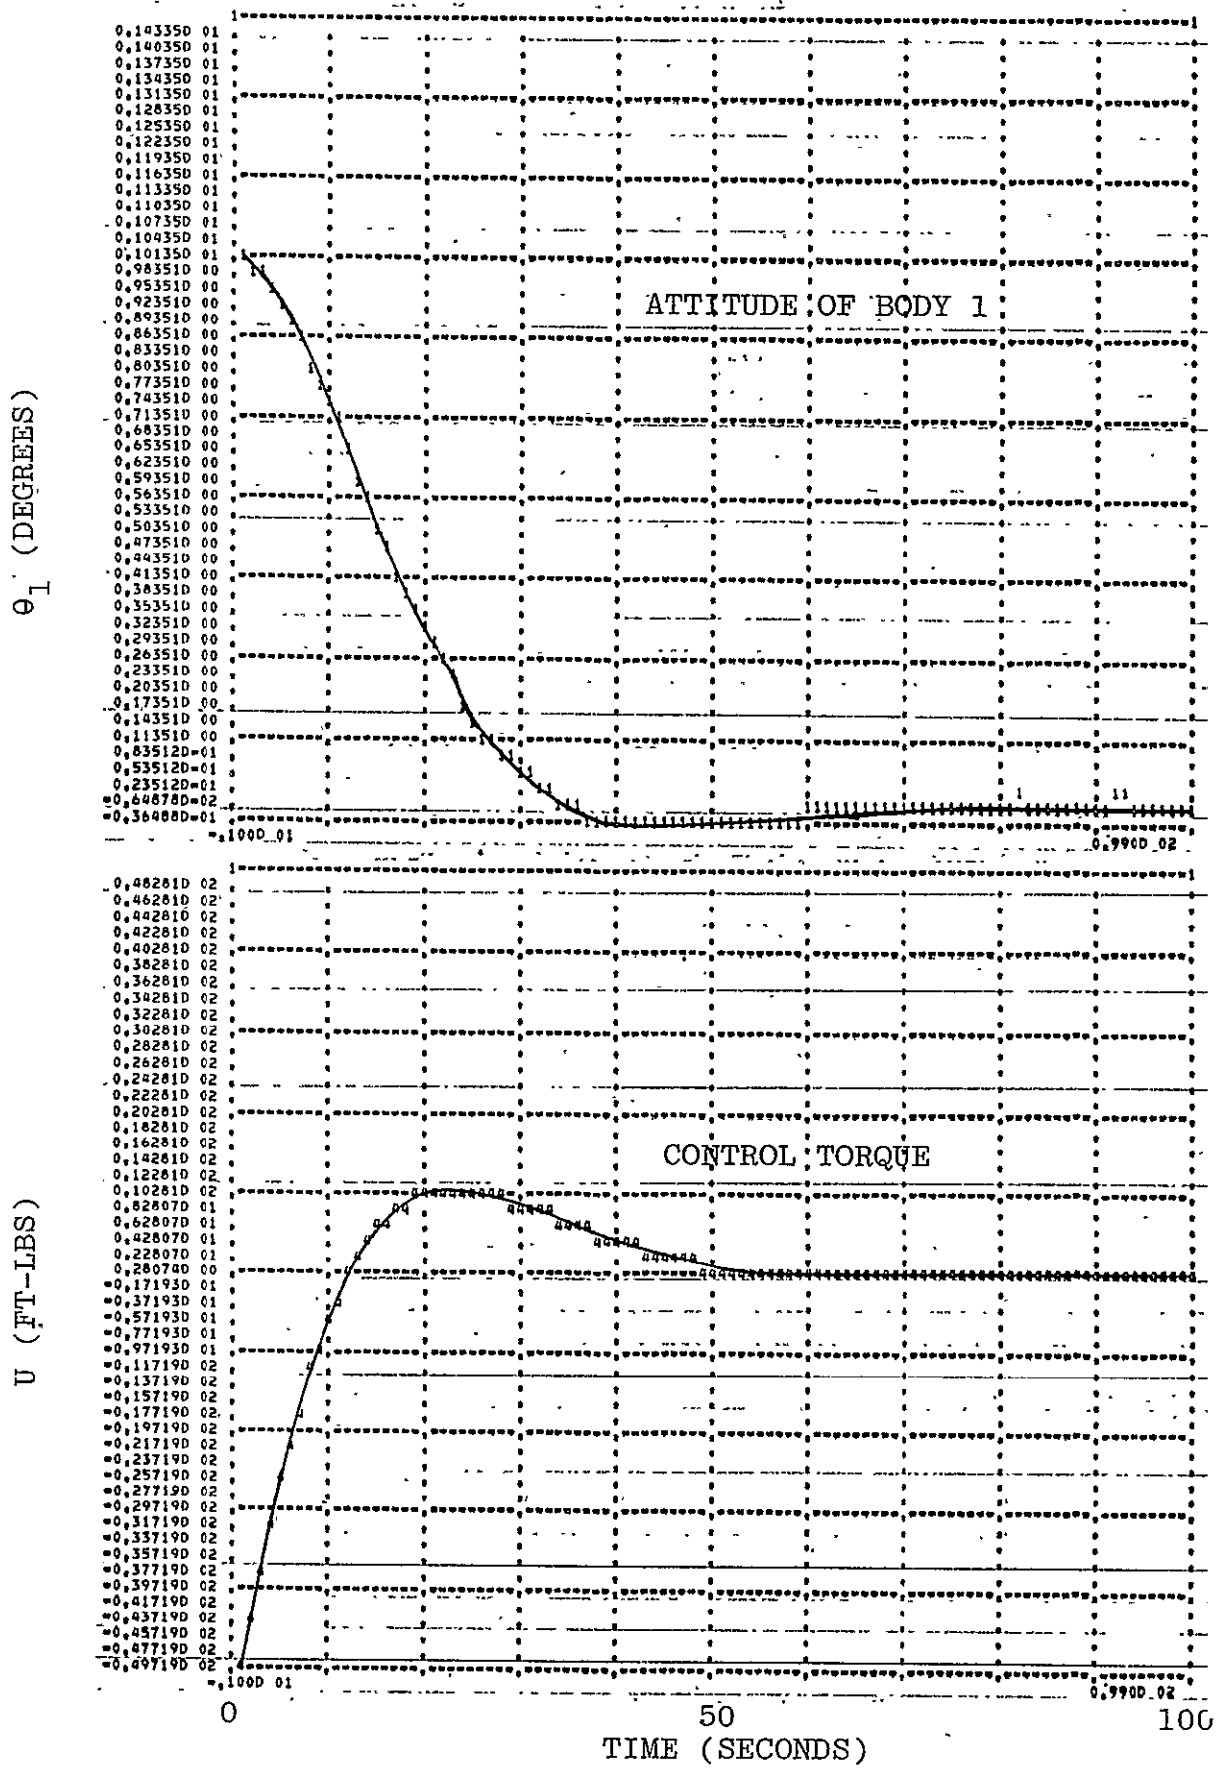



FIGURE 5-9 FULL STATE LQR FEEDBACK, CENTRAL BODY ATTITUDE AND CONTROL TORQUE INITIAL CONDITION:

$$\theta_1(0) = 1 \text{ DEGREE}$$

η_2 (DEGREES)

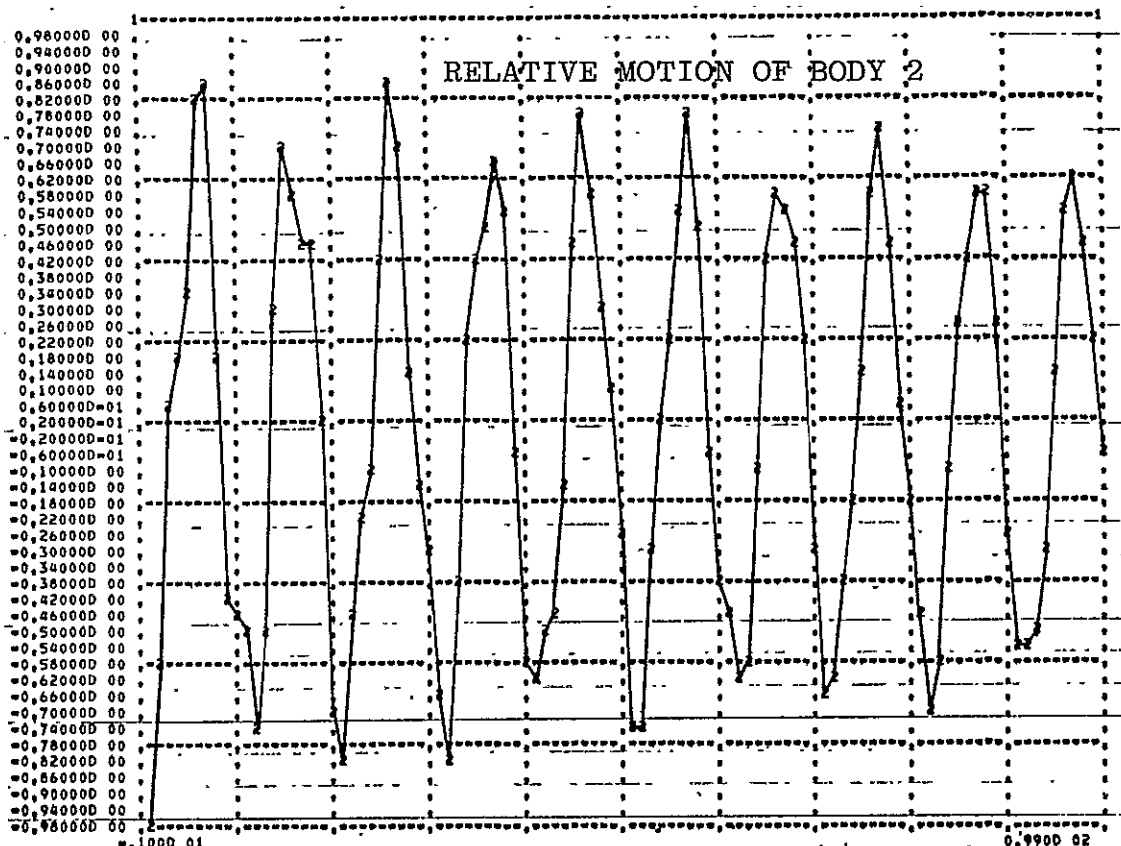


η_3 (DEGREES)

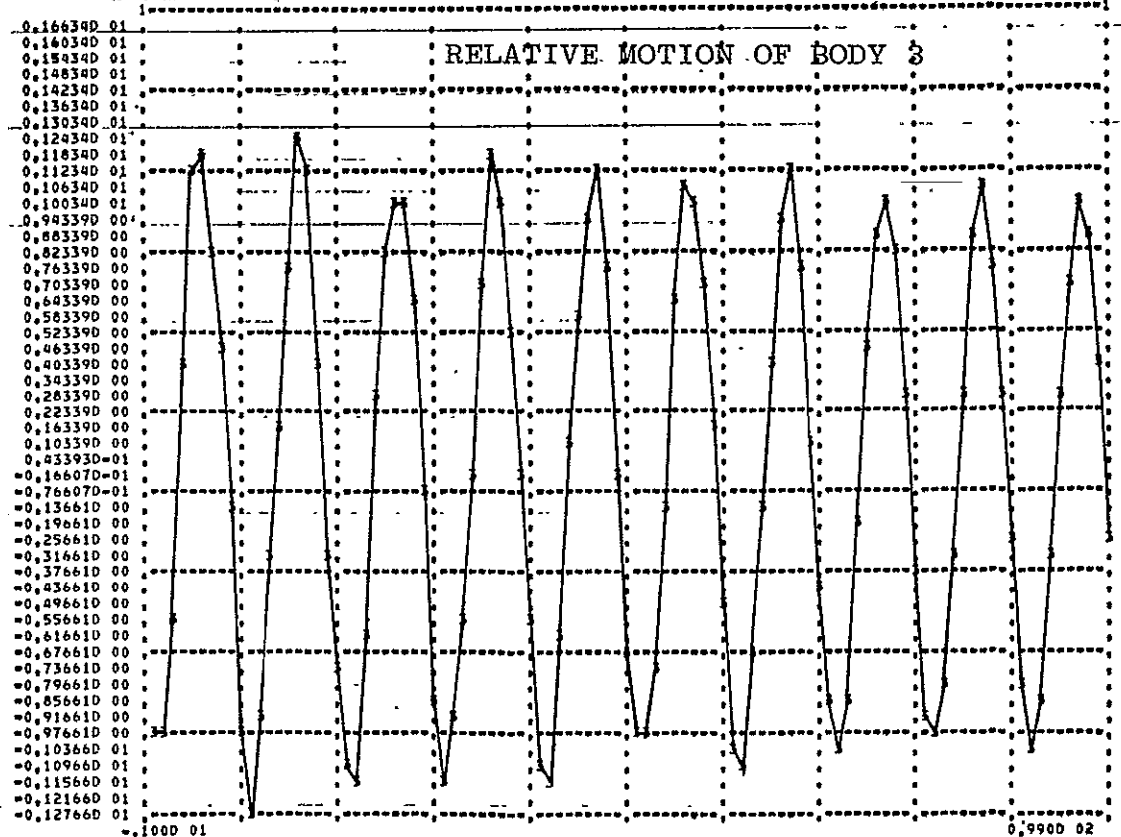


0 50 100
(TIME SECONDS)

FIGURE 5-10 FULL STATE LQR FEEDBACK, RELATIVE MOTION OF INBOARD AND OUTBOARD APPENDAGES.

θ_1 (DEGREES)

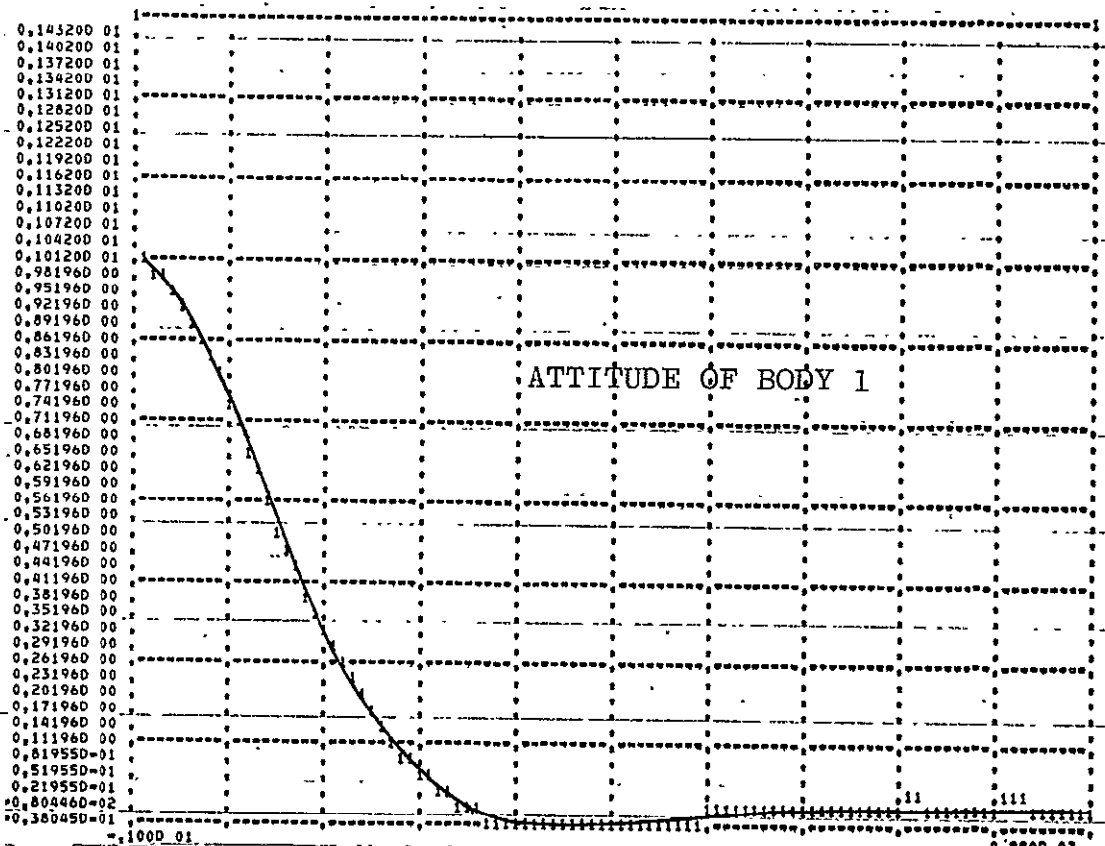

U (FT-LBS)

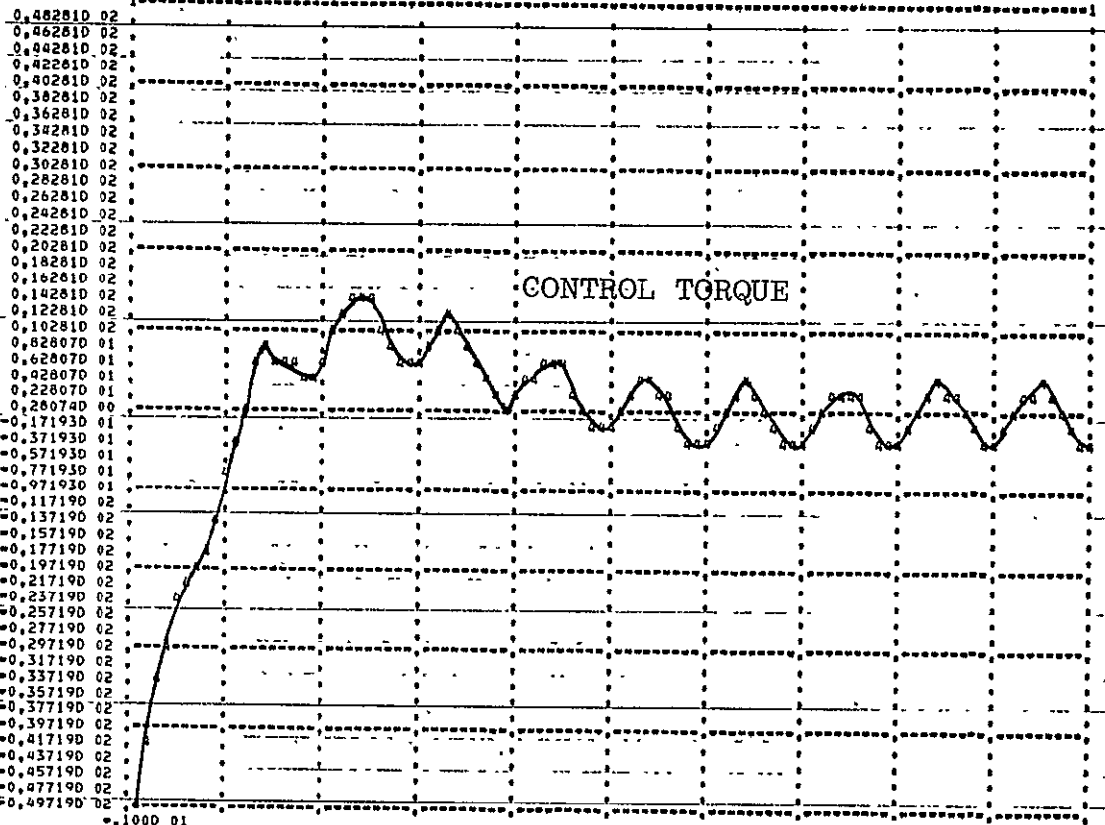

ORIGINAL PAGE IS
OF POOR QUALITY

FIGURE 5-11 PARTIAL STATE "LQR" FEEDBACK
CENTRAL BODY ATTITUDE AND CONTROL TORQUE
INITIAL CONDITION: $\theta_1(0) = 1$ DEGREE

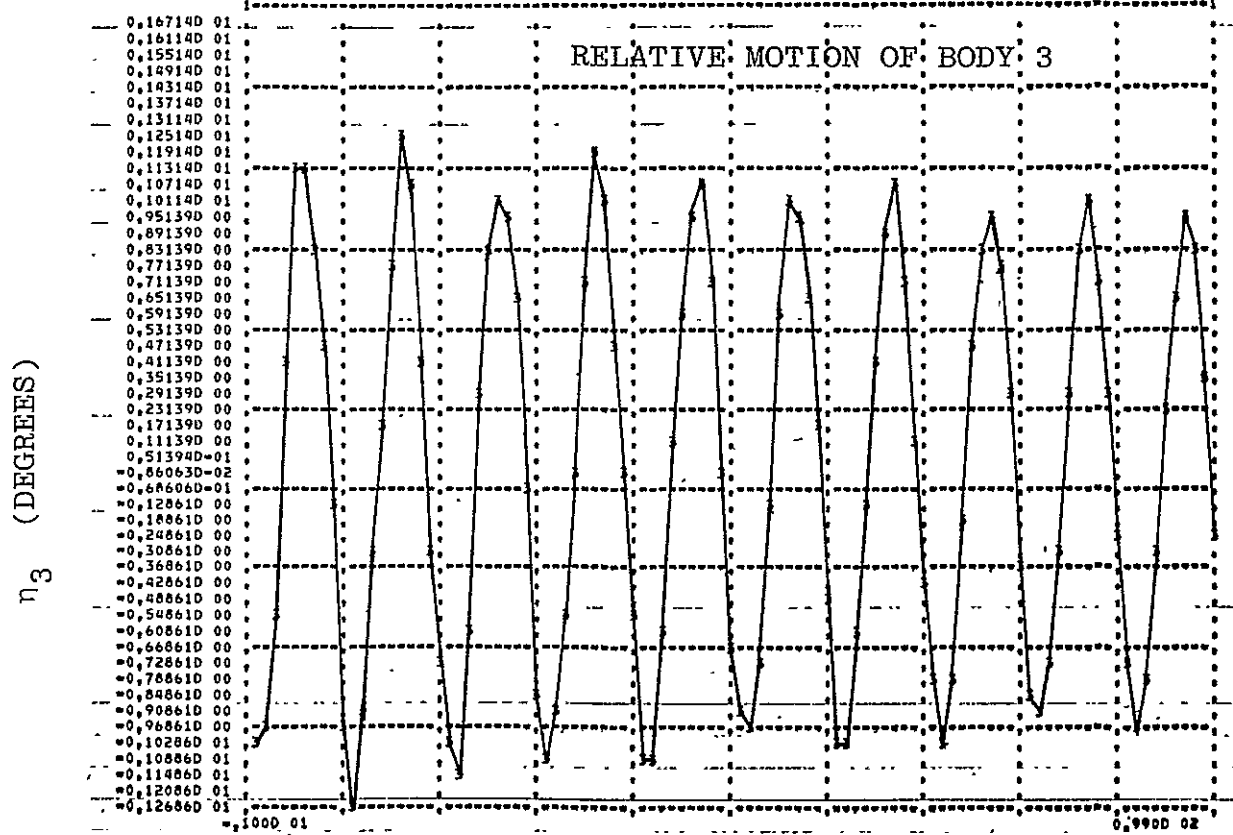
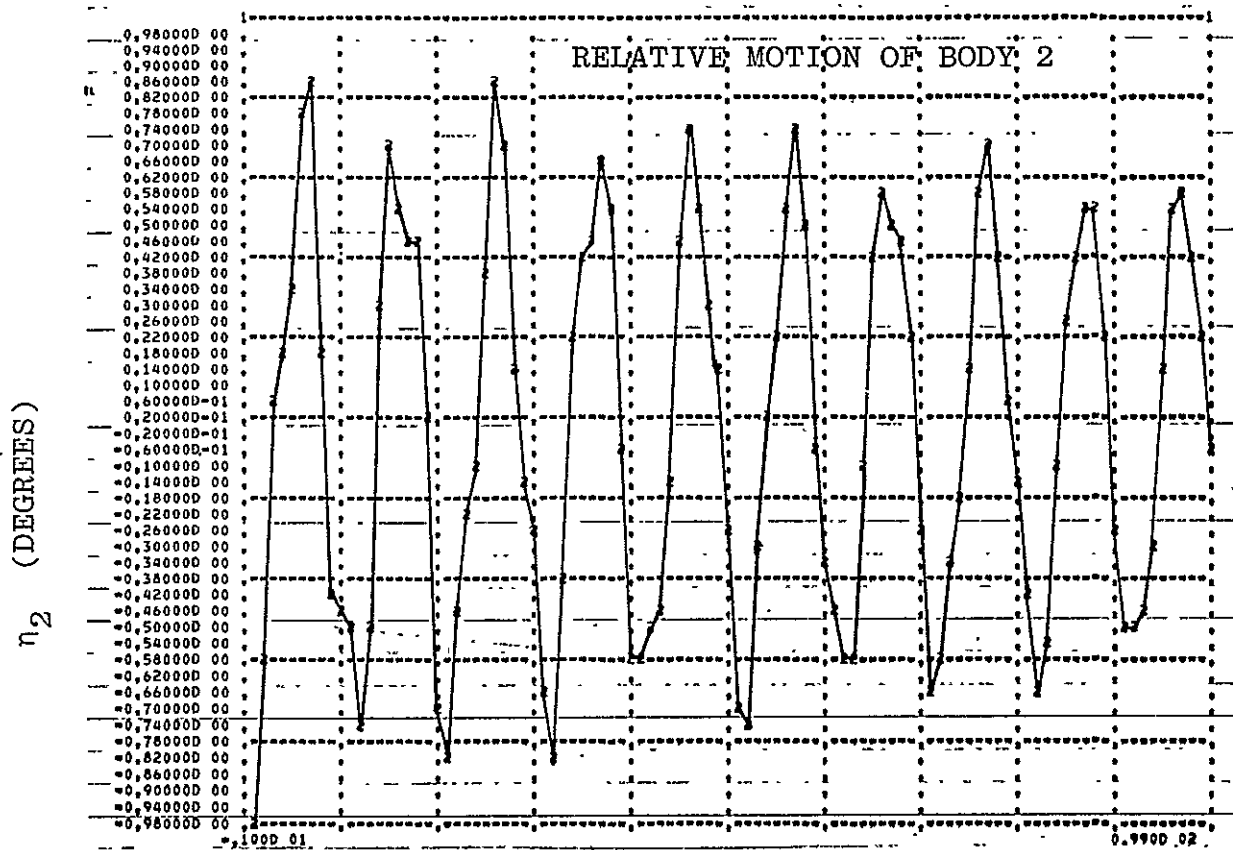


FIGURE 5-12 PARTIAL STATE "LQR" FEEDBACK
 RELATIVE MOTION OF INBOARD AND OUTBOARD
 APPENDAGES

5.4

DISCUSSION

In the previous sub-sections the LQR control technique described is a straight forward approach which is relatively easy to apply once a system is described in the state variable form. Some skill is involved in the selection of weighting factors (Q and R) for the performance index, otherwise the technique is relatively simple for linear, non-stochastic systems.

For the discrete mass and spring model defined here, only the full state variable feedback obtained completely satisfactory results. When solar wing appendage motion gains were reduced to zero, a lightly damped oscillation was obtained for the control torque u_1 -- although the response of the other variables appeared to be unchanged. This raises the question as to how the system would react for a multi-dimensional finite element representation for the solar wings. Feeding back hundreds of signals to a single actuator set seems to be impractical. Representing flexible modes of the solar wings by hybrid coordinates (Reference 5-8) would be a more reasonable approach, where truncation of high frequency or low mass solar wing modes may be accomplished in a selective manner.

The LQR control approach could be expanded in several different directions:

- a. More elements or dimensions as discussed above by modeling appendages from finite element data, which may then be represented in hybrid coordinates (Reference 5-9).

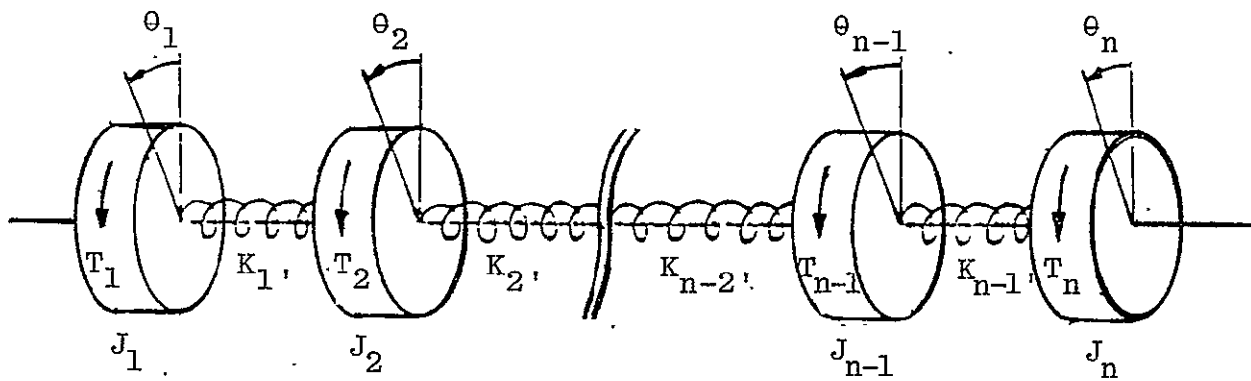


FIGURE 5-13 SINGLE AXIS N-DIMENSIONAL REPRESENTATION OF A LARGE FLEXIBLE VEHICLE

$$\text{where } Q_i = \begin{bmatrix} q_{2i-1} & 0 \\ 0 & 0 \end{bmatrix} \quad (5-25)$$

for $i = 1, k, n$.

The relative magnitudes of q_1 , q_{2k-1} and q_{2n-1} may be selected according to the pointing performance requirements of θ_1 , θ_k and θ_n . If a pointing stability or "jitter" requirement is specified, at say location m , θ_m can be reduced by a high weighting of q_{2m} relative to q_{2m-1} and others.

5.5 REFERENCES

- 5-1 Space Construction Base Buildup Summary, Data Package Attachment to Exhibit A Scope of Work, Request for Quotation 1-7-ED-07552-AP131D, Marshall Space Flight Center, 10 March 1977.
- 5-2 Jennings, J., Definition of Space Base Buildup, Bendix Corporation MT-40,801, 21 October 1977.
- 5-3 Porcelli, G., Attitude Control of Flexible Space Vehicles, AIAA Journal Volume 10, No. 6, June, 1972, PP. 807-812.
- 5-4 Nachmias, S., The Application Of The Hybrid Coordinates Formulation To A Simple Torsional Model, Bendix Corporation MT-40,814, Dec. 12, 1978.

- 5-5 Melsa, J. L., and Schultz, D. G., State Functions and Linear Control Systems, 1967, Mc Graw-Hill.
- 5-6 Kwakernaak, H. and Sivan, R., Linear Optimal Control Systems, 1972, Wiley-Interscience.
- 5-7 Nachmias, S., The Linear Quadratic Regulator (LQR) Approach As Applied To Attitude Control, Bendix Corporation MT-40,812, Nov. 20, 1978.
- 5-8 Likins, P., Dynamics And Control Of Flexible Space Vehicles, Jet Propulsion Laboratory, Technical Report 32-1329, Revision 1, Jan. 15, 1970.
- 5-9 Chichester, F. D., Kaczynski, R. F. and Nachmias, S., Application of Hybrid Coordinate Modelling and Multilevel Control Techniques to a Single Axis Torsional Model, Tenth Annual Pittsburgh Conference on Modelling and Simulation, University of Pittsburgh, April 27, 1979.

SECTION 6

6.0 SIMULATION OF MNA CONTROL

Some findings regarding the mathematical analysis, control system design and simulation of a multivariable Nyquist array (MNA) control method are presented here, as they apply to control and stabilization of a large flexible vehicle.

The mathematical model for the space vehicle (SCB Configuration 1) was obtained using the discrete coordinate modeling method described in Section 2. The model was then simulated on a Systems Engineering Lab's SEL/32 digital computer for dynamic evaluation and control system synthesis.

The model was reconfigured into state space equation form for eigenvalue calculations and control system design. The full-order three-axis model was reduced to three five-body single-axis models to determine the effect of cross-axis coupling on the eigenvalues of the three-axis model. It was determined through eigenvalue assignment, that for control system design purposes, each axis could be independently controlled. Further analysis revealed that symmetry in the torsional axis could simplify the control design effort. This condition does not prevail, however, in either the normal or lateral axis.

Using the symmetric single axis model for the torsional mode, a control system design study was performed using the MNA method and the retallack pole placement procedure. The MNA design method reflects a need for single loop bridged-T compensation when a limited number of measurements are available to the control design. This is due primarily to the location of the lightly damped modes within the control system bandwidth. As the bridged-T compensator is a form of closed loop pole assignment, the remainder of the design study for the torsional axis was performed using the Pole Placement method.

Simulation results for the single axis reduced model and the full order three axis model were identical when the pole shifts were made parallel to the real axis. This type of pole shift is a form of "active damping" and was used successfully to achieve acceptable levels of closed loop system performances. The full scale test results confirm the negligible effects of cross-axis coupling from the torsional axis to the normal and lateral axis.

6.1 CONTROL DESIGN FOR THE Z-AXIS

It was decided at this point in the analysis to concentrate the control design effort on the Z axis of Configuration 1 for two reasons. First, the symmetry assumption detailed above simplified the mathematical model for design and analysis purposes. Since the design methods to be described later are new to the

flexible spacecraft application, a complete understanding of the advantages, disadvantages and limitations of the proposed methods is required before more involved models are used. Secondly, the control system design using the reduced Z axis model can be tested on the full five-body three-axis simulation and compared with the time response of the single axis reduced model simulation. A comparison of these time responses will provide the experience and knowledge necessary to pursue the more difficult X and Y axis designs for this and subsequent SCB configurations.

Using the five-body three-axis model, the transfer matrix $G_5(S)$ was computed using Danielevsky's method (reference 6-1). Several of the ninety transfer functions were plotted using Bode methods to reveal that all flexible modes are located within the control system bandwidth. Design problems related to this condition are detailed in References 6-2 and 6-3. This analysis was repeated for the symmetric Z-axis model with the rigid body dynamics removed. A typical magnitude Bode plot is indicated in Figure 6-1, which shows the modes as they appear in the system bandwidth. The complete set of transfer functions is indicated in Appendix B.

The eigenvalues for the reduced order model (ROM) are:

- a. 0.0
- b. 0.0
- c,d. $-.00500564 \pm j1.00112$
- e,f. $-.00160836 \pm j0.32045$

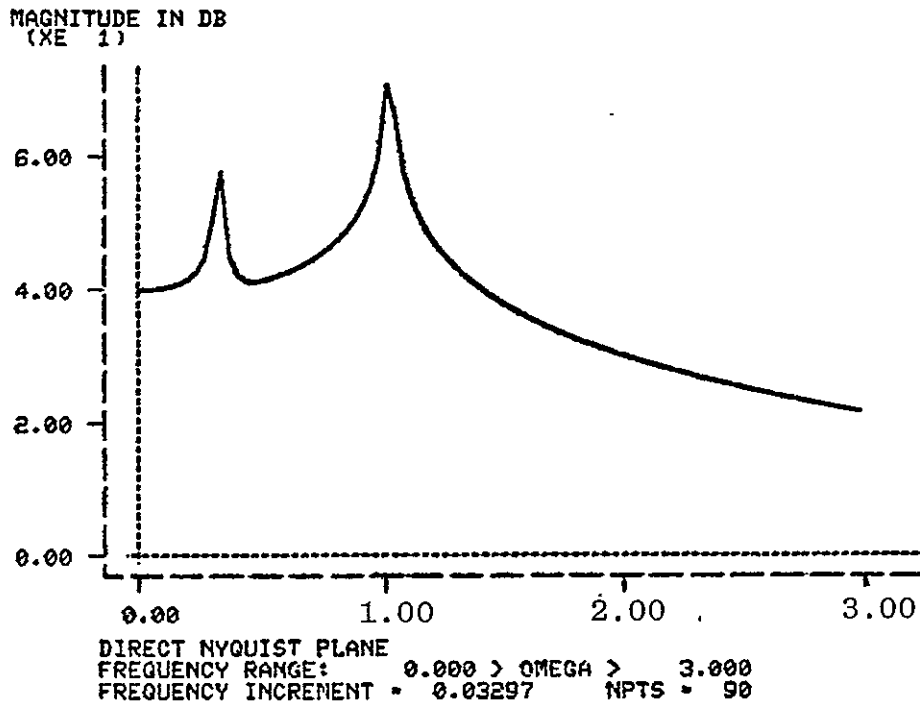


Figure 6-1. A Typical Bode Diagram for the Z Axis

This set corresponds to a denominator form of:

$$s^2 (s^2 + 2\delta_1\omega_1s + \omega_1^2) (s^2 + 2\delta_2\omega_2s + \omega_2^2)$$

where the roots of each quadratic term are:

$$s_1, s_2 = -\delta\omega \pm j\sqrt{\omega^2(1-\delta^2)}$$

For $\delta \ll 1$, $s_1, s_2 \cong -\delta\omega \pm j\omega$ and

$$\omega = \text{Im}(\lambda)$$

$$\delta = \text{Re}(\lambda)/\text{Im}(\lambda)$$

where λ is a complex eigenvalue. With the eigenvalue set above

$$\omega_1 = 1.00112$$

$$\delta_1 = .00500004$$

$$\omega_2 = .32045$$

$$\delta_2 = .00501907$$

The control system design for the ROM Z-axis model will proceed using the MNA method and the Retallack pole placement method. The MNA method will be considered using only ω_1 and ψ_{21} as the controlled outputs with τ_{1Z} and τ_{2Z} as the system inputs. The pole placement method will shift specific eigenvalues to prescribed locations using full state feedback.

6.2 MNA DESIGN FOR ROM Z-AXIS

Using the appropriate transfer functions from Appendix B, a direct Nyquist array (DNA) design was initiated over the frequency range $0 \leq \omega \leq 3.0$ using the technique described in Subsection 3.3. Recent results described in Reference 6-4 for finite frequency Nyquist array designs establish this range as acceptable for design and stability purposes.

For this DNA design the postcompensator matrix was prespecified as the identity matrix with the precompensator matrix selected in accordance with the algorithm in Reference 6-5. The closed loop diagram for this axis with

$$Q(S) = L G(S) K \quad (6-1)$$

representing the forward loop transfer matrix is indicated in Figure 6-2,

where: $G(S)$ = spacecraft vehicle transfer matrix
 L, K = Post- and pre-compensator matrices
 $F(S)$ = Feedback transfer matrix.

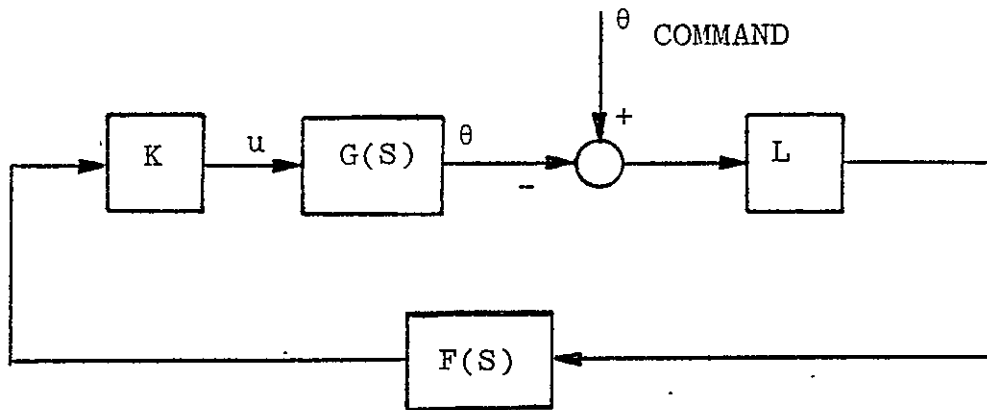


Figure 6-2. Closed Loop Spacecraft Control Diagram

In Reference 6-6, a procedure is described whereby Multivariable Bode diagrams can be obtained from MNA results using Reference 6-7. This procedure has been incorporated into an interactive design suite in Reference 6-8. Results for the ROM Z-axis are presented in Figures 6-3 and 6-4. The dominance levels obtained using equation(3-32) are very small, thus reflecting a decoupled condition as indicated by the virtual coincidence of the envelope curves in the Bode diagrams.

From Figure 6-3, the effect of solar wing interaction on the rigid body dynamics is seen to be negligible. Hence the control in loop 1 may proceed using a rigid body assumption. The dynamics indicated in Figure 6-4 reflect the lightly damped poles at $\omega = .32$ and $\omega = 1.0$ and also indicate the presence of a

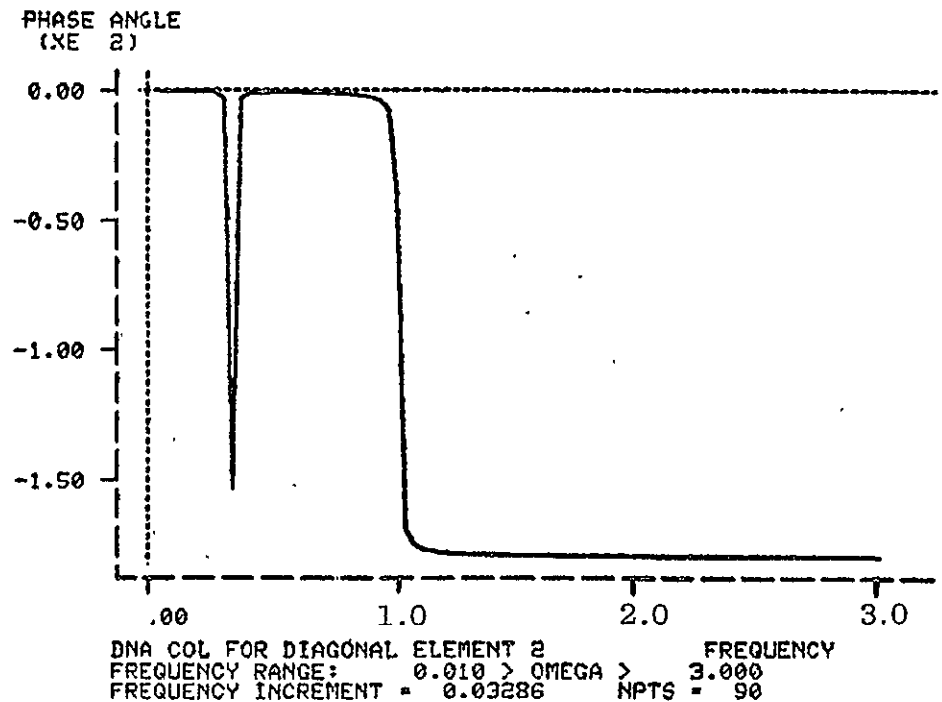
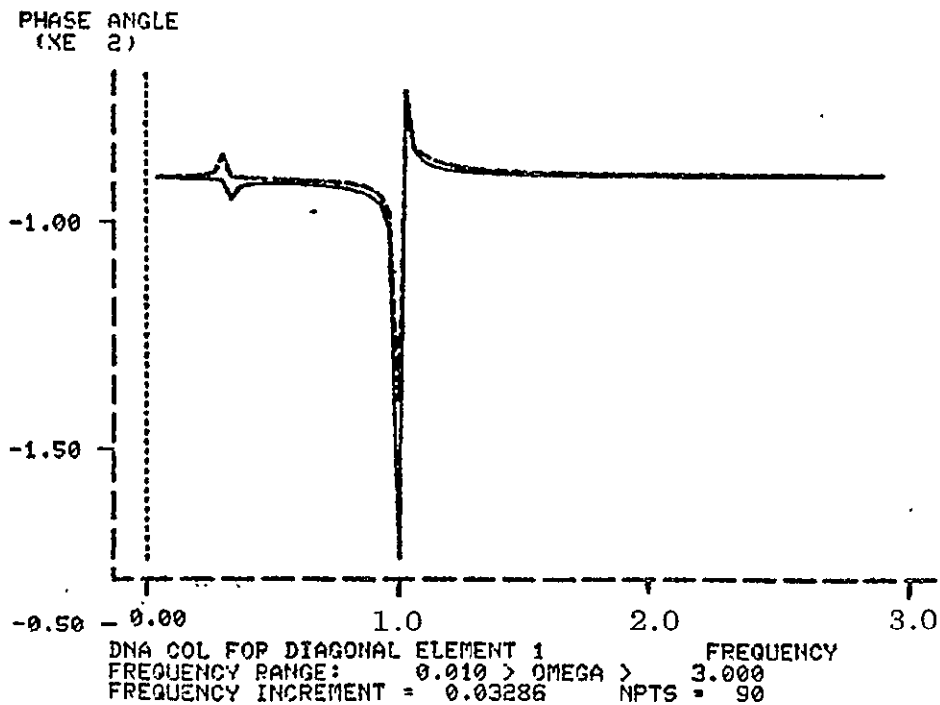
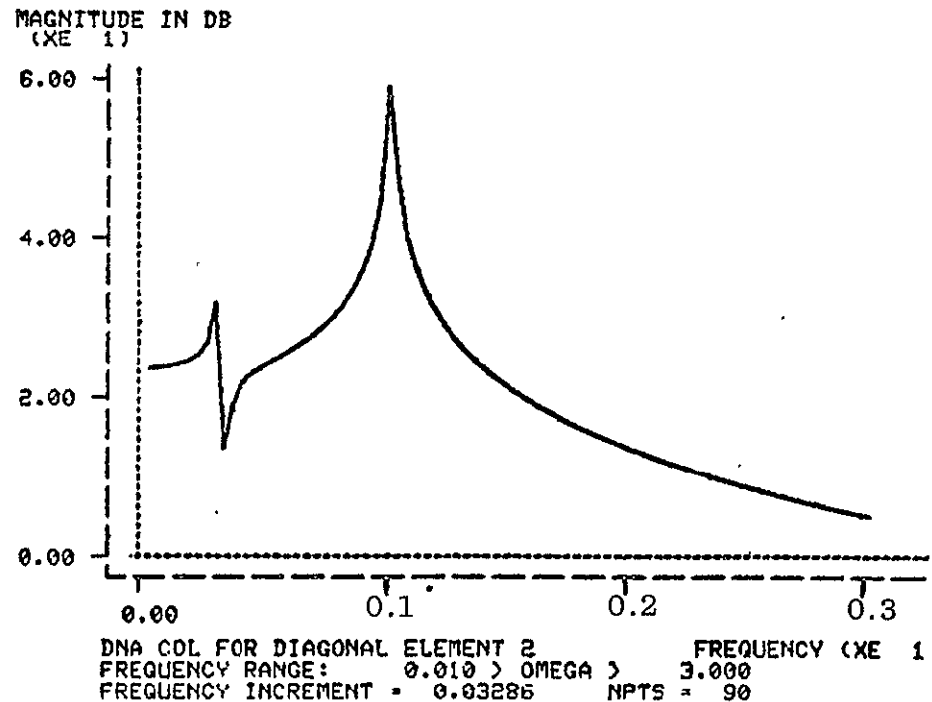
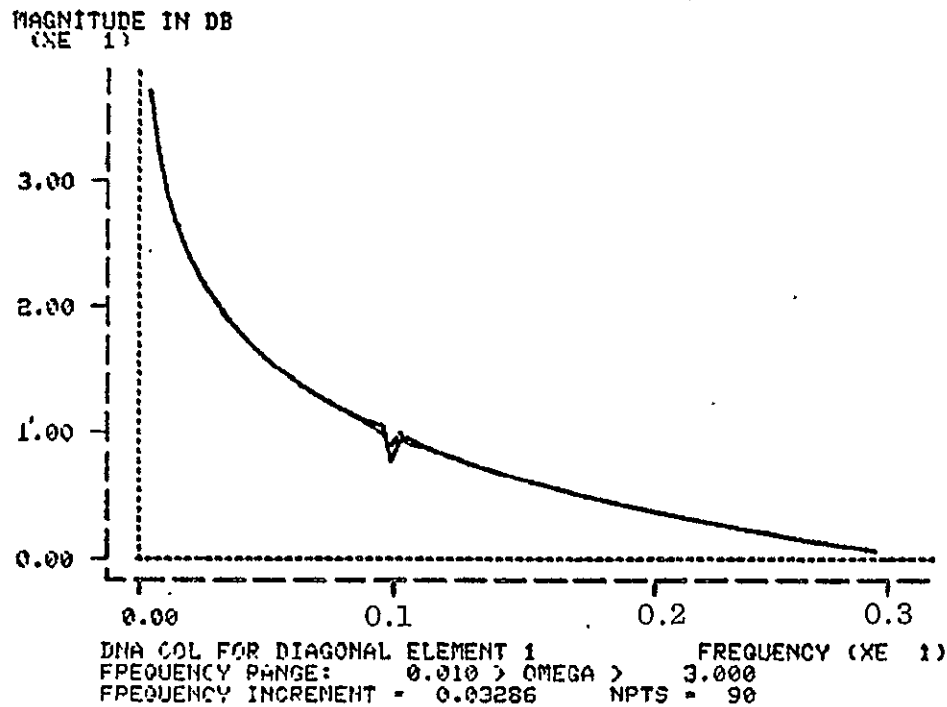


FIGURE 6-3 BODE DIAGRAM LOOP 1 FOR
ROM Z-AXIS

FIGURE 6-4 BODE DIAGRAM LOOP 2 FOR
ROM Z-AXIS


multivariable zero near $\omega = .32$. Since this anti-resonance is sharper than that of the pole at $\omega = .32$, the damping ratio for the zero is less than 0.005.

One possibility for the control of the mode at $\omega = .32$ is to decrease the damping ratio of the pole via a bridged-T compensator and shift the pole location to that of the multivariable zero. This approach would correspond to a pole-zero cancellation in the traditional single-input single-output case. Uncertainties in the dynamic model could, however, have a deleterious effect on the overall system behavior.

Alternatively the poles could be shifted outside the control bandwidth (active stiffening) and/or reduce the pole resonance peaks (active damping). Figure 6-5 indicates the time response of ψ_{21} in the closed loop system without dynamic compensation. In Figure 6-6, the Bode diagram for loop 2 is presented following a bridged-T compensator insertion to increase the damping ratio at $\omega = 1.0$ to $\delta = 0.1$.

$$F_{22}(S) = \frac{S^2 + .01 S + 1.01}{S^2 + .2 S + 1.01} \quad (6-2)$$

Figure 6-7 indicates the closed loop time response for $\psi_{21}(t)$ using (6-2). Retaining the pole at $\omega = 1.0$ has the effect of reducing the impact of the resonance at $\omega = 0.32$ as it will appear principally as an envelope modulation in the time response.

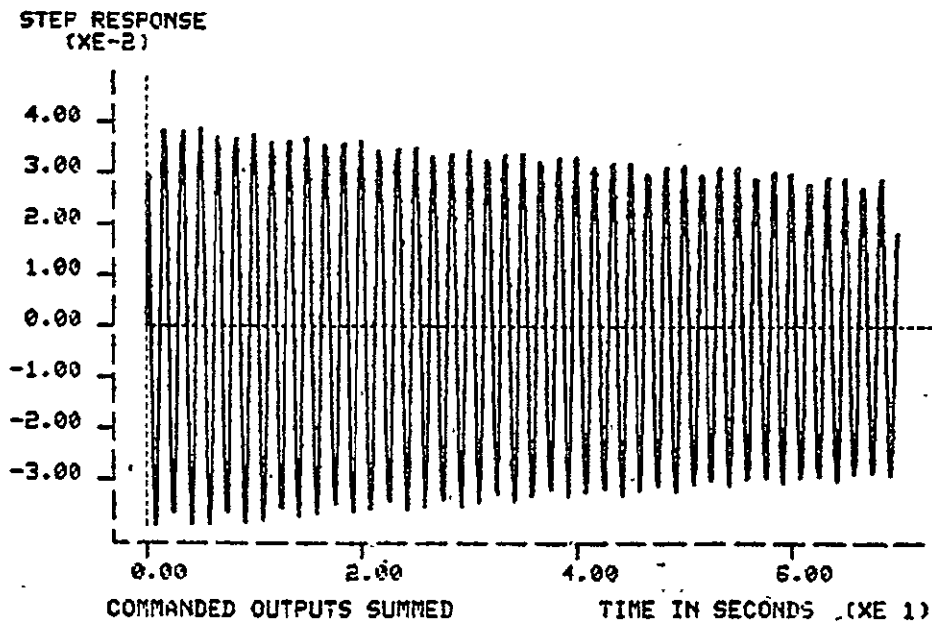

FIGUR 6-5 CLOSED LOOP TIME RESPONSE FOR ψ_{21} WITH NO DYNAMIC COMPENSATION.

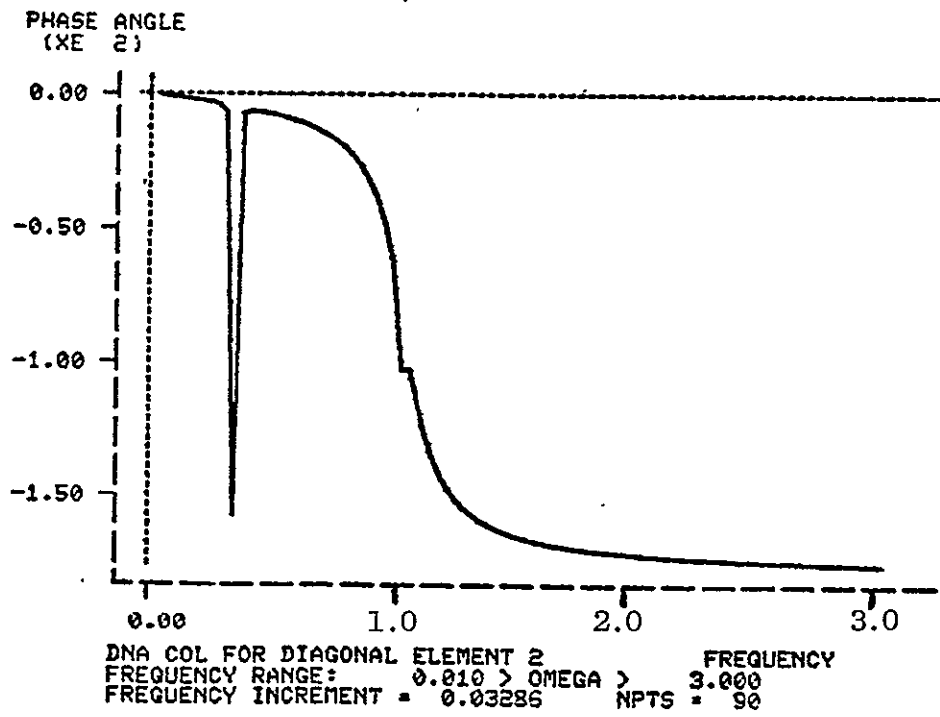
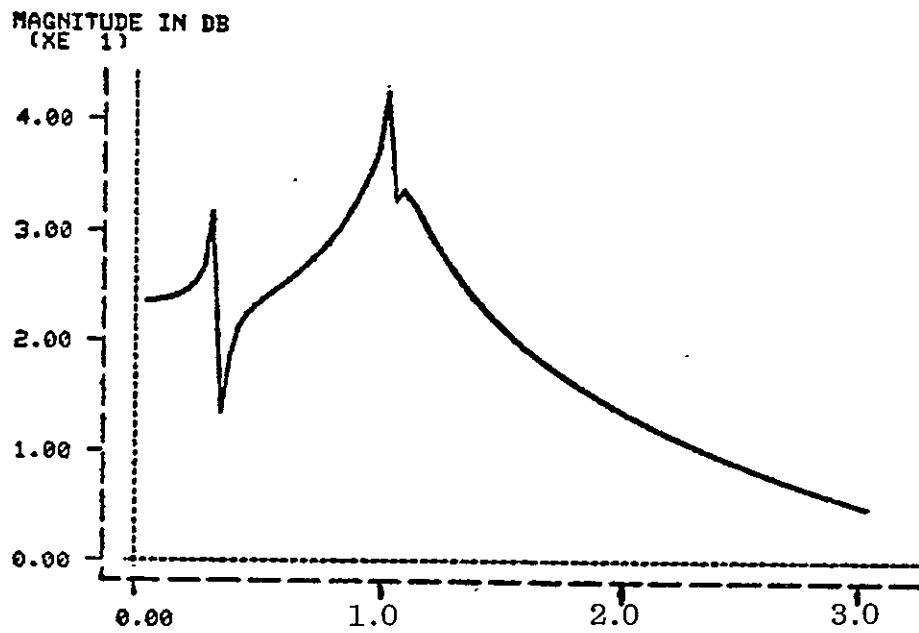


FIGURE 6-6 BODE DIAGRAM LOOP 2 WITH BRIDGED-T COMPENSATOR INSERTED

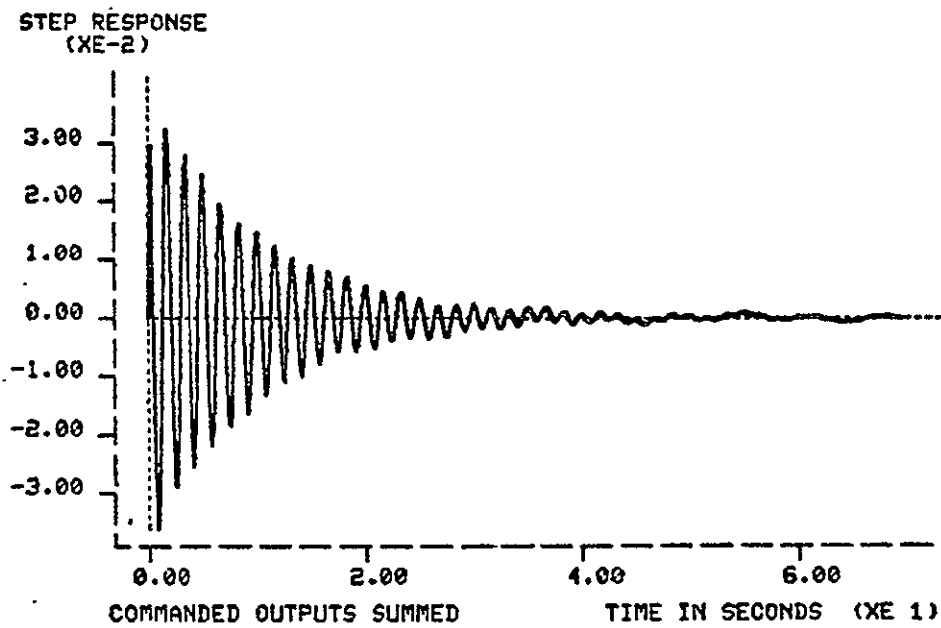


FIGURE 6-7 CLOSED LOOP ψ_{21} TIME RESPONSE FOR COMPENSATED SYSTEM

To examine the shift in frequency of the pole at $\omega = 1.0$, a bridged-T compensator was placed in loop 2 to increase the damping ratio to $\delta = 0.1$ and simultaneously shift the resonance to $\omega = 2.0$. This is equivalent to placing a complex zero pair at $\omega = 1.0$ and a complex pole pair at $\omega = 2.0$. The Bode diagram for this case is indicated in Figure 6-8 with the corresponding closed loop time response presented in Figure 6-9. Note that the zero placement removes the impact of the pole at $\omega = 1.0$ but increases the effect of the resonance at $\omega = .32$. This latter effect is due to the pole relocation at a higher frequency; i.e., system gain is effectively reduced by 50%. To recover the effect of Figure 6-7 the loop gain should be doubled. Alternatively, pole shifts in the resonance at $\omega = .32$ could be used. However, this would ultimately require a fourth order compensator for $f_{33}(S)$ in the closed loop control.

The above analysis and design synthesis for the ROM Z-axis model demonstrates the utility of the MNA method in the design of controls for flexible spacecraft. At this point, it was decided to postpone further design efforts using MNA procedures to examine the potential of the Retallack pole placement method.

6.3 RETALLACK POLE PLACEMENT FOR ROM Z-AXIS

The dyadic pole placement technique developed by Simon and Mitter (Reference 6-9) and further refined by Retallack and MacFarlane (Reference 6-10) utilizes the

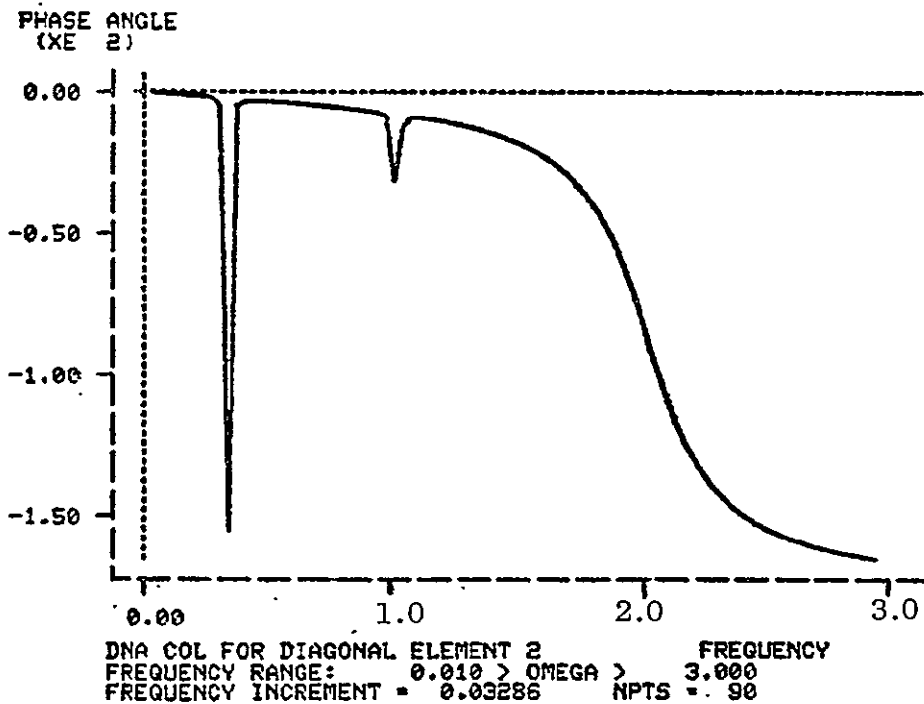
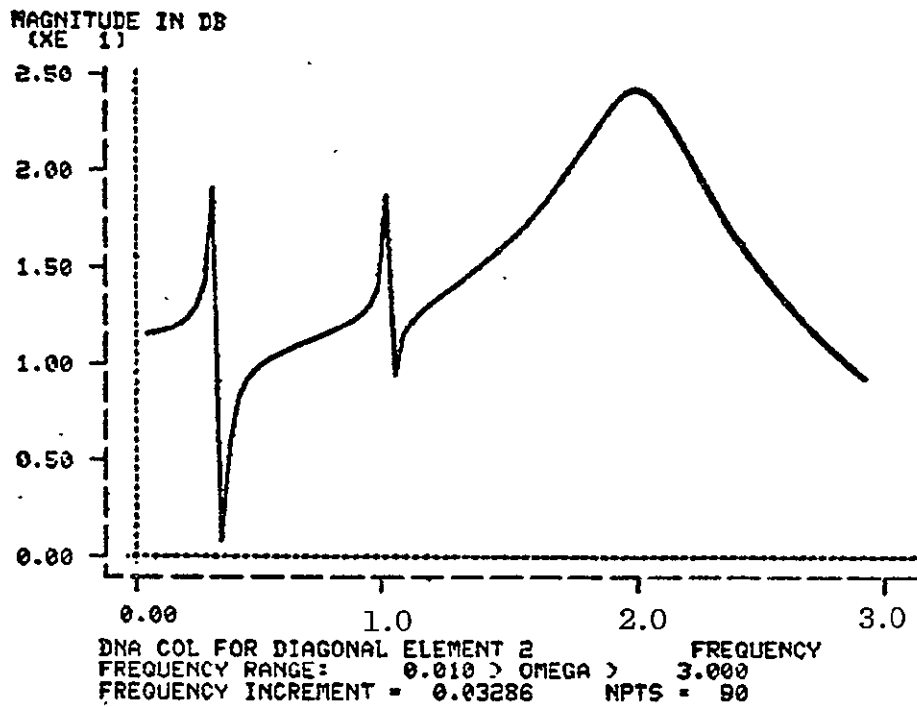


FIGURE 6-8 BODE PLOT FOR LOOP 2 WITH SIMULTANEOUS
 FREQUENCY AND DAMPING RATIO SHIFT OF POLE
 AT $\omega=1.0$.

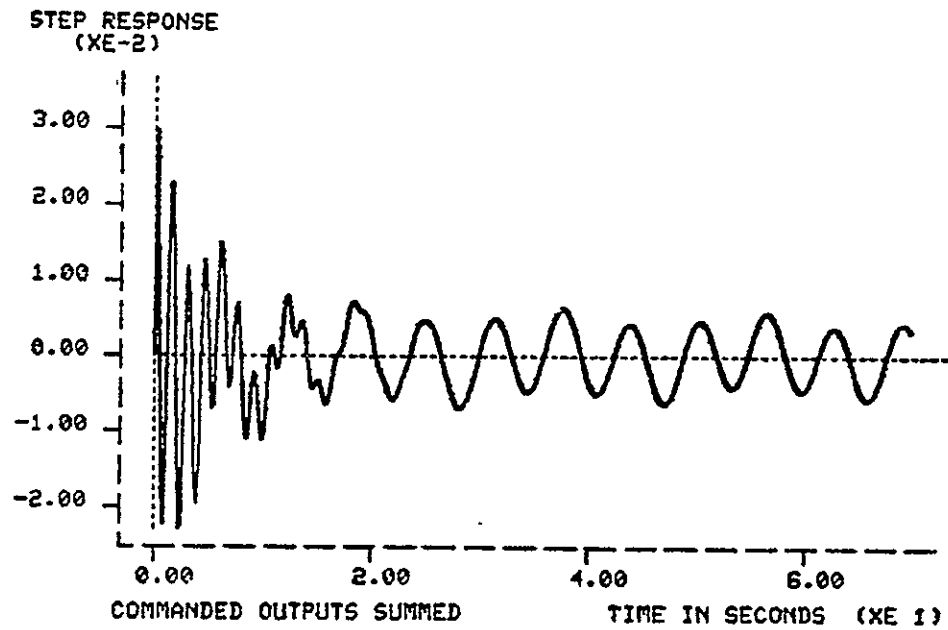


FIGURE 6-9 CLOSED LOOP TIME RESPONSE FOR ψ_{21}

model structure of a linear system to give the designer direct control over the movement of given system modes to desired closed loop locations. Unlike other methods, the Retallack algorithm is a state feedback procedure which allows for the direct assignment of specific open loop poles to specific closed loop locations. This method is particularly attractive from a design viewpoint whenever the open loop poles can be directly associated with specific parts of the physical system. In this way only those poles directly associated with the subsystem will be shifted.

Let λ_j ($j = 1, \dots, n$) represent the open loop poles of the system and let ρ_i ($i = 1, \dots, n$) be the desired closed loop set. Several algorithms are presently available to shift the eigenvalue set $\{\lambda_j\}$ to the desired set $\{\rho_i\}$. However, there is no guarantee that any particular eigenvalue λ_j will be moved to a specific location ρ_i . Without this eigenvalue location assignment flexibility, the resulting control in light of sensor and/or actuator failures could result in very unsatisfactory performance.

Given the dynamic system

$$\dot{\mathbf{x}} = \mathbf{Ax} + \mathbf{Bu} \quad (6-3)$$

and the control law of the form

$$u(t) = r - \mathbf{Kx} \quad (6-4)$$

where r is the set point control, the eigenvalues $\{\rho_i\}$ of the resulting closed loop system

$$\dot{x} = (A-BK) x + Br \quad (6-5)$$

are related to the open loop eigenvalue (λ_j) by the Hsu-Chen equation (Reference 6-11)

$$\left[I_n - (SI_n - A)^{-1} BK \right] = \frac{\prod_{i=1}^n (S-\rho_i)}{\prod_{j=1}^n (S-\lambda_j)} \quad (6-6)$$

The Jordan Cononical form for A is given by:

$$\Lambda = U^{-1} AU \quad (6-7)$$

where U is the modal matrix for A . Let $(\lambda_1, \lambda_2, \dots, \lambda_p)$ $p \leq n$ be the open loop poles to be shifted and define the modal controller K using the unity rank dyadic product as

$$K = f d^T V \quad (6-8)$$

where f is an m vector, d is a p vector and V contains the p rows of U^{-1} corresponding to $(\lambda_1, \dots, \lambda_p)$.

Using (6-8), Retallack reduces (6-6) to

$$1+d^T (SI_p - \Lambda)^{-1} \beta = \frac{\prod_{i=1}^p (S-\rho_i)}{\prod_{j=1}^p (S-\lambda_j)} \quad (6-9)$$

where

$$\beta = VBF \quad (6-10)$$

The remaining open loop poles ($\lambda_{p+1}, \dots, \lambda_p$) remain unchanged under dyadic feedback.

To overcome some of the numerical difficulties associated with the computation of the modal controller when clustered poles appear near the imaginary axis (Reference 6-12), the system in (6-3) is transformed to the Luenberger canonical Form (Reference 6-13),

$$\dot{\hat{w}} = \hat{A}w + \hat{B}u; \quad (6-11)$$

where $w = U^{-1}x$ and

$$\hat{A} = U^{-1}AU \quad (6-12)$$

$$\hat{B} = U^{-1}B \quad (6-13)$$

An efficient algorithm to realize this transformation is presented in Reference 6-14.

Since the eigenvalues of $(\hat{A} - \hat{B}\hat{K})$ are identical to those of $A - BK$, the pole placement process can be accomplished in the closed-loop system of (6-11) rather than in the closed-loop system in (6-3). Once the gain matrix K has been determined for the canonical system, the desired modal controller K for the original system (6-3) is given by

$$K = \hat{K}U^{-1} \quad (6-14)$$

For the ROM Z-axis model provided in Appendix B the system equations can be partitioned into two distinct sets: one for the rigid body dynamics and one

for the flexible appendage. The open loop eigenvalue sets are, respectively,

Set 1: 0.0, 0.0

Set 2: $-.00500564 \pm j 1.00112$
 $-.00160836 \pm j 0.320495$

Here ψ_1 was added to the state vector to produce the second pole at the origin. The state variables are then ω_1 , ω_{21} , ω_{42} , ψ_{21} , ψ_{42} , and ψ_1 with controls τ_{1Z} and τ_{2Z} . For the five-body single-axis control implementation τ_{3Z} is set equal to τ_{2Z} since symmetry was used to generate the Z-axis ROM.

The rigid body eigenvalues were shifted to the following positions

a1. $-.1, -.1$
b1. $-.2, -.2$
c1. $-.3, -.3$
d1. $-.7, -.7$

while the modes corresponding to the solar wing were shifted to

a2. $-.1 \pm j 1.00112$
 $-.1 \pm j 0.320495$
b2. $-.2 \pm j 1.00112$
 $-.2 \pm j 0.320495$
c2. $-.7 \pm j 1.00112$
 $-.7 \pm j 0.320495$

The resulting control laws were implemented in a time domain simulation of the Z-axis reduced order model with $\psi_1(t_0) = .02$ radians. Since all velocities, $\dot{\psi}_{21}(t_0)$ and $\dot{\psi}_{42}(t_0)$ are zero, this condition corresponds to an equilibrium point with all masses displaced .02 radians from the desired equilibrium point. In each case, the control restored the vehicle to the desired location in the manner indicated by the closed loop eigenvalue characteristics. Table 6-1 compares several of the important characteristics of the simulator responses.

The main purpose of this study was to demonstrate that the Retallack Pole Placement method can be effectively used in the control of flexible space vehicles of the SCB configuration. Several observations resulting from this effort are indicated below:

1. As the eigenvalues of the rigid body are moved further into the left half plane with fixed solar wing eigenvalues, the peak to peak excursions of ψ_{21} and ψ_{42} increase appreciably with little variation in the time to steady state.

2. For fixed rigid body eigenvalues and variable solar wing eigenvalues, the time to steady state decreases in proportion to the rate of increase in the damping ratio with small variations in the peak to peak excursions of ψ_{21} and ψ_{42} .

TABLE 6-1 CLOSED LOOP RESPONSE

$$\psi_1(0) = 0.02$$

EIGENVALUE SET	FIGURE NUMBERS	MAX $\left \tau_{1Z} \right $	MAX $\left \tau_{2Z} \right $	TIME TO STEADY STATE AND PEAK VALUE					
				ψ_{1i}		ψ_{21}		ψ_{42}	
				SECONDS	RADIANS	SECONDS	RADIANS	SECONDS	RADIANS
a_1, a_2	---	53.7	0.320	50.0	0.02	25.0	0.00050	25.0	0.0016
b_1, a_2	---	214.82	1.112	29.0	0.02	30.0	0.0021	24.0	0.0047
c_1, a_2	---	483.35	2.025	20.0	0.02	36.0	0.0041	30.0	0.0079
a_1, b_2	---	53.7	0.461	50.0	0.02	21.0	0.00085	25.0	0.0017
b_1, b_2	---	214.82	1.4518	29.0	0.02	25.0	0.0026	22.0	0.0051
c_1, b_2	6-10 to 6-14	483.4	2.717	17.0	0.02	25.0	0.0051	17.0	0.0088
d_1, b_2	6-15 to 6-19	2631.6	9.071	8.0	0.02	18.5	0.0171	18.5	0.0218
d_1, c_2	6-20 to 6-24	2631.6	30.637	8.0	0.02	13.0	0.0207	12.0	0.0303

6-20

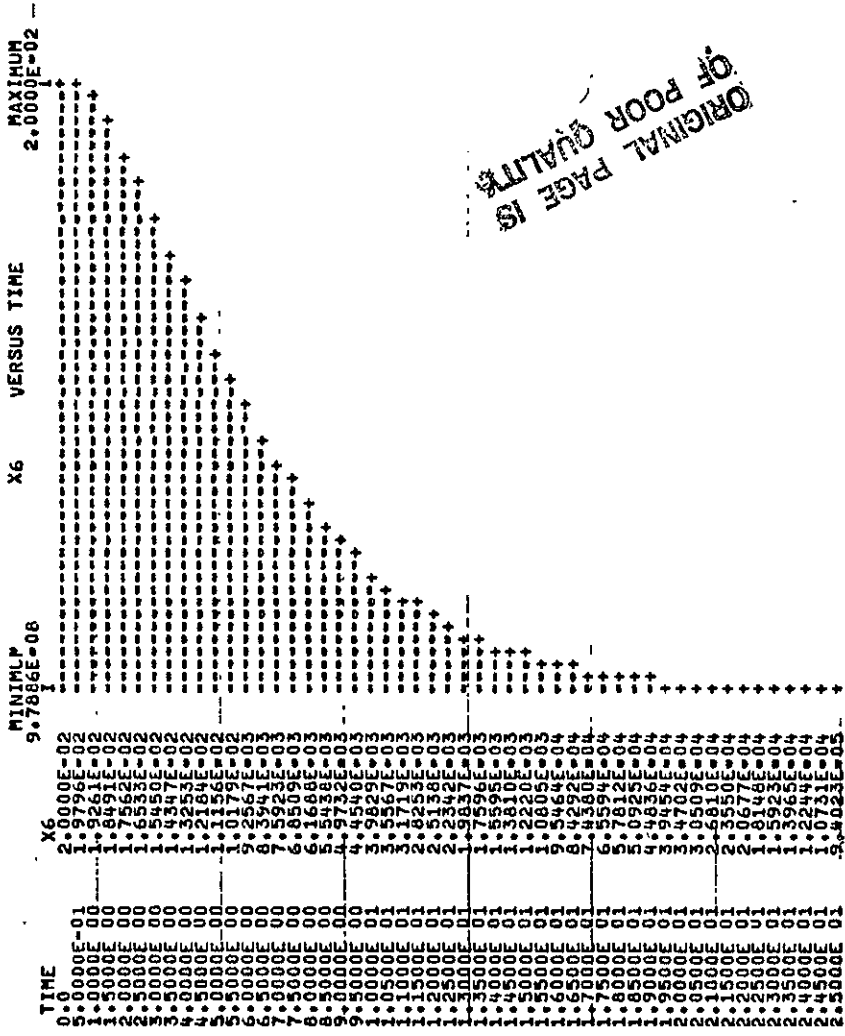


FIGURE 6-10 ANGULAR POSITION BODY 1

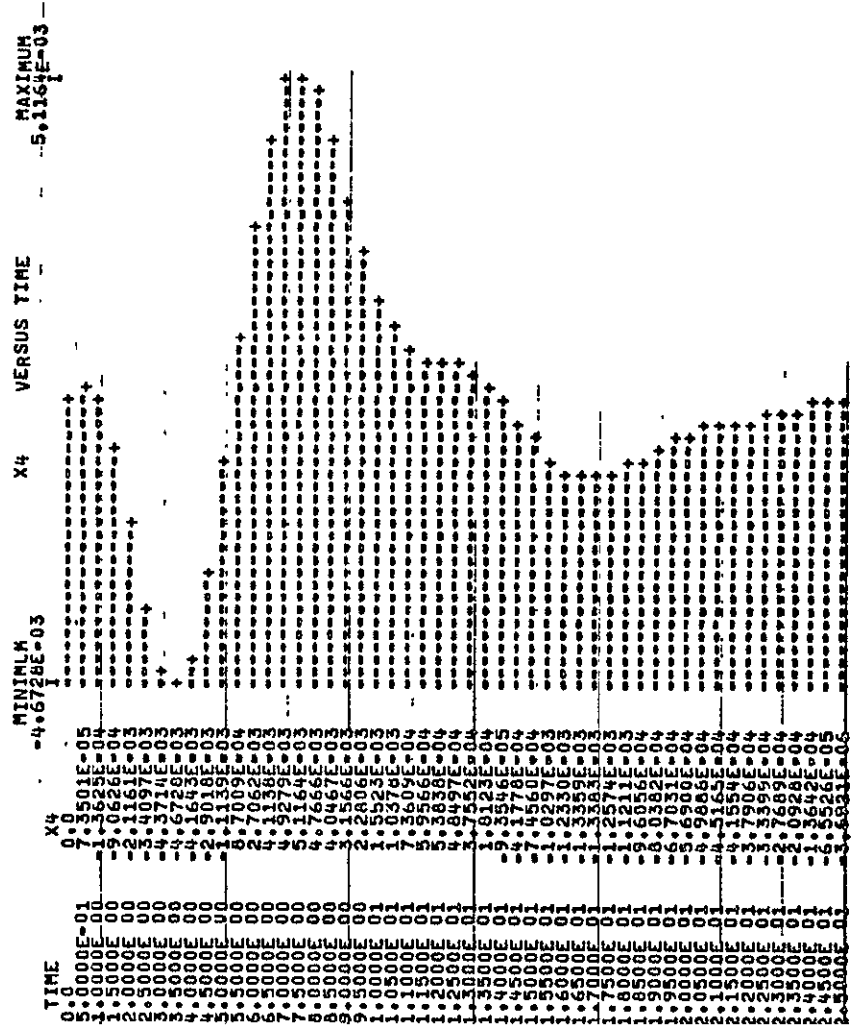


FIGURE 6-11 RELATIVE ANGULAR POSITION BODY 2

FIGURE 6-12 RELATIVE ANGULAR POSITION BODY 4



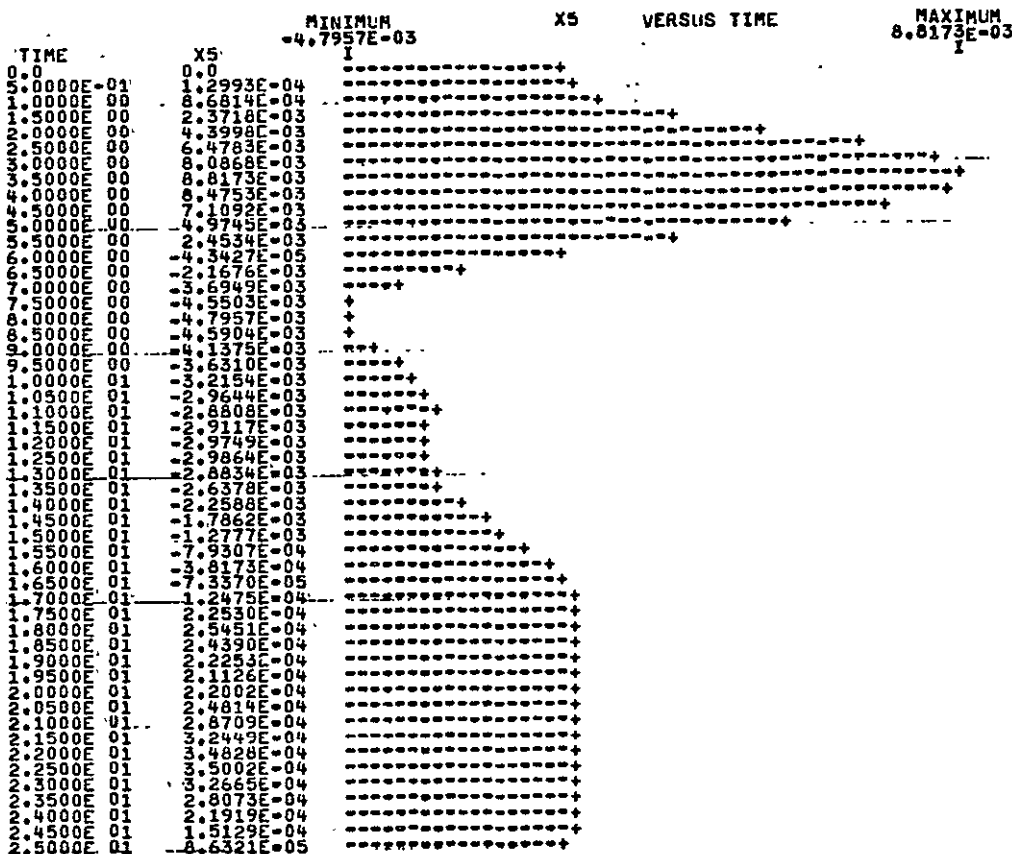


FIGURE 6-13 CONTROL TORQUE BODY 1

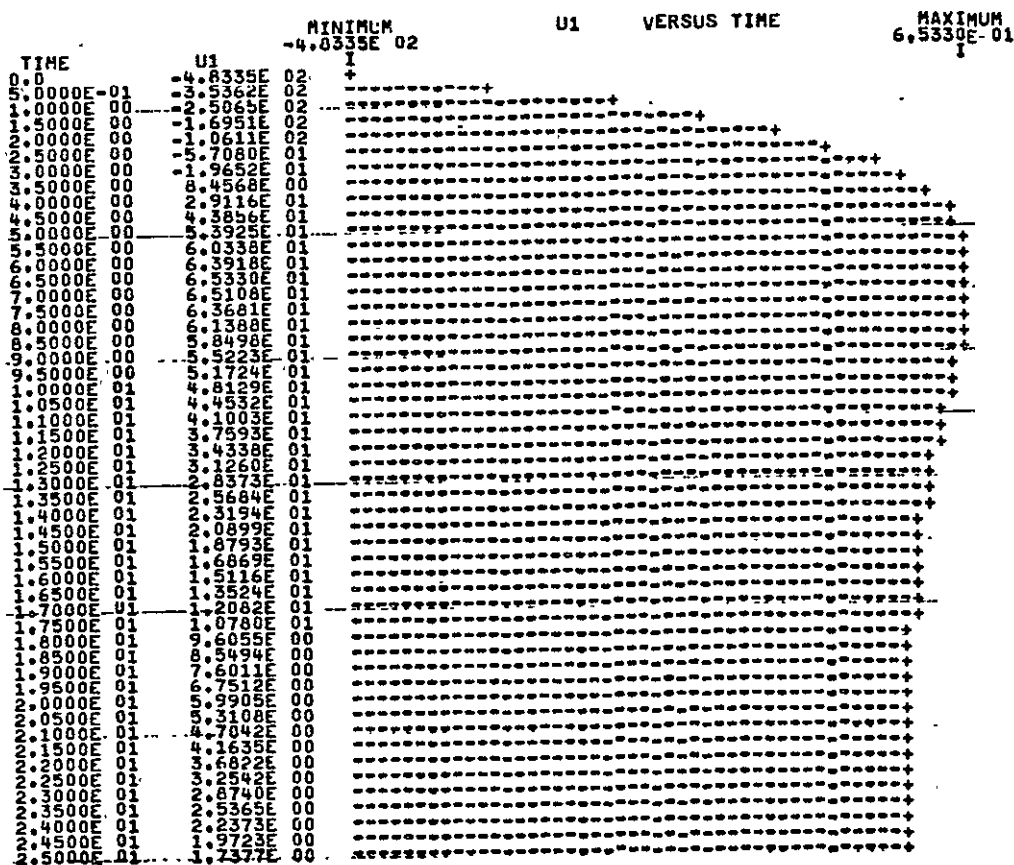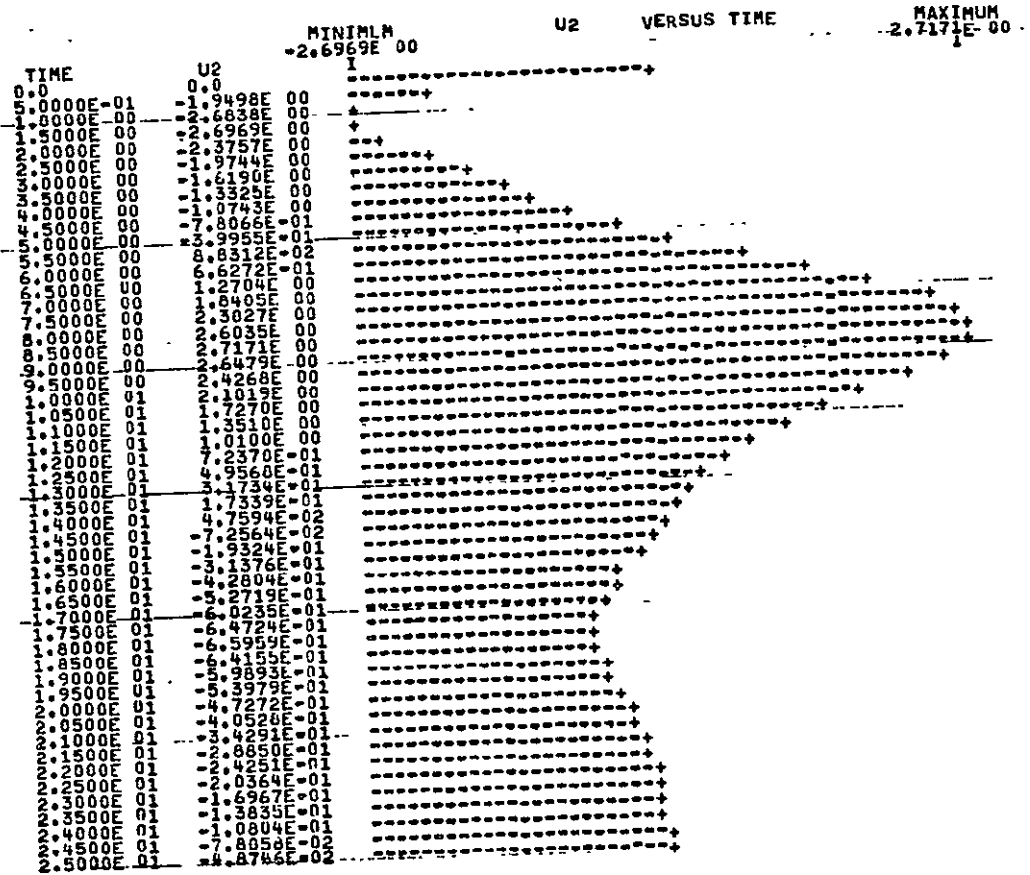

THIS PAGE IS
OF POOR QUALITY

FIGURE 6-14 CONTROL TORQUE BODY 2



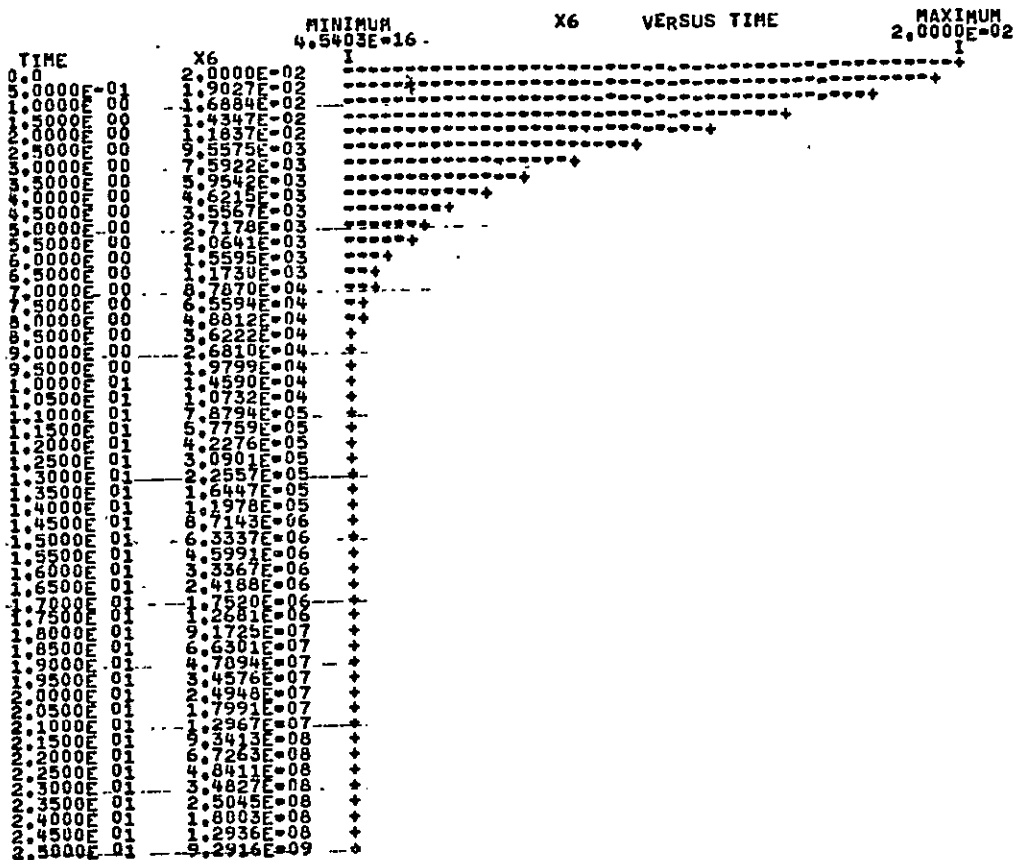


FIGURE 6-15 ANGULAR POSITION BODY 1

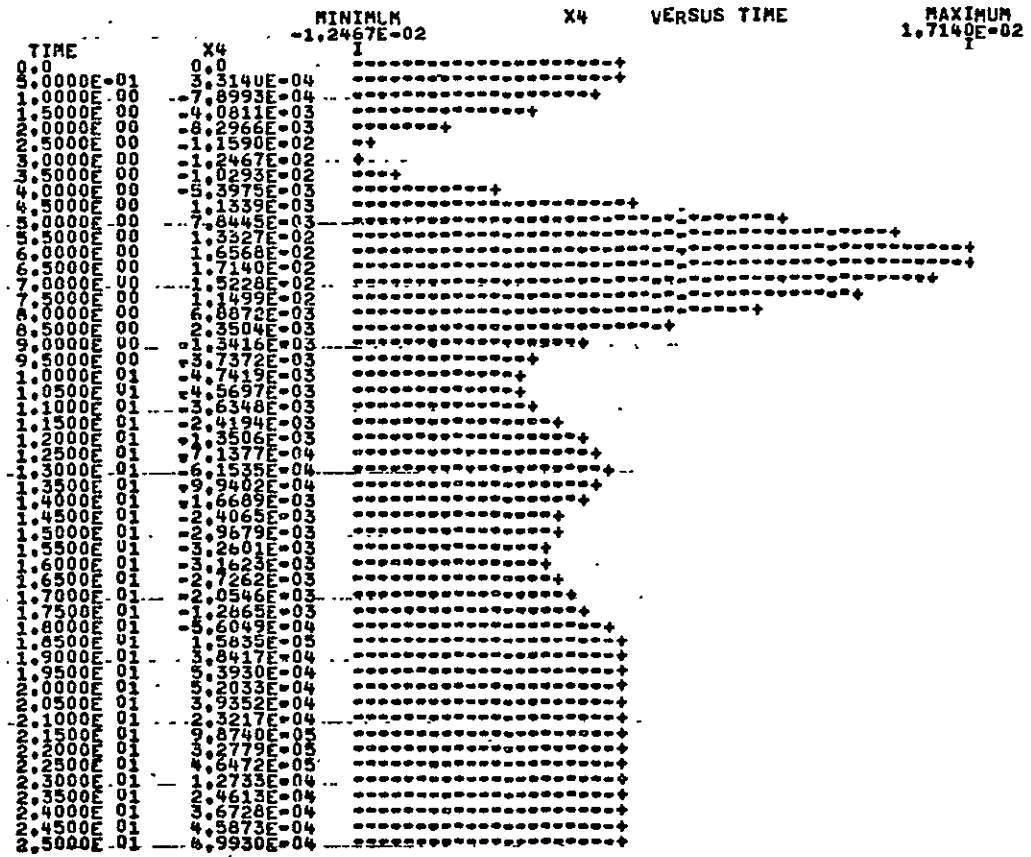


FIGURE 6-16 RELATIVE ANGULAR POSITION BODY 2

FIGURE 6-17 RELATIVE ANGULAR POSITION BODY 4

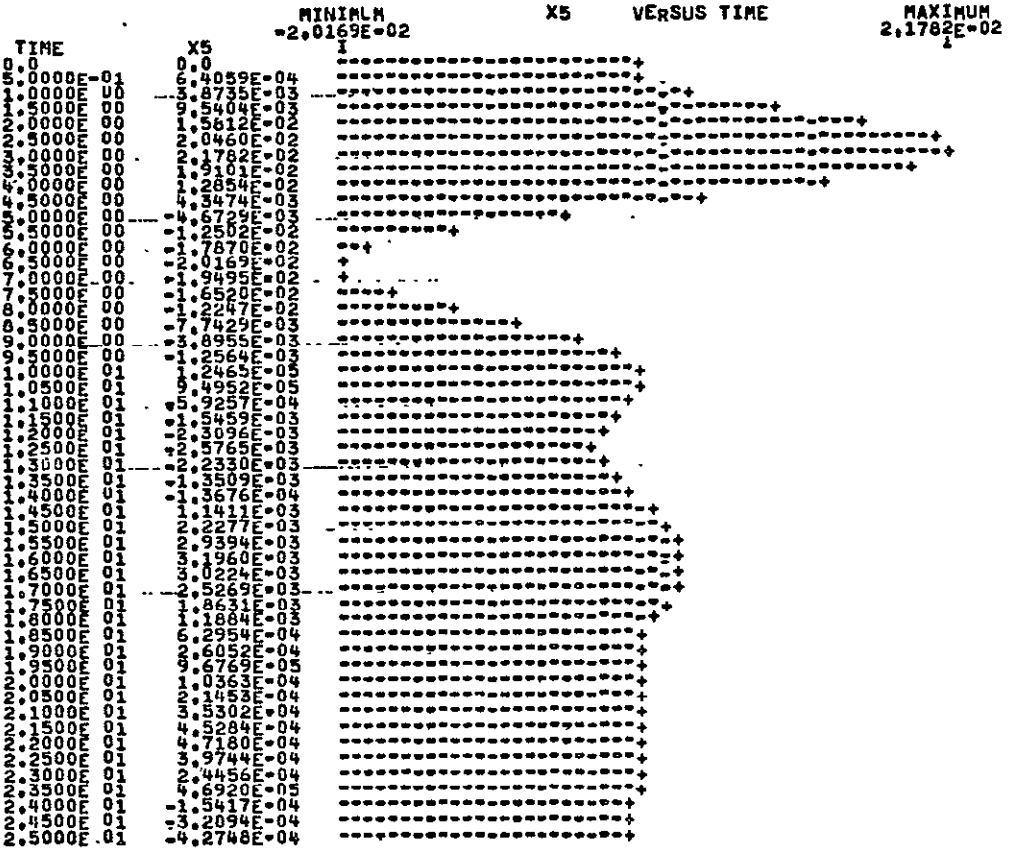
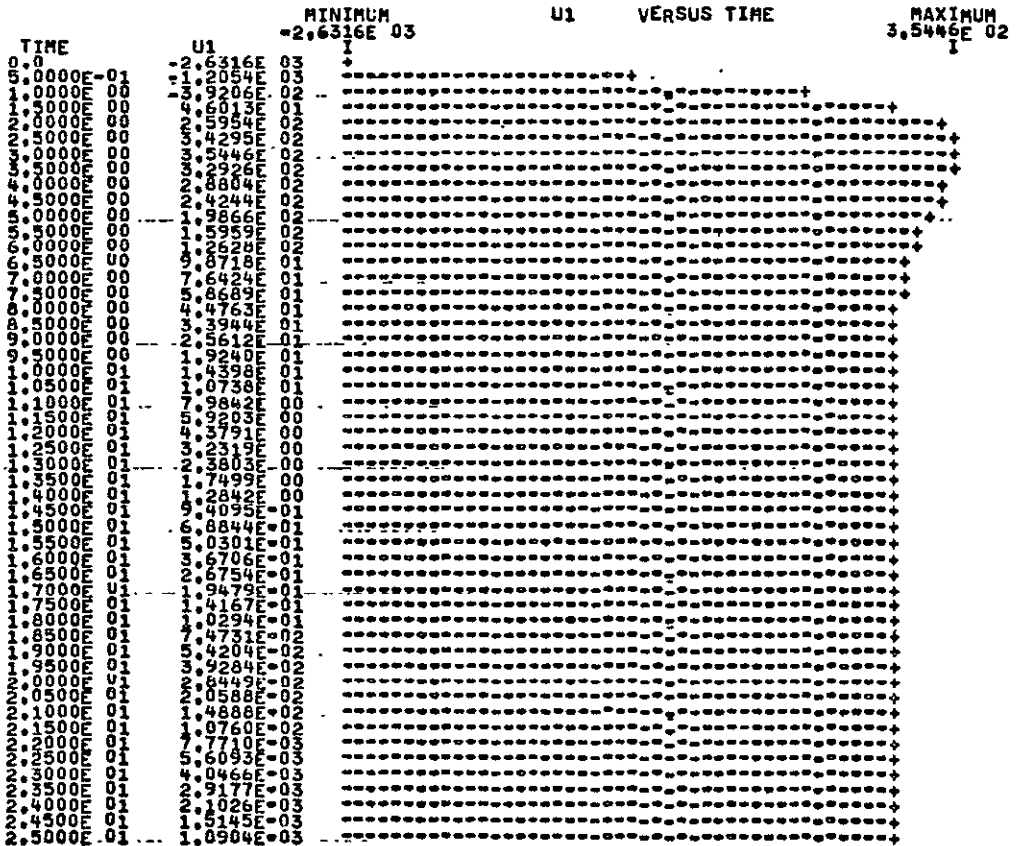


FIGURE 6-18 CONTROL TORQUE BODY 1



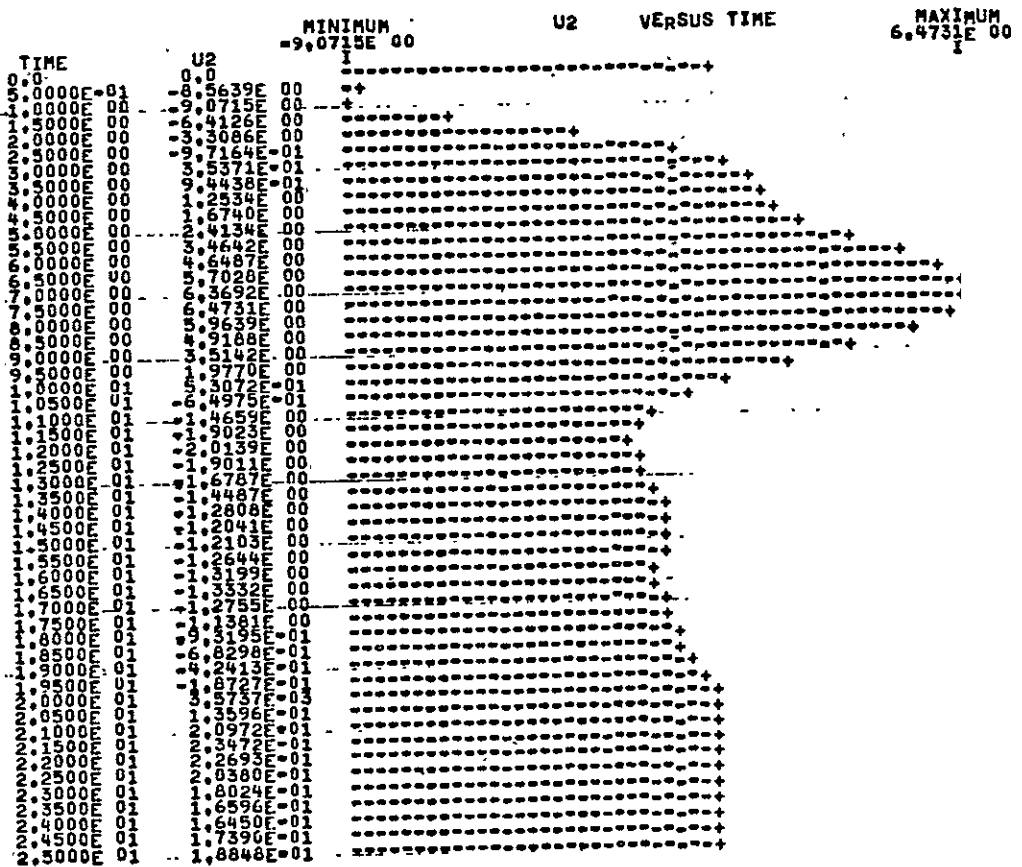


FIGURE 6-19 CONTROL TORQUE BODY 2

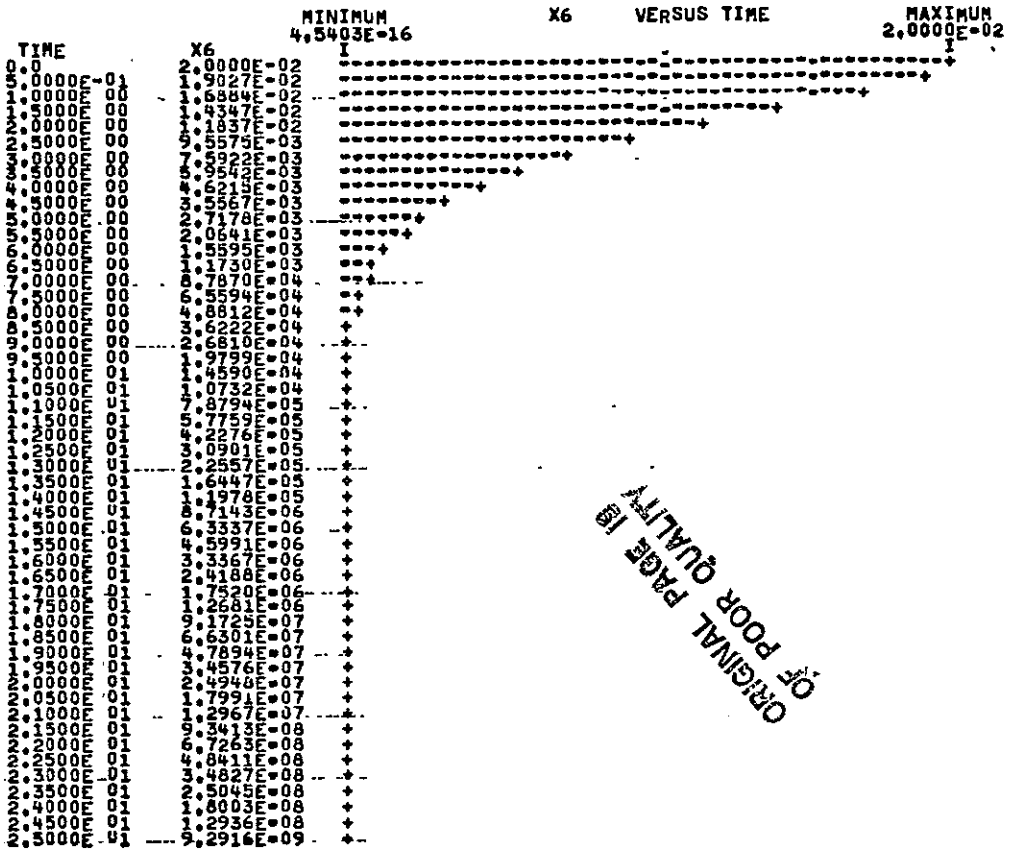


FIGURE 6-20 ANGULAR POSITION BODY 1

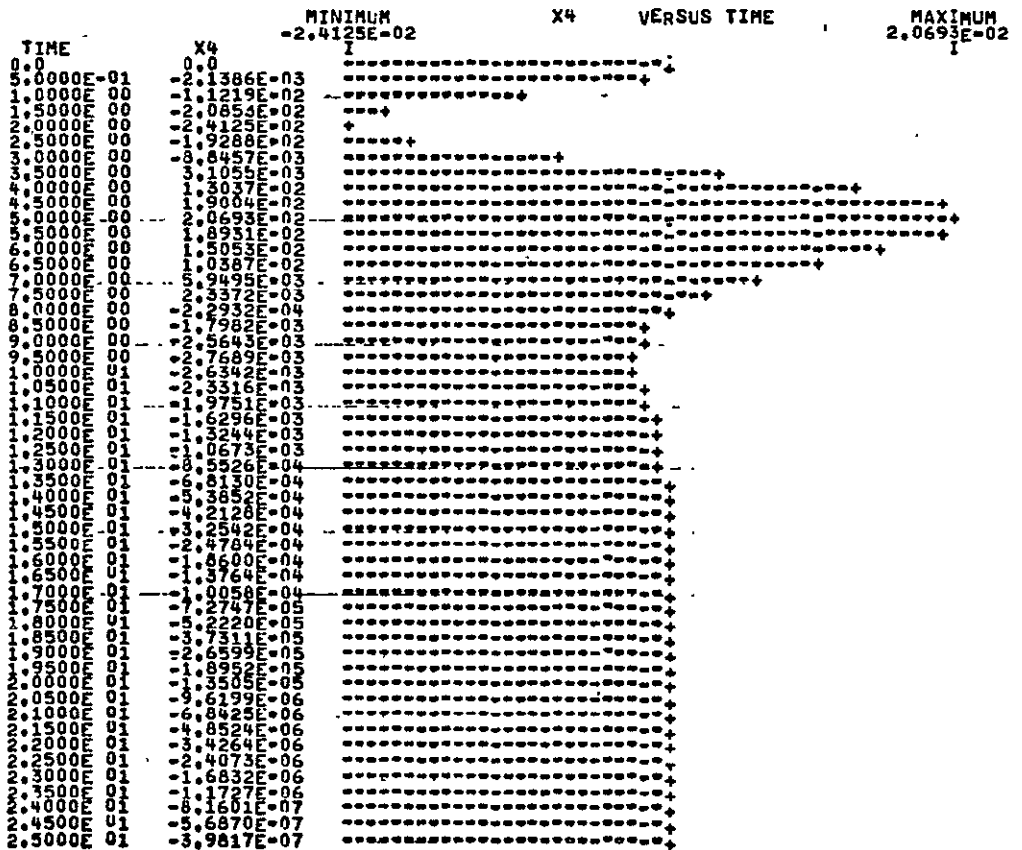


FIGURE 6-21 RELATIVE ANGULAR POSITION BODY 2

FIGURE 6-22 RELATIVE ANGULAR POSITION BODY 4


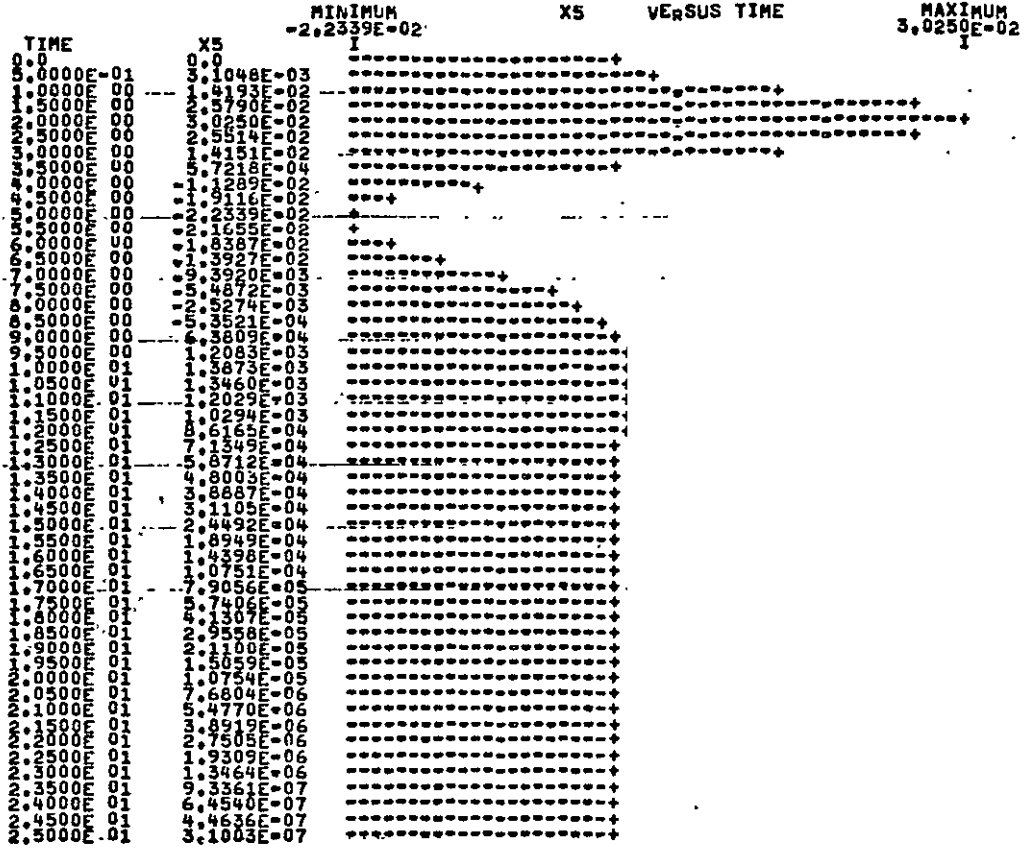


FIGURE 6-23 CONTROL TORQUE BODY 1

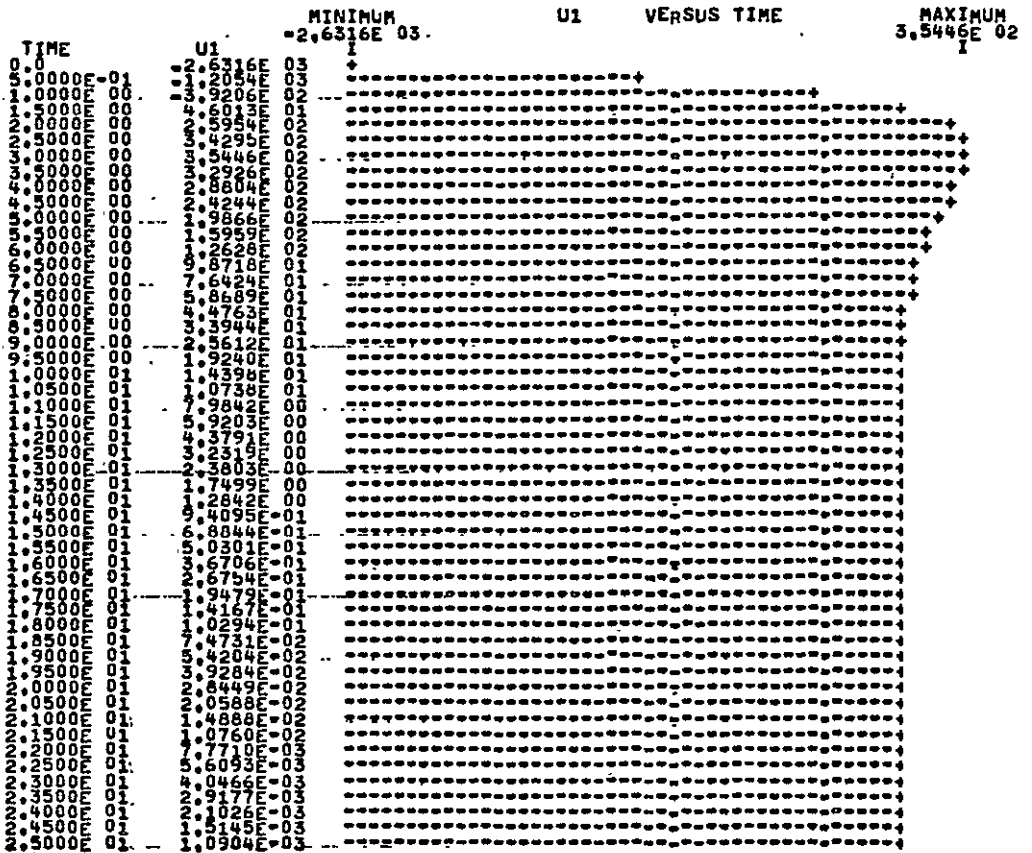

3. The maximum absolute value of τ_{1Z} increases exponentially as the rigid body dynamics are moved farther into the left half plane. See Figure 6-25.

4. The maximum absolute value of τ_{2Z} is proportional to the peak to peak excursions in the state variables associated with the solar wings. From Table 6-2 the feedback gains increase significantly as the real part of the eigenvalues increase. Also the rate of increase in the gains associated with ψ_{21} and ψ_{42} is greater than the rate of increase in the gains associated with ω_{21} and ω_{42} as $\text{Re}(\lambda)$ increases. The significance of this will appear when sensor failure studies are undertaken.

The above analysis relates to the time domain simulation of the Z axis reduced order model. Application of the control laws developed above were applied to the full scale five-body three-axis simulation.

These results are provided in Figures 6-26 through 6-30 for eigenvalue sets $\bar{c}1$ and $b2$ (corresponding to Figures 6-10 to 6-14 of the ROM). A comparison of the simulations for the full order model (FOM) with the simulations of the Z-axis reduced order model (ROM) demonstrates the effectiveness of the design method and the validity of the model reduction procedure.

The simulation results for the FOM for the other eigenvalue sets obtained using the ROM control also showed excellent comparison with the ROM simulation results.

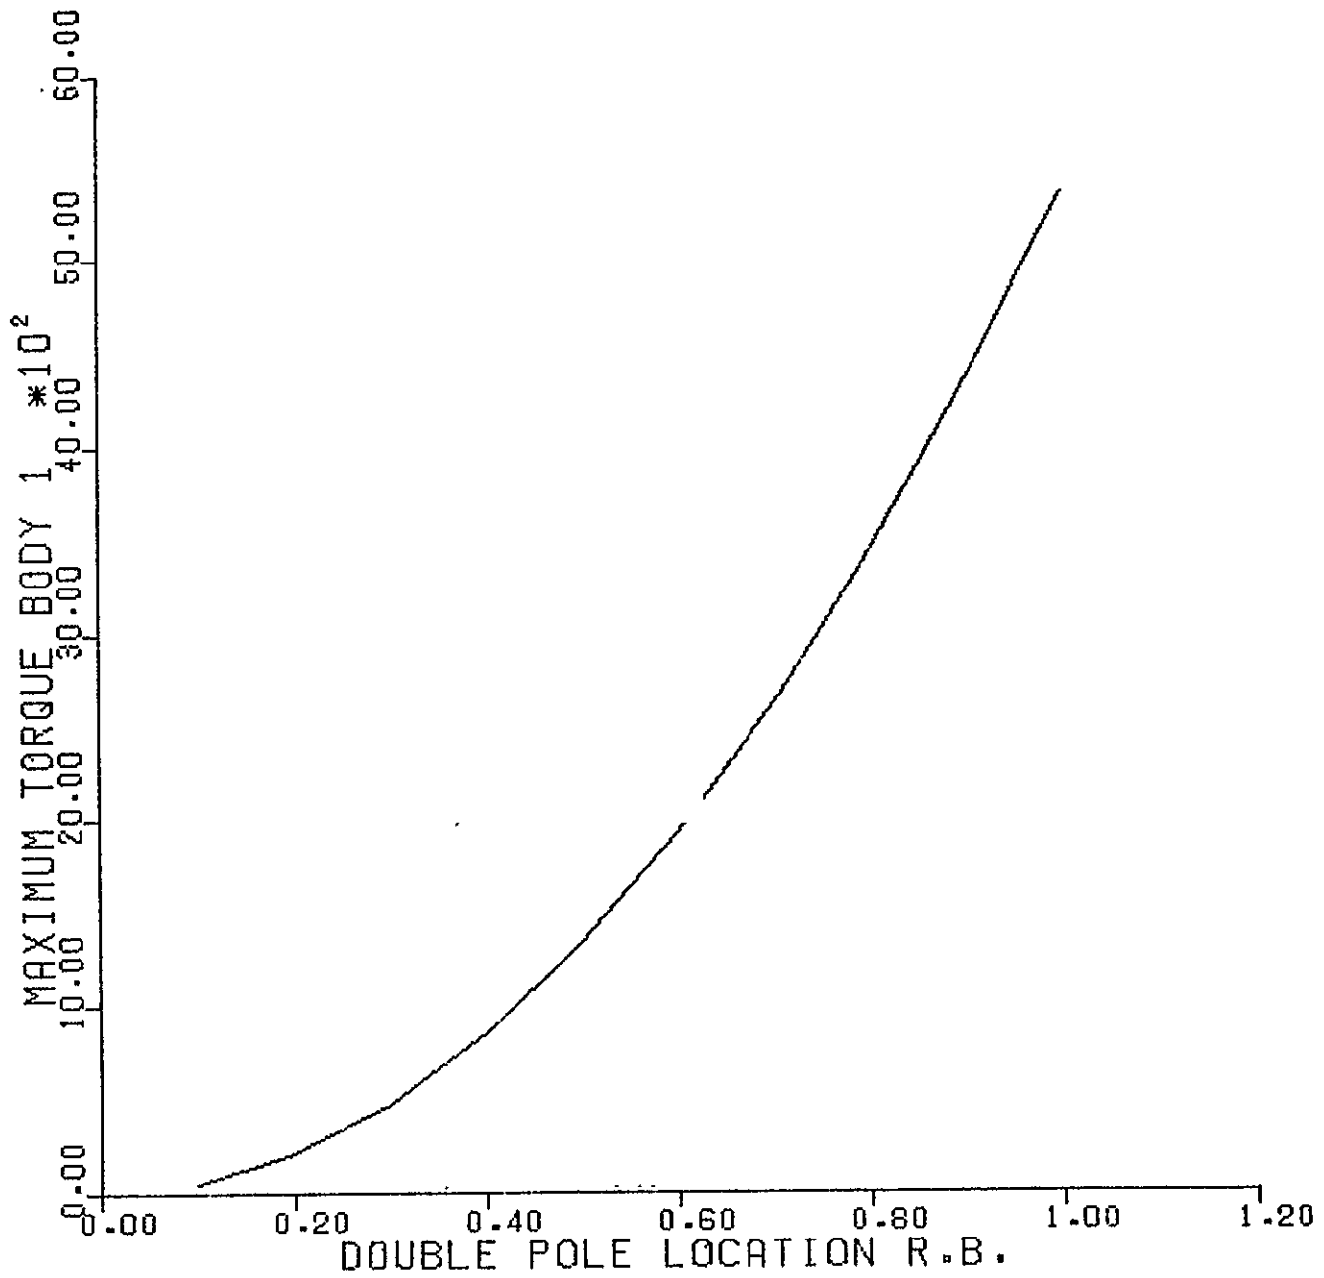


FIGURE 6-25 MAXIMUM TORQUE $|\tau_{1z}|$ VS POLE LOCATION FOR RIGID BODY

TABLE 6-2 . GAIN MATRIX FOR τ_{2Z}

$$\tau_{2Z} = -Kx(t)$$

REAL (λ)	ω_1	ω_{21}	ψ_{42}	ψ_{21}	ψ_{42}	ψ_1
0.10	0.0	1433.2	1140.2	68.411	30.98	0.0
0.20	0.0	3045.5	2449.4	291.98	124.97	0.0
0.70	0.0	19199.	17067.	5193.1	3003.8	0.0

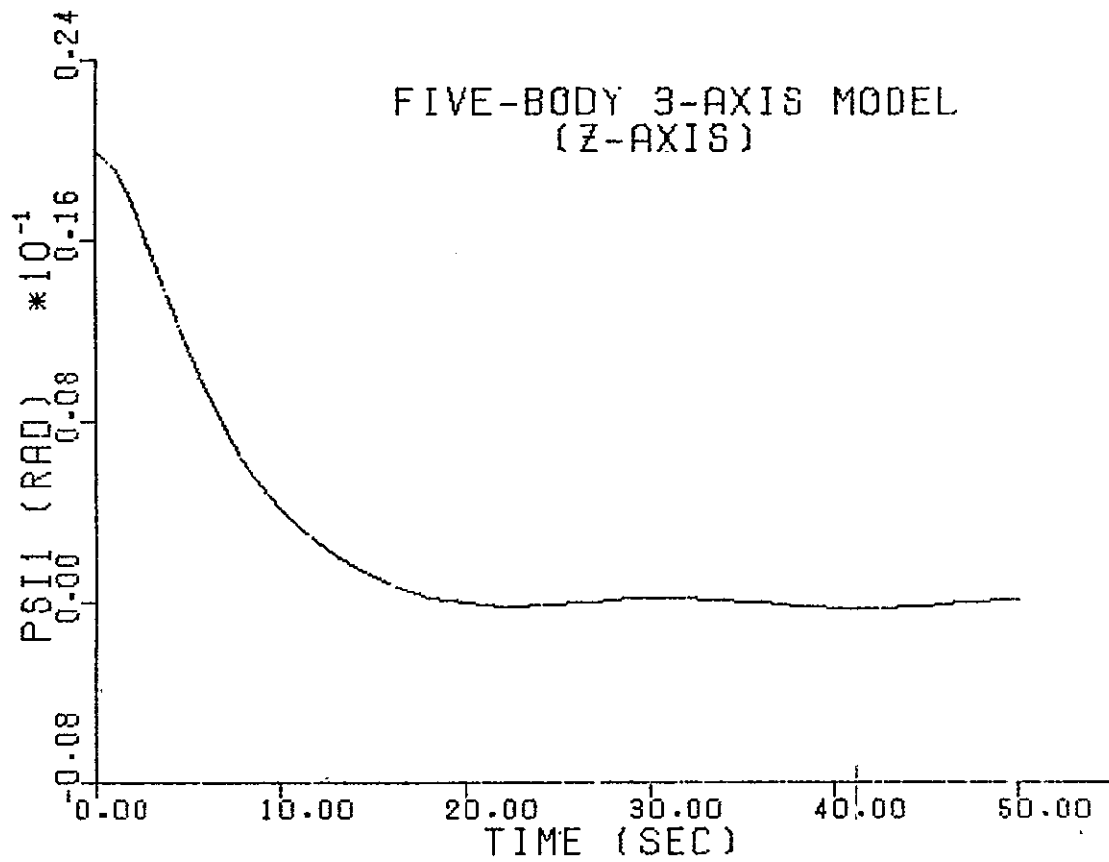


FIGURE 6-26- ANGULAR POSITION BODY 1

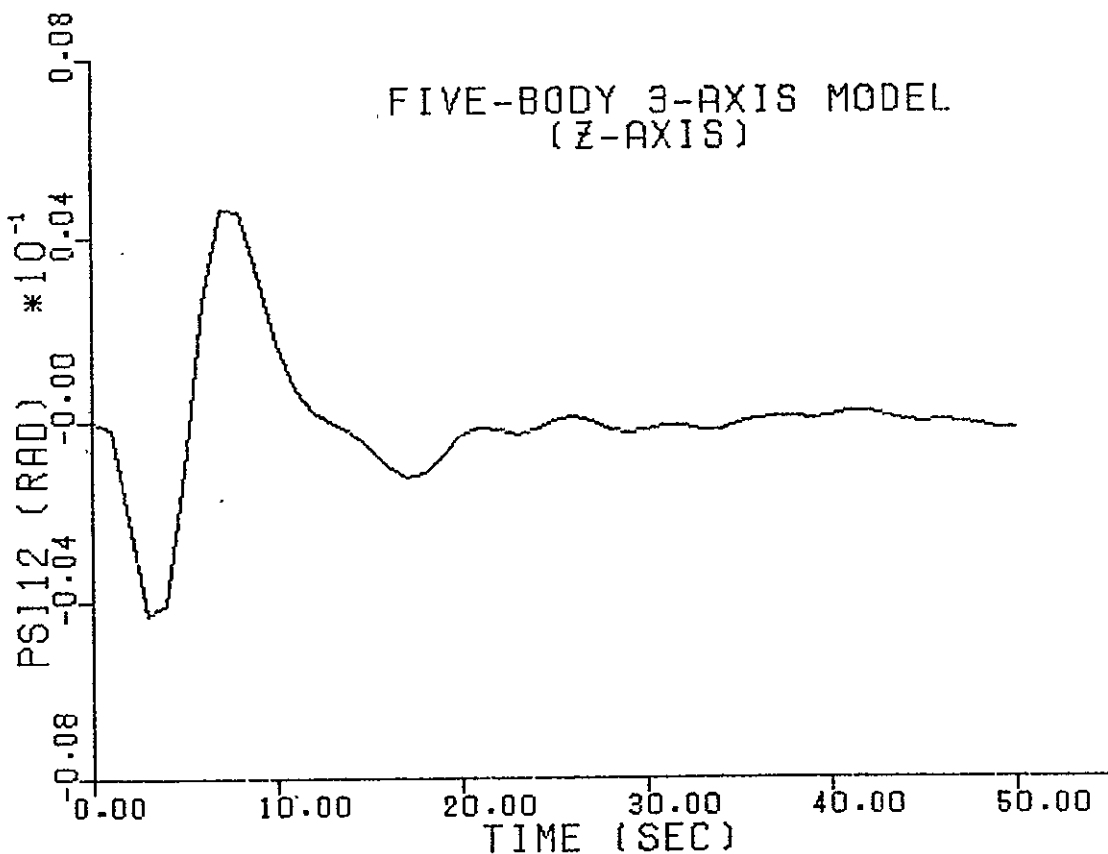


FIGURE 6-27 RELATIVE ANGULAR POSITION BODY 2

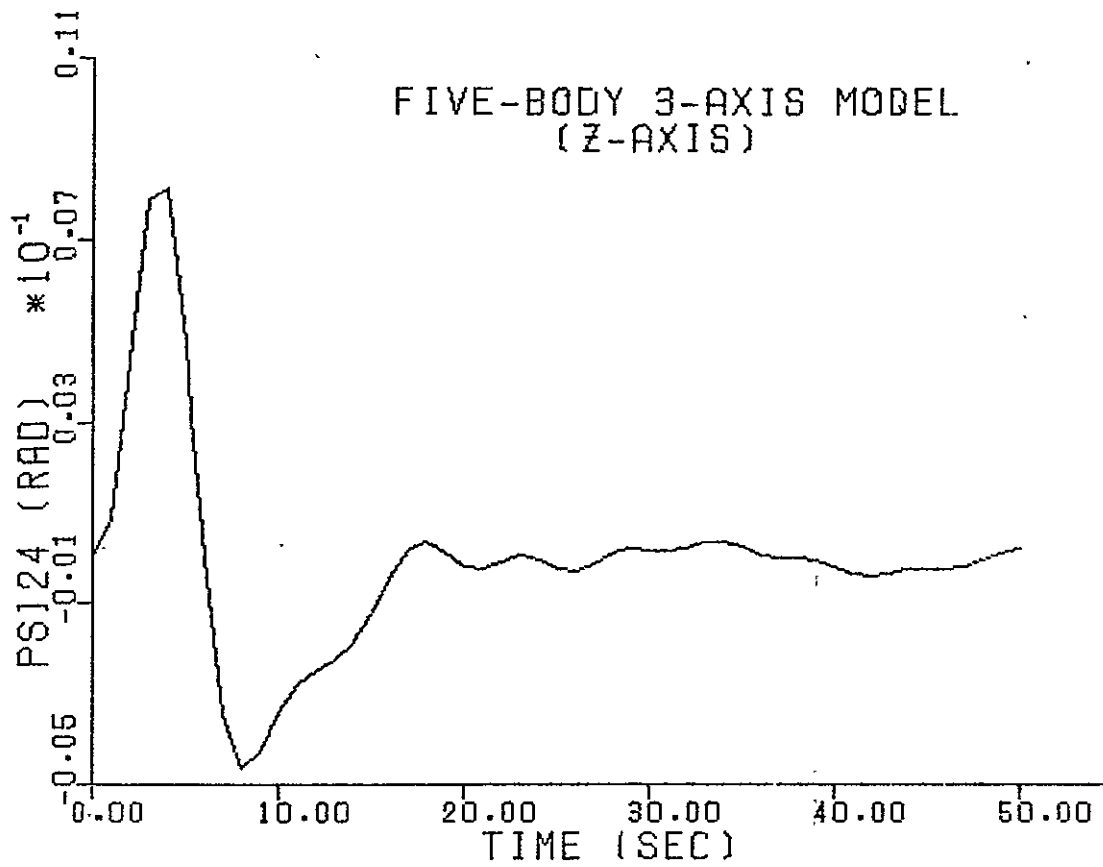


FIGURE 6-28 RELATIVE ANGULAR POSITION BODY 4

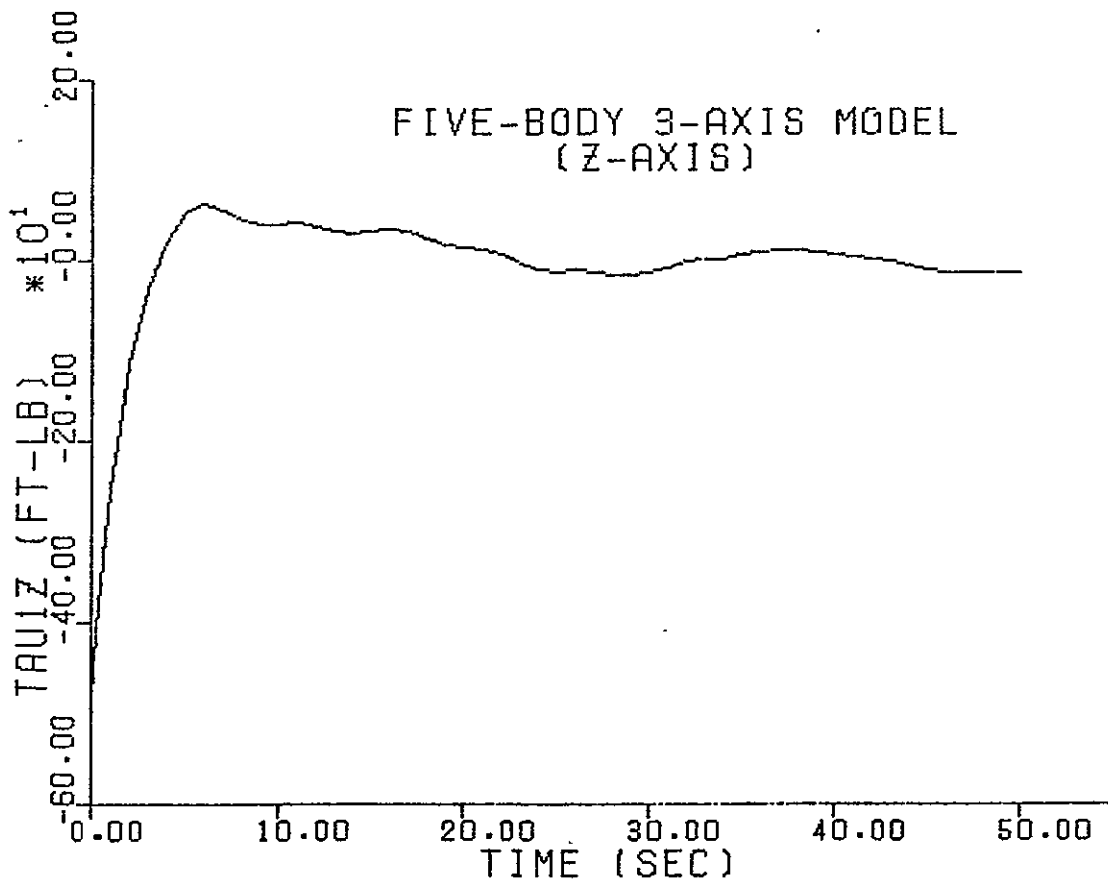


FIGURE 6-29 CONTROL TORQUE BODY 1

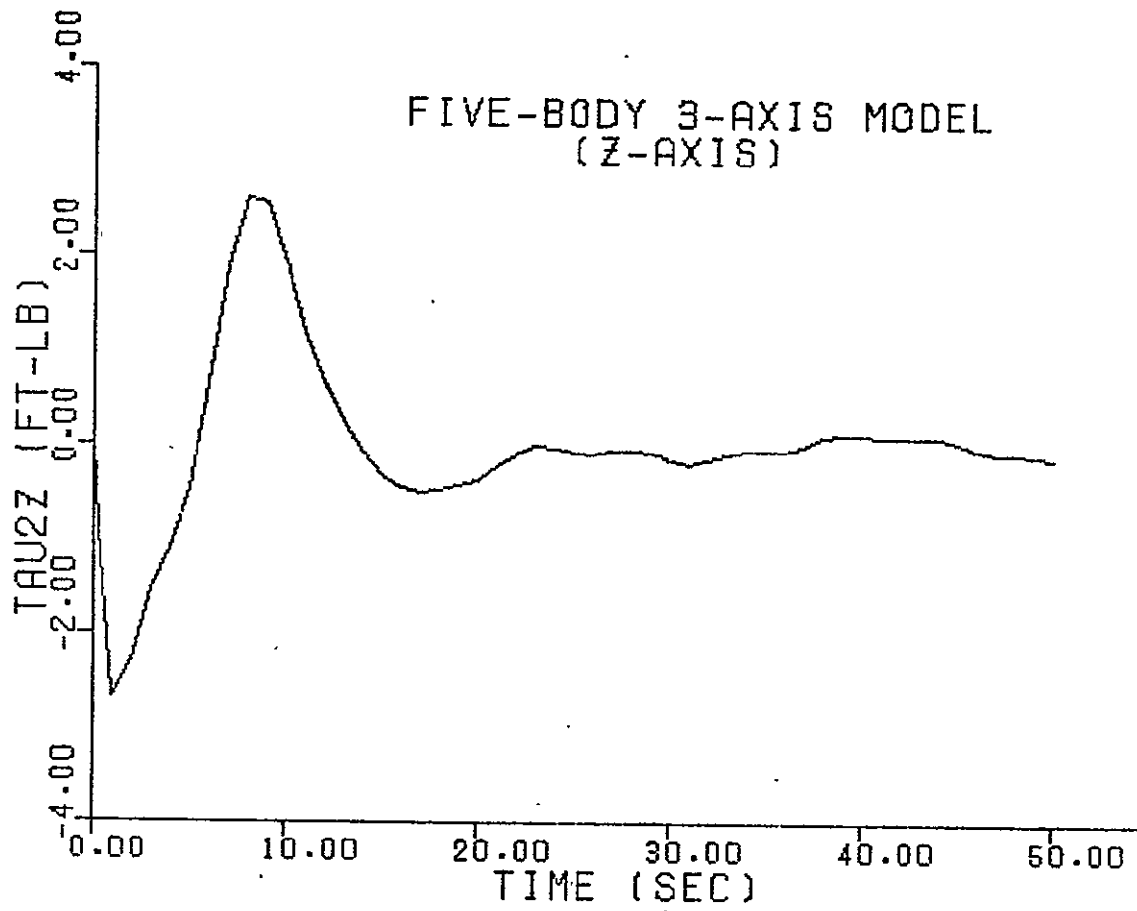


FIGURE 6-30 CONTROL TORQUE BODY 2

6.4

CONCLUSIONS AND RECOMMENDATIONS

An eigenvalue analysis of the five-body three-axis Space Construction Base/Configuration I vehicle shows that the eigenvalue shifts from a double pole configuration are due to the interaxis coupling of the solar wings. Cross-axis coupling for this vehicle has been shown to be negligible thus leading to the conclusion that from a control design viewpoint, each axis can be designed separately.

Using a symmetric reduced order model for the torsional axis, two new design procedures were studied. The multivariable Nyquist array method, a frequency domain design technique, was shown to be effective for the difficult case of the flexible modes within the control system bandwidth. Utilization of the multivariable Bode diagram facilitated the design process since standard single-input single-output methods could be used. The Retallack pole placement technique when coupled with a computationally efficient numerical algorithm to obtain the Luenberger canonical form was effective in placing specific open loop poles in desired positions. Time domain simulations demonstrated the potential of this method.

It is apparent from the results obtained that the methods used in this study should be investigated further. Specifically, several areas of consideration are identified:

- a) Design and evaluation associated with pole shifts in frequency as well as in damping ratio.

- b) Repeat design for the Y axis with and without the symmetry assumption. Compare designs using both MNA and pole placement procedures.
- c) Repeat the design for the X axis using MNA and pole placement.
- d) Sensitivity analysis of the control configuration under model parameter uncertainties.
- e) Sensor failure analysis in all axes and a simplification in the system gain space description for failure accommodation.
- f) Develop a test for robustness of the control design as a means of simplifying the design for future configuration studies.
- g) Incorporate design constraints on control magnitude and state measurement in the selection of control weighting vectors used in the pole placement procedure.
- h) Incorporate gain magnitude constraints and develop a criteria for gain selection based upon time domain waveforms.
- i) Consider a Kalman pole placement algorithm to sequentially place poles in desired locations using the criteria suggested above.
- j) Compare results using standard pole placement (Simon and Mitter) techniques and evaluate subsequent designs for robustness.

6.5 REFERENCES

- 6-1 Faddeeva, V.N., Computational Methods of Linear Algebra, Dover, Chapter, 3, 1979.
- 6-2 Porcelli, G., "Attitude Control of Flexible Space Vehicles", AIAA Journal, Vol. 10, No.6, June 1972.
- 6-3 Leininger, G.G., "Alternate Frequency Domain Design Methods for the Attitude Control of a Flexible Space Vehicle", Progress Report: Phase I prepared for Bendix Research Laboratory, May 1978.
- 6-4 Leininger, G.G. "New Dominance Characteristics for the Multivariable Nyquist Array Method", to appear International Journal of Control, 1979.
- 6-5 Leininger, G.G., "Diagonal Dominance for Multivariable Nyquist Array Methods Using Function Minimization", Automatica, Vol 15, No.3, Pages 339-436, 1979
- 6-6 Leininger, G.G. "Compensator Design for Multivariable Systems Using Bode and Nichols Methods", IFAC - Symposium on Computer Aided Control System Design, Zurich, August 1979.
- 6-7 Crossley, T.R., "Envelope Curves to Inverse Nyquist Array Diagrams", Int. J. Control, Vol 22, No.1, 1975.

- 6-8 Leininger, G.G., "An Interactive Design Suite for the Multivariable Nyquist Array Method", IFAC- Symp. on Computer Aided Control System Design, Zurich, August 1979.
- 6-9 Simon, J.D. and Mitter, S.K., "A Theory of Modal Control", Information and Control, Vol. 13, No.4, pp. 316-3353, October 1968.
- 6-10 Retallack, D.G. and MacFarlane, A.G.J., "Pole-Shifting Techniques for Multivariable Feedback Systems", Proc. IEE, Vol. 117, No.5, pp. 1037-1038, May 1970.
- 6-11 Hsu, C.H. and Chen, C.T., "A Proof of the Stability of Multivariable Feedback Systems", Proc. IEEE, Vol 56, pp. 2061-2062, 1968.
- 6-12 Wu, Y.W., Juang, J.N., and Rice, R.B., "Control of Large Flexible Space Structures Using Pole Placement Design Techniques", AIAA Guidance and Control Conference, Boulder, Colorado, August 1979.
- 6-13 Luenberger, D.G., "Canonical Forms for Linear Multivariable Systems", IEEE-AC, Vol AC-12, pp. 290-293, June 1967.
- 6-14 Jordan, D. and Sridhar, B., "An Efficient Algorithm for the Calculation of the Luenberger Canonical Form", IEEE-AC, Vol. AC-18, pp. 292-295, June 1973.

SECTION 7

SECTION 7

7.0 ALTERNATE CONTROL APPROACHES

Among alternate approaches to the application of control to the Space Construction Base one of the most promising appears to be the general one presented in this section. In the sequel this approach is developed for a plant (system to be controlled) that may be represented by a broad class of linear, constant parameter multivariable mathematical models.

The general development of this approach begins with a description of the salient characteristics of the class of linear constant parameter multivariable plants for which the approach is applicable. The matrix properties of the plants are then utilized in the development of techniques for the generation of state regulator control and estimation gain matrices that optimize plant performance.

Following the development of the general approach to the design of state controllers and estimators for this class of linear constant parameter multivariable plants, the considerations involved in applying this general approach to the rotational mathematical model of the Space Construction Base are discussed. These considerations include treatment of cyclical aerodynamic disturbance torques, selection of weighting coefficients for state variable estimation error in the computation of optimal estimator gain and decomposition of the known portion of input disturbances into terms corresponding to gravity gradient, actuator reaction and actuator desaturation torques.

7:1 LINEAR, CONSTANT PARAMETER, MULTIVARIABLE CONTROL APPROACH

7.1.1 Plant

Consider the following plant

$$\dot{\underline{x}}_p = A_p \underline{x}_p + C(\underline{u} + \underline{v}) + D\underline{w} \quad (7-1)$$

$$\underline{y} = B_p \underline{x}_p \quad (7-2)$$

where:

\underline{x}_p = plant state vector of dimension n

\underline{u} = plant control vector of dimension c

\underline{v} = plant control disturbance vector of dimension c

\underline{w} = plant disturbance vector of dimension d

\underline{y} = plant measurement vector of dimension m

A_p = uncontrolled plant matrix of dimension nxn

C = plant control matrix of dimension nxc

D = plant disturbance matrix of dimension nxd

B_p = plant measurement matrix of dimension mxn

Suppose that the jth column of the plant control matrix is linearly dependent. Then we can write:

$$\begin{aligned} C(\underline{u} + \underline{v}) &= C_j(\underline{u}_j + \underline{v}_j) + \underline{c}_j(\underline{u}_j + \underline{v}_j) \\ &= C_j(\underline{u}_j + \underline{v}_j) + C_j \underline{c}_j(\underline{u}_j + \underline{v}_j) \\ &= C_j \left[\underline{u}_j + \underline{v}_j + (\underline{u}_j + \underline{v}_j) \underline{c}_j \right] = C'(\underline{u}'_j + \underline{v}'_j) \end{aligned} \quad (7-3)$$

where:

C_j = C minus the jth column

\underline{u}_j = \underline{u} minus the jth component

\underline{v}_j = \underline{v} minus the jth component

\underline{c}_j = jth column of C
 u_j = jth component of \underline{u}
 v_j = jth component of \underline{v}
 \underline{c} = constant vector of dimension c-1

Thus we can assume, without loss of generality, that C has rank c. If M is a real symmetric matrix, then M and $M^T M$ have the same rank. Hence, defining:

$$M^* \equiv (M^T M)^{-1} M^T \quad (7-4)$$

we can write:

$$\begin{aligned} C(\underline{u} + \underline{v}) + D\underline{w} &= C(\underline{u} + \underline{v} + C^* D\underline{w}) + (I - CC^*) D\underline{w} \\ &= C(\underline{u} + \underline{v}') + D'\underline{w} \end{aligned} \quad (7-5)$$

Since $C^T D' = 0$, we can assume without loss of generality that the columns of C are orthogonal to the columns of the plant disturbance matrix. Now suppose that the ith row of the plant measurement matrix is linearly dependent. Then we can write:

$$B_p' \underline{x}_p = \underline{y}' \quad (7-6)$$

$$y_i = \left[(B_p')^T \underline{c} \right]^T \underline{x}_p = \underline{c}^T \underline{y}' \quad (7-7)$$

where:

B_p' = B_p minus the ith row
 \underline{y}' = \underline{y} minus the ith component
 y_i = The ith component of \underline{y}
 \underline{c} = a constant vector of dimension m-1

Thus we can assume without loss of generality that B_p has rank m . Furthermore, it is assumed that:

- 1) $c < n$ and $m \leq n$
- 2) All matrices are constant
- 3) The unknown part of \underline{v} and \underline{w} can be written as $B_d \underline{x}_d$ where \underline{x}_d satisfies the following matrix differential equation.

$$\dot{\underline{x}}_d = A_d \underline{x}_d \quad (7-8)$$

That is,

$$\underline{v} = \underline{v}_k + B_{v-v} \underline{x}_d \quad (7-9)$$

where:

$$\dot{\underline{x}}_v = A_{v-v} \underline{x}_v \quad (7-10)$$

and

$$\underline{w} = \underline{w}_k + B_{w-w} \underline{x}_d \quad (7-11)$$

where:

$$\dot{\underline{x}}_w = A_{w-w} \underline{x}_w \quad (7-12)$$

7.1.2 Design of State Feedback Controller

We wish to design a state feedback control system for this plant so that the plant state vector will remain near some equilibrium plant state vector $(\underline{x}_p)_d$.

$$\text{Since } A_p (\underline{x}_p)_d = 0, \quad (7-13)$$

we can write:

$$\dot{\underline{x}}_p = A_p \underline{x}_p + C(\underline{u} + \underline{v}) + D\underline{w} \quad (7-14)$$

$$\underline{y}' = B_p \underline{x}'_p \quad (7-15)$$

where:

$$\underline{x}'_p = \underline{x}_p - (\underline{x}_p)_d \quad (7-16)$$

and

$$\underline{y}' = \underline{y} - B_p (\underline{x}_p)_d \quad (7-17)$$

Hence, we can assume without loss of generality that:

$$(\underline{x}_p)_d = 0 \quad (7-18)$$

Since

$$C^T D = 0, \quad (7-19)$$

none of the plant disturbance vector can be cancelled by the plant control vector. However, all of the plant control disturbance vector can be cancelled. Therefore, we let:

$$\underline{u} = \underline{g}(\underline{x}_p) - \underline{v} \quad (7-20)$$

To simplify the design, we will limit the feedback structure to a linear, time-invariant function so that

$$\underline{u} = -G \underline{x}_p - \underline{v} \quad (7-21)$$

where G is a controller gain matrix of dimension $c \times n$. Substituting equation (7-21) into equation (7-1) yields:

$$\dot{\underline{x}}_p = A_c \underline{x}_p + D \underline{w} \quad (7-22)$$

where the controlled plant matrix may be expressed:

$$A_c = A_p - CG \quad (7-23)$$

Note that if we could choose G such that

$$A_c = -\frac{1}{T} I, \quad (7-24)$$

where I = identity matrix of the same dimensions as A_c , then the present plant state vector would be

$$\underline{x}_p(t) = e^{-\frac{t}{T}} \underline{x}_p(0) + D \int_0^t e^{-\frac{\tau-t}{T}} \underline{w}(\tau) d\tau \quad (7-25)$$

where $\underline{x}_p(0)$ is the initial plant state vector. This would be a desirable choice for G since, under the assumption that T is small, only recent, large plant disturbances could cause the present plant state not to be small. However, since c is less than n, there generally is no matrix G that will satisfy equation (7-24). Therefore we will choose G to render a measure of the difference between the two matrices in equation (7-24) as small as possible.

We could define the measure of the difference between these two matrices in the same way as for the measure of the difference between two vectors as $(\text{tr} E_c^T E_c)^{\frac{1}{2}}$ where:

$$E_c = A_c + \frac{1}{T} I \quad (7-26)$$

This yields the following solution.

$$G = C*(A_p + \frac{1}{T} I) \quad (7-27)$$

(The derivation and analysis of this solution appear in Appendix C)

However, we wish to make E_c small in the sense that for any \underline{x}_p , $E_c \underline{x}_p$ is small compared with \underline{x}_p . Furthermore, for various physical reasons, some plant state variables or combinations of plant state variables may be more important to control than others. Consequently we will

choose G to minimize the following quantity:

$$\max_{\underline{z} \neq 0} \frac{|W_c^T E_c \underline{z}|}{|W_c \underline{z}|} \quad (7-28)$$

where the columns of W_c are linearly independent.

Since $W_c^T W_c$ is nonsingular, we can write:

$$\max_{\underline{z} \neq 0} \frac{|W_c^T E_c \underline{z}|}{|W_c \underline{z}|} = \max_{\underline{z}' \neq 0} \frac{|E_c \hat{\underline{z}}'|}{|\underline{z}'|} \quad (7-29)$$

where

$$E_c \hat{\underline{z}}' = W_c^T E_c W_c^* \underline{z}' \quad (7-30)$$

$$\underline{z}' = W_c \underline{z} \quad (7-31)$$

Dividing the numerator and denominator of the right hand side by $|\underline{z}'|$ and then squaring, we see that the above problem is equivalent to choosing G to minimize the quantity:

$$\max_{|\underline{z}|=1} \underline{z}^T (E_c \hat{\underline{z}}')^T E_c \hat{\underline{z}}' \underline{z} \quad (7-32)$$

Introducing the constraint,

$$|\underline{z}| = 1, \quad (7-33)$$

by the Lagrange multiplier approach, a necessary condition for a critical value of \underline{z} is:

$$\frac{\partial}{\partial \underline{z}} \left[\underline{z}^T (E_c \hat{\underline{z}}')^T E_c \hat{\underline{z}}' \underline{z} - \lambda (\underline{z}^T \underline{z} - 1) \right] = 0 \quad (7-34)$$

where $\frac{\partial}{\partial \underline{z}}$ indicates a gradient with respect to \underline{z} .

Completing the differentiation indicated on the left hand side and dividing by 2 yields:

$$\left[(\underline{E}_c')^T \underline{E}_c' - \lambda \mathbf{I} \right] \underline{z} = 0 \quad (7-35)$$

Premultiplying both sides by \underline{z}^T and rearranging terms yields:

$$\lambda = \underline{z}^T (\underline{E}_c')^T \underline{E}_c' \underline{z} \quad (7-36)$$

From equations (7-35) and (7-36), we see that:

$$\max_{|\underline{z}|=1} \underline{z}^T (\underline{E}_c')^T \underline{E}_c' \underline{z} = \text{largest eigenvalue of } (\underline{E}_c')^T \underline{E}_c' \quad (7-37)$$

Hence, we wish to choose G such that Λ , the largest eigenvalue of $(\underline{E}_c')^T \underline{E}_c'$, is a minimum where:

$$\underline{E}_c' = \underline{W}_c (\underline{A}_p - \underline{C}G + \frac{1}{T} \mathbf{I}) \underline{W}_c^* \quad (7-38)$$

Since G is unconstrained, a necessary condition for the minimum value of Λ is

$$\frac{\partial \Lambda}{\partial G} = 0 \quad (7-39)$$

where $\frac{\partial}{\partial G}$ indicates the gradient with respect to G.

Furthermore, since $(\underline{E}_c')^T \underline{E}_c'$ is symmetric, Λ can be approximated by the fact that: $\Lambda = \lim_{k \rightarrow \infty} \frac{|\underline{e}_{-k+1}|}{|\underline{e}_{-k}|}$ (7-40)

where:

$$\underline{e}_{-k+1} = (\underline{E}_c')^T \underline{E}_c' \underline{e}_{-k} \quad (7-41)$$

(Appendix D gives a numerical algorithm for generating the optimum controller gain matrix).

7.1.3 Design of State Estimator

The plant control given by equation (7-21) requires complete knowledge of the present plant state and control disturbance. Generally, these quantities are not completely known. However, they can be estimated from the known part of the past plant disturbances and the past plant measurements. Let \underline{x}_e be defined as the solution to the following vector differential equation:

$$\dot{\underline{x}}_e = (A-HB)\underline{x}_e + \begin{bmatrix} D^T & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}^T \underline{w}_k + H\underline{y} \quad (7-42)$$

where:

$$A = \begin{bmatrix} A_c & 0 & DB_w \\ 0 & A_v & 0 \\ 0 & 0 & A_w \end{bmatrix} \quad (7-43)$$

H = constant estimator gain matrix

$$B = \begin{bmatrix} B_p & 0 & 0 \end{bmatrix} \quad (7-44)$$

$$\underline{x}_e(0) = B^T (B_p B_p^T)^{-1} \underline{y}(0) \quad (7-45)$$

Combining the assumptions about the system disturbances with equations (7-2) and (7-22) yields:

$$\dot{\underline{x}} = A\underline{x} + \begin{bmatrix} D^T & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}^T \underline{w}_k \quad (7-46)$$

$$\underline{y} = B\underline{x} \quad (7-47)$$

where:

$$\underline{x} = \begin{bmatrix} \underline{x}_p & \underline{x}_v & \underline{x}_w \end{bmatrix}^T \quad (7-48)$$

Subtracting equation (7-46) from equation (7-42) and substituting equation (7-47) for \underline{y} , it is evident that:

$$\dot{\underline{\Delta x}} = (A-HB) \underline{\Delta x} \quad (7-49)$$

where:

$$\underline{\Delta x} = \underline{x}_e - \underline{\hat{x}} \quad (7-50)$$

Therefore, if we choose H to satisfy:

$$A - HB = -\frac{20}{T}I \quad (7-51)$$

then \underline{x}_e would be a good estimate of \underline{x} since the solution to equation (7-49) would be

$$\underline{\Delta x}(t) = \underline{\Delta x}(0)e^{-\frac{20t}{T}} \quad (7-52)$$

However, since $m \leq n$, there exists no H such that equation (7-51) is satisfied. Furthermore, the estimator gain matrix that minimizes $(\text{tr} E_e^T E_e)^{\frac{1}{2}}$

$$\text{where: } E_e = A - HB + \frac{20}{T}I \quad (7-53)$$

yields estimates for the unknown part of the control and plant disturbances of zero at all times. (See Appendix E for a derivation and analysis of this solution).

Consequently, we will choose H to minimize the largest eigenvalue of the matrix, $(E_e^T)^T E_e$.

where:

$$E_e^T = W_e E_e W_e^* \quad (7-54)$$

(See Appendix D for a numerical algorithm for generating the optimum estimator gain matrix.) Figure 7-1 depicts the relationships between the plant, state controller and state estimator in the complete system.

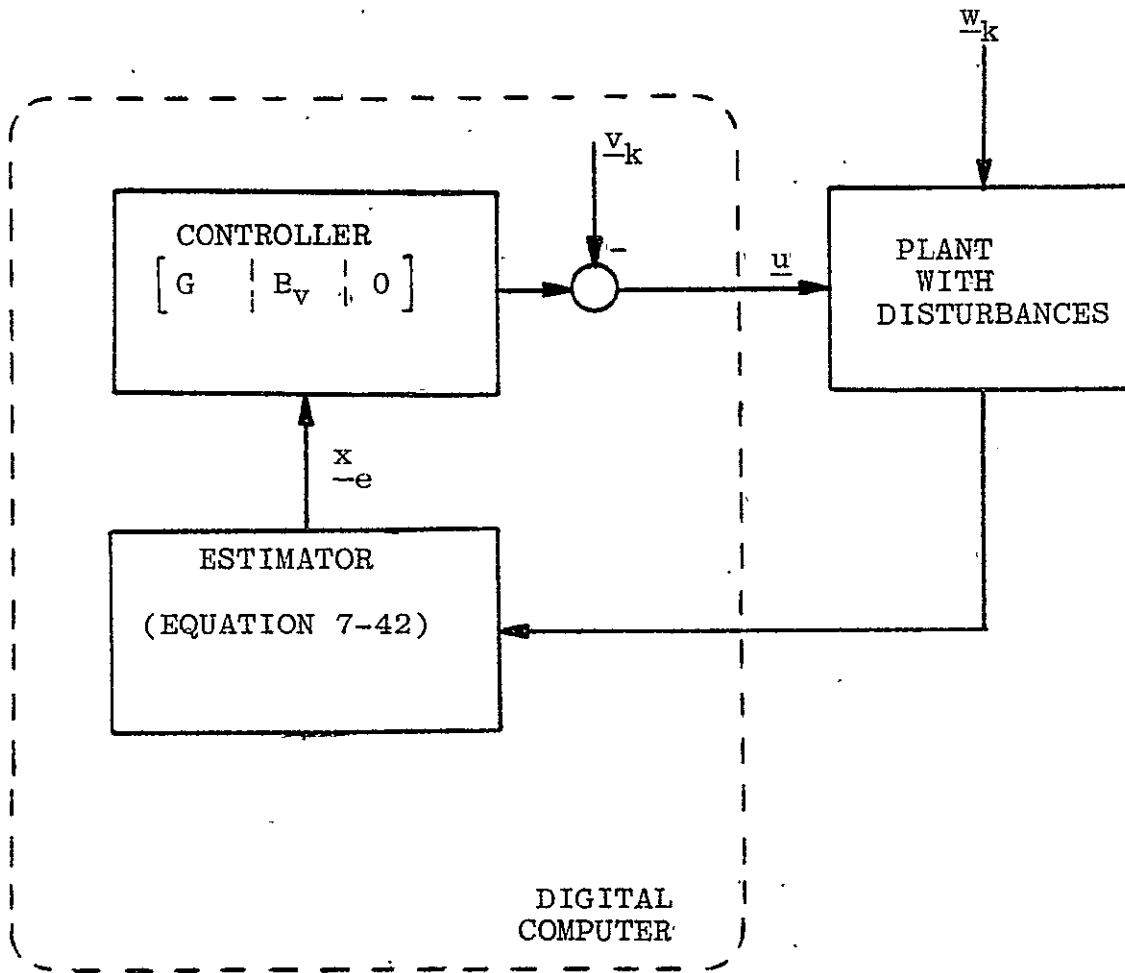


FIGURE 7-1
BLOCK DIAGRAM OF COMPLETE SYSTEM

7.1.4 System Design Parameters

Since the eigenvalues of equation (7-42) are approximately $-\frac{20}{T}$, the sampling frequency of the digital computer should be approximately $\frac{400}{T}$. The matrices C and B_p yield trade offs between control system performance and cost. The number of linearly independent actuators and sensors and, consequently, the system performance, increases as the ranks of these matrices increase. However, this better control system performance may not be worth the increased control system cost. The scalar T also affords a trade off between control system performance and cost. This trade off is more complex than those for C and B_p since smaller values of T not only increase control system cost but also may decrease control system performance. A control system simulation and trial and error will be necessary to choose the best values for C, B_p and T.

If a satisfactory control system cannot be found, it may be possible to significantly increase the performance and/or decrease the cost of the control system by making some relatively minor changes in the design of the uncontrolled plant. For instance, assume that

$$A_p = [f_{ij}(\underline{\pi})] \quad (7-55)$$

where $f_{ij}(\underline{\pi})$ is the i th row and j th column element of A_p and $\underline{\pi}$ is a vector of plant parameters which can be chosen to make control easier.

If we could render:

$$A_p = -\frac{1}{T}I \quad (7-56)$$

then $G=0$ and the control system would be optimal. However, since generally there will be no $\underline{\pi}$ such that these matrices are equal, we will render the difference between the two matrices of equation (7-56) as small as possible by choosing $\underline{\pi}$ to minimize the largest eigenvalue of $(E_p')^T E_p'$ where:

$$E_p' = W_c \left([f_{ij}(\underline{\pi})] + \frac{1}{T} I \right) W_c^* \quad (7-57)$$

7.2 APPLICATION TO SPACE BASE

A major problem in designing control systems for flexible spacecraft is the development of an accurate yet simple plant model. Because of the inherent difficulties of solving partial differential equations a finite element approach must be used. Space Base can be modeled as a number of rigid bodies connected in a tree configuration by either dissipative spring-hinges or electromagnetic torque actuators. The greater the number of rigid bodies used in the model, the better the accuracy of the model and hence the better the performance of the control system. However, if more rigid bodies are used than are necessary, then the order of the model and, consequently, the cost of the control system will be greater than necessary. It is conjectured that, for the control scheme of subsection 7.1, if the lowest resonant frequency of a physical structure is $\frac{20}{T}$ or higher, then that structure can be considered rigid.

Assuming that the control system is holding or very slowly changing the orientation of Space Base, the

equations of motion of the rigid body finite element model can be linearized and written in the form of equations (7-1) and (7-2) with the angular rate and position error of the most precisely pointed body and the relative angular rates and position of adjacent bodies as state variables.

7.2.1 Weighting of State Variables

There are two obvious reasons to weight the individual plant state variables when computing the optimum controller gain matrix. First, it makes no sense to add quantities of different physical dimensions such as angular rate and position. Second, it may be more important to control one section of Space Base than another. Consequently, if

$$\underline{x}_p = \left[\begin{array}{c|c} \dot{\underline{\theta}}^T & \underline{\theta}^T \end{array} \right]^T \quad (7-58)$$

where the vector $\dot{\underline{\theta}}$ contains the angular rate plant state variables and the vector $\underline{\theta}$ contains the angular position plant state variables, then a logical choice for W_c would be:

$$W_c = \left[\begin{array}{c|c} TW & 0 \\ \hline 0 & W \end{array} \right] \quad (7-59)$$

where the scalar, T , nondimensionalizes the angular rate plant state variables and W is a positive definite diagonal matrix which weights the relative importance of controlling the individual angular position plant state variables. For this choice of W_c , we have:

$$W_c^* = (W_c^T W_c)^{-1} W_c^T = \begin{bmatrix} \frac{1}{I} W^{-1} & 0 \\ 0 & W^{-1} \end{bmatrix} \quad (7-60)$$

Furthermore, a better choice for the starting value of G in the algorithm of Appendix D might be:

$$K = (W_c C)^* W_c (A_p + \frac{1}{T} I) \quad (7-61)$$

7.2.2 Aerodynamic Disturbance Torque

Assuming the earth's gravity gradient disturbance torque to be computed and thus known, the primary unknown disturbance torque acting on Space Base is aerodynamic.

Since this torque is approximately sinusoidal with orbit frequency, ω_o , we can write:

$$\underline{\dot{v}}_u = \underline{a} \cos \omega_o t + \underline{b} \sin \omega_o t \quad (7-62)$$

where \underline{v}_u is the unknown part of the control disturbance torque and \underline{a} and \underline{b} are constant but unknown vectors..

Differentiating \underline{v}_u twice with respect to time yields:

$$\begin{bmatrix} \ddot{\underline{v}}_u \\ \dot{\underline{v}}_u \end{bmatrix} = \begin{bmatrix} 0 & -\omega_o^2 I \\ I & 0 \end{bmatrix} \begin{bmatrix} \dot{\underline{v}}_u \\ \underline{v}_u \end{bmatrix} \quad (7-63)$$

Accordingly,

$$\underline{x}_v = \begin{bmatrix} \dot{\underline{v}}_u^T \\ \underline{v}_u^T \end{bmatrix}^T \quad (7-64)$$

$$B_v = \begin{bmatrix} 0 \\ I \end{bmatrix} \quad (7-65)$$

$$A_v = \left[\begin{array}{c|c} 0 & -\omega_o^2 I \\ \hline I & 0 \end{array} \right] \quad (7-66)$$

Similarly,

$$\underline{x}_w = \left[\begin{array}{c|c} \dot{w}_u^T & w_u^T \\ \hline \end{array} \right]^T \quad (7-67)$$

$$B_w = \left[\begin{array}{c|c} 0 & I \\ \hline \end{array} \right] \quad (7-68)$$

$$A_w = \left[\begin{array}{c|c} 0 & -\omega_o^2 I \\ \hline I & 0 \end{array} \right] \quad (7-69)$$

7.2.3 Weighting Coefficients For Disturbance State Variable Estimation Error

It is reasonable in computing the optimum estimator gain matrix to weight various combinations of the disturbance state variable estimation errors according to the magnitude and location of the jerk, acceleration and velocity they cause. Thus a logical choice for W_e is:

$$W_e = \begin{bmatrix} W_c & 0 & 0 & 0 & 0 \\ 0 & T^2 W_c C & 0 & 0 & 0 \\ 0 & 0 & T W_c C & 0 & 0 \\ 0 & 0 & 0 & T^2 W_c D & 0 \\ 0 & 0 & 0 & 0 & T W_c D \end{bmatrix} \quad (7-70)$$

For this choice of W_e , we have

$$W_e^* = \begin{bmatrix} W_c^* & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{T^2} (W_c C)^* & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{T} (W_c C)^* & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{T^2} (W_c D)^* & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{T} (W_c D)^* \end{bmatrix} \quad (7-71)$$

7.2.4 Known Input and Plant Disturbances

Assuming the use of rigid body momentum exchange actuators, the known part of the input disturbance can be divided into three components: gravity gradient, actuator reaction and actuator desaturation as follows.

$$\underline{v}_k = \underline{v}_g + \underline{v}_r + \underline{v}_d. \quad (7-72)$$

The known part of the plant disturbance is just gravity gradient.

SECTION 8

SECTION 8

SECTION 8

8.0 STRUCTURAL ANALYSIS STUDY

The determination of flexibility body characteristics for a series of connected substructures is an important problem in the study of spacecraft dynamics. Assuming that the flexibility characteristics of each of the substructures comprising a vehicle system are known in terms of the free-free modes which are obtained from a discrete coordinate formulation of the individual substructures, a method (Reference 8-1) has been developed recently for combining the substructures by deriving the forces and torques that exist at the connection points between contiguous bodies while satisfying the appropriate boundary conditions. It is the objective of this section to determine the validity of the above proposed method by considering a homogeneous beam as an example.

8.1 SUMMARY OF APPROACH

A homogeneous beam made of steel is considered as the example to investigate the validity of the method mentioned above. Initially, the beam is idealized to be composed of elastically interconnected discrete rigid bodies with no damping mechanism involved. The springs connecting the bodies are assumed to be capable of having both translational and rotational motion. The free-free modes of the beam are determined from the equations of motion of the discrete rigid bodies constituting the beam. Next, the beam is halved and

each half of the beam is modelled in a similar manner as the total beam. Hence, the free-free modes of each half of the beam can be determined. Then the two half-beams are connected by two connection points; and, by writing the forces and torques that exist at the connection points, the equations of motion of the connected beam are developed to obtain the free-free modes of the connected beam. This result is compared to the modes of the beam obtained previously.

8.2 TECHNICAL DISCUSSION

The beam is subdivided into $2n$ rigid bodies. The adjacent rigid bodies are connected by springs which are capable of both translational and rotational motion. Thus the idealized model of the beam, illustrated in Figure 8-1, is composed of elastically interconnected discrete rigid bodies with no damping mechanism involved. Figure 8-2 and Table 8-1 explain some of the nomenclature used in this Section.

It is assumed that the discrete bodies composing the beam undergo deformations so small that only terms involving the first-degree deformations need be retained in the analysis. Further, the beam is allowed unrestricted motion in response to any applied forces and torques. Before proceeding with the analyses, it is necessary to define the reference frame with respect to which all measurements are made. If an inertially fixed reference frame is chosen, the deformations relative to the frame may grow large if the beam

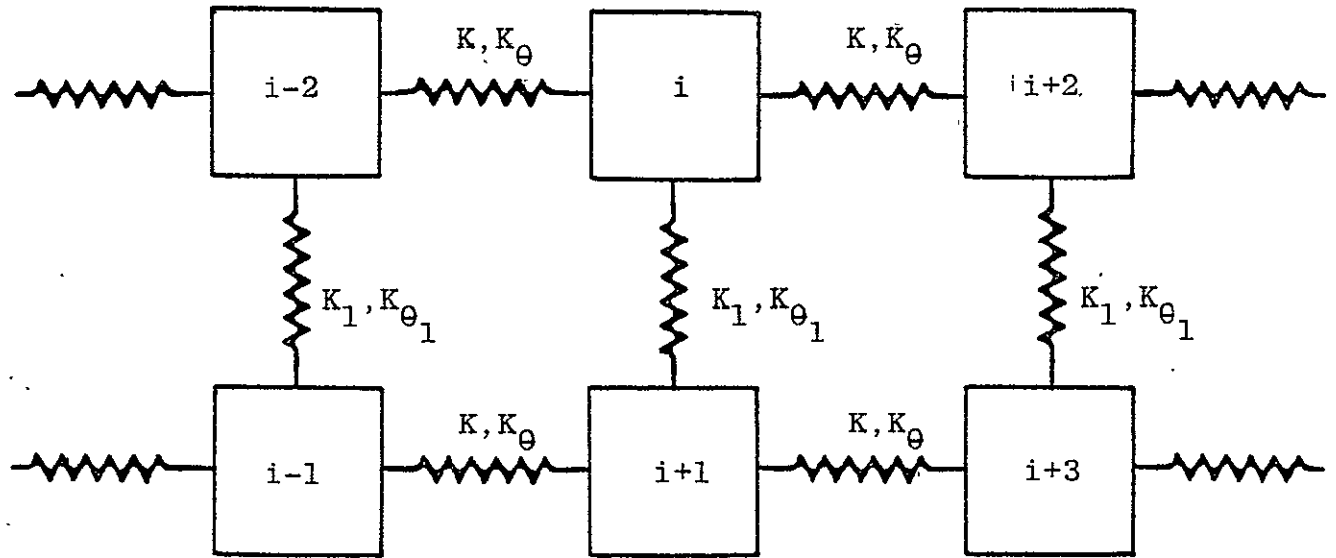


FIGURE 8-1 IDEALIZED MODEL OF THE BEAM

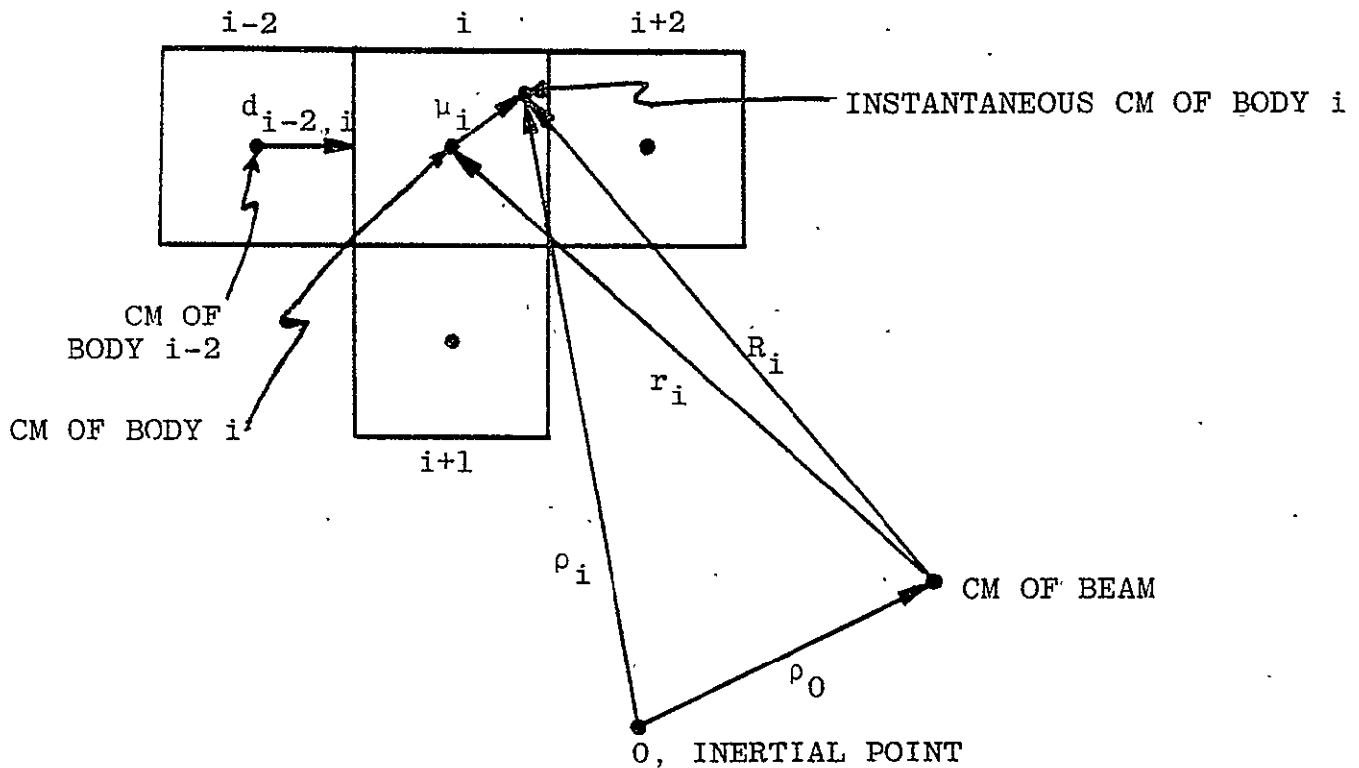


FIGURE 8-2 ILLUSTRATION OF SOME NOMENCLATURE

TABLE 8-1

NOMENCLATURE

ρ_0	vector from inertial point to CM of the beam
ρ_i	vector from inertial point to instantaneous (inst.) CM of body i
μ_i	vector from CM of body i to instantaneous (inst.) CM of body i
δ_i	vector from inst. CM of body i to an elemental mass in body i
γ_i	vector from CM of body i to the point of application of external force
ω_0	inertial rate of the rigid body frame of the total beam
ω_ℓ	inertial rate of the rigid body frame of the half beam # ℓ
β_i	angular rate of body i relative to the beam
ϵ_i	vector from the connection point to the CM of body i
d_{ij}	vector from the CM of body i to the interface point that lies on the line joining the CM's of bodies i and j.
F_{ij}	interface force between adjoining bodies i and j
$F_{c_{ij}}$	constraint force between adjoining bodies i and j
F_{e_i}	external force applied to body i
H_i	angular momentum of body i about the CM of the beam

TABLE 8-1 (CONT'D)

J_i	inertia of body i about its CM
K, K_1	translational stiffness matrix between adjoining bodies
K_θ, K_{θ_1}	rotational stiffness matrix between adjoining bodies
ℓ	refers to half-beam #1 for $\ell=1$ and to half beam #2 for $\ell=2$
m_i	mass of body i
M_{ij}	interface torque at the adjoining bodies of i and j
$M_{c_{ij}}$	constraint torque at the adjoining bodies of i and j
M_T	total mass of the beam
$M_{T-\ell}$	mass of the half beam # ℓ
n	the number of bodies constituting a half beam, or one-half of the number of bodies composing the beam
Q_0, Q_2	vector of the deformation coordinates
r_i	vector from the CM of the beam to the CM of body i
${}_\ell r_i$	vector from the CM of half beam # ℓ to the CM of body i in the half beam
R_i	vector from the CM of the beam to inst. CM of body i
T_{e_i}	external torque applied to body i

undergoes an appreciable motion so that the analysis, using the assumption that the deformations are small, is not valid. However, if the reference frame is chosen such that it moves with the beam in a well-defined manner, then the deformations relative to this "floating" frame may be assumed to be small and hence the 'first order deformations only' analysis can be carried out. The Tisserand frame (reference 8-2), with attractive properties for the purposes of this report, presents itself as such a floating reference frame. It is defined by the set of axes that moves in such a way as to set the internal angular momentum and the internal linear momentum always to zero. The latter requirement implies that the origin of the frame be located at the (rigid body) center of mass.

8.2.1 Preliminaries

The translational and rotational equation of motion for any discrete body i are given by:

$$F_i = m_i a_i \quad (8-1)$$

$$T_i = \overset{\circ}{H}_i \quad (8-2)$$

where F_i and T_i are, respectively, the force and the torque exerted on body i ; m_i is the mass of body i , a_i the inertial acceleration of the center of mass (CM) of body i , and $\overset{\circ}{H}_i$ the angular momentum of body i referred to its CM. The small circle (o) indicates time differentiation with respect to inertial space.

The following equations are of use in the ensuing development of the equations of motion for the bodies of the beam. By the definition of the CM of the beam

$$\sum_{i=1}^{2n} m_i r_i = 0 \quad (8-3)$$

and by the translational equation of motion of the beam

$$\ddot{\rho}_O = \frac{F_e}{M_T} \quad (8-4)$$

where the total external force is given by

$$F_e = \sum_{i=1}^{2n} F_{e_i} \quad (8-5)$$

and the total mass of the beam is given by

$$M_T = \sum_{i=1}^{2n} m_i \quad (8-6)$$

The rotational equation of motion of the beam is given by:

$$J^* \ddot{\omega}_0 = T_e \quad (8-7)$$

where the total external force is given by

$$T_e = \sum_{i=1}^{2n} T_{e_i} \quad (8-8)$$

and J^* is the inertia matrix about the CM of the beam. Since the beam is deformable, J^* is not a constant.

Equations (8-4) and (8-7) define the linear and angular accelerations of the Tisserand frame with respect to which all measurements are made.

8.2.2 Constraint Forces and Constraint Torques

Since the beam is modeled as elastically interconnected discrete rigid bodies, there exist constraint forces and constraint torques that are impressed on the discrete bodies due to the deformations of interconnected bodies. To derive the expressions for these forces and torques, the interconnection of a typical discrete body i with bodies $i+2$ and $i+1$ is illustrated respectively in Figures 8-3 and 8-4.

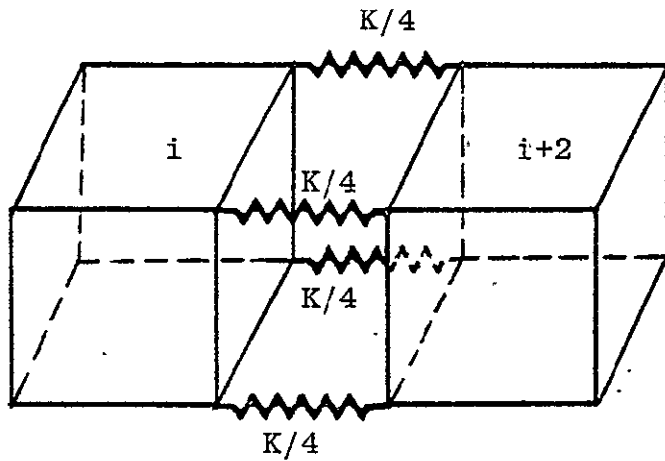


FIGURE 8-3 CONNECTION OF BODIES i AND $i+2$

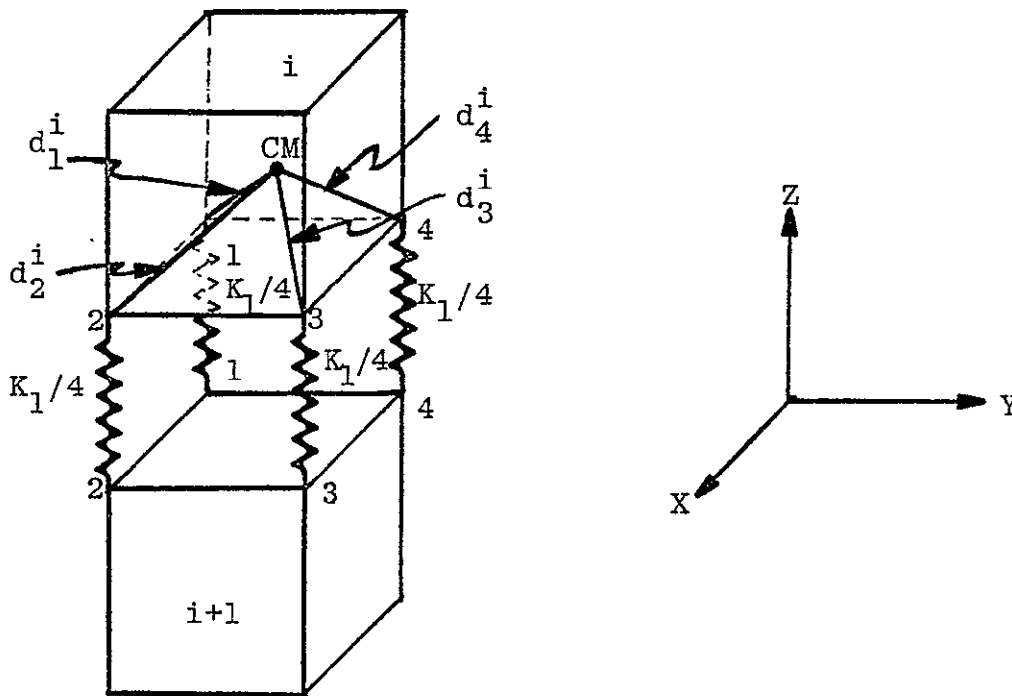


FIGURE 8-4 CONNECTION OF BODIES i AND $i+1$

Body i is connected to body $i+2$ (or $i-2$) via four springs, each with a translational spring constant $\frac{1}{4}K$ and a rotational spring constant $\frac{1}{4}K_\theta$. Similarly, it is connected to body $i+1$ via four springs each with translational and rotational spring constants $\frac{1}{4}K_1$ and $\frac{1}{4}K_{\theta_1}$.

Let d_j^i denote the vector from the CM of body i to the vertex j of body i . Then the constraint force that is exerted on body i due to body $i+1$ can be written as

$$F_{C_i, i+1} = \sum_{j=1}^4 \frac{1}{4}K_1 (\mu_{i+1} - \mu_i) + \sum_{j=1}^4 \frac{1}{4}K_1 (\beta_{i+1} \times d_j^{i+1} - \beta_i \times d_j^i) \quad (8-9)$$

Since

$$\sum_{j=1}^4 d_j^i = 4d_{i, i+1},$$

$$\sum_{j=1}^4 d_j^{i+1} = 4d_{i+1, i} \quad (8-10)$$

$$d_{i, i+1} = -d_{i+1, i}$$

and with the skew symmetric matrix A defined by

$$\tilde{A} = \begin{bmatrix} 0 & -A_z & A_y \\ A_z & 0 & -A_x \\ -A_y & A_x & 0 \end{bmatrix} \quad (8-11)$$

where A_x , A_y , A_z are the x, y, z components of the vector A, equation (8-9) simplifies to

$$F_{c_{i,i+1}} = K_1 (\mu_{i+1} - \mu_i) + K_1 \tilde{d}_{i,i+1} (\beta_{i+1} + \beta_i) \quad (8-12)$$

Similarly, the constraint force impressed on body i+1 due to body i is given by

$$F_{c_{i+1,i}} = K_1 (\mu_i - \mu_{i+1}) + K_1 \tilde{d}_{i+1,i} (\beta_i + \beta_{i+1})$$

In a similar manner, the constraint forces between bodies i and $i+2$ can be obtained to be

$$F_{c_{i,i+2}} = K(\mu_{i+2} - \mu_i) + K d_{i,i+2}^i (\beta_{i+2} + \beta_i) \quad (8-14)$$

$$F_{c_{i+2,i}} = K(\mu_i - \mu_{i+2}) + K d_{i+2,i} (\beta_i + \beta_{i+2}) \quad (8-15)$$

It can be seen from the above equations that

$$F_{c_{ij}} = F_{c_{ji}}$$

The constraint torque that is experienced by body i due to body $i+1$ can be written as

$$M_{c_{i,i+1}} = \sum_{j=1}^4 d_j^i \times \frac{1}{4} K_1 (\mu_{i+1} - \mu_i) + \dots \quad (8-16)$$

$$\sum_{j=1}^4 d_j^i \times \frac{1}{4} K_1 (\beta_{i+1} \times d_j^{i+1} - \beta_i \times d_j^i)$$

With d_{oj}^i as the vector in the xy plane of the body i from the center of elasticity of the four springs connecting bodies i and i+1 (the center is the point of meeting of the vectors $d_{i,i+1}$ and $d_{i+1,i}$) to the jth spring, equation (8-16) using (8-10) can be written as

$$\begin{aligned}
 M_{c_{i,i+1}} = & \tilde{d}_{i,i+1} K_1 (\mu_{i+1} - \mu_i) + \sum_{j=1}^4 \left[\frac{1}{4} (d_{i,i+1} + d_{oj}^i) \times \right. \\
 & \left. K_1 (d_{i,i+1} + d_{oj}^i)^{\sim} \right] \beta_i - \sum_{j=1}^4 \left[\frac{1}{4} (d_{i,i+1} + d_{oj}^i) \times \right. \\
 & \left. K_1 (d_{i+1,i} + d_{oj}^{i+1})^{\sim} \right] \beta_{i+1} \quad (8-17)
 \end{aligned}$$

The coefficient of β_i in equation (8-17) the term in brackets, simplifies to (noting that $d_{oj}^i = d_{oj}^{i+1}$)

$$\tilde{d}_{i,i+1} K_1 \tilde{d}_{i,i+1} - \frac{1}{4} \sum_{j=1}^4 \tilde{d}_{oj}^i \tilde{d}_{oj}^{i+1} K_1$$

The second term in the above expression may be recognized as the rotational spring constant between bodies i and $i+1$ and hence is replaced by K_{θ_1} . Thus equation (8-17) can be written as

$$\begin{aligned}
 M_{c_{i,i+1}} &= \tilde{d}_{i,i+1} K_1 (\mu_{i+1} - \mu_i) + \\
 &\quad \tilde{d}_{i,i+1} K_1 \tilde{d}_{i,i+1} (\beta_{i+1} + \beta_i) + \\
 &\quad K_{\theta_1} (\beta_{i+1} - \beta_i)
 \end{aligned} \tag{8-18}$$

Similarly, the constraint torque on body $i+1$ due to body i is given by

$$\begin{aligned}
 M_{c_{i+1,i}} &= \tilde{d}_{i+1,i} K_1 (\mu_i - \mu_{i+1}) + \\
 &\quad \tilde{d}_{i+1,i} K_1 \tilde{d}_{i+1,i} (\beta_i + \beta_{i+1}) + \\
 &\quad K_{\theta_1} (\beta_i - \beta_{i+1})
 \end{aligned} \tag{8-19}$$

In a similar way, the constraint torques between bodies i and $i+2$ may be obtained to be

$$\begin{aligned}
 M_{c_{i,i+2}} &= \tilde{d}_{i,i+2} K (\mu_{i+2} - \mu_i) + \\
 &\quad \tilde{d}_{i,i+2} K \tilde{d}_{i,i+2} (\beta_{i+2} + \beta_i) + \\
 &\quad K_\theta (\beta_{i+2} - \beta_i)
 \end{aligned} \tag{8-20}$$

$$\begin{aligned}
 M_{c_{i+2,i}} &= d_{i+2,i} K (\mu_i - \mu_{i+2}) + \\
 &\quad \tilde{d}_{i+2,i} K \tilde{d}_{i+2,i} (\beta_i + \beta_{i+2}) + \\
 &\quad K_\theta (\beta_i - \beta_{i+2})
 \end{aligned} \tag{8-21}$$

8.2.3 Translational Equations of Motion for the Full Beam

The translational equation for a typical body i can be written, using equation (8-1) and recognizing that the constraint force between the adjacent bodies contributes to the total force impressed on body i , as

$$F_{e_i} + F_{c_{i,i-2}} + F_{c_{i,i+1}} + F_{c_{i,i+2}} = m_i \overset{\circ\circ}{\rho}_i$$

$$i = 3, 5, \dots, 2n-3 \quad (8-22)$$

From Figure 8-2, it follows that

$$\rho_i = \rho_o + R_i \quad (8-23)$$

$$R_i = r_i + \mu_i \quad (8-24)$$

$$i = 1, 2, \dots, 2n$$

Combining (8-23) and (8-24) and differentiating twice in the inertial frame results in

$$\overset{\circ\circ}{\rho}_i = \overset{\circ\circ}{\rho}_o + \overset{\circ\circ}{r}_i + \overset{\circ\circ}{\mu}_i \quad (8-25)$$

The terms appearing in the right-hand side of the above equation can be written in terms of body i rigid body coordinates:

$$\overset{\circ\circ}{r}_i = \dot{\omega}_o \times r_i + \omega_o \times \omega_o \times r_i \approx \dot{\omega}_o \times r_i$$

$$\overset{\circ\circ}{\mu}_i = \overset{\circ\circ}{\mu}_i + \omega_0 \times \overset{\circ}{\mu}_i + 2\omega_0 \times \overset{\cdot}{\mu}_i + \omega_0 \times \omega_0 \times \mu_i \approx \overset{\circ\circ}{\mu}_i$$

where the dot (\cdot) indicates time differentiation in a reference frame located at the CM of body i . The approximation results due to the assumption that the deformations are small, which entails the deletion of nonlinear terms. Thus, with the above expressions and the equation (8-4), (8-25) becomes (writing the results in body i rigid body coordinates):

$$\overset{\circ\circ}{\rho}_i = \frac{F_e}{M_T} + \dot{\omega}_0 \times r_i + \overset{\circ\circ}{\mu}_i \quad (8-26)$$

Substituting for $\overset{\circ\circ}{\rho}_i$ from (8-26) and for the constraint forces from section 8.2.2, the translational equation of motion for body i can be obtained as

$$m_i \overset{\circ\circ}{\mu}_i + (2K + K_1) \mu_i - K \mu_{i-2} - K_1 \mu_{i+1} - K \mu_{i+2} - K_1 \tilde{d}_{i,i+1} \beta_i + K \tilde{d}_{i-2,i} \beta_{i-2} + K_1 \tilde{d}_{i+1,i} \beta_{i+1} + K \tilde{d}_{i+2,i} \beta_{i+2} = \dots$$

$$F_{e_i} - \frac{m_i}{M_T} F_e + m_i \tilde{r}_i \dot{\omega}_0$$

$$i=3, 5, \dots, 2n-3 \quad (8-27)$$

Similarly, the translational equations of motion for the remaining bodies can be obtained. A summary of the translational equations is given in Appendix F.1.

8.2.4 Rotational Equations of Motion for the Full Beam

Using equation (8-2) and noting that the constraint torques, which include the effect of constraint forces between the adjacent bodies, contribute to the total torque applied to body i (again, a typical body in the top row of the beam model), the rotational equation of motion for body i can be written as

$$T_{e_i} + \gamma_i x F_{e_i} + M_{c_{i,i-2}} + M_{c_{i,i+1}} + M_{c_{i,i+2}} = \overset{\circ}{H}_i \quad (8-28)$$

$$i=3, 5, \dots, 2n-3$$

The rate of change of the angular momentum of body i is given by

$$\overset{\circ}{H}_i = T_{i_0} \dot{H}_i \quad (8-29)$$

with

$$\dot{H}_i = J_i \overset{\circ}{T}_i^t (\dot{\omega}_0 + \ddot{\beta}_i) + J_i \left[\overset{\circ}{T}_i^t (\dot{\omega}_0 + \ddot{\beta}_i) \times \overset{\circ}{T}_i^t (\dot{\omega}_0 + \ddot{\beta}_i) \right] \quad (8-30)$$

where $\overset{\circ}{T}_i$ is a fixed transformation from the rigid body coordinate frame of body i to that of the inertial (Tisserand) frame. Neglecting nonlinear terms in (8-30) and noting that the transformation matrix can be approximated by the identity matrix, equations (8-29) and (8-30) combine to yield

$$\overset{\circ}{H}_i \approx J_i (\overset{\circ}{\omega}_0 + \overset{\circ\circ}{\beta}_i) \quad (8-31)$$

Substituting for the constraint torques from section 3.2, equations (8-28) and (8-31) with the following definitions.

$$K_{\psi} \overset{\Delta}{\sim} d_{i,i+2} \tilde{K} d_{i,i+2} \quad (8-32)$$

$$K_{\psi_1} \overset{\Delta}{\sim} d_{i,i+1} \tilde{K} d_{i,i+1} \quad (8-33)$$

for all i such that the subscripts are positive, yield

$$J_i \overset{\circ\circ}{\beta}_i + (2K_{\theta} + K_{\theta_1}) \beta_i - K_{\theta} \beta_{i-2} - K_{\theta_1} \beta_{i+1} - K_{\theta} \beta_{i+2}$$

$$+ (2K_{\psi} + K_{\psi_1}) \beta_i + K_{\psi} \beta_{i-2} + K_{\psi_1} \beta_{i+1} + K_{\psi} \beta_{i+2}$$

$$+ \tilde{d}_{i,i+1} K_1 \mu_i - \tilde{d}_{i,i-2} K \mu_{i-2} - \tilde{d}_{i,i+1} K_1 \mu_{i+1} - \tilde{d}_{i,i+2} K \mu_{i+2}$$

$$= T_{e_i} + \gamma_i F_{e_i} - J_i \overset{\circ}{\omega}_0 \quad (8-34)$$

$$i=3, 5, \dots, 2n-3$$

The rotational equations for bodies $i=4,6,\dots,2n-4$ can be written in a similar manner. To illustrate the nature of equations for the end bodies ($i=1,2,2n-1,2n$), the rotational equation of motion for body i is given:

$$\begin{aligned}
 & J_1 \ddot{\beta}_1 + (K_\theta + K_{\theta_1}) \beta_1 - K_{\theta_1} \beta_2 - K_\theta \beta_3 \\
 & + (K_\psi + K_{\psi_1}) \beta_1 + K_{\psi_1} \ddot{\beta}_2 + K_\psi \beta_3 \\
 & + (\tilde{d}_{12} K_1 + \tilde{d}_{13} K) \mu_1 - \tilde{d}_{12} K_1 \mu_2 - \tilde{d}_{13} K \mu_3 \\
 & = T_{e_1} + \gamma_1 F_{e_1} - J_1 \dot{\omega}_0
 \end{aligned}
 \tag{8-35}$$

The rotational equations for $i=2, 2n-1$ and $2n$ can be written in a similar manner. A summary of the rotational equations is given in Appendix F.2.

8.2.5 Matrix Equation of Motion for the Full Beam

In the equations of motion developed in the previous two sections, the right-hand sides (rhs) are functions of only external forces and torques, except seemingly for $\dot{\omega}_0$. The rate of change of the inertial rate of the rigid body frame of the beam, $\dot{\omega}_0$, may be defined as the product of the inverse of the inertia dyadic of the discrete bodies about the CM of the beam and the total external torque impressed on the beam; i.e.,

$$\dot{\omega}_0 = J_0^{-1} T_0 \quad (8-36)$$

where:

$$J_0 = \sum_{i=1}^{2n} (J_i - m_i \tilde{r}_i \tilde{r}_i) \quad (8-37)$$

and

$$T_0 = \sum_{i=1}^{2n} T_{e_i} + \tilde{\gamma}_i F_{e_i} \quad (8-38)$$

With the above definition (8-36), the rhs of the equations of motion is now only a function of external forces and torques.

The translational and rotational equations of motion of the discrete bodies constituting the beam may be combined into a single matrix equation to facilitate computations:

$$M_0 \ddot{Q} + K_0 Q = L_0 \quad (8-39)$$

where M_0 and K_0 are, respectively, mass and stiffness matrices of the beam and are $12n \times 12n$, L_0 is a $12n$ -column vector of external forces and torques, and Q is a $12n$ -column vector that characterizes the flexible beam deformations and is defined by

$$Q^t = \begin{bmatrix} \mu_1^t & \beta_1^t & \mu_2^t & \beta_2^t & \dots & \mu_{2n}^t & \beta_{2n}^t \end{bmatrix}$$

where μ_i 's and β_i 's are 3-row vectors and the superscript t denotes the transpose of the matrix or vector.

The beam model that is used in the computer simulation consists of $20(n=10)$ identical bodies so that

$$\begin{aligned} m_i &= m \\ J_i &= J \end{aligned}$$

for $i=1,2,\dots,2n$. Using the equations of motion developed in sections 8.2.3 and 8.2.4, the mass and stiffness matrices M_0 and K_0 can be defined as follows:

Mass Matrix $M_o = [m_{ij}]$

m_{ij} : 3x3 matrix

0 : 3x3 null matrix

$$m_{ij} = \begin{cases} m & i=j=1,3,\dots,4n-1 \\ J & i=j=2,4,\dots,4n \\ 0 & i \neq j \end{cases}$$

Stiffness Matrix $K_o = [K_{ij}]$

K_{ij} : 3 x 3 matrix

0 : 3 x 3 null matrix

$$K_{ij} = \begin{cases} K+K_1 & i=j=1,3,4n-3,4n-1 \\ K_\theta+K_{\theta_1}+K_\psi+K_{\psi_1} & i=j=2,4,4n-2,4n \\ 2K+K_1 & i=j=5,7,\dots,4n-5 \\ 2K_\theta+K_{\theta_1}+2K_\psi+K_{\psi_1} & i=j=6,8,\dots,4n-4 \end{cases}$$

$$K_{ij}=K_{ji}^t = \begin{cases} -K & (i,j)=(1,5),(3,7),\dots,(4n-5,4n-1) \\ -K_1 & (i,j)=(1,3),(5,7),\dots,(4n-3,4n-1) \\ K_\psi-K_\theta & (i,j)=(2,6),(4,8),\dots,(4n-4,4n) \\ K_{\psi_1}-K_{\theta_1} & (i,j)=(2,4),(6,8),\dots,(4n-2,4n) \end{cases}$$

$$K_{ij}=K_{ji}^t = \begin{cases} -K_\phi & (i,j)=(1,6),(3,8),\dots,(4n-5,4n) \\ -K_{\phi_1} & (i,j)=(1,4),(5,8),\dots,(4n-3,4n) \\ -K_\phi & (i,j)=(2,5),(4,7),\dots,(4n-4,4n-1) \\ -K_{\phi_1} & (i,j)=(2,3),(6,7),\dots,(4n-2,4n-1) \\ -K_{\phi_1} & (i,j)=(5,6),(9,10),\dots,(4n-7,4n-6) \\ +K_{\phi_1} & (i,j)=(7,8),(11,12),\dots,(4n-5,4n-4) \end{cases}$$

$$K_{ij} = K_{ji}^t = \begin{cases} -K_\emptyset & -K_{\emptyset_1} & (i,j) = (\bar{1}, \bar{2}) \\ -K_\emptyset & +K_{\emptyset_1} & (i,j) = (3,4) \\ K_\emptyset & -K_{\emptyset_1} & (i,j) = (4n-3, 4n-2) \\ K_\emptyset & +K_{\emptyset_1} & (i,j) = (4n-1, 4n) \end{cases}$$

$K_{ij} = 0$ otherwise.

The following definitions have been used in the above characterization of the matrix K_0 :

$$K_{\emptyset_1} \triangleq \tilde{d}_{i,i+1} K_1$$

$$K_\emptyset \triangleq \tilde{d}_{i,i+2} K$$

$$K_{\psi_1} \triangleq K_{\emptyset_1} \tilde{d}_{i,i+1}$$

$$K_\psi \triangleq K_\emptyset \tilde{d}_{i,i+2}$$

Also note that

$$d_{ij} = -d_{ji}$$

and

$$d_{i,i+2} = -d_{i,i-2}$$

8.2.6 Split Beam - Interface Forces and Torques

The beam is divided into two halves so that each half of the beam may be modeled to be composed of $n(=10)$ elastically interconnected discrete rigid bodies. The two halves of the beam are put together, as shown in Figure 8-5, by connecting the discrete bodies $n-1$ and $n+1$ and the bodies n and $n+2$. The beam thus connected is referred to as the 'split beam'. Since the two halves are modeled in a manner similar to that of the full beam, the free-free modes of the half-beams can be determined in a similar way as the full beam. Then the free-free modes of the split-beam can be obtained from the free-free modes of the half-beams and the forces and torques acting at the connection points of the half-beams. For computational simplicity, the above two steps can be combined to accomplish the same goal; namely, obtaining the free-free modes of the split-beam from the equations of motion of the $2n$ discrete bodies that compose the split-beam, keeping in mind that it is the interface forces and torques, not the constraint forces and torques, that act at connection points.

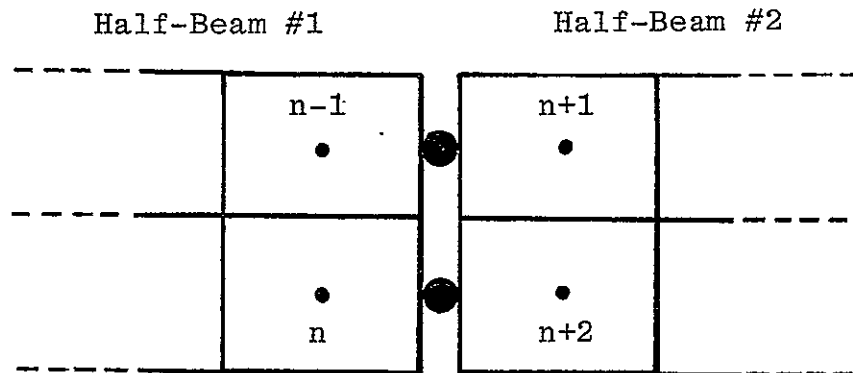


FIGURE 8-5 CONNECTION OF THE HALF-BEAMS

The equations of motion for the discrete bodies not involved in connections can be derived in an identical manner as for those of the full-beam. In order to derive the equations of motion for the bodies involved in the connections of the half-beams, it is first necessary to determine the interface forces and torques acting at each connection point.

The interface force at the connection point between bodies n and $n+2$ is determined by writing the translational equations of the bodies n and $n+2$:

$$F_{e_n} + F_{c_{n,n-1}} + F_{c_{n,n-2}} + F_{n,n+2} = m \ddot{\rho}_n \quad (8-40)$$

$$F_{e_{n+2}} + F_{c_{n+2,n+1}} + F_{c_{n+2,n+4}} + F_{n+2,n} = m \ddot{\rho}_{n+2} \quad (8-41)$$

where F_{ij} denotes the interface force at the connection point between bodies i and j . The bodies n and $n+2$ are connected such that they move as a rigid body so that $F_{n,n+2} = F_{n+2,n}$. Hence, the translational equation for this composite body can be written as

$$F_{e_n} + F_{e_{n+2}} + F_{c_{n,n-1}} + F_{c_{n,n-2}} + F_{c_{n+2,n+1}} + F_{c_{n+2,n+4}} = 2m \ddot{\rho}_{n,n+2} \quad (8-42)$$

where $\rho_{n,n+2}$ is the vector from the inertial point to the connection point. Further,

$$\rho_n = \rho_{n,n+2} + \epsilon_n \quad (8-43)$$

$$\rho_{n+2} = \rho_{n,n+2} + \epsilon_{n+2} \quad (8-44)$$

From equations (8-40), (8-42) and (8-43), and noting that (neglecting nonlinear terms)

$$\overset{oo}{\epsilon}_n = (\dot{\omega}_{o1} + \ddot{\beta}_n) \times \epsilon_n$$

where ω_{o1} is the inertial rate of the rigid body frame of the half-beam #1, the interface force can be solved to be

$$F_{n,n+2} = -m\tilde{\epsilon}_n \ddot{\beta}_n - m\tilde{\epsilon}_n \dot{\omega}_{o1} + \frac{1}{2} \left\{ \begin{array}{l} F_{c_{n+2,n+4}} + F_{c_{n+2,n+1}} \\ -F_{c_{n,n-1}} - F_{c_{n,n-2}} \end{array} \right\} + \frac{1}{2} (F_{e_{n+2}} - F_{e_n}) \quad (8-45)$$

Using equations (8.41), (8-42) and (8-44),

$$F_{n+2,n} = -m\tilde{\epsilon}_{n+2} \ddot{\beta}_{n+2} + \frac{1}{2} \left\{ \begin{array}{l} F_{c_{n,n-2}} + F_{c_{n,n-1}} + F_{c_{n+2,n+1}} + F_{c_{n+2,n+4}} \\ -m\tilde{\epsilon}_{n+2} \dot{\omega}_{o2} + \frac{1}{2} (F_{e_n} - F_{e_{n+2}}) \end{array} \right\} \quad (8-46)$$

where ω_{o2} is the inertial rate of the rigid body frame of half beam #2.

Since the two halves of the beam have the same inertial rate; -i.e.,

$$\dot{\omega}_{o1} + \ddot{\beta}_n = \dot{\omega}_{o2} + \ddot{\beta}_{n+2} \quad (8-47)$$

and

$\epsilon_n = -\epsilon_{n+2}$, it follows from (8-45) and (8-46) that

$$F_{n,n+2} = -F_{n+2,n} \quad (8-48)$$

which is as expected and says that there is no net force acting at the connection point when the split-beam is viewed as a whole.

Similarly, from the translation equations of bodies n-1 and n+1, the interface force at the connection point of these bodies can be obtained to be

$$F_{n-1,n+1} = -m\tilde{\epsilon}_{n-1} \ddot{\beta}_{n-1} + \frac{1}{2} \left[F_{c_{n+1,n+2}} + F_{c_{n+1,n+3}} - F_{c_{n-1,n}} - F_{c_{n-1,n-3}} \right] - m\tilde{\epsilon}_{n-1} \dot{\omega}_{o1} + \frac{1}{2} \left[F_{e_{n+1}} - F_{e_{n-1}} \right] \quad (8-49)$$

$$F_{n+1,n-1} = -m\tilde{\epsilon}_{n+1} \ddot{\beta}_{n+1} + \frac{1}{2} \left[F_{c_{n-1,n-3}} + F_{c_{n-1,n}} - F_{c_{n+1,n+2}} - F_{c_{n+1,n+3}} \right] + \frac{1}{2} \left[F_{e_{n-1}} - F_{e_{n+1}} \right] - m\tilde{\epsilon}_{n+1} \dot{\omega}_{o2} \quad (8-50)$$

and again noting that $\epsilon_{n-1} = -\epsilon_{n+1}$ and

$$\dot{\omega}_{o1} + \ddot{\beta}_{n-1} = \dot{\omega}_{o2} + \ddot{\beta}_{n+1} \quad (8-51)$$

it is seen that

$$F_{n-1,n+1} = -F_{n+1,n-1} \quad (8-52)$$

which is as expected.

The interface torque at the connection point between bodies n and $n+2$ is determined from the rotational equations of the bodies n and $n+2$:

$$T_{e_n} + \tilde{\gamma}_n F_{e_n} + M_{c_{n,n+2}} + M_{c_{n,n-1}} + \tilde{d}_{n,n+2} F_{n,n+2} + M_{n,n+2} = \overset{\circ}{H}_n \quad (8-53)$$

$$T_{e_{n+2}} + \tilde{\gamma}_{n+2} F_{e_{n+2}} + M_{c_{n+2,n+4}} + M_{c_{n+2,n+1}} + \tilde{d}_{n+2,n} F_{n+2,n} +$$

$$M_{n+2,n} = \overset{\circ}{H}_{n+2} \quad (8-54)$$

Since the net torque at the connection point should be zero, it follows that

$$M_{n,n+2} = -M_{n+2,n} \quad (8-55)$$

Using (8-55) in (8-53) and (8-54) results in the interface torque

$$M_{n,n+2} = \frac{1}{2} \left[M_{c_{n+2,n+4}} + M_{c_{n+2,n+1}} - M_{c_{n,n-1}} - M_{c_{n,n-2}} \right] - \frac{1}{2} T_{e_{n,n+2}} \quad (8-56)$$

where $T_{e_{n,n+2}}$ denotes the total external torque on bodies n and $n+2$. Use is made of the facts that

$$F_{n,n+2} = -F_{n+2,n} \quad (\text{equation}(8-48))$$

$$d_{n,n+2} = -d_{n+2,n}$$

that the inertial rates of the bodies n and n+2 are the same

$$\ddot{\beta}_n + \dot{\omega}_{O1} = \ddot{\beta}_{n+2} + \dot{\omega}_{O2}$$

and that the inertia about the CM of bodies n and n+2 is the same; i.e.,

$$J_n = J_{n+2}$$

Similarly, the interface torque at the connection point of bodies n-1 and n+1 may be determined to be

$$M_{n-1,n+1} = \frac{1}{2} \left[M_{c_{n+1,n+3}} + M_{c_{n+1,n+2}} - M_{c_{n-1,n}} - M_{c_{n-1,n-3}} \right] - \frac{1}{2} T_{e_{n-1,n+1}} \quad (8-57)$$

where $T_{e_{n-1,n+1}}$ is the total external torque on bodies n-1 and n+1. Again, the interface torques are such that

$$M_{n-1,n+1} = -M_{n+1,n-1} \quad (8-58)$$

8.2.7 Translational Equations For Bodies of the Split-Beam

The translational equation for a body i which is not involved in connections may be written, as before, as

$$F_{e_i} + F_{c_{i,i-2}} + F_{c_{i,i+1}} + F_{c_{i,i+2}} = m_i \ddot{\rho}_i$$

$$i \in I_1, I_3 \quad (8-59)$$

$$F_{e_i} + F_{c_{i,i-2}} + F_{c_{i,i-1}} + F_{c_{i,i+2}} = m_i \overset{\circ\circ}{\rho}_i \quad (8-60)$$

$$i \in I_2, I_4$$

where the indicator functions are defined as

$$I_1 = \{3, 5, \dots, n-3\}$$

$$I_2 = \{4, 6, \dots, n-2\}$$

$$I_3 = \{n+3, n+5, \dots, 2n-3\}$$

$$I_4 = \{n+4, n+6, \dots, 2n-2\}$$

From Figure 8-2, it follows that

$$\rho_i = {}_\ell \rho_O + {}_\ell r_i + \mu_i \quad (8-61)$$

where the preceding subscript ℓ can be either 1 or 2 which, respectively, refer to half-beams #1 or 2; and ${}_\ell r_i$ is the vector from the CM of half-beam # ℓ to the CM of body i in that half-beam. Differentiating (8-61) twice and retaining only the first-order terms in deformations, results in

$$\overset{\circ\circ}{\rho}_i = {}_\ell \overset{\circ\circ}{\rho}_O + \dot{\omega}_{O\ell} \times {}_\ell r_i + \ddot{\mu}_i \quad (8-62)$$

For half-beam # ℓ

$${}_\ell \overset{\circ\circ}{\rho}_O = \frac{{}_\ell F_e}{M_T^\ell} \quad (8-63)$$

where ${}_\ell F_e$ and M_T^ℓ are, respectively, the total external force applied on the half-beam # ℓ and the total mass of the half-beam # ℓ . Substituting equations (8-62) and

(8-63) in (8-59) and (8-60) results in the translational equations of motion for bodies not involved in connections. For example, the translational equation for bodies which are in the top row of the split-beam and are not involved in connection of the half-beams is given by

$$\begin{aligned}
 m_i \ddot{u}_i + (2K+K_1)u_i - K\mu_{i-2} - K_1\mu_{i+1} - K\mu_{i+2} - K_1\tilde{d}_{i,i+1}\beta_i \\
 + K\tilde{d}_{i-2,i}\beta_{i-2} + K_1\tilde{d}_{i+1,i}\beta_{i+1} + K\tilde{d}_{i+2,i}\beta_{i+2} \\
 = F_{e_i} - \frac{m_i}{M_{T_\ell}} F_{e_\ell} + m_i \tilde{r}_i \dot{\omega}_{o\ell}
 \end{aligned} \tag{8-64}$$

$$\begin{aligned}
 \ell = 1 \text{ for } i \in I_1 \\
 \ell = 2 \text{ for } i \in I_3
 \end{aligned}$$

Comparing (8-64) with (8-27) it can be seen that in general, the left-hand sides of the translational equations of the bodies (not involved in connections) of the split-beam are identical to that of the corresponding bodies of the full-beam. Further, it may be noted that the right-hand side (rhs) of (8-64) is an appropriately modified form of the rhs of (8-27).

The translational equations of motion for the four bodies involved in the connection of the half-beams are as follows:

$$\begin{aligned}
 m_{n-1} \ddot{u}_{n-1} - F_{c_{n-1,n}} - F_{c_{n-1,n-3}} - F_{n-1,n+1} = F_{e_{n-1}} - \frac{m_{n-1}}{M_{T_1}} F_e + \\
 m_{n-1} \tilde{r}_{n-1} \dot{\omega}_{o1}
 \end{aligned}$$

$$\begin{aligned}
m_n \ddot{u}_n - F_{c_{n,n-1}} - F_{c_{n,n-2}} - F_{n,n+2} = F_{e_n} - \frac{m_n}{M_{T1}} l^F e \\
+ m_n l \tilde{r}_n \dot{\omega}_{o1}
\end{aligned} \tag{8-65}$$

$$\begin{aligned}
m_{n+1} \ddot{u}_{n+1} - F_{c_{n+1,n+2}} - F_{c_{n+1,n+3}} - F_{n+1,n-1} = F_{e_{n+1}} - \frac{m_{n+1}}{M_{T2}} 2^F e \\
+ m_{n+1} 2 \tilde{r}_{n+1} \dot{\omega}_{o2}
\end{aligned}$$

$$\begin{aligned}
m_{n+2} \ddot{u}_{n+2} - F_{c_{n+2,n+1}} - F_{c_{n+2,n+4}} - F_{n+2,n} = F_{e_{n+2}} - \frac{m_{n+2}}{M_{T2}} 2^F e \\
+ m_{n+2} 2 \tilde{r}_{n+2} \dot{\omega}_{o2}
\end{aligned}$$

Substituting into (8-65) for the constraint forces from section 8.2.2 and for the interface forces from section 8.2.6 results in the translational equations of motion for the bodies involved in connections. These equations are given in Appendix F.3.

8.2.8 Rotational Equations For Bodies of the Split-Beam

The rotational equation of motion for the bodies not involved in connections of the half-beams may be written, as in Section 8.2.4, as

$$\begin{aligned}
T_{e_i} + \ell \gamma_i x^F e_i + M_{c_{i,i-2}} + M_{c_{i,i+1}} + M_{c_{i,i+2}} = \overset{\circ}{H}_i \tag{8-66} \\
\ell = 1 \text{ for } i \in I_1 \\
\ell = 2 \text{ for } i \in I_3
\end{aligned}$$

$$T_{e_i} + \ell \gamma_i x F_{e_i} + M_{c_{i,i-2}} + M_{c_{i,i-1}} + M_{c_{i,i+2}} = \overset{\circ}{H}_i \quad (8-67)$$

$$\ell = 1 \text{ for } i \in I_2$$

$$\ell = 2 \text{ for } i \in I_4$$

As in Section 8.2.4, the rate of change of the angular momentum of body i may be obtained to be

$$\overset{\circ}{H}_i = \begin{cases} J_i (\dot{\omega}_{o1} + \ddot{\beta}_i) & i \in I_1, I_2 \\ J_i (\dot{\omega}_{o2} + \ddot{\beta}_i) & i \in I_3, I_4 \end{cases} \quad (8-68)$$

Substituting for constraint torques from Section 8.2.2, equations (8-66) and (8-67) with the aid of (8-68) yield the rotational equations of motion for bodies not involved in connection. For example, for bodies in the top row of the beam, $J_i \ddot{\beta}_i + (2K_\theta + K_{\theta_1}) \beta_i - K_\theta \beta_{i-2} - K_{\theta_1} \beta_{i+1} - K_\theta \beta_{i+2}$

$$+ (2K_\psi + K_{\psi_1}) \beta_i + K_\psi \beta_{i-2} + K_{\psi_1} \beta_{i+1} + K_\psi \beta_{i+2}$$

$$+ K_{\phi_1} \mu_i + K_\phi \mu_{i-2} - K_{\phi_1} \mu_{i+1} - K_\phi \mu_{i+2}$$

$$= T_{e_i} + \tilde{\gamma}_i F_{e_i} - J_i \dot{\omega}_o \quad (8-69)$$

$$\ell = 1 \text{ for } i \in I_1$$

$$\ell = 2 \text{ for } i \in I_2$$

Comparing (8-69) with (8-34), it is again seen that the left-hand sides of the rotational equations of the bodies (not involved in connections) of the split-beam are identical to that of the corresponding bodies of the full-beam. Further, the right-hand side of (8-69) is an appropriately modified form of the rhs of (8-34).

The rotational equations for bodies involved in the connection of half-beams may be written as

$$T_{e_{n-1}} + \tilde{\gamma}_{n-1} F_{e_{n-1}} + M_{c_{n-1,n}} + M_{c_{n-1,n-3}} + \tilde{d}_{n-1,n+1} F_{n-1,n+1} + M_{n-1,n+1} = J_{n-1} (\dot{\omega}_{o1} + \ddot{\beta}_{n-1}) \quad (8-70)$$

$$T_{e_{n+2}} + \tilde{\gamma}_{n+2} F_{e_{n+2}} + M_{c_{n+2,n+1}} + M_{c_{n+2,n+4}} + \tilde{d}_{n+2,n} F_{n+2,n} + M_{n+2,n} = J_{n+2} (\dot{\omega}_{o2} + \ddot{\beta}_{n+2}) \quad (8-71)$$

The rotational equations for bodies $n+1$ and n would be identical, respectively, to (8-70) and (8-71) because (i) The expressions for the interface torques have been derived using the rotational equations of bodies $n-1$ and $n+1$ and bodies n and $n+2$, (ii) The inertial rate of the two halves of the beam is the same and hence for the bodies in connection,

$$\dot{\omega}_{o1} + \ddot{\beta}_{n-1} = \dot{\omega}_{o2} + \ddot{\beta}_{n+1} \quad (8-72)$$

$$\dot{\omega}_{o1} + \ddot{\beta}_n = \dot{\omega}_{o2} + \ddot{\beta}_{n+2} \quad (8-73)$$

If $\dot{\omega}_{o1} \neq \dot{\omega}_{o2}$, then (8-72) and (8-73) may be utilized as the rotational equations of bodies $n + 1$ and n , respectively. Substituting for the constraint and interface forces and torques from sections 8.2.2 and 8.2.6 into (8-70) and (8-71) results in the rotational equations of motion for bodies $n-1$ and $n+2$. These equations are given in Appendix F.4.

8.2.9 Matrix Equation of Motion for the Split-Beam

If the inertial rates of the rigid body frames of the two half-beams are assumed to be equal, then these inertial rates must equal the inertial rate of the rigid body frame of the original beam. Hence, it is seen again that the rhs of the equations of motion developed in the previous two sections are functions of only external forces and torques.

For the beam under consideration, $J_{o1} = J_{o2}$ and the inertial rates of the half-beams are equal; viz, $\dot{\omega}_{o1} = \dot{\omega}_{o2}$. In such a case (8-72) and (8-73) cannot be used as the rotational equations of bodies n and $n+1$. Moreover, these equations imply that

$$\beta_{n+1} = \beta_{n-1} \quad (8-74)$$

$$\beta_n = \beta_{n+2} \quad (8-75)$$

Thus, β_n and β_{n+1} may be eliminated from the equations of motion. The resultant translational and rotational equations of motion of the bodies composing the split-beam may be combined into the matrix equation

$$M_2 \ddot{Q}_2 + K_2 Q_2 = L_2 \quad (8-76)$$

where M_2 and K_2 are the mass and stiffness matrices, respectively, of the split-beam and are $(12n-6) \times (12n-6)$. L_2 is a $(12n-6)$ column vector of external forces and torques; and Q_2 is a $(12n-6)$ column vector

that characterizes the flexible beam deformations (excluding the angular deformation of bodies n and $n+1$) and is defined by

$$Q_2^t = \left[\mu_1^t \quad \beta_1^t \quad \mu_2^t \quad \beta_2^t \quad \dots \quad \mu_{n-1}^t \quad \beta_{n-1}^t \quad \mu_n^t \quad \mu_{n+1}^t \quad \mu_{n+2}^t \quad \beta_{n+2}^t \quad \dots \quad \mu_{2n}^t \quad \beta_{2n}^t \right]$$

Let K_2' be the $12n \times 12n$ stiffness matrix of the split-beam that can be obtained from the equations of motion of the bodies of the split-beam.

Since the left-hand sides of the equations of motion of the bodies which are not involved in the connection of the half-beams are identical to that of the corresponding bodies of the full beam, the rows of the K_2' matrix corresponding to the bodies not involved in connections would be identical to the corresponding rows of the stiffness matrix of the full beam, K_0 . So, let K_0' be the $12n \times 12n$ matrix K_0 , but with rows $2n-3, 2n-2, \dots, 2n+4$ which correspond to the equations of motion of the bodies in connection, set to zero. These rows are defined by the elements of a $12n \times 12n$ matrix, K_3 , which has all zero entries for rows $1, 2, \dots, 2n-4, 2n+5, 2n+6, \dots, 4n$ which correspond to the equations of motion of bodies not involved in connections and for which the remaining rows are defined by the equations of motion of the bodies in connections. However, the entries in rows $2n$ and $2n+2$

are all equal to zero due to the rotational equations ((8-72) and (8-73)) of the bodies $2n$ and $2n+2$. Once the $12n \times 12n$ matrix $K_2' = K_0' + K_3'$ is formed, the rows and columns corresponding to β_n and β_{n+1} have to be eliminated keeping in mind that $\beta_n = \beta_{n+2}$ and $\beta_{n+1} = \beta_{n-1}$ (for the case $\dot{\omega}_{o1} = \dot{\omega}_{o2}$). This is accomplished by adding column $2n$ to column $2n+4$ and column $2n+2$ to column $2n-2$ and then deleting the columns and rows $2n$ and $2n+2$, thus resulting in a $(12n-6) \times (12n-6)$ matrix which defines K_2 .

The $(12n-6) \times (12n-6)$ mass matrix is obtained from the equations of motion developed in sections 8.2.7 8.2.8 and noting the fact that $\beta_n = \beta_{n+2}$ and $\beta_{n+1} = \beta_{n-1}$ which helps eliminate β_n and β_{n+1} and results in the following:

Mass Matrix $M_2 = [m_{ij}]$ (12n-6)x(12n-6) matrix

m_{ij} : 3x3 matrix

0 : 3x3 null matrix

$$m_{ij} = \begin{cases} m & i=j=1, 3, \dots, 4n-3 \\ J & i=j=2, 4, \dots, 2n-4, 2n+4, 2n+6, \dots, 4n-2 \\ J+J^* & i=j=2n-2, 2n+2 \\ m & i=j=2n \\ m\tilde{\epsilon}_{n-1} & (i, j)=(2n-3, 2n-2) \\ m\tilde{\epsilon}_{n+1} & (i, j)=(2n, 2n-2) \\ m\tilde{\epsilon}_n & (i, j)=(2n-1, 2n+2) \\ m\tilde{\epsilon}_{n+2} & (i, j)=(2n+1, 2n+2) \\ 0 & \text{otherwise} \end{cases}$$

8.2.10 Determination of the Vibration Frequencies and Mode Shapes
The equations of motion for the beam being considered can be written, as pointed out earlier, as:

$$M\ddot{Q} + KQ = L \quad (8-77)$$

To determine the free-free modes of the system represented by (8-77), the external forces and torques on the rhs of (8-77) is set to zero. Thus, (8-77) may be written as:

$$\ddot{Q} + RQ = 0 \quad (8-78)$$

where

$$R = M^{-1}K \quad (8-79)$$

The eigenvalues, which will be real and positive if M and K are mass and stiffness matrices of a stable structural system, of the matrix R represent the square of the (natural) frequencies (in radians) of the modes of vibration which are possible in the system. The eigenvectors of the matrix R corresponding to the eigenvalues computed, characterize the mode shape of the vibration. Thus, if λ_i is an eigenvalue of R and X_i is the eigenvector corresponding to λ_i , then $\sqrt{\lambda_i}/2\pi$ is a natural frequency of the system and the components of the vector X_i describe the mode shape of the vibration.

8.2.11 Stiffness Matrices et al

For simulation purposes, a 20'x2'x4' homogeneous beam made of steel is considered. The beam is modelled by the twenty 2 ft. cubes. For the material being considered, the modulus of elasticity, the modulus of rigidity and the density are, respectively, given by

$$\begin{aligned} E &= 29 \times 10^6 \text{ psi} \\ G &= 11.5 \times 10^6 \text{ psi} \\ \rho &= 0.283 \text{ lbs/in}^3 \end{aligned}$$

With the coordinate system as defined in Figure 8-6, the following may be defined:

the axial spring constant	$K_y = \frac{bc}{a} E$
the shear spring constant	$K_x = K_z = \frac{5}{6} \frac{bc}{a} G$
the bending spring constant	$\left\{ \begin{aligned} K_{\theta_x} &= \frac{b^3c}{12a} E \\ K_{\theta_z} &= \frac{bc^3}{12a} E \end{aligned} \right.$

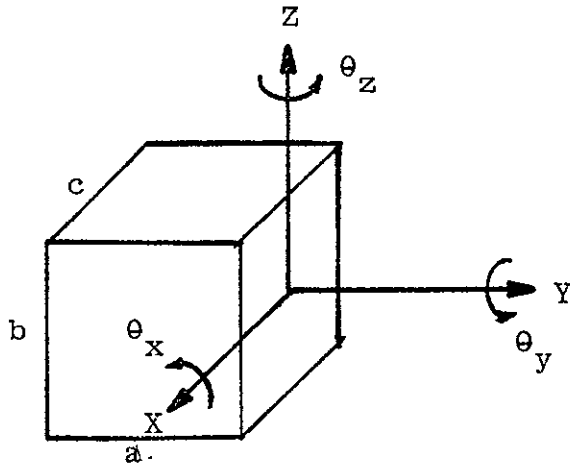


FIGURE 8-6 ILLUSTRATION OF THE COORDINATE SYSTEM

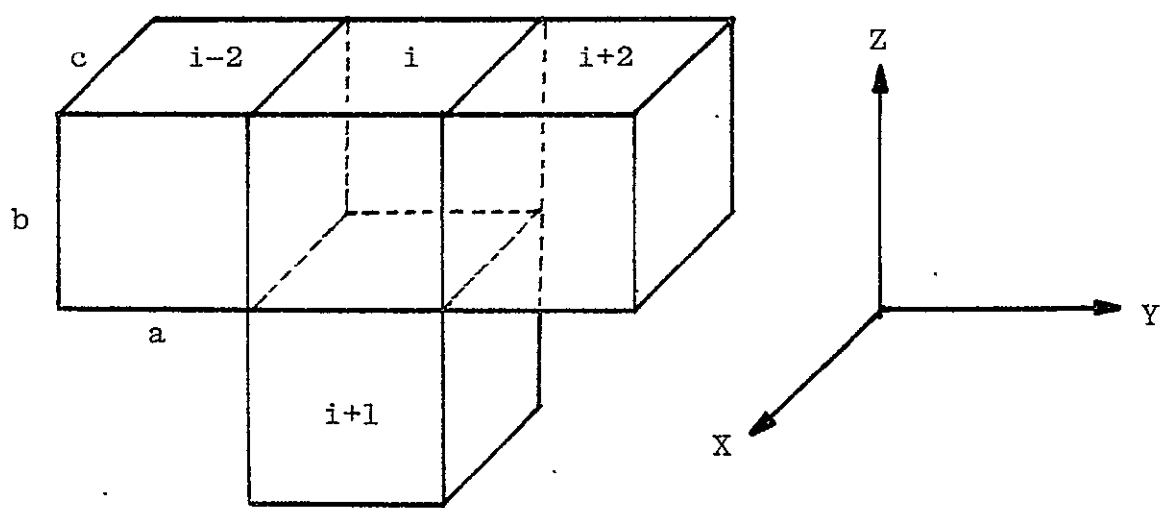


FIGURE 8-7 RELATIONSHIP BETWEEN BODIES

the torsional spring constant $K_{\theta_y} = \frac{J_p}{a} G$

where J_p is the polar moment of inertia and is given by

$$J_p = b^3 c \left[1/3 - 0.21 \frac{b}{c} \left(1 - \frac{b^4}{12c^4} \right) \right]$$

With the above definitions, the stiffness matrices for body i in relation to bodies $i-2$, $i+1$, and $i+2$ (see Figure 8-7) are as follows.

(i) the translational stiffness matrix for bodies i and $i+2$:

$$K = \frac{1}{2} \begin{bmatrix} \frac{5}{6} \frac{bc}{a} G & 0 & 0 \\ 0 & \frac{bc}{a} E & 0 \\ 0 & 0 & \frac{5}{6} \frac{bc}{a} G \end{bmatrix}$$

(ii) the translational stiffness matrix for bodies i and $i+1$:

$$K_1 = \frac{1}{2} \begin{bmatrix} \frac{5}{6} \frac{bc}{a} G & 0 & 0 \\ 0 & \frac{5}{6} \frac{bc}{a} G & 0 \\ 0 & 0 & \frac{bc}{a} E \end{bmatrix}$$

(iii) the rotational stiffness matrix for bodies i and $i+2$:

$$K_{\theta} = \frac{1}{2} \begin{bmatrix} \frac{b^3 c}{12a} E & 0 & 0 \\ 0 & \frac{J_p}{a} G & 0 \\ 0 & 0 & \frac{bc^3}{12a} E \end{bmatrix}$$

(iv) the rotational stiffness matrix for bodies i and $i+1$:

$$K_{\theta_1} = \frac{1}{2} \begin{bmatrix} \frac{a^3 c}{12b} E & 0 & 0 \\ 0 & \frac{ac^3}{12b} E & 0 \\ 0 & 0 & \frac{J_{pp}}{a} G \end{bmatrix}$$

$$\text{where } J_{pp} = a^3 c \left[1/3 - 0.21 \frac{a}{c} \left(1 - \frac{a^4}{12b^4} \right) \right]$$

The factor of one-half arises in the above definitions due to the fact that the spring rates of the adjacent bodies are in series.

The mass of each discrete body composing the beam can be computed from

$$m = \rho v/g$$

where v is the volume of each body and g is the gravitational acceleration.

The moment of inertia of a body about its CM is given by:

$$J = \int (\delta^T \delta I - \delta \delta^T) dm.$$

where δ is the vector from the CM of the body to an elemental mass dm and is given by

$$\delta^T = (ix, jy, kz)$$

and the elemental mass is given by

$$dm = \rho \, dx \, dy \, dz/g$$

For a body of $a \times b \times c$

$$J = \int_{-b/2}^{b/2} \int_{-a/2}^{a/2} \int_{-c/2}^{c/2} (\delta^T \delta I - \delta \delta^T) \frac{\rho}{g} \, dx \, dy \, dz$$

Carrying out the integration results in the inertia dyadic

$$J = \frac{m}{12} \begin{bmatrix} a^2+b^2 & 0 & 0 \\ 0 & b^2+c^2 & 0 \\ 0 & 0 & c^2+a^2 \end{bmatrix}$$

The various vectors that are required for the simulation of the equations of motion of the beam are as follows:

- (i) the vectors from the CM of the beam to the CM of the body i :

$$r_i = \left(0, -\frac{n-2 \left\lceil \frac{i+1}{2} \right\rceil + 1}{2} a, (-1)^{i+1} \frac{b}{2} \right)$$

$i=1, 2, \dots, n$

$$r_{2n-i+1} = -r_i$$

where $\left[\frac{i+1}{2} \right]$ denotes the integer part of $\frac{i+1}{2}$.

- (ii) the vectors from the CM of the half-beam #1 to the CM of the body i in the half-beam #1:

$${}^1r_i = \left(0, -\left[\frac{n}{2} - i+1 \right] a, (-1)^{i+1} \frac{b}{2} \right)$$

$i=1, 2, \dots, \frac{n}{2}$

$${}^1r_{n-i+1} = -{}^1r_i$$

$${}^1r_j = {}^2r_{n+j} \quad j=1, 2, \dots, n$$

- (iii) the vectors from the CM of body i to the interface point that lies on the line joining the CM of body i and the CM of the adjoining body:

$$d_{i,i+2} = \left(0, \frac{a}{2}, 0 \right) \quad i=1, 2, \dots, 2n-2$$

$$d_{i,i-2} = \left(0, -\frac{a}{2}, 0 \right) \quad i=3, 4, \dots, 2n$$

$$d_{i,i+1} = \left(0, 0, -\frac{b}{2} \right) \quad i=1, 3, \dots, 2n-1$$

$$d_{i,i-1} = \left(0, 0, \frac{b}{2} \right) \quad i=2, 4, \dots, 2n$$

- (iv) the vectors from the connection point to the CM of body i :

$$\epsilon_{n-1} = \epsilon_n = -\epsilon_{n+1} = -\epsilon_{n+2} = \left(0, -\frac{a}{2}, 0 \right)$$

Finally, it may be pointed out that, for the beam example being considered,

$$a = b = c = 2 \text{ ft.}$$

8.2.12 Simulation Results

The eigenvalues and the corresponding eigenvectors are obtained, as discussed in Section 8.2.10, for both the full beam and the split-beam. All the eigenvalues are, as expected, non-negative in both cases.

For the full beam, there are six zero eigenvalues which are associated with the six rigid body modes of the beam. The remaining 114 eigenvalues yield the beam's natural frequencies ranging from 58.2Hz to 2066.8Hz. The eigenvectors corresponding to these 114 eigenvalues, the imaginary parts being zero, are real and hence describe the mode shapes of the vibrations. Due to the truncation and roundoff errors in computations, four of the eigenvalues corresponding to the rigid body modes (instead of being zero) are complex conjugates with the real and imaginary parts being less than 10^{-6} and the other two eigenvalues are real and are less than 10^{-5} . Thus, the computed eigenvectors corresponding to these rigid body modes do not portray the shapes of the rigid body modes.

For the split-beam, there are twelve zero eigenvalues, six of which are associated with the rigid body modes of the beam and the rest of which result due to the way the half-beams are put together. The remaining 102 positive eigenvalues yield natural frequencies ranging from 66.8Hz to 2014.5Hz. Thus, there are twelve frequencies of vibration of the beam which are missing for the split-beam case; otherwise, the frequencies

of vibration of the split-beam compare very favorably with the natural frequencies of the full beam, the maximum error being 14.8%. A comparison chart of the frequencies of vibration obtained for the full beam and the split-beam is shown in Table 8-2.

The mode shapes of the non-zero natural frequencies of the split-beam compare, in general, quite favorably with the corresponding mode shapes obtained for the original beam. Since the angular deformations of two of the four bodies involved in the connection of the half-beams have been eliminated from the equations of motion of the split-beam, the mode shapes corresponding to these deformation coordinates are absent in the eigenvectors of the split-beam. In some cases, the relative amplitudes of vibration of the bodies involved in connections, given by the components (of the eigenvectors) corresponding to the deformation coordinates of the bodies in question, are close to zero. However, it may be pointed out that the corresponding components of the eigenvectors of the original beam are small, generally less than 20% of the maximum component of the eigenvector being considered.

In summary, the lower-order modes (that is, modes corresponding to the frequency range from the lowest to a frequency at least ten times the lowest frequency) of the split-beam compare very well with those of the original beam. The natural frequencies of the beam that are missing from those obtained for the split-beam are all in the high frequency range. Further, there

TABLE 8-2
 COMPARISON OF THE FREQUENCIES OF VIBRATION
 FOR THE ORIGINAL BEAM AND THE SPLIT-BEAM

<u>ORIGINAL BEAM</u>	<u>SPLIT-BEAM</u>
58.2	66.8
102.4	115.1
125.5	140.6
151.4	153.5
225.6	233.1
249.9	252.7
275.6	305.3
291.9	324.1
363.7	384.6
372.8	409.3
418	429.4
495.4	504.3
495.6	509.6
568.7	622.0
576.7	576.7
617.7	652.7
618.7	667.5
623.2	657.9
719.3	746.5
735.4	756.8
741.7	767.2
780.3	783.2
847.2	*
859.8	917.4
862.3	916.2

TABLE 8-2
CONT'D

<u>ORIGINAL BEAM</u>	<u>SPLIT-BEAM</u>
873.4	929.1
933.1	933.1
934.5	974.9
948.3	951.8
965	984
989.9	1045
991	991
1024.8	1071.6
1037	*
1044.1	*
1054.1	1074.1
1096.9	1096.9
1128.6	1128.6
1131.3	1139.5
1145.4	1157.2
1184.7	1128
1192.3	1192.5
1192.5	1192.6
1199.4	1199.4
1200.4	1202.8
1201.5	1201.9
1205.9	1247.2
1209	1181.4
1229.8	1231.5
1263.7	1219.7
1278.4	1278.4
1289.3	1291.3
1290.8	1294.7

TABLE 8-2
CONT'D

<u>ORIGINAL BEAM</u>	<u>SPLIT-BEAM</u>
1307.9	1317.8
1309.9	1311.3
1316.3	1362.4
1319.6	1319.6
1319.6	*
1319.6	*
1324.9	1344.4
1340.5	*
1341.1	1346.3
1358.8	*
1359	1307.3
1373.1	1374.2
1376.5	*
1387.9	1387.9
1401.3	1399.6
1402.3	1419.8
1409.9	1410.4
1411.9	1427.3
1417.4	1378.8
1431.3	1394.9
1433.4	1408.6
1441.1	1485.7
1461.6	1413.8
1466.3	1492.7
1503.3	*
1509.8	1509.8
1513.2	1515.7
1517.4	1565.1

TABLE 8-2
CONT'D

<u>ORIGINAL BEAM</u>	<u>SPLIT-BEAM</u>
1529.2	*
1530.5	1546.6
1556	1554
1579.3	*
1579.8	1562.9
1600.8	1564.7
1601.3	1601.4
1601.9	1601.2
1611.3	*
1627	1656.3
1635.7	1624.8
1635.9	1636
1656.4	1634.1
1656.5	1623.5
1662.8	*
1663.4	1669.2
1686.9	*
1690.1	1691.5
1713.5	1719.6
1721	*
1723	1657.8
1751.2	1724.5
1759.7	1759.7
1761.6	1761.6
1774.8	1774.8
1786.3	1756.4
1786.9	1752.9
1800.2	1829.2

TABLE 8-2
CONT'D

<u>ORIGINAL BEAM</u>	<u>SPLIT-BEAM</u>
1843.2	1753.6
1866	1850
1944.8	2002.2
2017.5	2014.5
2066.8	*

*Denotes frequencies for which there are no corresponding mode shapes.

are four split-beam's natural frequencies for which there are no corresponding mode shapes in the original beam. However, these are again in the high frequency range. The fact that the higher-order modes of the split-beam do not compare as well as the lower-order modes do with the corresponding modes of the original beam, poses no problem since the control systems associated with spacecraft are, in general, low frequency systems.

The computer outputs showing the natural frequencies and the mode shapes for the original beam and for the split-beam are given in Appendices G and H, respectively.

8.3

CONCLUSIONS

The computer simulation results indicate that the frequencies of vibration and the corresponding mode shapes obtained from the free-free modes of the half-beams and using the method developed for combining the half-beams compare very favorably with those obtained for the original beam using the standard discrete coordinate formulation. The distortions that are encountered in the modes of the split-beam are mostly in the higher-order modes. These distortions are mainly due to the fact that the dynamic model of the split-beam includes, in effect, only 18 bodies whereas the original beam is modeled with 20 bodies. Two of the bodies are "lost" because, for the split-beam, there are only 18 rotational equations and two of the 20 translational equations give rise to six more rigid body modes that are not in the original beam. Thus,

ten percent of the components of the system are, in effect, "lost" when the new modeling technique is utilized for a beam modeled with a small number of bodies. In practice, however, the number of bodies that constitute a spacecraft is large and the number of components involved in connections would be very small thus resulting in a very small percentage of the bodies being "lost" when the modeling technique being considered is used. Thus, in practice, it is expected that the difference between the flexible body characteristics obtained via the new method and the actual flexible body characteristics would be insignificant.

Hence, it can be concluded from the above remarks and the simulation results obtained that the method (reference 8-1) of combining substructures of a system achieves a good degree of fidelity in the determination of flexible body characteristics for the overall system from the characteristics of the substructures constituting the system.

8.4

REFERENCES

- 8-1 Rybak, S. C., A Method for Determining Overall Flexible Body Characteristics for a Series of Connected Substructures, Rocky Mountain Guidance and Control Conference, March 10-13, 1978, Keystone, Colorado.
- 8-2 Canavan, J. R. and Likins, P. W., Floating Reference Frames for Flexible Spacecraft, Journal of Spacecraft and Rockets, Vol. 14, No. 12, December 1977, pp 724-732.

SECTION 9

SECTION 9

9.0 CONCLUSIONS AND RECOMMENDATIONS

Equations have been generated for three different approaches to controlling a large flexible spacecraft. Two of the three (LQR and MNA) were simulated controlling a single axis of the Space Construction Base (SCB), Configuration 1. The third approach, multilevel control, was developed for a three axis SCB simulation; but the computer program was too complex for the actual simulation to be completed before the end of this reporting period.

One control approach utilized some conventional optimization techniques based upon design in the time domain. This approach (LQR) can be easily expanded in dimensions (more axes, actuator locations, flexible modes, etc), readily extended to include noise sources at sensors and actuators, and the filtering of state measurements.

The second control method (MNA), is essentially based upon design in the frequency domain. It utilizes system matrix manipulation to obtain diagonal dominance, thereby reducing the problem to a set of independent single loop designs.

The third control method utilizes a multilevel hierarchal technique which is amenable to implementation by a digital processor. Optimization of the control system is obtained through a performance index using weighting factors on components of the state variable and control vectors.

The other portion of the study was related to mathematical modeling of flexible spacecraft dynamics. The previously generated SCB vehicle equations were derived for large angular displacements of the central body and the appendages (solar wing elements). The model was simplified considerably by restricting motion to small angular displacements. This linearized model was then utilized in single-axis control simulations and the multilevel, three-axis, simulation equations. The three axis linearized equations were also examined with respect to MNA control while including the cross-coupling between axes (the full order mode, FOM). The reduced order model (ROM) was generated to study control of the SCB without cross-coupling, thereby reducing the problem from one larger three-axis analysis to three much simpler single-axis analyses.

A structural analysis study (Section 8) illustrated a technique whereby the structural characteristics of two or more submodules may be combined when the submodules are firmly connected, as through docking or berthing ports. Prediction of the resulting dynamics may be based upon the theory presented. This was verified by means of an example of connecting two shorter beams to obtain one which is longer.

9.1 CONCLUSIONS

The following conclusions are based upon the formulation of control equations and the simulations of Configuration 1 of the Spcae Construction Base:

- a. Excellent simulation results were obtained when feeding back the full state variable vector (for LQR, MNA and Retallack pole placement).
- b. The results for partial feedback of the state variable vector were satisfactory, but power expended at the central body actuator system was excessive when appendage deflection states were omitted (LQR).
- c. The MNA approach also produced good performance for the difficult case of vehicle flexible modes being within the closed loop bandwidth of the attitude control system.
- d. The Retallack pole placement method was very successful in placing specific open loop poles in desired positions when the control system loop is closed.
- e. The three-dimensional, five-body, linearized vehicle model was transformed into a scalar state variable equation set which was readily programmed for a digital computer.
- f. The three-axis, five-body multilevel control method was similarly transformed into an equation set amenable to programming.
- g. Cross-axis coupling of the subject vehicle was virtually negligible; that is, differences between the reduced order model (ROM) and the full order

model (FOM) were negligible.

In addition, the structural analysis technique developed in Section 8 was fairly successful in predicting the frequencies of vibration and mode shapes of the "split-beam" structure where the two submodules are fastened end-to-end. This is particularly fortunate since the number of finite elements used was not very high; 20 bodies were used in defining the original full beam and two sets of 10 bodies were used for each of the two connected submodules. Finite element modules for spacecraft in later stages of design usually are defined to a much higher degree; the fidelity of the method described, therefore, is actually expected to be much better when applied to clusters of "real" space vehicle modules.

9.2 RECOMMENDATIONS

The following items are recommended for future studies regarding control of large flexible space vehicles:

- a. All three control methods should be expanded to stabilize space vehicles modeled with more discrete elements and dimensions.
- b. Similarly, the control should be expanded to stabilize vehicles modeled in three axes, including cross-coupling.

- c. More attention must be devoted to quick, accurate generation of spacecraft mathematical models. For vehicles such as Configuration 1 of the SCB, the hybrid coordinate technique is an excellent candidate for this type of study because of the flexible solar wings. Decisions for truncating modes may then be more confidently made on the basis of modal dominance and frequencies.
- d. Noise on sensor measurements of states and at actuators may be included in future studies; these are customarily extensions to the LQR method.
- e. The MNA and pole placement method should be expanded to placement of closed loop poles with regard to the magnitude of frequency (in addition to damping factor).
- f. Control simulations of the LQR and MNA with pole placement methods should be repeated for the X and Y axes of the same vehicle configuration.
- g. Because of uncertainties of vehicle model parameters, sensitivity analyses must be included in control system evaluation to determine variations in performance.
- h. It may be desirable to try other pole placement techniques (the standard Simon and Mitter technique and the Kalman pole placement algorithm), and evaluate the subsequent designs and performance.

- i. A test should be developed for robustness of the control design as a means of simplifying design for future configurations.
- j. The three-axis multilevel control simulation should be completed (the SCB Configuration 1 model equations have previously been programmed).
- k. When access to measurement of essential state variables is impractical, filtering techniques must be developed for generation of observers required for the inaccessible states.
- l. The LQR method should be expanded for stabilization of two or more locations on a large flexible space vehicle; for example, when multiple Instrument Pointing Systems (IPS) are used. There may be a need for stabilization of all six degrees of freedom at the mounting location, particularly when the center of mass of the IPS inner gimbal and payload is not located at each gimbal pivot axis.

It is recommended also, that the structural analysis technique that was developed and evaluated on beams with a limited number of elements, be verified for a high degree of fidelity on more complex structural models with many more finite elements. Further, the problem of substructure model truncation prior to determining the overall system's characteristics should be examined.

APPENDIX A

NUMERICAL VALUES OF MATRICES USED IN ANALYSIS AND DESIGN

- Space Construction Base, Configuration 1

Values of matrices P, N, KD, KS, A, and B used for analysis and control system design purposes are shown on the following pages. A list of constants used in the model is also shown in this Appendix.

Most of the parameter values used in the simulation of five-body three-dimension model of Configuration I are based upon the request issued by Marshall Space Flight Center.

BENDIX RESEARCH LABORATORIES

*** P ARRAY (P * (MDOT) = Q) ***
TWO LINES PER A ROW

0. 3205759E 05	0. 0000000E 00	0. 4882813E-03	0. 4884078E 04	0. 1424752E-73	0. 0000000E 00	0. 4884074E 04	0. 0000000E 00
0. 0000000E 00	0. 1504288E 04	0. 0000000E 00	0. 0000000E 00	0. 1504288E 04	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 2948331E 06	0. 0000000E 00	0. 0000000E 00	0. 4884078E 04	0. 0000000E 00	0. 0000000E 00	0. 4884074E 04
0. 0000000E 00	0. 0000000E 00	0. 1504288E 04	0. 0000000E 00	0. 0000000E 00	0. 1504288E 04	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 2938206E 06	-0. 2556577E 05	0. 0000000E 00	0. 0000000E 00	0. 2556577E 05	0. 0000000E 00
0. 0000000E 00	0. 2717345E 05	0. 2834020E 05	0. 0000000E 00	0. 7874219E 04	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 4884078E 04	0. 0000000E 00	-0. 2556577E 05	0. 5356800E 05	0. 0000000E 00	0. 0000000E 00	0. 9802957E 03	0. 0000000E 00
0. 0000000E 00	0. 1868064E 05	0. 0000000E 00	0. 0000000E 00	0. 3019297E 03	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 3635371E 46	0. 4884078E 04	0. 0000000E 00	0. 0000000E 00	0. 5432681E 05	0. 0000000E 00	0. 0000000E 00	0. 9802957E 03
0. 0000000E 00	0. 0000000E 00	0. 1868064E 05	0. 0000000E 00	0. 0000000E 00	0. 3019297E 03	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 7571689E 03	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 4884074E 04	0. 0000000E 00	0. 2556577E 05	0. 9802957E 03	0. 0000000E 00	0. 0000000E 00	0. 5356797E 05	0. 0000000E 00
0. 0000000E 00	0. 3019294E 03	0. 0000000E 00	0. 0000000E 00	0. 1868063E 05	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 4884074E 04	0. 0000000E 00	0. 0000000E 00	0. 9802957E 03	0. 0000000E 00	0. 0000000E 00	0. 5432678E 05
0. 0000000E 00	0. 0000000E 00	0. 3019294E 03	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 1868063E 05	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 7571692E 03	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 1504288E 04	0. 0000000E 00	0. 2717345E 05	0. 1868064E 05	0. 0000000E 00	0. 0000000E 00	0. 3019294E 03	0. 0000000E 00
0. 0000000E 00	0. 1180585E 05	0. 0000000E 00	0. 0000000E 00	0. 9299382E 02	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 1504288E 04	0. 2834020E 05	0. 0000000E 00	0. 1868064E 05	0. 0000000E 00	0. 0000000E 00	0. 3019294E 03
0. 0000000E 00	0. 0000000E 00	0. 1256466E 05	0. 0000000E 00	0. 0000000E 00	0. 9299382E 02	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 7571689E 03	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 1504288E 04	0. 0000000E 00	0. 7874219E 04	0. 3019297E 03	0. 0000000E 00	0. 0000000E 00	0. 1868063E 05	0. 0000000E 00
0. 0000000E 00	0. 9299382E 02	0. 0000000E 00	0. 0000000E 00	0. 1180585E 05	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 1504288E 04	0. 0000000E 00	0. 0000000E 00	0. 3019297E 03	0. 0000000E 00	0. 0000000E 00	0. 1868063E 05
0. 0000000E 00	0. 0000000E 00	0. 9299382E 02	0. 0000000E 00	0. 0000000E 00	0. 1256466E 05	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00
0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 0000000E 00	0. 7571692E 03	0. 0000000E 00

P ARRAY

A-2

ORIGINAL PAGE IS
OF POOR QUALITY

BENDIX RESEARCH LABORATORIES

*** N ARRAY *** (W = N* XH1)

1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	0.00	1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00
1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00
0.00	1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
0.00	0.00	1.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00
1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00
0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00
0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00	1.00

A-3

N ARRAY

BENDIX RESEARCH LABORATORIES

*** A11 PART OF A -THE PLANT MATRIX (ROWS=1, 15 ; COLS=1, 15) ***
 (TWO LINES PER A ROW)

```

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 1280899E-02 0. 0000000E 00-0. 5771543E-12 0. 1280899E-02 0. 0000000E 00
-0. 5771543E-12-0. 6926712E-03 0. 0000000E 00 0. 0000000E 00-0. 6926707E-03 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 1000111E-02 0. 0000000E 00 0. 0000000E 00 0. 1000111E-02
0. 0000000E 00 0. 0000000E 00-0. 1348562E-02 0. 0000000E 00 0. 0000000E 00-0. 1348562E-02 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 7501572E-04 0. 0000000E 00 0. 1336089E-04 0. 7501571E-04 0. 0000000E 00
0. 1336089E-04 0. 4367963E-03 0. 0000000E 00 0. 0000000E 00-0. 4367961E-03 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 2962485E-02 0. 0000000E 00 0. 7431766E-05-0. 1354121E-02 0. 0000000E 00
0. 7431766E-05 0. 1767937E-01 0. 0000000E 00 0. 0000000E 00 0. 4263467E-03 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1118445E-01 0. 0000000E 00 0. 0000000E 00-0. 9886064E-03
0. 0000000E 00 0. 0000000E 00 0. 2963305E 00 0. 0000000E 00 0. 0000000E 00-0. 1739376E-03 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 7501571E-04 0. 0000000E 00-0. 4751936E-02-0. 7501572E-04 0. 0000000E 00
-0. 1336089E-04-0. 4367963E-03 0. 0000000E 00 0. 4231419E-02 0. 4367961E-03 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1354121E-02 0. 0000000E 00-0. 7431767E-05-0. 2962486E-02 0. 0000000E 00
-0. 7431767E-05 0. 4263471E-03 0. 0000000E 00 0. 0000000E 00 0. 1767937E-01 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 9886064E-03 0. 0000000E 00 0. 0000000E 00-0. 1118445E-01
0. 0000000E 00 0. 0000000E 00-0. 1739395E-03 0. 0000000E 00 0. 0000000E 00 0. 2963274E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 7501571E-04 0. 0000000E 00-0. 1336089E-04-0. 7501572E-04 0. 0000000E 00
-0. 4751936E-02-0. 4367963E-03 0. 0000000E 00 0. 0000000E 00 0. 4367961E-03 0. 0000000E 00 0. 4231419E-02

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 4130814E-02 0. 0000000E 00-0. 1011085E-04 0. 9961669E-04 0. 0000000E 00
-0. 1011085E-04-0. 5660854E-01 0. 0000000E 00 0. 0000000E 00 0. 3623310E-03 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 2520601E-01 0. 0000000E 00 0. 0000000E 00-0. 1479540E-04
0. 0000000E 00 0. 0000000E 00-0. 9839008E 00 0. 0000000E 00 0. 0000000E 00 0. 1957956E-02 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 4738573E-02 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 8462839E-02 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 9961659E-04 0. 0000000E 00 0. 1011084E-04 0. 4130814E-02 0. 0000000E 00
0. 1011084E-04 0. 3623313E-03 0. 0000000E 00 0. 0000000E 00-0. 5660854E-01 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1479524E-04 0. 0000000E 00 0. 0000000E 00 0. 2520575E-01
0. 0000000E 00 0. 0000000E 00 0. 1957956E-02 0. 0000000E 00 0. 0000000E 00-0. 9838948E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00
0. 4738573E-02 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 8462839E-02
    
```

A-6

$$A = \begin{bmatrix} A_{11} & A_{12} \\ I & O \end{bmatrix}, \quad A_{11} \quad \text{PART OF A MATRIX}$$

BENDIX RESEARCH LABORATORIES

*** A12 PART OF A -THE PLANT MATRIX (ROWS=1,15 ; COLS=16,30) ***
 (TWO LINES PER A ROW)

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 6956348E 00 0. 0000000E 00-0. 1054800E-09 0. 6956348E 00 0. 0000000E 00
 -0. 1054800E-09-0. 8228935E-02 0. 0000000E 00 0. 0000000E 00-0. 8228928E-02 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 2240359E 02 0. 0000000E 00 0. 0000000E 00 0. 2240359E 02
 0. 0000000E 00 0. 0000000E 00-0. 3008974E 00 0. 0000000E 00 0. 0000000E 00-0. 3008974E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 4073977E-01 0. 0000000E 00 0. 2441819E-02 0. 4073976E-01 0. 0000000E 00
 0. 2441819E-02 0. 5189139E-02 0. 0000000E 00 0. 0000000E 00-0. 5189139E-02 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1608875E 01 0. 0000000E 00 0. 1358220E-02-0. 7354001E 00 0. 0000000E 00
 0. 1358220E-02 0. 2100309E 00 0. 0000000E 00 0. 0000000E 00 0. 5064998E-02 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 2505439E 03 0. 0000000E 00 0. 0000000E 00-0. 2214587E 02
 0. 0000000E 00 0. 0000000E 00 0. 6611862E 02 0. 0000000E 00 0. 0000000E 00-0. 3880975E-01 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 4073977E-01 0. 0000000E 00-0. 8684571E 00-0. 4073976E-01 0. 0000000E 00
 -0. 2441819E-02-0. 5189139E-02 0. 0000000E 00 0. 1182682E 00 0. 5189139E-02 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 7354001E 00 0. 0000000E 00-0. 1358220E-02-0. 1608876E 01 0. 0000000E 00
 -0. 1358220E-02 0. 5065005E-02 0. 0000000E 00 0. 0000000E 00 0. 2100309E 00 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 2214587E 02 0. 0000000E 00 0. 0000000E 00-0. 2505439E 03
 0. 0000000E 00 0. 0000000E 00-0. 3881019E-01 0. 0000000E 00 0. 0000000E 00 0. 6611795E 02 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 4073977E-01 0. 0000000E 00-0. 2441819E-02-0. 4073976E-01 0. 0000000E 00
 -0. 8684571E 00-0. 5189139E-02 0. 0000000E 00 0. 0000000E 00 0. 5189139E-02 0. 0000000E 00 0. 1182682E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 2243375E 01 0. 0000000E 00-0. 1847846E-02 0. 5410015E-01 0. 0000000E 00
 -0. 1847846E-02-0. 6725094E 00 0. 0000000E 00 0. 0000000E 00 0. 4304495E-02 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 5646426E 03 0. 0000000E 00 0. 0000000E 00-0. 3314323E 00
 0. 0000000E 00 0. 0000000E 00-0. 2195325E 03 0. 0000000E 00 0. 0000000E 00 0. 4368683E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 8660153E 00 0. 0000000E 00 0. 0000000E 00
 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 2365364E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 5410010E-01 0. 0000000E 00 0. 1847845E-02 0. 2243375E 01 0. 0000000E 00
 0. 1847845E-02 0. 4304495E-02 0. 0000000E 00 0. 0000000E 00-0. 6725094E 00 0. 0000000E 00 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 3314285E 00 0. 0000000E 00 0. 0000000E 00 0. 5646367E 03
 0. 0000000E 00 0. 0000000E 00 0. 4368683E 00 0. 0000000E 00 0. 0000000E 00-0. 2195312E 03 0. 0000000E 00

0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00
 0. 8660153E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 2365364E 00

A-7

BENDIX RESEARCH LABORATORIES

*** B ARRAY (CONTROL MATRIX) FIRST 15 ROWS ***

0. 3208360E-04 0. 0000000E 00-0. 1608613E-12-0. 3284731E-05 0. 0000000E 00 0. 0000000E 00-0. 3284727E-05 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00 0. 3401813E-05 0. 0000000E 00 0. 0000000E 00-0. 3331086E-06 0. 0000000E 00 0. 0000000E 00-0. 3331086E-06 0. 0000000E 00
-0. 1608613E-12 0. 0000000E 00 0. 3723875E-05 0. 2071341E-05 0. 0000000E 00 0. 0000000E 00-0. 2071341E-05 0. 0000000E 00 0. 0000000E 00
-0. 3536833E-04 0. 0000000E 00 0. 2071341E-05 0. 4643211E-04 0. 0000000E 00 0. 0000000E 00 0. 2021786E-05 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00-0. 3734922E-05 0. 0000000E 00 0. 0000000E 00 0. 3803347E-04 0. 0000000E 00 0. 0000000E 00-0. 4296493E-07 0. 0000000E 00
0. 1608613E-12 0. 0000000E 00-0. 3723875E-05-0. 2071341E-05 0. 0000000E 00 0. 1320709E-02 0. 2071341E-05 0. 0000000E 00 0. 0000000E 00
-0. 3536833E-04 0. 0000000E 00-0. 2071341E-05 0. 2021789E-05 0. 0000000E 00 0. 0000000E 00 0. 4643212E-04 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00-0. 3734922E-05 0. 0000000E 00 0. 0000000E 00-0. 4296493E-07 0. 0000000E 00 0. 0000000E 00 0. 3803347E-04 0. 0000000E 00
0. 1608613E-12 0. 0000000E 00-0. 3723875E-05-0. 2071341E-05 0. 0000000E 00 0. 0000000E 00 0. 2071341E-05 0. 0000000E 00 0. 1320709E-02
0. 4468847E-05 0. 0000000E 00-0. 2818041E-05-0. 1095916E-03 0. 0000000E 00 0. 0000000E 00 0. 1718220E-05 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00 0. 4283829E-06 0. 0000000E 00 0. 0000000E 00-0. 9370365E-04 0. 0000000E 00 0. 0000000E 00 0. 4836363E-06 0. 0000000E 00
0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1320709E-02 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00
0. 4468843E-05 0. 0000000E 00 0. 2818039E-05 0. 1718219E-05 0. 0000000E 00 0. 0000000E 00-0. 1095916E-03 0. 0000000E 00 0. 0000000E 00
0. 0000000E 00 0. 4283829E-06 0. 0000000E 00 0. 0000000E 00 0. 4836357E-06 0. 0000000E 00 0. 0000000E 00-0. 9370269E-04 0. 0000000E 00
0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00 0. 0000000E 00-0. 1320709E-02

*** ROWS 16 THRU 30 ARE ALL ZEROS ***

B ARRAY

BENDIX RESEARCH LABORATORIES

***** SPACE BASE CONFIGURATION 1(SBODY) *****

CD 1	MSM1 0. 5109602E 03	KXSM1 0. 5125000E 01	KXSWB 0. 2991702E 02
CD 2	MHM1 0. 5124204E 03	KYSM1 0. 4816702E 01	KYSWB 0. 3091702E 02
CD 3	MDM1 0. 1748300E 03	KZSM1 0. 4816702E 01	KZSWB 0. 7566702E 01
CD 4	MTA1 0. 2020201E 02	KXSWA 0. 2991702E 02	KXTA1 0. 3091702E 01
CD 5	MSWA 0. 2644902E 02	KYSWA 0. 3091702E 02	KYTA1 0. 3625000E 01
CD 6	MSWB 0. 2644902E 02	KZSWA 0. 7566702E 01	KZTA1 0. 3625000E 01
CD 7	DTA1 0. 8750000E 01	LDM1 0. 1080000E 02	LHM1 0. 2600000E 02
CD 8	LSM1 0. 1100000E 02	LTA1 0. 1100000E 02	IXDM1 0. 3972300E 04
CD 9	IXHM1 0. 1345900E 05	IYDM1 0. 3686000E 04	IYHM1 0. 3558500E 05
CD 10	IZDM1 0. 3686000E 04	IZHM1 0. 3558500E 05	WSWA 0. 2600000E 02
CD 11	WSWB 0. 2600000E 02	XDM1 -0. 3141698E 02	YDM1 0. 0000000E 00
CD 12	ZDM1 0. 0000000E 00	XSWA 0. 1650000E 02	YSWA 0. 0000000E 00
CD 13	ZSWA 0. 5958301E 02	XHM1 -0. 1300000E 02	YHM1 0. 0000000E 00
CD 14	ZHM1 0. 0000000E 00	XSWB 0. 1650000E 02	YSWB 0. 0000000E 00
CD 15	ZSWB -0. 5958299E 02	XSM1 0. 5500000E 01	YSM1 0. 0000000E 00
CD 16	ZSM1 0. 0000000E 00	XTA1 0. 1650000E 02	YTA1 0. 0000000E 00
CD 17	ZTA1 0. 0000000E 00	KS12X 0. 1966830E 05	KS12Y 0. 5998410E 07
CD 18	KS12Z 0. 6557202E 03	CS12X 0. 3621600E 02	CS12Y 0. 2677732E 03

A-9

MODEL PARAMETERS

BENDIX RESEARCH LABORATORIES

CD 19	CS12Z 0. 3587900E 01	KS13X 0. 1966830E 05	KS13Y 0. 5998410E 07
CD 20	KS13Z 0. 6557202E 03	CS13X 0. 3621600E 02	CS13Y 0. 2677732E 03
CD 21	CS13Z 0. 3587900E 01	KS24X 0. 1841400E 04	KS24Y 0. 7024030E 06
CD 22	KS24Z 0. 8954901E 02	CS24X 0. 1550000E 03	CS24Y 0. 3148030E 04
CD 23	CS24Z 0. 3203900E 01	KS35X 0. 1841400E 04	KS35Y 0. 7024030E 06
CD 24	KS35Z 0. 8954901E 02	CS35X 0. 1550000E 03	CS35Y 0. 3148030E 04
CD 25	CS35Z 0. 3203900E 01	XLSNA 0. 1040000E 03	XLSNB 0. 1040000E 03
CD 26	RE1X 0. 0000000E 00	RE1Y 0. 0000000E 00	RE1Z 0. 0000000E 00
CD 27	RA1X 0. 0000000E 00	RA1Y 0. 0000000E 00	RA1Z 0. 0000000E 00
CD 28	RE2X 0. 0000000E 00	RE2Y 0. 0000000E 00	RE2Z 0. 0000000E 00
CD 29	RA2X 0. 0000000E 00	RA2Y 0. 0000000E 00	RA2Z 0. 0000000E 00
CD 30	RE3X 0. 0000000E 00	RE3Y 0. 0000000E 00	RE3Z 0. 0000000E 00
CD 31	RA3X 0. 0000000E 00	RA3Y 0. 0000000E 00	RA3Z 0. 0000000E 00
CD 32	RE4X 0. 0000000E 00	RE4Y 0. 0000000E 00	RE4Z 0. 0000000E 00
CD 33	RA4X 0. 0000000E 00	RA4Y 0. 0000000E 00	RA4Z 0. 0000000E 00
CD 34	RE5X 0. 0000000E 00	RE5Y 0. 0000000E 00	RE5Z 0. 0000000E 00
CD 35	OMG1X 0. 0000000E 00	OMG1Y 0. 0000000E 00	OMG1Z 0. 0000000E 00
CD 36	OMG2X 0. 0000000E 00	OMG2Y 0. 0000000E 00	OMG2Z 0. 0000000E 00
CD 37	OMG3X 0. 0000000E 00	OMG3Y 0. 0000000E 00	OMG3Z 0. 0000000E 00

A-10

ORIGINAL PAGE IS
OF POOR QUALITY

BENDIX RESEARCH LABORATORIES

CD 38	OMG4X 0. 0000000E 00	OMG4Y 0. 0000000E 00	OMG4Z 0. 0000000E 00
CD 39	OMG5X 0. 0000000E 00	OMG5Y 0. 0000000E 00	OMG5Z 0. 0000000E 00
CD 40	DPHI24 0. 0000000E 00	DTHT24 0. 0000000E 00	DPSI24 0. 0000000E 00
CD 41	DPHI35 0. 0000000E 00	DTHT35 0. 0000000E 00	DPSI35 0. 0000000E 00
CD 42	DPHI12 0. 0000000E 00	DTHT12 0. 0000000E 00	DPSI12 0. 0000000E 00
CD 43	DPHI13 0. 0000000E 00	DTHT13 0. 0000000E 00	DPSI13 0. 0000000E 00
CD 44	PHI1 0. 0000000E 00	THT1 0. 0000000E 00	PSI1 0. 2000000E-01
CD 45	RDT1X 0. 0000000E 00	RDT1Y 0. 0000000E 00	RDT1Z 0. 0000000E 00
CD 46	R1X 0. 0000000E 00	R1Y 0. 0000000E 00	R1Z 0. 0000000E 00
CD 47	DT 0. 5000000E-01	IPRT 0. 2000000E 02	TEND 0. 5000000E 02

APPENDIX B

TRANSFER FUNCTIONS FOR SYMMETRIC Z-AXIS WITH STATE VECTOR

$$x^T(t) = \left[\omega_1, \omega_{21}, \omega_{42}, \psi_{21}, \psi_{42} \right]$$

- Space Construction Base,
Configuration 1

RUN GOF8

NUMBER OF CONTROLLED STATES ? 5
NUMBER OF CONTROLS AND OUTPUTS ? 2,5
LIST INPUT MATRICES ? (NO) YES
ENTER INPUT MATRICES DATA FILE. *2AXIS2
LIST CALCULATED NUM. & DENOM. PAIRS ? (NO) YES
NAME OF GENERATED TRANSFER FUNCTION FILE ? *222

----- NUMERATOR COEFFICIENTS -----
0.37244E-05 0.00000 0.41150E-05 0.14901E-07
0.38339E-06
----- DENOMINATOR COEFFICIENTS -----
0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

INPUT MATRIX A -

0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00
0.0000E+00 -0.4765E-02 0.4231E-02 -0.8655E+00 0.1183E+00
0.0000E+00 0.4739E-02 -0.2463E-02 0.8650E+00 -0.2365E+00
0.0000E+00 0.1000E+01 0.0000E+00 0.0000E+00 0.0000E+00
0.0000E+00 0.0000E+00 0.1000E+01 0.0000E+00 0.0000E+00

OUTPUT 1 INPUT 2
----- NUMERATOR COEFFICIENTS -----
0.00000 0.00000 0.00000 0.00000
0.00000
----- DENOMINATOR COEFFICIENTS -----
0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

INPUT MATRIX B -

0.3724E-05 0.0000E+00
-0.3724E-05 0.1321E-02
0.0000E+00 -0.1321E-02
0.0000E+00 0.0000E+00
0.0000E+00 0.0000E+00

OUTPUT 2 INPUT 1
----- NUMERATOR COEFFICIENTS -----
-0.37244E-05-0.29802E-07-0.88073E-06 0.00000
0.00000
----- DENOMINATOR COEFFICIENTS -----
0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

INPUT MATRIX C -

0.1000E+01 0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00
0.0000E+00 0.1000E+01 0.0000E+00 0.0000E+00 0.0000E+00
0.0000E+00 0.0000E+00 0.1000E+01 0.0000E+00 0.0000E+00
0.0000E+00 0.0000E+00 0.0000E+00 0.1000E+01 0.0000E+00
0.0000E+00 0.0000E+00 0.0000E+00 0.0000E+00 0.1000E+01

OUTPUT 1 INPUT 1

B-1

ORIGINAL PAGE IS
OF POOR
QUALITY

OUTPUT 2 INPUT 2

----- NUMERATOR COEFFICIENTS -----

0.13210E-02 0.55879E-05 0.15614E-03 0.00000
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 3 INPUT 1

----- NUMERATOR COEFFICIENTS -----

0.00000 0.00000 -0.32250E-05 0.00000
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 3 INPUT 2

----- NUMERATOR COEFFICIENTS -----

-0.13210E-02-0.59605E-07-0.33026E-05 0.00000
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 4 INPUT 1

----- NUMERATOR COEFFICIENTS -----

0.00000 -0.37253E-05-0.31490E-07-0.58073E-06
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 4 INPUT 2

----- NUMERATOR COEFFICIENTS -----

-0.18626E-08 0.13210E-02 0.55854E-05 0.15614E-03
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 5 INPUT 1

----- NUMERATOR COEFFICIENTS -----

0.00000 0.00000 -0.18626E-07-0.32250E-05
0.00000

----- DENOMINATOR COEFFICIENTS -----

0.13228E-01 1.1050 0.42524E-02 0.10295
0.00000

OUTPUT 5 INPUT 2

----- NUMERATOR COEFFICIENTS -----

0.00000 -0.13210E-02-0.35623E-07-0.33024E-05
0.00000

----- DENOMINATOR COEFFICIENTS -----

B-2

APPENDIX C

DERIVATION AND ANALYSIS OF MINIMUM $(\text{TRACE } E_C^T E_C)^{\frac{1}{2}}$
SOLUTION FOR STATE CONTROLLER GAIN MATRIX C

The problem, minimize $|\underline{C}\underline{x}_j - \underline{y}_j|^2$ with respect to \underline{x} where \underline{x}_j is the j th column of G and \underline{y}_j is the j th column of $A_p + \frac{1}{T} I$, is equivalent to the problem, minimize $(\text{trace } E_c^T E_c)^{\frac{1}{2}}$ with respect to G where:

$$E_c \triangleq A_c + \frac{1}{T} I$$

$I \triangleq$ identity matrix of dimension n

Expanding $|\underline{C}\underline{x}_j - \underline{y}_j|^2$, we have

$$\underline{x}_j^T C^T C \underline{x}_j - 2 \underline{y}_j^T C \underline{x}_j + \underline{y}_j^T \underline{y}_j$$

Taking the gradient with respect to \underline{x}_j , setting equal to zero for a critical value and solving for \underline{x}_j , we obtain

$$\underline{x}_j = C^* \underline{y}_j \tag{C-1}$$

where

$$C^* \triangleq (C^T C)^{-1} C^T \tag{C-2}$$

Therefore:

$$G = C^* (A_p + \frac{1}{T} I) \tag{C-3}$$

Substituting equation (C-3) into equation (7-23) yields:

$$\underline{\dot{x}}_p = A_c \underline{x}_p + D \underline{w} \tag{7-22}$$

where:

$$A_c = A_p - CC^* \left(A_p + \frac{1}{T} I \right) \quad (C-4)$$

It was desired that all of the eigenvalues of the controlled plant matrix, A_c , be $-\frac{1}{T}$. The c linearly independent columns of C , that is, the vectors $C\underline{\delta}_i$; $i = 1$ to c ,

where:

$$\underline{\delta}_i = (\delta_{i1}, \delta_{i2}, \dots, \delta_{ic})^T \quad (C-5)$$

δ_{ij} = the Kronecker delta

are eigenvalues of A_c^T corresponding to the eigenvalue, $-1/T$; since

$$A_c^T C\underline{\delta}_i = -\frac{1}{T} C\underline{\delta}_i \quad (C-6)$$

Therefore, at least c of the eigenvalues of A_c are $-1/T$ since the number of linearly independent eigenvectors corresponding to a given eigenvalue is not greater than the multiplicity of the eigenvalue and the transpose of a matrix has the same eigenvalues as the matrix.

The rank of the sum of two matrices is equal to or less than the sum of the ranks of the matrices. Furthermore, the rank of a nonzero scalar times a matrix is equal to the rank of the matrix. Hence, we have:

$$\text{rank } A_c \leq \text{rank } R + \text{rank } CC^*$$

where:

$$R = (I - CC^*)A_p \quad (C-7)$$

If M_1 and M_2 are $p \times r$ and $r \times q$ matrices, respectively, and each is of rank r , then $M_1 M_2$ is of rank r . Hence, the matrix CC^* has rank c . If the rank of a square matrix of dimension n is r , then at least $n-r$ of the eigenvalues of the matrix are zero. Furthermore, a necessary condition for linear control system asymptotic stability, that is, for no disturbance, $\underline{x} \rightarrow 0$ as $t \rightarrow \infty$, $\forall \underline{x}(0)$, is that all of the eigenvalues of the controlled plant matrix have negative real parts. Therefore, a necessary condition for R is:

$$\text{rank } R \geq n-c$$

The rank of the product of two matrices can be no greater than the rank of either matrix. Thus, if r_ℓ of the columns of A_p are linearly independent and $r_\ell \leq n-c$, then the rank of R is less than or equal to $n-c$. If the j th column of A_p is in the range of C , that is, if $\underline{A}_{pj} = C\underline{c}$ where \underline{A}_{pj} is the j th column of A_p and \underline{c} is a c component constant vector, then the j th column of R is zero. Thus, if r of the columns of A_p are linearly independent and $r > n-c$, then $r+c-n$ of the columns of R will be zero and $n-r$ will be zero or linearly dependent, that is, the rank of R will be $n-c$. Therefore, for the minimum $(\text{tr } E_c^T E_c)^{\frac{1}{2}}$ solution for G to be asymptotically stable, it is necessary that the rank of R be $n-c$, that is, that $n-c$ columns of the plant matrix must be linearly independent from the columns of C .

APPENDIX D

Algorithm for Generating Optimum State
Controller or Estimator Gain Matrix

1. Compute $K = C*(A_p + \frac{I}{T} I)$ or

$$= (A + \frac{20}{T} I) B^T (B_p B_p^T)^{-1}$$
2. Set $\underline{e}_k = n^{-\frac{1}{2}} (1, 1, \dots, 1)^T$
3. Set $\lambda_k = 0$
4. Go to subroutine.
5. Set $\underline{e} = \underline{e}_{k+1} / |\underline{e}_{k+1}|$
6. Set $\lambda = \lambda_{k+1}$
7. Compute $\delta = 0.01$ largest $|k_{ij}|$
8. Set $i = 1$
9. Set $j = 1$
10. Set $k_{ij} = k_{ij} + \delta$
11. Set $\underline{e}_k = \underline{e}$
12. Set $\lambda_k = \lambda$
13. Go to subroutine.

14. Compute $\delta_{ij} = \lambda_{k+1} - \lambda$
15. Set $k_{ij} = k_{ij} - \delta$
16. If $j = n(m)$, go to step 19.
17. Set $j = j+1$
18. Go to step 10.
19. If $i = c$ (dimension of \underline{x}), go to step 22.
20. Set $i = i+1$
21. Go to step 9.
22. Compute $\Delta = \text{largest } |\delta_{ij}|$
23. Set $K = K - \frac{\delta}{\Delta} [\delta_{ij}]$
24. Set $\underline{e}_k = \underline{e}$
25. Set $\lambda_k = \lambda$
26. Go to subroutine.
27. If $|\lambda_{k+1} - \lambda| / \lambda_{k+1} > 0.01$, go to step 5.
28. Set G or H = K

SUBROUTINE

1. Compute $E = W_c (A_p - CK + \frac{1}{T}I)W_c^*$ or
$$= W_e (A - KB + \frac{20}{T} I)W_e^*$$
2. Compute $\underline{e}_{k+1} = E^T E \underline{e}_k$
3. Compute $\lambda_{k+1} = |\underline{e}_{k+1}|$
4. If $\lambda_{k+1} \leq 0$, go to step 6.
5. If $|\lambda_{k+1} - \lambda_k| / \lambda_{k+1} < 0.01$, return.
6. Set $\underline{e}_k = \underline{e}_{k+1} / |\underline{e}_{k+1}|$
7. Set $\lambda_k = \lambda_{k+1}$
8. Go to step 2.

APPENDIX E

Derivation and Analysis of Minimum $(\text{trace } E_e^T E_e)^{\frac{1}{2}}$
Solution for State Estimation Gain Matrix H

The problem, minimize $|B^T \underline{x}_i - \underline{y}_i|^2$ with respect to \underline{x}_i where:

$$\underline{x}_i^T = \text{ith row of } H$$

$$\underline{y}_i^T = \text{ith row of } A + \frac{20}{T} I,$$

is equivalent to the problem, minimize $(\text{tr } E_e^T E_e)^{\frac{1}{2}}$ with respect to H where:

$$E_e = A - HB + \frac{20}{T} I$$

$I =$ identity matrix of dimension A

Expanding $|B^T \underline{x}_i - \underline{y}_i|^2$ yields:

$$\underline{x}_i^T BB^T \underline{x}_i - 2\underline{y}_i^T B^T \underline{x}_i + \underline{y}_i^T \underline{y}_i$$

Taking the gradient with respect to \underline{x}_i , setting equal to zero for a critical value and solving for \underline{x}_i^T , we have

$$\underline{x}_i^T = \underline{y}_i^T B^T (BB^T)^{-1}. \quad (E-1)$$

where:

$$B = \left[B_p \mid 0 \mid 0 \right] \quad (7-44)$$

Therefore:

$$H = \left(A + \frac{20}{T} I \right) B^T (B_p B_p^T)^{-1} \quad (E-2)$$

Substitution of (E-2) into equation (7-42) yields:

$$\dot{\underline{x}}_e = \begin{bmatrix} A_c - H_1 B_p & 0 & D B_w \\ \text{---} & \text{---} & \text{---} \\ 0 & A_v & 0 \\ \text{---} & \text{---} & \text{---} \\ 0 & 0 & A_w \end{bmatrix} \underline{x}_e + \begin{bmatrix} D \\ \text{---} \\ 0 \\ \text{---} \\ 0 \end{bmatrix} \underline{w}_k + \begin{bmatrix} H_1 \\ \text{---} \\ 0 \\ \text{---} \\ 0 \end{bmatrix} \underline{y}$$

where: (E-3)

$$H_1 = \left(A_c + \frac{20}{T} I \right) B_p^T (B_p B_p^T)^{-1} \quad (E-4)$$

Since

$$\underline{x}_e(0) = \left[\underline{y}^T(0) (B_p B_p^T)^{-1} B_p \mid 0 \mid 0 \right]^T, \quad (E-5)$$

the estimates for \underline{x}_v and \underline{x}_w and thus the estimates for the unknown part of the control and plant disturbances are zero for all time.

APPENDIX F

EQUATIONS FOR THE FULL BEAM
AND SPLIT-BEAM

EQUATIONS FOR THE FULL BEAM AND SPLIT-BEAM

F.1 Translational equations for the full beam

$$(i) \quad m\ddot{\mu}_1 + (K+K_1)\mu_1 - K_1\mu_2 - K\mu_3 - (K_\emptyset + K_{\emptyset_1})\beta_1 - K_{\emptyset_1}\beta_2 - K_\emptyset\beta_3 = F'_{e_1}$$

$$(ii) \quad m\ddot{\mu}_2 + (K+K_1)\mu_2 - K_1\mu_1 - K\mu_4 - (K_\emptyset - K_{\emptyset_1})\beta_2 + K_{\emptyset_1}\beta_1 - K_\emptyset\beta_4 = F'_{e_2}$$

$$(iii) \quad m\ddot{\mu}_i + (2K+K_1)\mu_i - K\mu_{i-2} - K_1\mu_{i+1} - K\mu_{i+2} - K_{\emptyset_1}\beta_i \\ + K_\emptyset\beta_{i-2} - K_{\emptyset_1}\beta_{i+1} - K_\emptyset\beta_{i+2} = F'_{e_i} \\ i = 3, 5, \dots, 2n-3$$

$$(iv) \quad m\ddot{\mu}_i + (2K+K_1)\mu_i - K\mu_{i-2} - K_1\mu_{i-1} - K\mu_{i+2} + K_{\emptyset_1}\beta_i \\ + K_\emptyset\beta_{i-2} + K_{\emptyset_1}\beta_{i-1} - K_\emptyset\beta_{i+2} = F'_{e_i} \\ i = 4, 6, \dots, 2n-2$$

$$(v) \quad m\ddot{\mu}_{2n-1} + (K+K_1)\mu_{2n-1} - K_1\mu_{2n} - K\mu_{2n-3} - (K_{\emptyset_1} - K_\emptyset)\beta_{2n-1} - K_{\emptyset_1}\beta_{2n} + K_\emptyset\beta_{2n-3} \\ = F'_{e_{2n-1}}$$

$$(vi) \quad m\ddot{\mu}_{2n} + (K+K_1)\mu_{2n} - K_1\mu_{2n-1} - K\mu_{2n-2} + (K_{\emptyset_1} + K_\emptyset)\beta_{2n} + K_{\emptyset_1}\beta_{2n-1} + K_\emptyset\beta_{2n-2} \\ = F'_{e_{2n}}$$

where

$$F'_{e_i} = F_{e_i} - \frac{m}{M_T} F_e + m r_i \dot{\omega}_0$$

F.2 Rotational equations for the full beam

$$(i) \quad J\ddot{\beta}_1 + K_a\beta_1 + K_{b1}\beta_2 + K_b\beta_3 + (K_\phi + K_{\phi_1})\mu_1 - K_{\phi_1}\mu_2 - K_\phi\mu_3 = T'_e1$$

$$(ii) \quad J\ddot{\beta}_2 + K_a\beta_2 + K_{b1}\beta_1 + K_b\beta_4 + (K_\phi - K_{\phi_1})\mu_2 + K_{\phi_1}\mu_1 - K_\phi\mu_4 = T'_e2$$

$$(iii) \quad J\ddot{\beta}_i + K_d\beta_i + K_b\beta_{i-2} + K_{b1}\beta_{i+1} + K_b\beta_{i+2} + K_{\phi_1}\mu_i + K_\phi\mu_{i-2}$$

$$- K_{\phi_1}\mu_{i+1} - K_\phi\mu_{i+2} = T'_ei$$

$$i = 3, 5, \dots, 2n-3$$

$$(iv) \quad J\ddot{\beta}_i + K_d\beta_i + K_b\beta_{i-2} + K_{b1}\beta_{i-1} + K_b\beta_{i+2} - K_{\phi_1}\mu_i + K_\phi\mu_{i-2}$$

$$+ K_{\phi_1}\mu_{i-1} - K_\phi\mu_{i+2} = T'_ei$$

$$i = 4, 6, \dots, 2n-2$$

$$(v) \quad J\ddot{\beta}_{2n-1} + K_a\beta_{2n-1} + K_{b1}\beta_{2n} + K_b\beta_{2n-3} + (K_{\phi_1} - K_\phi)\mu_{2n-1} - K_{\phi_1}\mu_{2n} + K_\phi\mu_{2n-3} = T'_e_{2n-1}$$

$$(vi) \quad J\ddot{\beta}_{2n} + K_a\beta_{2n} + K_{b1}\beta_{2n-1} + K_b\beta_{2n-2} - (K_{\phi_1} + K_\phi)\mu_{2n} + K_{\phi_1}\mu_{2n-1} + K_\phi\mu_{2n-2} = T'_e_{2n}$$

where $K_a = K_\theta + K_{\theta_1} + K_\psi + K_{\psi_1}$

$$K_d = K_\theta + K_\psi + K_a$$

$$K_b = K_\psi - K_\theta$$

$$K_{b1} = K_{\psi_1} - K_{\theta_1}$$

$$T'_ei = T_{ei} + \hat{\gamma}_i F_{ei} - J\dot{\omega}_0$$

F.3 Translational equations for the bodies involved in the connection of half-beams

$$\begin{aligned}
 \text{(i)} \quad m\ddot{u}_{n-1} + m\ddot{\varepsilon}_{n-1} \beta_{n-1} - 0.5K\mu_{n+3} - 0.5K_1\mu_{n+2} + 0.5(K+K_1)\mu_{n+1} \\
 - 0.5K_1\mu_n + 0.5(K+K_1)\mu_{n-1} - 0.5K\mu_{n-3} - 0.5(K_\phi + K_{\phi_1})\beta_{n+1} \\
 - 0.5K_{\phi_1}\beta_n - 0.5(K_{\phi_1} - K_\phi)\beta_{n-1} + 0.5K_\phi\beta_{n-3} - 0.5K_\phi\beta_{n+3} - 0.5K_{\phi_1}\beta_{n+2} \\
 = F'_{e_{n-1}}
 \end{aligned}$$

$$\begin{aligned}
 \text{(ii)} \quad m\ddot{u}_n + m\ddot{\varepsilon}_n \beta_n - 0.5K\mu_{n+4} + 0.5(K+K_1)\mu_{n+2} - 0.5K_1\mu_{n+1} \\
 + 0.5(K+K_1)\mu_n - 0.5K_1\mu_{n-1} - 0.5K\mu_{n-2} + 0.5K_{\phi_1}\beta_{n+1} \\
 + 0.5(K_\phi + K_{\phi_1})\beta_n + 0.5K_{\phi_1}\beta_{n-1} + 0.5K_\phi\beta_{n-2} \\
 - 0.5K_\phi\beta_{n+4} - 0.5(K_\phi - K_{\phi_1})\beta_{n+2} = F'_{e_n}
 \end{aligned}$$

$$\begin{aligned}
 \text{(iii)} \quad m\ddot{u}_{n+1} + m\ddot{\varepsilon}_{n+1} \beta_{n+1} - 0.5K\mu_{n+3} - 0.5K_1\mu_{n+2} + 0.5(K+K_1)\mu_{n+1} - 0.5K_1\mu_n \\
 + 0.5(K+K_1)\mu_{n-1} - 0.5K\mu_{n-3} - 0.5(K_\phi + K_{\phi_1})\beta_{n+1} - 0.5K_{\phi_1}\beta_n \\
 + 0.5(K_\phi - K_{\phi_1})\beta_{n-1} + 0.5K_\phi\beta_{n-3} - 0.5K_{\phi_1}\beta_{n-2} - 0.5K_\phi\beta_{n+3} = F'_{e_{n+1}}
 \end{aligned}$$

$$\begin{aligned}
 \text{(iv)} \quad m\ddot{u}_{n+2} + m\ddot{\varepsilon}_{n+2} \beta_{n+2} - 0.5K\mu_{n+4} + 0.5(K+K_1)\mu_{n+2} - 0.5K_1\mu_{n+1} \\
 + 0.5(K+K_1)\mu_n - 0.5K_1\mu_{n-1} - 0.5K\mu_{n-2} - 0.5(K_\phi - K_{\phi_1})\beta_{n+2} \\
 + 0.5K_{\phi_1}\beta_{n+1} + 0.5(K_\phi + K_{\phi_1})\beta_n + 0.5K_{\phi_1}\beta_{n-1} \\
 + 0.5K_\phi\beta_{n-2} - 0.5K_\phi\beta_{n+4} = F'_{e_{n+2}}
 \end{aligned}$$

where: $F'_{e_i} = \frac{1}{2}(F_{e_i} + F_{e_j}) - \frac{m}{M_T \ell} F_e + m(\ell r_i - \varepsilon_i) \ddot{\omega}_o$

$\ell=1$ for $i=n-1, n$

$\ell=2$ for $i=n+1, n+2$

$j=i+(-1)^{\ell+1} 2$

F.4 Rotational equations for the bodies involved in the connection of half-beams

$$\begin{aligned}
 \text{(i)} \quad & (J+J_1^*)\ddot{\beta}_{n-1} - K_\emptyset(\mu_{n+3}-\mu_{n+1}) - d_1^* K_1(\mu_{n+2}-\mu_{n+1}) \\
 & - d_2^* K_1(\mu_n-\mu_{n-1}) - K_\emptyset(\mu_{n-1}-\mu_{n-3}) \\
 & + (K_\psi - 0.5K_\emptyset)\beta_{n+3} + (K_\psi + 0.5K_\emptyset + K_{\psi_{11}} + 0.5K_{\emptyset_1})\beta_{n+1} \\
 & + (K_{\psi_{11}} - 0.5K_{\emptyset_1})\beta_{n+2} + (K_\psi + 0.5K_\emptyset + K_{\psi_{12}} + 0.5K_{\emptyset_1})\beta_{n-1} \\
 & + (K_{\psi_{12}} - 0.5K_{\emptyset_1})\beta_n + (K_\psi - 0.5K_\emptyset)\beta_{n-3} \\
 & = T''_{e_{n-1}} - (J+J_1^*)\dot{\omega}_{o_1}
 \end{aligned}$$

$$\text{(ii)} \quad J \ddot{\beta}_n - J \ddot{\beta}_{n+2} = J \dot{\omega}_{o_2} - J \dot{\omega}_{o_1}$$

$$\text{(iii)} \quad J \ddot{\beta}_{n+1} - J \ddot{\beta}_{n-1} = J \dot{\omega}_{o_1} - J \dot{\omega}_{o_2}$$

$$\begin{aligned}
 \text{(iv)} \quad & (J+J_2^*)\ddot{\beta}_{n+2} - K_\emptyset(\mu_{n+4}-\mu_{n+2}) - d_3^* K_1(\mu_{n+1}-\mu_{n+2}) \\
 & - d_4^* K_1(\mu_{n-1}-\mu_n) - K_\emptyset(\mu_n-\mu_{n-2}) \\
 & + (K_\psi - 0.5K_\emptyset)\beta_{n+4} + (K_\psi + 0.5K_\emptyset + K_{\psi_{13}} + 0.5K_{\emptyset_1})\beta_{n+2} \\
 & + (K_{\psi_{13}} - 0.5K_{\emptyset_1})\beta_{n+1} + (K_\psi + 0.5K_\emptyset + K_{\psi_{14}} + 0.5K_{\emptyset_1})\beta_n \\
 & + (K_{\psi_{14}} - 0.5K_{\emptyset_1})\beta_{n-1} + (K_\psi - 0.5K_\emptyset)\beta_{n-2} \\
 & = T''_{e_{n+2}} - (J+J_2^*)\dot{\omega}_{o_2}
 \end{aligned}$$

where:

$$J_1^* = J_2^* = m \tilde{d}_{13} \tilde{\varepsilon}_{n-1}$$

$$d_1^* = -d_4^* = \frac{1}{2} (\tilde{d}_{12} - \tilde{d}_{31})$$

$$d_2^* = -d_3^* = \frac{1}{2} (\tilde{d}_{12} - \tilde{d}_{13})$$

$$K_{\psi_{11}} = -d_1^* K_1 \tilde{d}_{12} = K_{\psi_{14}}$$

$$K_{\psi_{12}} = -d_2^* K_1 \tilde{d}_{12} = K_{\psi_{13}}$$

APPENDIX G

MODE SHAPES OF THE
NATURAL FREQUENCIES
FOR THE ORIGINAL BEAM

NATURAL FREQUENCY= .582178E+02

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.33024E+00	0.00000	.23506E-12	0.00000	.44892E-12	0.00000	.17900E-13	0.00000	-.19128E-12	0.00000	-.97421E-01	0.00000
-.33024E+00	0.00000	.18507E-12	0.00000	.43009E-12	0.00000	-.12107E-14	0.00000	-.19146E-12	0.00000	-.97421E-01	0.00000
-.13612E+00	0.00000	.19979E-12	0.00000	.41581E-12	0.00000	-.25446E-13	0.00000	-.14710E-12	0.00000	-.92806E-01	0.00000
-.13612E+00	0.00000	.21906E-12	0.00000	.42516E-12	0.00000	-.11676E-13	0.00000	-.16659E-12	0.00000	-.92806E-01	0.00000
.40347E-01	0.00000	.22347E-12	0.00000	.42609E-12	0.00000	-.23142E-13	0.00000	-.15103E-12	0.00000	-.78165E-01	0.00000
.40347E-01	0.00000	.22219E-12	0.00000	.42456E-12	0.00000	-.10890E-13	0.00000	-.16981E-12	0.00000	-.78165E-01	0.00000
.17602E+00	0.00000	.25549E-12	0.00000	.38871E-12	0.00000	-.15673E-13	0.00000	-.97336E-13	0.00000	-.52494E-01	0.00000
-.17602E+00	0.00000	.18084E-12	0.00000	.39316E-12	0.00000	-.21793E-13	0.00000	-.10151E-12	0.00000	-.52494E-01	0.00000
.24998E+00	0.00000	.27174E-12	0.00000	.31708E-12	0.00000	-.41159E-13	0.00000	-.11119E-12	0.00000	-.18519E-01	0.00000
.24998E+00	0.00000	.18365E-12	0.00000	.32013E-12	0.00000	-.43248E-13	0.00000	-.11533E-12	0.00000	-.18519E-01	0.00000
-.24998E+00	0.00000	.28040E-12	0.00000	.28839E-12	0.00000	-.64740E-13	0.00000	-.11087E-12	0.00000	-.18519E-01	0.00000
-.24998E+00	0.00000	.17390E-12	0.00000	.28150E-12	0.00000	-.64916E-13	0.00000	-.10761E-12	0.00000	-.18519E-01	0.00000
.17602E+00	0.00000	.30439E-12	0.00000	.26943E-12	0.00000	-.72611E-13	0.00000	-.11264E-12	0.00000	-.52494E-01	0.00000
-.17602E+00	0.00000	.15919E-12	0.00000	.65218E-13	0.00000	-.76297E-13	0.00000	-.10572E-12	0.00000	-.52494E-01	0.00000
.40347E-01	0.00000	.30699E-12	0.00000	-.10000E-12	0.00000	-.73817E-13	0.00000	-.90325E-13	0.00000	.78165E-01	0.00000
.40347E-01	0.00000	.14783E-12	0.00000	-.98366E-13	0.00000	-.74489E-13	0.00000	-.92761E-13	0.00000	.78165E-01	0.00000
-.13612E+00	0.00000	.31357E-12	0.00000	-.26887E-12	0.00000	-.78778E-13	0.00000	-.90483E-13	0.00000	.92806E-01	0.00000
-.13612E+00	0.00000	.15218E-12	0.00000	-.26803E-12	0.00000	-.81236E-13	0.00000	-.93835E-13	0.00000	.92806E-01	0.00000
-.33024E+00	0.00000	.30778E-12	0.00000	-.43672E-12	0.00000	-.79788E-13	0.00000	-.73684E-13	0.00000	.97421E-01	0.00000
-.33024E+00	0.00000	.15372E-12	0.00000	-.43907E-12	0.00000	-.81589E-13	0.00000	-.67966E-13	0.00000	.97421E-01	0.00000

ORIGINAL PAGE IS
OF POOR QUALITY

G-1

NATURAL FREQUENCY* .102354E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.31516E-12	0.00000	.78616E-01	0.00000	.31678E+00	0.00000	-.84774E-01	0.00000	-.66182E-12	0.00000	.54916E-14	0.00000
.10627E-11	0.00000	-.78616E-01	0.00000	.31678E+00	0.00000	-.84774E-01	0.00000	-.67659E-12	0.00000	.62450E-13	0.00000
-.31959E-12	0.00000	.73579E-01	0.00000	.13696E+00	0.00000	-.83511E-01	0.00000	-.60907E-12	0.00000	.11193E-13	0.00000
-.85837E-12	0.00000	-.73579E-01	0.00000	.13696E+00	0.00000	-.83511E-01	0.00000	-.58525E-12	0.00000	.91650E-13	0.00000
-.25727E-12	0.00000	.61146E-01	0.00000	.35149E-01	0.00000	-.72074E-01	0.00000	-.47129E-12	0.00000	-.38747E-13	0.00000
.69870E-12	0.00000	-.61146E-01	0.00000	.35149E-01	0.00000	-.72074E-01	0.00000	-.46274E-12	0.00000	.10444E-12	0.00000
-.63464E-13	0.00000	.40736E-01	0.00000	-.17154E+00	0.00000	-.49080E-01	0.00000	-.30735E-12	0.00000	-.92123E-13	0.00000
.52575E-12	0.00000	-.40736E-01	0.00000	-.17154E+00	0.00000	-.49080E-01	0.00000	-.31459E-12	0.00000	.51963E-13	0.00000
.20445E-12	0.00000	.14319E-01	0.00000	-.24704E+00	0.00000	-.17422E-01	0.00000	-.80757E-13	0.00000	-.11787E-12	0.00000
-.38924E-12	0.00000	-.14319E-01	0.00000	-.24704E+00	0.00000	-.17422E-01	0.00000	-.10337E-12	0.00000	.46953E-13	0.00000
-.43339E-12	0.00000	.14319E-01	0.00000	-.24704E+00	0.00000	-.17422E-01	0.00000	-.12209E-12	0.00000	-.81230E-13	0.00000
.20064E-12	0.00000	-.14319E-01	0.00000	-.24704E+00	0.00000	-.17422E-01	0.00000	.10819E-12	0.00000	.85473E-13	0.00000
.61793E-12	0.00000	.40736E-01	0.00000	-.17154E+00	0.00000	.49080E-01	0.00000	.34900E-12	0.00000	-.49726E-13	0.00000
-.56045E-13	0.00000	-.40736E-01	0.00000	-.17154E+00	0.00000	.49080E-01	0.00000	.33856E-12	0.00000	.96801E-13	0.00000
.69625E-12	0.00000	.61146E-01	0.00000	.35149E-01	0.00000	-.72074E-01	0.00000	.49157E-12	0.00000	-.24159E-14	0.00000
-.32920E-12	0.00000	-.61146E-01	0.00000	.35149E-01	0.00000	.72074E-01	0.00000	.47998E-12	0.00000	.95940E-13	0.00000
.64404E-12	0.00000	-.73579E-01	0.00000	.13696E+00	0.00000	.83511E-01	0.00000	.63042E-12	0.00000	.47046E-13	0.00000
-.58170E-12	0.00000	.73579E-01	0.00000	.13696E+00	0.00000	.83511E-01	0.00000	.62428E-12	0.00000	.10791E-12	0.00000
.52179E-12	0.00000	-.78616E-01	0.00000	.31678E+00	0.00000	-.84774E-01	0.00000	.69167E-12	0.00000	.91322E-13	0.00000
-.78664E-12	0.00000	.78616E-01	0.00000	.31678E+00	0.00000	-.84774E-01	0.00000	.67920E-12	0.00000	.98788E-13	0.00000

G-2

NATURAL FREQUENCY= 125539E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.22354E+00	0.00000	-.18766E-12	0.00000	-.75533E-12	0.00000	.12264E-12	0.00000	-.21974E+00	0.00000	-.73770E-02	0.00000
.22354E+00	0.00000	.10071E-12	0.00000	-.77468E-12	0.00000	.12928E-12	0.00000	-.21974E+00	0.00000	.73770E-02	0.00000
.19912E+00	0.00000	-.15666E-12	0.00000	-.48719E-12	0.00000	.14490E-12	0.00000	-.19664E+00	0.00000	-.12383E-01	0.00000
.19912E+00	0.00000	.84686E-13	0.00000	-.48399E-12	0.00000	.16226E-12	0.00000	-.19664E+00	0.00000	.12383E-01	0.00000
.15772E+00	0.00000	-.13927E-12	0.00000	-.16621E-12	0.00000	.16836E-12	0.00000	-.15559E+00	0.00000	-.18413E-01	0.00000
.15772E+00	0.00000	.73263E-13	0.00000	-.16678E-12	0.00000	.13743E-12	0.00000	-.15559E+00	0.00000	.18413E-01	0.00000
.10123E+00	0.00000	-.10343E-12	0.00000	-.16081E-12	0.00000	.12179E-12	0.00000	-.99800E-01	0.00000	-.23107E-01	0.00000
.10123E+00	0.00000	.98634E-13	0.00000	.14691E-12	0.00000	.12327E-12	0.00000	-.99800E-01	0.00000	.23107E-01	0.00000
.34880E-01	0.00000	-.68650E-13	0.00000	-.38778E-12	0.00000	.79764E-13	0.00000	-.34379E-01	0.00000	-.25603E-01	0.00000
.34880E-01	0.00000	.35842E-13	0.00000	-.38865E-12	0.00000	.86219E-13	0.00000	-.34379E-01	0.00000	.25603E-01	0.00000
.34880E-01	0.00000	-.66851E-13	0.00000	-.48409E-12	0.00000	.79123E-14	0.00000	.34379E-01	0.00000	-.25603E-01	0.00000
.34880E-01	0.00000	.11260E-13	0.00000	-.48423E-12	0.00000	.38149E-14	0.00000	.34379E-01	0.00000	.25603E-01	0.00000
.10123E+00	0.00000	-.33282E-13	0.00000	-.40926E-12	0.00000	-.78530E-13	0.00000	-.99800E-01	0.00000	-.23107E-01	0.00000
.10123E+00	0.00000	.54744E-13	0.00000	.40942E-12	0.00000	-.40777E-13	0.00000	.99800E-01	0.00000	.23107E-01	0.00000
.15772E+00	0.00000	.11186E-12	0.00000	-.18029E-12	0.00000	-.13214E-12	0.00000	.15559E+00	0.00000	-.18413E-01	0.00000
.15772E+00	0.00000	-.11649E-12	0.00000	.17932E-12	0.00000	-.13865E-12	0.00000	.15559E+00	0.00000	.18413E-01	0.00000
.19912E+00	0.00000	.15016E-12	0.00000	-.16394E-12	0.00000	-.16729E-12	0.00000	-.19664E+00	0.00000	-.12383E-01	0.00000
.19912E+00	0.00000	-.15463E-12	0.00000	-.16328E-12	0.00000	-.15780E-12	0.00000	-.19664E+00	0.00000	.12383E-01	0.00000
.22354E+00	0.00000	.15390E-12	0.00000	-.53835E-12	0.00000	-.17518E-12	0.00000	.21974E+00	0.00000	-.73770E-02	0.00000
.22354E+00	0.00000	-.15791E-12	0.00000	-.53820E-12	0.00000	-.17531E-12	0.00000	.21974E+00	0.00000	.73770E-02	0.00000

NATURAL FREQUENCY= .151409E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.25021E+00	0.00000	-.41304E-13	0.00000	-.12909E-12	0.00000	-.87225E-14	0.00000	-.57051E-12	0.00000	.15155E+00	0.00000
.25021E+00	0.00000	-.78432E-14	0.00000	-.11360E-12	0.00000	-.12384E-13	0.00000	-.58822E-12	0.00000	.15155E+00	0.00000
-.45077E-01	0.00000	-.17111E-13	0.00000	-.11016E-12	0.00000	.31322E-14	0.00000	-.38982E-12	0.00000	.12380E+00	0.00000
-.45077E-01	0.00000	-.11525E-13	0.00000	-.10871E-12	0.00000	.36748E-13	0.00000	-.44250E-12	0.00000	.12380E+00	0.00000
-.23379E+00	0.00000	-.34042E-13	0.00000	-.62174E-13	0.00000	.42619E-13	0.00000	-.24055E-12	0.00000	.53568E-01	0.00000
-.23879E+00	0.00000	-.72684E-14	0.00000	-.63381E-13	0.00000	.19044E-13	0.00000	-.23783E-12	0.00000	.53568E-01	0.00000
-.25604E+00	0.00000	-.12962E-13	0.00000	.11813E-13	0.00000	.27109E-13	0.00000	-.84274E-13	0.00000	.33033E-01	0.00000
-.25664E+00	0.00000	.15372E-13	0.00000	-.26950E-14	0.00000	-.21388E-13	0.00000	-.81027E-13	0.00000	.33033E-01	0.00000
-.10818E+00	0.00000	-.13379E-13	0.00000	.67801E-13	0.00000	.22367E-13	0.00000	.30246E-13	0.00000	.92302E-01	0.00000
-.10818E+00	0.00000	.12076E-13	0.00000	.68269E-13	0.00000	-.24985E-13	0.00000	.41292E-13	0.00000	.92302E-01	0.00000
.10818E+00	0.00000	-.82825E-15	0.00000	.11541E-12	0.00000	.11550E-13	0.00000	.14048E-12	0.00000	.92302E-01	0.00000
.10818E+00	0.00000	.10438E-13	0.00000	.11507E-12	0.00000	.85977E-14	0.00000	.13238E-12	0.00000	.92302E-01	0.00000
.25664E+00	0.00000	.20557E-13	0.00000	.11679E-12	0.00000	-.72863E-14	0.00000	-.17142E-12	0.00000	.33033E-01	0.00000
.25664E+00	0.00000	-.12184E-13	0.00000	.11587E-12	0.00000	-.90409E-14	0.00000	.17711E-12	0.00000	.33033E-01	0.00000
.23879E+00	0.00000	.36234E-13	0.00000	.68165E-13	0.00000	-.33719E-13	0.00000	.18109E-12	0.00000	.53568E-01	0.00000
.23879E+00	0.00000	-.16520E-13	0.00000	.67429E-13	0.00000	-.35274E-13	0.00000	.17793E-12	0.00000	.53568E-01	0.00000
.45077E-01	0.00000	.35264E-13	0.00000	-.17475E-13	0.00000	-.44059E-13	0.00000	.14074E-12	0.00000	.12380E+00	0.00000
.45077E-01	0.00000	-.24594E-13	0.00000	-.17399E-13	0.00000	-.49441E-13	0.00000	.15701E-12	0.00000	.12380E+00	0.00000
-.25021E+00	0.00000	.51266E-13	0.00000	-.11938E-12	0.00000	-.45753E-13	0.00000	.18222E-12	0.00000	.15155E+00	0.00000
-.25021E+00	0.00000	-.34450E-13	0.00000	-.11934E-12	0.00000	-.45136E-13	0.00000	.87840E-13	0.00000	.15155E+00	0.00000

G-4

NATURAL FREQUENCY = .225557E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.73557E-13	0.00000	-.10536E+00	0.00000	-.22956E+00	0.00000	.12476E+00	0.00000	.72586E-13	0.00000	.23260E-13	0.00000
-.99821E-13	0.00000	.10536E+00	0.00000	-.22956E+00	0.00000	.12496E+00	0.00000	.11061E-12	0.00000	-.12916E-13	0.00000
-.90368E-14	0.00000	-.86253E-01	0.00000	.44973E-01	0.00000	.10898E+00	0.00000	.31877E-13	0.00000	-.27681E-14	0.00000
-.80689E-13	0.00000	.86253E-01	0.00000	.44973E-01	0.00000	.10898E+00	0.00000	.26037E-13	0.00000	-.14777E-13	0.00000
-.74290E-13	0.00000	-.47082E-01	0.00000	-.23930E+00	0.00000	.52710E-01	0.00000	.76948E-16	0.00000	.37080E-13	0.00000
-.92464E-13	0.00000	.47082E-01	0.00000	-.23930E+00	0.00000	.52710E-01	0.00000	.46746E-14	0.00000	-.22096E-13	0.00000
-.13750E-12	0.00000	-.14401E-02	0.00000	-.26101E+00	0.00000	-.21327E-01	0.00000	-.44402E-13	0.00000	-.26890E-13	0.00000
-.18732E-13	0.00000	.14401E-02	0.00000	.26101E+00	0.00000	-.21327E-01	0.00000	-.51447E-13	0.00000	-.30841E-14	0.00000
-.18877E-12	0.00000	-.29239E-01	0.00000	.11078E+00	0.00000	-.73073E-01	0.00000	-.67392E-13	0.00000	-.15801E-13	0.00000
-.55179E-14	0.00000	-.29239E-01	0.00000	.11078E+00	0.00000	-.73073E-01	0.00000	-.11362E-12	0.00000	.13449E-14	0.00000
-.14467E-12	0.00000	.29239E-01	0.00000	-.11078E+00	0.00000	-.73073E-01	0.00000	-.95848E-13	0.00000	-.33960E-13	0.00000
.65318E-13	0.00000	-.29239E-01	0.00000	-.11078E+00	0.00000	-.73073E-01	0.00000	-.97707E-13	0.00000	-.30798E-13	0.00000
-.23899E-13	0.00000	-.14401E-02	0.00000	-.26101E+00	0.00000	-.21327E-01	0.00000	-.37505E-13	0.00000	-.33131E-13	0.00000
-.69840E-13	0.00000	.14401E-02	0.00000	-.26101E+00	0.00000	-.21327E-01	0.00000	-.44819E-13	0.00000	.26797E-13	0.00000
.43022E-13	0.00000	-.47082E-01	0.00000	-.23930E+00	0.00000	.52710E-01	0.00000	.27954E-13	0.00000	-.45212E-15	0.00000
-.11795E-13	0.00000	.47082E-01	0.00000	-.23930E+00	0.00000	.52710E-01	0.00000	.26759E-13	0.00000	.63708E-13	0.00000
-.34253E-13	0.00000	-.86253E-01	0.00000	.44973E-01	0.00000	.10898E+00	0.00000	.71452E-13	0.00000	-.20525E-13	0.00000
-.15086E-12	0.00000	.86253E-01	0.00000	.44973E-01	0.00000	.10898E+00	0.00000	.64051E-13	0.00000	.90780E-13	0.00000
.23073E-13	0.00000	-.10536E+00	0.00000	.22956E+00	0.00000	.12496E+00	0.00000	.97716E-13	0.00000	.27731E-13	0.00000
-.25547E-12	0.00000	.10536E+00	0.00000	.22956E+00	0.00000	.12496E+00	0.00000	.98913E-13	0.00000	.84522E-13	0.00000

G-5

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .247856E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.22113E+00	0.00000	-.36942E-13	0.00000	-.13567E-12	0.00000	.46251E-13	0.00000	.20756E+00	0.00000	.29049E-01	0.00000
.22113E+00	0.00000	-.74210E-13	0.00000	-.14488E-12	0.00000	.50656E-13	0.00000	.20756E+00	0.00000	-.29049E-01	0.00000
.12808E+00	0.00000	-.10707E-13	0.00000	-.71271E-13	0.00000	.50266E-13	0.00000	.12300E+00	0.00000	.43154E-01	0.00000
.12808E+00	0.00000	.24951E-13	0.00000	-.43642E-13	0.00000	.54433E-13	0.00000	.12300E+00	0.00000	-.43154E-01	0.00000
-.36490E-02	0.00000	.57650E-14	0.00000	.48886E-14	0.00000	.79109E-14	0.00000	-.29158E-02	0.00000	.50109E-01	0.00000
.36490E-02	0.00000	-.23870E-13	0.00000	-.93226E-14	0.00000	-.19484E-13	0.00000	-.29158E-02	0.00000	-.50109E-01	0.00000
-.13300E+00	0.00000	-.19271E-13	0.00000	-.29888E-13	0.00000	-.66134E-14	0.00000	-.12604E+00	0.00000	.40095E-01	0.00000
.13300E+00	0.00000	.23390E-13	0.00000	.37994E-13	0.00000	.56652E-15	0.00000	-.12604E+00	0.00000	-.40095E-01	0.00000
-.21257E+00	0.00000	-.99011E-15	0.00000	-.27128E-13	0.00000	-.48148E-14	0.00000	-.20161E+00	0.00000	.15271E-01	0.00000
.21257E+00	0.00000	-.78350E-14	0.00000	.26878E-13	0.00000	.11017E-14	0.00000	-.20161E+00	0.00000	-.15271E-01	0.00000
-.21257E+00	0.00000	.68060E-14	0.00000	.11583E-13	0.00000	-.12105E-13	0.00000	-.20161E+00	0.00000	-.15271E-01	0.00000
.21257E+00	0.00000	-.74996E-14	0.00000	-.11434E-13	0.00000	-.14071E-13	0.00000	-.20161E+00	0.00000	.15271E-01	0.00000
-.13300E+00	0.00000	-.21942E-13	0.00000	-.41146E-13	0.00000	-.13414E-13	0.00000	-.12604E+00	0.00000	.40095E-01	0.00000
.13300E+00	0.00000	-.88560E-14	0.00000	-.41457E-13	0.00000	-.89211E-14	0.00000	-.12604E+00	0.00000	-.40095E-01	0.00000
-.36490E-02	0.00000	-.21579E-13	0.00000	-.41963E-13	0.00000	.10335E-13	0.00000	-.29158E-02	0.00000	-.50109E-01	0.00000
.36490E-02	0.00000	-.15484E-13	0.00000	-.41368E-13	0.00000	.80864E-14	0.00000	-.29158E-02	0.00000	.50109E-01	0.00000
.12808E+00	0.00000	-.47996E-13	0.00000	.11672E-13	0.00000	.12407E-13	0.00000	.12300E+00	0.00000	-.43154E-01	0.00000
-.12808E+00	0.00000	-.15793E-14	0.00000	-.11722E-13	0.00000	.13802E-13	0.00000	.12300E+00	0.00000	.43154E-01	0.00000
.22113E+00	0.00000	-.42511E-13	0.00000	.37228E-13	0.00000	.20842E-13	0.00000	.20756E+00	0.00000	-.29049E-01	0.00000
-.22113E+00	0.00000	-.33967E-14	0.00000	.37014E-13	0.00000	.20690E-13	0.00000	.20756E+00	0.00000	.29049E-01	0.00000

G-6

NATURAL FREQUENCY= .275554E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.18078E+00	0.00000	.28654E-13	0.00000	.16789E-12	0.00000	-.65804E-13	0.00000	-.28612E-12	0.00000	.19098E+00	0.00000
.18078E+00	0.00000	-.82548E-13	0.00000	.15602E-12	0.00000	-.60755E-13	0.00000	.30011E-12	0.00000	.19098E+00	0.00000
-.16829E+00	0.00000	.33581E-13	0.00000	.83018E-13	0.00000	-.15668E-13	0.00000	-.15557E-12	0.00000	.11037E+00	0.00000
.16829E+00	0.00000	-.46950E-13	0.00000	.55301E-13	0.00000	-.51187E-13	0.00000	-.12216E-12	0.00000	.11037E+00	0.00000
-.24191E+00	0.00000	-.15902E-13	0.00000	.42213E-13	0.00000	-.13276E-13	0.00000	.68313E-13	0.00000	-.40052E-01	0.00000
-.24191E+00	0.00000	-.23959E-13	0.00000	.37223E-13	0.00000	-.25224E-13	0.00000	.57221E-13	0.00000	-.40052E-01	0.00000
-.14575E-01	0.00000	.20881E-13	0.00000	.41187E-13	0.00000	-.12179E-13	0.00000	-.16668E-12	0.00000	.12673E+00	0.00000
-.14575E-01	0.00000	-.23425E-13	0.00000	.31627E-13	0.00000	-.10934E-13	0.00000	.16476E-12	0.00000	-.12673E+00	0.00000
.24400E+00	0.00000	.17280E-13	0.00000	.18252E-13	0.00000	-.71804E-14	0.00000	-.12978E-12	0.00000	-.67446E-01	0.00000
.24400E+00	0.00000	-.27227E-13	0.00000	.18625E-13	0.00000	-.43587E-14	0.00000	.13165E-12	0.00000	-.67446E-01	0.00000
-.24400E+00	0.00000	.19324E-14	0.00000	.71752E-14	0.00000	-.16751E-13	0.00000	.56015E-13	0.00000	.67446E-01	0.00000
.24400E+00	0.00000	-.12863E-14	0.00000	.78971E-14	0.00000	-.11977E-13	0.00000	-.64820E-13	0.00000	.67446E-01	0.00000
-.14575E-01	0.00000	.18211E-13	0.00000	.23102E-14	0.00000	-.39400E-14	0.00000	-.10257E-13	0.00000	.12673E+00	0.00000
-.14575E-01	0.00000	.45114E-14	0.00000	.22863E-14	0.00000	-.57491E-14	0.00000	-.68127E-14	0.00000	.12673E+00	0.00000
-.24191E+00	0.00000	.22756E-13	0.00000	.87446E-14	0.00000	.54082E-14	0.00000	-.31387E-13	0.00000	.40052E-01	0.00000
-.24191E+00	0.00000	.69393E-14	0.00000	.92608E-14	0.00000	.47604E-14	0.00000	-.31601E-13	0.00000	.40052E-01	0.00000
-.16829E+00	0.00000	.26917E-14	0.00000	-.24765E-14	0.00000	-.54047E-14	0.00000	-.38464E-13	0.00000	-.11037E+00	0.00000
-.16829E+00	0.00000	.31753E-13	0.00000	.24499E-14	0.00000	-.66565E-14	0.00000	-.29961E-13	0.00000	.11037E+00	0.00000
.18078E+00	0.00000	.17573E-13	0.00000	.10604E-13	0.00000	.72935E-14	0.00000	.45128E-13	0.00000	-.19098E+00	0.00000
.18078E+00	0.00000	.17631E-13	0.00000	.10947E-13	0.00000	.68888E-14	0.00000	-.26366E-13	0.00000	-.19098E+00	0.00000

G-7

NATURAL FREQUENCY = .291931E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.48198E-13	0.00000	.31233E+00	0.00000	.92622E-13	0.00000	.11326E-12	0.00000	.43073E-13	0.00000	.55990E-13	0.00000
.26233E-13	0.00000	.31233E+00	0.00000	.78986E-13	0.00000	.11849E-12	0.00000	.17394E-13	0.00000	.59738E-13	0.00000
.38200E-13	0.00000	.28176E+00	0.00000	.30520E-12	0.00000	.36647E-13	0.00000	.40296E-13	0.00000	.36845E-13	0.00000
.84762E-13	0.00000	.28176E+00	0.00000	.30048E-12	0.00000	.71563E-13	0.00000	.32645E-13	0.00000	.33452E-13	0.00000
.12229E-12	0.00000	.22361E+00	0.00000	.26444E-12	0.00000	.64580E-13	0.00000	.21878E-13	0.00000	.89906E-14	0.00000
.14783E-12	0.00000	.22361E+00	0.00000	.25896E-12	0.00000	.55067E-13	0.00000	.79022E-13	0.00000	.61130E-14	0.00000
.24597E-13	0.00000	.14356E+00	0.00000	.86709E-13	0.00000	.11055E-12	0.00000	.25774E-13	0.00000	.42029E-13	0.00000
.67176E-13	0.00000	.14356E+00	0.00000	.85345E-13	0.00000	.13086E-12	0.00000	.72138E-14	0.00000	.52064E-13	0.00000
.11057E-12	0.00000	.49469E-01	0.00000	.44617E-12	0.00000	.60303E-13	0.00000	.45773E-13	0.00000	.58469E-13	0.00000
.21337E-13	0.00000	.49469E-01	0.00000	.43373E-12	0.00000	.40109E-13	0.00000	.64022E-13	0.00000	.43468E-13	0.00000
.19556E-12	0.00000	.49469E-01	0.00000	.32691E-12	0.00000	.13177E-12	0.00000	.68210E-13	0.00000	.27096E-13	0.00000
.53362E-13	0.00000	.49469E-01	0.00000	.29492E-12	0.00000	.13004E-12	0.00000	.73932E-13	0.00000	.18177E-14	0.00000
.47057E-13	0.00000	.14356E+00	0.00000	.22309E-12	0.00000	.14742E-12	0.00000	.25633E-13	0.00000	.10257E-12	0.00000
.64273E-13	0.00000	.14356E+00	0.00000	.19367E-12	0.00000	.16778E-12	0.00000	.26756E-13	0.00000	.27942E-13	0.00000
.18051E-12	0.00000	.22361E+00	0.00000	.53603E-12	0.00000	.94912E-14	0.00000	.33954E-13	0.00000	.55788E-13	0.00000
.86254E-13	0.00000	.22361E+00	0.00000	.55405E-12	0.00000	.44380E-14	0.00000	.36861E-13	0.00000	.13069E-13	0.00000
.19441E-12	0.00000	.28176E+00	0.00000	.32509E-12	0.00000	.23950E-12	0.00000	.95908E-13	0.00000	.34608E-13	0.00000
.11919E-13	0.00000	.28176E+00	0.00000	.31917E-12	0.00000	.25379E-12	0.00000	.97033E-13	0.00000	.10227E-12	0.00000
.68973E-13	0.00000	.31233E+00	0.00000	.40688E-12	0.00000	.35549E-12	0.00000	.14737E-12	0.00000	.36354E-13	0.00000
.21170E-12	0.00000	.31233E+00	0.00000	.42221E-12	0.00000	.33936E-12	0.00000	.15541E-12	0.00000	.94203E-13	0.00000

5-8

17 40 3306253846 11.11.11

NATURAL FREQUENCY= .363684E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.92605E-13	0.00000	.12219E+00	0.00000	.16307E+00	0.00000	-.15552E+00	0.00000	-.72452E-13	0.00000	-.16384E-13	0.00000
.13025E-12	0.00000	-.12219E+00	0.00000	.16307E+00	0.00000	-.15552E+00	0.00000	-.11424E-12	0.00000	.17527E-13	0.00000
-.17055E-13	0.00000	.81601E-01	0.00000	-.16743E+00	0.00000	-.10002E+00	0.00000	-.77627E-14	0.00000	-.55174E-13	0.00000
.11260E-13	0.00000	-.81601E-01	0.00000	-.16743E+00	0.00000	-.10002E+00	0.00000	-.15987E-13	0.00000	.44691E-13	0.00000
.16465E-12	0.00000	.16438E-01	0.00000	-.24378E+00	0.00000	.21670E-01	0.00000	.12478E-12	0.00000	-.65964E-13	0.00000
-.59330E-13	0.00000	-.16438E-01	0.00000	-.24378E+00	0.00000	.21670E-01	0.00000	.93624E-13	0.00000	-.42827E-13	0.00000
.26124E-12	0.00000	-.26035E-01	0.00000	-.10780E-01	0.00000	.97258E-01	0.00000	.15967E-12	0.00000	-.37006E-13	0.00000
-.92372E-13	0.00000	.26035E-01	0.00000	-.10780E-01	0.00000	.97258E-01	0.00000	.15685E-12	0.00000	-.84861E-14	0.00000
.66056E-13	0.00000	-.17480E-01	0.00000	.25892E+00	0.00000	.53414E-01	0.00000	.56871E-13	0.00000	.10371E-12	0.00000
-.60606E-13	0.00000	.17480E-01	0.00000	.25892E+00	0.00000	.53414E-01	0.00000	-.72352E-13	0.00000	-.93079E-14	0.00000
-.20320E-12	0.00000	.17480E-01	0.00000	.25892E+00	0.00000	-.53414E-01	0.00000	-.65644E-13	0.00000	.62123E-13	0.00000
.25718E-13	0.00000	-.17480E-01	0.00000	.25892E+00	0.00000	-.53414E-01	0.00000	-.71008E-13	0.00000	-.13292E-13	0.00000
-.18682E-12	0.00000	.26035E-01	0.00000	-.10780E-01	0.00000	-.97258E-01	0.00000	-.11757E-12	0.00000	-.63798E-13	0.00000
.61155E-13	0.00000	-.26035E-01	0.00000	-.10780E-01	0.00000	-.97258E-01	0.00000	-.11090E-12	0.00000	-.57322E-13	0.00000
.13328E-13	0.00000	-.16438E-01	0.00000	-.24378E+00	0.00000	-.21670E-01	0.00000	-.61472E-13	0.00000	-.85390E-13	0.00000
-.16640E-12	0.00000	.16438E-01	0.00000	-.24378E+00	0.00000	-.21670E-01	0.00000	-.58305E-13	0.00000	-.19114E-13	0.00000
.14557E-12	0.00000	-.81601E-01	0.00000	-.16743E+00	0.00000	.10002E+00	0.00000	-.28795E-13	0.00000	-.21665E-14	0.00000
-.99077E-13	0.00000	.81601E-01	0.00000	-.16743E+00	0.00000	.10002E+00	0.00000	.30527E-13	0.00000	-.46551E-13	0.00000
.10614E-12	0.00000	-.12219E+00	0.00000	.16307E+00	0.00000	-.15552E+00	0.00000	.12638E-12	0.00000	.40913E-13	0.00000
-.17541E-12	0.00000	.12219E+00	0.00000	.16307E+00	0.00000	-.15552E+00	0.00000	.13148E-12	0.00000	-.88263E-13	0.00000

NATURAL FREQUENCY= .372782E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.21112E+00	0.00000	.33415E-14	0.00000	.25331E-13	0.00000	-.24258E-13	0.00000	-.18604E+00	0.00000	-.62371E-01	0.00000
-.21112E+00	0.00000	-.55040E-13	0.00000	.12475E-13	0.00000	-.76174E-14	0.00000	-.18604E+00	0.00000	-.62371E-01	0.00000
-.22244E-01	0.00000	-.15655E-13	0.00000	.37297E-13	0.00000	-.86833E-14	0.00000	-.23234E-01	0.00000	-.74685E-01	0.00000
-.22244E-01	0.00000	-.14304E-13	0.00000	.44444E-13	0.00000	-.76386E-14	0.00000	-.23234E-01	0.00000	-.74685E-01	0.00000
-.16489E+00	0.00000	-.27846E-13	0.00000	.64460E-13	0.00000	-.87890E-14	0.00000	.14772E+00	0.00000	-.47903E-01	0.00000
-.16489E+00	0.00000	-.45215E-13	0.00000	.63479E-13	0.00000	-.45864E-14	0.00000	.14772E+00	0.00000	-.47903E-01	0.00000
-.21900E+00	0.00000	.20746E-14	0.00000	.22753E-13	0.00000	-.30936E-13	0.00000	.19750E+00	0.00000	.13029E-01	0.00000
-.21900E+00	0.00000	-.30605E-13	0.00000	.19595E-13	0.00000	-.29377E-13	0.00000	.19750E+00	0.00000	-.13029E-01	0.00000
-.99257E-01	0.00000	.71066E-14	0.00000	-.39228E-13	0.00000	-.25849E-13	0.00000	.89591E-01	0.00000	-.63186E-01	0.00000
-.99257E-01	0.00000	-.25563E-13	0.00000	-.39252E-13	0.00000	-.24104E-13	0.00000	.89591E-01	0.00000	-.63186E-01	0.00000
-.99257E-01	0.00000	.52354E-14	0.00000	-.49011E-13	0.00000	.62533E-14	0.00000	-.89591E-01	0.00000	.63186E-01	0.00000
-.99257E-01	0.00000	-.46014E-14	0.00000	-.48997E-13	0.00000	-.84328E-14	0.00000	-.89591E-01	0.00000	-.63186E-01	0.00000
-.21900E+00	0.00000	.54363E-14	0.00000	-.18036E-14	0.00000	.17802E-13	0.00000	-.19750E+00	0.00000	.13029E-01	0.00000
-.21900E+00	0.00000	-.18632E-14	0.00000	-.18721E-14	0.00000	.16382E-13	0.00000	-.19750E+00	0.00000	-.13029E-01	0.00000
-.16489E+00	0.00000	.13233E-13	0.00000	.47200E-13	0.00000	-.30302E-14	0.00000	-.14772E+00	0.00000	-.47903E-01	0.00000
-.16489E+00	0.00000	.10033E-13	0.00000	.47749E-13	0.00000	.14378E-14	0.00000	-.14772E+00	0.00000	-.47903E-01	0.00000
-.22244E-01	0.00000	.38697E-13	0.00000	.36941E-13	0.00000	-.10818E-13	0.00000	.23234E-01	0.00000	-.74685E-01	0.00000
-.22244E-01	0.00000	-.11908E-13	0.00000	.36957E-13	0.00000	-.14759E-13	0.00000	.23234E-01	0.00000	-.74685E-01	0.00000
-.21112E+00	0.00000	-.40528E-13	0.00000	-.27290E-13	0.00000	-.33044E-13	0.00000	.18604E+00	0.00000	-.62371E-01	0.00000
-.21112E+00	0.00000	-.46273E-14	0.00000	-.27168E-13	0.00000	-.32946E-13	0.00000	.18604E+00	0.00000	-.62371E-01	0.00000

G-10

ORIGINAL PAGE IS
OF POOR QUALITY.

NATURAL FREQUENCY= .418007E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.11954E+00	0.00000	.82508E-14	0.00000	-.50010E-14	0.00000	-.21458E-13	0.00000	-.16011E-12	0.00000	.21902E+00	0.00000
.11954E+00	0.00000	-.41991E-13	0.00000	-.13825E-14	0.00000	-.24620E-13	0.00000	-.15566E-12	0.00000	.21902E+00	0.00000
.23122E+00	0.00000	-.21100E-13	0.00000	.85298E-14	0.00000	-.28839E-13	0.00000	.70825E-13	0.00000	.59140E-01	0.00000
.23122E+00	0.00000	-.12685E-14	0.00000	-.44848E-15	0.00000	.16375E-13	0.00000	.68611E-13	0.00000	.59140E-01	0.00000
.93326E-01	0.00000	.22738E-14	0.00000	.15012E-13	0.00000	-.55014E-14	0.00000	.14222E-12	0.00000	-.12921E+00	0.00000
.93326E-01	0.00000	-.25576E-13	0.00000	.16924E-13	0.00000	.80655E-14	0.00000	-.14605E-12	0.00000	-.12921E+00	0.00000
.23541E+00	0.00000	-.18631E-14	0.00000	-.22779E-13	0.00000	-.14985E-13	0.00000	-.24262E-13	0.00000	-.75020E-01	0.00000
.23541E+00	0.00000	-.39056E-13	0.00000	.18821E-13	0.00000	-.96941E-14	0.00000	-.71599E-13	0.00000	-.75020E-01	0.00000
.17756E+00	0.00000	-.24730E-13	0.00000	-.50159E-14	0.00000	-.21990E-13	0.00000	-.26882E-12	0.00000	.11441E+00	0.00000
.17756E+00	0.00000	-.16124E-13	0.00000	-.60085E-14	0.00000	-.17802E-13	0.00000	-.26305E-12	0.00000	.11441E+00	0.00000
.17756E+00	0.00000	.11669E-15	0.00000	-.21989E-13	0.00000	.54532E-14	0.00000	-.14599E-12	0.00000	.11441E+00	0.00000
.17756E+00	0.00000	-.24611E-13	0.00000	-.22255E-13	0.00000	.21797E-14	0.00000	-.15372E-12	0.00000	.11441E+00	0.00000
.23541E+00	0.00000	.19667E-13	0.00000	-.12549E-13	0.00000	.21994E-13	0.00000	-.24419E-12	0.00000	-.75020E-01	0.00000
.23541E+00	0.00000	-.12621E-13	0.00000	-.11824E-13	0.00000	.16280E-13	0.00000	.23323E-12	0.00000	-.75020E-01	0.00000
.93326E-01	0.00000	.86537E-14	0.00000	.14376E-13	0.00000	-.55867E-14	0.00000	.39223E-12	0.00000	-.12921E+00	0.00000
.93326E-01	0.00000	.17296E-13	0.00000	.13083E-13	0.00000	-.76265E-14	0.00000	.39870E-12	0.00000	-.12921E+00	0.00000
.23122E+00	0.00000	-.40877E-13	0.00000	-.19789E-13	0.00000	-.13874E-13	0.00000	-.90377E-13	0.00000	.59140E-01	0.00000
.23122E+00	0.00000	.66221E-14	0.00000	.19924E-13	0.00000	-.11797E-13	0.00000	.88194E-13	0.00000	.59140E-01	0.00000
-.11954E+00	0.00000	.37749E-13	0.00000	-.54704E-14	0.00000	-.13436E-13	0.00000	-.37886E-12	0.00000	.21902E+00	0.00000
-.11954E+00	0.00000	.18830E-13	0.00000	-.54995E-14	0.00000	-.14393E-13	0.00000	-.38051E-12	0.00000	.21902E+00	0.00000

G-11

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.18918E+00	0.00000	-.41291E-11	0.00000	-.15314E-11	0.00000	.45775E-11	0.00000	.15570E+00	0.00000	.10098E+00	0.00000
-.18918E+00	0.00000	.41075E-11	0.00000	-.15398E-11	0.00000	.45833E-11	0.00000	.15570E+00	0.00000	.10098E+00	0.00000
-.92025E-01	0.00000	-.26152E-11	0.00000	.59778E-11	0.00000	.16467E-11	0.00000	-.74324E-01	0.00000	.85806E-01	0.00000
.92025E-01	0.00000	.25857E-11	0.00000	-.59988E-11	0.00000	.16293E-11	0.00000	-.74324E-01	0.00000	-.85806E-01	0.00000
-.22194E+00	0.00000	-.11231E-11	0.00000	.20071E-11	0.00000	-.18291E-11	0.00000	-.18945E+00	0.00000	-.72055E-02	0.00000
.22194E+00	0.00000	.10655E-11	0.00000	-.20001E-11	0.00000	-.18362E-11	0.00000	-.18945E+00	0.00000	.72055E-02	0.00000
-.57420E-01	0.00000	-.11563E-11	0.00000	-.60931E-11	0.00000	-.76936E-12	0.00000	-.49098E-01	0.00000	-.84289E-01	0.00000
.57420E-01	0.00000	.11044E-11	0.00000	-.60890E-11	0.00000	-.77078E-12	0.00000	-.49098E-01	0.00000	.84289E-01	0.00000
.18221E+00	0.00000	-.21430E-11	0.00000	-.44459E-11	0.00000	.27263E-11	0.00000	.15718E+00	0.00000	-.49977E-01	0.00000
-.18221E+00	0.00000	.21021E-11	0.00000	-.44453E-11	0.00000	.27224E-11	0.00000	.15718E+00	0.00000	.49977E-01	0.00000
.18221E+00	0.00000	-.21421E-11	0.00000	-.44478E-11	0.00000	.27107E-11	0.00000	.15718E+00	0.00000	-.49977E-01	0.00000
-.18221E+00	0.00000	.20955E-11	0.00000	.44670E-11	0.00000	.27052E-11	0.00000	.15718E+00	0.00000	.49977E-01	0.00000
-.57420E-01	0.00000	-.11419E-11	0.00000	-.60668E-11	0.00000	-.78605E-12	0.00000	-.49098E-01	0.00000	-.84289E-01	0.00000
.57420E-01	0.00000	.11265E-11	0.00000	.60624E-11	0.00000	-.78320E-12	0.00000	-.49098E-01	0.00000	.84289E-01	0.00000
-.22194E+00	0.00000	-.10687E-11	0.00000	-.20469E-11	0.00000	-.18134E-11	0.00000	-.18945E+00	0.00000	-.72055E-02	0.00000
.22194E+00	0.00000	.10480E-11	0.00000	-.20477E-11	0.00000	-.18138E-11	0.00000	-.18945E+00	0.00000	.72055E-02	0.00000
-.92025E-01	0.00000	-.26229E-11	0.00000	-.59993E-11	0.00000	.16402E-11	0.00000	-.74324E-01	0.00000	-.85806E-01	0.00000
.92025E-01	0.00000	.26660E-11	0.00000	-.59990E-11	0.00000	.16499E-11	0.00000	-.74324E-01	0.00000	.85806E-01	0.00000
.18918E+00	0.00000	-.40923E-11	0.00000	.15932E-11	0.00000	.46059E-11	0.00000	.15570E+00	0.00000	-.10098E+00	0.00000
-.18918E+00	0.00000	.41558E-11	0.00000	.15923E-11	0.00000	.46048E-11	0.00000	.15570E+00	0.00000	.10098E+00	0.00000

G-12

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY = .495598E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.69314E-11	0.00000	.16056E+00	0.00000	-.61141E-01	0.00000	.17935E+00	0.00000	.56708E-11	0.00000	.37210E-11	0.00000
-.69111E-11	0.00000	.16056E+00	0.00000	-.61141E-01	0.00000	.17935E+00	0.00000	.57047E-11	0.00000	.36610E-11	0.00000
-.33953E-11	0.00000	-.10285E+00	0.00000	.23406E+00	0.00000	.63659E-01	0.00000	-.27461E-11	0.00000	.31503E-11	0.00000
-.33638E-11	0.00000	-.10285E+00	0.00000	.23406E+00	0.00000	.63659E-01	0.00000	-.27256E-11	0.00000	.31179E-11	0.00000
-.91909E-11	0.00000	-.42019E-01	0.00000	.79057E-01	0.00000	-.71042E-01	0.00000	-.69431E-11	0.00000	-.25827E-12	0.00000
-.80850E-11	0.00000	-.42019E-01	0.00000	.79057E-01	0.00000	-.71042E-01	0.00000	-.69350E-11	0.00000	-.26381E-12	0.00000
-.20997E-11	0.00000	-.44061E-01	0.00000	-.23732E+00	0.00000	-.30226E-01	0.00000	-.17913E-11	0.00000	-.31663E-11	0.00000
-.21051E-11	0.00000	-.44061E-01	0.00000	-.23732E+00	0.00000	-.30226E-01	0.00000	-.17868E-11	0.00000	-.30572E-11	0.00000
-.67996E-11	0.00000	-.82771E-01	0.00000	-.17405E+00	0.00000	.10601E+00	0.00000	.57586E-11	0.00000	.18330E-11	0.00000
-.66289E-11	0.00000	-.82771E-01	0.00000	-.17405E+00	0.00000	.10601E+00	0.00000	.57629E-11	0.00000	.18393E-11	0.00000
-.66700E-11	0.00000	-.82771E-01	0.00000	-.17405E+00	0.00000	.10601E+00	0.00000	.57553E-11	0.00000	.18925E-11	0.00000
-.66572E-11	0.00000	-.82771E-01	0.00000	-.17405E+00	0.00000	.10601E+00	0.00000	.57595E-11	0.00000	.18121E-11	0.00000
-.21794E-11	0.00000	-.44061E-01	0.00000	-.23732E+00	0.00000	-.30226E-01	0.00000	-.18172E-11	0.00000	-.30917E-11	0.00000
-.20730E-11	0.00000	-.44061E-01	0.00000	-.23732E+00	0.00000	-.30226E-01	0.00000	-.18076E-11	0.00000	-.31055E-11	0.00000
-.81385E-11	0.00000	-.42019E-01	0.00000	.79057E-01	0.00000	-.71042E-01	0.00000	-.69674E-11	0.00000	-.26126E-12	0.00000
-.81444E-11	0.00000	-.42019E-01	0.00000	.79057E-01	0.00000	-.71042E-01	0.00000	-.69743E-11	0.00000	-.28948E-12	0.00000
-.33652E-11	0.00000	-.10285E+00	0.00000	-.23406E+00	0.00000	.63659E-01	0.00000	-.27278E-11	0.00000	-.31434E-11	0.00000
-.34139E-11	0.00000	-.10285E+00	0.00000	-.23406E+00	0.00000	.63659E-01	0.00000	-.27350E-11	0.00000	-.32028E-11	0.00000
-.69288E-11	0.00000	.16056E+00	0.00000	.61141E-01	0.00000	.17935E+00	0.00000	.57310E-11	0.00000	.36880E-11	0.00000
-.69411E-11	0.00000	.16056E+00	0.00000	.61141E-01	0.00000	.17935E+00	0.00000	.57268E-11	0.00000	.37336E-11	0.00000

G-13

NATURAL FREQUENCY = .568725E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.66049E-01	0.00000	-.75792E-13	0.00000	.80918E-14	0.00000	.17149E-13	0.00000	.11085E-12	0.00000	-.23699E+00	0.00000
.66049E-01	0.00000	-.18360E-13	0.00000	-.14487E-13	0.00000	-.95541E-15	0.00000	.11938E-12	0.00000	-.23699E+00	0.00000
.23248E+00	0.00000	-.30219E-13	0.00000	-.30825E-13	0.00000	-.13245E-13	0.00000	-.14074E-12	0.00000	.12711E-01	0.00000
.23248E+00	0.00000	-.10647E-13	0.00000	-.25075E-13	0.00000	-.86196E-14	0.00000	-.13651E-12	0.00000	.12711E-01	0.00000
-.10842E+00	0.00000	-.33819E-13	0.00000	-.55445E-13	0.00000	.41818E-13	0.00000	-.14174E-12	0.00000	.14108E+00	0.00000
-.10842E+00	0.00000	.54817E-13	0.00000	-.64517E-13	0.00000	.13983E-13	0.00000	-.12738E-12	0.00000	.14108E+00	0.00000
-.22921E+00	0.00000	.79019E-15	0.00000	-.53887E-14	0.00000	.24705E-13	0.00000	.78784E-13	0.00000	-.85515E-01	0.00000
-.22921E+00	0.00000	.75707E-13	0.00000	-.21932E-15	0.00000	.30541E-13	0.00000	.84808E-13	0.00000	-.85515E-01	0.00000
.17120E+00	0.00000	-.42292E-13	0.00000	.68158E-13	0.00000	-.12763E-13	0.00000	.13526E-12	0.00000	-.12243E+00	0.00000
.17120E+00	0.00000	.69154E-13	0.00000	.50888E-13	0.00000	.10338E-13	0.00000	.12633E-12	0.00000	-.12243E+00	0.00000
-.17120E+00	0.00000	.46983E-13	0.00000	-.23333E-14	0.00000	-.14270E-13	0.00000	-.33471E-13	0.00000	.12243E+00	0.00000
-.17120E+00	0.00000	-.41758E-13	0.00000	.46509E-16	0.00000	-.18062E-13	0.00000	-.31288E-13	0.00000	.12243E+00	0.00000
-.22921E+00	0.00000	.19574E-13	0.00000	-.65698E-13	0.00000	-.93640E-14	0.00000	-.13301E-12	0.00000	.85515E-01	0.00000
-.22921E+00	0.00000	.33765E-13	0.00000	-.66713E-13	0.00000	-.10296E-13	0.00000	-.13355E-12	0.00000	.85515E-01	0.00000
-.10842E+00	0.00000	-.28790E-13	0.00000	-.15388E-13	0.00000	.21206E-13	0.00000	.68054E-13	0.00000	-.14108E+00	0.00000
-.10842E+00	0.00000	-.15160E-13	0.00000	-.13952E-13	0.00000	.15738E-13	0.00000	.69091E-13	0.00000	-.14108E+00	0.00000
.23248E+00	0.00000	-.17603E-13	0.00000	.39843E-13	0.00000	.12698E-14	0.00000	.10932E-12	0.00000	-.12711E-01	0.00000
.23248E+00	0.00000	-.66447E-13	0.00000	.45332E-13	0.00000	.14195E-13	0.00000	.11447E-12	0.00000	-.12711E-01	0.00000
-.66049E-01	0.00000	-.51584E-13	0.00000	-.24372E-14	0.00000	-.31818E-13	0.00000	-.10381E-12	0.00000	.23699E+00	0.00000
-.66049E-01	0.00000	-.88388E-13	0.00000	-.21071E-14	0.00000	-.31471E-13	0.00000	-.10033E-12	0.00000	.23699E+00	0.00000

G-14

ORIGINAL PAGE IS
OF POOR QUALITY.

NATURAL FREQUENCY= .576674E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-35001E-13	0.00000	30075E+00	0.00000	40400E-14	0.00000	-17502E-13	0.00000	-37113E-13	0.00000	-78438E-13	0.00000
39132E-13	0.00000	30075E+00	0.00000	-11539E-13	0.00000	-10918E-13	0.00000	-51692E-13	0.00000	70821E-13	0.00000
64270E-13	0.00000	18587E+00	0.00000	-34480E-13	0.00000	-93314E-14	0.00000	20870E-13	0.00000	89505E-15	0.00000
-10950E-13	0.00000	18587E+00	0.00000	-19273E-13	0.00000	17919E-13	0.00000	20573E-13	0.00000	30994E-13	0.00000
-33014E-13	0.00000	83930E-13	0.00000	10919E-12	0.00000	49780E-13	0.00000	16442E-13	0.00000	17354E-13	0.00000
-55507E-13	0.00000	66613E-13	0.00000	11308E-12	0.00000	36239E-13	0.00000	10716E-13	0.00000	-17141E-13	0.00000
-12292E-13	0.00000	18587E+00	0.00000	14707E-12	0.00000	-42000E-13	0.00000	-29337E-13	0.00000	-20384E-13	0.00000
25658E-13	0.00000	18587E+00	0.00000	15299E-12	0.00000	-13599E-13	0.00000	-45210E-13	0.00000	33356E-13	0.00000
32326E-14	0.00000	30075E+00	0.00000	-33061E-13	0.00000	-48457E-13	0.00000	-18358E-13	0.00000	33959E-13	0.00000
23939E-13	0.00000	30075E+00	0.00000	-56004E-13	0.00000	-75340E-13	0.00000	24779E-14	0.00000	16343E-13	0.00000
49464E-14	0.00000	30075E+00	0.00000	-14479E-12	0.00000	25655E-13	0.00000	24711E-13	0.00000	-58949E-14	0.00000
-15207E-13	0.00000	30075E+00	0.00000	-14583E-12	0.00000	17178E-14	0.00000	-71917E-14	0.00000	27421E-14	0.00000
88490E-14	0.00000	18587E+00	0.00000	-40050E-13	0.00000	29039E-13	0.00000	-81821E-14	0.00000	22806E-13	0.00000
28467E-13	0.00000	18587E+00	0.00000	-61118E-13	0.00000	38701E-13	0.00000	-68843E-14	0.00000	27044E-14	0.00000
45297E-13	0.00000	73154E-13	0.00000	55174E-13	0.00000	71002E-14	0.00000	12557E-13	0.00000	74681E-14	0.00000
55255E-14	0.00000	28032E-13	0.00000	86224E-13	0.00000	14571E-13	0.00000	-72056E-14	0.00000	36640E-13	0.00000
-14125E-13	0.00000	18587E+00	0.00000	77432E-13	0.00000	37773E-13	0.00000	32263E-13	0.00000	97273E-14	0.00000
68442E-13	0.00000	18587E+00	0.00000	73575E-13	0.00000	-31479E-13	0.00000	-34164E-13	0.00000	-21040E-13	0.00000
25568E-14	0.00000	30075E+00	0.00000	-17445E-13	0.00000	-54107E-13	0.00000	14145E-13	0.00000	41191E-13	0.00000
-35784E-13	0.00000	30075E+00	0.00000	-11392E-13	0.00000	-61166E-13	0.00000	70586E-14	0.00000	79891E-13	0.00000

G-15

NATURAL FREQUENCY= .617710E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.79738E-12	0.00000	-.21410E+00	0.00000	.47452E-01	0.00000	.18049E+00	0.00000	.61259E-12	0.00000	.72338E-12	0.00000
.71616E-12	0.00000	.21410E+00	0.00000	.47452E-01	0.00000	.18049E+00	0.00000	.56489E-12	0.00000	-.60539E-12	0.00000
.95538E-12	0.00000	-.14248E+00	0.00000	.18305E+00	0.00000	.18036E-01	0.00000	-.68442E-12	0.00000	.34517E-12	0.00000
.83059E-12	0.00000	.14248E+00	0.00000	.18305E+00	0.00000	.18036E-01	0.00000	-.72377E-12	0.00000	-.31022E-12	0.00000
.70926E-12	0.00000	-.90667E-01	0.00000	-.14614E+00	0.00000	-.41527E-01	0.00000	-.55002E-12	0.00000	-.42120E-12	0.00000
.69079E-12	0.00000	.90667E-01	0.00000	-.14614E+00	0.00000	-.41527E-01	0.00000	-.58609E-12	0.00000	.33442E-12	0.00000
.93341E-12	0.00000	-.86437E-01	0.00000	-.21237E+00	0.00000	.87174E-01	0.00000	.71807E-12	0.00000	-.33333E-12	0.00000
.74941E-12	0.00000	.86437E-01	0.00000	-.21237E+00	0.00000	.87174E-01	0.00000	.72053E-12	0.00000	.33922E-12	0.00000
.76817E-12	0.00000	-.43949E-01	0.00000	.12801E+00	0.00000	.83439E-01	0.00000	.63956E-12	0.00000	.42379E-12	0.00000
.86558E-12	0.00000	.43949E-01	0.00000	.12801E+00	0.00000	.83439E-01	0.00000	.65247E-12	0.00000	-.31855E-12	0.00000
.89214E-12	0.00000	-.43949E-01	0.00000	.12801E+00	0.00000	-.83439E-01	0.00000	-.67020E-12	0.00000	.35903E-12	0.00000
.75084E-12	0.00000	.43949E-01	0.00000	.12801E+00	0.00000	-.83439E-01	0.00000	-.67887E-12	0.00000	-.44277E-12	0.00000
.82336E-12	0.00000	-.86437E-01	0.00000	-.21237E+00	0.00000	-.87174E-01	0.00000	-.75727E-12	0.00000	-.39635E-12	0.00000
.10117E-11	0.00000	.86437E-01	0.00000	-.21237E+00	0.00000	-.87174E-01	0.00000	-.77086E-12	0.00000	.29137E-12	0.00000
.77897E-12	0.00000	-.90667E-01	0.00000	-.14614E+00	0.00000	.41527E-01	0.00000	.58723E-12	0.00000	-.35465E-12	0.00000
.68291E-12	0.00000	.90667E-01	0.00000	-.14614E+00	0.00000	.41527E-01	0.00000	.56253E-12	0.00000	.48989E-12	0.00000
.86747E-12	0.00000	.14248E+00	0.00000	.18305E+00	0.00000	-.18036E-01	0.00000	.78887E-12	0.00000	.33071E-12	0.00000
.10332E-11	0.00000	-.14248E+00	0.00000	.18305E+00	0.00000	-.18036E-01	0.00000	.76049E-12	0.00000	-.31014E-12	0.00000
.77408E-12	0.00000	.21410E+00	0.00000	.47452E-01	0.00000	-.18049E+00	0.00000	-.59320E-12	0.00000	.61162E-12	0.00000
.87103E-12	0.00000	-.21410E+00	0.00000	.47452E-01	0.00000	-.18049E+00	0.00000	-.62859E-12	0.00000	-.81233E-12	0.00000

G-16

NATURAL FREQUENCY= .618714E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15589E+00	0.00000	.66894E-12	0.00000	.52530E-13	0.00000	-.74862E-12	0.00000	-.11979E+00	0.00000	-.13635E+00	0.00000
.15589E+00	0.00000	-.73242E-12	0.00000	.66391E-13	0.00000	-.75270E-12	0.00000	-.11979E+00	0.00000	.13635E+00	0.00000
.18084E+00	0.00000	.33566E-12	0.00000	-.87326E-12	0.00000	-.80199E-13	0.00000	.14421E+00	0.00000	-.65166E-01	0.00000
.18084E+00	0.00000	-.40645E-12	0.00000	-.85371E-12	0.00000	-.80140E-13	0.00000	.14421E+00	0.00000	.65166E-01	0.00000
.13570E+00	0.00000	.11633E-12	0.00000	.43809E-12	0.00000	.32557E-12	0.00000	.11062E+00	0.00000	.78150E-01	0.00000
.13570E+00	0.00000	-.10920E-12	0.00000	.44107E-12	0.00000	.33360E-12	0.00000	.11062E+00	0.00000	-.78150E-01	0.00000
.16947E+00	0.00000	.52116E-13	0.00000	.10207E-11	0.00000	-.18602E-12	0.00000	-.14233E+00	0.00000	.64480E-01	0.00000
.16947E+00	0.00000	-.62025E-13	0.00000	.10157E-11	0.00000	-.18733E-12	0.00000	-.14233E+00	0.00000	-.64480E-01	0.00000
.15327E+00	0.00000	-.39388E-13	0.00000	-.37818E-12	0.00000	-.29172E-12	0.00000	-.12823E+00	0.00000	-.72016E-01	0.00000
.15327E+00	0.00000	.12438E-12	0.00000	-.38320E-12	0.00000	-.28862E-12	0.00000	-.12823E+00	0.00000	.72016E-01	0.00000
.15327E+00	0.00000	-.44258E-12	0.00000	-.66026E-12	0.00000	.39586E-12	0.00000	.12823E+00	0.00000	-.72016E-01	0.00000
.15327E+00	0.00000	.49289E-12	0.00000	-.65800E-12	0.00000	.39445E-12	0.00000	.12823E+00	0.00000	.72016E-01	0.00000
.16947E+00	0.00000	-.59728E-12	0.00000	.78741E-12	0.00000	-.53265E-12	0.00000	-.14233E+00	0.00000	.64480E-01	0.00000
.16947E+00	0.00000	.68193E-12	0.00000	.78484E-12	0.00000	.53339E-12	0.00000	-.14233E+00	0.00000	-.64480E-01	0.00000
.13570E+00	0.00000	-.64241E-12	0.00000	.74338E-12	0.00000	-.52782E-13	0.00000	-.11062E+00	0.00000	.78150E-01	0.00000
.13570E+00	0.00000	.63353E-12	0.00000	.74461E-12	0.00000	-.49542E-13	0.00000	-.11062E+00	0.00000	-.78150E-01	0.00000
.18084E+00	0.00000	-.82180E-12	0.00000	-.74503E-12	0.00000	.82303E-13	0.00000	-.14421E+00	0.00000	-.65166E-01	0.00000
.18084E+00	0.00000	.79316E-12	0.00000	.74526E-12	0.00000	.74286E-13	0.00000	-.14421E+00	0.00000	.65166E-01	0.00000
.15589E+00	0.00000	-.11258E-11	0.00000	-.41158E-12	0.00000	.80097E-12	0.00000	.11979E+00	0.00000	-.13635E+00	0.00000
.15589E+00	0.00000	.10459E-11	0.00000	-.41135E-12	0.00000	.79875E-12	0.00000	-.11979E+00	0.00000	.13635E+00	0.00000

G-17

NATURAL FREQUENCY= .623158E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.93417E-13	0.00000	-.13091E+00	0.00000	.16864E+00	0.00000	.17758E-01	0.00000	-.12560E-12	0.00000	-.19532E-13	0.00000
.13391E-12	0.00000	.13091E+00	0.00000	.16864E+00	0.00000	.17758E-01	0.00000	-.94406E-13	0.00000	.15451E-12	0.00000
.94634E-13	0.00000	-.14730E+00	0.00000	-.37993E-01	0.00000	.32249E-02	0.00000	.91766E-13	0.00000	-.34162E-13	0.00000
.18968E-12	0.00000	.14730E+00	0.00000	-.37993E-01	0.00000	.32249E-02	0.00000	-.13262E-12	0.00000	.44313E-13	0.00000
.11369E-12	0.00000	-.19322E+00	0.00000	-.11049E+00	0.00000	.10062E+00	0.00000	-.82666E-13	0.00000	.47874E-13	0.00000
.65344E-13	0.00000	.19322E+00	0.00000	-.11049E+00	0.00000	.10062E+00	0.00000	.10040E-12	0.00000	-.80901E-13	0.00000
.61672E-13	0.00000	-.21416E+00	0.00000	.89365E-01	0.00000	.12645E+00	0.00000	-.10477E-12	0.00000	.79897E-13	0.00000
.15815E-12	0.00000	.21416E+00	0.00000	.89365E-01	0.00000	.12645E+00	0.00000	-.74514E-13	0.00000	-.60362E-14	0.00000
.13407E-12	0.00000	-.19755E+00	0.00000	.10708E+00	0.00000	.39098E-01	0.00000	-.90419E-13	0.00000	-.34525E-13	0.00000
.37838E-13	0.00000	.19755E+00	0.00000	.10708E+00	0.00000	.39098E-01	0.00000	-.92101E-13	0.00000	.82506E-13	0.00000
.89731E-13	0.00000	-.19755E+00	0.00000	-.10708E+00	0.00000	.39098E-01	0.00000	.91236E-13	0.00000	-.41370E-13	0.00000
.12264E-12	0.00000	.19755E+00	0.00000	-.10708E+00	0.00000	.39098E-01	0.00000	-.85534E-13	0.00000	.15715E-13	0.00000
.94413E-13	0.00000	-.21416E+00	0.00000	-.89365E-01	0.00000	.12645E+00	0.00000	.57219E-13	0.00000	.25611E-13	0.00000
.32894E-13	0.00000	.21416E+00	0.00000	-.89365E-01	0.00000	.12645E+00	0.00000	.66409E-13	0.00000	-.43015E-13	0.00000
.75970E-13	0.00000	-.19322E+00	0.00000	.11049E+00	0.00000	.10062E+00	0.00000	-.60896E-13	0.00000	.84803E-13	0.00000
.95946E-13	0.00000	.19322E+00	0.00000	.11049E+00	0.00000	.10062E+00	0.00000	-.54536E-13	0.00000	-.19425E-13	0.00000
.12907E-12	0.00000	-.14730E+00	0.00000	.37993E-01	0.00000	.32249E-02	0.00000	-.82955E-13	0.00000	-.57860E-13	0.00000
.66777E-13	0.00000	.14730E+00	0.00000	.37993E-01	0.00000	.32249E-02	0.00000	-.73626E-13	0.00000	.52711E-13	0.00000
.11562E-12	0.00000	-.13091E+00	0.00000	-.16864E+00	0.00000	.17758E-01	0.00000	.86095E-13	0.00000	-.12651E-12	0.00000
.65836E-13	0.00000	.13091E+00	0.00000	.16864E+00	0.00000	.17758E-01	0.00000	.99251E-13	0.00000	.26977E-13	0.00000

NATURAL FREQUENCY = .711277E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.19230E-01	0.00000	.77156E-14	0.00000	-.89938E-13	0.00000	.14800E-13	0.00000	-.36053E-13	0.00000	.24607E+00	0.00000
.19230E-01	0.00000	-.47786E-13	0.00000	.63083E-13	0.00000	.34904E-13	0.00000	-.25252E-13	0.00000	.24607E+00	0.00000
-.18076E+00	0.00000	.10420E-13	0.00000	.80617E-13	0.00000	-.74938E-14	0.00000	-.55058E-13	0.00000	-.80657E-01	0.00000
-.18076E+00	0.00000	-.19851E-15	0.00000	.76794E-13	0.00000	.49804E-13	0.00000	-.83598E-13	0.00000	-.80657E-01	0.00000
-.24821E+00	0.00000	.24985E-13	0.00000	.40622E-13	0.00000	-.45912E-13	0.00000	.61637E-13	0.00000	-.57847E-01	0.00000
-.24821E+00	0.00000	-.22227E-13	0.00000	.31707E-13	0.00000	-.50290E-14	0.00000	.17324E-14	0.00000	-.57847E-01	0.00000
-.16962E-01	0.00000	.18525E-13	0.00000	-.69876E-13	0.00000	.79298E-14	0.00000	.77559E-13	0.00000	.16715E+00	0.00000
-.16962E-01	0.00000	.46851E-13	0.00000	-.78184E-13	0.00000	-.32578E-14	0.00000	.56123E-13	0.00000	.16715E+00	0.00000
-.22418E+00	0.00000	-.86136E-14	0.00000	-.16382E-13	0.00000	.37304E-13	0.00000	-.64071E-13	0.00000	-.85300E-01	0.00000
-.22418E+00	0.00000	.10045E-12	0.00000	-.11945E-13	0.00000	.46097E-13	0.00000	-.62227E-13	0.00000	-.85300E-01	0.00000
-.22418E+00	0.00000	.11999E-13	0.00000	.54398E-13	0.00000	.18590E-13	0.00000	-.62127E-14	0.00000	-.85300E-01	0.00000
-.22418E+00	0.00000	.96971E-13	0.00000	.47589E-13	0.00000	.90740E-14	0.00000	-.40718E-14	0.00000	-.85300E-01	0.00000
-.16962E-01	0.00000	-.17622E-13	0.00000	-.22940E-13	0.00000	-.12489E-13	0.00000	.71103E-13	0.00000	.16715E+00	0.00000
-.16962E-01	0.00000	.94807E-13	0.00000	-.20365E-13	0.00000	.14261E-14	0.00000	-.80844E-13	0.00000	.16715E+00	0.00000
-.24821E+00	0.00000	-.48554E-13	0.00000	-.13136E-13	0.00000	.33782E-13	0.00000	-.16309E-13	0.00000	-.57847E-01	0.00000
-.24821E+00	0.00000	.31014E-13	0.00000	-.22405E-13	0.00000	.24559E-13	0.00000	-.19819E-13	0.00000	-.57847E-01	0.00000
-.18076E+00	0.00000	-.70492E-13	0.00000	.35286E-13	0.00000	.20128E-13	0.00000	-.52292E-13	0.00000	-.80657E-01	0.00000
-.18076E+00	0.00000	-.14168E-13	0.00000	.35236E-13	0.00000	-.16441E-15	0.00000	-.62804E-13	0.00000	-.80657E-01	0.00000
-.19230E-01	0.00000	-.76909E-13	0.00000	.34628E-13	0.00000	-.19468E-13	0.00000	.49783E-13	0.00000	.24607E+00	0.00000
-.19230E-01	0.00000	-.42985E-13	0.00000	-.33196E-13	0.00000	-.16454E-13	0.00000	.50553E-13	0.00000	.24607E+00	0.00000

NATURAL FREQUENCY= .735407E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-1.0152E-12	0.00000	.14640E+00	0.00000	-.19551E+00	0.00000	.28985E-01	0.00000	-.97968E-13	0.00000	-.18962E-12	0.00000
.10914E-12	0.00000	-.14640E+00	0.00000	-.19551E+00	0.00000	.28985E-01	0.00000	-.65144E-13	0.00000	-.12432E-12	0.00000
-.23744E-12	0.00000	.17138E+00	0.00000	.17738E+00	0.00000	-.23611E-01	0.00000	.15908E-12	0.00000	-.59787E-16	0.00000
-.18059E-12	0.00000	-.17138E+00	0.00000	.17738E+00	0.00000	-.23611E-01	0.00000	.17536E-12	0.00000	-.36652E-13	0.00000
-.71940E-13	0.00000	.18756E+00	0.00000	.35832E-01	0.00000	-.15202E+00	0.00000	-.32940E-13	0.00000	-.97522E-13	0.00000
-.21692E-13	0.00000	-.18756E+00	0.00000	.35832E-01	0.00000	-.15202E+00	0.00000	-.16231E-13	0.00000	-.97425E-13	0.00000
-.19921E-12	0.00000	.11072E+00	0.00000	-.17137E+00	0.00000	-.21916E-01	0.00000	-.18100E-12	0.00000	-.75933E-13	0.00000
.22292E-12	0.00000	-.11072E+00	0.00000	-.17137E+00	0.00000	-.21916E-01	0.00000	-.15701E-12	0.00000	-.20705E-14	0.00000
.17200E-12	0.00000	.23793E-01	0.00000	.15367E+00	0.00000	.58092E-01	0.00000	.90916E-13	0.00000	-.80338E-13	0.00000
-.63646E-13	0.00000	-.23793E-01	0.00000	.15367E+00	0.00000	.58092E-01	0.00000	.12154E-12	0.00000	-.98624E-13	0.00000
.14164E-12	0.00000	-.23793E-01	0.00000	.15367E+00	0.00000	-.58092E-01	0.00000	.10327E-12	0.00000	-.64006E-13	0.00000
-.17966E-12	0.00000	.23793E-01	0.00000	.15367E+00	0.00000	-.58092E-01	0.00000	.12102E-12	0.00000	-.66178E-13	0.00000
-.21207E-12	0.00000	-.11072E+00	0.00000	-.17137E+00	0.00000	.21916E-01	0.00000	-.17425E-12	0.00000	-.25646E-13	0.00000
.20783E-12	0.00000	.11072E+00	0.00000	-.17137E+00	0.00000	.21916E-01	0.00000	-.16674E-12	0.00000	-.65913E-13	0.00000
-.23693E-14	0.00000	-.18756E+00	0.00000	.35832E-01	0.00000	-.15202E+00	0.00000	-.56138E-13	0.00000	-.11434E-12	0.00000
.64279E-13	0.00000	.18756E+00	0.00000	.35832E-01	0.00000	-.15202E+00	0.00000	-.44831E-13	0.00000	-.11040E-12	0.00000
.21876E-12	0.00000	-.17138E+00	0.00000	.17738E+00	0.00000	.23611E-01	0.00000	.19133E-12	0.00000	.24213E-13	0.00000
-.22524E-12	0.00000	.17138E+00	0.00000	-.17738E+00	0.00000	-.23611E-01	0.00000	.19272E-12	0.00000	-.12844E-13	0.00000
-.12433E-12	0.00000	-.14640E+00	0.00000	-.19551E+00	0.00000	-.28985E-01	0.00000	-.94302E-13	0.00000	.17726E-12	0.00000
.14840E-12	0.00000	.14640E+00	0.00000	-.19551E+00	0.00000	-.28985E-01	0.00000	-.88158E-13	0.00000	-.18581E-12	0.00000

G-20

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .741848E+03

IX	IX	IY	IY	IZ	IZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.11658E+00	0.00000	-.40570E-13	0.00000	.10037E-12	0.00000	-.27944E-13	0.00000	-.82744E-01	0.00000	-.16122E+00	0.00000
.11658E+00	0.00000	.87697E-13	0.00000	.10754E-12	0.00000	-.12711E-13	0.00000	-.82744E-01	0.00000	.16122E+00	0.00000
-.21957E+00	0.00000	-.66647E-13	0.00000	-.90432E-13	0.00000	.60836E-14	0.00000	.17337E+00	0.00000	-.19733E-01	0.00000
-.21957E+00	0.00000	.10596E-12	0.00000	-.13547E-12	0.00000	.16385E-13	0.00000	.17337E+00	0.00000	.19733E-01	0.00000
-.36280E-01	0.00000	-.71109E-13	0.00000	-.77591E-14	0.00000	.11297E-12	0.00000	-.34077E-01	0.00000	.10342E+00	0.00000
.36280E-01	0.00000	.92849E-13	0.00000	-.28888E-13	0.00000	-.61996E-13	0.00000	-.34077E-01	0.00000	-.10342E+00	0.00000
-.20446E+00	0.00000	-.44803E-13	0.00000	.10441E-12	0.00000	.26930E-17	0.00000	-.17076E+00	0.00000	-.42456E-01	0.00000
.20446E+00	0.00000	.34483E-13	0.00000	.13957E-12	0.00000	-.35267E-14	0.00000	-.17076E+00	0.00000	.42456E-01	0.00000
-.13775E+00	0.00000	-.11934E-14	0.00000	-.12600E-12	0.00000	-.63873E-13	0.00000	.11421E+00	0.00000	-.83481E-01	0.00000
.13775E+00	0.00000	.16587E-13	0.00000	-.13074E-12	0.00000	-.36212E-13	0.00000	.11421E+00	0.00000	.83481E-01	0.00000
-.13775E+00	0.00000	.19276E-13	0.00000	-.11639E-12	0.00000	.64424E-13	0.00000	.11421E+00	0.00000	-.83481E-01	0.00000
.13775E+00	0.00000	-.47963E-13	0.00000	-.12303E-12	0.00000	-.39573E-13	0.00000	.11421E+00	0.00000	.83481E-01	0.00000
-.20446E+00	0.00000	.59277E-13	0.00000	.15795E-12	0.00000	-.49407E-14	0.00000	-.17076E+00	0.00000	.42456E-01	0.00000
.20446E+00	0.00000	-.90029E-13	0.00000	.18341E-12	0.00000	-.27959E-13	0.00000	-.17076E+00	0.00000	-.42456E-01	0.00000
-.36280E-01	0.00000	.12213E-12	0.00000	-.57430E-14	0.00000	-.12138E-12	0.00000	-.34077E-01	0.00000	-.10342E+00	0.00000
.36280E-01	0.00000	-.13820E-12	0.00000	.86044E-14	0.00000	-.11520E-12	0.00000	-.34077E-01	0.00000	.10342E+00	0.00000
-.21957E+00	0.00000	.91055E-13	0.00000	-.17493E-12	0.00000	-.13451E-13	0.00000	.17337E+00	0.00000	-.19733E-01	0.00000
-.21957E+00	0.00000	-.10529E-12	0.00000	-.17240E-12	0.00000	-.63747E-14	0.00000	.17337E+00	0.00000	.19733E-01	0.00000
.11658E+00	0.00000	.58594E-13	0.00000	.13798E-12	0.00000	.63847E-13	0.00000	-.82744E-01	0.00000	.16122E+00	0.00000
.11658E+00	0.00000	-.61767E-13	0.00000	.13149E-12	0.00000	.64307E-13	0.00000	-.82744E-01	0.00000	-.16122E+00	0.00000

NATURAL FREQUENCY = .780279E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.37231E-15	0.00000	.17355E+00	0.00000	-.16049E-01	0.00000	-.17357E+00	0.00000	.25354E-13	0.00000	.35310E-14	0.00000
-.47587E-13	0.00000	-.17355E+00	0.00000	-.16049E-01	0.00000	-.17357E+00	0.00000	.17392E-13	0.00000	.31200E-13	0.00000
.33772E-14	0.00000	.52174E-01	0.00000	-.12018E+00	0.00000	.35478E-01	0.00000	.79004E-14	0.00000	.23029E-13	0.00000
-.68795E-14	0.00000	-.52174E-01	0.00000	-.12018E+00	0.00000	.35478E-01	0.00000	.22730E-14	0.00000	-.27414E-13	0.00000
.11049E-13	0.00000	-.47755E-01	0.00000	.25282E+00	0.00000	.49242E-01	0.00000	-.23366E-13	0.00000	-.11975E-14	0.00000
.85051E-14	0.00000	.47755E-01	0.00000	.25282E+00	0.00000	.49242E-01	0.00000	-.61997E-14	0.00000	.85687E-14	0.00000
.42026E-13	0.00000	-.11331E+00	0.00000	.11230E-01	0.00000	-.44104E-01	0.00000	.92561E-14	0.00000	.30309E-13	0.00000
.34518E-15	0.00000	.11331E+00	0.00000	.11230E-01	0.00000	-.44104E-01	0.00000	.10806E-13	0.00000	.84181E-14	0.00000
.90786E-14	0.00000	-.20366E+00	0.00000	-.17848E+00	0.00000	.12488E+00	0.00000	-.83861E-14	0.00000	.16335E-14	0.00000
.15624E-14	0.00000	.20366E+00	0.00000	-.17848E+00	0.00000	.12488E+00	0.00000	.32791E-13	0.00000	.16810E-14	0.00000
-.25125E-13	0.00000	-.20366E+00	0.00000	-.17848E+00	0.00000	.12488E+00	0.00000	-.23025E-13	0.00000	.17990E-14	0.00000
-.24989E-13	0.00000	.20366E+00	0.00000	.17848E+00	0.00000	.12488E+00	0.00000	-.18403E-13	0.00000	-.27318E-14	0.00000
.53371E-14	0.00000	-.11331E+00	0.00000	-.11230E-01	0.00000	-.44104E-01	0.00000	-.10649E-13	0.00000	-.34070E-14	0.00000
-.35139E-14	0.00000	.11331E+00	0.00000	-.11230E-01	0.00000	-.44104E-01	0.00000	-.43944E-14	0.00000	.22136E-13	0.00000
-.44021E-14	0.00000	-.47755E-01	0.00000	-.25282E+00	0.00000	.49242E-01	0.00000	.22104E-13	0.00000	-.18596E-14	0.00000
-.44009E-13	0.00000	.47755E-01	0.00000	-.25282E+00	0.00000	.49242E-01	0.00000	.29833E-13	0.00000	-.16864E-13	0.00000
.81799E-14	0.00000	-.52174E-01	0.00000	.12018E+00	0.00000	.35478E-01	0.00000	-.18505E-13	0.00000	.20123E-13	0.00000
.29108E-14	0.00000	.52174E-01	0.00000	.12018E+00	0.00000	.35478E-01	0.00000	-.19932E-13	0.00000	-.25503E-13	0.00000
.18014E-14	0.00000	.17355E+00	0.00000	-.16049E-01	0.00000	-.17357E+00	0.00000	-.36213E-13	0.00000	.16014E-13	0.00000
-.15699E-13	0.00000	-.17355E+00	0.00000	-.16049E-01	0.00000	-.17357E+00	0.00000	-.23732E-13	0.00000	.23951E-13	0.00000

G-22

NATURAL FREQUENCY = .847218E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.58404E-13	0.00000	-.28176E+00	0.00000	-.17532E-12	0.00000	.48835E-13	0.00000	.72002E-15	0.00000	-.27549E-12	0.00000
.57561E-13	0.00000	-.28176E+00	0.00000	-.16634E-12	0.00000	.67276E-13	0.00000	-.81667E-13	0.00000	-.82556E-13	0.00000
.17954E-12	0.00000	-.49469E-01	0.00000	-.13147E-12	0.00000	.20622E-13	0.00000	.12365E-12	0.00000	.11720E-12	0.00000
-.51883E-13	0.00000	-.49469E-01	0.00000	-.13585E-12	0.00000	.29838E-13	0.00000	.81053E-13	0.00000	.10631E-12	0.00000
-.32095E-12	0.00000	.22361E+00	0.00000	-.61859E-13	0.00000	.49720E-13	0.00000	-.68374E-13	0.00000	-.39097E-13	0.00000
-.83612E-13	0.00000	.22361E+00	0.00000	-.42183E-13	0.00000	.62121E-13	0.00000	-.88122E-13	0.00000	-.73530E-13	0.00000
.16966E-12	0.00000	.31233E+00	0.00000	-.27503E-13	0.00000	-.55451E-13	0.00000	.71960E-14	0.00000	-.10454E-12	0.00000
.20118E-12	0.00000	.31233E+00	0.00000	-.42527E-13	0.00000	-.17901E-13	0.00000	-.77674E-13	0.00000	.33759E-14	0.00000
-.17898E-15	0.00000	.14356E+00	0.00000	-.46423E-13	0.00000	-.77793E-13	0.00000	-.14719E-12	0.00000	.13914E-12	0.00000
-.21283E-12	0.00000	.14356E+00	0.00000	-.68196E-13	0.00000	-.66842E-13	0.00000	.79853E-13	0.00000	.75815E-13	0.00000
-.18878E-12	0.00000	.14356E+00	0.00000	-.16743E-13	0.00000	-.50452E-13	0.00000	-.54565E-13	0.00000	-.10033E-12	0.00000
.35360E-13	0.00000	-.14356E+00	0.00000	-.15853E-13	0.00000	-.67676E-13	0.00000	-.14125E-12	0.00000	-.16789E-12	0.00000
.18870E-12	0.00000	-.31233E+00	0.00000	-.48470E-13	0.00000	-.38073E-13	0.00000	.35578E-13	0.00000	.16454E-13	0.00000
.19979E-12	0.00000	-.31233E+00	0.00000	.30308E-13	0.00000	-.44736E-13	0.00000	-.65230E-13	0.00000	.11288E-12	0.00000
-.10330E-12	0.00000	-.22361E+00	0.00000	-.10182E-12	0.00000	-.13519E-13	0.00000	.12795E-12	0.00000	.86735E-13	0.00000
-.29832E-12	0.00000	-.22361E+00	0.00000	.98516E-13	0.00000	-.16912E-13	0.00000	.49000E-13	0.00000	-.11335E-13	0.00000
-.23384E-13	0.00000	.49469E-01	0.00000	.43721E-13	0.00000	.60189E-14	0.00000	-.39009E-13	0.00000	-.81501E-13	0.00000
.18265E-12	0.00000	.49469E-01	0.00000	.36422E-13	0.00000	.63606E-14	0.00000	-.93916E-13	0.00000	-.14806E-12	0.00000
.30668E-13	0.00000	.28176E+00	0.00000	-.86800E-13	0.00000	.76941E-13	0.00000	.26176E-13	0.00000	.86584E-13	0.00000
-.31882E-13	0.00000	.28176E+00	0.00000	-.99328E-13	0.00000	.77074E-13	0.00000	-.24669E-13	0.00000	.31110E-12	0.00000

G-23

NATURAL FREQUENCY = .859770E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.77737E-01	0.00000	.62919E-13	0.00000	.42443E-13	0.00000	-.74564E-13	0.00000	-.47663E-01	0.00000	-.17062E+00	0.00000
.77737E-01	0.00000	.11534E-12	0.00000	.30727E-13	0.00000	.43900E-13	0.00000	-.47663E-01	0.00000	-.17062E+00	0.00000
-.20367E+00	0.00000	.40291E-13	0.00000	-.22842E-13	0.00000	-.44128E-13	0.00000	.16208E+00	0.00000	.28791E-01	0.00000
-.20367E+00	0.00000	.25831E-13	0.00000	.12949E-13	0.00000	-.17326E-14	0.00000	.16208E+00	0.00000	-.28791E-01	0.00000
-.18399E+00	0.00000	-.29870E-13	0.00000	-.35652E-13	0.00000	.92918E-14	0.00000	-.16191E+00	0.00000	.58341E-01	0.00000
.18399E+00	0.00000	-.58727E-13	0.00000	-.29154E-13	0.00000	.51758E-14	0.00000	-.16191E+00	0.00000	-.58341E-01	0.00000
-.10309E-01	0.00000	-.80617E-13	0.00000	-.58047E-13	0.00000	.12887E-14	0.00000	-.10325E-01	0.00000	-.10400E+00	0.00000
.10309E-01	0.00000	-.13784E-12	0.00000	.10720E-13	0.00000	.50439E-14	0.00000	-.10325E-01	0.00000	.10400E+00	0.00000
-.19724E+00	0.00000	-.21427E-13	0.00000	.37188E-13	0.00000	-.22862E-13	0.00000	.16737E+00	0.00000	.50995E-01	0.00000
-.19724E+00	0.00000	-.97697E-13	0.00000	.40189E-13	0.00000	-.14649E-13	0.00000	.16737E+00	0.00000	-.50995E-01	0.00000
-.19724E+00	0.00000	.32227E-13	0.00000	-.11642E-13	0.00000	-.32619E-13	0.00000	-.16737E+00	0.00000	.50995E-01	0.00000
.19724E+00	0.00000	-.33525E-13	0.00000	-.76745E-14	0.00000	-.25780E-13	0.00000	-.16737E+00	0.00000	-.50995E-01	0.00000
.10309E-01	0.00000	.75285E-13	0.00000	-.18040E-13	0.00000	.82444E-14	0.00000	.10325E-01	0.00000	-.10400E+00	0.00000
-.10309E-01	0.00000	.50161E-13	0.00000	-.20088E-13	0.00000	.87465E-14	0.00000	.10325E-01	0.00000	.10400E+00	0.00000
-.18399E+00	0.00000	.48179E-13	0.00000	.50880E-13	0.00000	.15386E-13	0.00000	-.16191E+00	0.00000	.58341E-01	0.00000
.18399E+00	0.00000	.88239E-13	0.00000	.51087E-13	0.00000	.12555E-13	0.00000	-.16191E+00	0.00000	-.58341E-01	0.00000
-.20367E+00	0.00000	-.32124E-13	0.00000	.43035E-14	0.00000	-.19265E-14	0.00000	-.16208E+00	0.00000	.28791E-01	0.00000
.20367E+00	0.00000	.50805E-13	0.00000	.18759E-13	0.00000	-.97561E-15	0.00000	-.16208E+00	0.00000	-.28791E-01	0.00000
-.77737E-01	0.00000	-.99514E-13	0.00000	-.41535E-13	0.00000	.28801E-13	0.00000	.47663E-01	0.00000	-.17062E+00	0.00000
-.77737E-01	0.00000	.41617E-13	0.00000	-.43940E-13	0.00000	.30705E-13	0.00000	.47663E-01	0.00000	.17062E+00	0.00000

G-24

FILE 5000 IS 15 MINUTES IN 15

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .862306E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.21346E-01	0.00000	-.12510E-12	0.00000	.42746E-13	0.00000	.39084E-13	0.00000	.38121E-12	0.00000	-.24655E+00	0.00000
-.21346E-01	0.00000	-.13111E-13	0.00000	.37974E-14	0.00000	-.77780E-14	0.00000	.37243E-12	0.00000	-.24655E+00	0.00000
-.92837E-01	0.00000	-.77482E-13	0.00000	-.32725E-13	0.00000	.37425E-13	0.00000	-.12839E-11	0.00000	-.11989E+00	0.00000
-.92837E-01	0.00000	.13920E-13	0.00000	-.50104E-13	0.00000	.23168E-14	0.00000	-.12652E-11	0.00000	-.11989E+00	0.00000
.25646E+00	0.00000	.81340E-14	0.00000	.61490E-13	0.00000	.29982E-13	0.00000	.13193E-11	0.00000	-.65701E-01	0.00000
.25646E+00	0.00000	.21612E-13	0.00000	.51997E-13	0.00000	.15668E-13	0.00000	.12570E-11	0.00000	-.65701E-01	0.00000
-.24404E+00	0.00000	.93463E-13	0.00000	-.16101E-13	0.00000	-.56955E-13	0.00000	.12229E-12	0.00000	-.67100E-01	0.00000
-.24404E+00	0.00000	.12311E-13	0.00000	.29685E-14	0.00000	-.48734E-13	0.00000	.76110E-13	0.00000	-.67100E-01	0.00000
.10177E+00	0.00000	.10019E-12	0.00000	-.37758E-13	0.00000	-.18948E-13	0.00000	-.13277E-11	0.00000	-.14990E+00	0.00000
.10177E+00	0.00000	-.11437E-13	0.00000	-.53943E-13	0.00000	-.13498E-13	0.00000	-.13156E-11	0.00000	-.14990E+00	0.00000
.10177E+00	0.00000	.79736E-13	0.00000	.61070E-13	0.00000	-.15209E-13	0.00000	.13225E-11	0.00000	-.14990E+00	0.00000
.10177E+00	0.00000	-.48754E-13	0.00000	.61136E-13	0.00000	-.28990E-13	0.00000	.13446E-11	0.00000	-.14990E+00	0.00000
-.24404E+00	0.00000	.27595E-13	0.00000	-.38071E-14	0.00000	-.25543E-13	0.00000	-.13946E-12	0.00000	-.67100E-01	0.00000
-.24404E+00	0.00000	-.52713E-13	0.00000	-.55266E-14	0.00000	-.28097E-13	0.00000	-.11984E-12	0.00000	-.67100E-01	0.00000
.25646E+00	0.00000	-.34175E-13	0.00000	-.24190E-13	0.00000	.34762E-13	0.00000	-.12250E-11	0.00000	-.65701E-01	0.00000
.25646E+00	0.00000	-.25056E-13	0.00000	-.20124E-13	0.00000	.15320E-13	0.00000	-.12109E-11	0.00000	-.65701E-01	0.00000
-.92837E-01	0.00000	-.55191E-13	0.00000	.36227E-13	0.00000	.17249E-13	0.00000	.12098E-11	0.00000	-.11989E+00	0.00000
-.92837E-01	0.00000	.24709E-13	0.00000	.46488E-13	0.00000	.32557E-13	0.00000	.12279E-11	0.00000	-.11989E+00	0.00000
-.21346E-01	0.00000	-.72079E-13	0.00000	-.15550E-13	0.00000	.39923E-14	0.00000	-.34972E-12	0.00000	-.24655E+00	0.00000
-.21346E-01	0.00000	.61487E-13	0.00000	-.28107E-13	0.00000	.14541E-13	0.00000	-.34784E-12	0.00000	-.24655E+00	0.00000

C-4

G-25

NATURAL FREQUENCY= .873360E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.35419E-13	0.00000	-.18443E+00	0.00000	.16319E+00	0.00000	-.10008E-01	0.00000	-.95999E-13	0.00000	.26005E-12	0.00000
-.49980E-13	0.00000	.18443E+00	0.00000	.16319E+00	0.00000	-.10008E-01	0.00000	.10108E-12	0.00000	-.29668E-15	0.00000
-.13985E-12	0.00000	-.15136E+00	0.00000	-.22855E+00	0.00000	.50910E-01	0.00000	-.16943E-12	0.00000	-.72727E-13	0.00000
.75475E-13	0.00000	.15136E+00	0.00000	-.22855E+00	0.00000	.50910E-01	0.00000	-.19452E-13	0.00000	-.51409E-13	0.00000
-.22353E-12	0.00000	-.52076E-01	0.00000	.76219E-01	0.00000	.80586E-01	0.00000	.65140E-13	0.00000	-.23956E-14	0.00000
-.27456E-13	0.00000	.52076E-01	0.00000	.76219E-01	0.00000	.80586E-01	0.00000	-.14277E-12	0.00000	-.73133E-13	0.00000
-.12165E-12	0.00000	.11168E+00	0.00000	.10367E-01	0.00000	-.11764E+00	0.00000	.36427E-13	0.00000	.61709E-13	0.00000
-.13353E-12	0.00000	-.11168E+00	0.00000	.10367E-01	0.00000	-.11764E+00	0.00000	-.27843E-13	0.00000	-.31409E-13	0.00000
-.22116E-13	0.00000	.17365E+00	0.00000	-.20079E+00	0.00000	-.37230E-01	0.00000	-.70524E-13	0.00000	-.82098E-13	0.00000
.19487E-12	0.00000	-.17365E+00	0.00000	-.20079E+00	0.00000	-.37230E-01	0.00000	-.11320E-12	0.00000	.62390E-15	0.00000
.13930E-12	0.00000	.17365E+00	0.00000	-.20079E+00	0.00000	-.37230E-01	0.00000	.17906E-12	0.00000	-.59585E-13	0.00000
-.13203E-12	0.00000	-.17365E+00	0.00000	.20079E+00	0.00000	-.37230E-01	0.00000	.58337E-13	0.00000	.56768E-13	0.00000
-.11759E-12	0.00000	.11168E+00	0.00000	-.10367E-01	0.00000	-.11764E+00	0.00000	-.16042E-16	0.00000	.12411E-13	0.00000
.55809E-14	0.00000	-.11168E+00	0.00000	-.10367E-01	0.00000	-.11764E+00	0.00000	-.13569E-12	0.00000	-.11249E-12	0.00000
-.16493E-13	0.00000	.52076E-01	0.00000	-.76219E-01	0.00000	.80586E-01	0.00000	.16831E-13	0.00000	-.62382E-13	0.00000
.13069E-12	0.00000	-.52076E-01	0.00000	.76219E-01	0.00000	.80586E-01	0.00000	-.98529E-13	0.00000	-.43938E-13	0.00000
.58261E-13	0.00000	-.15136E+00	0.00000	.22855E+00	0.00000	.50910E-01	0.00000	.11065E-12	0.00000	.41911E-13	0.00000
-.12938E-12	0.00000	.15136E+00	0.00000	-.22855E+00	0.00000	.50910E-01	0.00000	-.24008E-13	0.00000	-.37317E-13	0.00000
-.39083E-13	0.00000	-.18443E+00	0.00000	-.16319E+00	0.00000	-.10008E-01	0.00000	.12549E-14	0.00000	-.45893E-13	0.00000
-.14602E-13	0.00000	.18443E+00	0.00000	.16319E+00	0.00000	-.10008E-01	0.00000	-.56138E-13	0.00000	-.12513E-12	0.00000

C-26

4-10-1968 11:00 AM '68

NATURAL FREQUENCY= .933079E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.33843E-13	0.00000	-.23041E-11	0.00000	-.11590E-11	0.00000	.49546E-11	0.00000	-.22361E+00	0.00000	-.41851E-13	0.00000
-.64350E-14	0.00000	-.19857E-11	0.00000	-.12178E-11	0.00000	.49806E-11	0.00000	.22361E+00	0.00000	-.76943E-13	0.00000
-.23986E-14	0.00000	.18949E-11	0.00000	.44259E-11	0.00000	-.29145E-11	0.00000	-.22361E+00	0.00000	.50877E-13	0.00000
-.37338E-13	0.00000	-.19047E-11	0.00000	.43797E-11	0.00000	-.29024E-11	0.00000	.22361E+00	0.00000	-.48596E-13	0.00000
-.29710E-14	0.00000	.35084E-11	0.00000	-.90659E-11	0.00000	-.78777E-12	0.00000	-.22361E+00	0.00000	.48675E-14	0.00000
-.64472E-13	0.00000	-.32803E-11	0.00000	-.90706E-11	0.00000	-.79520E-12	0.00000	.22361E+00	0.00000	-.31148E-13	0.00000
.25899E-13	0.00000	.33591E-11	0.00000	.80250E-11	0.00000	.15095E-12	0.00000	-.22361E+00	0.00000	.22153E-13	0.00000
-.92365E-13	0.00000	-.30148E-11	0.00000	.80361E-11	0.00000	.15095E-12	0.00000	.22361E+00	0.00000	-.39492E-13	0.00000
-.31306E-13	0.00000	.20832E-11	0.00000	-.20653E-11	0.00000	-.35958E-11	0.00000	-.22361E+00	0.00000	-.80281E-14	0.00000
-.52327E-13	0.00000	-.10993E-11	0.00000	-.20491E-11	0.00000	-.35857E-11	0.00000	.22361E+00	0.00000	.16179E-14	0.00000
-.57270E-13	0.00000	-.23956E-11	0.00000	-.23279E-11	0.00000	.36696E-11	0.00000	-.22361E+00	0.00000	-.31857E-13	0.00000
.67926E-13	0.00000	.21898E-11	0.00000	-.23293E-11	0.00000	.36695E-11	0.00000	.22361E+00	0.00000	-.21664E-13	0.00000
-.37133E-13	0.00000	-.35372E-11	0.00000	.80354E-11	0.00000	.70632E-15	0.00000	-.22361E+00	0.00000	-.45589E-14	0.00000
-.25077E-13	0.00000	.32333E-11	0.00000	.80512E-11	0.00000	.25889E-13	0.00000	.22361E+00	0.00000	.46581E-14	0.00000
.48697E-13	0.00000	-.34129E-11	0.00000	-.90204E-11	0.00000	.67178E-12	0.00000	-.22361E+00	0.00000	-.27950E-13	0.00000
.40260E-14	0.00000	.32287E-11	0.00000	-.90312E-11	0.00000	.67177E-12	0.00000	.22361E+00	0.00000	-.27930E-13	0.00000
-.51567E-14	0.00000	-.16656E-11	0.00000	.40932E-11	0.00000	.28357E-11	0.00000	-.22361E+00	0.00000	.26251E-13	0.00000
.36958E-13	0.00000	.16798E-11	0.00000	.41150E-11	0.00000	.28544E-11	0.00000	.22361E+00	0.00000	-.17284E-13	0.00000
-.29856E-13	0.00000	.25816E-11	0.00000	-.93050E-12	0.00000	-.49250E-11	0.00000	-.22361E+00	0.00000	-.48182E-13	0.00000
-.94800E-15	0.00000	-.23214E-11	0.00000	-.93835E-12	0.00000	-.49849E-11	0.00000	.22361E+00	0.00000	-.26941E-13	0.00000

G-27

NATURAL FREQUENCY= .934932E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.32656E-13	0.00000	.72543E-01	0.00000	.33451E-01	0.00000	-.15719E+00	0.00000	-.68167E-11	0.00000	.35537E-13	0.00000
-.55539E-13	0.00000	-.72543E-01	0.00000	.33451E-01	0.00000	-.15719E+00	0.00000	.67657E-11	0.00000	-.14632E-13	0.00000
-.33680E-14	0.00000	-.56170E-01	0.00000	-.13428E+00	0.00000	.91002E-01	0.00000	-.67807E-11	0.00000	.20135E-13	0.00000
.56340E-14	0.00000	.56170E-01	0.00000	-.13428E+00	0.00000	.91002E-01	0.00000	.67521E-11	0.00000	-.30461E-14	0.00000
.26101E-13	0.00000	-.10552E+00	0.00000	.28571E+00	0.00000	.22929E-01	0.00000	-.67785E-11	0.00000	-.37612E-14	0.00000
-.47925E-13	0.00000	.10552E+00	0.00000	.28571E+00	0.00000	.22929E-01	0.00000	.68209E-11	0.00000	-.15208E-13	0.00000
-.23875E-13	0.00000	-.10360E+00	0.00000	-.25451E+00	0.00000	-.19250E-02	0.00000	-.70048E-11	0.00000	-.55883E-14	0.00000
.17751E-13	0.00000	.10360E+00	0.00000	-.25451E+00	0.00000	-.19250E-02	0.00000	.69016E-11	0.00000	-.56986E-14	0.00000
.33449E-13	0.00000	-.67506E-01	0.00000	.69625E-01	0.00000	.11471E+00	0.00000	-.71425E-11	0.00000	-.11425E-13	0.00000
-.27648E-13	0.00000	.67506E-01	0.00000	.69625E-01	0.00000	.11471E+00	0.00000	.71662E-11	0.00000	.14215E-13	0.00000
-.39244E-14	0.00000	-.67506E-01	0.00000	.69625E-01	0.00000	-.11471E+00	0.00000	-.73915E-11	0.00000	-.85860E-14	0.00000
-.57318E-13	0.00000	.67506E-01	0.00000	.69625E-01	0.00000	-.11471E+00	0.00000	.73974E-11	0.00000	-.12739E-13	0.00000
.49443E-14	0.00000	.10360E+00	0.00000	-.25451E+00	0.00000	.19250E-02	0.00000	-.76020E-11	0.00000	-.72724E-14	0.00000
.48450E-13	0.00000	-.10360E+00	0.00000	-.25451E+00	0.00000	-.19250E-02	0.00000	.75449E-11	0.00000	.10238E-15	0.00000
.20464E-13	0.00000	.10552E+00	0.00000	.28571E+00	0.00000	-.22929E-01	0.00000	-.77352E-11	0.00000	-.81691E-14	0.00000
-.66278E-13	0.00000	-.10552E+00	0.00000	.28571E+00	0.00000	-.22929E-01	0.00000	.77879E-11	0.00000	.18724E-13	0.00000
-.32617E-13	0.00000	-.56170E-01	0.00000	-.13428E+00	0.00000	.91002E-01	0.00000	-.78657E-11	0.00000	-.25535E-13	0.00000
-.29465E-13	0.00000	.56170E-01	0.00000	-.13428E+00	0.00000	-.91002E-01	0.00000	.78576E-11	0.00000	-.25160E-13	0.00000
.29164E-13	0.00000	-.72543E-01	0.00000	.33451E-01	0.00000	.15719E+00	0.00000	-.78923E-11	0.00000	.39393E-13	0.00000
-.14403E-13	0.00000	.72543E-01	0.00000	.33451E-01	0.00000	-.15719E+00	0.00000	.79154E-11	0.00000	-.83384E-13	0.00000

NATURAL FREQUENCY= .964469E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.44950E-01	0.00000	.37635E-13	0.00000	.41226E-13	0.00000	.11466E-13	0.00000	.16696E-01	0.00000	.16035E+00	0.00000
.44950E-01	0.00000	.64469E-13	0.00000	.16949E-13	0.00000	.54686E-13	0.00000	.16696E-01	0.00000	.16035E+00	0.00000
.14844E+00	0.00000	.85907E-14	0.00000	.68832E-14	0.00000	-.84117E-14	0.00000	-.12018E+00	0.00000	-.55926E-01	0.00000
.14844E+00	0.00000	.31957E-13	0.00000	-.23050E-13	0.00000	-.27892E-13	0.00000	-.12018E+00	0.00000	.55926E-01	0.00000
.22611E+00	0.00000	-.29900E-14	0.00000	.16387E-13	0.00000	.42798E-14	0.00000	.21015E+00	0.00000	.16322E-01	0.00000
.22611E+00	0.00000	.20878E-13	0.00000	.46877E-13	0.00000	-.13260E-15	0.00000	.21015E+00	0.00000	-.16322E-01	0.00000
.20095E+00	0.00000	.78628E-14	0.00000	-.81672E-14	0.00000	-.25576E-13	0.00000	-.17748E+00	0.00000	.45817E-01	0.00000
.20095E+00	0.00000	.48026E-13	0.00000	-.68905E-14	0.00000	-.24043E-13	0.00000	-.17748E+00	0.00000	-.45817E-01	0.00000
.78343E-01	0.00000	.16596E-13	0.00000	-.56204E-13	0.00000	.92314E-14	0.00000	.70821E-01	0.00000	-.86603E-01	0.00000
.78343E-01	0.00000	.39652E-13	0.00000	-.58331E-13	0.00000	.10598E-13	0.00000	.70821E-01	0.00000	.86603E-01	0.00000
.78343E-01	0.00000	.11492E-13	0.00000	.20046E-13	0.00000	.12355E-13	0.00000	.70821E-01	0.00000	.86603E-01	0.00000
.78343E-01	0.00000	-.30808E-13	0.00000	.21350E-13	0.00000	.96368E-14	0.00000	.70821E-01	0.00000	-.86603E-01	0.00000
.20095E+00	0.00000	.18139E-13	0.00000	.48279E-14	0.00000	-.34148E-13	0.00000	-.17748E+00	0.00000	-.45817E-01	0.00000
.20095E+00	0.00000	-.75530E-13	0.00000	.77249E-14	0.00000	-.13871E-13	0.00000	-.17748E+00	0.00000	.45817E-01	0.00000
.22611E+00	0.00000	.26679E-13	0.00000	-.14624E-15	0.00000	-.25382E-13	0.00000	.21015E+00	0.00000	-.16322E-01	0.00000
.22611E+00	0.00000	-.70932E-13	0.00000	-.19651E-13	0.00000	-.36345E-13	0.00000	.21015E+00	0.00000	.16322E-01	0.00000
.14844E+00	0.00000	.35909E-13	0.00000	-.16795E-13	0.00000	-.83402E-14	0.00000	-.12018E+00	0.00000	.55926E-01	0.00000
.14844E+00	0.00000	-.31146E-13	0.00000	-.39506E-13	0.00000	-.12321E-13	0.00000	-.12018E+00	0.00000	-.55926E-01	0.00000
.44950E-01	0.00000	.56332E-13	0.00000	.41916E-13	0.00000	.20765E-13	0.00000	.16696E-01	0.00000	-.16035E+00	0.00000
.44950E-01	0.00000	.25418E-13	0.00000	.37948E-13	0.00000	.18378E-13	0.00000	.16696E-01	0.00000	.16035E+00	0.00000

G-30

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .987814E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.53495E-01	0.00000	-.63788E-13	0.00000	.30964E-13	0.00000	-.21153E-13	0.00000	-.26372E-11	0.00000	-.23210E+00	0.00000
.53495E-01	0.00000	.56289E-13	0.00000	-.23142E-13	0.00000	.30468E-13	0.00000	.24801E-11	0.00000	-.23210E+00	0.00000
-.63265E-02	0.00000	-.15717E-13	0.00000	-.56168E-13	0.00000	-.47705E-14	0.00000	-.10757E-11	0.00000	.10972E+00	0.00000
-.63265E-02	0.00000	.31214E-13	0.00000	-.59932E-13	0.00000	.37372E-13	0.00000	.19496E-11	0.00000	.10972E+00	0.00000
-.14137E+00	0.00000	-.28315E-13	0.00000	.35932E-13	0.00000	-.46286E-14	0.00000	-.62277E-12	0.00000	-.13533E+00	0.00000
-.14137E+00	0.00000	-.27297E-13	0.00000	.39733E-13	0.00000	-.46407E-14	0.00000	-.87430E-12	0.00000	-.13533E+00	0.00000
.23175E+00	0.00000	-.31107E-13	0.00000	-.35741E-13	0.00000	-.28961E-13	0.00000	-.23251E-11	0.00000	.83041E-01	0.00000
.23175E+00	0.00000	.69960E-13	0.00000	-.46713E-13	0.00000	-.26470E-13	0.00000	-.11139E-11	0.00000	.83041E-01	0.00000
-.28788E+00	0.00000	.85534E-14	0.00000	.22528E-13	0.00000	.25703E-14	0.00000	.25358E-11	0.00000	-.31879E-01	0.00000
-.28788E+00	0.00000	-.47004E-13	0.00000	-.21444E-13	0.00000	.78231E-14	0.00000	-.27964E-11	0.00000	-.31879E-01	0.00000
.28788E+00	0.00000	-.16929E-13	0.00000	.47802E-13	0.00000	-.45977E-14	0.00000	.22372E-11	0.00000	-.31879E-01	0.00000
.28788E+00	0.00000	-.11424E-14	0.00000	-.28131E-13	0.00000	-.13571E-13	0.00000	-.29797E-11	0.00000	-.31879E-01	0.00000
-.23175E+00	0.00000	-.12255E-14	0.00000	-.64063E-13	0.00000	.30782E-13	0.00000	.23066E-11	0.00000	.83041E-01	0.00000
-.23175E+00	0.00000	.58745E-13	0.00000	-.51439E-13	0.00000	-.99319E-14	0.00000	-.87639E-12	0.00000	.83041E-01	0.00000
.14137E+00	0.00000	-.36120E-13	0.00000	.23743E-13	0.00000	.29464E-13	0.00000	-.83054E-12	0.00000	-.13533E+00	0.00000
.14137E+00	0.00000	.51678E-13	0.00000	.31822E-13	0.00000	.32181E-13	0.00000	-.77489E-12	0.00000	-.13533E+00	0.00000
-.63265E-02	0.00000	-.13279E-13	0.00000	-.25910E-13	0.00000	-.70146E-14	0.00000	-.12221E-11	0.00000	.10972E+00	0.00000
-.63265E-02	0.00000	.21950E-13	0.00000	.14305E-13	0.00000	.26698E-14	0.00000	.20308E-11	0.00000	.10972E+00	0.00000
-.53495E-01	0.00000	-.29104E-13	0.00000	-.23195E-13	0.00000	-.19137E-13	0.00000	-.26488E-11	0.00000	-.23210E+00	0.00000
-.53495E-01	0.00000	-.36672E-13	0.00000	-.25529E-13	0.00000	-.19119E-13	0.00000	.25853E-11	0.00000	-.23210E+00	0.00000

G-31

NATURAL FREQUENCY= .990994E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.37130E-12	0.00000	.20721E-13	0.00000	-.51634E-14	0.00000	.13146E-14	0.00000	.30075E+00	0.00000	-.15725E-11	0.00000
.37613E-12	0.00000	.20263E-13	0.00000	.17545E-13	0.00000	-.45727E-13	0.00000	.30072E+00	0.00000	-.15526E-11	0.00000
-.10649E-12	0.00000	-.26347E-13	0.00000	.39127E-14	0.00000	.10734E-13	0.00000	.18587E+00	0.00000	.72721E-12	0.00000
-.80308E-13	0.00000	.31264E-13	0.00000	-.12262E-13	0.00000	-.13191E-13	0.00000	-.18587E+00	0.00000	.74529E-12	0.00000
-.89034E-12	0.00000	-.55855E-13	0.00000	.37214E-13	0.00000	.36195E-13	0.00000	.33747E-12	0.00000	-.87636E-12	0.00000
-.93421E-12	0.00000	.37531E-13	0.00000	.26013E-13	0.00000	-.11339E-13	0.00000	-.24701E-12	0.00000	-.92429E-12	0.00000
.14926E-11	0.00000	-.35365E-14	0.00000	.73247E-14	0.00000	-.90515E-14	0.00000	-.18587E+00	0.00000	.57163E-12	0.00000
.15561E-11	0.00000	.29284E-13	0.00000	-.58645E-14	0.00000	-.14339E-13	0.00000	.18587E+00	0.00000	.57248E-12	0.00000
-.18900E-11	0.00000	.27655E-13	0.00000	-.58687E-13	0.00000	-.20168E-14	0.00000	-.30075E+00	0.00000	-.24208E-12	0.00000
-.19151E-11	0.00000	.31437E-14	0.00000	-.55641E-13	0.00000	-.21912E-13	0.00000	.30075E+00	0.00000	-.20752E-12	0.00000
.19148E-11	0.00000	.44000E-13	0.00000	-.12022E-13	0.00000	.42853E-15	0.00000	-.30075E+00	0.00000	-.19808E-12	0.00000
.18794E-11	0.00000	-.52493E-13	0.00000	.41203E-14	0.00000	-.91192E-14	0.00000	.30075E+00	0.00000	-.20167E-12	0.00000
-.15514E-11	0.00000	.44346E-13	0.00000	.27182E-13	0.00000	-.20050E-13	0.00000	-.18587E+00	0.00000	.57717E-12	0.00000
.15102E-11	0.00000	-.61126E-13	0.00000	.28263E-13	0.00000	-.77287E-13	0.00000	.18587E+00	0.00000	.56456E-12	0.00000
.94481E-12	0.00000	-.32159E-14	0.00000	-.67270E-13	0.00000	.43161E-13	0.00000	-.24458E-12	0.00000	-.88832E-12	0.00000
.92605E-12	0.00000	.12256E-13	0.00000	-.68437E-13	0.00000	.10978E-13	0.00000	.26906E-12	0.00000	-.88017E-12	0.00000
.47928E-13	0.00000	-.54131E-13	0.00000	.11242E-12	0.00000	.36595E-13	0.00000	.18587E+00	0.00000	.71347E-12	0.00000
.56482E-13	0.00000	.49177E-13	0.00000	.13794E-12	0.00000	.31414E-13	0.00000	-.18587E+00	0.00000	.74925E-12	0.00000
-.34314E-12	0.00000	-.71548E-13	0.00000	-.51155E-13	0.00000	-.57912E-14	0.00000	.30075E+00	0.00000	-.15344E-11	0.00000
-.35133E-12	0.00000	.80781E-13	0.00000	-.52450E-13	0.00000	-.12319E-13	0.00000	-.30075E+00	0.00000	-.15772E-11	0.00000

NATURAL FREQUENCY = .102477E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.13645E-13	0.00000	-.22336E+00	0.00000	-.11262E+00	0.00000	-.85954E-01	0.00000	-.13071E-12	0.00000	-.31515E-13	0.00000
-.20788E-13	0.00000	-.22336E+00	0.00000	-.11262E+00	0.00000	-.85954E-01	0.00000	-.18309E-12	0.00000	-.13092E-13	0.00000
-.22537E-13	0.00000	-.44763E-01	0.00000	-.19882E+00	0.00000	-.13673E-01	0.00000	-.74552E-13	0.00000	-.23812E-13	0.00000
-.54040E-14	0.00000	-.44763E-01	0.00000	-.19882E+00	0.00000	-.13673E-01	0.00000	-.11796E-12	0.00000	-.91916E-14	0.00000
-.29691E-14	0.00000	-.10728E+00	0.00000	-.71852E-01	0.00000	-.57623E-01	0.00000	-.20506E-13	0.00000	-.11511E-13	0.00000
-.21803E-13	0.00000	-.10728E+00	0.00000	-.71852E-01	0.00000	-.57623E-01	0.00000	-.26056E-13	0.00000	-.49762E-14	0.00000
-.62244E-14	0.00000	-.25003E+00	0.00000	-.69712E-01	0.00000	-.13630E+00	0.00000	-.10708E-12	0.00000	-.40182E-13	0.00000
-.36100E-13	0.00000	-.25003E+00	0.00000	-.69712E-01	0.00000	-.13630E+00	0.00000	-.62467E-13	0.00000	-.27954E-13	0.00000
-.31063E-13	0.00000	-.10636E+00	0.00000	-.84056E-01	0.00000	-.16740E-01	0.00000	-.84173E-13	0.00000	-.34837E-13	0.00000
-.40311E-13	0.00000	-.10636E+00	0.00000	-.84056E-01	0.00000	-.16740E-01	0.00000	-.79474E-13	0.00000	-.29015E-13	0.00000
-.19436E-13	0.00000	-.10636E+00	0.00000	-.84056E-01	0.00000	-.16740E-01	0.00000	-.17036E-13	0.00000	-.28877E-13	0.00000
-.28352E-13	0.00000	-.10636E+00	0.00000	-.84056E-01	0.00000	-.16740E-01	0.00000	-.43830E-13	0.00000	-.61344E-14	0.00000
-.36729E-13	0.00000	-.25003E+00	0.00000	-.69712E-01	0.00000	-.13630E+00	0.00000	-.46970E-13	0.00000	-.13819E-13	0.00000
-.21333E-13	0.00000	-.25003E+00	0.00000	-.69712E-01	0.00000	-.13630E+00	0.00000	-.19157E-13	0.00000	-.20850E-13	0.00000
-.52705E-14	0.00000	-.10728E+00	0.00000	-.71852E-01	0.00000	-.57623E-01	0.00000	-.55363E-13	0.00000	-.10351E-13	0.00000
-.31282E-13	0.00000	-.10728E+00	0.00000	-.71852E-01	0.00000	-.57623E-01	0.00000	-.21301E-13	0.00000	-.27192E-13	0.00000
-.43979E-13	0.00000	-.44763E-01	0.00000	-.19882E+00	0.00000	-.13673E-01	0.00000	-.47306E-13	0.00000	-.27750E-13	0.00000
-.30648E-13	0.00000	-.44763E-01	0.00000	-.19882E+00	0.00000	-.13673E-01	0.00000	-.75473E-14	0.00000	-.18433E-13	0.00000
-.12255E-13	0.00000	-.22336E+00	0.00000	-.11262E+00	0.00000	-.85954E-01	0.00000	-.47406E-13	0.00000	-.33466E-13	0.00000
-.59443E-14	0.00000	-.22336E+00	0.00000	-.11262E+00	0.00000	-.85954E-01	0.00000	-.38436E-13	0.00000	-.44472E-13	0.00000

G-33

THE SYMBOLS IN THESE ARE NOT

NATURAL FREQUENCY = .104408E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.19689E-01	0.00000	-.65984E-13	0.00000	.31907E-13	0.00000	.18435E-13	0.00000	.43670E-02	0.00000	-.11099E+00	0.00000
.19689E-01	0.00000	.34540E-13	0.00000	-.57246E-13	0.00000	-.14367E-13	0.00000	.43670E-02	0.00000	.11099E+00	0.00000
.73349E-01	0.00000	-.41054E-13	0.00000	-.19493E-13	0.00000	.75658E-13	0.00000	.59221E-01	0.00000	.44438E-01	0.00000
.73349E-01	0.00000	.23519E-13	0.00000	-.64972E-13	0.00000	-.20770E-13	0.00000	.59221E-01	0.00000	-.44438E-01	0.00000
.14742E+00	0.00000	.37616E-13	0.00000	-.21240E-13	0.00000	-.24593E-13	0.00000	-.14900E+00	0.00000	-.46836E-01	0.00000
.14742E+00	0.00000	-.56953E-16	0.00000	-.26758E-13	0.00000	-.11660E-14	0.00000	-.14900E+00	0.00000	.46836E-01	0.00000
.20718E+00	0.00000	.52852E-13	0.00000	-.41871E-13	0.00000	-.16707E-13	0.00000	.19485E+00	0.00000	.30795E-01	0.00000
.20718E+00	0.00000	-.57793E-13	0.00000	-.52399E-13	0.00000	-.20399E-13	0.00000	.19485E+00	0.00000	-.30795E-01	0.00000
.23548E+00	0.00000	.36115E-13	0.00000	-.65024E-13	0.00000	-.66427E-14	0.00000	-.22585E+00	0.00000	-.98881E-02	0.00000
.23548E+00	0.00000	-.59516E-13	0.00000	.62779E-13	0.00000	-.14708E-13	0.00000	-.22585E+00	0.00000	.98881E-02	0.00000
.23548E+00	0.00000	-.14736E-13	0.00000	-.58390E-13	0.00000	-.10530E-13	0.00000	.22585E+00	0.00000	-.98881E-02	0.00000
.23548E+00	0.00000	-.17708E-13	0.00000	-.58402E-13	0.00000	-.14148E-13	0.00000	.22585E+00	0.00000	.98881E-02	0.00000
.20718E+00	0.00000	-.19573E-13	0.00000	.25497E-13	0.00000	.54061E-13	0.00000	-.19485E+00	0.00000	.30795E-01	0.00000
.20718E+00	0.00000	.58931E-13	0.00000	-.13883E-13	0.00000	.34583E-13	0.00000	-.19485E+00	0.00000	-.30795E-01	0.00000
.14742E+00	0.00000	-.12838E-13	0.00000	-.55226E-14	0.00000	.15254E-13	0.00000	.14900E+00	0.00000	-.46836E-01	0.00000
.14742E+00	0.00000	.56153E-13	0.00000	.70766E-14	0.00000	.30180E-14	0.00000	.14900E+00	0.00000	.46836E-01	0.00000
.73349E-01	0.00000	-.39100E-14	0.00000	-.12914E-13	0.00000	.65496E-14	0.00000	-.59221E-01	0.00000	.44438E-01	0.00000
.73349E-01	0.00000	-.17520E-14	0.00000	-.11876E-13	0.00000	.10784E-13	0.00000	-.59221E-01	0.00000	-.44438E-01	0.00000
.19689E-01	0.00000	.71792E-14	0.00000	-.20125E-13	0.00000	-.27782E-13	0.00000	-.43670E-02	0.00000	-.11099E+00	0.00000
.19689E-01	0.00000	-.62265E-13	0.00000	-.20223E-13	0.00000	-.28297E-13	0.00000	.43670E-02	0.00000	.11099E+00	0.00000

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14796E-13	0.00000	-.97427E-13	0.00000	-.13386E-12	0.00000	.22275E-12	0.00000	.28176E+00	0.00000	-.24557E-13	0.00000
-.91327E-14	0.00000	-.18095E-12	0.00000	-.12722E-12	0.00000	.26495E-12	0.00000	-.28176E+00	0.00000	-.12333E-14	0.00000
-.38979E-14	0.00000	.22083E-12	0.00000	.32576E-12	0.00000	-.24242E-12	0.00000	.49469E-01	0.00000	.44179E-13	0.00000
-.56429E-13	0.00000	-.11631E-12	0.00000	.32606E-12	0.00000	-.24116E-12	0.00000	-.49469E-01	0.00000	-.43737E-13	0.00000
-.68121E-14	0.00000	.20555E-12	0.00000	-.55950E-12	0.00000	.12796E-12	0.00000	-.22361E+00	0.00000	.16449E-13	0.00000
-.53894E-13	0.00000	.93436E-13	0.00000	-.54575E-12	0.00000	.10460E-12	0.00000	.22361E+00	0.00000	.27971E-13	0.00000
-.24177E-13	0.00000	.78460E-14	0.00000	-.84269E-12	0.00000	-.57143E-13	0.00000	-.31233E+00	0.00000	-.17057E-13	0.00000
-.12767E-13	0.00000	.69972E-13	0.00000	.83946E-12	0.00000	-.84428E-13	0.00000	.31233E+00	0.00000	-.53827E-14	0.00000
-.74024E-13	0.00000	-.27298E-12	0.00000	-.90165E-12	0.00000	.72109E-13	0.00000	-.14356E+00	0.00000	-.17642E-13	0.00000
-.38066E-13	0.00000	.16197E-14	0.00000	-.91617E-12	0.00000	-.11602E-12	0.00000	.14356E+00	0.00000	.45233E-13	0.00000
-.61593E-13	0.00000	-.23181E-12	0.00000	.87207E-12	0.00000	.79210E-13	0.00000	.14356E+00	0.00000	-.21876E-13	0.00000
-.20121E-13	0.00000	-.30583E-13	0.00000	.89841E-12	0.00000	.65311E-13	0.00000	-.14356E+00	0.00000	.30837E-14	0.00000
-.72795E-13	0.00000	-.84823E-13	0.00000	-.83806E-12	0.00000	-.97740E-13	0.00000	-.31233E+00	0.00000	-.49656E-13	0.00000
-.59251E-13	0.00000	-.17410E-13	0.00000	-.84364E-12	0.00000	-.10771E-12	0.00000	-.31233E+00	0.00000	-.54827E-13	0.00000
-.15800E-13	0.00000	.26847E-12	0.00000	.58027E-12	0.00000	.10592E-12	0.00000	.22361E+00	0.00000	-.30559E-13	0.00000
-.30220E-13	0.00000	-.76224E-13	0.00000	.57053E-12	0.00000	.93953E-13	0.00000	-.22361E+00	0.00000	-.12296E-13	0.00000
-.25275E-14	0.00000	.23147E-12	0.00000	-.27853E-12	0.00000	-.23399E-12	0.00000	-.49469E-01	0.00000	.43930E-13	0.00000
-.99399E-13	0.00000	-.14079E-12	0.00000	-.28110E-12	0.00000	-.23829E-12	0.00000	.49469E-01	0.00000	.13715E-13	0.00000
-.74008E-13	0.00000	-.16736E-12	0.00000	.95021E-13	0.00000	.27365E-12	0.00000	-.28176E+00	0.00000	-.97903E-13	0.00000
-.45191E-15	0.00000	-.14620E-12	0.00000	.91693E-13	0.00000	-.26913E-12	0.00000	.28176E+00	0.00000	-.11753E-12	0.00000

NATURAL FREQUENCY= .109690E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.18482E-13	0.00000	-.25583E+00	0.00000	.86949E-14	0.00000	-.31009E-13	0.00000	-.43844E-13	0.00000	.29151E-13	0.00000
-.23369E-13	0.00000	-.25583E+00	0.00000	.20584E-13	0.00000	.13597E-13	0.00000	.70707E-13	0.00000	-.40291E-13	0.00000
.24297E-14	0.00000	.97720E-01	0.00000	.44083E-14	0.00000	-.20926E-13	0.00000	-.46114E-13	0.00000	.32884E-13	0.00000
-.38234E-13	0.00000	.97720E-01	0.00000	-.43507E-13	0.00000	.14062E-13	0.00000	.94085E-13	0.00000	-.11830E-13	0.00000
-.34014E-13	0.00000	.31623E+00	0.00000	.35958E-13	0.00000	-.37207E-13	0.00000	.29836E-13	0.00000	-.14362E-13	0.00000
.30914E-13	0.00000	.31623E+00	0.00000	.16958E-13	0.00000	.37220E-13	0.00000	.75228E-13	0.00000	-.25504E-13	0.00000
-.38332E-13	0.00000	.97720E-01	0.00000	-.35261E-13	0.00000	-.28221E-13	0.00000	.22500E-12	0.00000	.81879E-14	0.00000
.42506E-14	0.00000	.97720E-01	0.00000	-.42061E-14	0.00000	-.48979E-13	0.00000	-.15467E-12	0.00000	.34253E-13	0.00000
-.23027E-13	0.00000	-.25583E+00	0.00000	.43067E-13	0.00000	.26901E-13	0.00000	.31283E-12	0.00000	-.84255E-14	0.00000
.30374E-13	0.00000	-.25583E+00	0.00000	.10603E-14	0.00000	.16467E-13	0.00000	-.27817E-12	0.00000	-.11822E-13	0.00000
.83867E-14	0.00000	-.25583E+00	0.00000	-.78999E-14	0.00000	-.43998E-14	0.00000	.84224E-13	0.00000	-.22849E-13	0.00000
.56143E-14	0.00000	-.25583E+00	0.00000	.28057E-13	0.00000	.15776E-14	0.00000	-.34383E-13	0.00000	-.92683E-14	0.00000
.80368E-15	0.00000	.97720E-01	0.00000	-.10095E-13	0.00000	-.39385E-13	0.00000	-.32051E-12	0.00000	.21652E-13	0.00000
-.25072E-14	0.00000	.97720E-01	0.00000	-.74692E-14	0.00000	.13561E-13	0.00000	.30084E-12	0.00000	.39295E-13	0.00000
.28191E-13	0.00000	.31623E+00	0.00000	.76115E-14	0.00000	.98079E-14	0.00000	-.41094E-12	0.00000	-.10323E-13	0.00000
.26880E-14	0.00000	.31623E+00	0.00000	.24079E-13	0.00000	.21073E-13	0.00000	.35822E-12	0.00000	-.22093E-13	0.00000
-.12060E-14	0.00000	.97720E-01	0.00000	-.53584E-13	0.00000	.15722E-13	0.00000	.54688E-13	0.00000	.31840E-14	0.00000
.10930E-15	0.00000	.97720E-01	0.00000	.46603E-13	0.00000	-.23331E-13	0.00000	.46404E-13	0.00000	-.29787E-13	0.00000
-.19772E-13	0.00000	-.25583E+00	0.00000	.11622E-13	0.00000	-.27587E-13	0.00000	-.47145E-12	0.00000	-.67369E-13	0.00000
.75098E-14	0.00000	-.25583E+00	0.00000	-.11372E-13	0.00000	-.34532E-14	0.00000	-.42162E-12	0.00000	.46921E-13	0.00000

G-37

NATURAL FREQUENCY= .112863E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.33889E-13	0.00000	.22239E-12	0.00000	.18277E-13	0.00000	.29623E-13	0.00000	.25583E+00	0.00000	.93808E-14	0.00000
.10627E-13	0.00000	.28195E-12	0.00000	.14958E-13	0.00000	.21546E-13	0.00000	-.25583E+00	0.00000	-.10156E-12	0.00000
-.11407E-13	0.00000	-.10353E-12	0.00000	-.55313E-13	0.00000	-.19611E-13	0.00000	-.97720E-01	0.00000	-.16244E-13	0.00000
-.81958E-13	0.00000	-.79188E-13	0.00000	-.32908E-13	0.00000	-.14389E-13	0.00000	.97720E-01	0.00000	.99543E-14	0.00000
.26764E-13	0.00000	-.30651E-12	0.00000	.69085E-13	0.00000	.46783E-13	0.00000	-.31623E+00	0.00000	.21242E-13	0.00000
-.66121E-14	0.00000	-.31535E-12	0.00000	.40113E-13	0.00000	-.19203E-14	0.00000	.31623E+00	0.00000	.19473E-14	0.00000
.32151E-14	0.00000	-.57721E-13	0.00000	-.36247E-13	0.00000	-.57886E-13	0.00000	-.97720E-01	0.00000	.12875E-13	0.00000
-.51601E-14	0.00000	-.12752E-12	0.00000	-.49750E-13	0.00000	-.40350E-13	0.00000	.97720E-01	0.00000	-.17440E-13	0.00000
-.20326E-13	0.00000	.21735E-12	0.00000	.20438E-13	0.00000	.37255E-13	0.00000	.25583E+00	0.00000	.48505E-13	0.00000
-.10743E-13	0.00000	.26250E-12	0.00000	.78463E-13	0.00000	.64555E-13	0.00000	-.25583E+00	0.00000	.42865E-13	0.00000
.16593E-14	0.00000	.23547E-12	0.00000	-.18747E-13	0.00000	-.19431E-13	0.00000	.25583E+00	0.00000	-.96331E-14	0.00000
.43095E-13	0.00000	.25872E-12	0.00000	.76021E-13	0.00000	-.35120E-13	0.00000	-.25583E+00	0.00000	.20552E-13	0.00000
-.77833E-13	0.00000	-.96405E-13	0.00000	.10089E-13	0.00000	.70767E-14	0.00000	-.97720E-01	0.00000	.11404E-13	0.00000
.90401E-14	0.00000	-.73312E-13	0.00000	.40836E-13	0.00000	.36911E-13	0.00000	.97720E-01	0.00000	-.31589E-14	0.00000
-.25533E-13	0.00000	-.27305E-12	0.00000	-.37528E-13	0.00000	-.18514E-13	0.00000	-.31623E+00	0.00000	.27276E-13	0.00000
.46198E-13	0.00000	.34171E-12	0.00000	.13274E-13	0.00000	-.41880E-13	0.00000	.31623E+00	0.00000	.25479E-13	0.00000
-.72128E-13	0.00000	-.68738E-13	0.00000	.43918E-13	0.00000	.41722E-14	0.00000	-.97720E-01	0.00000	.49462E-13	0.00000
.85906E-14	0.00000	-.12434E-12	0.00000	.16833E-13	0.00000	-.17372E-13	0.00000	.97720E-01	0.00000	.19488E-13	0.00000
-.45916E-13	0.00000	.21670E-12	0.00000	-.19212E-13	0.00000	.40909E-13	0.00000	.25583E+00	0.00000	.46859E-13	0.00000
.81426E-13	0.00000	.26336E-12	0.00000	-.22460E-13	0.00000	-.70604E-14	0.00000	-.25583E+00	0.00000	.65768E-13	0.00000

G-38

INVERSE ENGINEERING

NATURAL FREQUENCY = .113111E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15597E+00	0.00000	-.73970E-13	0.00000	.34782E-13	0.00000	-.55302E-13	0.00000	.26599E-12	0.00000	-.37940E+00	0.00000
.15597E+00	0.00000	.50310E-13	0.00000	.14072E-13	0.00000	.14789E-12	0.00000	-.32156E-12	0.00000	-.37940E+00	0.00000
-.20667E+00	0.00000	.17933E-13	0.00000	-.72030E-13	0.00000	-.20576E-13	0.00000	-.13791E-12	0.00000	.48199E-01	0.00000
-.20667E+00	0.00000	.15281E-13	0.00000	.36355E-13	0.00000	-.37890E-13	0.00000	.14512E-12	0.00000	.48199E-01	0.00000
.10085E+00	0.00000	.87977E-13	0.00000	-.10434E-12	0.00000	-.13581E-13	0.00000	-.59189E-12	0.00000	-.13021E+00	0.00000
-.10085E+00	0.00000	-.84709E-14	0.00000	-.51864E-13	0.00000	-.13573E-13	0.00000	.30457E-12	0.00000	-.13021E+00	0.00000
-.68627E-01	0.00000	.44192E-13	0.00000	.63997E-13	0.00000	-.20452E-13	0.00000	-.50770E-13	0.00000	.76572E-01	0.00000
-.68627E-01	0.00000	-.33358E-13	0.00000	-.47220E-13	0.00000	.13330E-14	0.00000	.33670E-12	0.00000	.76572E-01	0.00000
.18471E-01	0.00000	-.23106E-13	0.00000	-.29976E-13	0.00000	-.12266E-13	0.00000	.24047E-12	0.00000	-.81504E-01	0.00000
.18471E-01	0.00000	-.27365E-13	0.00000	-.41564E-13	0.00000	-.54575E-14	0.00000	-.35331E-12	0.00000	-.81504E-01	0.00000
-.18471E-01	0.00000	-.33856E-13	0.00000	.64887E-13	0.00000	.29476E-14	0.00000	.48500E-12	0.00000	.81504E-01	0.00000
-.18471E-01	0.00000	.25665E-14	0.00000	-.54859E-13	0.00000	.22645E-13	0.00000	-.22114E-12	0.00000	.81504E-01	0.00000
-.68627E-01	0.00000	-.31574E-13	0.00000	-.38184E-13	0.00000	.10169E-13	0.00000	-.12835E-12	0.00000	-.76572E-01	0.00000
-.68627E-01	0.00000	.39198E-13	0.00000	-.31708E-13	0.00000	-.63352E-14	0.00000	.20433E-13	0.00000	-.76572E-01	0.00000
.10085E+00	0.00000	.12087E-13	0.00000	.12451E-13	0.00000	.29896E-13	0.00000	-.32802E-12	0.00000	.13021E+00	0.00000
.10085E+00	0.00000	.74538E-13	0.00000	-.11672E-13	0.00000	.31103E-13	0.00000	.40887E-12	0.00000	.13021E+00	0.00000
-.20667E+00	0.00000	-.38259E-16	0.00000	-.12404E-14	0.00000	-.67968E-14	0.00000	-.17657E-12	0.00000	-.48199E-01	0.00000
-.20667E+00	0.00000	.44085E-14	0.00000	.35619E-15	0.00000	-.38430E-14	0.00000	.53381E-13	0.00000	-.48199E-01	0.00000
.15597E+00	0.00000	-.29103E-13	0.00000	-.85959E-14	0.00000	-.63128E-14	0.00000	.28158E-12	0.00000	.37940E+00	0.00000
.15597E+00	0.00000	-.22962E-13	0.00000	-.11023E-13	0.00000	-.53146E-14	0.00000	-.33649E-12	0.00000	.37940E+00	0.00000

G-39

NATURAL FREQUENCY* .114542E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15747E+00	0.00000	-.28129E-13	0.00000	-.13316E-13	0.00000	.39570E-13	0.00000	.43041E-12	0.00000	.36426E+00	0.00000
.15747E+00	0.00000	.41627E-13	0.00000	.60946E-13	0.00000	-.90759E-13	0.00000	.34017E-12	0.00000	.36426E+00	0.00000
.21803E+00	0.00000	.25044E-13	0.00000	-.11472E-13	0.00000	-.77859E-14	0.00000	.80067E-13	0.00000	-.21696E-01	0.00000
.21803E+00	0.00000	.69723E-13	0.00000	-.20926E-13	0.00000	-.10884E-13	0.00000	.12341E-13	0.00000	-.21696E-01	0.00000
-.13226E+00	0.00000	.13624E-13	0.00000	-.31266E-13	0.00000	-.94957E-14	0.00000	.19407E-13	0.00000	.95833E-01	0.00000
-.13226E+00	0.00000	.15434E-13	0.00000	-.25943E-13	0.00000	-.11781E-14	0.00000	.11531E-12	0.00000	.95833E-01	0.00000
.12396E+00	0.00000	.28929E-13	0.00000	-.38682E-13	0.00000	.43371E-14	0.00000	.15065E-13	0.00000	-.25080E-01	0.00000
.12396E+00	0.00000	-.37929E-13	0.00000	.39480E-13	0.00000	.17180E-14	0.00000	.19986E-12	0.00000	-.25080E-01	0.00000
-.10676E+00	0.00000	.43935E-13	0.00000	.67741E-13	0.00000	-.20180E-13	0.00000	-.43375E-13	0.00000	.17523E-01	0.00000
-.10676E+00	0.00000	-.44163E-13	0.00000	-.65537E-13	0.00000	-.74732E-14	0.00000	.12183E-12	0.00000	.17523E-01	0.00000
.10676E+00	0.00000	.31152E-13	0.00000	-.37319E-13	0.00000	-.42773E-13	0.00000	.12278E-12	0.00000	.17523E-01	0.00000
.10676E+00	0.00000	-.40752E-13	0.00000	.36258E-13	0.00000	-.25426E-13	0.00000	.17470E-12	0.00000	.17523E-01	0.00000
-.12396E+00	0.00000	-.13419E-13	0.00000	.73988E-13	0.00000	.46364E-13	0.00000	.23866E-13	0.00000	-.25080E-01	0.00000
-.12396E+00	0.00000	.38148E-13	0.00000	-.67183E-13	0.00000	.11062E-13	0.00000	-.42246E-13	0.00000	-.25080E-01	0.00000
.13226E+00	0.00000	-.39365E-13	0.00000	-.45912E-13	0.00000	.20148E-13	0.00000	.57653E-13	0.00000	.95833E-01	0.00000
.13226E+00	0.00000	.49929E-13	0.00000	.31138E-13	0.00000	-.76360E-14	0.00000	-.45739E-13	0.00000	.95833E-01	0.00000
-.21803E+00	0.00000	-.49035E-13	0.00000	.10903E-13	0.00000	.37461E-13	0.00000	-.18542E-13	0.00000	-.21696E-01	0.00000
-.21803E+00	0.00000	.43065E-13	0.00000	-.24183E-13	0.00000	-.31175E-13	0.00000	-.67484E-13	0.00000	-.21696E-01	0.00000
.15747E+00	0.00000	-.30066E-13	0.00000	-.17039E-13	0.00000	-.29961E-13	0.00000	-.40303E-13	0.00000	.36426E+00	0.00000
.15747E+00	0.00000	-.22218E-13	0.00000	-.17452E-13	0.00000	-.21185E-13	0.00000	-.19871E-13	0.00000	.36426E+00	0.00000

G-40

NATURAL FREQUENCY= .113472E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.94264E-14	0.00000	.17318E+00	0.00000	-.64245E-01	0.00000	-.19199E+00	0.00000	-.41357E-13	0.00000	.16511E-12	0.00000
.53271E-14	0.00000	-.17918E+00	0.00000	-.64245E-01	0.00000	-.19199E+00	0.00000	-.13792E-12	0.00000	-.21467E-12	0.00000
.17127E-13	0.00000	-.11319E+00	0.00000	.14612E+00	0.00000	.86940E-01	0.00000	.71632E-13	0.00000	-.29757E-13	0.00000
-.11759E-14	0.00000	.11819E+00	0.00000	.14612E+00	0.00000	.86940E-01	0.00000	.16859E-12	0.00000	-.65311E-13	0.00000
-.27170E-13	0.00000	-.24336E+00	0.00000	-.53985E-01	0.00000	.11036E+00	0.00000	-.53545E-13	0.00000	.25892E-13	0.00000
.15255E-13	0.00000	.24336E+00	0.00000	-.53985E-01	0.00000	.11036E+00	0.00000	.38794E-13	0.00000	.35157E-13	0.00000
.26177E-13	0.00000	-.64114E-01	0.00000	-.36605E-01	0.00000	.43062E-01	0.00000	-.65236E-13	0.00000	.47358E-13	0.00000
.16318E-13	0.00000	.64114E-01	0.00000	.36605E-01	0.00000	.43062E-01	0.00000	.37325E-13	0.00000	.27698E-13	0.00000
-.54133E-14	0.00000	.20458E+00	0.00000	-.63127E-01	0.00000	-.11212E+00	0.00000	-.27642E-13	0.00000	.36859E-13	0.00000
.28062E-13	0.00000	-.20458E+00	0.00000	-.63127E-01	0.00000	-.11212E+00	0.00000	.15958E-13	0.00000	.69357E-14	0.00000
-.13645E-13	0.00000	.20458E+00	0.00000	.63127E-01	0.00000	-.11212E+00	0.00000	.86174E-13	0.00000	.67930E-13	0.00000
-.24345E-14	0.00000	-.20458E+00	0.00000	-.63127E-01	0.00000	-.11212E+00	0.00000	-.61148E-13	0.00000	.92241E-13	0.00000
.49091E-13	0.00000	-.64114E-01	0.00000	.36605E-01	0.00000	.43062E-01	0.00000	.62997E-13	0.00000	-.14438E-13	0.00000
.20345E-13	0.00000	.64114E-01	0.00000	.36605E-01	0.00000	.43062E-01	0.00000	-.12024E-12	0.00000	.73225E-13	0.00000
.47611E-13	0.00000	-.24336E+00	0.00000	-.53985E-01	0.00000	.11036E+00	0.00000	-.18036E-12	0.00000	-.71804E-13	0.00000
-.39851E-13	0.00000	.24336E+00	0.00000	.53985E-01	0.00000	.11036E+00	0.00000	.20776E-13	0.00000	-.32760E-13	0.00000
-.88654E-13	0.00000	-.11819E+00	0.00000	-.14612E+00	0.00000	.86940E-01	0.00000	-.25615E-12	0.00000	-.56006E-13	0.00000
-.50299E-13	0.00000	.11819E+00	0.00000	-.14612E+00	0.00000	.86940E-01	0.00000	-.91416E-14	0.00000	.21244E-13	0.00000
.68725E-13	0.00000	.17813E+00	0.00000	-.64245E-01	0.00000	-.19199E+00	0.00000	.51138E-14	0.00000	-.14348E-13	0.00000
-.11630E-12	0.00000	-.17813E+00	0.00000	.64245E-01	0.00000	-.19199E+00	0.00000	-.22986E-12	0.00000	-.10273E-12	0.00000

G-41

NATURAL FREQUENCY= .119250E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.22404E-13	0.00000	.15413E-12	0.00000	.19992E+00	0.00000	-.42810E+00	0.00000	-.17240E-12	0.00000	.15083E-12	0.00000
-.29675E-13	0.00000	-.13058E-12	0.00000	-.19992E+00	0.00000	.42810E+00	0.00000	.80951E-13	0.00000	-.28578E-13	0.00000
.46241E-13	0.00000	-.74708E-13	0.00000	-.11209E+00	0.00000	-.10570E+00	0.00000	.23664E-12	0.00000	.21548E-13	0.00000
-.16319E-13	0.00000	.91008E-13	0.00000	.11209E+00	0.00000	.10570E+00	0.00000	-.20975E-12	0.00000	-.10075E-13	0.00000
-.67181E-14	0.00000	-.19617E-12	0.00000	-.86243E-01	0.00000	.34097E-01	0.00000	.12043E-12	0.00000	.69274E-13	0.00000
-.21253E-13	0.00000	.19071E-12	0.00000	.86243E-01	0.00000	-.34097E-01	0.00000	-.15715E-12	0.00000	-.37911E-13	0.00000
-.17459E-13	0.00000	-.43290E-13	0.00000	-.18034E-01	0.00000	.32349E-01	0.00000	-.20454E-12	0.00000	-.29394E-13	0.00000
-.27950E-13	0.00000	.53261E-13	0.00000	.18034E-01	0.00000	-.32349E-01	0.00000	.27802E-12	0.00000	-.18461E-13	0.00000
-.55425E-13	0.00000	.14767E-12	0.00000	-.20325E-02	0.00000	.59623E-02	0.00000	-.97203E-13	0.00000	.10799E-13	0.00000
-.49123E-13	0.00000	-.15168E-12	0.00000	-.20325E-02	0.00000	-.59623E-02	0.00000	.15177E-12	0.00000	-.14096E-13	0.00000
-.33072E-13	0.00000	.15823E-12	0.00000	.20325E-02	0.00000	.59623E-02	0.00000	.22537E-12	0.00000	-.62476E-13	0.00000
-.19670E-13	0.00000	-.16513E-12	0.00000	-.20325E-02	0.00000	-.59623E-02	0.00000	-.27492E-12	0.00000	.81453E-13	0.00000
-.10767E-12	0.00000	-.44711E-13	0.00000	.18034E-01	0.00000	.32349E-01	0.00000	-.27834E-13	0.00000	.18147E-13	0.00000
-.10416E-12	0.00000	.27495E-13	0.00000	-.18034E-01	0.00000	-.32349E-01	0.00000	-.18100E-12	0.00000	-.13669E-12	0.00000
.13325E-12	0.00000	-.19213E-12	0.00000	.86243E-01	0.00000	.34097E-01	0.00000	-.44649E-12	0.00000	-.81231E-13	0.00000
-.95133E-13	0.00000	.19481E-12	0.00000	-.86243E-01	0.00000	-.34097E-01	0.00000	-.89635E-13	0.00000	.15417E-12	0.00000
-.42428E-12	0.00000	-.11856E-12	0.00000	.11209E+00	0.00000	-.10570E+00	0.00000	-.41218E-12	0.00000	-.14553E-12	0.00000
-.37949E-12	0.00000	.10669E-12	0.00000	-.11209E+00	0.00000	.10570E+00	0.00000	-.13197E-12	0.00000	.17119E-12	0.00000
.37949E-12	0.00000	-.13813E-12	0.00000	-.19992E+00	0.00000	-.42810E+00	0.00000	-.79997E-12	0.00000	-.49363E-12	0.00000
-.38519E-12	0.00000	.14275E-12	0.00000	.19992E+00	0.00000	.42810E+00	0.00000	-.11064E-11	0.00000	.44340E-12	0.00000

G-43

NATURAL FREQUENCY# .119940E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.12403E+00	0.00000	-.74955E-13	0.00000	-.50058E-13	0.00000	.23218E-12	0.00000	-.18605E+00	0.00000	.22490E-10	0.00000
-.12403E+00	0.00000	.90577E-13	0.00000	.13098E-12	0.00000	-.38625E-13	0.00000	-.18605E+00	0.00000	-.21393E-10	0.00000
.12403E+00	0.00000	.40067E-13	0.00000	.44859E-13	0.00000	.38120E-13	0.00000	-.18605E+00	0.00000	.69975E-11	0.00000
-.12403E+00	0.00000	.55090E-13	0.00000	-.64449E-13	0.00000	-.76197E-13	0.00000	-.18605E+00	0.00000	-.70400E-11	0.00000
.12403E+00	0.00000	.70937E-13	0.00000	-.34521E-13	0.00000	-.64393E-13	0.00000	-.18605E+00	0.00000	.75983E-11	0.00000
-.12403E+00	0.00000	-.55557E-13	0.00000	-.13971E-12	0.00000	-.19197E-13	0.00000	-.18605E+00	0.00000	-.74005E-11	0.00000
.12403E+00	0.00000	-.61307E-14	0.00000	.72598E-13	0.00000	-.41134E-13	0.00000	-.18605E+00	0.00000	.38175E-11	0.00000
-.12403E+00	0.00000	-.64969E-13	0.00000	-.13933E-13	0.00000	.48798E-13	0.00000	-.18605E+00	0.00000	-.37696E-11	0.00000
.12403E+00	0.00000	-.83975E-13	0.00000	.27196E-13	0.00000	.24780E-14	0.00000	-.18605E+00	0.00000	.38364E-11	0.00000
-.12403E+00	0.00000	-.89047E-14	0.00000	.62816E-13	0.00000	.53285E-13	0.00000	-.18605E+00	0.00000	-.38653E-11	0.00000
.12403E+00	0.00000	-.42289E-13	0.00000	-.67562E-13	0.00000	.45094E-13	0.00000	-.18605E+00	0.00000	.35383E-11	0.00000
-.12403E+00	0.00000	.21749E-13	0.00000	-.32621E-13	0.00000	.31687E-14	0.00000	-.18605E+00	0.00000	-.34038E-11	0.00000
.12403E+00	0.00000	.46243E-13	0.00000	.10845E-13	0.00000	-.68649E-14	0.00000	-.18605E+00	0.00000	.31672E-11	0.00000
-.12403E+00	0.00000	.16327E-13	0.00000	.20721E-13	0.00000	.13938E-13	0.00000	-.18605E+00	0.00000	-.32279E-11	0.00000
.12403E+00	0.00000	-.96879E-13	0.00000	-.15284E-13	0.00000	-.25026E-14	0.00000	-.18605E+00	0.00000	.61457E-11	0.00000
-.12403E+00	0.00000	-.11035E-13	0.00000	-.60485E-13	0.00000	-.22267E-13	0.00000	-.18605E+00	0.00000	-.61069E-11	0.00000
.12403E+00	0.00000	.40979E-13	0.00000	.14530E-13	0.00000	-.16064E-13	0.00000	-.18605E+00	0.00000	.57877E-11	0.00000
-.12403E+00	0.00000	-.27130E-13	0.00000	.56542E-13	0.00000	-.40559E-13	0.00000	-.18605E+00	0.00000	-.56701E-11	0.00000
.12403E+00	0.00000	-.10349E-12	0.00000	.41792E-14	0.00000	.10312E-12	0.00000	-.18605E+00	0.00000	.18756E-10	0.00000
-.12403E+00	0.00000	.29723E-13	0.00000	-.47307E-13	0.00000	-.55930E-14	0.00000	-.18605E+00	0.00000	-.18342E-10	0.00000

G-44

NATURAL FREQUENCY#

NATURAL FREQUENCY= .120039E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.16477E+00	0.00000	-.77739E-13	0.00000	.23514E-12	0.00000	-.20152E-12	0.00000	-.35484E+00	0.00000	.16581E+00	0.00000
-.16477E+00	0.00000	.62379E-13	0.00000	-.18096E-12	0.00000	.27516E-12	0.00000	-.35484E+00	0.00000	-.16581E+00	0.00000
.16160E+00	0.00000	.36317E-13	0.00000	-.10022E-12	0.00000	-.13119E-12	0.00000	-.13954E+00	0.00000	.51349E-01	0.00000
-.16160E+00	0.00000	-.29740E-14	0.00000	-.72891E-13	0.00000	.11946E-12	0.00000	-.13954E+00	0.00000	-.51349E-01	0.00000
.62426E-01	0.00000	.67759E-13	0.00000	-.36482E-13	0.00000	-.20298E-13	0.00000	-.12598E+00	0.00000	.54742E-01	0.00000
-.62426E-01	0.00000	-.91262E-13	0.00000	.11768E-12	0.00000	-.36749E-13	0.00000	-.12598E+00	0.00000	-.54742E-01	0.00000
.51136E-01	0.00000	.66973E-13	0.00000	.41674E-14	0.00000	-.25163E-14	0.00000	-.47597E-01	0.00000	.27630E-01	0.00000
-.51136E-01	0.00000	-.52909E-13	0.00000	-.39299E-13	0.00000	-.71852E-13	0.00000	-.47597E-01	0.00000	-.27630E-01	0.00000
.70495E-02	0.00000	-.19367E-13	0.00000	-.64342E-14	0.00000	.41423E-13	0.00000	-.26231E-01	0.00000	.26898E-01	0.00000
-.70495E-02	0.00000	.36951E-13	0.00000	.13564E-13	0.00000	-.33291E-15	0.00000	-.26231E-01	0.00000	-.26898E-01	0.00000
.70495E-02	0.00000	-.73358E-13	0.00000	.26221E-13	0.00000	.40251E-13	0.00000	.26231E-01	0.00000	.26898E-01	0.00000
-.70495E-02	0.00000	.44174E-13	0.00000	-.23115E-13	0.00000	-.39716E-13	0.00000	.26231E-01	0.00000	-.26898E-01	0.00000
.51136E-01	0.00000	-.44265E-13	0.00000	-.41615E-13	0.00000	-.22472E-14	0.00000	-.47597E-01	0.00000	.27630E-01	0.00000
-.51136E-01	0.00000	-.55791E-14	0.00000	-.25866E-13	0.00000	.26012E-13	0.00000	-.47597E-01	0.00000	-.27630E-01	0.00000
.62426E-01	0.00000	.63416E-13	0.00000	.23992E-14	0.00000	-.87416E-14	0.00000	.12598E+00	0.00000	.54742E-01	0.00000
-.62426E-01	0.00000	-.34705E-13	0.00000	-.25870E-13	0.00000	-.13355E-13	0.00000	.12598E+00	0.00000	-.54742E-01	0.00000
.16160E+00	0.00000	.81457E-13	0.00000	.28960E-13	0.00000	-.48585E-13	0.00000	.13954E+00	0.00000	.51349E-01	0.00000
-.16160E+00	0.00000	-.23024E-13	0.00000	-.79489E-14	0.00000	.34862E-14	0.00000	.13954E+00	0.00000	-.51349E-01	0.00000
.16477E+00	0.00000	-.86077E-14	0.00000	-.13432E-13	0.00000	-.21528E-13	0.00000	.35484E+00	0.00000	.16581E+00	0.00000
-.16477E+00	0.00000	-.27660E-14	0.00000	.47058E-13	0.00000	.69655E-13	0.00000	.35484E+00	0.00000	-.16581E+00	0.00000

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	KX REAL	KX IMAG
.10041E+00	0.00000	-.15037E-13	0.00000	-.66613E-13	0.00000	.34745E-12	0.00000	-.32064E+00	0.00000	.26571E+00	0.00000
-.10041E+00	0.00000	.28510E-13	0.00000	.11415E-12	0.00000	-.26303E-12	0.00000	-.32064E+00	0.00000	-.26571E+00	0.00000
.96932E-01	0.00000	-.60229E-13	0.00000	-.13844E-12	0.00000	.17502E-13	0.00000	.20283E-01	0.00000	.76028E-01	0.00000
-.96932E-01	0.00000	.23895E-13	0.00000	-.12522E-12	0.00000	-.71316E-13	0.00000	.20283E-01	0.00000	-.76028E-01	0.00000
-.50512E-01	0.00000	.30266E-13	0.00000	-.47121E-13	0.00000	-.83163E-13	0.00000	.34062E-01	0.00000	.76002E-01	0.00000
.50512E-01	0.00000	-.37834E-13	0.00000	-.10507E-12	0.00000	-.42762E-13	0.00000	-.34062E-01	0.00000	-.76002E-01	0.00000
-.57299E-01	0.00000	-.20659E-13	0.00000	-.31286E-13	0.00000	-.25742E-13	0.00000	-.12951E+00	0.00000	.19675E-01	0.00000
.57299E-01	0.00000	.35692E-13	0.00000	.30156E-13	0.00000	.15812E-13	0.00000	.12951E+00	0.00000	-.19675E-01	0.00000
-.89535E-01	0.00000	-.37803E-13	0.00000	-.19956E-13	0.00000	.70476E-14	0.00000	.13678E+00	0.00000	.15941E-01	0.00000
.89535E-01	0.00000	.26335E-13	0.00000	-.23056E-13	0.00000	-.92792E-14	0.00000	-.13678E+00	0.00000	-.15941E-01	0.00000
-.89535E-01	0.00000	-.22561E-13	0.00000	-.80990E-14	0.00000	.20741E-13	0.00000	.13678E+00	0.00000	.15941E-01	0.00000
.89535E-01	0.00000	.58713E-13	0.00000	.80077E-14	0.00000	-.33564E-13	0.00000	-.13678E+00	0.00000	-.15941E-01	0.00000
-.57299E-01	0.00000	-.54761E-14	0.00000	-.18604E-13	0.00000	.11098E-13	0.00000	-.12951E+00	0.00000	.19675E-01	0.00000
.57299E-01	0.00000	.40708E-15	0.00000	-.24913E-13	0.00000	-.11162E-13	0.00000	.12951E+00	0.00000	-.19675E-01	0.00000
-.50512E-01	0.00000	-.44972E-13	0.00000	-.14614E-13	0.00000	-.25178E-13	0.00000	-.34062E-01	0.00000	-.76602E-01	0.00000
.50512E-01	0.00000	.48972E-13	0.00000	.16703E-13	0.00000	.71944E-15	0.00000	.34062E-01	0.00000	.76602E-01	0.00000
-.96932E-01	0.00000	-.44153E-13	0.00000	-.65311E-14	0.00000	-.15666E-13	0.00000	.20283E-01	0.00000	-.76028E-01	0.00000
.96932E-01	0.00000	.23082E-13	0.00000	-.17095E-13	0.00000	-.33328E-13	0.00000	-.20283E-01	0.00000	.76028E-01	0.00000
-.10041E+00	0.00000	-.21279E-13	0.00000	-.16312E-13	0.00000	.60942E-13	0.00000	-.32064E+00	0.00000	.26571E+00	0.00000
.10041E+00	0.00000	.41476E-14	0.00000	-.19531E-13	0.00000	-.33494E-14	0.00000	-.32064E+00	0.00000	.26571E+00	0.00000

G-46

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .120587E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.19639E-13	0.00000	.18124E-13	0.00000	-.19534E-12	0.00000	.43957E-12	0.00000	.22361E+00	0.00000	-.13046E-12	0.00000
.90635E-14	0.00000	-.50478E-13	0.00000	.14645E-12	0.00000	-.44024E-12	0.00000	-.22361E+00	0.00000	.12918E-12	0.00000
.68378E-14	0.00000	-.92499E-14	0.00000	.17934E-12	0.00000	.97762E-13	0.00000	-.22361E+00	0.00000	-.16882E-13	0.00000
-.21955E-13	0.00000	-.74669E-16	0.00000	-.16187E-12	0.00000	-.12007E-12	0.00000	.22361E+00	0.00000	.12111E-12	0.00000
.13283E-12	0.00000	-.47229E-13	0.00000	.16504E-12	0.00000	.18212E-15	0.00000	-.22361E+00	0.00000	-.54341E-13	0.00000
-.82810E-13	0.00000	.74760E-13	0.00000	-.12300E-12	0.00000	.79882E-13	0.00000	.22361E+00	0.00000	.42660E-13	0.00000
.82974E-13	0.00000	-.48603E-13	0.00000	.65496E-14	0.00000	-.77342E-13	0.00000	.22361E+00	0.00000	-.26712E-13	0.00000
-.86675E-13	0.00000	.27110E-13	0.00000	-.60970E-13	0.00000	.10141E-12	0.00000	-.22361E+00	0.00000	-.10776E-12	0.00000
.56537E-13	0.00000	.17416E-13	0.00000	-.81237E-13	0.00000	-.72993E-13	0.00000	.22361E+00	0.00000	.60294E-13	0.00000
-.79904E-13	0.00000	-.61492E-13	0.00000	.59960E-13	0.00000	.62522E-13	0.00000	-.22361E+00	0.00000	.98857E-14	0.00000
.62079E-13	0.00000	.81965E-13	0.00000	-.10652E-12	0.00000	-.39736E-13	0.00000	-.22361E+00	0.00000	-.51880E-13	0.00000
-.12803E-13	0.00000	-.79285E-13	0.00000	.14785E-12	0.00000	-.62823E-13	0.00000	.22361E+00	0.00000	-.96390E-14	0.00000
.44400E-13	0.00000	-.91628E-15	0.00000	-.31850E-13	0.00000	.13177E-12	0.00000	-.22361E+00	0.00000	-.57131E-13	0.00000
-.61448E-13	0.00000	.23758E-13	0.00000	-.43427E-13	0.00000	-.99654E-13	0.00000	.22361E+00	0.00000	-.61783E-13	0.00000
.10984E-13	0.00000	-.66481E-13	0.00000	.17999E-12	0.00000	.15614E-12	0.00000	.22361E+00	0.00000	.43944E-13	0.00000
-.38406E-13	0.00000	.57299E-13	0.00000	-.15092E-12	0.00000	-.98981E-13	0.00000	-.22361E+00	0.00000	.75918E-13	0.00000
.15154E-12	0.00000	-.12221E-13	0.00000	.26080E-12	0.00000	-.15203E-12	0.00000	.22361E+00	0.00000	-.48863E-13	0.00000
-.99809E-13	0.00000	.29529E-15	0.00000	-.30890E-12	0.00000	.16410E-12	0.00000	-.22361E+00	0.00000	-.56135E-13	0.00000
.83980E-13	0.00000	.42836E-13	0.00000	-.30040E-12	0.00000	-.83781E-12	0.00000	.22361E+00	0.00000	-.27050E-12	0.00000
-.12199E-12	0.00000	-.43913E-13	0.00000	.29604E-12	0.00000	.82101E-12	0.00000	.22361E+00	0.00000	.23297E-12	0.00000

G-47

NATURAL FREQUENCY = .120904E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.27905E-01	0.00000	-.11303E-12	0.00000	.10633E-12	0.00000	-.66418E-13	0.00000	-.13135E+00	0.00000	.28273E+00	0.00000
.27905E-01	0.00000	.14583E-12	0.00000	.56416E-14	0.00000	.28375E-12	0.00000	.13135E+00	0.00000	-.28273E+00	0.00000
-.19928E-01	0.00000	.88377E-13	0.00000	-.15473E-12	0.00000	-.18513E-13	0.00000	.22074E+00	0.00000	.57962E-01	0.00000
.19928E-01	0.00000	-.38820E-13	0.00000	-.15619E-13	0.00000	-.47603E-13	0.00000	.22074E+00	0.00000	-.57962E-01	0.00000
-.14008E+00	0.00000	.16746E-12	0.00000	.22958E-13	0.00000	-.32434E-13	0.00000	.17884E+00	0.00000	.30774E-01	0.00000
.14008E+00	0.00000	-.18695E-12	0.00000	.50912E-13	0.00000	-.10746E-12	0.00000	.17884E+00	0.00000	-.30774E-01	0.00000
-.80839E-01	0.00000	.91780E-13	0.00000	.32598E-13	0.00000	.47261E-14	0.00000	.18439E+00	0.00000	-.47574E-01	0.00000
.80839E-01	0.00000	-.10223E-12	0.00000	-.11054E-13	0.00000	-.85715E-13	0.00000	.18439E+00	0.00000	.47574E-01	0.00000
-.46064E-01	0.00000	-.10692E-12	0.00000	.59451E-13	0.00000	.48174E-13	0.00000	.50746E-01	0.00000	-.64511E-01	0.00000
.46064E-01	0.00000	.10282E-12	0.00000	-.44204E-14	0.00000	-.66975E-13	0.00000	.50746E-01	0.00000	.64511E-01	0.00000
-.46064E-01	0.00000	-.14986E-12	0.00000	-.15718E-13	0.00000	.92331E-13	0.00000	-.50746E-01	0.00000	-.64511E-01	0.00000
.46064E-01	0.00000	.15691E-12	0.00000	-.50730E-13	0.00000	.10717E-12	0.00000	-.50746E-01	0.00000	.64511E-01	0.00000
-.80839E-01	0.00000	.79565E-14	0.00000	-.42041E-13	0.00000	-.50787E-13	0.00000	.18439E+00	0.00000	-.47574E-01	0.00000
.80839E-01	0.00000	-.49730E-13	0.00000	.33568E-13	0.00000	-.59330E-14	0.00000	.18439E+00	0.00000	.47574E-01	0.00000
-.14008E+00	0.00000	.16634E-12	0.00000	-.48412E-13	0.00000	-.61683E-13	0.00000	.17884E+00	0.00000	.30774E-01	0.00000
.14008E+00	0.00000	-.17387E-12	0.00000	-.34578E-13	0.00000	-.59699E-13	0.00000	.17884E+00	0.00000	-.30774E-01	0.00000
-.19928E-01	0.00000	.10786E-12	0.00000	.98265E-13	0.00000	-.79087E-13	0.00000	.22074E+00	0.00000	.57962E-01	0.00000
.19928E-01	0.00000	-.86131E-13	0.00000	.82738E-13	0.00000	-.38986E-13	0.00000	.22074E+00	0.00000	-.57962E-01	0.00000
-.27905E-01	0.00000	-.10037E-12	0.00000	-.39571E-13	0.00000	.14036E-12	0.00000	.13135E+00	0.00000	.28273E+00	0.00000
.27905E-01	0.00000	.11533E-12	0.00000	-.18368E-13	0.00000	.13598E-12	0.00000	.13135E+00	0.00000	-.28273E+00	0.00000

G-48

NATURAL FREQUENCY* .122981E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.78367E-01	0.00000	.23707E-13	0.00000	-.45343E-13	0.00000	.77456E-13	0.00000	.20985E-01	0.00000	-.26407E+00	0.00000
-.78367E-01	0.00000	-.42136E-13	0.00000	.42150E-13	0.00000	-.11476E-12	0.00000	.20985E-01	0.00000	.26407E+00	0.00000
.40422E-01	0.00000	.20752E-13	0.00000	-.11651E-13	0.00000	.11806E-13	0.00000	-.25758E+00	0.00000	.48215E-02	0.00000
-.40422E-01	0.00000	-.14379E-13	0.00000	.11734E-13	0.00000	-.24666E-13	0.00000	-.25753E+00	0.00000	-.48215E-02	0.00000
.67552E-01	0.00000	-.16546E-13	0.00000	.46781E-13	0.00000	.14087E-13	0.00000	-.82454E-01	0.00000	.54355E-01	0.00000
-.67552E-01	0.00000	.30233E-13	0.00000	-.28540E-13	0.00000	-.42192E-13	0.00000	.82454E-01	0.00000	-.54355E-01	0.00000
.59991E-01	0.00000	.22020E-13	0.00000	-.23773E-13	0.00000	-.74773E-14	0.00000	.76324E-01	0.00000	-.10440E+00	0.00000
-.59991E-01	0.00000	-.56306E-13	0.00000	.32321E-13	0.00000	.22425E-13	0.00000	-.76324E-01	0.00000	.10440E+00	0.00000
.12635E+00	0.00000	.21448E-13	0.00000	-.19137E-13	0.00000	-.32245E-13	0.00000	.24272E+00	0.00000	-.35903E-01	0.00000
-.12635E+00	0.00000	-.33185E-13	0.00000	.34223E-14	0.00000	-.46380E-14	0.00000	-.24272E+00	0.00000	.35903E-01	0.00000
.12635E+00	0.00000	-.14198E-13	0.00000	-.18730E-13	0.00000	-.10334E-13	0.00000	.24272E+00	0.00000	-.35903E-01	0.00000
-.12635E+00	0.00000	-.57464E-13	0.00000	.13227E-13	0.00000	-.74384E-14	0.00000	-.24272E+00	0.00000	.35903E-01	0.00000
.59991E-01	0.00000	.17849E-13	0.00000	-.58328E-15	0.00000	-.95454E-14	0.00000	.76324E-01	0.00000	-.10440E+00	0.00000
-.59991E-01	0.00000	-.24900E-13	0.00000	.75756E-14	0.00000	.89861E-14	0.00000	-.76324E-01	0.00000	.10440E+00	0.00000
.67552E-01	0.00000	-.46227E-13	0.00000	.13806E-13	0.00000	-.46163E-13	0.00000	-.82454E-01	0.00000	.54355E-01	0.00000
-.67552E-01	0.00000	.56606E-13	0.00000	-.18801E-13	0.00000	.44820E-13	0.00000	.82454E-01	0.00000	-.54355E-01	0.00000
.40422E-01	0.00000	-.51645E-13	0.00000	-.11458E-13	0.00000	.28919E-13	0.00000	-.25758E+00	0.00000	.48215E-02	0.00000
-.40422E-01	0.00000	.74135E-13	0.00000	.37694E-13	0.00000	-.47775E-13	0.00000	-.25758E+00	0.00000	-.48215E-02	0.00000
.78367E-01	0.00000	.50642E-13	0.00000	-.21866E-14	0.00000	-.31241E-13	0.00000	.20985E-01	0.00000	-.26407E+00	0.00000
-.78367E-01	0.00000	-.22108E-13	0.00000	.14140E-13	0.00000	-.45319E-13	0.00000	-.20985E-01	0.00000	.26407E+00	0.00000

NATURAL FREQUENCY= .126367E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.98084E-01	0.00000	.47894E-13	0.00000	.23868E-13	0.00000	.79996E-13	0.00000	-.52228E-01	0.00000	-.23950E+00	0.00000
-.98084E-01	0.00000	-.62641E-13	0.00000	-.35084E-13	0.00000	-.25680E-13	0.00000	-.52228E-01	0.00000	.23950E+00	0.00000
.17440E-01	0.00000	.31071E-13	0.00000	.47910E-13	0.00000	-.36884E-13	0.00000	-.21106E+00	0.00000	.76377E-01	0.00000
-.17440E-01	0.00000	-.63953E-13	0.00000	-.13380E-13	0.00000	-.63331E-14	0.00000	-.21106E+00	0.00000	-.76377E-01	0.00000
-.30720E-01	0.00000	-.11793E-12	0.00000	-.10222E-13	0.00000	.73315E-13	0.00000	.10934E+00	0.00000	.88219E-01	0.00000
.30720E-01	0.00000	.62508E-13	0.00000	-.45662E-13	0.00000	.44971E-13	0.00000	.10934E+00	0.00000	-.88219E-01	0.00000
-.12901E+00	0.00000	-.10621E-12	0.00000	-.24568E-13	0.00000	-.15049E-13	0.00000	.24563E+00	0.00000	.16886E-01	0.00000
.12901E+00	0.00000	-.64074E-13	0.00000	.53808E-15	0.00000	.17825E-13	0.00000	.24563E+00	0.00000	-.16886E-01	0.00000
-.59123E-01	0.00000	.58980E-13	0.00000	-.79893E-14	0.00000	-.16449E-13	0.00000	.14582E+00	0.00000	-.11321E+00	0.00000
.59123E-01	0.00000	-.33661E-13	0.00000	.15738E-13	0.00000	-.35368E-13	0.00000	.14582E+00	0.00000	.11321E+00	0.00000
-.59123E-01	0.00000	.90290E-13	0.00000	-.23866E-13	0.00000	-.34667E-13	0.00000	-.14582E+00	0.00000	-.11321E+00	0.00000
.59123E-01	0.00000	-.52963E-13	0.00000	.13868E-13	0.00000	-.11096E-13	0.00000	-.14582E+00	0.00000	.11321E+00	0.00000
-.12901E+00	0.00000	-.22516E-13	0.00000	-.19169E-13	0.00000	.34284E-13	0.00000	-.24563E+00	0.00000	.16886E-01	0.00000
.12901E+00	0.00000	.39408E-13	0.00000	-.61469E-14	0.00000	.28416E-13	0.00000	-.24563E+00	0.00000	-.16886E-01	0.00000
-.30720E-01	0.00000	-.11393E-12	0.00000	.33034E-13	0.00000	-.16903E-13	0.00000	-.10934E+00	0.00000	.88219E-01	0.00000
.30720E-01	0.00000	-.24899E-13	0.00000	-.20830E-13	0.00000	.72542E-14	0.00000	-.10934E+00	0.00000	-.88219E-01	0.00000
-.17440E-01	0.00000	-.84839E-13	0.00000	-.43312E-13	0.00000	.52268E-13	0.00000	.21106E+00	0.00000	.76377E-01	0.00000
.17440E-01	0.00000	-.40951E-15	0.00000	-.29750E-13	0.00000	.63711E-13	0.00000	-.21106E+00	0.00000	-.76377E-01	0.00000
-.98084E-01	0.00000	.10185E-12	0.00000	-.16074E-13	0.00000	-.85892E-13	0.00000	.52228E-01	0.00000	-.23950E+00	0.00000
.98084E-01	0.00000	.31934E-13	0.00000	-.78134E-15	0.00000	-.89004E-13	0.00000	.52228E-01	0.00000	.23950E+00	0.00000

G-50

ORIGINAL PAGE IS
OF POOR
QUALITY

NATURAL FREQUENCY = .127944E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	KY IMAG	RZ REAL	RZ IMAG
.32213E-13	0.00000	-.28233E-13	0.00000	-.59839E-12	0.00000	-.31125E-12	0.00000	.18587E+00	0.00000	.85725E-13	0.00000
.70175E-13	0.00000	.23303E-13	0.00000	.60396E-12	0.00000	.39191E-12	0.00000	-.18587E+00	0.00000	-.10572E-12	0.00000
.50878E-14	0.00000	.27388E-13	0.00000	-.76007E-12	0.00000	.33664E-12	0.00000	-.30075E+00	0.00000	-.92619E-13	0.00000
.73325E-14	0.00000	-.93273E-15	0.00000	.70475E-12	0.00000	-.36278E-12	0.00000	.30075E+00	0.00000	.29451E-13	0.00000
.45851E-13	0.00000	.51840E-13	0.00000	.16594E-12	0.00000	.92174E-12	0.00000	-.20245E-12	0.00000	-.11751E-13	0.00000
.41600E-13	0.00000	-.48040E-13	0.00000	-.15823E-12	0.00000	-.93665E-12	0.00000	-.39650E-13	0.00000	.56229E-13	0.00000
.60386E-13	0.00000	.28086E-13	0.00000	.13018E-11	0.00000	.48566E-12	0.00000	.30075E+00	0.00000	.42354E-13	0.00000
.46197E-13	0.00000	-.64574E-13	0.00000	-.12362E-11	0.00000	-.57047E-12	0.00000	-.30075E+00	0.00000	-.36607E-13	0.00000
.72795E-14	0.00000	-.54069E-13	0.00000	.13463E-11	0.00000	-.35212E-12	0.00000	-.18587E+00	0.00000	.16035E-12	0.00000
.33833E-14	0.00000	.44573E-13	0.00000	-.13057E-11	0.00000	.44741E-12	0.00000	.18587E+00	0.00000	-.65092E-15	0.00000
.13451E-13	0.00000	-.57368E-13	0.00000	.35608E-12	0.00000	-.80113E-12	0.00000	-.18587E+00	0.00000	.46698E-14	0.00000
.45971E-13	0.00000	.62547E-13	0.00000	-.38687E-12	0.00000	-.87891E-12	0.00000	.18587E+00	0.00000	-.17286E-14	0.00000
.10556E-13	0.00000	-.93452E-14	0.00000	-.56681E-12	0.00000	-.48634E-12	0.00000	.30075E+00	0.00000	-.26349E-13	0.00000
.31555E-13	0.00000	-.76466E-14	0.00000	.53739E-12	0.00000	.46247E-12	0.00000	-.30075E+00	0.00000	.35907E-13	0.00000
.30535E-13	0.00000	.38718E-13	0.00000	-.68365E-12	0.00000	-.17073E-12	0.00000	.11289E-12	0.00000	-.51591E-13	0.00000
.24123E-13	0.00000	-.52034E-13	0.00000	.64481E-12	0.00000	-.17434E-12	0.00000	-.13883E-12	0.00000	-.27306E-13	0.00000
.17009E-13	0.00000	.66819E-13	0.00000	-.12872E-12	0.00000	.17695E-12	0.00000	-.30075E+00	0.00000	-.53496E-14	0.00000
.12385E-13	0.00000	-.48604E-13	0.00000	.22776E-12	0.00000	-.27155E-12	0.00000	.30075E+00	0.00000	-.16715E-13	0.00000
.36143E-14	0.00000	-.32369E-13	0.00000	-.23052E-12	0.00000	-.27134E-12	0.00000	.18587E+00	0.00000	.79430E-13	0.00000
.30677E-13	0.00000	.36213E-13	0.00000	.19210E-12	0.00000	.44115E-12	0.00000	-.18587E+00	0.00000	-.75771E-13	0.00000

NATURAL FREQUENCY = .128734E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
17173E-14	0.00000	.10742E-13	0.00000	.10126E+00	0.00000	.88224E-01	0.00000	.75350E-12	0.00000	-.22228E-13	0.00000
57066E-14	0.00000	-.56312E-13	0.00000	-.10126E+00	0.00000	-.88224E-01	0.00000	-.71148E-12	0.00000	.16067E-13	0.00000
85533E-14	0.00000	.94205E-14	0.00000	.11748E+00	0.00000	-.99758E-01	0.00000	-.11709E-11	0.00000	.33702E-13	0.00000
39333E-14	0.00000	.77716E-13	0.00000	-.11748E+00	0.00000	.99758E-01	0.00000	.11839E-11	0.00000	-.19893E-13	0.00000
39367E-14	0.00000	.14938E-13	0.00000	-.11557E+00	0.00000	-.19326E+00	0.00000	-.22424E-13	0.00000	.14066E-13	0.00000
10094E-13	0.00000	-.68992E-13	0.00000	.11557E+00	0.00000	.19326E+00	0.00000	.40611E-13	0.00000	-.43383E-13	0.00000
12497E-13	0.00000	-.24745E-13	0.00000	-.30329E+00	0.00000	-.22734E-01	0.00000	.11118E-11	0.00000	-.25371E-14	0.00000
19707E-13	0.00000	-.61137E-13	0.00000	.30329E+00	0.00000	.22734E-01	0.00000	-.11426E-11	0.00000	.10872E-13	0.00000
27487E-13	0.00000	.16713E-13	0.00000	-.16539E+00	0.00000	-.21549E+00	0.00000	-.63492E-12	0.00000	-.25935E-13	0.00000
28420E-13	0.00000	-.66087E-13	0.00000	.16539E+00	0.00000	.21549E+00	0.00000	.59693E-12	0.00000	.85806E-14	0.00000
15779E-13	0.00000	.12711E-14	0.00000	-.16539E+00	0.00000	-.21549E+00	0.00000	-.71512E-12	0.00000	-.16030E-14	0.00000
36564E-14	0.00000	.42162E-13	0.00000	-.16539E+00	0.00000	-.21549E+00	0.00000	.68787E-12	0.00000	-.29118E-13	0.00000
51803E-14	0.00000	-.25027E-13	0.00000	.30329E+00	0.00000	-.22734E-01	0.00000	.10115E-11	0.00000	-.97302E-14	0.00000
17143E-13	0.00000	.66655E-13	0.00000	-.30329E+00	0.00000	.22734E-01	0.00000	-.99559E-12	0.00000	-.21044E-13	0.00000
24006E-13	0.00000	-.11768E-13	0.00000	.11557E+00	0.00000	-.19326E+00	0.00000	-.75652E-16	0.00000	.15287E-13	0.00000
22866E-13	0.00000	-.46382E-13	0.00000	-.11557E+00	0.00000	.19326E+00	0.00000	-.51745E-13	0.00000	-.38004E-13	0.00000
84324E-14	0.00000	.86883E-14	0.00000	-.11748E+00	0.00000	-.99758E-01	0.00000	-.99461E-12	0.00000	.18793E-13	0.00000
28164E-13	0.00000	-.75632E-13	0.00000	.11748E+00	0.00000	.99758E-01	0.00000	.90880E-12	0.00000	-.43262E-14	0.00000
45942E-13	0.00000	.95016E-14	0.00000	-.10126E+00	0.00000	-.88224E-01	0.00000	-.55656E-12	0.00000	.18759E-13	0.00000
18766E-13	0.00000	.25735E-13	0.00000	.10126E+00	0.00000	.88224E-01	0.00000	-.59943E-12	0.00000	-.14517E-13	0.00000

G-52

NATURAL FREQUENCY= .129083E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.40962E-13	0.00000	-.25507E-13	0.00000	.17858E+00	0.00000	-.54902E-02	0.00000	.46085E-12	0.00000	-.92061E-14	0.00000
.84964E-14	0.00000	-.25819E-13	0.00000	-.17858E+00	0.00000	.54902E-02	0.00000	-.39488E-12	0.00000	-.13193E-13	0.00000
.22853E-13	0.00000	.25952E-13	0.00000	.17803E+00	0.00000	-.41619E-01	0.00000	-.70979E-12	0.00000	.10590E-13	0.00000
.71508E-14	0.00000	.26916E-13	0.00000	-.17803E+00	0.00000	.41619E-01	0.00000	.78068E-12	0.00000	.46726E-14	0.00000
.18856E-13	0.00000	.96740E-14	0.00000	-.89369E-01	0.00000	-.14003E+00	0.00000	.23470E-13	0.00000	.10487E-13	0.00000
.79105E-14	0.00000	.13066E-13	0.00000	-.89369E-01	0.00000	.14003E+00	0.00000	-.21022E-13	0.00000	-.33831E-13	0.00000
.12409E-13	0.00000	-.22318E-13	0.00000	-.12436E+00	0.00000	-.18499E+00	0.00000	.83735E-12	0.00000	-.32274E-13	0.00000
.91141E-14	0.00000	-.46520E-13	0.00000	.12436E+00	0.00000	.18499E+00	0.00000	-.84643E-12	0.00000	-.56569E-13	0.00000
.30928E-13	0.00000	-.38191E-13	0.00000	-.32162E+00	0.00000	-.91139E-01	0.00000	-.57486E-12	0.00000	-.14430E-13	0.00000
.57579E-14	0.00000	-.53064E-13	0.00000	.32162E+00	0.00000	.91139E-01	0.00000	.62568E-12	0.00000	-.22761E-13	0.00000
.14587E-13	0.00000	-.84456E-14	0.00000	-.32162E+00	0.00000	-.91139E-01	0.00000	-.51936E-12	0.00000	-.24653E-13	0.00000
.14330E-13	0.00000	.40139E-13	0.00000	.32162E+00	0.00000	.91139E-01	0.00000	.53485E-12	0.00000	.18368E-13	0.00000
.32744E-13	0.00000	.29251E-14	0.00000	-.12436E+00	0.00000	-.18499E+00	0.00000	-.89744E-12	0.00000	-.50222E-13	0.00000
.10479E-13	0.00000	.53874E-13	0.00000	.12436E+00	0.00000	.18499E+00	0.00000	-.96361E-12	0.00000	-.12614E-13	0.00000
.18091E-13	0.00000	-.13532E-14	0.00000	-.89369E-01	0.00000	.14003E+00	0.00000	-.66304E-13	0.00000	-.11911E-13	0.00000
.22044E-13	0.00000	-.40285E-13	0.00000	-.89369E-01	0.00000	-.14003E+00	0.00000	-.34240E-13	0.00000	-.12118E-13	0.00000
.20473E-13	0.00000	-.10279E-13	0.00000	.17803E+00	0.00000	.41619E-01	0.00000	-.96347E-12	0.00000	.15552E-13	0.00000
.23150E-13	0.00000	-.60117E-13	0.00000	-.17803E+00	0.00000	-.41619E-01	0.00000	.94514E-12	0.00000	-.67349E-13	0.00000
.94619E-14	0.00000	.41716E-14	0.00000	.17858E+00	0.00000	-.54902E-02	0.00000	.62045E-12	0.00000	-.27975E-13	0.00000
.16443E-13	0.00000	.31933E-13	0.00000	-.17858E+00	0.00000	.54902E-02	0.00000	-.59606E-12	0.00000	.52069E-13	0.00000

NATURAL FREQUENCY = .130794E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.10049E+00	0.00000	-.41099E-13	0.00000	.10796E-11	0.00000	.16441E-12	0.00000	.10272E+00	0.00000	.20403E+00	0.00000
.10049E+00	0.00000	.70111E-14	0.00000	-.10521E-11	0.00000	-.56503E-13	0.00000	.10272E+00	0.00000	.20403E+00	0.00000
-.21424E-01	0.00000	.93472E-13	0.00000	.10633E-11	0.00000	-.20265E-12	0.00000	.10160E+00	0.00000	-.13484E+00	0.00000
-.21424E-01	0.00000	-.16412E-13	0.00000	-.11516E-11	0.00000	.11996E-12	0.00000	.10160E+00	0.00000	.13484E+00	0.00000
.90522E-01	0.00000	-.31341E-13	0.00000	.83841E-12	0.00000	-.23274E-12	0.00000	-.25809E+00	0.00000	-.30901E-01	0.00000
.90522E-01	0.00000	-.31245E-13	0.00000	-.75149E-12	0.00000	.20908E-12	0.00000	-.25809E+00	0.00000	.30901E-01	0.00000
.64715E-01	0.00000	-.10150E-12	0.00000	.52299E-12	0.00000	-.14694E-12	0.00000	-.13577E+00	0.00000	.11904E+00	0.00000
.64715E-01	0.00000	.33772E-14	0.00000	-.50403E-12	0.00000	.19908E-12	0.00000	-.13577E+00	0.00000	-.11904E+00	0.00000
-.76170E-01	0.00000	-.28892E-13	0.00000	.37366E-12	0.00000	-.21170E-12	0.00000	.18954E+00	0.00000	.10036E+00	0.00000
.76170E-01	0.00000	.29043E-13	0.00000	-.42552E-12	0.00000	.19021E-12	0.00000	.18954E+00	0.00000	-.10036E+00	0.00000
-.76170E-01	0.00000	.59126E-13	0.00000	.10118E-12	0.00000	-.44204E-12	0.00000	.18954E+00	0.00000	.10036E+00	0.00000
.76170E-01	0.00000	.53261E-13	0.00000	-.90132E-13	0.00000	.41358E-12	0.00000	.18954E+00	0.00000	-.10036E+00	0.00000
.64715E-01	0.00000	.16461E-13	0.00000	-.43739E-12	0.00000	-.42260E-12	0.00000	-.13577E+00	0.00000	.11904E+00	0.00000
-.64715E-01	0.00000	.77993E-14	0.00000	.45024E-12	0.00000	.42046E-12	0.00000	-.13577E+00	0.00000	-.11904E+00	0.00000
.90522E-01	0.00000	-.21933E-13	0.00000	-.82224E-12	0.00000	-.17461E-12	0.00000	-.25809E+00	0.00000	.30901E-01	0.00000
-.90522E-01	0.00000	-.16981E-13	0.00000	.78733E-12	0.00000	.19496E-12	0.00000	-.25809E+00	0.00000	-.30901E-01	0.00000
.21424E-01	0.00000	-.16133E-13	0.00000	-.86771E-12	0.00000	-.49920E-13	0.00000	.10160E+00	0.00000	.13484E+00	0.00000
-.21424E-01	0.00000	-.28298E-13	0.00000	.08139E-12	0.00000	.16763E-13	0.00000	.10160E+00	0.00000	-.13484E+00	0.00000
-.10049E+00	0.00000	.10050E-13	0.00000	-.87166E-12	0.00000	-.32066E-13	0.00000	.10272E+00	0.00000	-.20403E+00	0.00000
.10049E+00	0.00000	.27784E-13	0.00000	.87732E-12	0.00000	.99787E-13	0.00000	.10272E+00	0.00000	.20403E+00	0.00000

NATURAL FREQUENCY = .130990E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-24278E-13	0.00000	-29297E-12	0.00000	28686E+00	0.00000	-56365E-02	0.00000	58108E-13	0.00000	10320E-12	0.00000
31503E-13	0.00000	-26224E-12	0.00000	28686E+00	0.00000	56865E-02	0.00000	-72124E-13	0.00000	-99693E-13	0.00000
81041E-14	0.00000	78053E-12	0.00000	28741E+00	0.00000	30498E-01	0.00000	-10255E-13	0.00000	-47392E-13	0.00000
20906E-13	0.00000	25471E-12	0.00000	28741E+00	0.00000	-30498E-01	0.00000	57268E-13	0.00000	82310E-13	0.00000
35247E-13	0.00000	28121E-12	0.00000	-22474E+00	0.00000	82947E-01	0.00000	-21070E-12	0.00000	91139E-14	0.00000
41013E-13	0.00000	28958E-12	0.00000	22474E+00	0.00000	-82947E-01	0.00000	73335E-15	0.00000	-62678E-14	0.00000
70396E-14	0.00000	-30340E-12	0.00000	11771E+00	0.00000	94718E-01	0.00000	11175E-12	0.00000	11258E-12	0.00000
23861E-13	0.00000	-22255E-12	0.00000	11771E+00	0.00000	-94718E-01	0.00000	-17915E-12	0.00000	32448E-13	0.00000
14298E-13	0.00000	-30630E-12	0.00000	31074E-01	0.00000	72372E-01	0.00000	16052E-12	0.00000	51755E-13	0.00000
65810E-13	0.00000	-25899E-12	0.00000	31074E-01	0.00000	-72372E-01	0.00000	25330E-14	0.00000	-23223E-13	0.00000
36973E-13	0.00000	30110E-12	0.00000	31074E-01	0.00000	72972E-01	0.00000	18051E-12	0.00000	-43771E-13	0.00000
32616E-13	0.00000	23325E-12	0.00000	31074E-01	0.00000	-72972E-01	0.00000	36823E-12	0.00000	15587E-13	0.00000
22021E-14	0.00000	32206E-12	0.00000	11771E+00	0.00000	94718E-01	0.00000	80472E-13	0.00000	-62143E-13	0.00000
12944E-13	0.00000	24218E-12	0.00000	11771E+00	0.00000	-94718E-01	0.00000	-14892E-12	0.00000	48238E-13	0.00000
26996E-13	0.00000	-28512E-12	0.00000	22474E+00	0.00000	82947E-01	0.00000	74086E-13	0.00000	-15987E-14	0.00000
44103E-13	0.00000	-23932E-12	0.00000	22474E+00	0.00000	-82947E-01	0.00000	-29443E-12	0.00000	10693E-14	0.00000
73253E-14	0.00000	-29767E-12	0.00000	28741E+00	0.00000	30498E-01	0.00000	-30831E-12	0.00000	56264E-13	0.00000
80640E-14	0.00000	-25365E-12	0.00000	28741E+00	0.00000	-30498E-01	0.00000	37409E-12	0.00000	14370E-13	0.00000
31559E-13	0.00000	27793E-12	0.00000	28686E+00	0.00000	-56865E-02	0.00000	17242E-12	0.00000	-88191E-13	0.00000
34096E-13	0.00000	26082E-12	0.00000	28686E+00	0.00000	56865E-02	0.00000	-13912E-12	0.00000	19266E-13	0.00000

NATURAL FREQUENCY= .131635E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.37009E-13	0.00000	-.74687E-01	0.00000	.40734E-01	0.00000	.27751E+00	0.00000	-.45836E-13	0.00000	.16576E-13	0.00000
.19466E-13	0.00000	.74687E-01	0.00000	.40734E-01	0.00000	.27751E+00	0.00000	-.34610E-13	0.00000	-.29076E-14	0.00000
-.25789E-13	0.00000	.26801E+00	0.00000	-.10863E+00	0.00000	-.18175E+00	0.00000	-.37837E-13	0.00000	.19501E-12	0.00000
-.31903E-13	0.00000	-.26801E+00	0.00000	-.10863E+00	0.00000	-.18175E+00	0.00000	.39638E-13	0.00000	.16611E-12	0.00000
-.65925E-13	0.00000	.94076E-01	0.00000	.90673E-01	0.00000	-.28859E-01	0.00000	.97121E-13	0.00000	.16728E-12	0.00000
.43973E-13	0.00000	-.94076E-01	0.00000	.90673E-01	0.00000	-.28859E-01	0.00000	-.14894E-13	0.00000	.16387E-12	0.00000
-.45921E-13	0.00000	-.16398E+00	0.00000	.22280E-01	0.00000	.96445E-01	0.00000	.52138E-13	0.00000	.31200E-12	0.00000
-.39279E-13	0.00000	.16398E+00	0.00000	.22280E-01	0.00000	.96445E-01	0.00000	.19700E-13	0.00000	.35618E-12	0.00000
-.55554E-14	0.00000	-.14032E+00	0.00000	-.44858E-01	0.00000	.10658E+00	0.00000	-.12258E-12	0.00000	.29129E-12	0.00000
.18702E-13	0.00000	.14032E+00	0.00000	-.44858E-01	0.00000	.10658E+00	0.00000	.33597E-13	0.00000	.29940E-12	0.00000
.19419E-13	0.00000	.14032E+00	0.00000	-.44858E-01	0.00000	-.10658E+00	0.00000	.41459E-13	0.00000	.38563E-12	0.00000
-.13704E-13	0.00000	-.14032E+00	0.00000	-.44858E-01	0.00000	.10658E+00	0.00000	-.10344E-12	0.00000	.37883E-12	0.00000
.87572E-14	0.00000	.16398E+00	0.00000	.22280E-01	0.00000	-.96445E-01	0.00000	.23554E-13	0.00000	.28808E-12	0.00000
.68764E-13	0.00000	-.16398E+00	0.00000	.22280E-01	0.00000	-.96445E-01	0.00000	.49956E-14	0.00000	.19715E-12	0.00000
-.15639E-13	0.00000	-.94076E-01	0.00000	.90673E-01	0.00000	.28859E-01	0.00000	-.39561E-13	0.00000	.22179E-12	0.00000
.23936E-13	0.00000	.94076E-01	0.00000	.90673E-01	0.00000	.28859E-01	0.00000	.14432E-12	0.00000	.22215E-12	0.00000
.38345E-13	0.00000	-.26801E+00	0.00000	-.10883E+00	0.00000	.18175E+00	0.00000	.53954E-13	0.00000	.11652E-12	0.00000
.74212E-13	0.00000	.26801E+00	0.00000	-.10883E+00	0.00000	.18175E+00	0.00000	-.73904E-13	0.00000	.17075E-12	0.00000
.42152E-13	0.00000	.74687E-01	0.00000	.40734E-01	0.00000	-.27751E+00	0.00000	-.81031E-13	0.00000	.43642E-13	0.00000
.55536E-14	0.00000	-.74687E-01	0.00000	.40734E-01	0.00000	-.27751E+00	0.00000	-.91187E-14	0.00000	.53478E-13	0.00000

G-56

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .131957E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.85573E-14	0.00000	.90445E-01	0.00000	-.20395E+00	0.00000	.68451E-03	0.00000	-.84754E-13	0.00000	-.63878E-13	0.00000
.13697E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.10853E-12	0.00000	-.43329E-13	0.00000
.41830E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.15652E-12	0.00000	-.12989E-12	0.00000
.31184E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.14985E-12	0.00000	-.57780E-13	0.00000
.20990E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.23360E-13	0.00000	-.99280E-13	0.00000
.38779E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.13435E-12	0.00000	-.12578E-12	0.00000
.24912E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.38474E-13	0.00000	-.39502E-13	0.00000
.24390E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.40722E-13	0.00000	-.80196E-13	0.00000
.36016E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.12975E-13	0.00000	-.13408E-12	0.00000
.17314E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.98866E-13	0.00000	-.14813E-12	0.00000
.24633E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.18192E-13	0.00000	-.98377E-13	0.00000
.88458E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.52135E-13	0.00000	-.71393E-13	0.00000
-.11441E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.24320E-13	0.00000	-.14039E-12	0.00000
.16979E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.66198E-13	0.00000	-.84030E-13	0.00000
.10103E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.89187E-13	0.00000	-.14000E-13	0.00000
.36085E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.19433E-13	0.00000	-.20720E-13	0.00000
.24279E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.93417E-14	0.00000	-.83332E-14	0.00000
.10687E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.17095E-13	0.00000	-.59805E-14	0.00000
.18546E-14	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.19027E-14	0.00000	-.38602E-13	0.00000
.26447E-13	0.00000	-.90445E-01	0.00000	-.20395E+00	0.00000	-.68451E-03	0.00000	-.65156E-14	0.00000	-.42130E-14	0.00000

NATURAL FREQUENCY= .131957E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.72582E-14	0.00000	-.10485E+00	0.00000	.81717E-01	0.00000	.14225E+00	0.00000	.37078E-13	0.00000	-.79407E-13	0.00000
-.21740E-13	0.00000	-.10485E+00	0.00000	-.81717E-01	0.00000	-.14225E+00	0.00000	-.53896E-13	0.00000	-.49648E-13	0.00000
.42786E-13	0.00000	.10485E+00	0.00000	.81717E-01	0.00000	-.14225E+00	0.00000	-.14397E-12	0.00000	.10464E-12	0.00000
.10310E-13	0.00000	.10485E+00	0.00000	-.81717E-01	0.00000	.14225E+00	0.00000	.11271E-12	0.00000	.20991E-14	0.00000
-.33423E-13	0.00000	-.10485E+00	0.00000	-.20279E+00	0.00000	-.14225E+00	0.00000	.18580E-12	0.00000	-.40463E-13	0.00000
-.41285E-13	0.00000	.10485E+00	0.00000	.20279E+00	0.00000	.14225E+00	0.00000	-.29398E-13	0.00000	-.38929E-13	0.00000
-.45464E-13	0.00000	-.10485E+00	0.00000	-.20279E+00	0.00000	-.14225E+00	0.00000	.53101E-13	0.00000	-.72886E-15	0.00000
-.94999E-14	0.00000	-.10485E+00	0.00000	.20279E+00	0.00000	-.14225E+00	0.00000	.13865E-13	0.00000	-.99771E-13	0.00000
.50499E-13	0.00000	-.10485E+00	0.00000	.81717E-01	0.00000	.14225E+00	0.00000	-.27104E-12	0.00000	-.44309E-14	0.00000
-.88410E-14	0.00000	-.10485E+00	0.00000	-.81717E-01	0.00000	-.14225E+00	0.00000	.13364E-12	0.00000	-.47823E-13	0.00000
.27517E-13	0.00000	.10485E+00	0.00000	.81717E-01	0.00000	-.14225E+00	0.00000	.13500E-12	0.00000	-.58292E-13	0.00000
-.12178E-13	0.00000	-.10485E+00	0.00000	-.81717E-01	0.00000	.14225E+00	0.00000	-.24676E-12	0.00000	-.53048E-13	0.00000
-.13251E-13	0.00000	.10485E+00	0.00000	-.20279E+00	0.00000	-.14225E+00	0.00000	.19426E-13	0.00000	-.35226E-13	0.00000
.10382E-13	0.00000	.10485E+00	0.00000	.20279E+00	0.00000	.14225E+00	0.00000	.94789E-13	0.00000	-.29127E-13	0.00000
-.28324E-14	0.00000	-.10485E+00	0.00000	-.20279E+00	0.00000	-.14225E+00	0.00000	-.13152E-12	0.00000	-.18268E-13	0.00000
-.12564E-14	0.00000	-.10485E+00	0.00000	.20279E+00	0.00000	-.14225E+00	0.00000	.18067E-12	0.00000	-.66315E-13	0.00000
-.16854E-13	0.00000	-.10485E+00	0.00000	.81717E-01	0.00000	.14225E+00	0.00000	.15139E-12	0.00000	-.16330E-13	0.00000
-.90031E-14	0.00000	-.10485E+00	0.00000	-.81717E-01	0.00000	-.14225E+00	0.00000	-.29380E-12	0.00000	.12876E-13	0.00000
.55185E-13	0.00000	.10485E+00	0.00000	.81717E-01	0.00000	-.14225E+00	0.00000	-.11009E-12	0.00000	-.45012E-13	0.00000
-.20257E-13	0.00000	-.10485E+00	0.00000	-.81717E-01	0.00000	.14225E+00	0.00000	-.85700E-13	0.00000	-.33369E-13	0.00000

NATURAL FREQUENCY= .131757E+04

TX REAL	IX IMAG	FY REAL	FY IMAG	FZ REAL	FZ IMAG	RX REAL	RA IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.36432E-14	0.00000	-.16324E+00	0.00000	-.15333E+00	0.00000	-.10121E+00	0.00000	-.11639E-12	0.00000	.20548E-13	0.00000
.32605E-14	0.00000	-.16324E+00	0.00000	.15333E+00	0.00000	.10121E+00	0.00000	.70812E-13	0.00000	-.14692E-13	0.00000
.67902E-13	0.00000	.16324E+00	0.00000	-.15333E+00	0.00000	.10121E+00	0.00000	.25849E-12	0.00000	-.31205E-13	0.00000
.36938E-14	0.00000	.16324E+00	0.00000	.15333E+00	0.00000	-.10121E+00	0.00000	-.27139E-12	0.00000	-.11467E-13	0.00000
.89728E-14	0.00000	.16324E+00	0.00000	-.49082E-01	0.00000	.10121E+00	0.00000	-.14228E-12	0.00000	.14097E-14	0.00000
.77175E-14	0.00000	-.16324E+00	0.00000	-.49082E-01	0.00000	-.10121E+00	0.00000	.17730E-12	0.00000	-.26804E-13	0.00000
.19278E-14	0.00000	-.16324E+00	0.00000	.49082E-01	0.00000	-.10121E+00	0.00000	-.42967E-13	0.00000	-.36254E-13	0.00000
.58490E-15	0.00000	-.16324E+00	0.00000	-.49082E-01	0.00000	.10121E+00	0.00000	.53262E-13	0.00000	.53567E-14	0.00000
.12636E-14	0.00000	-.16324E+00	0.00000	-.15333E+00	0.00000	-.10121E+00	0.00000	.20102E-12	0.00000	-.11903E-13	0.00000
.15223E-13	0.00000	-.16324E+00	0.00000	.15333E+00	0.00000	.10121E+00	0.00000	-.24763E-12	0.00000	.22112E-15	0.00000
.84892E-14	0.00000	.16324E+00	0.00000	-.15333E+00	0.00000	.10121E+00	0.00000	-.21171E-12	0.00000	-.47472E-13	0.00000
.57766E-14	0.00000	.16324E+00	0.00000	.15333E+00	0.00000	-.10121E+00	0.00000	.22982E-12	0.00000	-.47582E-13	0.00000
.14053E-13	0.00000	-.16324E+00	0.00000	-.49082E-01	0.00000	.10121E+00	0.00000	.30722E-13	0.00000	-.41271E-13	0.00000
.24156E-13	0.00000	.16324E+00	0.00000	.49082E-01	0.00000	-.10121E+00	0.00000	.19490E-13	0.00000	-.38742E-13	0.00000
.97999E-14	0.00000	-.16324E+00	0.00000	-.49082E-01	0.00000	-.10121E+00	0.00000	.24146E-12	0.00000	-.10986E-12	0.00000
.95944E-14	0.00000	-.16324E+00	0.00000	.49082E-01	0.00000	.10121E+00	0.00000	-.20206E-12	0.00000	-.96481E-13	0.00000
.43749E-13	0.00000	-.16324E+00	0.00000	-.15333E+00	0.00000	-.10121E+00	0.00000	-.28262E-12	0.00000	-.63489E-13	0.00000
.15452E-13	0.00000	-.16324E+00	0.00000	.15333E+00	0.00000	.10121E+00	0.00000	.32114E-12	0.00000	-.17365E-14	0.00000
.13841E-13	0.00000	.16324E+00	0.00000	-.15333E+00	0.00000	.10121E+00	0.00000	.18841E-12	0.00000	.23169E-13	0.00000
.90625E-13	0.00000	.16324E+00	0.00000	.15333E+00	0.00000	-.10121E+00	0.00000	-.99056E-13	0.00000	-.43252E-13	0.00000

NATURAL FREQUENCY# .132494E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.24521E-01	0.00000	.74357E-13	0.00000	-.10987E-12	0.00000	.20051E-12	0.00000	-.31807E-12	0.00000	-.78565E-02	0.00000
.24521E-01	0.00000	.10035E-12	0.00000	.16521E-12	0.00000	-.13173E-12	0.00000	-.14546E-12	0.00000	-.78565E-02	0.00000
.39200E-01	0.00000	-.83405E-13	0.00000	-.78113E-13	0.00000	-.75607E-13	0.00000	-.33399E-12	0.00000	.17215E+00	0.00000
.39200E-01	0.00000	-.98214E-13	0.00000	.57377E-13	0.00000	.64580E-13	0.00000	-.23313E-12	0.00000	.17215E+00	0.00000
-.14268E-01	0.00000	-.30864E-13	0.00000	-.25301E-12	0.00000	-.11651E-12	0.00000	.65237E-12	0.00000	.19171E+00	0.00000
-.14268E-01	0.00000	-.16006E-12	0.00000	.24343E-12	0.00000	.94158E-14	0.00000	.43257E-12	0.00000	.19171E+00	0.00000
.25497E-01	0.00000	.13472E-12	0.00000	-.19798E-12	0.00000	-.17786E-13	0.00000	-.34657E-12	0.00000	.29537E+00	0.00000
.25497E-01	0.00000	.25452E-13	0.00000	.23934E-12	0.00000	-.88201E-13	0.00000	.33270E-12	0.00000	.29537E+00	0.00000
.49055E-02	0.00000	-.16555E-13	0.00000	-.13905E-12	0.00000	.13350E-12	0.00000	-.54446E-12	0.00000	.30565E+00	0.00000
.49055E-02	0.00000	.13793E-12	0.00000	.15616E-12	0.00000	.24111E-13	0.00000	-.33742E-12	0.00000	.30565E+00	0.00000
-.49055E-02	0.00000	-.74137E-13	0.00000	-.14939E-12	0.00000	.11925E-13	0.00000	-.45433E-12	0.00000	.30565E+00	0.00000
-.49055E-02	0.00000	-.10327E-13	0.00000	.72359E-13	0.00000	-.87647E-14	0.00000	-.00662E-12	0.00000	.30565E+00	0.00000
.25497E-01	0.00000	.12275E-13	0.00000	-.15150E-12	0.00000	-.84440E-13	0.00000	-.30299E-12	0.00000	.29537E+00	0.00000
.25497E-01	0.00000	-.10360E-12	0.00000	.15612E-12	0.00000	-.58230E-14	0.00000	.33895E-12	0.00000	.29537E+00	0.00000
-.14268E-01	0.00000	.82943E-13	0.00000	-.17863E-12	0.00000	-.31792E-13	0.00000	.73968E-12	0.00000	.19171E+00	0.00000
-.14268E-01	0.00000	-.18246E-13	0.00000	.18965E-12	0.00000	-.13331E-12	0.00000	-.86485E-12	0.00000	.19171E+00	0.00000
.39200E-01	0.00000	-.58543E-14	0.00000	-.54978E-13	0.00000	.12098E-12	0.00000	-.94311E-13	0.00000	.17215E+00	0.00000
.39200E-01	0.00000	.12976E-12	0.00000	.84446E-13	0.00000	-.24032E-13	0.00000	-.30293E-12	0.00000	.17215E+00	0.00000
.24521E-01	0.00000	-.78885E-13	0.00000	-.37832E-13	0.00000	-.93201E-13	0.00000	-.26610E-12	0.00000	-.78565E-02	0.00000
.24521E-01	0.00000	-.17538E-13	0.00000	.51844E-13	0.00000	-.13502E-12	0.00000	-.17771E-12	0.00000	-.78565E-02	0.00000

G-60

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .134055E+04

TX REAL	TX IMAG	FY REAL	FY IMAG	FZ REAL	FZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14317E-12	0.00000	-.11342E-12	0.00000	-.33864E-12	0.00000	-.16813E-12	0.00000	.14350E+00	0.00000	.12859E-12	0.00000
.76678E-13	0.00000	-.10604E-12	0.00000	.35971E-12	0.00000	.19779E-12	0.00000	-.14356E+00	0.00000	.21067E-13	0.00000
.81030E-13	0.00000	.14857E-12	0.00000	-.34769E-12	0.00000	.25470E-12	0.00000	-.31233E+00	0.00000	.38792E-12	0.00000
.44738E-13	0.00000	.13655E-12	0.00000	.33811E-12	0.00000	-.23776E-12	0.00000	.31233E+00	0.00000	.49940E-12	0.00000
.37348E-13	0.00000	.15765E-12	0.00000	.15415E-12	0.00000	.26283E-12	0.00000	.22361E+00	0.00000	.41109E-13	0.00000
-.11206E-12	0.00000	.91961E-13	0.00000	-.16886E-12	0.00000	-.28308E-12	0.00000	-.22361E+00	0.00000	-.23349E-13	0.00000
.62300E-13	0.00000	-.10388E-12	0.00000	.21881E-12	0.00000	-.19599E-12	0.00000	.49469E-01	0.00000	.65812E-12	0.00000
.94074E-13	0.00000	-.13998E-12	0.00000	-.16640E-12	0.00000	.18984E-12	0.00000	-.49469E-01	0.00000	.54419E-12	0.00000
.41856E-14	0.00000	-.14995E-12	0.00000	-.21413E-12	0.00000	-.10799E-12	0.00000	-.28176E+00	0.00000	-.33984E-12	0.00000
.38366E-13	0.00000	-.86723E-13	0.00000	.19146E-12	0.00000	.16157E-12	0.00000	.28176E+00	0.00000	-.25911E-12	0.00000
.95731E-13	0.00000	.10045E-12	0.00000	-.12665E-12	0.00000	.26229E-12	0.00000	.28176E+00	0.00000	.33763E-12	0.00000
.31897E-13	0.00000	.13751E-12	0.00000	.10778E-12	0.00000	-.21755E-12	0.00000	-.28176E+00	0.00000	.37402E-12	0.00000
.81284E-13	0.00000	.16501E-12	0.00000	.24918E-12	0.00000	.15268E-12	0.00000	-.49469E-01	0.00000	-.61557E-12	0.00000
.73673E-13	0.00000	.91927E-13	0.00000	-.27882E-12	0.00000	-.25144E-12	0.00000	.49469E-01	0.00000	-.73732E-12	0.00000
.63773E-13	0.00000	-.11775E-12	0.00000	.32805E-12	0.00000	-.10324E-12	0.00000	-.22361E+00	0.00000	.27109E-13	0.00000
.26242E-13	0.00000	-.11134E-12	0.00000	-.27493E-12	0.00000	.12150E-12	0.00000	.22361E+00	0.00000	-.38530E-14	0.00000
.77819E-13	0.00000	-.18356E-12	0.00000	.23604E-13	0.00000	-.93367E-13	0.00000	.31233E+00	0.00000	-.65457E-12	0.00000
.74167E-13	0.00000	-.80416E-13	0.00000	-.46533E-13	0.00000	.16398E-12	0.00000	-.31233E+00	0.00000	.57450E-12	0.00000
.14601E-12	0.00000	.14205E-12	0.00000	.53041E-13	0.00000	.57997E-13	0.00000	-.14356E+00	0.00000	-.56601E-13	0.00000
-.18673E-12	0.00000	.15162E-12	0.00000	-.40770E-13	0.00000	-.17655E-12	0.00000	.14356E+00	0.00000	.13517E-12	0.00000

NATURAL FREQUENCY= .134105E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.74168E-01	0.00000	.32450E-13	0.00000	-.37061E-13	0.00000	-.13123E-12	0.00000	-.13887E-14	0.00000	.51985E-01	0.00000
-.74163E-01	0.00000	.30078E-16	0.00000	.26910E-13	0.00000	-.77961E-14	0.00000	.11165E-11	0.00000	.51985E-01	0.00000
.40623E-01	0.00000	-.10316E-12	0.00000	.65302E-14	0.00000	.71026E-13	0.00000	.95074E-12	0.00000	.29684E+00	0.00000
.40623E-01	0.00000	.27315E-13	0.00000	.16470E-13	0.00000	.37786E-13	0.00000	-.15013E-11	0.00000	.29684E+00	0.00000
.29392E-01	0.00000	-.57093E-13	0.00000	-.25373E-13	0.00000	.27981E-13	0.00000	-.18867E-11	0.00000	-.17137E-01	0.00000
.29392E-01	0.00000	.59884E-13	0.00000	-.92931E-14	0.00000	.83305E-13	0.00000	-.16872E-12	0.00000	-.17137E-01	0.00000
.43572E-01	0.00000	.10304E-12	0.00000	-.19394E-13	0.00000	.54341E-13	0.00000	.50612E-12	0.00000	.33758E+00	0.00000
.43572E-01	0.00000	-.17018E-13	0.00000	-.36841E-13	0.00000	-.43419E-13	0.00000	.10871E-11	0.00000	.33758E+00	0.00000
.19365E-01	0.00000	.40816E-13	0.00000	.53423E-13	0.00000	-.52977E-13	0.00000	.19062E-11	0.00000	-.19233E+00	0.00000
.19365E-01	0.00000	-.62331E-13	0.00000	.24552E-13	0.00000	-.63202E-15	0.00000	-.41680E-12	0.00000	-.19233E+00	0.00000
.19365E-01	0.00000	-.74049E-13	0.00000	.77389E-15	0.00000	.27357E-13	0.00000	-.22125E-11	0.00000	.19233E+00	0.00000
.19365E-01	0.00000	-.36188E-13	0.00000	-.32193E-13	0.00000	-.39235E-14	0.00000	.84746E-13	0.00000	.19233E+00	0.00000
.43572E-01	0.00000	-.77461E-14	0.00000	.25593E-13	0.00000	.16357E-13	0.00000	-.25118E-12	0.00000	-.33758E+00	0.00000
.43572E-01	0.00000	.81311E-13	0.00000	-.27403E-13	0.00000	.12816E-13	0.00000	-.72704E-12	0.00000	-.33758E+00	0.00000
.29392E-01	0.00000	.25058E-13	0.00000	-.37491E-15	0.00000	.72044E-13	0.00000	.22807E-11	0.00000	.17137E-01	0.00000
.29392E-01	0.00000	.24627E-13	0.00000	-.79015E-14	0.00000	.53603E-14	0.00000	.61191E-12	0.00000	.17137E-01	0.00000
.40623E-01	0.00000	-.55858E-13	0.00000	.36202E-13	0.00000	-.12509E-12	0.00000	-.11658E-11	0.00000	-.29684E+00	0.00000
.40623E-01	0.00000	-.95571E-13	0.00000	.10097E-13	0.00000	-.51945E-13	0.00000	.13618E-11	0.00000	-.29684E+00	0.00000
-.74168E-01	0.00000	-.29682E-13	0.00000	-.31320E-13	0.00000	.58126E-13	0.00000	-.10213E-12	0.00000	-.51985E-01	0.00000
-.74168E-01	0.00000	-.11876E-14	0.00000	-.31547E-14	0.00000	.18644E-12	0.00000	-.12890E-11	0.00000	-.51985E-01	0.00000

NATURAL FREQUENCY# 135881E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.19340E-03	0.00000	.99547E-15	0.00000	.29362E-13	0.00000	.70615E-13	0.00000	-.26549E-11	0.00000	.45164E-01	0.00000
.19340E-03	0.00000	-.69486E-13	0.00000	-.62154E-14	0.00000	-.12316E-12	0.00000	-.26389E-11	0.00000	.45164E-01	0.00000
.10141E+00	0.00000	.21892E-13	0.00000	.55597E-13	0.00000	.61437E-13	0.00000	.59637E-12	0.00000	-.14762E+00	0.00000
.10141E+00	0.00000	.45649E-13	0.00000	-.38253E-13	0.00000	-.24877E-13	0.00000	.53309E-12	0.00000	-.14762E+00	0.00000
.41078E-01	0.00000	.24854E-13	0.00000	.72068E-13	0.00000	-.52867E-13	0.00000	.53648E-11	0.00000	-.36194E+00	0.00000
.41078E-01	0.00000	-.10798E-13	0.00000	-.11421E-12	0.00000	.42756E-13	0.00000	.55435E-11	0.00000	-.36194E+00	0.00000
.50639E-02	0.00000	-.22953E-13	0.00000	.10475E-13	0.00000	.18202E-13	0.00000	-.27473E-11	0.00000	-.72642E-01	0.00000
.50639E-02	0.00000	-.33884E-13	0.00000	-.10985E-13	0.00000	.42953E-13	0.00000	-.29312E-11	0.00000	-.72642E-01	0.00000
.65593E-01	0.00000	.37853E-13	0.00000	.44720E-13	0.00000	.11493E-14	0.00000	-.41300E-11	0.00000	-.27764E+00	0.00000
.65593E-01	0.00000	.52532E-14	0.00000	-.87930E-13	0.00000	-.31736E-13	0.00000	-.38559E-11	0.00000	-.27764E+00	0.00000
.65593E-01	0.00000	.35232E-13	0.00000	.14421E-13	0.00000	-.95231E-13	0.00000	.40725E-11	0.00000	.27764E+00	0.00000
.65593E-01	0.00000	.26437E-13	0.00000	-.38932E-14	0.00000	.63303E-13	0.00000	.38396E-11	0.00000	.27764E+00	0.00000
.50639E-02	0.00000	-.26947E-13	0.00000	-.35176E-13	0.00000	.52679E-13	0.00000	.28056E-11	0.00000	.72642E-01	0.00000
.50639E-02	0.00000	-.21387E-13	0.00000	.85852E-14	0.00000	-.64937E-13	0.00000	.29395E-11	0.00000	.72642E-01	0.00000
.41078E-01	0.00000	-.14822E-13	0.00000	.10509E-12	0.00000	.32922E-13	0.00000	-.53694E-11	0.00000	.36194E+00	0.00000
.41078E-01	0.00000	-.24060E-13	0.00000	-.82945E-13	0.00000	-.45469E-13	0.00000	-.54829E-11	0.00000	.36194E+00	0.00000
.10141E+00	0.00000	.59016E-14	0.00000	.88925E-14	0.00000	-.45535E-13	0.00000	-.61727E-12	0.00000	.14762E+00	0.00000
.10141E+00	0.00000	.48773E-13	0.00000	-.29371E-13	0.00000	.12827E-12	0.00000	-.50493E-12	0.00000	.14762E+00	0.00000
.19340E-03	0.00000	-.19661E-13	0.00000	-.47117E-13	0.00000	.24943E-13	0.00000	.26630E-11	0.00000	-.45164E-01	0.00000
.19340E-03	0.00000	-.20068E-13	0.00000	.77682E-13	0.00000	-.77530E-13	0.00000	.26737E-11	0.00000	-.45164E-01	0.00000

C-63

NATURAL FREQUENCY= .135879E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.92605E-01	0.00000	.51142E-13	0.00000	.28252E-14	0.00000	-.82734E-13	0.00000	-.12691E+00	0.00000	-.16482E+00	0.00000
.92605E-01	0.00000	.16992E-13	0.00000	-.41267E-13	0.00000	.15594E-12	0.00000	-.12691E+00	0.00000	-.16482E+00	0.00000
.57432E-01	0.00000	-.11011E-13	0.00000	-.36519E-13	0.00000	-.28462E-13	0.00000	.27056E-01	0.00000	.15945E+00	0.00000
.57432E-01	0.00000	-.76857E-13	0.00000	-.24990E-13	0.00000	-.14263E-13	0.00000	.27056E-01	0.00000	-.15945E+00	0.00000
.83393E-01	0.00000	.24839E-14	0.00000	-.96665E-14	0.00000	.18519E-13	0.00000	.25971E+00	0.00000	-.89203E-01	0.00000
.83393E-01	0.00000	-.30048E-13	0.00000	.47345E-13	0.00000	-.34742E-13	0.00000	.25971E+00	0.00000	.89203E-01	0.00000
.39957E-01	0.00000	.12932E-13	0.00000	.33461E-13	0.00000	.59797E-13	0.00000	-.13664E+00	0.00000	-.14076E+00	0.00000
.39957E-01	0.00000	.24539E-13	0.00000	.17665E-13	0.00000	.95064E-14	0.00000	-.13664E+00	0.00000	.14076E+00	0.00000
.70130E-01	0.00000	.13288E-13	0.00000	.70542E-14	0.00000	-.99626E-15	0.00000	-.19046E+00	0.00000	.10068E+00	0.00000
.70130E-01	0.00000	.23252E-13	0.00000	-.20692E-13	0.00000	.19939E-13	0.00000	-.19046E+00	0.00000	-.10068E+00	0.00000
.70130E-01	0.00000	-.58410E-13	0.00000	-.27817E-13	0.00000	.75320E-13	0.00000	.19046E+00	0.00000	.10068E+00	0.00000
.70130E-01	0.00000	-.65105E-13	0.00000	.12508E-13	0.00000	-.47959E-13	0.00000	.19046E+00	0.00000	-.10068E+00	0.00000
.39957E-01	0.00000	.25739E-13	0.00000	-.34132E-13	0.00000	-.32245E-13	0.00000	.13664E+00	0.00000	-.14076E+00	0.00000
.39957E-01	0.00000	-.10174E-13	0.00000	-.41906E-13	0.00000	-.25693E-13	0.00000	.13664E+00	0.00000	.14076E+00	0.00000
.83393E-01	0.00000	.11949E-14	0.00000	-.20275E-14	0.00000	-.45468E-13	0.00000	-.25971E+00	0.00000	-.89203E-01	0.00000
.83393E-01	0.00000	-.75746E-13	0.00000	.16744E-13	0.00000	-.49475E-13	0.00000	-.25971E+00	0.00000	.89203E-01	0.00000
.57432E-01	0.00000	-.53199E-13	0.00000	-.57404E-14	0.00000	.64004E-13	0.00000	-.27056E-01	0.00000	.15945E+00	0.00000
.57432E-01	0.00000	.39208E-13	0.00000	-.19922E-13	0.00000	-.67022E-13	0.00000	-.27056E-01	0.00000	-.15945E+00	0.00000
.92605E-01	0.00000	.14076E-13	0.00000	.10875E-13	0.00000	-.14602E-12	0.00000	.12691E+00	0.00000	-.16482E+00	0.00000
.92605E-01	0.00000	.27339E-13	0.00000	.82664E-14	0.00000	-.60159E-13	0.00000	.12691E+00	0.00000	.16482E+00	0.00000

G-64 ORIGINAL PAGE IS OF POOR QUALITY

NATURAL FREQUENCY= .137313E+04

TX	TX	TY	TY	TZ	TZ	KX	KX	RY	RY	RZ	RL
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.10392E-12	0.00000	.27122E-13	0.00000	.11096E+00	0.00000	.19600E+00	0.00000	.15149E-12	0.00000	.34938E-13	0.00000
.39732E-13	0.00000	-.38959E-14	0.00000	.11096E+00	0.00000	-.19600E+00	0.00000	-.87910E-13	0.00000	-.19054E-13	0.00000
.71073E-14	0.00000	.11259E-12	0.00000	.45549E-01	0.00000	-.20579E+00	0.00000	-.34344E-12	0.00000	.46165E-12	0.00000
.34917E-13	0.00000	-.11844E-12	0.00000	-.45549E-01	0.00000	.20579E+00	0.00000	.35355E-12	0.00000	-.52925E-12	0.00000
.13467E-12	0.00000	-.62176E-13	0.00000	-.23359E+00	0.00000	.51021E-02	0.00000	.25964E-12	0.00000	.15595E-12	0.00000
.98002E-13	0.00000	.39268E-13	0.00000	.23359E+00	0.00000	-.51021E-02	0.00000	-.38121E-12	0.00000	.99706E-13	0.00000
.30811E-13	0.00000	-.57058E-13	0.00000	.53720E-01	0.00000	.24357E+00	0.00000	-.86638E-13	0.00000	.30093E-13	0.00000
.25013E-13	0.00000	.11836E-12	0.00000	-.53720E-01	0.00000	-.24357E+00	0.00000	.15025E-12	0.00000	-.47790E-13	0.00000
.10539E-12	0.00000	.25781E-13	0.00000	.17329E+00	0.00000	-.13571E+00	0.00000	-.40912E-13	0.00000	.18080E-12	0.00000
.12710E-12	0.00000	-.87539E-14	0.00000	-.17329E+00	0.00000	.13571E+00	0.00000	-.13410E-12	0.00000	-.13495E-12	0.00000
.51093E-13	0.00000	.26433E-13	0.00000	-.17329E+00	0.00000	-.13571E+00	0.00000	.15515E-12	0.00000	-.42846E-12	0.00000
.10043E-12	0.00000	-.68926E-13	0.00000	.17329E+00	0.00000	.13571E+00	0.00000	-.27972E-12	0.00000	-.44133E-12	0.00000
.42169E-13	0.00000	-.94223E-13	0.00000	-.23720E-01	0.00000	.24357E+00	0.00000	-.25157E-12	0.00000	.17230E-12	0.00000
.56257E-13	0.00000	.74667E-13	0.00000	.53720E-01	0.00000	-.24357E+00	0.00000	.17885E-12	0.00000	-.58385E-13	0.00000
.74405E-13	0.00000	-.12661E-13	0.00000	.23359E+00	0.00000	.51021E-02	0.00000	.19890E-12	0.00000	-.54365E-13	0.00000
.88958E-14	0.00000	.89030E-13	0.00000	-.23359E+00	0.00000	-.51021E-02	0.00000	-.72171E-13	0.00000	-.12674E-12	0.00000
.66957E-13	0.00000	.15308E-12	0.00000	-.45549E-01	0.00000	-.20579E+00	0.00000	-.56116E-13	0.00000	.34375E-12	0.00000
.49639E-13	0.00000	-.94585E-13	0.00000	.45549E-01	0.00000	.20579E+00	0.00000	.81928E-13	0.00000	.40029E-12	0.00000
.12476E-12	0.00000	-.64996E-14	0.00000	.11096E+00	0.00000	.19600E+00	0.00000	-.37163E-13	0.00000	.99640E-13	0.00000
.60024E-13	0.00000	-.36208E-13	0.00000	.11096E+00	0.00000	-.19600E+00	0.00000	-.82312E-13	0.00000	.20286E-13	0.00000

NATURAL FREQUENCY= .137652E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.84676E-01	0.00000	-.54540E-13	0.00000	.36809E-13	0.00000	.65241E-13	0.00000	.54919E-12	0.00000	-.45620E-01	0.00000
.84676E-01	0.00000	-.94677E-15	0.00000	.13741E-13	0.00000	.32440E-13	0.00000	.50311E-12	0.00000	-.45620E-01	0.00000
-.27462E-01	0.00000	.22026E-13	0.00000	-.75371E-13	0.00000	-.42474E-13	0.00000	-.88181E-13	0.00000	-.39990E+00	0.00000
-.27462E-01	0.00000	.17965E-13	0.00000	-.13124E-13	0.00000	.53620E-13	0.00000	-.49146E-13	0.00000	-.39990E+00	0.00000
-.64429E-01	0.00000	.16181E-12	0.00000	-.59509E-13	0.00000	-.50751E-13	0.00000	-.12515E-11	0.00000	.60068E-01	0.00000
-.64429E-01	0.00000	-.33175E-13	0.00000	.10058E-12	0.00000	-.91999E-13	0.00000	-.11580E-11	0.00000	.60068E-01	0.00000
-.91139E-02	0.00000	-.68200E-14	0.00000	-.25413E-14	0.00000	.94207E-14	0.00000	.55636E-12	0.00000	-.67867E-01	0.00000
-.91139E-02	0.00000	.16280E-13	0.00000	.16896E-13	0.00000	-.35417E-13	0.00000	.53321E-12	0.00000	-.67867E-01	0.00000
-.87030E-01	0.00000	-.73323E-13	0.00000	.12735E-13	0.00000	-.13664E-13	0.00000	-.12227E-11	0.00000	.25332E+00	0.00000
-.87030E-01	0.00000	.46416E-13	0.00000	-.27099E-13	0.00000	.82492E-13	0.00000	.12769E-11	0.00000	.25332E+00	0.00000
.87030E-01	0.00000	-.23108E-13	0.00000	-.41973E-13	0.00000	-.29860E-13	0.00000	-.94816E-12	0.00000	.25332E+00	0.00000
.87030E-01	0.00000	-.11019E-13	0.00000	.13416E-13	0.00000	-.10116E-14	0.00000	-.45828E-12	0.00000	.25332E+00	0.00000
.91139E-02	0.00000	.31137E-13	0.00000	-.89670E-14	0.00000	-.40859E-14	0.00000	-.11687E-11	0.00000	-.67867E-01	0.00000
.91139E-02	0.00000	-.22359E-13	0.00000	.28812E-13	0.00000	-.58093E-13	0.00000	-.12128E-11	0.00000	-.67867E-01	0.00000
.64429E-01	0.00000	.23568E-13	0.00000	.44722E-13	0.00000	.17821E-13	0.00000	.15043E-11	0.00000	.60068E-01	0.00000
.64429E-01	0.00000	.73667E-14	0.00000	-.44438E-13	0.00000	.48794E-13	0.00000	.15942E-11	0.00000	.60068E-01	0.00000
.27462E-01	0.00000	.42992E-13	0.00000	-.18997E-13	0.00000	-.84821E-13	0.00000	.44879E-12	0.00000	-.39990E+00	0.00000
.27462E-01	0.00000	-.40731E-13	0.00000	.51665E-13	0.00000	.11633E-13	0.00000	.34466E-12	0.00000	-.39990E+00	0.00000
-.84676E-01	0.00000	-.11488E-13	0.00000	-.71131E-14	0.00000	.68219E-13	0.00000	-.96246E-12	0.00000	-.45620E-01	0.00000
-.84676E-01	0.00000	.33506E-14	0.00000	-.17216E-13	0.00000	.44452E-13	0.00000	-.89705E-12	0.00000	-.45620E-01	0.00000

NATURAL FREQUENCY = .138786L+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-6.7064E-13	0.00000	-1.2871E-13	0.00000	-7.73916E-13	0.00000	-1.0222E-12	0.00000	-9.7720E-01	0.00000	-2.5680E-13	0.00000
-1.8940E-13	0.00000	-1.13137E-14	0.00000	-8.0165E-13	0.00000	-2.0922E-12	0.00000	-9.7720E-01	0.00000	-2.3624E-13	0.00000
-2.4617E-13	0.00000	-3.9425E-13	0.00000	-2.0324E-13	0.00000	-1.9203E-12	0.00000	-2.5583E+00	0.00000	-1.6683E-12	0.00000
-2.7767E-13	0.00000	-5.0760E-13	0.00000	-6.1650E-13	0.00000	-2.2348E-12	0.00000	-2.5583E+00	0.00000	-2.3635E-12	0.00000
-4.2843E-13	0.00000	-1.6308E-13	0.00000	-3.2887E-12	0.00000	-9.8255E-13	0.00000	-3.1623E+00	0.00000	-1.3733E-12	0.00000
-5.8768E-14	0.00000	-1.0492E-14	0.00000	-2.8450E-12	0.00000	-9.1845E-13	0.00000	-3.1623E+00	0.00000	-7.4555E-13	0.00000
-1.5837E-13	0.00000	-6.0555E-13	0.00000	-6.4584E-13	0.00000	-1.8290E-12	0.00000	-2.5583E+00	0.00000	-2.8744E-13	0.00000
-4.1043E-13	0.00000	-6.6768E-13	0.00000	-5.3119E-13	0.00000	-3.3753E-12	0.00000	-2.5583E+00	0.00000	-2.9761E-13	0.00000
-6.0777E-13	0.00000	-2.5786E-13	0.00000	-1.5799E-12	0.00000	-1.0429E-12	0.00000	-9.7720E-01	0.00000	-1.8406E-12	0.00000
-4.0915E-13	0.00000	-4.4958E-13	0.00000	-1.0405E-12	0.00000	-1.7135E-12	0.00000	-9.7720E-01	0.00000	-1.6812E-12	0.00000
-3.5863E-13	0.00000	-4.0204E-13	0.00000	-1.7324E-12	0.00000	-1.9960E-13	0.00000	-9.7720E-01	0.00000	-1.6309E-12	0.00000
-2.7774E-13	0.00000	-5.7217E-13	0.00000	-1.4636E-12	0.00000	-9.8989E-13	0.00000	-9.7720E-01	0.00000	-2.7036E-12	0.00000
-7.7869E-13	0.00000	-3.8460E-13	0.00000	-3.6630E-13	0.00000	-1.7314E-12	0.00000	-2.5583E+00	0.00000	-3.5582E-13	0.00000
-1.7912E-13	0.00000	-4.0976E-13	0.00000	-1.6218E-13	0.00000	-2.3285E-12	0.00000	-2.5583E+00	0.00000	-1.0330E-13	0.00000
-1.4057E-13	0.00000	-3.6671E-13	0.00000	-2.0060E-12	0.00000	-4.1462E-13	0.00000	-3.1623E+00	0.00000	-8.4413E-13	0.00000
-8.8301E-13	0.00000	-1.4878E-13	0.00000	-1.4230E-12	0.00000	-1.6882E-13	0.00000	-3.1623E+00	0.00000	-1.8038E-12	0.00000
-6.3578E-13	0.00000	-2.6668E-13	0.00000	-6.4879E-13	0.00000	-1.1420E-12	0.00000	-2.5583E+00	0.00000	-3.6802E-12	0.00000
-2.1163E-13	0.00000	-6.6139E-13	0.00000	-2.2374E-13	0.00000	-1.9757E-12	0.00000	-2.5583E+00	0.00000	-2.4222E-12	0.00000
-1.3849E-13	0.00000	-4.7801E-14	0.00000	-9.5631E-13	0.00000	-3.3302E-13	0.00000	-9.7720E-01	0.00000	-4.8711E-13	0.00000
-8.1435E-13	0.00000	-5.1233E-14	0.00000	-1.2300E-12	0.00000	-1.7573E-12	0.00000	-9.7720E-01	0.00000	-6.3457E-13	0.00000

NATURAL FREQUENCY= .140128E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	PY REAL	PY IMAG	RZ REAL	RZ IMAG
.20156E-01	0.00000	.25604E-12	0.00000	.16644E-12	0.00000	.16524E-11	0.00000	.38080E-12	0.00000	.51989E-01	0.00000
.20156E-01	0.00000	-.22629E-12	0.00000	.15224E-12	0.00000	.16130E-11	0.00000	.23572E-12	0.00000	.51989E-01	0.00000
.11156E+00	0.00000	.90233E-12	0.00000	-.27952E-12	0.00000	-.10248E-11	0.00000	-.37485E-12	0.00000	-.46142E-01	0.00000
.11156E+00	0.00000	-.89110E-12	0.00000	-.29997E-12	0.00000	-.10015E-11	0.00000	-.20055E-12	0.00000	-.46142E-01	0.00000
.47914E-01	0.00000	-.58684E-12	0.00000	.38714E-12	0.00000	.74467E-12	0.00000	-.25147E-12	0.00000	.41821E+00	0.00000
.47914E-01	0.00000	.49418E-12	0.00000	.41326E-12	0.00000	.79324E-12	0.00000	-.18585E-12	0.00000	.41821E+00	0.00000
.10997E+00	0.00000	-.60614E-12	0.00000	-.35020E-12	0.00000	.43172E-12	0.00000	.58927E-12	0.00000	.18344E+00	0.00000
.10997E+00	0.00000	.56017E-12	0.00000	-.26846E-12	0.00000	.42194E-12	0.00000	.55309E-12	0.00000	.18344E+00	0.00000
.47127E-01	0.00000	.63516E-12	0.00000	-.13302E-12	0.00000	-.43422E-12	0.00000	-.43189E-12	0.00000	.11315E+00	0.00000
.47127E-01	0.00000	-.51119E-12	0.00000	-.16447E-12	0.00000	-.50826E-12	0.00000	-.40487E-12	0.00000	.11315E+00	0.00000
.47127E-01	0.00000	.50022E-12	0.00000	.15255E-12	0.00000	-.44854E-12	0.00000	-.21612E-12	0.00000	.11315E+00	0.00000
.47127E-01	0.00000	-.50272E-12	0.00000	.18427E-12	0.00000	-.32705E-12	0.00000	-.37888E-12	0.00000	.11315E+00	0.00000
.10997E+00	0.00000	-.68978E-12	0.00000	.24135E-12	0.00000	.52997E-12	0.00000	.45446E-12	0.00000	.18344E+00	0.00000
.10997E+00	0.00000	.60650E-12	0.00000	.29544E-12	0.00000	.39634E-12	0.00000	.82057E-12	0.00000	.18344E+00	0.00000
.47914E-01	0.00000	-.43554E-12	0.00000	-.38218E-12	0.00000	.60025E-12	0.00000	-.22441E-12	0.00000	.41821E+00	0.00000
.47914E-01	0.00000	.44558E-12	0.00000	-.47431E-12	0.00000	.64763E-12	0.00000	-.52227E-12	0.00000	.41821E+00	0.00000
.11156E+00	0.00000	.93733E-12	0.00000	.29937E-12	0.00000	-.10406E-11	0.00000	-.32834E-12	0.00000	-.46142E-01	0.00000
.11156E+00	0.00000	-.87441E-12	0.00000	.32492E-12	0.00000	-.97352E-12	0.00000	-.21460E-12	0.00000	-.46142E-01	0.00000
.20156E-01	0.00000	.13515E-12	0.00000	-.15422E-12	0.00000	.14722E-11	0.00000	.33847E-12	0.00000	.51989E-01	0.00000
.20156E-01	0.00000	-.17172E-12	0.00000	-.14055E-12	0.00000	.15477E-11	0.00000	.32176E-12	0.00000	.51989E-01	0.00000

G-68

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .140228E+09

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.10772E-12	0.00000	.40077E-01	0.00000	.27796E-01	0.00000	.30640E+00	0.00000	-.15039E-12	0.00000	-.19668E-12	0.00000
.30874E-13	0.00000	-.40077E-01	0.00000	.27796E-01	0.00000	.30640E+00	0.00000	-.94978E-13	0.00000	.48688E-13	0.00000
.19910E-12	0.00000	.17855E+00	0.00000	-.58107E-01	0.00000	-.20233E+00	0.00000	-.22034E-13	0.00000	.19769E-12	0.00000
.13833E-12	0.00000	-.17855E+00	0.00000	-.58107E-01	0.00000	-.20233E+00	0.00000	.14445E-12	0.00000	-.36237E-13	0.00000
.23248E-13	0.00000	.10196E+00	0.00000	.85435E-01	0.00000	.13870E+00	0.00000	.35562E-12	0.00000	-.56214E-12	0.00000
.81923E-13	0.00000	-.10196E+00	0.00000	.85435E-01	0.00000	.13870E+00	0.00000	-.54822E-13	0.00000	.78019E-12	0.00000
.16457E-12	0.00000	-.12790E+00	0.00000	-.58437E-01	0.00000	.94170E-01	0.00000	-.30730E-12	0.00000	-.11764E-12	0.00000
.78995E-13	0.00000	.12790E+00	0.00000	-.58437E-01	0.00000	.94170E-01	0.00000	.69604E-13	0.00000	-.24405E-13	0.00000
.58383E-13	0.00000	.11273E+00	0.00000	.33202E-01	0.00000	-.91585E-01	0.00000	.10185E-12	0.00000	.50193E-13	0.00000
.36042E-13	0.00000	-.11273E+00	0.00000	-.33202E-01	0.00000	-.91585E-01	0.00000	-.10138E-12	0.00000	-.10566E-12	0.00000
.96446E-13	0.00000	.11273E+00	0.00000	.33202E-01	0.00000	-.91585E-01	0.00000	-.69947E-13	0.00000	-.19415E-12	0.00000
.75680E-13	0.00000	-.11273E+00	0.00000	-.33202E-01	0.00000	-.91585E-01	0.00000	.98478E-13	0.00000	-.20323E-13	0.00000
.13728E-12	0.00000	-.12790E+00	0.00000	.58437E-01	0.00000	.94170E-01	0.00000	-.19562E-13	0.00000	-.19752E-12	0.00000
.18309E-12	0.00000	.12790E+00	0.00000	.58437E-01	0.00000	.94170E-01	0.00000	-.23082E-12	0.00000	-.31011E-12	0.00000
.11015E-12	0.00000	-.10196E+00	0.00000	-.85435E-01	0.00000	.13870E+00	0.00000	.30956E-14	0.00000	.76616E-12	0.00000
.38339E-13	0.00000	.10196E+00	0.00000	.85435E-01	0.00000	.13870E+00	0.00000	.24877E-12	0.00000	.55053E-12	0.00000
.13587E-12	0.00000	.17855E+00	0.00000	-.58107E-01	0.00000	-.20233E+00	0.00000	.16148E-12	0.00000	-.34786E-13	0.00000
.23505E-12	0.00000	-.17855E+00	0.00000	-.58107E-01	0.00000	-.20233E+00	0.00000	-.23279E-13	0.00000	.20623E-12	0.00000
.50873E-13	0.00000	.40077E-01	0.00000	-.27796E-01	0.00000	.30640E+00	0.00000	-.14332E-12	0.00000	.31102E-13	0.00000
.91740E-13	0.00000	-.40077E-01	0.00000	-.27796E-01	0.00000	.30640E+00	0.00000	-.69577E-13	0.00000	-.17449E-12	0.00000

NATURAL FREQUENCY= .140988E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.67769E-01	0.00000	-.40579E-13	0.00000	.34134E-13	0.00000	.11651E-12	0.00000	-.13223E-10	0.00000	-.31183E-01	0.00000
.67769E-01	0.00000	-.20914E-13	0.00000	-.30146E-13	0.00000	.74115E-13	0.00000	-.13244E-10	0.00000	-.31183E-01	0.00000
.16291E-01	0.00000	.65007E-13	0.00000	-.54685E-14	0.00000	-.78837E-13	0.00000	.13527E-10	0.00000	-.35297E+00	0.00000
.16291E-01	0.00000	-.89936E-14	0.00000	-.34214E-13	0.00000	-.23511E-13	0.00000	.13574E-10	0.00000	-.35297E+00	0.00000
.13920E+00	0.00000	.51034E-13	0.00000	-.36594E-13	0.00000	-.93081E-13	0.00000	.12005E-10	0.00000	.12022E+00	0.00000
.13920E+00	0.00000	.80731E-14	0.00000	.63699E-13	0.00000	-.25696E-13	0.00000	.12062E-10	0.00000	.12022E+00	0.00000
.53942E-01	0.00000	-.53424E-13	0.00000	.46563E-13	0.00000	.10761E-12	0.00000	-.26287E-10	0.00000	-.29271E+00	0.00000
.53942E-01	0.00000	.59678E-13	0.00000	-.26695E-13	0.00000	.37535E-13	0.00000	-.26120E-10	0.00000	-.29271E+00	0.00000
.33781E-01	0.00000	.31068E-13	0.00000	-.29132E-13	0.00000	-.14759E-12	0.00000	.14053E-10	0.00000	-.39157E-01	0.00000
.33781E-01	0.00000	-.37835E-13	0.00000	-.49752E-13	0.00000	.21116E-13	0.00000	.13840E-10	0.00000	-.39157E-01	0.00000
.33781E-01	0.00000	.17399E-13	0.00000	-.27841E-13	0.00000	-.68384E-14	0.00000	.13468E-10	0.00000	-.39157E-01	0.00000
.33781E-01	0.00000	-.18595E-13	0.00000	.51747E-13	0.00000	.16511E-13	0.00000	.13759E-10	0.00000	-.39157E-01	0.00000
.53942E-01	0.00000	-.64517E-13	0.00000	.44524E-13	0.00000	-.93797E-13	0.00000	-.26023E-10	0.00000	-.29271E+00	0.00000
.53942E-01	0.00000	.14007E-13	0.00000	-.29480E-13	0.00000	.11862E-13	0.00000	-.26258E-10	0.00000	-.29271E+00	0.00000
.13920E+00	0.00000	.16713E-13	0.00000	.46838E-14	0.00000	-.81095E-13	0.00000	.12246E-10	0.00000	-.12022E+00	0.00000
.13920E+00	0.00000	.12924E-13	0.00000	-.31437E-13	0.00000	.30416E-13	0.00000	.12412E-10	0.00000	-.12022E+00	0.00000
.16291E-01	0.00000	.61412E-13	0.00000	-.35174E-13	0.00000	.35004E-13	0.00000	.13516E-10	0.00000	.35297E+00	0.00000
.16291E-01	0.00000	.81957E-15	0.00000	.64667E-13	0.00000	-.83646E-13	0.00000	.13348E-10	0.00000	.35297E+00	0.00000
.67769E-01	0.00000	-.20465E-13	0.00000	.32732E-13	0.00000	-.96552E-14	0.00000	-.13357E-10	0.00000	.31183E-01	0.00000
.67769E-01	0.00000	-.30477E-13	0.00000	-.49122E-13	0.00000	.11369E-12	0.00000	-.13199E-10	0.00000	.31183E-01	0.00000

NATURAL FREQUENCY= .141188E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.80298E-01	0.00000	.73672E-13	0.00000	.90672E-13	0.00000	.40022E-12	0.00000	.12803E+00	0.00000	.12769E+00	0.00000
.80298E-01	0.00000	-.46307E-13	0.00000	-.18922E-13	0.00000	.36345E-12	0.00000	.12803E+00	0.00000	.12769E+00	0.00000
.79055E-01	0.00000	.23112E-12	0.00000	-.98556E-13	0.00000	-.26433E-12	0.00000	-.13043E+00	0.00000	-.14739E+00	0.00000
.79085E-01	0.00000	-.15184E-12	0.00000	-.12326E-13	0.00000	-.15005E-12	0.00000	-.13043E+00	0.00000	.14739E+00	0.00000
.33191E-01	0.00000	-.15190E-12	0.00000	.47855E-13	0.00000	.24955E-12	0.00000	.11755E+00	0.00000	.20406E+00	0.00000
.33191E-01	0.00000	.86630E-13	0.00000	.83785E-13	0.00000	.14493E-12	0.00000	-.11755E+00	0.00000	-.20406E+00	0.00000
.75438E-01	0.00000	-.12350E-12	0.00000	-.15813E-13	0.00000	.77427E-13	0.00000	.25255E+00	0.00000	.13136E-01	0.00000
.75438E-01	0.00000	.75985E-13	0.00000	-.74292E-13	0.00000	.44100E-13	0.00000	.25255E+00	0.00000	.13136E-01	0.00000
.43459E-01	0.00000	.14929E-12	0.00000	.36095E-13	0.00000	-.10631E-12	0.00000	-.13260E+00	0.00000	-.15678E+00	0.00000
.43459E-01	0.00000	-.85926E-13	0.00000	-.42715E-13	0.00000	-.78527E-13	0.00000	-.13260E+00	0.00000	.15678E+00	0.00000
.43459E-01	0.00000	.15956E-12	0.00000	.65908E-14	0.00000	-.11208E-12	0.00000	-.13260E+00	0.00000	.15678E+00	0.00000
.43459E-01	0.00000	-.92721E-13	0.00000	.33494E-13	0.00000	-.11832E-12	0.00000	-.13260E+00	0.00000	.15678E+00	0.00000
.75438E-01	0.00000	-.13751E-12	0.00000	.77483E-13	0.00000	.11294E-12	0.00000	.25255E+00	0.00000	.13136E-01	0.00000
.75438E-01	0.00000	.43295E-13	0.00000	.33812E-13	0.00000	.60653E-13	0.00000	.25255E+00	0.00000	-.13136E-01	0.00000
.33191E-01	0.00000	-.10633E-12	0.00000	-.64497E-13	0.00000	.12195E-12	0.00000	-.11755E+00	0.00000	.20406E+00	0.00000
.33191E-01	0.00000	.10143E-12	0.00000	-.49866E-13	0.00000	.18320E-12	0.00000	-.11755E+00	0.00000	.20406E+00	0.00000
.79085E-01	0.00000	.18776E-12	0.00000	-.99300E-14	0.00000	-.13223E-12	0.00000	-.13043E+00	0.00000	.14739E+00	0.00000
.79085E-01	0.00000	-.12146E-12	0.00000	.78851E-13	0.00000	-.22351E-12	0.00000	-.13043E+00	0.00000	-.14739E+00	0.00000
.80298E-01	0.00000	.24706E-13	0.00000	.36009E-13	0.00000	.24042E-12	0.00000	.12803E+00	0.00000	-.12769E+00	0.00000
.80298E-01	0.00000	-.62198E-13	0.00000	-.56028E-13	0.00000	.26320E-12	0.00000	.12803E+00	0.00000	.12769E+00	0.00000

NATURAL FREQUENCY= .141740E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.26720E-13	0.00000	-.32785E-13	0.00000	-.31287E-13	0.00000	.86943E-13	0.00000	-.49469E-01	0.00000	.76180E-13	0.00000
.98900E-13	0.00000	-.70363E-14	0.00000	.58475E-13	0.00000	-.21097E-12	0.00000	-.49469E-01	0.00000	-.15830E-12	0.00000
.91871E-13	0.00000	.90955E-13	0.00000	-.28261E-13	0.00000	-.40427E-13	0.00000	.14356E+00	0.00000	-.22277E-12	0.00000
-.14850E-12	0.00000	-.11286E-12	0.00000	-.51514E-13	0.00000	-.19726E-12	0.00000	-.14356E+00	0.00000	.35233E-13	0.00000
-.25176E-13	0.00000	-.51028E-13	0.00000	.47957E-13	0.00000	.75327E-14	0.00000	-.22361E+00	0.00000	.51280E-12	0.00000
-.78175E-13	0.00000	.29007E-13	0.00000	.17265E-13	0.00000	-.11280E-12	0.00000	-.22361E+00	0.00000	-.19290E-12	0.00000
.46231E-13	0.00000	-.75507E-13	0.00000	-.10842E-12	0.00000	.46137E-13	0.00000	.28176E+00	0.00000	.14963E-12	0.00000
.15514E-12	0.00000	.71239E-13	0.00000	-.23154E-13	0.00000	.69832E-13	0.00000	-.28176E+00	0.00000	.14089E-12	0.00000
.14076E-14	0.00000	.44094E-13	0.00000	.15670E-13	0.00000	-.51098E-13	0.00000	-.31233E+00	0.00000	-.17495E-12	0.00000
-.40501E-13	0.00000	-.37105E-13	0.00000	-.54860E-13	0.00000	-.13577E-12	0.00000	.31233E+00	0.00000	.11179E-12	0.00000
.98070E-13	0.00000	.28420E-13	0.00000	.42966E-13	0.00000	-.10974E-12	0.00000	.31233E+00	0.00000	.23286E-12	0.00000
.42177E-14	0.00000	-.88589E-13	0.00000	-.51728E-13	0.00000	.12675E-14	0.00000	-.31233E+00	0.00000	.63349E-14	0.00000
.10195E-13	0.00000	-.60973E-13	0.00000	-.54274E-14	0.00000	.49665E-13	0.00000	-.28176E+00	0.00000	-.28889E-12	0.00000
.12794E-12	0.00000	.36435E-13	0.00000	.47902E-13	0.00000	.59195E-13	0.00000	.28176E+00	0.00000	-.31375E-12	0.00000
-.80055E-13	0.00000	-.26324E-13	0.00000	-.29641E-14	0.00000	-.73690E-13	0.00000	-.22361E+00	0.00000	-.37076E-12	0.00000
-.12255E-12	0.00000	.57522E-13	0.00000	-.69562E-13	0.00000	.43380E-13	0.00000	-.22361E+00	0.00000	-.26933E-13	0.00000
.19637E-13	0.00000	.85689E-13	0.00000	.92234E-14	0.00000	-.11147E-12	0.00000	-.14356E+00	0.00000	.20205E-12	0.00000
-.10118E-12	0.00000	-.68660E-13	0.00000	.81687E-13	0.00000	-.36532E-13	0.00000	.14356E+00	0.00000	-.32219E-13	0.00000
-.41545E-13	0.00000	.13449E-13	0.00000	-.40784E-13	0.00000	.28956E-12	0.00000	.49469E-01	0.00000	-.77977E-13	0.00000
.73171E-13	0.00000	-.19247E-13	0.00000	-.70761E-14	0.00000	.29764E-13	0.00000	-.49469E-01	0.00000	.11532E-12	0.00000

G-72

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .143130E+04

TX		FY		TZ		RX		RY	RY	RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.15267E-01	0.00000	-.33070E-13	0.00000	.38511E-13	0.00000	.16820E-12	0.00000	.24946E-12	0.00000	-.30563E-01	0.00000
.15267E-01	0.00000	-.50486E-13	0.00000	-.16922E-13	0.00000	-.36046E-13	0.00000	.18443E-12	0.00000	-.30563E-01	0.00000
.68375E-01	0.00000	.40364E-13	0.00000	-.73502E-13	0.00000	-.63016E-13	0.00000	-.32100E-12	0.00000	.54958E-02	0.00000
.68375E-01	0.00000	.29675E-13	0.00000	.62686E-13	0.00000	.18831E-13	0.00000	-.22652E-12	0.00000	.54958E-02	0.00000
.21470E-01	0.00000	-.21358E-14	0.00000	-.47832E-13	0.00000	.42659E-13	0.00000	-.28590E-12	0.00000	.28281E+00	0.00000
.21470E-01	0.00000	.57829E-13	0.00000	.42624E-13	0.00000	-.90942E-13	0.00000	-.34529E-12	0.00000	.28281E+00	0.00000
.13650E+00	0.00000	-.51584E-13	0.00000	-.77698E-14	0.00000	-.11830E-13	0.00000	.61792E-12	0.00000	.17257E+00	0.00000
.13650E+00	0.00000	-.21225E-13	0.00000	.29462E-14	0.00000	.18689E-13	0.00000	.60683E-12	0.00000	.17257E+00	0.00000
.10486E+00	0.00000	-.42948E-13	0.00000	.18000E-13	0.00000	-.15408E-12	0.00000	-.15562E-12	0.00000	.33274E+00	0.00000
.10486E+00	0.00000	-.22306E-13	0.00000	.39580E-13	0.00000	.23847E-13	0.00000	-.29643E-12	0.00000	.33274E+00	0.00000
.10486E+00	0.00000	-.34667E-13	0.00000	.78240E-14	0.00000	.83593E-13	0.00000	-.44517E-12	0.00000	.33274E+00	0.00000
.10486E+00	0.00000	.93237E-13	0.00000	.68050E-13	0.00000	-.57909E-13	0.00000	-.42016E-12	0.00000	.33274E+00	0.00000
.13650E+00	0.00000	-.11411E-12	0.00000	.12293E-13	0.00000	.13216E-12	0.00000	.71613E-12	0.00000	.17257E+00	0.00000
.13650E+00	0.00000	.14575E-13	0.00000	-.13815E-12	0.00000	.95875E-13	0.00000	.69658E-12	0.00000	.17257E+00	0.00000
.21470E-01	0.00000	.12720E-12	0.00000	-.60754E-13	0.00000	-.24804E-12	0.00000	-.26128E-12	0.00000	.28281E+00	0.00000
.21470E-01	0.00000	-.10871E-12	0.00000	.66812E-13	0.00000	-.86141E-13	0.00000	-.24219E-12	0.00000	-.28281E+00	0.00000
.68375E-01	0.00000	.19734E-13	0.00000	-.55625E-13	0.00000	-.21406E-12	0.00000	-.35348E-12	0.00000	.54958E-02	0.00000
.68375E-01	0.00000	-.10278E-12	0.00000	.62127E-13	0.00000	-.54845E-13	0.00000	-.37263E-12	0.00000	.54958E-02	0.00000
.15267E-01	0.00000	-.12176E-12	0.00000	.81167E-13	0.00000	-.22263E-12	0.00000	.43036E-12	0.00000	.30563E-01	0.00000
.15267E-01	0.00000	.47973E-13	0.00000	-.54418E-13	0.00000	-.62262E-13	0.00000	.47523E-12	0.00000	.30563E-01	0.00000

NATURAL FREQUENCY= .143337E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.36973E-01	0.00000	.24533E-13	0.00000	-.96226E-13	0.00000	-.13913E-12	0.00000	.98270E-13	0.00000	-.15501E-01	0.00000
.36973E-01	0.00000	.11057E-12	0.00000	.29950E-13	0.00000	.70128E-13	0.00000	.91605E-13	0.00000	-.15501E-01	0.00000
.74540E-02	0.00000	-.13464E-12	0.00000	.76278E-13	0.00000	.32359E-13	0.00000	-.59279E-13	0.00000	-.20409E+00	0.00000
.74540E-02	0.00000	-.60895E-13	0.00000	-.58349E-13	0.00000	-.22388E-13	0.00000	-.50359E-13	0.00000	-.20409E+00	0.00000
.11399E+00	0.00000	-.19177E-13	0.00000	-.10629E-13	0.00000	.50540E-13	0.00000	-.53760E-12	0.00000	.99866E-01	0.00000
.11399E+00	0.00000	.73300E-15	0.00000	-.79278E-13	0.00000	.78764E-13	0.00000	-.39494E-12	0.00000	.99866E-01	0.00000
.67772E-01	0.00000	.16743E-12	0.00000	-.28571E-13	0.00000	-.89583E-13	0.00000	.51512E-12	0.00000	.32161E+00	0.00000
.67772E-01	0.00000	-.28802E-13	0.00000	.29533E-13	0.00000	-.15336E-12	0.00000	.48765E-12	0.00000	.32161E+00	0.00000
.12368E+00	0.00000	-.11301E-12	0.00000	-.22367E-13	0.00000	.15013E-12	0.00000	.49197E-13	0.00000	-.25834E+00	0.00000
.12368E+00	0.00000	-.12025E-13	0.00000	.36585E-13	0.00000	.31921E-13	0.00000	-.56540E-14	0.00000	-.25834E+00	0.00000
.12368E+00	0.00000	-.65333E-13	0.00000	.16744E-13	0.00000	-.36423E-13	0.00000	-.81657E-12	0.00000	-.25834E+00	0.00000
.12368E+00	0.00000	-.70211E-14	0.00000	-.93360E-13	0.00000	.24509E-14	0.00000	-.77630E-12	0.00000	-.25834E+00	0.00000
.67772E-01	0.00000	.18312E-12	0.00000	-.59788E-13	0.00000	-.19624E-12	0.00000	.83180E-12	0.00000	.32161E+00	0.00000
.67772E-01	0.00000	.25350E-13	0.00000	.10861E-12	0.00000	-.47368E-13	0.00000	.87610E-12	0.00000	.32161E+00	0.00000
.11399E+00	0.00000	-.76897E-13	0.00000	.73736E-13	0.00000	-.25740E-12	0.00000	-.66789E-13	0.00000	.99866E-01	0.00000
.11399E+00	0.00000	.15501E-13	0.00000	-.10012E-13	0.00000	-.55672E-13	0.00000	-.12518E-12	0.00000	.99866E-01	0.00000
.74540E-02	0.00000	-.10916E-12	0.00000	.31071E-13	0.00000	-.78874E-13	0.00000	-.69952E-12	0.00000	-.20409E+00	0.00000
.74540E-02	0.00000	-.63213E-13	0.00000	-.68183E-13	0.00000	.16132E-12	0.00000	-.76638E-12	0.00000	-.20409E+00	0.00000
.36973E-01	0.00000	.10160E-12	0.00000	-.66270E-13	0.00000	.26533E-12	0.00000	.50272E-12	0.00000	-.15501E-01	0.00000
.36973E-01	0.00000	.20954E-13	0.00000	.42697E-13	0.00000	-.15922E-12	0.00000	.57605E-12	0.00000	-.15501E-01	0.00000

NATURAL FREQUENCY= .144110E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.76777E-13	0.00000	-.44315E-13	0.00000	-.11253E+00	0.00000	-.19881E+00	0.00000	.35786E-13	0.00000	-.59057E-13	0.00000
.77927E-13	0.00000	.60325E-13	0.00000	.11253E+00	0.00000	.19891E+00	0.00000	-.20701E-14	0.00000	-.55490E-13	0.00000
-.90207E-13	0.00000	-.14548E-13	0.00000	.41826E-01	0.00000	.22194E+00	0.00000	-.59723E-13	0.00000	-.28955E-12	0.00000
-.11665E-12	0.00000	-.65838E-13	0.00000	-.41826E-01	0.00000	-.22194E+00	0.00000	-.27891E-13	0.00000	-.20712E-12	0.00000
-.64956E-13	0.00000	.71337E-13	0.00000	.16215E+00	0.00000	-.18406E+00	0.00000	-.85683E-13	0.00000	.47910E-12	0.00000
-.10181E-12	0.00000	-.84052E-13	0.00000	-.16215E+00	0.00000	.18406E+00	0.00000	.13005E-13	0.00000	.45960E-12	0.00000
.22631E-12	0.00000	-.43806E-13	0.00000	-.18465E+00	0.00000	-.56097E-01	0.00000	.99372E-13	0.00000	-.66423E-13	0.00000
.23049E-12	0.00000	.41723E-13	0.00000	.18465E+00	0.00000	.56097E-01	0.00000	-.75214E-14	0.00000	.47740E-13	0.00000
-.56907E-13	0.00000	-.59651E-13	0.00000	.93205E-01	0.00000	.22527E+00	0.00000	-.56435E-13	0.00000	-.53797E-12	0.00000
.72824E-13	0.00000	-.60467E-14	0.00000	-.93205E-01	0.00000	-.22527E+00	0.00000	-.18107E-13	0.00000	-.40221E-12	0.00000
-.10016E-12	0.00000	.60103E-13	0.00000	.93205E-01	0.00000	-.22527E+00	0.00000	-.19419E-12	0.00000	.28439E-12	0.00000
.16451E-12	0.00000	-.70655E-13	0.00000	-.93205E-01	0.00000	.22527E+00	0.00000	.21466E-13	0.00000	.30029E-12	0.00000
-.15697E-12	0.00000	.32168E-13	0.00000	-.18465E+00	0.00000	.56097E-01	0.00000	.18859E-12	0.00000	.16704E-12	0.00000
.17374E-12	0.00000	.62261E-13	0.00000	.18465E+00	0.00000	-.56097E-01	0.00000	-.65678E-13	0.00000	.13195E-12	0.00000
-.76186E-14	0.00000	-.10510E-12	0.00000	.16215E+00	0.00000	.18406E+00	0.00000	-.42610E-13	0.00000	-.51509E-12	0.00000
.21055E-14	0.00000	.65857E-13	0.00000	-.16215E+00	0.00000	-.18406E+00	0.00000	.13672E-12	0.00000	-.27418E-12	0.00000
-.65236E-13	0.00000	.40129E-13	0.00000	.41826E-01	0.00000	-.22194E+00	0.00000	-.13272E-13	0.00000	.91139E-13	0.00000
-.11272E-12	0.00000	-.11454E-12	0.00000	-.41826E-01	0.00000	.22194E+00	0.00000	-.12332E-12	0.00000	.66974E-13	0.00000
-.81936E-14	0.00000	.11245E-12	0.00000	-.11253E+00	0.00000	-.19881E+00	0.00000	.33022E-13	0.00000	.11721E-13	0.00000
.44289E-13	0.00000	-.22257E-13	0.00000	.11253E+00	0.00000	-.19881E+00	0.00000	.82414E-13	0.00000	.93592E-13	0.00000

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.67235E-01	0.00000	.12667E-13	0.00000	.94200E-13	0.00000	.12207E-12	0.00000	-.11119E+00	0.00000	-.94709E-01	0.00000
-.67235E-01	0.00000	-.13467E-12	0.00000	-.65618E-13	0.00000	-.46723E-13	0.00000	-.11119E+00	0.00000	-.94709E-01	0.00000
-.82402E-01	0.00000	-.64673E-14	0.00000	-.57877E-13	0.00000	.74729E-13	0.00000	.17511E+00	0.00000	.10197E+00	0.00000
.82402E-01	0.00000	.57804E-13	0.00000	.60166E-13	0.00000	-.17410E-12	0.00000	.17511E+00	0.00000	-.10197E+00	0.00000
.21463E-01	0.00000	.28172E-13	0.00000	-.89419E-14	0.00000	.33805E-13	0.00000	-.58977E-01	0.00000	-.25140E+00	0.00000
-.21463E-01	0.00000	-.28245E-14	0.00000	.11042E-13	0.00000	-.77945E-13	0.00000	-.58977E-01	0.00000	.25140E+00	0.00000
.25679E-01	0.00000	-.64169E-14	0.00000	-.53891E-13	0.00000	-.24093E-13	0.00000	-.99195E-01	0.00000	.20313E+00	0.00000
-.25679E-01	0.00000	.85641E-14	0.00000	-.22101E-13	0.00000	.10070E-12	0.00000	-.99195E-01	0.00000	-.20313E+00	0.00000
-.66741E-01	0.00000	.43017E-15	0.00000	-.74934E-13	0.00000	.43552E-13	0.00000	-.21750E+00	0.00000	-.95687E-01	0.00000
.66741E-01	0.00000	-.15062E-13	0.00000	.37994E-13	0.00000	-.53300E-14	0.00000	.21750E+00	0.00000	.95687E-01	0.00000
-.66741E-01	0.00000	-.21140E-13	0.00000	-.72703E-13	0.00000	.43104E-13	0.00000	-.21750E+00	0.00000	-.95687E-01	0.00000
.66741E-01	0.00000	-.55337E-14	0.00000	-.11516E-13	0.00000	.52278E-13	0.00000	-.21750E+00	0.00000	.95687E-01	0.00000
-.25679E-01	0.00000	-.18461E-13	0.00000	-.26064E-13	0.00000	-.18049E-15	0.00000	.99195E-01	0.00000	.20313E+00	0.00000
.25679E-01	0.00000	-.28942E-14	0.00000	.62705E-14	0.00000	.10010E-12	0.00000	-.99195E-01	0.00000	-.20313E+00	0.00000
-.21463E-01	0.00000	.58251E-13	0.00000	.12786E-13	0.00000	.44323E-13	0.00000	.58977E-01	0.00000	-.25140E+00	0.00000
.21463E-01	0.00000	-.21410E-13	0.00000	-.16278E-13	0.00000	-.11645E-12	0.00000	-.58977E-01	0.00000	.25140E+00	0.00000
-.82402E-01	0.00000	-.11321E-13	0.00000	-.98935E-14	0.00000	.65533E-14	0.00000	-.17511E+00	0.00000	.10197E+00	0.00000
.82402E-01	0.00000	-.46329E-14	0.00000	-.52537E-14	0.00000	-.11558E-12	0.00000	-.17511E+00	0.00000	-.10197E+00	0.00000
-.67235E-01	0.00000	.30356E-14	0.00000	-.10982E-13	0.00000	.15860E-13	0.00000	.11119E+00	0.00000	-.94709E-01	0.00000
.67235E-01	0.00000	-.11612E-14	0.00000	.20173E-15	0.00000	-.18679E-13	0.00000	.11119E+00	0.00000	.94709E-01	0.00000

NATURAL FREQUENCY= .146027E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14632E-13	0.00000	.10075E+00	0.00000	.17045E-01	0.00000	.24343E+00	0.00000	-.32610E-13	0.00000	.24933E-13	0.00000
.14240E-13	0.00000	-.10875E+00	0.00000	-.17045E-01	0.00000	.24343E+00	0.00000	-.23054E-13	0.00000	-.24944E-13	0.00000
.15453E-13	0.00000	.72965E-01	0.00000	-.11605E-02	0.00000	-.13427E+00	0.00000	.35108E-13	0.00000	.29340E-13	0.00000
.72996E-14	0.00000	-.72965E-01	0.00000	-.11605E-02	0.00000	-.13427E+00	0.00000	-.18517E-13	0.00000	.54648E-13	0.00000
.55319E-14	0.00000	-.18351E+00	0.00000	.19430E-01	0.00000	.27352E+00	0.00000	.66255E-13	0.00000	-.15653E-13	0.00000
.32769E-13	0.00000	.18351E+00	0.00000	.19430E-01	0.00000	.27352E+00	0.00000	-.10453E-13	0.00000	.29453E-13	0.00000
.25303E-13	0.00000	-.72065E-01	0.00000	-.82792E-01	0.00000	-.11189E+00	0.00000	-.97169E-13	0.00000	-.83274E-13	0.00000
.54477E-13	0.00000	-.72065E-01	0.00000	-.82792E-01	0.00000	-.11189E+00	0.00000	-.49201E-13	0.00000	-.24687E-13	0.00000
.71243E-14	0.00000	.12348E+00	0.00000	.47484E-01	0.00000	-.11266E+00	0.00000	-.14281E-13	0.00000	.82389E-13	0.00000
.24421E-14	0.00000	-.12348E+00	0.00000	.47484E-01	0.00000	-.11266E+00	0.00000	-.64989E-14	0.00000	-.10646E-12	0.00000
.74321E-14	0.00000	-.12348E+00	0.00000	.47484E-01	0.00000	-.11266E+00	0.00000	.31278E-13	0.00000	-.17977E-12	0.00000
.14423E-13	0.00000	.12348E+00	0.00000	.47484E-01	0.00000	-.11266E+00	0.00000	.22387E-13	0.00000	-.59980E-13	0.00000
-.60176E-13	0.00000	-.72065E-01	0.00000	-.82792E-01	0.00000	.11189E+00	0.00000	-.53809E-13	0.00000	-.11073E-13	0.00000
-.83587E-13	0.00000	.72065E-01	0.00000	-.82792E-01	0.00000	.11189E+00	0.00000	-.76696E-13	0.00000	-.42607E-13	0.00000
.15107E-14	0.00000	-.18351E+00	0.00000	.19430E-01	0.00000	-.27352E+00	0.00000	.80812E-13	0.00000	.22521E-12	0.00000
.33796E-13	0.00000	.18351E+00	0.00000	.19430E-01	0.00000	-.27352E+00	0.00000	.33856E-13	0.00000	.15234E-12	0.00000
.30021E-13	0.00000	-.72965E-01	0.00000	-.11605E-02	0.00000	.13427E+00	0.00000	-.96725E-14	0.00000	-.19619E-12	0.00000
.52208E-13	0.00000	.72965E-01	0.00000	-.11605E-02	0.00000	.13427E+00	0.00000	-.85602E-14	0.00000	-.26563E-13	0.00000
.53404E-14	0.00000	-.10875E+00	0.00000	.17045E-01	0.00000	-.24343E+00	0.00000	-.56408E-13	0.00000	.29170E-13	0.00000
-.79327E-13	0.00000	.10875E+00	0.00000	.17045E-01	0.00000	-.24343E+00	0.00000	-.19252E-13	0.00000	-.73259E-13	0.00000

NATURAL FREQUENCY= .150333E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.50273E-01	0.00000	-.16365E-12	0.00000	-.16348E-13	0.00000	-.37741E-13	0.00000	-.77216E-01	0.00000	-.61399E-01	0.00000
-.50273E-01	0.00000	-.57630E-13	0.00000	-.42470E-13	0.00000	-.11924E-12	0.00000	-.77216E-01	0.00000	-.61399E-01	0.00000
-.64602E-01	0.00000	.23723E-12	0.00000	.39434E-14	0.00000	-.11422E-12	0.00000	.14377E+00	0.00000	.36350E-01	0.00000
.64602E-01	0.00000	.12302E-12	0.00000	.44872E-13	0.00000	-.22039E-13	0.00000	.14377E+00	0.00000	-.36350E-01	0.00000
-.43237E-01	0.00000	.12941E-14	0.00000	.10713E-13	0.00000	.45589E-13	0.00000	-.13251E+00	0.00000	-.19340E+00	0.00000
-.43237E-01	0.00000	.21999E-13	0.00000	-.25678E-13	0.00000	-.60145E-14	0.00000	-.13251E+00	0.00000	.19340E+00	0.00000
-.36589E-01	0.00000	-.25004E-12	0.00000	-.63372E-13	0.00000	.32719E-13	0.00000	.97757E-01	0.00000	.23587E+00	0.00000
.36589E-01	0.00000	.17158E-12	0.00000	-.23340E-13	0.00000	.10184E-12	0.00000	.97757E-01	0.00000	-.23587E+00	0.00000
-.76800E-02	0.00000	.18266E-12	0.00000	.11207E-12	0.00000	-.27654E-13	0.00000	-.31804E-01	0.00000	-.29878E+00	0.00000
-.76800E-02	0.00000	.12028E-12	0.00000	.13127E-13	0.00000	-.85494E-14	0.00000	-.31804E-01	0.00000	.29878E+00	0.00000
-.76800E-02	0.00000	.12517E-12	0.00000	.11768E-12	0.00000	.13584E-12	0.00000	-.31804E-01	0.00000	.29878E+00	0.00000
-.76800E-02	0.00000	.12292E-12	0.00000	.35446E-14	0.00000	.13950E-14	0.00000	-.31804E-01	0.00000	-.29878E+00	0.00000
-.36589E-01	0.00000	-.25139E-12	0.00000	-.87899E-13	0.00000	-.52394E-13	0.00000	.97757E-01	0.00000	-.23587E+00	0.00000
.36589E-01	0.00000	-.18623E-12	0.00000	-.27769E-13	0.00000	.16527E-12	0.00000	.97757E-01	0.00000	.23587E+00	0.00000
-.43237E-01	0.00000	.80015E-14	0.00000	.14522E-13	0.00000	.51568E-13	0.00000	-.13251E+00	0.00000	.19340E+00	0.00000
-.43237E-01	0.00000	-.71458E-13	0.00000	.14662E-13	0.00000	-.15422E-12	0.00000	-.13251E+00	0.00000	-.19340E+00	0.00000
-.64602E-01	0.00000	.22759E-12	0.00000	.74493E-13	0.00000	-.74029E-13	0.00000	.14377E+00	0.00000	-.36350E-01	0.00000
.64602E-01	0.00000	.21189E-12	0.00000	-.84338E-13	0.00000	.66102E-13	0.00000	.14377E+00	0.00000	.36350E-01	0.00000
-.50273E-01	0.00000	-.11798E-12	0.00000	-.65745E-13	0.00000	.63248E-13	0.00000	-.77216E-01	0.00000	.61399E-01	0.00000
-.50273E-01	0.00000	-.11849E-12	0.00000	.75266E-13	0.00000	-.11318E-12	0.00000	-.77216E-01	0.00000	-.61399E-01	0.00000

G-78

ORIGINAL PAGE IS
OF POOR
QUALITY

NATURAL FREQUENCY= .150975E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.35725E-13	0.00000	.18587E+00	0.00000	-.28110E-11	0.00000	-.46220E-11	0.00000	-.12292E-13	0.00000	-.69290E-13	0.00000
.50361E-14	0.00000	-.18587E+00	0.00000	.27746E-11	0.00000	.40106E-11	0.00000	-.44569E-13	0.00000	-.73431E-13	0.00000
.57017E-13	0.00000	-.30075E+00	0.00000	.26216E-11	0.00000	.45073E-11	0.00000	-.12482E-13	0.00000	-.12508E-12	0.00000
-.25991E-13	0.00000	-.30075E+00	0.00000	-.27652E-11	0.00000	-.42495E-11	0.00000	.30335E-13	0.00000	-.61393E-13	0.00000
.28095E-13	0.00000	.19193E-12	0.00000	.59454E-12	0.00000	-.75443E-11	0.00000	-.70092E-13	0.00000	-.35791E-13	0.00000
-.29614E-13	0.00000	-.45380E-12	0.00000	-.38836E-12	0.00000	.60774E-11	0.00000	-.76962E-13	0.00000	-.81315E-13	0.00000
-.16232E-13	0.00000	.30075E+00	0.00000	-.22852E-11	0.00000	.54549E-11	0.00000	.92332E-13	0.00000	-.49565E-13	0.00000
.30055E-13	0.00000	.30075E+00	0.00000	.24524E-11	0.00000	-.36000E-11	0.00000	.94252E-13	0.00000	-.20279E-12	0.00000
-.58307E-13	0.00000	-.18587E+00	0.00000	.37103E-11	0.00000	-.26272E-11	0.00000	.11464E-13	0.00000	-.11873E-12	0.00000
-.68207E-13	0.00000	-.18587E+00	0.00000	-.41925E-11	0.00000	.17063E-11	0.00000	.33113E-13	0.00000	.11470E-12	0.00000
.25067E-13	0.00000	-.18587E+00	0.00000	-.37767E-11	0.00000	-.22874E-11	0.00000	-.57924E-13	0.00000	.18532E-12	0.00000
-.21705E-13	0.00000	-.18587E+00	0.00000	.41870E-11	0.00000	.17979E-11	0.00000	-.41757E-13	0.00000	.75129E-13	0.00000
.48353E-13	0.00000	.30075E+00	0.00000	-.23862E-11	0.00000	-.51016E-11	0.00000	.30764E-13	0.00000	-.52597E-13	0.00000
.33971E-13	0.00000	.30075E+00	0.00000	-.24912E-11	0.00000	-.39546E-11	0.00000	-.21130E-13	0.00000	.59192E-14	0.00000
-.21053E-13	0.00000	-.29182E-12	0.00000	-.63553E-12	0.00000	-.72825E-11	0.00000	-.47125E-13	0.00000	-.45291E-13	0.00000
-.34107E-13	0.00000	-.15762E-12	0.00000	.45036E-12	0.00000	.62748E-11	0.00000	-.27586E-13	0.00000	-.11895E-12	0.00000
-.14409E-13	0.00000	-.30075E+00	0.00000	-.25671E-11	0.00000	.44874E-11	0.00000	.20385E-13	0.00000	.92729E-13	0.00000
-.36170E-13	0.00000	-.30075E+00	0.00000	.26975E-11	0.00000	-.42814E-11	0.00000	.56545E-13	0.00000	.26239E-13	0.00000
-.16774E-13	0.00000	.18587E+00	0.00000	.27812E-11	0.00000	-.44707E-11	0.00000	-.12410E-13	0.00000	.30109E-15	0.00000
.26533E-13	0.00000	.18587E+00	0.00000	-.27599E-11	0.00000	.40342E-11	0.00000	-.18152E-13	0.00000	.26658E-13	0.00000

NATURAL FREQUENCY= .151316E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.69577E-13	0.00000	.32185E-11	0.00000	.11712E+00	0.00000	.17968E+00	0.00000	.41348E-13	0.00000	.77714E-13	0.00000
-.81243E-13	0.00000	-.54191E-11	0.00000	-.11712E+00	0.00000	-.17968E+00	0.00000	-.10863E-12	0.00000	-.94337E-13	0.00000
.34310E-13	0.00000	-.67719E-11	0.00000	-.11115E+00	0.00000	-.18471E+00	0.00000	-.51917E-13	0.00000	.15350E-13	0.00000
-.54622E-13	0.00000	-.70674E-11	0.00000	.11115E+00	0.00000	.18471E+00	0.00000	-.89012E-13	0.00000	-.50694E-13	0.00000
-.45737E-13	0.00000	.14314E-11	0.00000	-.21642E-01	0.00000	.28560E+00	0.00000	.15331E-12	0.00000	-.25670E-12	0.00000
-.54377E-13	0.00000	-.14074E-11	0.00000	.21642E-01	0.00000	-.28560E+00	0.00000	.81302E-13	0.00000	-.19217E-12	0.00000
.22536E-14	0.00000	.51310E-11	0.00000	.10043E+00	0.00000	-.19340E+00	0.00000	-.42400E-14	0.00000	-.14517E-12	0.00000
-.48897E-14	0.00000	.89807E-11	0.00000	-.10943E+00	0.00000	.19340E+00	0.00000	-.19085E-13	0.00000	-.11864E-12	0.00000
.24079E-14	0.00000	-.37892E-11	0.00000	-.16594E+00	0.00000	.88575E-01	0.00000	-.91041E-13	0.00000	.29018E-12	0.00000
-.25311E-13	0.00000	-.48850E-11	0.00000	.16594E+00	0.00000	-.88575E-01	0.00000	-.55696E-13	0.00000	-.24047E-12	0.00000
-.90110E-14	0.00000	-.27268E-11	0.00000	.16594E+00	0.00000	.88575E-01	0.00000	.10250E-12	0.00000	-.57299E-13	0.00000
-.44663E-13	0.00000	-.59593E-11	0.00000	-.16594E+00	0.00000	-.88575E-01	0.00000	.95664E-13	0.00000	-.22450E-13	0.00000
.25507E-13	0.00000	.44039E-11	0.00000	-.10043E+00	0.00000	-.19340E+00	0.00000	-.31537E-13	0.00000	-.42310E-13	0.00000
-.33851E-13	0.00000	-.95946E-11	0.00000	.10043E+00	0.00000	.19340E+00	0.00000	-.12350E-13	0.00000	-.20595E-12	0.00000
-.35076E-13	0.00000	.15666E-11	0.00000	-.21642E-01	0.00000	.28560E+00	0.00000	-.68765E-13	0.00000	-.51388E-13	0.00000
-.30344E-13	0.00000	-.15309E-11	0.00000	-.21642E-01	0.00000	-.28560E+00	0.00000	-.58997E-13	0.00000	-.11908E-12	0.00000
-.14861E-13	0.00000	-.68161E-11	0.00000	.11115E+00	0.00000	-.18471E+00	0.00000	-.58602E-13	0.00000	-.63535E-13	0.00000
-.60355E-13	0.00000	-.71840E-11	0.00000	-.11115E+00	0.00000	.18471E+00	0.00000	.35172E-13	0.00000	-.19607E-13	0.00000
.46748E-13	0.00000	.39993E-11	0.00000	-.11712E+00	0.00000	.17968E+00	0.00000	-.51605E-13	0.00000	-.30793E-13	0.00000
.35990E-14	0.00000	.55285E-11	0.00000	.11712E+00	0.00000	-.17968E+00	0.00000	-.71804E-13	0.00000	.78346E-13	0.00000

NATURAL FREQUENCY= .151740E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.16652E-13	0.00000	-.87521E-01	0.00000	-.65868E-02	0.00000	-.11556E+00	0.00000	.12482E-13	0.00000	.19392E-13	0.00000
-.19029E-13	0.00000	-.87521E-01	0.00000	-.65868E-02	0.00000	-.11556E+00	0.00000	.21780E-14	0.00000	.82075E-14	0.00000
.34198E-13	0.00000	-.97171E-02	0.00000	-.28685E-01	0.00000	.40752E-01	0.00000	-.40107E-13	0.00000	-.62343E-13	0.00000
.31733E-14	0.00000	-.97171E-02	0.00000	-.28685E-01	0.00000	.40752E-01	0.00000	-.48509E-13	0.00000	.71383E-13	0.00000
-.25500E-14	0.00000	.11461E+00	0.00000	.43830E-01	0.00000	-.25051E+00	0.00000	-.63622E-13	0.00000	-.67277E-13	0.00000
-.39952E-13	0.00000	-.11461E+00	0.00000	.43830E-01	0.00000	-.25051E+00	0.00000	.39894E-13	0.00000	-.82064E-13	0.00000
-.35871E-13	0.00000	-.17342E+00	0.00000	-.26675E-01	0.00000	.30184E+00	0.00000	.10177E-12	0.00000	-.67522E-13	0.00000
-.22392E-13	0.00000	.17342E+00	0.00000	-.26675E-01	0.00000	.30184E+00	0.00000	-.37076E-13	0.00000	.21039E-12	0.00000
.55918E-13	0.00000	.82055E-01	0.00000	-.93702E-01	0.00000	-.14026E+00	0.00000	-.67921E-13	0.00000	-.60753E-13	0.00000
.20380E-13	0.00000	-.82055E-01	0.00000	-.93702E-01	0.00000	-.14026E+00	0.00000	.17491E-13	0.00000	.12637E-12	0.00000
-.31662E-13	0.00000	.82055E-01	0.00000	.93702E-01	0.00000	-.14026E+00	0.00000	.26715E-13	0.00000	-.23991E-12	0.00000
-.86837E-14	0.00000	-.82055E-01	0.00000	.93702E-01	0.00000	-.14026E+00	0.00000	.64391E-13	0.00000	.61183E-13	0.00000
-.33245E-13	0.00000	-.17342E+00	0.00000	-.26675E-01	0.00000	.30184E+00	0.00000	.26354E-14	0.00000	.30029E-13	0.00000
-.42903E-13	0.00000	.17342E+00	0.00000	-.26675E-01	0.00000	.30184E+00	0.00000	-.60809E-13	0.00000	.22666E-12	0.00000
.59757E-13	0.00000	.11461E+00	0.00000	.43830E-01	0.00000	-.25051E+00	0.00000	-.61109E-15	0.00000	.42753E-13	0.00000
.57480E-13	0.00000	-.11461E+00	0.00000	-.43830E-01	0.00000	-.25051E+00	0.00000	.58662E-13	0.00000	.14130E-12	0.00000
.14529E-13	0.00000	.97171E-02	0.00000	.28685E-01	0.00000	.40752E-01	0.00000	-.17716E-13	0.00000	-.23402E-12	0.00000
.12793E-13	0.00000	-.97171E-02	0.00000	-.28685E-01	0.00000	-.40752E-01	0.00000	-.48579E-13	0.00000	-.37418E-13	0.00000
-.45068E-13	0.00000	-.87521E-01	0.00000	.65868E-02	0.00000	-.11556E+00	0.00000	.67290E-14	0.00000	.70392E-14	0.00000
-.10294E-13	0.00000	.87521E-01	0.00000	-.65868E-02	0.00000	-.11556E+00	0.00000	-.60842E-14	0.00000	-.63007E-13	0.00000

NATURAL FREQUENCY= .152918E+04

TK	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.37640E-13	0.00000	-.14757E-01	0.00000	.69554E-02	0.00000	.49571E-02	0.00000	.25969E-13	0.00000	.37084E-14	0.00000
-.46993E-13	0.00000	.14757E-01	0.00000	.69554E-02	0.00000	.49571E-02	0.00000	-.73729E-13	0.00000	.24885E-13	0.00000
.49653E-13	0.00000	.18401E-01	0.00000	-.29677E-01	0.00000	.14941E-01	0.00000	-.37649E-13	0.00000	-.19254E-12	0.00000
-.34360E-13	0.00000	-.18401E-01	0.00000	-.29677E-01	0.00000	.14941E-01	0.00000	-.26956E-13	0.00000	.24422E-12	0.00000
.54598E-13	0.00000	.24173E-01	0.00000	.53675E-01	0.00000	-.11626E+00	0.00000	-.13168E-12	0.00000	-.15179E-12	0.00000
-.61228E-13	0.00000	-.24173E-01	0.00000	.53675E-01	0.00000	-.11626E+00	0.00000	-.40306E-13	0.00000	.19396E-12	0.00000
.51934E-14	0.00000	-.95841E-01	0.00000	-.53365E-01	0.00000	.26080E+00	0.00000	.40052E-13	0.00000	-.26074E-12	0.00000
-.36575E-14	0.00000	.95841E-01	0.00000	-.53365E-01	0.00000	.26080E+00	0.00000	.43891E-13	0.00000	.30899E-12	0.00000
.42757E-13	0.00000	.15058E+00	0.00000	.22411E-01	0.00000	-.36717E+00	0.00000	-.46470E-14	0.00000	-.33035E-12	0.00000
-.13449E-13	0.00000	-.15058E+00	0.00000	.22411E-01	0.00000	-.36717E+00	0.00000	-.55002E-13	0.00000	.36538E-12	0.00000
.75118E-14	0.00000	.15058E+00	0.00000	.22411E-01	0.00000	.36717E+00	0.00000	.33244E-13	0.00000	-.37188E-12	0.00000
-.30673E-14	0.00000	-.15058E+00	0.00000	.22411E-01	0.00000	.36717E+00	0.00000	-.47677E-13	0.00000	.29952E-12	0.00000
-.22957E-13	0.00000	.95841E-01	0.00000	-.53365E-01	0.00000	-.26080E+00	0.00000	-.32569E-13	0.00000	-.25075E-12	0.00000
-.24195E-13	0.00000	-.95841E-01	0.00000	-.53365E-01	0.00000	.26080E+00	0.00000	-.21649E-13	0.00000	.35390E-12	0.00000
-.21618E-13	0.00000	.24173E-01	0.00000	.53675E-01	0.00000	-.11626E+00	0.00000	.63769E-13	0.00000	-.16673E-12	0.00000
.71707E-13	0.00000	-.24173E-01	0.00000	.53675E-01	0.00000	.11626E+00	0.00000	.76307E-13	0.00000	.24890E-12	0.00000
-.25676E-13	0.00000	.18401E-01	0.00000	-.29677E-01	0.00000	-.14941E-01	0.00000	-.33828E-13	0.00000	-.31149E-12	0.00000
.10234E-13	0.00000	-.18401E-01	0.00000	-.29677E-01	0.00000	-.14941E-01	0.00000	-.31734E-14	0.00000	.23759E-12	0.00000
-.44998E-13	0.00000	.14757E-01	0.00000	.69554E-02	0.00000	-.49571E-02	0.00000	.14538E-13	0.00000	.93911E-14	0.00000
.30673E-13	0.00000	-.14757E-01	0.00000	.69554E-02	0.00000	-.49571E-02	0.00000	-.15036E-13	0.00000	.16297E-13	0.00000

NATURAL FREQUENCY= .153048E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RY IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.46497E-01	0.00000	-.32466E-13	0.00000	.37062E-13	0.00000	.32079E-13	0.00000	-.33416E-01	0.00000	-.96993E-02	0.00000
-.46497E-01	0.00000	-.51476E-13	0.00000	-.90361E-13	0.00000	-.57295E-13	0.00000	-.33416E-01	0.00000	-.96993E-02	0.00000
.24817E-01	0.00000	-.10247E-13	0.00000	.36222E-13	0.00000	.16404E-13	0.00000	-.15475E-02	0.00000	-.18734E+00	0.00000
-.24817E-01	0.00000	.40582E-15	0.00000	.59107E-13	0.00000	-.15742E-12	0.00000	-.15475E-02	0.00000	.18734E+00	0.00000
.33860E-01	0.00000	-.30909E-13	0.00000	-.11274E-12	0.00000	.89065E-13	0.00000	-.35262E-01	0.00000	-.18975E+00	0.00000
-.33860E-01	0.00000	.24123E-13	0.00000	-.17401E-13	0.00000	.84247E-13	0.00000	-.35262E-01	0.00000	.18975E+00	0.00000
.96133E-02	0.00000	.24718E-13	0.00000	.34455E-13	0.00000	-.14249E-12	0.00000	.96385E-02	0.00000	-.29148E+00	0.00000
-.96133E-02	0.00000	-.72012E-13	0.00000	.23710E-13	0.00000	-.12497E-12	0.00000	.96385E-02	0.00000	.29148E+00	0.00000
.12679E-01	0.00000	-.48152E-13	0.00000	-.37021E-13	0.00000	.13450E-12	0.00000	-.22774E-01	0.00000	-.29538E+00	0.00000
-.12679E-01	0.00000	.88485E-13	0.00000	.23529E-13	0.00000	.19393E-12	0.00000	-.22774E-01	0.00000	.29538E+00	0.00000
.12679E-01	0.00000	.56720E-13	0.00000	.13430E-13	0.00000	-.26393E-12	0.00000	.22774E-01	0.00000	-.29538E+00	0.00000
-.12679E-01	0.00000	-.46684E-13	0.00000	-.30449E-13	0.00000	-.14774E-12	0.00000	.22774E-01	0.00000	.29538E+00	0.00000
.96133E-02	0.00000	-.31789E-13	0.00000	.65964E-14	0.00000	.11035E-12	0.00000	-.96385E-02	0.00000	-.29148E+00	0.00000
-.96133E-02	0.00000	.28181E-13	0.00000	.32295E-13	0.00000	.10718E-12	0.00000	-.96385E-02	0.00000	.29148E+00	0.00000
.33860E-01	0.00000	.42898E-13	0.00000	.88876E-14	0.00000	-.10201E-12	0.00000	.35262E-01	0.00000	.18975E+00	0.00000
-.33860E-01	0.00000	-.12140E-13	0.00000	-.14403E-13	0.00000	-.13906E-13	0.00000	.35262E-01	0.00000	-.18975E+00	0.00000
.24817E-01	0.00000	-.18074E-13	0.00000	.13308E-13	0.00000	.81109E-13	0.00000	.15475E-02	0.00000	-.18734E+00	0.00000
-.24817E-01	0.00000	.78450E-14	0.00000	.49993E-13	0.00000	.14703E-12	0.00000	.15475E-02	0.00000	.18734E+00	0.00000
.46497E-01	0.00000	.22898E-13	0.00000	-.42103E-14	0.00000	.72250E-13	0.00000	-.33416E-01	0.00000	-.96993E-02	0.00000
-.46497E-01	0.00000	-.27757E-13	0.00000	-.64952E-13	0.00000	-.10813E-12	0.00000	.33416E-01	0.00000	.96993E-02	0.00000

NATURAL FREQUENCY= .155547E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.90473E-01	0.00000	.24000E-14	0.00000	.46943E-13	0.00000	.46564E-13	0.00000	.66668E-01	0.00000	.35687E-01	0.00000
.90473E-01	0.00000	-.14545E-14	0.00000	-.69895E-14	0.00000	.17594E-13	0.00000	-.66668E-01	0.00000	-.35687E-01	0.00000
.73501E-02	0.00000	-.73917E-13	0.00000	-.43952E-14	0.00000	.48405E-13	0.00000	-.21675E-01	0.00000	.32823E+00	0.00000
.73501E-02	0.00000	-.67373E-14	0.00000	-.42976E-13	0.00000	.72027E-13	0.00000	-.21675E-01	0.00000	-.32823E+00	0.00000
.93726E-02	0.00000	.23835E-13	0.00000	-.55090E-13	0.00000	-.67056E-13	0.00000	.27474E-01	0.00000	.21133E+00	0.00000
.93726E-02	0.00000	.76260E-14	0.00000	.15958E-13	0.00000	-.74095E-13	0.00000	.27474E-01	0.00000	-.21133E+00	0.00000
.48714E-01	0.00000	.16813E-13	0.00000	.37770E-13	0.00000	.19881E-13	0.00000	-.42362E-01	0.00000	.27330E+00	0.00000
.48714E-01	0.00000	-.17701E-13	0.00000	-.27021E-13	0.00000	.80721E-14	0.00000	-.42362E-01	0.00000	-.27330E+00	0.00000
.58482E-01	0.00000	-.16864E-14	0.00000	-.16675E-13	0.00000	-.46183E-13	0.00000	-.30105E-01	0.00000	.31877E-01	0.00000
.58482E-01	0.00000	.20973E-13	0.00000	.16805E-13	0.00000	-.18482E-13	0.00000	-.30105E-01	0.00000	-.31877E-01	0.00000
.58482E-01	0.00000	-.14121E-13	0.00000	-.23415E-14	0.00000	-.40752E-13	0.00000	-.30105E-01	0.00000	.31877E-01	0.00000
.58482E-01	0.00000	-.12319E-13	0.00000	.22353E-14	0.00000	-.87694E-13	0.00000	-.30105E-01	0.00000	-.31877E-01	0.00000
.48714E-01	0.00000	-.18395E-13	0.00000	.25525E-14	0.00000	-.53870E-13	0.00000	-.42362E-01	0.00000	.27330E+00	0.00000
.48714E-01	0.00000	.12445E-13	0.00000	-.21512E-14	0.00000	.51115E-13	0.00000	-.42362E-01	0.00000	-.27330E+00	0.00000
.93726E-02	0.00000	.22217E-13	0.00000	-.88637E-14	0.00000	.22864E-14	0.00000	.27474E-01	0.00000	-.21133E+00	0.00000
.93726E-02	0.00000	.39837E-13	0.00000	.34676E-13	0.00000	-.51633E-14	0.00000	.27474E-01	0.00000	.21133E+00	0.00000
.73501E-02	0.00000	-.53440E-13	0.00000	.13467E-13	0.00000	-.74262E-13	0.00000	-.21675E-01	0.00000	.32823E+00	0.00000
.73501E-02	0.00000	-.60161E-13	0.00000	-.94772E-14	0.00000	.11042E-12	0.00000	-.21675E-01	0.00000	-.32823E+00	0.00000
.90473E-01	0.00000	.12838E-13	0.00000	.80114E-14	0.00000	.24802E-15	0.00000	.66668E-01	0.00000	-.35687E-01	0.00000
.90473E-01	0.00000	.44969E-13	0.00000	-.31428E-13	0.00000	-.10422E-13	0.00000	.66668E-01	0.00000	.35687E-01	0.00000

NATURAL FREQUENCY= .157931E+04

TX REAL	IX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RK KLAL	RK IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.72324E-14	0.00000	.19912E-12	0.00000	.10382E+00	0.00000	.13253E+00	0.00000	-.49796E-13	0.00000	.40617E-13	0.00000
-.24766E-13	0.00000	-.11666E-12	0.00000	-.10382E+00	0.00000	-.13253E+00	0.00000	-.27859E-13	0.00000	-.27885E-14	0.00000
.25444E-13	0.00000	-.16095E-12	0.00000	-.12775E+00	0.00000	-.92391E-01	0.00000	.22559E-13	0.00000	.12835E-12	0.00000
-.36771E-13	0.00000	-.14612E-13	0.00000	.12775E+00	0.00000	.92391E-01	0.00000	.12679E-13	0.00000	-.42386E-14	0.00000
-.13768E-13	0.00000	.17404E-14	0.00000	.77042E-01	0.00000	.23456E+00	0.00000	.27333E-13	0.00000	-.58748E-13	0.00000
.17093E-13	0.00000	.10456E-13	0.00000	-.77042E-01	0.00000	-.23456E+00	0.00000	.28811E-13	0.00000	.20276E-12	0.00000
-.22384E-13	0.00000	.10277E-12	0.00000	-.64996E-01	0.00000	-.23760E+00	0.00000	-.18971E-13	0.00000	.31726E-13	0.00000
.22326E-13	0.00000	.89153E-13	0.00000	.64996E-01	0.00000	.23760E+00	0.00000	.43275E-14	0.00000	-.12430E-12	0.00000
.16870E-13	0.00000	-.14708E-13	0.00000	.11881E-01	0.00000	.28338E+00	0.00000	.40016E-14	0.00000	-.94939E-13	0.00000
-.56600E-13	0.00000	-.83122E-13	0.00000	-.11881E-01	0.00000	-.28338E+00	0.00000	-.28674E-13	0.00000	.12604E-13	0.00000
-.57109E-13	0.00000	-.84063E-13	0.00000	.11881E-01	0.00000	-.28338E+00	0.00000	.67103E-13	0.00000	-.23769E-13	0.00000
.48490E-13	0.00000	.91595E-14	0.00000	-.11881E-01	0.00000	.28338E+00	0.00000	-.94705E-13	0.00000	-.25429E-12	0.00000
-.50284E-13	0.00000	.97196E-13	0.00000	-.64996E-01	0.00000	.23760E+00	0.00000	-.58040E-14	0.00000	-.18194E-13	0.00000
-.40820E-13	0.00000	-.37256E-13	0.00000	.64996E-01	0.00000	-.23760E+00	0.00000	-.12308E-13	0.00000	-.38234E-15	0.00000
.45928E-13	0.00000	.11019E-12	0.00000	.77042E-01	0.00000	.23456E+00	0.00000	-.55808E-13	0.00000	.21194E-12	0.00000
-.95812E-14	0.00000	-.12983E-12	0.00000	-.77042E-01	0.00000	.23456E+00	0.00000	-.33391E-13	0.00000	-.57176E-13	0.00000
.25749E-13	0.00000	-.25083E-12	0.00000	-.12775E+00	0.00000	-.92391E-01	0.00000	-.32610E-14	0.00000	-.15432E-12	0.00000
-.49050E-14	0.00000	.17118E-12	0.00000	.12775E+00	0.00000	-.92391E-01	0.00000	.33843E-14	0.00000	-.59558E-15	0.00000
.65217E-14	0.00000	.62306E-12	0.00000	.10382E+00	0.00000	-.13253E+00	0.00000	-.18944E-13	0.00000	-.21448E-14	0.00000
-.52024E-14	0.00000	-.54458E-12	0.00000	-.10382E+00	0.00000	.13253E+00	0.00000	-.12175E-13	0.00000	-.12305E-13	0.00000

NATURAL FREQUENCY = .157976E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.12895E+00	0.00000	-.16112E-12	0.00000	-.61893E-12	0.00000	-.70330E-12	0.00000	.11096E+00	0.00000	-.91801E-01	0.00000
.12895E+00	0.00000	-.14050E-12	0.00000	-.69733E-12	0.00000	.13039E-11	0.00000	.11096E+00	0.00000	-.91801E-01	0.00000
-.96196E-01	0.00000	-.10718E-12	0.00000	-.81535E-12	0.00000	-.99372E-12	0.00000	-.12843E+00	0.00000	-.32178E+00	0.00000
.96196E-01	0.00000	-.13329E-13	0.00000	-.83453E-12	0.00000	-.40383E-12	0.00000	-.12843E+00	0.00000	-.32178E+00	0.00000
-.50639E-02	0.00000	-.72362E-13	0.00000	-.50347E-12	0.00000	-.16360E-11	0.00000	.66254E-01	0.00000	-.22914E-01	0.00000
.50639E-02	0.00000	.37418E-13	0.00000	.45473E-12	0.00000	.15003E-11	0.00000	.66254E-01	0.00000	-.22914E-01	0.00000
-.10813E+00	0.00000	.15047E-13	0.00000	-.40269E-12	0.00000	.17100E-11	0.00000	-.12479E+00	0.00000	-.38728E-01	0.00000
.10813E+00	0.00000	-.25704E-13	0.00000	-.35679E-12	0.00000	-.15382E-11	0.00000	-.12479E+00	0.00000	-.38728E-01	0.00000
-.12705E-01	0.00000	-.30979E-13	0.00000	-.55505E-13	0.00000	-.18577E-11	0.00000	.62554E-01	0.00000	-.22528E+00	0.00000
.12705E-01	0.00000	.11554E-14	0.00000	.46536E-13	0.00000	.20502E-11	0.00000	.62554E-01	0.00000	-.22528E+00	0.00000
-.12705E-01	0.00000	-.43164E-13	0.00000	-.12001E-12	0.00000	-.19020E-11	0.00000	-.62554E-01	0.00000	-.22528E+00	0.00000
.12705E-01	0.00000	.40283E-13	0.00000	.14339E-12	0.00000	-.18282E-11	0.00000	-.62554E-01	0.00000	-.22528E+00	0.00000
-.10813E+00	0.00000	-.71725E-13	0.00000	-.45769E-12	0.00000	-.16766E-11	0.00000	.12479E+00	0.00000	-.38728E-01	0.00000
.10813E+00	0.00000	-.10904E-13	0.00000	-.49329E-12	0.00000	.17474E-11	0.00000	.12479E+00	0.00000	-.38728E-01	0.00000
-.50639E-02	0.00000	-.99946E-14	0.00000	-.53364E-12	0.00000	.16008E-11	0.00000	-.66254E-01	0.00000	-.22914E-01	0.00000
.50639E-02	0.00000	-.43674E-14	0.00000	.47769E-12	0.00000	-.15190E-11	0.00000	-.66254E-01	0.00000	-.22914E-01	0.00000
-.96196E-01	0.00000	-.80508E-14	0.00000	-.89767E-12	0.00000	-.63618E-12	0.00000	-.12843E+00	0.00000	-.32178E+00	0.00000
.96196E-01	0.00000	.21323E-13	0.00000	-.85148E-12	0.00000	.68014E-12	0.00000	-.12843E+00	0.00000	-.32178E+00	0.00000
-.12895E+00	0.00000	-.16112E-12	0.00000	-.61893E-12	0.00000	-.70330E-12	0.00000	.11096E+00	0.00000	-.91801E-01	0.00000
.12895E+00	0.00000	-.14050E-12	0.00000	-.69733E-12	0.00000	.13039E-11	0.00000	.11096E+00	0.00000	-.91801E-01	0.00000

G-86

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY* .160062E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.11379E+00	0.00000	.74931E-11	0.00000	.33916E-11	0.00000	.10565E-10	0.00000	-.10671E+00	0.00000	-.10949E+00	0.00000
.11379E+00	0.00000	-.74269E-11	0.00000	.30715E-11	0.00000	.10422E-10	0.00000	.10671E+00	0.00000	.10949E+00	0.00000
.16997E+00	0.00000	-.20227E-11	0.00000	-.22025E-11	0.00000	.12914E-10	0.00000	.17828E+00	0.00000	-.17926E+00	0.00000
.16997E+00	0.00000	.20676E-11	0.00000	-.21862E-11	0.00000	.12591E-10	0.00000	.17828E+00	0.00000	.17926E+00	0.00000
.12999E-01	0.00000	.10505E-11	0.00000	-.12333E-11	0.00000	-.27002E-11	0.00000	-.72438E-01	0.00000	.24119E+00	0.00000
.12999E-01	0.00000	-.10552E-11	0.00000	-.14505E-11	0.00000	-.30451E-11	0.00000	-.72438E-01	0.00000	-.24119E+00	0.00000
.33464E-01	0.00000	.33255E-12	0.00000	.76055E-12	0.00000	.24094E-11	0.00000	.60371E-01	0.00000	.10526E+00	0.00000
.33464E-01	0.00000	-.20553E-12	0.00000	.83536E-12	0.00000	.18759E-11	0.00000	.60371E-01	0.00000	-.10526E+00	0.00000
.76644E-01	0.00000	-.35072E-12	0.00000	-.45524E-12	0.00000	.80360E-12	0.00000	-.59503E-01	0.00000	.19501E+00	0.00000
.76644E-01	0.00000	.26811E-12	0.00000	-.54699E-12	0.00000	.42395E-12	0.00000	-.59503E-01	0.00000	-.19501E+00	0.00000
.76644E-01	0.00000	.21716E-12	0.00000	.15899E-12	0.00000	.30905E-13	0.00000	-.59503E-01	0.00000	-.19501E+00	0.00000
.76644E-01	0.00000	-.16876E-12	0.00000	-.16092E-12	0.00000	-.65099E-12	0.00000	-.59503E-01	0.00000	.19501E+00	0.00000
.33464E-01	0.00000	.69750E-13	0.00000	-.22814E-12	0.00000	.13421E-11	0.00000	.60371E-01	0.00000	-.10526E+00	0.00000
.33464E-01	0.00000	-.14072E-13	0.00000	-.13852E-12	0.00000	.83485E-12	0.00000	.60371E-01	0.00000	.10526E+00	0.00000
.12999E-01	0.00000	.47499E-12	0.00000	.27913E-12	0.00000	-.89128E-12	0.00000	-.72438E-01	0.00000	-.24119E+00	0.00000
.12999E-01	0.00000	-.55814E-12	0.00000	-.42537E-12	0.00000	-.12298E-11	0.00000	-.72438E-01	0.00000	.24119E+00	0.00000
.16997E+00	0.00000	-.85911E-12	0.00000	.72504E-12	0.00000	.42558E-11	0.00000	.17828E+00	0.00000	.17926E+00	0.00000
.16997E+00	0.00000	.94113E-12	0.00000	.85009E-12	0.00000	.42098E-11	0.00000	.17828E+00	0.00000	-.17926E+00	0.00000
.11379E+00	0.00000	.24665E-11	0.00000	-.10853E-11	0.00000	.35297E-11	0.00000	-.10671E+00	0.00000	.10949E+00	0.00000
.11379E+00	0.00000	-.25505E-11	0.00000	-.10852E-11	0.00000	.35039E-11	0.00000	.10671E+00	0.00000	-.10949E+00	0.00000

NATURAL FREQUENCY= .163135E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15581E-11	0.00000	-.19405E+00	0.00000	-.84855E-01	0.00000	-.27770E+00	0.00000	-.14390E-11	0.00000	-.15460E-11	0.00000
-.14996E-11	0.00000	.19405E+00	0.00000	-.84855E-01	0.00000	-.27770E+00	0.00000	-.14171E-11	0.00000	.15053E-11	0.00000
-.23569E-11	0.00000	.70434E-01	0.00000	.58832E-01	0.00000	-.33491E+00	0.00000	.24368E-11	0.00000	-.24504E-11	0.00000
.23758E-11	0.00000	-.70434E-01	0.00000	.58832E-01	0.00000	-.33491E+00	0.00000	.24777E-11	0.00000	.23577E-11	0.00000
.16943E-12	0.00000	-.43451E-01	0.00000	.33278E-01	0.00000	.77418E-01	0.00000	-.97385E-12	0.00000	.32647E-11	0.00000
-.15901E-12	0.00000	.43451E-01	0.00000	.33278E-01	0.00000	.77418E-01	0.00000	-.94913E-12	0.00000	-.34548E-11	0.00000
-.42816E-12	0.00000	-.73081E-02	0.00000	-.18752E-01	0.00000	-.64784E-01	0.00000	.81537E-12	0.00000	.14958E-11	0.00000
.42058E-12	0.00000	.73081E-02	0.00000	-.18752E-01	0.00000	-.64784E-01	0.00000	.80350E-12	0.00000	-.14944E-11	0.00000
.10383E-11	0.00000	.27128E-02	0.00000	.13149E-01	0.00000	-.57854E-02	0.00000	-.77427E-12	0.00000	.26352E-11	0.00000
-.10363E-11	0.00000	-.27128E-02	0.00000	.13149E-01	0.00000	-.57854E-02	0.00000	-.75764E-12	0.00000	-.26130E-11	0.00000
.10787E-11	0.00000	.27128E-02	0.00000	-.13149E-01	0.00000	-.57854E-02	0.00000	-.89821E-12	0.00000	-.27586E-11	0.00000
-.11079E-11	0.00000	-.27128E-02	0.00000	-.13149E-01	0.00000	-.57854E-02	0.00000	-.87752E-12	0.00000	.28634E-11	0.00000
-.47542E-12	0.00000	-.73081E-02	0.00000	.18752E-01	0.00000	-.64784E-01	0.00000	.85885E-12	0.00000	-.14051E-11	0.00000
.50736E-12	0.00000	.73081E-02	0.00000	.18752E-01	0.00000	-.64784E-01	0.00000	.88763E-12	0.00000	.13814E-11	0.00000
.20276E-12	0.00000	-.43451E-01	0.00000	-.33278E-01	0.00000	.77418E-01	0.00000	-.99750E-12	0.00000	-.33822E-11	0.00000
-.24242E-12	0.00000	.43451E-01	0.00000	-.33278E-01	0.00000	.77418E-01	0.00000	-.10214E-11	0.00000	.33984E-11	0.00000
-.22796E-11	0.00000	.70434E-01	0.00000	-.58832E-01	0.00000	-.33491E+00	0.00000	.24025E-11	0.00000	.23357E-11	0.00000
.23052E-11	0.00000	-.70434E-01	0.00000	-.58832E-01	0.00000	-.33491E+00	0.00000	.24145E-11	0.00000	-.23068E-11	0.00000
.14751E-11	0.00000	-.19805E+00	0.00000	-.84855E-01	0.00000	-.27770E+00	0.00000	-.14133E-11	0.00000	.14478E-11	0.00000
-.15022E-11	0.00000	.19805E+00	0.00000	-.84855E-01	0.00000	-.27770E+00	0.00000	-.14138E-11	0.00000	-.14620E-11	0.00000

NATURAL FREQUENCY = .160187E+04											
TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.10059E-11	0.00000	.19841E+00	0.00000	-.84720E-01	0.00000	.27077E+00	0.00000	-.92087E-12	0.00000	-.90170E-12	0.00000
-.99603E-12	0.00000	-.19841E+00	0.00000	-.84720E-01	0.00000	-.27677E+00	0.00000	-.94127E-12	0.00000	-.90077E-12	0.00000
-.15170E-11	0.00000	-.72294E-01	0.00000	-.57525E-01	0.00000	.33657E+00	0.00000	-.15461E-11	0.00000	-.16461E-11	0.00000
-.15174E-11	0.00000	.72294E-01	0.00000	-.57525E-01	0.00000	-.33657E+00	0.00000	-.15695E-11	0.00000	-.16059E-11	0.00000
-.80841E-13	0.00000	.44741E-01	0.00000	-.37526E-01	0.00000	-.74027E-01	0.00000	-.58231E-12	0.00000	-.22554E-11	0.00000
-.68209E-13	0.00000	-.44741E-01	0.00000	-.37526E-01	0.00000	-.74027E-01	0.00000	-.55809E-12	0.00000	-.23055E-11	0.00000
-.25461E-12	0.00000	.10557E-01	0.00000	-.23357E-01	0.00000	.42776E-01	0.00000	-.47287E-12	0.00000	-.93597E-12	0.00000
-.24083E-12	0.00000	-.10557E-01	0.00000	-.23357E-01	0.00000	.42776E-01	0.00000	-.50841E-12	0.00000	-.97798E-12	0.00000
-.65561E-12	0.00000	-.19493E-01	0.00000	-.13027E-01	0.00000	-.37021E-01	0.00000	-.51093E-12	0.00000	-.18379E-11	0.00000
-.69732E-12	0.00000	.19493E-01	0.00000	-.13027E-01	0.00000	-.37021E-01	0.00000	-.46193E-12	0.00000	-.17310E-11	0.00000
-.73965E-12	0.00000	.19493E-01	0.00000	-.13027E-01	0.00000	-.37021E-01	0.00000	-.61712E-12	0.00000	-.17334E-11	0.00000
-.75891E-12	0.00000	-.19493E-01	0.00000	-.13027E-01	0.00000	-.37021E-01	0.00000	-.58983E-12	0.00000	-.19797E-11	0.00000
-.30063E-12	0.00000	-.10557E-01	0.00000	-.23357E-01	0.00000	-.42776E-01	0.00000	-.60475E-12	0.00000	-.88801E-12	0.00000
-.39477E-12	0.00000	.10557E-01	0.00000	-.23357E-01	0.00000	-.42776E-01	0.00000	-.62292E-12	0.00000	-.88773E-12	0.00000
-.13018E-12	0.00000	-.44741E-01	0.00000	-.37526E-01	0.00000	.74027E-01	0.00000	-.69330E-12	0.00000	-.23152E-11	0.00000
-.17854E-12	0.00000	.44741E-01	0.00000	-.37526E-01	0.00000	-.74027E-01	0.00000	-.67091E-12	0.00000	-.22133E-11	0.00000
-.15443E-11	0.00000	.72294E-01	0.00000	-.57525E-01	0.00000	-.33657E+00	0.00000	-.16388E-11	0.00000	-.15991E-11	0.00000
-.15350E-11	0.00000	-.72294E-01	0.00000	-.57525E-01	0.00000	-.33657E+00	0.00000	-.16156E-11	0.00000	-.15461E-11	0.00000
-.10077E-11	0.00000	-.19841E+00	0.00000	-.84720E-01	0.00000	-.27077E+00	0.00000	-.95356E-12	0.00000	-.90000E-12	0.00000
-.10200E-11	0.00000	.19841E+00	0.00000	-.84720E-01	0.00000	-.27077E+00	0.00000	-.97691E-12	0.00000	-.90093E-12	0.00000

NATURAL FREQUENCY= .161127E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.21807E-01	0.00000	.97755E-13	0.00000	.36082E-13	0.00000	.73985E-13	0.00000	.45997E-01	0.00000	.63308E-01	0.00000
.21807E-01	0.00000	-.56817E-14	0.00000	-.57438E-13	0.00000	.12605E-13	0.00000	-.45997E-01	0.00000	-.63308E-01	0.00000
.14481E+00	0.00000	-.15859E-12	0.00000	-.35356E-13	0.00000	.92650E-13	0.00000	-.16273E+00	0.00000	-.16875E+00	0.00000
-.14481E+00	0.00000	-.25111E-13	0.00000	.32789E-13	0.00000	-.56063E-13	0.00000	-.16273E+00	0.00000	.16875E+00	0.00000
.13194E+00	0.00000	.80229E-13	0.00000	.53590E-13	0.00000	-.12996E-13	0.00000	.16680E+00	0.00000	-.16496E+00	0.00000
-.13194E+00	0.00000	-.19362E-13	0.00000	-.37725E-13	0.00000	-.24348E-13	0.00000	-.16680E+00	0.00000	.16496E+00	0.00000
.23721E-01	0.00000	.29257E-13	0.00000	-.61338E-13	0.00000	.36620E-13	0.00000	-.10418E+00	0.00000	-.80572E-02	0.00000
-.23721E-01	0.00000	-.40153E-13	0.00000	.44360E-13	0.00000	.42647E-14	0.00000	-.10418E+00	0.00000	.80572E-02	0.00000
.13725E+00	0.00000	-.13391E-12	0.00000	-.60422E-13	0.00000	.14063E-13	0.00000	.17352E+00	0.00000	-.17342E+00	0.00000
-.13725E+00	0.00000	-.10451E-12	0.00000	-.56747E-13	0.00000	-.15446E-13	0.00000	.17352E+00	0.00000	.17342E+00	0.00000
.13725E+00	0.00000	.12961E-12	0.00000	-.81651E-13	0.00000	.39156E-14	0.00000	-.17352E+00	0.00000	.17342E+00	0.00000
-.13725E+00	0.00000	-.13955E-12	0.00000	.91369E-13	0.00000	-.41763E-13	0.00000	-.17352E+00	0.00000	-.17342E+00	0.00000
-.23721E-01	0.00000	-.45215E-13	0.00000	.29827E-13	0.00000	-.76082E-13	0.00000	.10418E+00	0.00000	-.80572E-02	0.00000
.23721E-01	0.00000	-.25138E-13	0.00000	-.12670E-13	0.00000	.74660E-13	0.00000	.10418E+00	0.00000	.80572E-02	0.00000
.13194E+00	0.00000	-.61701E-13	0.00000	-.63059E-13	0.00000	-.66568E-13	0.00000	-.16680E+00	0.00000	-.16496E+00	0.00000
-.13194E+00	0.00000	-.65736E-13	0.00000	.84710E-13	0.00000	.10522E-12	0.00000	-.16680E+00	0.00000	.16496E+00	0.00000
-.14481E+00	0.00000	.13199E-12	0.00000	.56198E-13	0.00000	-.11558E-12	0.00000	.16273E+00	0.00000	-.16875E+00	0.00000
.14481E+00	0.00000	.75072E-13	0.00000	-.94981E-13	0.00000	.17780E-12	0.00000	.16273E+00	0.00000	.16875E+00	0.00000
.21807E-01	0.00000	-.81976E-13	0.00000	.16865E-13	0.00000	.12057E-13	0.00000	-.45997E-01	0.00000	.63308E-01	0.00000
-.21807E-01	0.00000	-.46618E-13	0.00000	-.18299E-13	0.00000	-.28098E-13	0.00000	.45997E-01	0.00000	-.63308E-01	0.00000

CG-90

NATURAL FREQUENCY= .162701E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-13373E-12	0.00000	.39472E-12	0.00000	.80275E-01	0.00000	.23335E-01	0.00000	.15018E-12	0.00000	.12963E-12	0.00000
.17266E-12	0.00000	-.32401E-12	0.00000	-.80275E-01	0.00000	-.23335E-01	0.00000	.15791E-12	0.00000	-.14375E-12	0.00000
.22153E-12	0.00000	-.24072E-12	0.00000	.29536E-01	0.00000	.17868E+00	0.00000	-.28179E-12	0.00000	.18793E-12	0.00000
-.24661E-12	0.00000	-.67654E-14	0.00000	-.29536E-01	0.00000	-.17868E+00	0.00000	-.23209E-12	0.00000	-.29465E-12	0.00000
.17332E-14	0.00000	.16068E-12	0.00000	.60646E-01	0.00000	.19818E+00	0.00000	.92291E-13	0.00000	-.25534E-12	0.00000
-.66549E-15	0.00000	.12784E-13	0.00000	-.60646E-01	0.00000	-.19818E+00	0.00000	.66666E-13	0.00000	.21944E-12	0.00000
.76756E-13	0.00000	.26215E-13	0.00000	.58803E-02	0.00000	.28376E+00	0.00000	-.95035E-13	0.00000	-.12341E-12	0.00000
-.68284E-13	0.00000	-.62183E-15	0.00000	-.58803E-02	0.00000	-.28376E+00	0.00000	-.88033E-13	0.00000	.12415E-12	0.00000
-.96267E-13	0.00000	-.12805E-12	0.00000	.28254E-01	0.00000	.29383E+00	0.00000	.68810E-13	0.00000	-.28585E-12	0.00000
.70226E-13	0.00000	-.34070E-13	0.00000	-.28254E-01	0.00000	-.29383E+00	0.00000	-.70783E-13	0.00000	.31264E-12	0.00000
-.64593E-13	0.00000	.15421E-12	0.00000	-.28254E-01	0.00000	.29383E+00	0.00000	.24800E-13	0.00000	.15307E-12	0.00000
.86314E-13	0.00000	.41991E-13	0.00000	.28254E-01	0.00000	-.29383E+00	0.00000	-.40727E-13	0.00000	-.12639E-12	0.00000
.27957E-13	0.00000	-.10853E-12	0.00000	-.58803E-02	0.00000	.28376E+00	0.00000	-.51271E-13	0.00000	-.67209E-14	0.00000
-.94145E-14	0.00000	.14571E-13	0.00000	.58803E-02	0.00000	-.28376E+00	0.00000	-.37249E-13	0.00000	-.39219E-13	0.00000
-.21505E-13	0.00000	-.13167E-12	0.00000	-.60646E-01	0.00000	.19818E+00	0.00000	.94805E-13	0.00000	.19082E-12	0.00000
.25738E-13	0.00000	.12663E-13	0.00000	.60646E-01	0.00000	-.19818E+00	0.00000	-.60177E-13	0.00000	-.22907E-12	0.00000
.15210E-12	0.00000	.22389E-12	0.00000	-.29536E-01	0.00000	.17868E+00	0.00000	-.14559E-12	0.00000	-.22127E-12	0.00000
-.13707E-12	0.00000	.94881E-14	0.00000	.29536E-01	0.00000	-.17868E+00	0.00000	-.14708E-12	0.00000	.17061E-12	0.00000
-.99573E-13	0.00000	-.39917E-12	0.00000	-.80275E-01	0.00000	.23335E-01	0.00000	.89147E-13	0.00000	-.67342E-13	0.00000
.79901E-13	0.00000	.26543E-12	0.00000	.80275E-01	0.00000	-.23335E-01	0.00000	.79753E-13	0.00000	.89183E-13	0.00000

NATURAL FREQUENCY= .163565E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ	
										REAL	IMAG
-.63081E-01	0.00000	-.13411E-12	0.00000	.20810E-13	0.00000	-.69202E-13	0.00000	.48103E-01	0.00000	.55938E-01	0.00000
.63081E-01	0.00000	.44469E-13	0.00000	-.31364E-13	0.00000	-.29878E-13	0.00000	.48103E-01	0.00000	-.55938E-01	0.00000
.96988E-01	0.00000	.80982E-13	0.00000	.20365E-13	0.00000	.93992E-13	0.00000	-.64074E-01	0.00000	.14820E+00	0.00000
-.96988E-01	0.00000	.10804E-13	0.00000	.99494E-14	0.00000	-.15910E-12	0.00000	-.64074E-01	0.00000	-.14820E+00	0.00000
.57561E-01	0.00000	-.67821E-13	0.00000	-.75338E-13	0.00000	-.55173E-13	0.00000	-.65180E-01	0.00000	-.32431E+00	0.00000
-.57561E-01	0.00000	-.30401E-13	0.00000	.10963E-12	0.00000	.18608E-12	0.00000	-.65180E-01	0.00000	.32431E+00	0.00000
.17042E+00	0.00000	.67886E-13	0.00000	.10011E-12	0.00000	.91719E-13	0.00000	.16830E+00	0.00000	.46994E-01	0.00000
-.17042E+00	0.00000	.11907E-13	0.00000	-.70800E-13	0.00000	.66500E-13	0.00000	.16830E+00	0.00000	-.46994E-01	0.00000
.94519E-01	0.00000	.61680E-13	0.00000	-.10266E-12	0.00000	.60242E-13	0.00000	-.13947E+00	0.00000	.90037E-01	0.00000
-.94519E-01	0.00000	-.22091E-13	0.00000	.98248E-13	0.00000	.18055E-12	0.00000	-.13947E+00	0.00000	-.90037E-01	0.00000
-.94519E-01	0.00000	.16195E-13	0.00000	.60003E-13	0.00000	-.27440E-13	0.00000	.13947E+00	0.00000	.90037E-01	0.00000
.94519E-01	0.00000	-.64817E-13	0.00000	-.42397E-13	0.00000	.20332E-12	0.00000	.13947E+00	0.00000	-.90037E-01	0.00000
.17042E+00	0.00000	.20536E-13	0.00000	-.12700E-13	0.00000	-.69904E-14	0.00000	-.16830E+00	0.00000	.46994E-01	0.00000
-.17042E+00	0.00000	-.27039E-13	0.00000	.23182E-13	0.00000	.15444E-12	0.00000	-.16830E+00	0.00000	-.46994E-01	0.00000
-.57561E-01	0.00000	.57189E-13	0.00000	.54502E-13	0.00000	.10169E-12	0.00000	.65180E-01	0.00000	-.32431E+00	0.00000
.57561E-01	0.00000	-.16621E-13	0.00000	-.88369E-13	0.00000	.72941E-13	0.00000	.65180E-01	0.00000	.32431E+00	0.00000
-.96988E-01	0.00000	-.91321E-14	0.00000	-.93378E-13	0.00000	.23081E-13	0.00000	.64074E-01	0.00000	.14820E+00	0.00000
.96988E-01	0.00000	-.10292E-12	0.00000	.57987E-13	0.00000	.80367E-13	0.00000	.64074E-01	0.00000	-.14820E+00	0.00000
.63081E-01	0.00000	-.25485E-14	0.00000	.59018E-13	0.00000	-.70599E-13	0.00000	-.48103E-01	0.00000	.55938E-01	0.00000
-.63081E-01	0.00000	.32650E-13	0.00000	-.41942E-13	0.00000	.18886E-13	0.00000	-.48103E-01	0.00000	-.55938E-01	0.00000

G-92

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .163588E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.16346E-01	0.00000	.69867E-13	0.00000	.12983E-13	0.00000	.73511E-13	0.00000	.12104E-01	0.00000	.28535E-01	0.00000
.16346E-01	0.00000	-.44967E-13	0.00000	-.45638E-13	0.00000	.27921E-13	0.00000	.12104E-01	0.00000	-.28535E-01	0.00000
.95209E-01	0.00000	-.62613E-14	0.00000	-.65077E-13	0.00000	.90931E-13	0.00000	-.11148E+00	0.00000	-.25096E+00	0.00000
.95209E-01	0.00000	.85234E-13	0.00000	.36764E-13	0.00000	-.43657E-14	0.00000	-.11148E+00	0.00000	.25096E+00	0.00000
.19275E+00	0.00000	-.14330E-13	0.00000	-.41716E-13	0.00000	-.17965E-12	0.00000	.17602E+00	0.00000	-.76847E-01	0.00000
.19275E+00	0.00000	-.23901E-13	0.00000	.17972E-13	0.00000	-.69152E-13	0.00000	.17602E+00	0.00000	.76847E-01	0.00000
.31666E-01	0.00000	-.40962E-13	0.00000	-.30839E-13	0.00000	-.12774E-12	0.00000	-.60061E-01	0.00000	.29198E+00	0.00000
.31666E-01	0.00000	.48161E-13	0.00000	.26289E-13	0.00000	-.15787E-12	0.00000	-.60061E-01	0.00000	-.29198E+00	0.00000
.49529E-01	0.00000	-.26222E-13	0.00000	-.32439E-13	0.00000	-.14016E-12	0.00000	-.16584E-01	0.00000	.18624E-01	0.00000
.49529E-01	0.00000	.43106E-13	0.00000	.53664E-14	0.00000	-.11001E-12	0.00000	-.16584E-01	0.00000	-.18624E-01	0.00000
.49529E-01	0.00000	-.65945E-14	0.00000	.40413E-13	0.00000	-.50784E-13	0.00000	-.16584E-01	0.00000	.18624E-01	0.00000
.49529E-01	0.00000	.35564E-13	0.00000	-.10389E-13	0.00000	-.46623E-13	0.00000	-.16584E-01	0.00000	-.18624E-01	0.00000
.31666E-01	0.00000	-.14109E-14	0.00000	-.35036E-13	0.00000	-.13504E-13	0.00000	-.60061E-01	0.00000	.29198E+00	0.00000
.31666E-01	0.00000	.16644E-13	0.00000	.16857E-13	0.00000	-.40407E-13	0.00000	-.60061E-01	0.00000	-.29198E+00	0.00000
.19275E+00	0.00000	-.27633E-14	0.00000	-.11816E-13	0.00000	.21333E-13	0.00000	.17602E+00	0.00000	.76847E-01	0.00000
.19275E+00	0.00000	-.10699E-14	0.00000	.88301E-14	0.00000	-.21495E-14	0.00000	.17602E+00	0.00000	-.76847E-01	0.00000
.95209E-01	0.00000	.83253E-14	0.00000	-.13228E-13	0.00000	-.86429E-14	0.00000	-.11148E+00	0.00000	.25096E+00	0.00000
.95209E-01	0.00000	-.21939E-13	0.00000	.31523E-13	0.00000	.46257E-13	0.00000	-.11148E+00	0.00000	-.25096E+00	0.00000
.16346E-01	0.00000	-.89110E-14	0.00000	.14840E-13	0.00000	-.22192E-13	0.00000	.12104E-01	0.00000	-.28535E-01	0.00000
.16346E-01	0.00000	.21975E-13	0.00000	-.21957E-13	0.00000	.78014E-14	0.00000	.12104E-01	0.00000	.28535E-01	0.00000

NATURAL FREQUENCY= .165042E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.13580E-01	0.00000	-.41825E-13	0.00000	-.75258E-13	0.00000	-.44075E-14	0.00000	-.32178E-02	0.00000	-.12070E-01	0.00000
.13580E-01	0.00000	-.84341E-13	0.00000	.15012E-12	0.00000	.80486E-13	0.00000	-.32178E-02	0.00000	.12070E-01	0.00000
.48406E-01	0.00000	.22148E-12	0.00000	.24548E-13	0.00000	-.72634E-13	0.00000	.57720E-01	0.00000	.15572E+00	0.00000
.48406E-01	0.00000	.14329E-12	0.00000	-.47562E-13	0.00000	.29000E-12	0.00000	.57720E-01	0.00000	.15572E+00	0.00000
.14031E+00	0.00000	-.17420E-12	0.00000	.61554E-14	0.00000	-.11659E-12	0.00000	-.11021E+00	0.00000	.13758E-01	0.00000
.14031E+00	0.00000	-.15690E-12	0.00000	-.28715E-13	0.00000	.12059E-13	0.00000	-.11021E+00	0.00000	.13758E-01	0.00000
.36205E-01	0.00000	.64877E-14	0.00000	.75334E-13	0.00000	-.71635E-13	0.00000	.17147E-01	0.00000	.31611E+00	0.00000
.36205E-01	0.00000	.87925E-13	0.00000	-.75706E-13	0.00000	-.78291E-13	0.00000	.17147E-01	0.00000	.31611E+00	0.00000
.17013E+00	0.00000	.54349E-13	0.00000	-.40697E-13	0.00000	-.64264E-13	0.00000	.14108E+00	0.00000	.20973E+00	0.00000
.17013E+00	0.00000	.11651E-12	0.00000	.49627E-13	0.00000	-.93413E-13	0.00000	.14108E+00	0.00000	.20973E+00	0.00000
.17013E+00	0.00000	-.12118E-12	0.00000	.91635E-13	0.00000	-.42523E-13	0.00000	.14108E+00	0.00000	.20973E+00	0.00000
.17013E+00	0.00000	-.90366E-13	0.00000	-.72067E-13	0.00000	-.90701E-13	0.00000	.14108E+00	0.00000	.20973E+00	0.00000
.36205E-01	0.00000	-.19617E-13	0.00000	-.17223E-13	0.00000	.17174E-13	0.00000	-.17147E-01	0.00000	-.31611E+00	0.00000
.36205E-01	0.00000	.23096E-13	0.00000	-.12050E-13	0.00000	-.20073E-12	0.00000	-.17147E-01	0.00000	-.31611E+00	0.00000
.14031E+00	0.00000	.77241E-13	0.00000	.46303E-13	0.00000	.13078E-12	0.00000	.11021E+00	0.00000	.13758E-01	0.00000
.14031E+00	0.00000	.15108E-12	0.00000	-.74545E-13	0.00000	-.32843E-12	0.00000	.11021E+00	0.00000	.13758E-01	0.00000
.49406E-01	0.00000	-.15211E-12	0.00000	-.18017E-12	0.00000	.16436E-13	0.00000	-.57720E-01	0.00000	.15572E+00	0.00000
.48406E-01	0.00000	-.13800E-12	0.00000	.21222E-12	0.00000	-.72264E-13	0.00000	-.57720E-01	0.00000	.15572E+00	0.00000
.13580E-01	0.00000	.10204E-12	0.00000	.76460E-13	0.00000	-.80366E-13	0.00000	.32178E-02	0.00000	-.12070E-01	0.00000
.13580E-01	0.00000	.63673E-13	0.00000	-.57212E-13	0.00000	.10056E-12	0.00000	.32178E-02	0.00000	.12070E-01	0.00000

NATURAL FREQUENCY= .165645E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.34292E-01	0.00000	.14063E-13	0.00000	-.15217E-12	0.00000	-.10777E-12	0.00000	.24287E-01	0.00000	.30767E-01	0.00000
.34292E-01	0.00000	.17934E-13	0.00000	.63021E-13	0.00000	-.20778E-13	0.00000	.24287E-01	0.00000	-.30767E-01	0.00000
.58672E-01	0.00000	.13394E-13	0.00000	.88143E-13	0.00000	-.34043E-12	0.00000	-.30824E-01	0.00000	.86146E-01	0.00000
.58672E-01	0.00000	.69729E-13	0.00000	-.11183E-12	0.00000	.98753E-13	0.00000	-.30824E-01	0.00000	-.86146E-01	0.00000
.48980E-01	0.00000	-.75638E-13	0.00000	.93565E-14	0.00000	-.75578E-14	0.00000	-.60815E-01	0.00000	-.24713E+00	0.00000
.48980E-01	0.00000	.88602E-14	0.00000	-.57813E-14	0.00000	-.14517E-12	0.00000	-.60815E-01	0.00000	.24713E+00	0.00000
.18432E+00	0.00000	-.17448E-13	0.00000	.41425E-13	0.00000	-.47826E-13	0.00000	.15633E+00	0.00000	.62230E-01	0.00000
.18432E+00	0.00000	.14325E-13	0.00000	-.17161E-14	0.00000	.44039E-13	0.00000	.15633E+00	0.00000	-.62230E-01	0.00000
.11096E+00	0.00000	.47243E-13	0.00000	-.36871E-13	0.00000	.20074E-12	0.00000	-.88976E-01	0.00000	.30082E+00	0.00000
.11096E+00	0.00000	.13933E-14	0.00000	.27697E-13	0.00000	.84633E-13	0.00000	-.88976E-01	0.00000	-.30082E+00	0.00000
.11096E+00	0.00000	.12698E-13	0.00000	-.32848E-13	0.00000	.22861E-12	0.00000	-.88976E-01	0.00000	.30082E+00	0.00000
.11096E+00	0.00000	.99651E-13	0.00000	.14704E-13	0.00000	.24348E-12	0.00000	-.88976E-01	0.00000	-.30082E+00	0.00000
.18432E+00	0.00000	.85561E-13	0.00000	.32719E-13	0.00000	.35607E-12	0.00000	.15633E+00	0.00000	-.62230E-01	0.00000
.18432E+00	0.00000	-.29746E-13	0.00000	-.22597E-13	0.00000	.14073E-12	0.00000	.15633E+00	0.00000	.62230E-01	0.00000
.48980E-01	0.00000	.48700E-13	0.00000	-.69943E-13	0.00000	.24107E-12	0.00000	-.60815E-01	0.00000	.24713E+00	0.00000
.48980E-01	0.00000	-.41569E-13	0.00000	.18950E-13	0.00000	.18221E-12	0.00000	-.60815E-01	0.00000	-.24713E+00	0.00000
.58672E-01	0.00000	.11836E-13	0.00000	-.20915E-13	0.00000	.10006E-12	0.00000	-.30824E-01	0.00000	-.86146E-01	0.00000
.58672E-01	0.00000	-.40692E-13	0.00000	-.46039E-13	0.00000	.47266E-13	0.00000	-.30824E-01	0.00000	.86146E-01	0.00000
-.34292E-01	0.00000	-.38233E-13	0.00000	-.22474E-13	0.00000	-.15129E-13	0.00000	.24287E-01	0.00000	-.30767E-01	0.00000
.34292E-01	0.00000	.53410E-13	0.00000	.17319E-13	0.00000	-.35628E-13	0.00000	.24287E-01	0.00000	.30767E-01	0.00000

NATURAL FREQUENCY= .166276E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15626E-13	0.00000	-.14356E+00	0.00000	-.12627E-10	0.00000	-.47969E-11	0.00000	.25619E-13	0.00000	.43639E-14	0.00000
.16361E-13	0.00000	-.14356E+00	0.00000	.12534E-10	0.00000	.44925E-11	0.00000	-.20667E-13	0.00000	-.44038E-13	0.00000
.10456E-13	0.00000	.31233E+00	0.00000	-.11896E-11	0.00000	-.29114E-10	0.00000	-.12971E-13	0.00000	-.14128E-12	0.00000
-.36372E-13	0.00000	.31233E+00	0.00000	.11671E-11	0.00000	.26528E-10	0.00000	-.60293E-13	0.00000	.12019E-12	0.00000
-.14417E-12	0.00000	-.22361E+00	0.00000	-.14946E-11	0.00000	-.20742E-10	0.00000	.14439E-12	0.00000	.15066E-12	0.00000
.15900E-12	0.00000	-.22361E+00	0.00000	.14707E-11	0.00000	.20385E-10	0.00000	.13899E-12	0.00000	-.12098E-12	0.00000
.16172E-12	0.00000	-.49469E-01	0.00000	.70693E-11	0.00000	-.25649E-10	0.00000	-.12438E-12	0.00000	.73672E-13	0.00000
.15125E-12	0.00000	-.49469E-01	0.00000	-.70937E-11	0.00000	.24987E-10	0.00000	-.20586E-12	0.00000	-.63913E-13	0.00000
-.70616E-13	0.00000	.28176E+00	0.00000	.82675E-11	0.00000	-.30607E-11	0.00000	.94827E-13	0.00000	-.10025E-12	0.00000
.10629E-12	0.00000	.28176E+00	0.00000	-.82406E-11	0.00000	.23360E-11	0.00000	.36840E-13	0.00000	.10124E-12	0.00000
-.14953E-13	0.00000	-.28176E+00	0.00000	.84157E-11	0.00000	.27122E-11	0.00000	.81274E-14	0.00000	.17724E-12	0.00000
.13896E-13	0.00000	-.28176E+00	0.00000	-.83469E-11	0.00000	-.32385E-11	0.00000	-.33294E-13	0.00000	-.21569E-12	0.00000
.39900E-13	0.00000	.49469E-01	0.00000	.69924E-11	0.00000	.25408E-10	0.00000	.20174E-13	0.00000	.31341E-13	0.00000
-.62595E-13	0.00000	.49469E-01	0.00000	-.69529E-11	0.00000	-.25877E-10	0.00000	-.22326E-13	0.00000	.46749E-13	0.00000
.32046E-13	0.00000	.22361E+00	0.00000	-.14296E-11	0.00000	.20778E-10	0.00000	-.31591E-13	0.00000	-.11612E-12	0.00000
-.11604E-14	0.00000	-.22361E+00	0.00000	.14314E-11	0.00000	-.20870E-10	0.00000	-.85037E-13	0.00000	.13290E-12	0.00000
-.10896E-12	0.00000	-.31233E+00	0.00000	-.13149E-11	0.00000	.29100E-10	0.00000	.12892E-12	0.00000	.26333E-14	0.00000
.10956E-12	0.00000	-.31233E+00	0.00000	.13880E-11	0.00000	-.29017E-10	0.00000	-.10747E-12	0.00000	-.97410E-14	0.00000
.71615E-13	0.00000	.14356E+00	0.00000	-.12610E-10	0.00000	.46424E-11	0.00000	-.36568E-13	0.00000	.43751E-13	0.00000
-.62352E-13	0.00000	-.14356E+00	0.00000	.12574E-10	0.00000	-.45797E-11	0.00000	-.67398E-13	0.00000	-.47721E-13	0.00000

NATURAL FREQUENCY= .166343E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-0.10790E-13	0.00000	-0.13504E-10	0.00000	.13372E+00	0.00000	-0.49414E-01	0.00000	.54309E-13	0.00000	.22841E-13	0.00000
.13036E-13	0.00000	-0.13416E-10	0.00000	-0.13372E+00	0.00000	-0.49414E-01	0.00000	-0.30359E-13	0.00000	-0.19203E-13	0.00000
.42508E-13	0.00000	.29304E-10	0.00000	.13180E-01	0.00000	.30678E+00	0.00000	-0.32997E-13	0.00000	.25880E-13	0.00000
-0.49753E-13	0.00000	.29212E-10	0.00000	-0.13180E-01	0.00000	-0.30678E+00	0.00000	-0.86334E-14	0.00000	-0.12630E-13	0.00000
.37189E-13	0.00000	-0.20947E-10	0.00000	.15803E-01	0.00000	.21957E+00	0.00000	-0.15837E-13	0.00000	-0.63267E-13	0.00000
-0.22042E-13	0.00000	-0.20896E-10	0.00000	-0.15803E-01	0.00000	-0.21957E+00	0.00000	-0.40803E-13	0.00000	.23264E-13	0.00000
.54993E-13	0.00000	-0.46476E-11	0.00000	-0.74560E-01	0.00000	.27013E+00	0.00000	-0.28318E-14	0.00000	-0.10408E-12	0.00000
-0.22131E-13	0.00000	.46375E-11	0.00000	.74560E-01	0.00000	-0.27013E+00	0.00000	-0.64618E-13	0.00000	.68987E-13	0.00000
-0.92837E-13	0.00000	.26435E-10	0.00000	-0.88145E-01	0.00000	.30530E-01	0.00000	.24718E-13	0.00000	-0.29047E-13	0.00000
.28694E-13	0.00000	.26369E-10	0.00000	.88145E-01	0.00000	-0.30530E-01	0.00000	-0.48483E-13	0.00000	.22548E-13	0.00000
.14179E-13	0.00000	-0.26389E-10	0.00000	-0.88145E-01	0.00000	-0.30530E-01	0.00000	-0.40944E-13	0.00000	.17840E-12	0.00000
.28824E-13	0.00000	-0.26390E-10	0.00000	.88145E-01	0.00000	.30530E-01	0.00000	-0.25993E-14	0.00000	-0.10636E-12	0.00000
-0.28634E-14	0.00000	.46521E-11	0.00000	-0.74560E-01	0.00000	-0.27013E+00	0.00000	.36569E-13	0.00000	-0.11942E-13	0.00000
.79829E-14	0.00000	.46172E-11	0.00000	.74560E-01	0.00000	.27013E+00	0.00000	-0.26518E-13	0.00000	.72532E-13	0.00000
-0.48192E-13	0.00000	.20970E-10	0.00000	.15803E-01	0.00000	-0.21957E+00	0.00000	.83397E-13	0.00000	.14435E-12	0.00000
.22473E-13	0.00000	.20940E-10	0.00000	-0.15803E-01	0.00000	.21957E+00	0.00000	.34050E-13	0.00000	-0.18488E-12	0.00000
.97444E-13	0.00000	-0.29260E-10	0.00000	.13180E-01	0.00000	-0.30678E+00	0.00000	-0.65470E-13	0.00000	.58400E-13	0.00000
.96316E-13	0.00000	-0.27289E-10	0.00000	-0.13180E-01	0.00000	.30678E+00	0.00000	-0.10010E-12	0.00000	-0.42099E-14	0.00000
-0.13767E-13	0.00000	.13493E-10	0.00000	.13372E+00	0.00000	-0.49414E-01	0.00000	.47242E-13	0.00000	-0.26309E-13	0.00000
.14193E-13	0.00000	.13386E-10	0.00000	-0.13372E+00	0.00000	.49414E-01	0.00000	.18651E-13	0.00000	.92299E-13	0.00000

NATURAL FREQUENCY= .168689E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.56752E-13	0.00000	.33417E-01	0.00000	.10380E-02	0.00000	.37198E-01	0.00000	.27183E-13	0.00000	.13157E-13	0.00000
.14709E-13	0.00000	-.33417E-01	0.00000	.10380E-02	0.00000	.37198E-01	0.00000	-.13383E-13	0.00000	.12790E-13	0.00000
.32083E-13	0.00000	-.29133E-01	0.00000	-.27800E-01	0.00000	-.55769E-01	0.00000	.15265E-13	0.00000	.28774E-12	0.00000
-.15423E-13	0.00000	.29133E-01	0.00000	-.27800E-01	0.00000	-.55769E-01	0.00000	.33684E-13	0.00000	-.17785E-12	0.00000
.89728E-13	0.00000	-.52577E-01	0.00000	-.23631E-01	0.00000	-.20475E+00	0.00000	-.10171E-12	0.00000	-.19951E-12	0.00000
-.65022E-13	0.00000	.52577E-01	0.00000	-.23631E-01	0.00000	-.20475E+00	0.00000	-.76101E-13	0.00000	.17544E-12	0.00000
-.12125E-12	0.00000	-.74249E-01	0.00000	-.12017E-01	0.00000	-.28205E+00	0.00000	.13789E-12	0.00000	.93278E-15	0.00000
.98475E-13	0.00000	.74249E-01	0.00000	-.12017E-01	0.00000	-.28205E+00	0.00000	.98357E-13	0.00000	-.71819E-14	0.00000
.83481E-13	0.00000	-.88729E-01	0.00000	-.49463E-02	0.00000	-.32815E+00	0.00000	-.10644E-12	0.00000	.10052E-12	0.00000
-.76924E-13	0.00000	.88729E-01	0.00000	-.49463E-02	0.00000	-.32815E+00	0.00000	-.74601E-13	0.00000	-.12230E-12	0.00000
.35479E-14	0.00000	-.88729E-01	0.00000	.49463E-02	0.00000	-.32815E+00	0.00000	-.47654E-15	0.00000	.19446E-12	0.00000
.12198E-13	0.00000	.88729E-01	0.00000	.49463E-02	0.00000	-.32815E+00	0.00000	.31535E-13	0.00000	.12545E-12	0.00000
-.84088E-13	0.00000	-.74249E-01	0.00000	.12017E-01	0.00000	-.28205E+00	0.00000	.98313E-13	0.00000	.10690E-12	0.00000
.60661E-13	0.00000	.74249E-01	0.00000	.12017E-01	0.00000	-.28205E+00	0.00000	.86989E-13	0.00000	-.14722E-12	0.00000
.89415E-13	0.00000	-.52577E-01	0.00000	.23631E-01	0.00000	-.20475E+00	0.00000	-.90765E-13	0.00000	-.36844E-13	0.00000
-.79637E-13	0.00000	.52577E-01	0.00000	.23631E-01	0.00000	-.20475E+00	0.00000	-.10244E-12	0.00000	.36678E-13	0.00000
-.59528E-13	0.00000	-.29133E-01	0.00000	.27800E-01	0.00000	-.55769E-01	0.00000	.81037E-13	0.00000	.16215E-14	0.00000
.53874E-13	0.00000	.29133E-01	0.00000	.27800E-01	0.00000	-.55769E-01	0.00000	.76121E-13	0.00000	-.19342E-13	0.00000
.33492E-13	0.00000	.33417E-01	0.00000	-.10380E-02	0.00000	.37198E-01	0.00000	-.18739E-13	0.00000	.51761E-13	0.00000
-.34285E-13	0.00000	-.33417E-01	0.00000	-.10380E-02	0.00000	.37198E-01	0.00000	-.29515E-13	0.00000	-.37979E-13	0.00000

G-98

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .169000E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.60789E-14	0.00000	.15897E-12	0.00000	-.19524E+00	0.00000	-.14741E+00	0.00000	.99613E-14	0.00000	.41912E-13	0.00000
.66994E-14	0.00000	-.17157E-12	0.00000	.19524E+00	0.00000	.14741E+00	0.00000	.23586E-13	0.00000	-.17583E-13	0.00000
.51043E-13	0.00000	-.16073E-12	0.00000	.18885E+00	0.00000	-.22515E+00	0.00000	-.51466E-13	0.00000	-.10059E-12	0.00000
-.28564E-13	0.00000	.16309E-12	0.00000	-.18885E+00	0.00000	.22515E+00	0.00000	-.67719E-13	0.00000	.55211E-13	0.00000
-.60113E-13	0.00000	-.23160E-12	0.00000	-.62105E-01	0.00000	-.50557E-01	0.00000	.85341E-13	0.00000	.77403E-13	0.00000
-.97178E-13	0.00000	.25076E-12	0.00000	.62105E-01	0.00000	.50557E-01	0.00000	.86286E-13	0.00000	-.34864E-13	0.00000
.10302E-12	0.00000	-.22301E-12	0.00000	.21974E+00	0.00000	-.60964E-01	0.00000	-.55472E-13	0.00000	.30117E-13	0.00000
-.92824E-13	0.00000	.30878E-12	0.00000	-.21974E+00	0.00000	-.60964E-01	0.00000	-.56528E-13	0.00000	-.14318E-12	0.00000
-.29333E-13	0.00000	-.20876E-12	0.00000	-.10246E+00	0.00000	.19700E+00	0.00000	.37669E-13	0.00000	-.22864E-12	0.00000
-.39884E-14	0.00000	.19490E-12	0.00000	.10246E+00	0.00000	-.19700E+00	0.00000	.13921E-13	0.00000	.20691E-12	0.00000
-.55409E-13	0.00000	-.86558E-13	0.00000	-.10246E+00	0.00000	.19700E+00	0.00000	.35412E-13	0.00000	.76449E-13	0.00000
.22491E-13	0.00000	.94138E-13	0.00000	.10246E+00	0.00000	-.19700E+00	0.00000	.25257E-13	0.00000	-.14223E-12	0.00000
.57962E-13	0.00000	-.44297E-13	0.00000	-.21974E+00	0.00000	.60964E-01	0.00000	.17462E-14	0.00000	.41941E-13	0.00000
-.50186E-13	0.00000	.21999E-13	0.00000	.21974E+00	0.00000	-.60964E-01	0.00000	-.12055E-14	0.00000	-.63456E-13	0.00000
-.45829E-13	0.00000	-.12231E-13	0.00000	.62105E-01	0.00000	-.50557E-01	0.00000	.30080E-13	0.00000	-.11036E-12	0.00000
-.22533E-13	0.00000	.38546E-13	0.00000	-.62105E-01	0.00000	.50557E-01	0.00000	.28357E-13	0.00000	-.31292E-13	0.00000
-.26178E-14	0.00000	.22364E-13	0.00000	-.18885E+00	0.00000	-.22515E+00	0.00000	-.50099E-13	0.00000	.12560E-12	0.00000
-.42473E-13	0.00000	.51396E-14	0.00000	.18885E+00	0.00000	.22515E+00	0.00000	-.48891E-13	0.00000	.12186E-12	0.00000
.29290E-14	0.00000	-.25372E-13	0.00000	-.19524E+00	0.00000	-.14741E+00	0.00000	.35410E-13	0.00000	-.74082E-14	0.00000
.32720E-13	0.00000	.25993E-13	0.00000	.19524E+00	0.00000	.14741E+00	0.00000	.34026E-13	0.00000	-.41756E-13	0.00000

NATURAL FREQUENCY= .171349E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.12605E-13	0.00000	-.54653E-01	0.00000	.29958E-02	0.00000	-.53974E-01	0.00000	.31688E-13	0.00000	.50671E-13	0.00000
.49700E-13	0.00000	.54653E-01	0.00000	.29958E-02	0.00000	-.53974E-01	0.00000	.37151E-13	0.00000	-.68553E-13	0.00000
.76792E-13	0.00000	.57858E-01	0.00000	.43436E-01	0.00000	.12499E+00	0.00000	-.73966E-13	0.00000	-.95007E-13	0.00000
-.77193E-13	0.00000	-.57858E-01	0.00000	.43436E-01	0.00000	.12499E+00	0.00000	-.87969E-13	0.00000	-.20555E-13	0.00000
-.33045E-13	0.00000	.96099E-01	0.00000	.18150E-01	0.00000	.32355E+00	0.00000	.15748E-13	0.00000	-.14997E-12	0.00000
-.12647E-14	0.00000	-.96099E-01	0.00000	.18150E-01	0.00000	.32355E+00	0.00000	.14468E-14	0.00000	.16433E-12	0.00000
-.10102E-12	0.00000	.87622E-01	0.00000	-.22240E-01	0.00000	.23506E+00	0.00000	.83193E-13	0.00000	.73237E-13	0.00000
.11717E-12	0.00000	-.87622E-01	0.00000	-.22240E-01	0.00000	.23506E+00	0.00000	.12687E-12	0.00000	-.14327E-12	0.00000
.80708E-13	0.00000	.36580E-01	0.00000	-.42302E-01	0.00000	.11660E+00	0.00000	-.55550E-13	0.00000	.13694E-12	0.00000
-.10034E-12	0.00000	-.36580E-01	0.00000	-.42302E-01	0.00000	.11660E+00	0.00000	-.64282E-13	0.00000	-.12381E-12	0.00000
.34988E-13	0.00000	-.36580E-01	0.00000	-.42302E-01	0.00000	-.11660E+00	0.00000	-.36382E-13	0.00000	-.15684E-12	0.00000
-.50596E-13	0.00000	.36580E-01	0.00000	-.42302E-01	0.00000	-.11660E+00	0.00000	-.47973E-13	0.00000	.22675E-12	0.00000
-.63677E-13	0.00000	-.87622E-01	0.00000	.22280E-01	0.00000	-.29506E+00	0.00000	.67958E-13	0.00000	.20953E-13	0.00000
.62193E-13	0.00000	.87622E-01	0.00000	-.22280E-01	0.00000	-.29506E+00	0.00000	.68252E-13	0.00000	-.61535E-14	0.00000
.20371E-13	0.00000	-.96099E-01	0.00000	.18150E-01	0.00000	-.32355E+00	0.00000	-.42480E-13	0.00000	.46215E-13	0.00000
-.29027E-13	0.00000	.96099E-01	0.00000	.18150E-01	0.00000	-.32355E+00	0.00000	-.29533E-13	0.00000	-.55771E-13	0.00000
.79006E-14	0.00000	-.57858E-01	0.00000	.43436E-01	0.00000	-.12499E+00	0.00000	-.40807E-14	0.00000	.21640E-14	0.00000
-.31223E-13	0.00000	.57858E-01	0.00000	.43436E-01	0.00000	-.12499E+00	0.00000	.22230E-14	0.00000	-.47797E-13	0.00000
.58115E-14	0.00000	-.54653E-01	0.00000	.29958E-02	0.00000	.53974E-01	0.00000	-.20899E-13	0.00000	.19780E-13	0.00000
.21539E-14	0.00000	.54653E-01	0.00000	.29958E-02	0.00000	.53974E-01	0.00000	-.93305E-14	0.00000	-.21351E-13	0.00000

G-100

NATURAL FREQUENCY= .172097E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-30564E-13	0.00000	-13789E-14	0.00000	.30928E-01	0.00000	-.40542E-01	0.00000	.24328E-13	0.00000	.72502E-14	0.00000
-11412E-13	0.00000	.60453E-13	0.00000	-.30928E-01	0.00000	.40542E-01	0.00000	-.21279E-13	0.00000	-.11097E-13	0.00000
-10653E-13	0.00000	-.56328E-13	0.00000	.14346E+00	0.00000	.28427E+00	0.00000	-.22809E-13	0.00000	.41307E-13	0.00000
.99102E-14	0.00000	-.10064E-12	0.00000	-.14346E+00	0.00000	-.25427E+00	0.00000	-.60984E-15	0.00000	.23702E-13	0.00000
-11295E-13	0.00000	.79705E-13	0.00000	-.20502E+00	0.00000	.10700E+00	0.00000	.45969E-13	0.00000	-.35503E-13	0.00000
.20172E-13	0.00000	.83275E-13	0.00000	.20502E+00	0.00000	-.10700E+00	0.00000	.29503E-13	0.00000	-.81655E-13	0.00000
-.34154E-14	0.00000	-.60628E-13	0.00000	-.52218E-01	0.00000	.20311E-01	0.00000	-.32819E-13	0.00000	-.23486E-13	0.00000
-.15396E-13	0.00000	.47166E-13	0.00000	-.52218E-01	0.00000	-.20311E-01	0.00000	-.13859E-13	0.00000	-.20457E-13	0.00000
-.18677E-13	0.00000	-.16449E-12	0.00000	-.22101E+00	0.00000	-.20195E+00	0.00000	.65002E-13	0.00000	.87218E-13	0.00000
.57323E-13	0.00000	.24279E-15	0.00000	.22101E+00	0.00000	.20195E+00	0.00000	.26222E-13	0.00000	-.66601E-13	0.00000
.31202E-13	0.00000	.23887E-13	0.00000	.22101E+00	0.00000	-.20195E+00	0.00000	-.88661E-13	0.00000	-.70417E-13	0.00000
-.49997E-13	0.00000	.79346E-13	0.00000	-.22101E+00	0.00000	.20195E+00	0.00000	-.87054E-13	0.00000	.10792E-13	0.00000
-.12415E-12	0.00000	.45765E-13	0.00000	-.52218E-01	0.00000	.20311E-01	0.00000	-.14511E-12	0.00000	.11252E-12	0.00000
.98891E-13	0.00000	-.11108E-12	0.00000	-.52218E-01	0.00000	-.20311E-01	0.00000	-.13920E-12	0.00000	-.44808E-13	0.00000
.12705E-12	0.00000	.12993E-12	0.00000	.20502E+00	0.00000	.10700E+00	0.00000	-.13465E-12	0.00000	.94930E-13	0.00000
-.10891E-12	0.00000	-.17293E-12	0.00000	-.20502E+00	0.00000	-.10700E+00	0.00000	-.13211E-12	0.00000	.15780E-14	0.00000
-.20424E-13	0.00000	.15156E-12	0.00000	-.14346E+00	0.00000	.28427E+00	0.00000	.93646E-13	0.00000	-.16897E-12	0.00000
.10749E-12	0.00000	-.48640E-13	0.00000	.14346E+00	0.00000	-.28427E+00	0.00000	-.89326E-13	0.00000	.13053E-12	0.00000
.30775E-14	0.00000	-.11218E-12	0.00000	-.30928E-01	0.00000	-.40542E-01	0.00000	-.31720E-13	0.00000	.53963E-13	0.00000
-.45322E-13	0.00000	.76390E-13	0.00000	.30928E-01	0.00000	.40542E-01	0.00000	-.33402E-13	0.00000	-.56383E-13	0.00000

G-101

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.31373E-13	0.00000	.56487E-13	0.00000	-.16574E+00	0.00000	-.14532E+00	0.00000	-.11962E-13	0.00000	-.32241E-13	0.00000
-.36531E-13	0.00000	-.84666E-13	0.00000	.16574E+00	0.00000	.14532E+00	0.00000	-.32762E-13	0.00000	.33360E-13	0.00000
-.35663E-13	0.00000	-.73227E-13	0.00000	.25017E+00	0.00000	-.14595E+00	0.00000	.24700E-13	0.00000	-.50775E-13	0.00000
.22849E-13	0.00000	.19121E-12	0.00000	-.25017E+00	0.00000	.14595E+00	0.00000	.34785E-13	0.00000	.95359E-14	0.00000
.23156E-13	0.00000	-.19345E-12	0.00000	-.43067E-01	0.00000	.21295E+00	0.00000	-.21642E-13	0.00000	.62479E-13	0.00000
.15792E-13	0.00000	.75037E-13	0.00000	.43067E-01	0.00000	-.21295E+00	0.00000	-.36122E-13	0.00000	-.36660E-14	0.00000
.45619E-13	0.00000	.73033E-13	0.00000	.70914E-01	0.00000	.77507E-01	0.00000	-.11003E-13	0.00000	-.58346E-13	0.00000
.13232E-13	0.00000	.52371E-13	0.00000	-.70914E-01	0.00000	-.77507E-01	0.00000	-.12453E-14	0.00000	-.55420E-13	0.00000
.83733E-13	0.00000	.13330E-12	0.00000	-.11227E+00	0.00000	.21836E+00	0.00000	.30454E-13	0.00000	-.81514E-13	0.00000
.10022E-13	0.00000	-.11907E-12	0.00000	.11227E+00	0.00000	-.21836E+00	0.00000	.57407E-13	0.00000	.29684E-13	0.00000
.38733E-13	0.00000	.10070E-12	0.00000	-.11227E+00	0.00000	-.21836E+00	0.00000	-.14466E-13	0.00000	-.16582E-12	0.00000
.12461E-13	0.00000	-.12250E-12	0.00000	.11227E+00	0.00000	.21836E+00	0.00000	-.12067E-13	0.00000	.71896E-13	0.00000
.10814E-12	0.00000	.19028E-13	0.00000	.70914E-01	0.00000	-.77507E-01	0.00000	-.86969E-13	0.00000	-.25302E-12	0.00000
.60959E-13	0.00000	.68271E-13	0.00000	-.70914E-01	0.00000	.77507E-01	0.00000	-.87083E-13	0.00000	.11103E-12	0.00000
.15358E-12	0.00000	-.19776E-12	0.00000	-.43067E-01	0.00000	-.21295E+00	0.00000	.14539E-12	0.00000	-.27035E-12	0.00000
.11695E-12	0.00000	.10552E-12	0.00000	.43067E-01	0.00000	.21295E+00	0.00000	.14735E-12	0.00000	.12153E-12	0.00000
.26233E-13	0.00000	-.62218E-13	0.00000	.25017E+00	0.00000	.14595E+00	0.00000	-.70341E-13	0.00000	.19788E-12	0.00000
.32643E-13	0.00000	.16673E-12	0.00000	-.25017E+00	0.00000	-.14595E+00	0.00000	-.70700E-13	0.00000	-.12535E-12	0.00000
.19915E-13	0.00000	.83050E-13	0.00000	.16574E+00	0.00000	.14532E+00	0.00000	.22192E-13	0.00000	-.17300E-13	0.00000
.63250E-14	0.00000	-.10629E-12	0.00000	.16574E+00	0.00000	-.14532E+00	0.00000	.20538E-13	0.00000	.16813E-13	0.00000

NATURAL FREQUENCY= .175117E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.73630E-14	0.00000	-.69081E-01	0.00000	.94699E-02	0.00000	-.55798E-01	0.00000	-.10237E-13	0.00000	.52647E-15	0.00000
.35941E-14	0.00000	.69081E-01	0.00000	-.94699E-02	0.00000	-.55798E-01	0.00000	-.20422E-13	0.00000	.16420E-13	0.00000
-.14590E-13	0.00000	.91704E-01	0.00000	.42468E-01	0.00000	.18973E+00	0.00000	.15542E-13	0.00000	.41780E-13	0.00000
.33879E-13	0.00000	-.91704E-01	0.00000	.42468E-01	0.00000	.18973E+00	0.00000	.60359E-14	0.00000	-.33240E-13	0.00000
.24390E-13	0.00000	.11549E+00	0.00000	-.15792E-01	0.00000	.30559E+00	0.00000	-.10349E-13	0.00000	.64439E-14	0.00000
-.39772E-13	0.00000	-.11549E+00	0.00000	-.15792E-01	0.00000	.30559E+00	0.00000	-.84022E-14	0.00000	.28510E-13	0.00000
-.44553E-13	0.00000	.10792E-01	0.00000	-.61098E-01	0.00000	.34367E-01	0.00000	-.30006E-14	0.00000	.51891E-13	0.00000
.36375E-13	0.00000	-.10792E-01	0.00000	-.61098E-01	0.00000	.34367E-01	0.00000	.32446E-13	0.00000	.23333E-13	0.00000
.66139E-13	0.00000	-.10207E+00	0.00000	-.31912E-01	0.00000	-.27113E+00	0.00000	-.32274E-13	0.00000	.10410E-12	0.00000
-.28594E-13	0.00000	.10207E+00	0.00000	-.31912E-01	0.00000	-.27113E+00	0.00000	-.38355E-13	0.00000	-.28269E-15	0.00000
.70964E-14	0.00000	-.10207E+00	0.00000	.31912E-01	0.00000	-.27113E+00	0.00000	-.30469E-13	0.00000	-.54249E-13	0.00000
-.15986E-13	0.00000	.10207E+00	0.00000	.31912E-01	0.00000	-.27113E+00	0.00000	-.21993E-13	0.00000	.10710E-12	0.00000
-.52828E-13	0.00000	.10792E-01	0.00000	.61098E-01	0.00000	.34367E-01	0.00000	.88137E-13	0.00000	.93536E-13	0.00000
-.46250E-13	0.00000	-.10792E-01	0.00000	.61098E-01	0.00000	.34367E-01	0.00000	.86851E-13	0.00000	.89635E-13	0.00000
-.29013E-13	0.00000	.11549E+00	0.00000	-.15792E-01	0.00000	.30559E+00	0.00000	-.55070E-13	0.00000	.10150E-12	0.00000
-.33790E-13	0.00000	-.11549E+00	0.00000	.15792E-01	0.00000	.30559E+00	0.00000	-.57721E-13	0.00000	-.72185E-13	0.00000
-.24895E-13	0.00000	.91704E-01	0.00000	-.42468E-01	0.00000	-.18973E+00	0.00000	.25871E-13	0.00000	.18465E-13	0.00000
-.25163E-14	0.00000	-.91704E-01	0.00000	-.42468E-01	0.00000	.18973E+00	0.00000	.24469E-13	0.00000	.88847E-13	0.00000
.17480E-13	0.00000	-.69081E-01	0.00000	.94699E-02	0.00000	-.55798E-01	0.00000	-.31402E-13	0.00000	-.12002E-13	0.00000
-.19271E-14	0.00000	.69081E-01	0.00000	-.94699E-02	0.00000	-.55798E-01	0.00000	-.32618E-13	0.00000	-.27226E-13	0.00000

NATURAL FREQUENCY= .175972E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RK REAL	RK IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.11392E-13	0.00000	-.42150E-12	0.00000	.34483E-01	0.00000	-.25426E-01	0.00000	.19759E-13	0.00000	.11550E-13	0.00000
.35113E-13	0.00000	.26979E-12	0.00000	-.34483E-01	0.00000	.25426E-01	0.00000	-.20470E-13	0.00000	-.11444E-13	0.00000
-.96202E-14	0.00000	.78726E-12	0.00000	.11225E+00	0.00000	.26563E+00	0.00000	.12948E-13	0.00000	.55468E-13	0.00000
.15899E-13	0.00000	-.84146E-13	0.00000	-.11225E+00	0.00000	-.26563E+00	0.00000	.26541E-13	0.00000	-.81634E-13	0.00000
.41124E-13	0.00000	.13378E-12	0.00000	-.26865E+00	0.00000	.44686E-01	0.00000	-.33347E-13	0.00000	.20386E-13	0.00000
-.62279E-13	0.00000	-.88780E-12	0.00000	.26865E+00	0.00000	-.44686E-01	0.00000	-.39715E-13	0.00000	-.48319E-13	0.00000
-.33582E-14	0.00000	.31517E-12	0.00000	.61483E-01	0.00000	-.28890E+00	0.00000	.15775E-13	0.00000	-.40430E-13	0.00000
.50976E-13	0.00000	.25192E-12	0.00000	-.61483E-01	0.00000	.28890E+00	0.00000	.38196E-13	0.00000	.77008E-13	0.00000
.53520E-14	0.00000	-.61015E-12	0.00000	.60439E-01	0.00000	.31420E-02	0.00000	.98426E-15	0.00000	.24095E-14	0.00000
.19903E-13	0.00000	.35257E-12	0.00000	-.60439E-01	0.00000	-.31420E-02	0.00000	.22809E-14	0.00000	-.64380E-13	0.00000
-.32293E-13	0.00000	-.61412E-12	0.00000	.60439E-01	0.00000	-.31420E-02	0.00000	-.23745E-13	0.00000	-.31036E-13	0.00000
.86229E-14	0.00000	.24528E-12	0.00000	-.60439E-01	0.00000	.31420E-02	0.00000	-.28139E-13	0.00000	-.49314E-13	0.00000
-.18350E-13	0.00000	.36443E-12	0.00000	.61483E-01	0.00000	.28890E+00	0.00000	.53752E-13	0.00000	.35367E-13	0.00000
.22140E-13	0.00000	-.22925E-12	0.00000	-.61483E-01	0.00000	-.28890E+00	0.00000	-.50461E-13	0.00000	-.57716E-13	0.00000
.23928E-13	0.00000	.18515E-12	0.00000	.26865E+00	0.00000	-.44686E-01	0.00000	-.22450E-13	0.00000	.10990E-12	0.00000
-.32629E-13	0.00000	-.94185E-12	0.00000	.26865E+00	0.00000	.44686E-01	0.00000	-.25685E-13	0.00000	-.97652E-13	0.00000
.88550E-15	0.00000	.76857E-12	0.00000	.11225E+00	0.00000	-.26563E+00	0.00000	.12871E-13	0.00000	.42052E-13	0.00000
.36124E-13	0.00000	-.15497E-12	0.00000	-.11225E+00	0.00000	.26563E+00	0.00000	-.11869E-13	0.00000	-.54143E-13	0.00000
.18925E-13	0.00000	-.44465E-12	0.00000	.34483E-01	0.00000	.25426E-01	0.00000	-.26435E-14	0.00000	-.15260E-13	0.00000
-.55470E-13	0.00000	.23673E-12	0.00000	-.34483E-01	0.00000	-.25426E-01	0.00000	.16004E-14	0.00000	.15834E-13	0.00000

G-104

ORIGINAL PAGE IS
OF POOR QUALITY

WASH BURN 11 11 11

NATURAL FREQUENCY* .176159E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.46558E-14	0.00000	.36502E-12	0.00000	.10764E+00	0.00000	.91355E-01	0.00000	.22277E-13	0.00000	.10738E-13	0.00000
.20795E-13	0.00000	.21545E-12	0.00000	.10764E+00	0.00000	.91955E-01	0.00000	.23268E-13	0.00000	.10780E-13	0.00000
-.49971E-13	0.00000	-.82643E-12	0.00000	-.18444E+00	0.00000	.12552E+00	0.00000	.21082E-13	0.00000	.43644E-13	0.00000
.40519E-13	0.00000	-.69855E-12	0.00000	.18444E+00	0.00000	-.12552E+00	0.00000	.22088E-13	0.00000	-.75136E-13	0.00000
-.18224E-13	0.00000	.83413E-12	0.00000	-.35278E-01	0.00000	-.33989E+00	0.00000	-.10679E-12	0.00000	.70377E-13	0.00000
-.76146E-13	0.00000	.10823E-11	0.00000	.35278E-01	0.00000	.33989E+00	0.00000	-.80619E-13	0.00000	-.22912E-13	0.00000
-.23579E-13	0.00000	-.80142E-12	0.00000	.20687E+00	0.00000	.51508E-01	0.00000	.51887E-13	0.00000	-.10420E-13	0.00000
.32126E-13	0.00000	-.75970E-12	0.00000	-.20687E+00	0.00000	-.51508E-01	0.00000	.45339E-13	0.00000	.15399E-12	0.00000
-.31270E-13	0.00000	.38654E-12	0.00000	-.92705E-01	0.00000	.97651E-01	0.00000	-.12171E-13	0.00000	.89763E-13	0.00000
-.37056E-13	0.00000	.16080E-12	0.00000	.92705E-01	0.00000	-.97651E-01	0.00000	-.57451E-14	0.00000	-.15497E-12	0.00000
.22720E-13	0.00000	-.41350E-12	0.00000	-.92705E-01	0.00000	.97651E-01	0.00000	-.57014E-13	0.00000	-.11655E-12	0.00000
-.83705E-13	0.00000	.19275E-12	0.00000	-.92705E-01	0.00000	-.97651E-01	0.00000	-.63358E-13	0.00000	.54727E-13	0.00000
-.11024E-12	0.00000	-.83239E-12	0.00000	.20667E+00	0.00000	.51508E-01	0.00000	.89762E-13	0.00000	.21816E-13	0.00000
.66303E-13	0.00000	-.75665E-12	0.00000	.20687E+00	0.00000	-.51508E-01	0.00000	.84359E-13	0.00000	-.65972E-13	0.00000
-.75894E-13	0.00000	.85586E-12	0.00000	-.35278E-01	0.00000	-.33989E+00	0.00000	-.72719E-13	0.00000	.14797E-12	0.00000
-.16204E-13	0.00000	.11128E-11	0.00000	-.35278E-01	0.00000	.33989E+00	0.00000	-.79409E-13	0.00000	-.12307E-12	0.00000
.54716E-14	0.00000	-.90458E-12	0.00000	.18444E+00	0.00000	.12552E+00	0.00000	.60479E-14	0.00000	-.11612E-12	0.00000
.13857E-13	0.00000	-.65425E-12	0.00000	-.18444E+00	0.00000	-.12552E+00	0.00000	.12937E-13	0.00000	-.29086E-13	0.00000
-.43599E-14	0.00000	.38512E-12	0.00000	.10764E+00	0.00000	.91955E-01	0.00000	.16031E-13	0.00000	-.31952E-13	0.00000
.11255E-13	0.00000	-.21190E-12	0.00000	.10764E+00	0.00000	-.91955E-01	0.00000	-.13457E-13	0.00000	.30512E-13	0.00000

NATURAL FREQUENCY= .177482E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RA IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.15966E-13	0.00000	-.97720E-01	0.00000	-.19022E-12	0.00000	.26387E-12	0.00000	.11884E-13	0.00000	-.10009E-13	0.00000
-.35229E-13	0.00000	-.97720E-01	0.00000	-.18938E-12	0.00000	-.21903E-12	0.00000	-.25462E-13	0.00000	-.26112E-13	0.00000
-.19683E-13	0.00000	.25583E+00	0.00000	-.61458E-12	0.00000	-.26507E-12	0.00000	.92429E-14	0.00000	-.78612E-15	0.00000
-.35879E-14	0.00000	.25583E+00	0.00000	-.53825E-12	0.00000	.44443E-13	0.00000	-.32982E-14	0.00000	-.25096E-13	0.00000
-.18357E-13	0.00000	-.31623E+00	0.00000	-.45643E-12	0.00000	-.91704E-12	0.00000	.15626E-13	0.00000	-.25195E-13	0.00000
-.40683E-13	0.00000	-.31623E+00	0.00000	-.42794E-12	0.00000	.59846E-12	0.00000	.16100E-13	0.00000	-.31781E-13	0.00000
-.34749E-13	0.00000	.25583E+00	0.00000	-.37926E-12	0.00000	.85127E-12	0.00000	-.16993E-13	0.00000	-.37434E-14	0.00000
-.20961E-13	0.00000	.25583E+00	0.00000	-.30965E-12	0.00000	-.78259E-12	0.00000	-.11384E-13	0.00000	-.30689E-13	0.00000
-.66669E-14	0.00000	-.97720E-01	0.00000	-.58729E-12	0.00000	.28426E-12	0.00000	.21159E-13	0.00000	-.29856E-13	0.00000
-.32296E-15	0.00000	-.97720E-01	0.00000	-.63980E-12	0.00000	-.62435E-13	0.00000	.55549E-14	0.00000	-.98358E-14	0.00000
-.43102E-14	0.00000	-.97720E-01	0.00000	-.17542E-12	0.00000	-.37222E-12	0.00000	-.23016E-13	0.00000	-.93550E-14	0.00000
-.55235E-14	0.00000	-.97720E-01	0.00000	-.25273E-12	0.00000	.56528E-12	0.00000	-.10932E-13	0.00000	-.16348E-13	0.00000
-.10745E-13	0.00000	.25583E+00	0.00000	-.15995E-13	0.00000	.69775E-13	0.00000	-.21939E-14	0.00000	-.57525E-13	0.00000
-.12812E-14	0.00000	.25583E+00	0.00000	-.82032E-13	0.00000	-.19746E-12	0.00000	-.19556E-14	0.00000	-.48670E-13	0.00000
-.20464E-13	0.00000	-.31623E+00	0.00000	-.57378E-14	0.00000	-.11178E-12	0.00000	.25477E-13	0.00000	-.29477E-13	0.00000
-.58336E-14	0.00000	-.31623E+00	0.00000	-.72922E-14	0.00000	-.74038E-13	0.00000	.27446E-13	0.00000	-.10561E-13	0.00000
-.16194E-13	0.00000	.25583E+00	0.00000	-.99185E-14	0.00000	-.53205E-13	0.00000	-.12221E-13	0.00000	-.21607E-13	0.00000
-.80068E-14	0.00000	.25583E+00	0.00000	-.57215E-14	0.00000	-.13657E-12	0.00000	-.16023E-13	0.00000	.32451E-13	0.00000
-.14572E-13	0.00000	-.97720E-01	0.00000	-.20759E-13	0.00000	.23042E-13	0.00000	.22869E-13	0.00000	-.16741E-13	0.00000
-.66273E-14	0.00000	-.97720E-01	0.00000	-.44023E-13	0.00000	-.28554E-14	0.00000	.24439E-13	0.00000	.32498E-13	0.00000

G-106

001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053
054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

NATURAL FREQUENCY = .178633E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.16469E-13	0.00000	-.11041E-12	0.00000	.18747E-01	0.00000	-.13575E-01	0.00000	.19412E-13	0.00000	.36506E-13	0.00000
-.25499E-13	0.00000	.14264E-12	0.00000	-.18747E-01	0.00000	.13575E-01	0.00000	-.14688E-13	0.00000	-.27065E-13	0.00000
-.53656E-13	0.00000	.11480E-12	0.00000	.63142E-01	0.00000	.15243E+00	0.00000	.47334E-14	0.00000	-.10549E-13	0.00000
.29717E-13	0.00000	-.21842E-12	0.00000	-.63142E-01	0.00000	-.15243E+00	0.00000	-.92015E-14	0.00000	.18152E-13	0.00000
.20612E-14	0.00000	.24805E-12	0.00000	-.18840E+00	0.00000	.86491E-02	0.00000	-.23880E-13	0.00000	-.20662E-13	0.00000
-.23785E-13	0.00000	-.10237E-12	0.00000	.18840E+00	0.00000	-.86491E-02	0.00000	-.29282E-13	0.00000	-.12684E-13	0.00000
.37575E-13	0.00000	-.90382E-13	0.00000	.52706E-01	0.00000	-.30423E+00	0.00000	.17257E-13	0.00000	.33850E-14	0.00000
-.15492E-13	0.00000	-.42905E-13	0.00000	-.52706E-01	0.00000	.30423E+00	0.00000	-.37017E-13	0.00000	.32608E-14	0.00000
-.39105E-14	0.00000	-.16523E-12	0.00000	.22327E+00	0.00000	.20368E+00	0.00000	-.14802E-14	0.00000	.45194E-13	0.00000
-.15068E-14	0.00000	.20519E-12	0.00000	-.22327E+00	0.00000	-.20368E+00	0.00000	.87002E-14	0.00000	-.90780E-13	0.00000
.46793E-14	0.00000	-.49752E-13	0.00000	.22327E+00	0.00000	.20368E+00	0.00000	-.20627E-13	0.00000	.34515E-13	0.00000
-.53510E-14	0.00000	.13484E-12	0.00000	-.22327E+00	0.00000	-.20368E+00	0.00000	-.93858E-14	0.00000	-.24446E-13	0.00000
-.20992E-14	0.00000	.82275E-14	0.00000	-.52706E-01	0.00000	-.30423E+00	0.00000	.16683E-13	0.00000	-.62331E-13	0.00000
.41993E-14	0.00000	-.17724E-12	0.00000	.52706E-01	0.00000	.30423E+00	0.00000	-.14905E-13	0.00000	.60109E-13	0.00000
-.12955E-13	0.00000	.22175E-12	0.00000	-.18840E+00	0.00000	.86491E-02	0.00000	-.54363E-14	0.00000	-.30933E-13	0.00000
.65883E-14	0.00000	-.98407E-14	0.00000	.18840E+00	0.00000	-.86491E-02	0.00000	-.19520E-14	0.00000	-.20518E-13	0.00000
-.46315E-14	0.00000	-.32750E-13	0.00000	-.63142E-01	0.00000	.15243E+00	0.00000	-.92046E-14	0.00000	.14972E-13	0.00000
.16179E-13	0.00000	-.13613E-12	0.00000	.63142E-01	0.00000	-.15243E+00	0.00000	-.18480E-13	0.00000	-.26039E-13	0.00000
-.43252E-14	0.00000	-.12520E-13	0.00000	-.18747E-01	0.00000	-.13575E-01	0.00000	.27309E-13	0.00000	-.13923E-13	0.00000
-.12090E-13	0.00000	.76259E-13	0.00000	.18747E-01	0.00000	.13575E-01	0.00000	.32426E-13	0.00000	.19817E-13	0.00000

G-107

NATURAL FREQUENCY= .178670E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.40344E-13	0.00000	.20738E-13	0.00000	-.54197E-01	0.00000	-.45338E-01	0.00000	.60308E-14	0.00000	.30541E-13	0.00000
-.10470E-13	0.00000	-.63207E-13	0.00000	.54177E-01	0.00000	.45338E-01	0.00000	-.48098E-14	0.00000	-.32756E-14	0.00000
-.47483E-13	0.00000	.38267E-13	0.00000	-.49360E-01	0.00000	-.74578E-01	0.00000	-.13098E-13	0.00000	.63733E-13	0.00000
-.66436E-14	0.00000	.21886E-12	0.00000	-.99360E-01	0.00000	.74578E-01	0.00000	-.32842E-14	0.00000	-.86996E-15	0.00000
-.39482E-14	0.00000	-.11010E-12	0.00000	.45753E-01	0.00000	.24886E+00	0.00000	.72807E-14	0.00000	-.11004E-12	0.00000
-.32285E-13	0.00000	-.78659E-13	0.00000	-.45753E-01	0.00000	-.24886E+00	0.00000	-.16466E-14	0.00000	.32433E-13	0.00000
-.41706E-13	0.00000	.17917E-12	0.00000	-.23877E+00	0.00000	-.74627E-01	0.00000	-.59916E-14	0.00000	.92119E-14	0.00000
.19373E-13	0.00000	-.29800E-13	0.00000	.23877E+00	0.00000	.74627E-01	0.00000	.35621E-14	0.00000	.11972E-13	0.00000
-.24808E-13	0.00000	.66879E-13	0.00000	.14785E+00	0.00000	-.28480E+00	0.00000	-.62132E-15	0.00000	.43880E-13	0.00000
.32531E-13	0.00000	.86873E-14	0.00000	-.14785E+00	0.00000	.28480E+00	0.00000	.30391E-13	0.00000	.49761E-13	0.00000
-.66336E-14	0.00000	-.29449E-12	0.00000	.14785E+00	0.00000	.28480E+00	0.00000	.85952E-14	0.00000	.78905E-13	0.00000
-.17601E-13	0.00000	-.16944E-14	0.00000	-.14785E+00	0.00000	-.28480E+00	0.00000	.10365E-13	0.00000	-.86346E-13	0.00000
.48859E-13	0.00000	.12249E-12	0.00000	-.23877E+00	0.00000	.74627E-01	0.00000	-.63308E-13	0.00000	-.87337E-13	0.00000
-.45053E-13	0.00000	.30584E-12	0.00000	.23877E+00	0.00000	-.74627E-01	0.00000	-.62940E-13	0.00000	.43640E-13	0.00000
-.10087E-12	0.00000	-.11428E-12	0.00000	.45753E-01	0.00000	-.24886E+00	0.00000	.56681E-13	0.00000	-.12638E-12	0.00000
.71516E-13	0.00000	-.37431E-12	0.00000	-.45753E-01	0.00000	.24886E+00	0.00000	-.64450E-13	0.00000	.14003E-12	0.00000
.40711E-13	0.00000	.31783E-12	0.00000	.99360E-01	0.00000	.74578E-01	0.00000	-.36627E-13	0.00000	.98951E-13	0.00000
-.18310E-13	0.00000	.66778E-14	0.00000	-.99360E-01	0.00000	-.74578E-01	0.00000	-.39843E-13	0.00000	-.34032E-13	0.00000
-.89380E-14	0.00000	-.18635E-12	0.00000	-.54177E-01	0.00000	.45338E-01	0.00000	.10666E-14	0.00000	-.13989E-13	0.00000
.28377E-13	0.00000	.19525E-13	0.00000	.54197E-01	0.00000	-.45338E-01	0.00000	.22287E-14	0.00000	-.17649E-13	0.00000

G-108

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .180016E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.19441E-13	0.00000	-.85623E-01	0.00000	-.14785E-01	0.00000	-.53013E-01	0.00000	.49448E-13	0.00000	.28262E-13	0.00000
.34395E-13	0.00000	.85623E-01	0.00000	.14785E-01	0.00000	-.53013E-01	0.00000	-.11651E-14	0.00000	-.12905E-14	0.00000
-.12119E-13	0.00000	-.14144E+00	0.00000	.27078E-01	0.00000	.23184E+00	0.00000	-.21080E-13	0.00000	.70764E-14	0.00000
.27335E-13	0.00000	-.14144E+00	0.00000	.27078E-01	0.00000	.23184E+00	0.00000	-.39192E-13	0.00000	-.50564E-13	0.00000
-.69966E-13	0.00000	.38756E-01	0.00000	-.49063E-01	0.00000	.16354E+00	0.00000	.26181E-13	0.00000	-.28376E-13	0.00000
.69261E-14	0.00000	-.88756E-01	0.00000	-.49063E-01	0.00000	.16354E+00	0.00000	.24706E-13	0.00000	.24554E-13	0.00000
.12256E-13	0.00000	-.12754E+00	0.00000	-.39294E-01	0.00000	-.23487E+00	0.00000	-.52794E-14	0.00000	.57436E-13	0.00000
-.10339E-14	0.00000	.12754E+00	0.00000	-.39294E-01	0.00000	-.23487E+00	0.00000	.12957E-13	0.00000	-.28962E-14	0.00000
.65102E-13	0.00000	-.10865E+00	0.00000	.46495E-01	0.00000	-.20303E+00	0.00000	-.36684E-13	0.00000	-.55504E-14	0.00000
-.24115E-13	0.00000	.10865E+00	0.00000	.46495E-01	0.00000	-.20303E+00	0.00000	-.29199E-13	0.00000	-.12795E-13	0.00000
-.88266E-14	0.00000	.10365E+00	0.00000	.46495E-01	0.00000	.20303E+00	0.00000	-.10256E-14	0.00000	-.13835E-13	0.00000
.12081E-13	0.00000	-.10865E+00	0.00000	-.46495E-01	0.00000	.20303E+00	0.00000	-.89514E-15	0.00000	.67440E-13	0.00000
-.11030E-13	0.00000	.12754E+00	0.00000	-.39294E-01	0.00000	-.23487E+00	0.00000	-.22544E-13	0.00000	.81321E-13	0.00000
.23301E-13	0.00000	-.12754E+00	0.00000	-.39294E-01	0.00000	.23487E+00	0.00000	.19934E-13	0.00000	-.29003E-13	0.00000
-.79779E-13	0.00000	-.88756E-01	0.00000	-.49063E-01	0.00000	-.16354E+00	0.00000	-.26035E-13	0.00000	.73846E-13	0.00000
-.57331E-13	0.00000	.88756E-01	0.00000	-.49063E-01	0.00000	-.16354E+00	0.00000	-.25221E-13	0.00000	-.26348E-13	0.00000
-.12091E-13	0.00000	-.14144E+00	0.00000	.27078E-01	0.00000	-.23184E+00	0.00000	.18478E-13	0.00000	-.86982E-13	0.00000
-.80815E-14	0.00000	.14144E+00	0.00000	.27078E-01	0.00000	-.23184E+00	0.00000	.17588E-13	0.00000	.45875E-13	0.00000
-.50834E-13	0.00000	-.85623E-01	0.00000	-.14785E-01	0.00000	.53013E-01	0.00000	-.89583E-14	0.00000	-.15515E-13	0.00000
-.56611E-14	0.00000	-.85623E-01	0.00000	-.14785E-01	0.00000	.53013E-01	0.00000	.80220E-14	0.00000	-.12222E-13	0.00000

NATURAL FREQUENCY= .184318E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.51710E-13	0.00000	.49469E-01	0.00000	.23563E-13	0.00000	-.20285E-13	0.00000	.80362E-14	0.00000	-.46567E-13	0.00000
.28790E-15	0.00000	.49469E-01	0.00000	-.18341E-13	0.00000	-.43226E-13	0.00000	.12449E-13	0.00000	-.60413E-13	0.00000
.75404E-13	0.00000	-.14356E+00	0.00000	-.71488E-14	0.00000	.14553E-12	0.00000	.14388E-14	0.00000	-.52341E-14	0.00000
.16332E-13	0.00000	-.14356E+00	0.00000	.48833E-13	0.00000	.96948E-13	0.00000	.39993E-14	0.00000	.21955E-13	0.00000
.15134E-13	0.00000	.22361E+00	0.00000	-.62772E-13	0.00000	.31167E-13	0.00000	.79480E-14	0.00000	-.20678E-13	0.00000
.13405E-13	0.00000	.22361E+00	0.00000	.32092E-14	0.00000	.22086E-12	0.00000	.34412E-14	0.00000	.39053E-13	0.00000
.19312E-13	0.00000	-.28176E+00	0.00000	.73919E-13	0.00000	-.10556E-12	0.00000	-.19331E-13	0.00000	-.51102E-13	0.00000
.82021E-14	0.00000	-.28176E+00	0.00000	-.11910E-12	0.00000	-.16038E-12	0.00000	-.77850E-14	0.00000	-.76246E-14	0.00000
.27891E-13	0.00000	.31233E+00	0.00000	-.14354E-13	0.00000	-.51660E-13	0.00000	.55238E-13	0.00000	-.50538E-14	0.00000
.62629E-13	0.00000	.31233E+00	0.00000	.74532E-13	0.00000	-.26117E-12	0.00000	.45650E-13	0.00000	-.42104E-13	0.00000
.57759E-13	0.00000	-.31233E+00	0.00000	-.17447E-13	0.00000	.52040E-13	0.00000	-.16802E-13	0.00000	.48049E-13	0.00000
.32086E-13	0.00000	-.31233E+00	0.00000	.96574E-13	0.00000	.19522E-12	0.00000	-.23411E-13	0.00000	-.31250E-13	0.00000
.15629E-13	0.00000	.28176E+00	0.00000	.33245E-13	0.00000	.15318E-12	0.00000	-.36864E-13	0.00000	-.23719E-13	0.00000
.74957E-13	0.00000	.28176E+00	0.00000	-.86506E-13	0.00000	.23649E-12	0.00000	-.38613E-13	0.00000	.42368E-13	0.00000
.87090E-13	0.00000	-.22361E+00	0.00000	-.36853E-13	0.00000	-.48893E-13	0.00000	.35971E-13	0.00000	-.76430E-13	0.00000
.49973E-13	0.00000	-.22361E+00	0.00000	.45559E-13	0.00000	-.17858E-12	0.00000	.34181E-13	0.00000	.52649E-13	0.00000
.32189E-13	0.00000	.14356E+00	0.00000	-.76191E-14	0.00000	-.19463E-12	0.00000	-.15479E-13	0.00000	.92988E-13	0.00000
.13279E-13	0.00000	.14356E+00	0.00000	.46574E-13	0.00000	-.19449E-12	0.00000	-.18144E-13	0.00000	-.71471E-13	0.00000
-.12518E-13	0.00000	-.49469E-01	0.00000	.21974E-13	0.00000	.33375E-13	0.00000	-.90649E-14	0.00000	.30163E-13	0.00000
.61798E-14	0.00000	-.49469E-01	0.00000	.36454E-14	0.00000	.53534E-13	0.00000	-.11847E-13	0.00000	.11417E-14	0.00000

G-110

NATURAL FREQUENCY= .186002E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.15333E-13	0.00000	-.10191E+00	0.00000	.16216E-01	0.00000	-.48039E-01	0.00000	.66442E-14	0.00000	-.49670E-13	0.00000
-.29240E-13	0.00000	.10191E+00	0.00000	.16216E-01	0.00000	-.48039E-01	0.00000	.26125E-13	0.00000	-.11238E-13	0.00000
-.50994E-13	0.00000	.20656E+00	0.00000	.53926E-02	0.00000	.23347E+00	0.00000	-.14934E-13	0.00000	-.20115E-13	0.00000
-.46346E-13	0.00000	-.20656E+00	0.00000	.53926E-02	0.00000	.23347E+00	0.00000	-.21781E-13	0.00000	-.52084E-14	0.00000
-.21787E-13	0.00000	-.20272E-01	0.00000	-.48856E-01	0.00000	-.26200E-01	0.00000	-.19441E-13	0.00000	-.77310E-14	0.00000
.30577E-13	0.00000	.20272E-01	0.00000	-.48856E-01	0.00000	-.26200E-01	0.00000	.10405E-13	0.00000	.70674E-14	0.00000
.44634E-13	0.00000	-.19675E+00	0.00000	.18608E-01	0.00000	-.23610E+00	0.00000	.11251E-13	0.00000	.64839E-14	0.00000
.28481E-13	0.00000	.19675E+00	0.00000	.18608E-01	0.00000	-.23610E+00	0.00000	-.82872E-14	0.00000	.10684E-13	0.00000
.64810E-13	0.00000	.12758E+00	0.00000	.40779E-01	0.00000	.15371E+00	0.00000	.11238E-14	0.00000	-.15021E-13	0.00000
-.44044E-14	0.00000	-.12758E+00	0.00000	-.40779E-01	0.00000	.15371E+00	0.00000	-.50220E-14	0.00000	.23159E-13	0.00000
-.28977E-13	0.00000	.12758E+00	0.00000	-.40779E-01	0.00000	.15371E+00	0.00000	.56643E-14	0.00000	-.51212E-13	0.00000
.13341E-13	0.00000	-.12758E+00	0.00000	.40779E-01	0.00000	.15371E+00	0.00000	.18563E-13	0.00000	.94281E-13	0.00000
-.38904E-13	0.00000	-.19675E+00	0.00000	-.18608E-01	0.00000	-.23610E+00	0.00000	.46625E-13	0.00000	.95520E-13	0.00000
.35711E-13	0.00000	.19675E+00	0.00000	-.18608E-01	0.00000	-.23610E+00	0.00000	.48677E-13	0.00000	-.92389E-13	0.00000
.71190E-13	0.00000	-.20272E-01	0.00000	.48856E-01	0.00000	-.26200E-01	0.00000	-.58284E-13	0.00000	.65157E-13	0.00000
-.72198E-13	0.00000	.20272E-01	0.00000	-.48856E-01	0.00000	-.26200E-01	0.00000	-.55201E-13	0.00000	-.37974E-13	0.00000
-.10248E-13	0.00000	.20656E+00	0.00000	-.53926E-02	0.00000	.23347E+00	0.00000	.12814E-13	0.00000	-.10543E-12	0.00000
-.10985E-13	0.00000	-.20656E+00	0.00000	.53926E-02	0.00000	.23347E+00	0.00000	.84164E-14	0.00000	.94852E-13	0.00000
-.27351E-13	0.00000	-.10191E+00	0.00000	-.16216E-01	0.00000	-.48039E-01	0.00000	.20400E-13	0.00000	.66888E-14	0.00000
-.61085E-14	0.00000	.10191E+00	0.00000	-.16216E-01	0.00000	-.48039E-01	0.00000	.27385E-13	0.00000	.33008E-13	0.00000

G-111

NATURAL FREQUENCY= .194483E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	KY IMAG	RZ REAL	RZ IMAG
.37407E-13	0.00000	.10028E+00	0.00000	-.13396E-01	0.00000	.37738E-01	0.00000	-.20636E-13	0.00000	-.43785E-13	0.00000
.14430E-13	0.00000	-.10028E+00	0.00000	-.13396E-01	0.00000	.37738E-01	0.00000	-.21675E-13	0.00000	.15046E-13	0.00000
-.26594E-13	0.00000	-.24415E+00	0.00000	.93521E-02	0.00000	-.19111E+00	0.00000	.30314E-13	0.00000	.37695E-13	0.00000
.46041E-13	0.00000	.24415E+00	0.00000	.93521E-02	0.00000	-.19111E+00	0.00000	.37813E-13	0.00000	-.40298E-13	0.00000
-.47757E-13	0.00000	.18444E+00	0.00000	.21627E-01	0.00000	.15021E+00	0.00000	-.35621E-13	0.00000	.38354E-13	0.00000
-.59550E-13	0.00000	-.18444E+00	0.00000	.21627E-01	0.00000	.15021E+00	0.00000	-.45044E-13	0.00000	-.21479E-13	0.00000
.11517E-13	0.00000	.32933E-01	0.00000	-.32965E-01	0.00000	.26346E-01	0.00000	-.21133E-13	0.00000	-.31628E-13	0.00000
-.29083E-13	0.00000	-.32933E-01	0.00000	-.32965E-01	0.00000	.26346E-01	0.00000	.23473E-13	0.00000	.44002E-13	0.00000
-.19973E-13	0.00000	-.22247E+00	0.00000	.15383E-01	0.00000	-.18023E+00	0.00000	.18129E-13	0.00000	-.38115E-13	0.00000
.32441E-13	0.00000	.22247E+00	0.00000	.15383E-01	0.00000	-.18023E+00	0.00000	.21509E-13	0.00000	-.65319E-14	0.00000
-.20355E-13	0.00000	-.22247E+00	0.00000	.15383E-01	0.00000	.18023E+00	0.00000	-.12755E-13	0.00000	.33801E-13	0.00000
-.27336E-14	0.00000	-.22247E+00	0.00000	.15383E-01	0.00000	.18023E+00	0.00000	.15299E-13	0.00000	-.56317E-13	0.00000
.22709E-13	0.00000	-.32933E-01	0.00000	-.32965E-01	0.00000	-.26346E-01	0.00000	-.23657E-13	0.00000	-.96522E-14	0.00000
-.33577E-14	0.00000	.32933E-01	0.00000	-.32965E-01	0.00000	-.26346E-01	0.00000	-.18424E-13	0.00000	.34133E-13	0.00000
-.50526E-13	0.00000	-.18444E+00	0.00000	.21627E-01	0.00000	-.15021E+00	0.00000	-.23673E-14	0.00000	-.13808E-13	0.00000
.31703E-13	0.00000	.18444E+00	0.00000	.21627E-01	0.00000	-.15021E+00	0.00000	-.61524E-14	0.00000	.16046E-13	0.00000
-.10617E-13	0.00000	.24415E+00	0.00000	.93521E-02	0.00000	.19111E+00	0.00000	.48811E-14	0.00000	.30330E-13	0.00000
.16277E-13	0.00000	-.24415E+00	0.00000	.93521E-02	0.00000	.19111E+00	0.00000	.51714E-14	0.00000	-.14170E-13	0.00000
.29295E-13	0.00000	-.10028E+00	0.00000	-.13396E-01	0.00000	-.37738E-01	0.00000	.18961E-13	0.00000	.15655E-14	0.00000
-.28316E-13	0.00000	.10028E+00	0.00000	-.13396E-01	0.00000	-.37738E-01	0.00000	.14105E-13	0.00000	-.11251E-14	0.00000

G-112

NATURAL FREQUENCY = .201748E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
.18913E-14	0.00000	.76970E-01	0.00000	-.89081E-02	0.00000	.24647E-01	0.00000	-.18414E-14	0.00000	-.82259E-14	0.00000
.16933E-13	0.00000	-.76970E-01	0.00000	-.89081E-02	0.00000	.24647E-01	0.00000	-.40883E-14	0.00000	-.24235E-15	0.00000
.74810E-14	0.00000	-.21570E+00	0.00000	.12501E-01	0.00000	-.12926E+00	0.00000	.26080E-13	0.00000	.55994E-13	0.00000
.31183E-13	0.00000	.21570E+00	0.00000	.12501E-01	0.00000	-.12926E+00	0.00000	.33100E-13	0.00000	-.28060E-13	0.00000
.35522E-13	0.00000	.27205E+00	0.00000	-.68942E-03	0.00000	.16689E+00	0.00000	-.38033E-13	0.00000	.24769E-13	0.00000
.40363E-13	0.00000	-.27205E+00	0.00000	-.68942E-03	0.00000	.16689E+00	0.00000	-.18742E-13	0.00000	-.43627E-15	0.00000
.34257E-14	0.00000	-.22193E+00	0.00000	-.10864E-01	0.00000	-.13600E+00	0.00000	.19631E-13	0.00000	-.28752E-13	0.00000
.56561E-14	0.00000	.22193E+00	0.00000	-.10864E-01	0.00000	-.13600E+00	0.00000	.19164E-13	0.00000	.16887E-13	0.00000
.13304E-14	0.00000	.85051E-01	0.00000	.17848E-01	0.00000	.52085E-01	0.00000	-.11064E-13	0.00000	-.23496E-13	0.00000
.78403E-14	0.00000	-.85051E-01	0.00000	.17848E-01	0.00000	.52085E-01	0.00000	-.10871E-13	0.00000	.26960E-13	0.00000
.85596E-14	0.00000	.85051E-01	0.00000	-.17848E-01	0.00000	.52085E-01	0.00000	.16604E-13	0.00000	.59279E-14	0.00000
.26325E-13	0.00000	-.85051E-01	0.00000	-.17848E-01	0.00000	.52085E-01	0.00000	.14268E-13	0.00000	-.56697E-14	0.00000
.63970E-14	0.00000	-.22193E+00	0.00000	.10864E-01	0.00000	-.13600E+00	0.00000	-.30976E-13	0.00000	-.16331E-13	0.00000
.16135E-13	0.00000	.22193E+00	0.00000	.10864E-01	0.00000	-.13600E+00	0.00000	-.29942E-13	0.00000	.23285E-13	0.00000
.81881E-14	0.00000	.27205E+00	0.00000	.68942E-03	0.00000	.16689E+00	0.00000	.92977E-14	0.00000	-.59659E-13	0.00000
.31811E-13	0.00000	-.27205E+00	0.00000	-.68942E-03	0.00000	.16689E+00	0.00000	.98701E-14	0.00000	.25330E-13	0.00000
.12644E-13	0.00000	-.21570E+00	0.00000	-.12501E-01	0.00000	-.12926E+00	0.00000	-.12663E-13	0.00000	.25625E-15	0.00000
.22605E-13	0.00000	.21570E+00	0.00000	-.12501E-01	0.00000	-.12926E+00	0.00000	-.13123E-13	0.00000	.77490E-14	0.00000
.87732E-14	0.00000	.76970E-01	0.00000	-.89081E-02	0.00000	.24647E-01	0.00000	.11413E-13	0.00000	-.15362E-13	0.00000
.30938E-13	0.00000	-.76970E-01	0.00000	.89081E-02	0.00000	.24647E-01	0.00000	.16220E-13	0.00000	.10275E-13	0.00000

NATURAL FREQUENCY = .205683E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.32840E-13	0.00000	-.41038E-01	0.00000	.43599E-02	0.00000	-.11944E-01	0.00000	.10619E-13	0.00000	-.91981E-14	0.00000
.17816E-13	0.00000	.41038E-01	0.00000	.43599E-02	0.00000	-.11944E-01	0.00000	.33577E-14	0.00000	-.29948E-14	0.00000
.16079E-13	0.00000	.12530E+00	0.00000	-.79334E-02	0.00000	.64384E-01	0.00000	-.74487E-14	0.00000	-.37628E-13	0.00000
-.12327E-13	0.00000	-.12530E+00	0.00000	-.79334E-02	0.00000	.64384E-01	0.00000	-.10372E-13	0.00000	.24068E-13	0.00000
-.40262E-14	0.00000	.19778E+00	0.00000	.60912E-02	0.00000	-.10342E+00	0.00000	.22049E-13	0.00000	.75055E-14	0.00000
.22031E-13	0.00000	.19778E+00	0.00000	.60912E-02	0.00000	-.10342E+00	0.00000	.31748E-13	0.00000	.31130E-14	0.00000
.90383E-14	0.00000	.25048E+00	0.00000	-.38382E-02	0.00000	.13087E+00	0.00000	-.17025E-13	0.00000	-.24918E-13	0.00000
-.17765E-13	0.00000	-.25048E+00	0.00000	-.38382E-02	0.00000	.13087E+00	0.00000	-.17966E-13	0.00000	.59478E-14	0.00000
-.13336E-13	0.00000	.27820E+00	0.00000	.13205E-02	0.00000	-.14532E+00	0.00000	.19369E-13	0.00000	.46750E-14	0.00000
.11997E-13	0.00000	.27820E+00	0.00000	.13205E-02	0.00000	-.14532E+00	0.00000	.19341E-13	0.00000	-.12602E-13	0.00000
.11078E-13	0.00000	.27820E+00	0.00000	.13205E-02	0.00000	.14532E+00	0.00000	-.10630E-13	0.00000	-.32864E-14	0.00000
-.85928E-14	0.00000	-.27820E+00	0.00000	.13205E-02	0.00000	.14532E+00	0.00000	-.95791E-14	0.00000	-.80217E-14	0.00000
-.10548E-13	0.00000	-.25048E+00	0.00000	-.38382E-02	0.00000	-.13087E+00	0.00000	.21686E-13	0.00000	.15251E-13	0.00000
.11550E-13	0.00000	.25048E+00	0.00000	-.38382E-02	0.00000	-.13087E+00	0.00000	.23591E-13	0.00000	-.19072E-14	0.00000
.12350E-14	0.00000	.19778E+00	0.00000	.60912E-02	0.00000	.10342E+00	0.00000	-.18378E-13	0.00000	.12115E-13	0.00000
.17032E-14	0.00000	-.19778E+00	0.00000	.60912E-02	0.00000	-.10342E+00	0.00000	-.10088E-13	0.00000	-.14269E-14	0.00000
-.36122E-14	0.00000	-.12530E+00	0.00000	-.79334E-02	0.00000	-.64384E-01	0.00000	-.13334E-13	0.00000	-.13904E-13	0.00000
-.19951E-13	0.00000	.12530E+00	0.00000	-.79334E-02	0.00000	-.64384E-01	0.00000	-.12227E-13	0.00000	.16026E-13	0.00000
-.42160E-14	0.00000	.41038E-01	0.00000	.43599E-02	0.00000	.11944E-01	0.00000	.11125E-13	0.00000	-.13050E-15	0.00000
.13217E-13	0.00000	-.41038E-01	0.00000	.43599E-02	0.00000	.11944E-01	0.00000	.58210E-14	0.00000	.15049E-13	0.00000

G-114 ORIGINAL PAGE IS OF POOR QUALITY

APPENDIX H

MODE SHAPES OF THE
NATURAL FREQUENCIES
FOR THE SPLIT-BEAM

NATURAL FREQUENCY= .668129E+02

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.33831E+00	0.00000	-.11278E-12	0.00000	.13014E-12	0.00000	.16719E-13	0.00000	-.15071E-12	0.00000	-.10454E+00	0.00000
.33831E+00	0.00000	-.95724E-13	0.00000	.11619E-12	0.00000	.20081E-13	0.00000	-.12233E-12	0.00000	-.10454E+00	0.00000
.13026E+00	0.00000	-.12079E-12	0.00000	.15358E-12	0.00000	-.39354E-13	0.00000	-.14340E-12	0.00000	-.98263E-01	0.00000
.13026E+00	0.00000	-.12703E-12	0.00000	.18942E-12	0.00000	-.22974E-15	0.00000	-.15891E-12	0.00000	-.98263E-01	0.00000
.53843E-01	0.00000	-.10591E-12	0.00000	.12595E-12	0.00000	-.19140E-13	0.00000	-.10150E-12	0.00000	-.78569E-01	0.00000
.53843E-01	0.00000	-.11567E-12	0.00000	.13111E-12	0.00000	-.21333E-13	0.00000	-.10130E-12	0.00000	-.78569E-01	0.00000
.18333E+00	0.00000	-.12141E-12	0.00000	.70055E-13	0.00000	-.13501E-13	0.00000	-.52133E-13	0.00000	-.44482E-01	0.00000
.18333E+00	0.00000	-.12119E-12	0.00000	.72999E-13	0.00000	.30601E-14	0.00000	-.60226E-13	0.00000	-.44482E-01	0.00000
.23140E+00	0.00000	-.14202E-12	0.00000	.59322E-13	0.00000	.46184E-14	0.00000	-.20236E-13	0.00000	-.15960E-13	0.00000
.23140E+00	0.00000	-.13191E-12	0.00000	.55959E-13	0.00000						
.23140E+00	0.00000	-.14165E-12	0.00000	.85078E-13	0.00000						
.23140E+00	0.00000	-.13213E-12	0.00000	.71702E-13	0.00000	.34727E-14	0.00000	-.24020E-13	0.00000	.17992E-12	0.00000
.19333E+00	0.00000	-.13739E-12	0.00000	.66395E-13	0.00000	-.11886E-13	0.00000	-.62317E-13	0.00000	.44482E-01	0.00000
.18333E+00	0.00000	-.13076E-12	0.00000	.67510E-13	0.00000	-.19026E-13	0.00000	-.60672E-13	0.00000	.44482E-01	0.00000
.53843E-01	0.00000	-.14472E-12	0.00000	.12633E-13	0.00000	-.22284E-13	0.00000	-.89674E-13	0.00000	.78569E-01	0.00000
.53843E-01	0.00000	-.13850E-12	0.00000	.11891E-13	0.00000	-.42649E-13	0.00000	-.87159E-13	0.00000	.78569E-01	0.00000
.13026E+00	0.00000	-.13315E-12	0.00000	.31148E-13	0.00000	-.13883E-13	0.00000	-.16595E-12	0.00000	.98263E-01	0.00000
.13026E+00	0.00000	-.15041E-12	0.00000	.27060E-13	0.00000	-.74889E-14	0.00000	-.16459E-12	0.00000	.98263E-01	0.00000
.33831E+00	0.00000	-.13010E-12	0.00000	.42010E-13	0.00000	-.40625E-14	0.00000	-.20394E-12	0.00000	.10454E+00	0.00000
.33831E+00	0.00000	-.14949E-12	0.00000	.36979E-13	0.00000	-.39404E-14	0.00000	-.20442E-12	0.00000	.10454E+00	0.00000

H-1

ORIGINAL PAGE IS
OF POOR QUALITY

MOORE ENGINEERING CO. 10

NATURAL FREQUENCY# .115108E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.28561E-12	0.00000	-.80966E-01	0.00000	-.32482E+00	0.00000	.88918E-01	0.00000	.25201E-12	0.00000	.13095E-12	0.00000
-.21446E-12	0.00000	.80966E-01	0.00000	-.32482E+00	0.00000	.88918E-01	0.00000	.22682E-12	0.00000	.10571E-12	0.00000
.43195E-13	0.00000	-.74478E-01	0.00000	-.13380E+00	0.00000	.87149E-01	0.00000	.18623E-12	0.00000	.91213E-13	0.00000
-.34739E-12	0.00000	.74478E-01	0.00000	-.13380E+00	0.00000	.87149E-01	0.00000	.19979E-12	0.00000	.70835E-13	0.00000
-.18760E-12	0.00000	-.58482E-01	0.00000	.46558E-01	0.00000	.72083E-01	0.00000	.12942E-12	0.00000	.79177E-13	0.00000
-.43326E-12	0.00000	.58482E-01	0.00000	.46558E-01	0.00000	.72083E-01	0.00000	.11580E-12	0.00000	.39062E-14	0.00000
-.32662E-12	0.00000	-.32607E-01	0.00000	.17966E+00	0.00000	.42041E-01	0.00000	.46762E-13	0.00000	.71090E-14	0.00000
-.41510E-12	0.00000	.32607E-01	0.00000	.17966E+00	0.00000	.42041E-01	0.00000	.29894E-13	0.00000	.11014E-13	0.00000
-.23700E-12	0.00000	-.15152E-12	0.00000	.23240E+00	0.00000	-.16767E-12	0.00000	-.41406E-13	0.00000	-.14166E-12	0.00000
-.46987E-12	0.00000	-.37519E-12	0.00000	.23240E+00	0.00000						
-.10953E-12	0.00000	-.10162E-12	0.00000	.23240E+00	0.00000						
-.22865E-12	0.00000	.20549E-12	0.00000	.23240E+00	0.00000	.19598E-12	0.00000	-.33916E-13	0.00000	.52447E-13	0.00000
.26583E-13	0.00000	.32607E-01	0.00000	.17966E+00	0.00000	-.42041E-01	0.00000	-.15436E-12	0.00000	.33202E-14	0.00000
.29056E-12	0.00000	-.32607E-01	0.00000	.17966E+00	0.00000	-.42041E-01	0.00000	-.13468E-12	0.00000	-.62424E-14	0.00000
-.11671E-12	0.00000	.58482E-01	0.00000	.46558E-01	0.00000	-.72083E-01	0.00000	-.20236E-12	0.00000	.70247E-13	0.00000
.26047E-12	0.00000	-.58482E-01	0.00000	.46558E-01	0.00000	-.72083E-01	0.00000	-.20344E-12	0.00000	.22642E-13	0.00000
-.35689E-12	0.00000	.74478E-01	0.00000	-.13380E+00	0.00000	-.87149E-01	0.00000	-.28835E-12	0.00000	.12993E-12	0.00000
.19756E-12	0.00000	-.74478E-01	0.00000	-.13380E+00	0.00000	-.87149E-01	0.00000	-.27966E-12	0.00000	.59052E-13	0.00000
-.64941E-12	0.00000	.80966E-01	0.00000	-.32482E+00	0.00000	-.88918E-01	0.00000	-.35794E-12	0.00000	.12871E-12	0.00000
.40502E-13	0.00000	-.80966E-01	0.00000	-.32482E+00	0.00000	-.88918E-01	0.00000	-.33344E-12	0.00000	.81814E-13	0.00000

H-2

NATURAL FREQUENCY= .140637E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.23596E+00	0.00000	.72035E-15	0.00000	-.58598E-13	0.00000	.12967E-13	0.00000	-.23101E+00	0.00000	-.97879E-02	0.00000
.23596E+00	0.00000	.33324E-13	0.00000	-.48481E-13	0.00000	.20366E-13	0.00000	-.23101E+00	0.00000	-.97879E-02	0.00000
-.20366E+00	0.00000	.27953E-13	0.00000	-.47709E-13	0.00000	.35158E-13	0.00000	-.20069E+00	0.00000	-.16204E-01	0.00000
.20366E+00	0.00000	.47614E-13	0.00000	-.19035E-13	0.00000	.58095E-13	0.00000	-.20069E+00	0.00000	-.16204E-01	0.00000
-.14999E+00	0.00000	.32768E-13	0.00000	-.23957E-13	0.00000	.17018E-15	0.00000	-.14799E+00	0.00000	-.23088E-01	0.00000
.14999E+00	0.00000	.31071E-13	0.00000	-.44383E-13	0.00000	.54495E-14	0.00000	-.14799E+00	0.00000	-.23088E-01	0.00000
-.81106E-01	0.00000	.35511E-13	0.00000	-.67258E-14	0.00000	.65592E-14	0.00000	-.79322E-01	0.00000	-.25111E-01	0.00000
.81106E-01	0.00000	.61057E-13	0.00000	-.40238E-14	0.00000	-.45668E-14	0.00000	-.79322E-01	0.00000	-.25111E-01	0.00000
-.16653E-01	0.00000	.52824E-13	0.00000	.27373E-14	0.00000	.29530E-14	0.00000	-.12063E-12	0.00000	-.16653E-01	0.00000
.16653E-01	0.00000	.57607E-13	0.00000	.21162E-14	0.00000						
-.16653E-01	0.00000	.52412E-13	0.00000	.12779E-13	0.00000						
.16653E-01	0.00000	.56687E-13	0.00000	.81047E-14	0.00000	.62059E-14	0.00000	-.11398E-12	0.00000	.16653E-01	0.00000
-.81106E-01	0.00000	.64070E-13	0.00000	.22881E-13	0.00000	.13108E-13	0.00000	-.79322E-01	0.00000	-.25111E-01	0.00000
.81106E-01	0.00000	.57389E-13	0.00000	.14674E-13	0.00000	-.45192E-14	0.00000	-.79322E-01	0.00000	-.25111E-01	0.00000
-.14999E+00	0.00000	.71936E-13	0.00000	-.14896E-13	0.00000	.13865E-13	0.00000	-.14799E+00	0.00000	-.23088E-01	0.00000
.14999E+00	0.00000	.56915E-13	0.00000	.57929E-14	0.00000	-.54571E-15	0.00000	-.14799E+00	0.00000	-.23088E-01	0.00000
-.20366E+00	0.00000	.66611E-13	0.00000	-.83396E-14	0.00000	-.16669E-13	0.00000	-.20069E+00	0.00000	-.16204E-01	0.00000
.20366E+00	0.00000	.58091E-13	0.00000	-.15777E-13	0.00000	.15545E-13	0.00000	-.20069E+00	0.00000	-.16204E-01	0.00000
-.23596E+00	0.00000	.74163E-13	0.00000	-.24800E-13	0.00000	-.13171E-13	0.00000	-.23101E+00	0.00000	-.97879E-02	0.00000
.23596E+00	0.00000	.59959E-13	0.00000	-.31305E-13	0.00000	-.90092E-14	0.00000	-.23101E+00	0.00000	-.97879E-02	0.00000

H-3

NATURAL FREQUENCY= .153451E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.25389E+00	0.00000	-.18274E-13	0.00000	.96531E-13	0.00000	.52532E-14	0.00000	.69065E-12	0.00000	.15492E+00	0.00000
.25389E+00	0.00000	.10769E-13	0.00000	.14809E-12	0.00000	-.17830E-15	0.00000	.67075E-12	0.00000	.15492E+00	0.00000
-.47750E-01	0.00000	-.67759E-15	0.00000	.81197E-13	0.00000	-.24348E-13	0.00000	.59703E-12	0.00000	.12594E+00	0.00000
-.47750E-01	0.00000	.53164E-15	0.00000	.13805E-12	0.00000	.41572E-13	0.00000	.55634E-12	0.00000	.12594E+00	0.00000
-.24339E+00	0.00000	.33780E-13	0.00000	.36341E-13	0.00000	-.33670E-13	0.00000	.45714E-12	0.00000	.52822E-01	0.00000
.24339E+00	0.00000	-.25280E-13	0.00000	.36603E-13	0.00000	-.14478E-13	0.00000	.40857E-12	0.00000	.52822E-01	0.00000
-.25630E+00	0.00000	.39257E-13	0.00000	-.18778E-13	0.00000	-.36728E-13	0.00000	.15347E-12	0.00000	-.36860E-01	0.00000
-.25630E+00	0.00000	.29774E-14	0.00000	-.29621E-13	0.00000	-.23911E-13	0.00000	.15952E-12	0.00000	-.36860E-01	0.00000
-.97708E-01	0.00000	.29117E-13	0.00000	-.89227E-13	0.00000	-.10751E-13	0.00000	-.90725E-13	0.00000	-.97708E-01	0.00000
-.97708E-01	0.00000	.13607E-13	0.00000	-.78424E-13	0.00000						
.97708E-01	0.00000	.29152E-13	0.00000	-.97947E-13	0.00000						
-.97708E-01	0.00000	.13965E-13	0.00000	-.11401E-12	0.00000	-.14285E-13	0.00000	-.98762E-13	0.00000	-.97708E-01	0.00000
.25630E+00	0.00000	.17548E-13	0.00000	-.11019E-12	0.00000	.23981E-13	0.00000	-.32113E-12	0.00000	-.36860E-01	0.00000
.25630E+00	0.00000	.28436E-13	0.00000	-.10160E-12	0.00000	.15129E-14	0.00000	-.31538E-12	0.00000	-.36860E-01	0.00000
.24339E+00	0.00000	.46472E-14	0.00000	-.65646E-13	0.00000	.44767E-13	0.00000	-.42658E-12	0.00000	.52822E-01	0.00000
.24339E+00	0.00000	-.47008E-13	0.00000	.53215E-13	0.00000	.36592E-13	0.00000	-.43629E-12	0.00000	.52822E-01	0.00000
-.47750E-01	0.00000	-.82725E-14	0.00000	.21820E-13	0.00000	.32463E-13	0.00000	-.50732E-12	0.00000	.12594E+00	0.00000
-.47750E-01	0.00000	.57548E-13	0.00000	.35782E-13	0.00000	.60219E-13	0.00000	-.50884E-12	0.00000	.12594E+00	0.00000
-.25389E+00	0.00000	-.77791E-14	0.00000	.12405E-12	0.00000	.35338E-13	0.00000	-.53198E-12	0.00000	.15492E+00	0.00000
-.25389E+00	0.00000	.68390E-13	0.00000	.11244E-12	0.00000	.45966E-13	0.00000	-.52108E-12	0.00000	.15492E+00	0.00000

H-4

DATE: 10/10/85 TIME: 10:00

NATURAL FREQUENCY= .233056E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	KZ REAL	KZ IMAG
.12054E-12	0.00000	.10306E+00	0.00000	.23579E+00	0.00000	-.12953E+00	0.00000	.15304E-12	0.00000	-.44499E-13	0.00000
.19768E-12	0.00000	-.10806E+00	0.00000	.23579E+00	0.00000	-.12953E+00	0.00000	.14403E-12	0.00000	-.85854E-13	0.00000
.11833E-12	0.00000	.87124E-01	0.00000	-.50067E-01	0.00000	-.11181E+00	0.00000	.95655E-13	0.00000	.29080E-13	0.00000
.23843E-13	0.00000	-.87124E-01	0.00000	-.50067E-01	0.00000	-.11181E+00	0.00000	.69256E-13	0.00000	-.54016E-13	0.00000
.74272E-13	0.00000	.44439E-01	0.00000	-.24715E+00	0.00000	-.50209E-01	0.00000	.26504E-14	0.00000	.41065E-13	0.00000
.70813E-13	0.00000	-.44439E-01	0.00000	-.24715E+00	0.00000	-.50209E-01	0.00000	.11913E-14	0.00000	.16619E-13	0.00000
.42456E-13	0.00000	-.48312E-02	0.00000	-.25628E+00	0.00000	.29481E-01	0.00000	-.37687E-13	0.00000	.26488E-13	0.00000
.44201E-15	0.00000	.48312E-02	0.00000	-.25628E+00	0.00000	.29481E-01	0.00000	-.23086E-13	0.00000	.37075E-13	0.00000
.41496E-13	0.00000	-.37508E-01	0.00000	-.83410E-01	0.00000	.83410E-01	0.00000	.17565E-13	0.00000	-.21645E-13	0.00000
.85705E-14	0.00000	.37508E-01	0.00000	-.83410E-01	0.00000						
.10775E-12	0.00000	-.37508E-01	0.00000	.83410E-01	0.00000						
.11066E-12	0.00000	.37508E-01	0.00000	.83410E-01	0.00000	-.83410E-01	0.00000	-.41600E-13	0.00000	.40658E-13	0.00000
.10725E-12	0.00000	-.48312E-02	0.00000	.25628E+00	0.00000	.29481E-01	0.00000	-.59829E-13	0.00000	.16830E-14	0.00000
.57073E-13	0.00000	.48312E-02	0.00000	.25628E+00	0.00000	.29481E-01	0.00000	-.65709E-13	0.00000	.32428E-13	0.00000
.12692E-12	0.00000	.44439E-01	0.00000	-.24715E+00	0.00000	-.50209E-01	0.00000	-.65214E-13	0.00000	-.17835E-13	0.00000
.56496E-13	0.00000	-.44439E-01	0.00000	-.24715E+00	0.00000	-.50209E-01	0.00000	-.57832E-13	0.00000	.21501E-13	0.00000
.35587E-14	0.00000	.87124E-01	0.00000	.50067E-01	0.00000	-.11181E+00	0.00000	-.10418E-13	0.00000	-.46701E-13	0.00000
.28303E-13	0.00000	-.87124E-01	0.00000	.50067E-01	0.00000	-.11181E+00	0.00000	-.12867E-13	0.00000	.26084E-13	0.00000
.14605E-12	0.00000	.10306E+00	0.00000	-.23579E+00	0.00000	-.12953E+00	0.00000	.80921E-13	0.00000	-.62689E-13	0.00000
.13320E-13	0.00000	-.10306E+00	0.00000	-.23579E+00	0.00000	-.12953E+00	0.00000	.76493E-13	0.00000	.14846E-14	0.00000

H-5

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY = .292664E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.23355E+00	0.00000	-.11666E-13	0.00000	-.12106E-12	0.00000	.48373E-13	0.00000	.21894E+00	0.00000	.31406E-01	0.00000
-.23355E+00	0.00000	.72457E-13	0.00000	-.13718E-12	0.00000	-.59493E-13	0.00000	.21894E+00	0.00000	-.31406E-01	0.00000
.13305E+00	0.00000	-.64628E-15	0.00000	-.24875E-13	0.00000	.52284E-13	0.00000	.12783E+00	0.00000	.46474E-01	0.00000
-.13305E+00	0.00000	.32822E-13	0.00000	-.29016E-13	0.00000	-.27737E-13	0.00000	.12783E+00	0.00000	-.46474E-01	0.00000
-.83790E-02	0.00000	-.10880E-13	0.00000	.66532E-13	0.00000	.32057E-13	0.00000	-.66988E-02	0.00000	.53259E-01	0.00000
.83790E-02	0.00000	.41036E-13	0.00000	-.50437E-13	0.00000	-.14144E-13	0.00000	-.66988E-02	0.00000	-.53259E-01	0.00000
-.14429E+00	0.00000	-.17324E-14	0.00000	.79240E-13	0.00000	.30743E-14	0.00000	-.13479E+00	0.00000	.39454E-01	0.00000
.14429E+00	0.00000	.22571E-14	0.00000	-.93364E-13	0.00000	-.29911E-14	0.00000	-.13479E+00	0.00000	-.39454E-01	0.00000
-.21393E+00	0.00000	-.37603E-15	0.00000	.44173E-13	0.00000	-.21559E-13	0.00000	-.20528E+00	0.00000	.34187E-13	0.00000
.21393E+00	0.00000	-.16210E-13	0.00000	-.41289E-13	0.00000						
-.21393E+00	0.00000	.42974E-14	0.00000	.12589E-14	0.00000						
.21393E+00	0.00000	-.17569E-13	0.00000	-.74542E-14	0.00000	-.21007E-13	0.00000	-.20528E+00	0.00000	.34096E-13	0.00000
-.14429E+00	0.00000	-.12850E-13	0.00000	-.67879E-13	0.00000	-.68961E-14	0.00000	-.13479E+00	0.00000	-.39454E-01	0.00000
.14429E+00	0.00000	-.21341E-13	0.00000	-.55521E-13	0.00000	-.17462E-13	0.00000	-.13479E+00	0.00000	.39454E-01	0.00000
-.83790E-02	0.00000	-.38935E-13	0.00000	-.83830E-13	0.00000	.94822E-14	0.00000	-.66988E-02	0.00000	-.53259E-01	0.00000
.83790E-02	0.00000	-.17699E-13	0.00000	-.73616E-13	0.00000	.18396E-13	0.00000	-.66988E-02	0.00000	.53259E-01	0.00000
.13305E+00	0.00000	-.57124E-13	0.00000	-.84106E-14	0.00000	.39587E-13	0.00000	.12783E+00	0.00000	-.46474E-01	0.00000
-.13305E+00	0.00000	-.29182E-14	0.00000	-.33933E-13	0.00000	.32195E-13	0.00000	.12783E+00	0.00000	.46474E-01	0.00000
.23355E+00	0.00000	-.66165E-13	0.00000	.57651E-13	0.00000	.45603E-13	0.00000	.21894E+00	0.00000	-.31406E-01	0.00000
-.23355E+00	0.00000	.29516E-14	0.00000	-.68937E-13	0.00000	-.37765E-13	0.00000	.21894E+00	0.00000	.31406E-01	0.00000

H-6

AN UNCLASSIFIED FILE

0-5

NATURAL FREQUENCY= .305250L+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.17055E+00	0.00000	-.21520E-12	0.00000	.48836E-14	0.00000	-.58270E-14	0.00000	-.10870E-11	0.00000	.20595E+00	0.00000
.17055E+00	0.00000	-.22557E-12	0.00000	.23008E-13	0.00000	-.10086E-13	0.00000	-.11005E-11	0.00000	.20595E+00	0.00000
.19774E+00	0.00000	-.18821E-12	0.00000	.93598E-14	0.00000	.91383E-14	0.00000	-.45741E-12	0.00000	.10711E+00	0.00000
.19774E+00	0.00000	-.17385E-12	0.00000	.90410E-14	0.00000	.25543E-13	0.00000	-.48828E-12	0.00000	.10711E+00	0.00000
-.23536E+00	0.00000	-.13571E-12	0.00000	-.60705E-14	0.00000	-.63226E-14	0.00000	.28630E-12	0.00000	-.60691E-01	0.00000
-.23536E+00	0.00000	-.13049E-12	0.00000	.65858E-14	0.00000	.18675E-13	0.00000	.27534E-12	0.00000	-.60691E-01	0.00000
.32838E-01	0.00000	-.67431E-13	0.00000	.35444E-14	0.00000	-.53256E-14	0.00000	.76694E-12	0.00000	-.12248E+00	0.00000
.32838E-01	0.00000	-.72893E-13	0.00000	.25422E-14	0.00000	.45692E-14	0.00000	-.76783E-12	0.00000	-.12248E+00	0.00000
.22971E+00	0.00000	.16783E-13	0.00000	-.43695E-14	0.00000	-.11811E-14	0.00000	-.79071E-12	0.00000	.24780E-13	0.00000
.22971E+00	0.00000	.13674E-13	0.00000	.35616E-15	0.00000						
.22971E+00	0.00000	.19807E-13	0.00000	-.34487E-14	0.00000						
.22971E+00	0.00000	.13578E-13	0.00000	-.64917E-14	0.00000	-.52965E-14	0.00000	.78693E-12	0.00000	-.16208E-12	0.00000
.32838E-01	0.00000	.73858E-13	0.00000	-.46751E-14	0.00000	.34791E-14	0.00000	.14344E-12	0.00000	.12248E+00	0.00000
.32838E-01	0.00000	.70870E-13	0.00000	-.36870E-14	0.00000	.28618E-14	0.00000	.14477E-12	0.00000	.12248E+00	0.00000
-.23536E+00	0.00000	.14546E-12	0.00000	-.13630E-14	0.00000	.98153E-14	0.00000	-.33119E-12	0.00000	.60691E-01	0.00000
-.23536E+00	0.00000	.14437E-12	0.00000	-.34726E-14	0.00000	.33973E-14	0.00000	-.33631E-12	0.00000	.60691E-01	0.00000
.19774E+00	0.00000	-.18208E-12	0.00000	.32638E-14	0.00000	-.18762E-14	0.00000	-.48939E-12	0.00000	.10711E+00	0.00000
.19774E+00	0.00000	.17731E-12	0.00000	-.27895E-14	0.00000	.10560E-13	0.00000	-.48983E-12	0.00000	.10711E+00	0.00000
.17055E+00	0.00000	.21761E-12	0.00000	.17045E-14	0.00000	-.42459E-14	0.00000	-.44187E-12	0.00000	-.20595E+00	0.00000
.17055E+00	0.00000	-.21466E-12	0.00000	.71663E-14	0.00000	-.77955E-15	0.00000	-.43565E-12	0.00000	-.20595E+00	0.00000

H-7

ORIGINAL PAGE IS OF POOR QUALITY

NATURAL FREQUENCY= .324055E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.21078E-13	0.00000	-.32827E+00	0.00000	.15454E-12	0.00000	.57795E-13	0.00000	-.45190E-13	0.00000	-.70506E-13	0.00000
-.99160E-13	0.00000	-.32827E+00	0.00000	.15455E-12	0.00000	-.63060E-13	0.00000	-.39311E-13	0.00000	-.97536E-13	0.00000
.91549E-13	0.00000	-.28868E+00	0.00000	.22701E-12	0.00000	-.39734E-13	0.00000	-.12447E-14	0.00000	-.33259E-13	0.00000
-.58351E-13	0.00000	-.28868E+00	0.00000	.24630E-12	0.00000	-.45657E-14	0.00000	-.35207E-13	0.00000	-.56325E-13	0.00000
.29685E-13	0.00000	-.21426E+00	0.00000	.15059E-12	0.00000	-.20653E-13	0.00000	-.44007E-15	0.00000	.59440E-13	0.00000
.67806E-13	0.00000	-.21426E+00	0.00000	.14572E-12	0.00000	-.49202E-13	0.00000	-.21415E-13	0.00000	.30850E-13	0.00000
-.68828E-13	0.00000	-.11401E+00	0.00000	-.12728E-12	0.00000	-.42066E-13	0.00000	-.34521E-13	0.00000	.56880E-13	0.00000
.71490E-14	0.00000	-.11401E+00	0.00000	-.14303E-12	0.00000	-.71356E-13	0.00000	-.39784E-13	0.00000	.37205E-13	0.00000
-.11831E-12	0.00000	-.40486E-14	0.00000	-.20643E-12	0.00000	.58944E-13	0.00000	-.16424E-13	0.00000	-.15536E-13	0.00000
-.90017E-13	0.00000	.67901E-13	0.00000	-.20192E-12	0.00000						
-.37363E-13	0.00000	.35887E-15	0.00000	-.19285E-12	0.00000						
.40175E-13	0.00000	.91683E-13	0.00000	.20539E-12	0.00000	.74216E-13	0.00000	-.28680E-13	0.00000	.77720E-14	0.00000
-.94905E-14	0.00000	.11401E+00	0.00000	.97564E-13	0.00000	.10978E-12	0.00000	-.21072E-13	0.00000	-.13198E-13	0.00000
.53724E-13	0.00000	.11401E+00	0.00000	.96444E-13	0.00000	.11077E-12	0.00000	-.21246E-13	0.00000	-.10093E-13	0.00000
.53076E-13	0.00000	.21426E+00	0.00000	.30512E-12	0.00000	.55832E-14	0.00000	-.42636E-14	0.00000	-.36233E-13	0.00000
.74618E-13	0.00000	.21426E+00	0.00000	.31681E-12	0.00000	.38929E-14	0.00000	-.66546E-14	0.00000	.26123E-13	0.00000
.51379E-13	0.00000	.28868E+00	0.00000	.18483E-12	0.00000	-.13134E-12	0.00000	-.14920E-13	0.00000	.35857E-13	0.00000
.17965E-13	0.00000	.28868E+00	0.00000	.20008E-12	0.00000	-.12956E-12	0.00000	.52617E-14	0.00000	.18485E-13	0.00000
.29317E-13	0.00000	.32827E+00	0.00000	-.22950E-12	0.00000	-.20130E-12	0.00000	.22062E-13	0.00000	.40054E-13	0.00000
-.39456E-13	0.00000	.32827E+00	0.00000	-.22705E-12	0.00000	-.21837E-12	0.00000	.36207E-14	0.00000	.26636E-13	0.00000

NATURAL FREQUENCY= .384572L+03

	TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
	-.76092E-13	0.00000	.13198E+00	0.00000	.14991E+00	0.00000	-.16540E+00	0.00000	-.59373E-13	0.00000	-.61285E-13	0.00000
	.68207E-13	0.00000	-.13188E+00	0.00000	.14991E+00	0.00000	-.16540E+00	0.00000	-.80005E-13	0.00000	-.23200E-13	0.00000
	.53983E-14	0.00000	.67323E-01	0.00000	-.19181E+00	0.00000	-.99265E-01	0.00000	-.13005E-13	0.00000	-.14206E-13	0.00000
	-.58069E-13	0.00000	-.87323E-01	0.00000	-.19181E+00	0.00000	-.99265E-01	0.00000	-.21277E-13	0.00000	.20461E-13	0.00000
	.21162E-13	0.00000	.29042E-01	0.00000	-.23758E+00	0.00000	.31961E-01	0.00000	.30251E-13	0.00000	-.61013E-15	0.00000
	-.68645E-13	0.00000	-.20042E-01	0.00000	-.23758E+00	0.00000	.31961E-01	0.00000	.33255E-13	0.00000	.46266E-13	0.00000
	.34450E-13	0.00000	-.16275E-01	0.00000	.29709E-01	0.00000	.91664E-01	0.00000	-.50148E-13	0.00000	-.23583E-13	0.00000
	-.15030E-12	0.00000	.16275E-01	0.00000	.29709E-01	0.00000	.91664E-01	0.00000	.73313E-13	0.00000	-.48646E-14	0.00000
	.55980E-13	0.00000	-.37305E-13	0.00000	.24976E+00	0.00000	-.55530E-13	0.00000	.47720E-13	0.00000	.23713E-14	0.00000
	.12943E-13	0.00000	-.74033E-13	0.00000	.24976E+00	0.00000						
	.46707E-13	0.00000	-.13430E-12	0.00000	.24976E+00	0.00000						
	-.10628E-13	0.00000	-.17918E-13	0.00000	.24976E+00	0.00000	-.36782E-13	0.00000	.43051E-13	0.00000	-.24588E-13	0.00000
	-.83057E-13	0.00000	.16275E-01	0.00000	.29709E-01	0.00000	-.91664E-01	0.00000	-.44731E-13	0.00000	.41761E-13	0.00000
	.54170E-13	0.00000	-.16275E-01	0.00000	.29709E-01	0.00000	-.91664E-01	0.00000	-.49025E-13	0.00000	-.69256E-14	0.00000
	-.13615E-12	0.00000	-.20042E-01	0.00000	-.23758E+00	0.00000	-.31961E-01	0.00000	-.77758E-13	0.00000	-.11944E-13	0.00000
	.84098E-13	0.00000	.20042E-01	0.00000	-.23758E+00	0.00000	-.31961E-01	0.00000	-.88550E-13	0.00000	.11502E-13	0.00000
	-.14433E-13	0.00000	-.87323E-01	0.00000	-.19181E+00	0.00000	.99265E-01	0.00000	-.10178E-13	0.00000	-.49781E-13	0.00000
	.16492E-13	0.00000	.87323E-01	0.00000	-.19181E+00	0.00000	.99265E-01	0.00000	-.12201E-13	0.00000	.19441E-13	0.00000
	.10654E-12	0.00000	-.13198E+00	0.00000	.14991E+00	0.00000	-.16540E+00	0.00000	.99712E-13	0.00000	-.51237E-13	0.00000
	-.80000E-13	0.00000	.13198E+00	0.00000	.14991E+00	0.00000	-.16540E+00	0.00000	.98103E-13	0.00000	.43392E-13	0.00000

H-9

4-20-68

NATURAL FREQUENCY= .409336E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.21324E+00	0.00000	-.76334E-14	0.00000	-.25154E-13	0.00000	-.64284E-14	0.00000	-.18405E+00	0.00000	-.76321E-01	0.00000
.21324E+00	0.00000	-.51135E-14	0.00000	-.38082E-13	0.00000	-.66584E-14	0.00000	-.18405E+00	0.00000	.76321E-01	0.00000
.12889E-01	0.00000	-.71987E-14	0.00000	-.48020E-13	0.00000	.82848E-14	0.00000	.80321E-02	0.00000	-.84010E-01	0.00000
-.12889E-01	0.00000	.23203E-13	0.00000	-.21631E-13	0.00000	.13208E-13	0.00000	.80321E-02	0.00000	.84010E-01	0.00000
.20422E+00	0.00000	-.76861E-14	0.00000	-.20531E-13	0.00000	.49475E-14	0.00000	.18113E+00	0.00000	-.39319E-01	0.00000
-.20422E+00	0.00000	-.21557E-14	0.00000	.54768E-14	0.00000	.16615E-13	0.00000	.18113E+00	0.00000	.39319E-01	0.00000
.20828E+00	0.00000	.15430E-13	0.00000	.18842E-13	0.00000	.73592E-15	0.00000	.18186E+00	0.00000	-.30528E-01	0.00000
-.20828E+00	0.00000	-.32616E-14	0.00000	.93793E-14	0.00000	-.64767E-14	0.00000	.18186E+00	0.00000	.30528E-01	0.00000
.52271E-01	0.00000	.22474E-14	0.00000	.20424E-14	0.00000	-.30580E-14	0.00000	.63014E-13	0.00000	.52271E-01	0.00000
-.52271E-01	0.00000	-.84796E-14	0.00000	.76070E-14	0.00000						
-.52271E-01	0.00000	.15577E-14	0.00000	-.20496E-14	0.00000						
.52271E-01	0.00000	-.97443E-14	0.00000	-.13676E-13	0.00000	-.10443E-13	0.00000	.63569E-13	0.00000	-.52271E-01	0.00000
-.20828E+00	0.00000	.10837E-13	0.00000	-.19512E-13	0.00000	.16408E-13	0.00000	.18186E+00	0.00000	.30528E-01	0.00000
.20828E+00	0.00000	-.82655E-14	0.00000	-.63209E-14	0.00000	.33385E-14	0.00000	.18186E+00	0.00000	-.30528E-01	0.00000
-.20422E+00	0.00000	-.18175E-13	0.00000	-.83523E-14	0.00000	-.15663E-13	0.00000	.18113E+00	0.00000	.39319E-01	0.00000
.20422E+00	0.00000	-.18551E-13	0.00000	-.11263E-14	0.00000	.49696E-14	0.00000	.18113E+00	0.00000	-.39319E-01	0.00000
-.12889E-01	0.00000	.63400E-14	0.00000	.21230E-13	0.00000	-.13621E-13	0.00000	-.80321E-02	0.00000	.84010E-01	0.00000
.12889E-01	0.00000	-.10006E-13	0.00000	.31796E-14	0.00000	-.64755E-14	0.00000	-.80321E-02	0.00000	-.84010E-01	0.00000
.21324E+00	0.00000	-.40767E-14	0.00000	.43198E-14	0.00000	-.27329E-14	0.00000	.18405E+00	0.00000	-.76321E-01	0.00000
-.21324E+00	0.00000	-.21239E-13	0.00000	.12353E-13	0.00000	-.61970E-14	0.00000	.18405E+00	0.00000	.76321E-01	0.00000

NATURAL FREQUENCY= .429383E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.11901E+00	0.00000	.40735E-13	0.00000	-.72042E-14	0.00000	-.53296E-13	0.00000	-.13813E-11	0.00000	.22907E+00	0.00000
.11901E+00	0.00000	-.29395E-13	0.00000	.36285E-13	0.00000	-.62662E-13	0.00000	-.14040E-11	0.00000	.22907E+00	0.00000
-.24276E+00	0.00000	.35800E-14	0.00000	-.90452E-13	0.00000	-.67068E-13	0.00000	.18750E-13	0.00000	.56443E-01	0.00000
-.24276E+00	0.00000	.19218E-13	0.00000	-.52401E-11	0.00000	.25839E-13	0.00000	.21777E-13	0.00000	.56443E-01	0.00000
-.82824E-01	0.00000	-.20342E-13	0.00000	-.60572E-13	0.00000	.44334E-13	0.00000	.12721E-11	0.00000	.13708E+00	0.00000
-.82824E-01	0.00000	.30841E-13	0.00000	-.29992E-11	0.00000	-.31133E-13	0.00000	.12637E-11	0.00000	.13708E+00	0.00000
.24933E+00	0.00000	.22785E-13	0.00000	.51045E-14	0.00000	-.80511E-14	0.00000	.12715E-11	0.00000	-.62697E-01	0.00000
.24933E+00	0.00000	.13366E-13	0.00000	.34718E-13	0.00000	.34511E-14	0.00000	.12645E-11	0.00000	-.62697E-01	0.00000
-.14231E+00	0.00000	.15981E-13	0.00000	.30684E-13	0.00000	-.12630E-13	0.00000	.41906E-14	0.00000	-.14231E+00	0.00000
.14231E+00	0.00000	-.23688E-14	0.00000	.20517E-13	0.00000						
-.14231E+00	0.00000	.16639E-13	0.00000	.26072E-14	0.00000						
-.14231E+00	0.00000	-.25349E-14	0.00000	.13028E-13	0.00000	-.65901E-14	0.00000	.23472E-14	0.00000	.14231E+00	0.00000
-.24933E+00	0.00000	-.61531E-14	0.00000	-.21894E-13	0.00000	-.15960E-13	0.00000	-.12200E-11	0.00000	-.62697E-01	0.00000
-.24933E+00	0.00000	-.28762E-13	0.00000	-.17330E-13	0.00000	.11414E-14	0.00000	-.12115E-11	0.00000	-.62697E-01	0.00000
-.82824E-01	0.00000	.31384E-14	0.00000	-.19581E-13	0.00000	.34209E-14	0.00000	-.12261E-11	0.00000	.13708E+00	0.00000
-.82824E-01	0.00000	-.18204E-13	0.00000	-.26705E-13	0.00000	-.30486E-14	0.00000	-.12273E-11	0.00000	.13708E+00	0.00000
.24276E+00	0.00000	-.11882E-13	0.00000	.13646E-14	0.00000	.77059E-14	0.00000	-.67353E-13	0.00000	.56443E-01	0.00000
.24276E+00	0.00000	-.41989E-13	0.00000	-.28044E-14	0.00000	-.64924E-14	0.00000	-.62948E-13	0.00000	.56443E-01	0.00000
-.11901E+00	0.00000	-.15478E-13	0.00000	.20295E-13	0.00000	.43532E-15	0.00000	.12244E-11	0.00000	.22907E+00	0.00000
-.11901E+00	0.00000	-.26077E-13	0.00000	.25530E-13	0.00000	.13611E-14	0.00000	.12182E-11	0.00000	.22907E+00	0.00000

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY = .504272E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.20518E-12	0.00000	.17153E+00	0.00000	.39666E-01	0.00000	-.18145E+00	0.00000	.14170E-12	0.00000	.14041E-12	0.00000
.71614E-13	0.00000	-.17153E+00	0.00000	-.39666E-01	0.00000	-.18145E+00	0.00000	-.97754E-13	0.00000	-.31525E-13	0.00000
.10783E-12	0.00000	.11488E+00	0.00000	-.23721E+00	0.00000	-.60363E-01	0.00000	-.78988E-13	0.00000	.10517E-12	0.00000
.90733E-13	0.00000	-.11488E+00	0.00000	-.23721E+00	0.00000	-.60363E-01	0.00000	-.41747E-13	0.00000	-.63490E-13	0.00000
.15453E-12	0.00000	.60701E-01	0.00000	-.57233E-01	0.00000	.65742E-01	0.00000	-.12870E-12	0.00000	-.17456E-13	0.00000
.85911E-13	0.00000	-.60701E-01	0.00000	-.57233E-01	0.00000	.65742E-01	0.00000	-.12856E-12	0.00000	-.15433E-14	0.00000
.29054E-13	0.00000	.72363E-01	0.00000	.24151E+00	0.00000	.78242E-02	0.00000	-.40138E-13	0.00000	-.69157E-13	0.00000
.17925E-17	0.00000	-.72363E-01	0.00000	.24151E+00	0.00000	.78242E-02	0.00000	-.37192E-13	0.00000	.45343E-13	0.00000
.10186E-12	0.00000	.11589E+00	0.00000	-.13053E+00	0.00000	-.13053E+00	0.00000	.10651E-12	0.00000	-.54829E-14	0.00000
.61024E-13	0.00000	-.11589E+00	0.00000	-.13053E+00	0.00000	-.13053E+00	0.00000				
.65626E-13	0.00000	.11589E+00	0.00000	-.13053E+00	0.00000	-.13053E+00	0.00000				
.17305E-12	0.00000	-.11589E+00	0.00000	-.13053E+00	0.00000	-.13053E+00	0.00000	.10852E-12	0.00000	.30536E-13	0.00000
.85052E-13	0.00000	.72363E-01	0.00000	-.24151E+00	0.00000	-.78242E-02	0.00000	.36801E-13	0.00000	.13123E-13	0.00000
.11573E-12	0.00000	-.72363E-01	0.00000	-.24151E+00	0.00000	.78242E-02	0.00000	-.34590E-13	0.00000	-.46596E-13	0.00000
.12504E-12	0.00000	.60701E-01	0.00000	.57233E-01	0.00000	.65742E-01	0.00000	-.79716E-13	0.00000	-.44987E-13	0.00000
.10220E-12	0.00000	-.60701E-01	0.00000	.57233E-01	0.00000	.65742E-01	0.00000	-.79258E-13	0.00000	-.78738E-13	0.00000
.93133E-14	0.00000	.11488E+00	0.00000	.23721E+00	0.00000	-.60363E-01	0.00000	-.45699E-13	0.00000	-.39732E-13	0.00000
.10604E-12	0.00000	-.11488E+00	0.00000	.23721E+00	0.00000	-.60363E-01	0.00000	-.47675E-13	0.00000	.55930E-14	0.00000
.12649E-12	0.00000	.17153E+00	0.00000	.39666E-01	0.00000	-.18145E+00	0.00000	.98640E-13	0.00000	-.39633E-13	0.00000
.93256E-13	0.00000	-.17153E+00	0.00000	-.39666E-01	0.00000	-.18145E+00	0.00000	.85397E-13	0.00000	.96693E-13	0.00000

H-12

NATURAL FREQUENCY= .509274E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-1.19612E+00	0.00000	-1.12292E-12	0.00000	-1.33386E-13	0.00000	1.14720E-12	0.00000	-1.16009E+00	0.00000	-1.11109E+00	0.00000
1.19612E+00	0.00000	1.12623E-12	0.00000	1.32319E-13	0.00000	-1.13182E-12	0.00000	1.16009E+00	0.00000	1.11109E+00	0.00000
1.10960E+00	0.00000	-1.64779E-13	0.00000	-1.19205E-12	0.00000	1.49528E-13	0.00000	1.88986E-01	0.00000	1.89681E-01	0.00000
-1.10960E+00	0.00000	1.11647E-12	0.00000	1.19132E-12	0.00000	-1.52282E-13	0.00000	-1.88986E-01	0.00000	-1.89681E-01	0.00000
1.23063E+00	0.00000	-1.44988E-13	0.00000	-1.48054E-13	0.00000	1.63740E-13	0.00000	1.19786E+00	0.00000	1.15919E-01	0.00000
-1.23063E+00	0.00000	1.64087E-13	0.00000	1.70848E-13	0.00000	-1.12128E-13	0.00000	-1.19786E+00	0.00000	-1.15919E-01	0.00000
1.33669E-01	0.00000	-1.37473E-13	0.00000	-1.18580E-12	0.00000	1.57449E-14	0.00000	1.33682E-01	0.00000	1.85691E-01	0.00000
-1.33669E-01	0.00000	1.75903E-13	0.00000	1.20091E-12	0.00000	-1.16047E-13	0.00000	-1.33682E-01	0.00000	-1.85691E-01	0.00000
1.17778E+00	0.00000	-1.67040E-13	0.00000	-1.12349E-12	0.00000	1.11035E-12	0.00000	-1.16044E+00	0.00000	-1.14828E-12	0.00000
-1.17778E+00	0.00000	1.11179E-12	0.00000	1.11209E-12	0.00000						
1.17778E+00	0.00000	-1.86233E-13	0.00000	-1.10023E-12	0.00000						
-1.17778E+00	0.00000	1.11176E-12	0.00000	1.92702E-13	0.00000	1.10296E-12	0.00000	-1.16044E+00	0.00000	1.19859E-12	0.00000
1.33669E-01	0.00000	-1.49455E-13	0.00000	-1.18697E-12	0.00000	-1.15793E-13	0.00000	1.33682E-01	0.00000	1.85691E-01	0.00000
-1.33669E-01	0.00000	1.59963E-13	0.00000	1.20501E-12	0.00000	1.11189E-13	0.00000	-1.33682E-01	0.00000	-1.85691E-01	0.00000
1.23063E+00	0.00000	-1.60993E-13	0.00000	-1.41150E-13	0.00000	-1.60249E-13	0.00000	1.19786E+00	0.00000	-1.15919E-01	0.00000
-1.23063E+00	0.00000	1.49149E-13	0.00000	1.38452E-13	0.00000	1.71366E-13	0.00000	-1.19786E+00	0.00000	1.15919E-01	0.00000
1.10960E+00	0.00000	-1.11078E-12	0.00000	-1.19160E-12	0.00000	1.41514E-13	0.00000	1.88986E-01	0.00000	1.89681E-01	0.00000
-1.10960E+00	0.00000	1.78512E-13	0.00000	1.19373E-12	0.00000	-1.57097E-13	0.00000	-1.88986E-01	0.00000	-1.89681E-01	0.00000
1.19612E+00	0.00000	-1.15911E-12	0.00000	-1.29297E-13	0.00000	1.14650E-12	0.00000	-1.16009E+00	0.00000	1.11109E+00	0.00000
-1.19612E+00	0.00000	1.11776E-12	0.00000	1.31547E-13	0.00000	-1.14652E-12	0.00000	1.16009E+00	0.00000	-1.11109E+00	0.00000

H-13

NATURAL FREQUENCY = .621946E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RY IMAG	RZ REAL	RZ IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.51498E-01	0.00000	.60896E-13	0.00000	-.46253E-13	0.00000	-.30347E-14	0.00000	-.30815E-12	0.00000	.24856E+00	0.00000	.24856E+00	0.00000
.51498E-01	0.00000	-.42638E-13	0.00000	-.52578E-13	0.00000	-.10624E-13	0.00000	-.28725E-12	0.00000	.24856E+00	0.00000	.24856E+00	0.00000
-.22535E+00	0.00000	.61771E-13	0.00000	.26224E-13	0.00000	.25276E-13	0.00000	.34568E-12	0.00000	-.40947E-01	0.00000	-.40947E-01	0.00000
-.22535E+00	0.00000	-.10733E-13	0.00000	-.25965E-13	0.00000	-.37585E-14	0.00000	.34581E-12	0.00000	-.40947E-01	0.00000	-.40947E-01	0.00000
.18032E+00	0.00000	-.21283E-13	0.00000	.27628E-13	0.00000	-.52936E-14	0.00000	.23316E-12	0.00000	-.13098E+00	0.00000	-.13098E+00	0.00000
.18032E+00	0.00000	-.36661E-13	0.00000	.57331E-13	0.00000	-.14259E-13	0.00000	.25036E-12	0.00000	-.13098E+00	0.00000	-.13098E+00	0.00000
.18413E+00	0.00000	.40611E-13	0.00000	-.28867E-14	0.00000	-.31645E-13	0.00000	-.30887E-12	0.00000	.11848E+00	0.00000	.11848E+00	0.00000
.18413E+00	0.00000	-.25829E-13	0.00000	.42830E-14	0.00000	-.17623E-13	0.00000	-.30402E-12	0.00000	.11848E+00	0.00000	.11848E+00	0.00000
-.19060E+00	0.00000	.19016E-13	0.00000	-.20615E-13	0.00000	.94375E-15	0.00000	-.11784E-12	0.00000	-.80036E-13	0.00000	-.80036E-13	0.00000
-.19060E+00	0.00000	-.15083E-13	0.00000	-.19349E-13	0.00000								
-.19060E+00	0.00000	.17408E-13	0.00000	-.94613E-14	0.00000								
-.19060E+00	0.00000	-.14818E-13	0.00000	-.13074E-13	0.00000	.31107E-14	0.00000	-.11591E-12	0.00000	.26451E-12	0.00000	.26451E-12	0.00000
.18413E+00	0.00000	.14921E-13	0.00000	.22477E-13	0.00000	.12048E-13	0.00000	.42904E-12	0.00000	-.11848E+00	0.00000	-.11848E+00	0.00000
.18413E+00	0.00000	-.36282E-13	0.00000	.27200E-13	0.00000	-.26219E-14	0.00000	.42073E-12	0.00000	-.11848E+00	0.00000	-.11848E+00	0.00000
.18032E+00	0.00000	.13538E-13	0.00000	-.10756E-13	0.00000	-.20496E-13	0.00000	.44157E-13	0.00000	.13098E+00	0.00000	.13098E+00	0.00000
.18032E+00	0.00000	-.51466E-14	0.00000	-.12334E-13	0.00000	-.26097E-14	0.00000	.47193E-13	0.00000	.13098E+00	0.00000	.13098E+00	0.00000
-.22535E+00	0.00000	-.26182E-13	0.00000	-.28813E-13	0.00000	.61401E-15	0.00000	-.26993E-12	0.00000	.40947E-01	0.00000	.40947E-01	0.00000
-.22535E+00	0.00000	-.74717E-14	0.00000	-.34712E-13	0.00000	.22205E-14	0.00000	-.27355E-12	0.00000	.40947E-01	0.00000	.40947E-01	0.00000
.51498E-01	0.00000	-.20372E-13	0.00000	.32048E-13	0.00000	.32134E-13	0.00000	.53895E-13	0.00000	-.24856E+00	0.00000	-.24856E+00	0.00000
.51498E-01	0.00000	.56241E-14	0.00000	.33227E-13	0.00000	.23461E-13	0.00000	.44663E-13	0.00000	-.24856E+00	0.00000	-.24856E+00	0.00000

H-14

NATURAL FREQUENCY= .576674E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.86488E-14	0.00000	.30075E+00	0.00000	-.60498E-13	0.00000	-.14687E-13	0.00000	-.24803E-13	0.00000	-.48916E-13	0.00000
.39882E-14	0.00000	.30075E+00	0.00000	-.68100E-13	0.00000	-.19566E-13	0.00000	-.31324E-14	0.00000	-.28752E-13	0.00000
.20228E-13	0.00000	.16587E+00	0.00000	-.70553E-14	0.00000	.37128E-13	0.00000	.19176E-13	0.00000	.11623E-13	0.00000
.28673E-13	0.00000	.18587E+00	0.00000	-.28731E-13	0.00000	.87174E-14	0.00000	.64763E-14	0.00000	.47550E-14	0.00000
.33845E-14	0.00000	.43743E-13	0.00000	.33177E-13	0.00000	-.68413E-14	0.00000	.99123E-14	0.00000	-.21308E-14	0.00000
.38259E-13	0.00000	-.97780E-14	0.00000	.24732E-13	0.00000	-.11153E-13	0.00000	-.69902E-15	0.00000	-.20832E-14	0.00000
.26209E-13	0.00000	-.18587E+00	0.00000	.91946E-15	0.00000	-.18592E-13	0.00000	.25159E-13	0.00000	.13673E-13	0.00000
.38518E-13	0.00000	-.18587E+00	0.00000	.76673E-14	0.00000	-.11905E-13	0.00000	.12376E-14	0.00000	-.22887E-13	0.00000
.13577E-13	0.00000	.30075E+00	0.00000	.48338E-15	0.00000	.27359E-13	0.00000	-.18219E-13	0.00000	.17469E-13	0.00000
.57323E-13	0.00000	-.30075E+00	0.00000	.13553E-13	0.00000						
.13182E-13	0.00000	-.30075E+00	0.00000	-.64375E-13	0.00000						
.28308E-13	0.00000	-.30075E+00	0.00000	.06741E-13	0.00000	.22098E-13	0.00000	-.25709E-13	0.00000	.11624E-13	0.00000
.62977E-14	0.00000	-.18587E+00	0.00000	.17590E-12	0.00000	-.13660E-13	0.00000	.17088E-13	0.00000	.67176E-15	0.00000
.71707E-13	0.00000	-.18587E+00	0.00000	.14955E-12	0.00000	-.97487E-14	0.00000	.83072E-14	0.00000	.12047E-13	0.00000
.77179E-14	0.00000	-.25285E-13	0.00000	-.24652E-13	0.00000	-.62852E-13	0.00000	-.18200E-14	0.00000	.78159E-14	0.00000
.13815E-13	0.00000	.54927E-13	0.00000	-.16196E-13	0.00000	-.42639E-13	0.00000	-.15841E-14	0.00000	-.24544E-13	0.00000
.16757E-13	0.00000	.18587E+00	0.00000	-.22373E-12	0.00000	.43544E-13	0.00000	.24157E-14	0.00000	.59642E-14	0.00000
.50400E-13	0.00000	.18587E+00	0.00000	-.22498E-12	0.00000	.52963E-13	0.00000	.11951E-13	0.00000	.82578E-14	0.00000
.39272E-14	0.00000	.30075E+00	0.00000	.57494E-13	0.00000	.17875E-12	0.00000	.11324E-13	0.00000	-.31477E-13	0.00000
.18209E-13	0.00000	.30075E+00	0.00000	.46860E-13	0.00000	.18910E-12	0.00000	.21068E-13	0.00000	.82236E-14	0.00000

H-15

NATURAL FREQUENCY = .652664E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.13646E-13	0.00000	.23417E+00	0.00000	-.76656E-01	0.00000	-.17911E+00	0.00000	.11978E-14	0.00000	.25798E-13	0.00000
-.33662E-13	0.00000	-.23417E+00	0.00000	-.76656E-01	0.00000	-.17911E+00	0.00000	-.55861E-13	0.00000	.43155E-13	0.00000
-.18685E-13	0.00000	.15599E+00	0.00000	-.14947E+00	0.00000	-.71965E-02	0.00000	.32677E-14	0.00000	.12407E-13	0.00000
.11016E-13	0.00000	-.15599E+00	0.00000	-.14947E+00	0.00000	-.71965E-02	0.00000	-.15390E-13	0.00000	-.27690E-14	0.00000
-.27750E-13	0.00000	.99824E-01	0.00000	.20048E+00	0.00000	.22355E-01	0.00000	-.57223E-14	0.00000	-.19848E-13	0.00000
-.16514E-13	0.00000	-.99824E-01	0.00000	.20048E+00	0.00000	.22355E-01	0.00000	-.22916E-13	0.00000	-.19769E-13	0.00000
-.14354E-13	0.00000	.75571E-01	0.00000	.16354E+00	0.00000	-.97273E-01	0.00000	-.28573E-13	0.00000	-.10304E-13	0.00000
.81416E-14	0.00000	-.75571E-01	0.00000	.16354E+00	0.00000	-.97273E-01	0.00000	-.39396E-13	0.00000	.49488E-13	0.00000
-.72936E-13	0.00000	.25555E-12	0.00000	-.13789E+00	0.00000	-.10694E-12	0.00000	.12222E-13	0.00000	-.13240E-13	0.00000
-.12397E-13	0.00000	.79437E-13	0.00000	-.13789E+00	0.00000						
-.40001E-13	0.00000	-.23494E-12	0.00000	-.13789E+00	0.00000						
-.28581E-13	0.00000	.90579E-13	0.00000	-.13789E+00	0.00000	-.91971E-13	0.00000	.13007E-13	0.00000	.57904E-14	0.00000
.31035E-13	0.00000	-.75571E-01	0.00000	.16354E+00	0.00000	.97273E-01	0.00000	.77051E-14	0.00000	-.26637E-13	0.00000
-.22201E-13	0.00000	.75571E-01	0.00000	.16354E+00	0.00000	.97273E-01	0.00000	.11419E-13	0.00000	-.17744E-13	0.00000
.33360E-13	0.00000	-.99824E-01	0.00000	.20048E+00	0.00000	-.22355E-01	0.00000	.42074E-14	0.00000	.30330E-14	0.00000
-.10204E-13	0.00000	.99824E-01	0.00000	.20048E+00	0.00000	-.22355E-01	0.00000	.88910E-14	0.00000	.19083E-14	0.00000
.71051E-14	0.00000	-.15599E+00	0.00000	-.14947E+00	0.00000	.71965E-02	0.00000	.14730E-13	0.00000	.14150E-13	0.00000
-.17620E-13	0.00000	.15599E+00	0.00000	-.14947E+00	0.00000	.71965E-02	0.00000	.13438E-13	0.00000	-.27823E-13	0.00000
.20862E-13	0.00000	-.23417E+00	0.00000	-.76656E-01	0.00000	.17911E+00	0.00000	.47812E-14	0.00000	-.51685E-13	0.00000
-.47128E-13	0.00000	.23417E+00	0.00000	-.76656E-01	0.00000	.17911E+00	0.00000	.11950E-13	0.00000	-.48207E-13	0.00000

H-16

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY = .667464E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14679E+00	0.00000	-.74219E-13	0.00000	.16389E-13	0.00000	-.64468E-13	0.00000	.10980E+00	0.00000	.15409E+00	0.00000
.14679E+00	0.00000	.39866E-13	0.00000	-.51664E-14	0.00000	-.61581E-13	0.00000	.10980E+00	0.00000	-.15409E+00	0.00000
.21155E+00	0.00000	-.46053E-13	0.00000	-.86751E-13	0.00000	.10469E-13	0.00000	-.16732E+00	0.00000	.50934E-01	0.00000
.21155E+00	0.00000	.17466E-13	0.00000	.77511E-13	0.00000	.73145E-14	0.00000	-.16732E+00	0.00000	-.50934E-01	0.00000
.73668E-01	0.00000	-.45175E-13	0.00000	-.24619E-13	0.00000	-.22497E-13	0.00000	-.58085E-01	0.00000	-.10300E+00	0.00000
.73668E-01	0.00000	.12433E-13	0.00000	-.21833E-13	0.00000	-.15739E-13	0.00000	-.58085E-01	0.00000	.10300E+00	0.00000
.23531E+00	0.00000	-.23221E-13	0.00000	-.68727E-13	0.00000	.12005E-13	0.00000	.18596E+00	0.00000	-.37264E-01	0.00000
.23531E+00	0.00000	.23332E-13	0.00000	-.69242E-13	0.00000	-.21058E-13	0.00000	.18596E+00	0.00000	.37264E-01	0.00000
.87815E-01	0.00000	-.68162E-14	0.00000	.26287E-14	0.00000	.14984E-13	0.00000	-.58575E-13	0.00000	.87815E-01	0.00000
.87815E-01	0.00000	.23473E-13	0.00000	-.50156E-14	0.00000						
.87815E-01	0.00000	-.66474E-14	0.00000	.27910E-13	0.00000						
.87815E-01	0.00000	.23499E-13	0.00000	-.27457E-13	0.00000	.12718E-13	0.00000	-.63996E-13	0.00000	-.87815E-01	0.00000
.23531E+00	0.00000	.36043E-13	0.00000	-.11806E-13	0.00000	-.56647E-14	0.00000	-.18596E+00	0.00000	-.37264E-01	0.00000
.23531E+00	0.00000	-.78545E-14	0.00000	-.19445E-13	0.00000	-.17571E-13	0.00000	-.18596E+00	0.00000	.37264E-01	0.00000
.73668E-01	0.00000	.29595E-13	0.00000	-.47831E-13	0.00000	.13772E-13	0.00000	.58085E-01	0.00000	-.10300E+00	0.00000
.73668E-01	0.00000	-.68446E-14	0.00000	-.40180E-13	0.00000	-.28472E-14	0.00000	.58085E-01	0.00000	.10300E+00	0.00000
.21155E+00	0.00000	.39218E-13	0.00000	.30130E-13	0.00000	-.11097E-13	0.00000	.16732E+00	0.00000	.50934E-01	0.00000
.21155E+00	0.00000	-.24804E-13	0.00000	-.28757E-13	0.00000	-.83111E-14	0.00000	-.16732E+00	0.00000	-.50934E-01	0.00000
.14679E+00	0.00000	-.57784E-13	0.00000	.16858E-13	0.00000	-.35395E-13	0.00000	-.10980E+00	0.00000	.15409E+00	0.00000
.14679E+00	0.00000	-.50073E-13	0.00000	.15338E-13	0.00000	-.36279E-13	0.00000	-.10980E+00	0.00000	-.15409E+00	0.00000

H-17

NATURAL FREQUENCY = .657313E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.12363E-12	0.00000	.12503E+00	0.00000	-.18697E+00	0.00000	.12634E-01	0.00000	-.84217E-13	0.00000	-.80421E-13	0.00000
.13630E-12	0.00000	-.12503E+00	0.00000	-.18697E+00	0.00000	.12634E-01	0.00000	-.13061E-12	0.00000	.19289E-12	0.00000
.10535E-12	0.00000	.15386E+00	0.00000	.10112E+00	0.00000	-.58393E-02	0.00000	.15564E-12	0.00000	-.32013E-13	0.00000
.23630E-12	0.00000	-.15386E+00	0.00000	.10112E+00	0.00000	-.58393E-02	0.00000	.11539E-12	0.00000	.44237E-13	0.00000
.88622E-13	0.00000	.20402E+00	0.00000	-.92495E-01	0.00000	-.13195E+00	0.00000	.65231E-13	0.00000	.42964E-13	0.00000
.55123E-13	0.00000	-.20402E+00	0.00000	-.92495E-01	0.00000	-.13195E+00	0.00000	.29134E-13	0.00000	-.11844E-12	0.00000
.14561E-12	0.00000	.20038E+00	0.00000	-.15156E+00	0.00000	-.10212E+00	0.00000	-.18507E-12	0.00000	.49429E-13	0.00000
.21870E-12	0.00000	-.20038E+00	0.00000	-.15156E+00	0.00000	-.10212E+00	0.00000	-.13550E-12	0.00000	-.30678E-14	0.00000
.91554E-13	0.00000	.16206E+00	0.00000	-.17825E-01	0.00000	.17825E-01	0.00000	-.34731E-13	0.00000	-.57543E-13	0.00000
.65436E-13	0.00000	-.16206E+00	0.00000	-.17825E-01	0.00000						
.69068E-13	0.00000	.16206E+00	0.00000	-.17825E-01	0.00000						
.71691E-13	0.00000	-.16206E+00	0.00000	-.17825E-01	0.00000	.17825E-01	0.00000	.13413E-13	0.00000	.51564E-13	0.00000
.24633E-12	0.00000	.20038E+00	0.00000	.15156E+00	0.00000	-.10212E+00	0.00000	.17007E-12	0.00000	.57212E-13	0.00000
.19176E-12	0.00000	-.20038E+00	0.00000	.15156E+00	0.00000	-.10212E+00	0.00000	.18015E-12	0.00000	-.22326E-13	0.00000
.70929E-13	0.00000	.20402E+00	0.00000	-.92495E-01	0.00000	-.13195E+00	0.00000	-.51573E-13	0.00000	.99038E-13	0.00000
.29950E-13	0.00000	-.20402E+00	0.00000	-.92495E-01	0.00000	-.13195E+00	0.00000	-.57065E-13	0.00000	-.85675E-13	0.00000
.17509E-12	0.00000	.15386E+00	0.00000	-.10112E+00	0.00000	-.58393E-02	0.00000	-.13681E-12	0.00000	-.28219E-13	0.00000
.17361E-12	0.00000	-.15386E+00	0.00000	-.10112E+00	0.00000	-.58393E-02	0.00000	-.15662E-12	0.00000	.40207E-13	0.00000
.13465E-12	0.00000	.12503E+00	0.00000	.18697E+00	0.00000	.12634E-01	0.00000	.11244E-12	0.00000	-.13106E-12	0.00000
.14515E-12	0.00000	-.12503E+00	0.00000	.18697E+00	0.00000	.12634E-01	0.00000	.10074E-12	0.00000	.16092E-12	0.00000

81-H

H-19

NATURAL FREQUENCY= .746484E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.12239E-01	0.00000	.14906E-13	0.00000	-.51861E-13	0.00000	.37961E-13	0.00000	.23456E-12	0.00000	-.25843E+00	0.00000
-.12239E-01	0.00000	.14896E-13	0.00000	-.53616E-13	0.00000	.17454E-13	0.00000	.30479E-12	0.00000	-.25843E+00	0.00000
.17402E+00	0.00000	.59213E-13	0.00000	.50088E-13	0.00000	.93059E-14	0.00000	-.44834E-12	0.00000	.95880E-01	0.00000
.17402E+00	0.00000	-.51299E-13	0.00000	-.29941E-14	0.00000	-.35793E-13	0.00000	-.51282E-12	0.00000	.95880E-01	0.00000
-.27552E+00	0.00000	.74963E-14	0.00000	.54271E-14	0.00000	-.21482E-13	0.00000	.12038E-12	0.00000	.40324E-01	0.00000
-.27552E+00	0.00000	-.32194E-13	0.00000	-.35227E-13	0.00000	-.23560E-13	0.00000	.13513E-12	0.00000	.40324E-01	0.00000
.63539E-01	0.00000	-.54395E-14	0.00000	-.68947E-14	0.00000	.13981E-13	0.00000	-.38108E-12	0.00000	-.15909E+00	0.00000
.63539E-01	0.00000	-.21357E-13	0.00000	-.35810E-14	0.00000	.10974E-13	0.00000	.36843E-12	0.00000	-.15909E+00	0.00000
.15993E+00	0.00000	-.22846E-13	0.00000	.62985E-13	0.00000	-.48546E-14	0.00000	-.31278E-12	0.00000	.15993E+00	0.00000
-.15993E+00	0.00000	-.81335E-14	0.00000	.57246E-13	0.00000						
-.15993E+00	0.00000	-.23826E-13	0.00000	.53727E-13	0.00000						
-.15993E+00	0.00000	-.85462E-14	0.00000	.43029E-13	0.00000	-.87836E-14	0.00000	-.32053E-12	0.00000	.15993E+00	0.00000
-.63539E-01	0.00000	-.40179E-13	0.00000	-.62480E-13	0.00000	-.87267E-14	0.00000	.36603E-12	0.00000	-.15909E+00	0.00000
-.63539E-01	0.00000	.33050E-13	0.00000	-.59079E-13	0.00000	-.14965E-13	0.00000	.37070E-12	0.00000	-.15909E+00	0.00000
.27552E+00	0.00000	-.60635E-13	0.00000	-.12369E-13	0.00000	.19616E-13	0.00000	.18912E-12	0.00000	.40324E-01	0.00000
.27552E+00	0.00000	.61302E-13	0.00000	-.18679E-13	0.00000	.26935E-13	0.00000	.19331E-12	0.00000	.40324E-01	0.00000
-.17402E+00	0.00000	-.41279E-13	0.00000	.48400E-13	0.00000	-.17217E-14	0.00000	-.38069E-12	0.00000	.95880E-01	0.00000
-.17402E+00	0.00000	.54641E-13	0.00000	.50521E-13	0.00000	-.78394E-14	0.00000	-.38374E-12	0.00000	.95880E-01	0.00000
.12239E-01	0.00000	-.19539E-13	0.00000	-.42773E-13	0.00000	-.22698E-14	0.00000	.14832E-12	0.00000	-.25843E+00	0.00000
.12239E-01	0.00000	.39615E-13	0.00000	-.37139E-13	0.00000	-.31256E-14	0.00000	.14608E-12	0.00000	-.25843E+00	0.00000

NATURAL FREQUENCY* .756831E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.45345E-14	0.00000	.12978E+00	0.00000	-.19132E+00	0.00000	.52269E-01	0.00000	-.27400E-14	0.00000	.25074E-13	0.00000
.36492E-14	0.00000	-.12978E+00	0.00000	-.19132E+00	0.00000	.52269E-01	0.00000	-.19079E-13	0.00000	.54987E-13	0.00000
.30979E-14	0.00000	.16471E+00	0.00000	.20868E+00	0.00000	-.33167E-01	0.00000	.32543E-13	0.00000	.19515E-13	0.00000
.29467E-13	0.00000	-.16471E+00	0.00000	.20868E+00	0.00000	-.33167E-01	0.00000	.80492E-14	0.00000	-.14349E-13	0.00000
.41976E-13	0.00000	.17823E+00	0.00000	-.16535E-01	0.00000	-.15749E+00	0.00000	-.26191E-13	0.00000	-.94802E-14	0.00000
.68445E-13	0.00000	-.17823E+00	0.00000	-.16535E-01	0.00000	-.15749E+00	0.00000	-.65467E-13	0.00000	-.31817E-14	0.00000
.61767E-13	0.00000	.88189E-01	0.00000	-.17327E+00	0.00000	.23950E-02	0.00000	.33323E-13	0.00000	.11416E-14	0.00000
.36455E-13	0.00000	-.88189E-01	0.00000	-.17327E+00	0.00000	.23950E-02	0.00000	.35655E-13	0.00000	.49189E-13	0.00000
.21563E-13	0.00000	.22932E-12	0.00000	.17245E+00	0.00000	-.41417E-13	0.00000	-.24818E-13	0.00000	.23831E-13	0.00000
.47630E-13	0.00000	-.16695E-12	0.00000	.17245E+00	0.00000						
.24417E-13	0.00000	.24450E-12	0.00000	.17245E+00	0.00000						
.66018E-13	0.00000	-.16661E-12	0.00000	.17245E+00	0.00000	-.37322E-13	0.00000	-.46782E-13	0.00000	-.58849E-13	0.00000
.98007E-14	0.00000	-.88189E-01	0.00000	-.17327E+00	0.00000	-.23950E-02	0.00000	-.30201E-13	0.00000	.51643E-14	0.00000
.74814E-13	0.00000	.88189E-01	0.00000	-.17327E+00	0.00000	-.23950E-02	0.00000	-.25026E-13	0.00000	.48670E-13	0.00000
.51493E-14	0.00000	-.17823E+00	0.00000	-.16535E-01	0.00000	.15749E+00	0.00000	.29396E-13	0.00000	.69900E-14	0.00000
.11416E-12	0.00000	.17823E+00	0.00000	-.16535E-01	0.00000	.15749E+00	0.00000	.53379E-13	0.00000	.79246E-14	0.00000
.11197E-13	0.00000	-.16471E+00	0.00000	.20868E+00	0.00000	.33167E-01	0.00000	-.70142E-13	0.00000	-.15440E-13	0.00000
.43522E-13	0.00000	.16471E+00	0.00000	.20868E+00	0.00000	.33167E-01	0.00000	-.81479E-14	0.00000	-.10488E-13	0.00000
.22346E-13	0.00000	-.12978E+00	0.00000	-.19132E+00	0.00000	-.52269E-01	0.00000	-.56598E-13	0.00000	.43922E-13	0.00000
.18181E-13	0.00000	.12978E+00	0.00000	-.19132E+00	0.00000	-.52269E-01	0.00000	.27089E-13	0.00000	.60404E-13	0.00000

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY = .767238E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.11308E+00	0.00000	-.32015E-13	0.00000	-.18766E-13	0.00000	.36119E-13	0.00000	-.78689E-01	0.00000	-.17268E+00	0.00000
-.11308E+00	0.00000	.97524E-14	0.00000	-.30934E-13	0.00000	.30607E-13	0.00000	-.78689E-01	0.00000	.17268E+00	0.00000
.23163E+00	0.00000	-.12409E-13	0.00000	.45918E-13	0.00000	-.12916E-14	0.00000	.18184E+00	0.00000	-.94522E-02	0.00000
-.23163E+00	0.00000	-.37030E-13	0.00000	.56303E-13	0.00000	.14118E-13	0.00000	.18184E+00	0.00000	.94522E-02	0.00000
-.75811E-01	0.00000	-.29268E-13	0.00000	-.37198E-13	0.00000	-.14632E-13	0.00000	-.71851E-01	0.00000	.10514E+00	0.00000
.75811E-01	0.00000	-.38844E-13	0.00000	-.47540E-13	0.00000	.84735E-14	0.00000	-.71851E-01	0.00000	-.10514E+00	0.00000
-.19004E+00	0.00000	-.37721E-13	0.00000	-.21797E-13	0.00000	.23529E-13	0.00000	-.16885E+00	0.00000	-.55475E-01	0.00000
.19004E+00	0.00000	-.34593E-13	0.00000	-.75973E-14	0.00000	.12411E-13	0.00000	-.16885E+00	0.00000	.55475E-01	0.00000
-.14730E+00	0.00000	.59157E-13	0.00000	.44433E-13	0.00000	-.28104E-13	0.00000	.13755E+00	0.00000	.21577E-12	0.00000
-.14730E+00	0.00000	-.21924E-13	0.00000	-.27808E-13	0.00000						
.14730E+00	0.00000	.57350E-13	0.00000	-.10584E-13	0.00000						
-.14730E+00	0.00000	-.22070E-13	0.00000	-.33941E-14	0.00000	-.16026E-13	0.00000	.13755E+00	0.00000	.13283E-12	0.00000
-.19004E+00	0.00000	.21263E-13	0.00000	-.68192E-14	0.00000	-.84157E-14	0.00000	-.16885E+00	0.00000	-.55475E-01	0.00000
.19004E+00	0.00000	.15040E-13	0.00000	-.12516E-13	0.00000	-.50171E-14	0.00000	-.16885E+00	0.00000	.55475E-01	0.00000
-.75811E-01	0.00000	-.10801E-13	0.00000	-.52865E-13	0.00000	.91516E-14	0.00000	-.71851E-01	0.00000	-.10514E+00	0.00000
.75811E-01	0.00000	.15534E-13	0.00000	.52773E-13	0.00000	-.13597E-13	0.00000	-.71851E-01	0.00000	.10514E+00	0.00000
.23163E+00	0.00000	-.35744E-13	0.00000	-.41102E-14	0.00000	-.33846E-14	0.00000	.18184E+00	0.00000	.94522E-02	0.00000
-.23163E+00	0.00000	.21158E-13	0.00000	.46895E-14	0.00000	-.50943E-14	0.00000	.18184E+00	0.00000	-.94522E-02	0.00000
-.11308E+00	0.00000	-.63134E-13	0.00000	-.42735E-13	0.00000	.24294E-13	0.00000	-.78689E-01	0.00000	.17268E+00	0.00000
.11308E+00	0.00000	.32820E-13	0.00000	-.40233E-13	0.00000	.15650E-13	0.00000	-.78689E-01	0.00000	-.17268E+00	0.00000

H-21

H-22

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.18955E-13	0.00000	-.20116E+00	0.00000	.43425E-01	0.00000	.17456E+00	0.00000	-.24274E-13	0.00000	.77071E-13	0.00000
.33234E-13	0.00000	.20116E+00	0.00000	.43425E-01	0.00000	.17456E+00	0.00000	.46065E-13	0.00000	-.41094E-14	0.00000
-.44830E-13	0.00000	-.77023E-01	0.00000	.93062E-01	0.00000	-.32350E-01	0.00000	-.48307E-13	0.00000	-.24954E-13	0.00000
.17408E-13	0.00000	.77023E-01	0.00000	.93062E-01	0.00000	-.32350E-01	0.00000	-.65199E-13	0.00000	-.58574E-14	0.00000
.20204E-13	0.00000	.29088E-01	0.00000	-.26056E+00	0.00000	-.30303E-01	0.00000	.41781E-15	0.00000	-.23499E-13	0.00000
.63163E-13	0.00000	-.29088E-01	0.00000	-.26056E+00	0.00000	-.30303E-01	0.00000	.21108E-13	0.00000	.32219E-13	0.00000
.20903E-13	0.00000	.11390E+00	0.00000	.11908E-01	0.00000	.38266E-01	0.00000	.69331E-13	0.00000	.14233E-13	0.00000
-.91949E-13	0.00000	-.11390E+00	0.00000	.11908E-01	0.00000	.38266E-01	0.00000	.71464E-13	0.00000	-.11643E-13	0.00000
-.12395E-13	0.00000	.21905E+00	0.00000	.14465E+00	0.00000	-.14465E+00	0.00000	-.65093E-13	0.00000	.10226E-13	0.00000
.15843E-13	0.00000	-.21905E+00	0.00000	.14465E+00	0.00000						
.20937E-13	0.00000	.21905E+00	0.00000	.14465E+00	0.00000						
.99363E-13	0.00000	-.21905E+00	0.00000	-.14465E+00	0.00000	-.14465E+00	0.00000	-.46770E-13	0.00000	.12516E-13	0.00000
-.18775E-13	0.00000	.11390E+00	0.00000	-.11908E-01	0.00000	.38266E-01	0.00000	.41524E-13	0.00000	-.10328E-14	0.00000
.96952E-13	0.00000	-.11390E+00	0.00000	-.11908E-01	0.00000	.38266E-01	0.00000	.46802E-13	0.00000	.44941E-13	0.00000
.25209E-13	0.00000	.29088E-01	0.00000	.26056E+00	0.00000	-.30303E-01	0.00000	.22445E-13	0.00000	.30612E-13	0.00000
-.23472E-13	0.00000	-.29088E-01	0.00000	.26056E+00	0.00000	-.30303E-01	0.00000	.29216E-13	0.00000	-.27887E-13	0.00000
-.75462E-13	0.00000	-.77023E-01	0.00000	.93062E-01	0.00000	-.32350E-01	0.00000	-.64250E-13	0.00000	-.48469E-13	0.00000
.97503E-13	0.00000	.77023E-01	0.00000	.93062E-01	0.00000	-.32350E-01	0.00000	-.51687E-13	0.00000	.97409E-14	0.00000
-.29726E-13	0.00000	-.20116E+00	0.00000	-.43425E-01	0.00000	.17456E+00	0.00000	-.95853E-15	0.00000	-.62230E-13	0.00000
-.40148E-13	0.00000	.20116E+00	0.00000	-.43425E-01	0.00000	.17456E+00	0.00000	.15212E-13	0.00000	.52667E-13	0.00000

NATURAL FREQUENCY= .91741E+03

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.64013E-01	0.00000	.52910E-13	0.00000	-.63914E-13	0.00000	.63021E-13	0.00000	.32672E-01	0.00000	.18152E+00	0.00000
-.64013E-01	0.00000	-.54168E-13	0.00000	-.64139E-13	0.00000	-.43817E-13	0.00000	-.32672E-01	0.00000	-.18152E+00	0.00000
.19244E+00	0.00000	.67584E-13	0.00000	.13099E-12	0.00000	-.11365E-13	0.00000	-.15431E+00	0.00000	-.49635E-01	0.00000
-.19244E+00	0.00000	-.59661E-13	0.00000	.59608E-13	0.00000	-.53777E-13	0.00000	.15431E+00	0.00000	.49635E-01	0.00000
.23516E+00	0.00000	.26722E-13	0.00000	-.99840E-13	0.00000	-.30047E-13	0.00000	.21671E+00	0.00000	-.15861E-01	0.00000
-.23516E+00	0.00000	-.58134E-13	0.00000	-.67232E-13	0.00000	-.32795E-13	0.00000	-.21671E+00	0.00000	.15861E-01	0.00000
.13778E+00	0.00000	-.26199E-13	0.00000	-.64851E-14	0.00000	.40561E-13	0.00000	-.92067E-01	0.00000	-.99898E-01	0.00000
-.13778E+00	0.00000	.12028E-13	0.00000	.27777E-13	0.00000	-.34806E-13	0.00000	.92067E-01	0.00000	.99898E-01	0.00000
.10748E+00	0.00000	-.18432E-13	0.00000	.50613E-13	0.00000	-.20899E-13	0.00000	.50064E-13	0.00000	-.10748E+00	0.00000
-.10748E+00	0.00000	.27049E-13	0.00000	-.48549E-13	0.00000						
.10748E+00	0.00000	-.25496E-13	0.00000	.10137E-13	0.00000						
-.10748E+00	0.00000	.27084E-13	0.00000	-.18616E-13	0.00000	-.19383E-13	0.00000	-.10728E-12	0.00000	.10748E+00	0.00000
.13778E+00	0.00000	-.22444E-13	0.00000	-.49826E-13	0.00000	.28870E-13	0.00000	.92067E-01	0.00000	-.99898E-01	0.00000
-.13778E+00	0.00000	.48449E-13	0.00000	-.41048E-13	0.00000	-.37135E-13	0.00000	-.92067E-01	0.00000	.99898E-01	0.00000
.23516E+00	0.00000	-.16965E-14	0.00000	.40910E-13	0.00000	.11134E-13	0.00000	-.21671E+00	0.00000	-.15861E-01	0.00000
-.23516E+00	0.00000	.33215E-13	0.00000	-.40696E-13	0.00000	-.15375E-13	0.00000	.21671E+00	0.00000	.15861E-01	0.00000
.19244E+00	0.00000	.99330E-15	0.00000	-.31820E-13	0.00000	-.20011E-13	0.00000	.15431E+00	0.00000	-.49635E-01	0.00000
-.19244E+00	0.00000	-.11122E-13	0.00000	-.31241E-13	0.00000	-.96338E-14	0.00000	-.15431E+00	0.00000	.49635E-01	0.00000
.64013E-01	0.00000	-.21933E-14	0.00000	.15524E-14	0.00000	.24804E-14	0.00000	-.32672E-01	0.00000	.18152E+00	0.00000
-.64013E-01	0.00000	.20656E-13	0.00000	-.45732E-14	0.00000	-.25632E-14	0.00000	.32672E-01	0.00000	-.18152E+00	0.00000

H-23

NATURAL FREQUENCY= .916203E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.36878E-01	0.00000	.13594E-12	0.00000	-.14130E-13	0.00000	-.31553E-13	0.00000	.37110E-11	0.00000	-.24507E+00	0.00000
.36878E-01	0.00000	-.45652E-13	0.00000	-.31286E-13	0.00000	.14528E-13	0.00000	.41584E-11	0.00000	-.24507E+00	0.00000
.53519E-01	0.00000	.29100E-13	0.00000	.25568E-13	0.00000	-.97411E-14	0.00000	-.18871E-10	0.00000	.12083E+00	0.00000
.53519E-01	0.00000	-.82254E-13	0.00000	.99554E-13	0.00000	-.29680E-13	0.00000	-.18411E-10	0.00000	.12083E+00	0.00000
-.21665E+00	0.00000	-.80229E-13	0.00000	-.25457E-13	0.00000	-.11255E-13	0.00000	.26056E-10	0.00000	-.11441E+00	0.00000
-.21665E+00	0.00000	-.69860E-13	0.00000	-.88410E-13	0.00000	.15476E-13	0.00000	.26406E-10	0.00000	-.11441E+00	0.00000
.29143E+00	0.00000	-.10095E-12	0.00000	.63461E-13	0.00000	.28229E-13	0.00000	-.11289E-10	0.00000	-.25318E-01	0.00000
.29143E+00	0.00000	-.29064E-14	0.00000	.45571E-13	0.00000	.32188E-13	0.00000	-.11061E-10	0.00000	-.25318E-01	0.00000
-.16518E+00	0.00000	-.43208E-13	0.00000	.21087E-14	0.00000	-.59169E-14	0.00000	-.18784E-13	0.00000	-.13025E-10	0.00000
-.16518E+00	0.00000	.55891E-13	0.00000	.50784E-14	0.00000						
-.16518E+00	0.00000	-.42097E-13	0.00000	-.80237E-14	0.00000						
-.16518E+00	0.00000	.53184E-13	0.00000	-.62920E-14	0.00000	-.20317E-14	0.00000	.12487E-12	0.00000	.12477E-10	0.00000
.29143E+00	0.00000	-.24312E-14	0.00000	-.40161E-14	0.00000	.35762E-13	0.00000	.11008E-10	0.00000	.25318E-01	0.00000
.29143E+00	0.00000	.12060E-12	0.00000	-.16585E-13	0.00000	.28098E-13	0.00000	.11115E-10	0.00000	.25318E-01	0.00000
-.21665E+00	0.00000	.22365E-13	0.00000	.70660E-13	0.00000	-.11705E-13	0.00000	-.26224E-10	0.00000	-.11441E+00	0.00000
-.21665E+00	0.00000	.87735E-13	0.00000	.35495E-13	0.00000	-.12644E-13	0.00000	-.26146E-10	0.00000	-.11441E+00	0.00000
.53519E-01	0.00000	-.94261E-14	0.00000	-.47854E-13	0.00000	.19238E-13	0.00000	.18620E-10	0.00000	-.12083E+00	0.00000
.53519E-01	0.00000	.16745E-13	0.00000	-.51742E-13	0.00000	-.40007E-14	0.00000	.18703E-10	0.00000	-.12083E+00	0.00000
.36878E-01	0.00000	-.69485E-13	0.00000	.63753E-14	0.00000	.33882E-13	0.00000	-.39824E-11	0.00000	.24507E+00	0.00000
.36878E-01	0.00000	-.38617E-13	0.00000	.22056E-13	0.00000	.21267E-13	0.00000	-.39118E-11	0.00000	.24507E+00	0.00000

H-24

ORIGINAL PAGE IS
OF POOR QUALITY

44-38861-10-11-11

NATURAL FREQUENCY = .929122E+03

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.25537E-13	0.00000	.15613E+00	0.00000	-.14467E+00	0.00000	.43207E-01	0.00000	-.24626E-11	0.00000	-.10965E-13	0.00000
.19993E-13	0.00000	-.15613E+00	0.00000	-.14467E+00	0.00000	.43207E-01	0.00000	-.24714E-11	0.00000	-.72808E-13	0.00000
.48536E-13	0.00000	.13307E+00	0.00000	.25504E+00	0.00000	-.77583E-01	0.00000	-.25407E-11	0.00000	-.33072E-13	0.00000
-.22803E-13	0.00000	-.13307E+00	0.00000	.25504E+00	0.00000	-.77583E-01	0.00000	-.24421E-11	0.00000	-.14769E-13	0.00000
-.68464E-13	0.00000	.14734E-01	0.00000	-.19025E+00	0.00000	-.36558E-01	0.00000	-.23910E-11	0.00000	-.10437E-13	0.00000
-.34598E-13	0.00000	-.14734E-01	0.00000	-.19025E+00	0.00000	-.36558E-01	0.00000	-.24713E-11	0.00000	-.24754E-13	0.00000
.39059E-13	0.00000	-.13263E+00	0.00000	-.13724E+00	0.00000	.12436E+00	0.00000	-.23610E-11	0.00000	-.24056E-13	0.00000
-.24263E-13	0.00000	.13263E+00	0.00000	-.13724E+00	0.00000	.12436E+00	0.00000	-.22979E-11	0.00000	-.22687E-13	0.00000
-.22414E-13	0.00000	-.15396E+00	0.00000	-.44750E-01	0.00000	-.44750E-01	0.00000	-.22319E-11	0.00000	-.25230E-13	0.00000
-.18798E-13	0.00000	.15396E+00	0.00000	-.44750E-01	0.00000						
-.31239E-13	0.00000	-.15396E+00	0.00000	-.44750E-01	0.00000						
-.29851E-13	0.00000	.15396E+00	0.00000	-.44750E-01	0.00000	-.44750E-01	0.00000	-.22658E-11	0.00000	-.32847E-13	0.00000
-.15246E-13	0.00000	-.13263E+00	0.00000	-.13724E+00	0.00000	.12436E+00	0.00000	-.22212E-11	0.00000	-.34446E-13	0.00000
-.69185E-14	0.00000	.13263E+00	0.00000	-.13724E+00	0.00000	.12436E+00	0.00000	-.22612E-11	0.00000	-.15442E-13	0.00000
-.44014E-13	0.00000	.14734E-01	0.00000	.19025E+00	0.00000	-.36558E-01	0.00000	-.22067E-11	0.00000	-.18000E-13	0.00000
-.16429E-13	0.00000	-.14734E-01	0.00000	.19025E+00	0.00000	-.36558E-01	0.00000	-.21759E-11	0.00000	-.98461E-14	0.00000
-.36408E-13	0.00000	.13307E+00	0.00000	-.25504E+00	0.00000	-.77583E-01	0.00000	-.21562E-11	0.00000	-.31778E-13	0.00000
.23596E-13	0.00000	-.13307E+00	0.00000	-.25504E+00	0.00000	-.77583E-01	0.00000	-.21852E-11	0.00000	-.26948E-13	0.00000
.26410E-13	0.00000	.15613E+00	0.00000	.14467E+00	0.00000	.43207E-01	0.00000	-.20955E-11	0.00000	-.14032E-13	0.00000
-.17920E-13	0.00000	-.15613E+00	0.00000	.14467E+00	0.00000	.43207E-01	0.00000	-.20513E-11	0.00000	-.22694E-13	0.00000

H-25

NATURAL FREQUENCY= .933079E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.18031E-14	0.00000	.11655E+00	0.00000	.14660E-11	0.00000	-.4d202E-12	0.00000	.22410E+00	0.00000	-.1d041E-12	0.00000
.20763E-13	0.00000	.11655E+00	0.00000	.147d2E-11	0.00000	-.47013E-12	0.00000	-.22410E+00	0.00000	-.84b7vE-13	0.00000
.70526E-13	0.00000	-.11543E-11	0.00000	-.26240E-11	0.00000	.81035E-12	0.00000	.22410E+00	0.00000	-.51997E-13	0.00000
-.23068E-13	0.00000	.11840E-11	0.00000	-.26455E-11	0.00000	.80127E-12	0.00000	-.22410E+00	0.00000	.69835E-13	0.00000
-.15486E-12	0.00000	-.11655E+00	0.00000	.20203E-11	0.00000	.36692E-12	0.00000	.22410E+00	0.00000	-.59732E-13	0.00000
-.68243E-13	0.00000	-.11655E+00	0.00000	-.20018E-11	0.00000	.37558E-12	0.00000	-.22410E+00	0.00000	-.55083E-13	0.00000
.17151E-12	0.00000	-.11655E+00	0.00000	-.19261E-11	0.00000	-.12412E-11	0.00000	.22410E+00	0.00000	-.27b85E-13	0.00000
.1427dE-12	0.00000	-.11655E+00	0.00000	-.15046E-11	0.00000	-.12550E-11	0.00000	-.22410E+00	0.00000	.32127E-14	0.00000
-.61144E-13	0.00000	.15617E-11	0.00000	-.14839E-12	0.00000	.43232E-12	0.00000	.22410E+00	0.00000	.20165E-13	0.00000
-.14537E-12	0.00000	-.16024E-11	0.00000	-.37052E-12	0.00000						
-.11871E-12	0.00000	.15383E-11	0.00000	.55019E-12	0.00000						
-.72953E-13	0.00000	-.15990E-11	0.00000	.50027E-12	0.00000	.43216E-12	0.00000	-.22410E+00	0.00000	-.53874E-14	0.00000
.11032E-12	0.00000	.11655E+00	0.00000	.12470E-11	0.00000	-.12732E-11	0.00000	.22410E+00	0.00000	-.29335E-13	0.00000
.17733E-12	0.00000	.11655E+00	0.00000	.121d9E-11	0.00000	-.12519E-11	0.00000	-.22410E+00	0.00000	.40237E-13	0.00000
.32525E-13	0.00000	.11655E+00	0.00000	-.17810E-11	0.00000	.40054E-12	0.00000	.22410E+00	0.00000	.65477E-13	0.00000
-.20021E-12	0.00000	-.11655E+00	0.00000	-.178d8E-11	0.00000	.40035E-12	0.00000	-.22410E+00	0.00000	.67685E-13	0.00000
-.28044E-13	0.00000	-.13132E-11	0.00000	.25210E-11	0.00000	.74281E-12	0.00000	.22410E+00	0.00000	-.56392E-13	0.00000
.81358E-13	0.00000	.13174E-11	0.00000	.24854E-11	0.00000	.75208E-12	0.00000	-.22410E+00	0.00000	-.89743E-13	0.00000
.34768E-13	0.00000	-.11655E+00	0.00000	-.14659E-11	0.00000	-.39027E-12	0.00000	.22410E+00	0.00000	.60282E-13	0.00000
-.12352E-14	0.00000	-.11655E+00	0.00000	-.14414E-11	0.00000	-.33718E-12	0.00000	-.22410E+00	0.00000	.21298E-12	0.00000

NATURAL FREQUENCY= .474914L+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.32308E-13	0.00000	-.17756E-01	0.00000	-.50200E-01	0.00000	.12920E+00	0.00000	-.14072E-11	0.00000	.35455E-14	0.00000
-.33464E-14	0.00000	.17756E-01	0.00000	-.50200E-01	0.00000	.12920E+00	0.00000	.14348E-11	0.00000	.85377E-13	0.00000
.20393E-13	0.00000	.75281E-01	0.00000	.14850E+00	0.00000	-.96335E-01	0.00000	-.10313E-11	0.00000	.49102E-14	0.00000
-.32785E-13	0.00000	-.75281E-01	0.00000	.14850E+00	0.00000	-.96335E-01	0.00000	.10937E-11	0.00000	.30581E-15	0.00000
-.61563E-13	0.00000	.72219E-01	0.00000	-.26832E+00	0.00000	.42460E-02	0.00000	-.50028E-12	0.00000	.40195E-14	0.00000
.62975E-13	0.00000	-.72219E-01	0.00000	-.26832E+00	0.00000	.42460E-02	0.00000	.43033E-12	0.00000	.99300E-14	0.00000
.21388E-13	0.00000	.40855E-01	0.00000	.30987E+00	0.00000	.12268E-01	0.00000	.27982E-12	0.00000	-.15488E-13	0.00000
-.65871E-13	0.00000	-.40855E-01	0.00000	.30987E+00	0.00000	.12268E-01	0.00000	-.14818E-12	0.00000	.11959E-13	0.00000
.88182E-14	0.00000	-.10203E-12	0.00000	-.13984E+00	0.00000	-.60918E-13	0.00000	.75595E-12	0.00000	.21765E-14	0.00000
.15105E-14	0.00000	.10904E-12	0.00000	-.13984E+00	0.00000						
-.42204E-13	0.00000	-.71252E-13	0.00000	-.13984E+00	0.00000						
.34422E-13	0.00000	.11192E-12	0.00000	-.13984E+00	0.00000	-.59199E-13	0.00000	-.81721E-12	0.00000	-.42997E-14	0.00000
.27929E-13	0.00000	-.40855E-01	0.00000	.30987E+00	0.00000	-.12268E-01	0.00000	.90395E-12	0.00000	-.93193E-14	0.00000
-.27391E-13	0.00000	.40855E-01	0.00000	.30987E+00	0.00000	-.12268E-01	0.00000	-.85154E-12	0.00000	.13436E-13	0.00000
-.95509E-14	0.00000	-.72219E-01	0.00000	-.26832E+00	0.00000	-.42460E-02	0.00000	.67664E-12	0.00000	-.11928E-13	0.00000
.82669E-14	0.00000	.72219E-01	0.00000	-.26832E+00	0.00000	-.42460E-02	0.00000	-.69337E-12	0.00000	-.19069E-14	0.00000
.81757E-14	0.00000	-.75281E-01	0.00000	.14850E+00	0.00000	.96335E-01	0.00000	.31369E-12	0.00000	-.42301E-13	0.00000
.66750E-14	0.00000	.75281E-01	0.00000	.14850E+00	0.00000	.96335E-01	0.00000	-.32721E-12	0.00000	.21593E-13	0.00000
.12546E-14	0.00000	-.17756E-01	0.00000	-.50200E-01	0.00000	-.12920E+00	0.00000	.24513E-13	0.00000	.32875E-13	0.00000
.36711E-14	0.00000	-.17756E-01	0.00000	-.50200E-01	0.00000	-.12920E+00	0.00000	-.60261E-14	0.00000	-.56336E-13	0.00000

H-27

100 50000 50000 50000

NATURAL FREQUENCY= .951748E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.33767E-14	0.00000	.38745E-12	0.00000	-.14968E-12	0.00000	-.10414E-12	0.00000	-.32827E+00	0.00000	.49106E-13	0.00000
.20184E-13	0.00000	-.17469E-12	0.00000	-.18040E-12	0.00000	-.11318E-12	0.00000	-.32827E+00	0.00000	-.42276E-13	0.00000
-.46318E-13	0.00000	.10657E-12	0.00000	.17541E-12	0.00000	.32428E-13	0.00000	-.28868E+00	0.00000	.17621E-13	0.00000
.45363E-15	0.00000	-.91839E-13	0.00000	.20533E-12	0.00000	.41153E-13	0.00000	.28868E+00	0.00000	-.30043E-13	0.00000
.76042E-14	0.00000	-.17148E-12	0.00000	.12697E-12	0.00000	-.62074E-13	0.00000	-.21426E+00	0.00000	.10780E-13	0.00000
.12653E-13	0.00000	-.46559E-13	0.00000	.15036E-12	0.00000	-.83631E-13	0.00000	.21426E+00	0.00000	-.12958E-13	0.00000
-.41488E-13	0.00000	-.32977E-12	0.00000	-.30979E-12	0.00000	.12988E-12	0.00000	-.11401E+00	0.00000	.38081E-14	0.00000
-.65023E-13	0.00000	.11834E-12	0.00000	-.32152E-12	0.00000	-.12376E-12	0.00000	.11401E+00	0.00000	.15896E-13	0.00000
-.17561E-13	0.00000	-.27027E-12	0.00000	.26990E-12	0.00000	-.64660E-13	0.00000	-.47829E-12	0.00000	-.22492E-13	0.00000
.48473E-13	0.00000	.19837E-12	0.00000	-.28276E-12	0.00000						
.94414E-14	0.00000	-.26032E-12	0.00000	.15665E-12	0.00000						
.28840E-13	0.00000	.20701E-12	0.00000	.16147E-12	0.00000	-.52723E-13	0.00000	.49380E-12	0.00000	-.13360E-13	0.00000
-.35076E-13	0.00000	-.36150E-13	0.00000	-.68740E-12	0.00000	.23498E-12	0.00000	.11401E+00	0.00000	-.45458E-14	0.00000
-.31091E-13	0.00000	.31008E-12	0.00000	-.72934E-12	0.00000	.24010E-12	0.00000	-.11401E+00	0.00000	-.13109E-13	0.00000
-.13441E-13	0.00000	.28679E-12	0.00000	.70706E-12	0.00000	-.74463E-13	0.00000	.21426E+00	0.00000	.18155E-14	0.00000
.59411E-13	0.00000	-.34876E-13	0.00000	.71237E-12	0.00000	-.47518E-13	0.00000	-.21426E+00	0.00000	-.19740E-14	0.00000
.18595E-13	0.00000	-.32947E-12	0.00000	-.62860E-12	0.00000	-.25613E-12	0.00000	.28868E+00	0.00000	.46572E-14	0.00000
-.59672E-13	0.00000	-.31440E-12	0.00000	-.60705E-12	0.00000	-.24194E-12	0.00000	-.28868E+00	0.00000	.13706E-13	0.00000
.10981E-13	0.00000	.64720E-13	0.00000	.32299E-12	0.00000	.22906E-12	0.00000	.32827E+00	0.00000	.11790E-13	0.00000
-.12213E-13	0.00000	-.35295E-12	0.00000	.30117E-12	0.00000	.27683E-12	0.00000	-.32827E+00	0.00000	-.51965E-13	0.00000

H-28

NATURAL FREQUENCY= .984405E+03

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.39211E-01	0.00000	.31412E-13	0.00000	-.19891E-13	0.00000	-.11346E-12	0.00000	-.10720E-01	0.00000	-.15229E+00	0.00000
-.39211E-01	0.00000	-.25223E-13	0.00000	-.44596E-13	0.00000	-.50544E-13	0.00000	-.10720E-01	0.00000	.15229E+00	0.00000
.13113E+00	0.00000	-.45116E-13	0.00000	-.38010E-13	0.00000	.41951E-13	0.00000	.10918E+00	0.00000	.57038E-01	0.00000
-.13113E+00	0.00000	.16734E-13	0.00000	.29910E-13	0.00000	.23436E-13	0.00000	.10918E+00	0.00000	-.57038E-01	0.00000
-.21898E+00	0.00000	-.17311E-13	0.00000	-.58173E-13	0.00000	.44447E-13	0.00000	-.19851E+00	0.00000	-.29611E-01	0.00000
.21898E+00	0.00000	.22459E-13	0.00000	.39213E-13	0.00000	.42594E-13	0.00000	-.19851E+00	0.00000	.29611E-01	0.00000
.22378E+00	0.00000	-.10532E-13	0.00000	-.52075E-13	0.00000	-.89129E-15	0.00000	.21374E+00	0.00000	-.39217E-01	0.00000
-.22378E+00	0.00000	.12981E-13	0.00000	.28394E-13	0.00000	-.25216E-14	0.00000	.21374E+00	0.00000	.39217E-01	0.00000
-.96721E-01	0.00000	.26302E-14	0.00000	.18896E-13	0.00000	-.82587E-14	0.00000	-.11370E+00	0.00000	.45981E-13	0.00000
-.96721E-01	0.00000	.46297E-14	0.00000	-.32928E-14	0.00000						
-.96721E-01	0.00000	.20087E-14	0.00000	.78514E-15	0.00000						
-.96721E-01	0.00000	.62946E-14	0.00000	.18599E-13	0.00000	.50100E-14	0.00000	-.11370E+00	0.00000	.59141E-13	0.00000
-.22378E+00	0.00000	.52071E-13	0.00000	-.27928E-14	0.00000	-.40377E-13	0.00000	.21374E+00	0.00000	-.39217E-01	0.00000
-.22378E+00	0.00000	-.11610E-13	0.00000	-.97341E-14	0.00000	-.94659E-15	0.00000	.21374E+00	0.00000	-.39217E-01	0.00000
-.21898E+00	0.00000	.49993E-13	0.00000	.25264E-13	0.00000	.81645E-14	0.00000	-.19851E+00	0.00000	.29611E-01	0.00000
.21898E+00	0.00000	-.46232E-14	0.00000	-.21651E-13	0.00000	-.65678E-15	0.00000	-.19851E+00	0.00000	-.29611E-01	0.00000
.13113E+00	0.00000	.30545E-14	0.00000	-.10324E-13	0.00000	.32771E-14	0.00000	.10918E+00	0.00000	-.57038E-01	0.00000
-.13113E+00	0.00000	-.15510E-13	0.00000	-.15819E-13	0.00000	-.80377E-14	0.00000	.10918E+00	0.00000	.57038E-01	0.00000
-.39211E-01	0.00000	-.34630E-13	0.00000	-.11519E-13	0.00000	.10496E-13	0.00000	-.10720E-01	0.00000	.15229E+00	0.00000
.39211E-01	0.00000	-.80061E-14	0.00000	.64394E-14	0.00000	.86674E-14	0.00000	-.10720E-01	0.00000	-.15229E+00	0.00000

NATURAL FREQUENCY= .104499E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.81345E-01	0.00000	.58101E-13	0.00000	-.30729E-13	0.00000	-.23973E-13	0.00000	-.35101E-13	0.00000	.27086E+00	0.00000
-.81345E-01	0.00000	-.75905E-13	0.00000	-.20447E-14	0.00000	-.85623E-13	0.00000	.27719E-13	0.00000	.27086E+00	0.00000
.59051E-01	0.00000	-.96510E-14	0.00000	.52400E-13	0.00000	.53475E-13	0.00000	-.85180E-13	0.00000	-.10252E+00	0.00000
.59051E-01	0.00000	.60655E-13	0.00000	-.24874E-13	0.00000	.24960E-13	0.00000	-.97394E-13	0.00000	.10252E+00	0.00000
-.74947E-01	0.00000	-.80951E-13	0.00000	.26744E-13	0.00000	.49821E-13	0.00000	.22243E-12	0.00000	.17124E+00	0.00000
-.74947E-01	0.00000	.97379E-13	0.00000	.17050E-13	0.00000	.52680E-13	0.00000	.23111E-12	0.00000	.17124E+00	0.00000
-.19734E+00	0.00000	-.92364E-13	0.00000	-.52385E-14	0.00000	.27723E-13	0.00000	-.21546E-12	0.00000	-.98791E-01	0.00000
-.19734E+00	0.00000	.37791E-13	0.00000	.68105E-14	0.00000	.43696E-13	0.00000	-.21683E-12	0.00000	-.98791E-01	0.00000
.22530E+00	0.00000	-.24784E-13	0.00000	-.20450E-13	0.00000	.12730E-14	0.00000	.12191E-12	0.00000	.22530E+00	0.00000
.22530E+00	0.00000	.16094E-13	0.00000	-.28893E-13	0.00000						
-.22530E+00	0.00000	-.24199E-13	0.00000	-.18866E-13	0.00000						
-.22530E+00	0.00000	-.13709E-13	0.00000	-.27505E-13	0.00000	.89510E-15	0.00000	-.11045E-12	0.00000	.22530E+00	0.00000
.19734E+00	0.00000	.59086E-13	0.00000	.35425E-13	0.00000	-.19302E-13	0.00000	-.21993E-12	0.00000	-.98791E-01	0.00000
.19734E+00	0.00000	-.48618E-13	0.00000	.23874E-13	0.00000	-.48585E-13	0.00000	-.22476E-12	0.00000	-.98791E-01	0.00000
-.74947E-01	0.00000	.87243E-13	0.00000	-.27022E-13	0.00000	-.21615E-13	0.00000	.18834E-12	0.00000	.17124E+00	0.00000
-.74947E-01	0.00000	-.10146E-13	0.00000	.55865E-16	0.00000	-.16958E-13	0.00000	-.19126E-12	0.00000	.17124E+00	0.00000
.59051E-01	0.00000	.12934E-13	0.00000	.31937E-13	0.00000	.30923E-14	0.00000	-.95697E-13	0.00000	-.10252E+00	0.00000
.59051E-01	0.00000	-.47091E-13	0.00000	.23341E-13	0.00000	.83404E-14	0.00000	-.98119E-13	0.00000	.10252E+00	0.00000
-.81345E-01	0.00000	-.10985E-12	0.00000	-.33773E-13	0.00000	.57991E-13	0.00000	.16801E-13	0.00000	.27086E+00	0.00000
-.81345E-01	0.00000	.43982E-13	0.00000	-.23894E-13	0.00000	.54874E-13	0.00000	-.16042E-14	0.00000	.27086E+00	0.00000

H-30

12 01 5500 551000 00000

NATURAL FREQUENCY= .990994E+03.

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15385E-13	0.00000	-.21928E-13	0.00000	.21010E-12	0.00000	-.40993E-12	0.00000	-.33231E+00	0.00000	.63292E-13	0.00000
-.26278E-14	0.00000	.97677E-14	0.00000	.16962E-12	0.00000	-.41041E-12	0.00000	.33231E+00	0.00000	-.64944E-13	0.00000
-.69849E-13	0.00000	-.26234E-12	0.00000	-.61083E-12	0.00000	.36965E-12	0.00000	-.20538E+00	0.00000	-.10610E-13	0.00000
.64807E-13	0.00000	.31681E-12	0.00000	-.56428E-12	0.00000	.38726E-12	0.00000	.20538E+00	0.00000	-.75939E-14	0.00000
.78852E-13	0.00000	-.16575E-12	0.00000	.10190E-11	0.00000	-.36469E-13	0.00000	-.29277E-12	0.00000	.16484E-14	0.00000
-.88854E-13	0.00000	.16578E-12	0.00000	.10347E-11	0.00000	-.81169E-13	0.00000	.40440E-12	0.00000	-.57956E-13	0.00000
-.10909E-12	0.00000	-.24089E-13	0.00000	-.10967E-11	0.00000	-.11895E-12	0.00000	.20538E+00	0.00000	-.23451E-13	0.00000
.53311E-13	0.00000	.21705E-13	0.00000	-.11101E-11	0.00000	-.11707E-12	0.00000	-.20538E+00	0.00000	-.19105E-13	0.00000
.74275E-13	0.00000	.41045E-13	0.00000	.49430E-12	0.00000	.19827E-13	0.00000	.33231E+00	0.00000	.22246E-13	0.00000
-.42135E-13	0.00000	-.61407E-13	0.00000	.50586E-12	0.00000						
.34726E-13	0.00000	.41856E-13	0.00000	.51255E-12	0.00000						
-.26521E-13	0.00000	-.25614E-13	0.00000	.52197E-12	0.00000	.83431E-14	0.00000	-.33231E+00	0.00000	-.18267E-13	0.00000
-.91021E-13	0.00000	.78620E-13	0.00000	-.11219E-11	0.00000	-.80904E-13	0.00000	.20538E+00	0.00000	-.40369E-13	0.00000
-.10629E-12	0.00000	-.84896E-13	0.00000	-.11012E-11	0.00000	.74132E-13	0.00000	-.20538E+00	0.00000	-.13441E-13	0.00000
.69570E-13	0.00000	.19366E-12	0.00000	.96412E-12	0.00000	.50007E-13	0.00000	.37941E-12	0.00000	-.26350E-13	0.00000
-.56114E-13	0.00000	-.16906E-12	0.00000	.97012E-12	0.00000	.41871E-13	0.00000	-.24022E-12	0.00000	.27134E-14	0.00000
-.43810E-13	0.00000	.26411E-12	0.00000	-.58556E-12	0.00000	-.32764E-12	0.00000	-.20538E+00	0.00000	.21044E-13	0.00000
.31780E-13	0.00000	-.26554E-12	0.00000	-.58991E-12	0.00000	-.34018E-12	0.00000	.20538E+00	0.00000	-.31932E-13	0.00000
.15610E-13	0.00000	-.15835E-13	0.00000	.21246E-12	0.00000	.41686E-12	0.00000	-.33231E+00	0.00000	-.98215E-13	0.00000
-.11775E-13	0.00000	-.48398E-13	0.00000	.22808E-12	0.00000	.40439E-12	0.00000	.33231E+00	0.00000	.81971E-13	0.00000

H-31

NATURAL FREQUENCY= .107160E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.56861E-14	0.00000	.23074E+00	0.00000	.96435E-01	0.00000	.13996E+00	0.00000	.24610E-11	0.00000	-.29942E-13	0.00000
-.54360E-14	0.00000	.23074E+00	0.00000	.96435E-01	0.00000	.13996E+00	0.00000	-.24419E-11	0.00000	-.11262E-13	0.00000
-.33731E-13	0.00000	.13598E-01	0.00000	-.17617E+00	0.00000	-.27662E-01	0.00000	.14095E-12	0.00000	-.45652E-13	0.00000
-.34975E-13	0.00000	-.13598E-01	0.00000	-.17617E+00	0.00000	-.27662E-01	0.00000	-.11359E-12	0.00000	-.59401E-13	0.00000
.21414E-13	0.00000	.23071E+00	0.00000	.30298E-01	0.00000	-.84102E-01	0.00000	-.22255E-11	0.00000	.28785E-14	0.00000
.99170E-13	0.00000	-.23071E+00	0.00000	.30298E-01	0.00000	-.84102E-01	0.00000	.23119E-11	0.00000	.43292E-13	0.00000
-.72166E-13	0.00000	.24042E+00	0.00000	.44101E-02	0.00000	-.13909E+00	0.00000	-.23216E-11	0.00000	-.48918E-13	0.00000
-.83557E-13	0.00000	-.24042E+00	0.00000	.44101E-02	0.00000	-.13909E+00	0.00000	.23931E-11	0.00000	-.28287E-13	0.00000
.77999E-13	0.00000	.10311E-12	0.00000	.45023E-01	0.00000	-.65937E-13	0.00000	-.21011E-12	0.00000	.72266E-13	0.00000
.62137E-13	0.00000	.98129E-14	0.00000	.45023E-01	0.00000						
-.57192E-13	0.00000	.99222E-13	0.00000	.45023E-01	0.00000						
-.37383E-13	0.00000	-.18964E-13	0.00000	.45023E-01	0.00000	-.29826E-13	0.00000	.18387E-12	0.00000	.64219E-13	0.00000
.55018E-13	0.00000	-.24042E+00	0.00000	.44101E-02	0.00000	.13909E+00	0.00000	.21584E-11	0.00000	-.14562E-13	0.00000
.36512E-13	0.00000	.24042E+00	0.00000	.44101E-02	0.00000	.13909E+00	0.00000	-.21211E-11	0.00000	-.35864E-13	0.00000
-.26916E-13	0.00000	-.23071E+00	0.00000	.30298E-01	0.00000	-.84102E-01	0.00000	.22808E-11	0.00000	.76775E-13	0.00000
-.88570E-14	0.00000	.23071E+00	0.00000	.30298E-01	0.00000	-.84102E-01	0.00000	-.22626E-11	0.00000	.90528E-13	0.00000
-.30740E-13	0.00000	-.13598E-01	0.00000	-.17617E+00	0.00000	-.27662E-01	0.00000	.14024E-12	0.00000	-.22049E-13	0.00000
-.27105E-13	0.00000	.13598E-01	0.00000	-.17617E+00	0.00000	-.27662E-01	0.00000	-.13532E-12	0.00000	-.10647E-13	0.00000
.23348E-13	0.00000	.23074E+00	0.00000	.96435E-01	0.00000	-.13996E+00	0.00000	-.20712E-11	0.00000	.12142E-12	0.00000
.27776E-13	0.00000	-.23074E+00	0.00000	.96435E-01	0.00000	-.13996E+00	0.00000	.20361E-11	0.00000	.92637E-13	0.00000

H-32

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .107813E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.42223E-13	0.00000	.21564E-11	0.00000	-.74956E-12	0.00000	-.11637E-11	0.00000	.28868E+00	0.00000	-.48251E-13	0.00000
-.15830E-13	0.00000	-.15194E-11	0.00000	-.74492E-12	0.00000	-.12010E-11	0.00000	-.28868E+00	0.00000	-.40522E-13	0.00000
.33831E-13	0.00000	-.25507E-12	0.00000	.13415E-11	0.00000	.25976E-12	0.00000	.34005E-13	0.00000	-.13504E-13	0.00000
.42539E-13	0.00000	.46078E-14	0.00000	.13098E-11	0.00000	.26613E-12	0.00000	-.33445E-13	0.00000	.35898E-13	0.00000
-.64881E-14	0.00000	-.22759E-11	0.00000	-.11747E-12	0.00000	.65320E-12	0.00000	-.28868E+00	0.00000	-.95322E-14	0.00000
.17898E-13	0.00000	.14716E-11	0.00000	-.13809E-12	0.00000	.64931E-12	0.00000	.28868E+00	0.00000	-.18489E-13	0.00000
-.49984E-14	0.00000	-.20656E-11	0.00000	-.18618E-12	0.00000	.10493E-11	0.00000	-.28868E+00	0.00000	-.75055E-13	0.00000
.47563E-13	0.00000	.18251E-11	0.00000	-.15667E-12	0.00000	.11138E-11	0.00000	.28868E+00	0.00000	-.47822E-13	0.00000
-.35639E-13	0.00000	.33473E-12	0.00000	-.35741E-12	0.00000	.11484E-13	0.00000	-.14261E-12	0.00000	-.21890E-13	0.00000
-.43330E-13	0.00000	.29554E-12	0.00000	-.30582E-12	0.00000						
.12777E-13	0.00000	.31628E-12	0.00000	-.12178E-12	0.00000						
.24953E-14	0.00000	.24348E-12	0.00000	-.27294E-12	0.00000	.83546E-14	0.00000	.10000E-12	0.00000	-.25778E-13	0.00000
.13270E-13	0.00000	.18651E-11	0.00000	-.14071E-12	0.00000	-.11493E-11	0.00000	.28868E+00	0.00000	-.23352E-14	0.00000
-.35394E-13	0.00000	-.21153E-11	0.00000	-.16197E-12	0.00000	-.11721E-11	0.00000	-.28868E+00	0.00000	-.15969E-13	0.00000
.17434E-13	0.00000	.14958E-11	0.00000	-.15693E-12	0.00000	-.65791E-12	0.00000	.28868E+00	0.00000	-.27607E-13	0.00000
.15655E-13	0.00000	-.22563E-11	0.00000	-.17839E-12	0.00000	-.65916E-12	0.00000	-.28868E+00	0.00000	.12359E-13	0.00000
-.26975E-13	0.00000	-.54856E-15	0.00000	.14022E-11	0.00000	-.26284E-12	0.00000	.67637E-13	0.00000	-.12731E-13	0.00000
-.13950E-13	0.00000	-.21768E-12	0.00000	.13947E-11	0.00000	-.24176E-12	0.00000	-.10350E-12	0.00000	.70751E-14	0.00000
.26705E-13	0.00000	-.15469E-11	0.00000	-.77531E-12	0.00000	.11642E-11	0.00000	-.28868E+00	0.00000	.15480E-12	0.00000
.90968E-14	0.00000	.22175E-11	0.00000	-.77371E-12	0.00000	.11660E-11	0.00000	.28868E+00	0.00000	-.41137E-13	0.00000

H-33

10/10/10 10:10:10

NATURAL FREQUENCY= .109690E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.38222E-13	0.00000	-.25583E+00	0.00000	.10322E-12	0.00000	.69417E-13	0.00000	-.44144E-12	0.00000	-.98734E-14	0.00000
.70308E-14	0.00000	-.25583E+00	0.00000	.31525E-13	0.00000	.72460E-13	0.00000	-.55430E-12	0.00000	-.10299E-12	0.00000
-.10525E-13	0.00000	.97720E-01	0.00000	-.71625E-13	0.00000	-.33395E-13	0.00000	.12024E-12	0.00000	.48102E-13	0.00000
-.17322E-13	0.00000	.97720E-01	0.00000	.13024E-12	0.00000	.24131E-14	0.00000	-.11273E-12	0.00000	-.24797E-13	0.00000
-.24508E-13	0.00000	.31623E+00	0.00000	.29320E-14	0.00000	-.61891E-13	0.00000	-.29636E-12	0.00000	.72308E-14	0.00000
-.74115E-14	0.00000	.31623E+00	0.00000	.13930E-13	0.00000	-.27130E-13	0.00000	.38673E-12	0.00000	-.27570E-13	0.00000
.17193E-13	0.00000	.97720E-01	0.00000	.33464E-14	0.00000	-.86082E-13	0.00000	-.42696E-12	0.00000	.45090E-13	0.00000
.58835E-13	0.00000	.97720E-01	0.00000	.30949E-13	0.00000	-.72609E-13	0.00000	.47128E-12	0.00000	.64787E-13	0.00000
-.45928E-13	0.00000	-.25583E+00	0.00000	.12175E-13	0.00000	.21505E-13	0.00000	-.11085E-12	0.00000	-.56443E-13	0.00000
-.32980E-13	0.00000	-.25583E+00	0.00000	.25793E-13	0.00000						
.28407E-13	0.00000	-.25583E+00	0.00000	.19193E-13	0.00000						
.80953E-14	0.00000	-.25583E+00	0.00000	.53481E-13	0.00000	.23478E-13	0.00000	.15946E-12	0.00000	-.34055E-13	0.00000
-.73242E-13	0.00000	.97720E-01	0.00000	-.85400E-14	0.00000	.70659E-13	0.00000	-.55980E-12	0.00000	.52619E-13	0.00000
-.34350E-15	0.00000	.97720E-01	0.00000	.21542E-14	0.00000	.61083E-13	0.00000	-.45890E-12	0.00000	.23637E-14	0.00000
-.16350E-13	0.00000	.31623E+00	0.00000	-.94499E-14	0.00000	.40668E-13	0.00000	.70116E-12	0.00000	-.73826E-13	0.00000
.54857E-13	0.00000	.31623E+00	0.00000	-.10845E-13	0.00000	.39042E-13	0.00000	-.51848E-12	0.00000	-.43388E-13	0.00000
-.60926E-13	0.00000	.97720E-01	0.00000	-.36558E-13	0.00000	-.22106E-14	0.00000	.73815E-13	0.00000	.26366E-13	0.00000
-.35464E-15	0.00000	.97720E-01	0.00000	-.47199E-13	0.00000	.12238E-14	0.00000	-.61104E-13	0.00000	.69663E-13	0.00000
-.12726E-13	0.00000	-.25583E+00	0.00000	.19614E-13	0.00000	-.54751E-13	0.00000	-.59940E-12	0.00000	-.42266E-14	0.00000
.32207E-13	0.00000	-.25583E+00	0.00000	.33745E-13	0.00000	-.78366E-13	0.00000	.61199E-12	0.00000	.57627E-13	0.00000

H-34

NATURAL FREQUENCY= .112863E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.20107E-13	0.00000	.24124E-11	0.00000	-.78627E-12	0.00000	-.29558E-11	0.00000	.27911E+00	0.00000	-.29537E-13	0.00000
-.92558E-13	0.00000	-.27472E-11	0.00000	-.73985E-12	0.00000	-.29741E-11	0.00000	-.27911E+00	0.00000	.18610E-12	0.00000
-.10897E-12	0.00000	-.13782E-11	0.00000	.12044E-11	0.00000	.16305E-11	0.00000	-.10661E+00	0.00000	-.15729E-13	0.00000
-.47406E-13	0.00000	.15160E-11	0.00000	.12184E-11	0.00000	.16002E-11	0.00000	.10661E+00	0.00000	-.24829E-13	0.00000
-.40872E-14	0.00000	-.30478E-11	0.00000	.13092E-11	0.00000	.43305E-12	0.00000	-.34499E+00	0.00000	-.30083E-13	0.00000
-.39416E-13	0.00000	.34348E-11	0.00000	.12786E-11	0.00000	-.45726E-12	0.00000	.34499E+00	0.00000	-.78503E-14	0.00000
-.44943E-13	0.00000	-.21045E-11	0.00000	-.39289E-11	0.00000	.22350E-11	0.00000	-.10661E+00	0.00000	.41407E-13	0.00000
.17233E-13	0.00000	.21881E-11	0.00000	-.39361E-11	0.00000	.22253E-11	0.00000	.10661E+00	0.00000	-.58525E-14	0.00000
-.18362E-13	0.00000	-.20230E-11	0.00000	.39066E-11	0.00000	-.39436E-11	0.00000	.27911E+00	0.00000	-.33798E-13	0.00000
-.14789E-13	0.00000	-.22943E-11	0.00000	.39133E-11	0.00000						
-.73766E-13	0.00000	.20316E-11	0.00000	-.39540E-11	0.00000						
-.89417E-13	0.00000	-.22997E-11	0.00000	-.39674E-11	0.00000	-.39563E-11	0.00000	-.27911E+00	0.00000	.24115E-13	0.00000
-.35931E-13	0.00000	-.21342E-11	0.00000	.40827E-11	0.00000	.22531E-11	0.00000	-.10661E+00	0.00000	.11608E-12	0.00000
-.10385E-13	0.00000	.22764E-11	0.00000	.40422E-11	0.00000	.22499E-11	0.00000	.10661E+00	0.00000	-.52090E-13	0.00000
-.98914E-14	0.00000	-.31933E-11	0.00000	-.14105E-11	0.00000	.46386E-12	0.00000	-.34499E+00	0.00000	-.43333E-13	0.00000
-.44077E-13	0.00000	.35266E-11	0.00000	-.14284E-11	0.00000	-.47446E-12	0.00000	.34499E+00	0.00000	-.49286E-13	0.00000
-.79557E-13	0.00000	-.14777E-11	0.00000	-.12308E-11	0.00000	.17061E-11	0.00000	-.10661E+00	0.00000	.49007E-13	0.00000
.31539E-13	0.00000	.15599E-11	0.00000	-.12199E-11	0.00000	.17050E-11	0.00000	.10661E+00	0.00000	-.60222E-13	0.00000
-.17713E-13	0.00000	.25724E-11	0.00000	.79203E-12	0.00000	-.31210E-11	0.00000	.27911E+00	0.00000	-.10912E-12	0.00000
-.74642E-13	0.00000	-.27866E-11	0.00000	.78639E-12	0.00000	-.31584E-11	0.00000	-.27911E+00	0.00000	-.10967E-12	0.00000

NATURAL FREQUENCY= .113354E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15875E+00	0.00000	-.75649E-13	0.00000	.41728E-14	0.00000	.12013E-12	0.00000	.15527E-12	0.00000	.37649E+00	0.00000
.15875E+00	0.00000	.14186E-13	0.00000	.28922E-13	0.00000	-.73123E-13	0.00000	.16630E-12	0.00000	.37649E+00	0.00000
.21752E+00	0.00000	-.68175E-14	0.00000	.95281E-14	0.00000	-.24109E-13	0.00000	-.35917E-13	0.00000	-.36266E-01	0.00000
.21752E+00	0.00000	.76376E-14	0.00000	-.26739E-13	0.00000	-.42067E-14	0.00000	-.40307E-13	0.00000	-.36266E-01	0.00000
-.11797E+00	0.00000	.85331E-14	0.00000	.12048E-13	0.00000	-.36602E-14	0.00000	.30257E-13	0.00000	.10651E+00	0.00000
-.11797E+00	0.00000	-.18408E-13	0.00000	-.65048E-15	0.00000	.18469E-14	0.00000	.10773E-12	0.00000	.10651E+00	0.00000
-.10921E+00	0.00000	.13347E-13	0.00000	-.67891E-14	0.00000	-.65882E-14	0.00000	-.32626E-13	0.00000	-.66479E-01	0.00000
-.10921E+00	0.00000	-.62301E-14	0.00000	-.22351E-13	0.00000	.29439E-13	0.00000	.13084E-12	0.00000	-.66479E-01	0.00000
-.50006E-01	0.00000	.13517E-13	0.00000	.11460E-13	0.00000	.43228E-14	0.00000	-.33621E-13	0.00000	-.28079E-12	0.00000
-.50006E-01	0.00000	-.19710E-13	0.00000	.21321E-13	0.00000						
-.50006E-01	0.00000	.15597E-13	0.00000	.15662E-13	0.00000						
-.50006E-01	0.00000	-.21648E-13	0.00000	.18011E-13	0.00000	.95506E-15	0.00000	.71547E-13	0.00000	-.16514E-12	0.00000
-.10921E+00	0.00000	.41639E-13	0.00000	-.71024E-13	0.00000	-.30350E-13	0.00000	.77071E-13	0.00000	-.66479E-01	0.00000
-.10921E+00	0.00000	-.36171E-13	0.00000	-.68814E-13	0.00000	-.31810E-14	0.00000	-.15160E-12	0.00000	-.66479E-01	0.00000
-.11797E+00	0.00000	.48596E-13	0.00000	.38601E-13	0.00000	-.63388E-14	0.00000	.16238E-12	0.00000	.10651E+00	0.00000
-.11797E+00	0.00000	-.30380E-13	0.00000	.36898E-13	0.00000	-.20530E-14	0.00000	-.17054E-12	0.00000	.10651E+00	0.00000
.21752E+00	0.00000	.13217E-13	0.00000	.16447E-13	0.00000	-.10977E-13	0.00000	.61769E-13	0.00000	-.36266E-01	0.00000
.21752E+00	0.00000	-.25184E-13	0.00000	.26505E-13	0.00000	.88595E-14	0.00000	-.23777E-13	0.00000	-.36266E-01	0.00000
.15875E+00	0.00000	.20556E-14	0.00000	-.89626E-14	0.00000	.27222E-13	0.00000	-.14412E-12	0.00000	.37649E+00	0.00000
.15875E+00	0.00000	.39649E-14	0.00000	-.23454E-13	0.00000	.28856E-13	0.00000	.78079E-13	0.00000	.37649E+00	0.00000

H-36

NATURAL FREQUENCY= .115719E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.15026E+00	0.00000	-.16534E-13	0.00000	.89122E-14	0.00000	-.30020E-14	0.00000	-.42218E-12	0.00000	-.33629E+00	0.00000
.15026E+00	0.00000	-.35156E-13	0.00000	-.97639E-13	0.00000	.11180E-13	0.00000	-.50985E-12	0.00000	-.33629E+00	0.00000
.21765E+00	0.00000	-.86780E-14	0.00000	.88480E-13	0.00000	-.24858E-13	0.00000	-.27559E-13	0.00000	.48380E-02	0.00000
-.21765E+00	0.00000	-.46812E-13	0.00000	.47843E-14	0.00000	-.18305E-13	0.00000	-.14652E-12	0.00000	.48380E-02	0.00000
.14247E+00	0.00000	.25714E-13	0.00000	-.91596E-13	0.00000	-.34635E-13	0.00000	-.19583E-12	0.00000	.51290E-01	0.00000
.14247E+00	0.00000	.15320E-13	0.00000	-.71653E-13	0.00000	-.13578E-13	0.00000	-.72113E-13	0.00000	.51290E-01	0.00000
-.17058E+00	0.00000	.13394E-14	0.00000	.19890E-13	0.00000	-.27729E-14	0.00000	-.58360E-12	0.00000	.14918E-01	0.00000
-.17058E+00	0.00000	.45433E-13	0.00000	.12099E-13	0.00000	.48819E-13	0.00000	-.43602E-12	0.00000	.14918E-01	0.00000
.12950E+00	0.00000	.87968E-14	0.00000	.87181E-14	0.00000	.11140E-13	0.00000	-.98168E-13	0.00000	.12950E+00	0.00000
.12950E+00	0.00000	-.73756E-14	0.00000	.94817E-14	0.00000						
.12950E+00	0.00000	.92194E-14	0.00000	.21824E-13	0.00000						
.12950E+00	0.00000	-.61661E-14	0.00000	.33103E-13	0.00000	.14436E-13	0.00000	-.11106E-12	0.00000	.12950E+00	0.00000
.17058E+00	0.00000	.34622E-13	0.00000	-.49690E-13	0.00000	-.24108E-13	0.00000	.40983E-12	0.00000	.14918E-01	0.00000
.17058E+00	0.00000	-.21069E-13	0.00000	-.57336E-13	0.00000	.95353E-15	0.00000	.38012E-12	0.00000	.14918E-01	0.00000
.14247E+00	0.00000	.41622E-13	0.00000	.12321E-13	0.00000	-.40918E-13	0.00000	-.51197E-13	0.00000	.51290E-01	0.00000
.14247E+00	0.00000	-.29179E-13	0.00000	.79507E-14	0.00000	.54779E-14	0.00000	-.62771E-13	0.00000	.51290E-01	0.00000
.21765E+00	0.00000	.99199E-14	0.00000	.37389E-13	0.00000	-.21912E-13	0.00000	.12087E-12	0.00000	.48380E-02	0.00000
.21765E+00	0.00000	-.35069E-13	0.00000	.34408E-13	0.00000	-.12909E-13	0.00000	.12853E-12	0.00000	.48380E-02	0.00000
-.15026E+00	0.00000	-.28693E-13	0.00000	-.67802E-14	0.00000	-.85738E-14	0.00000	.66201E-13	0.00000	-.33629E+00	0.00000
-.15026E+00	0.00000	.19194E-13	0.00000	-.23310E-13	0.00000	.84793E-14	0.00000	.51443E-13	0.00000	-.33629E+00	0.00000

H-37

NATURAL FREQUENCY= .112800E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.48124E-13	0.00000	.13893E+00	0.00000	-.40324E-01	0.00000	-.16302E+00	0.00000	-.27254E-11	0.00000	-.60602E-13	0.00000
.24443E-13	0.00000	-.13893E+00	0.00000	-.40324E-01	0.00000	-.16302E+00	0.00000	.29337E-11	0.00000	.12783E-12	0.00000
-.31477E-13	0.00000	-.80033E-01	0.00000	.63895E-01	0.00000	.88913E-01	0.00000	.10518E-11	0.00000	-.56754E-13	0.00000
.95663E-13	0.00000	.80033E-01	0.00000	.63895E-01	0.00000	.88913E-01	0.00000	-.10671E-11	0.00000	-.38746E-13	0.00000
.66411E-14	0.00000	-.17616E+00	0.00000	.73692E-01	0.00000	.25126E-01	0.00000	.34888E-11	0.00000	-.18399E-13	0.00000
-.36706E-13	0.00000	.17616E+00	0.00000	.73692E-01	0.00000	.25126E-01	0.00000	-.34637E-11	0.00000	-.25426E-13	0.00000
-.27068E-13	0.00000	-.11467E+00	0.00000	-.21312E+00	0.00000	.11820E+00	0.00000	.10448E-11	0.00000	-.35704E-13	0.00000
.60529E-13	0.00000	.11467E+00	0.00000	-.21312E+00	0.00000	.11820E+00	0.00000	-.11447E-11	0.00000	-.19737E-13	0.00000
-.18257E-13	0.00000	.11675E+00	0.00000	.20873E+00	0.00000	-.20873E+00	0.00000	-.28058E-11	0.00000	.17032E-13	0.00000
-.54258E-13	0.00000	-.11675E+00	0.00000	.20873E+00	0.00000	-.20873E+00	0.00000				
-.63367E-13	0.00000	.11675E+00	0.00000	-.20873E+00	0.00000						
.10910E-12	0.00000	-.11675E+00	0.00000	-.20873E+00	0.00000	-.20873E+00	0.00000	.28741E-11	0.00000	-.49381E-13	0.00000
-.14603E-13	0.00000	.11467E+00	0.00000	.21312E+00	0.00000	.11820E+00	0.00000	.10762E-11	0.00000	-.21600E-13	0.00000
-.79090E-14	0.00000	.11467E+00	0.00000	.21312E+00	0.00000	.11820E+00	0.00000	-.94534E-12	0.00000	.34992E-13	0.00000
-.39084E-13	0.00000	-.17616E+00	0.00000	-.73692E-01	0.00000	-.25126E-01	0.00000	.35028E-11	0.00000	.18980E-13	0.00000
.54463E-13	0.00000	.17616E+00	0.00000	-.73692E-01	0.00000	.25126E-01	0.00000	-.35418E-11	0.00000	-.19539E-13	0.00000
.95910E-14	0.00000	-.80033E-01	0.00000	-.63895E-01	0.00000	.88913E-01	0.00000	.11082E-11	0.00000	.25915E-13	0.00000
-.74676E-14	0.00000	.80033E-01	0.00000	.63895E-01	0.00000	.88913E-01	0.00000	-.10373E-11	0.00000	.25644E-13	0.00000
-.14345E-13	0.00000	.13893E+00	0.00000	-.40324E-01	0.00000	-.16302E+00	0.00000	-.28276E-11	0.00000	-.60701E-13	0.00000
-.15236E-13	0.00000	-.13893E+00	0.00000	.40324E-01	0.00000	-.16302E+00	0.00000	.28113E-11	0.00000	.89231E-14	0.00000

H-38

NATURAL FREQUENCY= .119248E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.36195E-13	0.00000	-.85934E-14	0.00000	-.20013E+00	0.00000	.42984E+00	0.00000	-.64178E-13	0.00000	-.16460E-13	0.00000
-.11658E-13	0.00000	-.59705E-13	0.00000	.20013E+00	0.00000	-.42984E+00	0.00000	-.10513E-12	0.00000	-.75684E-13	0.00000
.29926E-13	0.00000	-.27863E-13	0.00000	.11319E+00	0.00000	.10556E+00	0.00000	-.12612E-12	0.00000	-.71111E-14	0.00000
-.72628E-13	0.00000	.38959E-13	0.00000	-.11319E+00	0.00000	-.10556E+00	0.00000	.84239E-13	0.00000	.10880E-13	0.00000
.33423E-13	0.00000	-.27707E-13	0.00000	.85664E-01	0.00000	-.36624E-01	0.00000	-.57497E-13	0.00000	.17015E-13	0.00000
-.39772E-14	0.00000	.96447E-13	0.00000	-.85664E-01	0.00000	.36624E-01	0.00000	-.74930E-13	0.00000	-.22077E-14	0.00000
.35663E-13	0.00000	-.26403E-14	0.00000	.12242E-01	0.00000	-.35388E-01	0.00000	.99227E-13	0.00000	.16268E-13	0.00000
-.51998E-13	0.00000	.23315E-13	0.00000	-.12242E-01	0.00000	.35388E-01	0.00000	-.13979E-12	0.00000	.32555E-13	0.00000
.58792E-13	0.00000	-.34826E-13	0.00000	.10971E-01	0.00000	-.21318E-12	0.00000	-.11680E-12	0.00000	.23610E-13	0.00000
-.55526E-13	0.00000	.44454E-13	0.00000	-.10971E-01	0.00000						
.11402E-12	0.00000	-.61483E-13	0.00000	.10971E-01	0.00000						
-.89306E-13	0.00000	.74827E-13	0.00000	-.10971E-01	0.00000	-.21024E-12	0.00000	-.60083E-13	0.00000	.46764E-13	0.00000
.30993E-13	0.00000	-.12265E-13	0.00000	.12242E-01	0.00000	.35388E-01	0.00000	-.22656E-12	0.00000	-.18992E-13	0.00000
-.76722E-13	0.00000	.99854E-14	0.00000	-.12242E-01	0.00000	-.35388E-01	0.00000	-.97352E-13	0.00000	.85042E-15	0.00000
.11269E-12	0.00000	-.54297E-13	0.00000	.85664E-01	0.00000	.36624E-01	0.00000	-.78769E-13	0.00000	.59176E-13	0.00000
-.84442E-13	0.00000	.68251E-13	0.00000	-.85664E-01	0.00000	-.36624E-01	0.00000	.61248E-13	0.00000	-.44591E-13	0.00000
-.41172E-13	0.00000	-.31552E-13	0.00000	.11319E+00	0.00000	-.10556E+00	0.00000	-.75276E-13	0.00000	.44170E-13	0.00000
-.38038E-13	0.00000	.40039E-13	0.00000	-.11319E+00	0.00000	.10556E+00	0.00000	-.15359E-12	0.00000	-.20450E-13	0.00000
.35952E-13	0.00000	-.53852E-13	0.00000	.20013E+00	0.00000	-.42984E+00	0.00000	.73157E-13	0.00000	.28969E-12	0.00000
-.38418E-13	0.00000	-.47868E-13	0.00000	-.20013E+00	0.00000	.42984E+00	0.00000	-.17155E-12	0.00000	-.10856E-12	0.00000

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.10685E-12	0.00000	-.83688E-14	0.00000	-.20082E+00	0.00000	.43013E+00	0.00000	-.20487E-12	0.00000	-.96927E-13	0.00000
.12322E-12	0.00000	-.54301E-13	0.00000	.20082E+00	0.00000	-.43013E+00	0.00000	.18179E-12	0.00000	.57894E-13	0.00000
-.97173E-13	0.00000	-.39435E-13	0.00000	.11248E+00	0.00000	.10583E+00	0.00000	.29516E-13	0.00000	-.19410E-13	0.00000
.86701E-13	0.00000	.43985E-13	0.00000	-.11248E+00	0.00000	-.10583E+00	0.00000	-.22121E-12	0.00000	.32627E-13	0.00000
-.78989E-13	0.00000	-.47346E-13	0.00000	.85624E-01	0.00000	-.34726E-01	0.00000	.13395E-12	0.00000	-.64527E-14	0.00000
.88452E-13	0.00000	.79640E-13	0.00000	-.85624E-01	0.00000	.34726E-01	0.00000	-.56342E-13	0.00000	.11977E-13	0.00000
-.46387E-13	0.00000	-.16325E-13	0.00000	.16704E-01	0.00000	-.31182E-01	0.00000	.25810E-12	0.00000	.85503E-14	0.00000
.69863E-13	0.00000	-.39137E-14	0.00000	-.16704E-01	0.00000	.31182E-01	0.00000	-.34644E-13	0.00000	-.18389E-13	0.00000
-.56366E-13	0.00000	.17032E-13	0.00000	.51597E-03	0.00000	-.51597E-03	0.00000	.67936E-14	0.00000	-.46545E-13	0.00000
.31891E-13	0.00000	-.66504E-13	0.00000	-.51597E-03	0.00000						
.60019E-13	0.00000	.25689E-13	0.00000	-.51597E-03	0.00000						
-.24568E-14	0.00000	-.76630E-13	0.00000	.51597E-03	0.00000	.51597E-03	0.00000	.10614E-12	0.00000	.12881E-13	0.00000
-.10886E-12	0.00000	-.70940E-14	0.00000	-.16704E-01	0.00000	-.31182E-01	0.00000	-.56788E-13	0.00000	.81542E-14	0.00000
.16256E-13	0.00000	.19549E-13	0.00000	.16704E-01	0.00000	.31182E-01	0.00000	.83968E-13	0.00000	-.19313E-13	0.00000
-.71933E-14	0.00000	-.38128E-13	0.00000	-.85624E-01	0.00000	-.34726E-01	0.00000	.15663E-12	0.00000	.45893E-13	0.00000
.60894E-13	0.00000	.75154E-13	0.00000	.85624E-01	0.00000	.34726E-01	0.00000	.83173E-13	0.00000	-.15469E-13	0.00000
-.13601E-12	0.00000	-.30720E-13	0.00000	-.11248E+00	0.00000	.10583E+00	0.00000	.19912E-12	0.00000	.21596E-13	0.00000
.34882E-13	0.00000	.24523E-13	0.00000	.11248E+00	0.00000	-.10583E+00	0.00000	.53393E-15	0.00000	.96429E-14	0.00000
-.36299E-13	0.00000	-.16831E-13	0.00000	.20082E+00	0.00000	-.43013E+00	0.00000	.12988E-12	0.00000	.17214E-12	0.00000
.12355E-12	0.00000	-.60286E-13	0.00000	-.20082E+00	0.00000	.43013E+00	0.00000	.23854E-12	0.00000	.50670E-13	0.00000

H-40

ORIGINAL PAGE IS
OF POOR QUALITY

NATURAL FREQUENCY= .119740E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.13119E+00	0.00000	-.11672E-13	0.00000	.15327E-12	0.00000	-.37830E-12	0.00000	-.19679E+00	0.00000	.80226E-11	0.00000
.13119E+00	0.00000	-.76447E-13	0.00000	-.15193E-12	0.00000	.27537E-12	0.00000	-.19679E+00	0.00000	-.73871E-11	0.00000
.13119E+00	0.00000	.40946E-13	0.00000	-.71850E-13	0.00000	-.96939E-13	0.00000	-.19679E+00	0.00000	.27391E-11	0.00000
.13119E+00	0.00000	.30796E-13	0.00000	.72826E-13	0.00000	.67362E-13	0.00000	-.19679E+00	0.00000	-.27965E-11	0.00000
.13119E+00	0.00000	-.10072E-13	0.00000	-.28077E-13	0.00000	.38036E-13	0.00000	-.19679E+00	0.00000	.23389E-11	0.00000
.13119E+00	0.00000	.71030E-13	0.00000	.10944E-12	0.00000	-.22022E-13	0.00000	-.19679E+00	0.00000	-.21890E-11	0.00000
.13119E+00	0.00000	-.53964E-13	0.00000	-.86737E-13	0.00000	.59088E-13	0.00000	-.19679E+00	0.00000	.97289E-12	0.00000
.13119E+00	0.00000	.73519E-13	0.00000	-.40031E-13	0.00000	.34138E-13	0.00000	-.19679E+00	0.00000	-.10686E-11	0.00000
.13119E+00	0.00000	-.64862E-15	0.00000	.41016E-13	0.00000	-.48896E-13	0.00000	-.19679E+00	0.00000	-.16123E-11	0.00000
.13119E+00	0.00000	-.44811E-13	0.00000	.44551E-13	0.00000						
.13119E+00	0.00000	.38556E-15	0.00000	-.83263E-13	0.00000						
.13119E+00	0.00000	-.44502E-13	0.00000	-.45695E-13	0.00000	-.46521E-13	0.00000	-.19679E+00	0.00000	.14495E-11	0.00000
.13119E+00	0.00000	-.13553E-13	0.00000	.68516E-13	0.00000	.49081E-13	0.00000	-.19679E+00	0.00000	.14855E-12	0.00000
.13119E+00	0.00000	.41282E-13	0.00000	-.46381E-13	0.00000	.22442E-13	0.00000	-.19679E+00	0.00000	-.34972E-14	0.00000
.13119E+00	0.00000	-.19851E-13	0.00000	-.12159E-13	0.00000	.24185E-13	0.00000	-.19679E+00	0.00000	-.35791E-12	0.00000
.13119E+00	0.00000	.87079E-13	0.00000	-.46809E-13	0.00000	.40447E-14	0.00000	-.19679E+00	0.00000	.51117E-12	0.00000
.13119E+00	0.00000	-.30937E-13	0.00000	-.32459E-14	0.00000	.19935E-13	0.00000	-.19679E+00	0.00000	-.69778E-13	0.00000
.13117E+00	0.00000	.51678E-13	0.00000	-.15149E-13	0.00000	.51980E-13	0.00000	-.19679E+00	0.00000	.27339E-12	0.00000
.13119E+00	0.00000	-.27179E-13	0.00000	-.11728E-13	0.00000	-.10856E-12	0.00000	-.19679E+00	0.00000	-.11003E-11	0.00000
.13119E+00	0.00000	-.80480E-13	0.00000	.25347E-13	0.00000	.85288E-14	0.00000	-.19679E+00	0.00000	.13792E-11	0.00000

H-41

NATURAL FREQUENCY= .120278E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.13611E+00	0.00000	.52467E-13	0.00000	-.57843E-14	0.00000	.19783E-12	0.00000	-.36563E+00	0.00000	.24117E+00	0.00000
-.13611E+00	0.00000	.39601E-13	0.00000	.78650E-15	0.00000	-.21392E-12	0.00000	-.36563E+00	0.00000	-.24117E+00	0.00000
.13474E+00	0.00000	-.23400E-13	0.00000	.72026E-13	0.00000	.43506E-13	0.00000	-.36984E-01	0.00000	.79296E-01	0.00000
-.13474E+00	0.00000	.13011E-13	0.00000	-.78411E-13	0.00000	-.14978E-13	0.00000	-.36984E-01	0.00000	-.79296E-01	0.00000
-.21215E-01	0.00000	-.92983E-13	0.00000	.42357E-13	0.00000	-.37807E-13	0.00000	-.32993E-01	0.00000	.61701E-01	0.00000
.21215E-01	0.00000	-.41978E-13	0.00000	-.59664E-14	0.00000	.39654E-13	0.00000	-.32993E-01	0.00000	-.61701E-01	0.00000
.11144E-01	0.00000	-.70777E-13	0.00000	-.49081E-13	0.00000	-.39364E-13	0.00000	.99759E-01	0.00000	.21214E-01	0.00000
-.11144E-01	0.00000	-.27878E-13	0.00000	-.14579E-13	0.00000	.42230E-13	0.00000	.99759E-01	0.00000	-.21214E-01	0.00000
-.64030E-01	0.00000	.64986E-13	0.00000	.35125E-13	0.00000	-.32958E-13	0.00000	-.26560E-11	0.00000	-.64030E-01	0.00000
.64030E-01	0.00000	.42350E-13	0.00000	.43137E-13	0.00000						
-.64030E-01	0.00000	.63052E-13	0.00000	-.46172E-13	0.00000						
-.64030E-01	0.00000	.42961E-13	0.00000	-.25766E-13	0.00000	-.33576E-13	0.00000	-.26999E-11	0.00000	.64030E-01	0.00000
-.11144E-01	0.00000	-.32737E-13	0.00000	.62753E-13	0.00000	.32717E-13	0.00000	-.99759E-01	0.00000	.21214E-01	0.00000
.11144E-01	0.00000	.17777E-13	0.00000	.55934E-13	0.00000	.22157E-13	0.00000	-.99759E-01	0.00000	-.21214E-01	0.00000
-.21215E-01	0.00000	-.66871E-13	0.00000	-.50294E-13	0.00000	-.18902E-13	0.00000	.32993E-01	0.00000	.61701E-01	0.00000
.21215E-01	0.00000	-.28124E-13	0.00000	-.37939E-13	0.00000	-.68718E-14	0.00000	.32993E-01	0.00000	-.61701E-01	0.00000
-.13474E+00	0.00000	-.38501E-13	0.00000	-.16280E-13	0.00000	.62210E-14	0.00000	.36984E-01	0.00000	.79296E-01	0.00000
.13474E+00	0.00000	-.38512E-13	0.00000	.10544E-13	0.00000	.24544E-13	0.00000	.36984E-01	0.00000	-.79296E-01	0.00000
-.13611E+00	0.00000	.11299E-12	0.00000	.43137E-13	0.00000	-.37701E-13	0.00000	.36563E+00	0.00000	.24117E+00	0.00000
.13611E+00	0.00000	-.35206E-14	0.00000	-.16170E-13	0.00000	-.79234E-13	0.00000	.36563E+00	0.00000	-.24117E+00	0.00000

H-42

NO. 00000000000000000000

NATURAL FREQUENCY= .120186E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.10132E+00	0.00000	-.67524E-13	0.00000	-.10077E-12	0.00000	.46141E-13	0.00000	.32835E+00	0.00000	-.27462E+00	0.00000
.10132E+00	0.00000	-.75297E-13	0.00000	.46113E-13	0.00000	-.71775E-13	0.00000	.32835E+00	0.00000	-.27462E+00	0.00000
-.98268E-01	0.00000	.17747E-13	0.00000	.52627E-13	0.00000	.49436E-13	0.00000	-.26183E-01	0.00000	-.79082E-01	0.00000
.98268E-01	0.00000	.23343E-13	0.00000	.92212E-14	0.00000	-.64504E-13	0.00000	-.26183E-01	0.00000	-.79082E-01	0.00000
.55556E-01	0.00000	-.79339E-13	0.00000	-.88860E-14	0.00000	-.54880E-13	0.00000	-.37810E-01	0.00000	-.76197E-01	0.00000
-.55556E-01	0.00000	.31644E-13	0.00000	-.96790E-13	0.00000	.31277E-14	0.00000	-.37810E-01	0.00000	-.76197E-01	0.00000
.54992E-01	0.00000	.14050E-13	0.00000	-.61243E-14	0.00000	-.11164E-13	0.00000	-.13846E+00	0.00000	-.16886E-01	0.00000
-.54992E-01	0.00000	-.41459E-13	0.00000	.16286E-13	0.00000	.23794E-13	0.00000	-.13846E+00	0.00000	-.16886E-01	0.00000
.89043E-01	0.00000	-.52016E-13	0.00000	-.87854E-14	0.00000	.36410E-13	0.00000	-.12590E+00	0.00000	-.25554E-11	0.00000
-.89043E-01	0.00000	-.10881E-13	0.00000	-.14810E-13	0.00000						
.89043E-01	0.00000	-.51668E-13	0.00000	.41912E-13	0.00000						
-.89043E-01	0.00000	-.13948E-13	0.00000	.45866E-13	0.00000	.30155E-13	0.00000	-.12590E+00	0.00000	-.24052E-11	0.00000
.54992E-01	0.00000	.43836E-13	0.00000	-.67592E-13	0.00000	-.91052E-14	0.00000	-.13846E+00	0.00000	-.16886E-01	0.00000
-.54992E-01	0.00000	-.19410E-13	0.00000	.40621E-13	0.00000	-.49933E-13	0.00000	-.13846E+00	0.00000	-.16886E-01	0.00000
.55556E-01	0.00000	.73726E-13	0.00000	.28821E-13	0.00000	-.13798E-13	0.00000	-.37810E-01	0.00000	-.76197E-01	0.00000
-.55556E-01	0.00000	-.11437E-13	0.00000	.30012E-13	0.00000	-.27700E-13	0.00000	-.37810E-01	0.00000	-.76197E-01	0.00000
-.98268E-01	0.00000	.46672E-13	0.00000	-.44001E-13	0.00000	-.17604E-13	0.00000	-.26183E-01	0.00000	-.79082E-01	0.00000
.98268E-01	0.00000	.34514E-13	0.00000	.23159E-13	0.00000	-.14875E-13	0.00000	-.26183E-01	0.00000	-.79082E-01	0.00000
.10132E+00	0.00000	-.93134E-13	0.00000	-.37534E-13	0.00000	-.64332E-13	0.00000	.32835E+00	0.00000	-.27462E+00	0.00000
-.10132E+00	0.00000	.20269E-13	0.00000	-.29246E-13	0.00000	.53152E-13	0.00000	.32835E+00	0.00000	-.27462E+00	0.00000

H-43

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.23455E-14	0.00000	.58789E-14	0.00000	.15669E-12	0.00000	.56467E-13	0.00000	.21426E+00	0.00000	-.32914E-13	0.00000
.89637E-14	0.00000	-.14190E-13	0.00000	-.10845E-12	0.00000	.16698E-12	0.00000	-.21426E+00	0.00000	.11825E-13	0.00000
.27054E-14	0.00000	.80540E-13	0.00000	-.81330E-14	0.00000	-.18868E-12	0.00000	-.28868E+00	0.00000	-.68835E-13	0.00000
-.27602E-14	0.00000	-.68140E-13	0.00000	-.89283E-13	0.00000	.50004E-13	0.00000	.28868E+00	0.00000	-.10683E-13	0.00000
.35033E-13	0.00000	.23924E-13	0.00000	-.10091E-12	0.00000	-.13791E-12	0.00000	-.11401E+00	0.00000	-.86682E-14	0.00000
-.22249E-13	0.00000	-.14924E-13	0.00000	.16212E-12	0.00000	.10708E-12	0.00000	.11401E+00	0.00000	.32611E-14	0.00000
-.22265E-13	0.00000	-.50985E-13	0.00000	-.28308E-12	0.00000	.30766E-13	0.00000	.32827E+00	0.00000	.77057E-14	0.00000
-.61006E-14	0.00000	.48381E-13	0.00000	.15778E-12	0.00000	.43421E-13	0.00000	-.32827E+00	0.00000	-.47218E-13	0.00000
.12485E-13	0.00000	.89571E-14	0.00000	-.11030E-12	0.00000	.76236E-13	0.00000	.19398E-12	0.00000	.39563E-13	0.00000
.18651E-13	0.00000	.27415E-13	0.00000	.18802E-12	0.00000						
-.29755E-13	0.00000	-.73609E-14	0.00000	-.72107E-14	0.00000						
.31773E-13	0.00000	.33180E-13	0.00000	-.82246E-13	0.00000	-.15982E-12	0.00000	-.10834E-12	0.00000	.38529E-14	0.00000
-.87302E-14	0.00000	-.11891E-13	0.00000	.13472E-12	0.00000	.56911E-13	0.00000	-.32827E+00	0.00000	-.23092E-13	0.00000
.27592E-13	0.00000	.34717E-14	0.00000	-.92106E-13	0.00000	-.31119E-13	0.00000	.32827E+00	0.00000	-.39235E-13	0.00000
-.22653E-13	0.00000	.35950E-13	0.00000	.11956E-12	0.00000	.13078E-13	0.00000	.11401E+00	0.00000	.87864E-14	0.00000
.39254E-13	0.00000	-.34665E-13	0.00000	-.16958E-12	0.00000	-.36199E-13	0.00000	-.11401E+00	0.00000	.12912E-13	0.00000
-.89714E-13	0.00000	.53759E-13	0.00000	.22259E-12	0.00000	-.21303E-13	0.00000	.28868E+00	0.00000	-.36605E-13	0.00000
.26898E-14	0.00000	-.44597E-13	0.00000	-.13662E-12	0.00000	-.36664E-13	0.00000	-.28868E+00	0.00000	-.24091E-13	0.00000
-.31048E-13	0.00000	-.24672E-13	0.00000	.12477E-12	0.00000	.54413E-13	0.00000	-.21426E+00	0.00000	-.11700E-13	0.00000
.13235E-13	0.00000	.26070E-13	0.00000	-.14474E-12	0.00000	.10343E-12	0.00000	.21426E+00	0.00000	-.68453E-14	0.00000

NATURAL FREQUENCY= .118144E+04

TX	TY	TZ	RX	RY	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG
.61737E-01	0.00000	-.20454E-13	0.00000	.13426E-12	0.00000
.61737E-01	0.00000	-.16225E-13	0.00000	-.11164E-12	0.00000
.53717E-01	0.00000	.15270E-13	0.00000	-.97864E-13	0.00000
.53717E-01	0.00000	-.27079E-13	0.00000	.47041E-13	0.00000
.13798E+00	0.00000	-.28715E-13	0.00000	-.29162E-13	0.00000
.13798E+00	0.00000	-.21084E-13	0.00000	.84919E-13	0.00000
.82324E-02	0.00000	-.11850E-13	0.00000	.23946E-13	0.00000
.82324E-02	0.00000	.33988E-13	0.00000	.20030E-13	0.00000
.25744E+00	0.00000	-.47021E-13	0.00000	-.37889E-13	0.00000
.25744E+00	0.00000	-.22320E-13	0.00000	.31900E-13	0.00000
.25744E+00	0.00000	-.48964E-13	0.00000	-.10018E-13	0.00000
.25744E+00	0.00000	-.20653E-13	0.00000	.14981E-13	0.00000
.82324E-02	0.00000	-.22453E-13	0.00000	.23283E-13	0.00000
.82324E-02	0.00000	-.11334E-14	0.00000	-.10912E-13	0.00000
.13798E+00	0.00000	.43135E-13	0.00000	-.66829E-14	0.00000
.13798E+00	0.00000	-.76544E-14	0.00000	.68564E-14	0.00000
.53717E-01	0.00000	.93228E-14	0.00000	.25629E-14	0.00000
.53717E-01	0.00000	-.22980E-13	0.00000	.31080E-13	0.00000
.61737E-01	0.00000	-.15672E-13	0.00000	-.63899E-14	0.00000
.61737E-01	0.00000	-.55979E-14	0.00000	-.68367E-14	0.00000

H-45

NATURAL FREQUENCY= .123147E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.89492E-01	0.00000	.13936E-13	0.00000	-.37908E-13	0.00000	-.46685E-13	0.00000	.10027E-01	0.00000	-.28216E+00	0.00000
-.89492E-01	0.00000	-.54418E-13	0.00000	.41469E-13	0.00000	-.25330E-13	0.00000	.10027E-01	0.00000	.28216E+00	0.00000
.46351E-01	0.00000	-.28497E-13	0.00000	-.18318E-13	0.00000	.39009E-13	0.00000	-.27720E+00	0.00000	.12517E-01	0.00000
-.46351E-01	0.00000	.60125E-14	0.00000	.49501E-13	0.00000	-.52397E-13	0.00000	-.27720E+00	0.00000	-.12517E-01	0.00000
.64333E-01	0.00000	.11660E-13	0.00000	-.85908E-14	0.00000	.39538E-14	0.00000	-.80737E-01	0.00000	-.59509E-01	0.00000
-.64333E-01	0.00000	-.27387E-13	0.00000	-.48824E-14	0.00000	-.36705E-13	0.00000	-.80737E-01	0.00000	.59509E-01	0.00000
-.63007E-01	0.00000	-.12666E-13	0.00000	-.67391E-14	0.00000	.31038E-14	0.00000	.10621E+00	0.00000	-.10888E+00	0.00000
.63007E-01	0.00000	.54505E-14	0.00000	-.21903E-13	0.00000	.18773E-13	0.00000	.10621E+00	0.00000	.10888E+00	0.00000
-.13717E+00	0.00000	-.30824E-13	0.00000	.48034E-13	0.00000	-.35607E-13	0.00000	.24170E+00	0.00000	-.54863E-12	0.00000
.13717E+00	0.00000	-.89468E-14	0.00000	-.56466E-14	0.00000						
-.13717E+00	0.00000	-.30853E-13	0.00000	-.29444E-13	0.00000						
.13717E+00	0.00000	-.12659E-13	0.00000	-.12655E-13	0.00000	-.77424E-14	0.00000	.24170E+00	0.00000	-.48251E-12	0.00000
-.63007E-01	0.00000	-.44274E-15	0.00000	-.28528E-13	0.00000	-.24825E-13	0.00000	.10621E+00	0.00000	-.10888E+00	0.00000
.63007E-01	0.00000	-.14679E-13	0.00000	-.39903E-13	0.00000	-.13319E-13	0.00000	.10621E+00	0.00000	.10888E+00	0.00000
.64333E-01	0.00000	.34570E-13	0.00000	.11602E-13	0.00000	-.38661E-13	0.00000	-.80737E-01	0.00000	-.59509E-01	0.00000
-.64333E-01	0.00000	-.39832E-14	0.00000	-.16673E-13	0.00000	-.19804E-13	0.00000	-.80737E-01	0.00000	.59509E-01	0.00000
.46351E-01	0.00000	.57039E-13	0.00000	-.63425E-14	0.00000	-.12678E-13	0.00000	-.27720E+00	0.00000	-.12517E-01	0.00000
-.46351E-01	0.00000	.15616E-13	0.00000	.95339E-14	0.00000	-.47880E-13	0.00000	-.27720E+00	0.00000	.12517E-01	0.00000
.89492E-01	0.00000	-.14171E-13	0.00000	.22104E-13	0.00000	-.15732E-14	0.00000	.10027E-01	0.00000	-.28216E+00	0.00000
-.89492E-01	0.00000	-.20621E-13	0.00000	-.22270E-13	0.00000	-.32138E-13	0.00000	.10027E-01	0.00000	.28216E+00	0.00000

H-46

NATURAL FREQUENCY= .121916L+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.10034E+00	0.00000	.51093E-13	0.00000	.97775E-13	0.00000	-.23311E-12	0.00000	.20654E-02	0.00000	-.28552E+00	0.00000
.10034E+00	0.00000	-.29317E-13	0.00000	-.84424E-13	0.00000	.15969E-12	0.00000	.20654E-02	0.00000	-.28552E+00	0.00000
-.76487E-01	0.00000	-.37875E-13	0.00000	-.57911E-13	0.00000	.13631E-13	0.00000	.29451E+00	0.00000	-.41771E-02	0.00000
.76487E-01	0.00000	.26233E-13	0.00000	.19214E-13	0.00000	-.66409E-13	0.00000	.29451E+00	0.00000	-.41771E-02	0.00000
-.10597E+00	0.00000	-.19138E-13	0.00000	-.39967E-15	0.00000	.35185E-14	0.00000	.18410E+00	0.00000	-.79940E-02	0.00000
.10597E+00	0.00000	.32621E-13	0.00000	.93713E-13	0.00000	-.19491E-13	0.00000	.18410E+00	0.00000	-.79940E-02	0.00000
-.61947E-01	0.00000	-.34533E-13	0.00000	-.37344E-13	0.00000	.51728E-13	0.00000	-.60820E-02	0.00000	-.10203E+00	0.00000
.61947E-01	0.00000	.25713E-13	0.00000	-.91055E-14	0.00000	-.60867E-14	0.00000	-.60820E-02	0.00000	-.10203E+00	0.00000
-.91187E-01	0.00000	.10270E-13	0.00000	.12525E-13	0.00000	-.82310E-14	0.00000	-.41165E-12	0.00000	.91187E-01	0.00000
.91187E-01	0.00000	-.18372E-13	0.00000	-.10009E-13	0.00000						
-.91187E-01	0.00000	.98333E-14	0.00000	-.28825E-14	0.00000						
.91167E-01	0.00000	-.20235E-13	0.00000	-.31934E-13	0.00000	-.10637E-13	0.00000	-.45364E-12	0.00000	-.91187E-01	0.00000
-.61947E-01	0.00000	.13524E-13	0.00000	.93051E-14	0.00000	-.10779E-13	0.00000	.60820E-02	0.00000	-.10203E+00	0.00000
.61947E-01	0.00000	-.47386E-14	0.00000	-.36175E-13	0.00000	-.39751E-14	0.00000	.60820E-02	0.00000	-.10203E+00	0.00000
-.10597E+00	0.00000	.13419E-13	0.00000	.76401E-15	0.00000	-.23321E-14	0.00000	-.18410E+00	0.00000	-.79940E-02	0.00000
.10597E+00	0.00000	-.18944E-13	0.00000	-.12054E-13	0.00000	-.64838E-14	0.00000	.18410E+00	0.00000	.79940E-02	0.00000
-.76487E-01	0.00000	.47638E-14	0.00000	-.38220E-14	0.00000	-.11181E-13	0.00000	-.29451E+00	0.00000	-.41771E-02	0.00000
.76487E-01	0.00000	-.14497E-13	0.00000	.18602E-14	0.00000	.21517E-13	0.00000	-.29451E+00	0.00000	-.41771E-02	0.00000
-.10034E+00	0.00000	-.56930E-14	0.00000	.42733E-14	0.00000	.16747E-13	0.00000	-.20654E-02	0.00000	.28552E+00	0.00000
.10034E+00	0.00000	-.18643E-13	0.00000	.67008E-15	0.00000	-.24987E-13	0.00000	-.20654E-02	0.00000	-.28552E+00	0.00000

NATURAL FREQUENCY= .127844L+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
20150E-13	0.00000	.50334E-12	0.00000	.35519E-12	0.00000	-.46221E-12	0.00000	.19629E+00	0.00000	-.13071E-13	0.00000
40686E-13	0.00000	-.50490E-12	0.00000	-.73040E-12	0.00000	-.93250E-12	0.00000	-.19629E+00	0.00000	.13193E-14	0.00000
44272E-14	0.00000	-.56507E-12	0.00000	.11015E-11	0.00000	.97105E-14	0.00000	-.31760E+00	0.00000	-.74526E-13	0.00000
.35305E-13	0.00000	.55499E-12	0.00000	-.11749E-13	0.00000	.70071E-12	0.00000	.31760E+00	0.00000	-.83238E-14	0.00000
.46206E-14	0.00000	-.60848E-12	0.00000	-.72155E-12	0.00000	-.11746E-12	0.00000	.17530E-12	0.00000	-.64071E-13	0.00000
.64411E-15	0.00000	.69483E-12	0.00000	-.30959E-12	0.00000	.12193E-11	0.00000	-.16820E-12	0.00000	-.35169E-13	0.00000
.35569E-13	0.00000	.39226E-12	0.00000	-.48810E-12	0.00000	-.65353E-12	0.00000	.31760E+00	0.00000	.39737E-14	0.00000
.33757E-14	0.00000	-.36571E-12	0.00000	.12537E-11	0.00000	-.22286E-12	0.00000	-.31760E+00	0.00000	-.27660E-13	0.00000
.20292E-13	0.00000	.73326E-12	0.00000	-.14574E-11	0.00000	.11592E-11	0.00000	-.19629E+00	0.00000	.42032E-13	0.00000
.18264E-13	0.00000	-.71085E-12	0.00000	-.68538E-13	0.00000						
.34162E-13	0.00000	.70667E-12	0.00000	.84732E-12	0.00000						
.20011E-13	0.00000	-.70753E-12	0.00000	.70524E-12	0.00000	.38398E-12	0.00000	.19629E+00	0.00000	.96272E-14	0.00000
.17571E-13	0.00000	.33072E-12	0.00000	-.31273E-13	0.00000	-.34008E-12	0.00000	.31760E+00	0.00000	-.13835E-13	0.00000
.22330E-14	0.00000	-.35649E-12	0.00000	-.76798E-12	0.00000	-.49774E-12	0.00000	-.31760E+00	0.00000	-.40043E-14	0.00000
.88081E-14	0.00000	-.69152E-12	0.00000	.73438E-12	0.00000	.43207E-12	0.00000	.46985E-12	0.00000	.16302E-13	0.00000
.598715E-14	0.00000	.68340E-12	0.00000	.21042E-12	0.00000	.68494E-12	0.00000	-.45830E-12	0.00000	-.16378E-13	0.00000
.21435E-13	0.00000	-.50962E-12	0.00000	-.41364E-12	0.00000	.27278E-12	0.00000	-.31760E+00	0.00000	-.53051E-14	0.00000
.41335E-14	0.00000	.51341E-12	0.00000	-.63863E-12	0.00000	.39079E-12	0.00000	.31760E+00	0.00000	-.19581E-13	0.00000
.40310E-13	0.00000	.44464E-12	0.00000	.30500E-12	0.00000	-.58009E-12	0.00000	.19629E+00	0.00000	.40963E-13	0.00000
.53204E-14	0.00000	-.46525E-12	0.00000	.77721E-13	0.00000	-.72588E-12	0.00000	-.19629E+00	0.00000	-.51881E-13	0.00000

H-48

NATURAL FREQUENCY= .129134E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.11960E-13	0.00000	-.67936E-14	0.00000	-.12769E+00	0.00000	-.87735E-01	0.00000	.48192E-12	0.00000	.56405E-14	0.00000
.28283E-14	0.00000	-.30542E-13	0.00000	.12769E+00	0.00000	.87735E-01	0.00000	-.52011E-12	0.00000	-.14951E-13	0.00000
-.26797E-13	0.00000	.12643E-13	0.00000	-.14283E+00	0.00000	.10531E+00	0.00000	-.66238E-12	0.00000	-.10014E-13	0.00000
-.17830E-13	0.00000	.11803E-13	0.00000	.14283E+00	0.00000	-.10531E+00	0.00000	.70873E-12	0.00000	-.17641E-13	0.00000
-.11603E-13	0.00000	-.27481E-13	0.00000	.99878E-01	0.00000	.20670E+00	0.00000	-.63637E-13	0.00000	-.19791E-14	0.00000
.27501E-13	0.00000	.45804E-13	0.00000	-.99878E-01	0.00000	-.20670E+00	0.00000	.93726E-13	0.00000	-.32847E-14	0.00000
-.12627E-13	0.00000	-.16012E-13	0.00000	.30458E+00	0.00000	.41725E-01	0.00000	.75918E-12	0.00000	.88645E-15	0.00000
-.76489E-15	0.00000	.17172E-13	0.00000	-.30458E+00	0.00000	-.41725E-01	0.00000	-.72148E-12	0.00000	.13839E-13	0.00000
-.92314E-14	0.00000	-.15887E-15	0.00000	.19031E+00	0.00000	-.19031E+00	0.00000	-.42918E-12	0.00000	-.84287E-14	0.00000
.17554E-13	0.00000	-.16653E-13	0.00000	-.19031E+00	0.00000	.19031E+00	0.00000	.38225E-12	0.00000	-.17242E-13	0.00000
.88398E-14	0.00000	-.18121E-13	0.00000	-.19031E+00	0.00000	.19031E+00	0.00000	-.38225E-12	0.00000	-.17242E-13	0.00000
-.38485E-13	0.00000	-.35743E-13	0.00000	.19031E+00	0.00000	-.19031E+00	0.00000	.55325E-12	0.00000	.37176E-13	0.00000
-.24051E-13	0.00000	.54725E-14	0.00000	-.30458E+00	0.00000	.41725E-01	0.00000	-.55325E-12	0.00000	-.37176E-13	0.00000
.42571E-13	0.00000	-.15348E-14	0.00000	.30458E+00	0.00000	-.41725E-01	0.00000	-.49105E-12	0.00000	-.41713E-13	0.00000
-.45428E-13	0.00000	.37622E-14	0.00000	-.99878E-01	0.00000	.20670E+00	0.00000	.15410E-12	0.00000	.32168E-14	0.00000
.22503E-13	0.00000	.45724E-14	0.00000	.99878E-01	0.00000	-.20670E+00	0.00000	-.40164E-15	0.00000	.41564E-13	0.00000
-.20040E-13	0.00000	-.20570E-13	0.00000	.14283E+00	0.00000	.10531E+00	0.00000	-.53339E-12	0.00000	-.26882E-13	0.00000
.37634E-13	0.00000	.13893E-13	0.00000	-.14283E+00	0.00000	-.10531E+00	0.00000	.53559E-12	0.00000	.51383E-13	0.00000
.11014E-13	0.00000	.34734E-14	0.00000	.12769E+00	0.00000	-.87735E-01	0.00000	.28895E-12	0.00000	.48901E-13	0.00000
.60250E-15	0.00000	-.77106E-14	0.00000	-.12769E+00	0.00000	.87735E-01	0.00000	-.29712E-12	0.00000	-.88790E-13	0.00000

H-49

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RA REAL	RA IMAG
.29161E-13	0.00000	.76452E-13	0.00000	.20326E+00	0.00000	.35038E-01	0.00000	-.52083E-12	0.00000	-.92660E-13	0.00000
.52764E-13	0.00000	-.30717E-13	0.00000	-.20326E+00	0.00000	-.35038E-01	0.00000	.44475E-12	0.00000	.10564E-12	0.00000
.76536E-14	0.00000	-.11675E-12	0.00000	.20808E+00	0.00000	-.75291E-01	0.00000	.63252E-12	0.00000	.65885E-13	0.00000
.22175E-13	0.00000	.80221E-13	0.00000	-.20888E+00	0.00000	.75291E-01	0.00000	-.72690E-12	0.00000	-.63775E-13	0.00000
.30195E-13	0.00000	-.42618E-13	0.00000	.42646E-01	0.00000	-.18396E+00	0.00000	.13414E-12	0.00000	.12071E-13	0.00000
.21350E-13	0.00000	.16382E-13	0.00000	-.42646E-01	0.00000	.18396E+00	0.00000	.10465E-12	0.00000	-.28189E-13	0.00000
.47995E-13	0.00000	.68399E-13	0.00000	-.18480E+00	0.00000	-.14612E+00	0.00000	-.64403E-12	0.00000	-.58577E-13	0.00000
.58335E-13	0.00000	-.10434E-12	0.00000	.18480E+00	0.00000	.14612E+00	0.00000	.74994E-12	0.00000	.26377E-13	0.00000
.15251E-13	0.00000	.65384E-13	0.00000	-.26999E+00	0.00000	-.44942E-12	0.00000	.40260E-12	0.00000	.33263E-13	0.00000
.49466E-13	0.00000	-.56555E-13	0.00000	.26999E+00	0.00000						
.74992E-14	0.00000	.67283E-13	0.00000	-.26999E+00	0.00000						
.63500E-13	0.00000	-.32829E-13	0.00000	.26999E+00	0.00000	.64615E-12	0.00000	-.38697E-12	0.00000	-.52242E-13	0.00000
.32463E-13	0.00000	-.22985E-13	0.00000	-.18480E+00	0.00000	.14612E+00	0.00000	-.53081E-12	0.00000	.59175E-13	0.00000
.57675E-13	0.00000	-.31636E-13	0.00000	.18480E+00	0.00000	-.14612E+00	0.00000	.42710E-12	0.00000	.41038E-13	0.00000
.41604E-13	0.00000	-.73382E-13	0.00000	.42646E-01	0.00000	.18396E+00	0.00000	-.18947E-12	0.00000	.31353E-14	0.00000
.25827E-14	0.00000	.49240E-13	0.00000	-.42646E-01	0.00000	-.18396E+00	0.00000	.35750E-13	0.00000	-.76006E-13	0.00000
.60138E-14	0.00000	-.30319E-13	0.00000	.20888E+00	0.00000	.75291E-01	0.00000	.55950E-12	0.00000	.57019E-14	0.00000
-.16771E-13	0.00000	.52023E-13	0.00000	-.20888E+00	0.00000	-.75291E-01	0.00000	-.47740E-12	0.00000	-.92849E-13	0.00000
.53534E-13	0.00000	.39953E-13	0.00000	.20326E+00	0.00000	-.35038E-01	0.00000	-.21723E-12	0.00000	-.52029E-13	0.00000
.25273E-13	0.00000	-.35479E-13	0.00000	-.20326E+00	0.00000	.35038E-01	0.00000	.28719E-12	0.00000	.79923E-13	0.00000

IC 400 10/10/1960 11:18 AM

NATURAL FREQUENCY= .131783E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.10666E+00	0.00000	-.86045E-13	0.00000	-.92997E-13	0.00000	.46898E-13	0.00000	.11406E+00	0.00000	.21429E+00	0.00000
-.10666E+00	0.00000	-.26642E-13	0.00000	-.11620E-12	0.00000	.25685E-13	0.00000	.11406E+00	0.00000	-.21429E+00	0.00000
.34183E-01	0.00000	.47496E-13	0.00000	-.79406E-13	0.00000	-.94622E-13	0.00000	.88106E-01	0.00000	-.15274E+00	0.00000
-.34183E-01	0.00000	-.46855E-13	0.00000	.98024E-13	0.00000	-.68459E-13	0.00000	.88106E-01	0.00000	.15274E+00	0.00000
.10045E+00	0.00000	.33947E-13	0.00000	-.13042E-12	0.00000	-.42421E-13	0.00000	-.30280E+00	0.00000	-.25308E-01	0.00000
-.10045E+00	0.00000	-.44866E-13	0.00000	.12891E-12	0.00000	.62631E-13	0.00000	-.30280E+00	0.00000	.25308E-01	0.00000
.68169E-01	0.00000	-.50436E-14	0.00000	-.10910E-12	0.00000	.73559E-13	0.00000	-.84213E-01	0.00000	.14597E+00	0.00000
-.68169E-01	0.00000	.24082E-13	0.00000	.64574E-13	0.00000	-.10190E-13	0.00000	-.84213E-01	0.00000	-.14597E+00	0.00000
-.96136E-01	0.00000	.90043E-14	0.00000	-.81857E-13	0.00000	-.17445E-13	0.00000	.18485E+00	0.00000	.11867E-11	0.00000
.96136E-01	0.00000	-.56862E-13	0.00000	.58302E-13	0.00000						
-.96136E-01	0.00000	.77822E-14	0.00000	-.12157E-12	0.00000						
.96136E-01	0.00000	-.56006E-13	0.00000	.17033E-12	0.00000	.54814E-13	0.00000	.18485E+00	0.00000	-.81511E-12	0.00000
.68169E-01	0.00000	.45434E-13	0.00000	-.17314E-12	0.00000	-.52016E-13	0.00000	-.84213E-01	0.00000	.14597E+00	0.00000
-.68169E-01	0.00000	.15451E-13	0.00000	.18460E-12	0.00000	.37804E-13	0.00000	-.84213E-01	0.00000	-.14597E+00	0.00000
.10045E+00	0.00000	-.27627E-13	0.00000	-.18937E-12	0.00000	-.44238E-13	0.00000	-.30280E+00	0.00000	.25308E-01	0.00000
-.10045E+00	0.00000	.78875E-13	0.00000	.18508E-12	0.00000	.68648E-13	0.00000	-.30280E+00	0.00000	-.25308E-01	0.00000
.34183E-01	0.00000	-.29453E-13	0.00000	-.17785E-12	0.00000	.25888E-13	0.00000	.88106E-01	0.00000	.15274E+00	0.00000
-.34183E-01	0.00000	.60559E-14	0.00000	.14791E-12	0.00000	-.31306E-13	0.00000	.88106E-01	0.00000	-.15274E+00	0.00000
-.10666E+00	0.00000	-.30160E-13	0.00000	-.13884E-12	0.00000	-.45739E-13	0.00000	.11406E+00	0.00000	-.21429E+00	0.00000
.10666E+00	0.00000	-.47850E-13	0.00000	.15087E-12	0.00000	-.36843E-14	0.00000	.11406E+00	0.00000	.21429E+00	0.00000

H-51

NATURAL FREQUENCY: .131132E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	Tz REAL	Tz IMAG	XX REAL	XX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.20643E-13	0.00000	-.54604E-13	0.00000	-.28017E+00	0.00000	-.22623E-02	0.00000	-.18249E-12	0.00000	-.26208E-13	0.00000
.96077E-14	0.00000	.20498E-13	0.00000	.28017E+00	0.00000	.22623E-02	0.00000	.16950E-12	0.00000	-.21620E-13	0.00000
-.19965E-13	0.00000	.91490E-13	0.00000	-.28046E+00	0.00000	.23102E-01	0.00000	.28697E-12	0.00000	-.23784E-13	0.00000
-.46166E-14	0.00000	-.61868E-13	0.00000	.28046E+00	0.00000	-.23102E-01	0.00000	-.29570E-12	0.00000	-.10978E-13	0.00000
-.10401E-13	0.00000	.13311E-13	0.00000	-.23336E+00	0.00000	.66293E-01	0.00000	.94574E-13	0.00000	.24589E-13	0.00000
.29900E-13	0.00000	-.13808E-13	0.00000	.23336E+00	0.00000	-.66293E-01	0.00000	-.57588E-13	0.00000	-.15155E-13	0.00000
-.47220E-13	0.00000	-.51845E-13	0.00000	-.14545E+00	0.00000	.81508E-01	0.00000	-.28283E-12	0.00000	-.91969E-14	0.00000
.18703E-13	0.00000	.37140E-13	0.00000	.14545E+00	0.00000	-.81508E-01	0.00000	.35720E-12	0.00000	.51463E-14	0.00000
.18839E-13	0.00000	-.21910E-13	0.00000	-.67405E-01	0.00000	.67405E-01	0.00000	.14011E-12	0.00000	.17142E-13	0.00000
.19551E-13	0.00000	.64434E-14	0.00000	.67405E-01	0.00000						
-.58959E-13	0.00000	-.15391E-13	0.00000	.67405E-01	0.00000						
.53187E-14	0.00000	.18372E-13	0.00000	-.67405E-01	0.00000	-.67405E-01	0.00000	-.68741E-13	0.00000	.25449E-14	0.00000
.64241E-13	0.00000	.13476E-13	0.00000	.14545E+00	0.00000	.81508E-01	0.00000	-.84909E-13	0.00000	-.57631E-13	0.00000
-.25291E-13	0.00000	-.12173E-13	0.00000	-.14545E+00	0.00000	-.81508E-01	0.00000	.55496E-14	0.00000	.24383E-13	0.00000
.44651E-13	0.00000	.14520E-13	0.00000	.23336E+00	0.00000	.66293E-01	0.00000	-.14076E-12	0.00000	.35975E-14	0.00000
-.50727E-13	0.00000	-.29741E-13	0.00000	-.23336E+00	0.00000	-.66293E-01	0.00000	-.14513E-12	0.00000	-.71783E-13	0.00000
-.16367E-13	0.00000	.14500E-13	0.00000	.28046E+00	0.00000	.23102E-01	0.00000	.99340E-13	0.00000	.10812E-12	0.00000
-.20183E-13	0.00000	-.24876E-13	0.00000	-.28046E+00	0.00000	-.23102E-01	0.00000	.30237E-13	0.00000	-.70198E-13	0.00000
-.19113E-13	0.00000	-.25291E-13	0.00000	.28017E+00	0.00000	-.22623E-02	0.00000	.27172E-13	0.00000	-.10598E-12	0.00000
.75793E-13	0.00000	.23131E-13	0.00000	-.28017E+00	0.00000	.22623E-02	0.00000	.78653E-13	0.00000	.74926E-13	0.00000

ORIGINAL PAGE IS
OF ROOM 3447-70

NATURAL FREQUENCY= .136237E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.27748E-14	0.00000	-.19527E-01	0.00000	.35496E-01	0.00000	.30667E+00	0.00000	.62218E-13	0.00000	-.17837E-13	0.00000
-.37514E-13	0.00000	-.19527E-01	0.00000	.35496E-01	0.00000	.30667E+00	0.00000	-.72065E-13	0.00000	.61450E-13	0.00000
-.11380E-13	0.00000	.21188E+00	0.00000	-.91344E-01	0.00000	-.20451E+00	0.00000	-.33523E-12	0.00000	-.18429E-12	0.00000
-.23891E-13	0.00000	-.21188E+00	0.00000	-.91344E-01	0.00000	-.20451E+00	0.00000	.29630E-12	0.00000	.15351E-12	0.00000
-.17951E-13	0.00000	-.35416E-02	0.00000	.10515E+00	0.00000	.40730E-01	0.00000	.49238E-12	0.00000	.13272E-12	0.00000
.46893E-13	0.00000	.35416E-02	0.00000	.10515E+00	0.00000	.40730E-01	0.00000	-.37104E-12	0.00000	.83274E-13	0.00000
-.37639E-13	0.00000	-.18683E+00	0.00000	-.27984E-01	0.00000	.14420E+00	0.00000	-.19011E-12	0.00000	.12482E-12	0.00000
.21590E-13	0.00000	.18683E+00	0.00000	-.27984E-01	0.00000	.14420E+00	0.00000	.34199E-12	0.00000	.14379E-12	0.00000
.61795E-13	0.00000	-.18197E-12	0.00000	-.21320E-01	0.00000	.13042E-12	0.00000	.64494E-14	0.00000	.23544E-13	0.00000
.20362E-13	0.00000	.17285E-12	0.00000	-.21320E-01	0.00000						
.24576E-13	0.00000	-.15583E-12	0.00000	-.21320E-01	0.00000						
.47280E-13	0.00000	.17095E-12	0.00000	-.21320E-01	0.00000	-.26960E-12	0.00000	-.32893E-14	0.00000	-.17780E-13	0.00000
-.20810E-13	0.00000	.18683E+00	0.00000	-.27984E-01	0.00000	-.14420E+00	0.00000	.73436E-13	0.00000	.15638E-13	0.00000
-.24077E-13	0.00000	-.18683E+00	0.00000	-.27984E-01	0.00000	-.14420E+00	0.00000	-.46406E-13	0.00000	.17871E-13	0.00000
.31967E-13	0.00000	.35416E-02	0.00000	.10515E+00	0.00000	-.40730E-01	0.00000	-.86103E-13	0.00000	.34589E-13	0.00000
-.36232E-13	0.00000	-.35416E-02	0.00000	.10515E+00	0.00000	-.40730E-01	0.00000	-.36223E-13	0.00000	.42971E-14	0.00000
-.12455E-13	0.00000	-.21188E+00	0.00000	-.91344E-01	0.00000	.20451E+00	0.00000	.70748E-13	0.00000	.75978E-13	0.00000
-.62238E-14	0.00000	.21188E+00	0.00000	-.91344E-01	0.00000	.20451E+00	0.00000	-.26622E-13	0.00000	-.72573E-14	0.00000
-.40861E-13	0.00000	-.19527E-01	0.00000	.35496E-01	0.00000	-.30667E+00	0.00000	.73733E-13	0.00000	.37257E-14	0.00000
.49384E-13	0.00000	-.19527E-01	0.00000	.35496E-01	0.00000	-.30667E+00	0.00000	.68113E-13	0.00000	.41944E-13	0.00000

H-53

UNCLASSIFIED

NATURAL FREQUENCY= .131957E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.20846E-12	0.00000	.71112E-14	0.00000	-.22361E+00	0.00000	.85118E-13	0.00000	-.15841E-12	0.00000	-.39487E-12	0.00000
-.17350E-12	0.00000	.47189E-14	0.00000	.22361E+00	0.00000	-.16510E-13	0.00000	-.24021E-12	0.00000	.34742E-12	0.00000
-.54261E-13	0.00000	.22861E-14	0.00000	-.22361E+00	0.00000	.60814E-13	0.00000	-.19307E-12	0.00000	.23906E-12	0.00000
.65929E-13	0.00000	-.18079E-13	0.00000	.22361E+00	0.00000	-.11469E-12	0.00000	-.11980E-12	0.00000	-.27653E-12	0.00000
.17633E-12	0.00000	-.40693E-13	0.00000	-.22361E+00	0.00000	-.20594E-13	0.00000	.55575E-12	0.00000	.69514E-13	0.00000
.19607E-12	0.00000	.57306E-14	0.00000	.22361E+00	0.00000	.70976E-13	0.00000	.52132E-12	0.00000	-.46648E-13	0.00000
-.14415E-12	0.00000	-.45927E-14	0.00000	-.22361E+00	0.00000	-.18520E-12	0.00000	.18716E-12	0.00000	-.23968E-12	0.00000
.13456E-12	0.00000	.11847E-13	0.00000	.22361E+00	0.00000	.17876E-12	0.00000	.12518E-12	0.00000	.26150E-12	0.00000
.19630E-12	0.00000	.20516E-13	0.00000	-.22361E+00	0.00000	.31572E-13	0.00000	-.29147E-12	0.00000	.40502E-13	0.00000
.15248E-12	0.00000	-.38364E-13	0.00000	.22361E+00	0.00000						
.11619E-12	0.00000	.26345E-14	0.00000	-.22361E+00	0.00000						
.15458E-12	0.00000	.11893E-14	0.00000	.22361E+00	0.00000	.14883E-13	0.00000	-.29247E-12	0.00000	-.31190E-13	0.00000
.55358E-13	0.00000	.36648E-13	0.00000	-.22361E+00	0.00000	.14802E-12	0.00000	.10674E-12	0.00000	.17745E-12	0.00000
.93019E-13	0.00000	-.67760E-13	0.00000	.22361E+00	0.00000	-.24494E-12	0.00000	.14088E-12	0.00000	-.23901E-12	0.00000
.12638E-12	0.00000	-.25736E-13	0.00000	-.22361E+00	0.00000	-.14744E-13	0.00000	.39997E-12	0.00000	-.69558E-13	0.00000
.12935E-12	0.00000	.98456E-15	0.00000	.22361E+00	0.00000	-.21340E-13	0.00000	.36752E-12	0.00000	-.43296E-13	0.00000
.68634E-13	0.00000	-.56157E-13	0.00000	-.22361E+00	0.00000	-.21225E-13	0.00000	-.79705E-13	0.00000	-.19737E-12	0.00000
.24458E-13	0.00000	.61453E-13	0.00000	.22361E+00	0.00000	.14079E-12	0.00000	-.13682E-12	0.00000	.17407E-12	0.00000
.16697E-12	0.00000	.93712E-14	0.00000	-.22361E+00	0.00000	.89414E-13	0.00000	-.19005E-12	0.00000	.26658E-12	0.00000
.13900E-12	0.00000	-.29751E-13	0.00000	.22361E+00	0.00000	-.22079E-12	0.00000	-.14400E-12	0.00000	-.29057E-12	0.00000

H-54

NATURAL FREQUENCY = .134445E+04

TX	FX	FY	FY	FZ	FZ	RX	RY	RZ	RZ		
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG		
.59168E-01	0.00000	-.58622E-13	0.00000	-.96111E-12	0.00000	-.16570E-11	0.00000	-.50326E-12	0.00000	-.16347E-01	0.00000
.59168E-01	0.00000	-.49069E-13	0.00000	.93413E-12	0.00000	.17039E-11	0.00000	.48591E-12	0.00000	-.16347E-01	0.00000
.20781E-01	0.00000	.57009E-13	0.00000	-.54668E-12	0.00000	.17242E-11	0.00000	-.52013E-12	0.00000	.31699E+00	0.00000
.20781E-01	0.00000	-.32793E-13	0.00000	.56676E-12	0.00000	-.17849E-11	0.00000	.41841E-12	0.00000	.31699E+00	0.00000
.33738E-02	0.00000	.30117E-13	0.00000	.22764E-11	0.00000	.79398E-12	0.00000	-.13816E-11	0.00000	-.16789E+00	0.00000
.33738E-02	0.00000	-.48013E-13	0.00000	-.22284E-11	0.00000	-.76441E-12	0.00000	-.13236E-11	0.00000	-.16789E+00	0.00000
.13621E-01	0.00000	-.38407E-13	0.00000	.83788E-12	0.00000	-.20440E-11	0.00000	-.46314E-12	0.00000	.33860E+00	0.00000
.13621E-01	0.00000	.21516E-13	0.00000	-.82800E-12	0.00000	.20465E-11	0.00000	.43395E-12	0.00000	.33860E+00	0.00000
.56464E-01	0.00000	-.35323E-13	0.00000	-.15427E-11	0.00000	.25352E-13	0.00000	.60292E-12	0.00000	-.56464E-01	0.00000
.56464E-01	0.00000	.19158E-13	0.00000	.14545E-11	0.00000						
.56464E-01	0.00000	-.41426E-13	0.00000	-.14931E-11	0.00000						
.56464E-01	0.00000	.20124E-13	0.00000	.15415E-11	0.00000	.41394E-13	0.00000	-.57288E-12	0.00000	-.56464E-01	0.00000
.13621E-01	0.00000	.30498E-13	0.00000	.87682E-12	0.00000	.19670E-11	0.00000	-.24713E-12	0.00000	-.33860E+00	0.00000
.13621E-01	0.00000	-.31173E-13	0.00000	-.87590E-12	0.00000	-.19960E-11	0.00000	.16937E-12	0.00000	.33860E+00	0.00000
.33738E-02	0.00000	.21569E-13	0.00000	.21803E-11	0.00000	-.84759E-12	0.00000	-.92854E-12	0.00000	-.16789E+00	0.00000
.33738E-02	0.00000	-.16878E-13	0.00000	-.21826E-11	0.00000	.83236E-12	0.00000	.81455E-12	0.00000	.16789E+00	0.00000
.20781E-01	0.00000	-.17778E-13	0.00000	-.62725E-12	0.00000	-.16857E-11	0.00000	.20644E-12	0.00000	.31699E+00	0.00000
.20781E-01	0.00000	.51649E-13	0.00000	.65224E-12	0.00000	.16208E-11	0.00000	-.20759E-12	0.00000	.31699E+00	0.00000
.59168E-01	0.00000	-.25268E-13	0.00000	-.91746E-12	0.00000	.16851E-11	0.00000	.39644E-12	0.00000	-.16347E-01	0.00000
.59168E-01	0.00000	.36301E-13	0.00000	.97955E-12	0.00000	-.15941E-11	0.00000	-.29842E-12	0.00000	-.16347E-01	0.00000

H-55

NATURAL FREQUENCY= .134626E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.64676E-01	0.00000	.68914E-14	0.00000	.14359E-12	0.00000	.22854E-12	0.00000	-.49887E-12	0.00000	.22759E-01	0.00000
.64676E-01	0.00000	.54009E-14	0.00000	-.17481E-12	0.00000	-.46886E-12	0.00000	-.50742E-12	0.00000	.22759E-01	0.00000
.11927E-01	0.00000	-.36675E-13	0.00000	.96688E-13	0.00000	-.23955E-12	0.00000	-.33305E-12	0.00000	.33191E+00	0.00000
.11927E-01	0.00000	.33494E-13	0.00000	-.50361E-13	0.00000	.34732E-12	0.00000	-.41567E-12	0.00000	.33191E+00	0.00000
-.27643E-02	0.00000	.37099E-13	0.00000	-.42843E-12	0.00000	-.19082E-12	0.00000	.10563E-11	0.00000	.14148E+00	0.00000
-.27643E-02	0.00000	-.44622E-13	0.00000	.37440E-12	0.00000	.47348E-13	0.00000	.10735E-11	0.00000	.14148E+00	0.00000
.19663E-01	0.00000	.22255E-13	0.00000	-.17211E-12	0.00000	.30755E-12	0.00000	.24762E-12	0.00000	.33606E+00	0.00000
.19663E-01	0.00000	-.30443E-13	0.00000	.14373E-12	0.00000	-.33805E-12	0.00000	.31703E-12	0.00000	.33606E+00	0.00000
.59705E-01	0.00000	-.85675E-14	0.00000	.29767E-12	0.00000	-.25017E-13	0.00000	-.45743E-12	0.00000	-.36718E-11	0.00000
.59705E-01	0.00000	-.86157E-14	0.00000	-.22675E-12	0.00000						
.59705E-01	0.00000	-.98212E-14	0.00000	.24990E-12	0.00000						
.59705E-01	0.00000	-.35425E-14	0.00000	-.30199E-12	0.00000	-.41121E-13	0.00000	-.50521E-12	0.00000	-.39888E-11	0.00000
.19663E-01	0.00000	.34108E-13	0.00000	-.11643E-12	0.00000	-.34458E-12	0.00000	-.82122E-13	0.00000	.33606E+00	0.00000
.19663E-01	0.00000	.76533E-13	0.00000	.15061E-12	0.00000	.41019E-12	0.00000	-.85006E-13	0.00000	.33606E+00	0.00000
-.27643E-02	0.00000	-.33358E-13	0.00000	-.45417E-12	0.00000	.10562E-12	0.00000	.31370E-12	0.00000	.14148E+00	0.00000
-.27643E-02	0.00000	-.89965E-14	0.00000	.43726E-12	0.00000	-.82516E-13	0.00000	.38454E-12	0.00000	.14148E+00	0.00000
.11927E-01	0.00000	-.87980E-13	0.00000	.90401E-13	0.00000	.38537E-12	0.00000	.88622E-13	0.00000	-.33191E+00	0.00000
.11927E-01	0.00000	-.41364E-13	0.00000	-.13060E-12	0.00000	-.36792E-12	0.00000	.97279E-13	0.00000	.33191E+00	0.00000
.64676E-01	0.00000	.24710E-13	0.00000	.21120E-12	0.00000	-.43031E-12	0.00000	-.27844E-12	0.00000	-.22759E-01	0.00000
.64676E-01	0.00000	.51984E-13	0.00000	-.16778E-12	0.00000	.27465E-12	0.00000	-.22961E-12	0.00000	-.22759E-01	0.00000

H-56

NATURAL FREQUENCY= .130729E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ	RZ
										REAL	IMAG
.10203E+00	0.00000	-.23274E-13	0.00000	.29947E-12	0.00000	-.52966E-13	0.00000	.91390E-01	0.00000	.21998E+00	0.00000
.10203E+00	0.00000	.38232E-13	0.00000	-.28382E-12	0.00000	-.18100E-14	0.00000	.91390E-01	0.00000	-.21998E+00	0.00000
.28667E-01	0.00000	.18434E-13	0.00000	.30455E-12	0.00000	-.56793E-13	0.00000	.12827E+00	0.00000	-.13147E+00	0.00000
-.28667E-01	0.00000	-.35671E-14	0.00000	-.28316E-12	0.00000	-.22304E-13	0.00000	.12827E+00	0.00000	.13147E+00	0.00000
.84533E-01	0.00000	-.40641E-13	0.00000	.27769E-12	0.00000	.65203E-13	0.00000	-.29157E+00	0.00000	.74670E-01	0.00000
-.84533E-01	0.00000	.40661E-13	0.00000	-.25296E-12	0.00000	.46282E-13	0.00000	-.29157E+00	0.00000	.74670E-01	0.00000
.13385E+00	0.00000	.18754E-13	0.00000	.19969E-12	0.00000	-.22354E-13	0.00000	-.11612E+00	0.00000	.12515E+00	0.00000
-.13385E+00	0.00000	.11690E-13	0.00000	-.25490E-12	0.00000	.43560E-13	0.00000	-.11612E+00	0.00000	-.12515E+00	0.00000
-.93315E-01	0.00000	.69812E-14	0.00000	.16439E-12	0.00000	-.89667E-13	0.00000	.18511E-11	0.00000	-.93315E-01	0.00000
.93315E-01	0.00000	-.39837E-13	0.00000	-.15089E-12	0.00000						
.93315E-01	0.00000	.98526E-14	0.00000	-.15769E-13	0.00000						
-.93315E-01	0.00000	-.39874E-13	0.00000	-.30448E-13	0.00000	.63569E-13	0.00000	.16898E-11	0.00000	.93315E-01	0.00000
.13385E+00	0.00000	-.40310E-13	0.00000	.32164E-14	0.00000	-.54966E-13	0.00000	.11612E+00	0.00000	.12515E+00	0.00000
-.13385E+00	0.00000	.32245E-13	0.00000	-.67390E-13	0.00000	.12872E-12	0.00000	.11612E+00	0.00000	-.12515E+00	0.00000
.84533E-01	0.00000	-.22236E-13	0.00000	-.16035E-12	0.00000	-.14402E-12	0.00000	.29157E+00	0.00000	.74670E-01	0.00000
-.84533E-01	0.00000	.34768E-13	0.00000	.19422E-12	0.00000	-.10421E-12	0.00000	.29157E+00	0.00000	.74670E-01	0.00000
-.28667E-01	0.00000	-.54870E-13	0.00000	-.28661E-12	0.00000	.31960E-13	0.00000	-.12827E+00	0.00000	-.13147E+00	0.00000
.28667E-01	0.00000	.51730E-13	0.00000	.18354E-12	0.00000	-.77610E-13	0.00000	-.12827E+00	0.00000	.13147E+00	0.00000
.10203E+00	0.00000	.94269E-14	0.00000	-.19512E-12	0.00000	-.57129E-13	0.00000	-.91390E-01	0.00000	.21998E+00	0.00000
-.10203E+00	0.00000	-.23518E-13	0.00000	.23495E-12	0.00000	-.31531E-13	0.00000	.91390E-01	0.00000	-.21998E+00	0.00000

H-57

in: rmp05 statua rmp05

NATURAL FREQUENCY = .137419E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.11549E-13	0.00000	-.12058E-13	0.00000	-.11069E+00	0.00000	-.20222E+00	0.00000	.21155E-12	0.00000	-.26139E-13	0.00000
-.17765E-13	0.00000	-.22718E-13	0.00000	.11069E+00	0.00000	.20222E+00	0.00000	-.19054E-12	0.00000	-.11619E-13	0.00000
-.20109E-13	0.00000	-.23037E-12	0.00000	-.41866E-01	0.00000	.21444E+00	0.00000	-.51315E-12	0.00000	-.43171E-14	0.00000
-.36277E-13	0.00000	-.23638E-12	0.00000	.41866E-01	0.00000	-.21444E+00	0.00000	.47170E-12	0.00000	-.35026E-13	0.00000
-.10578E-13	0.00000	.29733E-13	0.00000	.24688E+00	0.00000	-.37057E-02	0.00000	.54418E-12	0.00000	-.12070E-12	0.00000
-.86569E-14	0.00000	-.42398E-14	0.00000	-.24688E+00	0.00000	.37057E-02	0.00000	-.52527E-12	0.00000	-.11373E-13	0.00000
-.14473E-13	0.00000	.22536E-12	0.00000	-.47768E-01	0.00000	-.24271E+00	0.00000	-.32276E-12	0.00000	-.82107E-13	0.00000
.21941E-13	0.00000	-.20527E-12	0.00000	.47768E-01	0.00000	.24271E+00	0.00000	.40968E-12	0.00000	-.89763E-13	0.00000
.15209E-13	0.00000	-.23464E-13	0.00000	-.15714E+00	0.00000	.15714E+00	0.00000	-.88453E-14	0.00000	-.40897E-13	0.00000
-.42153E-14	0.00000	.12386E-13	0.00000	.15714E+00	0.00000						
-.23396E-13	0.00000	-.21864E-14	0.00000	.15714E+00	0.00000						
-.26179E-13	0.00000	-.21526E-13	0.00000	-.15714E+00	0.00000	-.15714E+00	0.00000	-.20380E-14	0.00000	-.16024E-13	0.00000
.12278E-13	0.00000	-.24905E-12	0.00000	.47768E-01	0.00000	-.24271E+00	0.00000	-.27347E-12	0.00000	-.14792E-12	0.00000
-.18932E-13	0.00000	.20730E-12	0.00000	-.47768E-01	0.00000	.24271E+00	0.00000	-.31447E-12	0.00000	-.17577E-12	0.00000
-.18544E-13	0.00000	-.92923E-16	0.00000	-.24688E+00	0.00000	-.37057E-02	0.00000	-.48788E-12	0.00000	-.50765E-13	0.00000
.11235E-13	0.00000	-.85037E-14	0.00000	.24688E+00	0.00000	.37057E-02	0.00000	.49569E-12	0.00000	-.19434E-13	0.00000
-.22679E-13	0.00000	.27867E-12	0.00000	-.41866E-01	0.00000	-.21444E+00	0.00000	.45948E-12	0.00000	-.50215E-13	0.00000
.27515E-13	0.00000	-.26230E-12	0.00000	.41866E-01	0.00000	-.21444E+00	0.00000	-.37956E-12	0.00000	-.12978E-12	0.00000
-.16292E-13	0.00000	-.18974E-13	0.00000	.11069E+00	0.00000	-.20222E+00	0.00000	-.20577E-12	0.00000	-.21259E-13	0.00000
-.64269E-14	0.00000	.18115E-14	0.00000	-.11069E+00	0.00000	.20222E+00	0.00000	.18049E-12	0.00000	-.28056E-13	0.00000

NATURAL FREQUENCY= .138786E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	KY REAL	KY IMAG	RZ REAL	RZ IMAG
-.25427E-13	0.00000	-.57698E-13	0.00000	-.77477E-14	0.00000	.7>709E-13	0.00000	-.99105E-01	0.00000	-.14953E-13	0.00000
-.61354E-13	0.00000	-.21139E-13	0.00000	-.47316E-13	0.00000	.17198E-12	0.00000	-.99105E-01	0.00000	-.67633E-13	0.00000
-.35240E-13	0.00000	-.83486E-13	0.00000	-.80509E-13	0.00000	-.93271E-13	0.00000	-.25946E+00	0.00000	-.14382E-12	0.00000
-.49276E-13	0.00000	-.85041E-13	0.00000	-.39881E-14	0.00000	-.11966E-12	0.00000	-.25946E+00	0.00000	-.65679E-13	0.00000
-.32196E-15	0.00000	-.15822E-13	0.00000	-.90931E-13	0.00000	-.27804E-13	0.00000	-.32071E+00	0.00000	-.20835E-12	0.00000
-.65054E-13	0.00000	-.19770E-13	0.00000	-.82381E-13	0.00000	-.41462E-14	0.00000	-.32071E+00	0.00000	-.21666E-12	0.00000
-.65454E-13	0.00000	-.72091E-13	0.00000	-.78866E-13	0.00000	-.30064E-13	0.00000	-.25946E+00	0.00000	-.74503E-13	0.00000
-.35093E-13	0.00000	-.76834E-13	0.00000	-.11261E-13	0.00000	-.94807E-13	0.00000	-.25946E+00	0.00000	-.28228E-13	0.00000
-.24502E-13	0.00000	-.17939E-14	0.00000	-.47035E-13	0.00000	-.81023E-14	0.00000	-.99105E-01	0.00000	-.18242E-14	0.00000
-.86911E-14	0.00000	-.39229E-13	0.00000	-.88497E-13	0.00000						
-.20094E-13	0.00000	-.56958E-14	0.00000	-.52492E-13	0.00000						
-.14663E-13	0.00000	-.22543E-13	0.00000	-.62458E-14	0.00000	-.50977E-13	0.00000	-.99105E-01	0.00000	-.27304E-14	0.00000
-.43307E-15	0.00000	-.45567E-14	0.00000	-.99211E-13	0.00000	-.41006E-13	0.00000	-.25946E+00	0.00000	-.16151E-13	0.00000
-.20830E-13	0.00000	-.15752E-13	0.00000	-.23843E-13	0.00000	-.76276E-13	0.00000	-.25946E+00	0.00000	-.22896E-13	0.00000
-.34519E-13	0.00000	-.11984E-13	0.00000	-.60654E-13	0.00000	-.25049E-13	0.00000	-.32071E+00	0.00000	-.55259E-13	0.00000
-.12892E-13	0.00000	-.62547E-15	0.00000	-.97436E-13	0.00000	-.60085E-13	0.00000	-.32071E+00	0.00000	-.88019E-13	0.00000
-.22934E-13	0.00000	-.60395E-14	0.00000	-.57176E-13	0.00000	-.36749E-13	0.00000	-.25946E+00	0.00000	-.63256E-13	0.00000
-.13172E-13	0.00000	-.93593E-14	0.00000	-.67708E-14	0.00000	-.32673E-13	0.00000	-.25946E+00	0.00000	-.11381E-12	0.00000
-.54001E-13	0.00000	-.33359E-13	0.00000	-.77461E-14	0.00000	-.55642E-13	0.00000	-.99105E-01	0.00000	-.10261E-13	0.00000
-.17753E-13	0.00000	-.11476E-13	0.00000	-.26782E-13	0.00000	-.16>77E-13	0.00000	-.99105E-01	0.00000	-.20448E-13	0.00000

H-59

NATURAL FREQUENCY= .139958E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.54223E-01	0.00000	.41358E-13	0.00000	.49305E-13	0.00000	-.92407E-13	0.00000	.25746E-12	0.00000	.66226E-01	0.00000
-.54228E-01	0.00000	.29814E-13	0.00000	-.11494E-14	0.00000	-.24054E-13	0.00000	-.23639E-12	0.00000	.66226E-01	0.00000
.11450E+00	0.00000	-.21983E-13	0.00000	.32542E-13	0.00000	.10027E-12	0.00000	-.27579E-12	0.00000	.13424E+00	0.00000
-.11450E+00	0.00000	-.83051E-14	0.00000	-.68557E-14	0.00000	-.50429E-13	0.00000	-.30388E-12	0.00000	.13424E+00	0.00000
.12503E-01	0.00000	.28590E-13	0.00000	-.78511E-13	0.00000	-.62387E-13	0.00000	-.79324E-13	0.00000	-.44262E+00	0.00000
-.12503E-01	0.00000	-.61158E-13	0.00000	-.12238E-12	0.00000	-.23005E-13	0.00000	-.20693E-12	0.00000	-.44262E+00	0.00000
-.11450E+00	0.00000	.17756E-13	0.00000	.67424E-14	0.00000	-.19963E-13	0.00000	.40353E-12	0.00000	-.74119E-01	0.00000
-.11450E+00	0.00000	-.23250E-13	0.00000	-.77337E-14	0.00000	.81358E-13	0.00000	-.41983E-12	0.00000	-.74119E-01	0.00000
.47721E-01	0.00000	-.31035E-13	0.00000	-.46817E-13	0.00000	-.40052E-13	0.00000	-.53477E-13	0.00000	-.47721E-01	0.00000
-.47721E-01	0.00000	.35300E-13	0.00000	-.23261E-13	0.00000						
-.47721E-01	0.00000	-.33557E-13	0.00000	-.24577E-13	0.00000						
-.47721E-01	0.00000	-.32902E-13	0.00000	-.13792E-13	0.00000	-.21213E-13	0.00000	-.10130E-13	0.00000	-.47721E-01	0.00000
.11450E+00	0.00000	-.61567E-14	0.00000	.19971E-13	0.00000	-.32212E-13	0.00000	-.39753E-12	0.00000	-.74119E-01	0.00000
-.11450E+00	0.00000	-.46852E-13	0.00000	-.38496E-13	0.00000	-.58982E-13	0.00000	-.30586E-12	0.00000	-.74119E-01	0.00000
-.12503E-01	0.00000	-.11072E-13	0.00000	-.10852E-13	0.00000	-.63664E-13	0.00000	-.22780E-12	0.00000	-.44262E+00	0.00000
-.12503E-01	0.00000	-.65148E-14	0.00000	.30618E-13	0.00000	.73156E-13	0.00000	.17152E-12	0.00000	-.44262E+00	0.00000
-.11450E+00	0.00000	-.14828E-13	0.00000	-.27713E-13	0.00000	.58655E-13	0.00000	-.24870E-12	0.00000	.13424E+00	0.00000
-.11450E+00	0.00000	.25055E-13	0.00000	.40276E-14	0.00000	-.18783E-13	0.00000	.23850E-12	0.00000	.13424E+00	0.00000
.54223E-01	0.00000	-.27792E-13	0.00000	.34160E-13	0.00000	-.10583E-13	0.00000	-.30344E-12	0.00000	.66226E-01	0.00000
-.54224E-01	0.00000	.37466E-13	0.00000	-.29990E-13	0.00000	-.33049E-14	0.00000	-.34400E-12	0.00000	.66226E-01	0.00000

H-60

NATURAL FREQUENCY= .141702E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.11948E-13	0.00000	-.71365E-01	0.00000	-.22500E-01	0.00000	-.30058E+00	0.00000	.53363E-14	0.00000	-.68596E-14	0.00000
.81535E-14	0.00000	.71365E-01	0.00000	-.22500E-01	0.00000	-.30058E+00	0.00000	-.20562E-13	0.00000	-.27004E-13	0.00000
.28111E-14	0.00000	-.15195E+00	0.00000	.32158E-01	0.00000	.19759E+00	0.00000	.72647E-13	0.00000	-.40179E-13	0.00000
.29379E-13	0.00000	.15195E+00	0.00000	.32158E-01	0.00000	.19759E+00	0.00000	-.57013E-13	0.00000	-.26200E-13	0.00000
.23645E-13	0.00000	.14946E+00	0.00000	-.55878E-01	0.00000	-.21796E+00	0.00000	-.19761E-12	0.00000	-.78279E-13	0.00000
.35649E-14	0.00000	-.14946E+00	0.00000	-.55878E-01	0.00000	-.21796E+00	0.00000	.14400E-12	0.00000	-.19120E-13	0.00000
.31088E-13	0.00000	.59539E-01	0.00000	.36042E-01	0.00000	-.13972E-01	0.00000	.15751E-12	0.00000	-.76095E-13	0.00000
.21467E-13	0.00000	-.59539E-01	0.00000	.36042E-01	0.00000	-.13972E-01	0.00000	-.28282E-12	0.00000	-.91334E-13	0.00000
.46782E-13	0.00000	-.13812E+00	0.00000	.46691E-01	0.00000	-.46691E-01	0.00000	-.18646E-13	0.00000	-.10389E-13	0.00000
.67303E-14	0.00000	.13812E+00	0.00000	.46691E-01	0.00000						
.54662E-13	0.00000	-.13812E+00	0.00000	-.46691E-01	0.00000						
.73950E-13	0.00000	.13812E+00	0.00000	-.46691E-01	0.00000	-.46691E-01	0.00000	.15590E-12	0.00000	-.40927E-13	0.00000
.12050E-12	0.00000	.59539E-01	0.00000	-.36042E-01	0.00000	-.13972E-01	0.00000	-.61031E-13	0.00000	-.11077E-12	0.00000
.77203E-13	0.00000	-.59539E-01	0.00000	-.36042E-01	0.00000	-.13972E-01	0.00000	-.46142E-12	0.00000	-.22864E-13	0.00000
.38055E-13	0.00000	.14946E+00	0.00000	.55878E-01	0.00000	-.21796E+00	0.00000	-.15273E-12	0.00000	.17897E-12	0.00000
.30990E-13	0.00000	-.14946E+00	0.00000	.55878E-01	0.00000	-.21796E+00	0.00000	.25002E-12	0.00000	-.26279E-12	0.00000
.78884E-13	0.00000	-.15195E+00	0.00000	-.32158E-01	0.00000	.19759E+00	0.00000	-.37584E-12	0.00000	-.72977E-13	0.00000
.84040E-13	0.00000	.15195E+00	0.00000	-.32158E-01	0.00000	.19759E+00	0.00000	-.94313E-13	0.00000	.12407E-12	0.00000
.77366E-13	0.00000	-.71365E-01	0.00000	.22500E-01	0.00000	-.30058E+00	0.00000	-.22380E-12	0.00000	-.90001E-13	0.00000
.44770E-13	0.00000	.71365E-01	0.00000	-.22500E-01	0.00000	-.30058E+00	0.00000	-.47448E-13	0.00000	-.11042E-12	0.00000

H-61

NATURAL FREQUENCY= .141040E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.60583E-01	0.00000	-.32878E-13	0.00000	.35018E-13	0.00000	-.12970E-12	0.00000	-.57790E-11	0.00000	-.19797E-01	0.00000
.60583E-01	0.00000	.49348E-13	0.00000	-.19590E-13	0.00000	-.55043E-13	0.00000	-.58140E-11	0.00000	-.19797E-01	0.00000
.61010E-02	0.00000	-.64048E-13	0.00000	.15601E-13	0.00000	.70043E-13	0.00000	.63812E-11	0.00000	.34460E+00	0.00000
.61010E-02	0.00000	.55861E-14	0.00000	-.27882E-14	0.00000	.79939E-14	0.00000	.64237E-11	0.00000	.34460E+00	0.00000
-.14329E+00	0.00000	.25623E-13	0.00000	-.12857E-13	0.00000	-.39663E-13	0.00000	.33226E-11	0.00000	.32931E-01	0.00000
-.14329E+00	0.00000	-.67802E-13	0.00000	-.42303E-13	0.00000	-.11745E-12	0.00000	.33301E-11	0.00000	.32931E-01	0.00000
.25451E-01	0.00000	.34327E-13	0.00000	.13421E-13	0.00000	.41669E-13	0.00000	-.93782E-11	0.00000	.32800E+00	0.00000
.25451E-01	0.00000	.36967E-13	0.00000	.56709E-13	0.00000	.23252E-13	0.00000	-.93319E-11	0.00000	.32800E+00	0.00000
.51157E-01	0.00000	-.82846E-14	0.00000	.25762E-13	0.00000	.19685E-15	0.00000	.36852E-12	0.00000	-.57888E-11	0.00000
.51157E-01	0.00000	.37930E-13	0.00000	-.15200E-13	0.00000						
.51157E-01	0.00000	-.82466E-14	0.00000	.19926E-13	0.00000						
.51157E-01	0.00000	.40536E-13	0.00000	-.51125E-13	0.00000	-.19126E-13	0.00000	.33163E-12	0.00000	-.11086E-11	0.00000
.25451E-01	0.00000	-.47507E-13	0.00000	-.51354E-13	0.00000	.28313E-13	0.00000	.84172E-11	0.00000	.32800E+00	0.00000
.25451E-01	0.00000	-.46365E-13	0.00000	.14765E-13	0.00000	.51400E-14	0.00000	.83616E-11	0.00000	.32800E+00	0.00000
-.14329E+00	0.00000	.69773E-13	0.00000	.20492E-13	0.00000	-.91182E-13	0.00000	-.31992E-11	0.00000	-.32931E-01	0.00000
-.14329E+00	0.00000	-.62327E-13	0.00000	.19567E-13	0.00000	-.15332E-12	0.00000	-.32478E-11	0.00000	-.32931E-01	0.00000
.61010E-02	0.00000	.19643E-13	0.00000	-.51182E-14	0.00000	.46034E-13	0.00000	-.56812E-11	0.00000	.34460E+00	0.00000
.61010E-02	0.00000	.13264E-12	0.00000	-.11666E-13	0.00000	.12445E-12	0.00000	-.56484E-11	0.00000	.34460E+00	0.00000
.60583E-01	0.00000	-.87458E-13	0.00000	.10667E-13	0.00000	-.94788E-13	0.00000	.52529E-11	0.00000	.19797E-01	0.00000
.60583E-01	0.00000	-.18411E-13	0.00000	.19062E-13	0.00000	-.12524E-12	0.00000	.53464E-11	0.00000	.19797E-01	0.00000

H-62

NATURAL FREQUENCY= .142730E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.83457E-01	0.00000	-.77332E-12	0.00000	.76063E-13	0.00000	.16731E-12	0.00000	.13738E+00	0.00000	.12548E+00	0.00000
.83457E-01	0.00000	-.82088E-12	0.00000	-.11132E-13	0.00000	-.20684E-13	0.00000	.13738E+00	0.00000	-.12548E+00	0.00000
.85901E-01	0.00000	.11277E-11	0.00000	-.44672E-14	0.00000	-.14529E-12	0.00000	-.16856E+00	0.00000	-.14557E+00	0.00000
-.85901E-01	0.00000	.11004E-11	0.00000	-.65250E-13	0.00000	.11442E-12	0.00000	-.16856E+00	0.00000	.14557E+00	0.00000
.14424E-01	0.00000	.35994E-12	0.00000	-.12496E-13	0.00000	.14760E-12	0.00000	-.50298E-01	0.00000	.26700E+00	0.00000
-.14424E-01	0.00000	.42987E-12	0.00000	.88487E-13	0.00000	-.73546E-13	0.00000	-.50298E-01	0.00000	-.26700E+00	0.00000
-.89379E-01	0.00000	-.12342E-11	0.00000	.62888E-13	0.00000	-.45268E-13	0.00000	.22771E+00	0.00000	-.85935E-01	0.00000
.89379E-01	0.00000	-.12320E-11	0.00000	-.12741E-12	0.00000	.75001E-14	0.00000	.22771E+00	0.00000	.85935E-01	0.00000
.72511E-01	0.00000	.49835E-13	0.00000	-.57496E-13	0.00000	.41183E-14	0.00000	-.14623E+00	0.00000	-.10736E-12	0.00000
-.72511E-01	0.00000	-.36080E-13	0.00000	.48154E-13	0.00000						
.72511E-01	0.00000	.49799E-13	0.00000	-.47983E-13	0.00000						
-.72511E-01	0.00000	-.38954E-13	0.00000	.99814E-13	0.00000	.23759E-13	0.00000	-.14623E+00	0.00000	.31977E-12	0.00000
-.89379E-01	0.00000	.11892E-11	0.00000	.50919E-13	0.00000	.78696E-13	0.00000	.22771E+00	0.00000	.85935E-01	0.00000
.89379E-01	0.00000	-.12492E-11	0.00000	-.10735E-12	0.00000	-.15802E-13	0.00000	.22771E+00	0.00000	-.85935E-01	0.00000
.14424E-01	0.00000	-.41817E-12	0.00000	-.30413E-13	0.00000	-.13552E-12	0.00000	-.50298E-01	0.00000	-.26700E+00	0.00000
-.14424E-01	0.00000	-.42214E-12	0.00000	-.18828E-13	0.00000	.12146E-12	0.00000	-.50298E-01	0.00000	.26700E+00	0.00000
.85901E-01	0.00000	-.10525E-11	0.00000	-.23393E-13	0.00000	.45484E-13	0.00000	-.16856E+00	0.00000	.14557E+00	0.00000
-.85901E-01	0.00000	-.11179E-11	0.00000	.36006E-13	0.00000	-.13030E-12	0.00000	-.16856E+00	0.00000	-.14557E+00	0.00000
-.83457E-01	0.00000	.81704E-12	0.00000	.56739E-13	0.00000	-.68708E-13	0.00000	.13738E+00	0.00000	-.12548E+00	0.00000
.83457E-01	0.00000	.80070E-12	0.00000	-.29756E-13	0.00000	.77289E-13	0.00000	.13738E+00	0.00000	.12548E+00	0.00000

H-63

NUMBER OF NASTRAN I/O

71

NATURAL FREQUENCY= .137480E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.11154E-13	0.00000	-.25984E-13	0.00000	-.87209E-13	0.00000	.11035E-12	0.00000	-.11401E+00	0.00000	-.12648E-13	0.00000
-.81970E-14	0.00000	.35636E-13	0.00000	.12777E-12	0.00000	.45658E-12	0.00000	-.11401E+00	0.00000	-.80059E-14	0.00000
-.11058E-13	0.00000	.18478E-12	0.00000	-.12898E-12	0.00000	-.25039E-13	0.00000	.28868E+00	0.00000	-.28156E-13	0.00000
.61943E-14	0.00000	-.24050E-12	0.00000	-.88311E-14	0.00000	-.38482E-12	0.00000	-.28868E+00	0.00000	-.22048E-13	0.00000
-.20909E-13	0.00000	.15987E-13	0.00000	.30974E-12	0.00000	.37935E-13	0.00000	-.32827E+00	0.00000	-.15235E-13	0.00000
.53800E-13	0.00000	-.42822E-13	0.00000	-.12334E-12	0.00000	-.36952E-13	0.00000	.32827E+00	0.00000	-.56199E-13	0.00000
-.42878E-13	0.00000	-.16299E-12	0.00000	.42474E-14	0.00000	-.54327E-13	0.00000	.21426E+00	0.00000	-.75961E-13	0.00000
.19936E-13	0.00000	.23476E-12	0.00000	.34113E-13	0.00000	.37278E-12	0.00000	-.21426E+00	0.00000	-.65088E-13	0.00000
-.70526E-13	0.00000	-.52282E-13	0.00000	-.16169E-12	0.00000	.19001E-12	0.00000	.32718E-12	0.00000	-.37760E-15	0.00000
.68765E-14	0.00000	.17160E-13	0.00000	.66689E-13	0.00000						
-.43850E-13	0.00000	-.28418E-13	0.00000	.18239E-12	0.00000						
.43741E-13	0.00000	.40086E-13	0.00000	-.18353E-12	0.00000	-.14375E-12	0.00000	-.21634E-12	0.00000	.36943E-14	0.00000
-.21746E-13	0.00000	.22243E-12	0.00000	-.31359E-13	0.00000	-.48095E-12	0.00000	-.21426E+00	0.00000	-.51107E-15	0.00000
.44577E-13	0.00000	-.30995E-12	0.00000	-.11646E-12	0.00000	.55608E-13	0.00000	.21426E+00	0.00000	-.87763E-13	0.00000
.20274E-14	0.00000	.62386E-13	0.00000	-.73042E-13	0.00000	-.10295E-12	0.00000	.32827E+00	0.00000	-.79843E-13	0.00000
.86539E-14	0.00000	-.35953E-13	0.00000	.43977E-12	0.00000	-.11772E-12	0.00000	-.32827E+00	0.00000	-.79425E-13	0.00000
-.29074E-13	0.00000	-.27583E-12	0.00000	-.95876E-13	0.00000	.56255E-12	0.00000	-.28868E+00	0.00000	.12032E-13	0.00000
-.51935E-14	0.00000	.34545E-12	0.00000	-.21759E-12	0.00000	.11656E-12	0.00000	.28868E+00	0.00000	-.17942E-13	0.00000
.12625E-13	0.00000	-.17434E-13	0.00000	.16245E-12	0.00000	-.72144E-12	0.00000	.11401E+00	0.00000	-.22589E-13	0.00000
.18454E-13	0.00000	-.35449E-13	0.00000	-.56774E-13	0.00000	-.29390E-12	0.00000	-.11401E+00	0.00000	.52092E-13	0.00000

NATURAL FREQUENCY= .139491E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.43380E-01	0.00000	-.67321E-13	0.00000	-.21741E-13	0.00000	-.76730E-13	0.00000	-.22638E-12	0.00000	-.65684E-01	0.00000
.43380E-01	0.00000	.17087E-13	0.00000	.19080E-13	0.00000	.10021E-13	0.00000	-.14972E-13	0.00000	-.65684E-01	0.00000
-.12133E+00	0.00000	.46444E-13	0.00000	.52860E-13	0.00000	.37569E-13	0.00000	.13508E-12	0.00000	-.62940E-01	0.00000
.12138E+00	0.00000	.65006E-13	0.00000	-.10764E-12	0.00000	-.23574E-13	0.00000	-.17965E-12	0.00000	-.62940E-01	0.00000
.15829E-01	0.00000	-.23026E-13	0.00000	.22931E-13	0.00000	-.10778E-13	0.00000	-.98800E-13	0.00000	.45321E+00	0.00000
.15829E-01	0.00000	-.31232E-13	0.00000	-.64574E-13	0.00000	.11634E-13	0.00000	.31907E-12	0.00000	.45321E+00	0.00000
.99713E-01	0.00000	-.65902E-13	0.00000	.33924E-13	0.00000	.50527E-13	0.00000	.90676E-13	0.00000	-.11667E+00	0.00000
.99713E-01	0.00000	-.73507E-13	0.00000	.23069E-13	0.00000	-.73581E-14	0.00000	-.22097E-12	0.00000	-.11667E+00	0.00000
.37548E-01	0.00000	.74539E-13	0.00000	.40830E-13	0.00000	-.41488E-13	0.00000	-.11437E-12	0.00000	-.59656E-12	0.00000
.37548E-01	0.00000	.13158E-13	0.00000	-.39471E-13	0.00000						
.37548E-01	0.00000	.75176E-13	0.00000	-.34816E-13	0.00000						
.37548E-01	0.00000	.10670E-13	0.00000	.27860E-13	0.00000	.34697E-13	0.00000	-.89384E-13	0.00000	-.37237E-12	0.00000
.99713E-01	0.00000	-.28342E-13	0.00000	.22738E-13	0.00000	.16165E-13	0.00000	.36130E-12	0.00000	.11667E+00	0.00000
.99713E-01	0.00000	-.67174E-13	0.00000	-.26967E-13	0.00000	-.39965E-13	0.00000	.19587E-12	0.00000	.11667E+00	0.00000
.15829E-01	0.00000	-.17354E-13	0.00000	.92561E-14	0.00000	-.28187E-13	0.00000	-.82972E-13	0.00000	-.45321E+00	0.00000
.15829E-01	0.00000	-.12353E-13	0.00000	-.83880E-14	0.00000	.84376E-13	0.00000	.10600E-12	0.00000	-.45321E+00	0.00000
-.12138E+00	0.00000	.95994E-13	0.00000	-.37409E-13	0.00000	-.62656E-14	0.00000	-.25070E-12	0.00000	.62940E-01	0.00000
-.12138E+00	0.00000	.70862E-14	0.00000	.17998E-13	0.00000	-.72990E-13	0.00000	-.32996E-12	0.00000	.62940E-01	0.00000
.43380E-01	0.00000	.23583E-13	0.00000	.33053E-13	0.00000	.33978E-13	0.00000	.10891E-12	0.00000	.65684E-01	0.00000
.43380E-01	0.00000	-.47335E-13	0.00000	-.22280E-13	0.00000	.10426E-12	0.00000	.16505E-12	0.00000	.65684E-01	0.00000

H-65

22

NATURAL FREQUENCY* .140861E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.55416E-01	0.00000	.68272E-14	0.00000	.56825E-14	0.00000	.14698E-12	0.00000	-.21441E-11	0.00000	-.10970E-01	0.00000
.55416E-01	0.00000	-.14043E-13	0.00000	.22253E-13	0.00000	.84469E-13	0.00000	-.20133E-11	0.00000	-.10970E-01	0.00000
.24061E-01	0.00000	.32404E-13	0.00000	.81769E-14	0.00000	-.10477E-12	0.00000	.23827E-11	0.00000	-.33985E+00	0.00000
.24061E-01	0.00000	-.65344E-13	0.00000	.15558E-14	0.00000	-.30277E-13	0.00000	.23128E-11	0.00000	-.33985E+00	0.00000
.14223E+00	0.00000	-.46283E-13	0.00000	-.19139E-13	0.00000	.12632E-12	0.00000	.11458E-11	0.00000	-.41965E-01	0.00000
.14223E+00	0.00000	.47271E-14	0.00000	.13598E-13	0.00000	.78448E-13	0.00000	.11502E-11	0.00000	-.41965E-01	0.00000
.34900E-03	0.00000	.55668E-13	0.00000	-.20696E-13	0.00000	-.52118E-13	0.00000	-.32473E-11	0.00000	.33288E+00	0.00000
.34900E-03	0.00000	.85721E-14	0.00000	-.47758E-13	0.00000	.25309E-14	0.00000	-.32924E-11	0.00000	.33288E+00	0.00000
.50989E-01	0.00000	.27438E-13	0.00000	-.29504E-13	0.00000	-.12705E-13	0.00000	.25621E-12	0.00000	.50989E-01	0.00000
.50989E-01	0.00000	-.40765E-13	0.00000	-.50778E-14	0.00000						
.50989E-01	0.00000	.27469E-13	0.00000	-.47043E-13	0.00000						
.50989E-01	0.00000	-.37998E-13	0.00000	.47603E-13	0.00000	.28050E-13	0.00000	.21969E-12	0.00000	.50989E-01	0.00000
.34900E-03	0.00000	.83040E-14	0.00000	.89884E-13	0.00000	-.12139E-13	0.00000	.26040E-11	0.00000	.33288E+00	0.00000
.34900E-03	0.00000	.64190E-13	0.00000	-.88518E-14	0.00000	-.41843E-13	0.00000	.25747E-11	0.00000	.33288E+00	0.00000
.14223E+00	0.00000	-.11533E-12	0.00000	-.45813E-13	0.00000	.70039E-13	0.00000	-.11934E-11	0.00000	-.41965E-01	0.00000
.14223E+00	0.00000	.77413E-13	0.00000	-.12696E-13	0.00000	.17324E-12	0.00000	-.12056E-11	0.00000	-.41965E-01	0.00000
-.24061E-01	0.00000	.38831E-13	0.00000	-.19860E-13	0.00000	-.48919E-13	0.00000	-.18929E-11	0.00000	-.33985E+00	0.00000
-.24061E-01	0.00000	-.10468E-12	0.00000	.90915E-15	0.00000	-.13699E-12	0.00000	-.18505E-11	0.00000	-.33985E+00	0.00000
-.55416E-01	0.00000	.53900E-13	0.00000	.24161E-13	0.00000	.12709E-12	0.00000	.16565E-11	0.00000	-.10970E-01	0.00000
-.55416E-01	0.00000	-.24319E-13	0.00000	-.75939E-14	0.00000	.18837E-12	0.00000	.17102E-11	0.00000	-.10970E-01	0.00000

H-66.

ORIGINAL PAGE IS
OF POOR QUALITY

"NATURAL FREQUENCY" .148567E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-4.4913E-13	0.00000	-3.7672E-12	0.00000	-1.2644E+00	0.00000	-1.9822E+00	0.00000	-1.3866E-13	0.00000	5.4616E-13	0.00000
-4.3400E-13	0.00000	1.6968E-13	0.00000	1.2644E+00	0.00000	1.9822E+00	0.00000	1.2746E-13	0.00000	-4.2511E-13	0.00000
5.6862E-13	0.00000	3.0215E-12	0.00000	8.7486E-01	0.00000	2.0738E+00	0.00000	-9.1025E-13	0.00000	2.5823E-13	0.00000
-4.7007E-13	0.00000	3.3859E-12	0.00000	-8.7486E-01	0.00000	-2.0738E+00	0.00000	-6.1229E-13	0.00000	1.4123E-12	0.00000
3.0073E-13	0.00000	2.4867E-12	0.00000	6.8664E-01	0.00000	-2.8929E+00	0.00000	-5.8315E-13	0.00000	1.2217E-12	0.00000
-2.0639E-13	0.00000	-2.9479E-12	0.00000	-6.8664E-01	0.00000	2.8929E+00	0.00000	-3.1492E-14	0.00000	-1.0943E-12	0.00000
-4.3438E-13	0.00000	-5.7206E-12	0.00000	1.8133E+00	0.00000	8.7407E-01	0.00000	1.4284E-12	0.00000	6.0270E-13	0.00000
2.8085E-13	0.00000	-8.2554E-13	0.00000	1.8133E+00	0.00000	-8.7407E-01	0.00000	1.0704E-12	0.00000	1.0130E-12	0.00000
4.0111E-13	0.00000	2.1551E-12	0.00000	1.5163E+00	0.00000	2.2278E-12	0.00000	-8.1130E-13	0.00000	-2.1549E-13	0.00000
1.1901E-13	0.00000	1.9267E-12	0.00000	1.5163E+00	0.00000						
5.1432E-13	0.00000	2.1815E-12	0.00000	1.5163E+00	0.00000						
4.9207E-13	0.00000	1.8527E-12	0.00000	1.5163E+00	0.00000	-1.8462E-12	0.00000	-5.7796E-13	0.00000	3.8359E-13	0.00000
-8.4151E-13	0.00000	-1.7640E-12	0.00000	1.8133E+00	0.00000	-8.7407E-01	0.00000	1.9685E-12	0.00000	7.0964E-13	0.00000
1.2307E-12	0.00000	-5.8992E-12	0.00000	1.8133E+00	0.00000	8.7407E-01	0.00000	1.6564E-12	0.00000	8.0088E-13	0.00000
1.3225E-13	0.00000	-2.3821E-12	0.00000	6.8664E-01	0.00000	2.8929E+00	0.00000	2.4370E-13	0.00000	-2.3204E-12	0.00000
2.0544E-13	0.00000	2.7129E-12	0.00000	6.8664E-01	0.00000	-2.8929E+00	0.00000	-3.4829E-14	0.00000	1.9856E-12	0.00000
5.0979E-13	0.00000	4.2613E-12	0.00000	8.7486E-01	0.00000	-2.0738E+00	0.00000	1.0338E-12	0.00000	-1.5842E-13	0.00000
-2.5456E-13	0.00000	3.4099E-12	0.00000	-8.7486E-01	0.00000	2.0738E+00	0.00000	-1.0680E-12	0.00000	-2.4121E-12	0.00000
-9.5294E-13	0.00000	-3.0450E-13	0.00000	-1.2644E+00	0.00000	1.9822E+00	0.00000	5.0965E-13	0.00000	-7.8816E-13	0.00000
-2.8358E-13	0.00000	-3.9047E-12	0.00000	1.2644E+00	0.00000	-1.9822E+00	0.00000	5.2137E-13	0.00000	4.4675E-14	0.00000

H-67

NATURAL FREQUENCY= 141374E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.87931E-01	0.00000	.41932E-13	0.00000	.16790E-13	0.00000	.65093E-13	0.00000	.14421E+00	0.00000	.13396E+00	0.00000
.87931E-01	0.00000	.13003E-13	0.00000	-.32495E-14	0.00000	.17261E-12	0.00000	.14421E+00	0.00000	-.13396E+00	0.00000
.80915E-01	0.00000	.69726E-13	0.00000	-.10704E-12	0.00000	-.60007E-13	0.00000	-.15696E+00	0.00000	-.15625E+00	0.00000
.80915E-01	0.00000	-.70970E-13	0.00000	-.51127E-13	0.00000	-.93580E-13	0.00000	-.15696E+00	0.00000	.15625E+00	0.00000
.30891E-01	0.00000	.69633E-13	0.00000	.65003E-13	0.00000	.95319E-13	0.00000	-.86590E-01	0.00000	.26647E+00	0.00000
.30891E-01	0.00000	.32796E-13	0.00000	.60681E-13	0.00000	.11529E-12	0.00000	-.86590E-01	0.00000	-.26647E+00	0.00000
.11747E+00	0.00000	.21459E-13	0.00000	-.62608E-13	0.00000	-.12348E-14	0.00000	.22942E+00	0.00000	-.37544E-01	0.00000
.11747E+00	0.00000	-.36814E-14	0.00000	.13075E-13	0.00000	-.28859E-13	0.00000	.22942E+00	0.00000	.37544E-01	0.00000
.61456E-01	0.00000	.75384E-13	0.00000	.11141E-13	0.00000	.24205E-13	0.00000	-.37343E-12	0.00000	.61456E-01	0.00000
.61456E-01	0.00000	-.61858E-13	0.00000	-.31956E-13	0.00000						
.61456E-01	0.00000	.81443E-13	0.00000	.54778E-13	0.00000						
.61456E-01	0.00000	-.56596E-13	0.00000	.54866E-13	0.00000	.44132E-13	0.00000	-.39035E-12	0.00000	-.61456E-01	0.00000
.11747E+00	0.00000	.13558E-12	0.00000	-.98672E-14	0.00000	.12810E-12	0.00000	-.22942E+00	0.00000	-.37544E-01	0.00000
.11747E+00	0.00000	.12662E-13	0.00000	-.99093E-14	0.00000	.13843E-12	0.00000	-.22942E+00	0.00000	.37544E-01	0.00000
.30891E-01	0.00000	.60609E-14	0.00000	-.32501E-13	0.00000	.23462E-13	0.00000	.86590E-01	0.00000	.26647E+00	0.00000
.30891E-01	0.00000	.11721E-13	0.00000	-.30931E-13	0.00000	.99818E-14	0.00000	.86590E-01	0.00000	-.26647E+00	0.00000
.80915E-01	0.00000	.12290E-12	0.00000	-.80715E-14	0.00000	-.66747E-13	0.00000	.15696E+00	0.00000	-.15625E+00	0.00000
.80915E-01	0.00000	.20465E-13	0.00000	.86807E-15	0.00000	-.35730E-13	0.00000	.15696E+00	0.00000	.15625E+00	0.00000
.87931E-01	0.00000	-.14072E-13	0.00000	.86667E-14	0.00000	.42798E-13	0.00000	-.14421E+00	0.00000	.13396E+00	0.00000
.87931E-01	0.00000	-.55125E-13	0.00000	.11485E-14	0.00000	.41001E-13	0.00000	-.14421E+00	0.00000	-.13396E+00	0.00000

H-68

11-13-68 11:15 AM

NATURAL FREQUENCY# .149273E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	KX REAL	KX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.21367E-13	0.00000	.10684E+00	0.00000	.10204E-01	0.00000	.17563E+00	0.00000	-.32582E-13	0.00000	-.33804E-13	0.00000
-.14391E-13	0.00000	-.10684E+00	0.00000	.10204E-01	0.00000	.17563E+00	0.00000	-.73990E-13	0.00000	.23227E-13	0.00000
-.31258E-13	0.00000	.20090E-01	0.00000	.21855E-01	0.00000	-.84948E-01	0.00000	.75702E-13	0.00000	.78223E-13	0.00000
.15778E-13	0.00000	-.20090E-01	0.00000	.21855E-01	0.00000	-.84948E-01	0.00000	.44090E-14	0.00000	-.65782E-13	0.00000
-.32040E-13	0.00000	-.16074E+00	0.00000	-.26186E-01	0.00000	.28520E+00	0.00000	.28751E-13	0.00000	-.78707E-13	0.00000
.12091E-13	0.00000	.16094E+00	0.00000	-.26186E-01	0.00000	.28520E+00	0.00000	.37178E-13	0.00000	.97055E-13	0.00000
-.76228E-13	0.00000	.15205E+00	0.00000	-.53351E-01	0.00000	-.26688E+00	0.00000	-.78099E-13	0.00000	.20189E-13	0.00000
-.43078E-13	0.00000	-.15205E+00	0.00000	-.53351E-01	0.00000	-.26688E+00	0.00000	-.48391E-13	0.00000	-.18274E-13	0.00000
-.93925E-14	0.00000	.33250E-13	0.00000	.47478E-01	0.00000	.61297E-13	0.00000	-.39841E-14	0.00000	.19069E-13	0.00000
.22732E-13	0.00000	-.21014E-12	0.00000	.47478E-01	0.00000						
-.26420E-13	0.00000	.27129E-13	0.00000	.47478E-01	0.00000						
-.17531E-13	0.00000	-.22373E-12	0.00000	.47478E-01	0.00000	.41899E-13	0.00000	-.20999E-13	0.00000	.12957E-13	0.00000
.28703E-13	0.00000	-.15205E+00	0.00000	-.53351E-01	0.00000	.26688E+00	0.00000	-.64000E-14	0.00000	.72173E-13	0.00000
.21893E-13	0.00000	.15205E+00	0.00000	-.53351E-01	0.00000	.26688E+00	0.00000	-.13111E-13	0.00000	.80510E-13	0.00000
.74741E-13	0.00000	.16094E+00	0.00000	-.26186E-01	0.00000	-.28520E+00	0.00000	-.79783E-13	0.00000	-.13390E-12	0.00000
-.58419E-14	0.00000	-.16094E+00	0.00000	-.26186E-01	0.00000	-.28520E+00	0.00000	-.86113E-13	0.00000	.14296E-12	0.00000
-.43386E-13	0.00000	-.20090E-01	0.00000	.21855E-01	0.00000	.84948E-01	0.00000	.25362E-14	0.00000	-.27443E-13	0.00000
-.43006E-13	0.00000	.20090E-01	0.00000	.21855E-01	0.00000	.84948E-01	0.00000	.43754E-14	0.00000	-.52884E-13	0.00000
.16381E-13	0.00000	-.10684E+00	0.00000	.10204E-01	0.00000	-.17563E+00	0.00000	-.11101E-13	0.00000	.47572E-14	0.00000
-.17621E-13	0.00000	.10684E+00	0.00000	.10204E-01	0.00000	-.17563E+00	0.00000	-.37681E-14	0.00000	.40026E-13	0.00000

H-69

NATURAL FREQUENCY= .150775E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.23127E-14	0.00000	.18587E+00	0.00000	.12436E-11	0.00000	.16684E-11	0.00000	-.10658E-13	0.00000	-.19581E-16	0.00000
.10985E-13	0.00000	.18587E+00	0.00000	-.12977E-11	0.00000	-.20049E-11	0.00000	.16884E-13	0.00000	-.51473E-14	0.00000
-.67445E-14	0.00000	-.30075E+00	0.00000	-.11977E-11	0.00000	-.17250E-11	0.00000	-.68697E-13	0.00000	-.28232E-13	0.00000
-.52666E-13	0.00000	-.30075E+00	0.00000	.11731E-11	0.00000	.17652E-11	0.00000	-.69798E-13	0.00000	-.43649E-14	0.00000
-.37751E-16	0.00000	.31621E-13	0.00000	.24351E-13	0.00000	.28370E-11	0.00000	.36292E-13	0.00000	.15315E-12	0.00000
.10363E-13	0.00000	-.26321E-12	0.00000	.21800E-14	0.00000	-.33635E-11	0.00000	-.37370E-13	0.00000	-.74665E-13	0.00000
-.25245E-13	0.00000	.30075E+00	0.00000	.10499E-11	0.00000	-.17303E-11	0.00000	.13320E-13	0.00000	-.17119E-12	0.00000
.17166E-13	0.00000	.30075E+00	0.00000	-.93658E-12	0.00000	.23382E-11	0.00000	-.39329E-13	0.00000	.39531E-13	0.00000
.70134E-14	0.00000	-.18587E+00	0.00000	-.15351E-11	0.00000	.17142E-11	0.00000	-.81135E-14	0.00000	-.28955E-13	0.00000
-.27341E-13	0.00000	-.18587E+00	0.00000	.14226E-11	0.00000						
-.34365E-13	0.00000	-.18587E+00	0.00000	-.19516E-11	0.00000						
.12572E-13	0.00000	.18587E+00	0.00000	-.19654E-11	0.00000	-.17146E-11	0.00000	-.22629E-13	0.00000	-.15151E-13	0.00000
.34289E-13	0.00000	.30075E+00	0.00000	-.15401E-11	0.00000	-.24449E-11	0.00000	-.35636E-13	0.00000	-.59220E-13	0.00000
.60311E-14	0.00000	.30075E+00	0.00000	.16255E-11	0.00000	-.21690E-11	0.00000	-.26156E-13	0.00000	-.62950E-13	0.00000
-.42245E-13	0.00000	-.46078E-13	0.00000	-.23631E-12	0.00000	-.42934E-11	0.00000	.19788E-13	0.00000	-.46639E-13	0.00000
-.26183E-14	0.00000	.18587E-12	0.00000	-.21893E-12	0.00000	-.39295E-11	0.00000	-.39605E-13	0.00000	-.15223E-12	0.00000
-.56531E-13	0.00000	-.30075E+00	0.00000	.14682E-11	0.00000	-.26103E-11	0.00000	.98707E-14	0.00000	-.74689E-13	0.00000
-.11948E-13	0.00000	-.30075E+00	0.00000	-.15039E-11	0.00000	.23787E-11	0.00000	.32133E-13	0.00000	.15774E-12	0.00000
-.82713E-13	0.00000	.18587E+00	0.00000	-.16669E-11	0.00000	.25769E-11	0.00000	-.28752E-13	0.00000	.11607E-12	0.00000
.40820E-13	0.00000	.18587E+00	0.00000	.16820E-11	0.00000	-.24337E-11	0.00000	-.82308E-14	0.00000	-.44121E-13	0.00000

H-70

ORIGINAL PAGE IS
OF POOR QUALITY

FORM 8 (REV. 5-10-64)

NATURAL FREQUENCY= .151565E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.19464E-13	0.00000	.22990E-11	0.00000	-.12235E+00	0.00000	-.18143E+00	0.00000	-.23910E-13	0.00000	-.34608E-13	0.00000
-.21921E-13	0.00000	.23276E-11	0.00000	.12235E+00	0.00000	.18143E+00	0.00000	-.28480E-13	0.00000	-.56346E-13	0.00000
.15034E-13	0.00000	-.37247E-11	0.00000	.11138E+00	0.00000	.17875E+00	0.00000	-.26488E-13	0.00000	-.27240E-13	0.00000
.89351E-14	0.00000	-.37339E-11	0.00000	-.11138E+00	0.00000	-.17875E+00	0.00000	-.97525E-14	0.00000	.18986E-13	0.00000
-.34661E-13	0.00000	.36593E-13	0.00000	.90891E-02	0.00000	-.30223E+00	0.00000	.46857E-13	0.00000	-.31132E-13	0.00000
.23936E-13	0.00000	-.27605E-13	0.00000	-.90891E-02	0.00000	.30223E+00	0.00000	.46672E-13	0.00000	.59309E-13	0.00000
.34602E-13	0.00000	.37502E-11	0.00000	-.10689E+00	0.00000	.18262E+00	0.00000	.42141E-13	0.00000	-.48908E-13	0.00000
-.12709E-13	0.00000	.37341E-11	0.00000	.10689E+00	0.00000	-.18262E+00	0.00000	-.30463E-13	0.00000	.14127E-12	0.00000
-.43792E-15	0.00000	-.23752E-11	0.00000	.14295E+00	0.00000	-.14295E+00	0.00000	.51509E-14	0.00000	-.16841E-13	0.00000
.38046E-13	0.00000	-.22988E-11	0.00000	-.14295E+00	0.00000						
-.54973E-13	0.00000	-.23246E-11	0.00000	-.14295E+00	0.00000						
-.11380E-13	0.00000	-.23165E-11	0.00000	.14295E+00	0.00000	.14295E+00	0.00000	-.49603E-13	0.00000	.26517E-13	0.00000
-.59941E-13	0.00000	.37931E-11	0.00000	.10689E+00	0.00000	.18262E+00	0.00000	.77915E-13	0.00000	-.92439E-13	0.00000
.84293E-14	0.00000	.38226E-11	0.00000	-.10689E+00	0.00000	-.18262E+00	0.00000	.71027E-13	0.00000	-.10873E-12	0.00000
-.32823E-13	0.00000	-.30517E-13	0.00000	-.90891E-02	0.00000	-.30223E+00	0.00000	-.28614E-13	0.00000	.85545E-13	0.00000
-.54899E-13	0.00000	-.21525E-14	0.00000	.90891E-02	0.00000	.30223E+00	0.00000	-.43185E-13	0.00000	.23059E-12	0.00000
.62209E-13	0.00000	-.37476E-11	0.00000	-.11138E+00	0.00000	.17875E+00	0.00000	-.24245E-14	0.00000	.85313E-13	0.00000
-.59348E-13	0.00000	-.37792E-11	0.00000	.11138E+00	0.00000	-.17875E+00	0.00000	.36897E-13	0.00000	-.17983E-13	0.00000
-.14664E-13	0.00000	.22765E-11	0.00000	.12235E+00	0.00000	-.18143E+00	0.00000	-.26556E-13	0.00000	-.50507E-13	0.00000
-.32777E-13	0.00000	.24054E-11	0.00000	-.12235E+00	0.00000	.18143E+00	0.00000	.15711E-13	0.00000	-.77763E-14	0.00000

H-71

NATURAL FREQUENCY= .156512E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14383E-12	0.00000	-.73165E-01	0.00000	-.93298E-02	0.00000	-.82356E-01	0.00000	-.17199E-12	0.00000	-.13961E-12	0.00000
-.16805E-12	0.00000	.73165E-01	0.00000	-.93298E-02	0.00000	-.82356E-01	0.00000	-.21072E-12	0.00000	.16694E-12	0.00000
-.13428E-12	0.00000	.29904E-01	0.00000	-.18286E-01	0.00000	-.60357E-02	0.00000	.20860E-12	0.00000	-.15635E-12	0.00000
.13880E-12	0.00000	-.29904E-01	0.00000	-.18286E-01	0.00000	-.60357E-02	0.00000	.22453E-12	0.00000	.18571E-12	0.00000
.28769E-13	0.00000	.64611E-01	0.00000	-.50528E-01	0.00000	-.16028E+00	0.00000	-.13611E-12	0.00000	-.26802E-12	0.00000
-.28494E-13	0.00000	-.64611E-01	0.00000	.50528E-01	0.00000	-.16028E+00	0.00000	-.14457E-12	0.00000	.19430E-12	0.00000
-.19012E-12	0.00000	-.14570E+00	0.00000	.53175E-01	0.00000	.35800E+00	0.00000	.20052E-12	0.00000	-.15362E-12	0.00000
.17038E-12	0.00000	.14570E+00	0.00000	.53175E-01	0.00000	.35800E+00	0.00000	.25816E-12	0.00000	-.10990E-12	0.00000
.10337E-12	0.00000	.19424E+00	0.00000	-.11832E+00	0.00000	.11832E+00	0.00000	-.14762E-12	0.00000	-.38248E-13	0.00000
-.10442E-12	0.00000	-.19424E+00	0.00000	-.11832E+00	0.00000	.11832E+00	0.00000				
.15428E-12	0.00000	.19424E+00	0.00000	.11832E+00	0.00000	.11832E+00	0.00000	-.16659E-12	0.00000	-.46027E-13	0.00000
-.13268E-12	0.00000	-.19424E+00	0.00000	-.11832E+00	0.00000	-.11832E+00	0.00000	.24729E-12	0.00000	-.27063E-12	0.00000
-.20219E-12	0.00000	-.14570E+00	0.00000	-.53175E-01	0.00000	.35800E+00	0.00000	.28034E-12	0.00000	.35965E-12	0.00000
.18618E-12	0.00000	.14570E+00	0.00000	-.53175E-01	0.00000	.35800E+00	0.00000	-.18306E-12	0.00000	.36373E-13	0.00000
.69721E-13	0.00000	.64611E-01	0.00000	-.50528E-01	0.00000	-.16028E+00	0.00000	-.18488E-12	0.00000	-.63925E-13	0.00000
-.31888E-14	0.00000	-.64611E-01	0.00000	-.50528E-01	0.00000	-.16028E+00	0.00000	.22617E-12	0.00000	.97960E-13	0.00000
-.18461E-12	0.00000	.29904E-01	0.00000	-.18286E-01	0.00000	-.60357E-02	0.00000	.22123E-12	0.00000	-.19763E-12	0.00000
.15904E-12	0.00000	-.29904E-01	0.00000	-.18286E-01	0.00000	-.60357E-02	0.00000	-.13027E-12	0.00000	.13002E-12	0.00000
.11416E-12	0.00000	-.73165E-01	0.00000	.93298E-02	0.00000	-.82356E-01	0.00000	-.13491E-12	0.00000	-.11722E-12	0.00000
-.10958E-12	0.00000	.73165E-01	0.00000	.93298E-02	0.00000	-.82356E-01	0.00000				

H-72

NATURAL FREQUENCY= .154656E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
-.19586E-01	0.00000	-.88422E-15	0.00000	-.86511E-14	0.00000	-.55781E-13	0.00000	-.75551E-02	0.00000	-.25799E-01	0.00000
-.19586E-01	0.00000	.93836E-13	0.00000	-.24807E-13	0.00000	-.90086E-13	0.00000	-.75551E-02	0.00000	.25799E-01	0.00000
-.73963E-01	0.00000	.32938E-13	0.00000	-.68344E-14	0.00000	.17442E-13	0.00000	.89980E-01	0.00000	.21894E+00	0.00000
-.73963E-01	0.00000	-.44037E-13	0.00000	.52146E-13	0.00000	-.40180E-13	0.00000	.89980E-01	0.00000	-.21894E+00	0.00000
-.19023E-01	0.00000	.82745E-14	0.00000	-.85110E-14	0.00000	.17915E-13	0.00000	-.65156E-01	0.00000	.11383E+00	0.00000
-.19023E-01	0.00000	-.36930E-13	0.00000	-.10164E-14	0.00000	.92951E-13	0.00000	-.65156E-01	0.00000	-.11383E+00	0.00000
-.48991E-01	0.00000	.92284E-13	0.00000	-.35342E-13	0.00000	-.11856E-12	0.00000	.64845E-01	0.00000	.39015E+00	0.00000
-.48991E-01	0.00000	.40739E-13	0.00000	.12174E-13	0.00000	.18472E-12	0.00000	.64845E-01	0.00000	-.39015E+00	0.00000
-.88217E-01	0.00000	-.13007E-13	0.00000	.57213E-13	0.00000	-.26378E-13	0.00000	-.39986E-12	0.00000	.88217E-01	0.00000
-.88217E-01	0.00000	-.47647E-13	0.00000	-.79669E-13	0.00000						
-.88217E-01	0.00000	-.11513E-13	0.00000	.19920E-14	0.00000						
-.88217E-01	0.00000	-.41772E-13	0.00000	-.93930E-14	0.00000	.35736E-13	0.00000	-.39585E-12	0.00000	-.88217E-01	0.00000
-.48991E-01	0.00000	.16543E-13	0.00000	.17109E-13	0.00000	.45598E-13	0.00000	-.64845E-01	0.00000	.39015E+00	0.00000
-.48991E-01	0.00000	-.10471E-13	0.00000	-.31828E-13	0.00000	.16611E-13	0.00000	-.64845E-01	0.00000	-.39015E+00	0.00000
-.19023E-01	0.00000	.15611E-13	0.00000	.24060E-13	0.00000	.41995E-13	0.00000	.65156E-01	0.00000	.11383E+00	0.00000
-.19023E-01	0.00000	-.18367E-13	0.00000	-.23636E-13	0.00000	-.91492E-13	0.00000	-.65156E-01	0.00000	-.11383E+00	0.00000
-.73963E-01	0.00000	-.25850E-13	0.00000	-.24482E-13	0.00000	.56661E-13	0.00000	-.89980E-01	0.00000	.21894E+00	0.00000
-.73963E-01	0.00000	-.87385E-13	0.00000	.52296E-13	0.00000	-.63839E-13	0.00000	-.89980E-01	0.00000	-.21894E+00	0.00000
-.19586E-01	0.00000	.11682E-13	0.00000	.34494E-14	0.00000	-.32097E-13	0.00000	.75551E-02	0.00000	-.25799E-01	0.00000
-.19586E-01	0.00000	.20689E-13	0.00000	.13884E-13	0.00000	-.11299E-13	0.00000	-.75551E-02	0.00000	.25799E-01	0.00000

H-73

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.49578E-01	0.00000	-.11123E-13	0.00000	-.37388E-13	0.00000	-.61393E-13	0.00000	-.22209E-01	0.00000	.14991E-02	0.00000
.49578E-01	0.00000	-.31807E-13	0.00000	-.49093E-13	0.00000	-.18997E-14	0.00000	-.22209E-01	0.00000	-.14991E-02	0.00000
.50537E-01	0.00000	.42127E-13	0.00000	-.64679E-15	0.00000	.22007E-13	0.00000	-.50750E-01	0.00000	-.27504E+00	0.00000
.50537E-01	0.00000	.39937E-13	0.00000	.16338E-13	0.00000	-.18604E-12	0.00000	-.50750E-01	0.00000	.27504E+00	0.00000
.14062E-01	0.00000	.35424E-13	0.00000	.46893E-13	0.00000	.17450E-13	0.00000	.41153E-01	0.00000	-.15457E+00	0.00000
.14062E-01	0.00000	.24899E-13	0.00000	-.58183E-14	0.00000	.19033E-13	0.00000	.41153E-01	0.00000	.15457E+00	0.00000
.10031E-01	0.00000	-.42517E-13	0.00000	.10696E-13	0.00000	.39228E-13	0.00000	-.44251E-01	0.00000	-.35612E+00	0.00000
.10031E-01	0.00000	-.82163E-13	0.00000	-.26229E-14	0.00000	-.44675E-13	0.00000	-.44251E-01	0.00000	.35612E+00	0.00000
.96084E-01	0.00000	.15918E-13	0.00000	-.78884E-14	0.00000	.27705E-13	0.00000	.76057E-01	0.00000	-.11972E-11	0.00000
.96084E-01	0.00000	.36035E-13	0.00000	.87750E-14	0.00000						
.96084E-01	0.00000	.18317E-13	0.00000	.54457E-13	0.00000						
.96084E-01	0.00000	.35371E-13	0.00000	-.50262E-13	0.00000	-.30012E-13	0.00000	.76057E-01	0.00000	-.11205E-11	0.00000
.10031E-01	0.00000	-.38176E-13	0.00000	-.47940E-13	0.00000	.70161E-13	0.00000	-.44251E-01	0.00000	.35612E+00	0.00000
.10031E-01	0.00000	-.46890E-13	0.00000	.44408E-13	0.00000	-.84882E-13	0.00000	-.44251E-01	0.00000	-.35612E+00	0.00000
.14062E-01	0.00000	-.24424E-15	0.00000	.93417E-14	0.00000	-.76763E-14	0.00000	.41153E-01	0.00000	.15457E+00	0.00000
.14062E-01	0.00000	.50580E-13	0.00000	-.13852E-13	0.00000	-.26797E-13	0.00000	.41153E-01	0.00000	-.15457E+00	0.00000
.50537E-01	0.00000	-.20511E-13	0.00000	-.60217E-13	0.00000	-.17359E-13	0.00000	-.50750E-01	0.00000	.27504E+00	0.00000
.50537E-01	0.00000	.16015E-13	0.00000	.32355E-13	0.00000	.27371E-13	0.00000	-.50750E-01	0.00000	-.27504E+00	0.00000
.49578E-01	0.00000	-.24655E-13	0.00000	.35225E-13	0.00000	-.59418E-14	0.00000	-.22209E-01	0.00000	-.14991E-02	0.00000
.49578E-01	0.00000	.19416E-13	0.00000	-.33374E-13	0.00000	.62465E-13	0.00000	-.22209E-01	0.00000	.14991E-02	0.00000

H-74

NATURAL FREQUENCY= .156288E+04

TX	TX	TY	TY	TZ	TZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.12993E+00	0.00000	-.38830E-13	0.00000	.16252E-14	0.00000	-.10983E-13	0.00000	-.12320E+00	0.00000	-.97208E-01	0.00000
.12993E+00	0.00000	.79774E-13	0.00000	-.60284E-15	0.00000	-.24711E-13	0.00000	-.12320E+00	0.00000	-.97208E-01	0.00000
-.95945E-01	0.00000	-.14063E-15	0.00000	.90100E-14	0.00000	-.12199E-12	0.00000	.15940E+00	0.00000	-.27375E+00	0.00000
-.95945E-01	0.00000	-.64003E-13	0.00000	.10523E-13	0.00000	.12424E-13	0.00000	.15940E+00	0.00000	.27375E+00	0.00000
.48150E-01	0.00000	.77738E-14	0.00000	.34906E-13	0.00000	.82912E-13	0.00000	-.13712E+00	0.00000	-.16332E+00	0.00000
-.48150E-01	0.00000	-.84333E-14	0.00000	-.34489E-13	0.00000	-.93712E-13	0.00000	-.13712E+00	0.00000	.16332E+00	0.00000
-.14554E+00	0.00000	-.38806E-14	0.00000	-.22389E-13	0.00000	.12820E-12	0.00000	.16629E+00	0.00000	-.25801E-01	0.00000
.14554E+00	0.00000	.35403E-13	0.00000	.17936E-13	0.00000	.66433E-13	0.00000	.16629E+00	0.00000	-.25801E-01	0.00000
-.54700E-01	0.00000	-.30757E-13	0.00000	-.48143E-13	0.00000	.60681E-13	0.00000	-.33520E-11	0.00000	.54700E-01	0.00000
-.54700E-01	0.00000	-.37890E-13	0.00000	-.15450E-13	0.00000						
-.54700E-01	0.00000	.31235E-13	0.00000	.80743E-13	0.00000						
.54700E-01	0.00000	-.38179E-13	0.00000	-.32314E-13	0.00000	-.39515E-14	0.00000	-.33512E-11	0.00000	-.54700E-01	0.00000
.14554E+00	0.00000	-.29213E-13	0.00000	-.68781E-13	0.00000	.14139E-12	0.00000	-.16629E+00	0.00000	.25801E-01	0.00000
-.14554E+00	0.00000	.81643E-13	0.00000	.40195E-13	0.00000	-.28877E-14	0.00000	-.16629E+00	0.00000	-.25801E-01	0.00000
-.48150E-01	0.00000	-.20060E-13	0.00000	-.10220E-13	0.00000	-.39819E-13	0.00000	.13712E+00	0.00000	-.16332E+00	0.00000
.48150E-01	0.00000	-.28600E-13	0.00000	-.14863E-13	0.00000	-.31993E-13	0.00000	.13712E+00	0.00000	.16332E+00	0.00000
-.95945E-01	0.00000	-.16863E-13	0.00000	-.58703E-13	0.00000	-.84912E-13	0.00000	-.15940E+00	0.00000	-.27375E+00	0.00000
-.95945E-01	0.00000	.26392E-13	0.00000	.66173E-13	0.00000	.53423E-13	0.00000	-.15940E+00	0.00000	.27375E+00	0.00000
-.12993E+00	0.00000	-.47412E-13	0.00000	.63677E-13	0.00000	-.59585E-13	0.00000	.12320E+00	0.00000	-.97208E-01	0.00000
.12993E+00	0.00000	.91821E-14	0.00000	-.59093E-13	0.00000	.35460E-13	0.00000	.12320E+00	0.00000	.97208E-01	0.00000

H-75

NATURAL FREQUENCY = .156471E+04

IX	IX	YX	YX	YZ	YZ	RX	RX	RY	RY	RZ	RZ
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.11990E+00	0.00000	-.21817E-13	0.00000	-.31009E-13	0.00000	-.13783E-13	0.00000	.11840E+00	0.00000	.96990E-01	0.00000
.11990E+00	0.00000	-.21451E-13	0.00000	-.65740E-13	0.00000	-.39181E-13	0.00000	.11840E+00	0.00000	-.96990E-01	0.00000
.10630E+00	0.00000	.39433E-13	0.00000	.37811E-14	0.00000	-.12385E-12	0.00000	-.17021E+00	0.00000	.22051E+00	0.00000
.10630E+00	0.00000	-.10822E-14	0.00000	.39914E-15	0.00000	-.32237E-13	0.00000	-.17021E+00	0.00000	-.22051E+00	0.00000
.50967E-01	0.00000	-.25915E-13	0.00000	-.93112E-14	0.00000	.25014E-13	0.00000	.15154E+00	0.00000	.12892E+00	0.00000
.50967E-01	0.00000	.20936E-13	0.00000	.46743E-14	0.00000	-.74401E-13	0.00000	-.15154E+00	0.00000	-.12892E+00	0.00000
.14645E+00	0.00000	-.35387E-13	0.00000	-.29201E-13	0.00000	-.38118E-13	0.00000	-.19933E+00	0.00000	.10549E+00	0.00000
.14645E+00	0.00000	-.31730E-13	0.00000	-.18744E-14	0.00000	-.94372E-13	0.00000	-.19933E+00	0.00000	.10549E+00	0.00000
.81882E-01	0.00000	.47612E-14	0.00000	.68200E-14	0.00000	-.11756E-13	0.00000	.99601E-01	0.00000	.18572E-11	0.00000
.81882E-01	0.00000	.17224E-13	0.00000	.26754E-13	0.00000						
.81882E-01	0.00000	.32224E-14	0.00000	-.56044E-14	0.00000						
.81882E-01	0.00000	.18719E-13	0.00000	-.11296E-14	0.00000	-.16546E-13	0.00000	.99601E-01	0.00000	-.18309E-11	0.00000
.14645E+00	0.00000	-.14124E-13	0.00000	-.41252E-13	0.00000	-.18713E-13	0.00000	-.19933E+00	0.00000	.10549E+00	0.00000
.14645E+00	0.00000	-.22419E-13	0.00000	.16116E-13	0.00000	.30938E-13	0.00000	-.19933E+00	0.00000	-.10549E+00	0.00000
.50967E-01	0.00000	.20509E-13	0.00000	-.11490E-13	0.00000	-.27055E-13	0.00000	.15154E+00	0.00000	-.12892E+00	0.00000
.50967E-01	0.00000	-.57551E-14	0.00000	.21704E-13	0.00000	.15070E-12	0.00000	.15154E+00	0.00000	.12892E+00	0.00000
.10630E+00	0.00000	-.15194E-14	0.00000	.51812E-14	0.00000	.32700E-13	0.00000	-.17021E+00	0.00000	-.22051E+00	0.00000
.10630E+00	0.00000	.25130E-13	0.00000	-.85990E-14	0.00000	-.16404E-12	0.00000	-.17021E+00	0.00000	.22051E+00	0.00000
.11990E+00	0.00000	.33738E-13	0.00000	.11641E-14	0.00000	.59771E-13	0.00000	.11840E+00	0.00000	-.96990E-01	0.00000
.11990E+00	0.00000	-.28656E-13	0.00000	-.29990E-13	0.00000	.44191E-13	0.00000	.11840E+00	0.00000	.96990E-01	0.00000

07-H

NATURAL FREQUENCY = .160140E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.41873E-13	0.00000	-.19592E+00	0.00000	-.84425E-01	0.00000	-.27528E+00	0.00000	-.34958E-13	0.00000	-.40839E-13	0.00000
.49977E-13	0.00000	.19592E+00	0.00000	-.84425E-01	0.00000	-.27528E+00	0.00000	-.52631E-13	0.00000	-.71103E-13	0.00000
.79173E-13	0.00000	-.69742E-01	0.00000	-.58925E-01	0.00000	-.33388E+00	0.00000	-.64269E-13	0.00000	-.78307E-13	0.00000
.90060E-13	0.00000	-.69742E-01	0.00000	-.58925E-01	0.00000	-.33388E+00	0.00000	-.64083E-13	0.00000	-.67123E-13	0.00000
.39783E-13	0.00000	-.44597E-01	0.00000	-.31608E-01	0.00000	-.79350E-01	0.00000	-.11133E-13	0.00000	-.14367E-13	0.00000
.24129E-13	0.00000	.44597E-01	0.00000	.31608E-01	0.00000	.79350E-01	0.00000	-.15632E-13	0.00000	-.44707E-13	0.00000
-.36158E-13	0.00000	-.46052E-02	0.00000	-.20740E-01	0.00000	-.76626E-01	0.00000	-.72951E-13	0.00000	-.12551E-12	0.00000
.10395E-12	0.00000	.46052E-02	0.00000	-.20740E-01	0.00000	-.76626E-01	0.00000	-.69009E-13	0.00000	-.21574E-12	0.00000
.68557E-13	0.00000	-.47360E-02	0.00000	.16173E-01	0.00000	-.16173E-01	0.00000	-.49314E-13	0.00000	-.13531E-15	0.00000
-.12060E-12	0.00000	.47360E-02	0.00000	.16173E-01	0.00000	.16173E-01	0.00000				
.27439E-13	0.00000	-.47360E-02	0.00000	-.16173E-01	0.00000	-.16173E-01	0.00000	-.89735E-13	0.00000	-.54389E-13	0.00000
-.62102E-13	0.00000	.47360E-02	0.00000	.16173E-01	0.00000	.16173E-01	0.00000	-.99904E-13	0.00000	-.22237E-13	0.00000
-.71591E-13	0.00000	-.46052E-02	0.00000	.20740E-01	0.00000	-.76626E-01	0.00000	-.92220E-13	0.00000	-.60423E-13	0.00000
.75052E-13	0.00000	.46052E-02	0.00000	-.20740E-01	0.00000	-.76626E-01	0.00000	-.92220E-13	0.00000	-.60423E-13	0.00000
.12806E-13	0.00000	-.44597E-01	0.00000	-.31688E-01	0.00000	-.79350E-01	0.00000	-.59897E-13	0.00000	-.12213E-12	0.00000
-.51277E-13	0.00000	.44597E-01	0.00000	-.31688E-01	0.00000	-.79350E-01	0.00000	-.41795E-13	0.00000	-.25011E-13	0.00000
-.35537E-13	0.00000	-.69742E-01	0.00000	-.58925E-01	0.00000	-.33388E+00	0.00000	-.32070E-13	0.00000	-.10017E-12	0.00000
.75879E-13	0.00000	-.69742E-01	0.00000	-.58925E-01	0.00000	-.33388E+00	0.00000	-.43446E-13	0.00000	-.37025E-14	0.00000
.51234E-13	0.00000	-.19592E+00	0.00000	-.84425E-01	0.00000	-.27528E+00	0.00000	-.17329E-13	0.00000	-.34830E-13	0.00000
-.49352E-13	0.00000	.19592E+00	0.00000	-.84425E-01	0.00000	-.27528E+00	0.00000	-.24798E-14	0.00000	-.34869E-13	0.00000

H-77

ANALYSIS REPORT - 11/11/63 - 27

NATURAL FREQUENCY= .160117E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.14252E-12	0.00000	.19826E+00	0.00000	.84884E-01	0.00000	.27817E+00	0.00000	.78938E-13	0.00000	.84991E-13	0.00000
.12576E-12	0.00000	-.19826E+00	0.00000	.84884E-01	0.00000	.27817E+00	0.00000	.11067E-12	0.00000	-.70274E-13	0.00000
.11017E-12	0.00000	-.70664E-01	0.00000	-.58911E-01	0.00000	.33442E+00	0.00000	-.73553E-13	0.00000	.19843E-12	0.00000
-.11626E-12	0.00000	.70664E-01	0.00000	-.58911E-01	0.00000	.33442E+00	0.00000	-.87722E-13	0.00000	-.28678E-12	0.00000
.21173E-13	0.00000	.42822E-01	0.00000	-.32511E-01	0.00000	-.76582E-01	0.00000	-.19022E-13	0.00000	.24308E-13	0.00000
-.26417E-13	0.00000	-.42822E-01	0.00000	-.32511E-01	0.00000	-.76582E-01	0.00000	-.20423E-13	0.00000	.73136E-13	0.00000
.61449E-13	0.00000	.78979E-02	0.00000	.17350E-01	0.00000	.68183E-01	0.00000	-.58614E-13	0.00000	-.28849E-12	0.00000
-.11449E-12	0.00000	-.78979E-02	0.00000	.17350E-01	0.00000	.68183E-01	0.00000	-.10625E-12	0.00000	.23879E-12	0.00000
-.86872E-13	0.00000	-.41633E-12	0.00000	-.10812E-01	0.00000	-.12680E-11	0.00000	.17915E-13	0.00000	-.24878E-13	0.00000
.12990E-12	0.00000	.44630E-12	0.00000	-.10812E-01	0.00000						
-.46916E-13	0.00000	-.45345E-12	0.00000	-.10812E-01	0.00000						
.47578E-13	0.00000	.42416E-12	0.00000	-.10812E-01	0.00000	-.13281E-11	0.00000	.52824E-13	0.00000	.62993E-13	0.00000
.48444E-13	0.00000	-.78979E-02	0.00000	.17350E-01	0.00000	-.68183E-01	0.00000	-.89997E-13	0.00000	.15784E-13	0.00000
-.49305E-13	0.00000	.78979E-02	0.00000	.17350E-01	0.00000	-.68183E-01	0.00000	-.74656E-13	0.00000	.13698E-13	0.00000
-.44680E-13	0.00000	-.42822E-01	0.00000	-.32511E-01	0.00000	.76582E-01	0.00000	.78455E-13	0.00000	-.91347E-13	0.00000
.57666E-13	0.00000	.42822E-01	0.00000	-.32511E-01	0.00000	.76582E-01	0.00000	.87619E-13	0.00000	.21134E-12	0.00000
.72785E-13	0.00000	.70664E-01	0.00000	-.58911E-01	0.00000	-.33442E+00	0.00000	-.10973E-12	0.00000	-.34073E-13	0.00000
-.20892E-13	0.00000	-.70664E-01	0.00000	-.58911E-01	0.00000	-.33442E+00	0.00000	-.98311E-13	0.00000	-.10456E-13	0.00000
-.75750E-13	0.00000	-.19826E+00	0.00000	.84884E-01	0.00000	-.27817E+00	0.00000	-.47088E-13	0.00000	-.62298E-13	0.00000
.79597E-13	0.00000	.19826E+00	0.00000	.84884E-01	0.00000	-.27817E+00	0.00000	.50605E-13	0.00000	.19381E-13	0.00000

H-78

ORIGINAL PAGE IS
OF POOR QUALITY

UNCLASSIFIED

NATURAL FREQUENCY= .165625E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.47273E-13	0.00000	-.49682E-13	0.00000	.10640E+00	0.00000	.26016E-01	0.00000	.51340E-13	0.00000	.56496E-13	0.00000
-.83342E-13	0.00000	.80711E-13	0.00000	-.10640E+00	0.00000	-.26016E-01	0.00000	-.39702E-13	0.00000	-.42286E-13	0.00000
-.64727E-13	0.00000	.84175E-14	0.00000	.43328E-01	0.00000	.28142E+00	0.00000	-.50656E-13	0.00000	-.61436E-13	0.00000
-.10727E-12	0.00000	-.71436E-13	0.00000	-.43328E-01	0.00000	-.28142E+00	0.00000	-.76761E-13	0.00000	-.30985E-13	0.00000
-.12192E-12	0.00000	.40753E-13	0.00000	.13857E-01	0.00000	.21049E+00	0.00000	.66017E-13	0.00000	.53503E-13	0.00000
.11340E-12	0.00000	.45087E-13	0.00000	-.13857E-01	0.00000	-.21049E+00	0.00000	.75766E-13	0.00000	.14776E-13	0.00000
.24220E-13	0.00000	-.45234E-13	0.00000	-.29544E-01	0.00000	.31574E+00	0.00000	-.48963E-13	0.00000	.55620E-13	0.00000
-.27790E-13	0.00000	-.20639E-13	0.00000	.29544E-01	0.00000	-.31574E+00	0.00000	-.30976E-13	0.00000	-.93544E-13	0.00000
-.22321E-13	0.00000	-.18244E-13	0.00000	-.90278E-01	0.00000	.90278E-01	0.00000	.12865E-13	0.00000	-.10117E-13	0.00000
.14437E-13	0.00000	-.13964E-13	0.00000	.40278E-01	0.00000						
.43300E-14	0.00000	.64480E-14	0.00000	.90278E-01	0.00000						
-.47183E-13	0.00000	.11128E-13	0.00000	-.90278E-01	0.00000	-.90278E-01	0.00000	.15038E-13	0.00000	-.21772E-13	0.00000
-.54031E-13	0.00000	.14325E-13	0.00000	.29544E-01	0.00000	.31574E+00	0.00000	.57287E-14	0.00000	-.62040E-13	0.00000
-.58475E-13	0.00000	.67095E-13	0.00000	-.29544E-01	0.00000	-.31574E+00	0.00000	-.81340E-14	0.00000	.71800E-13	0.00000
-.61673E-13	0.00000	-.67455E-13	0.00000	.13857E-01	0.00000	.21049E+00	0.00000	-.72549E-13	0.00000	.20177E-13	0.00000
-.84585E-14	0.00000	-.17808E-13	0.00000	.13857E-01	0.00000	-.21049E+00	0.00000	-.67923E-13	0.00000	-.13112E-13	0.00000
.86665E-13	0.00000	.97777E-14	0.00000	-.43328E-01	0.00000	.28142E+00	0.00000	-.32994E-13	0.00000	-.18581E-12	0.00000
-.59806E-13	0.00000	.73173E-13	0.00000	.43328E-01	0.00000	-.28142E+00	0.00000	-.25911E-13	0.00000	.42559E-13	0.00000
-.11720E-12	0.00000	.37944E-13	0.00000	-.10640E+00	0.00000	.26016E-01	0.00000	.62308E-13	0.00000	-.63550E-13	0.00000
.10263E-12	0.00000	-.33305E-13	0.00000	.10640E+00	0.00000	-.26016E-01	0.00000	.76697E-13	0.00000	.36333E-13	0.00000

H-79

WATER 11/10/10 10:10:10

12

NATURAL FREQUENCY= .162483E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.84794E-01	0.00000	.85263E-13	0.00000	.17461E-12	0.00000	.22880E-12	0.00000	.74136E-01	0.00000	.85204E-01	0.00000
.84794E-01	0.00000	.62193E-13	0.00000	.14554E-12	0.00000	.98156E-13	0.00000	.74136E-01	0.00000	.85204E-01	0.00000
.15130E+00	0.00000	.40272E-13	0.00000	.18964E-12	0.00000	.87805E-13	0.00000	.12654E+00	0.00000	.13892E+00	0.00000
.15130E+00	0.00000	.49257E-14	0.00000	.15360E-12	0.00000	.16583E-12	0.00000	.12654E+00	0.00000	.13892E+00	0.00000
.16589E-01	0.00000	.93949E-13	0.00000	.93247E-13	0.00000	.12458E-12	0.00000	.40942E-02	0.00000	.37663E+00	0.00000
.16589E-01	0.00000	.33799E-13	0.00000	.13106E-12	0.00000	.19566E-12	0.00000	.40942E-02	0.00000	.37663E+00	0.00000
.12888E+00	0.00000	.29798E-13	0.00000	.16749E-12	0.00000	.76725E-13	0.00000	.94212E-01	0.00000	.38834E-01	0.00000
.12888E+00	0.00000	.52178E-13	0.00000	.20095E-12	0.00000	.83488E-13	0.00000	.94212E-01	0.00000	.38834E-01	0.00000
.42733E-01	0.00000	.46075E-14	0.00000	.95993E-13	0.00000	.52974E-13	0.00000	.30146E-11	0.00000	.42733E-01	0.00000
.42733E-01	0.00000	.22353E-13	0.00000	.95377E-13	0.00000						
.42733E-01	0.00000	.43910E-14	0.00000	.16017E-13	0.00000						
.42733E-01	0.00000	.20977E-13	0.00000	.20679E-14	0.00000	.47855E-13	0.00000	.30162E-11	0.00000	.42733E-01	0.00000
.12888E+00	0.00000	.40209E-13	0.00000	.41797E-13	0.00000	.34850E-14	0.00000	.94212E-01	0.00000	.38834E-01	0.00000
.12888E+00	0.00000	.34989E-13	0.00000	.13102E-13	0.00000	.26917E-13	0.00000	.94212E-01	0.00000	.38834E-01	0.00000
.16589E-01	0.00000	.91804E-13	0.00000	.39629E-13	0.00000	.17364E-12	0.00000	.40942E-02	0.00000	.37663E+00	0.00000
.16589E-01	0.00000	.69556E-13	0.00000	.32115E-13	0.00000	.11183E-13	0.00000	.40942E-02	0.00000	.37663E+00	0.00000
.15130E+00	0.00000	.22793E-13	0.00000	.34930E-13	0.00000	.14198E-12	0.00000	.12654E+00	0.00000	.13892E+00	0.00000
.15130E+00	0.00000	.37211E-13	0.00000	.12719E-13	0.00000	.80867E-13	0.00000	.12654E+00	0.00000	.13892E+00	0.00000
.84794E-01	0.00000	.27157E-14	0.00000	.53109E-13	0.00000	.71170E-13	0.00000	.74136E-01	0.00000	.85204E-01	0.00000
.84794E-01	0.00000	.20000E-13	0.00000	.27269E-13	0.00000	.27131E-13	0.00000	.74136E-01	0.00000	.85204E-01	0.00000

H-80

NATURAL FREQUENCY= .163603E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RY IMAG	RZ REAL	RZ IMAG
.24201E-01	0.00000	.46150E-14	0.00000	.73167E-13	0.00000	.93547E-13	0.00000	.56525E-02	0.00000
.24201E-01	0.00000	-.16734E-13	0.00000	-.20304E-13	0.00000	.85962E-13	0.00000	.56525E-02	0.00000
.80987E-01	0.00000	.33401E-13	0.00000	-.24686E-13	0.00000	.18948E-12	0.00000	.10108E+00	0.00000
.80987E-01	0.00000	-.25338E-13	0.00000	.20313E-13	0.00000	-.13279E-13	0.00000	.10108E+00	0.00000
.19709E+00	0.00000	.21336E-13	0.00000	-.64075E-13	0.00000	-.29782E-13	0.00000	.18092E+00	0.00000
.19709E+00	0.00000	.56804E-14	0.00000	.58785E-13	0.00000	.13843E-12	0.00000	.18092E+00	0.00000
.53147E-01	0.00000	-.18477E-13	0.00000	.10364E-13	0.00000	-.60061E-13	0.00000	-.78565E-01	0.00000
.53147E-01	0.00000	-.35309E-13	0.00000	-.23193E-13	0.00000	.16366E-12	0.00000	-.78565E-01	0.00000
.38758E-01	0.00000	.45762E-15	0.00000	.40152E-13	0.00000	-.20644E-13	0.00000	-.69214E-02	0.00000
.38758E-01	0.00000	.14496E-13	0.00000	-.42523E-13	0.00000				
.38758E-01	0.00000	.83763E-16	0.00000	-.15098E-13	0.00000				
.38758E-01	0.00000	.14884E-13	0.00000	.62347E-14	0.00000	.24816E-13	0.00000	-.69214E-02	0.00000
.53147E-01	0.00000	-.19910E-13	0.00000	.58895E-13	0.00000	.56990E-13	0.00000	-.78565E-01	0.00000
.53147E-01	0.00000	-.37592E-13	0.00000	-.64154E-13	0.00000	-.79844E-13	0.00000	-.78565E-01	0.00000
.19709E+00	0.00000	.23141E-13	0.00000	-.66545E-13	0.00000	-.43857E-13	0.00000	.18092E+00	0.00000
.19709E+00	0.00000	.45062E-13	0.00000	.62992E-13	0.00000	-.10807E-13	0.00000	.18092E+00	0.00000
.80987E-01	0.00000	-.49209E-13	0.00000	.12200E-12	0.00000	.93063E-13	0.00000	-.10108E+00	0.00000
.80987E-01	0.00000	-.20195E-13	0.00000	-.10904E-12	0.00000	-.14971E-12	0.00000	-.10108E+00	0.00000
.24201E-01	0.00000	.29213E-13	0.00000	-.11643E-12	0.00000	.87710E-13	0.00000	.56525E-02	0.00000
.24201E-01	0.00000	-.67160E-16	0.00000	.10917E-12	0.00000	-.75165E-13	0.00000	.56525E-02	0.00000

NATURAL FREQUENCY= .163408E+04

TX		TY		TZ		RX		RY		RZ	
REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG	REAL	IMAG
.23957E-01	0.00000	-.10204E-12	0.00000	-.14352E-12	0.00000	-.19517E-12	0.00000	-.66426E-02	0.00000	-.22435E-01	0.00000
.23957E-01	0.00000	.66883E-13	0.00000	.99738E-13	0.00000	.67090E-14	0.00000	-.66426E-02	0.00000	.22435E-01	0.00000
.85015E-01	0.00000	.89799E-13	0.00000	.16965E-12	0.00000	-.28038E-12	0.00000	.10538E+00	0.00000	.27121E+00	0.00000
.85015E-01	0.00000	-.10425E-13	0.00000	-.12376E-12	0.00000	-.23822E-13	0.00000	.10538E+00	0.00000	-.27121E+00	0.00000
.19804E+00	0.00000	-.10460E-12	0.00000	-.10622E-12	0.00000	-.10781E-12	0.00000	-.18383E+00	0.00000	.41681E-01	0.00000
.19804E+00	0.00000	-.13932E-13	0.00000	-.12249E-12	0.00000	.57716E-13	0.00000	-.18383E+00	0.00000	-.41681E-01	0.00000
.50922E-01	0.00000	.37706E-13	0.00000	.14929E-12	0.00000	-.14421E-12	0.00000	.79750E-01	0.00000	-.27101E+00	0.00000
.50922E-01	0.00000	.27730E-13	0.00000	-.14379E-12	0.00000	.50361E-13	0.00000	.79750E-01	0.00000	.27101E+00	0.00000
.23470E-01	0.00000	-.87432E-14	0.00000	-.22271E-13	0.00000	-.19731E-13	0.00000	-.36446E-12	0.00000	-.23470E-01	0.00000
.23470E-01	0.00000	-.18966E-14	0.00000	.33522E-13	0.00000						
.23470E-01	0.00000	-.87192E-14	0.00000	-.65077E-13	0.00000						
.23470E-01	0.00000	.46264E-15	0.00000	.56681E-13	0.00000	.90222E-14	0.00000	.36940E-12	0.00000	.23470E-01	0.00000
.50922E-01	0.00000	.19965E-13	0.00000	.20823E-12	0.00000	.11821E-12	0.00000	-.79750E-01	0.00000	-.27101E+00	0.00000
.50922E-01	0.00000	-.40509E-13	0.00000	-.17561E-12	0.00000	-.42588E-13	0.00000	-.79750E-01	0.00000	.27101E+00	0.00000
.19804E+00	0.00000	.66847E-13	0.00000	-.75264E-13	0.00000	.30705E-12	0.00000	.18383E+00	0.00000	.41681E-01	0.00000
.19804E+00	0.00000	-.16632E-13	0.00000	.10525E-12	0.00000	-.82001E-13	0.00000	.18383E+00	0.00000	-.41681E-01	0.00000
.85015E-01	0.00000	-.15799E-13	0.00000	.71562E-13	0.00000	.12758E-12	0.00000	-.10538E+00	0.00000	.27121E+00	0.00000
.85015E-01	0.00000	-.21050E-13	0.00000	-.67020E-13	0.00000	-.11788E-12	0.00000	-.10538E+00	0.00000	-.27121E+00	0.00000
.23957E-01	0.00000	.25272E-13	0.00000	-.13646E-12	0.00000	.54469E-13	0.00000	.66426E-02	0.00000	-.22435E-01	0.00000
.23957E-01	0.00000	.59526E-14	0.00000	.99771E-13	0.00000	-.11030E-12	0.00000	.66426E-02	0.00000	.22435E-01	0.00000

NATURAL FREQUENCY= .162354E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.86194E-01	0.00000	.21174E-13	0.00000	-.13238E-12	0.00000	-.73945E-13	0.00000	-.75896E-01	0.00000	-.87172E-01	0.00000
-.86194E-01	0.00000	.51764E-13	0.00000	.59778E-13	0.00000	-.39820E-14	0.00000	-.75896E-01	0.00000	-.87172E-01	0.00000
-.15447E+00	0.00000	-.42919E-13	0.00000	.78838E-13	0.00000	-.22810E-12	0.00000	.13027E+00	0.00000	-.13766E+00	0.00000
.15447E+00	0.00000	-.43294E-13	0.00000	-.25668E-13	0.00000	.16477E-12	0.00000	.13027E+00	0.00000	.13766E+00	0.00000
-.12936E-01	0.00000	.29626E-13	0.00000	-.92686E-14	0.00000	-.65777E-13	0.00000	.18366E-02	0.00000	.37633E+00	0.00000
.12936E-01	0.00000	.46781E-13	0.00000	.38353E-13	0.00000	.17125E-12	0.00000	.18366E-02	0.00000	-.37633E+00	0.00000
.12184E+00	0.00000	.86327E-14	0.00000	.92764E-13	0.00000	-.43438E-13	0.00000	-.99490E-01	0.00000	-.41934E-01	0.00000
-.12184E+00	0.00000	-.20378E-13	0.00000	-.87031E-13	0.00000	.91820E-13	0.00000	-.99490E-01	0.00000	.41934E-01	0.00000
-.40626E-01	0.00000	.93308E-14	0.00000	-.64336E-14	0.00000	-.19193E-13	0.00000	.43274E-01	0.00000	.33905E-01	0.00000
.40626E-01	0.00000	.54332E-14	0.00000	.50958E-14	0.00000						
-.40626E-01	0.00000	.10039E-13	0.00000	-.42289E-13	0.00000						
.40626E-01	0.00000	.66525E-14	0.00000	.35032E-13	0.00000	.15077E-13	0.00000	.43274E-01	0.00000	-.33577E-01	0.00000
.12184E+00	0.00000	-.23978E-13	0.00000	-.43982E-13	0.00000	-.67393E-13	0.00000	-.99490E-01	0.00000	.41934E-01	0.00000
-.12184E+00	0.00000	.38212E-13	0.00000	-.85278E-13	0.00000	-.27253E-13	0.00000	-.99490E-01	0.00000	-.41934E-01	0.00000
-.12936E-01	0.00000	-.60074E-14	0.00000	.21022E-14	0.00000	.85043E-13	0.00000	.18366E-02	0.00000	-.37633E+00	0.00000
.12936E-01	0.00000	-.35897E-13	0.00000	-.30611E-13	0.00000	-.63586E-13	0.00000	.18366E-02	0.00000	.37633E+00	0.00000
-.15447E+00	0.00000	.13435E-13	0.00000	.62967E-13	0.00000	.18661E-12	0.00000	.13027E+00	0.00000	.13766E+00	0.00000
.15447E+00	0.00000	-.27203E-13	0.00000	-.73329E-13	0.00000	-.12471E-12	0.00000	.13027E+00	0.00000	-.13766E+00	0.00000
-.86194E-01	0.00000	-.28042E-13	0.00000	-.11901E-12	0.00000	.50644E-13	0.00000	-.75896E-01	0.00000	.87172E-01	0.00000
-.86194E-01	0.00000	-.11636E-13	0.00000	.90092E-13	0.00000	-.79575E-13	0.00000	-.75896E-01	0.00000	-.87172E-01	0.00000

NATURAL FREQUENCY= .166916E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.40043E-13	0.00000	-.46612E-13	0.00000	.20073E+00	0.00000	.13638E+00	0.00000	-.19115E-13	0.00000	-.99012E-13	0.00000
-.30786E-13	0.00000	.13526E-15	0.00000	-.20073E+00	0.00000	-.13638E+00	0.00000	-.34604E-13	0.00000	.10205E-12	0.00000
-.16528E-12	0.00000	.56536E-13	0.00000	-.13288E+00	0.00000	.25896E+00	0.00000	.16209E-12	0.00000	.38186E-13	0.00000
.16953E-12	0.00000	.23129E-13	0.00000	.13288E+00	0.00000	-.25896E+00	0.00000	.11487E-12	0.00000	-.62349E-13	0.00000
.59273E-13	0.00000	-.67892E-14	0.00000	.88700E-01	0.00000	.20901E+00	0.00000	-.56923E-13	0.00000	-.40198E-12	0.00000
-.76991E-13	0.00000	-.54901E-13	0.00000	-.88700E-01	0.00000	-.20901E+00	0.00000	-.39830E-13	0.00000	-.32243E-12	0.00000
.11763E-12	0.00000	.34978E-13	0.00000	-.22353E+00	0.00000	.47261E-01	0.00000	-.83454E-13	0.00000	-.24364E-12	0.00000
-.12112E-12	0.00000	-.37691E-14	0.00000	.22353E+00	0.00000	-.47261E-01	0.00000	-.72155E-13	0.00000	-.53088E-13	0.00000
-.41123E-13	0.00000	.30791E-14	0.00000	.66986E-01	0.00000	.49591E-12	0.00000	.17460E-13	0.00000	-.41358E-13	0.00000
.19912E-13	0.00000	-.20853E-14	0.00000	-.66986E-01	0.00000						
.55294E-13	0.00000	.33310E-13	0.00000	.66986E-01	0.00000						
-.85956E-13	0.00000	-.12625E-13	0.00000	-.66986E-01	0.00000	-.49338E-12	0.00000	-.36868E-14	0.00000	.36353E-13	0.00000
.13372E-13	0.00000	-.14256E-12	0.00000	-.22353E+00	0.00000	-.47261E-01	0.00000	-.48807E-13	0.00000	-.31448E-12	0.00000
-.12272E-13	0.00000	.46285E-13	0.00000	.22353E+00	0.00000	.47261E-01	0.00000	-.42773E-13	0.00000	-.47169E-12	0.00000
-.21761E-12	0.00000	-.53463E-13	0.00000	-.88700E-01	0.00000	-.20901E+00	0.00000	.19663E-12	0.00000	-.69948E-14	0.00000
.28016E-12	0.00000	.12707E-12	0.00000	-.88700E-01	0.00000	.20901E+00	0.00000	.18881E-12	0.00000	-.56205E-14	0.00000
-.15755E-12	0.00000	-.10870E-12	0.00000	.13288E+00	0.00000	-.25896E+00	0.00000	-.11735E-12	0.00000	.24319E-12	0.00000
-.13477E-12	0.00000	-.23317E-13	0.00000	.13288E+00	0.00000	.25896E+00	0.00000	-.11779E-12	0.00000	-.45845E-12	0.00000
-.25133E-13	0.00000	.27976E-13	0.00000	.20073E+00	0.00000	-.13638E+00	0.00000	-.62823E-14	0.00000	-.95014E-13	0.00000
-.19428E-13	0.00000	-.33187E-13	0.00000	-.20073E+00	0.00000	.13638E+00	0.00000	-.15372E-13	0.00000	.11863E-12	0.00000

NATURAL FREQUENCY= .169149E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.99159E-14	0.00000	.14813E-12	0.00000	-.18569E+00	0.00000	-.15685E+00	0.00000	.25872E-13	0.00000	-.25579E-13	0.00000
-.21773E-13	0.00000	-.21102E-13	0.00000	.18569E+00	0.00000	.15685E+00	0.00000	.24503E-15	0.00000	-.57203E-14	0.00000
.43116E-13	0.00000	-.27009E-12	0.00000	.22405E+00	0.00000	-.15618E+00	0.00000	-.81386E-13	0.00000	-.75640E-14	0.00000
-.12596E-14	0.00000	-.11075E-12	0.00000	-.22405E+00	0.00000	.15618E+00	0.00000	-.21376E-13	0.00000	-.92379E-14	0.00000
-.31168E-13	0.00000	.70381E-13	0.00000	-.91327E-01	0.00000	-.98778E-02	0.00000	.32593E-13	0.00000	-.22336E-14	0.00000
.56238E-13	0.00000	.32470E-12	0.00000	.91327E-01	0.00000	.98778E-02	0.00000	.26146E-13	0.00000	-.94758E-13	0.00000
.90647E-13	0.00000	-.22737E-12	0.00000	.23020E+00	0.00000	.12525E+00	0.00000	.13897E-13	0.00000	.22086E-12	0.00000
-.16003E-13	0.00000	-.47878E-13	0.00000	-.23020E+00	0.00000	-.12525E+00	0.00000	-.19505E-13	0.00000	-.14219E-12	0.00000
.29014E-13	0.00000	.64455E-13	0.00000	-.16721E+00	0.00000	.16721E+00	0.00000	-.15752E-13	0.00000	.25970E-13	0.00000
.35515E-14	0.00000	-.65627E-13	0.00000	.16721E+00	0.00000	-.16721E+00	0.00000	-.20745E-13	0.00000	-.67436E-14	0.00000
-.14869E-13	0.00000	.65232E-13	0.00000	-.16721E+00	0.00000	.16721E+00	0.00000	-.55039E-13	0.00000	-.15806E-12	0.00000
.38357E-14	0.00000	-.67545E-13	0.00000	.23020E+00	0.00000	-.12525E+00	0.00000	-.43432E-13	0.00000	.63458E-13	0.00000
.32175E-13	0.00000	.23404E-13	0.00000	-.23020E+00	0.00000	.12525E+00	0.00000	-.87420E-13	0.00000	-.46287E-13	0.00000
-.42257E-13	0.00000	.29794E-12	0.00000	.23020E+00	0.00000	-.12525E+00	0.00000	.83350E-13	0.00000	-.51360E-13	0.00000
.84393E-13	0.00000	-.41583E-12	0.00000	-.91327E-01	0.00000	-.98778E-02	0.00000	.72679E-13	0.00000	.24333E-12	0.00000
-.75628E-13	0.00000	-.40987E-13	0.00000	.91327E-01	0.00000	.98778E-02	0.00000	.68923E-13	0.00000	-.26040E-12	0.00000
-.10912E-12	0.00000	.12354E-12	0.00000	-.22405E+00	0.00000	-.15618E+00	0.00000	-.59715E-13	0.00000	.64024E-13	0.00000
.65750E-13	0.00000	.33470E-12	0.00000	.22405E+00	0.00000	.15618E+00	0.00000	-.61503E-13	0.00000	-.10502E-12	0.00000
.86317E-13	0.00000	-.24437E-13	0.00000	-.18569E+00	0.00000	.15685E+00	0.00000	-.61503E-13	0.00000	-.10502E-12	0.00000
-.96550E-13	0.00000	-.14656E-12	0.00000	-.18569E+00	0.00000	.15685E+00	0.00000				

H-85

OF POOR QUALITY

NATURAL FREQUENCY = .171962E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.64782E-13	0.00000	-.59669E-01	0.00000	.38858E-02	0.00000	-.57833E-01	0.00000	.31520E-13	0.00000	-.15009E-13	0.00000
.52722E-13	0.00000	.59669E-01	0.00000	.38858E-02	0.00000	-.57833E-01	0.00000	-.16873E-13	0.00000	-.57341E-13	0.00000
.29849E-13	0.00000	.65336E-01	0.00000	.47754E-01	0.00000	-.14164E+00	0.00000	-.11376E-13	0.00000	.15319E-12	0.00000
-.18122E-13	0.00000	-.65336E-01	0.00000	.47754E-01	0.00000	.14164E+00	0.00000	.19681E-14	0.00000	-.10661E-12	0.00000
.63699E-13	0.00000	.10522E+00	0.00000	.13756E-01	0.00000	.35512E+00	0.00000	-.69798E-13	0.00000	-.22015E-14	0.00000
-.58011E-13	0.00000	-.10522E+00	0.00000	.13756E-01	0.00000	.35512E+00	0.00000	-.46421E-13	0.00000	.42465E-13	0.00000
.67613E-13	0.00000	.91973E-01	0.00000	-.41698E-01	0.00000	-.26157E+00	0.00000	.44209E-13	0.00000	-.13467E-12	0.00000
.29400E-13	0.00000	-.91973E-01	0.00000	-.41698E-01	0.00000	-.26157E+00	0.00000	-.14060E-13	0.00000	.14062E-12	0.00000
-.42573E-13	0.00000	.30660E-12	0.00000	-.23698E-01	0.00000	.52615E-13	0.00000	.13254E-13	0.00000	-.13807E-13	0.00000
.11906E-14	0.00000	-.28101E-12	0.00000	-.23698E-01	0.00000						
.32437E-13	0.00000	.29847E-12	0.00000	-.23698E-01	0.00000						
.21121E-13	0.00000	-.28112E-12	0.00000	-.23698E-01	0.00000	-.44212E-13	0.00000	.14571E-13	0.00000	-.20054E-14	0.00000
.47963E-13	0.00000	-.91973E-01	0.00000	-.41698E-01	0.00000	-.26157E+00	0.00000	-.62109E-13	0.00000	.40815E-13	0.00000
.69389E-13	0.00000	.91973E-01	0.00000	-.41698E-01	0.00000	-.26157E+00	0.00000	-.67047E-13	0.00000	-.21827E-13	0.00000
.42131E-16	0.00000	-.10522E+00	0.00000	.13756E-01	0.00000	.35512E+00	0.00000	-.99189E-14	0.00000	-.46995E-13	0.00000
.13397E-13	0.00000	.10522E+00	0.00000	.13756E-01	0.00000	.35512E+00	0.00000	-.80908E-14	0.00000	.75258E-13	0.00000
.81698E-14	0.00000	-.65336E-01	0.00000	.47754E-01	0.00000	-.14164E+00	0.00000	-.65321E-14	0.00000	-.12983E-13	0.00000
.24583E-13	0.00000	.65336E-01	0.00000	.47754E-01	0.00000	-.14164E+00	0.00000	-.15401E-13	0.00000	.36498E-13	0.00000
.55465E-14	0.00000	.59669E-01	0.00000	.38858E-02	0.00000	.57833E-01	0.00000	.19208E-14	0.00000	-.11118E-13	0.00000
.32354E-13	0.00000	-.59669E-01	0.00000	.38858E-02	0.00000	-.57833E-01	0.00000	-.45615E-14	0.00000	-.19541E-13	0.00000

NATURAL FREQUENCY= .165778E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.39537E-13	0.00000	.58657E-14	0.00000	.89227E-02	0.00000	-.55711E-01	0.00000	-.28313E-11	0.00000	-.44428E-13	0.00000
-.45087E-13	0.00000	-.76782E-14	0.00000	-.89227E-02	0.00000	.55711E-01	0.00000	-.42280E-13	0.00000	.77638E-13	0.00000
-.41879E-13	0.00000	-.15967E-13	0.00000	.13752E+00	0.00000	.21554E+00	0.00000	.31311E-13	0.00000	.84650E-14	0.00000
.35091E-13	0.00000	.15909E-14	0.00000	-.13752E+00	0.00000	-.21554E+00	0.00000	.44248E-13	0.00000	.44680E-13	0.00000
.19725E-13	0.00000	.29252E-13	0.00000	-.63270E-01	0.00000	.96220E-01	0.00000	-.46766E-14	0.00000	.18427E-13	0.00000
-.10344E-14	0.00000	.14847E-14	0.00000	-.63270E-01	0.00000	-.96220E-01	0.00000	-.24896E-13	0.00000	-.36467E-14	0.00000
-.47390E-14	0.00000	-.26806E-13	0.00000	.10046E+00	0.00000	.35862E+00	0.00000	.40558E-13	0.00000	.10115E-12	0.00000
.58121E-13	0.00000	-.15419E-13	0.00000	-.10046E+00	0.00000	-.35862E+00	0.00000	.48162E-13	0.00000	-.61001E-13	0.00000
-.68310E-14	0.00000	-.26216E-13	0.00000	-.18364E+00	0.00000	-.45213E-11	0.00000	.73340E-14	0.00000	.95410E-14	0.00000
-.21050E-13	0.00000	.25357E-13	0.00000	.18364E+00	0.00000						
.37958E-14	0.00000	-.75758E-14	0.00000	-.18364E+00	0.00000						
-.67262E-14	0.00000	-.92741E-14	0.00000	-.18364E+00	0.00000	.45018E-11	0.00000	-.57232E-14	0.00000	.92630E-14	0.00000
.53124E-13	0.00000	.40584E-13	0.00000	.10046E+00	0.00000	-.35862E+00	0.00000	-.67844E-13	0.00000	-.28478E-13	0.00000
-.98647E-14	0.00000	.37091E-13	0.00000	-.10046E+00	0.00000	.35862E+00	0.00000	-.70749E-13	0.00000	.49841E-13	0.00000
-.68407E-13	0.00000	-.51149E-13	0.00000	-.63270E-01	0.00000	-.96220E-01	0.00000	.10255E-12	0.00000	.41670E-13	0.00000
.85030E-13	0.00000	-.26653E-13	0.00000	.63270E-01	0.00000	.96220E-01	0.00000	-.99709E-13	0.00000	-.31362E-13	0.00000
-.87428E-13	0.00000	.31750E-13	0.00000	.13752E+00	0.00000	-.21554E+00	0.00000	-.78602E-13	0.00000	.52821E-13	0.00000
-.69171E-13	0.00000	-.13616E-13	0.00000	-.13752E+00	0.00000	.21554E+00	0.00000	-.67950E-13	0.00000	-.17652E-12	0.00000
-.28295E-13	0.00000	-.44400E-14	0.00000	.89227E-02	0.00000	.55711E-01	0.00000	.27278E-13	0.00000	-.16948E-13	0.00000
-.23766E-13	0.00000	-.20596E-13	0.00000	-.89227E-02	0.00000	-.55711E-01	0.00000	.35668E-13	0.00000	.22772E-13	0.00000

NATURAL FREQUENCY= .172450E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.35762E-13	0.00000	.63788E-01	0.00000	-.55062E-02	0.00000	.60589E-01	0.00000	-.25238E-13	0.00000	-.29061E-13	0.00000
-.92346E-14	0.00000	-.63788E-01	0.00000	-.55062E-02	0.00000	.60589E-01	0.00000	.91181E-14	0.00000	.36514E-13	0.00000
-.61676E-13	0.00000	-.71894E-01	0.00000	-.51147E-01	0.00000	-.16315E+00	0.00000	.70166E-13	0.00000	-.50582E-13	0.00000
.61489E-13	0.00000	.71894E-01	0.00000	-.51147E-01	0.00000	-.16315E+00	0.00000	.29026E-13	0.00000	.32597E-13	0.00000
-.45755E-13	0.00000	-.11734E+00	0.00000	-.40370E-02	0.00000	-.37534E+00	0.00000	-.33318E-13	0.00000	.71233E-13	0.00000
.13004E-13	0.00000	.11734E+00	0.00000	-.40370E-02	0.00000	-.37534E+00	0.00000	-.49363E-13	0.00000	-.12240E-12	0.00000
.18243E-13	0.00000	-.87598E-01	0.00000	.45239E-01	0.00000	-.20271E+00	0.00000	-.61377E-14	0.00000	.51061E-13	0.00000
-.51303E-14	0.00000	.87598E-01	0.00000	.45239E-01	0.00000	-.20271E+00	0.00000	-.11771E-13	0.00000	-.18757E-13	0.00000
.17764E-13	0.00000	.49494E-01	0.00000	.11234E-02	0.00000	-.11234E-02	0.00000	-.55885E-14	0.00000	-.10933E-13	0.00000
.60560E-14	0.00000	-.49494E-01	0.00000	.11234E-02	0.00000						
-.15478E-13	0.00000	.49494E-01	0.00000	-.11234E-02	0.00000						
-.31631E-13	0.00000	-.49494E-01	0.00000	-.11234E-02	0.00000	-.11234E-02	0.00000	-.21784E-13	0.00000	.16396E-13	0.00000
.21048E-13	0.00000	-.87598E-01	0.00000	-.45239E-01	0.00000	-.20271E+00	0.00000	.14708E-13	0.00000	-.70270E-13	0.00000
.33762E-13	0.00000	.87598E-01	0.00000	-.45239E-01	0.00000	-.20271E+00	0.00000	.17227E-13	0.00000	.83839E-13	0.00000
-.38021E-13	0.00000	-.11734E+00	0.00000	.40370E-02	0.00000	-.37534E+00	0.00000	.50168E-13	0.00000	.16542E-12	0.00000
.56478E-13	0.00000	.11734E+00	0.00000	.40370E-02	0.00000	-.37534E+00	0.00000	.46628E-13	0.00000	.22145E-12	0.00000
.79325E-13	0.00000	-.71894E-01	0.00000	.51147E-01	0.00000	-.16315E+00	0.00000	-.24239E-13	0.00000	.49940E-13	0.00000
-.40167E-13	0.00000	.71894E-01	0.00000	.51147E-01	0.00000	-.16315E+00	0.00000	-.13389E-13	0.00000	-.71237E-13	0.00000
-.91183E-14	0.00000	.63788E-01	0.00000	.55062E-02	0.00000	.60589E-01	0.00000	-.15630E-13	0.00000	-.32298E-14	0.00000
.19759E-13	0.00000	-.63788E-01	0.00000	-.55062E-02	0.00000	.60589E-01	0.00000	-.51663E-14	0.00000	.64890E-13	0.00000

NATURAL FREQUENCY* .175473E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.28824E-13	0.00000	.15071E-12	0.00000	-.29782E-01	0.00000	.29396E-01	0.00000	-.10144E-13	0.00000	.16366E-13	0.00000
.11034E-13	0.00000	.12236E-12	0.00000	.29782E-01	0.00000	-.29396E-01	0.00000	.94157E-13	0.00000	-.10427E-13	0.00000
-.11922E-13	0.00000	-.35798E-12	0.00000	-.12010E+00	0.00000	.26002E+00	0.00000	-.35084E-13	0.00000	.29461E-13	0.00000
-.18350E-13	0.00000	-.32047E-12	0.00000	.12010E+00	0.00000	.26002E+00	0.00000	-.36455E-13	0.00000	-.43854E-13	0.00000
.20318E-13	0.00000	.35486E-12	0.00000	.26706E+00	0.00000	-.58912E-01	0.00000	.15023E-13	0.00000	-.61713E-13	0.00000
-.14101E-13	0.00000	.41408E-12	0.00000	-.26706E+00	0.00000	.58912E-01	0.00000	-.11525E-13	0.00000	.31797E-13	0.00000
-.52327E-13	0.00000	-.28245E-12	0.00000	-.53169E-01	0.00000	.29069E+00	0.00000	.12460E-13	0.00000	.38906E-13	0.00000
.92081E-14	0.00000	-.22278E-12	0.00000	.53169E-01	0.00000	-.29069E+00	0.00000	.12234E-13	0.00000	-.53955E-14	0.00000
.26138E-13	0.00000	.38847E-13	0.00000	-.64007E-01	0.00000	.42409E-12	0.00000	-.30524E-13	0.00000	-.13225E-14	0.00000
.29242E-13	0.00000	.17804E-13	0.00000	.64007E-01	0.00000						
-.52948E-14	0.00000	-.57916E-13	0.00000	-.64007E-01	0.00000						
-.16618E-13	0.00000	.24648E-13	0.00000	.64007E-01	0.00000	-.42646E-12	0.00000	-.33151E-13	0.00000	.29351E-13	0.00000
-.40242E-14	0.00000	.82416E-13	0.00000	-.53169E-01	0.00000	.29069E+00	0.00000	-.30146E-13	0.00000	-.11136E-12	0.00000
-.22479E-13	0.00000	.86731E-13	0.00000	.53169E-01	0.00000	.29069E+00	0.00000	-.25543E-13	0.00000	.11208E-12	0.00000
-.83073E-13	0.00000	-.14351E-12	0.00000	.26706E+00	0.00000	-.58912E-01	0.00000	.87906E-13	0.00000	-.48973E-13	0.00000
.64871E-13	0.00000	-.17902E-12	0.00000	-.26706E+00	0.00000	.58912E-01	0.00000	.89387E-13	0.00000	-.68353E-13	0.00000
.42713E-13	0.00000	.12570E-12	0.00000	-.12010E+00	0.00000	.26002E+00	0.00000	-.46540E-13	0.00000	.89967E-13	0.00000
-.49212E-13	0.00000	.16167E-12	0.00000	.12010E+00	0.00000	-.26002E+00	0.00000	-.44498E-13	0.00000	-.79439E-13	0.00000
.31094E-13	0.00000	-.47538E-13	0.00000	-.29782E-01	0.00000	-.29396E-01	0.00000	.31888E-13	0.00000	-.32449E-13	0.00000
-.36234E-13	0.00000	-.71520E-13	0.00000	.29782E-01	0.00000	.29396E-01	0.00000	.21771E-13	0.00000	-.16930E-13	0.00000

NATURAL FREQUENCY= .176161E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.27558E-13	0.00000	.38794E-12	0.00000	-.10676E+00	0.00000	-.93938E-01	0.00000	.74332E-13	0.00000	.39106E-13	0.00000
-.43736E-13	0.00000	.34887E-12	0.00000	.10676E+00	0.00000	.93938E-01	0.00000	.50146E-13	0.00000	.73028E-14	0.00000
.50642E-13	0.00000	-.95026E-12	0.00000	.19150E+00	0.00000	-.11318E+00	0.00000	-.63305E-13	0.00000	-.55914E-13	0.00000
-.91927E-13	0.00000	-.90862E-12	0.00000	-.19150E+00	0.00000	.11318E+00	0.00000	-.19503E-13	0.00000	.96118E-13	0.00000
-.78733E-13	0.00000	.11474E-11	0.00000	.21885E-01	0.00000	.34474E+00	0.00000	.66824E-13	0.00000	-.39964E-13	0.00000
.85691E-13	0.00000	.11847E-11	0.00000	-.21885E-01	0.00000	-.34474E+00	0.00000	.71964E-13	0.00000	.40988E-14	0.00000
.38332E-13	0.00000	-.96453E-12	0.00000	-.20542E+00	0.00000	-.67259E-01	0.00000	-.44504E-13	0.00000	.76387E-13	0.00000
-.18813E-13	0.00000	-.94232E-12	0.00000	.20542E+00	0.00000	.67259E-01	0.00000	-.77048E-13	0.00000	-.33121E-13	0.00000
-.64522E-13	0.00000	.39249E-12	0.00000	.97480E-01	0.00000	-.97480E-01	0.00000	-.13435E-13	0.00000	-.18623E-13	0.00000
.50629E-13	0.00000	.38696E-12	0.00000	-.97480E-01	0.00000	.97480E-01	0.00000				
.29910E-14	0.00000	.36272E-12	0.00000	-.97480E-01	0.00000						
-.10884E-13	0.00000	.38651E-12	0.00000	.97480E-01	0.00000	.97480E-01	0.00000	-.62331E-14	0.00000	.19747E-13	0.00000
-.76588E-14	0.00000	-.10562E-11	0.00000	.20542E+00	0.00000	-.67259E-01	0.00000	.23513E-14	0.00000	-.31173E-13	0.00000
-.38120E-14	0.00000	-.10673E-11	0.00000	-.20542E+00	0.00000	.67259E-01	0.00000	.73090E-14	0.00000	.39906E-13	0.00000
-.19065E-13	0.00000	.13360E-11	0.00000	-.21885E-01	0.00000	.34474E+00	0.00000	.16610E-13	0.00000	.45052E-13	0.00000
.10377E-13	0.00000	.13016E-11	0.00000	.21885E-01	0.00000	-.34474E+00	0.00000	-.13429E-13	0.00000	.23979E-14	0.00000
.13751E-13	0.00000	-.10334E-11	0.00000	-.19150E+00	0.00000	-.11318E+00	0.00000	.39917E-13	0.00000	.22817E-13	0.00000
.15667E-13	0.00000	-.16899E-11	0.00000	.19150E+00	0.00000	.11318E+00	0.00000	.34241E-13	0.00000	-.76861E-13	0.00000
-.19155E-14	0.00000	.40772E-12	0.00000	.10676E+00	0.00000	-.93938E-01	0.00000	-.22316E-13	0.00000	-.42877E-13	0.00000
.39777E-14	0.00000	.42457E-12	0.00000	-.10676E+00	0.00000	.93938E-01	0.00000	-.17621E-13	0.00000	-.29199E-14	0.00000

H-90

ORIGINAL PAGE IS
OF POOR
QUALITY

NATURAL FREQUENCY= .177482E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.11361E-13	0.00000	.97720E-01	0.00000	.35034E-12	0.00000	.27477E-12	0.00000	.15709E-13	0.00000	.11133E-13	0.00000
.14696E-13	0.00000	.97720E-01	0.00000	-.33634E-12	0.00000	-.23400E-12	0.00000	.31526E-13	0.00000	-.23435E-13	0.00000
-.74329E-13	0.00000	-.25583E+00	0.00000	-.51410E-12	0.00000	.54268E-12	0.00000	-.48110E-14	0.00000	.37176E-13	0.00000
-.16461E-13	0.00000	-.25583E+00	0.00000	.49434E-12	0.00000	-.64467E-12	0.00000	-.59188E-14	0.00000	-.79344E-13	0.00000
-.75713E-14	0.00000	.31623E+00	0.00000	-.33466E-12	0.00000	-.11768E-11	0.00000	-.57276E-13	0.00000	-.13799E-13	0.00000
-.77253E-13	0.00000	.31623E+00	0.00000	.34521E-12	0.00000	.10427E-11	0.00000	-.45677E-13	0.00000	-.23228E-13	0.00000
-.87278E-13	0.00000	-.25583E+00	0.00000	-.84783E-12	0.00000	-.14533E-14	0.00000	.25266E-13	0.00000	-.87978E-15	0.00000
.11632E-13	0.00000	-.25583E+00	0.00000	-.83673E-12	0.00000	-.41269E-14	0.00000	.10390E-13	0.00000	-.14694E-13	0.00000
.92663E-14	0.00000	.97720E-01	0.00000	-.35180E-12	0.00000	.52653E-12	0.00000	-.47603E-14	0.00000	.65727E-14	0.00000
.29957E-14	0.00000	.97720E-01	0.00000	.33875E-12	0.00000						
-.25094E-13	0.00000	.97720E-01	0.00000	.71015E-12	0.00000						
.10186E-13	0.00000	.97720E-01	0.00000	-.71404E-12	0.00000	-.52596E-12	0.00000	-.63652E-14	0.00000	-.11412E-13	0.00000
-.43543E-13	0.00000	-.25583E+00	0.00000	-.12677E-11	0.00000	.91010E-12	0.00000	-.10723E-13	0.00000	.22769E-13	0.00000
-.23902E-13	0.00000	-.25583E+00	0.00000	.12704E-11	0.00000	-.93017E-12	0.00000	-.16112E-13	0.00000	-.26459E-13	0.00000
.18930E-13	0.00000	.31623E+00	0.00000	-.35036E-12	0.00000	-.26024E-11	0.00000	-.49263E-14	0.00000	-.54375E-13	0.00000
-.40663E-13	0.00000	.31623E+00	0.00000	.35899E-12	0.00000	.25303E-11	0.00000	-.10663E-13	0.00000	.69668E-13	0.00000
-.25461E-13	0.00000	-.25583E+00	0.00000	.16282E-11	0.00000	.34440E-12	0.00000	.17370E-13	0.00000	-.82193E-14	0.00000
-.87574E-14	0.00000	-.25583E+00	0.00000	-.16123E-11	0.00000	-.33046E-12	0.00000	-.14295E-13	0.00000	.79196E-14	0.00000
.22606E-13	0.00000	.97720E-01	0.00000	-.72953E-12	0.00000	.74872E-12	0.00000	-.43089E-13	0.00000	-.31574E-15	0.00000
.37076E-13	0.00000	.97720E-01	0.00000	.72987E-12	0.00000	-.74194E-12	0.00000	-.34275E-13	0.00000	-.18332E-13	0.00000

I6-H

NATURAL FREQUENCY= .175038E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.16327E-13	0.00000	.61643E-12	0.00000	.42023E-01	0.00000	-.21887E-01	0.00000	.21167E-13	0.00000	.66223E-14	0.00000
-.16868E-13	0.00000	.52426E-12	0.00000	-.42023E-01	0.00000	.21887E-01	0.00000	.29836E-13	0.00000	-.31667E-13	0.00000
.44513E-13	0.00000	-.14993E-11	0.00000	.10789E+00	0.00000	.28400E+00	0.00000	-.19384E-13	0.00000	.52489E-14	0.00000
-.27459E-13	0.00000	-.13812E-11	0.00000	-.10789E+00	0.00000	-.28400E+00	0.00000	-.15561E-13	0.00000	.12403E-13	0.00000
-.26446E-13	0.00000	.15465E-11	0.00000	-.27426E+00	0.00000	.33926E-01	0.00000	-.87627E-14	0.00000	-.86138E-13	0.00000
.62073E-14	0.00000	.17649E-11	0.00000	.27426E+00	0.00000	-.33926E-01	0.00000	-.24688E-14	0.00000	.12987E-12	0.00000
-.16524E-14	0.00000	-.12110E-11	0.00000	.69997E-01	0.00000	-.27041E+00	0.00000	.94120E-14	0.00000	-.64577E-13	0.00000
.60665E-13	0.00000	-.10137E-11	0.00000	-.69997E-01	0.00000	.27041E+00	0.00000	.11538E-13	0.00000	.28337E-13	0.00000
-.17931E-13	0.00000	.65619E-13	0.00000	.26724E-01	0.00000	-.26724E-01	0.00000	-.10421E-13	0.00000	-.90932E-14	0.00000
-.20687E-14	0.00000	.92241E-14	0.00000	-.26724E-01	0.00000						
.42529E-14	0.00000	.52578E-13	0.00000	-.26724E-01	0.00000						
-.31874E-13	0.00000	.12764E-13	0.00000	.26724E-01	0.00000	.26724E-01	0.00000	.78489E-14	0.00000	-.11442E-13	0.00000
.13883E-13	0.00000	-.10216E-11	0.00000	-.69997E-01	0.00000	-.27041E+00	0.00000	-.14985E-13	0.00000	.38805E-13	0.00000
.58711E-14	0.00000	.89924E-12	0.00000	.69997E-01	0.00000	.27041E+00	0.00000	-.15968E-13	0.00000	-.58560E-13	0.00000
-.71982E-14	0.00000	-.14701E-11	0.00000	.27426E+00	0.00000	-.33926E-01	0.00000	-.24005E-13	0.00000	-.63486E-13	0.00000
-.23142E-13	0.00000	-.14898E-11	0.00000	-.27426E+00	0.00000	.33926E-01	0.00000	-.27339E-13	0.00000	.11051E-12	0.00000
.21233E-13	0.00000	.13214E-11	0.00000	.10789E+00	0.00000	.28400E+00	0.00000	.61850E-14	0.00000	-.50866E-13	0.00000
.58050E-13	0.00000	.13229E-11	0.00000	-.10789E+00	0.00000	-.28400E+00	0.00000	.64978E-14	0.00000	.96451E-13	0.00000
-.17852E-13	0.00000	-.51840E-12	0.00000	-.42023E-01	0.00000	-.21887E-01	0.00000	.15331E-13	0.00000	.79219E-14	0.00000
.15053E-13	0.00000	-.51872E-12	0.00000	.42023E-01	0.00000	.21887E-01	0.00000	-.20663E-13	0.00000	.22104E-13	0.00000

H-92

27

NATURAL FREQUENCY= -175288E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.81494E-13	0.00000	.25529E-11	0.00000	-.13115E+00	0.00000	-.11043E+00	0.00000	-.43717E-15	0.00000	.69929E-13	0.00000
.33647E-13	0.00000	.26170E-11	0.00000	.13115E+00	0.00000	.11043E+00	0.00000	-.96037E-14	0.00000	.50801E-13	0.00000
-.55177E-13	0.00000	-.66260E-11	0.00000	.21182E+00	0.00000	-.15345E+00	0.00000	-.53511E-14	0.00000	.11835E-13	0.00000
-.14982E-13	0.00000	-.65817E-11	0.00000	-.21182E+00	0.00000	.15345E+00	0.00000	.34696E-13	0.00000	-.45347E-13	0.00000
-.55682E-13	0.00000	.74664E-11	0.00000	.33248E-01	0.00000	.34817E+00	0.00000	-.95754E-13	0.00000	-.99171E-13	0.00000
-.14305E-13	0.00000	.75123E-11	0.00000	-.33248E-01	0.00000	-.34817E+00	0.00000	-.88480E-13	0.00000	.55774E-13	0.00000
-.47152E-13	0.00000	-.46402E-11	0.00000	-.16439E+00	0.00000	-.18661E-01	0.00000	.37147E-13	0.00000	.66091E-13	0.00000
.11217E-12	0.00000	-.47918E-11	0.00000	.16439E+00	0.00000	.18661E-01	0.00000	.56153E-13	0.00000	-.37714E-13	0.00000
.17398E-13	0.00000	-.11127E-12	0.00000	.50464E-01	0.00000	.60716E-12	0.00000	.18750E-13	0.00000	.22449E-13	0.00000
.75111E-14	0.00000	-.13514E-12	0.00000	-.50464E-01	0.00000						
-.74833E-14	0.00000	-.11627E-12	0.00000	.50464E-01	0.00000						
-.26913E-14	0.00000	-.13491E-12	0.00000	-.50464E-01	0.00000	-.60001E-12	0.00000	.23678E-13	0.00000	.34924E-14	0.00000
-.63749E-13	0.00000	.54730E-11	0.00000	-.16439E+00	0.00000	.18661E-01	0.00000	-.44803E-13	0.00000	-.12436E-13	0.00000
-.54482E-13	0.00000	-.54589E-11	0.00000	.16439E+00	0.00000	-.18661E-01	0.00000	-.41134E-13	0.00000	.58191E-13	0.00000
-.72151E-13	0.00000	-.82842E-11	0.00000	.33248E-01	0.00000	-.34817E+00	0.00000	.10086E-13	0.00000	.10548E-12	0.00000
.30269E-13	0.00000	-.82911E-11	0.00000	-.33248E-01	0.00000	.34817E+00	0.00000	.13201E-13	0.00000	-.15431E-12	0.00000
-.25832E-14	0.00000	.72312E-11	0.00000	.21182E+00	0.00000	.15345E+00	0.00000	.38343E-13	0.00000	.16567E-12	0.00000
-.27117E-13	0.00000	.72730E-11	0.00000	-.21182E+00	0.00000	-.15345E+00	0.00000	.24458E-13	0.00000	-.14763E-12	0.00000
.95821E-13	0.00000	-.28424E-11	0.00000	-.13115E+00	0.00000	.11043E+00	0.00000	-.15202E-13	0.00000	.37318E-13	0.00000
-.90467E-13	0.00000	-.28740E-11	0.00000	.13115E+00	0.00000	-.11043E+00	0.00000	-.20633E-13	0.00000	-.14363E-13	0.00000

H-93

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

NATURAL FREQUENCY = .182921E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.16719E-13	0.00000	.10317E+00	0.00000	-.17593E-01	0.00000	.55701E-01	0.00000	.57644E-14	0.00000	.24368E-13	0.00000
.19294E-13	0.00000	-.10317E+00	0.00000	-.17593E-01	0.00000	.55701E-01	0.00000	-.55669E-14	0.00000	-.21194E-13	0.00000
.16441E-13	0.00000	-.18833E+00	0.00000	-.17558E-01	0.00000	-.26026E+00	0.00000	-.34911E-13	0.00000	.32229E-13	0.00000
.35303E-13	0.00000	.18833E+00	0.00000	-.17558E-01	0.00000	-.26026E+00	0.00000	-.45818E-13	0.00000	-.13802E-13	0.00000
.11147E-13	0.00000	-.52531E-01	0.00000	.57659E-01	0.00000	-.73297E-01	0.00000	.59598E-14	0.00000	-.19386E-13	0.00000
.55709E-14	0.00000	.52531E-01	0.00000	.57659E-01	0.00000	-.73297E-01	0.00000	-.49590E-14	0.00000	.19740E-13	0.00000
.52947E-13	0.00000	.20199E+00	0.00000	.44205E-02	0.00000	.28184E+00	0.00000	-.95729E-15	0.00000	.79839E-13	0.00000
.23225E-13	0.00000	-.20199E+00	0.00000	.44205E-02	0.00000	.28184E+00	0.00000	.26738E-13	0.00000	-.81227E-14	0.00000
.13457E-13	0.00000	.17945E-12	0.00000	-.26930E-01	0.00000	-.11403E-12	0.00000	-.17945E-13	0.00000	-.10685E-13	0.00000
.97371E-14	0.00000	-.20465E-12	0.00000	-.26930E-01	0.00000						
.34983E-13	0.00000	.17954E-12	0.00000	-.26930E-01	0.00000						
.98991E-14	0.00000	-.20465E-12	0.00000	-.26930E-01	0.00000	-.95334E-13	0.00000	-.20051E-13	0.00000	-.11016E-13	0.00000
.27512E-13	0.00000	-.20199E+00	0.00000	.44205E-02	0.00000	-.28184E+00	0.00000	.13149E-13	0.00000	-.56601E-13	0.00000
.31941E-13	0.00000	.20199E+00	0.00000	.44205E-02	0.00000	-.28184E+00	0.00000	.14728E-13	0.00000	.57290E-13	0.00000
.19905E-13	0.00000	-.52531E-01	0.00000	.57659E-01	0.00000	.73297E-01	0.00000	-.60193E-14	0.00000	.11491E-12	0.00000
.16463E-13	0.00000	.52531E-01	0.00000	.57659E-01	0.00000	-.73297E-01	0.00000	.13795E-14	0.00000	-.62168E-13	0.00000
.18248E-13	0.00000	.18833E+00	0.00000	-.17558E-01	0.00000	.26026E+00	0.00000	.43922E-13	0.00000	.13636E-13	0.00000
.15249E-13	0.00000	-.18833E+00	0.00000	-.17558E-01	0.00000	.26026E+00	0.00000	.32716E-13	0.00000	-.37266E-13	0.00000
.26209E-13	0.00000	-.10317E+00	0.00000	-.17593E-01	0.00000	-.55701E-01	0.00000	-.33396E-13	0.00000	.33477E-13	0.00000
-.73293E-13	0.00000	.10317E+00	0.00000	-.17593E-01	0.00000	-.55701E-01	0.00000	-.33531E-13	0.00000	-.22963E-13	0.00000

H-94

110 00000 0.00000 0.00000

NATURAL FREQUENCY= .175361E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
.14586E-13	0.00000	-.11401E+00	0.00000	-.29734E-11	0.00000	-.26070E-11	0.00000	.32858E-13	0.00000	-.24184E-14	0.00000
-.20325E-13	0.00000	-.11401E+00	0.00000	.29423E-11	0.00000	.26583E-11	0.00000	.11557E-13	0.00000	.17727E-13	0.00000
-.21844E-13	0.00000	.28868E+00	0.00000	.51513E-11	0.00000	-.29084E-11	0.00000	.83654E-14	0.00000	-.23860E-13	0.00000
-.42019E-14	0.00000	.28868E+00	0.00000	-.52362E-11	0.00000	.26425E-11	0.00000	.21873E-13	0.00000	-.22078E-14	0.00000
-.18394E-13	0.00000	-.32827E+00	0.00000	-.32073E-13	0.00000	.75447E-11	0.00000	.22752E-13	0.00000	-.52263E-13	0.00000
.16002E-13	0.00000	-.32827E+00	0.00000	.36890E-13	0.00000	-.81515E-11	0.00000	.13010E-13	0.00000	-.24131E-13	0.00000
.40531E-14	0.00000	.21426E+00	0.00000	-.32675E-11	0.00000	-.11587E-11	0.00000	-.12271E-13	0.00000	.37373E-15	0.00000
.32221E-13	0.00000	.21426E+00	0.00000	.33406E-11	0.00000	.74230E-12	0.00000	-.61752E-14	0.00000	-.10191E-13	0.00000
.30625E-13	0.00000	.31252E-12	0.00000	.10283E-11	0.00000	-.30578E-13	0.00000	-.16350E-13	0.00000	-.36468E-14	0.00000
.19862E-13	0.00000	.22196E-12	0.00000	-.10179E-11	0.00000						
.14771E-13	0.00000	.29171E-12	0.00000	.47313E-12	0.00000						
-.21332E-14	0.00000	.21744E-12	0.00000	-.96479E-12	0.00000	.13424E-13	0.00000	.25878E-13	0.00000	-.17154E-14	0.00000
.34997E-13	0.00000	-.21426E+00	0.00000	-.39608E-11	0.00000	-.10413E-11	0.00000	-.21382E-13	0.00000	-.36373E-13	0.00000
-.32395E-13	0.00000	-.21426E+00	0.00000	.38611E-11	0.00000	.70951E-12	0.00000	-.15040E-13	0.00000	-.24295E-13	0.00000
.62305E-13	0.00000	.32827E+00	0.00000	.21084E-11	0.00000	-.75539E-11	0.00000	-.45251E-13	0.00000	-.64953E-13	0.00000
-.74713E-13	0.00000	.32827E+00	0.00000	-.21216E-11	0.00000	.68719E-11	0.00000	-.42761E-13	0.00000	.52685E-13	0.00000
-.70798E-13	0.00000	-.28868E+00	0.00000	.39725E-11	0.00000	.46272E-11	0.00000	.78541E-13	0.00000	-.10043E-12	0.00000
.73928E-13	0.00000	-.28868E+00	0.00000	-.38727E-11	0.00000	-.49144E-11	0.00000	-.66498E-13	0.00000	.13220E-12	0.00000
-.22496E-13	0.00000	.11401E+00	0.00000	-.30001E-11	0.00000	.22846E-11	0.00000	-.11032E-13	0.00000	.54094E-13	0.00000
-.26186E-13	0.00000	.11401E+00	0.00000	.30214E-11	0.00000	-.21795E-11	0.00000	-.22661E-13	0.00000	-.45541E-13	0.00000

NATURAL FREQUENCY= .145000E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.13515E-13	0.00000	-.10692E+00	0.00000	.17738E-01	0.00000	-.54314E-01	0.00000	.38391E-14	0.00000	-.37263E-14	0.00000
.32430E-13	0.00000	.10892E+00	0.00000	.17738E-01	0.00000	-.54314E-01	0.00000	-.15567E-13	0.00000	-.14736E-13	0.00000
.17871E-13	0.00000	.21136E+00	0.00000	.10667E-01	0.00000	.25825E+00	0.00000	-.19292E-13	0.00000	-.24717E-13	0.00000
-.32645E-14	0.00000	-.21136E+00	0.00000	.10667E-01	0.00000	.25825E+00	0.00000	.14107E-13	0.00000	-.14104E-14	0.00000
.23543E-13	0.00000	.11144E-01	0.00000	-.53255E-01	0.00000	.15730E-01	0.00000	-.24087E-13	0.00000	-.34652E-13	0.00000
-.22914E-13	0.00000	-.11144E-01	0.00000	-.53255E-01	0.00000	.15730E-01	0.00000	-.13093E-13	0.00000	.15832E-13	0.00000
.66234E-14	0.00000	-.21512E+00	0.00000	.28367E-02	0.00000	-.25525E+00	0.00000	.34648E-13	0.00000	-.33720E-13	0.00000
-.36195E-14	0.00000	.21512E+00	0.00000	.28367E-02	0.00000	-.25525E+00	0.00000	.37385E-13	0.00000	.11689E-13	0.00000
.18855E-13	0.00000	.93383E-01	0.00000	.47271E-02	0.00000	-.47271E-02	0.00000	.81766E-14	0.00000	.14894E-13	0.00000
.22219E-13	0.00000	-.93383E-01	0.00000	.47271E-02	0.00000	-.47271E-02	0.00000				
-.14622E-13	0.00000	.93383E-01	0.00000	-.47271E-02	0.00000	-.47271E-02	0.00000	.42258E-14	0.00000	.10635E-14	0.00000
.28116E-13	0.00000	-.93383E-01	0.00000	-.47271E-02	0.00000	-.47271E-02	0.00000	-.94637E-14	0.00000	.10487E-13	0.00000
.20963E-13	0.00000	-.21512E+00	0.00000	.28367E-02	0.00000	-.25525E+00	0.00000	-.94174E-14	0.00000	.12860E-13	0.00000
-.12932E-13	0.00000	.21512E+00	0.00000	-.28367E-02	0.00000	-.25525E+00	0.00000	-.26181E-14	0.00000	-.32907E-13	0.00000
.54915E-14	0.00000	.11144E-01	0.00000	.53255E-01	0.00000	.15730E-01	0.00000	-.65009E-14	0.00000	.34471E-13	0.00000
-.18300E-13	0.00000	-.11144E-01	0.00000	.53255E-01	0.00000	.15730E-01	0.00000	.93230E-14	0.00000	.10041E-13	0.00000
.73467E-14	0.00000	.21136E+00	0.00000	-.10667E-01	0.00000	.25825E+00	0.00000	.74386E-14	0.00000	.39923E-14	0.00000
-.16635E-13	0.00000	-.21136E+00	0.00000	-.10667E-01	0.00000	.25825E+00	0.00000	.13302E-13	0.00000	-.17486E-13	0.00000
-.21903E-13	0.00000	-.10892E+00	0.00000	-.17738E-01	0.00000	-.54314E-01	0.00000	.56145E-14	0.00000	.35459E-15	0.00000
.11542E-13	0.00000	.10892E+00	0.00000	-.17738E-01	0.00000	-.54314E-01	0.00000				

H-96

OF POOR QUALITY

NATURAL FREQUENCY= .200210E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.10783E-13	0.00000	.88884E-01	0.00000	-.10583E-01	0.00000	.23390E-01	0.00000	.13008E-13	0.00000	-.13136E-13	0.00000
-.12058E-13	0.00000	-.88884E-01	0.00000	-.10583E-01	0.00000	.29390E-01	0.00000	-.28729E-14	0.00000	.23805E-13	0.00000
-.16753E-13	0.00000	-.24219E+00	0.00000	.13337E-01	0.00000	-.15293E+00	0.00000	.99702E-14	0.00000	.65441E-14	0.00000
.32377E-13	0.00000	.24219E+00	0.00000	.13337E-01	0.00000	-.15293E+00	0.00000	-.10299E-14	0.00000	.24168E-15	0.00000
.21043E-13	0.00000	.28072E+00	0.00000	.34567E-02	0.00000	.18141E+00	0.00000	-.17880E-13	0.00000	-.14085E-13	0.00000
-.77444E-14	0.00000	-.28072E+00	0.00000	.34567E-02	0.00000	.18141E+00	0.00000	-.32740E-13	0.00000	.69367E-15	0.00000
-.18314E-13	0.00000	-.18345E+00	0.00000	-.16341E-01	0.00000	-.11468E+00	0.00000	.11580E-13	0.00000	.15495E-13	0.00000
-.42416E-13	0.00000	.18345E+00	0.00000	-.16341E-01	0.00000	-.11468E+00	0.00000	.77027E-14	0.00000	-.72503E-14	0.00000
-.22593E-13	0.00000	-.31265E-12	0.00000	.10131E-01	0.00000	.29480E-14	0.00000	.13489E-13	0.00000	-.22995E-13	0.00000
-.57781E-14	0.00000	.31398E-12	0.00000	.10131E-01	0.00000						
.22563E-13	0.00000	-.31265E-12	0.00000	.10131E-01	0.00000						
-.15608E-13	0.00000	.31398E-12	0.00000	-.10131E-01	0.00000	.28339E-14	0.00000	.13972E-13	0.00000	.85882E-14	0.00000
-.27858E-14	0.00000	.18345E+00	0.00000	-.16341E-01	0.00000	.11468E+00	0.00000	.55116E-14	0.00000	-.62483E-13	0.00000
.25481E-13	0.00000	-.18345E+00	0.00000	-.16341E-01	0.00000	.11468E+00	0.00000	.53319E-14	0.00000	.59446E-13	0.00000
-.36749E-13	0.00000	-.28072E+00	0.00000	.34567E-02	0.00000	-.18141E+00	0.00000	.22376E-13	0.00000	.41391E-13	0.00000
.40213E-13	0.00000	.28072E+00	0.00000	.34567E-02	0.00000	-.18141E+00	0.00000	.31158E-13	0.00000	-.27011E-13	0.00000
.54284E-14	0.00000	-.24219E+00	0.00000	-.13337E-01	0.00000	.15293E+00	0.00000	-.32943E-13	0.00000	.46375E-13	0.00000
-.20554E-13	0.00000	.24219E+00	0.00000	.13337E-01	0.00000	-.15293E+00	0.00000	-.33726E-13	0.00000	-.46259E-13	0.00000
.39820E-14	0.00000	-.88884E-01	0.00000	-.10583E-01	0.00000	-.23390E-01	0.00000	-.17746E-15	0.00000	.15041E-14	0.00000
.30697E-14	0.00000	.88884E-01	0.00000	-.10583E-01	0.00000	-.23390E-01	0.00000	.17057E-14	0.00000	.66975E-14	0.00000

H-97

27

NATURAL FREQUENCY= .201454E+04

TX REAL	TX IMAG	TY REAL	TY IMAG	TZ REAL	TZ IMAG	RX REAL	RX IMAG	RY REAL	RY IMAG	RZ REAL	RZ IMAG
-.20255E-13	0.00000	.79916E-01	0.00000	-.93145E-02	0.00000	.25745E-01	0.00000	.16675E-13	0.00000	-.76377E-14	0.00000
-.58994E-14	0.00000	-.79916E-01	0.00000	-.93145E-02	0.00000	.25745E-01	0.00000	.19045E-13	0.00000	-.73611E-14	0.00000
-.18938E-13	0.00000	-.22277E+00	0.00000	.12794E-01	0.00000	-.13502E+00	0.00000	-.59788E-14	0.00000	.19689E-13	0.00000
-.23324E-13	0.00000	.22277E+00	0.00000	.12794E-01	0.00000	-.13502E+00	0.00000	-.17217E-13	0.00000	-.15244E-13	0.00000
-.51597E-13	0.00000	.27649E+00	0.00000	.67816E-03	0.00000	.17199E+00	0.00000	-.25981E-13	0.00000	-.30254E-13	0.00000
-.50050E-14	0.00000	-.27649E+00	0.00000	.67816E-03	0.00000	.17199E+00	0.00000	-.17487E-13	0.00000	.23383E-13	0.00000
-.15170E-13	0.00000	-.21665E+00	0.00000	-.14383E-01	0.00000	-.12840E+00	0.00000	.23240E-14	0.00000	.28537E-13	0.00000
.37264E-13	0.00000	.21665E+00	0.00000	-.14383E-01	0.00000	-.12840E+00	0.00000	.18228E-14	0.00000	-.60827E-13	0.00000
.10441E-13	0.00000	.72045E-01	0.00000	.72504E-03	0.00000	-.72504E-03	0.00000	.73977E-14	0.00000	.72867E-14	0.00000
.39336E-14	0.00000	-.72045E-01	0.00000	.72504E-03	0.00000						
-.19272E-14	0.00000	.72045E-01	0.00000	-.72504E-03	0.00000	-.72504E-03	0.00000	.81239E-14	0.00000	-.70363E-15	0.00000
.60275E-14	0.00000	-.72045E-01	0.00000	-.72504E-03	0.00000	-.72504E-03	0.00000				
-.32051E-14	0.00000	-.21665E+00	0.00000	.14383E-01	0.00000	-.12840E+00	0.00000	-.21362E-13	0.00000	-.15893E-13	0.00000
-.34924E-13	0.00000	.21665E+00	0.00000	.14383E-01	0.00000	-.12840E+00	0.00000	-.20990E-13	0.00000	.21992E-13	0.00000
-.10727E-13	0.00000	.27649E+00	0.00000	-.67816E-03	0.00000	.17199E+00	0.00000	.37267E-13	0.00000	-.15049E-13	0.00000
.13773E-13	0.00000	-.27649E+00	0.00000	-.67816E-03	0.00000	.17199E+00	0.00000	-.37271E-13	0.00000	.23861E-14	0.00000
.84652E-13	0.00000	-.22277E+00	0.00000	-.12794E-01	0.00000	-.13502E+00	0.00000	-.13330E-13	0.00000	.27295E-13	0.00000
.10626E-13	0.00000	.22277E+00	0.00000	-.12794E-01	0.00000	-.13502E+00	0.00000	-.12800E-13	0.00000	-.26800E-13	0.00000
.10748E-13	0.00000	.79916E-01	0.00000	.93145E-02	0.00000	.25745E-01	0.00000	.15385E-14	0.00000	.54457E-14	0.00000
-.11607E-13	0.00000	-.79916E-01	0.00000	.93145E-02	0.00000	.25745E-01	0.00000	.21479E-14	0.00000	.13438E-13	0.00000