

Original citation:

Brown, Dominic , Bettencourt, Matthew T., Wright, Steven A., Jones, John P. and Jarvis, Stephen A. (2017) Performance of second order particle-in-cell methods on modern many-core architectures. In: Computational Plasma Physics Conference, University of York, York, UK, 20-22 Nov 2017 (Unpublished)

Permanent WRAP URL:

<http://wrap.warwick.ac.uk/96717>

Copyright and reuse:

The Warwick Research Archive Portal (WRAP) makes this work by researchers of the University of Warwick available open access under the following conditions. Copyright © and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable the material made available in WRAP has been checked for eligibility before being made available.

Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

A note on versions:

The version presented here may differ from the published version or, version of record, if you wish to cite this item you are advised to consult the publisher's version. Please see the 'permanent WRAP URL' above for details on accessing the published version and note that access may require a subscription.

For more information, please contact the WRAP Team at: wrap@warwick.ac.uk

Performance of Second Order Particle-in-Cell Methods on Modern Many-Core Architectures

Dominic A. S. Brown¹, Matthew T. Bettencourt², Steven A. Wright¹, John P. Jones³,
and Stephen A. Jarvis¹

¹Department of Computer Science, University of Warwick, UK

²Electromagnetic Theory, Sandia National Laboratories, Albuquerque, NM

³UK Atomic Weapons Establishment, Aldermaston, UK

Abstract

The emergence of modern many-core architectures that offer an extreme level of parallelism makes methods that were previously infeasible due to computational expense now achievable. Particle-in-Cell (PIC) codes often fail to fully leverage this increased performance potential due to their high use of memory bandwidth. The use of higher order PIC methods may offer a solution to this by improving simulation accuracy significantly for an increase in computational intensity when compared to their first order counterparts. This greater expense is accompanied with only a minor increase in the amount of memory throughput required during the simulation.

In this presentation we will show the performance of a second order PIC algorithm. Our implementation uses second order finite elements and particles that are represented with a collection of surrounding ghost particles. These ghost particles each have associated weights and offsets around the true particle position and therefore represent a charge distribution. We test our PIC implementation against a first order algorithm on various modern compute architectures including Intel's Knights Landing (KNL) and NVIDIA's Tesla P100.

Our preliminary results show the viability of second order methods for PIC applications on these architectures when compared to previous generations of many-core hardware. Specifically, we see an order of magnitude improvement in performance for second order methods between the Pascal and Kepler GPU architectures, despite only a $4\times$ improvement in theoretical peak performance between the architectures. Although these initial results show a large increase in runtime over first order methods, we hope to be able to show improved scaling behaviour and increased simulation accuracy in the future.

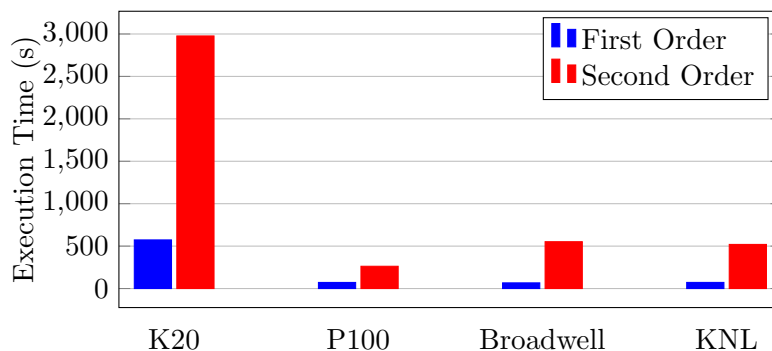


Figure 1: Execution time of a two stream problem using 1 million particles, 500 steps