



# LUND UNIVERSITY

## Data quality in eye trackers: Signal resolution

Holmqvist, Kenneth; Niehorster, Diederick C; Blignaut, Pieter

DOI:

[10.16910/jemr.11.5](https://doi.org/10.16910/jemr.11.5)

2018

*Document Version:*

Publisher's PDF, also known as Version of record

[Link to publication](#)

*Citation for published version (APA):*

Holmqvist, K., Niehorster, D. C., & Blignaut, P. (2018). *Data quality in eye trackers: Signal resolution*. Abstract from The Scandinavian Workshop on Applied Eye Tracking 2018, Copenhagen, Denmark.  
<https://doi.org/10.16910/jemr.11.5>

*Total number of authors:*

3

*Creative Commons License:*

CC BY

### General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

## SESSION 1: Eye-tracking technology: Latest developments

### Data quality in eye trackers: Signal resolution

Kenneth Holmqvist<sup>1</sup>, Diederick C. Niehorster<sup>2</sup>, & Pieter Blignaut<sup>3</sup>

<sup>1</sup> Regensburg University, Germany


<sup>2</sup> Lund University, Sweden

<sup>3</sup> University of Free State, South Africa

For evaluating whether the data from an eye tracker are precise enough for measuring microsaccades, Poletti and Rucci (2016) advocate that the measure “resolution” be used rather than the more established RMS-S2S. Resolution needs to be measured using an artificial eye that can be turned in very small steps, and visual estimation is used to assess whether the movements are visible in the recorded data from the eye tracker. As such, resolution cannot be measured with human data. Currently, resolution has an unclear and entirely uninvestigated relationship to existing RMS-S2S and STD measures of precision (Holmqvist & Andersson, 2017, p. 190). Resolution measurements have only been made on the DPI and one other eye tracker. We do not know resolution values for the most used eye trackers.

In this talk, we present a mechanism – the Stepperbox – for moving artificial eyes arbitrary distances from 1 arcmin and upward. We first present a validation of the mechanism that shows that it is capable of reliably making these movements.

We then use the Stepperbox to find the smallest reliably detectable movement in multiple eye trackers and empirically investigate how resolution relates to the extent (STD) and velocity (RMS-S2S) of noise produced by these eye trackers. Figure 1 shows one of our recordings.

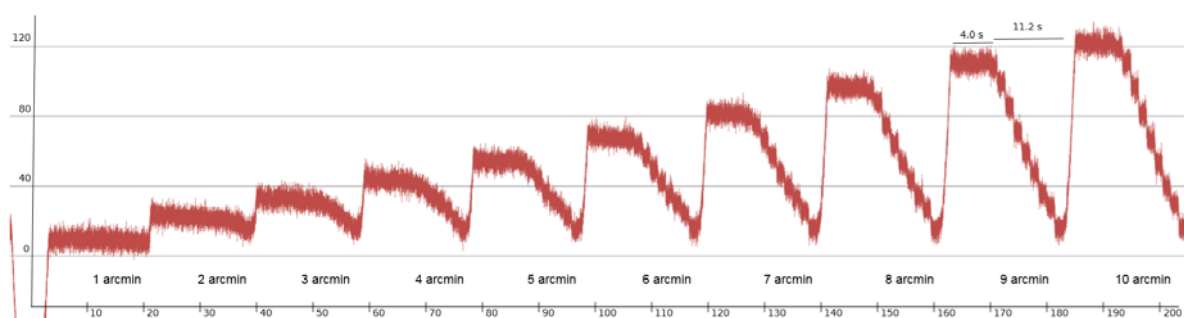

**Figure 1.** Increasingly larger steps from 1 arcmin to 10 arcmin steps. Each staircase shape involved 10 movements of identical amplitude after a 4 s waiting period. Stops between steps are 1 s long. The smaller movements clearly drown in the noise of this Tobii TX300 eye tracker, and resolution is 6-7 arcmin.

A preliminary analysis indicates that the RMS-S2S values have a *linear relationship* to the resolution values. Eye trackers with filters (coloured noise) differ slightly from eye trackers with no filtering (white noise). We take our results to show that RMS-S2S can be used to assess the minimal amplitude movement that can be reliably detected with an eye tracker. We argue that Poletti and Rucci’s criticism of RMS-S2S hides a conceptual confusion of resolution as the amplitude where events begin to drown in noise vs. resolution as quantization of the measurement space.

#### References

- Holmqvist, K., & Andersson, R. (2017). *Eye tracking: A comprehensive guide to methods, paradigms, and measures*. Lund, Sweden: Lund Eye-Tracking Research Institute.
- Poletti, M., & Rucci, M. (2016). A compact field guide to the study of microsaccades: Challenges and functions. *Vision Research*, 118, 83-97. doi: 10.1016/j.visres.2015.01.018