

AN IMPROVEMENT OF RGB COLOR IMAGE WATERMARKING
TECHNIQUE USING ISB STREAM BIT AND HADAMARD MATRIX

RAMADHAN ALI MOHAMMED

A dissertation submitted in partial fulfillment of the
Requirements for the award of the degree of
Master of Science (Computer Science)

Faculty of Computing
Universiti Teknologi Malaysia

JANUARY 2014

I cordially dedicate this thesis to the biggest treasures of my life, my parents, my brothers and my sisters who gave me their love and also for their endless support and encouragement.

*To my God, Allah 'azza wa jalla
Then to my beloved mother, wife, and parent in law*

ACKNOWLEDGEMENT

I will like to appreciate the almighty Allah (SWT) for seeing me through in my studies and for his protection and provisions. I am also thankful to UTM staff, and all everyone in Faculty of Computing.

I am grateful for several people for making this thesis possible. I would like to begin by expressing my deep appreciation to my supervisor, Professor **Dr. Ghazali bin Sulong** for his guidance and encouragement. Despite the busy schedule he has provide me with valuable ideas, advice and comments. I am very fortunate to have him as my adviser.

Special thanks to my friend professor Dr. Hewa Yaseen, Mr.Beston and Mr. Esmail who provide me with all necessary help.

Finally, my everlasting respect and appreciation to my dearest parents and my family in Kurdistan who have supported me by their du'a and prayers all the time.

ABSTRACT

In the past half century, the advancement of internet technology has been rapid and widespread. The innovation provides an efficient platform for human communication and other digital applications. Nowadays, everyone can easily access, copy, modify and distribute digital contents for personal or commercial gains. Therefore, a good copyright protection is required to discourage the illicit activities. One way is to watermark the assets by embedding an owner's identity which could later on be used for authentication. Thus far, many watermarking techniques have been proposed which focus on improving three standard measures, visual quality or imperceptibility, robustness and capacity. Although their performances are encouraging, there are still plenty of rooms for improvements. Thus, this study proposes a new watermarking technique using Least Significant Bit (LSB) insertion approach coupled with Hadamard matrix. The technique involves four main stages: Firstly, the cover image is decomposed into three separate channels, Red, Green and Blue. Secondly, the Blue channel is chosen and converted into an eight bit stream. Thirdly, the second least significant bit is selected from the bit stream for embedding. In order to increase the imperceptibility a Hadamard matrix is used to find the best pixels of the cover image for the embedding task. Experimental results on standard dataset have revealed that average PSNR value is greater than 58db, which indicates the watermarked image is visually identical to its original. However, the proposed technique suffers from Gaussian and Poisson noise attacks.

ABSTRAK

Dalam setengah abad yang lalu, kemajuan teknologi internet telah berkembang dengan pesat dan meluas. Inovasi ini menyediakan platform yang berkesan untuk komunikasi manusia dan aplikasi digital yang lain. Kini, semua orang boleh dengan mudah mengakses, menyalin, mengubahsuai dan mengedar kandungan digital untuk keuntungan peribadi atau komersial. Oleh itu, perlindungan hak cipta yang baik adalah diperlukan untuk mengekang aktiviti-aktiviti haram. Satu cara adalah mentera airkan asset tersebut dengan menerapkan identiti pemilik yang kemudiannya boleh digunakan untuk pengesahan. Sehingga kini, banyak teknik tera air telah dicadangkan yang memberi tumpuan kepada peningkatan tiga ukuran piawai iaitu kualiti visual atau imperceptibility, keteguhan dan keupayaan. Walaupun pencapaian mereka adalah menggalakkan, masih terdapat banyak ruang yang perlu diperbaiki. Oleh itu, kajian ini mencadangkan teknik tera air baru menggunakan pendekatan kemasukan Bit Ketara Terkecil (LSB) yang digabung dengan Hadamard matriks. Teknik ini melibatkan empat peringkat utama: Pertama, imej penutup dihuraikan kepada tiga saluran berasingan iaitu Merah, Hijau dan Biru. Kedua, saluran Biru dipilih dan ditukar menjadi aliran lapan bit. Ketiga, bit ketara kedua terkecil dipilih dari aliran bit tersebut untuk pembenaman. Dalam usaha untuk meningkatkan imperceptibility, matriks Hadamard digunakan untuk mencari piksel terbaik daripada imej penutup untuk tugas pembenaman. Keputusan eksperimen keatas dataset piawai mendedahkan bahawa purata nilai PSNR adalah lebih besar daripada 58db, yang menunjukkan bahawa imej tera air adalah seiras dengan imej asalnya dari segi visual. Walau bagaimanapun, teknik yang dicadangkan kecundang apabila berhadapan dengan serangan hingar Gaussian dan Poisson.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	i
	DEDICATION	ii
	ACKNOWLEDGEMENT	iii
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBRIVIATION	xiii
1	INTRODUCTION	
	1.1 Overview	1
	1.2 Problem Background	3
	1.3 Problem Statement	6
	1.4 Research Question	6
	1.5 Research Aim	7
	1.6 Research Objectives	7
	1.7 Research Scope	8
	1.8 Research Framework	9
	1.9 Research Organization	10
2	LITERATURE REVIEW	
	2.1 Introduction	11
	2.2 Type of Watermark	13
	2.2.1 Robust and Fragile Watermark	15

2.2.2	Visible and Invisible Watermark	16
2.2.3	Asymmetric and Symmetric Watermark	17
2.3	Watermark technique	17
2.3.1	The Spatial Domain Technique	18
2.4	Watermark Requirements	19
2.4.1	Imperceptibility	20
2.4.2	Robustness	21
2.4.3	Robustness versus Imperceptibility	22
2.4.4	Capacity/Data Payload	23
2.4.5	Security	23
2.5	Watermark Attack and Countermeasures	24
2.5.1	Simple Attack	26
2.5.2	Detection Disabling	26
2.5.3	Cropping	26
2.5.4	Rotation and Scaling	27
2.5.5	Ambiguity Attacks	28
2.5.6	Removal Attack	29
2.5.7	Protocol Attack	29
2.5.8	Copy Attack	30
2.6	Watermark Domain	30
2.6.1	Spatial Domain Methods	31
2.6.1.1	List Significant Bit	31
2.6.1.2	Most Significant Bit	34
2.7	Watermark and Hadamard Matrix	34

3 METHODOLOGY

3.1	Introduction	41
3.2	Research Methodology	42
3.3	Pre-Processing	43
3.3.1	Partitioning RGB Color Image	44
3.4	Embedding Stage	45
3.4.1	Watermark Embedding Algorithm	46
3.4.2	ISB Embedding Process	47
3.5	Attack Mechanism	51

3.6	Extracting Stage	52
	3.6.1 Watermark Extracting Algorithm	53
3.7	Evaluation Stage	54
3.8	Summary	56
4	RESULT AND DISCUSSION	
4.1	Introduction	57
4.2	Result Implementation	59
	4.2.1 Imperceptibility Testing	60
	4.2.2 Robustness Testing	68
	4.2.3 Attack Testing	68
	4.2.3.1 Gaussian Noise	69
	4.2.3.2 Salt Pepper Noise	71
	4.2.3.3 Poisson noise	73
4.4	Comparison	85
4.4	Summary	87
5	CONCLUSION	
5.1	Introduction	88
5.2	Conclusion	89
5.3	Contribution	89
5.4	Dissertation Future Work	90
	REFERENCES	91

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Compare between Watermark Technique	18
2.9	Summary of Related Work	40
4.1	PSNR Result of Lena Image Using Blue Channel	61
4.2	PSNR Result of Baboon Image Using Blue Channel	62
4.3	PSNR Result of Pepper Image Using Blue Channel	63
4.4	PSNR Result of Airplane Image Using Blue Channel	64
4.5	PSNR Result of Goldhill Image Using Blue Channel	65
4.6	PSNR Result of Sailboat Image Using Blue Channel	66
4.7	PSNR Result of Tiffany Image Using Blue Channel	67
4.8	PSNR Value of Various Cover Image	68
4.9	Dataset Image by Applying Gaussian Noise Attack	69
4.10	Database Image by Applying Salt and Pepper Attack	71
4.11	Database Image by Applying Poisson noise Attack	73
4.12	NCC Result of Lena Image	76
4.13	NCC Result of Baboon Image	77
4.14	NCC Result of Pepper Image	78
4.15	NCC Result of Goldhill Image	79
4.16	NCC Result of Sailboat Image	80
4.17	NCC Result of Airplane Image	81
4.18	NCC Result of Tiffany Image	82
4.19	NCC Value of Various Cover Images	84
4.20	Comparison PSNR	85
4.21	Comparison NCC	86

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	The Frame Work of the Proposed Method	9
2.1	Sample of Host Image before and After Attack	12
2.2	Type of Watermark Technique	14
2.3	Fragile Watermark	15
2.4	Visible Watermark	16
2.5	Parameter of Watermarking Capacity, Imperceptibility And Robustness	22
2.6	Watermarking Attack	25
2.7	The Cropping Attack a Watermarked Image Using Spatial (a) and Frequency Domain (b)	27
2.8	The Rotation and Scaling Attack Watermarked Image and the Extracted Watermark	28
2.9	Bit-Plane of a Gray Scale Image	32
2.10	New pixel Value of the Cover Image	33
2.11	A Hadamard, 12, 16, 20, 24 and 28	37
2.12	Another Design of Hadamard	38
2.13	Using Hadamard as a Mask	39
3.1	Methodology Framework	42
3.2	Pre-Processing	43
3.3	Dividing of RGB Host Image into R, G and B Channel	44
3.4	Shows the Embedding Stage of the Watermark Technique	45
3.5	Embedding Secret inside Host Image	48
3.6	Selecting Pixel from Host Image to Embedding Secret Message Selected by Hadamard	49
3.7	ISB Embedding Process	50

3.8	Attack Stage	51
3.8	Extracting Stage	52
4.1	Binary Watermark (64x64) and Host Image (256x256)	58
4.2	Lena Original Image and Watermarked Image	59

LIST OF ABBRIVIATIONS

BMP	Bitmap Image
DB	Decibel
DCT	Discrete Cosine Transform
DFT	Discrete Fourier Transform
DWT	Discrete Wavelet Transform
H	Hadamard Matrix
HVS	Human Visual System
ISB	Intermediate Significant Bit
ISBN	International Standard Book Number
ISRC	International Standard Recording Code
LSB	List Significant Bit
MSB	Most Significant Bit
MSS	Mean Square Strength
NCC	Norma Cross Correlation
PSNR	Peak Signal to Noise Ratio
RGB	Read Green Blue
S	Secret Data

CHAPTER 1

INTRODUCTION

1.1 Overview

The past half century has seen rapid and widespread change in digital technology. Digital image, as one of the new digital technologies, has replaced analogue photography. The Internet has also become one of the most important tools for digital images worldwide. For this reason, the security of electronic documents has become a complex concern and digital image watermarking is a solution used to reduce the number of forged digital documents (Langelaar, 2000; Kumar, 2011).

It is well known that electronic publishing offers many advantages, but there are some risks, such as the illegal use of electronic information resources protected by copyright and modifying data. Some protective solutions including authentication, integrity, confidentiality and copyright protection are necessary to avoid plagiarism issues. To find the real owner of digital data, such as images or video, digital watermarking methods are adequate. Loading and managing protected text, and then using it without supervision, is very easy for other people, so that copyright management is very important. Large amounts of money have been spent by publishers and booksellers to avoid copyright problems. Now the question has become a very important international issue.

Digital watermarking has been presented as a practical solution for identifying the documents owner, and has been applied for a variety of purposes including: copyright protection, data authentication, fingerprint, medical applications, and broadcast monitoring. Furthermore, documents can be divided into two main groups, analog and digital. Obviously, protecting data against digital documents is more difficult due to the rapid development of networks, computers, and the Internet. In other words, digital documents can easily be saved and edited on computers compared to analog documents.

There are two general approaches to watermark extraction. The first is blind watermarking and the second is non-blind watermarking (Hyeong *et al.*, 2010). In blind watermarking there is no need to have the original document, while in a non-blind extraction we need to have the original document to detect the watermark. In addition, the watermark can be visible or invisible in both digital and analog documents. For example, a visible watermark can be a signature in an image that is used to point out the owner of the image; meanwhile an invisible watermark is not easily apparent. The embedded watermark can be extracted using an extraction algorithm to identify the copyright owner (Song *et al.*, 2011).

There are many classes of invisible watermarks for different applications such as fragile watermarks and robust watermarks. Fragile watermarks are designed to be easily broken by image processing operations.

Existing digital watermarking methods can be attributed to one of the two areas, including the spatial and frequency based on the contents of the receiving domain image. Many studies have been proposed based on the frequency and spatial domains. For example, digital image watermarking using LSB (Least Significant Bit), MSB (Most Significant Bit) and ISB (Intermediate Significant Bit) are three common methods used to achieve reliability and quality, at the same time, in the spatial domain (Nasir *et al.*, 2007).

Withholding of information refers to a pair of broad terms relating to image processing fields, which are steganography and watermarking. Hiding information applies to unobservable information (watermarks) and sensitive information (steganography), both fields trying to solve a wide range of tasks in time in the content of message attachments.

Conceptually, watermarking and steganography are related to each other, but at the same time they have different characteristics, requirements, and designs, which have led both of them to create and produce a variety of technical solutions. Digital watermarks can be defined as a code that will remain close to the visible or invisible data, and is inside the data before and after any process, such as decoding, but conventional cryptographic methods do not provide this. For the protection of intellectual property, digital watermarking is useful and is important in terms of invisible momentum (Mohananthini and Yamuna, 2012).

1.2 Problem Background

There are many images on the worldwide web which do not possess watermarks and as a result, they can be downloaded and modified illegally by anyone. Additionally, the rightful owner of the image cannot be identified and authenticated without watermarking (Al-Hunaity *et al.*, 2007). As a result, watermarking is used to safeguard against these illegal acts through the addition of a watermark image into the host image.

Aside from its use in images, watermarking can use also be used for other documents of vital importance such as text, audio and video. In general, some concerns regarding this area of research need to be resolved, including robustness, security as well as imperceptibility.

A major issue regarding digital image watermarking is imperceptibility (Cox *et al.*, 1997); this involves the insertion of a watermark into the cover image without causing any degradation. This requires that the watermarked image and host image be indistinguishable after the watermark is embedded. This means that the watermarked image as well as the original image must be so similar that they cannot be distinguished using the naked eye. Actually, the embedded watermark is said to be indiscernible if human eyes cannot differentiate between the original image and the watermarked image (Giakoumaki *et al.*, 2006).

Another important issue regarding digital watermarking is robustness (Podilchuk and Zeng, 1998); this requires that the watermarking scheme be stable. It also involves signal processing attacks such as noise addition, sharpening, blurring among others. Robustness is linked to the ability to retrieve the watermark after putting the watermarked image through varied processing attacks. Thus, an image must possess adequate robustness in the event of the occurrence of any kind of attack (Hernández and Pérez-González, 1999).

The watermarking scheme employed should possess the ability to safeguard the watermark against potential signal processing operations, while simultaneously assessing the condition of the watermark after the occurrence of an unwanted incident (Cox *et al.*, 1997). The last issue of importance with regards to digital watermarking is security (Barni *et al.*, 2003); this refers to the protection of the watermark against users who are not permitted. In this regard, the digital watermark should be entirely undetectable.

As a result of the application of algorithms for the insertion of watermarks within the cover image as well as for their proper extraction, a secret key needs to be utilized to insure the integrity of the algorithms. Without this application, illicit users would have no trouble modifying, detecting or removing the watermark from the host image. Furthermore, based on the fact that human eyes possess various sensitivities for diverse image regions, a watermark ought to be implanted within the most important component of the host image (Macq *et al.*, 2004).

While processing the watermark, it is of vital importance to locate the optimal region within the image for the insertion of the watermark. As indicated by (Hsieh, *et al.*, 2001), robustness and imperceptibility are the two major factors in watermarking that endeavor to modify along with the volume of information which can be inserted within the host. Although the spatial domain is not robust in defense of attacks like compression and image manipulations such as cropping, re-sampling or format conversions, it is easy and uncomplicated to utilize as no transform is used. Nevertheless, each of the two methods possesses its own advantages. A benefit of the spatial domain method is that it is simple to apply to any image. Another benefit of spatial watermarking is that it provides a means of connectivity between robustness and quality in the watermarked images. Two essential factors with regards to spatial watermarking are informed within the watermark as well as the area where the watermark can be embedded within the host image (Macq *et al.*, 2004).

A large number of studies (Bamatraf *et al.*, 2011; Chopra *et al.*, 2012; Luo *et al.*, 2010; Kaur and Kaur, 2013; Thien and Lin, 2003; Wu and Tsai, 2003; Zhang and Wang, 2005) employed the spatial domain technique within their research.

1.3 Problem Statement

Due to the importance of watermarking in information technology, extensive research has been carried out in this field, both in the spatial domain and transforms domain technique. Although the spatial domain technique was the earlier of the two to receive attention, research on it is still far from complete. The spatial technique inserts the watermark in the underused intermediate significant bit of the image, thus allowing a watermark to be in an image without largely affecting the value of the image (Nikolaidis and Pitas, 1999).

The advantage of using this technique are that it is very simple, fast, efficient, and provides high capacity, and the quality of the watermarked image can be more easily controlled (Wu and Huang, 2007). On the other hand, the spatial domain technique has some disadvantages. One of them is that it is not robust against attack (Barreto *et al.*, 2002; Li and Yang, 2007; Venkatraman *et al.*, 2004), while others are that the security they provide is easy to bypass and the inability to loss compress the image without damaging the watermark (Wu and Tsai, 2003; Kao *et al.*, 2008).

1.4 Research Questions

- i) How can a watermark image be embedded in the host image without causing visible degradation?
- ii) How can improve robustness of extracted watermark?
- iii) How can a technique be developed to reach the level of robustness?

1.5 Research Aim

The purpose of this research is to propose a procedure for a color image watermarking scheme via ISB intermediate significant bits and a Hadamard matrix for the insertion of a watermark image within host image. The watermarking method put forward aims to attain and enhance the robustness and imperceptibility of color watermarked image, thus enabling the image to hold up against attack.

1.6 Research Objectives

The aims and objectives of this research include the following:

- i) To improve the PSNR value by using ISB (Intermediate Significant Bit) and Blue channel for embedding.
- ii) To improve the robustness of extracted watermark logo by duplicated of the hidden data through Hadamard matrix.
- iii) To propose a Hadamard matrix to be used as a mask to select target pixels for embedding watermark pixels inside it.

1.7 Research Scope

The color image arrangement of the pixels includes three colors (blue, red and green). It therefore follows that each pixel contains 24 bits (for 8-bit representation) where 8-bits component for red, green and 8-bits for the blue component in pixels. The suggested method use blue channel to conceal information.

To start with, the components of the color pixels have to be taken apart, resulting in three separate $M \times N$ matrices, one for each color component, where the size of the original image is $M \times N$. Presently, the use of various pixel value methods for encapsulating data in the matrix is done in the blue channel. The program is constructed on a Windows environment with Delphi 5.0 and Matlab R 2011 a.

- i) By means of the spatial domain technique, the intermediate significant bits ISB of an image pixel.
- ii) The project focuses on 256x256 RGB images of the host image and binary UTM logo binary image size (64x64) bit BMP format as a watermark. The format of the host image is also (bmp).
- iii) Attacks like Poisson noise, salt and pepper and Gaussian filter noise will also be used on the watermarked text document image in order to assess the quality and robustness of the suggested watermarking method.
- iv) Hadamard matrix used as a method of implanting watermark image.
- v) The approach is using non-blind watermarking in spatial domain by applying ISB.

1.8 Research Framework

The Figure 1.1 explains the framework of the research and explains all watermarking stages include embedding extracting and evaluation the both PSNR and NCC value. Section 3.3, 3.4 and 3.5 explain each stage of the framework in details.

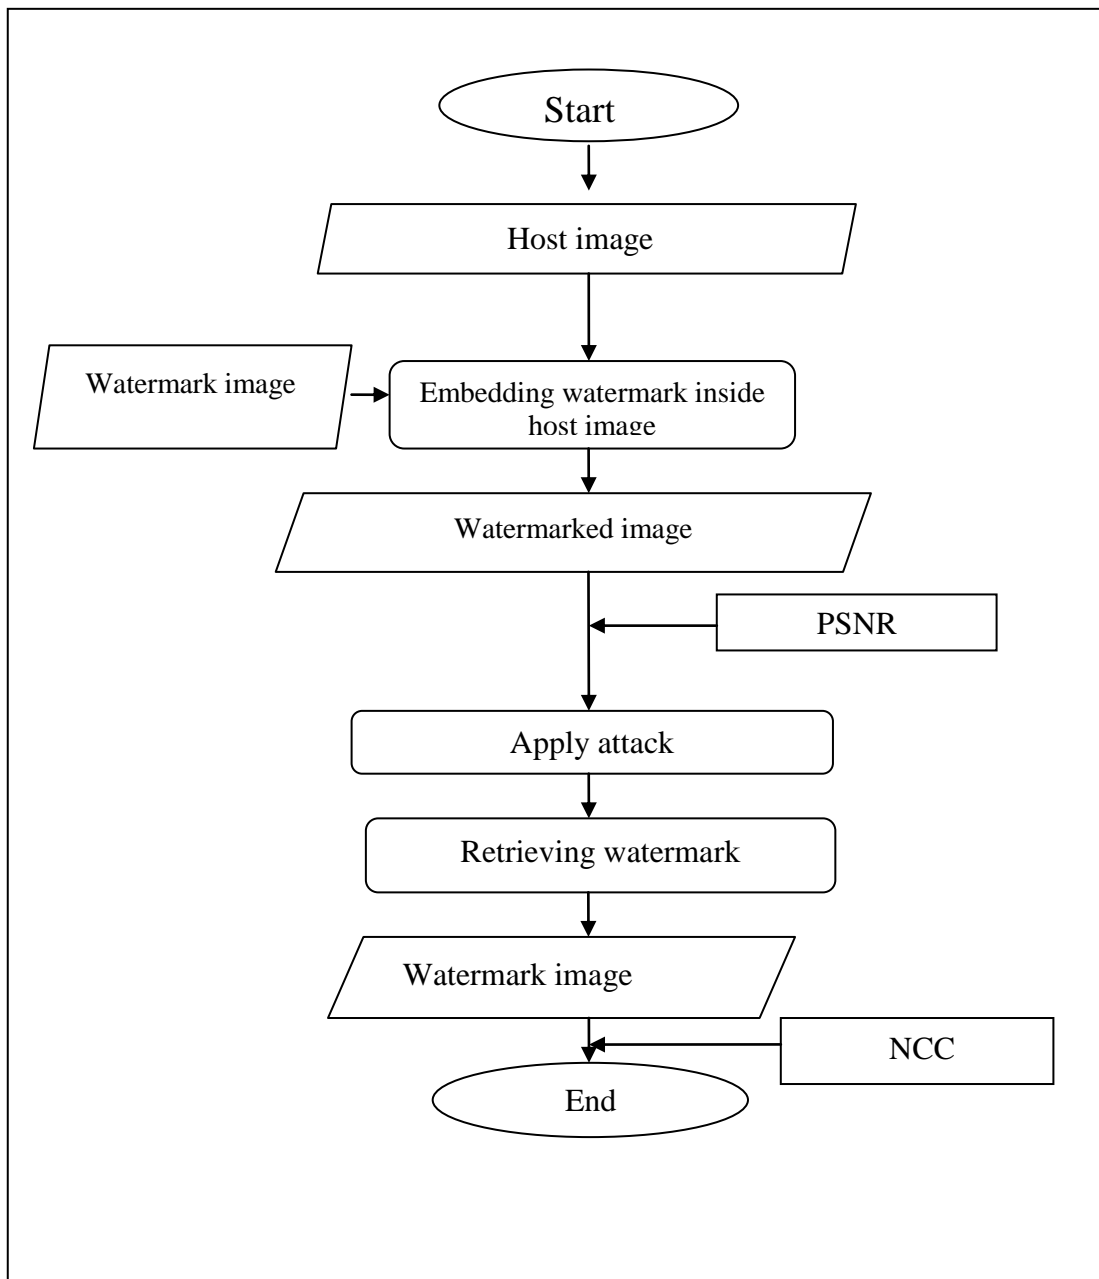


Figure 1.1: The Framework of the Proposed Method.

1.9 Thesis organization

The structure of the dissertation is: In the first chapter the research is first presented and this encompasses the problem statements, aim of the study as well as problem background. The following chapter gives a preamble as well as a standard summary regarding digital watermarking, watermarking techniques as well as the basic principles of digital watermarking. Chapter three provides a concise depiction of ISB; this chapter also outlines an explanation of the projected technique methodology. Chapter four discusses the outcomes of the methodology as outlined earlier in chapter three. Lastly general deductions of the thesis as well as proposals for areas where further research may be carried out in the future are discussed in the final chapter.

REFERENCE

- Agarwal, R., Santhanam, M., and Venugopalan, K. (2011). *Multichannel digital watermarking of color images using SVD*. Paper presented at the Image Information Processing (ICIIP), 2011 International Conference on. 41(7), 35-43.
- Al-Haj, A. (2007). Combined DWT-DCT digital image watermarking. *Journal of computer science*, 3(9), 740.
- Al-Hunaity, M. F., Najim, S. A., and El-Emary, I. M. (2007). Colored digital image watermarking using the wavelet technique. *American Journal of Applied Sciences*, 4(9), 658.
- Alleysson, D., Susstrunk, S., and Héroult, J. (2005). Linear demosaicing inspired by the human visual system. *Image Processing, IEEE Transactions on*, 14(4), 439-449.
- Arnold, M. K., Schmucker, M., and Wolthusen, S. D. (2003). *Techniques and applications of digital watermarking and content protection*. Artech House.
- Bamatraf, A., Ibrahim, R., Salleh, M., and Mohd, N. (2011). A New Digital Watermarking Algorithm Using Combination of Least Significant Bit (LSB) and Inverse Bit. *arXiv preprint arXiv:1111.6727*.
- Barni, M., Bartolini, F., and Furon, T. (2003). A general framework for robust watermarking security. *Signal processing*, 83(10), 2069-2084.
- Barni, M., Bartolini, F., Cappellini, V., and Piva, A. (1998). A DCT-domain system for robust image watermarking. *Signal processing*, 66(3), 357-372.
- Barreto, P. S., Kim, H. Y., and Rijmen, V. (2002). Toward secure public-key blockwise fragile authentication watermarking. *IEE Proceedings-Vision, Image and Signal Processing*, 149(2), 57-62.
- Benedek, G., Lastovka, J., Fritsch, K., and Greytak, T. (1964). Brillouin scattering in liquids and solids using low-power lasers. *JOSA*, 54(10), 1284-1285.

- Bennour, J., Dugelay, J.-L., and Matta, F. (2007). Watermarking attack: BOWS contest. *Security, Steganography, and Watermarking of Multimedia Contents IX*, 6505, 650518.
- Bitsios, P., Giakoumaki, S. G., Theou, K. and Frangou, S. (2006). Increased prepulse inhibition of the acoustic startle response is associated with better strategy formation and execution times in healthy males. *Neuropsychologia*, **44**(12), 2494-2499.
- Caronni, G. (1995). Assuring Ownership Rights for Digital Images. In *VIS*(Vol. 95, pp. 251-263).
- Cary, G. D. (1966). Quiet Revolution in Copyright: The End of the Publication Concept. *Geo. Wash. L. Rev.*, 35, 652.
- Chan, C. K. and Cheng, L. M. (2001). Improved hiding data in images by optimal moderately-significant-bit replacement. *Electronics Letters*, **37**(16), 1017-1018.
- Chan, C. K. and Cheng, L. M. (2004). Hiding data in images by simple LSB substitution. *Pattern recognition*, **37**(3), 469-474.
- Chang, C. C. and Tseng, H. W. (2004). A steganography method for digital images using side match. *Pattern Recognition Letters*, **25**(12), 1431-1437.
- Chang, C. C., Hu, Y. S. and Lu, T. C. (2006). A watermarking-based image ownership and tampering authentication scheme. *Pattern Recognition Letters*, **27**(5), 439-446.
- Chang, C. C., Lin, C. C. and Hu, Y. S. (2007). An SVD oriented watermark embedding scheme with high qualities for the restored images. *International Journal of Innovative Computing, Information and Control*, **3**(3), 609-620.
- Chang, K. C., Huang, P. S., Tu, T. M. and Chang, C. P. (2007). Adaptive image steganographic scheme based on Tri-way Pixel-Value Differencing. In *Systems, Man and Cybernetics, 2007.ISIC. IEEE International Conference on* (pp. 1165-1170). IEEE.
- Cheddad, A., Condell, J., Curran, K., and Mc Kevitt, P. (2010). Digital image steganography: Survey and analysis of current methods. *Signal processing*, **90**(3), 727-752.
- Chen, P.C (1999). On the study of watermarking application in www- Modelling Performance Analysis, and Application of Digital Image Watermarking System. Ph. D. Thesis, Monash Universty.

- Chen, P.-M. (2000). *A visible watermarking mechanism using a statistic approach*. Paper presented at the Signal Processing Proceedings, 2000. WCCC-ICSP 2000. 5th International Conference on.
- Chen, S. X. (1999). Beta kernel estimators for density functions. *Computational Statistics and Data Analysis*, 31(2), 131-145.
- Chen, T. Z., Horng, G., and Wang, S. H. (2003). A Robust Wavelet Based Watermarking Scheme using Quantization and Human Visual System Model. *Pakistan journal of Information and Technology*, 2(3), 213-230.
- Cheung, W. N. (2000). Digital image watermarking in spatial and transform domains. In *TENCON 2000. Proceedings* (Vol. 3, pp. 374-378). IEEE.
- Choi, H. I., Kim, T. W., Kwon, S. H., Moon, H. P., Park, S. H., Shin, H. J., and Sohn, J. K. (2010). Digital watermarking of polygonal meshes with linear operators of scale functions. *Computer-Aided Design*, 42(3), 163-172.
- Chopra, D., Gupta, P., and Gupta, A (2012). Lsb Based Digital Image Watermarking For Gray Scale Image. *IOSR Journal of Computer Engineering (IOSRJCE) ISSN, 2278-0661*.
- Chu, S. C., Jain, L. C., Huang, H. C. and Pan, J. S. (2010). Error-resilient triple-watermarking with multiple description coding. *Journal of Networks*, 5(3), 267-274.
- Codr, J. (2009). Unseen: An Overview of Steganography and Presentation of Associated Java Application C-Hide. Retrieved January, 8, 2010.
- Cooley, J. W. and Tukey, J. W. (1965). An algorithm for the machine calculation of complex Fourier series. *Mathematics of computation*, 19(90), 297-301.
- Cox, I. J., Kilian, J., Leighton, F. T. and Shamoon, T. (1997). Secure spread spectrum watermarking for multimedia. *Image Processing, IEEE Transactions on*, 6(12), 1673-1687.
- Cox, I. J., Kilian, J., Leighton, T., and Shamoon, T. (1996). *Secure spread spectrum watermarking for images, audio and video*. Paper presented at the Image Processing, 1996. Proceedings., International Conference on. (Vol. 3, pp. 243-246). IEEE.
- Cox, I. J., Miller, M. L. and McKellips, A. L. (1999). Watermarking as communications with side information. *Proceedings of the IEEE*, 87(7), 1127-1141.

- Cox, I., Miller, M., Bloom, J. and Miller, M. (2001). *Digital watermarking*. Morgan Kaufmann.
- Cox, I., Miller, M., Bloom, J., Fridrich, J. and Kalker, T. (2007). *Digital watermarking and steganography*. Morgan Kaufmann.
- Cox, I., Miller, M., Bloom, J., and Miller, M. (2001). *Digital watermarking*: Morgan Kaufmann.
- Daoshun, W., Jinghong, L., Lei, Z., and Yiqi, D. (2003, November Memon, N., and Delp, E. L., and Wolfgang, R. F. (1996). A Watermark for Digital Images. Proceeding of the IEEE International Conference on image processing. September. Lauzanne:219-222.
- Fiaidhi, J., Mohammed, S., Jaam, J., and Hasnah, A. (2003). A standard framework for personalization via ontology-based query expansion. *Pakistan Journal of Information and Technology*, 2(2), 96-103.
- Gelasca, E. D., Ebrahimi, T., Corsini, M. and Barni, M. (2005). Objective evaluation of the perceptual quality of 3D watermarking. In *Image Processing, 2005. IICIP 2005. IEEE International Conference on* (Vol. 1, pp. I-241). IEEE.
- Giakoumaki, S. G., Theou, K., and Frangou, S. (2006). Increased prepulse inhibition of the acoustic startle response is associated with better strategy formation and execution times in healthy males. *Neuropsychologia*, 44(12), 2494-2499.
- Golomb, S. W. and Baumert, L. D. (1963). The search for Hadamard matrices. *The American Mathematical Monthly*, 70(1), 12-17.
- Hartung, F., and Kutter, M. (1999). Multimedia watermarking techniques. *Proceedings of the IEEE*, 87(7), 1079-1107.
- Hernández, J. R., and Pérez-González, F. (1999). Statistical analysis of watermarking schemes for copyright protection of images. *Proceedings of the IEEE*, 87(7), 1142-1166.
- Herrigel, A., ó Ruanaidh, J., Petersen, H., Pereira, S. and Pun, T. (1998). Secure copyright protection techniques for digital images. In *Information Hiding* (pp. 169-190). Springer Berlin Heidelberg.
- Ho, A. T., Shen, J. and Tan, S. H. (2003, January). Robust digital image-in-image watermarking algorithm using the fast Hadamard transform. In *International Symposium on Optical Science and Technology* (pp. 76-85). International Society for Optics and Photonics.

- Ho, A. T., Shen, J., Tan, S. H. and Kot, A. C. (2002). Digital image-in-image watermarking for copyright protection of satellite images using the fast Hadamard transform. In *Geoscience and Remote Sensing Symposium, 2002.IGARSS'02.2002 IEEE International* (Vol. 6, pp. 3311-3313).IEEE.
- Hsieh, M. S., Tseng, D. C. and Huang, Y. H. (2001). Hiding digital watermarks using multiresolution wavelet transform. *Industrial Electronics, IEEE Transactions on*, **48**(5), 875-882.
- Hsu, C. T. and Wu, J. L. (1996, September).Hidden signatures in images.In *Image Processing, 1996.Proceedings., International Conference on* (Vol. 3, pp. 223-226). IEEE.
- Hsu, C. T. and Wu, J. L. (1998).DCT-based watermarking for video. *Consumer Electronics, IEEE Transactions on*, **44**(1), 206-216.
- Huang, H. C., Chu, C. M. and Pan, J. S. (2009).Genetic watermarking for copyright protection. In *Information Hiding and Applications* (pp. 1-19). Springer Berlin Heidelberg.
- Hui-qin, W., Ji-chao, H., and Fu-ming, C. (2010). *Colour Image Watermarking Algorithm Based on the Arnold Transform*. Paper presented at the Communications and Mobile Computing (CMC), 2010 International Conference on.
- Hyeong,I T.W. K., Song H., Hwan,P.Sungha, P. Heon,J.Jung,K.(2010). Digital watermarkingof polygonal meshes with linear operators of scale functions. *Comput. AidedDes.*, 42, 163-172.
- Joag-Dev, K., and Proschan, F. (1983). Negative association of random variables with applications. *The Annals of Statistics*, *11*(1), 286-295.
- Joyner, D.and Kim, J. L. (2011). *Selected unsolved problems in coding theory*.Springer.
- Kahn, H., and Park, J. (2003).A semi-fragile Watermarking using JND.Proceedings of the Pacific Rim Workshop on Digital Steganography (2003).July. Kitakyushu, Japan.
- Kang, H., and Park, J. (2003). A semi-fragile watermarking using JND. *Proc. of STEG2003*, 127-131.
- Kang, M. G. and (2003). Super-resolution image reconstruction: a technical overview. *Signal Processing Magazine, IEEE*, 20(3), 21-36.

- Kang, X., Huang, J., Shi, Y. Q. and Lin, Y. (2003). A DWT-DFT composite watermarking scheme robust to both affine transform and JPEG compression. *Circuits and Systems for Video Technology, IEEE Transactions on*, **13**(8), 776-786.
- Kao, S. H., Chao, H. T., Chen, H. W., Hwang, T. I., Liao, T. L. and Wei, Y. H. (2008). Increase of oxidative stress in human sperm with lower motility. *Fertility and sterility*, **89**(5), 1183-1190.
- Kaur, G., and Kaur, K. (2013). Image Watermarking Using LSB (Least Significant Bit). *International Journal*, 3(4).
- Khan, A. (2006). *Intelligent perceptual shaping of a digital watermark* (Doctoral dissertation, PhD thesis, Computer Science and Engineering, GhulamIshaq Khan Institute of Engineering Sciences and Technology, Topi, Pakistan).
- Kumar, K., Hughes, E., Holmes, R., and Souder, P. (2011). Precision Low Energy Weak Neutral Current Experiments. *Modern Physics Letters A*, 10(39), 2979-2992.
- Kundur, D., and Hatzinakos, D. (1999). Digital watermarking for telltale tamper proofing and authentication. *Proceedings of the IEEE*, 87(7), 1167-1180.
- Kutter, M., and Petitcolas, F. A. (1999). A fair benchmark for image watermarking systems. *Electronic Imaging*, 99, 219-239.
- Kutter, M., Jordan, F. D. and Bossen, F. (1997). Digital signature of color images using amplitude modulation. In *Electronic Imaging'97* (pp. 518-526). International Society for Optics and Photonics.
- Kwon, S. H., Kim, T. W., Choi, H. I., Moon, H. P., Park, S. H., Shin, H. J. and Sohn, J. K. (2011). Blind digital watermarking of rational Bézier and B-spline curves and surfaces with robustness against affine transformations and Möbiusreparameterization. *Computer-Aided Design*, **43**(6), 629-638.
- Langelaar, G. C. (2000). Real-time watermarking techniques for compressed video data. *Printed by Universal Press, Veenendaal*, **158**, 1.
- Latif, A., and Rashidi, F. (2011). A watermarking scheme based on the parametric slant-hadamard transform. *Journal of Information Hiding and Multimedia Signal Processing*, 2(4), 377-386.
- Lee, G. J., Yoon, E. J. and Yoo, K. Y. (2008). A new LSB based digital watermarking scheme with random mapping function. In *Ubiquitous*

- Multimedia Computing, 2008.UMC'08. International Symposium on* (pp. 130-134). IEEE.
- Li, G., Yao, Y., Yang, H., Shrotriya, V., Yang, G. and Yang, Y. (2007). "Solvent Annealing" Effect in Polymer Solar Cells Based on Poly (3-hexylthiophene) and Methanofullerenes. *Advanced Functional Materials*, **17**(10), 1636-1644.
- Lie, W. N. and Chang, L. C. (1999). Data hiding in images with adaptive numbers of least significant bits based on the human visual system. In *Image Processing, 1999.ICIP 99.Proceedings.1999 International Conference on*(Vol. 1, pp. 286-290).IEEE.
- Lin, E. T. and Delp, E. J. (1999).A review of data hiding in digital images. In *ISand TS PicsConference* (pp.274-278). Societyfor Imaging Science and Technology.
- Lin, E. T.,and Delp, E. J. (1999). A review of fragile image watermarks. In proceedings of the Multimedia and Security Workshop (ACM Multimedia'99) *Multimedia Contents* (pp. 25-29).
- Luo, L., Chen, Z., Chen, M., Zeng, X., and Xiong, Z. (2010). Reversible image watermarking using interpolation technique. *Information Forensics and Security, IEEE Transactions on*, 5(1), 187-193.
- Macq, B., Dittmann, J. and Delp, E. J. (2004).Benchmarking of image watermarking algorithms for digital rights management. *Proceedings of the IEEE*, **92**(6), 971-984.
- MacWilliams, F. F. J., and Sloane, N. N. J. A. (1977). *The Theory of Error-correcting Codes: Part 2* (Vol. 16): Elsevier.
- Maity, S. P. and Kundu, M. K. (2002).Robust and Blind Spatial Watermarking In Digital Image.In *ICVGIP*.
- Maity, S. P. and Kundu, M. K. (2002).Robust and Blind Spatial Watermarking In Digital Image.In *ICVGIP*.
- Mehta, A., Prabhakar, M., Kumar, P., Deshmukh, R. and Sharma, P. L. (2012).Excitotoxicity: Bridge to various triggers in neurodegenerative disorders.*European journal of pharmacology*.
- Memo,D.A., Wong, S. C. (2003). U.S. Patent No. 6,532,556. Washington, DC: U.S. Patent and Trademark Office.
- Memon, N. and Wong, P. W. (1998).Protecting digital media content.*Communications of the ACM*, **41**(7), 35-43.

- Mohan, B. C., Kumar, S. S. and Chatterjee, B. N. (2006), "Digital Image Watermarking in Dual Domains ", Proc, IET International Conference on Visual Information Engineering, PP. 410 – 415, IEEE Computer Society.
- Mohan, B. C., Kumar, S. S., and Chatterjee, B. N. (2006). Digital image watermarking in dual domains.
- Mohananthini, N., and Yamuna, G. (2012). *Watermarking for images using wavelet domain in Back-Propagation neural network*. Paper presented at the Advances in Engineering, Science and Management (ICAESM), 2012 International Conference on.
- Mohanty, S. P. (1999). Digital watermarking: A tutorial review. URL: <http://www.csee.usf.edu/smohanty/research/Reports/WMSurvey1999Mohanty.pdf>.
- MZM Khedher, A., and Abdul Manaf, A. (2009). A novel digital watermarking technique based on ISB (Intermediate Significant Bit). *World Academy of Science, Engineering and Technology*, 50, 989-996.
- Nasir, I., Weng, Y. and Jiang, J. (2008). A New Robust Watermarking Scheme for Color Image in Spatial Domain. School of Informatics, University of Bradford, 978-0-7695-3122-9/08 Crown Copyright.
- Nasir, I., Weng, Y., and Jiang, J. (2007, December). A new robust watermarking scheme for color image in spatial domain. In *Signal-Image Technologies and Internet-Based System, 2007. SITIS'07. Third International IEEE Conference on* (pp. 942-947). IEEE.
- Nikolaidis, N. and Pitas, I. (1999). Digital image watermarking: an overview. In *Multimedia Computing and Systems, 1999. IEEE International Conference on* (Vol. 1, pp. 1-6). IEEE.
- Nikolaidis, N., and Pitas, I. (1998). Robust image watermarking in the spatial domain. *Signal processing*, 66(3), 385-403.
- Petitcolas, F. A., Anderson, R. J. and Kuhn, M. G. (1999). Information hiding-a survey. *Proceedings of the IEEE*, 87(7), 1062-1078.
- Podilchuk, C. I. and Delp, E. J. (2001). Digital watermarking: algorithms and applications. *Signal Processing Magazine, IEEE*, 18(4), 33-46.
- Podilchuk, C. I., and Zeng, W. (1998). Image-adaptive watermarking using visual models. *Selected Areas in Communications, IEEE Journal on*, 16(4), 525-539.

- Qi, Xiaojun. RST-invariant digital watermarking based on template and log-polar mapping. In *Proceeding of the 6th IASTED international conference on, signal and image processing (SIP'04)*, pp. 42-46. 2004.
- Qureshi, M. A., and Tao, R. (2006). *Technical Challenges for Digital Watermarking*. Paper presented at the Computational Engineering in Systems Applications, IMACS Multiconference on.
- Saryazdi, S., and Nezamabadi-Pour, H. (2005). A blind digital watermark in hadamard domain. *World Acad Sci Eng Technol*, 3, 126-129.
- Schyndel, R. G., Tirkel, A. Z. and Osborne, C. F. (1994). A digital watermark. In *Image Processing, 1994. Proceedings. ICIP-94., IEEE International Conference* (Vol. 2, pp. 86-90). IEEE.
- Sharifara, A. (2012). *Digital image watermarking by using intermediate significant bits in gray scale images*. Universiti Teknologi Malaysia, Faculty of Computer Science and Information Systems.
- Song, H. T. Hyeong, I. Hwan, Sung, H. HEON, J. Jung, K. Sohn. (2011). Blind digital watermarking of rational Bézier and B-spline curves and surfaces with robustness against affine transformations and Möbius reparameterization. *Comput. Aided Des.*, 43, 629-638.
- Swanson, M. D., Zhu, B. and Tewfik, A. H. (1996). Transparent robust image watermarking. In *Image Processing, 1996. Proceedings., International Conference on* (Vol. 3, pp. 211-214). IEEE.
- Tao, P. and Eskicioglu, A. M. (2004). A robust multiple watermarking scheme in the discrete wavelet transform domain. In *Optics East* (pp. 133-144). International Society for Optics and Photonics.
- Thien, C. C. and Lin, J. C. (2003). A simple and high-hiding capacity method for hiding digit-by-digit data in images based on modulus function. *Pattern Recognition*, 36(12), 2875-2881.
- Tsui, T. K., Zhang, X. P. and Androutsos, D. (2008). Color image watermarking using multidimensional Fourier transforms. *Information Forensics and Security, IEEE Transactions on*, 3(1), 16-28.
- Vellore-India, V.-I. V.-I. (2011). Entropy based Robust Watermarking Scheme using Hadamard Transformation Technique. *Entropy*, 12(9).
- Venkatraman, P., Wetzel, R., Tanaka, M., Nukina, N. and Goldberg, A. L. (2004). Eukaryotic proteasomes cannot digest polyglutamine sequences and release

them during degradation of polyglutamine-containing proteins. *Molecular cell*, **14**(1), 95-104.

Voloshynovskiy, S. V., Deguillaume, F., Pereira, S. and Pun, T. (2001). Optimal adaptive diversity watermarking with channel state estimation. In *Photonics West 2001-Electronic Imaging* (pp. 673-685). International Society for Optics and Photonics.

Voloshynovskiy, S., Pereira, S., Iquise, V. and Pun, T. (2001). Attack modelling: towards a second generation watermarking benchmark. *Signal processing*, **81**(6), 1177-1214.

Voloshynovskiy, S., Pereira, S., Pun, T., Eggers, J. J. and Su, J. K. (2001). Attacks on digital watermarks: classification, estimation based attacks, and benchmarks. *Communications Magazine, IEEE*, **39**(8), 118-126.

Wang, J. Y., and Adelson, E. H. (1994). Representing moving images with layers. *Image Processing, IEEE Transactions on*, **3**(5), 625-638.

Wang, R. Z., Lin, C. F. and Lin, J. C. (2001). Image hiding by optimal LSB substitution and genetic algorithm. *Pattern recognition*, **34**(3), 671-683.

Wang, S. J. (2005). Steganography of capacity required using modulo operator for embedding secret image. *Applied Mathematics and Computation*, **164**(1), 99-116.

Wolfgang, R. B. and Delp, E. J. (1996). A watermark for digital images. In *Image Processing, 1996. Proceedings., International Conference on* (Vol. 3, pp. 219-222). IEEE.

Wong, P. W. (1998). Protecting digital media content. *Communications of the*

Wu, D. C. and Tsai, W. H. (2000). Spatial-domain image hiding using image differencing. *IEE Proceedings-Vision, Image and Signal Processing*, **147**(1), 29-37.

Wu, D. C. and Tsai, W. H. (2003). A steganographic method for images by pixel-value differencing. *Pattern Recognition Letters*, **24**(9), 1613-1626.

Xiaojun Qi, "RST-Invariant Digital Watermarking Based on Template and Log-Polar Mapping," Proc. of the 6th IASTED International Conference on Signal and Image Processing (SIP'04), pp. 42-46, Honolulu, Hawaii, August 23-25, 2004.

- Zeki, A. M. and Abdul Manaf, A. (2011). ISB watermarking embedding: A block based model. *Information Technology Journal*, **10**(4), 841-848.
- Zeki, A. M. and Manaf, A. A. (2009). A Novel Digital Watermarking Technique Based on ISB (Intermediate Significant Bit). *International Journal of Information Technology*, vol:5:3.
- Zhang, X. and Wang, S. (2005). Steganography using multiple-base notational system and human vision sensitivity. *Signal Processing Letters, IEEE*, **12**(1), 67-70.
- Zhang, Y., Lu, Z.-M., and Zhao, D.-N. (2010). A blind image watermarking scheme using fast Hadamard transform. *Information Technology Journal*, **9**(7), 1369-1375.
- Zongmin, L., Xiuping, M. and Hua, L. (2007). 3D model retrieval based on U system rotation invariant moments. In *Pervasive Computing and Applications, 2007.ICPCA 2007. 2nd International Conference on* (pp. 183-188). IEEE.
- on (pp. 183-188). IEEE.