

Singapore Management University Institutional Knowledge at Singapore Management University

Research Collection School Of Information Systems

School of Information Systems

5-2018

Hierarchical learning of cross-language mappings through distributed vector representations for code

Nghi D. Q. BUI

Singapore Management University, dqnbui.2016@phdis.smu.edu.sg

Lingxiao JIANG

Singapore Management University, lxjiang@smu.edu.sg

DOI: <https://doi.org/10.1145/3183399.3183427>

Follow this and additional works at: https://ink.library.smu.edu.sg/sis_research

 Part of the [Software Engineering Commons](https://ink.library.smu.edu.sg/sis_research)

Citation

BUI, Nghi D. Q. and JIANG, Lingxiao. Hierarchical learning of cross-language mappings through distributed vector representations for code. (2018). *ICSE-NIER '18: Proceedings of the 40th International Conference on Software Engineering: New Ideas and Emerging Results: Gothenburg, Sweden, May 30 - June 3*. 33-36. Research Collection School Of Information Systems.

Available at: https://ink.library.smu.edu.sg/sis_research/4090

This Conference Proceeding Article is brought to you for free and open access by the School of Information Systems at Institutional Knowledge at Singapore Management University. It has been accepted for inclusion in Research Collection School Of Information Systems by an authorized administrator of Institutional Knowledge at Singapore Management University. For more information, please email libIR@smu.edu.sg.

Hierarchical Learning of Cross-Language Mappings through Distributed Vector Representations for Code

Nghi D. Q. Bui

School of Information Systems
Singapore Management University
dqnbui.2016@phdis.smu.edu.sg

Lingxiao Jiang

School of Information Systems
Singapore Management University
lxjiang@smu.edu.sg

ABSTRACT

Translating a program written in one programming language to another can be useful for software development tasks that need functionality implementations in different languages. Although past studies have considered this problem, they may be either specific to the language grammars, or specific to certain kinds of code elements (e.g., tokens, phrases, API uses). This paper proposes a new approach to automatically learn cross-language representations for various kinds of structural code elements that may be used for program translation. Our key idea is two folded: First, we normalize and enrich code token streams with additional structural and semantic information, and train cross-language vector representations for the tokens (a.k.a. *shared embeddings* based on word2vec, a neural-network-based technique for producing word embeddings; Second, hierarchically from bottom up, we construct shared embeddings for code elements of higher levels of granularity (e.g., expressions, statements, methods) from the embeddings for their constituents, and then build mappings among code elements across languages based on similarities among embeddings.

Our preliminary evaluations on about 40,000 Java and C# source files from 9 software projects show that our approach can automatically learn shared embeddings for various code elements in different languages and identify their cross-language mappings with reasonable Mean Average Precision scores. When compared with an existing tool for mapping library API methods, our approach identifies many more mappings accurately. The mapping results and code can be accessed at <https://github.com/bdqngi/hierarchical-programming-language-mapping>. We believe that our idea for learning cross-language vector representations with code structural information can be a useful step towards automated program translation.

KEYWORDS: software maintenance, language mapping, word2vec, syntactic structure, program translation

1 INTRODUCTION

Automated program translation (a.k.a. language migration) can be very useful for software development as it may help reduce developer coding time, especially for functionalities and library APIs that need to be implemented and maintained in various program-

ming languages. Take the Apache Lucene as an example: it is a popular information retrieval library, providing many APIs for a third-party client program to access its core functionalities. Lucene was originally implemented in Java and not easy to be used by client programs in other languages. Due to popular demands for its functionalities, it has been ported to other languages (e.g., C#, C++, Python, Ruby, PHP, etc.) to support clients in those languages. Nevertheless, multiple versions of Lucene in different languages increase the cost on its maintenance and development, as new features or bug fixes in one version may need to be manually ported to another version for consistency. An automated approach to translate code among languages can help save much cost, and still be useful even if the approach cannot generate complete translations but can identify likely translation candidates in large code bases.

Existing studies on program translation may be classified in two categories. One is based on grammar rules (e.g., Java2CSharp at <https://github.com/codejuicer/java2csharp>), which can be very accurate, but inflexible in dealing with different languages or language evolutions as the translations need to be programmed repeatedly for different grammars. The other is based on statistical language models for selected code elements (e.g., for tokens [15], token phrases with contexts [16, 17], or APIs and API sequences [4, 5, 13, 14, 18, 21, 22]), which can deal with different languages but may need to incorporate various kinds of contexts (e.g., sequences/co-occurrence relations, data/control dependencies) for selected code elements [5, 17].

In the field of natural language processing (NLP), neural-network-based Neural Machine Translation (NMT) has emerged as an alternative to statistical language models, achieving good results for natural language translation [19]. NMT models use distributed vector representations of words as the basic unit to compose representations for more complex language elements, such as sentences and paragraphs. One prominent distributed vector representation is word2vec [10, 12], which uses neural networks to learn vector representations of words (a.k.a. *word embeddings*) from natural language articles to capture latent semantics with respect to a modeling objective, such as predicting the context given a word or predicting the next word given a context. Also, similarities among different natural languages can be exploited for machine translation [11], which can be applicable for programming languages as there are many across-language code clones too [2].

Inspired by NMT and limitations in existing program translation techniques, **our goal** is to produce a new way of *representing code in distributed vectors for any kind of code elements across languages*.

Our key idea is mainly based on two observations: (1) code clearly has hierarchical structures as illustrated in Figure 1 and is often composable, and (2) code structures (in addition to its textual appearance) often accurately reflect its semantics, which are dif-

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
ICSE-NIER'18, May 27-June 3 2018, Gothenburg, Sweden

© 2018 Copyright held by the owner/author(s). Publication rights licensed to the Association for Computing Machinery.
ACM ISBN 978-1-4503-5662-6/18/05...\$15.00
<https://doi.org/10.1145/3183399.3183427>

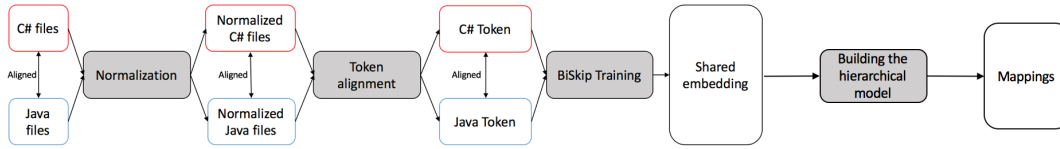


Figure 2: An overview of our approach

3.3 The Bilingual skip-gram Model

Our goal here is to learn distributed vector representations for cross-language code tokens, which can then serve as the basis for more complex composed code elements. We use the bilingual skip gram model (BiSkip) [9] to achieve the goal. The motivation behind BiSkip is to learn shared embeddings between tokens cross-lingually rather than just monolingually: Rather than just predicting the tokens in one language, they use the tokens in one language to predict their aligned tokens in another language and vice versa. For example, from a large corpus of Java and C# code, the BiSkip model may be able to learn that the token `readonly` in C# is aligned to and has the same meaning as the token `final` in Java, and `final` often occurs together with `public` and `int` to define certain constants. Then, when given the token `readonly`, we can use the BiSkip model to substitute `final` for `readonly` and predict that its surrounding tokens are `int` and `public`. The BiSkip model has been shown to perform well for both bilingual and monolingual tasks [9]. In this paper, we utilize the Berkeley aligner [8] to generate token alignments from the code token streams to be used by BiSkip.

3.4 Hierarchical Models

Once we get the vector representation for tokens across languages, we want to generate representations for more complex code elements, such as expressions, definitions, declarations, statements, methods, classes, and modules (Figure 1) so that code mappings and program translations can be done for more complex elements. Since all of the elements are hierarchical compositions of elements at lower levels of granularity including tokens, our intuition is to generate representations for elements at higher levels of granularity by composing the shared embeddings of their constituent elements.

According to [7], simply averaging word embeddings of all words in a text can be a strong baseline for representing the whole text for the task of short text similarity comparison. Variants of this simple averaging strategy exist, such as averaging the embeddings with their weights measured in terms of term-frequency/inverse-document-frequency (TF-IDF) to decrease the influence of the most common words. As a preliminary exploration in this paper, we only consider 3 levels of granularity of this task: expressions, statements, and methods, and use the simple averaging operation to compose shared embeddings according to the structures of code abstract syntax trees. While the next section shows the limited settings produce promising code mapping results, we leave more comprehensive exploration of composition strategies for future work.

4 EMPIRICAL EVALUATION

4.1 Data

Table 1 is a summary of our training dataset. We consider the language pair C# and Java in all the evaluations. We collect the comparable dataset as in StaMiner [13]. We use the implementation of BiSkip from [1] to generate the vector representations of tokens.

Project	Java			C#		
	Ver	Files	Methods	Ver	Files	Methods
ANTLR(AN)	4.0.0	276	3560	4.0.0	630	5049
db4o(DB)	8.0	5556	38525	8.0	3845	23248
fpml(FP)	1.7	130	727	1.7	135	1038
Itext(IT)	7.0.5	1147	10003	7.0.5	2647	18842
JUnit(JG)	4.10.0	1394	13862	4.10.0	1079	9203
JTS(JT)	4.0.0	958	7883	4.0.0	1035	6640
Lucene(LC)	7.1.0	6098	48038	7.1.0	2930	19961
POI	4.0.0	3295	29172	4.0.0	2794	16717
Neodatis(ND)	2.1	960	10525	2.1	987	12153

Table 1: Overview of our training data set

Levels	Expressions	Statements	Methods
Avg. MAP, k = 1	0.31	0.38	0.44
Avg. MAP, k = 5	0.43	0.50	0.58
Avg. MAP, k = 10	0.57	0.53	0.59

Table 2: Average MAP scores for element mappings at various granularity levels

4.2 Evaluation Tasks

4.2.1 Element mappings. As described in Section 3.4, we aim to build vector representation for compositional cases in order to find good mappings in a hierarchical model across languages. We extract all the expressions, the statements and the methods of each project in our data set by traversing the AST representation to identify the element type, then we manually defined ground truth elements pairs. We treat each element in Java as a query to retrieve the top-k elements of C#. Then we use Mean Average Precision (MAP) as the metric to evaluate this task. Due to the limitation of pages, instead of showing the MAP score for each type of element of each project, we calculate the *average MAP* of all project for each type of element. Table 2 shows the results of the evaluations, with $k = 1, 5, 10$, respectively.

4.2.2 API mappings. We use the task described in StaMiner [13] to evaluate how effective our approach. We consider 2 types of API names: classes and methods. For each *name* in Java, we get its vector representation and use it as a query. The query is used to find the top-k nearest neighbors among the shared embeddings for C# names. In this task, we only consider $k = 1$, which means we consider only the exact match of the query. Since there are too many APIs to build ground truth manually, we randomly select 100 APIs of each project for this task. Table 3 shows the precisions for class mappings and method mappings.

Compared to StaMiner [13] and DeepAM [5] that mine API mappings by using statistical machine translation techniques and deep learning, our work is more generalized in term of the kind of code elements supported. Their work only focuses on learning the mappings between language SDK APIs, while our approach allows mappings among any kind of structural code elements in a language beyond SDK APIs. Although finding the mappings for SDK APIs in different languages is a commonly needed and important task, developers often need more mappings for program elements (e.g.,

Level\Project	AN	FP	IT	JG	JTS	LC	POI	DB	ND
Class	0.85	0.82	0.88	0.69	0.83	0.82	0.78	0.86	0.79
Method	0.81	0.80	0.83	0.77	0.72	0.87	0.89	0.82	0.83

Table 3: Precision of API method mappings

variable names, data structures, statements, method implementations, etc.). We believe that being able to find the mappings among program elements of any granularity is a important step to reach the goal of automated language migration.

We also found that our approach detects correctly about 400 more SDK API method mappings and 150 more SDK API class mappings that were not set in the latest mapping files in the Java2CSharp tool, while StaMiner detects 120 more SDK mappings for both classes and methods and 84 of which are also in our mappings. In this evaluation, we only consider $k=1$ for the top- k nearest neighbors. We expect to find even more mappings if we consider a larger k and we can find more mappings for APIs that are *not* in the language SDK libraries. We leave these evaluations for future work.

4.3 Threats to Validity

For the model training, we use the same settings as described by Mikolov et al. [12], which may not be the best with respect to our dataset. We will do more empirical research to choose better hyper-parameters to improve training results. The normalization step is mostly based on srcML [3] to get the AST of source code. At this moment, srcML supports four languages (C, C++, C#, Java), and we only perform experiments on the Java – C# pair. In the future, we want to explore the generalizability of our approach with more programming languages supported by srcML and beyond.

The correctness of our API mappings results were checked by ourselves manually, which may be biased and incomprehensive. To evaluate the actual correctness and usefulness of our API mappings, we plan to do more large-scale evaluations by using Java2CSharp to see how our mappings can help reduce the compilation error rates when compared with StaMiner during actual migration of projects.

As described in [20], source code is very localized. Since we treat a whole file as a corpus, which means we ignore the localness of the tokens. The skip-gram model focuses on capturing the global regularities over the whole corpus, and neglects local regularities, thus ignoring the localness of software. A natural way to collect local-awareness parallel corpus is that we can slice the file into multiple slices based on dependence information, then we align the parallel corpus based on the similarity of the slices. In addition, we only aligned files based on filename similarity. We could do better based on file-content similarity. Further, we constructed vector representations for higher level elements by a simple averaging technique for all the tokens in such elements. We could do better based on more structural and semantic contexts of the tokens. We leave more detailed explorations for future work.

5 CONCLUSION AND FUTURE WORK

This work proposes an approach to learn code element mappings across programming languages based on distributed vector representations. By utilizing the alignment of files in projects with multiple versions of implementations in different languages, we learn the alignment of tokens in an unsupervised manner, and generate the shared embeddings for tokens across languages. Then, the shared embeddings for more complex code elements are composed

from the embeddings of their constituent elements and tokens from bottom up according to the hierarchical structures of the syntax trees of the code. Our preliminary evaluations show that our approach can map many code elements between Java and C# accurately. This can serve as a foundation for more complicated tasks, such as program translation, cross-language program classification, code clone detection, code reuse, and even synthesis.

In the future, we want to improve the techniques used in our approach and examine our approach for more language pairs.

6 ACKNOWLEDGEMENTS

This work is partly funded by a MOE Tier 1 Grant 17-C220-SMU-008 from SIS at SMU. We also thank the anonymous reviewers for their insightful comments and suggestions.

REFERENCES

- [1] Alexandre Bérard, Christophe Servan, Olivier Pietquin, and Laurent Besacier. 2016. MultiVec: a Multilingual and Multilevel Representation Learning Toolkit for NLP. In *10th Language Resources and Evaluation Conference (LREC)*.
- [2] Xiao Cheng, Zhiming Peng, Lingxiao Jiang, Hao Zhong, Haibo Yu, and Jianjun Zhao. 2016. Mining revision histories to detect cross-language clones without intermediates. In *ASE*. 696–701.
- [3] Michael L Collard, Michael J Decker, and Jonathan I Maletic. 2011. Lightweight transformation and fact extraction with the srcML toolkit. In *11th IEEE International Working Conference on Source Code Analysis and Manipulation (SCAM)*. 173–184.
- [4] Xiaodong Gu, Hongyu Zhang, Dongmei Zhang, and Sunghun Kim. 2016. Deep API learning. In *FSE*. 631–642.
- [5] Xiaodong Gu, Hongyu Zhang, Dongmei Zhang, and Sunghun Kim. 2017. DeepAM: Migrate APIs with Multi-modal Sequence to Sequence Learning. In *26th International Joint Conference on Artificial Intelligence (IJCAI)*. 3675–3681.
- [6] Vincent J Hellendoorn and Premkumar Devanbu. 2017. Are deep neural networks the best choice for modeling source code?. In *ESEC/FSE*. 763–773.
- [7] Tom Kenter and Maarten De Rijke. 2015. Short text similarity with word embeddings. In *24th ACM International on Conference on Information and Knowledge Management (CIKM)*. 1411–1420.
- [8] Percy Liang, Ben Taskar, and Dan Klein. 2006. Alignment by agreement. In *the main conference on Human Language Technology Conference of the North American Chapter of the Association of Computational Linguistics (HLT-NAACL)*. Association for Computational Linguistics, 104–111.
- [9] Thang Luong, Hieu Pham, and Christopher D Manning. 2015. Bilingual Word Representations with Monolingual Quality in Mind. In *1st Workshop on Vector Space Modeling for Natural Language Processing (VS@HLT-NAACL)*. 151–159.
- [10] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Efficient Estimation of Word Representations in Vector Space. *CoRR* abs/1301.3781 (2013).
- [11] Tomas Mikolov, Quoc V Le, and Ilya Sutskever. 2013. Exploiting similarities among languages for machine translation. *arXiv preprint arXiv:1309.4168* (2013).
- [12] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013. Distributed representations of words and phrases and their compositionality. In *Advances in neural information processing systems (NIPS)*. 3111–3119.
- [13] Anh Tuan Nguyen, Hoan Anh Nguyen, Tung Thanh Nguyen, and Tien N. Nguyen. 2014. Statistical learning approach for mining API usage mappings for code migration. In *ASE*. 457–468.
- [14] Anh Tuan Nguyen, Hoan Anh Nguyen, Tung Thanh Nguyen, and Tien N. Nguyen. 2014. Statistical learning of API mappings for language migration. In *ICSE*. 618–619.
- [15] Anh Tuan Nguyen, Tung Thanh Nguyen, and Tien N. Nguyen. 2013. Lexical statistical machine translation for language migration. In *ESEC/FSE*. 651–654.
- [16] Anh Tuan Nguyen, Tung Thanh Nguyen, and Tien N. Nguyen. 2015. Divide-and-Conquer Approach for Multi-phase Statistical Migration for Source Code (T). In *ASE*. 585–596.
- [17] Anh Tuan Nguyen, Zhaopeng Tu, and Tien N. Nguyen. 2016. Do Contexts Help in Phrase-Based, Statistical Source Code Migration?. In *ICSME*. 155–165.
- [18] Hung Dang Phan, Anh Tuan Nguyen, Trong Duc Nguyen, and Tien N. Nguyen. 2017. Statistical migration of API usages. In *ICSE*. 47–50.
- [19] Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to Sequence Learning with Neural Networks. In *Annual Conference on Neural Information Processing Systems (NIPS)*. 3104–3112.
- [20] Zhaopeng Tu, Zhendong Su, and Premkumar T. Devanbu. 2014. On the localness of software. In *FSE*. 269–280.
- [21] Hao Zhong, Suresh Thummalapenta, and Tao Xie. 2013. Exposing Behavioral Differences in Cross-Language API Mapping Relations. In *FASE*. 130–145.
- [22] Hao Zhong, Suresh Thummalapenta, Tao Xie, Lu Zhang, and Qing Wang. 2010. Mining API mapping for language migration. In *ICSE*. 195–204.