

Biomimetic membranes with Pluronic® based vesicles incorporating Aquaporin Z

Górecki, Radoslaw Pawel; Spulber, Mariana; Tvermoes, Dana; Trzasku, Krzysztof; Hélix-Nielsen, Claus

Publication date: 2018

Document Version Publisher's PDF, also known as Version of record

Link back to DTU Orbit

Citation (APA):

Górecki, R. P., Spulber, M., Tvermoes, D., Trzasku, K., & Hélix-Nielsen, C. (2018). Biomimetic membranes with Pluronic® based vesicles incorporating Aquaporin Z. Poster session presented at Euromembrane 2018, Valencia, Spain.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

• Users may download and print one copy of any publication from the public portal for the purpose of private study or research.

- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Biomimetic membranes with Pluronic[®] based vesicles incorporating Aquaporin Z

Radosław Górecki^{a b}, Mariana Spulber^a, Dana Tvermoes^a, Krzysztof Trzaskuś^a, Claus Hélix-Nielsen^b

^a Aquaporin A/S, Nymøllevej 78, 2800 Kgs Lyngby, Denmark


^b Technical University of Denmark, Department of Environmental Engineering, Anker Engelunds Vej 1, 2900 Kgs Lyngby, Denmark

Keywords: Biomimetic polyamide membranes; Amino groups; Vesicles; Aquaporin; Pluronic[®]

Corresponding author: Radosław Górecki - rgo@aquaporin.dk





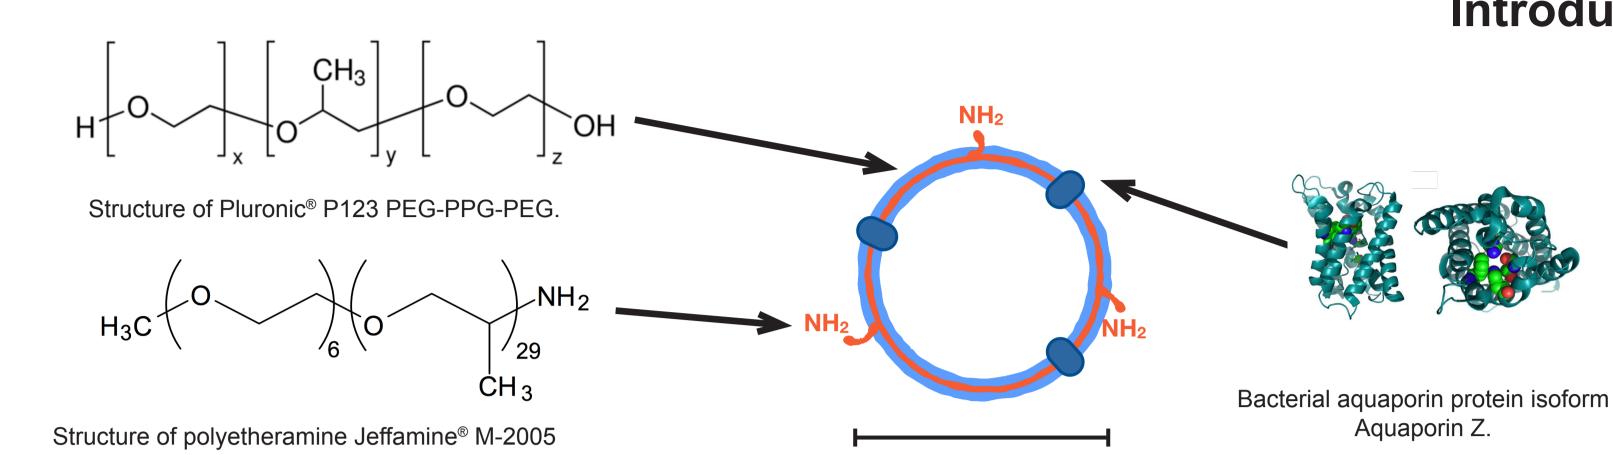

Introduction


- Given the rising problem of water scarcity the significance of developing highly efficient membranes for water purification and reuse becomes increasingly important.
- Biomimetic membranes represent a highly efficient alternative to traditional membranes, due to improved water flux, without compromising on selectivity (Tang et al., 2013). These membranes mimic functional features of biological membranes by reconstitution of selected channel proteins such as aquaporin (Kumar et al., 2007).
- Aquaporin channels, like all proteins are very sensitive to their environment, here we propose a way to ensure protein functionality by incorporating Aquaporin Z (AqpZ) into polymer-based self-assembled nanostructures – vesicles / proteopolymersomes.
- The vesicles proposed here are Pluronic[®] based, formed by self-assembly of the amphiphilic block copolymer Pluronic® and Jeffamine® a hydrophobic amino modified polypropylene oxide mixture.
- Vesicle size and water permeability was quantified, subsequently they were embedded into forward osmosis (FO) poly-

100 - 200 nm


Figure 1. Structure of polymeric vesicle functionally reconstituting AqpZ proteins, which protects the protein from degradation. The vesicle is made of amphiphilic ABA copolymer and equipped with NH, groups which will allow the covalent bonding into the final polyamide matrix of the membrane active layer.

amide thin film composite (TFC) membranes, which performance was characterized in terms of water flux (J_w) and reverse solute flux (J_{s}) .

• The aim of the study is to develop an formulation for polymeric nanostructures functionally reconstituting AqpZ proteins, which can be covalently incorporated into biomimetic membranes.

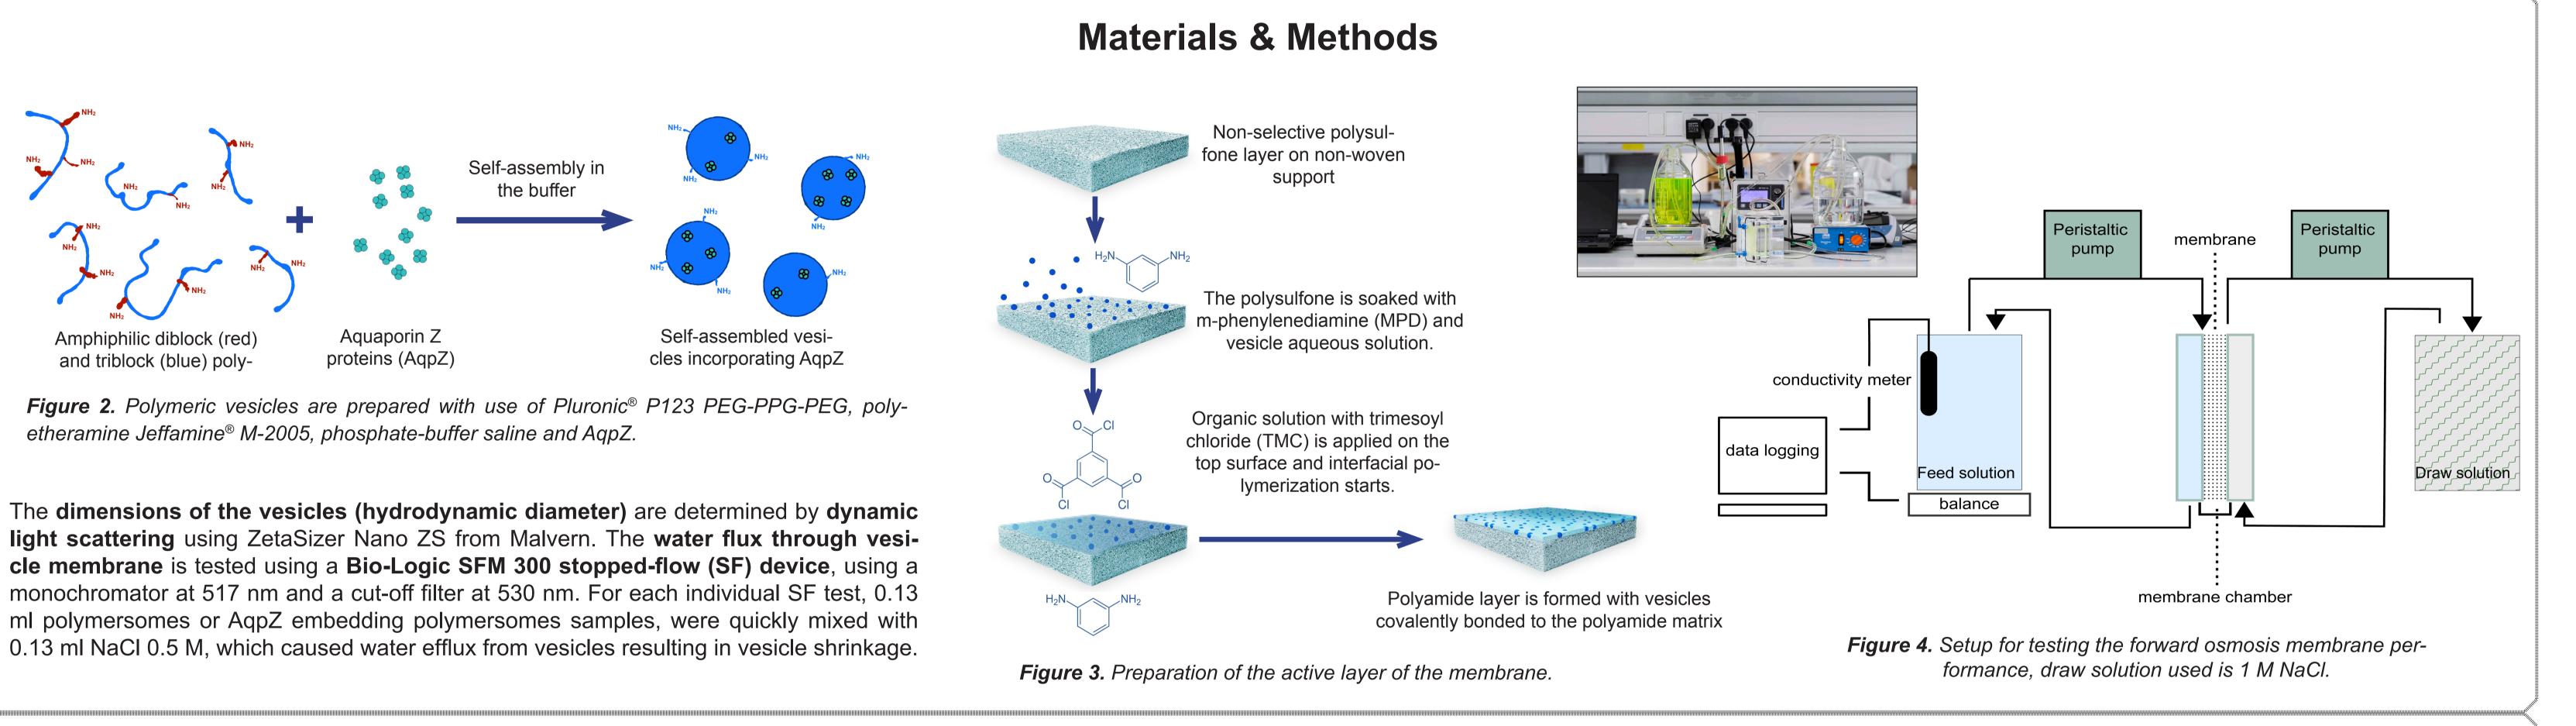

Results & Discussion

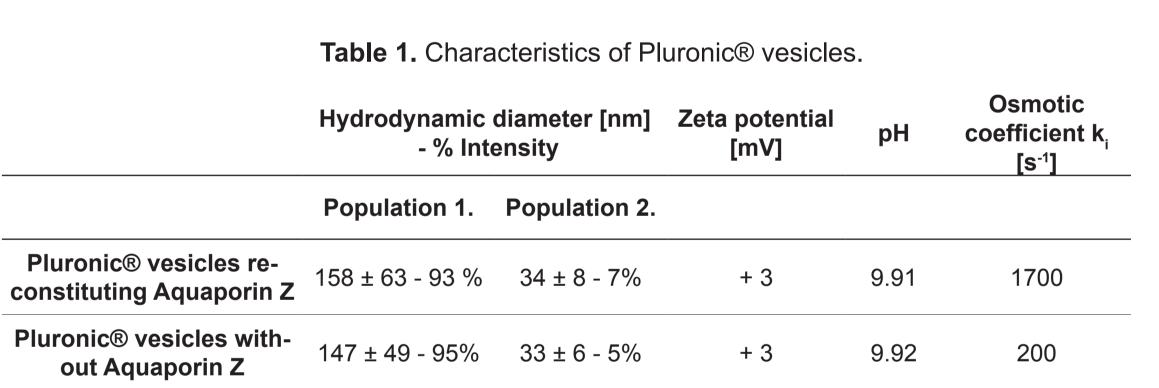

The only significant change in vesicles characteristics when AqpZ proteins are incorporated is the osmotic coefficient, which is directly related to the water flux through the membrane of the vesicle (Grzelakowski et al., 2015).

$$Y = at + b + \sum_{i=1}^{N} c_i e^{-k_i t}$$

Equation 1. Exponential equation used for calculation of the osmotic coefficient, where:

t - time [s]

- *k*_i osmotic coefficient [s⁻¹]
- *c*, *relative amplitude*
- a; b fitting coefficients
- Y light scattering

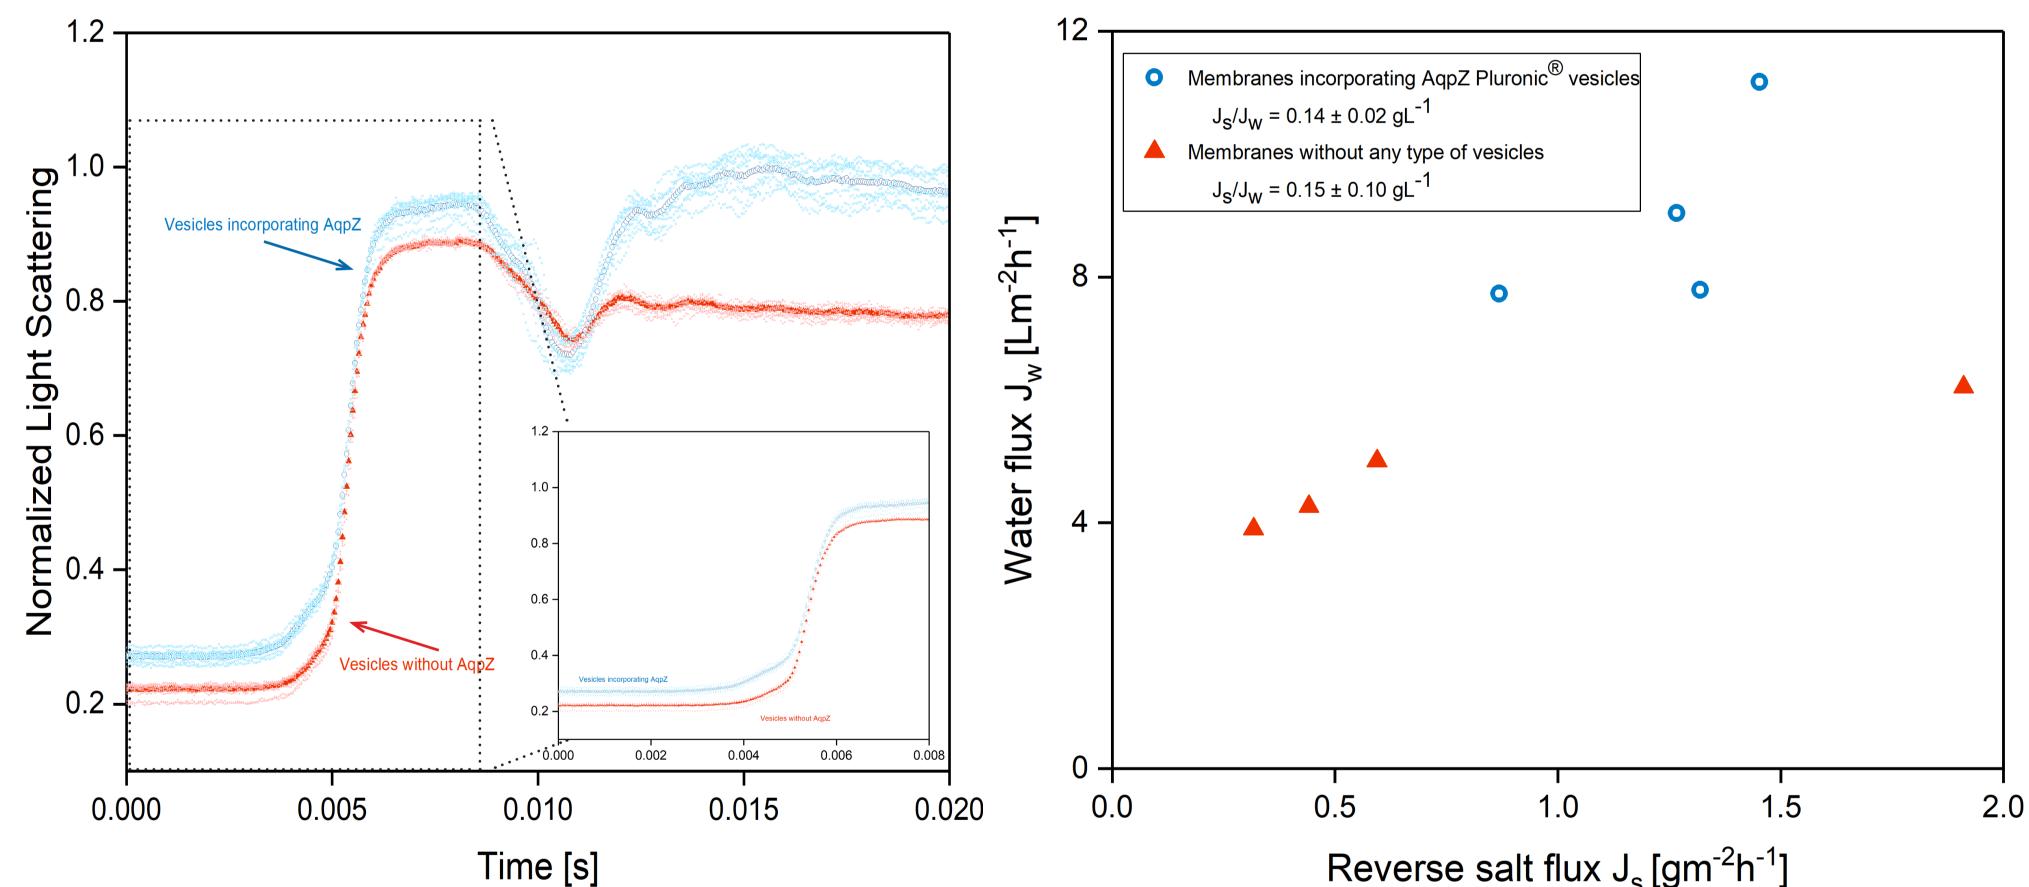


Figure 5. Stopped-flow light scattering results for the vesicles incorporating Aquaporin Z and blank ones. The analysis of exponential growth is made on the first population of the structures showing the most rapid shrinkage.

Figure 6. The screening FO experiment with membranes incorporating Pluronic® vesicles incorporating AqpZ.

• The preparation of vesicles by self-assembly is advantageous over film rehydration method, often used for polymersomes preparation, as it requires less equipment and is faster.

• The method for preparation of vesicles that we propose here is simple and does not require filtration step, that is very often necessary when dealing with self-assembly of polymeric vesicles.

• Vesicles proposed here, however, also have disatvantages such as limited long-term stability in diluted aqueous solutions, as the vesicles will tend to dissasemble to other nanostructures, when concentrations of polymers are changed. This is due to the fact that the form of vesicles will no longer be the most energy-favourable.

Conclusions

• AqpZ transmembrane water channel proteins can be succesfully functionally reconstituted into PEG-PPG-PEG copolymer membrane of the vesicle. Functional reconstitution has been confirmed by stopped-flow, while DLS and Zeta-potential analysis confirmed that there is no significant effect on the size and electrokinetic properties of vesicles when AqpZ are incorporated in comparison to the AqpZ-free Pluronic[®] vesicles.

• Based on the screening experiment, it is shown that the incorporation of AqpZ-reconsituting Pluronic® vesicles into the active polyamide layer of the membrane increase the flux over the FO membrane, without comprising on overall membrane performance (J_J) .

Outlook

• To understand in depth the incorporation of Pluronic[®] vesicles into the polyamide layer, further investigation on membranes has to be conducted - including testing in the reverse osmosis and vesicle quantification on the membrane.

• Furthermore, the proposed technology may be applied to the new generation of both reverse and forward osmosis biomimetic membranes, including the hollow fibre configuration.

References

• Tang et al., *Desalination by biomimetic aquaporin membranes: Review of status and prospects*, *Desalination*, 2013

• Kumar et al., Highly permeable pol. membranes based on the incorporation of the functional water channel protein Aquaporin Z, Proceedings of National Academy of Science, 2007

• Grzelakowski et al., A framework for accurate evaluation of the promise of aquaporin based biomimetic membranes, Journal of Membrane *Science*, 2015

Acknowledgments

This research is part of the Industrial PhD project entitled Development of the Next Generation of Aquaporin Inside[™] biomimetic membranes, co-founded by the Innovation Fund Denmark.

