Chapman University Chapman University Digital Commons

Mathematics, Physics, and Computer Science Faculty Articles and Research Science and Technology Faculty Articles and Research

1997

Module Embedding

Atanas Radenski Chapman University, radenski@chapman.edu

Follow this and additional works at: http://digitalcommons.chapman.edu/scs_articles
Part of the Programming Languages and Compilers Commons

Recommended Citation

Radenski, A. Module Embedding. Software - Concepts and Tools, Vol. 19, Issue 3, 1998, Springer, 122-129.

This Article is brought to you for free and open access by the Science and Technology Faculty Articles and Research at Chapman University Digital Commons. It has been accepted for inclusion in Mathematics, Physics, and Computer Science Faculty Articles and Research by an authorized administrator of Chapman University Digital Commons. For more information, please contact laughtin@chapman.edu.

Module Embedding

Comments

This is a pre-copy-editing, author-produced PDF of an article accepted for publication in *Software - Concepts and Tools*, volume 19, issue 3, in 1998 following peer review. The final publication is available at Springer athttp://www.springer.com/computer/swe/journal/378e.

Copyright

Springer

Module Embedding¹

Atanas Radenski

Computer Science Department

UNC-WSSU, P. O. Box 19479

Winston-Salem, North Carolina 27110, USA

radenski@ga.unc.edu

Summary

This paper proposes a code reuse mechanism called module embedding that enables the building of new modules from existing ones through inheritance, overriding of procedures, and overriding of types; the paper also describes an implementation scheme for this mechanism. Module embedding is beneficial when modules and classes are used in combination and need to be extended together, or when modules are more appropriate medium than classes.

Keywords:

modules, object-oriented programming, inheritance, extensibility.

¹ This work is partially supported by NSF grant CCR-9509223 and NASA grant NAG3-2011.

1 Motivation

In modular languages, classes and modules are complimentary constructs that satisfy different needs of programmers. A class introduces an abstract data type that can be used to create several objects. A module can be employed to

- encapsulate one or more classes;
- define and implement an abstract data structure, i.e., a single entity without an associated type;
- group several related classes and procedures into a subsystem or into a framework;
- encapsulate a library of mathematical functions;
- package a class with related global variables and procedures.

An essential difference between classes and modules is that classes are extensible and their operations are invoked by dynamic binding, while modules are not directly extensible and their operations are invoked by static binding. We propose to eliminate this difference by means of a code reuse mechanism that we call module embedding. Module embedding enables the building of new modules from existing ones through inheritance, overriding of procedures, and overriding of types. Module embedding can be beneficial when modules and classes are used in combination and need to be extended together, or when classes are less appropriate than modules or not applicable at all.

We illustrate the essence of module embedding and the potential benefits of its adoption by means of an example. Consider the problem of implementing and using simple bank accounts, such

t.hat.:

- each account has a certain balance;
- a client may open, transact on, or close an account;
- their total balance characterizes all open accounts.

In Figure 1, all components of the implementation are encapsulated in a module, MO. The class of all accounts is represented as an extensible record type (an approach first adopted in Oberon [13, 14] and later used in Ada [10]). Procedure transact can be used for deposits (amt > 0) or withdrawls (amt < 0); it also updates the total balance of all accounts. As in Oberon, the '*' sign is used as mark that designates exported, or public entities [14].

Figure 1. Embeddable module M0; exports are marked by `*'.

Consider now the problem of keeping track of the total number of all accounts and assigning account numbers to individual accounts. This can be achieved by embedding module MO into a new module, M1, which also contains an additional global variable,

numAccnts, as shown in Figure 2. The embedding module, M1, inherits all exports of the embedded module M0: the type account, the global variable total, and the procedures open, close, and transact; these entities are re-exported by M1.

```
module M1 (M0);
type account* = record
           number*: integer;
        end:
var numAccnts*: integer;
procedure open*(var a: account);
      ^open(a);
begin
  numAccnts := numAccnts + 1;
  a.number := numAccnts
end;
procedure close*(var a: account);
begin ^close(a);
  numAccnts := numAccnts - 1
end;
begin {initialization of M1}
  numAccnts := 0
end.
```

Figure 2. Embedding module MO into module M1.

Module M1 extends the definition of the inherited type account with an additional field to represent the account number. The extended type definition comprises two fields: balance (inherited) and number (extended). In module M1, the extended type definition overrides the type definition inherited from M0. In the embedding module M1, any variable (or parameter) of type account that is inherited from the embedded module M0 comprises both fields balance and number. In M1, for example, the parameter a: account of procedure open has components a.balance and a.number. As a general rule, a record type definition from an embedded module can be overridden by an extended definition in the embedding module.

Furthermore, module M1 overrides the bodies of the inherited procedures open and close (see Figure 2). In M1, the overriding body of open increments the total number of accounts and assigns an account number to the newly created definition of the account type; the newly defined body of close decrements the total number of accounts. Note that the bodies of open and close inherited from M0 are still available in M1 and can be invoked through the designators ^open and ^close.

```
module client;
import M1;
var account: M1.account;
begin {client}
   M1.open(a); M1.transact(a, 100);
   M1.transact(a, -50); M1.close(a);
end.
```

Figure 3. Client module.

A client can import a module (see Figure 3) and use its exported entities through qualified identifiers; however, the client is not permitted to override them. More differences between module import and module embedding are discussed later in the paper.

In summary, module embedding has the following properties:

- the body of a procedure inherited from an embedded module can be overridden in the embedding module;
- the definition of a record type inherited from an embedded module can be overridden with an extended definition in the embedding module.

We envision several benefits from module embedding. Module embedding is indispensable when modules and classes are used in

combination, and, therefore, should be extended together (as illustrated by the bank account example). In particular, module embedding can be applied to:

- expand the set of global variables related to a class and extend the class itself;
- expand the set of procedures related to a group of classes and extend the classes themselves;
- define and implement extensible typeless entities, such as abstract data structures or libraries of functions.

In the rest of this paper we (1) define module embedding, (2) describe an implementation scheme for embeddable modules, and (3) discuss related work and advantages of module embedding.

2 Embeddable Modules

Definition of Module Embedding

An embeddable module (sometimes shortly referred to as module in this paper) is a collection of declared constants, types, variables, and procedures/functions (Figure 4). The module can also include a sequence of statements used for initialization. Some of the declared entities are exported by the module and can be used by client modules, while the non-exported entities remain private in the module. Technically, identifiers of exported entities are marked with a '*' sign. Exported variables are write-protected in client modules (i.e., importing modules) but can be updated in embedding modules.

```
module M0;
  const
    ... constant declarations...
  type
    ... type declarations...
  var
    exported*: typeIdent;
    private: typeIdent;
    procedure dynamic*;
  begin ... end;
  procedure static;
  begin ... end;
begin ... end;
begin ... end;
```

Figure 4. Principal parts of an embeddable module.

```
module M1(M0);
    ... new declarations...
    var private : typeIdent;
    procedure dynamic*;
    ... overrides M0.dynamic...
    begin ... end;
    procedure static;
    ... new private procedure ...
    begin ... end;
begin ... end;
begin
    ... initialization
end.
```

Figure 5. Module embedding.

Modules are embeddable, i.e., one or more existing modules can be embedded in a newly declared module. For example, module MO from Figure 4 is embedded in module M1 in Figure 5. The embedding module M1 inherits all components of its embedded module MO. Only identifiers that are exported by MO are visible in the embedding module M1; such identifiers are re-exported by M1. Besides, the embedding module may declare new identifiers in addition to those inherited from its embedded modules. Newly declared identifiers must be different from identifiers that are exported by embedded

modules but can be the same as their private identifiers.

A procedure identifier exported by an embedded module MO can be re-declared in its embedding module M1, provided that the procedure heading in M1 is the same as in MO. The newly declared procedure body overrides the procedure body inherited from the embedded module. For example, both module MO and module M1 contain private static procedures that do not interfere, while the public dynamic procedure declared in M1 overrides the public dynamic procedure declared in MO. Any call of procedure dynamic, including calls from within the embedded module MO, will invoke the procedure body declared in M1.

```
module M0;
  type class* = record
    a*: integer;
  end;
  var object*: class;
begin
  object.a := 0;
end.
module M1(M0);
type class* = record
  b*: integer;
end;
begin
  object.b := 0;
end.
```

Figure 6. An object of an extensible type.

Furthermore, a record type identifier exported by an embedded module MO can be re-declared in its embedding module M1. A record type definition in M1 extends the definition inherited from MO; the extended definition comprises all fields originally specified in MO and, in addition, the fields specified in M1. The extended type definition overrides the type definition inherited from MO. Consider, for example, a class declared in MO and extended in M1, and an object exported by MO (Figure 6). Although the object is originally declared in MO, when inherited by M1 it contains all fields that belong to the extended class.

A newly declared module can embed one, two, three, or more existing modules (provided the exported name spaces of the embedded modules are disjoint). In other words, embedding is a form of multiple inheritance that applies to modules. Such form of multiple inheritance can be implemented in a relatively straightforward manner because modules, in contrast to classes, are typeless single instances that do not require run-time dispatch tables. As far as record type extension is concerned, we prefer to limit it to single record types, i.e., to single inheritance, for the sake of conceptual simplicity and efficient implementation.

Module Compilation, Execution, and Import

Embeddable modules are separate compilation units and separate execution units. The implementation converts a correct module 1) into a symbol file that represents the module's interface and 2) into an object file. At run time, the implementation executes a module by loading its object file and then executing the module body. For example, module MO (Figure 4) can be compiled and then executed. A module can be directly executed for either testing the module, or because that module is intended to be used as a main module, or main program in traditional terms. This approach eliminates the need for a special linguistic construct for main programs. A major benefit is that a main module (i.e., a main program) is as extensible and adaptable as any other module.

A client module specifies a list of imported modules, as for example module CO; import MO; ... end. The client, CO, can refer to

exported entities only through qualified identifiers, such as MO.exported and MO.dynamic. At run time, the implementation executes imported modules before the execution of the client. By definition, imported modules are shared between client modules. At run time, the implementation loads only one instance of each imported module and this copy is shared by all of its clients.

The execution of a module body is preceded by the execution of the bodies of its base modules, if any. This rule ensures proper module initialization.

Comparison of Module Import and Module Embedding

The principal difference between module import and module embedding is that module import implements shares-a relationship between modules while module embedding implements contains-a relationship.

Consider for example an application in which modules M1 and M2 (Figure 7) import M0. The imported module M0 is shared between modules M1 and M2. Any change of M0 by, say, M1 is visible for M2 as well.

Alternatively, if module M0 is embedded into modules M1 and M2, each of these modules will have M0 as its proper part (Figure 8). Now, M1 and M2 incorporate separate instances of M0. Therefore, M1 may change components inherited from M0, but these changes do not affect the same components inherited by M2. Besides, M1 and M2 can make different extensions of the same record type inherited from M0. Likewise, M1 and M2 can have different procedures override the same procedure inherited from M0.

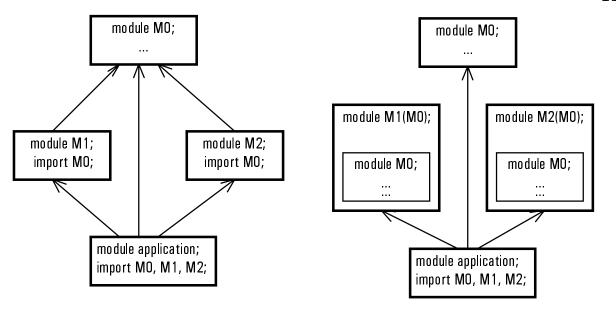


Figure 7. Import implements shares-a relationship (graphically represented by arrows).

Figure 8. Embedding implements contains-a relationship (graphically represented by nesting).

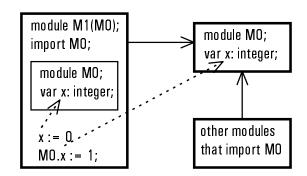


Figure 9. Mixing contains-a and shares-a relationships.

Note that module import and embedding can be mixed, if necessary in order to implement shares-a and contains-a relationships. For example, a module M1 can import module M0 and, at the same, embed module M0 (Figure 9). In this case, M1 embeds a separate instance of module M0 and also refers to the shared instance of the imported module M0. Note that the qualified identifier M0.x stands for an imported component, while the identifier x always stands for a component that is inherited from an embedded module.

3 Implementation Issues

A Language with Modules Embedding and its Implementation

We have incorporated embeddable modules in an experimental objectparallel language. Our embeddable modules allow gluing together
sequential domain-specific code with ready-to-use generic parallel
algorithms, in order to effectively build parallel applications.
Technically, a generic parallel algorithm is specified as an
embeddable module which implements a common synchronization and
communications structure, such as a pipeline, a grid, a masterserver structure, etc. This module can be embedded into domainspecific modules that contain only sequential code. Thus, a
concrete parallel application is derived from the paradigm by
embedding the paradigm module into a module with domain-specific
sequential code.

Generic parallel algorithms, also called *parallel paradigms*, were introduced and studied by Brinch Hansen [5] in terms of the

structured language SuperPascal [4]. This type-safe parallel language is based on some widely accepted parallel programming means, such as send, receive, for-all, and parallel statements, and channel types. In SuperPascal, a paradigm can only be implemented as a concrete main program using concrete constants, types, and procedures. In order to mix a paradigm with user supplied sequential code, the user must have the source code for the paradigm and make textual modifications, such as adding new program components and modifying existing ones. The Paradigm/SP language that we have developed enhances the parallel-programming features of SuperPascal with embeddable parameterized modules. We have studied known parallel paradigms and developed new ones, and our conclusion is that embeddable modules provide easy to use support for parallel paradigms, while traditional classes may lead to representations that are unnecessarily complex. Furthermore, module embedding, and procedure and type overriding make it possible for a general 'paradigm' module to be easily mixed with sequential problem-specific code, i.e., adapted to a specific application.

We have developed a prototype implementation of the Paradigm/SP language. The prototype implementation consists of (1) a compiler that generates abstract code and (2) a loader and an interpreter for this abstract code. The implementation is an enhancement of the SuperPascal compiler [5] and its predecessor [3] with separate compilation, dynamic binding for methods and classes, and dynamic loading. The implementation reuses some algorithms from the Oberon compiler [15]. The compiler incorporates two independent components, the parser and the assembler. The parser performs

traditional recursive descent syntax and semantic checks, outputs a symbol file, and generates intermediate code. This intermediate code is then processed by the assembler, which performs optimization and generates an abstract object file. Finally, abstract object files are dynamically loaded and then executed by the interpreter. A working version of the prototype implementation is available in [18].

The abstract code of a module consists of two parts, initialization code and proper code. The proper code is a direct compilation from the module statements. The initialization code is executed by the dynamic loader and is used to set-up several types of descriptors associated with each loaded module. The import descriptor associates module numbers with the effective base addresses of imported and base modules. The procedure descriptors and the type descriptors are discussed in the next two sections.

The initialization code of all modules from an application is executed prior the execution of any proper code. Besides, code of an embedded module is executed prior code of its embedding modules; code of an imported module is executed prior code of its clients.

Type Overriding

An extensible record type is bound at run time to a particular record definition (i.e., to a particular set of fields). The length of the type can be different in different applications. Even in the same application, an extensible record type can have different definitions with different lengths. Assume, for

example, that a record type T is declared in module M0 (Figure 8) and re-defined in modules M1 and M2. In the application shown in Figure 8, the record types M0.T, M1.T, and M2.T will be bound to three different type definitions in modules M0, M1, and M2 correspondingly.

A dynamic type is either an extensible record type, or a type with one or more components of a dynamic type. Objects of dynamic types are implemented as pointers and are automatically allocated and deallocated heap memory.

For each dynamic type, the compiler generates a type descriptor that belongs to its declaring module and that binds the type to a particular type definition. The type descriptor contains the type length and references to the type descriptors of all dynamic components of that type. For example, the principal components of an extensible record type descriptor are:

Record-Type-Descriptor = Record-Type-Tag Record-Length Dynamic-Field-Descriptor-References

The displacement of this type descriptor regarding the base address of the declaring module is kept in the symbol file.

The initialization code of the declaring module contains instructions that assign into the type descriptor the record length and references to the dynamic field descriptors. When an extended module re-defines the type, its initialization code updates the type descriptor with the length of the extended type definition and with references to the newly added dynamic record fields.

For each whole dynamic variable (or value parameter), the compiler generates

- an instruction to allocate a memory bock for the whole variable and of its dynamic components when the variable scope is entered;
- an instruction to deallocate that memory when the scope of the variable is exited.

All deallocated blocks of the same type are kept in a list of free blocks and are re-used for next memory allocations.

A type that is local for a module is not visible in its embedding modules; by definition, such a local type is not extensible. However, a local type can still contain dynamic components and is, therefore, implemented as a dynamic type.

Procedure Overriding

The implementation separates user declared procedures in two categories. Procedures that are marked for export are external because they can be called in client modules and can be re-defined in embedding modules. All other procedures are local for their declaring module.

An external procedure is bound at run time to a particular procedure body (i.e., particular implementation). For each originally declared procedure, the compiler generates a procedure descriptor that belongs to the declaring module and that binds the procedure to a particular procedure body. The procedure descriptor contains the items that are needed for an external procedure call, namely a reference to the procedure body and the base address of the module containing that body:

Procedure-Descriptor = Module-Base Procedure-Body-Reference

The initialization code of the declaring module contains an instruction that assigns the module base and a reference to the procedure body into the procedure descriptor. When an embedding module redefines the procedure, its initialization code updates the procedure descriptor with the base address of the embedding module and a reference to the newly declared procedure body. Since an embedded module is always loaded before its embedded modules, the procedure descriptor refers to the very last implementation of the procedure. A call of the procedure from any module invokes that last version.

An external procedure call is compiled into an instruction with two arguments. The first argument is the *number* of the declaring module (i.e., the module that contains the procedure descriptor). The second argument is the *offset* of the procedure's descriptor regarding the base address of its declaring module:

Procedure-Call = Instruction-Code Declaring- Module-Number Descriptor-Offset

At run time, the entry point of an external procedure is calculated by fetching the base address of the declaring module from the import descriptor and then fetching the contents of the procedure descriptor. The procedure descriptor is then used to establish the entry point of the procedure body and the base address of the module that contains that body. Such an invocation is nearly as efficient as a procedure call through a pointer:

Declaring-Module-Base-Address = Import-Descriptor [Instruction . Declaring-Module-Number]

Procedure-Descriptor-Address = Declaring-Module-Base-Address + Instruction . Descriptor-Offset

Procedure-Entry-Point = Procedure-Descriptor . Procedure-Body-Reference

Local procedures are bound to their declaring module at compile time. A local procedure call is compiled into an instruction that contains the displacement of the procedure entry address regarding the location of the calling instruction itself.

4 Related Work and Conclusions

Embeddable modules are useful for the implementation of typeless structures, such as, for example, common libraries of procedures or generic algorithms. Alternatively, *classes* are needed when it comes to the implementation of multiple entities of the same abstract type. In modular object-oriented languages, such as Oberon-2 [6], classes are represented by means of extensible record types [13].

```
MODULE M0;
  TYPE class* = RECORD
    ... data fields ...
  END;
  PROCEDURE (VAR self: class) method*(...);
  BEGIN ... implementation ... END;
END.

MODULE M1;
IMPORT M0;
  TYPE subClass* = RECORD(M0.class)
    ... new data fields ...
  END;
  PROCEDURE (VAR self: subClass) method*(...);
  BEGIN ... type guards/tests ... END;
END.
```

Figure 10. Methods as type-bound procedures.

As illustrated in Figure 10, methods are represented as type-bound procedures that are syntactically connected to an extensible record type, i.e., a class [6]. Other modular languages, such as Ada-95

[10, 11] and Modula-3 [2], follow similar approaches to classes and methods.

```
module M0;
  type class* = record
    ... data fields ...
end;
  procedure method*(var self: class; ...);
  begin ... implementation ... end;
end.

module M1(M0);
  type class* = record
    ... new data fields ...
end;
  procedure method*(var self: class; ...);
  begin ... end;
end
```

Figure 11. Methods as module-bound procedures.

Similarly to known modular languages, we represent classes as extensible record types. What is different in our approach is that record extension overrides an existing type and does not introduce a new type. Furthermore, we represent methods as module-associated procedures rather than type-bound ones; module-associated procedures can be overridden similarly to type-bound procedures, as specified earlier in this paper. Module-associated procedures can be related to extensible record types, i.e., to classes, through regular parameters and therefore, used as methods for those classes. A module MO (Figure 11) can implement a class as an extensible record type and a method as a procedure. Furthermore, a module MI that embeds MO can extend the class and override the inherited method. Objects that belong to the class can be passes as parameters to the method. Such extended objects do not require type test and guards because they are not polymorphic, in contrast to

extensible objects in Oberon ([8] offers a detailed discussion of type tests and guards). A disadvantage of our proposed extensible records is that they do not support heterogeneous data structures.

The purpose of the module system of the Cecil language [17] is to support encapsulation and static type checking for multimethods. Cecil supports explicit module import that obeys visibility rules similar to those adopted in C++ subclassing. As analyzed in [17], the standard visibility rules of module imports can make static subchecking of multimethods impossible and force dynamic typechecking. In order to ensure static subchecking of multimethods, a form of module import called module extension is proposed in [17]. In contrast to our proposed concept of module embedding, in Cecil extended modules are shared, just like imported modules. Furthermore, extended or imported modules in Cecil allow standard subtyping while our embeddable modules allow type redefinition.

It has been widely recognized [9, 7, 1, 6] both modules and classes support necessary abstractions, which should be, used as complementary media. What we propose is to shift power from classes to modules by introducing a form of inheritance that applies to modules. The object-orientation of Paradigm/SP is founded on enhancements of traditional concepts, such as module, record type, and procedure. In this, we agree with authors who prefer using widespread and historically established terms with object-enhanced syntax and semantics [12].

Embeddable modules seem to be conceptually simpler than classes and, therefore, are easier to use. In particular, an

embeddable module can be a good replacement for a single-entity class, or a singleton pattern [16]. Because of its relative simplicity, module embedding is easier to implement than subclassing. For example, multiple inheritance for modules is easier to implement efficiently than for classes because modules are not first-class objects (there are no module types and module references). In particular, invoking a procedure that is inherited from one of several embedded modules is as efficient as calling a procedure through a pointer.

A disadvantage of embeddable modules as compared to classes is that modules do not introduce types and, therefore, cannot be used to create multiple instances. Furthermore, dynamic types impose run-time overhead on the implementation. Finally, a drawback of module embedding is that it complicates the semantic and the syntax of the underlying modular language. Nevertheless, we believe that the introduction of module embedding is justified, because known code reuse mechanisms, such as parametric polymorphism (i.e., generics), interfaces, procedure parameters or pointers cannot completely achieve the effects of module embedding.

The existence of two principal object-oriented styles has been distinguished in the recent years. The traditional and older style is centered on classes as abstractions, and on objects as concrete instances of such abstractions. Such a *class-based* object style is supported by a number of pure or hybrid object-oriented languages, such as Smalltalk, Simula, C++, Java, and Oberon-2. The alternative object style is centered around concrete objects and on the possibility to use such objects as prototypes from which other

objects can be derived. Such a prototype-based object style is supported by newer languages, such as Self and NewtonScript. One of the strengths of the Paradigm/SP language is that it supports to some extent both class-based and pattern-based object-styles.

Indeed, embeddable modules are relevant medium for pattern-based OOP, while extensible record types support class-based OOP.

Therefore, Paradigm/SP is a hybrid object language, which, by the way, is a relevant tool for the traditional structured programming style as well.

5 References

- G. Bracha. The Programming Language Jigsaw: Mixins,
 Modularity and Multiple Inheritance. Technical report UUCS-92-007, University of Uta, 1992.
- L. Cardelli, J. Donahue, L. Glasman, M. Jordan, B. Kalsow and G. Nelson. Modula-3 language definition. ACM SIGPLAN Notices, 27, No8, 1992, 15-42.
- 3. B. Hansen. Brinch Hansen on Pascal Compilers, Prentice Hall, 1985.
- B. Hansen. SuperPascal a publication language for parallel scientific computing, Concurrency Practice and Experience,
 No 5, 1994, 461-483.
- 5. B. Hansen. Studies in Computational Science: Parallel Programming Paradigms. Prentice Hall, 1995.
- 6. H. Moessenboeck. Object-Oriented Programming in Oberon-2.

 Springer-Verlag, 1993.

- 7. C. Lucas and P. Steyaert. Modular inheritance of objects through mixin-methods. In *Advances in Modular Languages*,
 University of Ulm, 1994, 273-282.
- 8. Reiser and N. Wirth. Programming in Oberon: Steps beyond
 Pascal and Modula. ACM Press, 1992.
- 9. C. Szyperski. Why we need both: Modules and classes, in Proceedings of OOPSLA, 1992, 19-32.
- 10. S.-T. Taft. Ada 9X: A technical summary, Communications of the ACM, 35, No 11, 77-84.
- 11. T.-S. Taft. Ada 9X: From abstraction-oriented to object-oriented, *Proceedings of OOPSLA*, 1993, 127-135.
- 12. J. Winkler. Objectivism: "Class" considered harmful, Communications of the ACM, 35, No 8, 1992, 128-130.
- 13. N. Wirth. Type extensions, ACM Transactions on Programming Languages and Systems, 10, 1987, 204-214.
- 14. N. Wirth. The programming language Oberon, Software Practice and Experience, 18, No 7, 1988, 671-690.
- 15. N. Wirth and J. Gutknecht. Project Oberon, ACM Press, 1992.
- 16. E. Gamma, R. Helm, R. Johnson, and J. Vlissides. Design Patterns, Elements of Reusable Object-Oriented Software, Addison-Wesley Professional Computing Series, Addison-Wesley, 1995.
- 17. C. Chambers and G. Leavens. Typechecking and Modules for Multimethods, ACM Transactions on Programming Languages and Systems, 17, No 6, 1995, 805-843.
- 18. A. Radenski (1998). Prototype Implementation of Paradigm/SP,

http://www.rtpnet.org/~radenski/research/language.html.