



LJMU Research Online

Saba, T, Bashardoost, M, Kolivand, H, Rahim, MSM, Rehman, A and Khan, MA

Enhancing fragility of zero-based text watermarking utilizing effective characters list

<http://researchonline.ljmu.ac.uk/id/eprint/11305/>

Article

Citation (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

Saba, T, Bashardoost, M, Kolivand, H, Rahim, MSM, Rehman, A and Khan, MA (2019) Enhancing fragility of zero-based text watermarking utilizing effective characters list. Multimedia Tools and Applications. ISSN 1380-7501

LJMU has developed **LJMU Research Online** for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact researchonline@ljmu.ac.uk

<http://researchonline.ljmu.ac.uk/>

Enhancing Fragility of Zero-based Text Watermarking Utilizing Effective Characters List

**Tanzila Saba¹, Morteza Bashardoost², MohdShafryMohd Rahim²,
Hoshang Kolivand³, Amjad Rehman⁴, Muhammad Attique Khan⁵**

¹College of Computer and Information Sciences Prince Sultan University Riyadh 11586 Saudi Arabia

²Media Centre, Institute of Human Centred, University Industry Research Laboratory (UIRL), UniversitiTeknologi Malaysia UTM, Skudai, Johor, Malaysia

³Department of Computer Science, Liverpool John Moores University, Liverpool, UK, L3 3AF

⁴College of Computer and Information Systems Al Yamamah University Riyadh 11512 Saudi Arabia

⁵Department of Computer Science and Engineering, HITEC University Museum Road, Taxila, Pakistan

Abstract. Text is an important medium used for sharing information worldwide. For a text document, digital watermarking is an efficient way for copyright protection, authentication, tamper proofing, to name but a few. In this paper, a zero-based watermarking approach is proposed for document authentication and tamper detection. To enhance the fragility of watermark, the proposed text watermarking approach can be comfortably utilized – based on the Effective Characters List (ECL) for watermark generation. The ECL method is generated for English text zero-watermarking by maintaining the contents of the original document and constructing the watermark by formulating the smooth transition between the selected characters in the documents. The evaluation of the proposed watermarking approach is based on three famous watermarking attacks including deletion, insertion, and reordering with an accuracy of 80.76%, 80.36%, and 88.1%, respectively. For a fair evaluation, a comparison is put forth with a recent zero-based watermarking method - clearly showing that the proposed method outperforms existing with greater accuracy.

Keywords: watermarking; authentication; tamper detection; zero-based watermarking; fragility; effective characters list.

1. Introduction

Digital watermarking is an efficient technique utilized for copyright protection, authentication, tamper proofing, etc. [1-4]. When the digital watermarking is used for authentication purpose, it would be utilized to identify the original property from fake ones. The robust watermark is ineffective when the text watermarking method is used

for authentication purpose[5, 6]. In fact, the opposite side of robustness, which is fragility, should be considered in the development of watermarking methods for authentication purposes[7].

Texts is an important medium that it is used widely to transfer information. Plain text is the main part of many kinds of information and most of the digital contents such as newspapers, books, and legal documents are in the form of text[8]. The malicious attackers are mostly active to modify these text documents and can lead to a fatal decision. The previous attempts on text watermarking can be categorized into four main classes include image-based approach, syntactic-based approach, semantic-based approach, and zero-based approach[2, 9]. Zero text watermarking techniques are content features dependent that is mostly used for authentication purposes[10]. The prominent idea of the zero-based watermarking system is to create the watermark based on some features of documents and store generated watermark in a safe place e.g. Certifying Authority (CA), instead of modifying contents and appearance of the original document[11]. A lot of techniques are introduced in the literature for copyright protection and tamper detection of text documents and some of them gives a very strong solution against crucial problems. The text watermarking methods such as format, content, and image-based approach has many limitations for tempering detection. These methods are not suitable for all types of tempering attacks.

1.1. Motivation

The two primary reasons based on which ECL method is adopted are: a) fragility and b) watermark size. Both are, although, quite staunch to each other - when the size of watermark decreases, the fragility also decreases and vice versa. Therefore, a robust method is required which maintains the original contents and improve the performance.

1.2. Problem Statement

In the digital watermarking, the general problems exist such as: a) robust sufficient to confront attacks while remaining indistinguishable by the human eye, b) the text document is visible for all persons whereas it should be visible only authorized person. These are the key security reasons and limitations for any watermarking approach. In this work, we consider the problem of digital contents which are changes after encryption, therefore through watermarking. We also consider the problem of the number of character selection for watermark generation. The increase in the character list decreased the overall system accuracy.

1.3. Contributions

In this paper, we propose a new zero-based watermarking approach for digital documents, which utilizes the Effective Characters List (ECL) to produce the watermark. Our major contributions are the following:

A new method is proposed for text watermarking through an Effective Characters List (ECL). The proposed ECL method is generated for English text zero-watermarking

which maintains the contents of the original document and constructs the watermark by formulating the transition between the selected characters in the documents. Later, through Effectiveness Ratio (ER) determines that how many characters are selected for the watermark generation. A group of characters is selected through ER value which referred to as ECL. Further, a 2-D Markov Matrix is utilized to examine the position of ECL members in the document.

2. Related Work

The previous attempts towards text watermarking have been categorized by many kinds of literature based on the watermark embedding procedure [3, 12]. There exists several zero text watermarking approaches that are utilized for document authentication and tamper detection[4, 13, 14].

Shubah et al. [15] introduced a discrete fractional Fourier transform approach for image watermarking. The original image is converted into frequency components and embedded a binary watermark using a quantization based method. Finally, watermark bits are extracted through adaptive thresholding method. The experiments are conducted on various standard images and achieve a significant performance. Ahmed et al. [16] introduced a DCT and DWT based image watermarking approach which initially processed the original image into three respective channels such as red, green, and blue. The DWT and DCT are performed separately on each channel which later embedded through several numbers of color bands. The experimental process is performed on several images such as rotating, filtering, and a few more. The results reveal that the introduced method is outperforms for linear and nonlinear attacks. Bin et al. [17] introduced a semi-fragile watermarking approach for image restoration and authentication. The introduced method outperforms to locate temper contents. Ferdinando et al. [18] implemented fuzzy relation equations for image watermarking temper detection. The makes block based comparisons and achieved better performance on the presented approach.

Fang et al. [19] introduced a self-embedding approach for watermarking in hierarchical reformation. From each image, the binary bits are obtained and individually interleaved. Later, the interleaved data is segmented into a number of blocks. Finally, the segmented data is combined through LSB layer for authentication. The results reveal that the presented method works well as compare to relative existing techniques. Nassaradin et al. [20] presented an watermarking approach for text protection from malicious attacks. They introduced an unicode based approach and tested under different various attacks and showed improved capacity as compared to existing methods. Aditi et al. [21] introduced a multiple watermark algorithm for healthcare applications. They used DWT, DCT, and SVD features which are later improved through a neural network (NN). The NN removes the noise factors of the watermarked document and showed significant improvement. Al-wesabi et al. [22] proposed an English text zero-based watermarking algorithm that works based on probabilistic patterns. The authors also developed a content authentication zero-based watermarking method [23] based on word

mechanism order one of Markov model. The zero-based concept employed for image watermarking [24]. Later, few zero-based methods [22, 25] were presented for Chinese text watermarking. Jalil et al. [26] developed a method that works based on the occurrence frequency of non-vowel ASCII characters and words. In another attempt [27], the authors used text constituents, double letters and the most frequently used words in English text to generate the zero-based watermark. The Genetic algorithm based optimization is performed in this work. Mali, et al. [28] introduced an algorithm, which is based on English grammatical words besides a suitable encryption method. An English zero-based watermarking approach based on word mechanism order two of Markov model is introduced by Vasant Rao et al. [29]. Subsequently, Ghilan et al. [30] presented an intelligent zero-based text watermarking approach based on probabilistic patterns. In this approach, the letter-based Markov model of order three (LNMZW3) was constructed to generate the watermark based on the interrelationship of contents. Ba-Alwi et al. [31], also developed the ADV-LNMZW3 method, which is an extension for the LNMZW3 algorithm. A hybrid approach based on zero-watermarking and digital-signature-like manipulations were presented by Tayan et al. [32] for sensitive text documents in order to achieve content originality and integrity verification. Tayan et al. [33] suggested an adaptive zero-watermarking technique for authentication of highly-sensitive documents, such as Quran, which is based on a spread-spectrum approach that embeds one-watermark bit per set, with a parameterized set-size. One of the most prominent properties of zero-based text watermarking methods is fragility and watermark size. Halab et al. [34] described a semi-fragile watermarking approach through multiple features extraction. The canny edge detector is utilized for extraction of original samples the watermark is combined for more security improvement. Chaun et al. [35] presented a self-embedding watermarking approach which significantly handle the problem of tempering revival.

The existing zero-based watermarking approaches that are presented for authentication of documents are unable to improve both fragility and watermark size simultaneously. This means, either the generated watermarks are large in size, or the watermark is not fragile enough to detect and calculate the tampering attacks. Therefore, it is essential to proposed new methods which can handle these listed problems.

3. ECL Zero-based Watermarking: Proposed Methodology

The zero-based watermarking methods generate fragile watermarks based on the position of particular document elements. In fact, fragility is the main feature of watermarking algorithms that are used for authentication purpose. Besides fragility, the size of the generated watermark is the other important property of zero-based methods. Two essential properties of zero-based watermarking methods, which are fragility and watermark size contradict each other. It means when the watermark size decreases the fragility of the method also reduces and on the other side, by increasing the fragility of technique the size of generated watermark increases.

Therefore, we introduce an improved English text zero-watermarking technique based

on the position of the most frequent characters of a document called ECL watermarking. The ECL watermarking algorithm maintains the contents of the original document and constructs the watermark by formulating the transition between the selected characters in the document. The generated watermark is stored in the Certifying Authority in order to prove the ingenuity of document in the future. The main flow of propose method is shown in Figure 1.

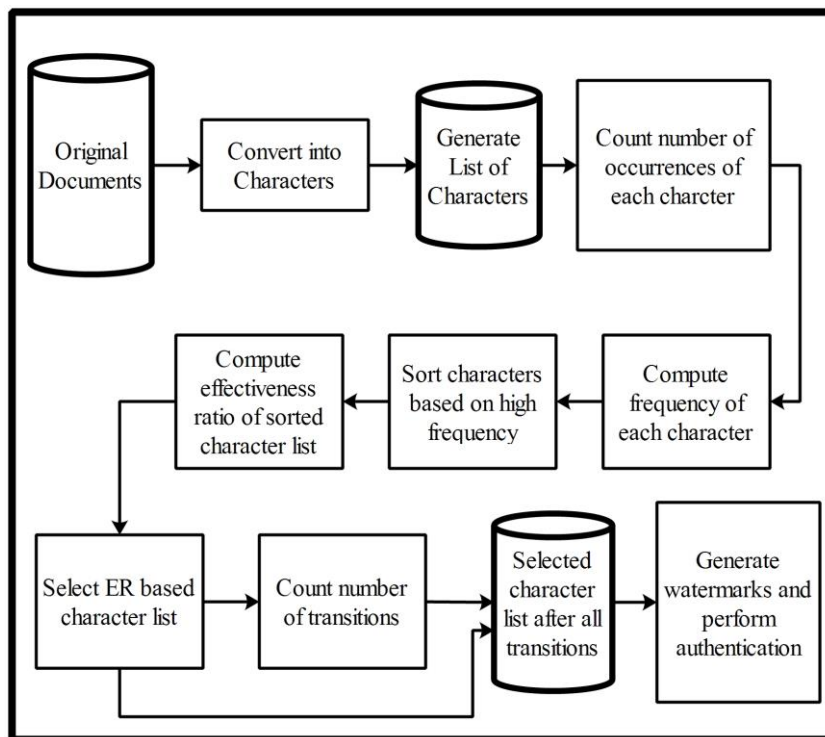


Figure 1: Detailed flow of proposed watermarking generation system.

Similar to other common watermarking algorithms, ECL watermarking method has also two separate phases that are watermark generation and watermark re-generation. The main purpose of the first phase is to generate the watermark for the original document and save it in an authentic place. Whereas, the aim of the secondphase is to generate the watermark forthe received document and check its originality.

3.1. Watermark Generation Algorithm

Characters are the smallest part of the text structure. The proposed method uses the characters of a document in the process of watermark generation. After converting all the characters to the small cases, the distinct list of all characters of the document is prepared. This list usually includes letters, digits, punctuations, special characters, or

any other character that appeared in the document.

When the list of characters is created, the document is processed to count the number of occurrence for each character in the list. Subsequently, the list of characters is sorted in descending order based on the number of occurrences. It means the characters which appeared more frequently in the document, place on the top of the list.

Afterwards, the Effectiveness Ratio (ER) determines how many characters should be selected for the watermark generation. The ER is calculated as follows:

$$ER = \frac{\sum_{i=1}^n O(c_i)}{\text{Count}(\text{Document Characters})} \quad (1)$$

Where, the value of ER is between zero and one. The notation $O(c_i)$ represents the number of occurrence of an i^{th} character in the sorted unique characters, n denotes the total number of characters. The higher values of ER lead to selecting more items from the top of the characters list. By determining the value of ER a group of characters are selected which is referred as Effective Characters List (ECL). In fact, effectiveness ratio specifies how many characters need to be in the ECL. ECL is a collection of characters that are selected from the top of sorted unique characters (UCs) and the total number of occurrence of these characters equals to ER percent of document's length. Mathematically, it is described as follows:

$$ECL = \{c \mid c \in UC_s \& \sum O(c) = ER \times \text{Count}(Nc)\} \quad (2)$$

Where, Nc denotes total number of characters in the document, c denotes the subset of character list C . In order to investigate the relative position of ECL members in the document, a 2D array is utilized, which is called the Markov Matrix. The size of Markov matrix [36] is square and also known as stochastic matrix. Equation (3) illustrates the Markov matrix:

$$M = \left\{ \begin{array}{c|c} \begin{matrix} * & c_1 & c_2 & \dots & c_n \\ c_1 & t_{11} & t_{12} & \dots & t_{1n} \\ c_2 & t_{21} & t_{22} & \dots & t_{2n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ c_n & t_{n1} & t_{n2} & \dots & t_{nn} \end{matrix} & \begin{matrix} P \\ P_1 \\ P_2 \\ \vdots \\ P_n \end{matrix} \end{array} \middle| n = \text{Size (ECL)} \right\} \quad (3)$$

Where, c_i refers to an element of ECL, t_{ij} denotes number of immediate appearance of c_j after c_i in the document, $*$ denotes the transition point, and P_i shows the transition pattern of each ECL element. The sum of each row in the given matrix is 1 and non of the ECL elements are negative. Its explain that, the all ECL elements are non negative.

The watermark is composed of three sections in the proposed ECL watermarking method. It starts with three digits that represent the ECL length, then followed by ECL members and has the concatenation of all transition patterns at the end. The formation of the generated watermark is illustrated in Equation (4).

$$WM = \text{Concatenation}(\text{Padding}(\text{Size}(\text{ECL}), 3), \text{ECL}, \text{Concatenation}(\text{Pi})) \quad (4)$$

Where, WM denotes the generated watermarks which are obtained after concatenation of ECL size, ECL members, and number of transition patterns (Pi). The entire process of watermark generation is also summarized in Algorithm 1.

Algorithm 1. Watermark Generation Algorithm

Step 1:Input: $I(x, y) \leftarrow$ original documents
Step 2: Output: $WM(x, y) \leftarrow$ Watermark generation
Step 3: For $i \leftarrow 1:N$
 - Remove the spaces and Control characters
 - Compute ER value through $ER = \frac{\sum_{i=1}^n O(c_i)}{\text{Count}(Nc)}$ // where Nc denotes total number of characters in the document
 - Create ECL as $\{c \mid c \in UC_s \& \sum O(c) = ER \times \text{Count}(Nc)\}$
Step 4:Generate a Markov matrix using ECL members by Eq. (3)
Step 5:Initiate matrix with zero values as $M \leftarrow \text{zeros}[]$
Step 6:FOR $j \leftarrow 1:M$ // j is each element in ECL
 - Count the number of transition to every state
 - Store the value in Markov matrix
 END // Inner loop
Step 7:Generate the pattern based on transitions
Step 8:Construct the watermark base on the generated patterns and ECL
 END // Outer loop
Step 9: $WM \leftarrow$ Watermarks //Store the watermark
Step 10: $CA \leftarrow$ Certifying Authority //Document info in the CA

3.2. Watermark Regeneration and Tamper Detection

In this phase, which is performing by certifying authority, the genuineness of given document is examined. This process is composed of two steps, which are watermark regeneration and tampering calculation. The first step determines the originality of a document, while the second step estimates the size of tampering attack.

In the first step, the received document is pre-processed and the ECL is produced. Then the Markov matrix is constructed to generate the transition patterns. Afterwards, the watermark is produced in the same format that is explained for original document. Finally, the document is marked as original, if the generated watermark and the retrieved watermark from CA are identical. Figure 2 illustrates the architecture diagram of this process:

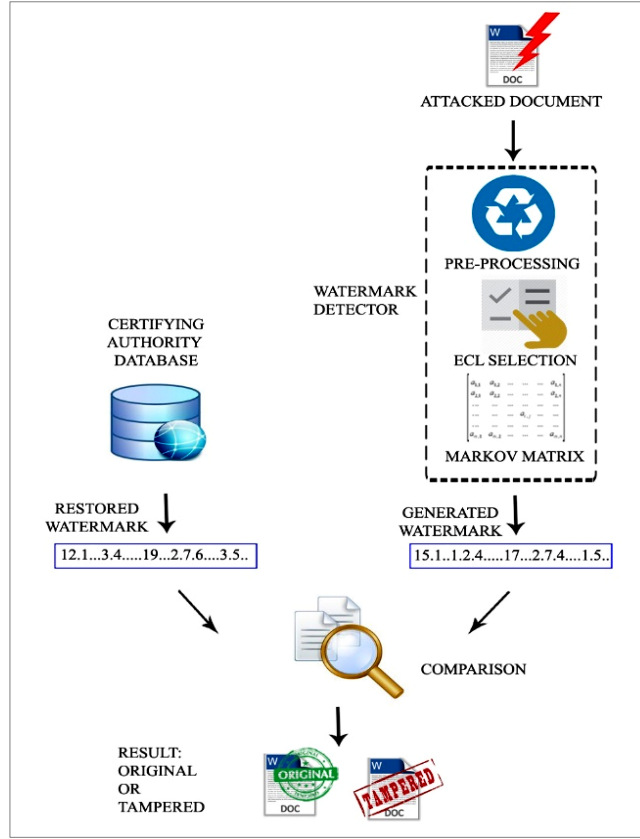


Figure 2: Watermark regeneration process in ECL watermarking method

The detection algorithm, which is the second step of this phase, computes the distortion rate and temperment percentage. The Pattern Matching Rate (PMR) shows the degree of similarity between the original and attacked watermark. The PMR itself is the average of all State Weights (SW). Moreover, each SW is measured by Equation (5):

$$S_W(i) = \left| \frac{PMR_S(i) * Transition\ Frequency(i)}{Total\ Number\ of\ transitions} \right| \quad (5)$$

Where, PMR_S denotes the calculated Pattern Matching Rate for one state. The PMR_S and PMR_T are measured by Equation (6) and (7). PMR_T refers to Pattern Matching Rate that is measured for a certain transition. Also, WMP_O and WMP_A represent the original and attacked watermarking pattern matrices.

$$PMR_S(i) = \left| \frac{\sum_{j=1}^p (PMR_T(i,j))}{Total\ state\ pattern\ count} \right| (6)$$

$$PMR_T(i, j) = \left| \frac{WMP_O(i, j) - |WMP_O(i, j) - WMP_A(i, j)|}{WMP_O(i, j)} \right| \quad (7)$$

4. Experimental Results

The evaluation is performed in two different aspects such as tamper detection & calculation and watermark size. The documents that are used in the experiment are five variable size texts from the Reuters' corpus (volume 1) dataset. Small and large volumes of the most popular attacks of text watermarking, namely deletion, insertion and reordering are applied on the original documents for text alteration. Furthermore, the watermark is generated for the different value of the ER in order to investigate the balance between watermark-size and tamper detection accuracy.

4.1. Tamper Detection and Calculation

The first stage of text watermarking methods' evaluation is to check if the modification of the document can be detected. The watermark is generated base on a variable range of effectiveness ratio for each attacked document. All the generated watermarks are compared to correspondent original watermark for the purpose of checking the similarity of watermarks. The degree of similarity of original and tampered documents is presented as Pattern Matching Rate (PMR). The PMR always has a value between 0 and 1, where 0 is the minimum and 1 is the maximum degrees of similarity.

4.1.1. Small-Size Attack

In this section, the accuracy of tamper detection is investigated for the documents, which have been modified by 5% of various attacks. The calculated PMR values for attacked documents with respect to different Ers, presented in Table 1. 10 different ER ratios are selected such as 0.10 to 1.00, where the 0.10 is increment of each iteration. The results presented in Table 1 are computed on different Doc documents such as SST1, SST2, MST1, MST2, and LST1. The each document includes number of words as 179, 421, 469, 559, and 2018. Three types of attacks are perform against each document and achieve average PMR rate is more than 92%. From Table 1, the volume of insertion attack is 5% and the desired PMR for this experiment is 0.95. Regarding the presented PMR values in Table 1, the volume of alteration is estimated precisely for the majority of generated watermarks. The best watermarks are generated when the ER equals 0.60 or more. The worst cases of tamper calculation occurred when the value of ER set to 0.1.

Table 1: Calculated PMR values for documents under 5% of attack

| Doc. Name | Word Count | Attack Type | Effectiveness Ratio | | | | | | | | | |
|-----------|------------|-------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 |
| | | Ins | 0.000 | 0.889 | 0.824 | 0.841 | 0.862 | 0.711 | 0.889 | 0.907 | 0.920 | 0.943 |

| | | | | | | | | | | | | |
|--------|------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| [SST1] | 179 | Del | 0.000 | 0.946 | 0.957 | 0.963 | 0.939 | 0.960 | 0.955 | 0.946 | 0.956 | 0.962 |
| | | Ord | 0.000 | 0.956 | 0.954 | 0.931 | 0.961 | 0.936 | 0.946 | 0.943 | 0.949 | 0.957 |
| [SST2] | 421 | Ins | 1.000 | 0.971 | 0.947 | 0.646 | 0.940 | 0.914 | 0.901 | 0.905 | 0.889 | 0.963 |
| | | Del | 1.000 | 0.735 | 0.833 | 0.880 | 0.876 | 0.906 | 0.918 | 0.922 | 0.933 | 0.977 |
| | | Ord | 1.000 | 0.902 | 0.909 | 0.932 | 0.951 | 0.958 | 0.940 | 0.926 | 0.921 | 0.974 |
| [MST1] | 469 | Ins | 1.000 | 0.965 | 0.963 | 0.920 | 0.924 | 0.915 | 0.916 | 0.818 | 0.895 | 0.954 |
| | | Del | 0.750 | 0.941 | 0.896 | 0.930 | 0.927 | 0.937 | 0.939 | 0.940 | 0.944 | 0.977 |
| | | Ord | 1.000 | 0.963 | 0.854 | 0.893 | 0.900 | 0.909 | 0.910 | 0.920 | 0.931 | 0.971 |
| [MST2] | 559 | Ins | 1.000 | 0.250 | 0.937 | 0.954 | 0.958 | 0.933 | 0.914 | 0.925 | 0.924 | 0.965 |
| | | Del | 0.969 | 0.971 | 0.971 | 0.943 | 0.950 | 0.950 | 0.945 | 0.939 | 0.945 | 0.979 |
| | | Ord | 1.000 | 0.979 | 0.837 | 0.889 | 0.933 | 0.939 | 0.936 | 0.930 | 0.932 | 0.975 |
| [LST1] | 2018 | Ins | 1.000 | 0.962 | 0.946 | 0.943 | 0.945 | 0.933 | 0.921 | 0.806 | 0.905 | 0.952 |
| | | Del | 0.905 | 0.939 | 0.956 | 0.946 | 0.952 | 0.940 | 0.941 | 0.943 | 0.938 | 0.970 |
| | | Ord | 0.968 | 0.959 | 0.857 | 0.866 | 0.893 | 0.916 | 0.916 | 0.915 | 0.909 | 0.960 |

4.1.2. Large-Size Attack

In the second part of the tamper calculation review, the accuracy of attack measurement is inspected for the documents, which have been amended by 50% of insertion, deletion, and reordering attack. In the same style with the previous section, the cell with dark background color in Table 2 represents a deficiency of method in document authentication. The results presented in Table 2 are calculated for different ER ratios for five documents. As, the volume of attack is 50% in this experiment. Therefore, the anticipated PMR value is 0.5. By comparing the result of this experiment with the previous experiment, the tamper calculation accuracy is dramatically reduced. However, when the ER is set to a value between 0.5 and 0.9, the method provides a better estimation for the size of the attack. On the other hand, the tamper detection accuracy is rather unreliable once the Effectiveness Ratio equals to 0.1.

Table 2: Calculated PMR Values for Documents under 50% of Attack

| Doc. Name | Word Count | Attack Type | Effectiveness Ratio | | | | | | | | | |
|-----------|------------|-------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|
| | | | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 |
| [SST1] | 179 | Ins | 0.500 | 0.450 | 0.436 | 0.319 | 0.455 | 0.351 | 0.377 | 0.432 | 0.526 | 0.800 |
| | | Del | 0.000 | 0.896 | 0.288 | 0.305 | 0.475 | 0.465 | 0.532 | 0.568 | 0.646 | 0.750 |
| | | Ord | 0.000 | 0.718 | 0.787 | 0.806 | 0.792 | 0.807 | 0.754 | 0.735 | 0.749 | 0.831 |
| [SST2] | 421 | Ins | 0.300 | 0.344 | 0.343 | 0.365 | 0.309 | 0.367 | 0.313 | 0.363 | 0.400 | 0.800 |
| | | Del | 0.600 | 0.638 | 0.304 | 0.539 | 0.458 | 0.545 | 0.529 | 0.536 | 0.576 | 0.835 |
| | | Ord | 0.600 | 0.591 | 0.770 | 0.780 | 0.813 | 0.825 | 0.771 | 0.742 | 0.776 | 0.907 |
| [MST1] | 469 | Ins | 0.000 | 0.181 | 0.164 | 0.283 | 0.212 | 0.356 | 0.369 | 0.317 | 0.382 | 0.805 |
| | | Del | 0.500 | 0.796 | 0.748 | 0.691 | 0.480 | 0.523 | 0.525 | 0.516 | 0.584 | 0.810 |
| | | Ord | 1.000 | 0.642 | 0.689 | 0.704 | 0.741 | 0.763 | 0.742 | 0.717 | 0.730 | 0.893 |
| [MST2] | 559 | Ins | 0.781 | 0.198 | 0.461 | 0.472 | 0.462 | 0.324 | 0.338 | 0.358 | 0.408 | 0.811 |
| | | Del | 0.438 | 0.109 | 0.624 | 0.584 | 0.563 | 0.548 | 0.546 | 0.528 | 0.589 | 0.826 |
| | | Ord | 0.906 | 0.685 | 0.758 | 0.786 | 0.821 | 0.834 | 0.776 | 0.772 | 0.754 | 0.895 |
| [LST1] | 2018 | Ins | 0.444 | 0.155 | 0.400 | 0.256 | 0.284 | 0.323 | 0.223 | 0.274 | 0.340 | 0.802 |
| | | Del | 0.476 | 0.448 | 0.452 | 0.513 | 0.508 | 0.509 | 0.512 | 0.504 | 0.506 | 0.817 |
| | | Ord | 0.841 | 0.859 | 0.814 | 0.790 | 0.812 | 0.843 | 0.807 | 0.817 | 0.785 | 0.879 |

4.2. Watermark Size

Watermark size is the other prominent properties of zero-based text watermarking techniques that refer to the length of the generated watermark for the original document. Indeed, any zero-based text watermarking method that provides a high level of tamper detection should be able to maintain small size of the generated watermark. Table 3 illustrates the size of generated watermarks for the selected documents based on different values of Effectiveness Ratio. From Table 3, the size of the generated watermark is directly related to the value of ER. The significant surge in the generated watermark size appears when the ER changes from 0.90 to 1.00. However, the watermark length increases steadily when the ER value soars from 0.10 to 0.90. Furthermore, checking the size of the watermark under an ER value verifies that the length of the generated watermark has a slight growth while the size of document increased. Moreover, we also compute the ER on a new large dataset which includes total of 3484 documents. The number of words and characters counts are 305442 and 4,77210, respectively. The different values of ER shows that watermark size is increased for ratio 0.90 to 1.0.

Table 3: Watermarks Size based on Different Values of Effectiveness Ratio

| Doc. Name | Word Count | Char. Count | Effectiveness Ratio | | | | | | | | | |
|----------------|------------|-------------|---------------------|------|------|------|------|------|------|------|------|------|
| | | | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 |
| [SST1] | 179 | 1023 | 4 | 22 | 37 | 53 | 105 | 167 | 236 | 364 | 510 | 1050 |
| [SST2] | 421 | 2589 | 6 | 13 | 46 | 71 | 99 | 167 | 247 | 334 | 586 | 2185 |
| [MST1] | 469 | 2712 | 5 | 25 | 40 | 61 | 120 | 197 | 287 | 426 | 766 | 2226 |
| [MST2] | 559 | 3378 | 6 | 13 | 43 | 69 | 134 | 208 | 297 | 450 | 800 | 2537 |
| [LST1] | 2018 | 12897 | 6 | 17 | 52 | 78 | 115 | 203 | 300 | 549 | 924 | 3403 |
| [Tobacco 3484] | 305442 | 4,77210 | 37 | 97 | 159 | 278 | 390 | 598 | 852 | 1304 | 2902 | 5126 |

Comparison and Discussion

In this section, the proposed ECL based watermarking method is compared with recent zero-based watermarking approaches [29, 31]. The evaluation is performed in two aspects as- tamper detection accuracy and watermark size.

4.2.1. Tamper Detection Accuracy

As the first part of the evaluation, the mean error of tampered detection accuracy for 5% and 50% of insertion, deletion, and reordering attacks is reviewed. Figure 3 illustrates the mean percentage of deviation in the estimation of attack size when 5% of insertion, deletion, and reordering attacks are applied on original documents. In order to consider the different size of ECL in the experiment, the average of attack size for diversity values of ER is referred to as estimated attack size in the proposed ECL method.

The evaluation results show that the proposed watermarking approach provides the minimum tamper calculation error for deletion and reordering attacks. However, the word-based Markov order 1 method offers the best precision of attack size, when the documents are modified by 5% of insertion attack. Nevertheless, the ECL method can measure the volume of insertion attack better than word-based Markov order 2 and LNMZW3 approaches [31]. In another tamper detection evaluation scenario, the documents are altered by 50% of common text watermarking attacks. Figure 4 demonstrates the percentage of error in detecting the size of attack by the above-mentioned approaches.

The overall comparison of tested methods for 50% of attacks proves that the ECL method identifies the attack volume more accurately. Although, the word-based methods perform accurate tamper calculation for the small size of attacks, when the size of the attack increases the provided estimation are hardly accurate.



Figure 3: Mean Percentage of Deviation(MPD) in Tamper Calculation for 5% of Attack



Figure 4: Mean Percentage of Deviation(MPD) in Tamper Calculation for 50% of Attack

4.2.2. Watermark Size

As the second part of the evaluation plan, the length of generated watermarks by using selected methods is analyzed. Table 4 represents the length of the generated watermark for five original documents such as SST1, SST2, MST1, MST2, and LST1. The ECL method's generated watermark sizes as shown when ER is set to 90%, 100%, and the average size of all tested ERs. Based on the provided information in Table 4, the length of generated watermarks is smaller than the size of the original documents in all methods except LNMZW3. In [22], the generated watermarks for SST1, SST2, MST1, MST2, and LST1 are 327, 765, 899, 1065, 3731, respectively. The size of generated watermarks in the LNMZW3[31] method are high as compare to word based methods. The size of generated watermarks in the word-based methods is dependent on the size of the documents and the length of generated watermarks by word base methods is about one-third of the original documents' length. In the proposed ECL method generates small sizes of the watermark when the ER is set to 90% or below. The drawback of the ECL method is when the effectiveness ratio equals 100% where the size of the watermark is comparatively larger than word-based methods. Nevertheless, the ECL method (with ER=100%) generates smaller watermarks for the large document when it is compared with word-based methods. Additionally, the trend of increasing watermark sizes in ECL method is very slower than word base methods.

Table 4: Size of Generated watermark in Evaluated Methods

| Method | [SST1] | [SST2] | [MST1] | [MST2] | [LST1] |
|-------------------------------|--------|--------|--------|--------|--------|
| Word-Based Markov Order 1[22] | 327 | 765 | 899 | 1065 | 3731 |
| Word-Based Markov Order 2[30] | 349 | 827 | 929 | 1099 | 4057 |
| LNMZW3[31] | 1458 | 3078 | 3665 | 4095 | 10612 |

| | | | | | |
|------------------------|------|------|------|------|------|
| ECL (Average all ER) | 254 | 375 | 415 | 455 | 530 |
| ECL (ER = 0.9) | 510 | 586 | 766 | 800 | 829 |
| ECL (ER = 1.0) | 1050 | 2185 | 2226 | 2537 | 3228 |

In addition, the comparison with existing techniques is conducted in Table 5. In Table 5, the comparison is conducted through different parameters such as insertion, deletion, and reordering. In addition, the comparison is also conducted based on average performance. The comparison results described that the proposed technique outperforms as compared to existing ones.

Table 5: Comparison with existing techniques

| Method | Year | Average Accuracy |
|-----------------|-------------|---|
| [31] | 2014 | 70.34% |
| [29] | 2017 | 62.068% (Under 10% of attacks) 87.02% (Under 1% of attacks) |
| Proposed | 2018 | 80.36% (Insertion under 50% of attacks) 80.76% (Deletion under 50% of attacks) 88.1% (Reordering under 50% of attacks) |

5. Conclusion and Future Work

In this article, we propose a zero-text watermarking algorithm to ensure the fragility and watermark size. A group of most frequency characters in the document are selected for watermark generation in order to reduce the size of generated watermark, while maintaining the fragility of the watermark. The effective characters list (ECL) is exploited to reduce the size of the generated watermark. Performance of the proposed ECL watermarking approach is evaluated by applying three types of random dispersed attacks, namely deletion, insertion, and reordering. From results, we conclude that the proposed method significantly reduces the number of generated watermarks. We also conclude that the proposed algorithm always detects any modification size in the tested documents when the effectiveness ratio (ER) is greater than 0.1. On 0.1, not significant performance is achieved. In addition, the ECL method provides the best precision of tampering detection in the majority of test cases. Also, the generated watermarks by the ECL method are the smallest watermarks among the tested approaches.

This method has a few limitations such as: a) it is less accurate to calculate the size of advanced replacement attacks compared to the normal replacement attacks. In the future work, we will consider this limitation. Moreover, in the future, the fragility of the ECL watermarking approach needs to be examined under advanced types of possible attacks.

Acknowledgement

"This work is output of the collaboration of Department of Computer Science, Liverpool John Moores University, Liverpool, UK , University Industry Research Laboratory (UIRL), Universiti Teknologi Malaysia UTM, Skudai, Johor, Malaysia and Machine Learning Research Group [RG-CCIS-2017-06-02] Prince Sultan University Riyadh Saudi Arabia"

References

1. Pramoun, T. and T. Amornraksa. *Improved image watermarking using pixel averaging and unbiased retrieval*. in *2009 9th International Symposium on Communications and Information Technology*. 2009. IEEE.
2. Kamaruddin, N.S., et al., *A Review of Text Watermarking: Theory, Methods, and Applications*. IEEE Access, 2018. **6**: p. 8011-8028.
3. Alkawaz, M.H., et al., *Concise analysis of current text automation and watermarking approaches*. *Security and Communication Networks*, 2016. **9**(18): p. 6365-6378.
4. Alotaibi, R.A. and L.A. Elrefaei, *Improved capacity Arabic text watermarking methods based on open word space*. *Journal of King Saud University-Computer and Information Sciences*, 2018. **30**(2): p. 236-248.
5. Tan, L., et al., *Print-scan invariant text image watermarking for hardcopy document authentication*. *Multimedia Tools and Applications*, 2018: p. 1-23.
6. Sharif, M., et al., *A framework for offline signature verification system: Best features selection approach*. *Pattern Recognition Letters*, 2018.
7. Hemida, O., et al., *A restorable fragile watermarking scheme with superior localization for both natural and text images*. *Multimedia Tools and Applications*, 2018: p. 1-31.
8. Krishna, G.J., R. Vadlamani, and S.N. Bhattu, *Key Generation for Plain Text in Stream Cipher via Bi-Objective Evolutionary Computing*. *Applied Soft Computing*, 2018.
9. Zheng, W., et al. *Robust and high capacity watermarking for image based on DWT-SVD and CNN*. in *2018 13th IEEE*

- Conference on Industrial Electronics and Applications (ICIEA)*. 2018. IEEE.
10. Wang, C., et al., *Ternary radial harmonic Fourier moments based robust stereo image zero-watermarking algorithm*. *Information Sciences*, 2019. **470**: p. 109-120.
 11. Walke, A., et al., *Enhanced Password Processing Scheme Using Visual Cryptography And Steganography*. *International Journal on Recent and Innovation Trends in Computing and Communication*, 2018. **6**(4): p. 35-37.
 12. Ahmad, A.M., et al., *Data hiding based on improved exploiting modification direction method and Huffman coding*. *Journal of Intelligent Systems*, 2014. **23**(4): p. 451-459.
 13. Alotaibi, R.A. and L.A. Elrefaei, *Text-image watermarking based on integer wavelet transform (IWT) and discrete cosine transform (DCT)*. *Applied Computing and Informatics*, 2018.
 14. Sinha, S., et al., *Authentication and Tamper Detection in Telemedicine using Zero Watermarking*. *Procedia Computer Science*, 2018. **132**: p. 557-562.
 15. Saxena, S., et al. *Robust digital image watermarking Scheme based on discrete fractional fourier transform*. in *AIP Conference Proceedings*. 2019. AIP Publishing.
 16. Abdulrahman, A.K. and S. Ozturk, *A novel hybrid DCT and DWT based robust watermarking algorithm for color images*. *Multimedia Tools and Applications*, 2019. **78**(12): p. 17027-17049.
 17. Feng, B., et al., *A Novel Semi-fragile Digital Watermarking Scheme for Scrambled Image Authentication and Restoration*. *Mobile Networks and Applications*, 2019: p. 1-13.
 18. Di Martino, F. and S. Sessa, *Fragile watermarking tamper detection via bilinear fuzzy relation equations*. *Journal of Ambient Intelligence and Humanized Computing*, 2019. **10**(5): p. 2041-2061.
 19. Cao, F., et al., *Hierarchical recovery for tampered images based on watermark self-embedding*. *Displays*, 2017. **46**: p. 52-60.
 20. Al-maweri, N.A.S., et al., *Robust Digital Text Watermarking Algorithm based on Unicode Extended Characters*. *Indian Journal of Science and Technology*, 2016. **9**(48).
 21. Zear, A., A.K. Singh, and P. Kumar, *A proposed secure multiple watermarking technique based on DWT, DCT and SVD for*

- application in medicine*. Multimedia Tools and Applications, 2018. **77**(4): p. 4863-4882.
22. Al-Wesabi, F.N., A.Z. Alshakaf, and K.U. Vasantrao. *A zero text watermarking algorithm based on the probabilistic weights for content authentication of text documents*. in *Proceedings on National Conference on Recent Trends in Computing NCRTC*. 2012. Citeseer.
 23. Gutub, A.A.-A., W. Al-Alwani, and A.B. Mahfoodh, *Improved method of Arabic text steganography using the extension 'Kashida' character*. Bahria University Journal of Information & Communication Technology, 2010. **3**(1): p. 68-72.
 24. Zhenjiu, X., et al., *Zero-watermarking based on boost normed singular value decomposition and cellular neural network*. Journal of Image and Graphics, 2017. **3**: p. 002.
 25. Husain, A., *Printed Document Forgery Detection Using Text Reordering and Mixing of Matrices in Zero Watermarking*. 2015, Universiti Teknologi Malaysia.
 26. Jalil, Z., et al., *Improved zero text watermarking algorithm against meaning preserving attacks*. World academy of science, engineering and technology, 2010. **46**: p. 592-596.
 27. SINGH, M. and A. SAXENA, *Image watermarking using discrete cosine transform [DCT] and genetic algorithm [GA]*. 2017.
 28. Taleby Ahvanooy, M., et al., *A Comparative Analysis of Information Hiding Techniques for Copyright Protection of Text Documents*. Security and Communication Networks, 2018. **2018**.
 29. Bashardoost, M., et al., *Replacement Attack: A New Zero Text Watermarking Attack*. 3D Research, 2017. **8**(1): p. 8.
 30. Ghilan, M.M., F.M. Ba-Alwi, and F.N. Al-Wesabi, *Combined Markov model and zero watermarking techniques to enhance content authentication of english text documents*. International Journal of Computational Linguistics Research, 2014. **5**(1): p. 26-42.
 31. Ba-Alwi, F.M., M.M. Ghilan, and F.N. Al-Wesabi, *Content authentication of English text via internet using zero watermarking technique and Markov model*. International Journal of Applied Information Systems (IJ AIS), 2014. **7**(1): p. 25-36.

32. Tayan, O., M.N. Kabir, and Y.M. Alginahi, *A hybrid digital-signature and zero-watermarking approach for authentication and protection of sensitive electronic documents*. The Scientific World Journal, 2014. **2014**.
33. Tayan, O., Y.M. Alginahi, and M.N. Kabir. *An adaptive zero-watermarking approach for text documents protection*. in *International Conference on Advances in Computer and Information Technology*. 2013.
34. Patel, H.A. and N.H. Divecha, *A Feature-Based Semi-fragile Watermarking Algorithm for Digital Color Image Authentication Using Hybrid Transform*, in *Advances in Computer and Computational Sciences*. 2018, Springer. p. 455-465.
35. Qin, C., et al., *Non-uniform watermark sharing based on optimal iterative BTC for image tampering recovery*. IEEE MultiMedia, 2018. **25**(3): p. 36-48.
36. Blackwell, D., *Equivalent comparisons of experiments*. The annals of mathematical statistics, 1953: p. 265-272.