



Face Recognition In Authentic Time Videos

G MAHESH

M. Tech student, Dept of ECE, Siddhartha Institute of Engineering And Technology, Hyderabad, TS, India.

M PUSHPALATHA

Assistant Professor, Dept of ECE, Siddhartha Institute of Engineering and Technology, Hyderabad, TS, India.

Abstract: Face detection systems are capable of handling well-aligned images captured under controlled situations. However, objects in world and their images present before us varied orientations, mismatched expressions, and well or poor lit conditions. Traditional face detection and recognition algorithms display a below par performance on such images. In this paper, we present a method for face detection and recognition which is adapted to real-world conditions that can be trained using very few training examples and is technically efficient. Our method consists of performing a frontal image alignment process followed by classification using sparse representation techniques. We perform our face detection and recognition based on a realistically simple and feasible algorithm, which are implemented to extract the best performance.

Index Terms: Face detection; Face Recognition; Training; LBP; Eigen face; Fischer; PCA; Viola-Jones; Histogram of Gradients (HOG);

I. INTRODUCTION

Face detection can be defined as a creative process that deals with scanning an object's image and taking the resultant datasets. It takes a high level of coding using an algorithm that It requires a high level of coding using an algorithm that can detect moving images from a running video stream and capture the different poses that form it's dataset[7]. It is probably one of the most popular areas of research in image processing and has a wide range of real-world applications including surveillance, access control, identity authentication, and photo based image detection and recognition. Face recognition systems are generally conceived as image processing systems that try to capture the identity behind the running video images and tag them with an identity to complete this process. Recognition of images are performed through a pair of pictures using pattern matching of images belonging to the same individual or performing face identification or recognition wherein it puts a label on an unknown face with respect to some training set. In this paper, we address how the same kind of detection and recognition can be utilized in campus surveillance. In modern day college or school premises, there is an increasingly high demand in the need of technology based monitoring. It creates a platform for a image processed detection to filter out unwanted and undesired individuals, by firing out warning messages to the user via an on-screen tagging that displays strangers and other unknown individuals as "Unknown" and helps in checking unauthorized individuals from gaining access to private data. In the recent decades, the automatic face detection and recognition has seen considerable progression in the field of military and other top-secret organizations.

II. RELATED WORK

The earliest developed face recognition algorithms used individual features on the faces, such as organs i.e. eyes, mouth or nose region to perform identification. These were purely feature set based classifiers that held a huge impact on the use of face and classifier based datasets [4]. However, such methods did not lead to good results because of the variability and the low amount of information used. The Viola-Jones[5] object detection framework is the first object detection framework to provide competitive advantage and was proposed in 2001 by Paul Viola and Michael Jones. Although it can be trained to detect a variety of object classes, it was motivated primarily by the problem of face detection. This algorithm is implemented in OpenCV as cvHaarDetectObjects(). From the 90s, new methods that use global features of the faces were developed. Turk and Pentland proposed EigenFaces[5] that uses Principal Component Analysis (PCA). Other methods like Fisherfaces or Laplacianfaces extract features from face images and perform nearest neighbor identification using Euclidean distance measure. Baback et al. use a Bayesian[6] approach where a probabilistic similarity measure is used to perform classification. Wright et al. applied the ideas of sparse coding to face recognition: they proposed the Sparse Representation based Classification (SRC) scheme, a dictionary learning based approach to recognize faces.

III. SYSTEM ARCHITECTURE

Fig1. Shows the detailed architecture of the system with flows to the respective sub-modules. The captured face triggers a set of images that form a part of the dataset and each such individual datasets constitute a collection. The persons whose image is detected is passed in sets to be trained for the

purpose of recognition. The person's individual images get collated together to be linked to a database for further recognition. The training sub-module goes through a .yml file which encompasses the individual images of a person dataset and produces the best of average among the compared images and assigns the value associated with it. The recognition sub-module takes both the compared values from the .yml file and the image set from the database and produces the corresponding match for the face recognition.

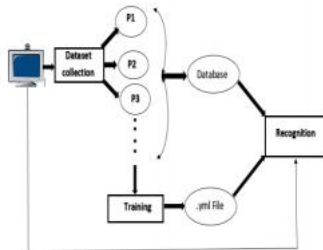


Fig1. System Architecture

IV. DESIGN AND IMPLEMENTATION

In this phase, we collect the images for an individual person. Firstly, we start the camera and detect the person's frontal face. We use the Viola-Jones algorithm to perform the above action. We use haarcascade_frontalface.xml file to detect the frontal face of the focused person. A rectangular box is put on the person's detected face. It is of dimension 130 x 100 pixels. It is further converted into a grey scale image, and then resized into a smaller dimension. We then capture around 30 different orientations of the video.

We import all the person's detected images from their individual datasets. Live streaming via the camera is initiated. We use LBPH Face Recognizer () [2] to train the images. We now create a Fisher Face Recognizer () in the camera's live stream to detect the faces which uses haarcascade_frontalface.xml file. We then put a rectangular box around the detected face and convert the face to grayscale image. Now we extract the frontal face feature set and give a value to it. This value is then compared with the trained image set contained in the dataset. We use predict method to choose or match the image contained in dataset with that of the detected image. It results in the following two consequences: If in case the condition is "TRUE", i.e. there exists a closely matched image, it will return the value of the detected image, and similarly in case of a "FALSE" condition, i.e. there exists no close matches, it would return a "Not recognized" value.

V. EXPERIMENTAL RESULTS

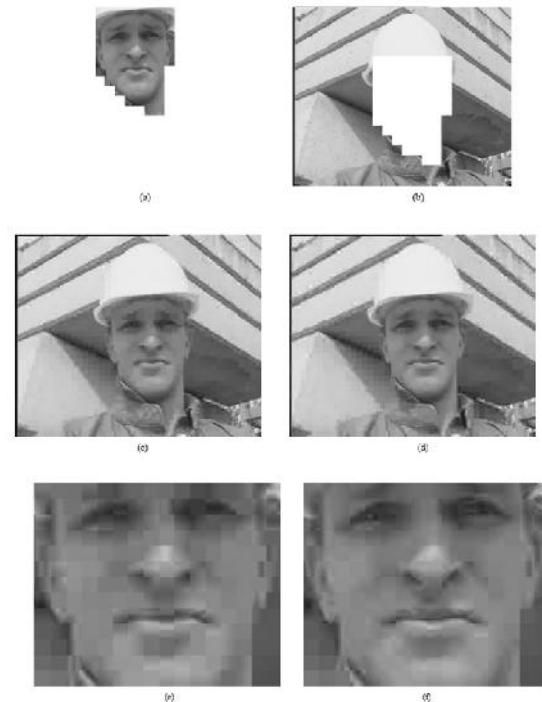


Fig.2. (a) Foreground MB's and (b) background MB's (c) coded by RM8 and (d) coded by H.261FB. (e) Magnified image of (c). (f) Magnified image of (d).

VI. CONCLUSION

This paper presents an approach to detect and recognize the faces which in turn can be effectively used inside a campus for surveillance purpose. This approach can be further enhanced for an Automated-Attendance-Tracking System with a few code deviations and some hardware modifications. It can also be used to track and find the location of a person in the campus. Compared to existing methods, it gives us a much effective and simple solution in the live streaming arena. We can nearly double the recognition rate while halving the computational runtime by giving more training dataset images of each person and by using a very high resolution camera.

VII. REFERENCES

- [1] Xavier Fontaine, Radhakrishna Achanta, Sabine Susstrunk. Face recognition in real-world images In Proceedings of IEEE CVPR 97, pages 495-501,2016.
- [2]. Caifeng Shan, Shaogang Gong and Peter W. McOwan "ROBUST FACIAL EXPRESSION RECOGNITION USING LOCAL BINARY PATTERNS", 2012.
- [3]. Timo Ahonen, Student Member, IEEE, Abdenour Hadid, and Matti Pietika" inen, Senior Member, IEEE "Face Description

- with Local Binary Patterns: Application to Face Recognition”, December 2006.
- [4] N. Dalal and B. Triggs. Histograms of oriented gradients for human detection. Conference on Computer Vision and Pattern Recognition (CVPR), 2005.
 - [5]. P. Viola and M. Jones, “Rapid Object Detection using a Boosted Cascade of Simple Features”, CVPR 2001. Vol I: 511-518
 - [6]. A. Mohan, C. Papageorgiou, and T. Poggio, “ExampleBased Object Detection in images by Components”, IEEE Trans on PAMI, 23(4): 394-361, 2001.
 - [7] Alan J Lipton, Hironobu Fujiyoshi and Raju S. Moving Target Classification and Tracking from Real-time video. In Proceedings of IEEE CVPR 97, pages 301-395, 1999.
 - [8] Mathew Turk and Alex Pentland, “Eigenfaces for recognition”. In Proceedings of IEEE CVPR 97, pages 568–574, 1997.
 - [9]. Rein-Lien Hsu’, Mohamed Abdel-Mottaleb*, and Anil K. Jain “FACE DETECTION IN COLOR IMAGES”, 1995.
 - [10]. http://link.springer.com/chapter/10.1007/978-3-319-44790-2_14