

# Learning to Propagate Labels on Graphs: An Iterative Multitask Regression Framework for Semi-supervised Hyperspectral Dimensionality Reduction

Danfeng Hong<sup>a,b</sup>, Naoto Yokoya<sup>c</sup>, Jocelyn Chanussot<sup>d</sup>, Jian Xu<sup>a</sup>, Xiao Xiang Zhu<sup>a,b</sup>

<sup>a</sup>Remote Sensing Technology Institute (IMF), German Aerospace Center (DLR), Wessling, Germany

<sup>b</sup>Signal Processing in Earth Observation (SiPEO), Technical University of Munich (TUM), Munich, Germany

<sup>c</sup>Geoinformatics Unit, RIKEN Center for Advanced Intelligence Project (AIP), RIKEN, Tokyo, Japan

<sup>d</sup>Univ. Grenoble Alpes, CNRS, Grenoble INP, GIPSA-lab, Grenoble, France

---

## Abstract

Hyperspectral dimensionality reduction (HDR), an important preprocessing step prior to high-level data analysis, has been garnering growing attention in the remote sensing community. Although a variety of methods, both unsupervised and supervised models, have been proposed for this task, yet the discriminative ability in feature representation still remains limited due to the lack of a powerful tool that effectively exploits the labeled and unlabeled data in the HDR process. A semi-supervised HDR approach, called iterative multitask regression (IMR), is proposed in this paper to address this need. IMR aims at learning a low-dimensional subspace by jointly considering the labeled and unlabeled data, and also bridging the learned subspace with two regression tasks: labels and pseudo-labels initialized by a given classifier. More significantly, IMR dynamically propagates the labels on a learnable graph and progressively refines pseudo-labels, yielding a well-conditioned feedback system. Experiments conducted on three widely-used hyperspectral image datasets demonstrate that the dimension-reduced features learned by the proposed IMR framework with respect to classification or recognition accuracy are superior to those of related state-of-the-art HDR approaches.

**Keywords:** Dimensionality reduction, graph learning, hyperspectral image, iterative, label propagation, multitask regression, remote sensing, semi-supervised.

---

## 13 1. Introduction

14 Recently, hyperspectral imaging in sensing techniques has garnered growing at-  
15 tention for many remote sensing tasks [1], such as land-use and land-cover classifica-  
16 tion [2, 3, 4], large-scale urban or agriculture mapping [5, 6, 7, 8], spectral unmixing  
17 [9, 10, 11, 12], object detection [13, 14, 15, 16], and multimodal scene interpretation  
18 [17, 18, 19, 20], as forthcoming spaceborne spectroscopy imaging satellites (e.g., En-  
19 MAP [21]) make hyperspectral imagery (HSI) available on a larger scale. Although  
20 HSI features richer spectral information than RGB [22] and multispectral (MS) data  
21 [23], yielding more accurate and discriminative detection and identification of un-  
22 known materials, yet the very high dimensionality in HSI also introduces some crucial  
23 drawbacks that need to be taken seriously: high storage cost, information redundancy,  
24 and the performance degradation resulting from *the curse of dimensionality*, to name a  
25 few. A general but effective solution to these issues is *dimensionality reduction*, also  
26 referred to as *subspace learning*. In this process, we expect to compress the HSI to a  
27 low-dimensional subspace along the spectral dimension while preserving the highest  
28 possible spectral discrimination.

29 With the significant support in both theory and practice as well as a fact that  
30 the learning-based strategy is somehow superior to the manually-designed feature ex-  
31 traction [24], a considerable number of subspace learning approaches have been de-  
32 signed and applied to hyperspectral data processing and analysis in the past decades  
33 [25, 26, 27, 28, 29, 30, 31], particularly hyperspectral dimensionality reduction (HDR)  
34 [32, 33, 34] and spectral band selection [35, 36]. Depending on their different learn-  
35 ing strategies, HDR techniques are roughly categorized as unsupervised, supervised,  
36 or semi-supervised strategies.

37 The classic principal component analysis (PCA) [37] is a user-friendly dimension-  
38 ality reduction method for that is limited to capturing the underlying topology of the  
39 data. Rather, manifold learning techniques (e.g., locally linear embedding (LLE) [38],  
40 Laplacian eigenmaps (LE) [39], local tangent space alignment (LTSA) [40], and their  
41 variants: locality preserving projections (LPP) [41], neighborhood preserving embed-  
42 ding (NPE) [42], large-scale LLE [43], enhanced-local tangent space alignment (ENH-

LTSA) [44]), by and large, follow the graph embedding framework presented in [45]. This framework starts with the construction of graph (topology) structure and aim at learning a low-dimensional data embedding while preserving the topological structure. Some popular and advanced methods have been proposed based on the graph embedding framework for HDR. For example, Ma et al. [46] proposed to locally embed the intrinsic structure of the hyperspectral data into a low-dimensional subspace for hyperspectral image classification. Li et al. [47] modeled the locally neighboring relations between hyperspectral data in a linearized system for HDR. In [48], a multi-feature manifold discriminant analysis was developed on the basis of graph embedding framework for hyperspectral image classification. Authors of [49] upgraded the existing landmark isometric mapping approach for the fast and nonlinear HDR. The same investigators [50] further extended their work to linearly extract the low-dimensional representation with sparse and low-rank attribute embeddings for HSI classification. In [33], a joint spatial-spectral manifold embedding is developed to extract the discriminative dimension-reduced features. Subsequently, Huang et al. [51] proposed a general spatial-spectral manifold learning framework to reduce the dimension of hyperspectral imagery.

In supervised HDR strategies, the main consideration is the discrimination between intra-class and inter-class, where different discriminative rules are followed: local discriminative analysis (LDA) [37], local fisher discriminative analysis (LFDA) [52], sparse discriminant analysis [26], noise-adjusted discriminant analysis [53], feature space discriminant analysis [54], and so on. Despite the superior class separability, these methods still might fail to robustly represent the features due to sensitivity to various complex noises and ill-conditioned statistical assumptions, especially in the case of small-scale samples. Unlike the aforementioned approaches that seek to project the original data directly into a discriminative subspace, Ji et al. [55] simultaneously performed dimensionality reduction and classification under a regression-based framework, in order to find an optimally latent subspace where the decision boundary is expected to be better determined. With the local manifold regularization in the projected subspace, this strategy has been successfully applied and extended to learn the discriminative representation for supervised HDR [56].

Most previously-proposed HDR methods adhere to either the unsupervised or the supervised strategy, yet the labeled and unlabeled information is less frequently taken into consideration. A straightforward way to consider the unlabeled samples is the graph-based label propagation (GLP) [57], which has been successfully applied to semi-supervised HSI classification [58] together with the support vector machine (SVM) classifier. To effectively improve the discrimination and generalization of dimension-reduced features, some proposed semi-supervised HDR works have been proposed by the attempt to preserve the potentially global data structure that lies in the whole high-dimensional space. For example, [59] followed a graph-based semi-supervised learning paradigm for HDR and classification, where the graphs are constructed by different local manifold learning approaches. A general but effective work integrating LDA with LPP, called semi-supervised local discriminant analysis (SELD), was proposed in [60] for a semi-supervised hyperspectral feature extraction. Inspired by GLP, [61] enhanced the performance of LDA by jointly utilizing the labels and “soft-labels” predicted by GLP for the semi-supervised subspace dimensionality reduction. Wu et al. [62] proposed a similar approach to achieving a semi-supervised discriminative dimensionality reduction of HSI by embedding pseudo-labels (instead of the similarity measurement in LPP [60]) into LFDA rather than LDA in [61].

### 1.1. Motivation and Objectives

Although these proposed semi-supervised approaches have been proven to be effective in handling the issue of HDR to some extent, yet their graph structures for unlabeled samples are constructed either from the similarity measurement (e.g., using RBF) or from the pseudo-labels inferred by GLP or pre-trained classifier. The resulting features by using this type of graph construction strategy is neither robust nor generalized, due to the noisy data and labels as well as the scarce labeled samples. Also, these semi-supervised algorithms, as often as not, attempt to find a single transformation that connects the original data and the subspace to be estimated. On account of the complexity in the learning process, the optimal subspace search is hardly accomplished only by a single transformation. On the other hand, in spite of being guided by label information, there is still lack of an explicit and direct connection between

the learned subspace and the label space in the subspace learning strategy interpreted by a single projection, further causing the performance bottleneck. In addition, these subspace-learning-based models are commonly treated as a disjunct feature learning step before classification. In other words, it is unknown what kinds of features in the learning process may be capable of improving classification accuracy.

According to these factors, our objectives in this paper can be summarized as follows: 1) to bridge the to-be-estimated subspace with the label information more explicitly and effectively; 2) to introduce many unlabeled samples for improving the model’s generalization ability; 3) and to refine the quality of class indicators of unlabeled samples for high discriminative HDR.

## 1.2. Method Overview and Contributions

Towards the aforementioned goals, a novel regression-induced learning model motivated by the joint learning (JL) framework [55, 56] is proposed, which seeks to learn an optimal subspace by considering the correspondences between the training samples and labels on a to-be-estimated latent subspace. We further extend the JL framework to a multitask regression model with the joint embedding of labeled and unlabeled samples. In the multitask framework, we also propose to adaptively learn a *soft-graph* structure from the data rather than utilizing a *hard-graph* (fixed graph) constructed manually or generated by additional algorithms, yielding a high-performance and more generalized label propagation. In the meantime, to facilitate the use of pseudo-labels more effectively, the learned graph can be updated after each outer iteration ends, and the pseudo-labels accordingly refined, thereby enabling the learned features to be progressively optimized. More specifically, the main contributions of this work can be highlighted as follows.

- We propose a JL-based variant: a novel iterative multitask regression (IMR) framework by simultaneously considering few labeled samples and unlabeled samples in quantity, with the application to semi-supervised HDR.
- We adaptively learn the connectivity (graph structure) between samples by aligning the labeled and unlabeled samples in the estimated subspace.

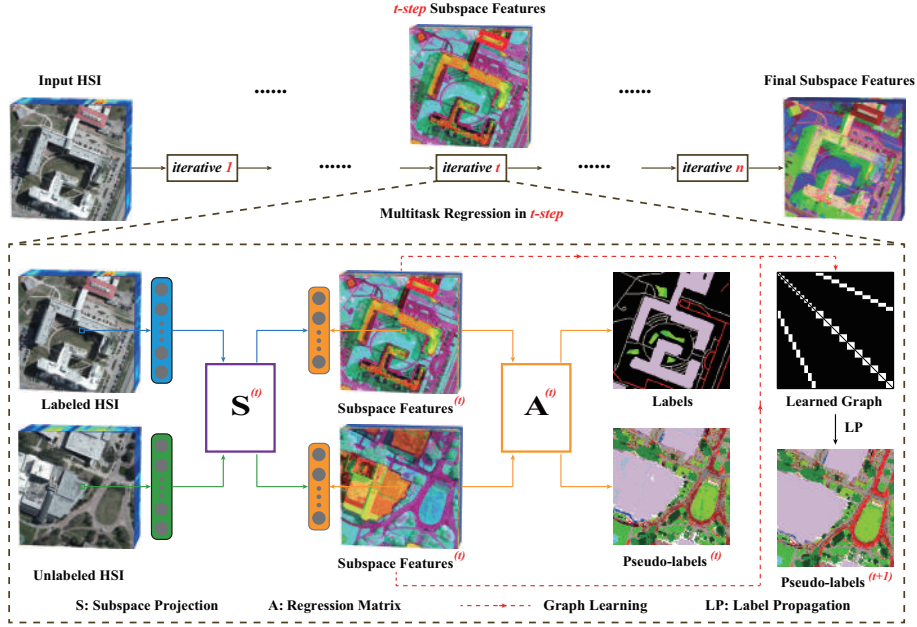


Figure 1: An overview of the proposed IMR framework. In fact, each iterative ( $t$ -step) starts with the input of labeled and unlabeled data and ends up the output of the subspace projections ( $\mathbf{S}^{(t)}$ ), regression matrix ( $\mathbf{A}^{(t)}$ ), and learned graph ( $\mathbf{W}^{(t)}$ ) aligning the labeled with unlabeled samples. With the  $t$ -step learned graph, the pseudo-labels ( $t + 1$ ) can be refined.

- We deeply integrate the adaptive graph learning with the proposed multitask regression framework in an iterative manner, making it possible for pseudo-labels to be gradually updated using the learned graph in each outer iteration.
- We also design a general solver that originates from the alternating direction method of multipliers (ADMM) optimizer for the solution of our proposed IMR method.

## 2. The Proposed Methodology

In this section, we start with a brief review of our model's cornerstone, the JL framework, and then extend it to a variant of multitask learning by synchronously regressing the labeled and unlabeled data. We will further introduce the proposed iterative multitask regression (IMR) model by integrating the JL framework with the advanced graph learning technique, which more effectively propagates labels. Finally, an

ADMM-based optimizer is used for the IMR solution. Fig. 1 illustrates the workflow of the proposed IMR method.

### 2.1. Review of the JL Model

Let  $\mathbf{X}_l \in \mathbb{R}^{d \times N}$  be the unfolded hyperspectral data with  $d$  bands by  $N$  pixels (or samples), and  $\mathbf{Y}_l \in \mathbb{R}^{l \times N}$  be the corresponding one-hot encoded label matrix with  $l$  classes by  $N$  pixels. We model the original JL problem [55] as follows.

$$\min_{\mathbf{A}, \mathbf{S}} \frac{1}{2} \|\mathbf{Y}_l - \mathbf{A}\mathbf{S}\mathbf{X}_l\|_F^2 + \frac{\alpha}{2} \|\mathbf{A}\|_F^2 \quad \text{s.t.} \quad \mathbf{S}\mathbf{S}^T = \mathbf{I}, \quad (1)$$

where  $\mathbf{S} \in \mathbb{R}^{d_{sub} \times N}$  and  $\mathbf{A} \in \mathbb{R}^{l \times d_{sub}}$  denote the subspace projection and the regression matrix linking the estimated subspace with label information, respectively, and  $d_{sub}$  represents the subspace dimension.  $\|\bullet\|_F$  denotes the Frobenius norm and  $\alpha$  is the regularization parameter.

Slightly different from the original JL, an improved model with manifold (graph) regularization is formulated by optimizing the following objective function.

$$\min_{\mathbf{A}, \mathbf{S}} \frac{1}{2} \|\mathbf{Y}_l - \mathbf{A}\mathbf{S}\mathbf{X}_l\|_F^2 + \frac{\alpha}{2} \|\mathbf{A}\|_F^2 + \frac{\beta}{2} \text{tr}(\mathbf{S}\mathbf{X}_l\mathbf{L}_l\mathbf{X}_l^T\mathbf{S}^T) \quad \text{s.t.} \quad \mathbf{S}\mathbf{S}^T = \mathbf{I}, \quad (2)$$

where  $\mathbf{L}_l \in \mathbb{R}^{N \times N} = \mathbf{D}_l - \mathbf{W}_l$  is the Laplacian matrix,  $\mathbf{W}_l \in \mathbb{R}^{N \times N}$  is an adjacency matrix (graph), and  $\mathbf{D}_{l(ii)} = \sum_{i \neq j} \mathbf{W}_{l(i,j)}$  is the corresponding degree matrix. The term  $\text{tr}$  denotes the trace of matrix parameterized by  $\beta$ . The JL-based models in Eqs. (1) and (2) have been proven to be effectively solved with the ADMM optimizer [63]. Once the projection matrix  $\mathbf{S}$  is learned, the subspace features can be computed by  $\mathbf{S}\mathbf{X}$ .

### 2.2. Iterative Multitask Regression (IMR)

Labeling in *Earth Vision* is extremely costly and time-consuming, as the remote sensing images have a larger-scale and more complex visual field. This leads to a limited number of labeled samples, which further hinders improvement of the model's learning and generalization capability. To this end, we effectively utilize the information of unlabeled samples that are largely available by making a regression between the unlabeled samples and pseudo-labels in the form of multitask learning.

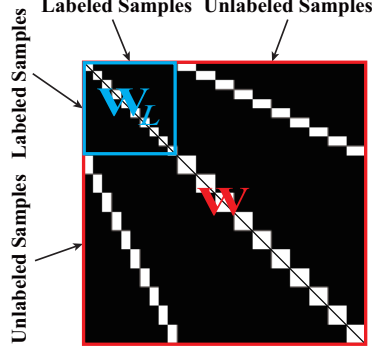


Figure 2: A showcase for joint adjacency matrix ( $\mathbf{W}$ ) (in red), where  $\mathbf{W}_L$  (in blue) is a LDA-like graph constructed by labels.

### 2.2.1. Multitask Regression with Graph Learning

In the multitask framework, we propose a learning-based graph regularization instead of a fixed graph artificially constructed with the known kernels (e.g., using Gaussian kernel function), in order to depict the connectivity (or similarity) between samples. Accordingly, a multitask regression framework is proposed for semi-supervised HDR by optimizing the following objective function.

$$\min_{\mathbf{A}, \mathbf{S}, \mathbf{L}} \left\{ \begin{aligned} & \frac{\gamma}{2} \|\mathbf{Y}_l - \mathbf{A}\mathbf{S}\mathbf{X}_l\|_F^2 + \frac{1-\gamma}{2} \|\mathbf{Y}_{pl} - \mathbf{A}\mathbf{S}\mathbf{X}_{pl}\|_F^2 + \frac{\alpha}{2} \|\mathbf{A}\|_F^2 \\ & + \frac{\beta}{2} \text{tr}(\mathbf{S}\mathbf{X}\mathbf{L}\mathbf{X}^T\mathbf{S}^T) \\ \text{s.t. } & \mathbf{S}\mathbf{S}^T = \mathbf{I}, \quad \mathbf{L} = \mathbf{L}^T, \quad \mathbf{L}_{i,j,i \neq j} \preceq 0, \quad \mathbf{L}_{i,j,i=j} \succeq 0, \quad \text{tr}(\mathbf{L}) = s \end{aligned} \right\}, \quad (3)$$

where  $\mathbf{X}_{pl} \in \mathbb{R}^{d \times M}$  and  $\mathbf{Y}_{pl} \in \mathbb{R}^{l \times M}$  denote unlabeled hyperspectral data and a one-hot encoded pseudo-label matrix, respectively, while  $\mathbf{X} = [\mathbf{X}_l, \mathbf{X}_{pl}] \in \mathbb{R}^{d \times (N+M)}$  and  $\mathbf{L} \in \mathbb{R}^{(N+M) \times (N+M)}$  is a joint Laplacian matrix. The term  $s > 0$  is a constant to control the scale. Furthermore, the two fidelity terms in multitask learning are balanced by a penalty parameter  $\gamma$ .

To solve (3) effectively, we rewrite the trace term as

$$\text{tr}(\mathbf{S}\mathbf{X}\mathbf{L}\mathbf{X}^T\mathbf{S}^T) = \frac{1}{2} \text{tr}(\mathbf{W}\mathbf{Z}) = \frac{1}{2} \|\mathbf{W} \odot \mathbf{Z}\|_{1,1}, \quad (4)$$

where  $\mathbf{W} \in \mathbb{R}^{(N+M) \times (N+M)}$  is the to-be-learned joint adjacency matrix (see Fig. 2



in red). In  $\mathbf{W}$ , the similarities between  $\mathbf{X}$  can be measured by a *pair-wise distance matrix* ( $\mathbf{Z} \in \mathbb{R}^{(2N+M) \times (2N+M)}$ ) on Euclidean space; this matrix can be computed by  $\mathbf{Z}_{i,j} = \|(\mathbf{S}\mathbf{X})_i - (\mathbf{S}\mathbf{X})_j\|^2$ . Moreover, the operator  $\odot$  is interpreted as a *term-wise Schur-Hadamard* product.

By means of Eq. (4), optimizing problem (3) on a smooth manifold can be equivalently converted on a sparse graph as follows.

$$\min_{\mathbf{A}, \mathbf{S}, \mathbf{W}} \left\{ \begin{array}{l} \frac{\gamma}{2} \|\mathbf{Y}_l - \mathbf{A}\mathbf{S}\mathbf{X}_l\|_F^2 + \frac{1-\gamma}{2} \|\mathbf{Y}_{pl} - \mathbf{A}\mathbf{S}\mathbf{X}_{pl}\|_F^2 + \frac{\alpha}{2} \|\mathbf{A}\|_F^2 + \frac{\beta}{4} \|\mathbf{W} \odot \mathbf{Z}\|_{1,1} \\ \text{s.t. } \mathbf{S}\mathbf{S}^T = \mathbf{I}, \quad \mathbf{W} = \mathbf{W}^T, \quad \mathbf{W}_{i,j} \succeq 0, \quad \|\mathbf{W}\|_{1,1} = s \end{array} \right\}. \quad (5)$$

In Eq. (5), the  $\|\mathbf{W} \odot \mathbf{Z}\|_{1,1}$  is specified as a *point-wise weighted  $\ell_1$ -norm* with respect to the variable of  $\mathbf{W}$ , yielding a weighted sparsity.

### 2.2.2. Optimizing Pseudo-Labels with Graph-based Label Propagation

In Eq. (3), the pseudo-labels are predicted by using a trained classifier, e.g., SVM or random forest. Although the model's performance can be moderately improved through the use of unlabeled samples and pseudo-labels, yet the discrimination of the dimension-reduced HSI still remains limited by only regressing the static pseudo-labels. For this reason, the labels are dynamically propagated on the learned graph using GLP, when the model converges in each step<sup>1</sup>, aiming at iteratively refining or optimizing pseudo-labels, as illustrated in Fig. 1. The updated pseudo-labels together with the other inputs of  $\mathbf{X}_l$ ,  $\mathbf{X}_{pl}$ , and  $\mathbf{Y}_l$  can be re-fed into the next round of model training, thus progressively improving the learning and generalization ability of the proposed multitask model.

### 2.3. Modal Learning

Unlike the previous HDR methods following the graph embedding framework [46, 49, 33, 48, 51] that solve low-dimensional embedding as a problem of generalized eigenvalues decomposition (GED) [45], our model learning process is to iteratively and

<sup>1</sup>Given the inputs of  $\mathbf{X}_l$  and  $\mathbf{X}_{pl}$  as well as  $\mathbf{Y}_l$  and  $\mathbf{Y}_{pl}$ , we estimate the variables of  $\mathbf{A}$ ,  $\mathbf{S}$ , and  $\mathbf{L}$  by solving problem (3). This process is defined as a "step" or in our case an "iteration".

---

**Algorithm 1:** Iterative Multitask Regression (IMR)

---

**Input:**  $\mathbf{Y}_l, \mathbf{X}_l, \mathbf{X}_{pl}, \mathbf{L}, \maxIter$ , and regularization parameters  $\alpha, \beta, \gamma$ .

**Output:**  $\mathbf{A}, \mathbf{S}, \mathbf{L}$ , and  $\mathbf{Y}_{pl}$

```
1  $t = 1, \zeta = 1e - 4, \epsilon = 1e - 6, Obj = 1 + \zeta;$ 
2 Initializing  $\mathbf{A}^t, \mathbf{S}^t, \mathbf{W}^t$ , and  $\mathbf{Y}_{pl}^t$ 
3 while  $Obj \geq \epsilon$  or  $t \leq \maxIter$  do
4    $k = 1, ObjIn = 1 + \zeta;$ 
5   while  $ObjIn \geq \zeta$  or  $i \leq \maxIter$  do
6     Fix others to update  $\mathbf{A}^k$  ▷ Learning Regression Matrix
7     Fix others to update  $\mathbf{S}^k$  ▷ Learning Subspace Projections
8     Fix others to wisely update  $\mathbf{W}^k$  instead of directly optimizing  $\mathbf{L}^k$ 
9     1. compute  $\mathbf{W}^k$  ▷ Graph Learning
10    2. construct the LDA-like graph ( $\mathbf{W}_L^k$ ) for the labeled samples
11    3. replace the part of  $\mathbf{W}^k$  learned by the labeled samples with  $\mathbf{W}_L^k$ 
12    4. obtain  $\mathbf{L}^k = \mathbf{D}^k - \mathbf{W}^k$ , where  $\mathbf{D}_{ii}^k = \sum_{i \neq j} \mathbf{W}_{ij}^k$ 
13    Check the convergence condition of the inner loop: if the condition is
      satisfied then
14      Stop iteration;
15      Output  $\mathbf{W}^t = \mathbf{W}^k, \mathbf{Z}_l^t = \mathbf{S}^k \mathbf{X}_l, \mathbf{Z}_{pl}^t = \mathbf{S}^k \mathbf{X}_{pl};$ 
16    else
17       $k \leftarrow k + 1;$ 
18    end
19  end
20  Update  $\mathbf{Y}_{pl}^{t+1}$  with  $\mathbf{Y}_l^t, \mathbf{Z}_l^t, \mathbf{Y}_{pl}^t, \mathbf{Z}_{pl}^t, \mathbf{W}^t$  using LP ▷ Updating Pseudo-labels
21  Check the convergence condition of the outer loop: if  $\mathbf{W}^t = \mathbf{W}^{t-1}$  or
     $Obj = \|\mathbf{W}^t - \mathbf{W}^{t-1}\|_F \preceq \epsilon$  then
22    Optimization finished.
23  else
24     $t \leftarrow t + 1;$ 
25  end
26 end
```

---

205 alternately optimize several convex subproblems with respect to the variables  $\mathbf{A}, \mathbf{S}$ , and  
206  $\mathbf{W}$  as well as to-be-updated  $\mathbf{Y}_{pl}$  instead of directly solving the non-convex problem  
207 (5) by the separable strategy of the variables. An implementation of the proposed  
208 IMR is summarized in **Algorithm 1**. Such optimization strategy has been proven to  
209 be effective for solving the aforementioned issue [64, 65] and successfully applied in  
210 many real cases [55, 56, 63, 66].

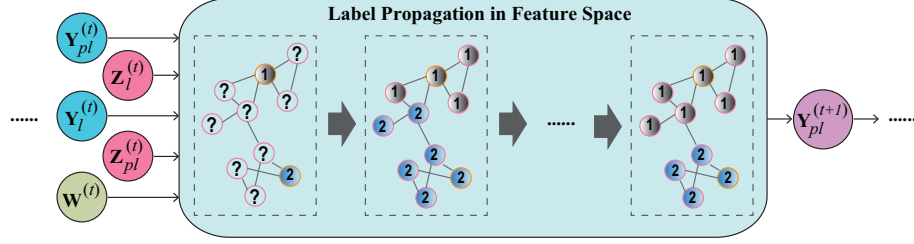


Figure 3: An illustration of label propagation used for updating the pseudo-labels, where  $\mathbf{Z}_l^{(t)} = \mathbf{S}^{(t)} \mathbf{X}_l$  and  $\mathbf{Z}_{pl}^{(t)} = \mathbf{S}^{(t)} \mathbf{X}_{pl}$  denote the low-dimensional feature representation for the labeled and unlabeled samples, respectively.

### 2.3.1. Learning Regression Matrix ( $\mathbf{A}$ )

Intuitively, the optimization problem for solving the variable  $\mathbf{A}$  is a Tikhonov-regularized least square regression, which is formulated as follows.

$$\min_{\mathbf{A}} \frac{\gamma}{2} \|\mathbf{Y}_l - \mathbf{A} \mathbf{S} \mathbf{X}_l\|_{\mathbb{F}}^2 + \frac{1-\gamma}{2} \|\mathbf{Y}_{pl} - \mathbf{A} \mathbf{S} \mathbf{X}_{pl}\|_{\mathbb{F}}^2 + \frac{\alpha}{2} \|\mathbf{A}\|_{\mathbb{F}}^2. \quad (6)$$

A closed-form solution of Eq. (6) is given by

$$\mathbf{A} = (\gamma \mathbf{Y}_l \mathbf{H}_l + (1-\gamma) \mathbf{Y}_{pl} \mathbf{H}_{pl}) \times (\gamma \mathbf{H}_l \mathbf{H}_l^T + (1-\gamma) \mathbf{H}_{pl} \mathbf{H}_{pl}^T + \alpha \mathbf{I})^{-1}, \quad (7)$$

where  $\mathbf{H}_l = \mathbf{S} \mathbf{X}_l$  and  $\mathbf{H}_{pl} = \mathbf{S} \mathbf{X}_{pl}$ .

### 2.3.2. Learning Subspace Projections ( $\mathbf{S}$ )

The variable  $\mathbf{S}$  can be estimated by solving the following optimization problem.

$$\begin{aligned} \min_{\mathbf{S}} \quad & \frac{\gamma}{2} \|\mathbf{Y}_l - \mathbf{A} \mathbf{S} \mathbf{X}_l\|_{\mathbb{F}}^2 + \frac{1-\gamma}{2} \|\mathbf{Y}_{pl} - \mathbf{A} \mathbf{S} \mathbf{X}_{pl}\|_{\mathbb{F}}^2 + \frac{\beta}{2} \text{tr}(\mathbf{S} \mathbf{X}_l \mathbf{L}_l \mathbf{X}_l^T \mathbf{S}^T) \\ \text{s.t.} \quad & \mathbf{S} \mathbf{S}^T = \mathbf{I}. \end{aligned} \quad (8)$$

The orthogonality-constrained regression problem in Eq. (8) has been effectively solved by using an ADMM-based optimization algorithm [63].

### 2.3.3. Learning Graph Structure ( $\mathbf{W}$ )

In the sub-problem, we learn the connectivity (or similarity) between samples from the data rather than using certain existing distance measurements. Therefore, the re-

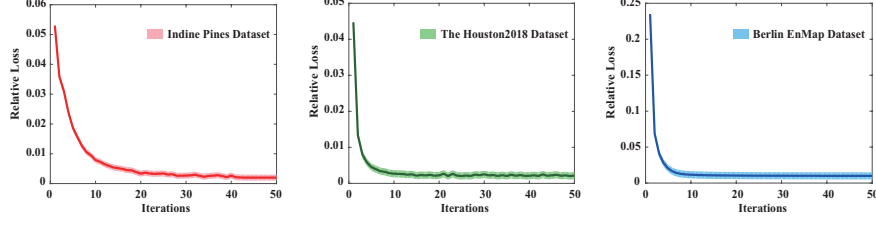


Figure 4: Convergence analysis of the proposed IMR method on three different datasets: Indine Pines, Houston2018, and Berlin EnMap. Note that the relative loss recorded in the convergence curve is obtained by averaging the loss values of multiple outer iterations in our proposed method.

sulting optimization problem can be formulated as

$$\min_{\mathbf{W}} \frac{\beta}{4} \|\mathbf{W} \odot \mathbf{Z}\|_{1,1} \quad \text{s.t.} \quad \mathbf{W} = \mathbf{W}^T, \quad 1/N_k \succeq \mathbf{W}_{i,j} \succeq 0, \quad \|\mathbf{W}\|_{1,1} = s, \quad (9)$$

whose solution has been obtained with an effective ADMM as well, as presented in [66]. Please note that for those samples with labels, we construct a graph-based local discriminant analysis (LDA) [39] in the place of the corresponding part in the learned graph  $\mathbf{W}$ , as shown in Fig. 2. The LDA-like graph ( $\mathbf{W}_L$ ) can be expressed by

$$\mathbf{W}_{L(i,j)} = \begin{cases} \frac{1}{N_k}, & \mathbf{X}_i \text{ and } \mathbf{X}_j \text{ are the samples belonging to the } k\text{-th class;} \\ 0, & \text{otherwise,} \end{cases} \quad (10)$$

where  $N_k$  denotes the number of samples belonging to  $k$ -th class.

#### 2.3.4. Updating Pseudo-labels ( $\mathbf{Y}_{pl}$ )

Given the labels ( $\mathbf{Y}_l$ ) and pseudo-labels ( $\mathbf{Y}_{pl}^{(t)}$ ) of the  $t$ -th step, and the labeled ( $\mathbf{X}_l$ ) and unlabeled ( $\mathbf{X}_{pl}$ ) samples, we can correspondingly learn the joint graph structure ( $\mathbf{W}^{(t)}$ ) in the  $t$ -th step from the  $t$ -th latent feature spaces ( $\mathbf{Z}^{(t)}$ ). The learned  $\mathbf{W}^{(t)}$  can then be further applied to infer the pseudo-labels of next step ( $\mathbf{Y}_{pl}^{(t+1)}$ ) by LP, and then the updated pseudo-labels can be fed into a next-round model learning. This process is illustrated in Fig. 3. Please note that the model's iteration will be suspended as long as the to-be-learned adjacency matrix  $\mathbf{W}$  is not changed or the residual error ( $\epsilon$ ) between the current  $\mathbf{W}^{(t)}$  and the former step  $\mathbf{W}^{(t-1)}$  are close to zero (e.g.,  $10^{-6}$ ).

#### 2.4. Convergence Analysis and Computational Complexity

Considering the non-convexity of Eq. (5) when all variables are considered simultaneously, a common and effective solution for the optimization problem is using a block coordinate descent (BCD) by alternatively optimizing each subproblem with respect to  $\mathbf{A}$ ,  $\mathbf{S}$ , and  $\mathbf{W}$  in an alternating strategy. The BCD algorithm has been guaranteed in theory to converge to a stationary point, if and only if each to-be-estimated variable in Eq. (5) can be exactly minimized [64]. Owing to the convexity in each independent task, an unique minimum can be ideally found in our case when the Lagrangian parameters used in ADMM are updated within finitely iterative steps [65]. The same or similar criterion has been successfully applied in various practical applications [10, 67, 68, 69]. In addition, we also draw the convergence curves corresponding to the three used datasets, respectively, by recording the relative loss of objective function of Eq. (5) in each iteration, as shown in Fig. (4). One can be seen from the figure is that our model is able to fast reach the state of convergence with more or less 20 steps.

As observed in Section 2.3: **Model Learning**, the computational cost in our IMR model is mainly dominated by matrix products, where the most costly step lies in solving  $\mathbf{S}$ , yielding an overall  $\mathcal{O}(d(2N + M)^2t)$  computational cost for Eq. (5).

### 3. Experiments

#### 3.1. Data Description

Three popular and promising HSI datasets – Indian Pines [70], Houston2018 [71], and Berlin EnMap [72] – are used to assess the quantitative and qualitative performance of the IMR method, as briefly described below.

##### 3.1.1. Indian Pines Dataset

The hyperspectral scene located in the northwestern Indiana, USA, has been widely used in various HSI-related tasks, such as dimensionality reduction [27, 56] and classification [73]. It consists of  $145 \times 145$  pixels with 220 spectral bands covering the wavelength from 400 nm to 2500 nm at intervals of 10 nm. There are 16 classes in

Table 1: Scene categories of the three HSI datasets used and the corresponding number of training and test samples for each class.

No.	IndianPine dataset			Houston2018 dataset			Berlin EnMap dataset		
	Class Name	TR	TE	Class Name	TR	TE	Class Name	TR	TE
1	CornNotill	50	1384	HealthyGrass	711	9088	Forest	656	11075
2	CornMintill	50	784	StressedGrass	3323	29179	Residential	825	56601
3	Corn	50	184	ArtificialTurf	171	513	Industrial	446	3735
4	GrassPasture	50	447	EvergreenTrees	954	12634	Low Plants	673	12006
5	GrassTrees	50	697	DeciduousTrees	350	4698	Soil	688	3040
6	HayWindrowed	50	439	BareEarth	664	3852	Allotment	415	2427
7	SoybeanNotill	50	918	Water	82	184	Commercial	367	4938
8	SoybeanMintill	50	2418	Residential	5375	34387	Water	184	1242
9	SoybeanClean	50	564	NonResidential	7794	215890	—	—	—
10	Wheat	50	162	Roads	3824	41986	—	—	—
11	Woods	50	1244	Sidewalks	1455	32547	—	—	—
12	BuildingsGrassTrees	50	330	Crosswalks	148	1368	—	—	—
13	StoneSteelTowers	50	45	Thoroughfares	4645	41713	—	—	—
14	Alfalfa	15	39	Highways	271	9578	—	—	—
15	GrassPastureMowed	15	11	Railways	391	6546	—	—	—
16	Oats	15	5	PavedParking	1271	10204	—	—	—
17	—	—	—	UnpavedParking	20	95	—	—	—
18	—	—	—	Cars	532	6046	—	—	—
19	—	—	—	Trains	154	5211	—	—	—
20	—	—	—	StadiumSeats	503	6321	—	—	—
Total		695	9671	Total	9867	116123	Total	4254	95064

the scene that are mostly vegetation, as detailed in Table 1 along with the number of training and test samples. Fig. 6 shows the false-color image of the studied scene as well as the distribution of training and test samples used in [74, 56].

### 3.1.2. Houston2018 Dataset

This dataset is multi-modal data provided for the 2018 IEEE GRSS data fusion contest, where the HSI was acquired by an ITRES CASI 1500 sensor. The HSI, with dimensions of  $601 \times 2384 \times 50$ , was collected from the wavelengths between  $380 \text{ nm}$  to  $1050 \text{ nm}$  at a ground sampling distance (GSD) of  $1 \text{ m}$ . This is a complex city scene with 20 challenging classes (see Fig. 7 and Table 1 for more details, including the specific training and test information). Note that we downsampled the ground truth map to the same GSD with the HSI by the nearest-neighbor-interpolation.

### 3.1.3. Berlin EnMap Dataset

The EnMap HSI with a GSD of  $30 \text{ m}$  was simulated by the corresponding HyMap data [75] over a hybrid area that includes urban, rural, and vegetation in Berlin, Ger-

many, this data is openly and freely available from the website<sup>2</sup>. This image consists of  $797 \times 220$  pixels and 244 spectral bands in the wavelength ranging from 400 *nm* to 2500 *nm*. The ground truth in the scene is generated by the OpenStreetMap [76] in the form of land cover and land use, and further refined and corrected by means of Google Earth. Table 1 lists the scene categories and the number of training and test samples, while the false-color image and corresponding distribution of training and test samples are given in Fig. 8.

### 3.2. Experimental Configuration

#### 3.2.1. Evaluation Metrics

With the input of different dimension-reduced features, we adopt the pixel-wise classification as a potential application for quantitative evaluation in terms of classification or recognition accuracy. More specifically, three commonly-used indices, *Overall Accuracy (OA)*, *Average Accuracy (AA)*, and *Kappa Coefficient ( $\kappa$ )*, are computed to quantify the experimental results using two simple but effective classifiers: nearest neighbor (NN) and linear SVM (LSVM). In our case, the two classifiers were selected because those more powerful classifiers (e.g., kernel SVM, random forest, deep neural network) tend to result in confusing evaluation, as it is unknown whether the performance improvement originates from either these advanced classifiers or the features itself.

#### 3.2.2. Comparison with State-of-the-Art Baselines

We evaluate the performance of the proposed IMR model visually and quantitatively in comparison with eight state-of-the-art baselines, including

- **Non-HDR**: original spectral features (OSF);
- **Supervised HDR**: feature space discriminant analysis (FSDA) [54], joint learning (JL) [63];

---

<sup>2</sup>(<http://doi.org/10.5880/enmap.2016.002>)

- 305 • **Semi-supervised subspace learning for HDR:** semi-supervised local discrim-  
306 inant analysis (SELD) [60], collaborative discriminative manifold embedding  
307 (CDME) [77];
- 308 • **GLP-based semi-supervised HDR:** soft-label LDA (SL-LDA) [61], semi-super-  
309 vised fisher local discriminant analysis (SSFLDA) [62].


### 310 3.2.3. *Implementation Preparation*

311 The parameter settings for the algorithms play a key role in performance assess-  
312 ment. A common tactic for model selection is to run cross-validation on the train-  
313 ing set. Following that, we conducted a 10-fold cross-validation to determine the  
314 optimal parameter combination for the different algorithms. In detail, there param-  
315 eters that need to be tuned to maximize the classification performance on the train-  
316 ing set were subspace dimension<sup>3</sup> ( $d_{sub}$ ), selected from 5 to 50 at intervals of 5; the  
317 number of nearest neighbors ( $k$ ); the standard deviation ( $\sigma$ ) in SELD and SSFLDA,  
318 ranging from  $\{10, 20, \dots, 50\}$  and  $\{10^{-2}, 10^{-1}, 10^0, 10^1, 10^2\}$ , respectively; and the  
319 regularization parameters (e.g.,  $\alpha$  and  $\beta$ ) in JL, CDME, and IMR in the range of  
320  $\{10^{-2}, 10^{-1}, 10^0, 10^1, 10^2\}$ , while another regularization parameter  $\gamma$  in IMR can be  
321 selected from  $\{0.1, 0.2, \dots, 0.9\}$ . Moreover, initializing the adjacency matrix ( $\mathbf{W}$ ) and  
322 pseudo-labels ( $\mathbf{Y}_{pl}$ ) in IMR is also an important factor in determining the model’s per-  
323 formance. We first predict the unlabeled samples using a pre-trained classifier on the  
324 training set; then the predicted results can be naturally input into the model as pseudo-  
325 labels. Likewise, the initialized  $\mathbf{W}$  can be given by the labels and pseudo-labels. In  
326 addition, note that the clustering technique (e.g., K-means) is applied to handle the  
327 highly computational complexity caused by the large quantity of unlabeled samples  
328 during the process of model learning. As a trade-off, the number of cluster centers  
329 used in our case is approximately set to be the same as that of the training samples.


---

<sup>3</sup>For LDA-based approaches, e.g., FSDA, SELD, SL-LDA, and SSFLDA, the class number minus 1 is set to be  $d_{sub}$  [37].




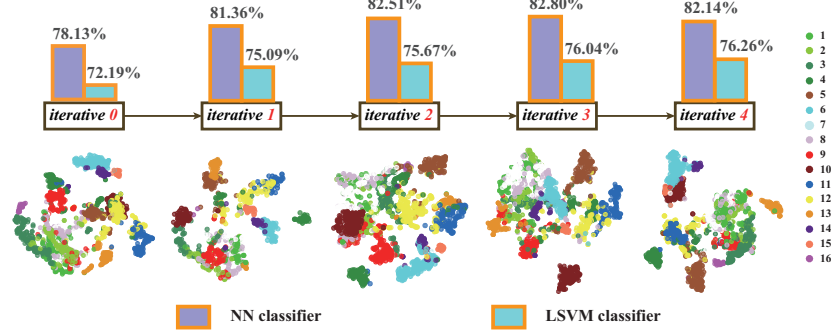

(a) Indian Pines dataset

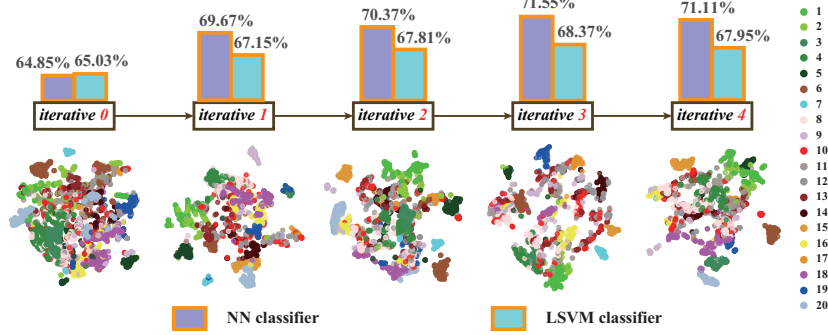

(b) Houston2018 dataset

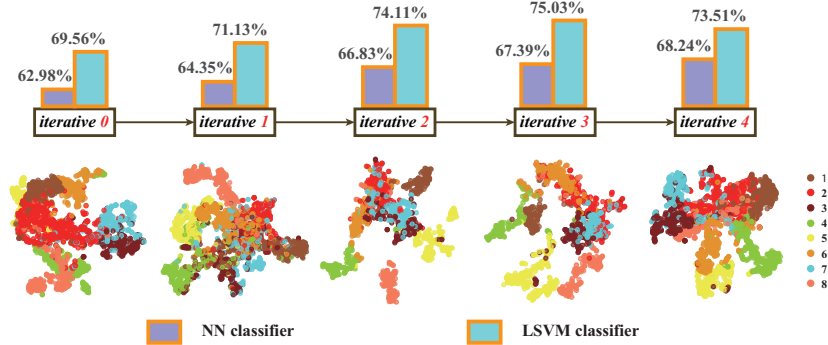

(c) Berlin EnMap dataset

Figure 5: Visual and quantitative (OA) performance analysis with the different number of iterations in IMR on the three datasets.

### 3.2.4. The Number of Iterations in the Proposed IMR

According to the model's stopping criteria in **Algorithm 1**, our IMR method generally converges to a desirable solution that corresponds to a well-learned adjacency

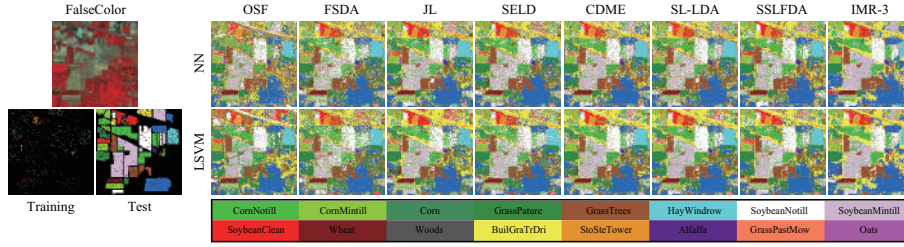


Figure 6: False-color image, the distribution of training and test samples as well as classification maps of the compared methods using two different classifiers on the Indian Pines dataset.

matrix ( $\mathbf{W}$ ) out of three or four iterations. To support the results more effectively, we further investigate the effects of assigning a different number of iterations in IMR for the three datasets. Fig. 5 gives both visual and quantitative results with the increase of the IMR's iterations<sup>4</sup>. Note that the IMR with *iterative 0* equivalently degrades to a version without label propagation. The OAs are clearly much lower without using an iterative strategy to update pseudo labels (*iterative 0*) than when using several iterations. Intuitively, this proves the superiority of the iterative strategy by gradually optimizing the pseudo-labels. It is worth noting, however, that the performance gain starts to slow down after two iterations and then remains essentially stable in the follow-up iterations, as the variable  $\mathbf{W}$  is hardly changed any further. Similarly, for the different number of iterations, there is a consistent trend in the compactability of intra-class and the separability of inter-class. To summarize, we determine the number of iterations in the IMR to be 3 (IMR-3 for short); it will be used for comparison in the following experiments.

### 3.3. Results and Analysis

#### 3.3.1. The Indian Pines Dataset

Fig. 6 presents the classification maps for different HDR compared methods using two classifiers on the Indian Pines dataset; Table 2 correspondingly lists the quantitative results obtained under the optimal parameter combination.

Using the NN classifier, there is basically the same classification performance in OSF and FSDA. Despite an improved supervised criteria, FSDA still yields poor clas-

<sup>4</sup>Here, we just showcase the results of four iterations, since in our case the model has usually converged around the number of iterations.

Table 2: Quantitative performance comparison among the different algorithms with the optimal parameters on the IndianPines dataset in terms of OA, AA, and  $\kappa$  as well as accuracy for each class. The best is shown in bold. Note that IMR-3 denotes the IMR with three iterations.

Methods	OSF (%)		FSDA (%)		JL (%)		SELD (%)		CDME (%)		SL-LDA (%)		SSLFDA (%)		IMR-3 (%)	
Parameter	$d$		$d$		$(\alpha, \beta, d)$		$(k, \sigma, d)$		$(\alpha, \beta, d)$		$d$		$(k, \sigma, d)$		$(\alpha, \beta, \gamma, d)$	
	220		15		(0.01, 0.01, 20)		(10, 0.1, 15)		(0.01, 0.01, 20)		15		(5, 0.1, 15)		(0.01, 0.1, 0.8, 20)	
Classifier	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM
OA	65.89	64.12	64.14	63.67	76.89	71.51	72.09	69.52	74.63	71.41	70.93	73.20	75.26	72.67	<b>82.80</b>	76.04
AA	75.71	73.62	74.52	72.98	84.94	82.54	80.09	75.33	83.25	83.06	82.20	83.96	85.91	83.71	<b>86.27</b>	81.80
$\kappa$	0.6148	0.5974	0.5964	0.5912	0.7379	0.6785	0.6838	0.6543	0.7117	0.6773	0.6713	0.6980	0.7200	0.6915	<b>0.8033</b>	0.7266
Class1	51.66	57.15	51.45	49.86	66.47	64.60	63.80	58.02	59.47	56.79	57.73	64.09	70.23	65.46	<b>74.64</b>	73.05
Class2	57.40	53.57	48.47	47.19	72.19	64.54	62.76	56.12	65.31	67.47	59.69	66.84	67.35	61.86	66.20	58.29
Class3	70.65	81.52	69.57	74.46	86.96	83.70	76.09	71.74	73.91	85.87	71.74	83.15	<b>87.50</b>	88.59	86.96	80.98
Class4	88.14	87.25	90.60	83.45	94.63	90.83	93.06	90.60	94.63	92.84	94.63	93.74	<b>94.85</b>	93.51	89.26	82.10
Class5	81.78	80.06	86.80	86.37	90.10	88.09	91.39	85.65	91.25	87.37	88.52	88.95	93.54	89.96	<b>95.55</b>	91.68
Class6	95.90	91.34	97.95	97.49	<b>99.32</b>	95.67	98.63	97.95	97.72	97.72	98.41	97.72	98.41	97.49	98.41	98.18
Class7	66.56	66.45	58.06	62.31	73.31	66.45	63.40	58.93	74.95	72.66	73.20	79.63	75.16	71.90	<b>82.79</b>	64.71
Class8	55.21	42.51	42.97	43.59	63.52	53.80	55.96	55.54	62.82	53.89	54.43	53.23	55.21	52.69	<b>78.41</b>	68.53
Class9	53.01	65.96	71.45	66.49	81.56	75.18	75.53	75.18	68.44	68.44	68.44	69.15	78.01	81.91	<b>83.51</b>	70.74
Class10	98.15	95.06	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>	<b>99.38</b>
Class11	82.88	82.56	85.53	84.57	89.31	86.25	88.83	89.07	92.12	88.18	87.94	88.91	89.87	88.99	<b>94.50</b>	94.05
Class12	50.91	67.27	77.88	80.61	82.12	80.00	77.58	78.79	80.91	83.64	81.21	<b>85.76</b>	81.52	75.15	74.55	71.82
Class13	<b>97.78</b>	95.56	<b>97.78</b>	95.56	95.56	<b>97.78</b>	95.56	93.33	95.56	<b>97.78</b>	<b>97.78</b>	93.33	<b>97.78</b>	95.56	88.89	91.11
Class14	79.49	58.97	74.36	56.41	84.62	74.36	79.49	64.10	84.62	76.92	82.05	79.49	<b>94.87</b>	76.92	87.18	64.10
Class15	81.82	72.73	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	90.91	90.91	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	90.91	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>
Class16	<b>100.00</b>	80.00	<b>40.00</b>	<b>40.00</b>	80.00	<b>100.00</b>	60.00	40.00	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	80.00	<b>100.00</b>

sification accuracy, since directly projecting the original data into a discriminative sub-  
space with the limited amount of labeled samples is very challenging, especially when  
dealing with noisy data (e.g., HSI) with various spectral variabilities. Overall, the clas-  
sification performance by considering the unlabeled samples is better than that without  
considering them. It should be noted, however, that inspired by latent subspace learn-  
ing, the JL model dramatically outperforms FSDA (more than 10% improvement), but  
also improves the OAs of around 4%, 6%, 2%, and 1%, respectively, compared to those  
semi-supervised HDR approaches (SELD, CDME, SL-LDA, and SSLFDA). This intu-  
itively indicates the superiority of the regression-based JL model for feature learning.  
Following the JL-like model, the proposed IMR framework achieves the best perfor-  
mance owing to the multitask learning framework, where the labeled and unlabeled  
samples can be jointly regressed, and to the iterative updating strategy of pseudo-labels.  
There is a similar trend in classification performance using the LSVM classifier, yet its  
performance is relatively weaker than those with the NN classifier. The possible reason  
for that is the few training samples available, further leading to the poor estimation of  
decision boundary for the SVM-like classifier learning.

Furthermore, we can observe from Table 2 that our IMR not only outperforms  
other HDR methods in terms of OA, AA, and  $\kappa$ , but it also obtains highly competitive  
results for each class, particularly for those classes with a relatively limited number  
of training samples in comparison with the number of test samples, such as *Corn-*

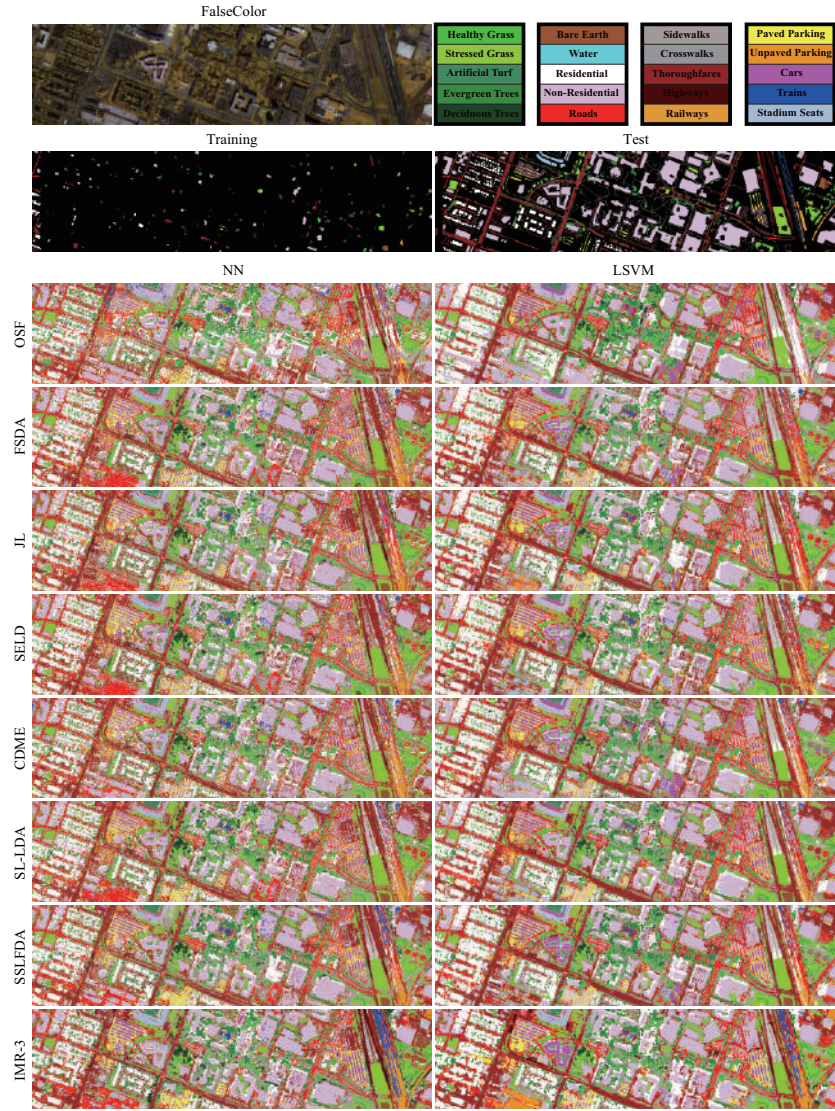


Figure 7: False-color image, the distribution of training and test samples as well as classification maps of compared methods using two different classifiers on the Houston2018 dataset.

373 *Notill, Grass-Trees, Soybean-Notill, Soybean-Mintill, Soybean-Clean, and Wheat.* This  
 374 provides powerful evidence of the effectiveness of transferring the unlabeled samples  
 375 to the learned subspace and the superiority of iteratively optimizing pseudo-labels.

Table 3: Quantitative performance comparison among the different algorithms with the optimal parameters on the Houston2018 dataset in terms of OA, AA, and  $\kappa$  as well as accuracy for each class. The best is shown in bold. Note that IMR-3 denotes the IMR with three iterations.

Methods	OSF (%)		FSDA (%)		JL (%)		SELD (%)		CDME (%)		SL-LDA (%)		SSLFDA (%)		IMR-3 (%)	
Parameter	$d$		$d$		$(\alpha, \beta, d)$		$(k, \sigma, d)$		$(\alpha, \beta, d)$		$d$		$(k, \sigma, d)$		$(\alpha, \beta, \gamma, d)$	
	50		19		(0.01, 0.01, 25)		(10, 0.1, 19)		(0.01, 0.01, 20)		19		(10, 0.1, 19)		(0.01, 0.01, 0.9, 30)	
Classifier	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM
OA	52.75	59.14	60.92	63.12	62.93	63.50	61.10	62.72	62.02	63.62	58.78	64.62	63.59	63.70	<b>71.55</b>	68.37
AA	46.77	42.97	55.15	50.85	56.72	50.87	55.21	50.71	54.81	51.07	53.26	52.65	58.51	52.94	<b>81.41</b>	67.07
$\kappa$	0.4232	0.4883	0.5161	0.5397	0.5390	0.5450	0.5187	0.5352	0.5261	0.5462	0.4921	0.5534	0.5506	0.5501	<b>0.6468</b>	0.6065
Class1	78.43	<b>89.50</b>	59.65	71.67	72.42	83.11	59.56	71.24	65.14	69.06	58.23	69.91	72.56	82.59	80.46	80.75
Class2	81.91	89.35	82.86	89.19	83.52	88.92	84.58	89.11	83.12	88.91	83.96	89.08	89.05	<b>91.46</b>	86.38	89.25
Class3	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	99.21	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	97.62	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	<b>100.00</b>	99.21
Class4	74.15	88.95	86.38	81.57	86.12	<b>91.12</b>	85.53	87.39	81.89	82.44	84.01	87.81	87.97	90.70	87.97	90.90
Class5	14.94	9.68	30.05	15.03	27.33	12.14	28.86	15.79	27.84	14.60	27.25	19.78	28.10	16.64	<b>80.05</b>	30.05
Class6	11.32	12.00	13.45	12.00	19.28	17.26	15.25	12.00	20.18	15.70	12.89	12.00	12.00	12.00	<b>95.07</b>	31.17
Class7	60.00	31.11	60.00	57.78	60.00	55.56	60.00	55.56	60.00	55.56	84.44	60.00	60.00	51.11	<b>100.00</b>	95.56
Class8	77.97	85.46	85.46	87.89	84.63	86.37	85.54	86.92	81.33	88.84	85.90	85.70	87.29	<b>89.95</b>	86.67	89.37
Class9	56.49	63.84	65.25	68.01	67.23	67.52	64.88	67.45	68.41	68.27	62.54	71.53	65.07	65.58	<b>71.81</b>	68.84
Class10	37.17	39.19	39.79	46.20	43.24	49.03	40.53	45.15	39.07	<b>50.21</b>	38.07	46.77	48.92	47.65	45.00	49.92
Class11	31.97	34.29	34.42	40.81	38.91	39.14	35.94	37.45	35.72	39.67	31.33	36.21	43.78	41.38	43.17	<b>45.00</b>
Class12	5.95	0.00	6.25	0.00	10.12	0.30	5.65	0.00	6.55	0.30	5.65	0.00	17.86	0.00	<b>37.20</b>	1.79
Class13	48.04	65.54	57.83	59.12	63.10	63.52	60.34	62.03	59.57	62.04	58.51	64.73	65.54	69.59	67.30	<b>73.69</b>
Class14	10.89	0.00	18.48	9.43	20.98	4.01	15.52	7.76	16.40	8.18	18.56	4.80	16.52	8.09	<b>86.02</b>	29.24
Class15	8.10	1.35	62.92	34.50	37.75	18.85	54.51	29.65	67.77	32.17	40.64	34.19	31.00	24.80	<b>99.63</b>	81.09
Class16	52.11	42.82	70.81	73.87	76.58	73.17	74.02	70.96	62.02	66.74	64.73	58.19	85.17	73.75	<b>91.13</b>	85.13
Class17	88.89	0.00	72.22	22.22	88.89	16.67	77.78	27.78	72.22	33.33	61.11	61.11	<b>100.00</b>	44.44	<b>100.00</b>	88.89
Class18	48.59	72.46	63.98	73.15	67.98	76.54	59.01	76.26	56.38	77.50	59.49	62.66	72.81	73.43	<b>87.85</b>	70.95
Class19	23.55	0.93	35.60	29.03	35.44	19.61	34.21	25.71	34.05	25.41	30.35	30.89	43.78	29.27	<b>90.73</b>	69.88
Class20	24.98	32.89	37.69	45.57	50.85	55.43	62.46	46.08	58.51	44.95	57.63	57.69	42.69	46.26	<b>91.71</b>	70.56

### 3.3.2. The Houston2018 Dataset

Classification performance using the different low-dimensional feature representations is evaluated on the Houston2018 dataset both visually and quantitatively, as shown in Fig. 7 and listed in Table 3, respectively. The optimal parameters used for different compared methods are given in Table 3 as well. Likewise, due to more challenging categories in this scene and small-scale training set, the ability to classify the materials for the LSVM is limited. This might explain a phenomena in Table 3, that is, why the NN-based classifier, to some extent, performs better than the SVM-based one for many compared methods.

More specifically, OSF yields a poor classification performance, due to the highly redundant spectral information and the sensitivity to noise. Unlike OSF that directly uses the original spectral features as the input features, FSDA and JL are apt to discriminate the materials due to the utilization of the label information. Further, taking the unlabeled samples into account is of great benefit in finding a better decision boundary, yielding a possible performance improvement, as shown in those subspace-based learning semi-supervised HDR methods (e.g., SELD, CDME). It is worth noting that the regression-based JL model is provided with nearly identical performance to those semi-supervised HDR approaches using both NN and LSVM classifiers, even though

Table 4: Quantitative performance comparison among the different algorithms with the optimal parameters on the Berlin EnMap dataset in terms of OA, AA, and  $\kappa$  as well as accuracy for each class. The best is shown in bold. Note that IMR-3 denotes the IMR with three iterations.

Methods	OSF (%)		FSDA (%)		JL (%)		SELD (%)		CDME (%)		SL-LDA (%)		SSLFDA (%)		IMR-3 (%)	
Parameter	$d$		$d$		$(\alpha, \beta, d)$		$(k, \sigma, d)$		$(\alpha, \beta, d)$		$d$		$(k, \sigma, d)$		$(\alpha, \beta, \gamma, d)$	
	244		7		(0.01, 0.1, 20)		(10, 0.1, 7)		(0.01, 0.01, 15)		7		(25, 0.1, 7)		(0.1, 0.01, 0.8, 20)	
Classifier	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM	NN	LSVM
OA	53.97	67.87	61.51	67.77	62.56	68.47	61.55	69.86	60.88	69.05	60.53	66.01	60.87	70.13	67.39	<b>75.03</b>
AA	57.47	66.04	64.61	65.98	64.71	65.90	63.79	65.76	62.88	65.13	63.87	65.34	65.96	67.36	69.05	<b>69.36</b>
$\kappa$	0.3781	0.5372	0.4711	0.5299	0.4821	0.5392	0.4702	0.5540	0.4621	0.5469	0.4619	0.5142	0.4668	0.5620	0.5411	<b>0.6222</b>
Class1	61.82	79.41	76.14	74.43	78.50	76.25	75.54	78.57	73.35	80.55	78.61	80.15	74.18	80.26	80.48	<b>81.91</b>
Class2	51.39	67.42	57.50	68.11	58.89	68.94	57.70	70.92	57.80	69.92	55.75	64.37	55.92	70.32	64.81	<b>77.61</b>
Class3	43.72	55.56	55.26	56.79	56.79	57.40	51.35	54.00	49.16	58.31	49.02	53.47	51.94	53.65	<b>61.95</b>	61.85
Class4	60.06	70.63	70.66	69.71	70.40	70.66	72.62	71.78	71.16	71.02	72.51	72.83	71.71	72.91	<b>74.76</b>	73.60
Class5	89.54	87.63	89.90	91.68	90.46	92.43	90.89	92.47	92.11	92.96	90.69	<b>93.36</b>	92.83	90.59	91.87	88.82
Class6	59.21	66.50	61.93	65.55	61.48	64.40	58.71	60.77	61.35	62.22	60.53	64.81	67.33	64.94	<b>68.44</b>	65.06
Class7	32.46	40.06	38.01	40.54	37.04	38.29	37.26	38.80	30.96	28.03	33.29	30.34	<b>42.89</b>	42.45	36.55	42.79
Class8	61.51	61.11	67.47	61.03	64.09	58.78	66.26	58.78	67.15	58.05	70.53	63.37	70.85	63.77	<b>73.51</b>	63.29

the powerful GLP is utilized (e.g., SL-LDA, SSLFDA). As expected, the performance of the IMR framework, which optimizes the pseudo-labels in an iterative fashion, is dramatically superior to that of others with the OA's increase of approximately 8% (NN) and 5% (LSVM).

More intuitively, the proposed IMR performs better at identifying each material than other methods. In particular, when facing the extremely unbalanced sample distribution (see Table 1), our method gradually improves the quality of the pseudo-labels, thereby making the model develop a more powerful learning ability. Table 3 also reveals an interesting but unsurprising result: for those classes with a very limited number of training samples (e.g., *Deciduous Trees*, *Bare Earth*, *Water*, *Crosswalks*, *Highways*, *Unpaved Parking*, and *Stadium Seats*), the IMR makes a significant performance gain (an increase of at least 50% for these classes) with the aid of iterative pseudo-label learning.

### 3.3.3. The Berlin EnMap Dataset

For the Berlin EnMap dataset, the visual comparison of eight different algorithms in the form of classification maps is shown in Fig. 8. Table 4 details the comparison by means of three quantitative indices: OA, AA, and  $\kappa$ .

With a very high spectral dimension (244), OSF only holds a 53.97% accuracy when using the NN classifier. The performance of supervised HDR methods (SFDA and JL) is obviously superior to that of OSF, with an increase of at least 8% using the NN classifier. This reveals the importance of HDR in the follow-up hyperspectral data analysis. Furthermore, these methods exhibit balanced accuracies using the



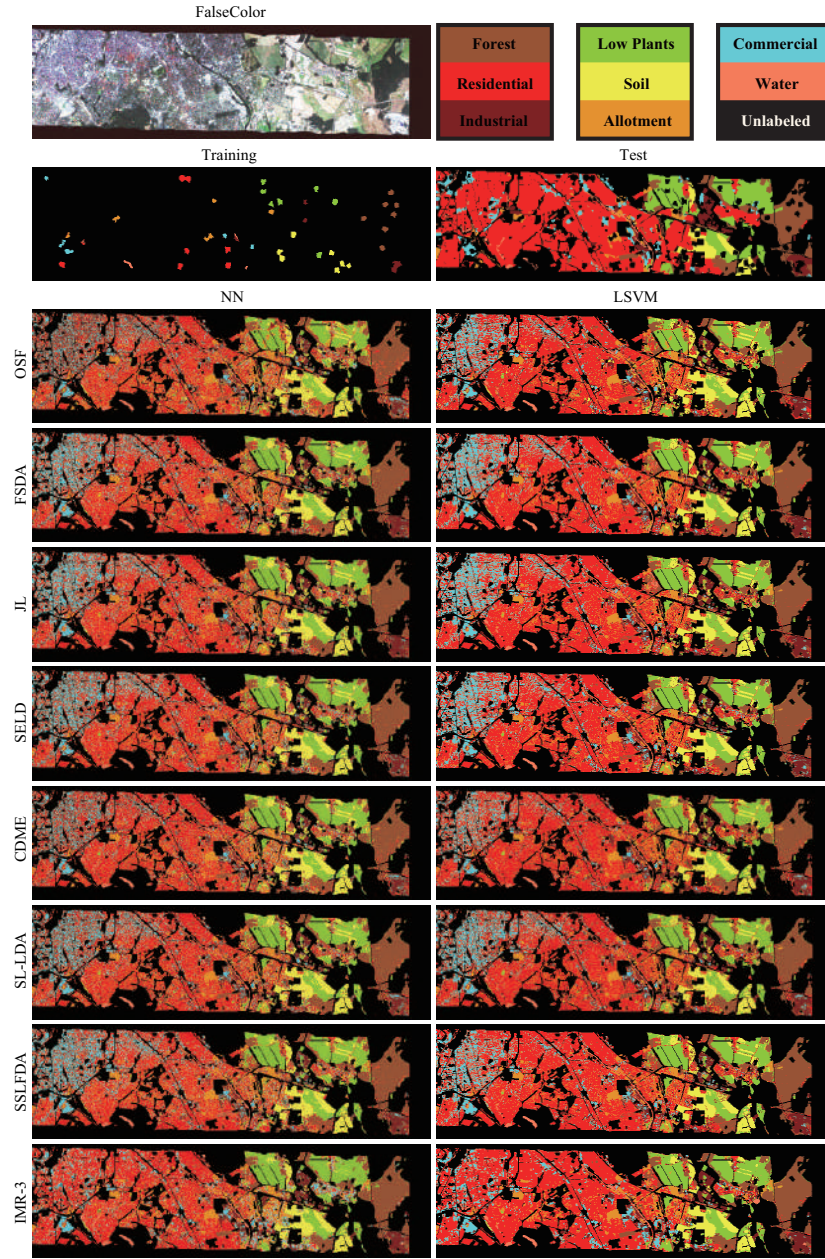


Figure 8: False-color image, the distribution of training and test samples as well as classification maps of compared methods using two different classifiers on the EnMap Berlin dataset.

LSVM classifier, where JL shows a better classification performance owing to its well-designed architecture in the regression-based latent subspace learning. SELD learns the subspace projections by not only considering the label information but also computing the similarities between the unlabeled samples, yielding an effective semi-supervised low-dimensional embedding. However, the similarities between samples are usually measured by certain fixed functions, i.e., radial basis function (RBF), in the high-dimensional space, leading to poor robustness and ability to generalize. CDME implements an automatic similarity measurement by collaboratively representing the connectivity between the samples for the low-dimensional embedding. By the means of the soft (or pseudo) labels instead of using similarity measurement, SL-LDA and SSFLDA jointly use the labels and pseudo-labels to find a high discriminative subspace in a semi-supervised embedding approach.

Beyond the two subspace-based (SELD and CDME) and two GLP-based (SL-LDA and SSFLDA) semi-supervised strategies, we propose to iteratively optimize the pseudo-labels and feed them into a multitask regression framework in order to find a latent optimal subspace where the final decision boundary for different classes can be easily determined. On the other hand, our proposed IMR for each of the classes in the studied image exceeds the vast majority of compared methods except the material of *Commercial*, thereby further revealing the IMR’s advantages in low-dimensional representation learning.

### 3.4. Parameter Sensitivity Analysis

#### 3.4.1. On the Regularization Parameters

The quality of low-dimensional features extracted by the proposed IMR model is, to some extent, sensitive to the selection of three regularization parameters ( $\alpha$ ,  $\beta$ , and  $\gamma$ ) as shown in Eq. (5). For this reason, we experimentally investigate the effects of different parameter setting in terms of OA via the NN classifier. The resulting analysis on the three datasets is quantified in Fig. 9, where the parameter combinations of ( $\gamma = 0.8, \alpha = 0.01, \beta = 0.1$ ), ( $\gamma = 0.9, \alpha = 0.01, \beta = 0.01$ ), and ( $\gamma = 0.8, \alpha = 0.1, \beta = 0.01$ ) obtain the optimal classification performance on the test set for the Indine Pines dataset, Houston2018 dataset, and Berlin EnMap dataset, respectively. The results



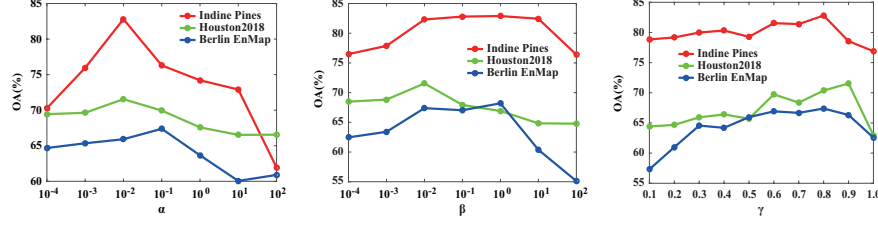


Figure 9: Sensitivity analysis on the regularization parameters (e.g.,  $\alpha$ ,  $\beta$ , and  $\gamma$ ) of the IMR in Eq. (5).

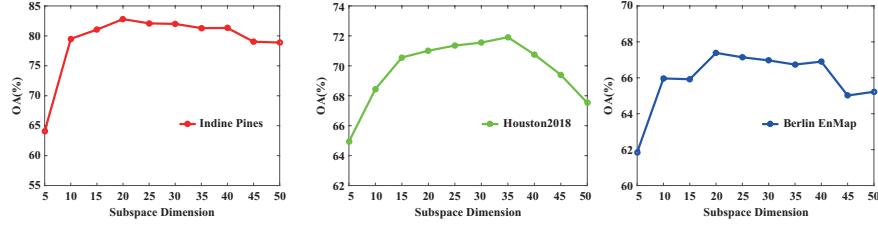


Figure 10: Sensitivity analysis on the subspace dimension in the proposed IMR method.

regrading the parameter setting are basically consistent with those obtained by cross-validation on the training set (see the Section 3.2.3: **Implementation Preparation**). Thus, the cross-validation strategy can be effectively used to determine the model's parameters so that other researchers can produce the results for their tasks.

### 3.4.2. On the Subspace Dimension

Apart from the regularization parameters, we analyze the performance gain in using the different subspace dimension of our IMR method, since a proper subspace dimension tends to reach a trade-off between discrimination and redundancy of the dimension-reduced product. For this purpose, the corresponding experiments are conducted by using the NN classifier to see the classification performance with the gradually-reducing dimension. As can be seen from Fig. 10, with the increase of subspace dimension, the IMR's performance sharply increases to around 20 for first dataset, 30 for the second dataset, and 20 for the last dataset, respectively, then starts to reach a relatively stable state, and finally decreases with a slight perturbation when the subspace dimension is approaching to that of original spectral signature.

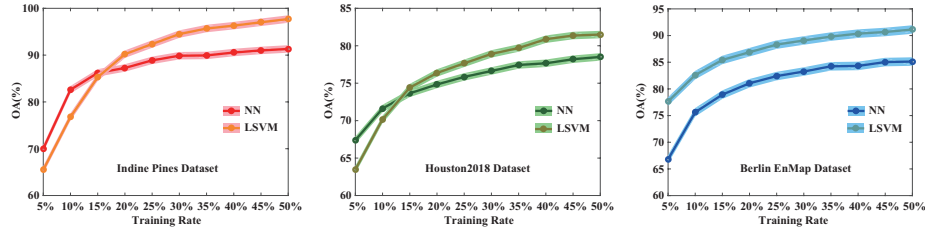


Figure 11: Sensitivity analysis to the size of training set using the NN and LVSM classifiers for the used three datasets.

### 3.4.3. On the Training Set Size

Although the IMR adopts the semi-supervised learning strategy by jointly accounting for the labeled and unlabeled samples, yet the HDR's performance is determined by the number of training samples to a great extent. This is, therefore, indispensable to investigate the sensitivity with an increasing size of training set. To highlight and emphasize the effectiveness and superiority of our proposed method in the HDR issue, we arrange the classification task by resetting the training set randomly selected from all labeled samples out of 10 run with the different proportions in the range of 5% to 50% at a 5% interval and the rest as the test set, and the average classification accuracies are reported by integrating the ten outputs in the end. Fig. 11 shows a similar trend in OAs with two classifiers (NN and LVSM) on the three different datasets, that is, the classification performance improves with the size of training set, faster in the early, and later basically stabilized. This also indicates that our semi-supervised method is not heavily dependent on a large-scale training set, which can hold a desirable and competitive performance in HDR, even when only small-scale labeled samples are used for training. On the other hand, we can observe an interesting conclusion on the first two datasets from the Fig. 11 that the NN classifier outperforms the LVSM one when the training samples are insufficient, e.g., less than around 15% of total samples. This could be well explained by the fact that LVSM is a learning-based classifier depending on the adequate samples for training an effective model, which is also supported by the experimental results yielding the higher OAs using the LVSM than those using the NN while using more training samples. Furthermore, with the increasing of training samples, the performance gain is prone to gradually become slow and meet the bottleneck,

Table 5: Time cost for the HDR of different methods on the three datasets.

Datasets	Time Cost (s)							
	OSF	FSDA	JL	SELD	CDME	SL-LDA	SSFLDA	IMR
Indine Pines	–	0.06	4.60	9.68	1.85	2.32	3.13	51.05
Houston2018	–	0.09	41.25	192.22	12.06	12.77	24.88	132.41
Berlin EnMap	–	0.22	48.81	57.81	10.82	11.48	25.20	75.72

probably due to the lack of the spatial information modeling.

### 3.5. Computational Cost in Different Methods

The experiments for HDR conducted by different methods are implemented for simulation on a laptop with the CPU i7-6700HQ (2.60GHz) and a 32GB random access memory (RAM). Herein, we assess the operational efficiency of the compared HDR approaches in terms of running time, as listed in Table 5.

In general, the running time of supervised HDR is much less than that of semi-supervised HDR, such as between supervised discriminant analysis (FSDA) and semi-supervised discriminant analysis (SELD, CDME, SL-LDA, and SSFLDA). The conclusion is just as much applicable to another group, that is, JL and our proposed IMR. Remarkably, although the newly-proposed IMR model seems to be operationally complex compared to other HDR methods, yet as it turns out, the IMR shows the computationally efficiency and the time cost is acceptable, mainly owing to the fast matrix-based computing power in regression-based techniques.

## 4. Conclusions

To facilitate the use of unlabeled samples effectively and efficiently, we propose a novel regression-based semi-supervised HDR model, called iterative multitask regression (IMR), which 1) simultaneously bridges the labeled and unlabeled samples with the labels and pseudo-labels in a multitask regression framework; and 2) progressively updates the pseudo-labels in an iterative fashion. This model provides us a new insight into the solutions of HDR-related problems. We conducted extensive experiments on three convincing and challenging HSI datasets, demonstrating that our method (IMR) is capable of extracting more discriminative features by allowing for the unlabeled samples and by optimizing the pseudo-labels.

508 It should be noted, however, that while there has been a desirable performance boost  
 509 in IMR, it is still limited to working well only by linearly learning the low-dimensional  
 510 feature representations for complex nonlinear cases. For this reason, our future work  
 511 will address the HDR issue in a more complex scene and extend our framework to a  
 512 nonlinear one with possible spatial information modeling.

## 513 5. Acknowledgements

514 The authors would like to thank the Hyperspectral Image Analysis group and the  
 515 NSF Funded Center for Airborne Laser Mapping (NCALM) at the University of Hous-  
 516 ton for providing the CASI University of Houston dataset.

517 This work was supported by funding from the European Research Council (ERC)  
 518 under the European Union’s Horizon 2020 research and innovation program (grant  
 519 agreement No [ERC-2016-StG-714087]) and from Helmholtz Association under the  
 520 framework of the Young Investigators Group ”SiPEO” (VH-NG-1018, [www.sipeo.bgu.tum.de](http://www.sipeo.bgu.tum.de)). The work of N. Yokoya was supported by Japan Society for the Promotion of  
 521 Science (JSPS) KAKENHI 15K20955.

523 [1] A. Plaza, J. A. Benediktsson, J. W. Boardman, J. Brazile, L. Bruzzone, G. Camps-  
 524 Valls, J. Chanussot, M. Fauvel, P. Gamba, A. Gualtieri, et al., Recent advances in  
 525 techniques for hyperspectral image processing, *Remote sensing of environment*  
 526 113 (2009) S110–S122.

527 [2] H. Yu, L. Gao, W. Liao, B. Zhang, A. Pižurica, W. Philips, Multiscale superpixel-  
 528 level subspace-based support vector machines for hyperspectral image classifica-  
 529 tion, *IEEE Geoscience and Remote Sensing Letters* 14 (11) (2017) 2142–2146.

530 [3] L. Gan, J. Xia, P. Du, J. Chanussot, Class-oriented weighted kernel sparse repre-  
 531 sentation with region-level kernel for hyperspectral imagery classification, *IEEE*  
 532 *Journal of Selected Topics in Applied Earth Observations and Remote Sensing*  
 533 11 (4) (2018) 1118–1130.

534 [4] R. Hang, Q. Liu, D. Hong, P. Ghamisi, Cascaded recurrent neural networks for

- hyperspectral image classification, *IEEE Transactions on Geoscience and Remote Sensing* 57 (8) (2019) 5384–5394.
- [5] F. Dell’Acqua, P. Gamba, A. Ferrari, J. A. Palmason, J. A. Benediktsson, K. Árnason, Exploiting spectral and spatial information in hyperspectral urban data with high resolution, *IEEE Geoscience and Remote Sensing Letters* 1 (4) (2004) 322–326.
- [6] C. Yang, J. H. Everitt, Q. Du, B. Luo, J. Chanussot, Using high-resolution airborne and satellite imagery to assess crop growth and yield variability for precision agriculture, *Proc. IEEE* 101 (3) (2013) 582–592.
- [7] F. Fan, W. Fan, Q. Weng, Improving urban impervious surface mapping by linear spectral mixture analysis and using spectral indices, *Canadian Journal of Remote Sensing* 41 (6) (2015) 577–586.
- [8] Y. Xie, Q. Weng, Spatiotemporally enhancing time-series dmsp/ols nighttime light imagery for assessing large-scale urban dynamics, *ISPRS Journal of Photogrammetry and Remote Sensing* 128 (2017) 1–15.
- [9] S. Henrot, J. Chanussot, C. Jutten, Dynamical spectral unmixing of multitemporal hyperspectral images, *IEEE Transactions on Image Processing* 25 (7) (2016) 3219–3232.
- [10] D. Hong, N. Yokoya, J. Chanussot, X. X. Zhu, Learning low-coherence dictionary to address spectral variability for hyperspectral unmixing, in: *Proceedings of IEEE International Conference on Image Processing (ICIP)*, 2017, pp. 1–5.
- [11] Y. Zhong, X. Wang, L. Zhao, R. Feng, L. Zhang, Y. Xu, Blind spectral unmixing based on sparse component analysis for hyperspectral remote sensing imagery, *ISPRS Journal of Photogrammetry and Remote Sensing* 119 (2016) 49–63.
- [12] D. Hong, N. Yokoya, J. Chanussot, X. X. Zhu, An augmented linear mixing model to address spectral variability for hyperspectral unmixing, *IEEE Transactions on Image Processing* 28 (4) (2019) 1923–1938.

- [13] C. McCann, K. S. Repasky, R. Lawrence, S. Powell, Multi-temporal mesoscale hyperspectral data of mixed agricultural and grassland regions for anomaly detection, *ISPRS Journal of Photogrammetry and Remote Sensing* 131 (2017) 121–133.
- [14] X. Wu, D. Hong, P. Ghamisi, W. Li, R. Tao, MsRi-CCF: Multi-scale and rotation-insensitive convolutional channel features for geospatial object detection, *Remote Sensing* 10 (12) (2018) 1990.
- [15] C. Li, L. Gao, Y. Wu, B. Zhang, J. Plaza, A. Plaza, A real-time unsupervised background extraction-based target detection method for hyperspectral imagery, *Journal of Real-Time Image Processing* 15 (3) (2018) 597–615.
- [16] X. Wu, D. Hong, J. Tian, J. Chanussot, W. Li, R. Tao, ORSIm Detector: A novel object detection framework in optical remote sensing imagery using spatial-frequency channel features, *IEEE Transactions on Geoscience and Remote Sensing* 57 (7) (2019) 5146–5158.
- [17] D. Tuia, D. Marcos, G. Camps-Valls, Multi-temporal and multi-source remote sensing image classification by nonlinear relative normalization, *ISPRS Journal of Photogrammetry and Remote Sensing* 120 (2016) 1–12.
- [18] N. Yokoya, P. Ghamisi, J. Xia, S. Sukhanov, R. Heremans, I. Tankoyeu, B. Bechtel, B. Le Saux, G. Moser, D. Tuia, Open data for global multimodal land use classification: Outcome of the 2017 ieee grss data fusion contest, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 11 (5) (2018) 1363–1377.
- [19] X. Zhu, Y. Hou, Q. Weng, L. Chen, Integrating uav optical imagery and lidar data for assessing the spatial relationship between mangrove and inundation across a subtropical estuarine wetland, *ISPRS Journal of Photogrammetry and Remote Sensing* 149 (2019) 146–156.
- [20] X. Liu, C. Deng, J. Chanussot, D. Hong, B. Zhao, Stfnct: A two-stream convo-

- lutional neural network for spatiotemporal image fusion, *IEEE Transactions on Geoscience and Remote Sensing* 57 (9) (2019) 6552–6564.
- [21] L. Guanter, H. Kaufmann, K. Segl, S. Foerster, C. Rogass, S. Chabrillat, T. Kuester, A. Hollstein, G. Rossner, C. Chlebek, et al., The EnMAP spaceborne imaging spectroscopy mission for earth observation, *Remote Sensing* 7 (7) (2015) 8830–8857.
- [22] J. Kang, M. Körner, Y. Wang, H. Taubenböck, X. X. Zhu, Building instance classification using street view images, *ISPRS journal of photogrammetry and remote sensing* 145 (2018) 44–59.
- [23] D. Hong, W. Liu, J. Su, Z. Pan, G. Wang, A novel hierarchical approach for multispectral palmprint recognition, *Neurocomputing* 151 (2015) 511–521.
- [24] D. Hong, W. Liu, X. Wu, Z. Pan, J. Su, Robust palmprint recognition based on the fast variation vese–osher model, *Neurocomputing* 174 (2016) 999–1012.
- [25] G. Licciardi, F. Pacifici, D. Tuia, S. Prasad, T. West, F. Giacco, C. Thiel, J. Inglada, E. Christophe, J. Chanussot, et al., Decision fusion for the classification of hyperspectral data: Outcome of the 2008 GRSS data fusion contest, *IEEE Transactions on Geoscience and Remote Sensing* 47 (11) (2009) 3857–3865.
- [26] H. Huang, M. Yang, Dimensionality reduction of hyperspectral images with sparse discriminant embedding, *IEEE Transactions on Geoscience and Remote Sensing* 53 (9) (2015) 5160–5169.
- [27] D. Hong, N. Yokoya, X. X. Zhu, Local manifold learning with robust neighbors selection for hyperspectral dimensionality reduction, in: *2016 IEEE International Geoscience and Remote Sensing Symposium (IGARSS)*, IEEE, 2016, pp. 40–43.
- [28] F. Luo, H. Huang, Z. Ma, J. Liu, Semisupervised sparse manifold discriminative analysis for feature extraction of hyperspectral images, *IEEE Transactions on Geoscience and Remote Sensing* 54 (10) (2016) 6197–6211.

- 615 [29] Q. Liu, R. Hang, H. Song, Z. Li, Learning multiscale deep features for high-  
616 resolution satellite image scene classification, *IEEE Transactions on Geoscience*  
617 *and Remote Sensing* 56 (1) (2017) 117–126.
- 618 [30] Y. Xu, Z. Wu, J. Chanussot, Z. Wei, Joint reconstruction and anomaly detection  
619 from compressive hyperspectral images using mahalanobis distance-regularized  
620 tensor rpca, *IEEE Transactions on Geoscience and Remote Sensing* 56 (5) (2018)  
621 2919–2930.
- 622 [31] Y. Xu, Z. Wu, J. Chanussot, Z. Wei, Nonlocal patch tensor sparse representation  
623 for hyperspectral image super-resolution, *IEEE Transactions Image Processing*  
624 28 (6) (2019) 3034–3047.
- 625 [32] L. Gao, D. Yao, Q. Li, L. Zhuang, B. Zhang, J. Bioucas-Dias, A new low-rank  
626 representation based hyperspectral image denoising method for mineral mapping,  
627 *Remote Sensing* 9 (11) (2017) 1145.
- 628 [33] D. Hong, N. Yokoya, X. X. Zhu, Learning a robust local manifold representation  
629 for hyperspectral dimensionality reduction, *IEEE Journal of Selected Topics in*  
630 *Applied Earth Observations and Remote Sensing* 10 (6) (2017) 2960–2975.
- 631 [34] L. Gao, B. Zhao, X. Jia, W. Liao, B. Zhang, Optimized kernel minimum noise  
632 fraction transformation for hyperspectral image classification, *Remote Sensing*  
633 9 (6) (2017) 548.
- 634 [35] W. Sun, L. Zhang, B. Du, W. Li, Y. M. Lai, Band selection using improved sparse  
635 subspace clustering for hyperspectral imagery classification, *IEEE Journal of Se-*  
636 *lected Topics in Applied Earth Observations and Remote Sensing* 8 (6) (2015)  
637 2784–2797.
- 638 [36] W. Sun, L. Tian, Y. Xu, D. Zhang, Q. Du, Fast and robust self-representation  
639 method for hyperspectral band selection, *IEEE Journal of Selected Topics in Ap-*  
640 *plied Earth Observations and Remote Sensing* 10 (11) (2017) 5087–5098.
- 641 [37] A. M. Martínez, A. C. Kak, Pca versus lda, *IEEE Transactions on Pattern Analysis*  
642 *and Machine Intelligence* (2) (2001) 228–233.



- [38] S. T. Roweis, L. K. Saul, Nonlinear dimensionality reduction by locally linear embedding, *Science* 290 (5500) (2000) 2323–2326.
- [39] M. Belkin, P. Niyogi, Laplacian eigenmaps for dimensionality reduction and data representation, *Neural Computation* 15 (6) (2003) 1373–1396.
- [40] Z. Zhang, H. Zha, Principal manifolds and nonlinear dimensionality reduction via tangent space alignment, *SIAM journal on scientific computing* 26 (1) (2004) 313–338.
- [41] X. He, P. Niyogi, Locality preserving projections, in: *Advances in Neural Information Processing Systems (NIPS)*, 2004, pp. 153–160.
- [42] X. He, D. Cai, S. Yan, H.-J. Zhang, Neighborhood preserving embedding, in: *Tenth IEEE International Conference on Computer Vision (ICCV)*, Vol. 2, IEEE, 2005, pp. 1208–1213.
- [43] D. Hong, N. Yokoya, X. Zhu, The K-LLE algorithm for nonlinear dimensionality reduction of large-scale hyperspectral data, in: *Hyperspectral Image and Signal Processing: Evolution in Remote Sensing (WHISPERS)*, 2016 8th Workshop on, IEEE, 2016, pp. 1–5.
- [44] W. Sun, A. Halevy, J. J. Benedetto, W. Czaja, W. Li, C. Liu, B. Shi, R. Wang, Nonlinear dimensionality reduction via the enh-ltsa method for hyperspectral image classification, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 7 (2) (2014) 375–388.
- [45] S. Yan, D. Xu, B. Zhang, H.-J. Zhang, Q. Yang, S. Lin, Graph embedding and extensions: A general framework for dimensionality reduction, *IEEE Transactions on Pattern Analysis and Machine Intelligence* 29 (1) (2007) 40–51.
- [46] L. Ma, M. M. Crawford, J. Tian, Local manifold learning-based  $k$ -nearest-neighbor for hyperspectral image classification, *IEEE Transactions on Geoscience and Remote Sensing* 48 (11) (2010) 4099–4109.

- [47] W. Li, S. Prasad, J. E. Fowler, L. M. Bruce, Locality-preserving dimensionality reduction and classification for hyperspectral image analysis, *IEEE Transactions on Geoscience and Remote Sensing* 50 (4) (2012) 1185–1198.
- [48] H. Huang, Z. Li, Y. Pan, Multi-feature manifold discriminant analysis for hyperspectral image classification, *Remote Sensing* 11 (6) (2019) 651.
- [49] W. Sun, A. Halevy, J. J. Benedetto, W. Czaja, C. Liu, H. Wu, B. Shi, W. Li, UI-isomap based nonlinear dimensionality reduction for hyperspectral imagery classification, *ISPRS Journal of Photogrammetry and Remote Sensing* 89 (2014) 25–36.
- [50] W. Sun, G. Yang, B. Du, L. Zhang, L. Zhang, A sparse and low-rank near-isometric linear embedding method for feature extraction in hyperspectral imagery classification, *IEEE Transactions on Geoscience and Remote Sensing* 55 (7) (2017) 4032–4046.
- [51] H. Huang, G. Shi, H. He, Y. Duan, F. Luo, Dimensionality reduction of hyperspectral imagery based on spatial-spectral manifold learning, *IEEE Transactions on Cybernetics* DOI:10.1109/TCYB.2019.2905793.
- [52] M. Sugiyama, Dimensionality reduction of multimodal labeled data by local fisher discriminant analysis, *Journal of Machine Learning Research* 8 (May) (2007) 1027–1061.
- [53] W. Li, S. Prasad, J. E. Fowler, Noise-adjusted subspace discriminant analysis for hyperspectral imagery classification, *IEEE Geoscience and Remote Sensing Letters* 10 (6) (2013) 1374–1378.
- [54] M. Imani, H. Ghassemian, Feature space discriminant analysis for hyperspectral data feature reduction, *ISPRS Journal of Photogrammetry and Remote Sensing* 102 (2015) 1–13.
- [55] S. Ji, J. Ye, Linear dimensionality reduction for multi-label classification, in: *Twenty-first International Joint Conference on Artificial Intelligence (IJCAI)*, Vol. 9, 2009, pp. 1077–1082.

- [56] D. Hong, N. Yokoya, J. Xu, X. Zhu, Joint & progressive learning from high-dimensional data for multi-label classification, in: Proceedings of the European Conference on Computer Vision (ECCV), 2018, pp. 469–484.
- [57] X. Zhu, Z. Ghahramani, J. D. Lafferty, Semi-supervised learning using gaussian fields and harmonic functions, in: Proceedings of the 20th International Conference on Machine learning (ICML), 2003, pp. 912–919.
- [58] H. Li, Y. Wang, S. Xiang, J. Duan, F. Zhu, C. Pan, A label propagation method using spatial-spectral consistency for hyperspectral image classification, *International Journal of Remote Sensing* 37 (1) (2016) 191–211.
- [59] L. Ma, M. M. Crawford, X. Yang, Y. Guo, Local-manifold-learning-based graph construction for semisupervised hyperspectral image classification, *IEEE Transactions on Geoscience and Remote Sensing* 53 (5) (2015) 2832–2844.
- [60] W. Liao, A. Pizurica, P. Scheunders, W. Philips, Y. Pi, Semisupervised local discriminant analysis for feature extraction in hyperspectral images, *IEEE Transactions on Geoscience and Remote Sensing* 51 (1) (2013) 184–198.
- [61] M. Zhao, Z. Zhang, T. W. Chow, B. Li, A general soft label based linear discriminant analysis for semi-supervised dimensionality reduction, *Neural Networks* 55 (2014) 83–97.
- [62] H. Wu, S. Prasad, Semi-supervised dimensionality reduction of hyperspectral imagery using pseudo-labels, *Pattern Recognition* 74 (2018) 212–224.
- [63] D. Hong, N. Yokoya, J. Chanussot, X. X. Zhu, CoSpace: Common subspace learning from hyperspectral-multispectral correspondences, *IEEE Transactions on Geoscience and Remote Sensing* 57 (7) (2019) 4349–4359.
- [64] D. P. Bertsekas, Nonlinear programming, *Journal of the Operational Research Society* 48 (3) (1997) 334–334.
- [65] S. Boyd, N. Parikh, E. Chu, B. Peleato, J. Eckstein, Distributed optimization and statistical learning via the alternating direction method of multipliers, *Foundations and Trends® in Machine learning* 3 (1) (2011) 1–122.

- [66] D. Hong, N. Yokoya, N. Ge, J. Chanussot, X. X. Zhu, Learnable manifold alignment (LeMA): A semi-supervised cross-modality learning framework for land cover and land use classification, *ISPRS Journal of Photogrammetry and Remote Sensing* 147 (2019) 193–205.
- [67] P. Zhou, C. Zhang, Z. Lin, Bilevel model-based discriminative dictionary learning for recognition, *IEEE transactions on image processing* 26 (3) (2017) 1173–1187.
- [68] X. Xu, Z. Shi, B. Pan, 0-based sparse hyperspectral unmixing using spectral information and a multi-objectives formulation, *ISPRS journal of photogrammetry and remote sensing* 141 (2018) 46–58.
- [69] D. Hong, X. X. Zhu, Sulora: Subspace unmixing with low-rank attribute embedding for hyperspectral data analysis, *IEEE Journal of Selected Topics in Signal Processing* 12 (6) (2018) 1351–1363.
- [70] M. F. Baumgardner, L. L. Biehl, D. A. Landgrebe, 220 band aviris hyperspectral image data set: June 12, 1992 indian pine test site 3, [Online] (2015) Available: <https://purrr.purdue.edu/publications/1947/1>.
- [71] B. Le Saux, N. Yokoya, R. Hänsch, S. Prasad, 2018 ieee grss data fusion contest: Multimodal land use classification [technical committees], *IEEE geoscience and remote sensing magazine* 6 (1) (2018) 52–54.
- [72] A. Okujeni, S. Van Der Linden, P. Hostert, Berlin-urban-gradient dataset 2009—an enmap preparatory flight campaign (datasets), GFZ Data Services.
- [73] I. Dópido, A. Villa, A. Plaza, P. Gamba, A quantitative and comparative assessment of unmixing-based feature extraction techniques for hyperspectral image classification, *IEEE Journal of selected topics in applied earth observations and remote sensing* 5 (2) (2012) 421–435.
- [74] P. Ghamisi, J. A. Benediktsson, M. O. Ulfarsson, Spectral–spatial classification of hyperspectral images based on hidden markov random fields, *IEEE Transactions on Geoscience and Remote Sensing* 52 (5) (2014) 2565–2574.

- [75] A. A. Mueller, A. Hausold, P. Strobl, HySens-DAIS/ROSIS imaging spectrometers at DLR, in: Remote Sensing for Environmental Monitoring, GIS Applications, and Geology, Vol. 4545, International Society for Optics and Photonics, 2002, pp. 225–236. 752  
753  
754  
755
- [76] M. Haklay, P. Weber, Openstreetmap: User-generated street maps, IEEE Pervasive Computing 7 (4) (2008) 12–18. 756  
757
- [77] M. Lv, Q. Hou, N. Deng, L. Jing, Collaborative discriminative manifold embedding for hyperspectral imagery, IEEE Geoscience and Remote Sensing Letters 14 (4) (2017) 569–573. 758  
759  
760