

This is a repository copy of A cohesive interface approach to model the inter-lamellar behaviour of the intervertebral disc annulus fibrosus.

White Rose Research Online URL for this paper: http://eprints.whiterose.ac.uk/79944/

Version: Accepted Version

## **Proceedings Paper:**

Mengoni, M, Luxmoore, BJ, Jones, AC et al. (3 more authors) (2014) A cohesive interface approach to model the inter-lamellar behaviour of the intervertebral disc annulus fibrosus. In: Proceedings of 7th World Congress of Biomechanics and the 20th Congress of The European Society of Biomechanics. The World Congress of Biomechanics, 6 - 11 July 2014, Boston, USA. (Unpublished)

## Reuse

Unless indicated otherwise, fulltext items are protected by copyright with all rights reserved. The copyright exception in section 29 of the Copyright, Designs and Patents Act 1988 allows the making of a single copy solely for the purpose of non-commercial research or private study within the limits of fair dealing. The publisher or other rights-holder may allow further reproduction and re-use of this version - refer to the White Rose Research Online record for this item. Where records identify the publisher as the copyright holder, users can verify any specific terms of use on the publisher's website.

## **Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.




## A cohesive interface approach to model the inter-lamellar behaviour of the intervertebral disc annulus fibrosus

Mengoni M.<sup>1</sup>, Luxmoore B.J.<sup>1</sup>, Jones A.C.<sup>1</sup>, Wijayathunga V.N.<sup>1</sup>, Broom N.D.<sup>2</sup>, and Wilcox R.K.<sup>1</sup>

INTRODUCTION - The method of representing the inter-lamellar behaviour in Finite Element (FE) models of the disc has been shown to affect the gross disc mechanics [1]. This study aim was to develop an approach to produce inter-lamellar models of the Annulus Fibrosus, i.e. constitutive models of interaction between lamellae.

METHODS (Figure 1) - Mature ovine intervertebral discs were used in the present study as a model for the discs of the human lumbar spine. The annulus fibrosus was dissected and radial slices were subjected to mechanical tests. Images were taken under conventional and differential interference contrast (DIC) microscopy. The images before and during loading were used to produce 2D computational models of the annulus structural behaviour. The DIC images were analysed (ImageJ, U.S. N.I.H., USA) to extract the edges between lamellae and converted into quadrilateral FE meshes (ScanIP 5.1, Simpleware Ltd, UK, and Abagus 6.12, Dassault Systèmes). Each lamella was modelled with Holzapfel's anisotropic hyperelastic constitutive behaviour, with one fibre orientation per lamella. For this, model parameters were identified to fit to experimental data on the behaviour of tissue components (the proteoglycan matrix and the collagen fibres) [1]. Several modelling hypotheses were tested for the inter-lamellar behaviour: fully bonded conditions, simple frictionless behaviour, friction behaviour with a Coulomb contact, and delamination behaviour, with or without friction, through the use of a cohesive interface model. Displacement boundary conditions were applied reproducing the measured external displacement on the conventional microscopy images. Adequacy of the inter-lamellar behaviour model was assessed by comparing computational and experimental deformed geometries, specifically the change in lamellar interfaces.

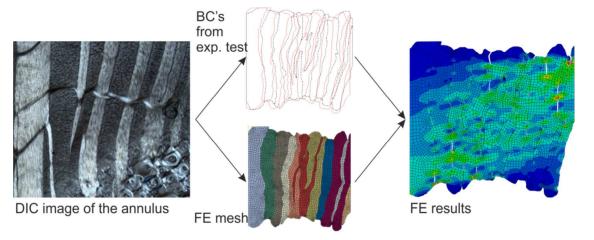

**Figure 1**: Methods: from DIC image to boundary conditions (in red the sample segmentation before testing, in black the segmentation at the end of a tensile test) and mesh extraction, to FE results depending on the assumed inter-lamellar behaviour (here with a cohesive interface, no friction)

<sup>&</sup>lt;sup>1</sup> Institute of Medical and Biological Engineering, University of Leeds, Leeds LS2 9JT, UK

<sup>&</sup>lt;sup>2</sup> Department of Chemical and Materials Engineering, University of Auckland, NZ

RESULTS AND DISCUSSION - The fully bonded model's stiffness was about 2.5 times the frictionless model's, twice the cohesive model's, and 1.5 times the friction model's. Using a cohesive interface allowed the representation of the observed local delamination when the annulus was under tension. However the full calibration of the interface model requires further mechanical tests, specifically under shear. The inter-lamellar behaviour is thus an important feature to consider in a numerical model of the annulus fibrosus structural aspects along with the strength of the fibres and their orientation.

[1] Mengoni M., Wijayathunga V.N., Jones A.C. & Wilcox R.K. (Dec 2013) Structural Modelling of the Annulus Fibrosus - an Anisotropic Hyperelastic Model Approach at the Lamellar Level [4 pages], In P. Nithiarasu and R. Löhner (Eds.) Proceedings of the *3rd International Conference on Computational & Mathematical Biomedical Engineering*, ISSN 2227-9385 (to appear)