

Interactive Visualization of Video Data for Fish Population Monitoring

Emma Beauxis-Aussalet
CWI
Science Park 123, Amsterdam
emmanuelle.beauxis-aussalet@cwi.nl

Lynda Hardman
CWI
Science Park 123, Amsterdam
lynda.hardman@cwi.nl

ABSTRACT

The recent use of computer vision techniques for monitoring ecosystems has opened new perspectives for marine ecology research. These techniques can extract information about fish populations from in-situ cameras, without requiring ecologists to watch the videos. However, they inherently introduce uncertainty since automatic information extraction is imperfect. To be accepted for scientific use, video analysis tools must support the analysis of the extracted information and of their uncertainty. Another challenge concerns the diversity of scientific interests. Ecologists have diverse research goals and information needs, for instance specific species, time periods, or locations. We present a visualization interface addressing these two challenges: providing information about fish populations as well as computer vision uncertainty; and enabling the exploration of specific subsets of the video data depending on user needs.

Author Keywords

Data Visualization; Uncertainty; Interaction Design; User Trust; Computer Vision Application.

ACM Classification Keywords

H.5.2. [User Interface]: Graphical user interfaces;

INTRODUCTION

The Fish4Knowledge project (fish4knowledge.eu) has continuously recorded video footage of coral reef fish from 9 underwater cameras during 3 years. This collection motivated the use of computer vision for automatically recognizing fish from different species, and monitoring the population dynamics. The original video collection is processed in 3 steps: sequencing of continuous video streams into 10-minute clips (for storage purposes), identification of fish amongst other objects, and recognition of fish species.

Paste the appropriate copyright/license statement here. ACM now supports three different publication options:

- ACM copyright: ACM holds the copyright on the work. This is the historical approach.
- License: The author(s) retain copyright, but ACM receives an exclusive publication license.
- Open Access: The author(s) wish to pay for the work to be open access. The additional fee must be paid to ACM.

This text field is large enough to hold the appropriate release statement assuming it is single-spaced in TimesNewRoman 8 point font. Please do not change or modify the size of this text box.

From an ecologist's perspective, each information processing step potentially introduces errors: from data collection (recording videos) and processing (recognizing fish), to interpretation (deriving facts from automatic fish counts). We developed visualizations and interaction designs for exploring these uncertainties. Our interface¹ discloses the data collection and data processing methods and their possible biases. It lets users walk through explanations of the video analysis processes and their uncertainty. The interface offers interactive visualizations of fish populations, e.g., to explore numbers of fish from specific species, locations or time periods. The uncertainties of the observed fish populations are also visualizable. Finally, users can annotate and share their findings.

ELICITING AND ADDRESSING USER NEEDS

Ecologists are not experts in computer vision systems and their technical concepts. The information about provenance and uncertainty needs to be comprehensive and sufficiently detailed, while remaining understandable. We investigated user information needs by interviewing ecologists and computer vision experts [1-3]. Regularly collecting user feedback along design stages revealed user needs throughout all stages, depending on users' expectations and knowledge of computer vision. User-Centered Design had limitations for introducing this novel technology: non-experts did not foresee all uncertainties inherent to the technology, nor appropriate metrics for interpreting them (e.g., ground-truth evaluation). Requirements from non-experts only would produce *incoherent design* as [5] notifies. Interviews of computer vision experts complemented the information requirements. Computer vision experts were particularly needed for supplying uncertainty metrics, and specifying *Uncertainty* and *Error Modeling* [4]: leveraging user support depended on experts' uncertainty evaluation. We identified 5 main information needs and 10 underlying uncertainty factors (Tables 1-2). Addressing such multi-factorial uncertainty issue is a key challenge in visualization research [6-8]: "*The R&D community must [...] develop methods and principles for representing data quality, reliability, and certainty measures throughout the data transformation and analysis process*"[9]. Such methods and principles are not mature in our application domain: except [10] similar applications

¹ The prototype is online: f4k.project.cwi.nl

evaluated uncertainty with ecology-specific methods rather than computer vision methods (e.g., ground-truth evaluation). Our interface bridges this gap by developing visualizations of computer vision uncertainty accessible to non-experts. We introduce a novel visualization of ground-truth evaluation for non-experts (Figure 3), and an interaction design for exploring multiple uncertainty factors.

Information Need	Source	UI Tab
Watch Videos	Users	Video tab
Fish and species counts	Users	Visualization tab
Trends and Correlations	Users	Visualization, Report tabs
Uncertainty of Computer Vision system	Users, Experts	Video, Video Analysis, Visualization tabs
Uncertainty of Computer Vision results	Users, Experts	Visualization tab

Table 1. The main information needs.

EXPLORING VIDEO PROCESSING STEPS

The user interface tabs deliver manageable units of information and reflect the information processing sequence: data collection (*Video* tab), data processing (*Video Analysis*, *Extracted Data* tabs) and data interpretation (*Visualization*, *Report* tabs).

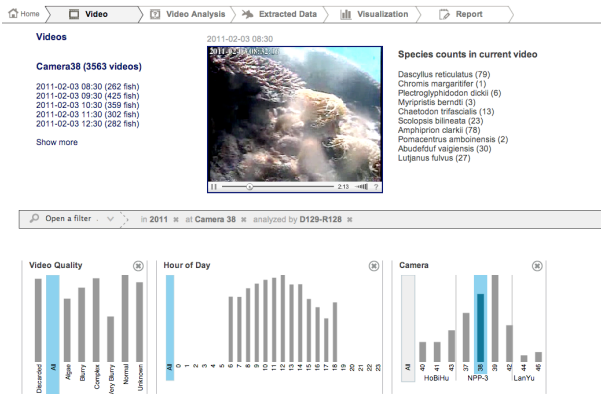


Figure 2. The Video tab.

The *Video* tab supports video browsing (Figure 2). It contains filtering functionalities for specifying the videos of interest (e.g., at specific location or time periods). Users can control the data collection conditions: which ecosystems are observed, with which field of view and image quality (e.g., lens biofouling, water turbidity).

The *Video Analysis* tab provides explanations of the video processing steps and visualizations of their uncertainty. It exposes the technical concepts needed for understanding computer vision uncertainty. The *Overview* sub-tab provides explanations of the main video processing steps. The *Fish Detection*, and *Species Recognition* sub-tabs provide visualizations of ground-truth evaluations (Figure 3). The *Workflow* sub-tab provides on-demand video processing. Users can request the analysis of specific videos (from user-defined time periods and cameras) with specific component versions (e.g., with the best accuracy for the

species of interest). It serves either for processing videos that were not yet analyzed, or for experimenting with different versions of the video analysis components (e.g., to check robustness of observations).

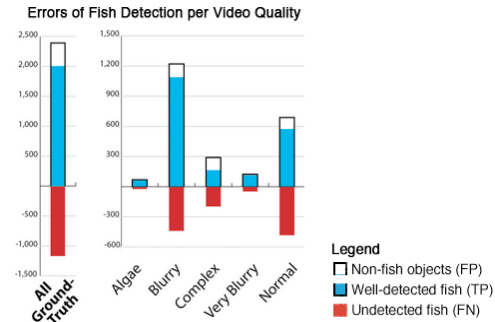


Figure 3. Visualization of ground-truth evaluation.

The *Extracted Data* tab provides an overview of the available video data and their properties (i.e., their dimensions). It shows all the characteristics of fish extracted from the video footage. It also explains the 4 main metrics provided for describing fish populations and their uncertainty: Number of Fish, Number of Video Samples (to check for missing videos), Number of Fish per Video Sample (to compensate for missing videos), and Number of Species. It helps understanding how fish populations can be monitored, and identifying the information relevant for particular studies.

VISUALIZING COMPUTER VISION UNCERTAINTY

The computer vision community uses well-accepted methods for evaluating uncertainty. They basically rely on a ground-truth: a set of images with manually identified objects, to which automatically identified objects are compared. A variety of metrics and visualizations can be derived from ground-truth evaluation. They are easily understood by experts but not by non-experts [1]. We adapted their visualization for non-experts. We reduced complexity by avoiding the use of advanced metrics (e.g., rates such as Precision/Recall), thresholds (e.g., ROC curves) and True Negatives (i.e., errors automatically discarded and having no impact on fish counts). [1] highlights that providing more details is likely to overwhelm users. The visualization exposes the proportions of items in the ground-truth, which is often omitted in more traditional evaluations. It indicates potential biases: the fewer the items, the higher the chance of error. The *Video Analysis* tab provides uncertainty visualizations (Figure 4) for each video analysis steps (fish detection and species recognition). Uncertainty is detailed for each video quality and each species, since different levels of errors indicate potential biases in the video data.

VISUALIZING COMPUTER VISION RESULTS

The *Visualization* tab (Figure 4) provides means to explore the video data, and the uncertainty due to missing videos, video quality or fish appearance quality. Videos can be missing due to camera maintenance, encoding errors, or

unfinished processing queues. The quality of each fish appearance is measured using a *certainty score*. It indicates how much fish look like the fish model for its species. The higher the score, the more certain is the species recognition.

In Figure 4, Zone A contains the main graph. Zone B supports the adaptation of the main graph to specific user needs. Users can specify what the axes of the main graph represent. For instance, while the y-axis represents numbers of fish, the x-axis can represent their distribution over weeks of the year or hours of the day. Users can also select other types of graph (stacked chart or box plot). They provide additional information about the visualized fish population: e.g., the proportion of each species, or the variance of fish abundance. The selection of stacked charts or boxplot leads to the display of dedicated menus for adapting further the visualization. For instance fish counts can be stacked by species or by camera. Zone C contains filter widgets for both selecting datasets of interest, and overviewing datasets over several dimensions. Filter widgets are displayed on-demand. There are widgets for each dimension of the data, namely: Year, Week of Year and Hour of Day of fish occurrence, Camera, Species, Certainty Score, Video Quality and Software Version. A summary of the filters applied is provided in Zone B. To limit information overload, the default filters (e.g., all species, all cameras) are not mentioned in the summary. The widgets' histograms display the same metric as the main graph, and applied to the same dataset. E.g., in Figure 6 both the graph of Zone A and the histograms of Zone C display numbers of fish per video sample. Both use a dataset of fish detected by software D50-R52, occurring in 2011 at Camera 38, and belonging to all species, certainty score, video quality, week of year and hour of day. The *Camera* widget uses a dataset from all cameras, and highlights in blue which camera is selected.

The *Report* tab supports manual grouping and annotation of graphs created in the *Visualization* tab. Graphs can be added to and removed from a report. They can be annotated with a title and a comment. Users can download and upload reports in the form of text file containing a list of parameters. Reports can be saved and shared any file.

Our interaction design let users specify which data dimensions are relevant for their goal. Information of interest is displayed on-demand (open widgets in Zone C, change graph axes, display details in stacked charts and boxplots). Irrelevant information is not displayed (close widgets, switch back to simple graph). It provides both overviewing (widgets in Zone C) and detailed views (main graph in Zone A). It supports a wide range of data analysis goals, while limiting display cluttering and information overload. It addresses our design context with ecologists pursuing a variety of research goals, while being unfamiliar with video data.

CONCLUSION

Our interface allows ecologists to monitor fish populations using novel computer vision techniques. It allows the exploration of multiple uncertainty factors and aspects of the data. Early user feedback shows we achieved intuitive interactivity and easy to understand visualizations, although the dataset is unfamiliar to users. It allows preliminary data exploration for a variety of user goals, and the identification of uncertainties that may impact further information processing. This design informs and inspires other use cases dealing with open-ended data exploration, familiarization with novel data, or visualization of machine learning uncertainty.

REFERENCES

1. Beauxis-Aussalet, E., Arslanova, E., Hardman, L., & Van Ossenbruggen, J. A case study of trust issues in scientific video collections. *2nd international workshop on Multimedia Analysis for Ecological Data* (pp. 41-46). ACM, 2013.
2. Beauxis-Aussalet, E., Palazzo, S., Nadarajan, G., Arslanova, E., Spampinato, C., & Hardman, L. A video processing and data retrieval framework for fish population monitoring. *2nd international workshop on Multimedia Analysis for Ecological Data* (pp. 15-20). ACM, 2013.
3. Fish4Knowledge Project Deliverables: D2.1 User Information Needs; D2.3 Component-based Prototype and Evaluation; D6.6 Public Query interface. <http://groups.inf.ed.ac.uk/f4k/deliverables.htm>
4. Correa, C. D., Chan, Y. H., & Ma, K. L. A framework for uncertainty-aware visual analytics. In *IEEE Symposium on Visual Analytics Science and Technology* (pp 51-58), VAST, 2009.
5. Norman, D. A. Human-centered design considered harmful. *Interactions*, 12(4), 14-19, 2005.
6. Johnson, C. R. and Sanderson. A. R. A next step: Visualizing errors and uncertainty. *Computer Graphics and Applications*, IEEE, 23(5): 6–10, 2003.
7. Chen, C. Top 10 unsolved information visualization problems. *Computer Graphics and Applications*, IEEE, 25(4): 12–16, 2005.
8. Johnson, C. Top scientific visualization research problems. *Computer graphics and applications*, IEEE, 24(4): 13–17, 2004.
9. Thomas J. J., & Cook. K. A. A visual analytics agenda. *Computer Graphics and Applications*, IEEE, 26(1): 10–13, 2006.
10. Hetrick, N. J., Simms K. M., Plumb M. P., Larson J. P. Feasibility of using video technology to estimate salmon escapement in the Ongivivuk River. Technical Report, *US Fish and Wildlife Service*, 2004

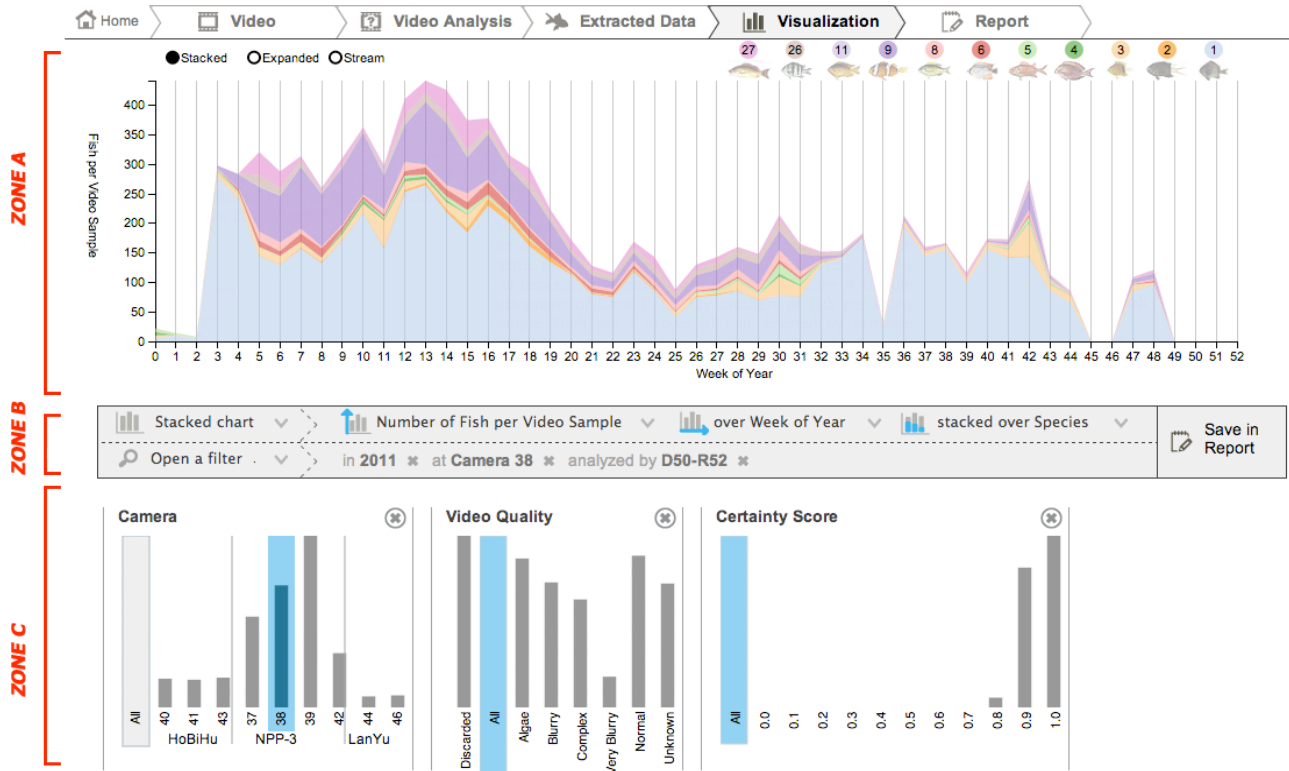


Figure 4. The Visualization tab.

Uncertainty Factor	Description	Source	Design Stage	UI Features
<i>Data Collection</i>				
Sampling Coverage	Camera recordings may not include all important areas and time periods.	Users	First Stage	Map of cameras (<i>Video Analysis</i> tab), Numbers of videos and fish per video (<i>Visualization</i> tab)
Image Quality	Recording conditions may impair the collected information (e.g., turbidity, fouling, video encoding).	Users, Experts	First Stage	Video browser, Classification of video quality, Filtering options (<i>Video</i> , <i>Visualization</i> tabs)
Field of View	Camera's fields of view may observe heterogeneous, incomparable ecosystems.	Users	Latest Stage	Video browser (<i>Video</i> tab)
Duplicated Individuals	Fish swimming back and forth are repeatedly recorded. Rates of duplication vary amongst <i>Fields of Views</i> and species swimming behaviors, thus producing biases.	Users	Latest Stage	<i>Evaluation method needs further research</i>
<i>Data Processing</i>				
Ground-Truth Quality	Ground-Truth items may be scarce, represent the wrong species or odd fish appearances.	Users, Experts	Mid-Term	Number of ground-truth items per species (<i>Video Analysis</i>)
Fragmentary Processing	Some videos may be yet unprocessed, missing or unusable.	Experts		Numbers of videos and fish per video (<i>Visualization</i> tab), On-demand video processing (<i>Workflow</i> sub-tab)
Fish Detection Errors	Fish may be undetected, and non-fish objects may be detected as fish	Experts		Ground-Truth evaluation (<i>Video Analysis</i> tab)
Species Recognition Errors	Species may be unrecognized, or confused with another.	Users, Experts	First Stage	Ground-Truth evaluation (<i>Video Analysis</i> tab)
Emerging Biases	Errors may be random (noise) or systematic (bias). Biases may emerge from combining data collection (<i>Fields of View</i> , <i>Image Quality</i>) and processing (<i>Fish Detection</i> and <i>Species Recognition Errors</i>).	Users	Latest Stage	Ground-Truth evaluation of <i>Fish Misdetected</i> over <i>Image Quality</i> (<i>Video Analysis</i> tab)
<i>Data Interpretation</i>				
Error-prone conditions in Computer Vision Results	Errors in computer vision results may be extrapolated from errors measured in test conditions, compared to the conditions specific to computer vision result subsets (<i>Image Quality</i> , <i>Field of View</i>).	Users, Experts	Mid-Term	Classification of videos and fish appearance, Filtering options (<i>Visualization</i> tabs)

Table 2. The uncertainty factors, identified by users all along design stages and complemented by system experts.