

Low bit Rate Video Quality Analysis Using NRDPF-VQA Algorithm

*Subrahmanyam Ch, **D Venkata Rao, ***N Usha Rani

* Research Scholar, ** Principal, *** Professor & Head

*,*** School of Electronics, Vignan's Foundation for Science, Technology and Research University
Vadlamudi, Guntur Dist, India

** Narasaraopeta Institute of Engineering & Technology, Narasaraopeta, Guntur Dist, India

Article Info

Article history:

Received Oct 1, 2014

Revised Nov 31, 2014

Accepted Dec 20, 2014

Keyword:

H.264/AVC

No-Reference

NRDPF-VQA

NR-VQA

VQEG HDTV

ABSTRACT

In this work, we propose NRDPF-VQA (No Reference Distortion Patch Features Video Quality Assessment) model aims to use to measure the video quality assessment for H.264/AVC (Advanced Video Coding). The proposed method takes advantage of the contrast changes in the video quality by luminance changes. The proposed quality metric was tested by using LIVE video database. The experimental results show that the new index performance compared with the other NR-VQA models that require training on LIVE video databases, CSIQ video database, and VQEG HDTV video database. The values are compared with human score index analysis of DMOS.

Copyright © 2015 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Subrahmanyam.Ch,

Research Scholar,

School of Electronics, Vignan's Foundation for Science, Technology and Research University

Vadlamudi, Guntur Dist, India.

E-mail: subrahmanyamch2002@gmail.com

1. INTRODUCTION

We know the underlying 'quality aware' natural video statistics model in the space-time domain and describe perceptually relevant temporal features that are used to model inter subband correlations over both local and global time spans [2, 4, 6, 14, 19, 22]. The overall model is the basis on an algorithm for predicting video quality that is shown to correlate well with human judgments of visual quality. We also compare its performance to state-of-the-art FR and NR VQA approaches [18]. Before we describe the model in detail, we review relevant prior work in the area of VQA. We create a 'zero shot' NR VQA model by making measurements of perceptually relevant temporal video statistics [14]. Natural videos contain regular structures and have generally piece-wise smooth luminances in spacetime separated by sparse spatio-temporal edge discontinuities [16]. This strong property of natural videos has been exploited in a variety of applications. It induces self similarity over space and time which, for example, has been exploited for resolution enhancement, action recognition, RR and NR VQA [12, 19, 21]. Self similarity statistics computed using differences between consecutive frames have been used to capture distortion-induced anomalous behavior and to conduct visual quality inference. Deriving inspiration from these examples, we model temporal self similarities using frame differences between consecutive frames. Once the normalized coefficients for each subband are computed, each coefficient map is partitioned into $P \times X \times P$ patches [14, 19]. Features are extracted using the coefficients of each patch. The coefficients of each sub-band are modeled as obeying a generalized Gaussian distribution, which effectively captures the behavior of the coefficients of natural and distorted of videos [17].

We have proposed the use of exemplar natural picture content as ground truth relative to which statistical regularity may be determined. Such a model, however, may be limited in that it can only capture common baseline characteristics of a specific collection of non-distorted content, and is thereby not able to universally represent video specific intrinsic characteristics [1, 9, 12]. Also, the construction of such a database requires the unbiased selection and maintenance of hundreds of natural undistorted videos. This also raises the question of how many exemplar videos are needed to design an accurate natural video model, and how distinctive these need to be relative to each other and to the world of videos [4, 9, 12, 17]. Finally, given the limitations of image/video camera capture, distortions are inevitably introduced in the capture process and hence the procurement of perfectly natural 'pristine' videos is practically impossible [16].

2. RESEARCH METHOD

The approach for the NRDPF- VQA (No Reference Distortion Patch Feature Video Quality Analysis) that we have developed can be summarized as follows. Given a (possibly distorted) video having low bit rate, first compute encoding and decoding of the frames selected by the video duration. The following are the equations to be applied to a given distortion video [15].

The equations represent the features of the distortion patches of video. It also observed that the normalized luminance values strongly tend towards a unit normal Gaussian characteristic for video. Compute the MATLAB program for the equations.

$$S = \begin{bmatrix} f(M_x) & f(M_x, M_y) \\ f(M_x, M_y) & f(M_x) \end{bmatrix}$$

Where $f(V) = \sum_{l,k} w[i,j]V(i-1, j-k)^2$

$M_x(i,j)$ and $M_y(i,j)$ are horizontal and vertical motion vectors at pixel (i,j) respectively, w is the window of dimension m X m over which the localized computation of the tensor is performed.

$$C = \left(\frac{\lambda_1 - \lambda_2}{\lambda_1 + \lambda_2} \right)^2$$

$$f(x|\alpha, \beta, \gamma) = \alpha e^{-(\beta|x-\mu|)^\gamma}$$

$$\alpha = \frac{\beta\gamma}{2\Gamma(1/\gamma)}$$

$$\beta = \frac{1}{\alpha} \sqrt{\frac{\Gamma(3/\gamma)}{\Gamma(1/\gamma)}}$$

$$\Gamma(z) = \int_0^\infty t^{z-1} e^{-t} dt \quad z > 0$$

The NRDPF-VQA algorithm is designed for this video quality assessment purpose. The MATLAB code is developed for entire equations.

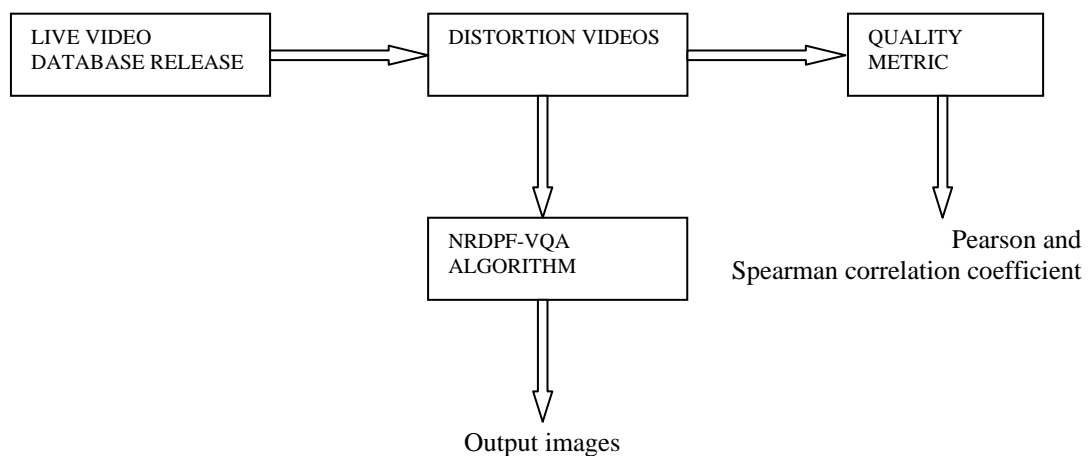


Figure 1. Experimental setup using LIVE database

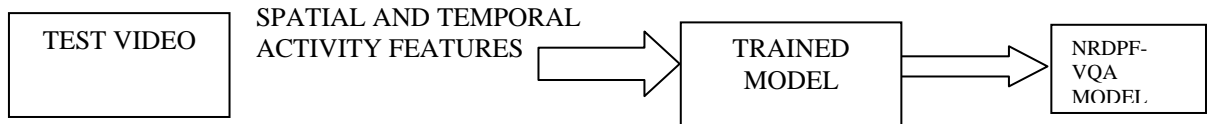


Figure 2. NRDPF-VQA model frame work

3. RESULTS AND ANALYSIS

While we are using a probabilistic framework for distortion classification where we use the probability of video being distorted with a particular distortion, but just as a proof of how good the features used in the framework act as distortion identifiers and also which distortions are misclassified with which ones, we are reporting the confusion matrix for first stage classification. We would like to point out that each entry in the confusion matrix is the mean of confusions across LIVE video database. We can see from database that H.264/AVC format is confused with other formats. Also, MPEG-2 and IP are also confused sometimes. White noise and Blur are comparatively more robust in detection and not confused usually with other distortions.



(a)



(b)



(c)

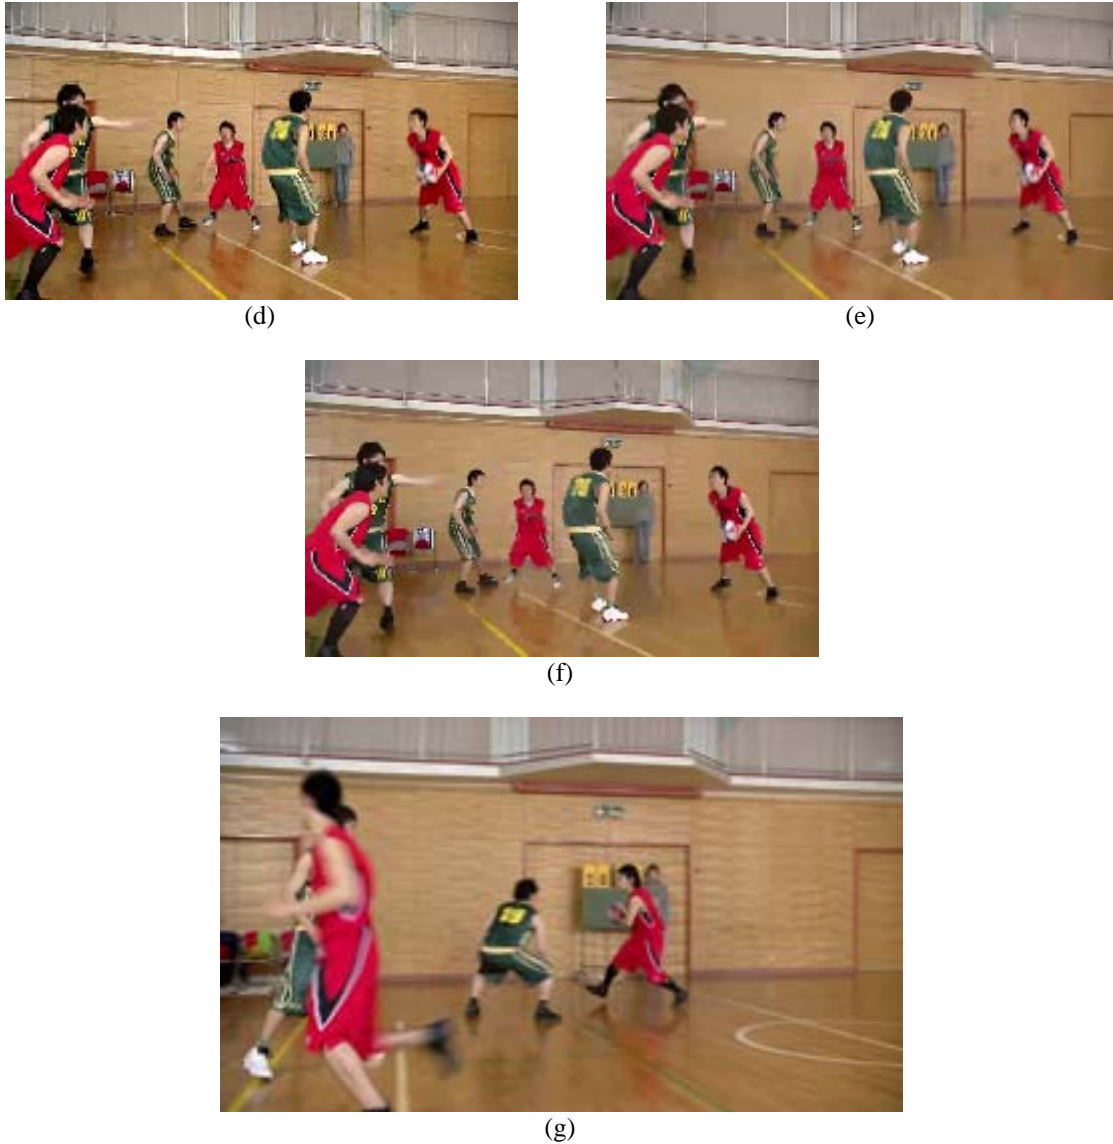


Figure 3. Images from (a) to (g) are consider for H.264 Video with low bit rate

As we computed have correlations for each algorithm over train test trials, we find mean SROCC value and the standard error associated with these correlation values. We plot the same across the dataset along with error bars one standard deviation wide for each of the evaluated algorithms.

Table I. Ground truth and NRDPF-VQA for videos (a), (c), (d), (f) and (g) from live VQA database

Video	a	c	d	f	g
Actual	0.9500	1.4600	1.1800	1.1800	0.5000
VL bit-rate	1.0923	1.2651	1.1981	1.0189	0.9365
NRDPF-VQA (Proposed)	1.0021	1.3642	1.1842	1.1792	0.6245

Table II. Median SROCC correlations on every possible combination of train/test set splits (subjective DMOS Vs NRDPF-VQA DMOS). 80% of content used for training

Distortion	PSNR	SSIM	VQM	STMAD	MOVIE	RRED	VIDEO-BLIINDS	NRDPF-VQA
MPEG-2	0.667	0.786	0.828	0.9484	0.9286	0.809	0.882	0.9514
H.264	0.714	0.762	0.828	0.9286	0.9048	0.885	0.851	0.9312
Wireless	0.680	0.714	0.714	0.7976	0.800	0.771	0.802	0.8124
IP	0.660	0.600	0.770	0.7143	0.788	0.771	0.826	0.8436
ALL	0.671	0.650	0.7451	0.8250	0.807	0.826	0.821	0.8514

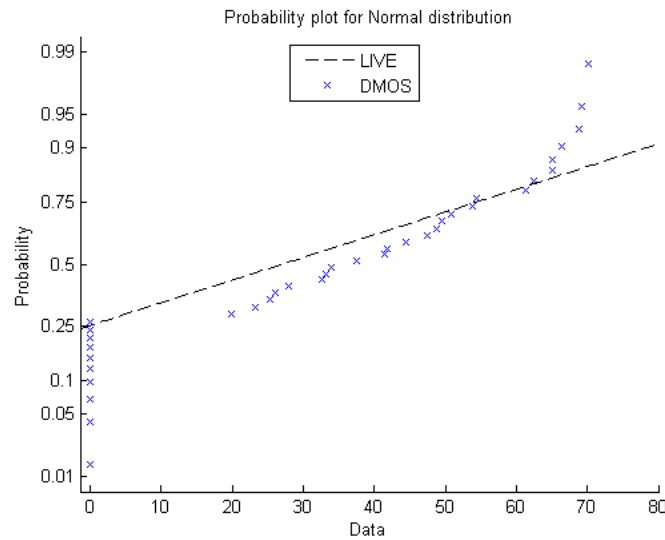


Figure 4. Probability Plot for DMOS index for H.264 format

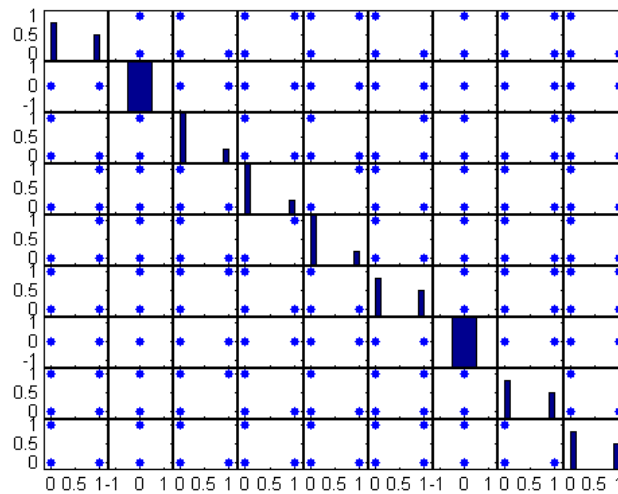


Figure 5. Plot for Frame features for H.264

4. CONCLUSION

We proposed a No reference Video based quality assessment model NRDPF-VQA which performs quality assessment of Video with out any information from distortion image. No distortion specific features such as noise; blur has been modeled in the algorithm in specific. The algorithm only quantifies the blind in the video due to presence of distortions. The designed framework is spatial domain, human perception based, simpler and faster which makes it superior to other no reference algorithms. The index is been shown to perform well across different distortions verifying its distortion agnostic nature. An exhaustive analysis of

performance is done using LIVE VQA database, CSIQ Video database and VQEG HDTV Video database on four kinds of distortions through spearman rank ordered correlation coefficient. The frame work is found to perform statistically better than other proposed no reference algorithms.

REFERENCES

- [1] Kalpana Seshadrinathan and A.C. Bovik, "Motion Tuned Spatio-temporal Quality Assessment of Natural Videos", vol. 19, no. 2, pp. 335-350, *IEEE Transactions on Image Processing*, Feb. 2010.
- [2] M.A. Saad, A.C. Bovik and C. Charrier, "A DCT Statistics-Based Blind Image Quality Index", *IEEE Signal Processing Letters*, pp. 583-586, vol. 17, no. 6, June 2010.
- [3] H.R. Sheikh and A.C. Bovik, "Image information and visual quality", *IEEE Transactions on Image Processing*, vol.15, no.2, pp. 430- 444, Feb. 2006.
- [4] H.R. Sheikh and A.C. Bovik, "Image information and visual quality", *IEEE Transactions on Image Processing*, vol.15, no.2, pp. 430- 444, Feb. 2006.
- [5] H.R. Sheikh, A.C. Bovik and G. de Veciana, "An information fidelity criterion for image quality assessment using natural scene statistics", *IEEE Transactions on Image Processing*, vol.14, no.12pp. 2117- 2128, Dec.2005.
- [6] X. Zhu and P. Milanfar, "Automatic parameter selection for denoising algorithms using a no-reference measure of image content", *IEEE Trans. Image Process*, vol. 19, no. 12, pp. 3116–3132, Dec. 2010.
- [7] Ehsan Ollah Sheybani, "An Algorithm for Real-Time Blind Image Quality Comparison and Assessment", *International Journal of Electrical and Computer Engineering (IJECE)*, pp. 120-129, vol. 2, no. 1, February 2012.
- [8] A. Buades, B. Coll, and J. M. Morel, "A non-local algorithm for image denoising", in Proc. IEEE Comput. Soc. Conf. Comput. Vis. Pattern Recognit., vol. 2. Jun. 2005, pp. 60–65.
- [9] Akshay Gore, H.K. Kansal, Savita Gupta, "Local Standard Deviation Based Image Quality Metrics for JPEG Compressed Images", *TELKOMNIKA*, vol. 12, no. 10, pp. 7280-7286, October 2014.
- [10] F. Luisier, T. Blu, and M. Unser, "A new SURE approach to image denoising: Interscale orthonormal wavelet thresholding", *IEEE Trans. Image Process*, vol. 16, no. 3, pp. 593–606, Mar. 2007.
- [11] K. Dabov, A. Foi, V. Katkovnik, and K. Egiazarian, "Image denoising by sparse 3-D transform-domain collaborative filtering", *IEEE Trans. Image Process*, vol. 16, no. 8, pp. 2080–2095, Aug. 2007.
- [12] Wang Yu Ling, Yang Hu, "Machine Learning to Design Full-reference Image Quality Assessment Algorithm", *TELKOMNIKA*, pp. 3414-3421, vol. 11, no. 6, June 2013.
- [13] A. Mittal, A. K. Moorthy and A. C. Bovik, "No-reference image quality assessment in the spatial domain", *IEEE Transactions on Image Processing*, Vol: 21 No: 12, Page(s): 4695-4708, December 2012.
- [14] Yang X.K., Ling W.S., Lu Z.K., Ong E.P. and Yao S.S. (2005) Just noticeable distortion model and its applications in video coding, *Signal Process, Image commun*, 20, 662–680.
- [15] Chin Y.J. and Berger T. (1999) A software-only videocodec using pixelwise conditional differential replenishment and perceptual enhancements. *IEEE Trans. Circuits Syst. Video Technol*, 9, 438–450.
- [16] Chou C.H. and Chen C.W. (1996) A perceptually optimized 3-D subband codec for video communication over wireless channels. *IEEE Trans. Circuits Syst. Video Technol*, 6, 143–156.
- [17] Ahumada A.J. and Peterson H.A. (1992) Luminance-Model-Based DCT Quantization for Color Image Compression. SPIE Conf. on Human Vision, Visual Processing, and Digital Display III, Vol. 1666, pp. 365–374, SPIE, San Diego.
- [18] Watson, A.B. (1993) *DCT Quantization Matrices Visually Optimized for Individual Images*. Proc. SPIE, pp. 202–216.
- [19] Seshadrinathan K., Soundararajan R., Bovik A.C. and Cormack L.K. (2010) Study of subjective and objective quality assessment of video. *IEEE Trans. Image Process*, 19, 1427–1441.
- [20] Seshadrinathan, K. and Bovik, A.C. (2010) Motion tuned spatiotemporal quality assessment of natural videos. *IEEE Trans. Image Process*, 19, 335–350.
- [21] Wang, Z. and Li, Q. (2007) Video quality assessment using a statistical model of human visual speed perception. *JOSA*, 24, B61–B69.
- [22] Ninassi, A., Le Meur, O., Le Callet, P. and Barba, D. (2009) Considering temporal variations of spatial visual distortions in video quality assessment. *IEEE J. Sel. Topics Signal Process*, 3, 253–265.
- [23] Lidong Wang, "The Effect of Force on Fingerprint Image Quality and Fingerprint Distortion", *International Journal of Electrical and Computer Engineering (IJECE)*, pp. 294-300, vol. 3, no. 3, June 2013.
- [24] Barkowsky M., Bialkowski J., Eskofier B., Bitto R. and Kaup A. (2009) Temporal trajectory aware video quality measure. *IEEE J. Sel. Top. Signal Process*, 3, 266–279.
- [25] Hekstra A.P., Beerends J.G., Ledermann D., De Caluwe F.E., Kohler S., Koenen R.H., Rihs S., Ehram M. and Schlauss D. (2002) PVQM—A perceptual video quality measure. *Signal Process. Image commun*, 17, 781–798.

BIOGRAPHIES OF AUTHORS

Subrahmanyam Ch received B.Tech degree in Electronics and Communication Engineering from Jawaharlal Nehru Technological University, Hyderabad, India, and M.Tech degree in Digital Electronics and Communication Engineering from JNTU, Hyderabad, India.

He joined as a research scholar (part time), ECE department in January 2010. His research interests include signal and image processing, Computer vision. He published more than 20 research papers in journals and conferences.



Dr. Venkata Rao published more than 40 technical papers in International and National Journals and conferences of international repute. His research interests include signal and image processing, wireless networks. He carried out AICTE projects worth Rs. 23 lakhs as Principal Investigator and Project coordinator. Dr.D. Venkata Rao is recognized guide under JNTU Kakinada. Currently he is guiding 6 research scholars in different universities for their Ph.D in the areas of signal processing. Image processing, wireless networks. He guided more than 50 UG and PG projects. He is Fellow Member of Institution of Engineers (India) and member of Board of Studies, Department of Electronics and Instrumentation Engineering, Bapatla Engineering college (Autonomous).



Dr. N Usha Rani published more than 25 technical papers in International and National Journals and conferences of international repute. Her research interests include signal and image processing, VLSI. He carried out AICTE projects like MODROBS and Project coordinator. She is recognized guide under Vignan University. Currently she is guiding 5 research scholars in the university for their Ph.D in the areas of signal processing.