

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

5,000

Open access books available

125,000

International authors and editors

140M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Applications of Heat Transfer Enhancement Techniques: A State-of-the-Art Review

*Suvanjan Bhattacharyya, Devendra K. Vishwakarma,
Sanghati Roy, Ranjib Biswas
and Mohammad Moghimi Ardekani*

Abstract

The fundamentals of heat transfer and its applications, the classification of heat transfer technology and different heat transfer techniques, and the needs for augmentation and its benefits and the different combinations of two or more inserts and integral roughness elements for heat transfer augmentation purpose have been introduced and discussed in this chapter. It is shown that most of the compound techniques performed better than the individual inserts for heat transfer enhancement. This chapter has also been dedicated to understanding the basic concepts of vortex generators for heat transfer enhancement in plate-fin heat exchangers. The performance of transverse, longitudinal, and wing-type vortex generators has been discussed as well.

Keywords: heat transfer, review, enhancement, heat exchanger, vortex generators, twisted tape, ribs, combine techniques

1. Introduction

The phenomenon of heat transfer has always been a topic of interest to researchers and manufacturers alike. The previous researchers have addressed heat transfer characteristics of wide varieties of fields like bio-heat transfer, semiconductors, various cooling techniques, and natural phenomenon like oceanic currents and other important and relevant areas.


This chapter aims to cover all the relevant research papers about heat transfer published till 2018; few are there containing numerical and analytical aspects of heat transfer, while others are highlighted for its applications in engineering.

2. Free stream and flows over a surface


The chapters have been classified into categories like compressible and high-speed flows, externally influenced flows, flow related to films and interfaces, instable flow effects, flows with special fluid types, and flow related to reactions.

2.1 Effect of external surface


The effect of turbulence on free stream during heat transfer enhancement caused by the destruction of the viscous sublayer in the gaseous cavitation of CO₂-saturated water was recognized. The influence of roughness and wall temperature

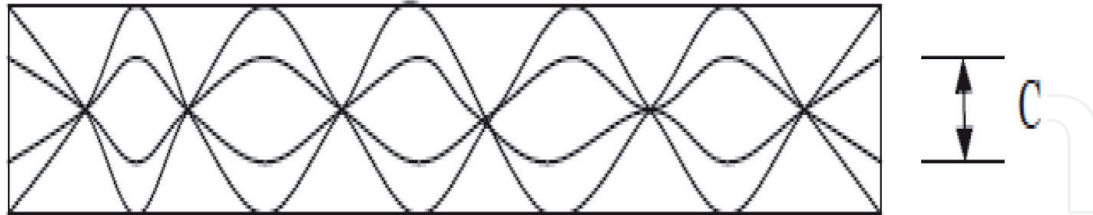


(a)

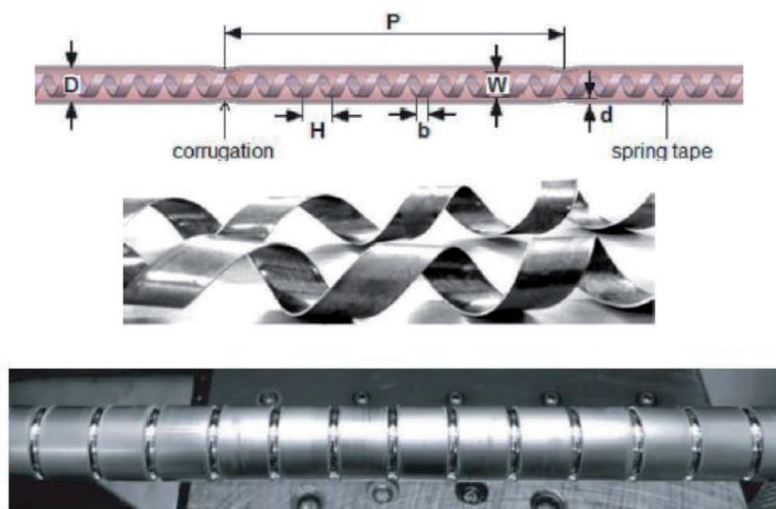

(b)

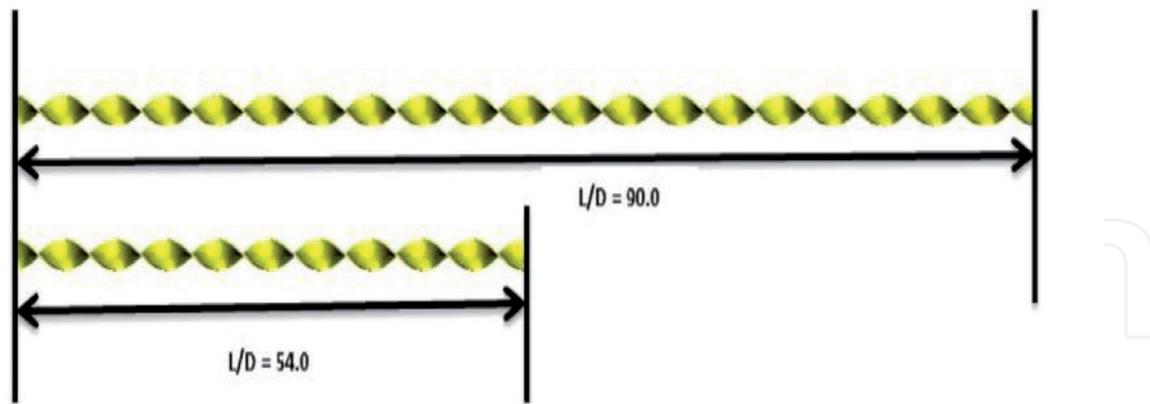

(c)

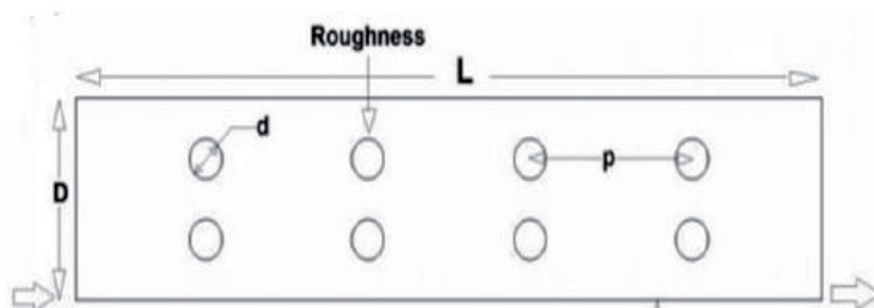

(d)

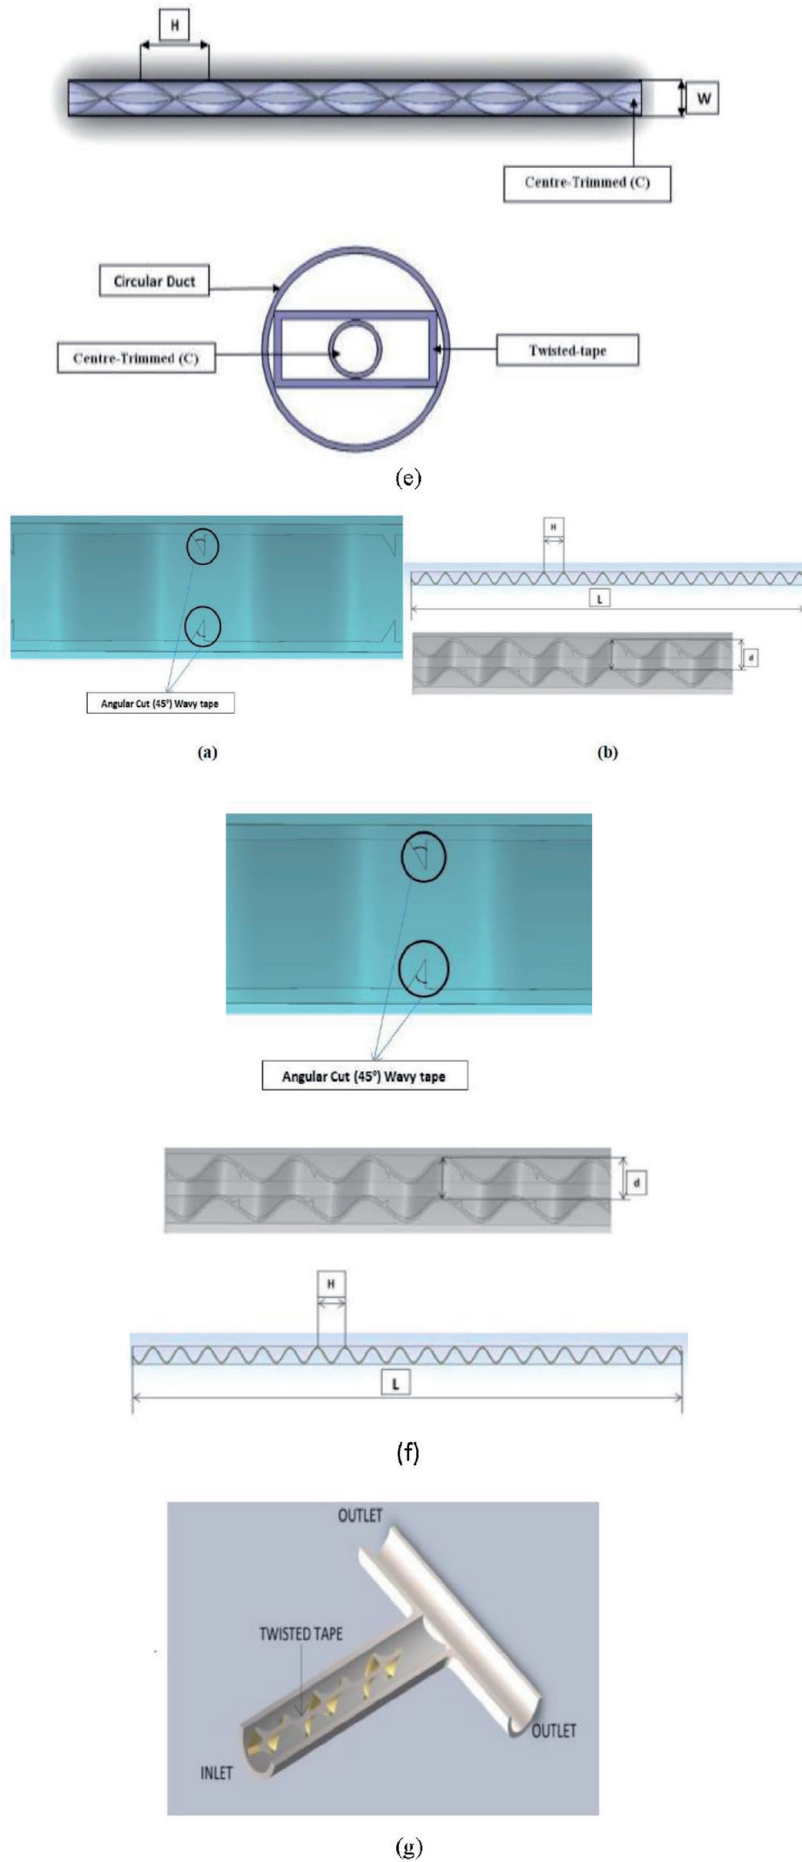


Figure 1. Different types of vortex generators used for enhancement of heat transfer. (a) Center-cleared twisted tape [4]. (b) Spring tape insert [9]. (c) Twisted tape [10]. (d) Swirl generator [12]. (e) Twisted tape with clearance at the center [13]. (f) Wavy tape with angular cuts [14]. (g) Full-length twisted tape [16].

on the turbulent boundary layers was investigated [1, 2]. A model was developed to evaluate fluxes in urban boundary layers using the naphthalene sublimation technique [3].

2.2 Effect of geometry

Heat transfer enhancement is the process of improving the rate of heat deposition or removal on a surface. It is a subject of interest to the researchers as it results in savings in energy as well as cost. Heat transfer can be enhanced by using different types of swirl generators. Geometry plays a vital role in heat transfer enhancement. Transverse ribs with twisted tape and helical tape; axial rib with screw tape; and inclined limb in cylindrical duct have been studied for friction factor and Nusselt number [4–8]. Heat transfer augmentation techniques have been used to the study the effect of heat transfer and pressure drop due to insertion of twisted tape, inclined turbulator, corrugated tube with spring tape, diamond shape cylinder, wavy turbulator for short length and full length, center-trimmed twisted tape, flow around hexagonal cylinder, wavy channel, rhombus duct, square duct, and double pipe [9–20] as shown in **Figure 1**.

2.3 High-speed flow

A computational fluid dynamic (CFD) model has been developed to understand the hypersonic flow fields for reentry vehicles; facility was created for modeling the projectile flight heating upon reentry. Simulation model for heat transfer due to convection and heat penetration was proposed [21], and comparative study has been conducted using of the European Atmospheric Reentry Demonstrator.

3. Channel flows

3.1 Straight wall passage

Initially, thermal characteristics in straight wall passages have been considered to analyze the heat transfer phenomenon in channel flows. Using the finite elements method, Nusselt number and friction factor were calculated for laminar regime. An investigation on laminar-turbulent transition inside a heated horizontal tube was conducted [22]. An analytical study for joule heating in a parallel plate channel with thermally developed flow has been conducted [23]. A circular tube was examined using various different conditions for viscous flow [24]. A novel method was developed for evaluating the Nusselt number for hydrodynamic flow conditions [25]. Horizontal, inclined channels and vertical plane passages were examined for mixed convective heat transfer [26, 27]. A prediction was presented for Nusselt number for the in-tube cooling of supercritical carbon dioxide [28].

3.2 Microscale heat transfer

The study of fine scale heat transfer was done with various channel configurations. 3D flow and heat transfer were examined in microchannels [29]. Theoretical analysis for heat transfer in laminar flow between two parallel plates separated by a very small space in micron range was conducted. The momentum and energy equations are solved for the hydraulic and fully developed thermal flow in the microchannel [30]. This method was also used to simulate rarefied gas flow and heat transfer in microchannels in a particular Knudsen number range [31]. Water was

used as the working fluid in microchannel of rectangular shaped heat sinks, and computational studies were carried out [32]; also, their thermal performance was optimized minus water [33]. Convective heat transfer of fully developed flow both thermally and hydrodynamically in a rectangular microchannel is investigated [34]. A simulation model of low-power microchannel thermal reactor was presented [35]. Fractal branching used for the cooling of electronic chips was investigated [36]. Slotted microchannels were studied analytically on the basis of conduction and convection [37]. The performance of thermal fluid in a small capillary was studied experimentally [38].

3.3 Irregular geometries

A variety of papers covering numerous geometries have been taken into consideration in this section. Narrow-spaced fuel element configuration in multichannel was modeled numerically [39]. Rhombus and ellipse shape ducts were studied using Galerkin integral method [40, 41]. The heat transfer in a pin fin at the end of the wall was investigated [42]. The heat transfer in a milliscale thrust nozzle was studied numerically [43]. Viscous flow convections and heat transfer were studied in corrugated ducts [44]. For square ducts a combined study was undertaken to understand the thermal characteristics in different shapes [45]. Experimental study was done with regard to two-pass internal coolant passages in gas turbines [46]. An increase in heat transfer due to rolling and pitching action in swirling ducts was found experimentally [47]. Flow and heat transfer for metal honeycomb geometry was inspected [48]. The effect of viscous forced convection in branching ducts was studied [49].

4. Flow separation

A study showing the separation of energy in free shear zone was carried out, and the role of pressure in the flow separation was studied [50]. In vertical ducts and other cross sections, mixed convection was investigated numerically [51]. Three-dimensional flow studies for understanding the effect of step height were also available. Large eddy simulation (LES) was undertaken for the turbulent flow over a backward-facing step [52]. A laminar airfoil was taken, and adiabatic and heating conditions were investigated at modest subsonic Mach numbers [53]. Correlations among the heat transfer coefficients of dull-edged flat plates and square channels were studied [54]. A finite volume method was used to investigate the 2D natural convection in a heated cylinder, and the significance of aspect ratio, Prandtl number, and boundary conditions on thermal characteristics were studied [55].

5. Experimental methods

Precise measurement results in good outcome in every research work. In heat transfer, measurement plays a pivotal role in the analysis of thermal system. Even after the numerical modeling of a heat flow system, it is not possible to define all the parameters with full accuracy leading to the failure of many thermal systems. This includes most of the engineering devices such as spacecraft, cryogenic engines, satellites, etc. Modeling of a turbulent flow and transition zone is very complicated, and hence it is difficult to predict very accurately. For the accuracy and relevancy of data, precise measurement is required which gives rise to the development of precise system with better accuracy.

5.1 Heat transfer

Heat flux measurement is an important aspect for understanding the physics related to transport of heat; distinguish among conduction, convection, and radiation mechanism; analyze energy balance; derive material properties; and understand the flow regimes, etc. The physical and mathematical models are presented to investigate the evolution of surface waves for free-falling turbulent wavy films with varying Reynolds number [56]. Thermochromic liquid crystal (TLC) is one of the best techniques to visualize the transient heat flow over the surface. The change in color of TLC from red to green to blue helps understand the flow of heat flux over a surface in supersonic wind tunnel [57]. Luminescent coating is another option for measurement of heat flow over a surface. The method has been used to determine the heat flow in shorter duration of less than 10 ms hypersonic flow [58]. Heater foils can be used to measure the bulk temperature development in time-based heat flow measurement by using a simplified model in which temperature development has been characterized [59].

5.2 Temperature measurement

For the temperature measurement during rapid contact solidification at the surface of substrate, an interfacial temperature sensor of 1 μm diameter has been fabricated [60]. A telecentric objective has been used for the first time to phase out the dependence on the angles in color determination in fluid-based TLCs for precision measurement [61]. An acoustic thermal scan has been evaluated using numerical methodology to evaluate the spatial resolution [62].

5.3 Velocity measurement

A multiple hot-film sensor (MHFS) arrays were used to evaluate the skin friction along the surfaces of two-dimensional streamlined objects (circular cylinder) [63]. A high time resolution ultrasonic velocity profiler (UVP) system has been developed to determine 1D velocity profile on an ultrasonic beamline [64]. A numerical investigation [65] was conducted to determine the thermal response of hot wire for the measurement of sudden shift in the velocity in turbulent flow.

5.4 Miscellaneous

Bubble cluster pattern has been reported in the turbulent bubbly flow using rake of resistive flow and signal processing associated with it [66]. Air and liquid flows have been measured individually in two-phase air liquid flow [67]. Ultrasound Doppler velocimetry has been used to measure the thickness and velocity of the liquid film [68]. A novel pressure-sensitive paint (PSP) has been formulated and used for pressure measurement in cryogenic wind tunnel [69]. A high-sensitivity thermal conductivity detector has been developed from different materials which can be used in the diagnosis of fault in transformer, oil exploration, etc. [70].

6. Phase change

This part of the chapter deals with melting and freezing of materials. The section is divided into several subsections such as phase change materials (PCMs); formation of ice and its melting; melting and freezing of radial objects; melting and

solidification of metals, nonmetals, and composites; crystallization; and globule, spray, and plunge cooling for better understanding.

6.1 Phase change materials

The inability to recover latent heat after super cooling of PCMs has been pointed out, and the method to recover latent heat has been discussed [71]. The melting mechanism of PCMs in magnetic field in low-gravity atmosphere has been discussed [72]. Other works include fabrication of carbon brushes which can be used to enhance the thermal conductivity in phase change materials, the role of ultrasonic vibration on melting characterization of PCMs, and detailed examination of solid liquid phase change heat flow enhancement.

6.2 Formation of ice and its melting

Researches on the formation of ice and its melting include the thermal behavior of ice under constant heat flow per unit area and melt removal, melting of ice using natural convection, ice making by cooling water-oil emulsion with stirring, and numerical simulation of melting of ice in water under the influence of natural convection and cooling effect produced by melting of ice [73–75].

6.3 Melting and freezing of radial objects

A lot of work has been presented on phase change in radial objects such as sphere, cylinders, and slabs. A mathematical model using numerical analysis has been developed to study the melting process of PCMs in sphere [76]. A novel packed bed of spheres has been developed using graphite/PCM composite for increasing the thermal conductivity which resulted in reduction in melting and freezing time significantly [77].

6.4 Melting and solidification of metals, non-metals, and composites

It has been observed that the supercooling properties of sodium acetate trihydrate can be improved by addition of nano-Cu [78]. A simulation model of melting and solidification of PCM in metallic porous foam has been investigated in the heat exchanger. The Hunt-Trivedi model has been used to simulate the solidification process of AISI 304 stainless steel [79].

6.5 Crystal growth

The crystal growth involves controlled growth of microstructure using optical heating, modeling of mass crystallization in magma chamber, effect of crystal growth on solute distribution, and simulation of crystal growth for binary melting process [80, 81].

6.6 Globules, spray, and plunge cooling

This subsection deals with the deposition of metal droplets on the premolten pool and wavy surfaces, numerical analysis using FEM to study fluid mechanics and heat transfer of solder droplet on flat surface, numerical analysis of microdroplet deposition over a novel micromanufacturing process, and utilization of impulse atomization technique to produce controlled size droplets [82–84].

7. Numerical methods

Numerical methods are used to develop the mathematical models to solve complex numerical problems. The technique is used widely in research for modeling and optimization of the physical work which otherwise required rigorous work. The research work done in the field of heat transfer using numerical methods has been depicted in this section.

7.1 Heat conduction

A hybrid 3D model has been developed for the analysis of transient heat conduction in a functionally graded material (FGM) using generalized finite difference method [85], Cattaneo-Vernotte model (CV model) was used to develop numerical simulation of non-Fourier heat conduction for a fin attached to a microelectronic surface [86], Galerkin-vector theory and numerical method are used to develop a mathematical model to study heat conduction in nonhomogenous materials [87], and heat conduction model was developed using numerical methods to understand the flow of heat in the granular materials [88].

7.2 Inverse analysis

Systematic and local error has been identified using WKB method through numerical analysis [89], numerical inverse Laplace transform was used to solve nonlinear differential Equation [90], and numerical inverse method has been developed to extract heat flux in heat-sensitive coating region [91].

7.3 Fluid flow

The lattice Boltzmann method is used for simulation model of non-Newtonian fluid flow, two fluid method, and discrete particle method used for simulating the gas-solid flow of rough particles. A CFD model can be used effectively to study the hydrofluidization freezing, and a numerical simulation of fluid flow with thermal hydraulic mechanical coupling method on an uneven surface was developed [89].

7.4 Turbulent flow

Numerical methods can also be utilized to predict the turbulent flow. k - ϵ and LES model were used to study turbulent flow field around rows of tree and building, turbulence in flow field and temperature can be predicted, renormalization is used to determine the eddy diffusion in turbulence flow, intermittency model was developed for studying the laminar boundary transition at supersonic and hypersonic condition, and LES is used to forecast the heat transfer coefficient and blade metal temperature [92].

8. Heat exchanger and thermosyphons

8.1 Applications

The sheer variety of heat transfer operations has been demonstrated by a number of researchers in their works dealing with thermoacoustic and thermoelectric

devices, rotating heat exchangers, commercial blood oxygenators, soil and deep bore heat exchangers, space craft radiators, and pressurized bubble columns.

8.2 Enhancement of heat transfer

The procedure to ease heat transfer has been stated by many researchers. The fin technology of extension is quite prevalent in the recent times. An investigation was carried out with fin tubes using liquid crystal display technology and plate finned tube exchanger by infrared thermal imaging, and performance measurement has been reported for a finned tube surface and annular fins. Fins having curly surfaces are examined for humid airflow. In addition to this film-wise condensation on plane low finned tubes, transient conduction in a fin, performance of extruded-serrated and extruded-finned tube bundles, and the features of a multi-pass heat exchanger have also been reported.

8.3 Microscale heat transfer

A number of applications now employ miniaturization of heat transfer devices: micro-heat pipe arrays, electronic cooling, microturbine, evaporation and boiling in microfin, microheat pipes, microscale temperature measurements, and modeling of microchannel flows [93].

8.4 Effect of fouling

An investigation has been done to study the effect of gas-side fouling in cross flow. Calcium carbonate fouling effect was studied with a microscale image; mineral fouling in extended tube heat exchangers was studied; the use of polyacrylic acid as anti-scaling and antifouling agent was studied [94–96].

8.5 Systems based on thermosyphon

Thermosyphons found applications in a variety of heat transfer complications such as space radiators and cooling of structures, solar water heaters, nuclear reactors and system based on geothermal energy, evaporators, preheaters, tiny heat pipes used to cool PC, laptops, and other electronic components [97–100].

9. Heat transfer: general applications

The relationship between the parameters of a fluidized bed and the heat transfer to a body engulf in it [101]. The SIMPLE algorithm [102] was used to simulate a blast furnace, and a relationship has been developed for the heat transfer coefficients on extension walls and hydrowalls of the boilers [103]. A porous radiant recirculated burner (PRRB) concept is developed to reduce losses due to open-flame combustion [104]. Leong studied the effect of latent heat of fusion on thin plates and numerical analysis of temperature change in biscuits using Monte Carlo (MC) method [105].

Multiple papers investigated the thermohydraulics of the cooling flow in nuclear reactors. A model was developed to study heat flux for low flow rates [106]. Inter-wrapper flow was studied, and its effects were analyzed numerically [107]. In the case of ceramic-coated turbine blades, the heat transfer coefficient does not significantly affect metal temperatures when thermal radiation is in the picture.

10. Insolation

10.1 Solar radiation

Various perspectives to evaluate solar data using modified modeling have been conducted by researchers. A new correlation between sunshine duration and radiation on the surface of the earth has been derived by Suehrcke [108]. It was found that the correlation is very well established for average value. A correction factor was proposed by Muneer [109] for calibrating the shadow band pyranometer. A model was using upper air humidity to estimate global solar radiation [110].

10.2 Solar air heater

Numerical solutions were also developed for absorbers in a porous medium, Nusselt number and Reynolds-Rayleigh number correlations for natural convection in an open-ended rectangular channel and models for solar air heater with fins [111]. Collector efficiency was predicted in a simplified manner.

10.3 Solar water heaters

Novelties in the design of solar water heating application are presented in this subsection. Fourier transform technique has been used to estimate the heat transfer and efficiency of a flat solar plate collector [112]. Double-sided flat plate collector was used to experimentally investigate the reduction in heat losses in comparison to conventional solar collector [113]. An experimental investigation on ICS solar water heater with compound parabolic concentrating integral collector storage system was designed and tested [114]. A 2D concentrator was developed aiming to store solar energy [115].

11. Plasma heat transfer and MHD

11.1 Investigation and application

In this section, heat transfer in thermal plasma reactor for nanoparticle synthesis has been investigated through different models [116]. A 3D model of heat transfer in thermal plasma system has been developed to show 3D effect of carrier gas [117]; effects of nucleation temperature were investigated by radio frequency; 2D numerical simulation was developed to show flow and heat transfer in argon gas plasma, temperature gradient, velocity, and concentration to study the nitridation of MoSi_2 which was carried in thermal plasma reactor; and numerical simulation model was developed to show the effect of radial injection of gas (with and without swirl) on flow and temperature field [118]. Plasma induced between two electrodes with and without swirl has been investigated for heat transfer with fluid flow [119].

11.2 Magnetohydrodynamics (MHD)

A simple monoenergetic operator and the Bhatnagar-Gross-Krook model were presented to estimate heat transfer in a rare gas between parallel plates [120]. A mathematical model of 2D magnetohydrodynamic Prandtl fluid flow over a sheet is examined [121], 3D magnetohydrodynamic Cauchy problem has been investigated [122], 2D pseudo-steady compressible magnetohydrodynamic system is studied for expansion of gas in vacuum [123], bio-convection flow of nanofluid is studied

in magnetic field [124], and numerical analysis of MHD flow over vertical rotating cone is investigated. Also, the volume of fluid method is used to investigate the MHD of incompressible flow, and MHD fluid behavior is studied for flow and heat transfer [125].

12. Conclusion

In this review article, an effort has been made to study the recent development in the field of heat transfer enhancement. A lot of experimental and numerical research have been done to study the aspect of heat transfer in different fields such as channel flow, crystal growth, heat exchangers, thermosyphons, phase change materials, temperature and velocity measurement, solar energy, etc. The effect of geometry such as channel modification through inserts, roughness, etc. and external power such as magnetic field, electric field, ultrasound, etc. on the thermal performance and augmentation of heat transfer has been studied. In addition to this, the lattice Boltzmann method, WKB method, numerical inverse method, k-epsilon, Cattaneo-Vernotte model, Hunt-Trivedi model, and LES model have been studied for different heat transfer applications. Overall this review gives a full-scale summary of heat transfer applications.

Author details

Suvanjan Bhattacharyya^{1*}, Devendra K. Vishwakarma², Sanghati Roy²,
Ranjib Biswas³ and Mohammad Moghimi Ardekani⁴

¹ Center for Renewable Energy and Environment Development (CREED),
Department of Mechanical Engineering, Birla Institute of Technology and Science,
Pilani, Vidyavihar, Rajasthan, India

² Department of Mechanical Engineering, Birla Institute of Technology and
Science, Pilani, Vidyavihar, Rajasthan, India

³ Department of Mechanical Engineering, MCKV Institute of Engineering,
Howrah, West Bengal, India

⁴ Department of Design and Engineering, Staffordshire University,
Stoke-on-Trent, UK

*Address all correspondence to: suvanjan.bhattacharyya@pilani.bits-pilani.ac.in

IntechOpen

© 2020 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/3.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. 

References

- [1] Lee SY, Choi YD. Turbulence enhancement by ultrasonically induced gaseous cavitation in the CO₂ saturated water. *KSME Journal*. 2002;**16**(2):246-254
- [2] Avelino MR, Freire APS. On the displacement in origin for turbulent boundary layers subjected to sudden changes in wall temperature and roughness. *International Journal of Heat and Mass Transfer*. 2002;**45**(15):3143-3153
- [3] Barlow JF, Belcher SE. A wind tunnel model for quantifying fluxes in the urban boundary layer. *Boundary-Layer Meteorology*. 2002;**104**(1):131-150
- [4] Bhattacharyya S, Saha S, Saha SK. Laminar flow heat transfer enhancement in a circular tube having integral transverse rib roughness and fitted with centre-cleared twisted-tape. *Experimental Thermal and Fluid Science*. 2012;**44**:727-735
- [5] Bhattacharyya S, Saha SK. Thermohydraulics of laminar flow through a circular tube having integral helical rib roughness and fitted with centre-cleared twisted-tape. *Experimental Thermal and Fluid Science*. 2012;**42**:154-162
- [6] Saha SK, Bhattacharyya S, Pal PK. Thermohydraulics of laminar flow of viscous oil through a circular tube having integral axial rib roughness and fitted with center-cleared twisted-tape. *Experimental Thermal and Fluid Science*. 2012;**41**:121-129
- [7] Bhattacharyya S, Chattopadhyay H, Benim AC. 3D CFD simulation on heat transfer enhancement in turbulent channel flow with twisted tape inserts. *Progress in Computational Fluid Dynamics, An International Journal*. 2017;**17**(3):193-197
- [8] Bhattacharyya S, Chattopadhyay H, Benim AC. Numerical investigation on heat transfer in a circular tube with inclined ribs. *Progress in Computational Fluid Dynamics, An International Journal*. 2017;**17**(6):390-396
- [9] Bhattacharyya S, Benim AC, Chattopadhyay H, Banerjee A. Experimental investigation of the heat transfer performance of a corrugated tube with spring tape turbulator inserts. *Experimental Heat Transfer*. 2019;**32**(5):411-425
- [10] Bhattacharyya S. Experimental study on effect of heat transfer enhancement of heat exchanger tube inserted with short length spring tapes. *Iranian Journal of Science and Technology Transactions of Mechanical Engineering*. DOI: 10.1007/s40997-018-0251-0
- [11] Bhattacharyya S, Benim AC, Chattopadhyay H, Banerjee A. Experimental and numerical analysis of forced convection in a twisted tube. *Journal of Thermal Science*. 2019;**23**(4):1043-1052
- [12] Bhattacharyya S, Chattopadhyay H. Experimental investigation on heat transfer enhancement by swirl generators in a solar air heater duct. *International Journal of Heat and Technology*. 2016;**34**(2):191-196
- [13] Bhattacharyya S, Chattopadhyay H, Bandhopadhyay S. Numerical study on heat transfer enhancement through a circular duct fitted with centre-trimmed twisted tape. *International Journal of Heat and Technology*. 2016;**34**(3):401-406
- [14] Bhattacharyya S, Chattopadhyay H, Benim AC. Heat transfer enhancement of laminar flow of ethylene glycol through a square channel fitted with

angular cut wavy strip. *Procedia Engineering*. 2016;157:19-28

[15] Bhattacharyya S, Chattopadhyay H, Swami A, Uddin MK. Convective heat transfer enhancement and entropy generation of laminar flow of water through a wavy channel. *International Journal of Heat and Technology*. 2016;34(4):727-733

[16] Bhattacharyya S, Chattopadhyay H, Haldar A. Design of twisted tape turbulator at different entrance angle for heat transfer enhancement in a solar heater. *Beni-Suef University Journal of Basic and Applied Sciences*. 2018;7(1):118-126

[17] Nandi TK, Bhattacharyya S, Gobinda Das S, Chattopadhyay H. Thermohydraulic transport characteristics in wavy microchannel under pulsating inlet flow condition. *Chemical Engineering Transactions*. 2017;62:271-276

[18] Bhattacharyya S, Das S, Sarkar A. Numerical simulation of flow and heat transfer around hexagonal cylinder. *International Journal of Heat and Technology*. 2017;35(2):360-363

[19] Bhattacharyya S, Khan AI, Maity DK, Pradhan S. Hydrodynamics and heat transfer of turbulent flow around a rhombus cylinder. *Chemical Engineering Transactions*. 2017;62:373-378

[20] Bhattacharyya S, Sarkar A, Das S, Mullick A. Computational studies of heat transfer enhancement in a circular wavy micro channel. *Chemical Engineering Transactions*. 2017;62:361-366

[21] Meese EA, Norstrud H. Simulation of convective heat flux and heat penetration for a spacecraft at re-entry. *Aerospace Science and Technology*. 2002;6(3):185-194

[22] Koizumi H. Laminar-turbulent transition behavior of fully developed air flow in a heated horizontal tube. *International Journal of Heat and Mass Transfer*. 2002;45(5):937-949

[23] Lahjomri J, Oubarra A, Alemany A. Heat transfer by laminar Hartmann flow in thermal entrance region with a step change in wall temperatures: The Graetz problem extended. *International Journal of Heat and Mass Transfer*. 2002;45(5):1127-1148

[24] Mahulikar SP, Tso CP. A new classification for thermal development of fluid flow in a circular tube under laminar forced convection. *Proceedings of the Royal Society of London Series A: Mathematical, Physical and Engineering Sciences*. 2002;458(2019):669-682

[25] Nickolay M, Martin H. Improved approximation for the Nusselt number for hydrodynamically developed laminar flow between parallel plates. *International Journal of Heat and Mass Transfer*. 2002;45(15):3263-3266

[26] Ozsunar A, Baskaya S, Sivrioglu M. Experimental investigation of mixed convection heat transfer in a horizontal and inclined rectangular channel. *Heat and Mass Transfer*. 2002;38(3):271-278

[27] Wang J, Li J, Jackson JD. Mixed convection heat transfer to air flowing upwards through a vertical plane passage: Part 3. *Chemical Engineering Research and Design*. 2002;80(A3):252-260

[28] Pitla SS, Groll EA, Ramadhyani S. New correlation to predict the heat transfer coefficient during in-tube cooling of turbulent supercritical CO₂. *International Journal of Refrigeration - Revue internationale du Froid*. 2002;25(7):887-895

[29] Toh KC, Chen XY, Chai JC. Numerical computation of fluid flow

and heat transfer in microchannels. *International Journal of Heat and Mass Transfer*. 2002;**45**(26):5133-5141

[30] Zhu X, Xin MD, Liao Q. Analysis of heat transfer between two unsymmetrically heated parallel plates with microspacing in the slip flow regime. *Microscale Thermophysical Engineering*. 2002;**6**(4):287-301

[31] Wang X, Wang QW, Tao WQ, Zheng P. Simulation of rarefied gas flow and heat transfer in microchannels. *Science in China, Series E Technological Sciences*. 2002;**45**(3):321-327

[32] Qu WL, Mudawar I. Analysis of three-dimensional heat transfer in micro-channel heat sinks. *International Journal of Heat and Mass Transfer*. 2002;**45**(19):3973-3985

[33] Ryu JH, Choi DH, Kim SJ. Numerical optimization of the thermal performance of a microchannel heat sink. *International Journal of Heat and Mass Transfer*. 2002;**45**(13):2823-2827

[34] Tunc G, Bayazitoglu Y. Heat transfer in rectangular microchannels. *International Journal of Heat and Mass Transfer*. 2002;**45**(4):765-773

[35] Erickson D, Li DQ. Numerical simulations of a low power microchannel thermal cycling reactor. *International Journal of Heat and Mass Transfer*. 2002;**45**(18):3759-3770

[36] Chen YP, Cheng P. Heat transfer and pressure drop in fractal tree-like microchannel nets. *International Journal of Heat and Mass Transfer*. 2002;**45**(13):2643-2648

[37] Leont'ev AI, Polyakov AF. Formulation and solution of the problem on convection-conduction heat transfer in a system of slotted microchannels at a uniform temperature of the frame. *High Temperature*. 2002;**40**(4):577-585

[38] Celata GP, Cumo M, Guglielmi M, Zummo G. Experimental investigation of hydraulic and single-phase heat transfer in 0.130-mm capillary tube. *Microscale Thermophysical Engineering*. 2002;**6**(2):85-97

[39] Huang J, Wang QW, Tao WQ. Numerical simulation of turbulent flow and heat transfer in multi-channel, narrow-gap fuel element. *Engineering Computations (Swansea, Wales)*. 2002;**19**(3-4):327-345

[40] Lee YM, Lee PC. Heat transfer coefficients of laminar flow in a rhombic duct with constant wall temperature. *Numerical Heat Transfer: Part A Applications*. 2002;**42**(3):285-296

[41] Sakalis VD, Hatzikonstantinou PM, Kafousias N. Thermally developing flow in elliptic ducts with axially variable wall temperature distribution. *International Journal of Heat and Mass Transfer*. 2002;**45**(1):25-35

[42] Hwang JJ, Lui CC. Measurement of endwall heat transfer and pressure drop in a pin-fin wedge duct. *International Journal of Heat and Mass Transfer*. 2002;**45**(4):877-889

[43] Alexeenko AA, Levin DA, Gimelshein SF, Collins RJ, Markelov GN. Numerical simulation of high-temperature gas flows in a millimeter-scale thruster. *Journal of Thermophysics and Heat Transfer*. 2002;**16**(1):10-16

[44] Niu JL, Zhang LZ. Heat transfer and friction coefficients in corrugated ducts confined by sinusoidal and arc curves. *International Journal of Heat and Mass Transfer*. 2002;**45**(3):571-578

[45] Wang LB, Wang QW, He YL, Tao WQ. Experimental and numerical study of developing turbulent flow and heat transfer in convergent/divergent square ducts. *Heat and Mass Transfer*. 2002;**38**(4-5):399-408

- [46] Chanteloup D, Juaneda Y, Bolcs A. Combined 3-D flow and heat transfer measurements in a 2-pass internal coolant passage of gas turbine airfoils. *Journal of Turbomachinery-Transactions of the ASME*. 2002;**124**(4):710-718
- [47] Chang SW, Zheng Y. Enhanced heat transfer with swirl duct under rolling and pitching environment. *Journal of Ship Research*. 2002;**46**(3):149-166
- [48] Brautsch A, Griffin T, Schlegel A. Heat transfer characterization of support structures for catalytic combustion. *International Journal of Heat and Mass Transfer*. 2002;**45**(15):3223-3231
- [49] El-Shaboury AMF, Soliman HM, Ormiston SJ. Laminar forced convection in two-dimensional equilateral and reduced branching ducts. *Numerical Heat Transfer: Part A Applications*. 2002;**42**(5):487-512
- [50] Han B, Goldstein RJ, Choi HG. Energy separation in shear layers. *International Journal of Heat and Mass Transfer*. 2002;**45**(1):47-55
- [51] Cheng CH, Huang SY, Aung W. Numerical predictions of mixed convection and flow separation in a vertical duct with arbitrary cross section. *Numerical Heat Transfer: Part A Applications*. 2002;**41**(5):491-514
- [52] Nie JH, Armaly BF. Three-dimensional convective flow adjacent to backward-facing step-effects of step height. *International Journal of Heat and Mass Transfer*. 2002;**45**(12):2431-2438
- [53] Stock HW. Wind tunnel-flight correlation for laminar wings in adiabatic and heating flow conditions. *Aerospace Science and Technology*. 2002;**6**(4):245-257
- [54] Sun ZF. Correlations for mass transfer coefficients over blunt boards based on modified boundary layer theories. *Chemical Engineering Science*. 2002;**57**(11):2029-2033
- [55] Roychowdhury DG, Das SK, Sundararajan T. Numerical simulation of natural convective heat transfer and fluid flow around a heated cylinder inside an enclosure. *Heat and Mass Transfer*. 2002;**38**(7-8):565-576
- [56] Ye XM, Yan WP, Jiang ZY, Li CX. Hydrodynamics of free-falling turbulent wavy films and implications for enhanced heat transfer. *Heat Transfer Engineering*. 2002;**23**(1):48-60
- [57] Mee DJ, Chiu HS, Ireland PT. Techniques for detailed heat transfer measurements in cold supersonic blowdown tunnels using thermochromic liquid crystals. *International Journal of Heat and Mass Transfer*. 2002;**45**(16):3287-3297
- [58] Hubner JP, Carroll BF, Schanze KS. Heat-transfer measurements in hypersonic flow using luminescent coating techniques. *Journal of Thermophysics and Heat Transfer*. 2002;**16**(4):516-522
- [59] von Wolfersdorf J. Bulk temperature development in transient heat transfer measurements using heater foils. *Journal of Heat Transfer-Transactions of the ASME*. 2002;**124**(5):982-985
- [60] Wang W, Qiu HH. Interfacial thermal conductance in rapid contact solidification process. *International Journal of Heat and Mass Transfer*. 2002;**45**(10):2043-2053
- [61] Gunther A, von Rohr PR. Influence of the optical configuration on temperature measurements with fluid dispersed TLCs. *Experiments in Fluids*. 2002;**32**(5):533-541
- [62] Bograchev KM, Passechnik VI. Evaluation of the spatial resolution of

- passive acoustic thermal tomography. *Acoustical Physics*. 2002;**48**(4):406-411
- [63] Desgeorges O, Lee T, Kafyeke F. Multiple hot-film sensor array calibration and skin friction measurement. *Experiments in Fluids*. 2002;**32**(1):37-43
- [64] Ozaki Y, Kawaguchi T, Takeda Y, Hishida K, Maeda M. High time resolution ultrasonic velocity profiler. *Experimental Thermal and Fluid Science*. 2002;**26**(2-4):253-258
- [65] Durst F, Shi JM, Breuer M. Numerical prediction of hot-wire corrections near walls. *Journal of Fluids Engineering, Transactions of the ASME*. 2002;**124**(1):241-250
- [66] Salesse A, de Tournemine AL, Roig V. Development of bubble cluster detection and identification method. *Experimental Thermal and Fluid Science*. 2002;**26**(2-4):163-171
- [67] Dong W, Hu LZ. Gas-liquid two-phase flow measurement using ESM. *Experimental Thermal and Fluid Science*. 2002;**26**(6-7):827-832
- [68] Zhaojun F, Jing C, Shitao S. Investigating the liquid film characteristics of gas-liquid swirling flow using ultrasound Doppler velocimetry. *AICHE Journal*. 2017;**63**:2348-2357
- [69] Asai K, Amao Y, Iijima Y, Okura I, Nishide H. Novel pressure-sensitive paint for cryogenic and unsteady wind-tunnel testing. *Journal of Thermophysics and Heat Transfer*. 2002;**16**(1):109-115
- [70] Wu YE, Chen K, Chen CW, Hsu KH. Fabrication and characterization of thermal conductivity detectors (TCDs) of different flow channel and heater designs. *Sensors and Actuators A: Physical*. 2002;**100**(1):37-45
- [71] Zhao Y, Zhang X, Xu X, Zhang S. Research progress in nucleation and supercooling induced by phase change materials. *Journal of Energy Storage*. 2020;**27**:101156
- [72] Asako Y, Goncalves E, Faghri M, Charmchi M. Numerical solution of melting processes for fixed and unfixed phase change material in the presence of magnetic field-simulation of low-gravity environment. *Numerical Heat Transfer: Part A Applications*. 2002;**42**(6):565-583
- [73] Tsuchida D, Kang C, Okada M, Matsumoto K, Kawagoe T. Ice formation process by cooling water-oil emulsion with stirring in a vessel. *International Journal of Refrigeration - Revue internationale du Froid*. 2002;**25**(2):250-258
- [74] Bansal H, Niktriyuk P. Arbitrary shaped ice particle melting under the influence of natural convection. *AICHE Journal*. 2017;**63**:3158-3176
- [75] Yeh HM, Ho CD, Wang WP. Cool thermal discharge by melting ice and producing chilled air. *Heat Transfer Engineering*. 2002;**23**(1):61-68
- [76] Wei L, Sui-Guang L, Shikai G, Yunhao W, Xueling L. Numerical study on melt fraction during melting of phase change material inside a sphere. *International Journal of Hydrogen Energy*. 2017;**42**(29):18232-18239
- [77] Al-Shannaq R, Young B, Farid M. Cold energy storage in a packed bed of novel graphite/PCM composite spheres. *Energy*. 2019;**171**(15):296-305
- [78] Wenlong C, Yanping Y, Liangliang S, Xiaoling C, Xiaojiao Y. Experimental studies on the supercooling and melting/freezing characteristics of nano-copper/sodium acetate trihydrate composite phase change materials. *Renewable Energy*. 2016;**99**:1029-1037

- [79] Esapour M, Hamzehnezhad A, Ali Rabiennaaj A, Darzi MJ. Melting and solidification of PCM embedded in porous metal foam in horizontal multi-tube heat storage system. *Energy Conversion and Management*. 2018;**171**:398-410
- [80] Bazarov LS, Gordeeva VI, Shevchenko VS, Petrushin EI. Experimental modeling of mass crystallization processes in the volume of a flat magma chamber. *Petrology*. 2002;**10**(5):469-478
- [81] Fukui K, Maeda K. Effects of crystal growth rate and heat and mass transfer on solute distribution. *Chemical Engineering Science*. 2002;**57**(15):3133-3140
- [82] Butty V, Poulidakos D, Giannakouros J. Three dimensional presolidification heat transfer and fluid dynamics in molten micro droplet deposition. *International Journal of Heat and Fluid Flow*. 2002;**23**(3):232-241
- [83] Haferl S, Poulidakos D. Transport and solidification phenomena in molten microdroplet pileup. *Journal of Applied Physics*. 2002;**92**(3):1675-1689
- [84] Henein H. Single fluid atomization through the application of impulses to a melt. *Materials Science & Engineering, A: Structural Materials - Properties, Microstructure and Processing*. 2002;**326**(1):92-100
- [85] Wenzhen Q, Chia-Ming F, Yaoming Z. Analysis of three dimensional heat conduction in functionally graded materials by using a hybrid numerical method. *International Journal of Heat and Mass Transfer*. 2019;**145**:118771
- [86] Yi L, Ling L, Yuwen Z. Numerical simulation of non-Fourier heat conduction in fins by lattice Boltzmann method. *Applied Thermal Engineering*. 2020;**145**:114670
- [87] Xiujiang S, Qian W, Liqin W. New Galerkin-vector theory and efficient numerical method for analyzing steady-state heat conduction in inhomogeneous bodies subjected to a surface heat flux. *Applied Thermal Engineering*. 2019;**161**:113838
- [88] Jun H, Quansheng L, Zhijun W, Xiangyu X. Modelling transient heat conduction of granular materials by numerical manifold method. *Engineering Analysis with Boundary Elements*. 2018;**86**:45-55
- [89] Ying X, Zhinxue S, Zhuang L, Jun Y, Dongyan F, Kelvin B, et al. Numerical simulation of fluid flow and heat transfer in EGS with thermal-hydraulic-mechanical coupling method based on a rough fracture model. *Energy Procedia*. 2019;**158**:6038-6045
- [90] Mathey P, Jullien P. Numerical analysis of a WKB inverse method in view of index profile reconstruction in diffused waveguides. *Optics Communications*. 1996;**122**(4-6):127-134
- [91] Rani D, Mishra V. Numerical inverse Laplace transform based on Bernoulli polynomials operational matrix for solving nonlinear differential equations. *Results in Physics*. 2020;**16**:102836
- [92] Merci B, Dick E, Vierendeels J, De Langhe C. Determination of epsilon at inlet boundaries. *International Journal of Numerical Methods for Heat and Fluid Flow*. 2002;**12**(1):65-80
- [93] Medic G, Durbin PA. Toward improved prediction of heat transfer on turbine blades. *Journal of Turbomachinery-Transactions of the ASME*. 2002;**124**(2):187-192
- [94] Wand L, Song F. Development of an intermittency equation for the modeling

of the supersonic/hypersonic boundary layer flow transition. *Flow, Turbulence and Combustion*. 2011;**87**(1):165-187

[95] Tafti DK, He L, Nagendra K. Large eddy simulation for predicting turbulent heat transfer in gas turbines. *Philosophical Transactions. Series A, Mathematical, Physical, and Engineering Sciences*. 2014;**372**(2022):20130322

[96] Gui-Qing W, He-Ping L, Cheng-Yu B, Xi C. Modeling of the heat transfer and flow features of the thermal plasma reactor with counter-flow gas injection. *International Journal of Heat and Mass Transfer*. 2009;**52**(3-4):760-766

[97] Wang CC, Lo J, Lin YT, Wei CS. Flow visualization of annular and delta inlet vortex generators in fin-and-tube heat exchanger application. *International Journal of Heat and Mass Transfer*. 2002;**45**(18):3803-3815

[98] Wang YX, Peterson GP. Optimization of micro heat pipe radiators in a radiation environment. *Journal of Thermophysics and Heat Transfer*. 2002;**16**(4):537-546

[99] Schaller M, Hoffmann KH, Rivero R, Andresen B, Salamon P. The influence of heat transfer irreversibilities on the optimal performance of diabatic distillation columns. *Journal of Non-Equilibrium Thermodynamics*. 2002;**27**(3):257-269

[100] Bojic M, Lukic N. Controlling evaporative three finger thermosyphon. *Energy Conversion and Management*. 2002;**43**(5):709-720

[101] Al-Busoul MA. Bed-to-surface heat transfer in a circulating fluidized bed. *Heat and Mass Transfer*. 2002;**38**(4-5):295-299

[102] de Castro JA, Nogami H, Yagi J. Three-dimensional multiphase

mathematical modeling of the blast furnace based on the multifluid model. *ISIJ International*. 2002;**42**(1):44-52

[103] Dutta A, Basu P. Overall heat transfer to water walls and wing walls of commercial circulating fluidized-bed boilers. *Journal of the Institute of Energy*. 2002;**75**(504):85-90

[104] Jugjai S, Rungsimuntuchart N. High efficiency heat-recirculating domestic gas burners. *Experimental Thermal and Fluid Science*. 2002;**26**(5):581-592

[105] Leong KC, Lu GQ, Rudolph V. The effect of latent heat of fusion on heat transfer in fluidized-bed coating of thin plates. *Chemical Engineering and Processing*. 2002;**41**(7):567-576

[106] Caro-Corrales J, Cronin K, Abodayeh K, Gutierrez-Lopez G, Ordorica-Falomir C. Analysis of random variability in biscuit cooling. *Journal of Food Engineering*. 2002;**54**(2):147-156

[107] Holowach MJ, Hochreiter LE, Cheung FB, Aumiller DL. Critical heat flux during reflood transients in small-hydraulic-diameter geometries. *Nuclear Technology*. 2002;**140**(1):18-27

[108] Driesse A, Thevenard D. A test of Suehrcke's sunshine-radiation relationship using a global data set. *Solar Energy*. 2002;**72**(2):167-175

[109] Muneer T, Zhang X. A new method for correcting shadow band diffuse irradiance data. *Journal of Solar Energy Engineering-Transactions of the ASME Journal*. 2002;**124**(1):34-43

[110] Yang K, Koike T. Estimating surface solar radiation from upper-air humidity. *Solar Energy*. 2002;**72**(2):177-186

[111] Chamkha AJ, Issa C, Khanafer K. Natural convection from an inclined plate embedded in a variable porosity

- porous medium due to solar radiation. *International Journal of Thermal Sciences*. 2002;**41**(1):73-81
- [112] El-Adawi MK. New approach to modelling a flat plate collector: The Fourier transform technique. *Renewable Energy*. 2002;**26**(3):489-506
- [113] Groenhout NK, Behnia M, Morrison GL. Experimental measurement of heat loss in an advanced solar collector. *Experimental Thermal and Fluid Science*. 2002;**26**(2-4):131-137
- [114] Tripanagnostopoulos Y, Souliotis M, Nousia T. CPC type integrated collector storage systems. *Solar Energy*. 2002;**72**(4):327-350
- [115] Rincon EA, Osorio FA. A new troughlike nonimaging solar concentrator. *Journal of Solar Energy Engineering-Transactions of the ASME*. 2002;**124**(1):51-54
- [116] Belessiotis V, Mathioulakis E. Analytical approach of thermosyphon solar domestic hot water system performance. *Solar Energy*. 2002;**72**(4):307-315
- [117] Chen YT, Chong KK, Lim CS, Lim BH, Tan KK, Aliman O, et al. Report of the first prototype of non-imaging focusing heliostat and its application in high temperature solar furnace. *Solar Energy*. 2002;**72**(6):531-544
- [118] Xi C, He-Ping L. Three-dimensional flow and heat transfer in thermal plasma systems. *Surface and Coating Technology*. 2003;**171**(1-3):124-133
- [119] Ramachandran K, Nishiyama H. Three-dimensional effects of carrier gas and particle injections on the thermo-fluid fields of plasma jets. *Journal of Physics D: Applied Physics*. 2002;**35**(4):307-317
- [120] Christlieb AJ, Hitchon WNG. Three-dimensional solutions of the Boltzmann equation: Heat transport at long mean free paths. *Physical Review E*. 2002:6708
- [121] Zaman S, Mahwish G. Magnetohydrodynamic bioconvective flow of Williamson nanofluid containing gyrotactic microorganisms subjected to thermal radiation and Newtonian conditions. *Journal of Theoretical Biology*. 2019;**479**:22-28
- [122] Sulochana C, Samrat SP, Sandeep N. Numerical investigation of magnetohydrodynamic (MHD) radiative flow over a rotating cone in the presence of Soret and chemical reaction. *Propulsion and power Research*. 2018;**7**(1):91-101
- [123] Zhang J, Ming-Jiu N. Direct numerical simulations of incompressible multiphase magnetohydrodynamics with phase change. *Journal of Computational Physics*. 2018;**375**:717-746
- [124] Kumaran G, Sandeep N, Animasaun IL. Computational modeling of magnetohydrodynamic non-Newtonian fluid flow past a paraboloid of revolution. *Alexandria Engineering Journal*. 2018;**57**(3):1859-1865
- [125] Rahimah J, Roslinda N, Ioan P. Magnetohydrodynamic rotating flow and heat transfer of ferrofluid due to an exponentially permeable stretching/shrinking sheet. *Journal of Magnetism and Magnetic Materials*. 2018;**465**:365-374