

2019 INTERNATIONAL CONFERENCE OF COMPUTER SCIENCE AND INFORMATION TECHNOLOGY (ICoSNIKOM)

**MEDAN, NORTH SUMATERA, INDONESIA
28 – 29TH NOVEMBER 2019**



IEEE



IEEE CSS/RAS Joint Chapter Indonesia

ISBN : 978-1-7281-5423-7/19

TABLE OF CONTENT

TABLE OF CONTENT	i
1. 1570594778 - An Analysis of the Gamification Use in Learning Management System	1
2. 1570596599 - Comparison of SURF and HOG extraction in Classifying the blood image of malaria parasites using SVM	9
3. 1570597430 - The Development of Document Similarity Detector by Jaccard Formulation	15
4. 1570597937 - Indonesian EFL Learners' Performance Using Hybrid Learning: A case study in an Indonesian university	19
5. 1570598039 - Adaptive Moment Estimation to Minimize Square Error in Backpropagation Algorithm	24
6. 1570598197 - Adopting Tiny Encryption Algorithm for Patient Healthcare Record on Smart Card	31
7. 1570598392 - The design of data collection for vegetables farm monitoring system	36
8. 1570600413 - A Model for Minimizing Hospital Service Costs	40
9. 1570600490 - Schedule Control System for Wearable Medicine Box Using Bluetooth Low Energy	45
10. 1570600594 - Adopting Fingerprint as an Authentication Factor on E-Ticketing Mechanism	50
11. 1570600831 - Fruit Ripeness Based on RGB, HSV, HSL, L*a*b* Color Feature Using SVM	56
12. 1570601276 - Classification of Nuclear Explosion Earthquake Signal based on Machine Learning Approach	61
13. 1570601284 - Development of Web Stock Opname Application With SAP Business One Using Scrum Method	65
14. Face Recognition Using Light-Convolutional Neural Networks Based on Modified VGG16 Model	70
15. 1570601312 - Time Series Financial Market Forecasting Based on Support Vector Regression Algorithm	74
16. 1570601356 - Analysis of Fuzzy C-Means and Analytical Hierarchy Process (AHP) Models Using Xie-Beni Index	78
17. 1570601364 - The Drivers of Repurchase Intention in Electronic Commerce: A Case Study of Indonesian Buyers	84
18. 1570601365 - Developing an Expert System of Palm Oil Plant Disease	88
19. 1570601366 - Decision Support System of Best Teacher Selection using Method MOORA and SAW	93
20. 1570601592 - Forecasting Plant Growth Using Neural Network Time Series	99
21. 1570601632 - Customer Relationship Management by Using Objective Matrix Method to Survey Customer Satisfaction	103
22. 1570602302 - Determines the Weight Criteria of Simple Additive Weighting Method Using Certainty Factor	107
23. 1570602563 - Design and Simulation of Automatic Folders	112
24. 1570602971 - Low Power - Low Rate Vessel Tracking System (VTS) in Territorial Waters	116
25. 1570603141 - Evaluation of Internal Control of Payroll System in Hospital	121
26. 1570603412 - The Effect of Implementation of E-Filing System on	

Taxpayer Compliance with the Understanding of the Internet	125
27. 1570603457 - Implementation of Viola-Jones Algorithm for Object Detection Using FPGA	129
28. 1570603840 - Business Intelligence for Education Management System	135
29. 1570604184 - Implementation ANFIS Method for Prediction Needs Drug-based Population Diseases and Patient	141
30. 1570604240 - Determining land priority for Housing Development: using Fuzzy AHP application	146
31. 1570604266 - Sentiment analysis for opinion IESM product with recurrent neural network approach based on long short-term memory	151
32. 1570604597 - Hybrid-AES-Blowfish algorithm: key exchange using neural network	155
33. 1570607145 - Evaluation of Employee Attendance System Using COBIT 5 Framework	159
34. 1570610538 - Alteration in Resting EEG for Different Dosage of Methadone Treatment	163
35. 1570610541 - EEG-P300 Potential in Methadone Subjects based on Parietal and Frontal Channels with Different Image Stimulus	167
36. 1570610839 - Implementation of Wireless Sensor Network as Fire Detector using Arduino Nano	172
37. 1570610906 - E-Marketing and Challenges among Indonesian Coffee Farmers	176
38. 1570612174 - An Application of Backpropagation Neural Network for Sales Forecasting Rice Miling Unit	181
39. 1570612472 - An Increase of the Central Frequency of Alpha Brain Wave Effected by Soy Peptide in Open Eyes Condition based EEG Signals	185
40. 1570612842 - Ant Algorithm Optimization for Clustering News Online.....	190
41. 1570613413 - An Increase of Brain Wave Amplitude on High Frequency Ranges based EEG P300 Signals	194
42. 1570614591 - Prototype of Radio Frequency Identification Technology Utilization for Monitoring of BTS Room Using of IoT (Internet of Things) System	198

ORGANIZING COMMITTEE

Advisory Council

Opim Salim Sitompul – Head of APTIKOM Region I Sumatera Utara – NAD

Humuntal Rumapea – Rector of Universitas Methodist Indonesia

General Chair

Naikson Fandier Saragih

Program Chair

Poltak Sihombing

Sajadin Sembiring

Technical Program Committee

Herman Mawengkang

Opim Salim Sitompul

Muhammad Zarlis

Tulus

Mahyuddin

Zainal Hasibuan

Beny Nasution

Rahmat Widia Sembiring

Secretary

Jamaluddin

Treasury

Edward Rajagukguk

Publication Chair

Arjon Turnip

Proceeding Chair

Indra Kelana Jaya

INTERNATIONAL PROGRAM COMMITTEE

The International Program Committee of the International Conference of Computer Science and Information Technology (ICoSNIKOM 2019) consists of 52 members from various renowned educational institutions. Each member can be assigned not only as conference publication but also has a role in reviews and evaluates submissions.

The first deadline of paper submission will be 02 October 2019. Reviewers will be chosen based on field of expertise and non-student priority. Reviewers can also be experienced members of organizing committee. Thus, we strongly believe in the review results in the paper of the International Conference of Computer Science and Information Technology (ICoSNIKOM 2019) will be strict and thus ensure high quality presentations.

The members are presented below:

1. Rahmat Budiarto-Albaha - University Saudi Arabia
2. Hiba Zuhair - Al-Nahrain University & Baghdad/Iraq, Iraq
3. Abulmaali M. Taher - Al Jabal Al Gharbi University, Libya
4. Tegoeh Tjahjowidodo - Nanyang Technological University, Singapore
5. Jasni Mohamad Zain University Teknologi Mara UITM, Malaysia
6. Muhamad Taufik Abdullah - University Putra Malaysia, Malaysia
7. Ng Seng Beng - University Putra Malaysia, Malaysia
8. Rahmita Wirza O.K. Rahmat - University Putra Malaysia, Malaysia
9. Nurul Amelina Nasharuddin - University Putra Malaysia, Malaysia
10. Lili Nurliyana Abudullah - University Putra Malaysia, Malaysia
11. Nurul Amelina Nasharuddin - University Putra Malaysia, Malaysia
12. Fermi Pasha - Monash University, Malaysia
13. Pandian Vasant - Petronas University
14. Tawfik Ismail - Cairo University, Egypt
15. Wayan Suparta - Universitas Pembangunan Jaya, Indonesia
16. Rini Akmeliawati - International Islamic University Malaysia, Malaysia
17. Zulkhairi Md. Dahalin - Universiti Utara Malaysia, Malaysia
18. Eko Supriyanto - University Teknologi Malaysia, Malaysia
19. Fan-Gang Tseng - National Tsing Hua University, Taiwan
20. J. Andrew Yeh - National Tsing Hua University, Taiwan
21. Poki Chen - National Taiwan University of Science and Technology, Taiwan
22. Nutthita Chuankrerkkul - Chulalongkorn University, Thailand
23. Surapong Chatpun - Institute of Biomedical Engineering, Prince of Songkha University, Thailand
24. Kamolrat Intaratat - Sukhothai Thammathirat Open University, Thailand
25. Vanvisa Chutchavong - King Mongkut's Institute of Technology Ladkrabang & Faculty of Engineering, Thailand
26. Connie Man-Ching Yuen - Hong Kong Shue Yan University, Hong Kong
27. Yousef Farhaoui - Moulay Ismail University, Morocco

28. Debasish Ghose - Indian Institute of Science, India
29. J. Suthagar - Karunya University, India
30. Koshy George - PES Institute of Technology, India
31. Partha Pratim Ray - Sikkim University, India
32. Kathiravan Srinivasan - Vellore Institute of Technology (VIT), India
33. Asis Kumar Tripathy - Vellore Institute of Technology, Vellore, India
34. Jeehyun Kim - Kyunpook National University, Korea
35. Yong-Hoon Lee - Pusan National University, Korea
36. Sejoon Lim - Kookmin University, Korea
37. Daniel Abasolo - University of Surrey, United Kingdom
38. Yanuar Nugroho - Manchester University, United Kingdom
39. Anna Antonyova - University Of Presov, Slovak Republic
40. Gerhard Wilhelm Weber - Poznan University Of Technology, Poland
41. Konrad Kowalczyk - AGH University of Science and Technology
42. Ruben Ruiz - Universitat Politecnica de Valencia, Spain
43. Le Hoa Nguyen - Hanoi University of Science and Technology, Vietnam
44. Nguyen Van Cuong - Can Tho University, Vietnam
45. Sulfikar Amir - Nanyang Technological University, Singapore
46. Dimitrios N. Kallergis - University of West Attca, Greece
47. Andreas Dengel - German Research Center For Artificial Intelligence, German
48. Dorien de Tombe - Founder and Chair International Research Society on Methodology Societal Complexity, Nederland
49. Michael Seger - University of Medical Informatics and Technology, Austria
50. Ahmed Toaha Mobashsher - The University of Queensland & LicenSys Pty Ltd, Australia
51. Satu Elisa Schaeffer - Universidad Autónoma de Nuevo León, Mexico
52. Ichijo Holdaka - University Of Miyazaki, Japan
53. Masaji Watanabe - Okayama University, Japan
54. Minoru Sasaki - Gifu University, Japan
55. Yoshihiro Ymamoto - Tottori University, Japan
56. Zhang Zhe - Tianjin University, R. China
57. Zhao Zihua - Beihang University, R. China
58. Shoukun Wang - Beijing Institue of Technology, R. China
59. Gerhard Wilhelm Weber - Poznan University of Technology, Poland
60. Abdel Salhi - University of Essex, UK
61. Soheyl Khalilpourazari - Kharazmi University, Iran
62. Efran Tirkolaee - Isfahan University of Technology, Iran
63. Reza Lotfi - Yazd University, Iran
64. Taufik F. Abidin - Syiah Kuala University, Indonesia
65. Dedy Hartama - STIKOM Tunas Bangsa, Indonesia
66. Evi Christiani Sitepu - USU, Indonesia
67. Martha Rianna - USU, Indonesia
68. Zainal Arifin - ITS, Indonesia

69. Mauridhi H. Purnomo - ITS, Indonesia
70. Endarko - ITS, Indonesia
71. Augie Widyotriatmo - ITB, Indonesia
72. Basuki Rachmatul Alam - ITB, Indonesia
73. Hendrawan - ITB, Indonesia
74. Suasmoro - ITB, Indonesia
75. Dessy Novita - Padjadjaran University, Indonesia
76. Ismoyo Haryanto - Diponegoro University, Indonesia
77. Riko Saragih - Universitas Maranatha, Indonesia
78. Ayi Purbasari - Universitas Pasundan, Indonesia
79. Rila Mandala - Institut Teknologi Bandung, Indonesia
80. Dahlan Abdullah - Univ. Malikussaleh, Indonesia
81. Hadiyanto Lim - Universitas Methodist, Indonesia
82. Zk Abdurahman Baizal - Telkom University, Indonesia
83. Ronsen Purba - STMIK Mikroskil, Indonesia
84. Roslina - Politeknik Negeri Medan, Indonesia
85. Rasmulia Sembiring - Universitas Methodist Indonesia
86. Arnaldo Sinaga - Del Institute of Technology, Indonesia
87. Marhaposan Situmorang - Universitas Methodist Indonesia, Indonesia
88. Abba Suganda Girsang - Bina Nusantara University, Indonesia
89. Indra Hartarto Tambunan - Institute of Technology, Indonesia
90. Hapnes Toba - Maranatha University, Indonesia
91. Kerista Tarigan - Universitas Sumatera Utara, Indonesia
92. Hartono - Universitas Potensi Utama, Indonesia
93. Syahrul Humaidi - Universitas Sumatera Utara, Indonesia
94. Indra Hartarto Tambunan - Institut Teknologi Del, Indonesia
95. Akim M. H. Pardede - STMIK Kaputama, Indonesia
96. Muhammad Iqbal - Universitas Pembangunan Panca Budi, Indonesia
97. Arwin Datumaya Wahyudi Sumari - TNI Angkatan Udara, Indonesia
98. Yuliarman Saragih - University of Singaperbangsa Karawang, Indonesia

PROGRAM BOOK

2nd International Conference of Computer Science and Information Technology (ICoSNIKOM 2019)

Hotel Danau Toba, November 29th 2019

NO	TIME	ACTIVITIES	PIC
1	07.00-08.30	Registration	Committee
2	08.30-08.50	Traditional Dance	Committee
3	08.55-09.00	Opening MC: Formal	MC
4	09.00-09.15	National Ceremony	MC
5	09.15-09.20	Praying	Lince Silalahi M. Th
6	09.20-09.25	Welcoming Speech and Report from General Chair of The 2019 ICoSNIKOM	Naikson F. Saragih, S.T., M. Kom
7	09.25-09.30	Opening Speech from Rector of Universitas Methodist Indonesia (UMI-Medan)	Drs. Humuntal Rumapea, M. Kom
8	09.30-09.35	Opening Speech from IEEE Indonesian CSS/RAS Joint Chapter	Arjon Turnip, Ph. D
9	09.35-09.45	Opening Speech from Head of APTIKOM SUMUT	Prof. Dr. Opim Salim Sitompul
10	09.45-09.55	Opening Speech from Head of APTIKOM	Prof. Dr. Zainal Hasibuan/ Prof. Dr. Muhammad Zarlis
11	09.55-10.00	Photo Session	MC
12	10.00-10.10	Coffe Break	Committee
13	10.10-10.50	Prof. Dr. Opim Salim Sitompul <i>“Machine Intelligence Era: Challenges and Opportunities”</i>	Moderator : Winarto M. Sc
14	10.50-11.30	Prof. Putra Sumari <i>“Deep Learning Technology in Industri 4.0: Concepts and Applications”</i>	Moderator : Winarto M. Sc
15	11.30-12.00	Arjon Turnip Ph. D (Invited Speaker) <i>“An Increase of Brain Wave Amplitude on High Frequency Ranges based EEG P300 Signals”</i>	Moderator : Darwis Robinson Manalu M.M., M. Kom
16	12.00-12.30	Industry Session	MC
17	12.30-14.00	ISHOMA	
18	14.00-17.15	Paralel Sesion 1-4	Committee
19	17.15-17.30	Best Paper Announcement	MC
20	18.00-19.00	Closing Ceremony	MC

Face Recognition Using Light-Convolutional Neural Networks Based on Modified VGG16 Model

Anugrah Bintang Perdana, Adhi Prahara
Informatics Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
nugabp@gmail.com, adhi.prahara@tif.uad.ac.id

Abstract—Identification and verification systems nowadays utilize biometric technology such as face recognition, retina scan, and fingerprint mapping to recognize a person identity. For the face recognition technology, the traditional methods usually consist of four stages: face detection, face alignment, feature extraction, and classification. Recently, deep learning gains popularity in the face recognition task due to its performance that outperform the traditional methods and its simplicity that combines features extraction and classification in a single architecture. Deep learning especially Convolutional Neural Networks (CNN) has been successfully implemented in the face recognition applications. There are many variations of CNN based models that successfully improved the face recognition performance. However, the majority of the models have very deep layers and trained with large scale face image dataset that need a lot of computational resources. In this research, a light-CNN based on modified VGG16 model is proposed to recognize face with a limited dataset. The proposed light-CNN is compact yet produces good performances with 94.4% accuracy.

Keywords—light-CNN, face recognition, deep learning

I. INTRODUCTION

Understanding how the human visual system (HVS) processes visual information involves building models that would account for the human-level performance on a multitude of tasks [1]. In the intelligence systems model, biometric technology recently becomes popular. Biometric technology performs authentication and identification data from the unique characteristics of persons such as face, retina, and fingerprint. The conventional face recognition pipeline consists of four stages: face detection, face alignment, feature extraction and classification [2]. The most important stage in the face recognition model is feature extraction. Hand-crafted features such as Eigenfaces [3], Fisherfaces [4] and Local Binary Patterns (LBP) [2], [5], [6] have achieved good performance in the face recognition task. However, the performance degrades if the features applied on unconstrained environment such as complex background, illumination, various pose, and occlusion [2].

There are several methods that can be implemented to recognize objects and deep learning is the one that commonly used. Deep learning simply uses a network with each input layers of neuron is connected to every output neuron in the next layer. Deep learning, in particular Convolutional Neural Networks (CNN) is a validated image representation and classification technique for image analysis and applications [7]. Deep learning does not need complicated method to extract the features, especially when using CNN. Datasets trained by CNN will give variety of results that depends on the architecture and the datasets. CNN has received immense

success in multiple applications such as natural language processing, object classification, and image segmentation [8]. CNN provides state-of-the-art results in several computer vision problems. CNN has a large number of parameter that requires a large number of training sample which becomes the limiting factor for a small sample size problem [8].

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) [9] was held to evaluate the algorithms for object recognition and classification in a large scale. There are a few popular object recognition and classification algorithms such as CNN algorithm which won the competition for the first time in 2012 with 8 layers called AlexNet [10]. Lately, many variations of CNN model able to significantly improve the performance of object detection and classification for example VGGNet [11]. VGGNet consists of 16 convolution layers that became the runner-up in 2014. The brief review of some successful CNN models for face recognition problems are presented in the following paragraph.

Schroff *et al.* [12] from Google, Inc. proposes a system called FaceNet. FaceNet learns to map a face into Euclidean space where the distance can be directly used for face recognition. They use Deep Convolutional Network in the feature extraction process. The experiment shows result 99.63% and 95.12% accuracy from LFW and Youtube Faces dataset. Taigman *et al.* [13] from Facebook proposes DeepFace model. From the process of face recognition namely face detection, face alignment, feature representation, and face recognition, they optimize the face alignment and feature representation steps using 3D face model. The experiment conducted on 4 million faces with more than 4,000 labels and shows 97.35% accuracy in LFW dataset. Following by its predecessor which using deep neural networks for object recognition, Sun *et al.* [14] motivated to apply deep neural networks on face recognition problems. The work based on VGGNet and GoogLeNet to make them suitable for face recognition. The result achieves 99.53% accuracy on LFW face recognition dataset and 96.0% of LFW rank-1 face identification accuracy.

However, aside from the great achievement of the previous deep learning models, deep neural networks need more resources for the computation. There are few articles that discuss about light CNN [15], [16]. Wu *et al.* proposes new activation function called Max-Feature-Map (MFM) to be used in their proposed light-CNN model. By reducing the parameters and accelerate the computational process, light CNN framework able to learn a robust face representation on noisy labeled dataset [15]. Zheng and Zu proposes normalized light-CNN using 11 hidden layers implemented in LFW and achieve 98.46% of face verification accuracy [16].



Fig. 1. VGG16 architecture. (modified from <https://medium.com/coinmonks/paper-review-of-vggnet-1st-runner-up-of-ilsvlc-2014-image-classification-d02355543a11>).

Face recognition generally used for identification and verification. There are several facial features that can be used to recognize persons. This paper has a goal to build light CNN architecture that can be implemented with limited data based on existing architecture namely VGG16. The implementation of the proposed CNN model will be explained in the next section that organized as follow: Section II presents the proposed light-CNN architectures, Section III presents the result and discussion, and finally the conclusion of this work is presented in Section IV.

II. LIGHT-CNN FOR FACE RECOGNITION

In this research, the proposed light-CNN architecture is built based on VGG16 which suitable for limited dataset. Figure 1 shows the baseline of VGG16 architecture for face recognition. VGG16 which design for large scale classification has quite deep layers with several small convolutional layers with various number of kernel followed by max pooling.

A. Light-CNN Architecture

The proposed architecture which based on VGG16 model can be seen in Table I. From VGG16 architecture which illustrated in Figure 1, one layer from the 64 filters convolutional layers is removed and the 256 filters and 512 filters convolutional layers are completely removed. Also the size of fully connected layers is changed. By removing some layers from VGG16 model, the architecture becomes light and compact.

TABLE I. THE PROPOSED LIGHT-CNN ARCHITECTURE

Layer Type	Kernel	Size	Stride
Conv1	64	3 x 3	1 x 1
Max Pooling	-	2 x 2	1 x 1
Conv2-1	128	3 x 3	1 x 1
Conv2-2	128	3 x 3	1 x 1
Conv2-3	128	3 x 3	1 x 1
Max Pooling	-	2 x 2	1 x 1
FC	512	-	-
FC	30	-	-
Soft-max	1	-	-

The proposed architecture uses 120 x 120 pixels as the size of the input image and has only two types of convolutional layers which followed by max pooling. Each convolutional layer followed by rectified linear unit (ReLU) activation function. The first convolutional layer has 64 filters with 3 x 3 filter size followed by max pooling layer with 2 x 2 filter size. The second convolutional layers have 128 filters with 3

x 3 filter size followed by max pooling layer with 2 x 2 filter size. In the final layers, there are two fully connected layers which have 512 neurons and 30 neurons for classification into 30 labels using soft-max.

The general procedure of face recognition system proposed in this research is shown in Figure 2. From Figure 2, the face recognition process is divided into two phases namely training and testing. In the training phase, dataset of labeled face image is resized into 120 x 120 pixels then used to train the networks using the proposed architecture. The trained model will be used in the face recognition process in the testing phase. In the testing phase, face detection method is applied to the frame grabbed from video camera or webcam. Every face which found in the frame will be cropped and resize to fit the input model. After applying the face recognition procedure using the previously trained model, a threshold is applied to discard the face label which has confidence score below the threshold and pass the face label which has confidence score above the threshold. This procedure will reduce the false classification by the model. The face label then shown in the screen as the result of face recognition system.

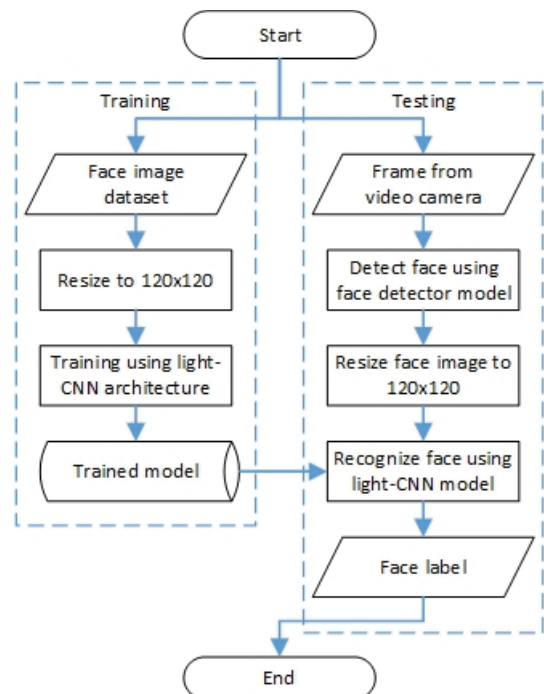


Fig. 2. The general procedure of the proposed face recognition system.

B. Performance Measurement

In order to evaluate the performance of the proposed model, we use confusion matrix. From the confusion matrix,

accuracy, recall, precision, and F1 measure are calculated using (1) – (4) respectively.

$$accuracy = \frac{TP+TN}{TP+TN+FP+FN} \quad (1)$$

$$recall = \frac{TP}{TP+FN} \quad (2)$$

$$precision = \frac{TP}{TP+FP} \quad (3)$$

$$F1\ measure = 2 \times \frac{precision \times recall}{precision+recall} \quad (4)$$

TP is true positive, TN is true negative, FP is false positive and FN is false negative.

III. RESULT AND DISCUSSION

The proposed method is built using Python 3.6 with additional deep learning library Keras, image processing library OpenCV, matplotlib, and scikit-learn library. The method runs on computer with processor Intel Core-i7, NVidia GTX 1070, and 16GB of RAM while the training model uses Google Colab GPU with NVIDIA Tesla K80 and memory 16 GB.

A. Dataset

The dataset consists of 30 labels of face image in RGB format. Some face labels are acquired from ROSE-Youtu Face Liveness Detection Database which used in [17] and some are taken manually with camera. Every face that found in the video will be cropped automatically using face detection method from OpenCV library. The dataset consists of 7,250 face images which then divided into 5,075 face image for training and 2,175 face images for validation. A new set of 484 face images is used for testing. Some samples of the dataset are shown in Figure 3. As shown in Figure 3, each face image has various size and background and has not follow certain pattern.



Fig. 3. Sample of face images used in this research.


B. Performance Evaluation

The dataset has 30 labels and consists of 7,250 face images with 5,075 images for training and 2,175 images for validation. Training is performed for 50 epochs using Stochastic Gradient Descent (SGD) optimizer. The accuracy and loss from the model are monitored and shown in Figure 4(a) and Figure 4(b) respectively. From Figure 4, the training accuracy is quite stable in 0.98 and 0.1 loss after approximately 10 epochs and does not show any overfitting case. The trained model then applied in the test dataset and achieves score 0.944 or 94.4% of accuracy. From the 484 test data, the model can correctly predict 457 data. The proposed model also achieves recall score 95%, precision score 93%, and F1 measure score 94%.


Before reaching the final architecture in Table I, we conduct a test for two architectures based on VGG16. In the first trial architecture, a 32 filters of convolutional layer are added before the 64 filters of convolutional layer from Table I. In the second trial architecture, the difference between architecture in Table I is only the input size that changed to 96

x 96 pixels. The first and the second trial architecture achieve accuracy score 92.9% and 93.3% respectively.

To compare the result with the baseline, VGG16 architecture is used to train the training dataset and test the result on the same test data as the proposed model. The baseline architecture achieves 77.8% accuracy which correctly classify 370 data from 484 test data. Table II shows the comparison of accuracy from VGG16 and the proposed method.

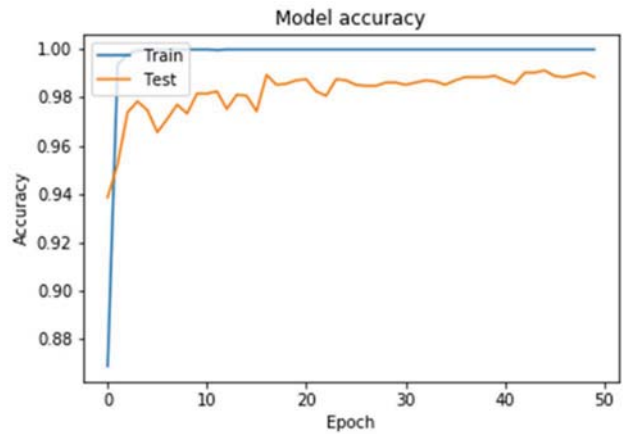

(a) Training accuracy

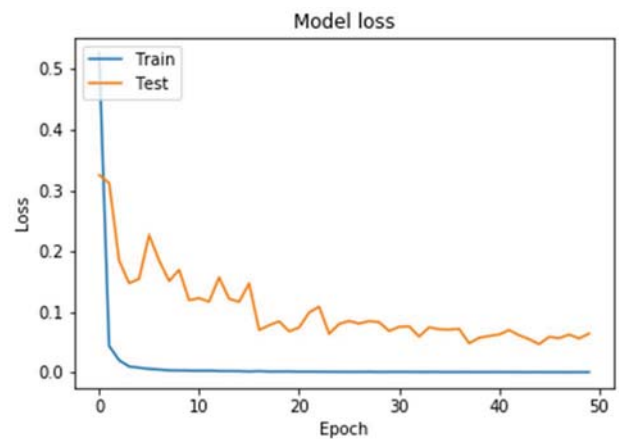

(b) Training loss

Fig. 4. The graph of training and validation of the proposed model

From Table II, the accuracy of the proposed light-CNN model is better than the rest of the modified models. Compare to the first trial and VGG16 model, the proposed architecture is more compact and light. This prove that light-CNN model is superior in accuracy and training time when the dataset is limited and the number of category is small.

TABLE II. COMPARISON BETWEEN VGG16 AND THE PROPOSED METHOD

Architecture	Accuracy
VGG16	77.8%
First trial	92.9%
Second trial	93.3%
Proposed	94.4%

IV. CONCLUSION

Face recognition in shallow learning pipeline consists of four stages, and the most important step is the feature extraction step. One of the advantage of deep learning is deep learning does not need a complicated method to extract the features. However, the deep convolutional networks need more resources for the computation while the light convolutional networks do not spend too much time for training the model. Our experiment shows that shallow network such as light-CNN also produces high accuracy which is 94.4% and performs better in limited dataset and small number of labels.

ACKNOWLEDGMENT

This research is supported by LPPM Universitas Ahmad Dahlan with research grant no. PF-135/SP3/LPPM-UAD/IV/2019.

REFERENCES

- [1] J. Kubilius, S. Bracci, and H. P. Op de Beeck, "Deep Neural Networks as a Computational Model for Human Shape Sensitivity," *PLoS Comput. Biol.*, vol. 12, no. 4, p. e1004896, Apr. 2016.
- [2] L. Liu, P. Fieguth, G. Zhao, M. Pietikäinen, and D. Hu, "Extended local binary patterns for face recognition," *Inf. Sci. (Ny)*, vol. 358–359, pp. 56–72, Sep. 2016.
- [3] M. Turk and A. Pentland, "Eigenfaces for Recognition," *J. Cogn. Neurosci.*, vol. 3, no. 1, pp. 71–86, Jan. 1991.
- [4] P. N. Belhumeur, J. P. Hespanha, and D. J. Kriegman, "Eigenfaces vs. Fisherfaces: recognition using class specific linear projection," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 19, no. 7, pp. 711–720, Jul. 1997.
- [5] T. Ahonen, A. Hadid, and M. Pietikäinen, "Face Recognition with Local Binary Patterns," Springer, Berlin, Heidelberg, 2004, pp. 469–481.
- [6] T. Huynh, R. Min, and J.-L. Dugelay, "An Efficient LBP-Based Descriptor for Facial Depth Images Applied to Gender Recognition Using RGB-D Face Data," in *Computer Vision - ACCV 2012 Workshops: ACCV 2012 International Workshops, Daejeon, Korea, November 5-6, 2012, Revised Selected Papers, Part I*, J.-I. Park and J. Kim, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2013, pp. 133–145.
- [7] G. Carneiro, Y. Zheng, F. Xing, and L. Yang, "Review of Deep Learning Methods in Mammography, Cardiovascular, and Microscopy Image Analysis," Springer, Cham, 2017, pp. 11–32.
- [8] R. Keshari, M. Vatsa, R. Singh, and A. Noore, "Learning Structure and Strength of CNN Filters for Small Sample Size Training," in *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, 2018, pp. 9349–9358.
- [9] O. Russakovsky *et al.*, "ImageNet Large Scale Visual Recognition Challenge," *Int. J. Comput. Vis.*, vol. 115, no. 3, pp. 211–252, Dec. 2015.
- [10] A. Krizhevsky, I. Sutskever, and G. E. Hinton, "ImageNet classification with deep convolutional neural networks," *Proceedings of the 25th International Conference on Neural Information Processing Systems - Volume 1*. Curran Associates Inc., pp. 1097–1105, 2012.
- [11] K. Simonyan and A. Zisserman, "Very Deep Convolutional Networks for Large-Scale Image Recognition," Sep. 2014.
- [12] F. Schroff, D. Kalenichenko, and J. Philbin, "FaceNet: A unified embedding for face recognition and clustering," in *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015, pp. 815–823.
- [13] Y. Taigman, M. Yang, M. Ranzato, and L. Wolf, "DeepFace: Closing the Gap to Human-Level Performance in Face Verification," in *2014 IEEE Conference on Computer Vision and Pattern Recognition*, 2014, pp. 1701–1708.
- [14] Y. Sun, D. Liang, X. Wang, and X. Tang, "DeepID3: Face Recognition with Very Deep Neural Networks," Feb. 2015.
- [15] X. Wu, R. He, Z. Sun, and T. Tan, "A Light CNN for Deep Face Representation With Noisy Labels," *IEEE Trans. Inf. Forensics Secur.*, vol. 13, no. 11, pp. 2884–2896, Nov. 2018.
- [16] H. H. Zheng and Y. X. Zu, "A Normalized Light CNN for Face Recognition," *J. Phys. Conf. Ser.*, vol. 1087, no. 6, p. 062015, Sep. 2018.
- [17] H. Li, W. Li, H. Cao, S. Wang, F. Huang, and A. C. Kot, "Unsupervised Domain Adaptation for Face Anti-Spoofing," *IEEE Trans. Inf. Forensics Secur.*, vol. 13, no. 7, pp. 1794–1809, Jul. 2018.